


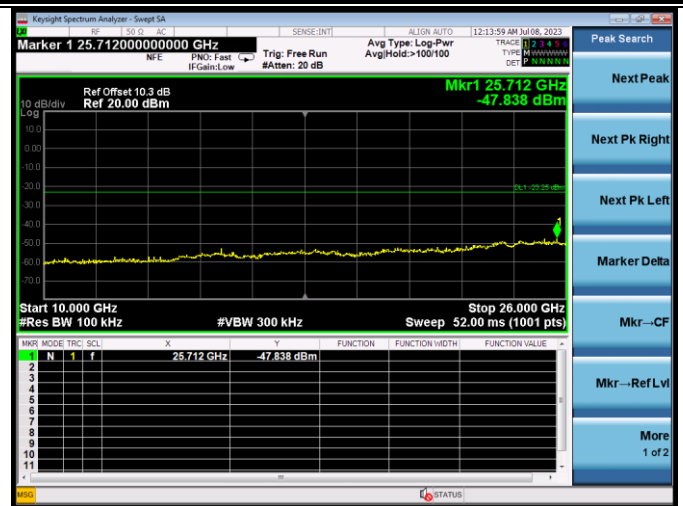
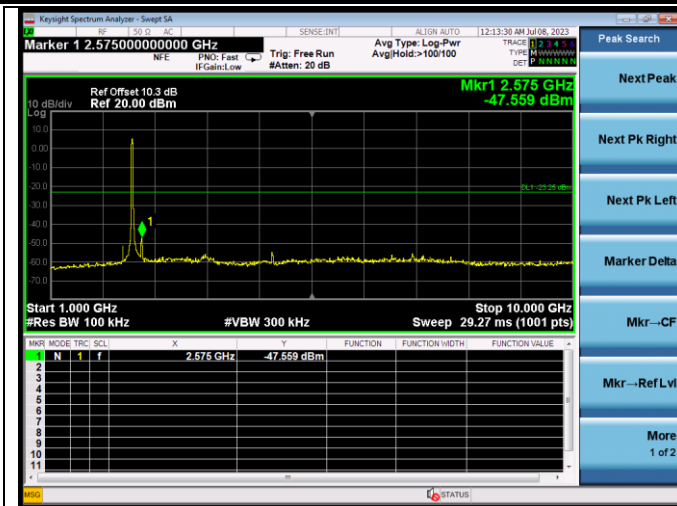
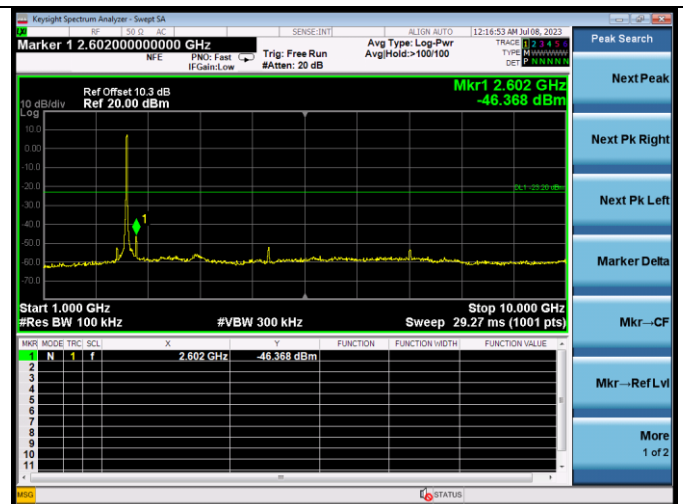
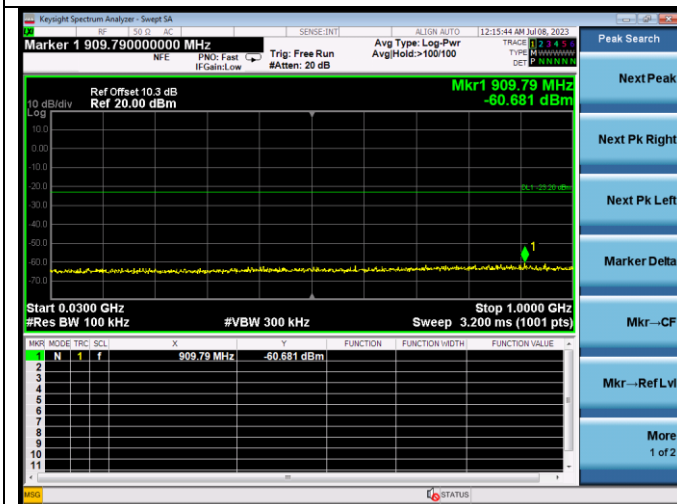
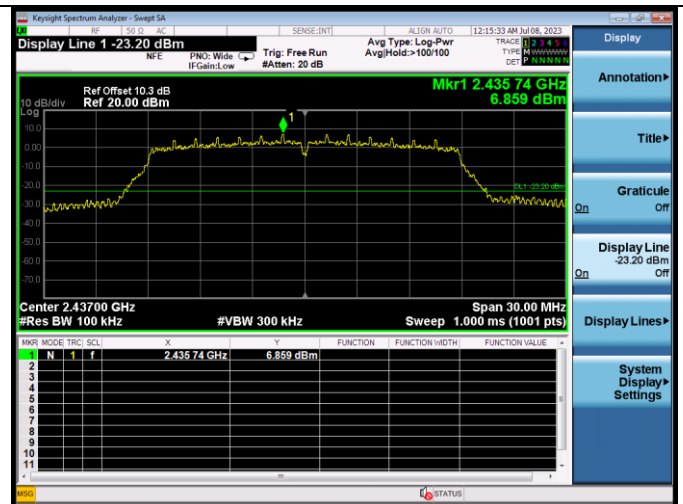
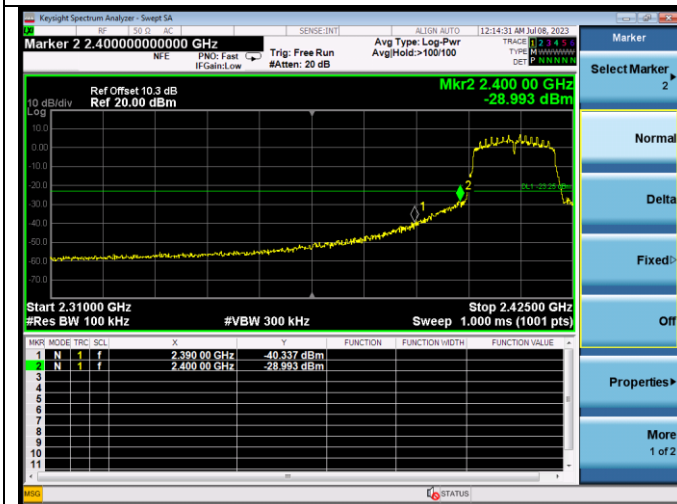
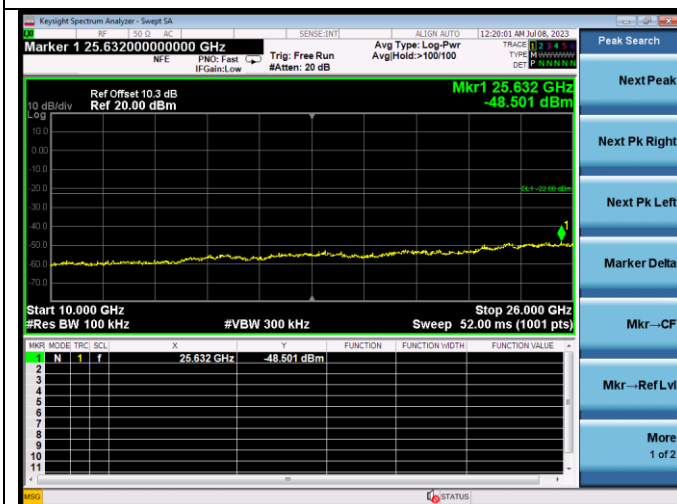
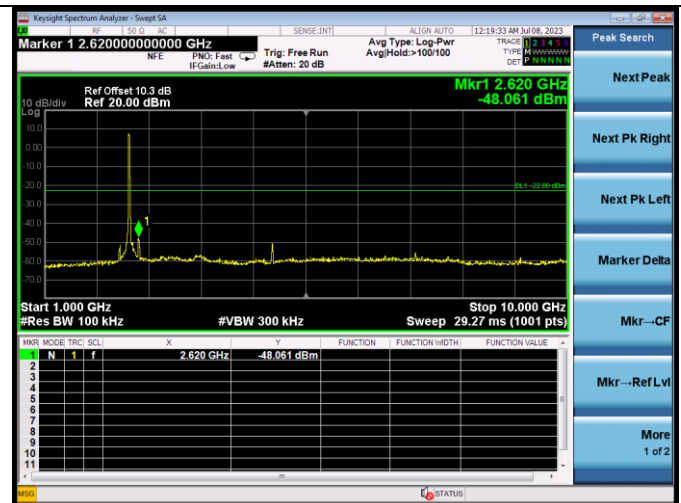


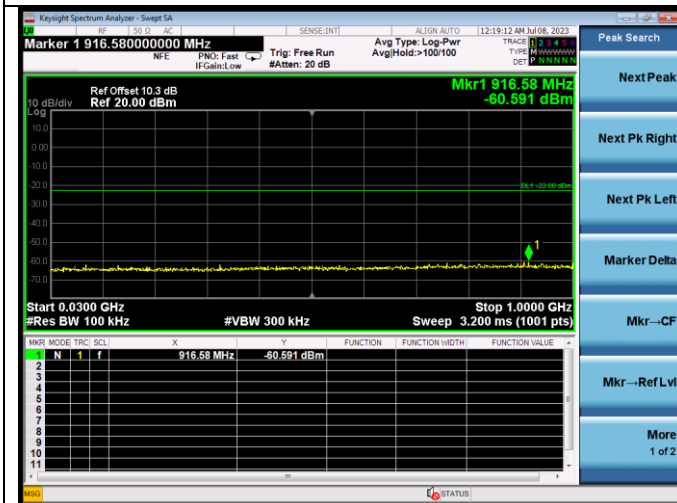

Test CH6: 2437MHz




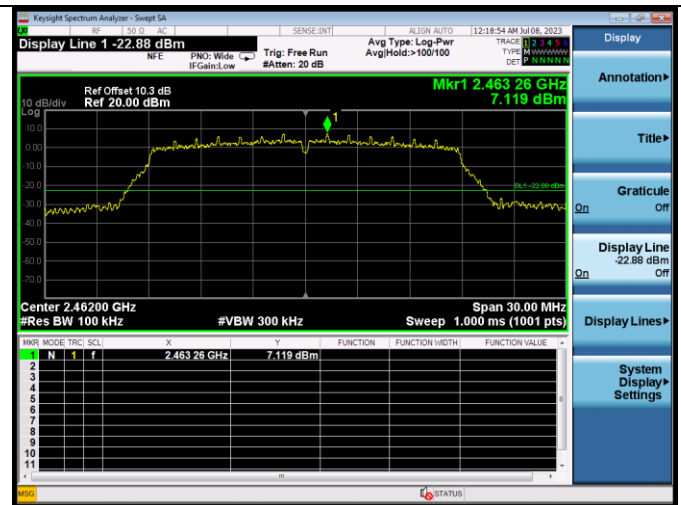


Test CH11: 2462MHz

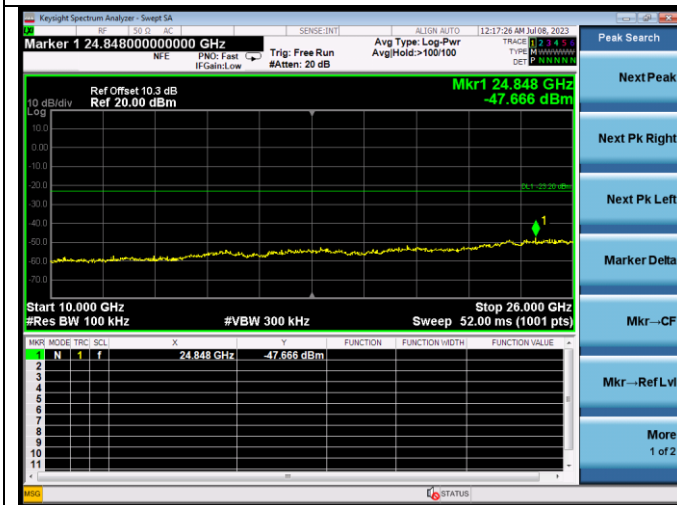



Test Mode: IEEE 802.11n HT40

Test CH3: 2422MHz

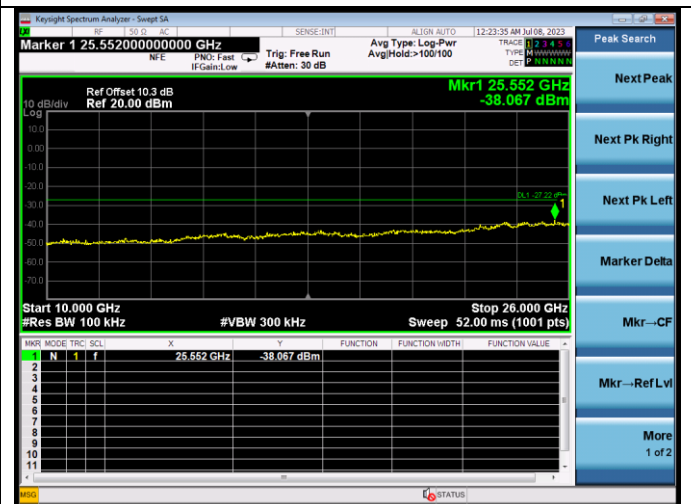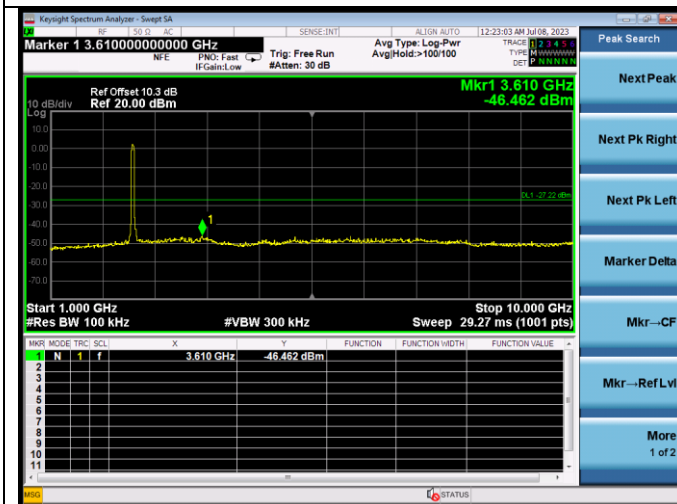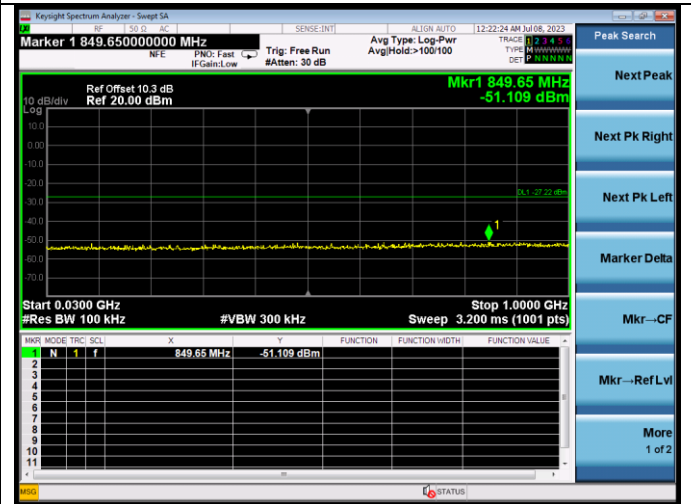
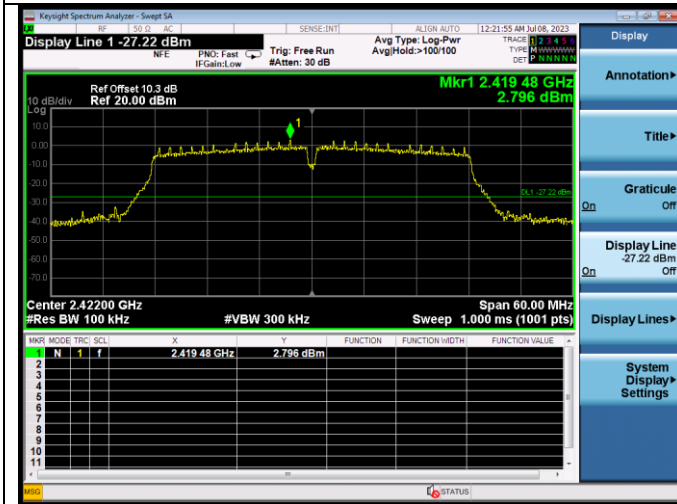



Test CH6: 2437MHz

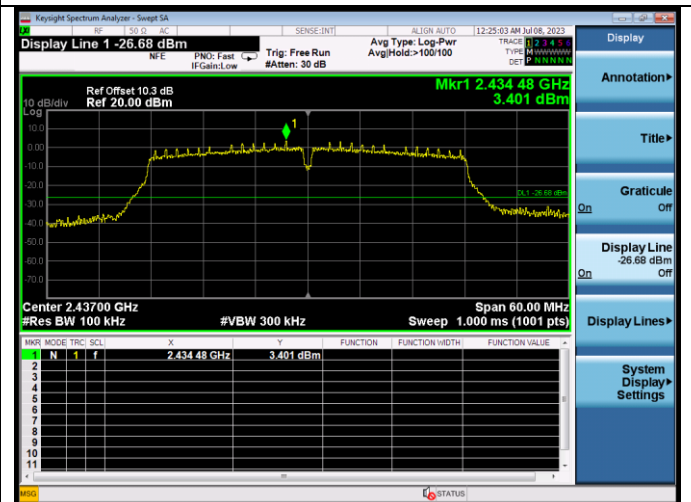

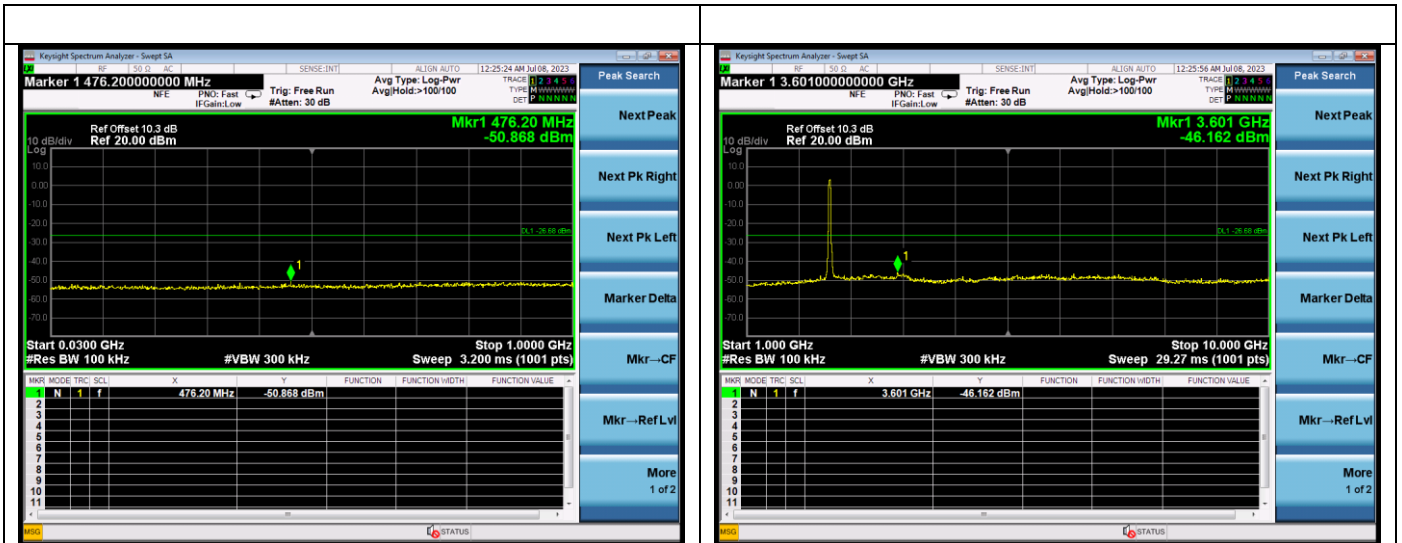

Test CH9: 2452MHz

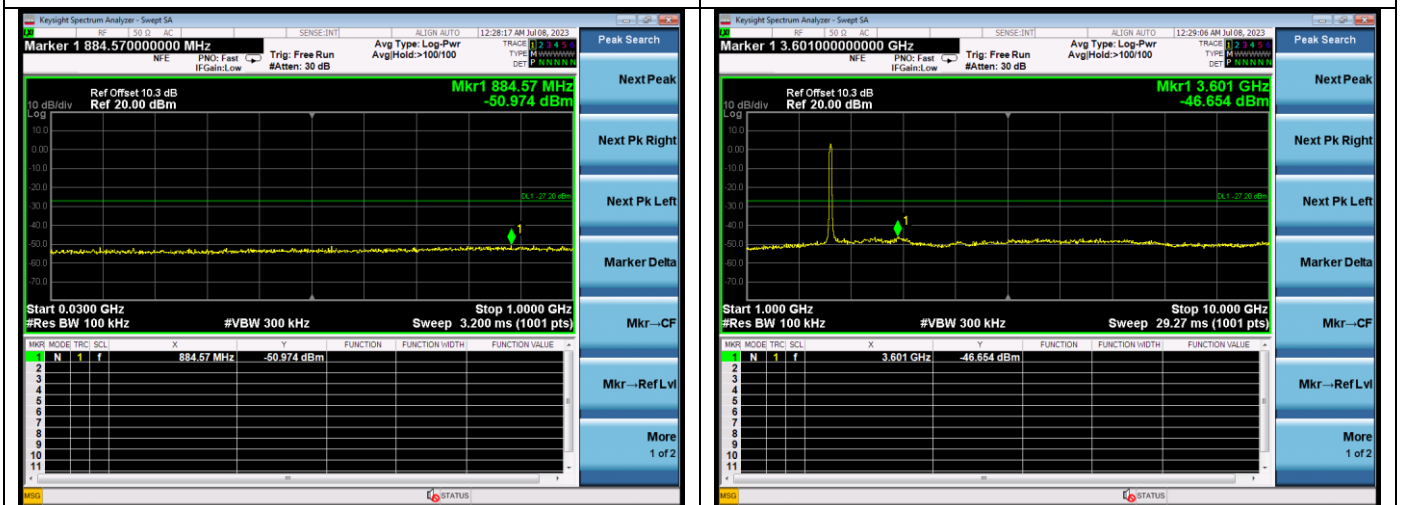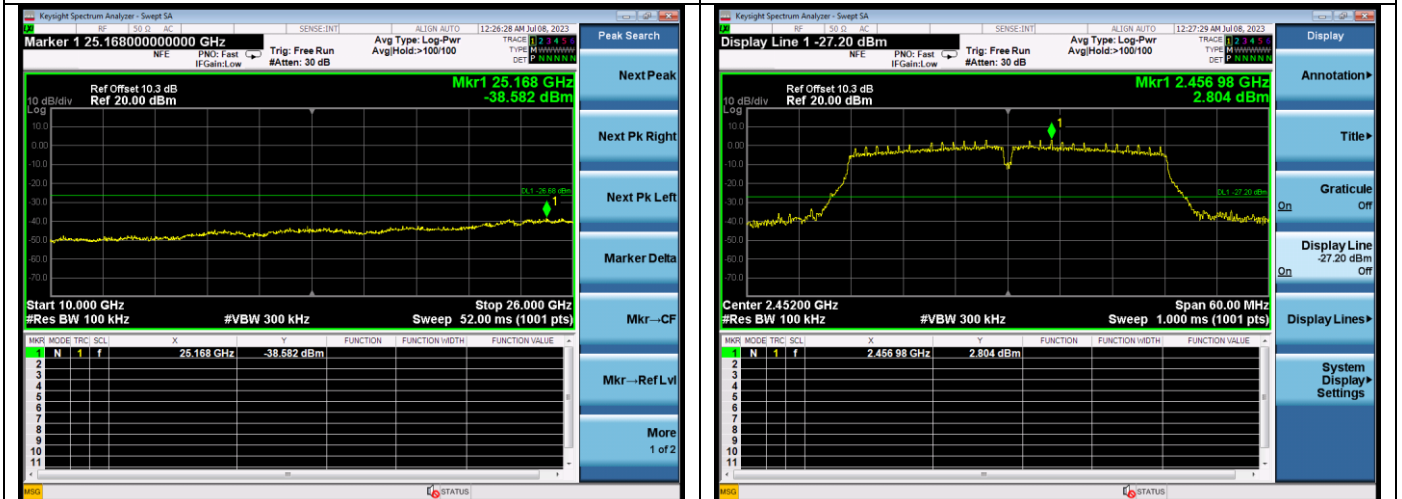

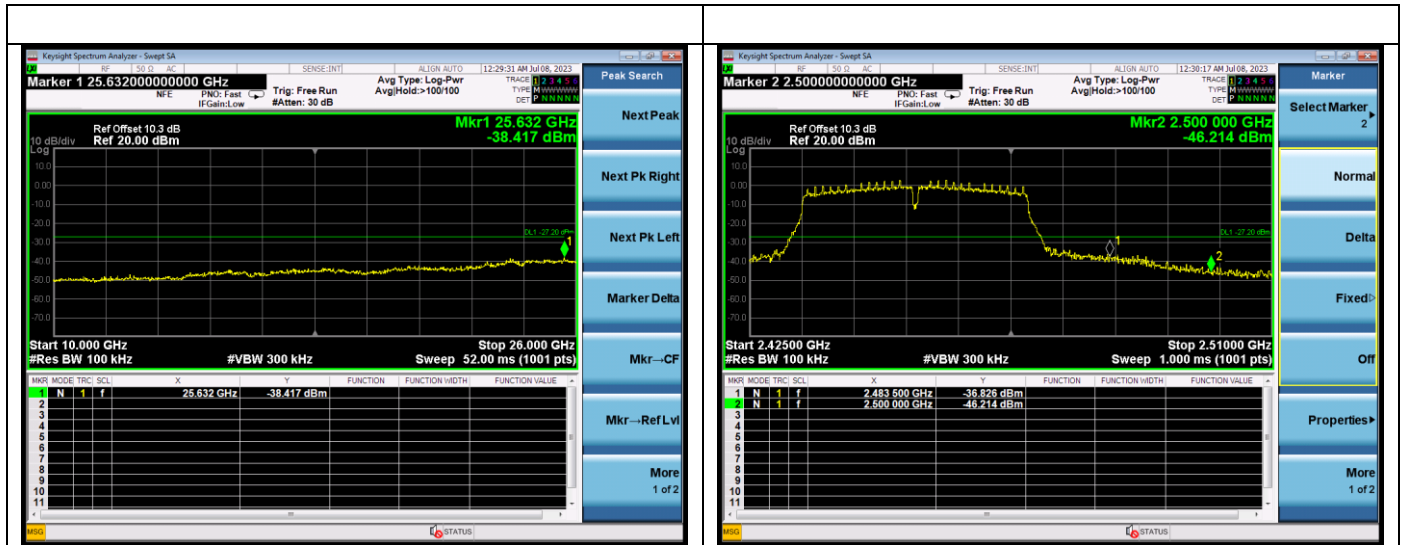

6. BAND EDGE COMPLIANCE TEST

6.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3mChamber(Svswr)	AUDIX	N/A	N/A	Aug.09,22	5 Year
2.	3mChamber(SE)	AUDIX	N/A	N/A	Sep.16,22	5 Year
3.	Signal Analyzer	Rohde & Schwarz	FSV30	104050	Apr.01,23	1 Year
4.	Amplifier	Agilent	83017A	MY53270084	Oct.09,22	1 Year
5.	RF Cable	EMCI	EMC104-SM-S M-15000	190407	Jun.25,23	1 Year
6.	Test Software	AUDIX	e3	6.100913a	N/A	N/A
7.	Horn Antenna	ETC	MCTD 1209	DRH15F03007	Aug.12,22	1 Year

Note: N/A means Not applicable.

6.2. Limit


All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

6.3. Test Procedure

1. The EUT is placed on a turntable, which is 1.5m above the ground plane and worked at highest radiated power.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=1MHz; VBW=3MHz; Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz; VBW=10Hz; Sweep=AUTO

6.4. Test Results

Pass (The testing data was attached in the next pages.)

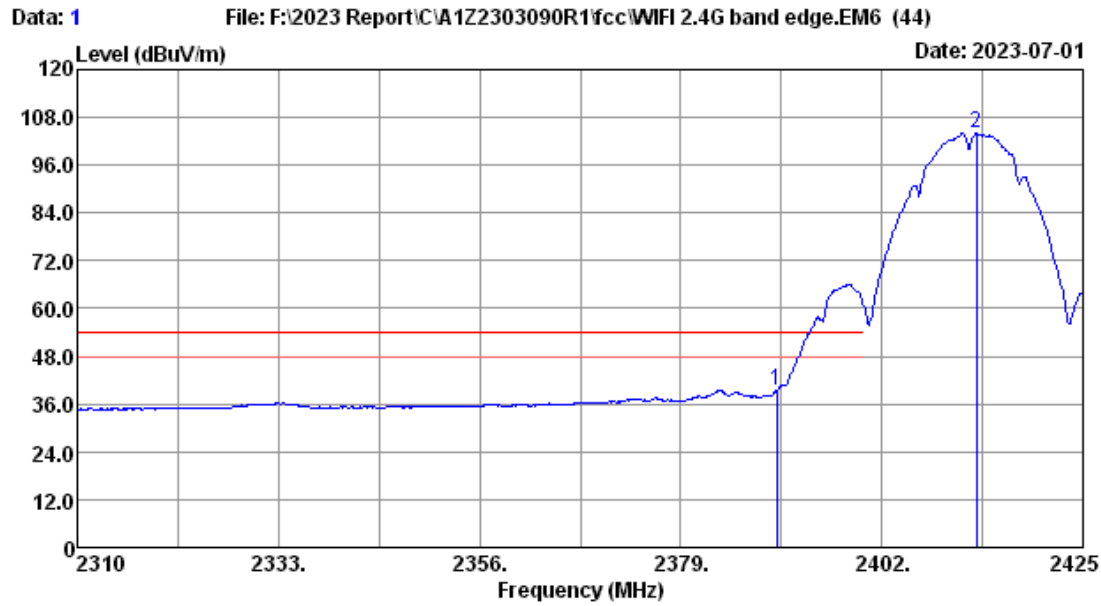


Site no.	: 3m Chamber	Data no.	: 1
Dis. / Ant.	: 3m 2022 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C AV		
Env. / Ins.	: 23.2°C/52.5%	Engineer	: nier
Test Mode	: Wifi2.4G 11b 2412MHz TX		
	:		
	:		

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
					Reading (dBuV)	Level (dBuV/m)			
1	2390.00	27.70	2.29	34.36	43.96	39.59	54.00	14.41	Average
2	2412.81	27.73	2.30	34.36	108.35	104.02	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.


2. The emission levels that are 20dB below the official
limit are not reported.

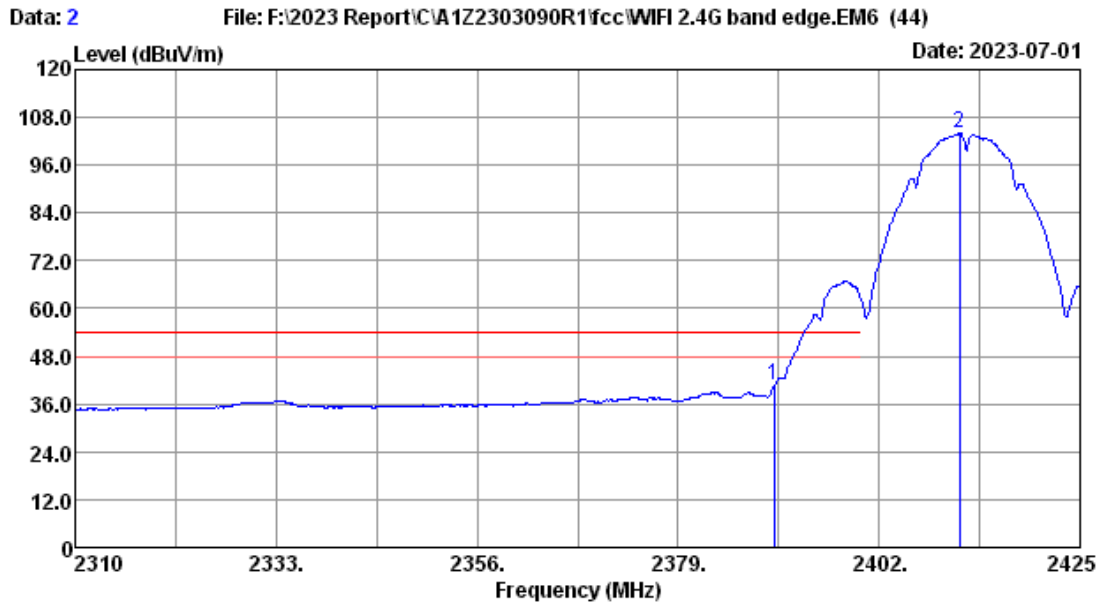

Site no. : 3m Chamber Data no. : 2
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2°C/52.5% Engineer : nier
 Test Mode : Wifi2.4G 11b 2412MHz TX
 :
 :

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.70	2.29	34.36	44.98	40.61	54.00	13.39	Average
2	2411.20	27.73	2.30	34.36	108.42	104.09	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

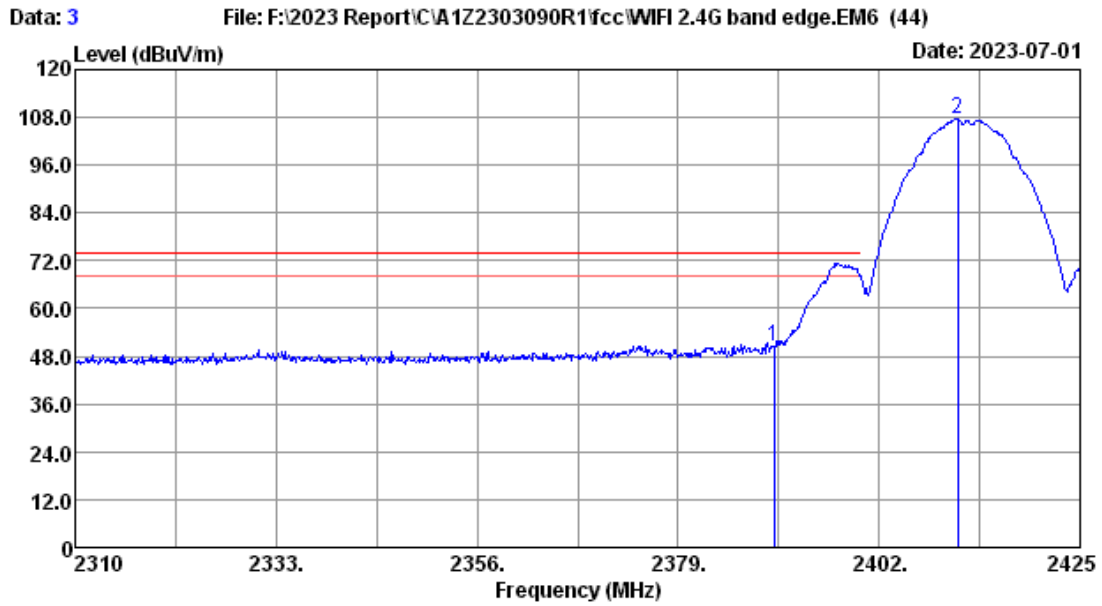

Site no. : 3m Chamber Data no. : 3
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : nier
 Test Mode : Wifi2.4G 11b 2412MHz TX
 :
 :

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.70	2.29	34.36	54.98	50.61	74.00	23.39	Peak
2	2410.97	27.73	2.30	34.36	111.83	107.50	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

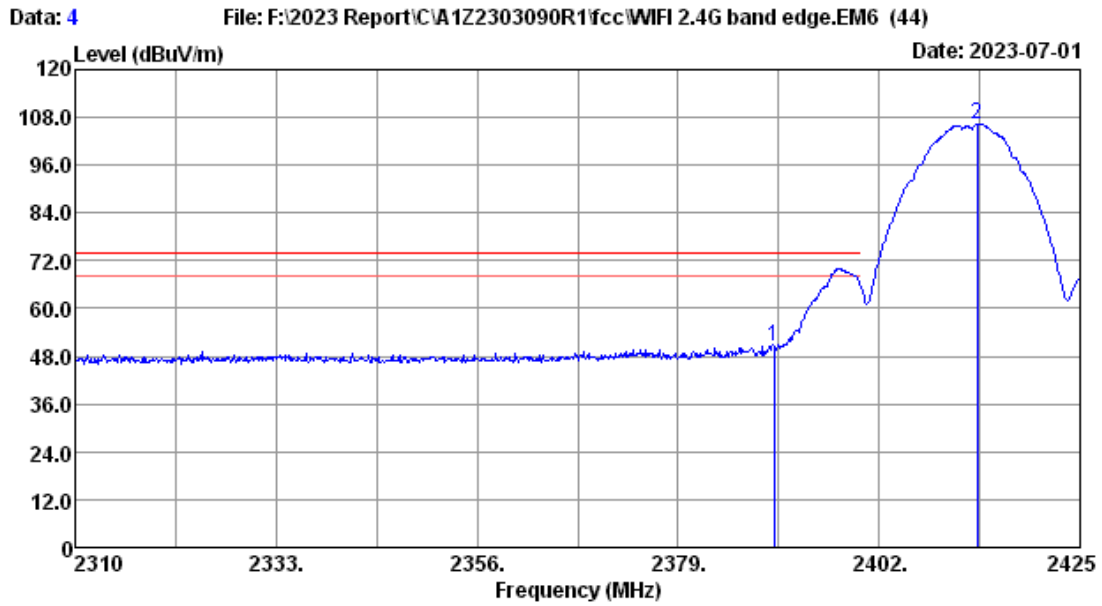

Site no. : 3m Chamber Data no. : 4
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : nier
 Test Mode : Wifi2.4G 11b 2412MHz TX
 :
 :

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.70	2.29	34.36	54.74	50.37	74.00	23.63	Peak
2	2413.27	27.73	2.30	34.36	110.82	106.49	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

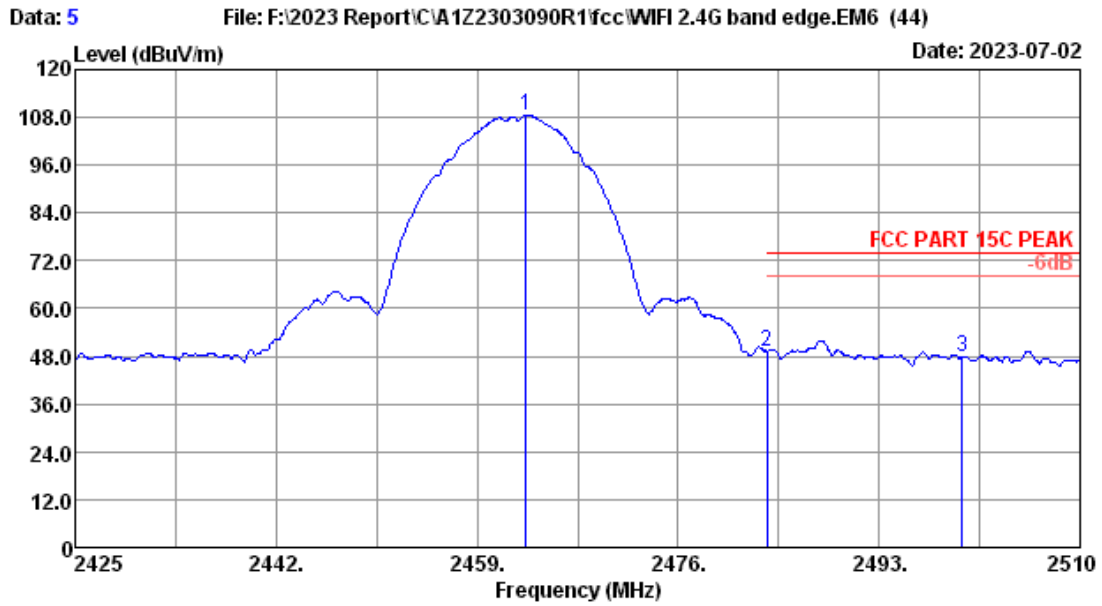

Site no. : 3m Chamber Data no. : 5
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : nier
 Test Mode : Wifi2.4G 11b 2462MHz TX
 :
 :

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2463.17	27.80	2.33	34.35	112.80	108.58	-----	-----	Peak
2	2483.50	27.80	2.34	34.35	53.49	49.28	74.00	24.72	Peak
3	2500.00	27.80	2.35	34.35	51.94	47.74	74.00	26.26	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

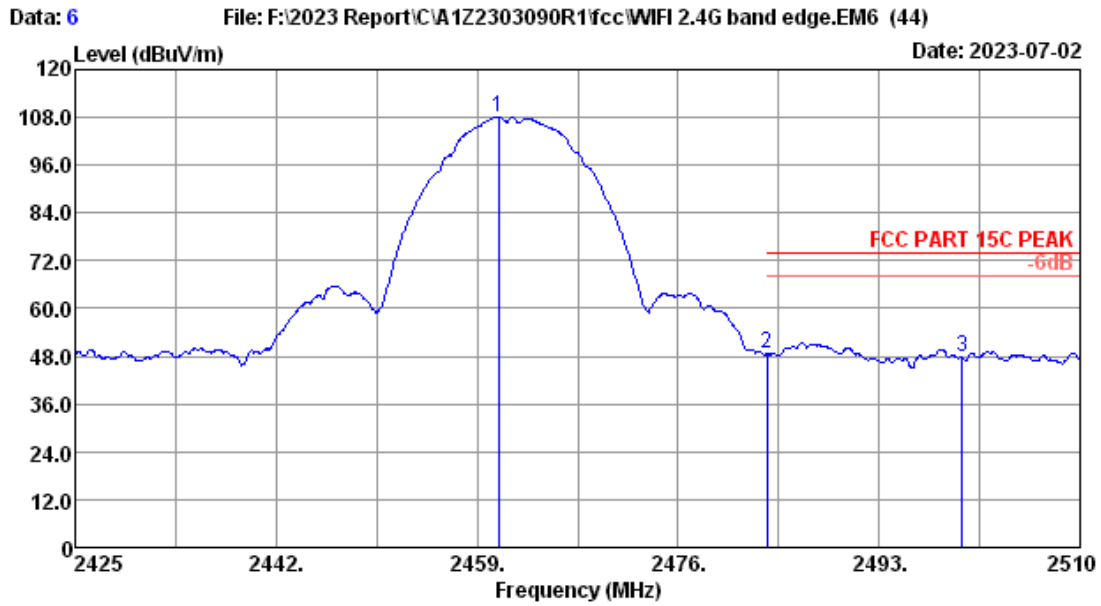

Site no. : 3m Chamber Data no. : 6
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : nier
 Test Mode : Wifi2.4G 11b 2462MHz TX
 :
 :

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2460.79	27.80	2.33	34.35	112.37	108.15	-----	-----	Peak
2	2483.50	27.80	2.34	34.35	52.83	48.62	74.00	25.38	Peak
3	2500.00	27.80	2.35	34.35	51.94	47.74	74.00	26.26	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

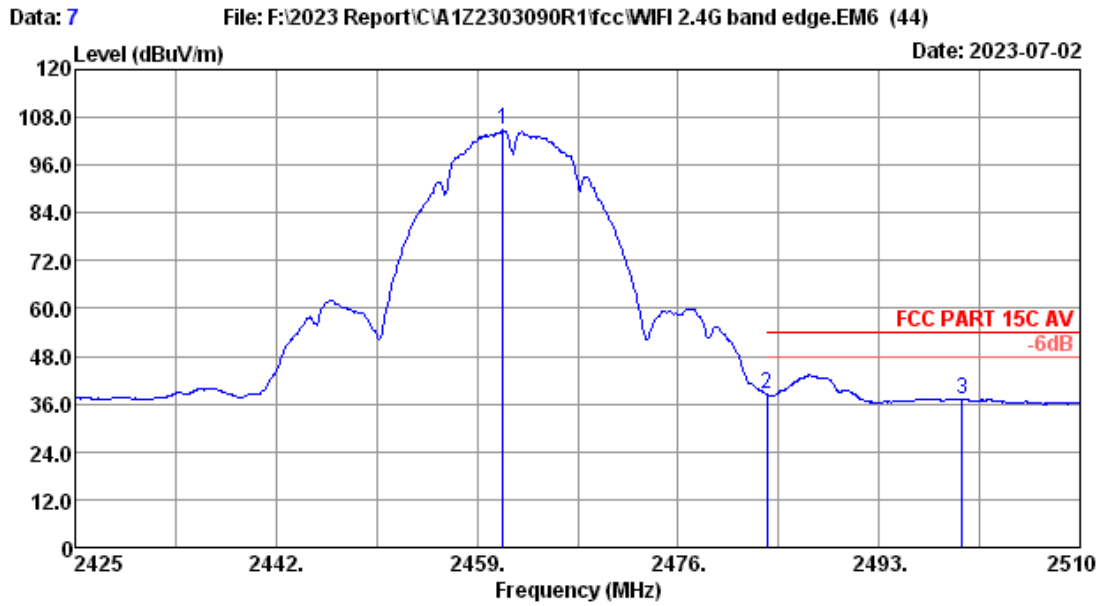

Site no. : 3m Chamber Data no. : 7
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2°C/52.5% Engineer : nier
 Test Mode : Wifi2.4G 11b 2462MHz TX
 :
 :

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2461.21	27.80	2.33	34.35	108.97	104.75	-----	-----	Average
2	2483.50	27.80	2.34	34.35	42.68	38.47	54.00	15.53	Average
3	2500.00	27.80	2.35	34.35	41.39	37.19	54.00	16.81	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

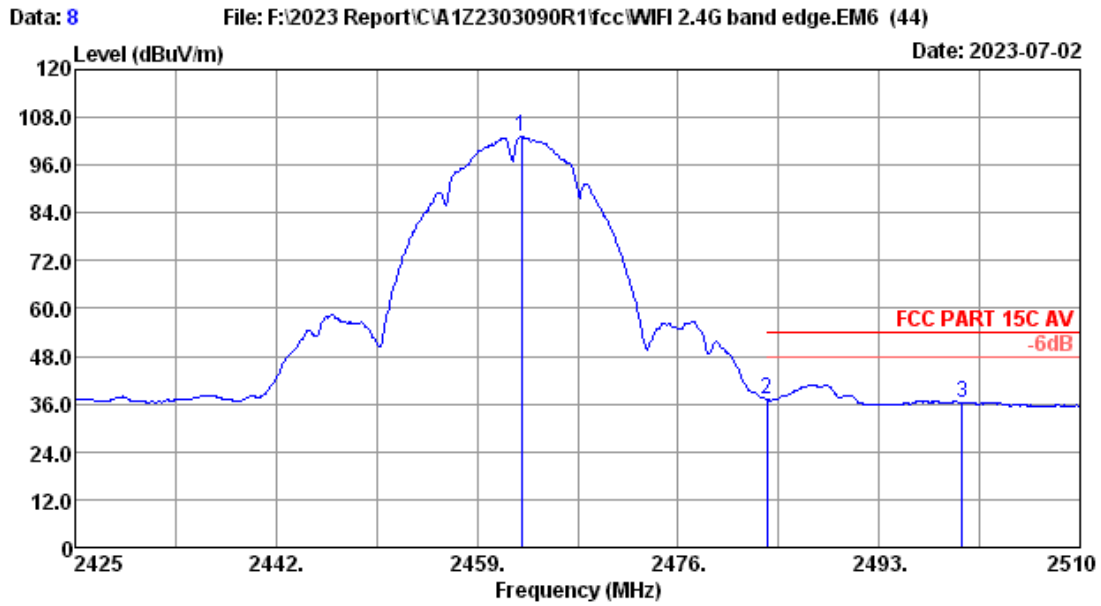

Site no. : 3m Chamber Data no. : 8
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2°C/52.5% Engineer : nier
 Test Mode : Wifi2.4G 11b 2462MHz TX
 :
 :

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.74	27.80	2.33	34.35	107.50	103.28	-----	-----	Average
2	2483.50	27.80	2.34	34.35	41.39	37.18	54.00	16.82	Average
3	2500.00	27.80	2.35	34.35	40.69	36.49	54.00	17.51	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

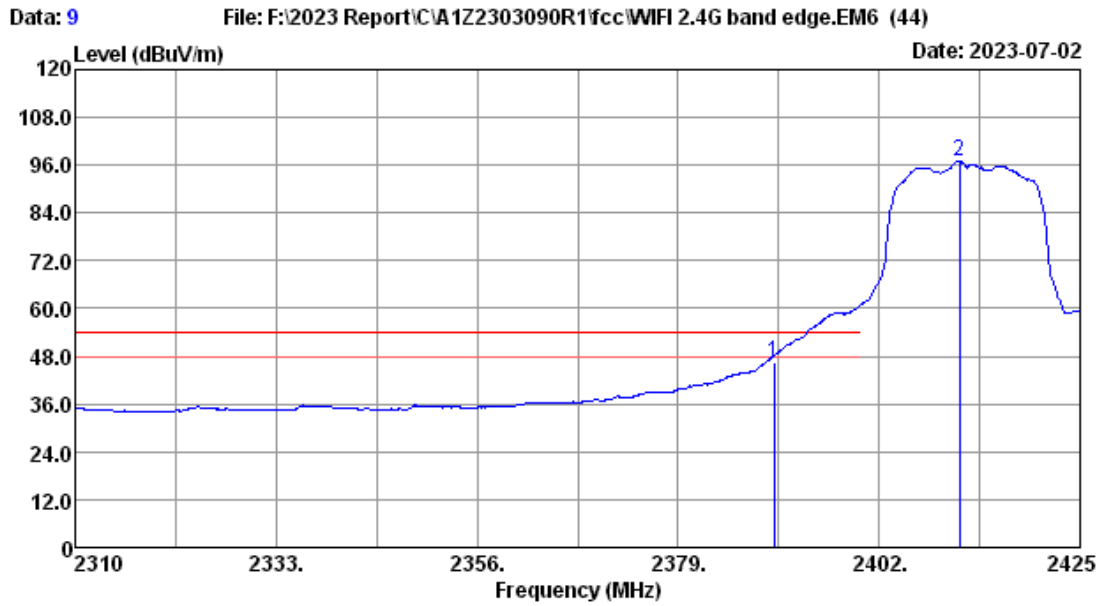

Site no. : 3m Chamber Data no. : 9
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2°C/52.5% Engineer : nier
 Test Mode : Wifi2.4G 11g 2412MHz TX
 :
 :

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.70	2.29	34.36	51.00	46.63	54.00	7.37	Average
2	2411.20	27.73	2.30	34.36	101.39	97.06	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

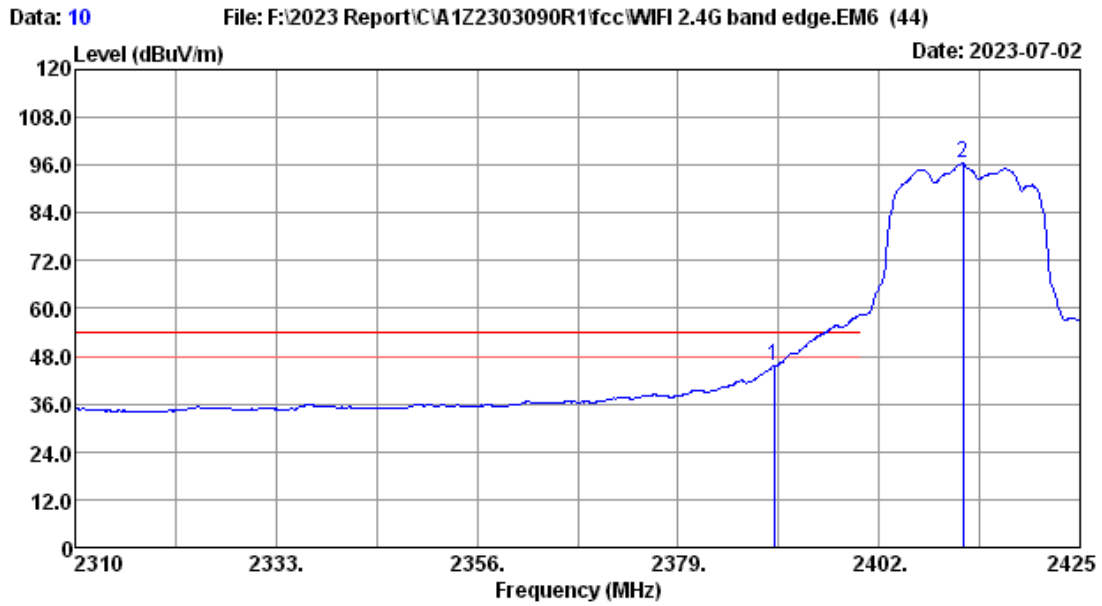


Site no.	: 3m Chamber	Data no.	: 10
Dis. / Ant.	: 3m 2022 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C AV		
Env. / Ins.	: 23.2°C/52.5%	Engineer	: nier
Test Mode	: Wifi2.4G 11g 2412MHz TX		
	:		
	:		

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBuV)	Emission		Margin (dB)	Remark
						Level (dBuV/m)	Limits (dBuV/m)		
1	2390.00	27.70	2.29	34.36	50.05	45.68	54.00	8.32	Average
2	2411.66	27.73	2.30	34.36	100.70	96.37	-----	-----	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.


2. The emission levels that are 20dB below the official
limit are not reported.

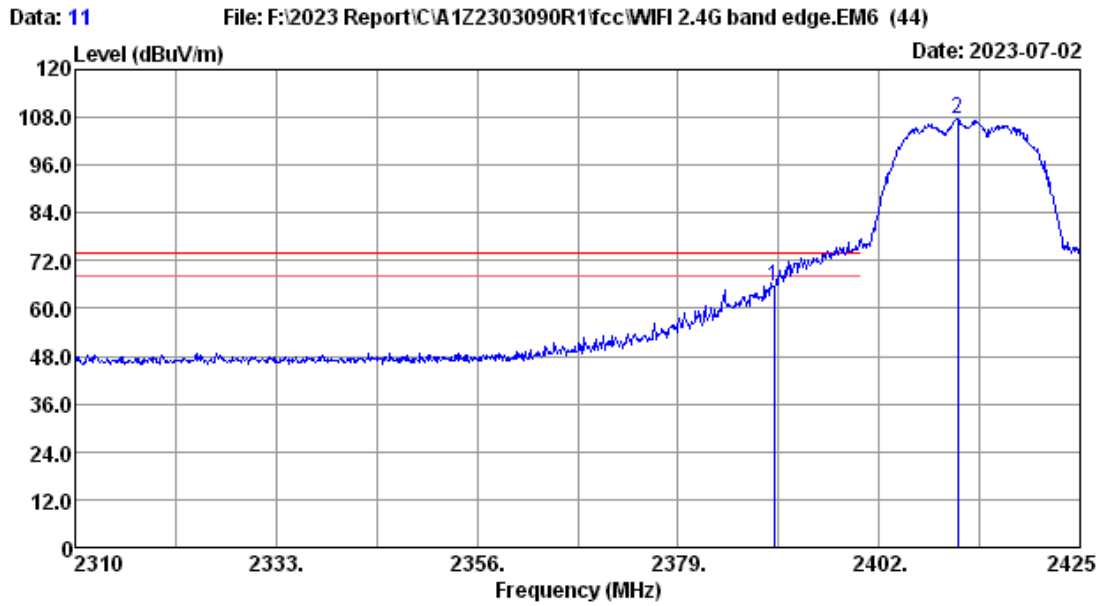

Site no. : 3m Chamber Data no. : 11
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : nier
 Test Mode : Wifi2.4G 11g 2412MHz TX
 :
 :

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.70	2.29	34.36	70.09	65.72	74.00	8.28	Peak
2	2410.97	27.73	2.30	34.36	111.92	107.59	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

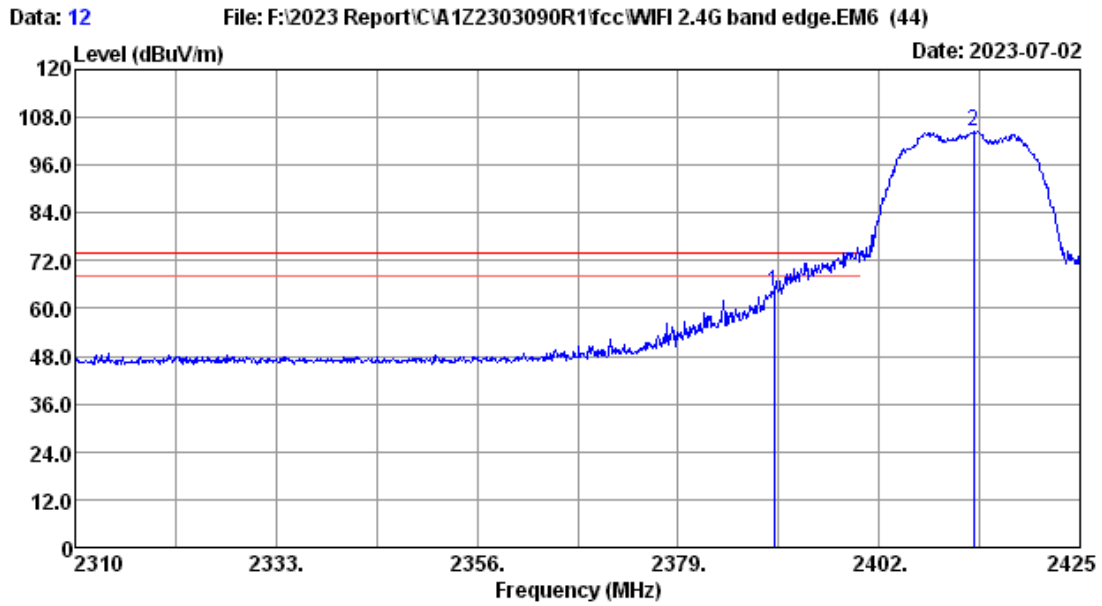

Site no. : 3m Chamber Data no. : 12
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : nier
 Test Mode : Wifi2.4G 11g 2412MHz TX
 :
 :

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.70	2.29	34.36	68.57	64.20	74.00	9.80	Peak
2	2412.81	27.73	2.30	34.36	108.76	104.43	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

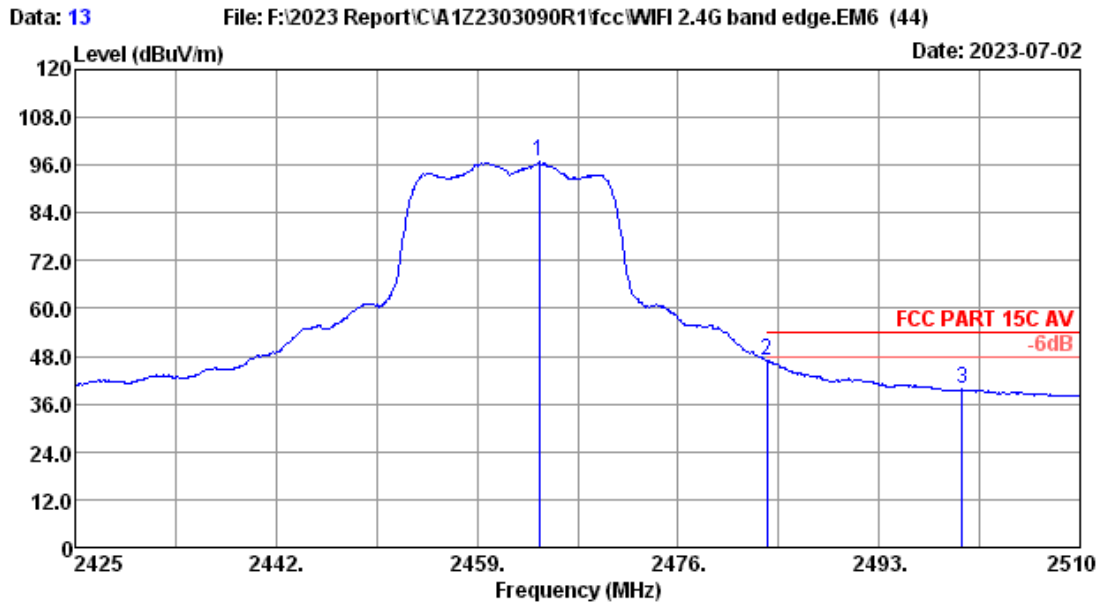

Site no. : 3m Chamber Data no. : 13
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2°C/52.5% Engineer : nier
 Test Mode : Wifi2.4G 11g 2462MHz TX
 :
 :

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2464.27	27.80	2.33	34.35	100.98	96.76	-----	-----	Average
2	2483.50	27.80	2.34	34.35	51.11	46.90	54.00	7.10	Average
3	2500.00	27.80	2.35	34.35	43.84	39.64	54.00	14.36	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

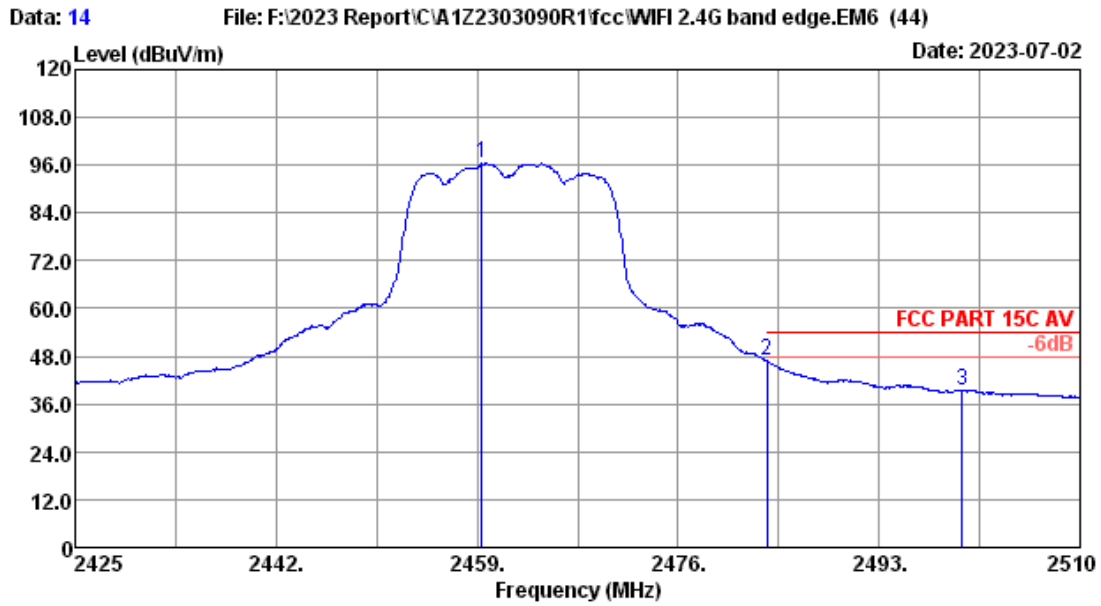

Site no. : 3m Chamber Data no. : 14
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2°C/52.5% Engineer : nier
 Test Mode : Wifi2.4G 11g 2462MHz TX
 :
 :

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2459.43	27.80	2.33	34.35	100.64	96.42	-----	-----	Average
2	2483.50	27.80	2.34	34.35	51.14	46.93	54.00	7.07	Average
3	2500.00	27.80	2.35	34.35	43.74	39.54	54.00	14.46	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

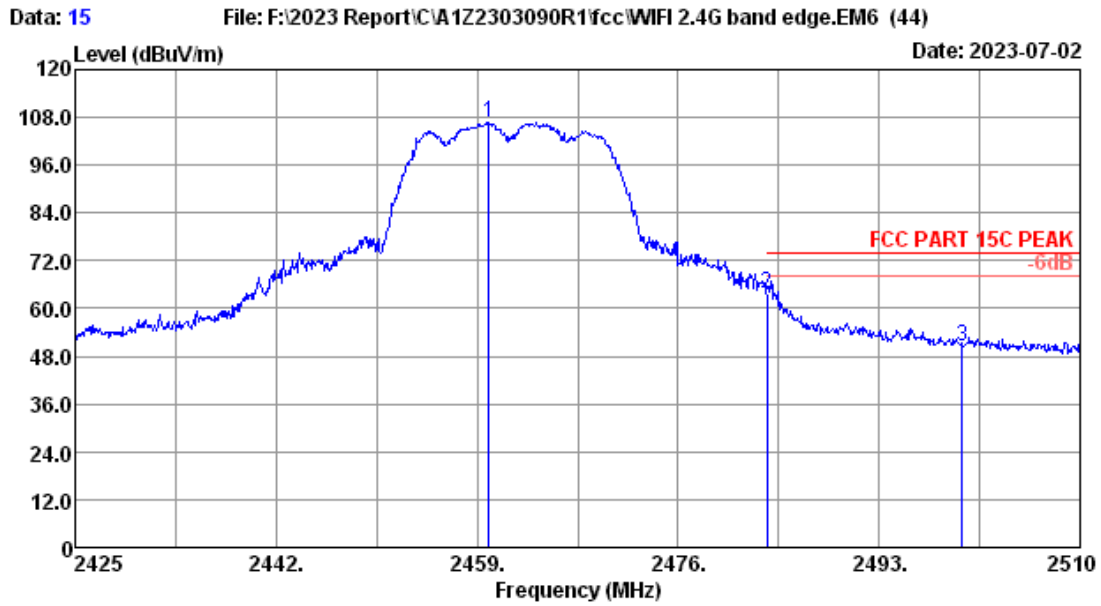

Site no. : 3m Chamber Data no. : 15
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : nier
 Test Mode : Wifi2.4G 11g 2462MHz TX
 :
 :

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2460.02	27.80	2.33	34.35	110.96	106.74	-----	-----	Peak
2	2483.50	27.80	2.34	34.35	67.92	63.71	74.00	10.29	Peak
3	2500.00	27.80	2.35	34.35	54.73	50.53	74.00	23.47	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

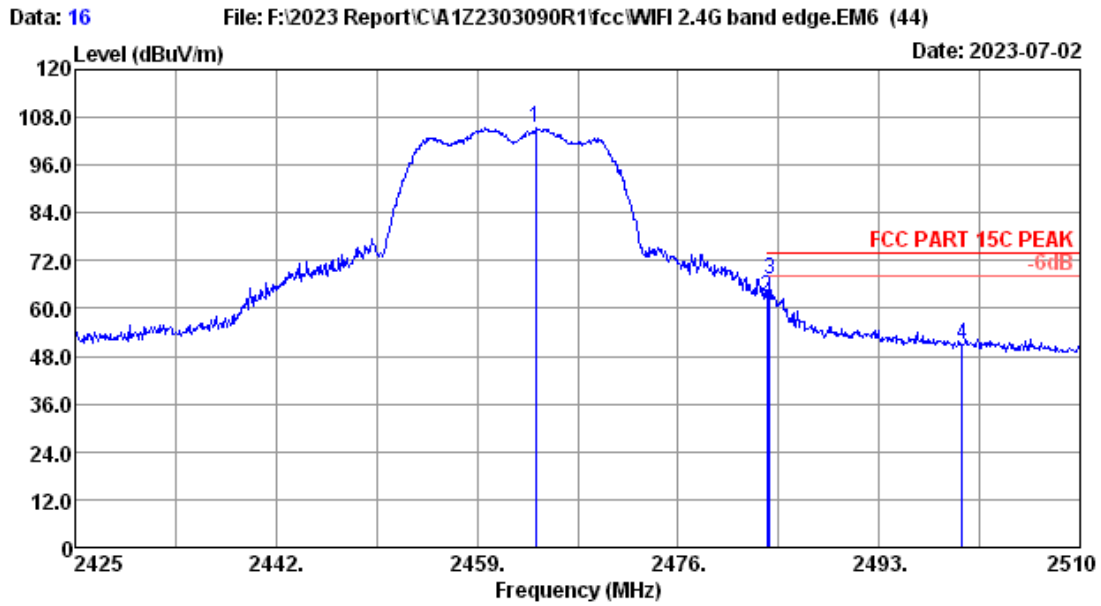

Site no. : 3m Chamber Data no. : 16
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : nier
 Test Mode : Wifi2.4G 11g 2462MHz TX
 :
 :

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2463.93	27.80	2.33	34.35	109.76	105.54	-----	-----	Peak
2	2483.50	27.80	2.34	34.35	67.24	63.03	74.00	10.97	Peak
3	2483.74	27.80	2.34	34.35	71.35	67.14	74.00	6.86	Peak
4	2500.00	27.80	2.35	34.35	55.31	51.11	74.00	22.89	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

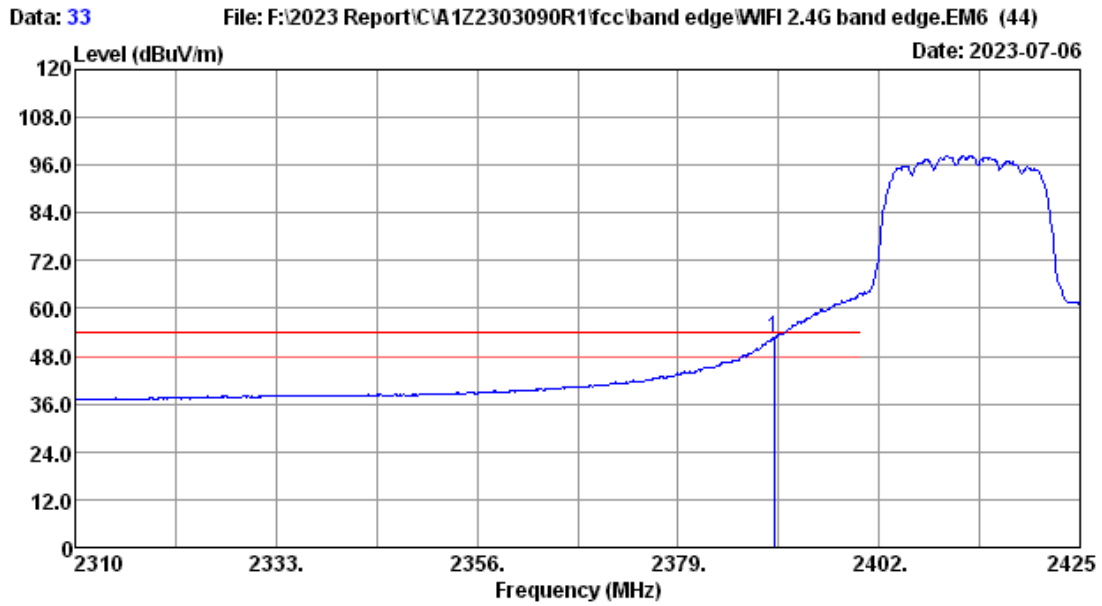

Site no. : 3m Chamber Data no. : 33
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2°C/52.5% Engineer : nier
 Test Mode : Wifi2.4G 11n20 2412MHz TX
 :
 :

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.70	4.85	34.36	54.38	52.57	54.00	1.43	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

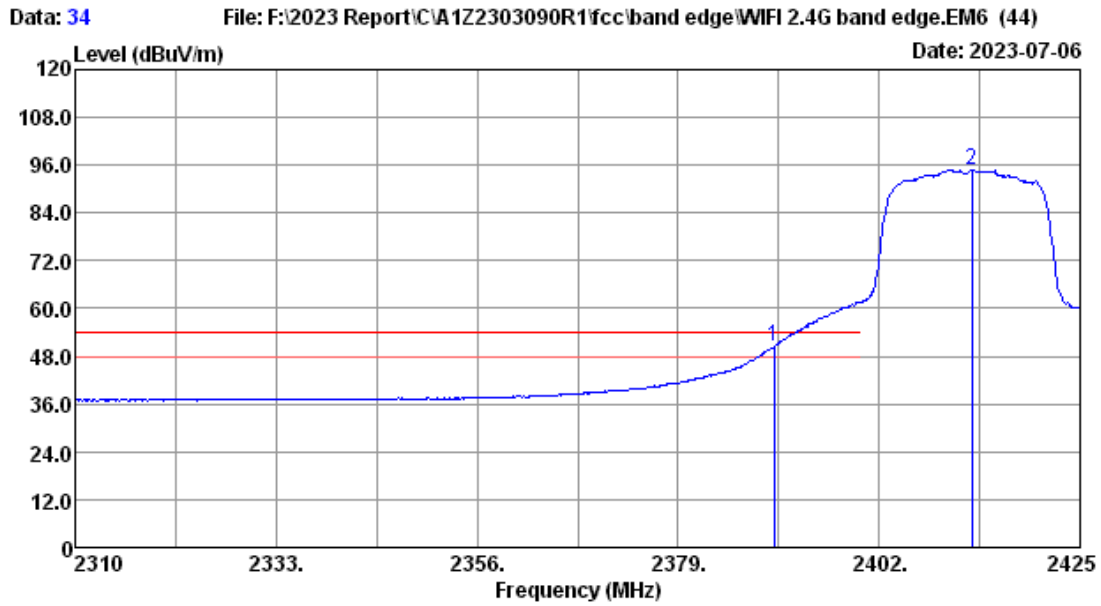

Site no. : 3m Chamber Data no. : 34
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2°C/52.5% Engineer : nier
 Test Mode : Wifi2.4G 11n20 2412MHz TX
 :
 :

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.70	4.85	34.36	52.35	50.54	54.00	3.46	Average
2	2412.58	27.73	4.87	34.36	96.70	94.94	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

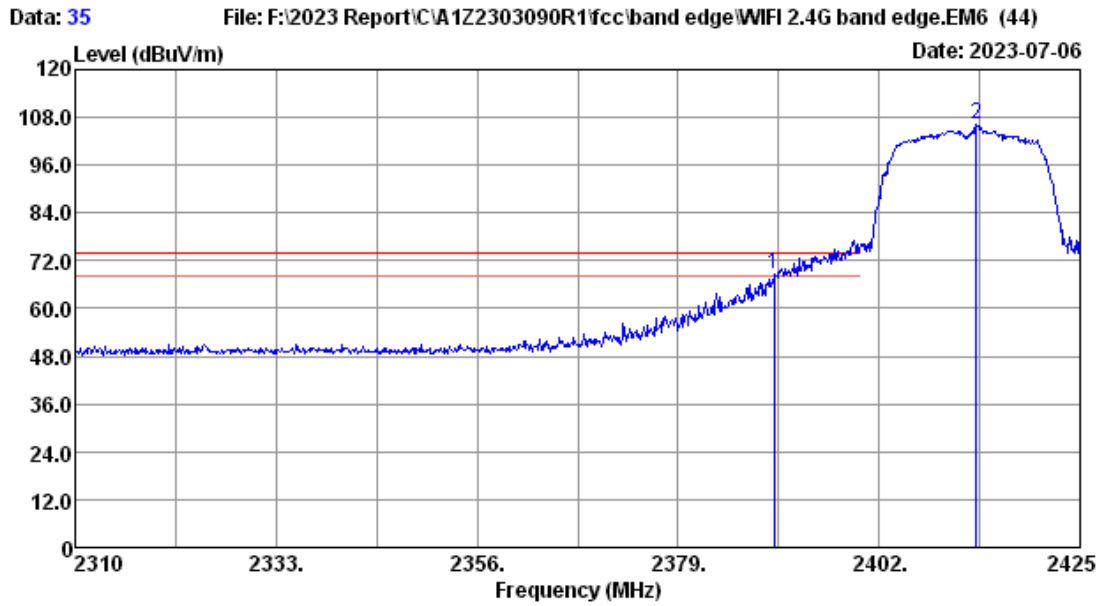

Site no. : 3m Chamber Data no. : 35
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : nier
 Test Mode : Wifi2.4G 11n20 2412MHz TX
 :
 :

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.70	4.85	34.36	70.30	68.49	74.00	5.51	Peak
2	2413.16	27.73	4.87	34.36	107.84	106.08	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

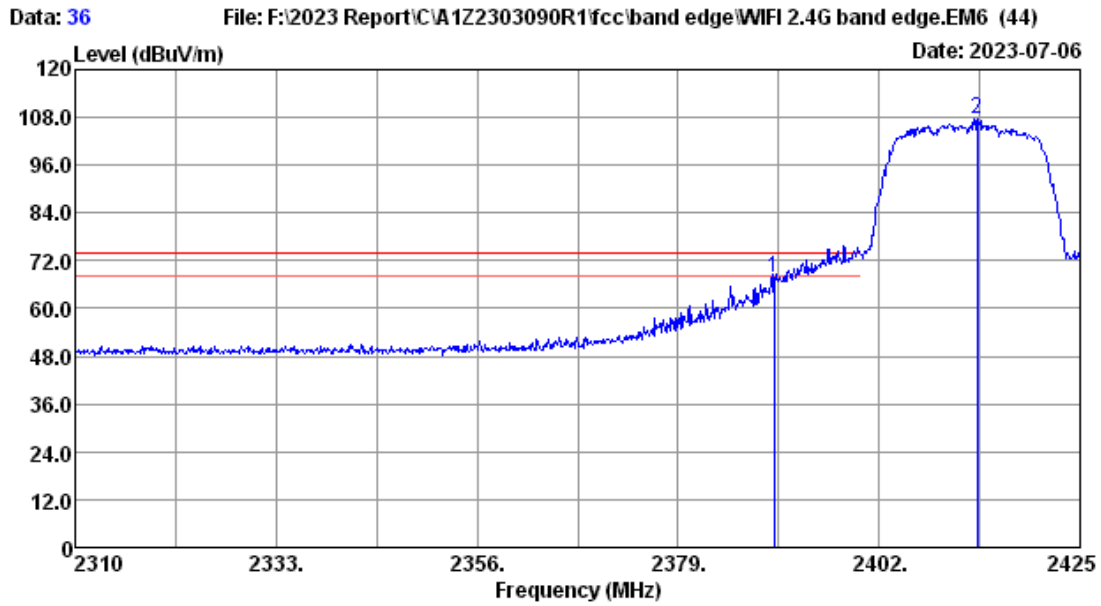

Site no. : 3m Chamber Data no. : 36
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : nier
 Test Mode : Wifi2.4G 11n20 2412MHz TX
 :
 :

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.70	4.85	34.36	69.47	67.66	74.00	6.34	Peak
2	2413.27	27.73	4.87	34.36	109.58	107.82	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

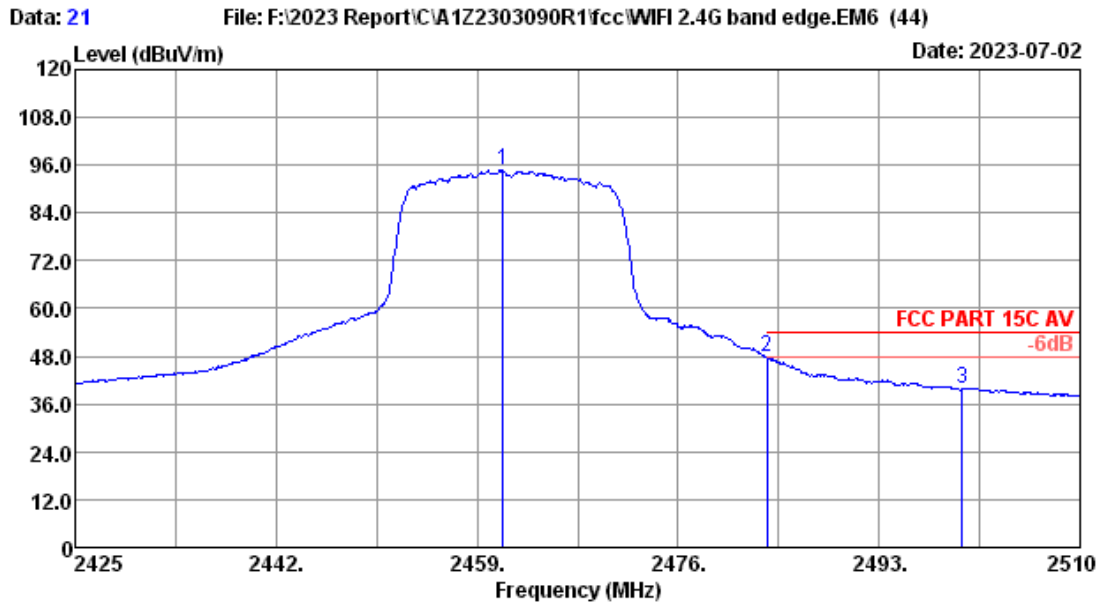

Site no. : 3m Chamber Data no. : 21
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2°C/52.5% Engineer : nier
 Test Mode : Wifi2.4G 11n20 2462MHz TX
 :
 :

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2461.21	27.80	2.33	34.35	98.86	94.64	-----	-----	Average
2	2483.50	27.80	2.34	34.35	52.05	47.84	54.00	6.16	Average
3	2500.00	27.80	2.35	34.35	43.85	39.65	54.00	14.35	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

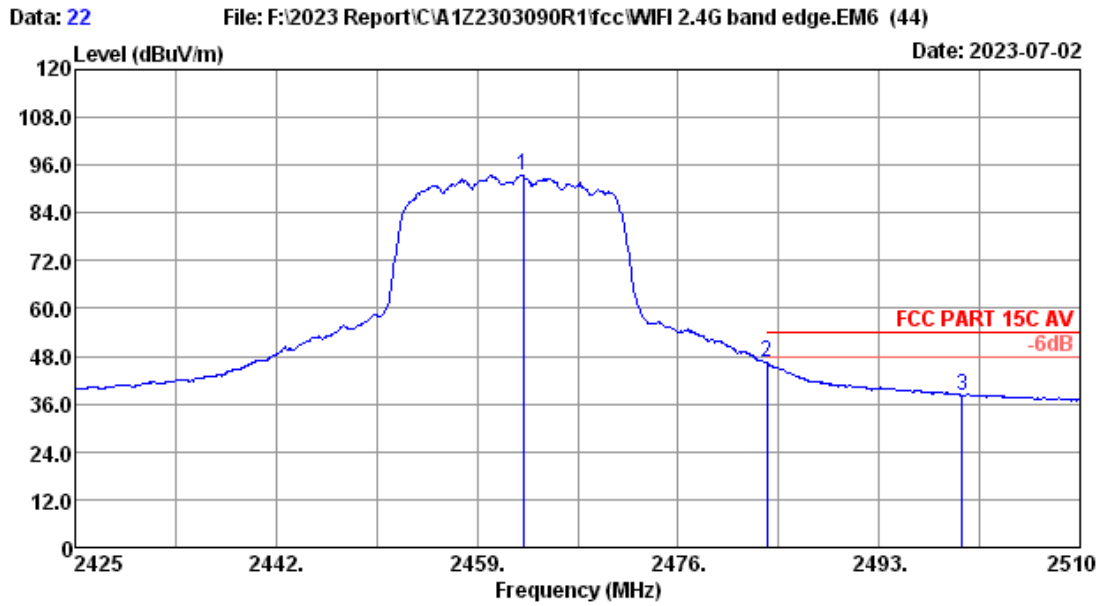

Site no. : 3m Chamber Data no. : 22
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2°C/52.5% Engineer : nier
 Test Mode : Wifi2.4G 11n20 2462MHz TX
 :
 :

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.91	27.80	2.33	34.35	97.57	93.35	-----	-----	Average
2	2483.50	27.80	2.34	34.35	50.65	46.44	54.00	7.56	Average
3	2500.00	27.80	2.35	34.35	42.49	38.29	54.00	15.71	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

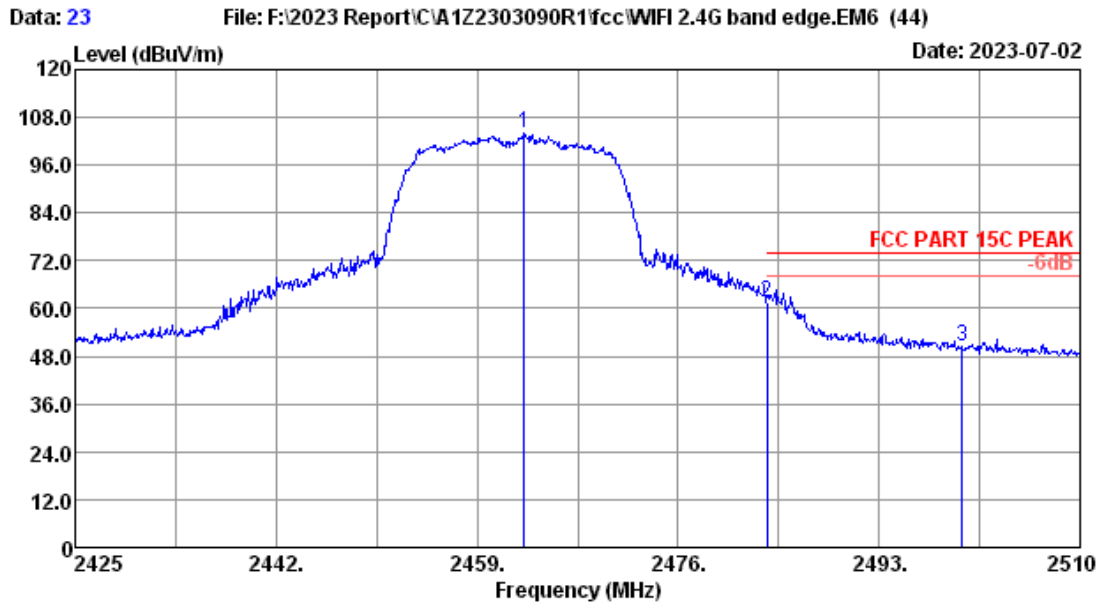

Site no. : 3m Chamber Data no. : 23
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : nier
 Test Mode : Wifi2.4G 11n20 2462MHz TX
 :
 :

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2463.00	27.80	2.33	34.35	108.08	103.86	-----	-----	Peak
2	2483.50	27.80	2.34	34.35	65.70	61.49	74.00	12.51	Peak
3	2500.00	27.80	2.35	34.35	54.53	50.33	74.00	23.67	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

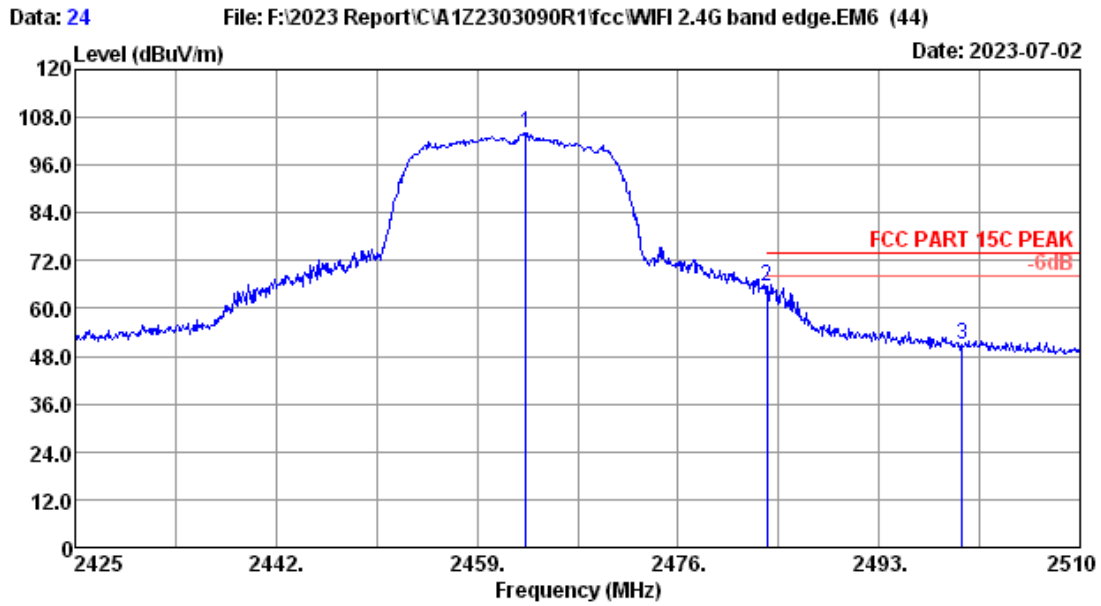

Site no. : 3m Chamber Data no. : 24
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : nier
 Test Mode : Wifi2.4G 11n20 2462MHz TX
 :
 :

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2463.17	27.80	2.33	34.35	108.46	104.24	-----	-----	Peak
2	2483.50	27.80	2.34	34.35	69.77	65.56	74.00	8.44	Peak
3	2500.00	27.80	2.35	34.35	55.12	50.92	74.00	23.08	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

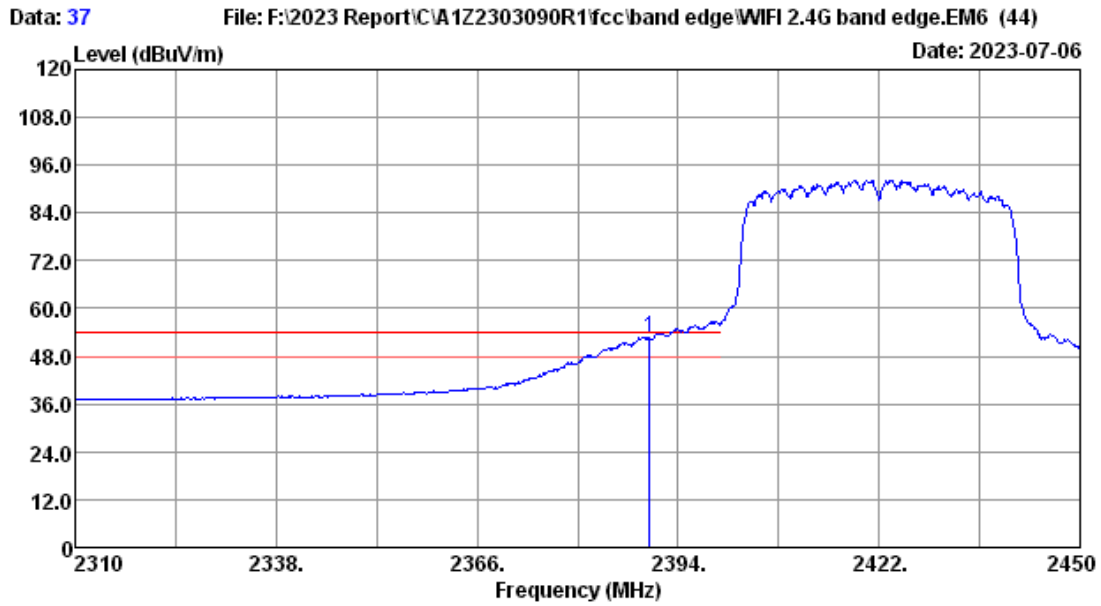

Site no.	: 3m Chamber	Data no.	: 37
Dis. / Ant.	: 3m 2022 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C AV		
Env. / Ins.	: 23.2°C/52.5%	Engineer	: nier
Test Mode	: Wifi2.4G 11n40 2422MHz TX		
	:		
	:		

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBuV)	Emission		Margin (dB)	Remark
						Level (dBuV/m)	Limits (dBuV/m)		
1	2390.00	27.70	4.85	34.36	54.49	52.68	54.00	1.32	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

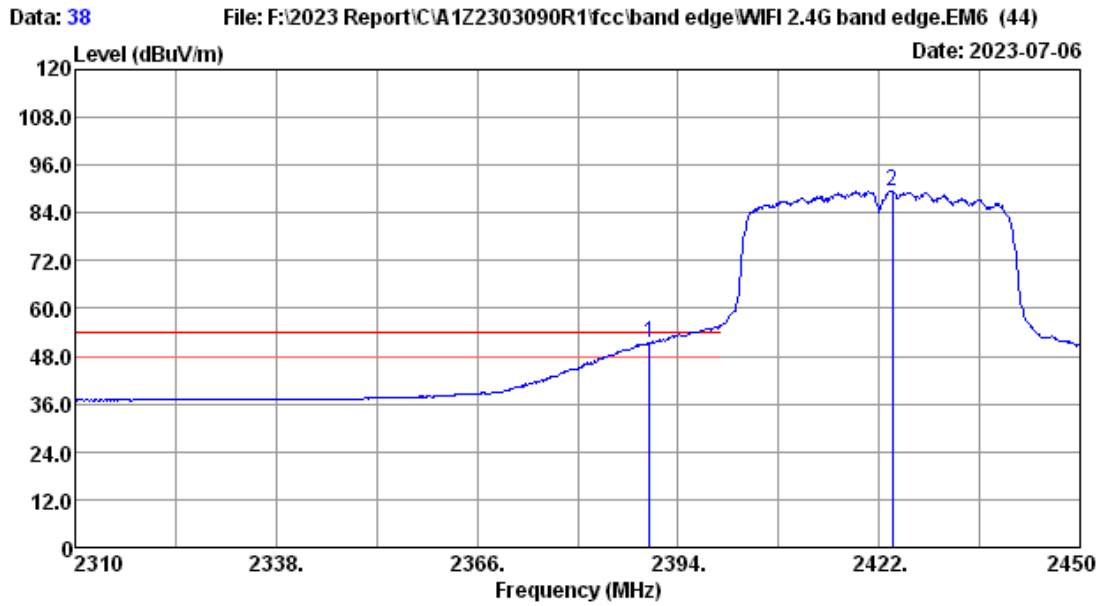

Site no. : 3m Chamber Data no. : 38
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2°C/52.5% Engineer : nier
 Test Mode : Wifi2.4G 11n40 2422MHz TX
 :
 :

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.70	4.85	34.36	53.20	51.39	54.00	2.61	Average
2	2423.82	27.77	4.88	34.36	91.24	89.53	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

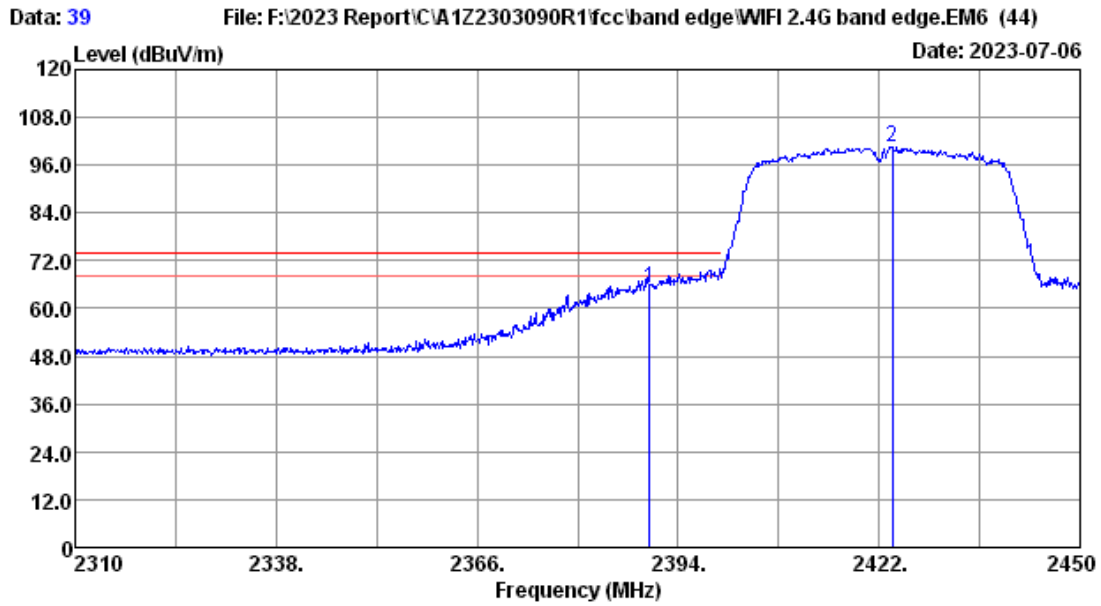

Site no. : 3m Chamber Data no. : 39
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : nier
 Test Mode : Wifi2.4G 11n40 2422MHz TX
 :
 :

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.70	4.85	34.36	66.75	64.94	74.00	9.06	Peak
2	2423.82	27.77	4.88	34.36	102.15	100.44	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

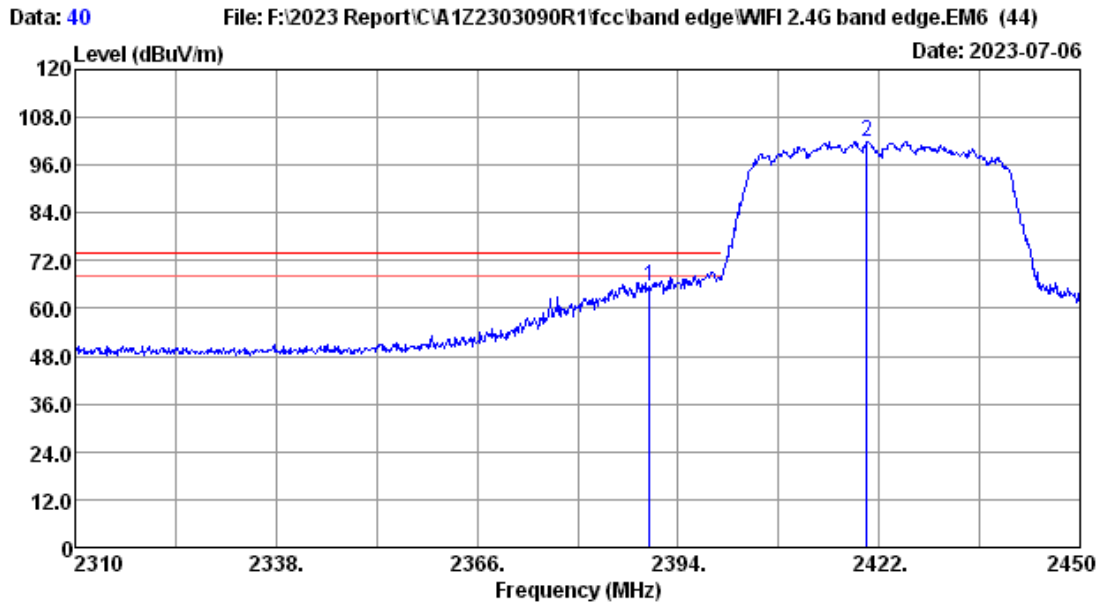

Site no. : 3m Chamber Data no. : 40
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : nier
 Test Mode : Wifi2.4G 11n40 2422MHz TX
 :
 :

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.70	4.85	34.36	67.29	65.48	74.00	8.52	Peak
2	2420.32	27.77	4.88	34.36	103.75	102.04	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

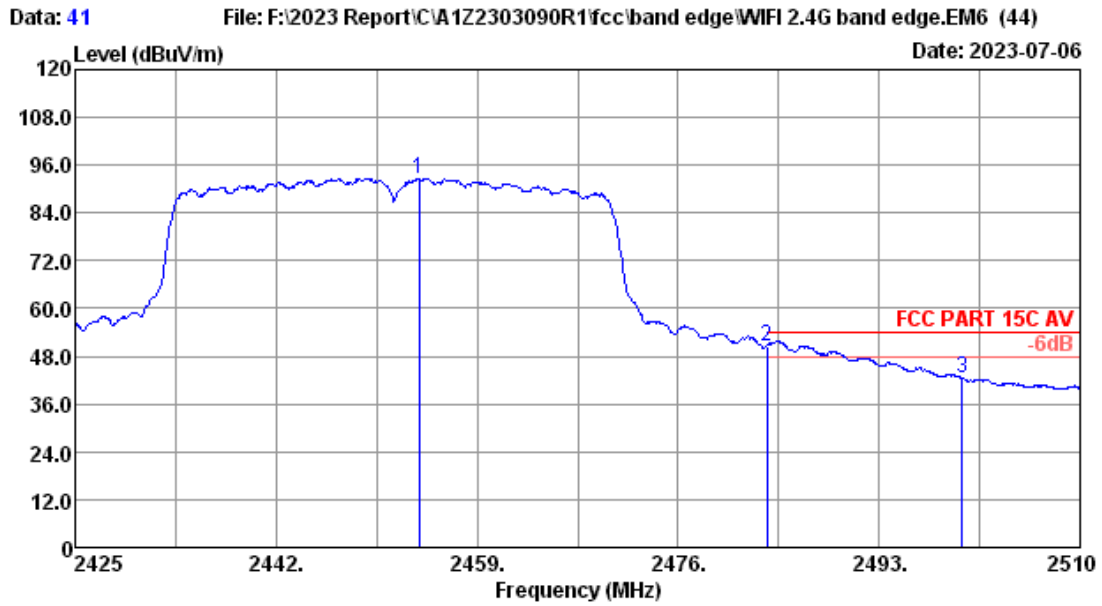

Site no. : 3m Chamber Data no. : 41
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2°C/52.5% Engineer : nier
 Test Mode : Wifi2.4G 11n40 2452MHz TX
 :
 :

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2454.07	27.80	4.91	34.35	94.37	92.73	-----	-----	Average
2	2483.50	27.80	4.94	34.35	52.23	50.62	54.00	3.38	Average
3	2500.00	27.80	4.95	34.35	44.28	42.68	54.00	11.32	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

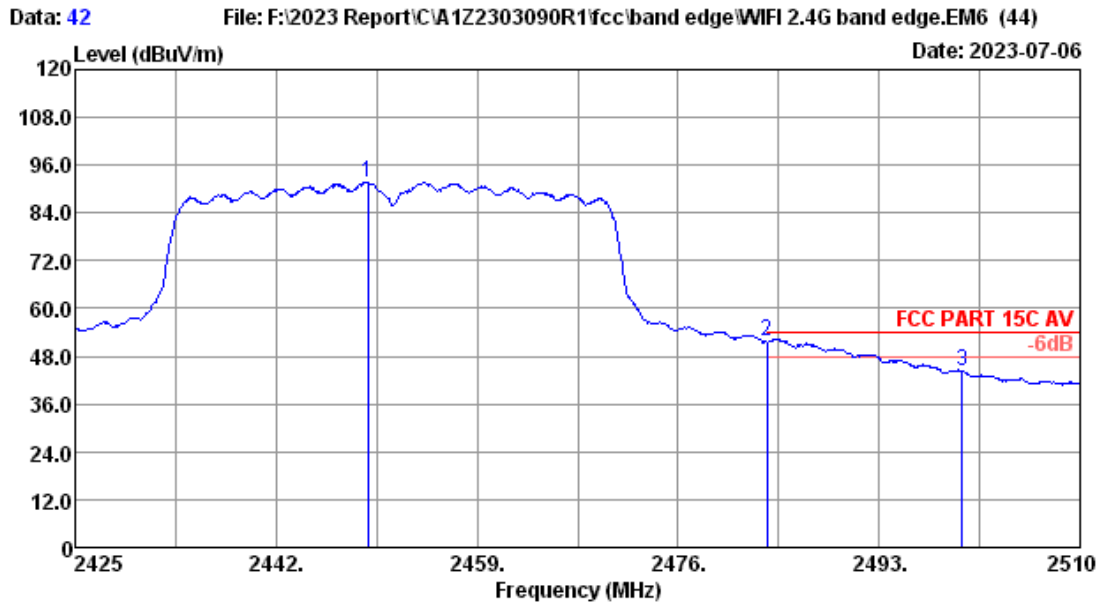

Site no. : 3m Chamber Data no. : 42
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23.2°C/52.5% Engineer : nier
 Test Mode : Wifi2.4G 11n40 2452MHz TX
 :
 :

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2449.74	27.80	4.90	34.35	93.32	91.67	-----	-----	Average
2	2483.50	27.80	4.94	34.35	53.33	51.72	54.00	2.28	Average
3	2500.00	27.80	4.95	34.35	45.77	44.17	54.00	9.83	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

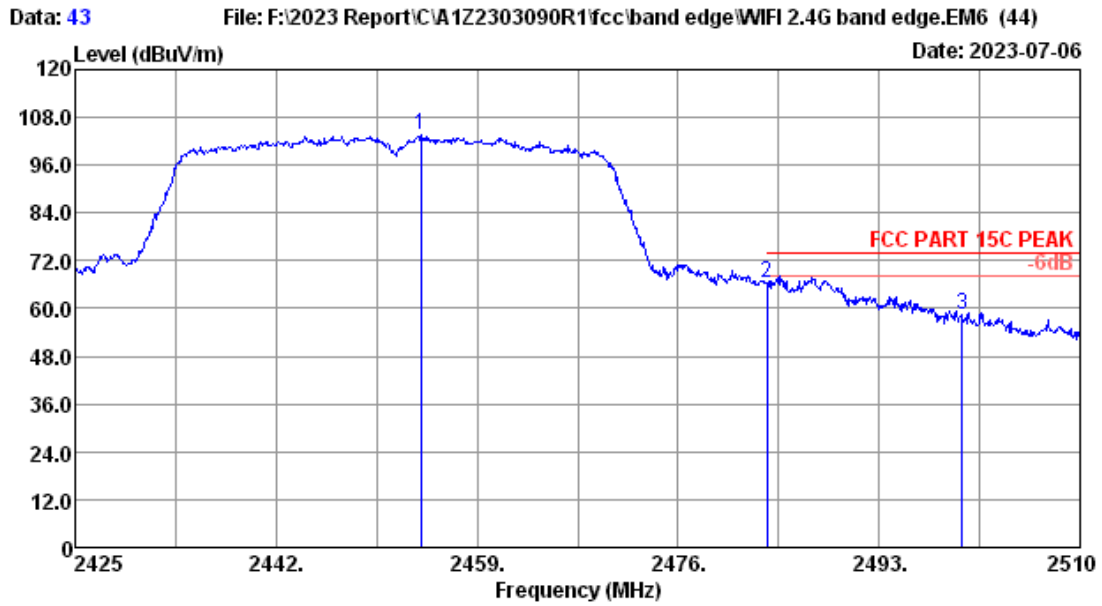

Site no. : 3m Chamber Data no. : 43
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : nier
 Test Mode : Wifi2.4G 11n40 2452MHz TX
 :
 :

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2454.24	27.80	4.91	34.35	105.23	103.59	-----	-----	Peak
2	2483.50	27.80	4.94	34.35	67.87	66.26	74.00	7.74	Peak
3	2500.00	27.80	4.95	34.35	59.94	58.34	74.00	15.66	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

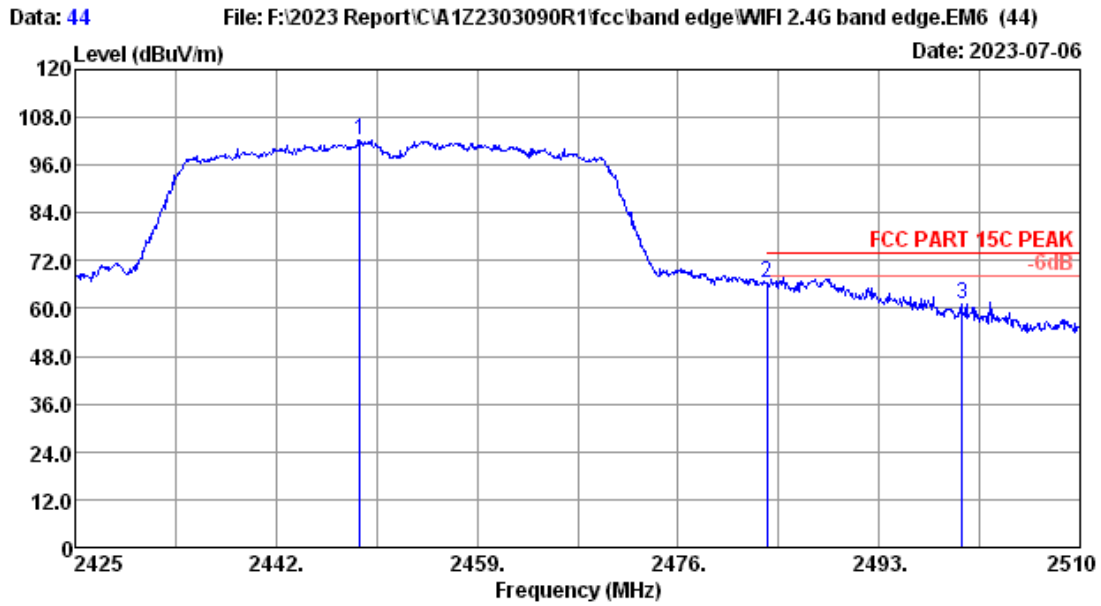

Site no. : 3m Chamber Data no. : 44
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : nier
 Test Mode : Wifi2.4G 11n40 2452MHz TX
 :
 :

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2449.06	27.80	4.90	34.35	103.98	102.33	-----	-----	Peak
2	2483.50	27.80	4.94	34.35	68.24	66.63	74.00	7.37	Peak
3	2500.00	27.80	4.95	34.35	62.65	61.05	74.00	12.95	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

7. 6DB BANDWIDTH TEST

7.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Apr.01,23	1 Year
2.	RF Cable	HUBER+SUHNER	SUCOFLE X-106	505238/6	Apr.02,23	1 Year

7.2. Limit

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz

7.3. Test Procedure

The transmitter output was connected to a spectrum analyzer, The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 300kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

7.4. Test Results


EUT: Wi-Fi Module		
M/N: U9W37		
Test date: 2023-07-07	Pressure: 103.1±1.0 kpa	Humidity: 51.5±3.0%
Tested by: Winter	Test site: RF site	Temperature: 22.5±0.6 °C

Test Mode	CH	-6dB Bandwidth (MHz)		Limit (KHz)
		ANTA	ANTB	
11b	CH1	8.600	9.089	≧ 500
	CH6	8.615	9.083	
	CH11	8.096	8.137	
11g	CH1	15.11	15.16	≧ 500
	CH6	15.69	15.16	
	CH11	15.12	15.15	
11n HT20	CH1	15.14	15.04	≧ 500
	CH6	15.12	15.10	
	CH11	15.15	15.13	
11n HT40	CH3	35.16	35.16	≧ 500
	CH6	35.13	35.13	
	CH9	35.19	35.08	

Conclusion: PASS

ANT A:

Test Mode: IEEE 802.11b
Test CH1: 2412MHz

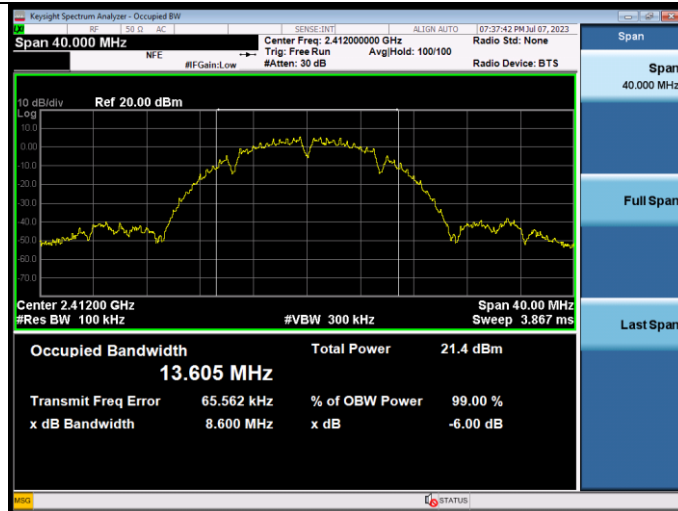


ANT B:


Test Mode: IEEE 802.11b
Test CH1: 2412MHz




Test CH6: 2437MHz

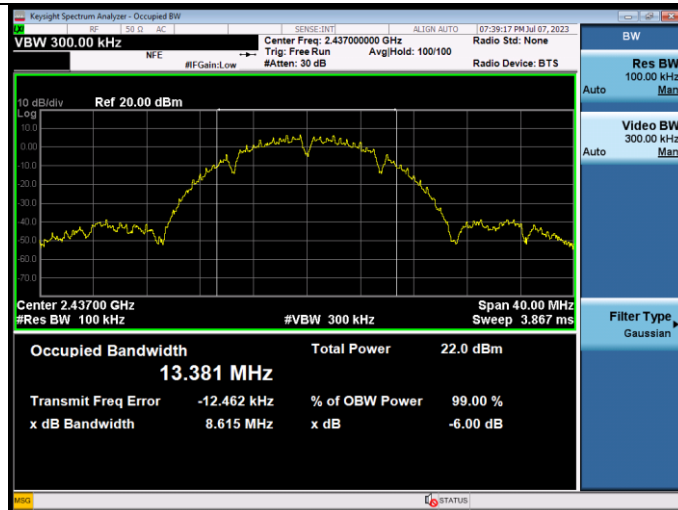


Test CH6: 2437MHz

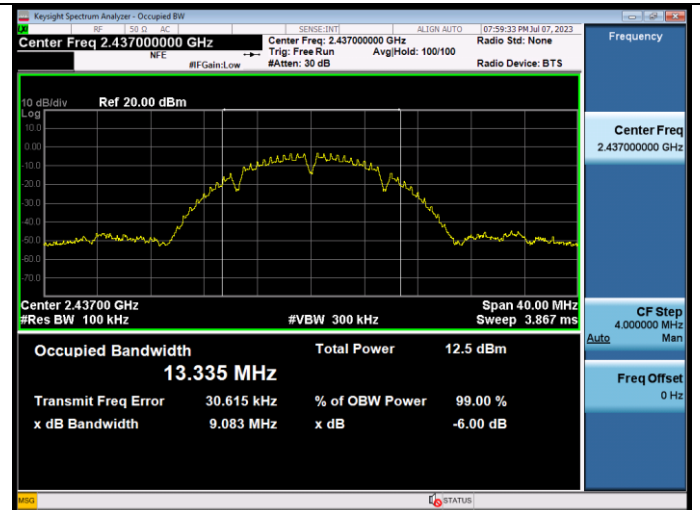

Test CH11: 2462MHz

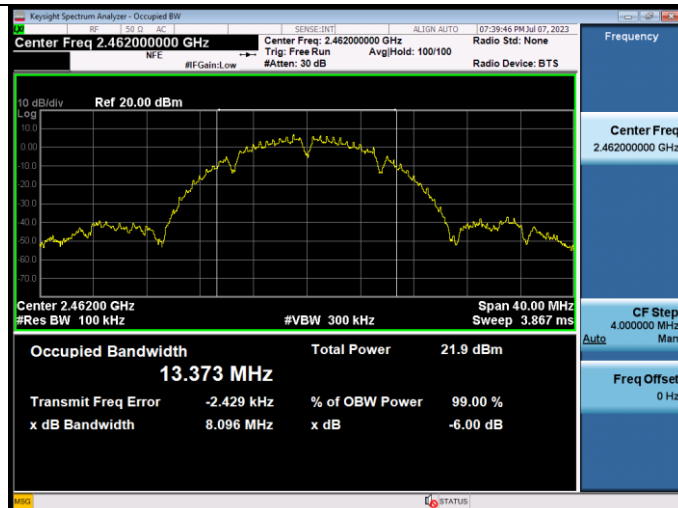


Test CH11: 2462MHz

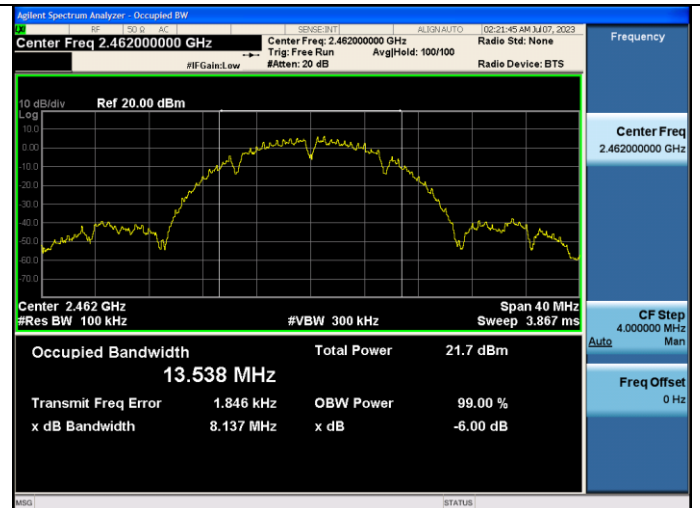

ANT A:

Test Mode: IEEE 802.11g
Test CH1: 2412MHz

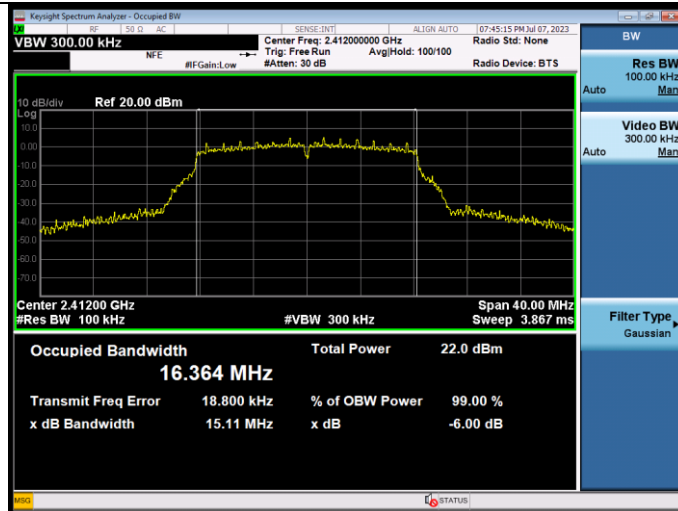

ANT B:

Test Mode: IEEE 802.11g
Test CH1: 2412MHz




Test CH6: 2437MHz




Test CH6: 2437MHz



Test CH11: 2462MHz

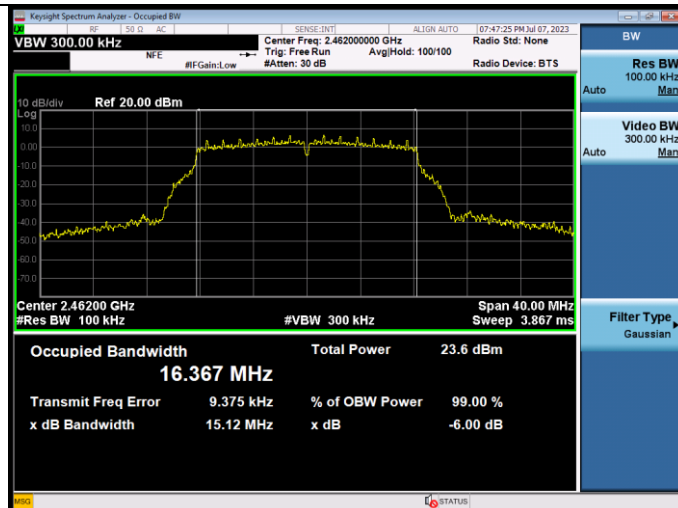


Test CH11: 2462MHz

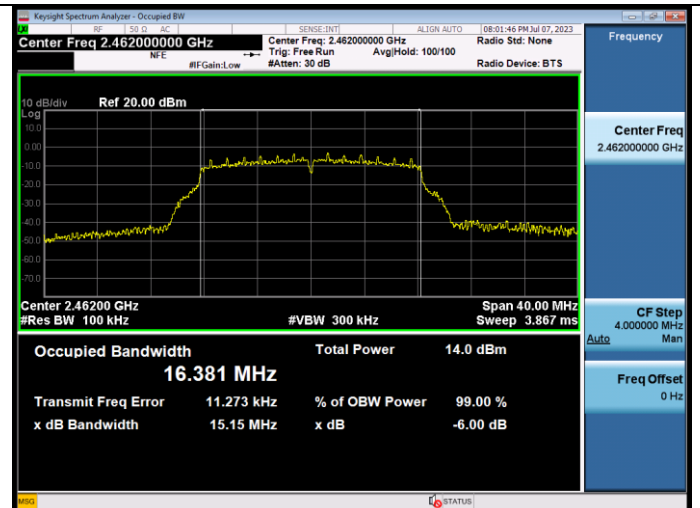


ANT A:

Test Mode: IEEE 802.11n HT20
Test CH1: 2412MHz

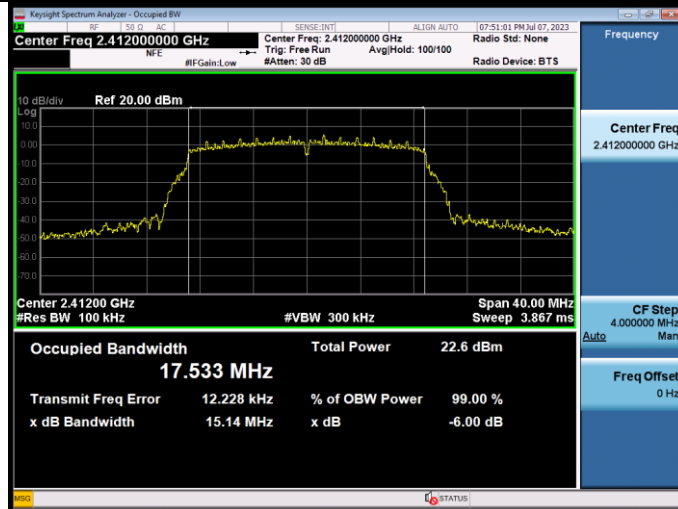


ANT B:


Test Mode: IEEE 802.11n HT20
Test CH1: 2412MHz

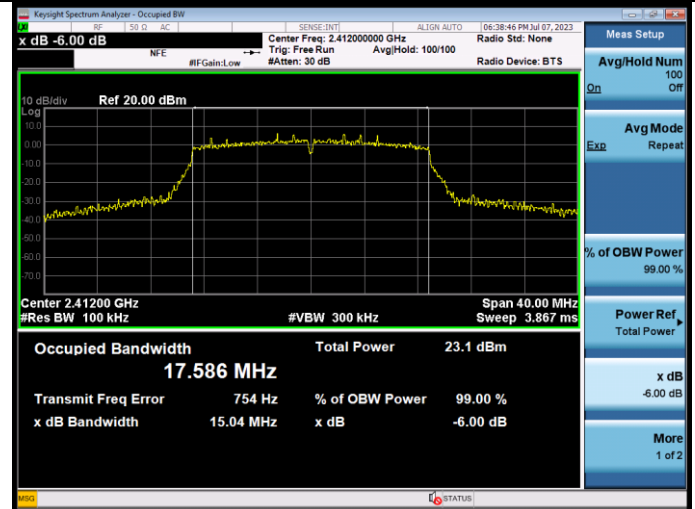


Test CH6: 2437MHz

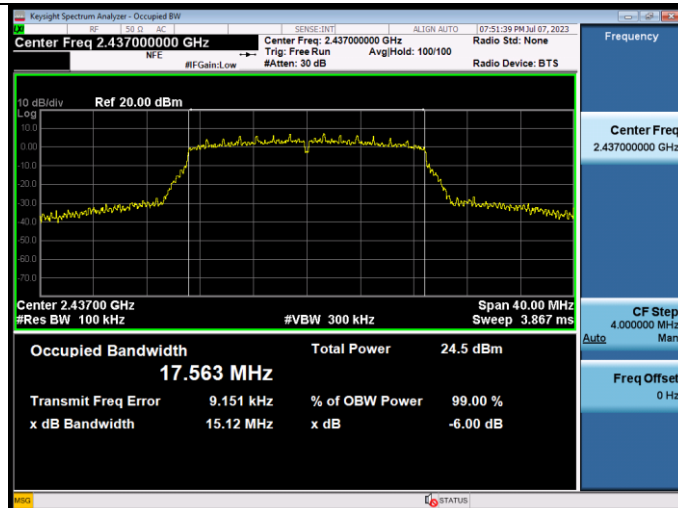

Test CH6: 2437MHz

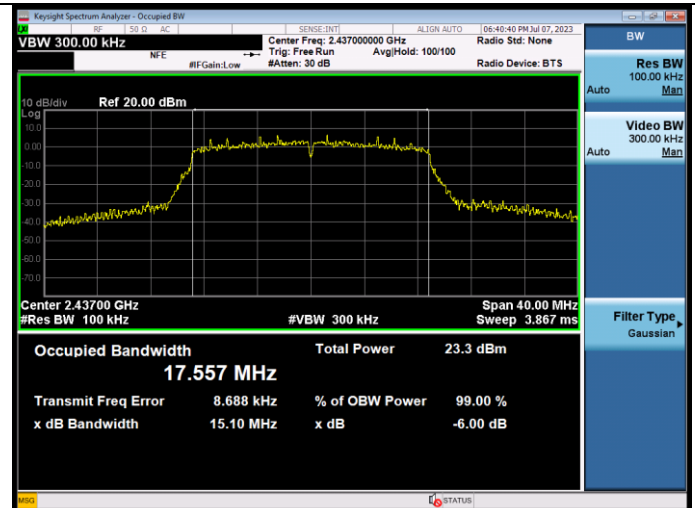

Test CH11: 2462MHz

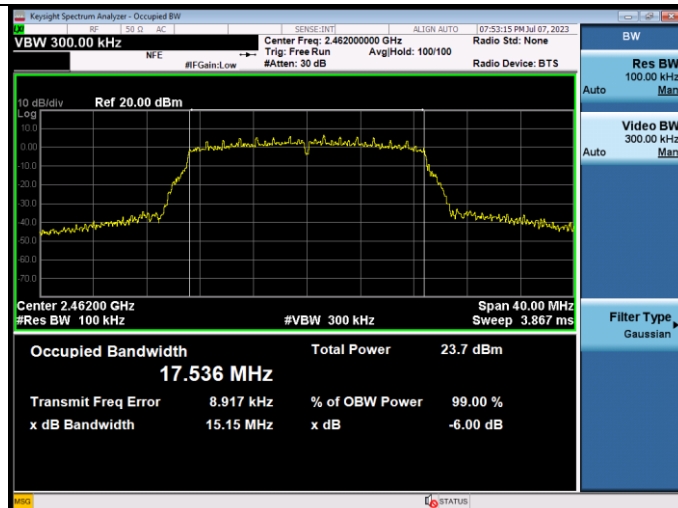

Test CH11: 2462MHz

