



TEST REPORT

FCC PART 15 SUBPART E 15.407

Report Reference No.: **CTL1908174031-WF02**

Compiled by:
(position+printed name+signature)

Happy Guo
(File administrators)

Happy Guo

Tested by:
(position+printed name+signature)

Nice Nong
(Test Engineer)

Nice Nong

Approved by:
(position+printed name+signature)

Ivan Xie
(Manager)

Ivan Xie

Product Name.....: WiFi AP/CPE

Model/Type reference: WiFi AP/CPE-2458-3x3-AC

List Model(s).....: N/A

Trade Mark.....: Nodes

FCC ID.....: 2AU5Y-WIFIAP

Applicant's name: **Beijing Nodes Network Technology Co., Ltd.**

Address of applicant: Rm705, Shenzhou Building, No.31 Zhongguancun South Street,
Haidian District, Beijing 100081 China

Test Firm: **Shenzhen CTL Testing Technology Co., Ltd.**

Address of Test Firm: Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road,
Nanshan District, Shenzhen, China 518055

Test specification.....:

Standard.....: **47 CFR FCC Part 15 Subpart E 15.407**

TRF Originator: Shenzhen CTL Testing Technology Co., Ltd.

Master TRF: Dated 2011-01

Date of receipt of test item.....: Sep. 05, 2019

Date of sampling.....: Sep. 05, 2019

Date of Test Date.....: Sep. 05, 2019–Oct. 23, 2019

Data of Issue.....: Oct. 25, 2019

Result.....: **Pass**

Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

TEST REPORT

Test Report No. :	CTL1908174031-WF02	Oct. 25, 2019 ----- Date of issue
--------------------------	---------------------------	---

Equipment under Test : WiFi AP/CPE

Model /Type : WiFi AP/CPE-2458-3x3-AC

Listed Models : N/A

Applicant : **Beijing Nodes Network Technology Co., Ltd.**

Address : Rm705, Shenzhou Building, No.31 Zhongguancun
South Street, Haidian District, Beijing 100081 China

Manufacturer : **Beijing Nodes Network Technology Co., Ltd.**

Address : Rm705, Shenzhou Building, No.31 Zhongguancun
South Street, Haidian District, Beijing 100081 China

Test result	Pass *
--------------------	---------------

* In the configuration tested, the EUT complied with the standards specified page 5.

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the issuing testing laboratory.

Table of Contents

Page

1. SUMMARY.....	5
1.1. TEST STANDARDS.....	5
1.2. TEST DESCRIPTION.....	5
1.3. TEST FACILITY.....	6
1.4. STATEMENT OF THE MEASUREMENT UNCERTAINTY.....	6
2. GENERAL INFORMATION.....	8
2.1. ENVIRONMENTAL CONDITIONS.....	8
2.2. GENERAL DESCRIPTION OF EUT.....	8
2.3. DESCRIPTION OF TEST MODES AND TEST FREQUENCY.....	9
2.4. EQUIPMENTS USED DURING THE TEST.....	10
2.5. SPECIAL ACCESSORIES.....	11
2.6. RELATED SUBMITTAL(S) / GRANT (S).....	11
2.7. MODIFICATIONS.....	11
3. TEST CONDITIONS AND RESULTS.....	12
3.1. CONDUCTED EMISSIONS TEST.....	12
3.2. RADIATED EMISSIONS.....	15
3.3. MAXIMUM CONDUCTED AVERAGE OUTPUT POWER.....	21
3.4. POWER SPECTRAL DENSITY.....	23
3.5. EMISSION BANDWIDTH (26dBm BANDWIDTH).....	40
3.6. MINIMUM EMISSION BANDWIDTH (6dBm BANDWIDTH).....	50
3.7. FREQUENCY STABILITY.....	60
4. TEST SETUP PHOTOS OF THE EUT.....	62
5. PHOTOS OF THE EUT.....	63

1. SUMMARY

1.1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15 Subpart E](#)—Unlicensed National Information Infrastructure Devices

[ANSI C63.10:2013](#) : American National Standard for Testing Unlicensed Wireless Devices

[KDB789033 D02](#): General UNII Test Procedures New Rules v02r01

1.2. Test Description

FCC Requirement		
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15.407(a)	Emission Bandwidth(26dBm Bandwidth)	PASS ^{Note1}
FCC Part 15.407(e)	Minimum Emission Bandwidth(6dBm Bandwidth)	PASS ^{Note2}
FCC Part 15.407(a)	Maximum Conducted Output Power	PASS
FCC Part 15.407(a)	Peak Power Spectral Density	PASS
FCC Part 15.407(g)	Frequency Stability	PASS
FCC Part 15.407(b)	Undesirable emission	PASS
FCC Part 15.407(b)/15.205/15.209	Radiated Emissions	PASS
FCC Part 15.407(h)	Dynamic Frequency Selection	N/A
FCC Part 15.203/15.247(b)	Antenna Requirement	PASS

Note 1: Apply to U-NII 1, U-NII 2A, and U-NII 2C band.

Note 2: Apply to U-NII 3 band only.

1.3. Test Facility

1.3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L7497

Shenzhen CTL Testing Technology Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No. 4343.01

Shenzhen CTL Testing Technology Co., Ltd, EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

IC Registration No.: 9518B

CAB identifier: CN0041

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements with Registration No.: 9518B on Jan. 22, 2019.

FCC-Registration No.: 399832

Designation No.: CN1216

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 399832, December 08, 2017.

1.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Measurement Uncertainty	Notes
Transmitter power conducted	±0.57 dB	(1)
Transmitter power Radiated	±2.20 dB	(1)
Conducted spurious emission 9KHz-40 GHz	±2.20 dB	(1)
Occupied Bandwidth	±0.01ppm	(1)
Radiated Emission 30~1000MHz	±4.10dB	(1)
Radiated Emission Above 1GHz	±4.32dB	(1)

Conducted Disturbance0.15~30MHz	$\pm 3.20\text{dB}$	(1)
---------------------------------	---------------------	-----

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

2. GENERAL INFORMATION

2.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

2.2. General Description of EUT

Product Name:	WiFi AP/CPE			
Model/Type reference:	WiFi AP/CPE-2458-3x3-AC			
Power supply:	DC 56V from Adapter			
Adapter information:	Model:GRT-560110A Input:AC100~240V 50/60Hz 1.5A MAX Output:DC 56V === 1000mA			
Hardware version:	HW1.4			
Software version:	V2.2.1.402			
WIFI				
	20MHz system	40MHz system	80MHz system	160MHz system
Supported type:	802.11a 802.11n 802.11ac	802.11n 802.11ac	802.11ac	N/A
Operation frequency:	5180-5240MHz 5745-5825MHz	5190-5230MHz 5755-5795MHz	5210MHz; 5775MHz	N/A
Modulation:	OFDM	OFDM	OFDM	N/A
Channel number:	9	4	2	N/A
Channel separation:	20MHz	40MHz	80MHz	N/A
Antenna type:	Integral Antenna			
Antenna gain:	5G CH0:13 dBi 5G CH1:13 dBi 5G CH2:13 dBi			
Directional gain:	17.77 dBi (GANT + 10 log(NANT) dBi)			

Note: For more details, please refer to the user's manual of the EUT.

2.3. Description of Test Modes and Test Frequency

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing.

All test performed at the low, middle and high of operational frequency range of each mode.

Operation Frequency List WIFI on 5G Band:

Operating band	20MHz		40MHz		80MHz	
	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
U-NII 1 (5150MHz-5250MHz)	36	5180	38	5190	42	5210
	40	5200				
	44	5220	46	5230		
	48	5240				
U-NII 3 (5725MHz-5850MHz)	149	5745	151	5755	155	5775
	153	5765				
	157	5785	159	5795		
	161	5805				
	165	5825				

Note:

1. "--"Means no channel(s) available any more.
2. The line display in grey is those Channels/Frequencies select to test in this report for each operation mode.

Data Rate Used:

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate
Maximum Conducted Output Power Power Spectral Density Emission Bandwidth(26dBm Bandwidth) Minimum Emission Bandwidth(6dBm Bandwidth) Undesirable emission Frequency Stability	11a/OFDM	6 Mbps
	11n(20MHz),11ac(20MHz)/OFDM	7.2 Mbps
	11n(40MHz),11ac(40MHz)/OFDM	15.0Mbps
	11ac(80MHz)/OFDM	65.0Mbps
	11n(20MHz),11ac(20MHz)/MIMO	7.2 Mbps
	11n(40MHz),11ac(40MHz)/MIMO	15.0Mbps
	11ac(80MHz)/MIMO	65.0Mbps

2.4. Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	3560.6550.1 2	2019/05/20	2020/05/19
LISN	R&S	ESH2-Z5	860014/010	2019/05/20	2020/05/19
Bilog Antenna	Sunol Sciences Corp.	JB1	A061713	2019/05/20	2020/05/19
EMI Test Receiver	R&S	ESCI	1166.5950.03	2019/05/20	2020/05/19
Power Sensor	Agilent	U2021XA	MY55130004	2019/05/20	2020/05/19
Power Meter	Agilent	U2021XA	MY55130006	2019/05/20	2020/05/19
Spectrum Analyzer	Agilent	E4407B	MY41440676	2019/05/20	2020/05/19
Spectrum Analyzer	Keysight	N9020A	MY53420874	2019/05/20	2020/05/19
Spectrum Analyzer	Agilent	N9020	US46220290	2019/05/20	2020/05/19
Controller	EM Electronics	EM 1000	060859	2019/05/20	2020/05/19
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2019/05/20	2020/05/19
Active Loop Antenna	Da Ze	ZN30900A	/	2019/05/20	2020/05/19
Amplifier	Agilent	8449B	3008A02306	2019/05/20	2020/05/19
Signal Generator	Agilent	N5182A	MY47420864	2019/05/20	2020/05/19
Signal Generator	Wiltron	68347B	657001	2019/05/20	2020/05/19
Programmable constant temperature and humidity test chamber	ESPEC	EL-10KA	A20120523	2019/05/20	2020/05/19
Amplifier	Agilent	8447D	2944A10176	2019/05/20	2020/05/19
Temperature/Humidity Meter	Gangxing	CTH-608	02	2019/05/20	2020/05/19
High-Pass Filter	micro-tranics	HPM50108	G174	2019/05/20	2020/05/19
High-Pass Filter	micro-tranics	HPM50111	G142	2019/05/20	2020/05/19
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	2019/05/20	2020/05/19
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	2019/05/20	2020/05/19
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	2019/05/20	2020/05/19
RF Cable	Megalon	RF-A303	N/A	2019/05/20	2020/05/19

The calibration interval was one year

2.5. Special Accessories

Manufacturer	Description	Model	Serial Number	Certificate
ASUS	Notebook PC	FL5900U	9014	FCC ID:PPD-QCNFA335
Delta	AC Adapter	ADP-65DW A	00A99	SDOC

2.6. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended to comply with Section 15.407 of the FCC Part 15, Subpart E Rules.

2.7. Modifications

No modifications were implemented to meet testing criteria.

3. TEST CONDITIONS AND RESULTS

3.1. Conducted Emissions Test


LIMIT

According to FCC CFR Title 47 Part 15 Subpart C Section 15.207, AC Power Line Conducted Emissions Limits for Licence-Exempt Radio Apparatus as below:

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

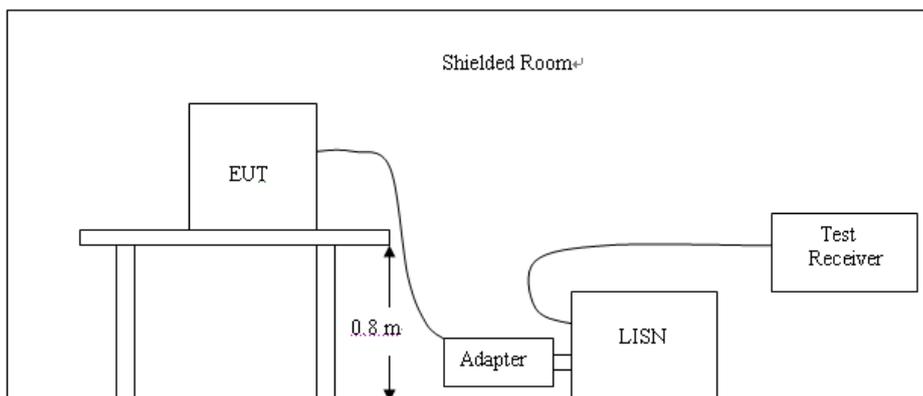


TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
4. The adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST RESULTS

Remark:

1. All modes of 802.11a/ n/ac were tested at Low, Middle, and High channel; only the worst result of 802.11a CH36 was reported as below:
2. Both 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz power supply have been tested, only the worst result of 120 VAC, 60 Hz was reported as below:
3. Pre-test AC conducted emission at power from AC mains mode and at charge from PC mode, recorded worst case.

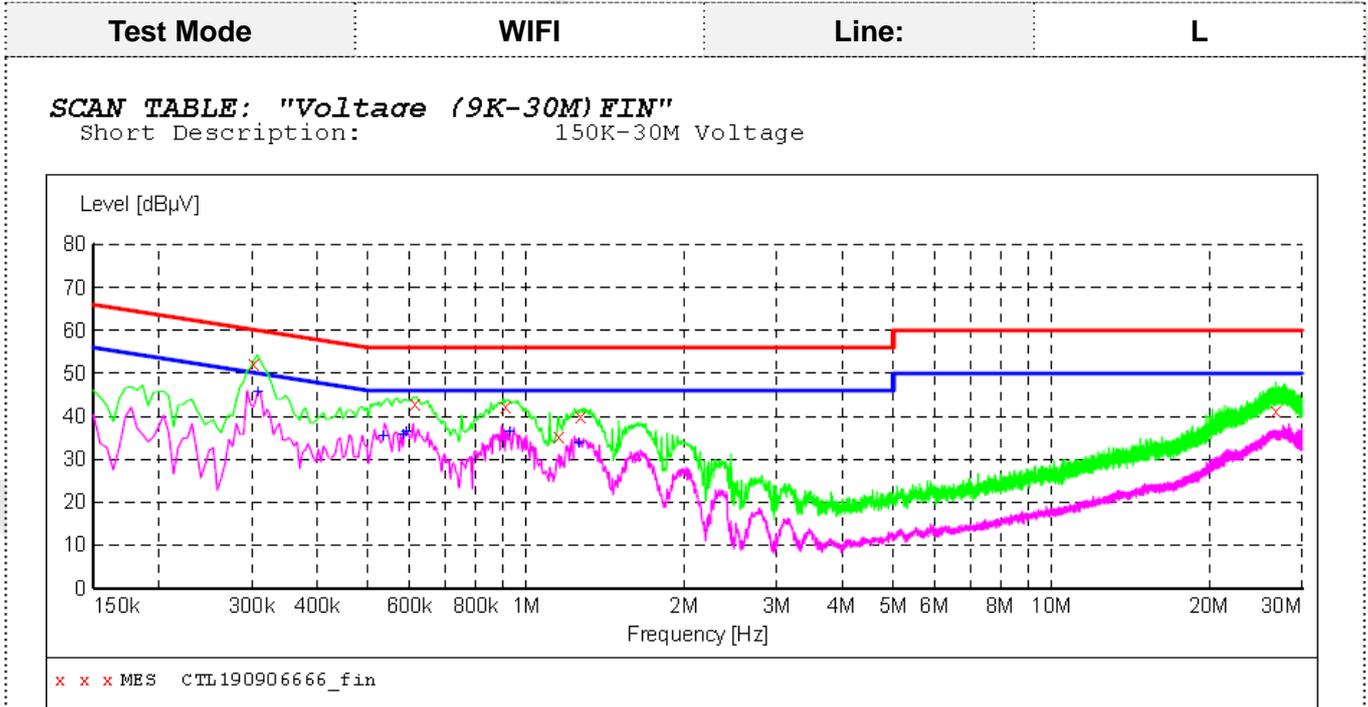

MEASUREMENT RESULT: "CTL190906666_fin"

2019-9-6 05:34??

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.303000	52.10	11.2	60	8.1	QP	L1	GND
0.613500	42.90	11.2	56	13.1	QP	L1	GND
0.915000	42.20	11.3	56	13.8	QP	L1	GND
1.153500	35.50	11.3	56	20.5	QP	L1	GND
1.270500	40.10	11.3	56	15.9	QP	L1	GND
26.749500	41.30	11.7	60	18.7	QP	L1	GND

MEASUREMENT RESULT: "CTL190906666_fin2"


2019-9-6 05:34??

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.307500	45.60	11.2	50	4.4	AV	L1	GND
0.532500	35.30	11.2	46	10.7	AV	L1	GND
0.582000	35.80	11.2	46	10.2	AV	L1	GND
0.591000	36.40	11.2	46	9.6	AV	L1	GND
0.928500	36.40	11.3	46	9.6	AV	L1	GND
1.257000	33.80	11.3	46	12.2	AV	L1	GND

Test Mode	WIFI	Line:	N
-----------	------	-------	---

SCAN TABLE: "Voltage (9K-30M) FIN"

Short Description: 150K-30M Voltage

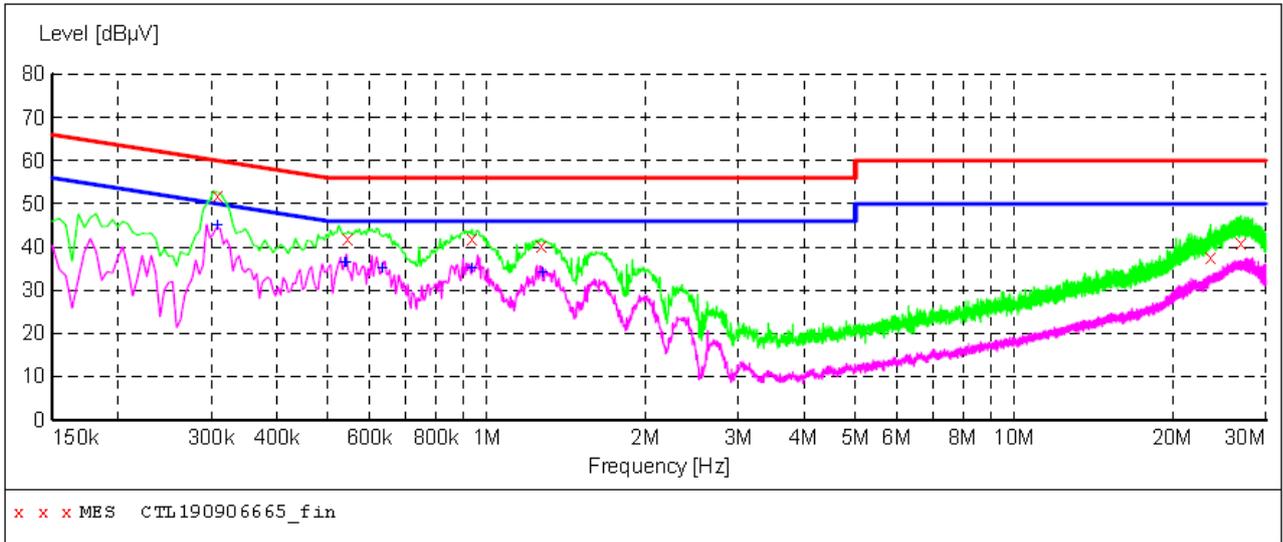

MEASUREMENT RESULT: "CTL190906665_fin"

2019-9-6 05:30??

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.307500	52.00	11.2	60	8.0	QP	N	GND
0.546000	42.10	11.2	56	13.9	QP	N	GND
0.937500	41.90	11.3	56	14.1	QP	N	GND
1.270500	40.20	11.3	56	15.8	QP	N	GND
23.563500	37.70	11.6	60	22.3	QP	N	GND
26.929500	41.10	11.7	60	18.9	QP	N	GND

MEASUREMENT RESULT: "CTL190906665_fin2"

2019-9-6 05:30??

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.307500	45.10	11.2	50	4.9	AV	N	GND
0.537000	36.40	11.2	46	9.6	AV	N	GND
0.541500	36.30	11.2	46	9.7	AV	N	GND
0.631500	34.90	11.2	46	11.1	AV	N	GND
0.937500	34.90	11.3	46	11.1	AV	N	GND
1.275000	33.90	11.3	46	12.1	AV	N	GND

3.2. Radiated Emissions

Limit

The maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Undesirable emission limits

Requirement	Limit(EIRP)	Limit (Field strength at 3m) <small>Note1</small>
15.407(b)(1)	PK:-27(dBm/MHz)	PK:68.2(dBμV/m)
15.407(b)(2)		
15.407(b)(3)		
15.407(b)(4)		

Note1: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$


- (5) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209
- (6) In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Radiated emission limits


Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	20log(2400/F(KHz))+40log(300/3)	2400/F(KHz)
0.49-1.705	3	20log(24000/F(KHz))+ 40log(30/3)	24000/F(KHz)
1.705-30	3	20log(30)+ 40log(30/3)	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

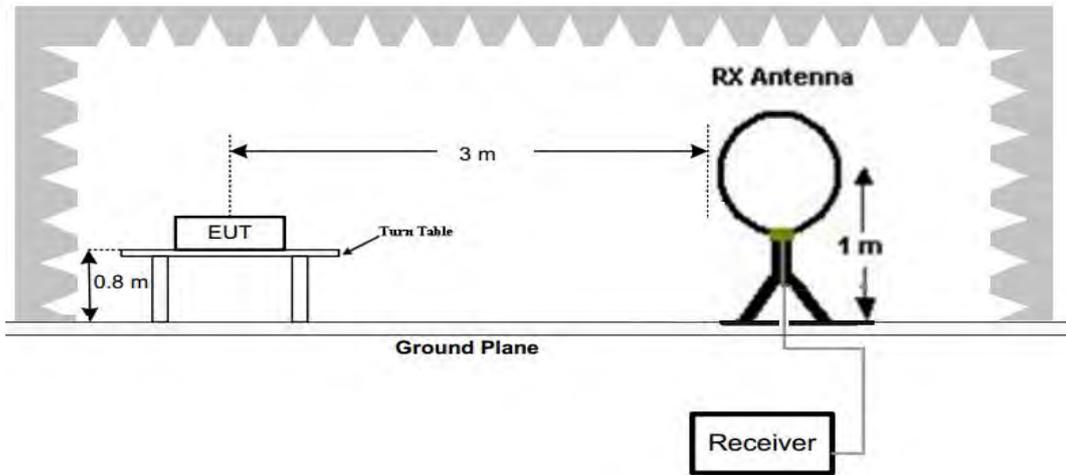

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

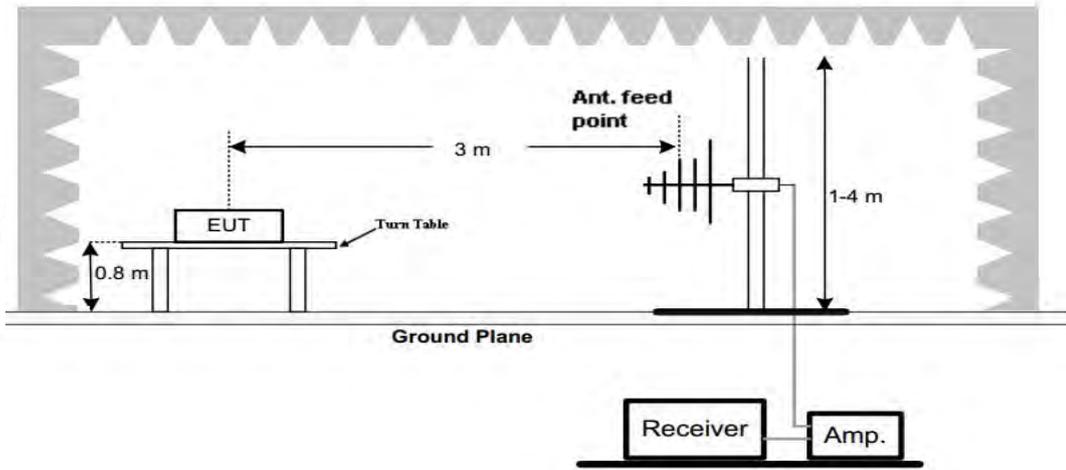

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

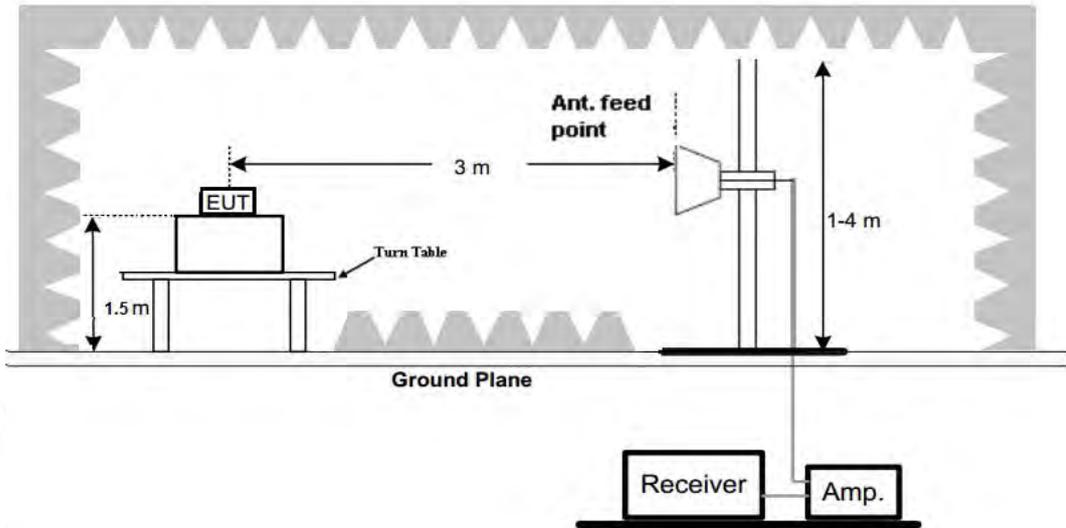

Test Procedure

- Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
- Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT
- And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- Repeat above procedures until all frequency measurements have been completed.
- Radiated emission test frequency band from 9KHz to 40GHz.
- The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Bilog Antenna	3
1GHz-18GHz	Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

- Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz, Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz, Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz, Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

TEST RESULTS

Remark:


- This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.
- All 802.11a / 802.11n (HT20) / 802.11ac (HT20) / 802.11n (HT40) / 802.11ac (HT40) / 802.11ac (HT80) modes have been tested for below 1GHz test, only the worst case 802.11ac (HT20) low channel of U-NII 1 band was recorded.
- All 802.11a / 802.11n (HT20) / 802.11ac (HT20) / 802.11n (HT40) / 802.11ac (HT40) / 802.11ac (HT80) modes have been tested for above 1GHz test, only the worst case 802.11ac (HT20) was recorded.
- Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.

For 30MHz-1GHz

Horizontal

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength				Transducer
Start	Stop	Detector	Meas. Time	IF Bandw.		
30.0 MHz	1.0 GHz	MaxPeak	300.0 ms	100 kHz	JB1	

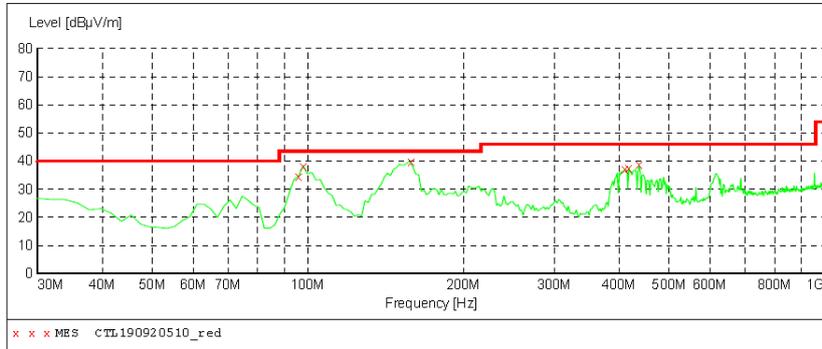

MEASUREMENT RESULT: "CTL190920510_red"


2019-9-20 16:30

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
95.960000	34.60	10.3	43.5	8.9	---	0.0	0.00	HORIZONTAL
97.900000	38.30	10.8	43.5	5.2	---	0.0	0.00	HORIZONTAL
158.040000	39.70	14.5	43.5	3.8	---	0.0	0.00	HORIZONTAL
410.240000	37.10	18.5	46.0	8.9	---	0.0	0.00	HORIZONTAL
418.000000	37.50	18.7	46.0	8.5	---	0.0	0.00	HORIZONTAL
437.400000	38.70	19.2	46.0	7.3	---	0.0	0.00	HORIZONTAL

Vertical

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength				Transducer
Start	Stop	Detector	Meas. Time	IF Bandw.		
30.0 MHz	1.0 GHz	MaxPeak	300.0 ms	100 kHz	JB1	

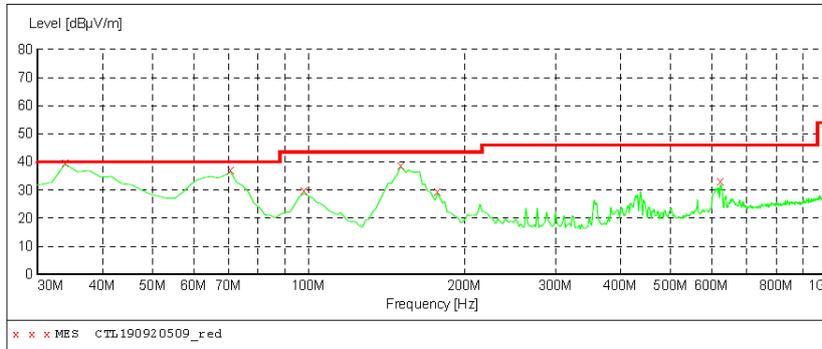

MEASUREMENT RESULT: "CTL190920509_red"

2019-9-20 16:22

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
33.880000	43.50	19.7	40.0	4.7	QP	0.0	0.00	VERTICAL
70.740000	40.60	9.1	40.0	2.1	QP	0.0	0.00	VERTICAL
97.900000	33.00	10.8	43.5	10.5	---	0.0	0.00	VERTICAL
150.280000	42.40	14.4	43.5	4.4	QP	0.0	0.00	VERTICAL
177.440000	33.10	14.6	43.5	10.4	---	0.0	0.00	VERTICAL
623.640000	36.10	23.4	46.0	9.9	---	0.0	0.00	VERTICAL

U-NII 3 & 802.11ac (HT20) Mode (above 1GHz)

Tested Channel	Frequency (MHz)	Emission Level (dBuV/m)	Detector Mode	ANT Pol	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre amplifier (dB)	Correction Factor (dB/m)
149 (5745MHz)	5720.00	50.36	PK	H	68.20	17.84	38.85	37.64	9.28	35.41	11.51
	11490.00	52.45	PK	H	68.20	15.75	34.19	39.69	12.90	34.33	18.26
	--	--	--	--	--	--	--	--	--	--	--
157 (5785MHz)	11570.00	51.98	PK	H	68.20	16.22	33.53	39.71	13.05	34.31	18.45
	--	--	--	--	--	--	--	--	--	--	--
165 (5825MHz)	5855.00	49.54	PK	H	68.20	18.66	38.00	37.64	9.28	35.38	11.54
	11650.00	52.21	PK	H	68.20	15.99	33.59	39.73	13.19	34.30	18.62
	--	--	--	--	--	--	--	--	--	--	--

Tested Channel	Frequency (MHz)	Emission Level (dBuV/m)	Detector Mode	ANT Pol	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre amplifier (dB)	Correction Factor (dB/m)
149 (5745MHz)	5720.00	49.20	PK	V	68.20	19.00	37.69	37.64	9.28	35.41	11.51
	11490.00	52.22	PK	V	68.20	15.98	33.96	39.69	12.90	34.33	18.26
	--	--	--	--	--	--	--	--	--	--	--
157 (5785MHz)	11570.00	51.98	PK	V	68.20	16.22	33.53	39.71	13.05	34.31	18.45
	--	--	--	--	--	--	--	--	--	--	--
165 (5825MHz)	5855.00	49.21	PK	V	68.20	18.99	37.67	37.64	9.28	35.38	11.54
	11650.00	52.13	PK	V	68.20	16.07	33.51	39.73	13.19	34.30	18.62
	--	--	--	--	--	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the other emission levels were very low against the limit.
5. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.
6. Worst case data at 6Mbps at IEEE 802.11a; MCS0 at IEEE 802.11n HT20, IEEE 802.11n HT40, IEEE 802.11ac VHT20 ,IEEE 802.11ac VHT40 and IEEE 802.11ac VHT80;

3.3. Maximum Conducted Average Output Power

Limit

FCC requirement:

For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power sensor.

Test Configuration



Test Results

Note:

1. Measured output power at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 6Mbps at IEEE 802.11a; MCS0 at IEEE 802.11n HT20, IEEE 802.11n HT40, IEEE 802.11ac VHT20 ,IEEE 802.11ac VHT40 and IEEE 802.11ac VHT80;

U-NII 1

Type	Channel	Output power Average(dBm)			Total (dBm)	Limit (dBm)	Result
		Ant1	Ant2	Ant3			
802.11a	36	13.25	13.29	13.48	N/A	23.98	Pass
	40	12.56	12.47	12.39	N/A		
	48	12.84	12.73	12.61	N/A		
802.11n(HT20)	36	7.14	7.18	7.25	11.96	12.21	Pass
	40	7.05	7.11	7.09	11.85		
	48	7.12	7.16	7.18	11.92		
802.11n(HT40)	38	7.23	7.17	7.15	11.95	12.21	Pass
	46	7.19	7.27	7.16	11.98		
802.11ac(HT20)	36	7.26	7.15	7.21	11.98	12.21	Pass
	40	6.98	7.04	7.15	11.83		
	48	6.86	6.73	6.63	11.51		
802.11ac(HT40)	38	6.73	6.92	6.88	11.62	12.21	Pass
	46	6.81	6.84	6.76	11.57		
802.11ac(HT80)	42	6.97	6.85	6.84	11.66	12.21	Pass

U-NII 3

Type	Channel	Output power Average(dBm)			Total (dBm)	Limit (dBm)	Result
		Ant1	Ant2	Ant3			
802.11a	149	15.46	15.42	15.38	N/A	30.00	Pass
	157	14.18	13.29	14.37	N/A		
	165	13.15	12.40	12.67	N/A		
802.11n(HT20)	149	13.36	13.25	13.42	18.12	18.23	Pass
	157	13.18	13.09	13.11	17.90		
	165	13.05	12.89	13.09	17.78		
802.11n(HT40)	151	12.78	12.86	12.74	17.56	18.23	Pass
	159	12.63	12.71	12.76	17.47		
802.11ac(HT20)	149	12.59	12.66	12.15	17.24	18.23	Pass
	157	12.30	12.40	12.43	17.15		
	165	12.02	12.52	12.88	17.26		
802.11ac(HT40)	151	12.79	12.79	12.71	17.53	18.23	Pass
	159	12.14	12.71	12.93	17.38		
802.11ac(HT80)	155	12.70	12.04	12.14	17.07	18.23	Pass

3.4. Power Spectral Density

Limit

FCC requirement:

For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15 - 5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 MHz band.^{note1}

(ii) For an indoor access point operating in the band 5.15 - 5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 MHz band.^{note1}

(iii) For fixed point-to-point access points operating in the band 5.15 - 5.25 GHz, transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.

(iv) For mobile and portable client devices in the 5.15 - 5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 MHz band.^{note1}

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands

The maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

IC requirement:

For the band 5.15-5.25 GHz.

The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

Frequency band 5250-5350 MHz

The power spectral density shall not exceed 11 dBm in any 1.0 MHz band

Frequency bands 5470-5600 MHz and 5650-5725 MHz

The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

For the band 5.725 - 5.85 GHz


The maximum power spectral density shall not exceed 30 dBm in any 500 kHz band.^{note1, note2}

Note1: If transmitting antennas of directional gain greater than 6 dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note2: Fixed point - to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information.

Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW = 1MHz for U-NII 1, U-NII 2A, U-NII C band and 510KHz for U-NII 3 band.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to encompass the entire EBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level.

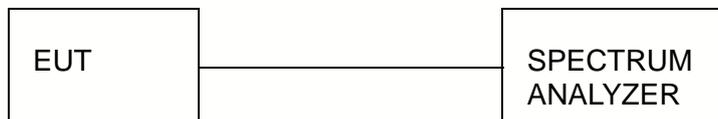Test Configuration**Test Results****U-NII 1**

Type	Channel	P.S.D(dBm/MHz)			Total (dBm/MHz)	Limit (dBm/ MHz)	Result
		Ant1	Ant2	Ant3			
802.11a	36	-3.318	-2.627	-1.892	/	11	Pass
	40	-2.618	-2.413	-2.216	/		
	48	-2.977	-3.017	-2.810	/		
802.11n(HT20)	36	-7.280	-7.594	-7.572	-2.71	-0.77	Pass
	40	-6.656	-6.764	-6.819	-1.97		
	48	-6.529	-6.684	-6.730	-1.88		
802.11n(HT40)	38	-7.725	-7.483	-7.964	-2.95		Pass
	46	-7.745	-7.931	-7.699	-3.02		
802.11ac(HT20)	36	-6.870	-7.170	-7.219	-2.31		Pass
	40	-6.832	-6.843	-7.052	-2.14		
	48	-6.709	-6.769	-7.201	-2.12		
802.11ac(HT40)	38	-7.109	-6.714	-7.073	-2.19		Pass
	46	-6.546	-6.972	-7.171	-2.12		
802.11ac(HT80)	42	-6.055	-5.709	-6.684	-1.36	Pass	


U-NII 3

Type	Channel	Power Spectral Density (dBm/500KHz)			Total (dBm/MHz)	Limit (dBm/500K Hz)	Result
		Ant1	Ant2	Ant3			
802.11a	149	3.967	4.327	4.162	/	30	Pass
	157	3.092	3.128	3.721	/		
	165	3.354	1.993	1.671	/		
802.11n(HT20)	149	3.727	3.758	4.671	8.85	18.23	
	157	3.169	3.894	2.965	8.13		
	165	2.406	3.401	2.178	7.47		
802.11n(HT40)	151	0.161	1.069	1.988	5.91		
	159	-1.044	-1.023	0.120	4.16		
802.11ac(HT20)	149	3.965	3.602	4.368	8.76		
	157	2.803	2.340	3.577	7.71		
	165	2.218	2.110	2.254	6.97		
802.11ac(HT40)	151	0.776	-0.319	1.158	5.35		
	159	-1.370	0.714	-0.417	4.50		
802.11ac(HT80)	155	-3.431	-2.834	-3.188	1.63		

Note:

1. Measured output power at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 6Mbps at IEEE 802.11a; MCS0 at IEEE 802.11n HT20, IEEE 802.11n HT40, IEEE 802.11ac VHT20, IEEE 802.11ac VHT40 and IEEE 802.11ac VHT80;
4. Please refer to following test plots;

Ant.1
802.11a

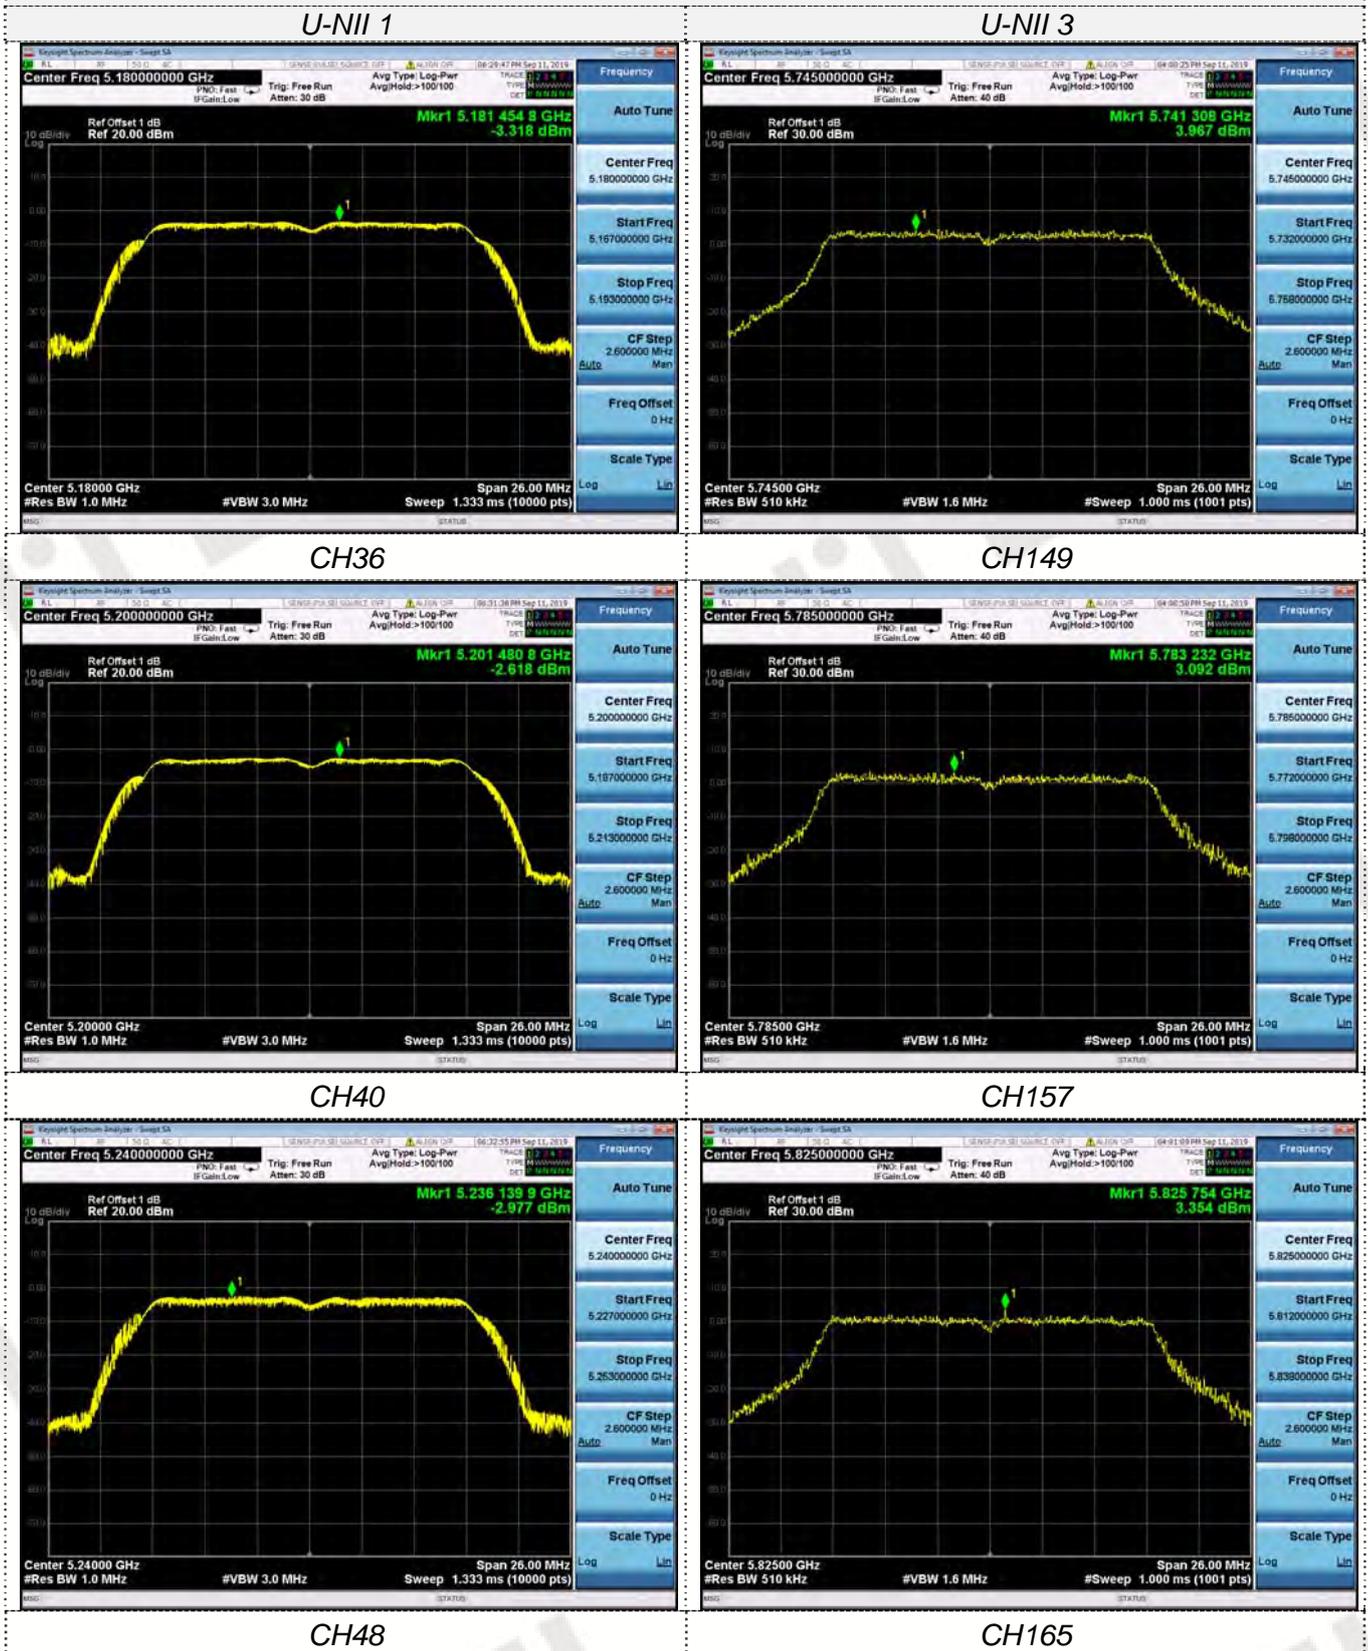


802.11n(HT20)


U-NII 1



U-NII 3

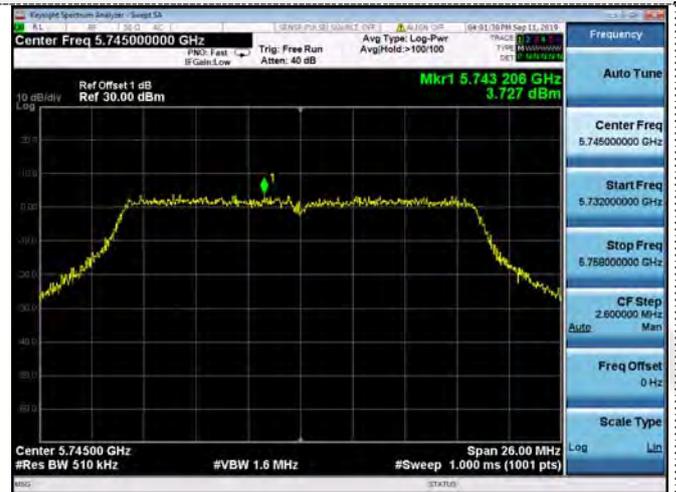

CH36

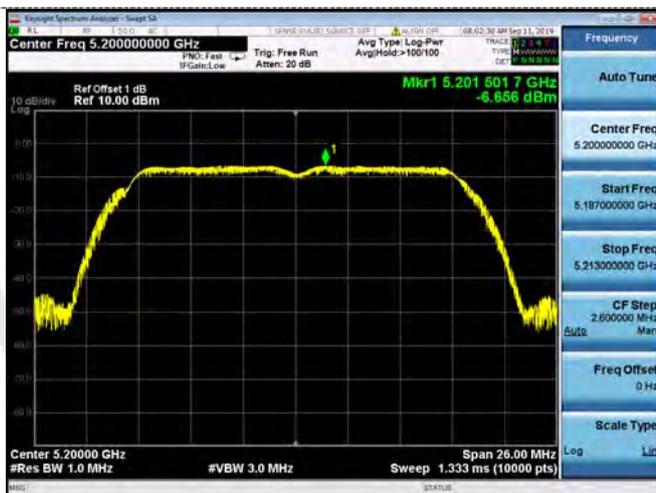

CH149



CH40



CH157




CH48

CH165

802.11n(HT40)

U-NII 1

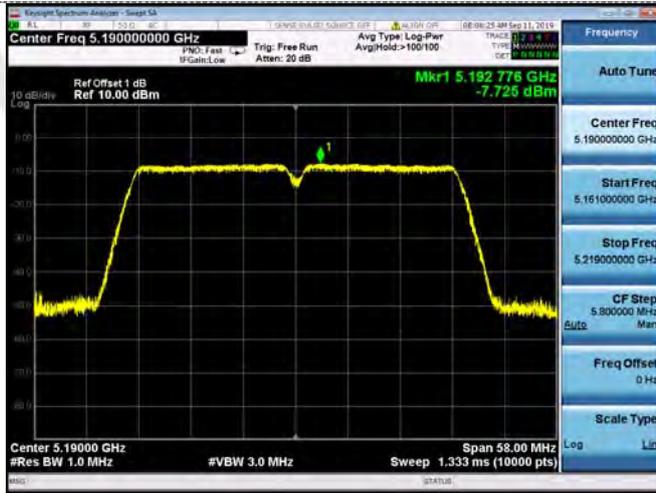

U-NII 3



CH38



CH151



CH46

CH159

802.11ac(HT20)


U-NII 1



U-NII 3




CH36

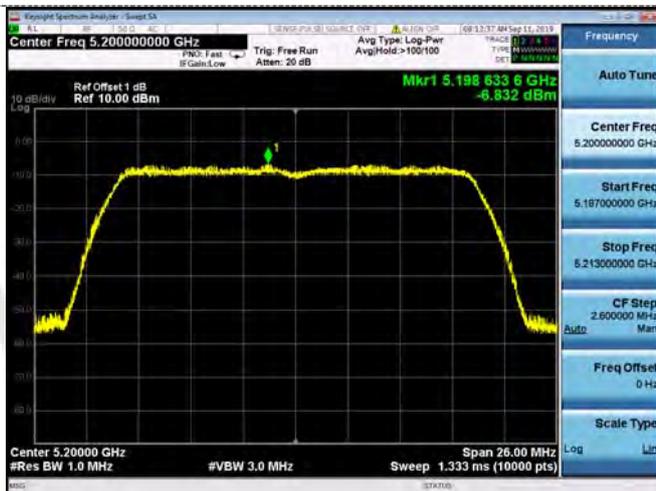

CH149



CH40

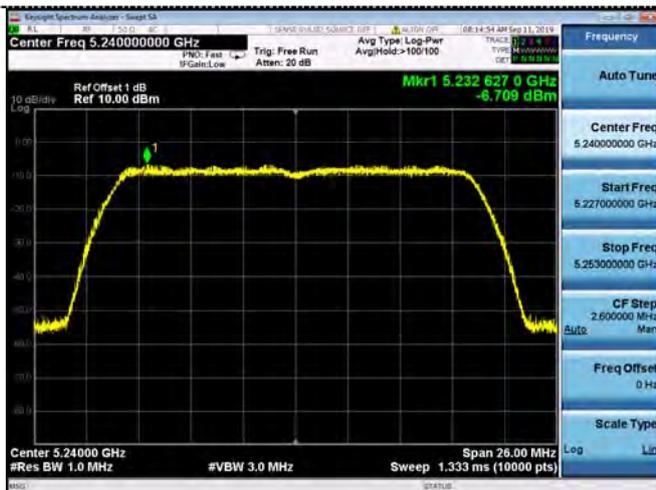

CH157




CH48

CH165

802.11ac(HT40)


U-NII 1

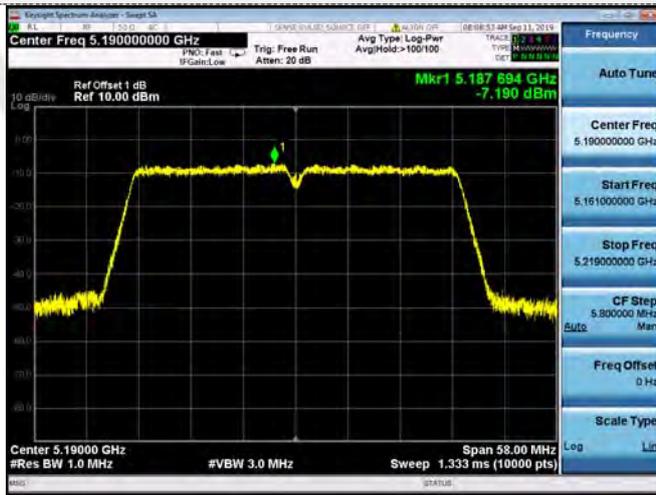

U-NII 3




CH38

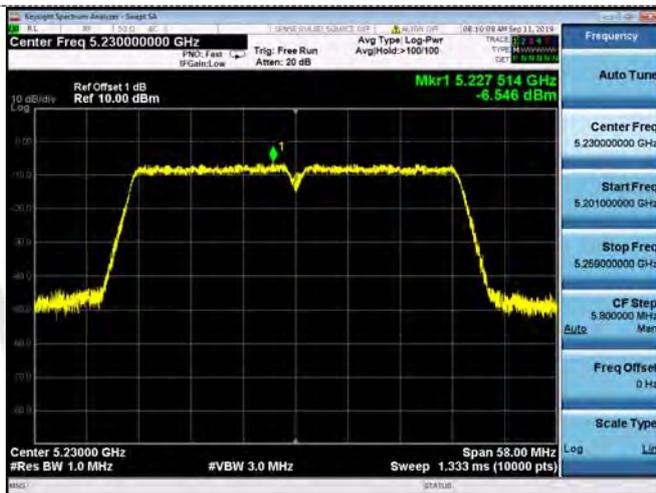


CH151



CH46

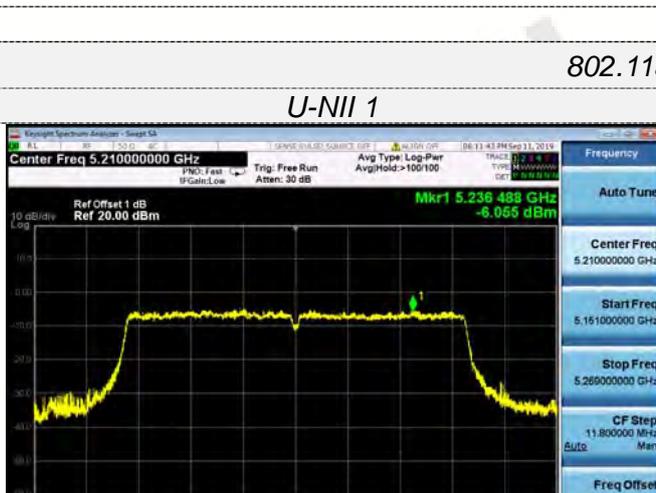

CH159

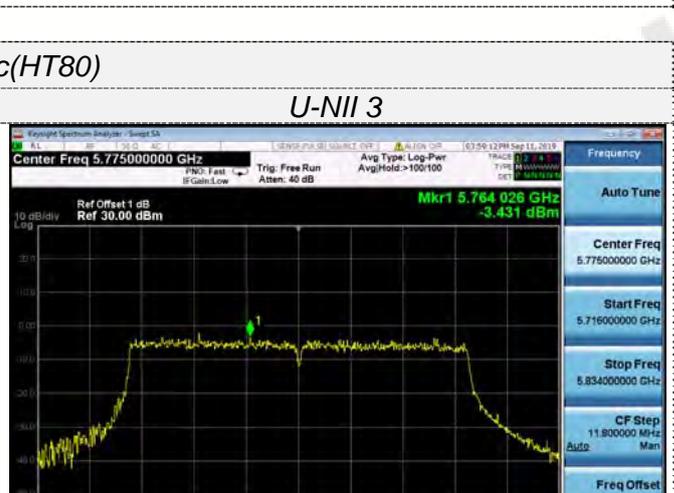

802.11ac(HT80)

U-NII 1



U-NII 3




CH42

CH155

Ant.2
802.11a


U-NII 1

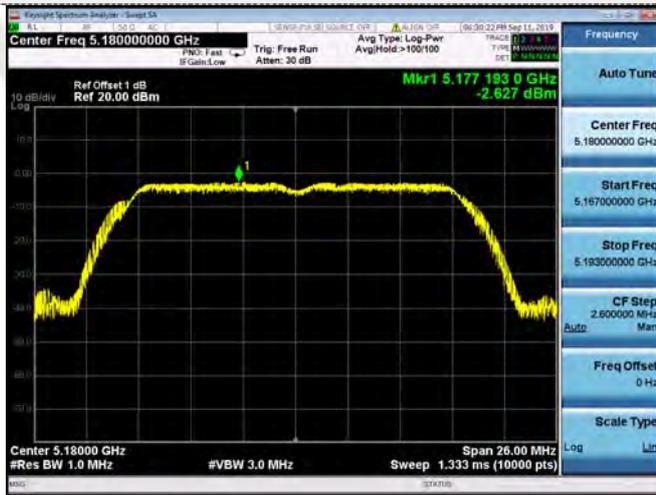


U-NII 3




CH36

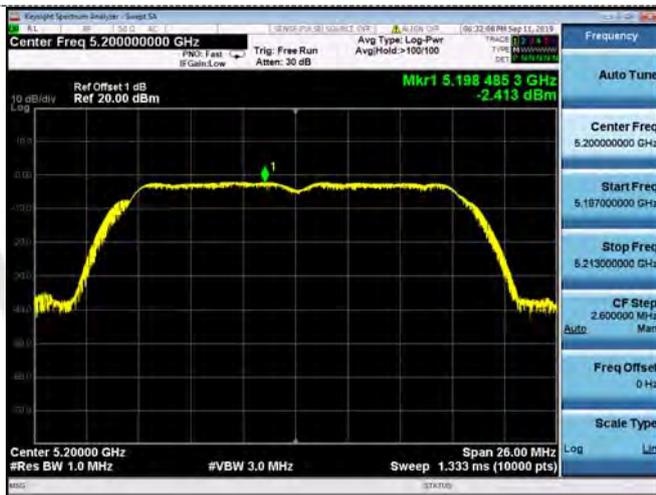

CH149

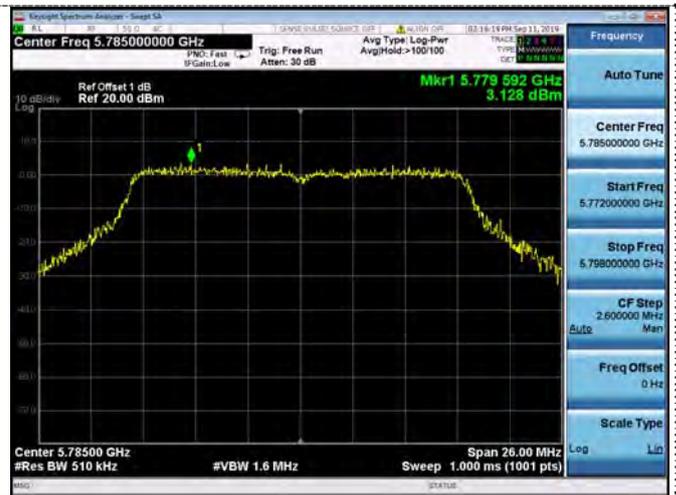

CH40

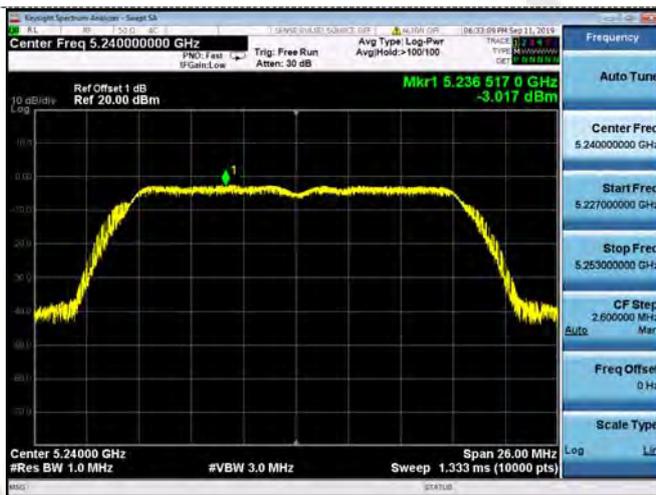

CH157




CH48

CH165

802.11n(HT20)


U-NII 1

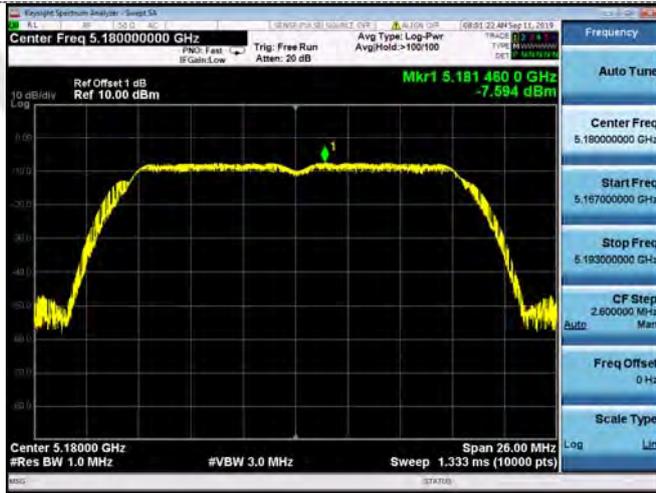

U-NII 3




CH36

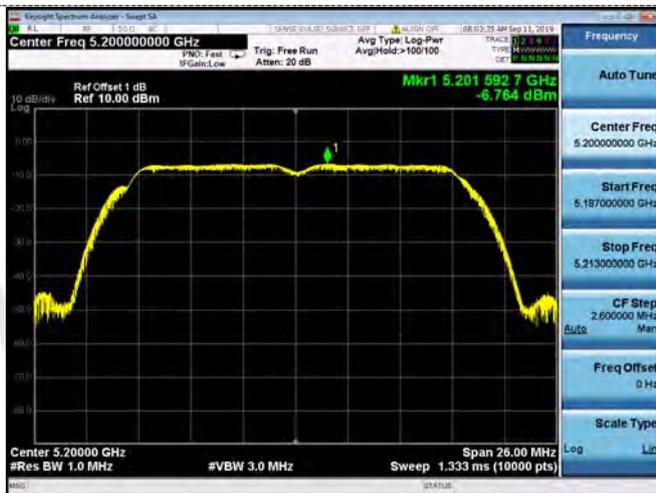


CH149



CH40

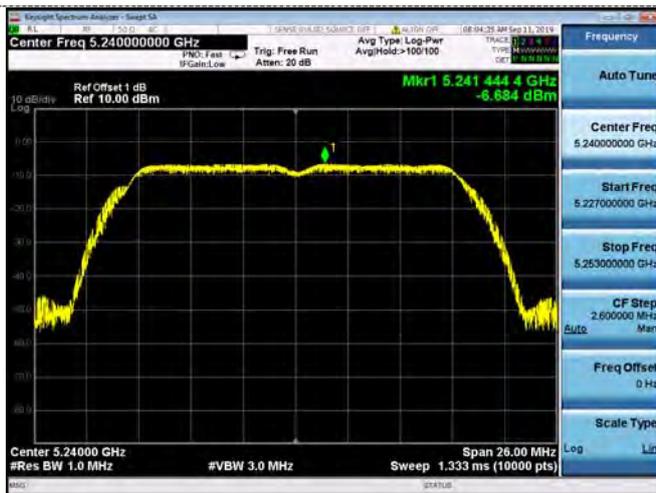

CH157

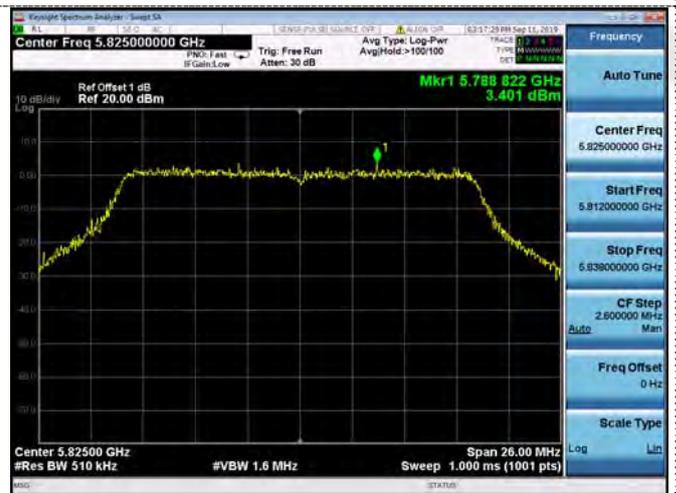


CH48


CH165

802.11n(HT40)


U-NII 1

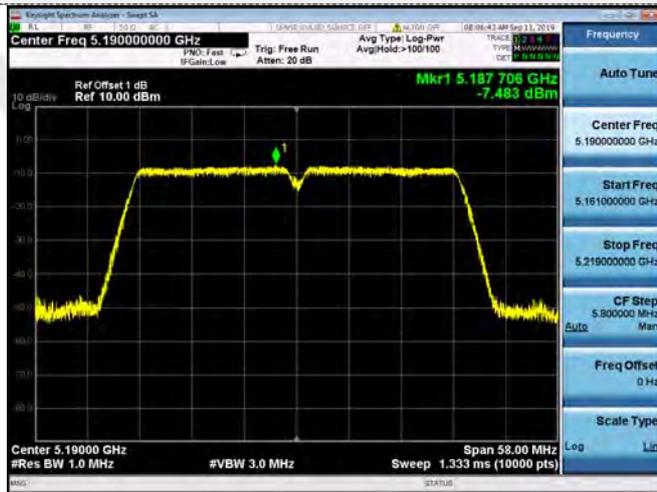

U-NII 3

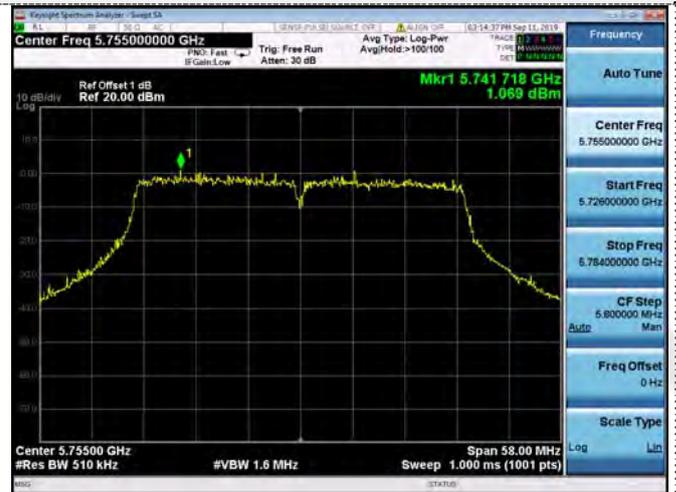

CH38

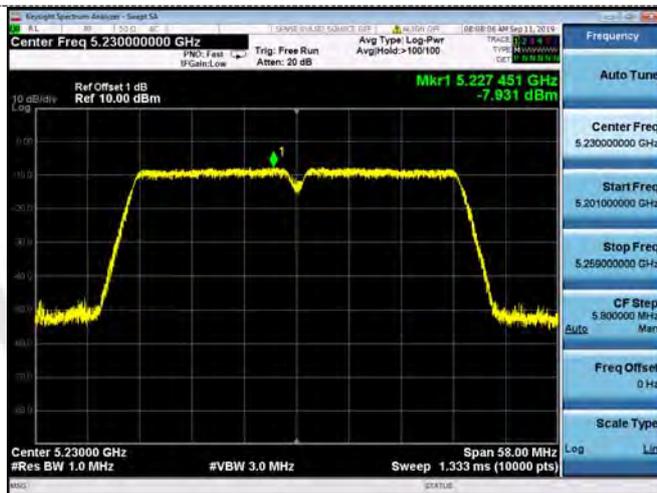

CH151



CH46




CH159



802.11ac(HT20)


U-NII 1

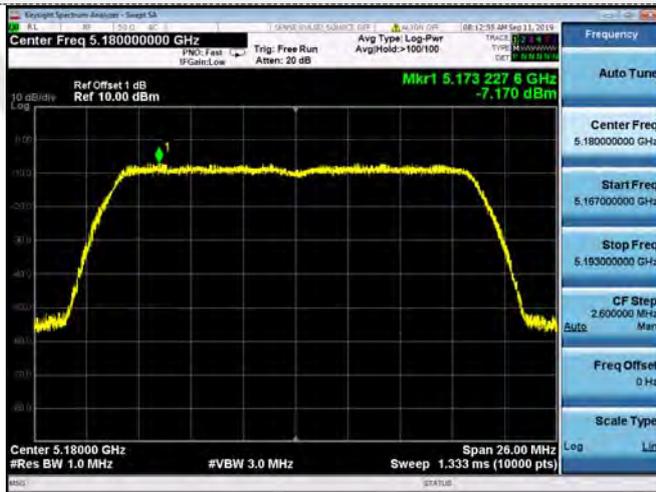

U-NII 3




CH36

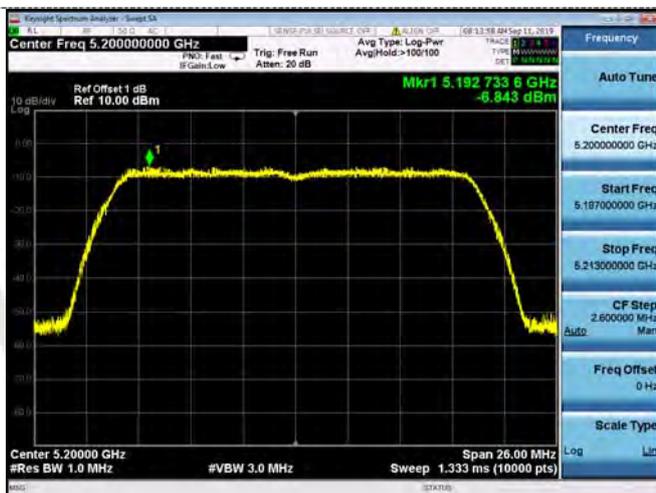

CH149



CH40

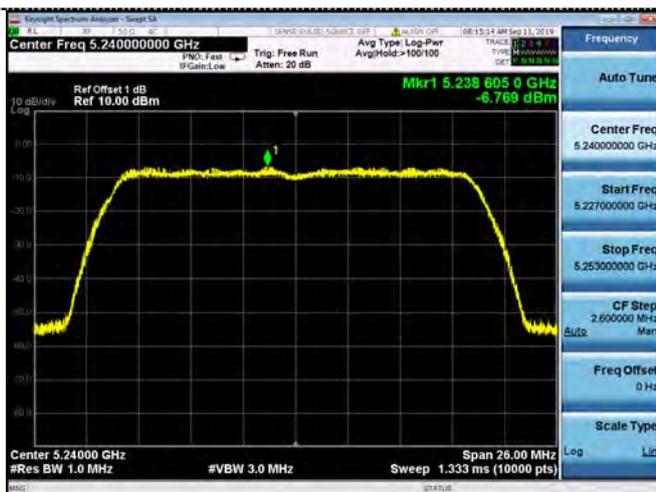

CH157




CH48

CH165

802.11ac(HT40)


U-NII 1

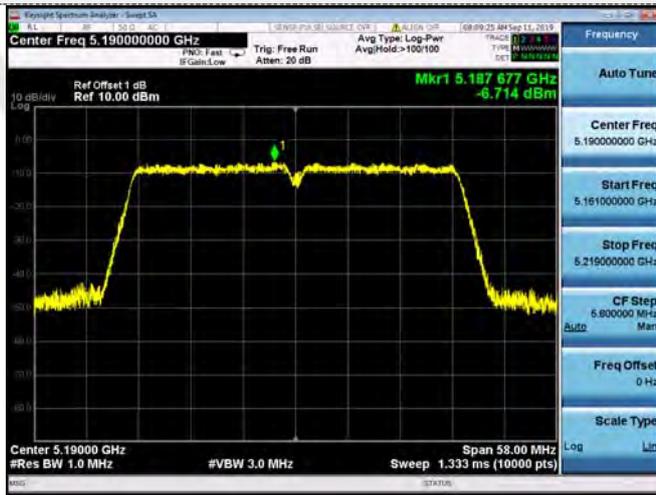

U-NII 3




CH38

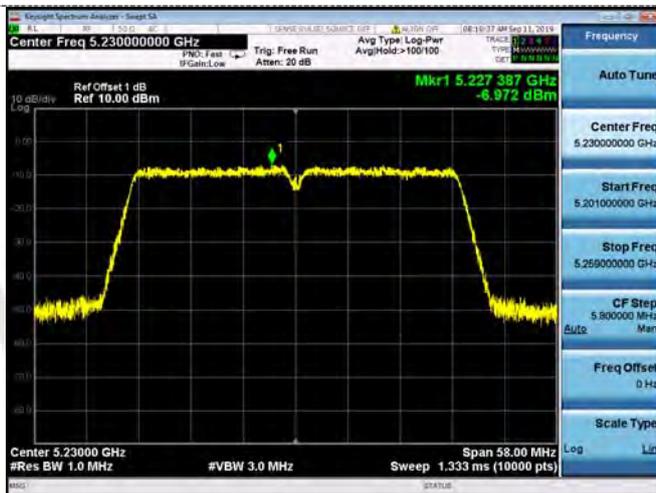

CH151



CH46

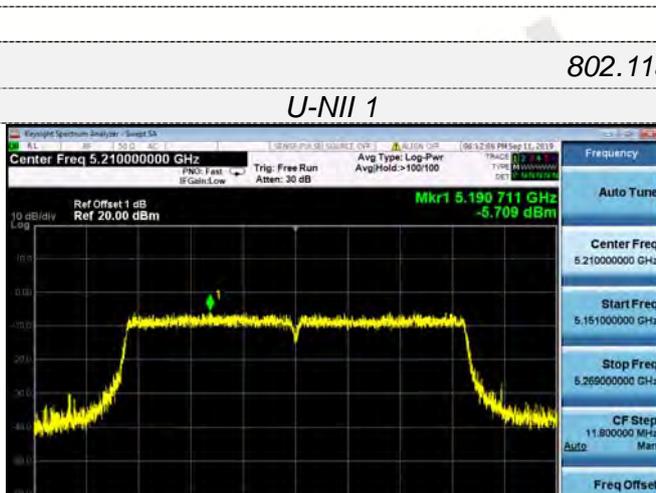


CH159



802.11ac(HT80)

U-NII 1

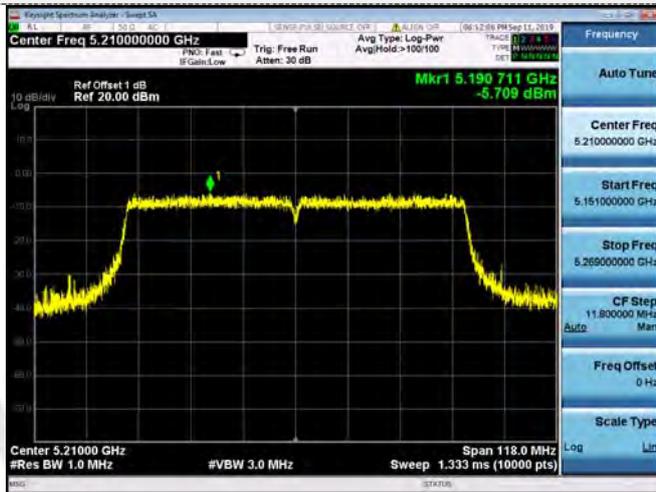

U-NII 3




CH42

CH155

Ant.3
802.11a


U-NII 1

U-NII 3

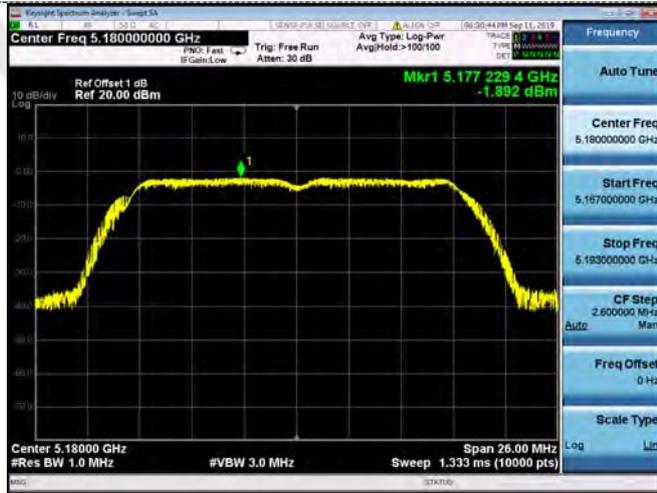



CH36

CH149

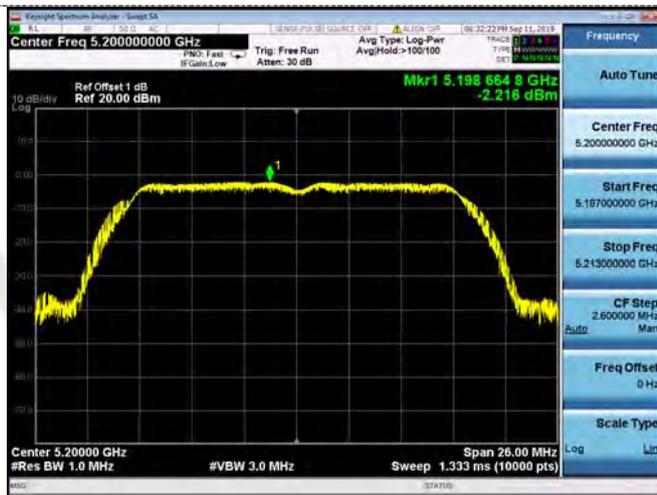

CH40

CH157

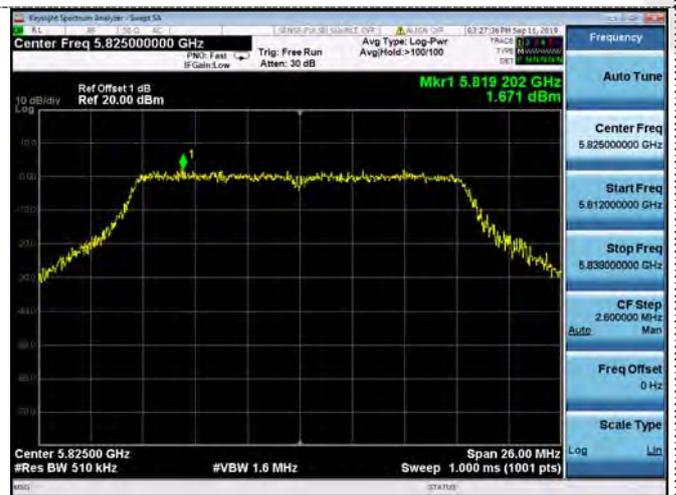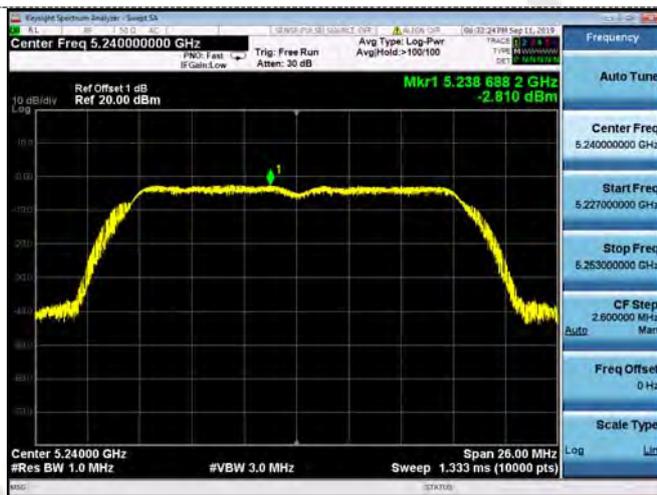


CH48

CH165

802.11n(HT20)


U-NII 1

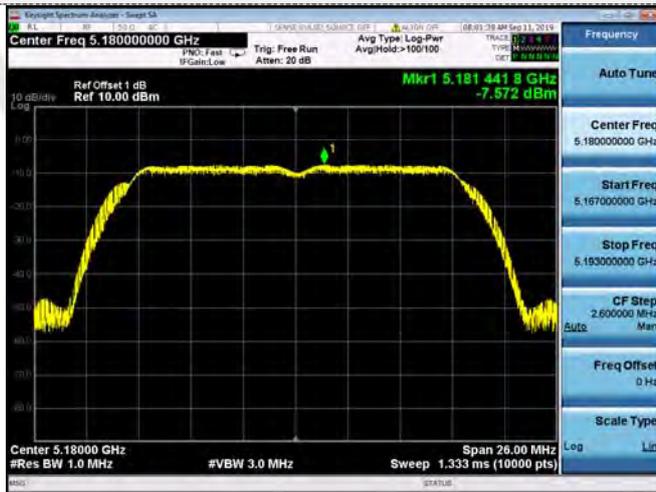

U-NII 3




CH36

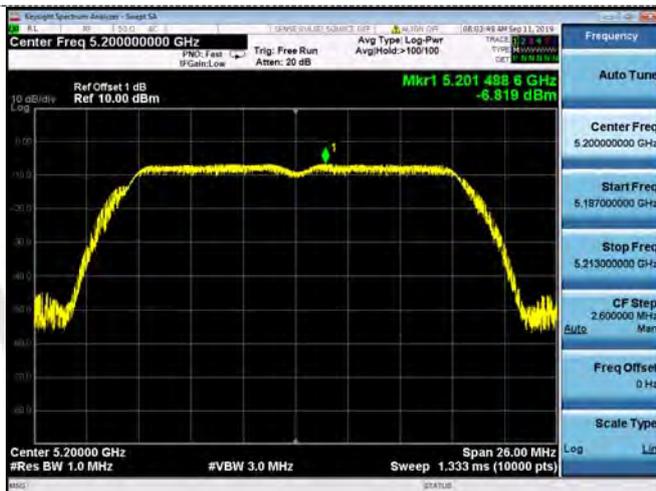

CH149



CH40

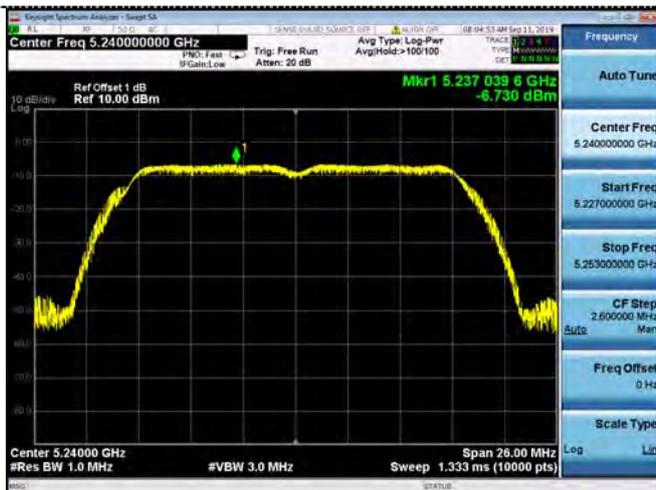

CH157



CH48


CH165

802.11n(HT40)


U-NII 1




U-NII 3

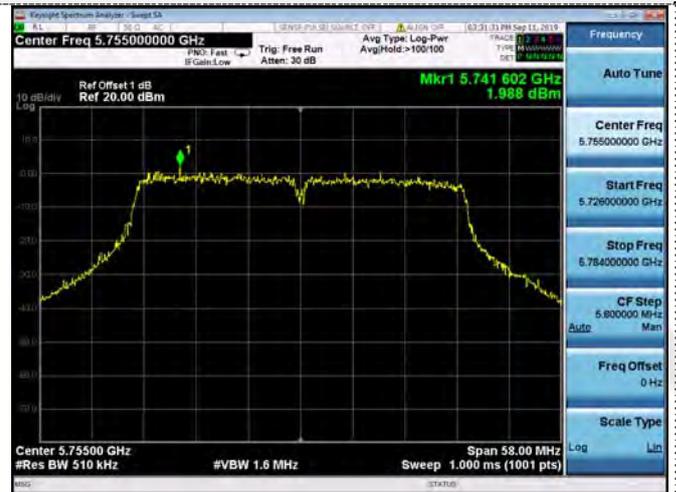

CH38

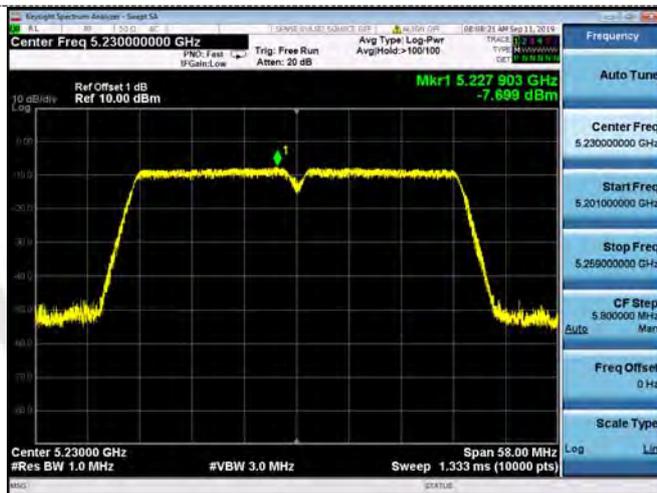

CH151

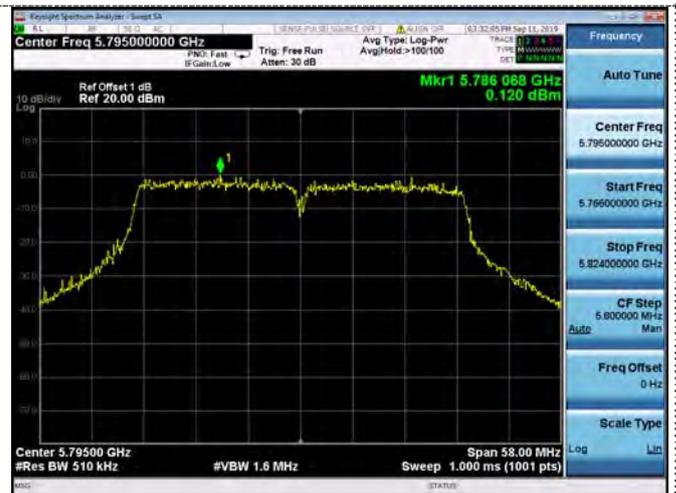


CH46

CH159

802.11ac(HT20)


U-NII 1

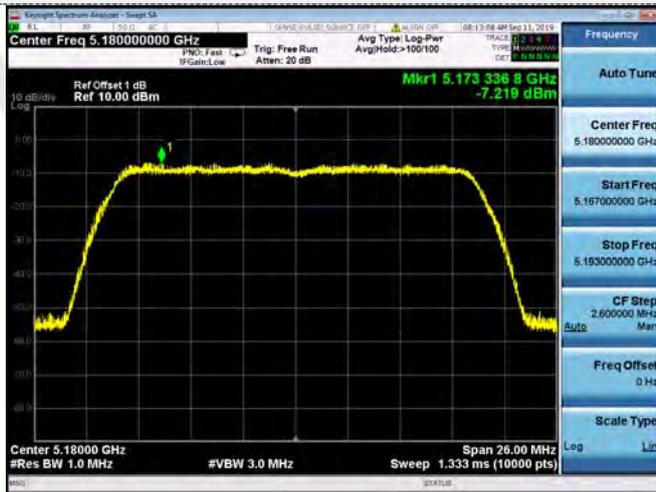

U-NII 3




CH36

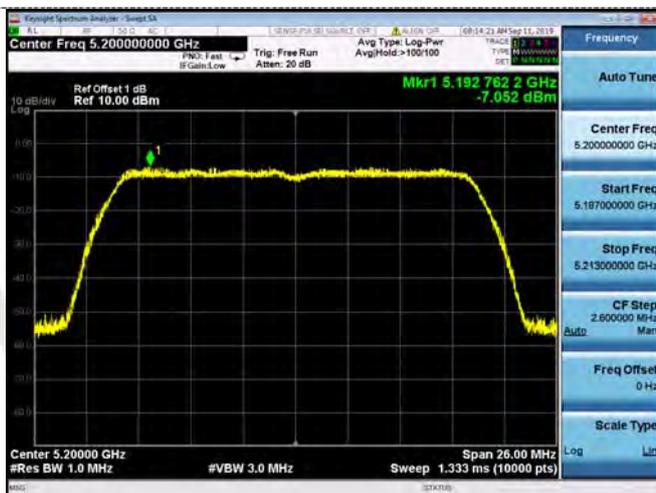

CH149



CH40

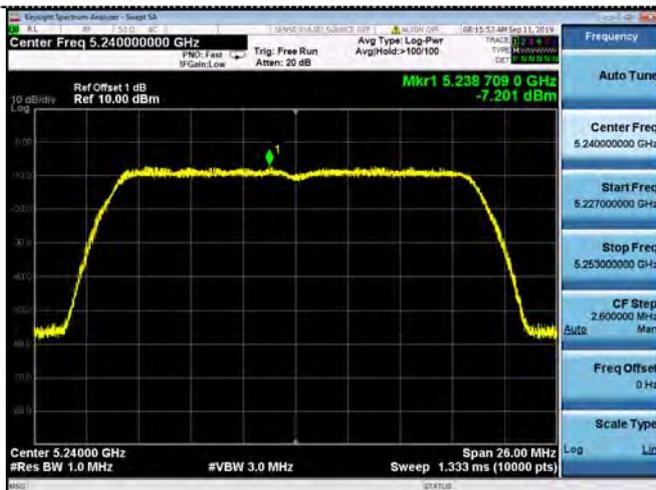

CH157




CH48

CH165

802.11ac(HT40)


U-NII 1

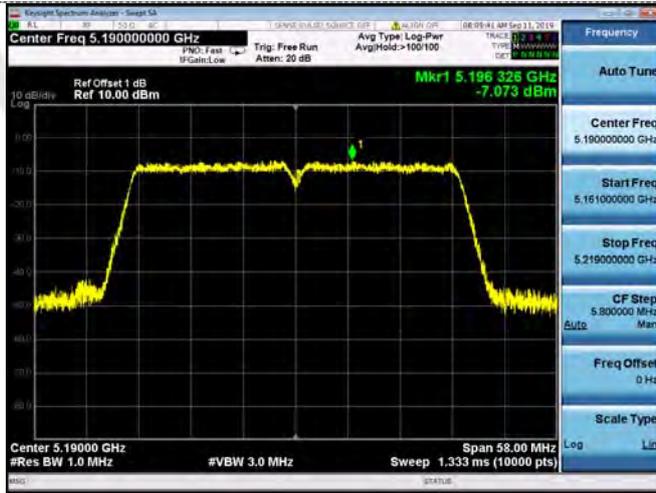


U-NII 3




CH38

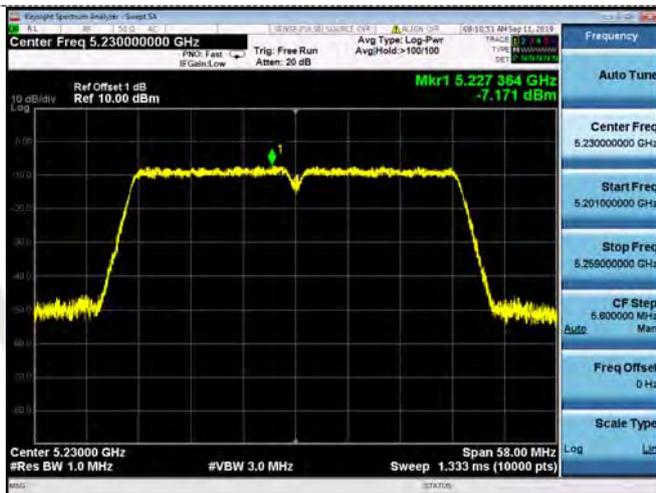


CH151

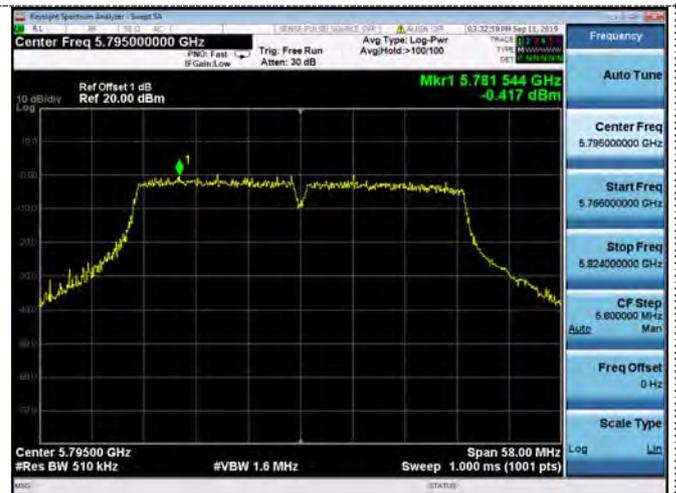

CH46

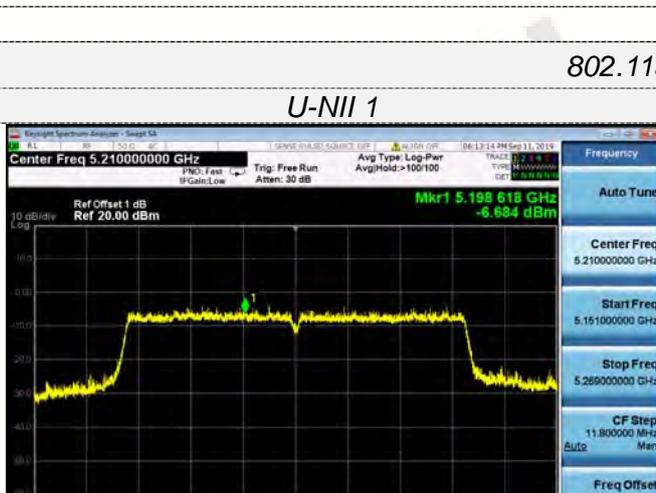


CH159

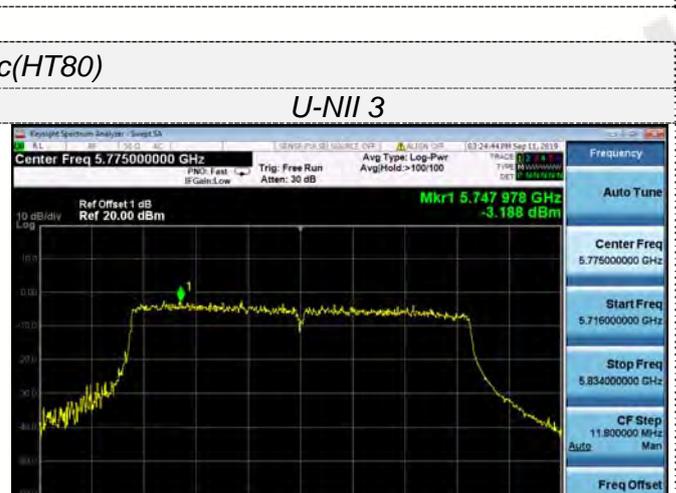

802.11ac(HT80)

U-NII 1

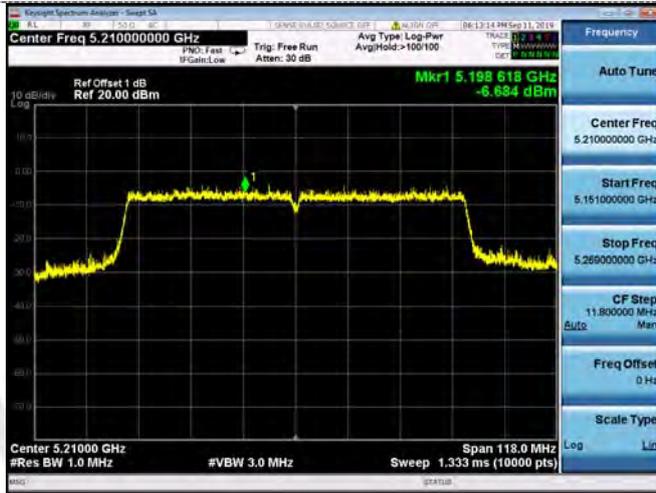

U-NII 3



CH42

CH155

3.5. Emission Bandwidth (26dBm Bandwidth)


Limit

N/A

Test Procedure

1. Set resolution bandwidth (RBW) = approximately 1 % of the EBW.
2. Set the video bandwidth (VBW) > RBW.
3. Detector = Peak.
4. Trace mode = Max hold.
5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW / EBW ratio is approximately 1 %.

Test Configuration

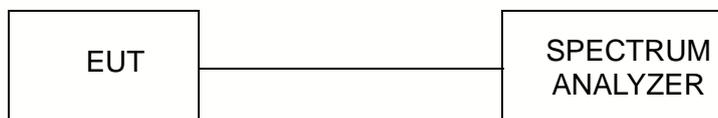

Test Results

Type	Bands	Channel	26dB Bandwidth (MHz)			Limit (MHz)	Result
			Ant1	Ant2	Ant3		
802.11a	U-NII 1	36	19.86	19.95	19.75	N/A	Pass
		40	19.91	19.94	19.93		
		48	19.93	19.96	19.96		
802.11n(HT20)	U-NII 1	36	19.92	19.99	19.96		
		40	19.83	19.89	19.89		
		48	19.95	19.98	19.98		
802.11n(HT40)	U-NII 1	38	39.97	39.97	39.96		
		46	39.79	39.87	39.90		

Type	Bands	Channel	26dB Bandwidth (MHz)			Limit (MHz)	Result
			Ant1	Ant2	Ant3		
802.11ac(HT20)	U-NII 1	36	19.69	19.83	19.85	N/A	Pass
		40	19.74	19.85	19.91		
		48	19.72	19.76	19.82		
802.11ac(HT40)	U-NII 1	38	39.35	39.49	39.49		
		46	39.45	39.73	39.73		
802.11ac(HT80)	U-NII 1	42	87.55	86.67	85.83		

Note:

1. Measured 26dB bandwidth at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 6Mbps at IEEE 802.11a; MCS0 at IEEE 802.11n HT20, IEEE 802.11n HT40, IEEE 802.11ac VHT20, IEEE 802.11ac VHT40 and IEEE 802.11ac VHT80;
4. Please refer to following test plots;

Ant.1


802.11a

U-NII 1




802.11n(HT20)


U-NII 1

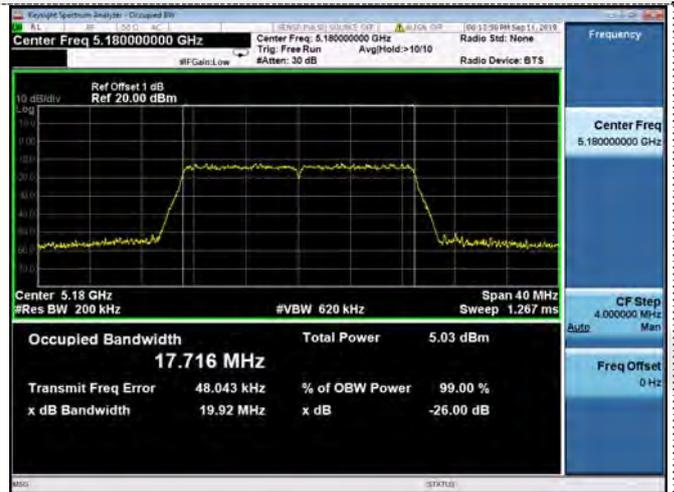

CH36

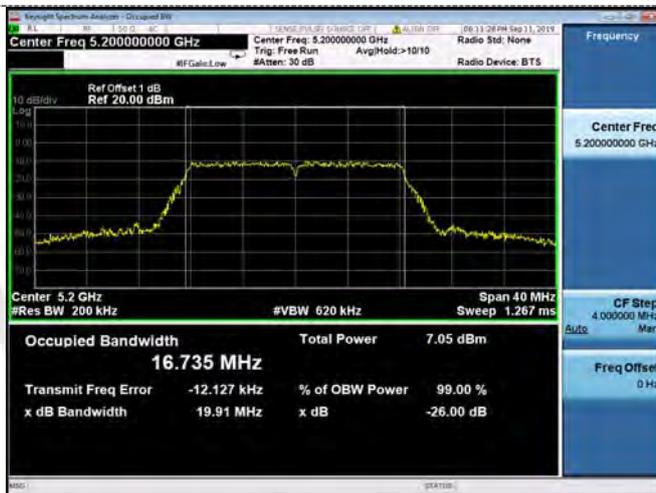

CH36

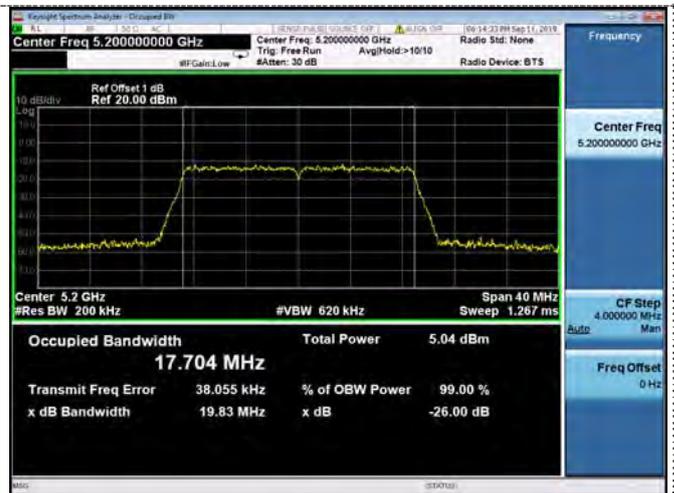

CH40



CH40



CH48

CH48

802.11n(HT40)

U-NII 1



CH38

802.11ac(HT20)

U-NII 1



CH36



CH46




CH40



CH48

802.11ac(HT40)

U-NII 1

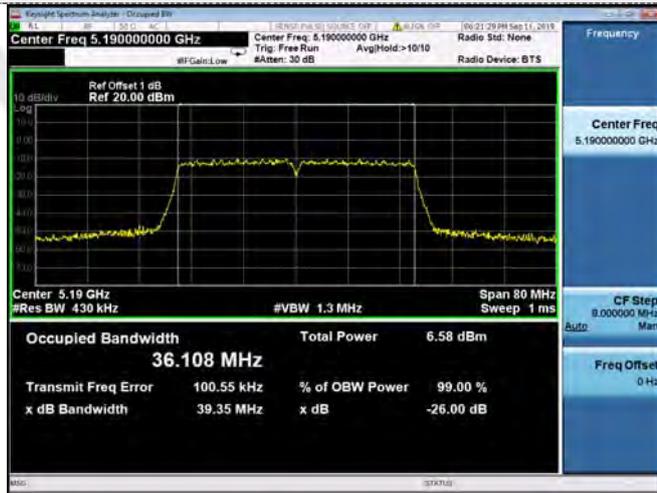

CH38

802.11ac(HT80)

U-NII 1



CH42



CH46

Ant.2

802.11a
U-NII 1

802.11n(HT20)
U-NII 1




CH36

CH36



CH40

CH40

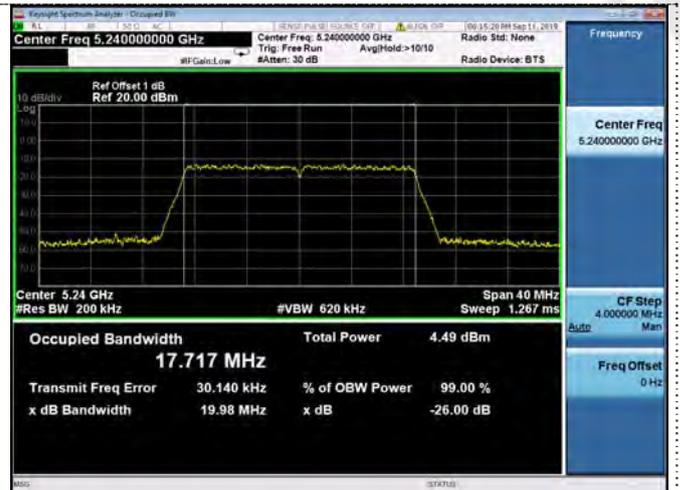


CH48

CH48

802.11n(HT40)

U-NII 1

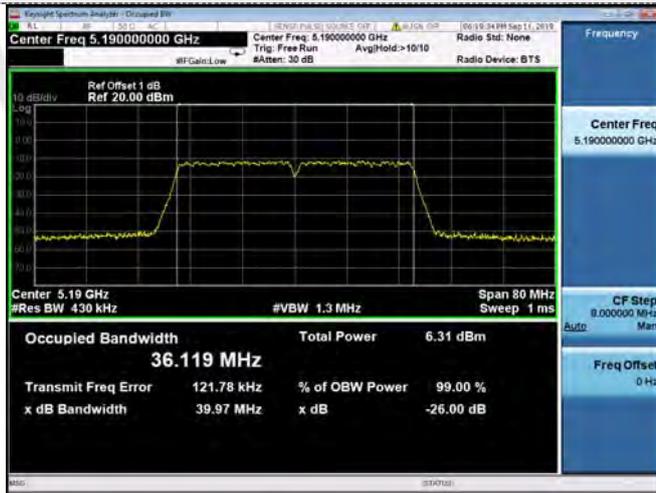

CH38

802.11ac(HT20)


U-NII 1




CH36



CH46

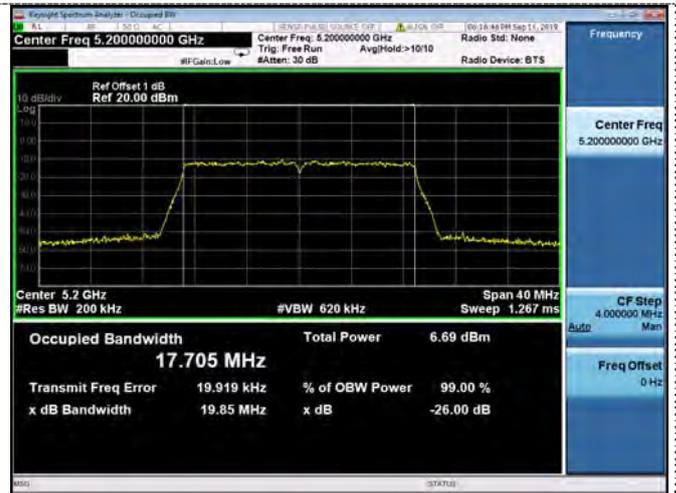


CH40

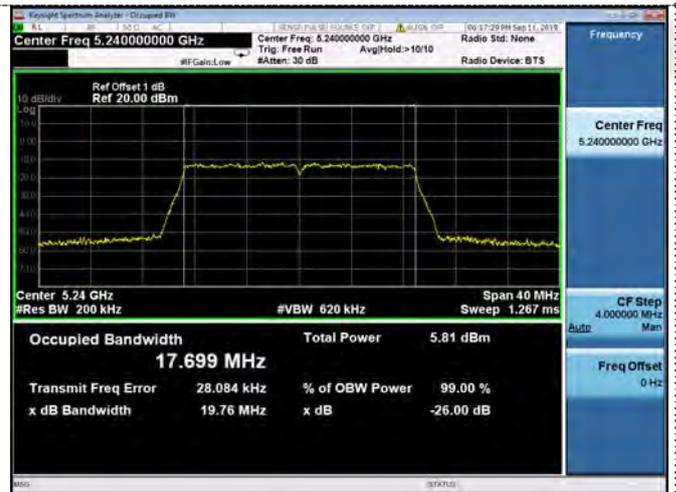

CH48

802.11ac(HT40)

U-NII 1

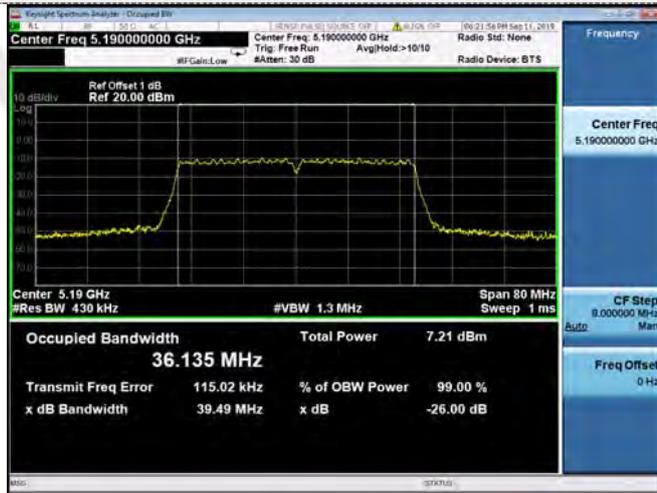

CH38

802.11ac(HT80)

U-NII 1



CH42




CH46

Ant.3

802.11a
U-NII 1



802.11n(HT20)
U-NII 1

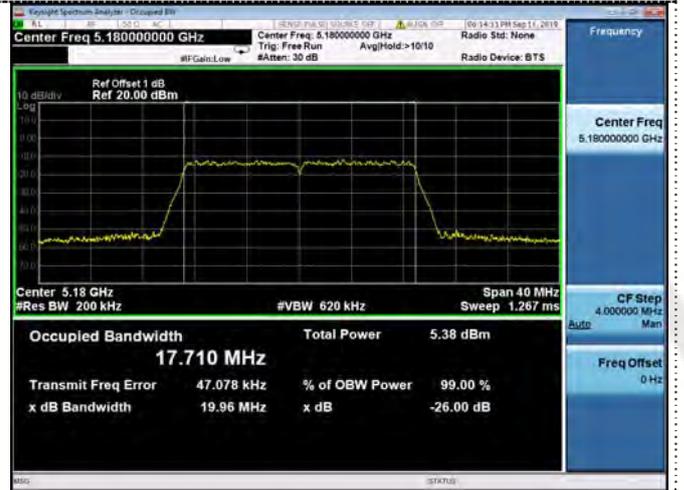

CH36



CH36



CH40



CH40



CH48

CH48

802.11n(HT40)

U-NII 1



CH38

802.11ac(HT20)


U-NII 1




CH36



CH46

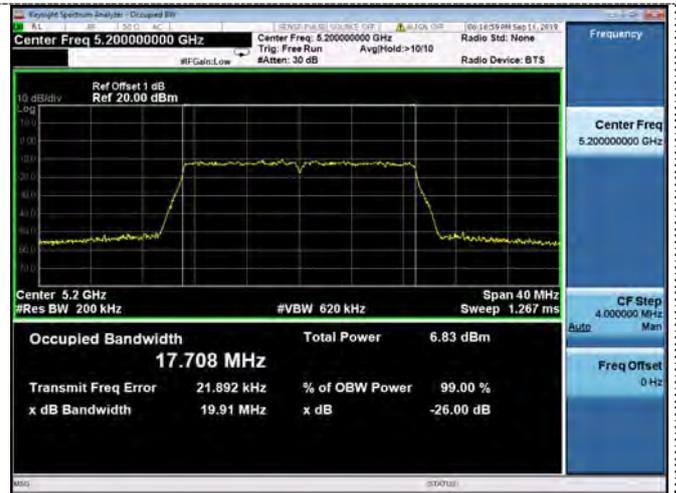


CH40

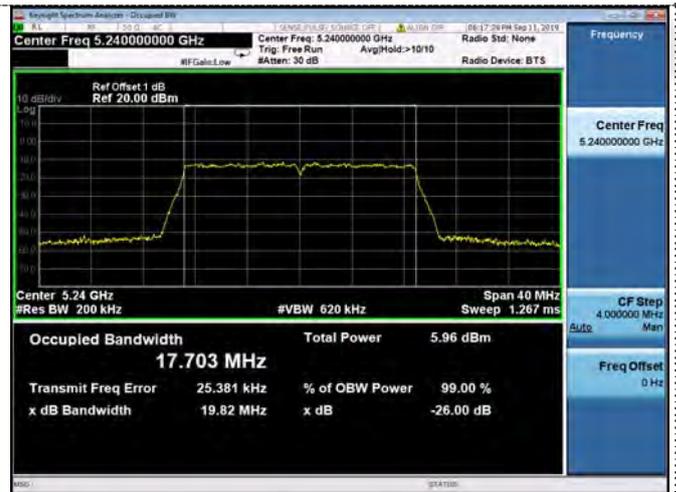

CH48

802.11ac(HT40)

U-NII 1

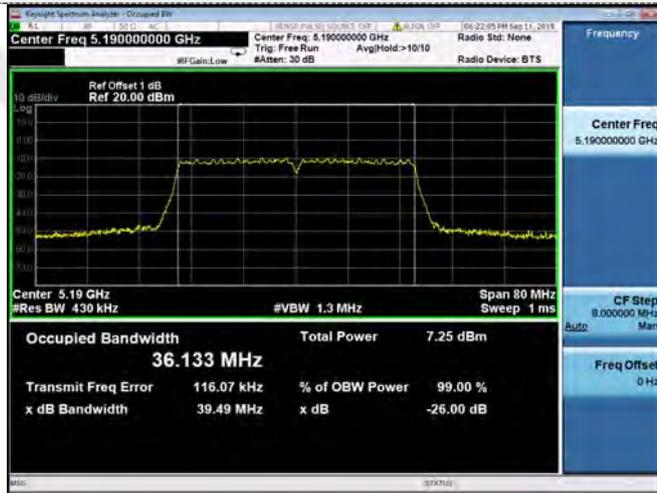


CH38

802.11ac(HT80)

U-NII 1



CH42

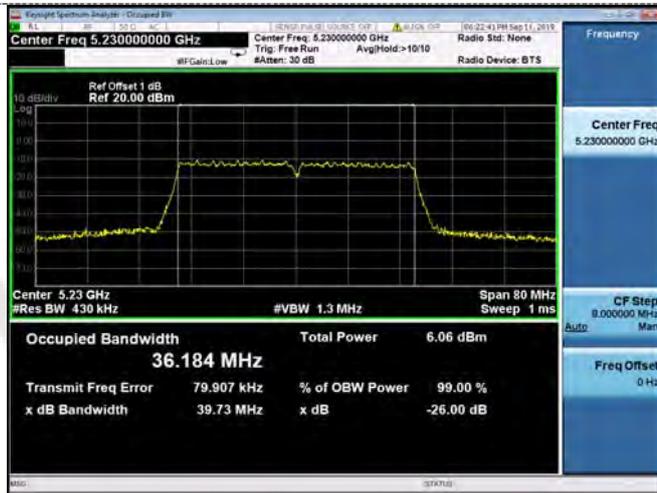

CH46

3.6. Minimum Emission Bandwidth (6dBm Bandwidth)


Limit

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure

1. Set resolution bandwidth (RBW) = 100 kHz
2. Set the video bandwidth 3 x RBW.
3. Detector = Peak.
4. Trace mode = Max hold.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Test Configuration

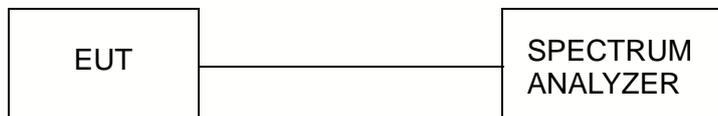

Test Results

Type	Bands	Channel	Ant1	Ant2	Ant3	Limit (KHz)	Result
802.11a	U-NII 3	149	16.51	16.47	16.50	≥500KHz	Pass
		157	16.45	16.49	16.45		
		165	16.46	16.50	16.51		
802.11n(HT20)	U-NII 3	149	17.75	17.73	17.74		
		157	17.75	17.73	17.68		
		165	17.75	17.71	17.74		
802.11n(HT40)	U-NII 3	151	36.34	36.46	39.15		
		159	36.13	35.80	39.51		
802.11ac(HT20)	U-NII 3	149	17.71	17.73	20.91		
		157	17.67	17.72	20.77		
		165	17.68	17.59	21.02		
802.11ac(HT40)	U-NII 3	151	36.39	36.42	38.51		
		159	36.12	36.07	39.17		
802.11ac(HT80)	U-NII 3	155	76.43	75.88	80.17		

Note:

1. Measured 26dB bandwidth at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 6Mbps at IEEE 802.11a; MCS0 at IEEE 802.11n HT20, IEEE 802.11n HT40, IEEE 802.11ac VHT20, IEEE 802.11ac VHT40 and IEEE 802.11ac VHT80;
4. Please refer to following test plots;

Ant1


802.11a



802.11n(HT20)



CH149

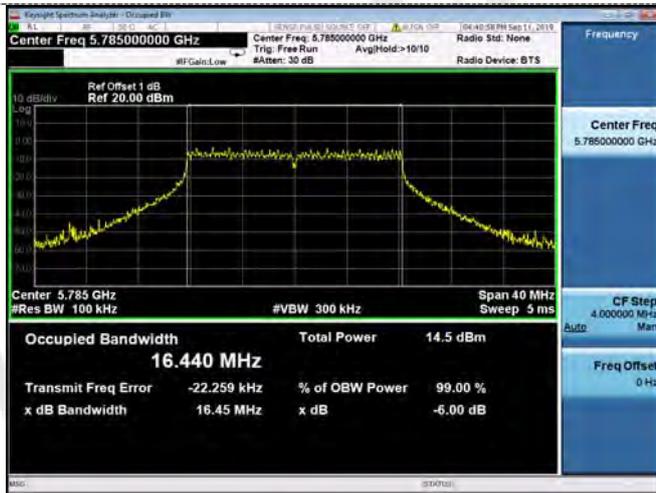

CH149



CH157



CH157



CH165

CH165

802.11n(HT40)



802.11ac(HT20)




CH151



CH149



CH159

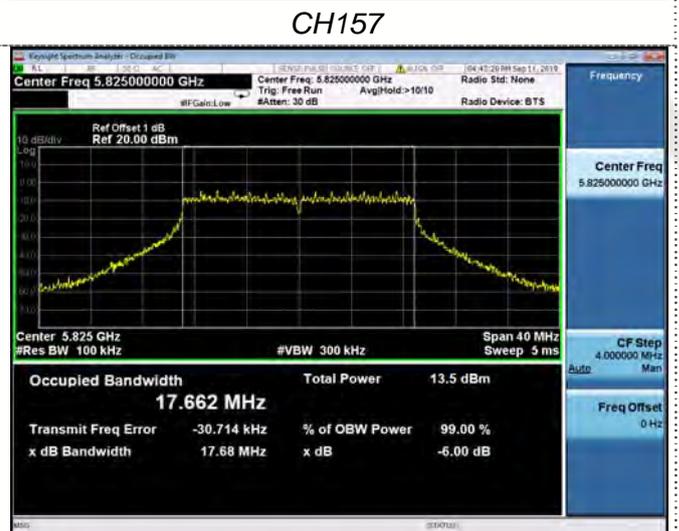


CH157

CH165


802.11ac(HT40)



802.11ac(HT80)

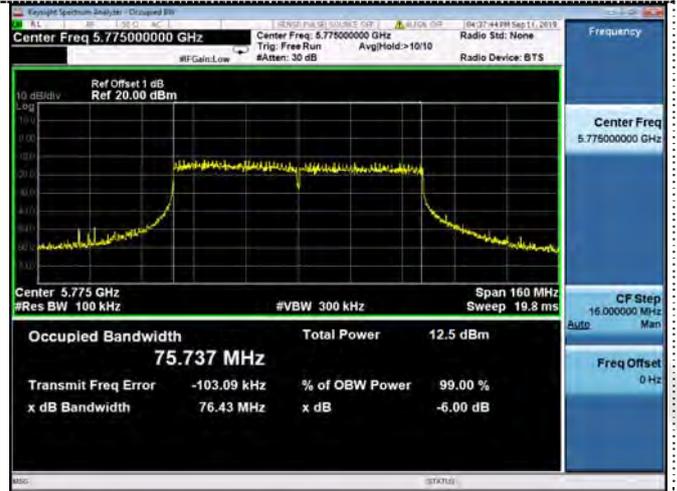

CH151

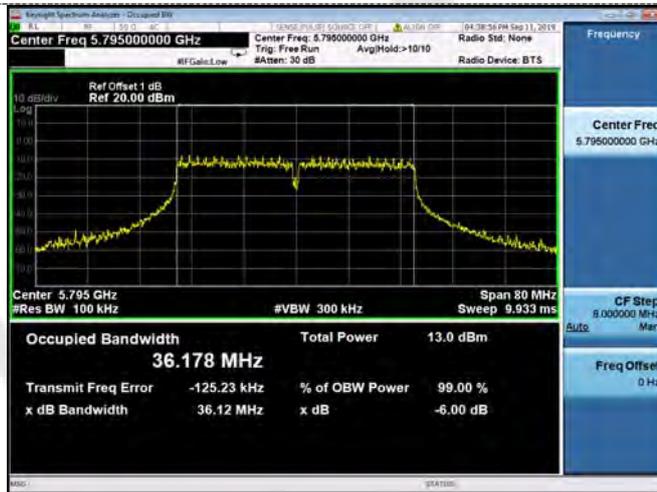

CH155

CH159



Ant2

802.11a



802.11n(HT20)



CH149




CH149



CH157



CH157

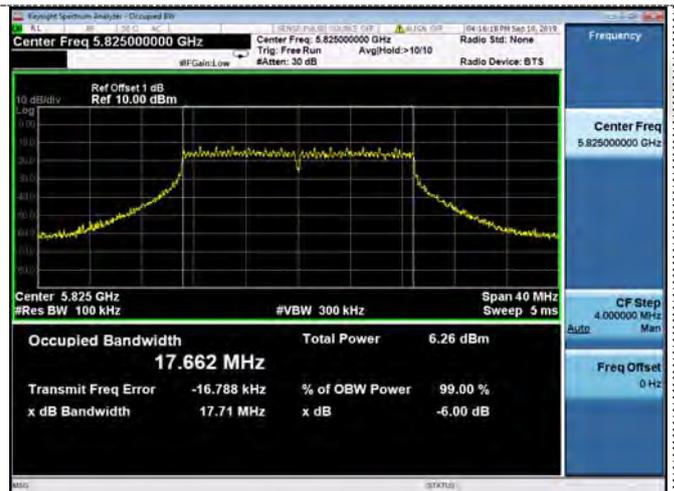

CH165

CH165

802.11n(HT40)



802.11ac(HT20)



CH151



CH149




CH159



CH157

CH165

802.11ac(HT40)

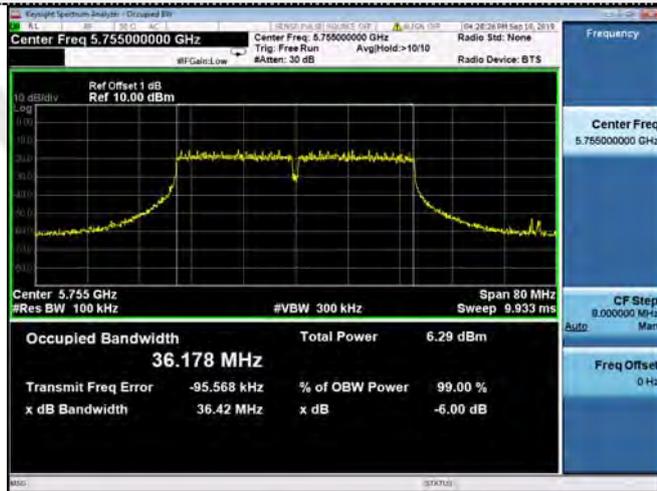

802.11ac(HT80)



CH151



CH159

CH155



Ant3

802.11a



802.11n(HT20)



CH149



CH149



CH157



CH157



CH165

CH165

802.11n(HT40)



802.11ac(HT20)




CH151



CH149



CH159

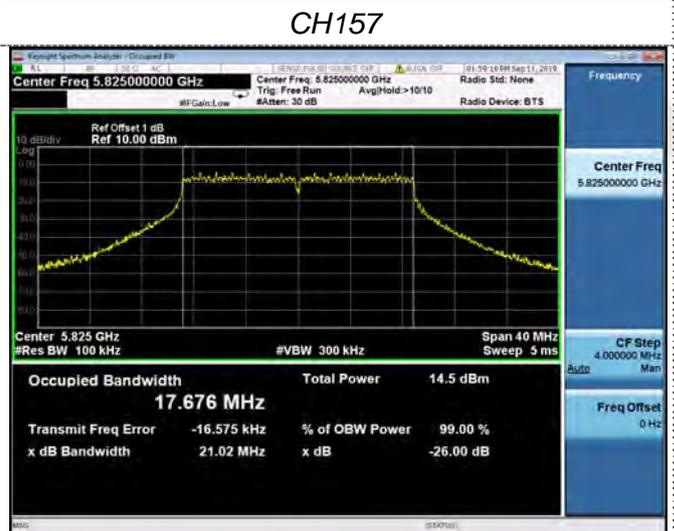

CH165

802.11ac(HT40)



802.11ac(HT80)



CH151



CH155

CH159




3.7. Frequency Stability

LIMIT

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

TEST CONFIGURATION

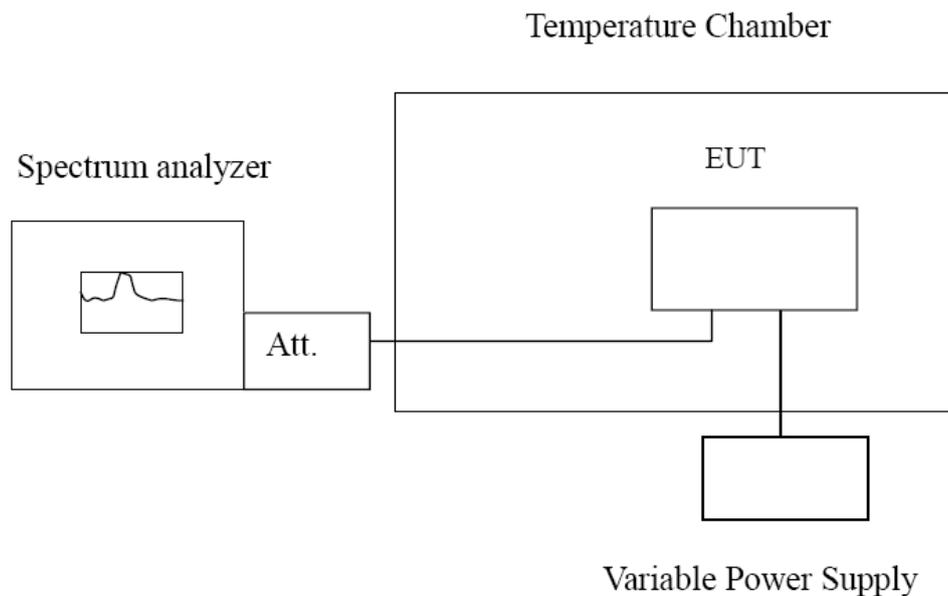

TEST PROCEDURE

Frequency Stability under Temperature Variations:

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

Frequency Stability under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

TEST RESULTS

Record worst case as below:

Reference Frequency: 802.11ac channel=36 frequency=5180MHz					
Voltage (V)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
56.0	-30	456	0.088	Within the band of operation	Pass
	-20	667	0.129		
	-10	794	0.153		
	0	832	0.161		
	10	837	0.162		
	20	657	0.127		
	30	528	0.102		
	40	568	0.110		
	50	501	0.097		
64.4	25	906	0.175		
47.6	25	456	0.088		

Reference Frequency: 802.11ac channel=149 frequency=5745MHz					
Voltage (V)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
56.0	-30	698	0.013	Within the band of operation	Pass
	-20	610	0.011		
	-10	766	0.014		
	0	832	0.015		
	10	723	0.013		
	20	711	0.013		
	30	816	0.015		
	40	995	0.018		
	50	656	0.012		
64.4	25	680	0.012		
47.6	25	937	0.017		

4. Test Setup Photos of the EUT



5. Photos of the EUT

Reference to the test report No. CTL1908174031-WF01

***** End of Report *****