

## FCC PART 15.247

### TEST REPORT

For

**IMachine (Xiamen) Intelligent Devices Co.,Ltd.**

Unit 1502-2, No.3 Jinzhong Road, Huli District, Xiamen, China

**FCC ID: 2AUA5-P1**

|                                                                                                                                                                                                                                                                                                                             |                                    |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|
| <b>Report Type:</b><br>Original Report                                                                                                                                                                                                                                                                                      | <b>Product Type:</b><br>ALL-IN-ONE |
| <b>Report Number:</b> RXM190916056-00C                                                                                                                                                                                                                                                                                      |                                    |
| <b>Report Date:</b> 2019-11-07                                                                                                                                                                                                                                                                                              |                                    |
| Simon Wang                                                                                                                                                                                                                                                                                                                  |                                    |
| <b>Reviewed By:</b> RF Engineer                                                                                                                                                                                                                                                                                             |                                    |
| <b>Prepared By:</b> Bay Area Compliance Laboratories Corp. (Shenzhen)<br>6/F., West Wing, Third Phase of Wanli Industrial<br>Building, Shihua Road, Futian Free Trade Zone,<br>Shenzhen, Guangdong, China<br>Tel: +86-755-33320018<br>Fax: +86-755-33320008<br><a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a> |                                    |

**Note:** This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA\* or any agency of the Federal Government. This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '\*'. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

## **TABLE OF CONTENTS**

|                                                                               |           |
|-------------------------------------------------------------------------------|-----------|
| <b>GENERAL INFORMATION.....</b>                                               | <b>4</b>  |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....                      | 4         |
| OBJECTIVE .....                                                               | 4         |
| RELATED SUBMITTAL(S)/GRANT(S).....                                            | 4         |
| TEST METHODOLOGY .....                                                        | 4         |
| MEASUREMENT UNCERTAINTY .....                                                 | 5         |
| <b>SYSTEM TEST CONFIGURATION .....</b>                                        | <b>6</b>  |
| DESCRIPTION OF TEST CONFIGURATION .....                                       | 6         |
| EQUIPMENT MODIFICATIONS .....                                                 | 7         |
| EUT EXERCISE SOFTWARE .....                                                   | 7         |
| SUPPORT EQUIPMENT LIST AND DETAILS .....                                      | 13        |
| EXTERNAL I/O CABLE.....                                                       | 13        |
| BLOCK DIAGRAM OF TEST SETUP .....                                             | 14        |
| <b>SUMMARY OF TEST RESULTS .....</b>                                          | <b>15</b> |
| <b>TEST EQUIPMENT LIST .....</b>                                              | <b>16</b> |
| <b>FCC §15.247 (i) &amp; §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....</b> | <b>18</b> |
| APPLICABLE STANDARD .....                                                     | 18        |
| RESULT .....                                                                  | 18        |
| <b>FCC §15.203 - ANTENNA REQUIREMENT.....</b>                                 | <b>19</b> |
| APPLICABLE STANDARD .....                                                     | 19        |
| ANTENNA CONNECTOR CONSTRUCTION .....                                          | 19        |
| <b>FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS .....</b>                    | <b>20</b> |
| APPLICABLE STANDARD .....                                                     | 20        |
| EUT SETUP .....                                                               | 20        |
| EMI TEST RECEIVER SETUP.....                                                  | 20        |
| TEST PROCEDURE .....                                                          | 20        |
| CORRECTED FACTOR & MARGIN CALCULATION .....                                   | 21        |
| TEST RESULTS SUMMARY .....                                                    | 21        |
| TEST DATA .....                                                               | 21        |
| <b>FCC §15.209, §15.205 &amp; §15.247(d) - SPURIOUS EMISSIONS.....</b>        | <b>24</b> |
| APPLICABLE STANDARD .....                                                     | 24        |
| EUT SETUP .....                                                               | 24        |
| EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....                             | 25        |
| TEST PROCEDURE .....                                                          | 25        |
| CORRECTED AMPLITUDE & MARGIN CALCULATION .....                                | 25        |
| TEST RESULTS SUMMARY .....                                                    | 25        |
| TEST DATA .....                                                               | 26        |
| <b>FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....</b>                      | <b>41</b> |
| APPLICABLE STANDARD .....                                                     | 41        |
| TEST PROCEDURE .....                                                          | 41        |
| TEST DATA .....                                                               | 41        |
| <b>FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....</b>               | <b>58</b> |

|                                                                       |           |
|-----------------------------------------------------------------------|-----------|
| APPLICABLE STANDARD .....                                             | 58        |
| TEST PROCEDURE .....                                                  | 58        |
| TEST DATA .....                                                       | 58        |
| <b>FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....</b> | <b>61</b> |
| APPLICABLE STANDARD .....                                             | 61        |
| TEST PROCEDURE .....                                                  | 61        |
| TEST DATA .....                                                       | 61        |
| <b>FCC §15.247(e) - POWER SPECTRAL DENSITY .....</b>                  | <b>71</b> |
| APPLICABLE STANDARD .....                                             | 71        |
| TEST PROCEDURE .....                                                  | 71        |
| TEST DATA .....                                                       | 71        |

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

|                       |                                                                                                                     |
|-----------------------|---------------------------------------------------------------------------------------------------------------------|
| Product               | ALL-IN-ONE                                                                                                          |
| Tested Model          | iMachine P1                                                                                                         |
| Multiple Model        | iMachine Q1, iMachine K1, iMachine L1, iMachine M1, iMachine N1, iMachine R1, iMachine S1, iMachine T1, iMachine U1 |
| Frequency Range       | Bluetooth LE: 2402~2480MHz<br>Wi-Fi: 2412~2462MHz                                                                   |
| Conducted Peak Power  | Bluetooth LE: 1.69dBm<br>Wi-Fi: 17.11dBm                                                                            |
| Modulation Technique  | Bluetooth LE: GFSK<br>Wi-Fi: DSSS, OFDM                                                                             |
| Antenna Specification | Internal Antenna<br>Bluetooth/Wi-Fi: 3dBi@2.4GHz                                                                    |
| Voltage Range         | DC 24V from adapter                                                                                                 |
| Date of Test          | 2019-09-26 to 2019-10-25                                                                                            |
| Sample serial number  | 190916056(Assigned by BACL, Shenzhen)                                                                               |
| Received date         | 2019-09-16                                                                                                          |
| Sample/EUT Status     | Good condition                                                                                                      |
| Adapter information   | Model: DJ-240250-SA<br>Input: AC 100-240V, 50/60Hz, 0.15A<br>Output: DC 24V, 2.5A                                   |

Notes: This series products model: iMachine Q1, iMachine K1, iMachine L1, iMachine M1, iMachine N1, iMachine R1, iMachine S1, iMachine T1, iMachine U1 and iMachine P1 are electrically identical. Model iMachine P1 was selected for fully testing, the detailed information can be referred to the product similarity declaration letter.

### Objective

This report is prepared on behalf of *iMachine (Xiamen) Intelligent Devices Co.,Ltd.* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Related Submittal(s)/Grant(s)

FCC Part 15.247 DSS and Part 15B JBC submissions with FCC ID: 2AUA5-P1.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

**Measurement Uncertainty**

| Parameter                          |            | Uncertainty |
|------------------------------------|------------|-------------|
| Occupied Channel Bandwidth         |            | ±5%         |
| RF Output Power with Power meter   |            | ±0.73dB     |
| RF conducted test with spectrum    |            | ±1.6dB      |
| AC Power Lines Conducted Emissions |            | ±1.95dB     |
| Emissions,<br>Radiated             | Below 1GHz | ±4.75dB     |
|                                    | Above 1GHz | ±4.88dB     |
| Temperature                        |            | ±1 °C       |
| Humidity                           |            | ±6%         |
| Supply voltages                    |            | ±0.4%       |

*Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.*

**Test Facility**

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

For 802.11b, 802.11g and 802.11n-HT20 mode, 11 channels are provided to testing:

| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|
| 1       | 2412            | 8       | 2447            |
| 2       | 2417            | 9       | 2452            |
| 3       | 2422            | 10      | 2457            |
| 4       | 2427            | 11      | 2462            |
| 5       | 2432            | /       | /               |
| 6       | 2437            | /       | /               |
| 7       | 2442            | /       | /               |

For 802.11b, 802.11g, 802.11n-HT20 mode, EUT was tested with Channel 1, 6 and 11

For 802.11n-HT40 mode, 7 channels are provided to testing:

| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|
| 1       | 2422            | 6       | 2447            |
| 2       | 2427            | 7       | 2452            |
| 3       | 2432            | /       | /               |
| 4       | 2437            | /       | /               |
| 5       | 2442            | /       | /               |

EUT was tested with Channel 1, 4 and 7.

For BLE mode, 40 channels are provided to testing:

| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|
| 0       | 2402            | 20      | 2442            |
| 1       | 2404            | 21      | 2444            |
| 2       | 2406            | 22      | 2446            |
| 3       | 2408            | 23      | 2448            |
| 4       | 2410            | 24      | 2450            |
| 5       | 2412            | 25      | 2452            |
| 6       | 2414            | 26      | 2454            |
| 7       | 2416            | 27      | 2456            |
| 8       | 2418            | 28      | 2458            |
| 9       | 2420            | 29      | 2460            |
| 10      | 2422            | 30      | 2462            |
| 11      | 2424            | 31      | 2464            |
| 12      | 2426            | 32      | 2466            |
| 13      | 2428            | 33      | 2468            |
| 14      | 2430            | 34      | 2470            |
| 15      | 2432            | 35      | 2472            |
| 16      | 2434            | 36      | 2474            |
| 17      | 2436            | 37      | 2476            |
| 18      | 2438            | 38      | 2478            |
| 19      | 2440            | 39      | 2480            |

EUT was tested with Channel 0, 19 and 39.

### Equipment Modifications

No modification was made to the EUT tested.

### EUT Exercise Software

“DRTU” exercise software was used.


The device was tested with the worst case was performed as below:

| Mode         | Data rate | Power level |                |              |
|--------------|-----------|-------------|----------------|--------------|
|              |           | Low channel | Middle channel | High channel |
| 802.11b      | 1 Mbps    | 11.5        | 11.5           | 11.5         |
| 802.11g      | 6 Mbps    | 8.5         | 8.5            | 8.5          |
| 802.11n-HT20 | MCS0      | 9           | 9              | 9            |
| 802.11n-HT40 | MCS0      | 6           | 6              | 6            |
| BLE          | /         | Default     | Default        | Default      |

Pre-scan with all the data rates, the above data rate is the worst case for Wi-Fi test.


Duty cycle  
Antenna 1

### 802.11b mode

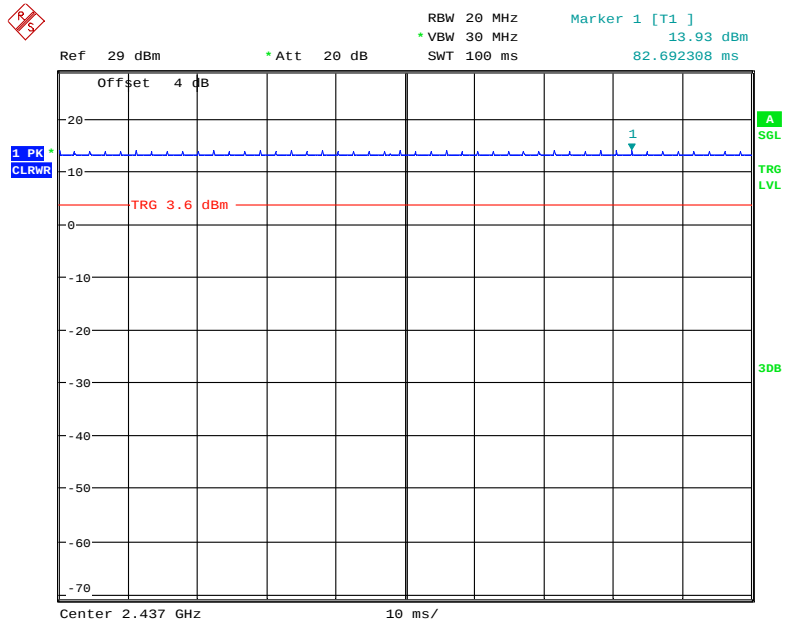


Date: 25.OCT.2019 14:42:57

### 802.11g mode

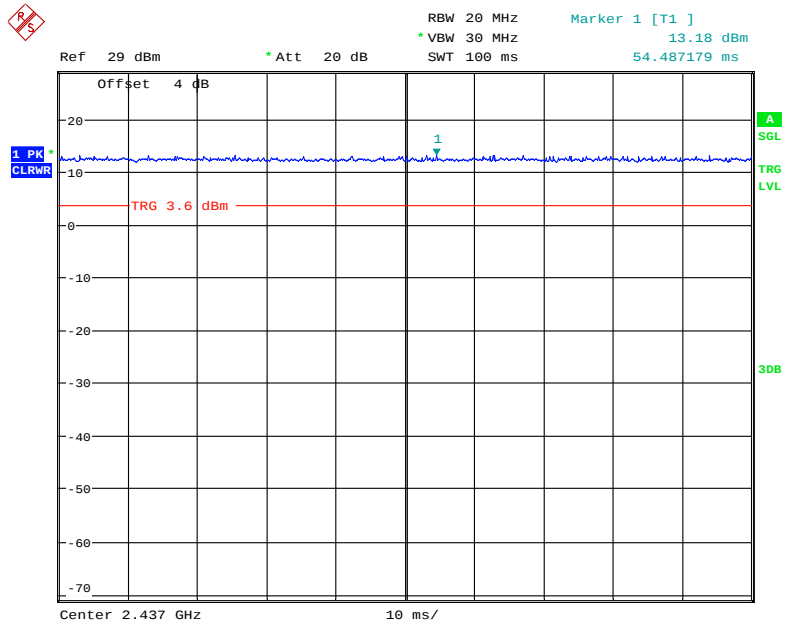


Date: 25.OCT.2019 14:41:21

### 802.11n-HT20 Mode

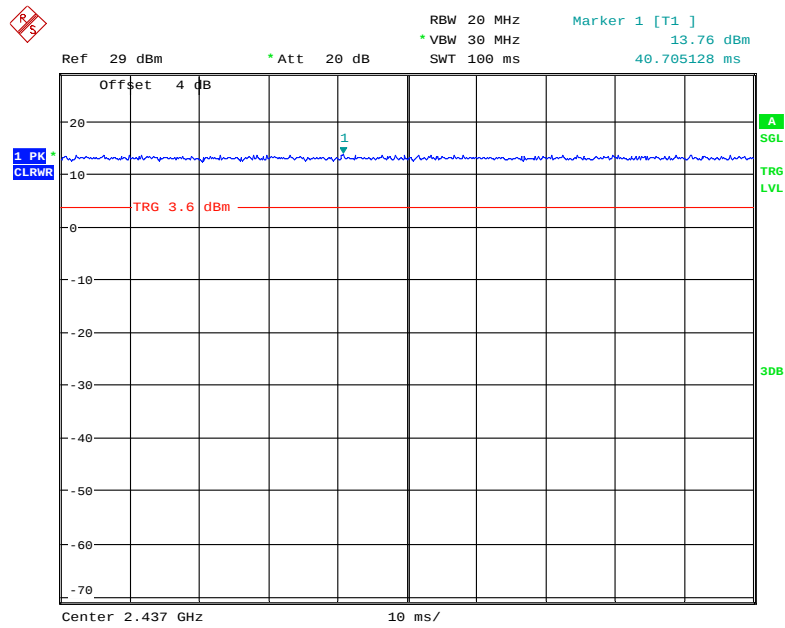

Date: 25.OCT.2019 14:40:41


### 802.11n-HT40 Mode

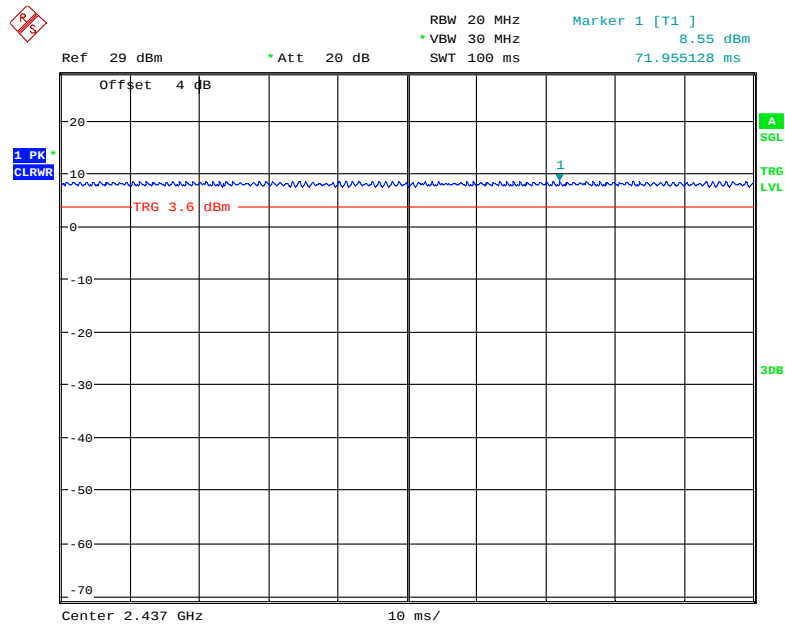

Date: 25.OCT.2019 14:39:27


Antenna 2

802.11b mode

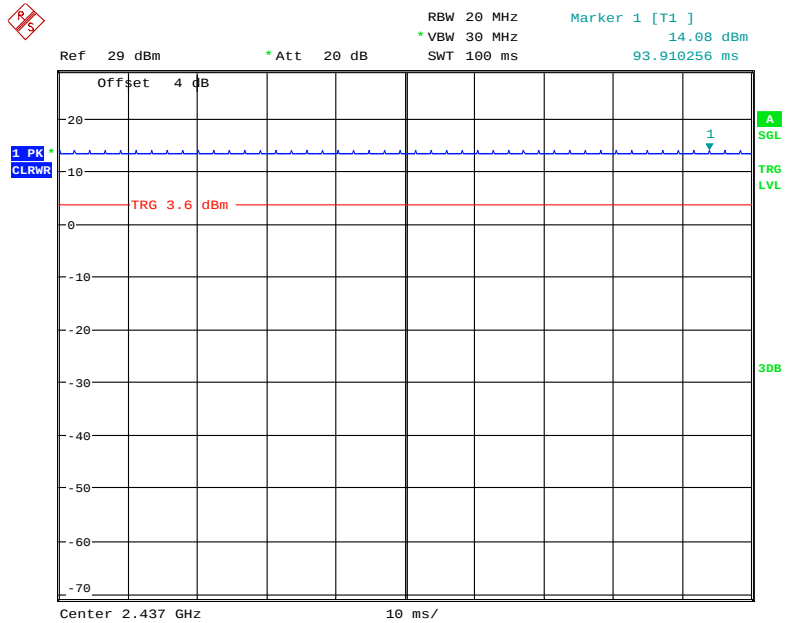


Date: 25.OCT.2019 16:26:20

802.11g mode

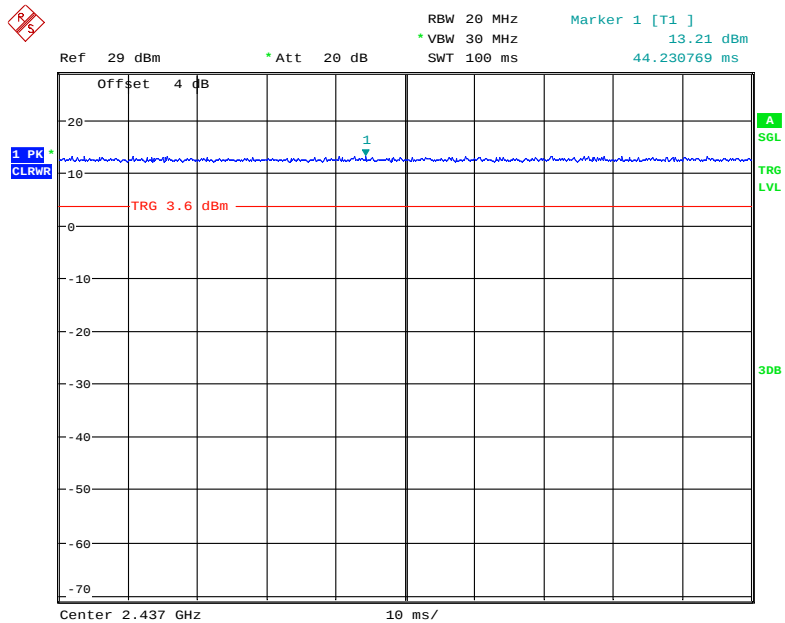


Date: 25.OCT.2019 16:25:50

802.11n-HT20 Mode

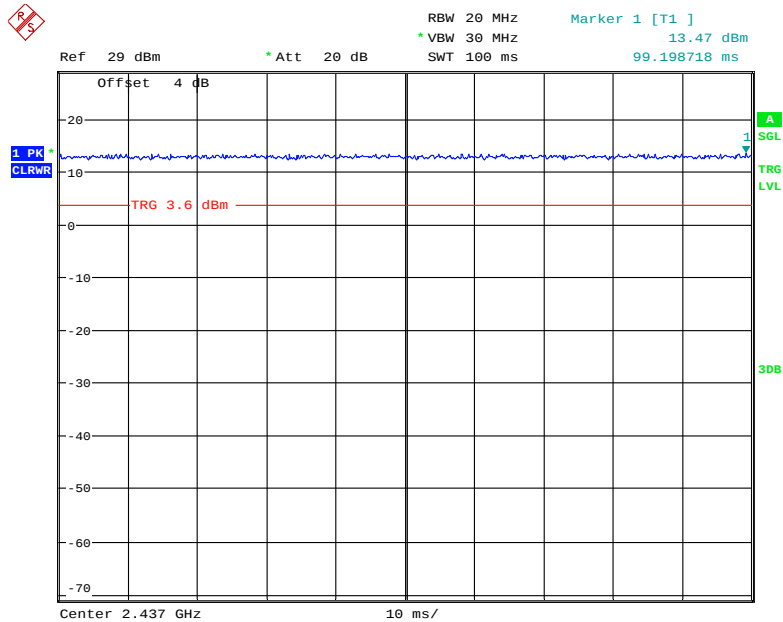


Date: 25.OCT.2019 16:25:23

802.11n-HT40 Mode

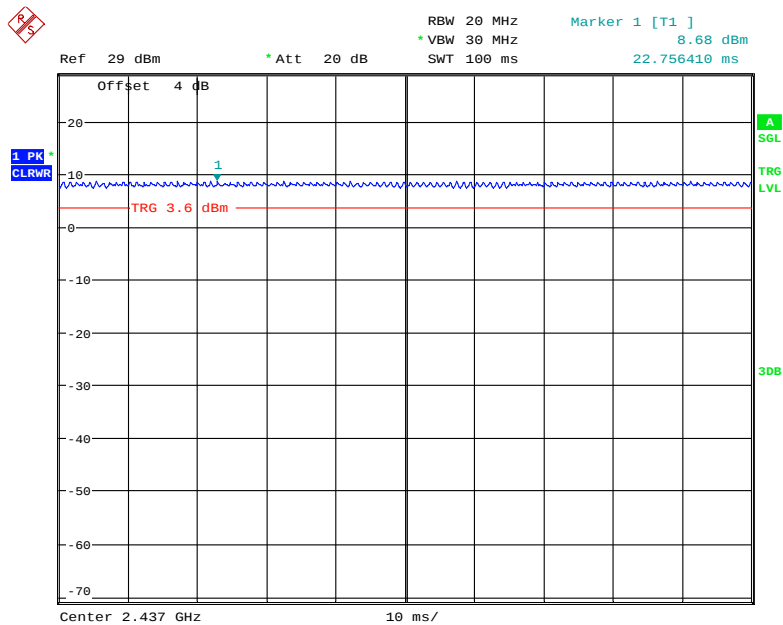

Date: 25.OCT.2019 16:24:39

## BLE Mode

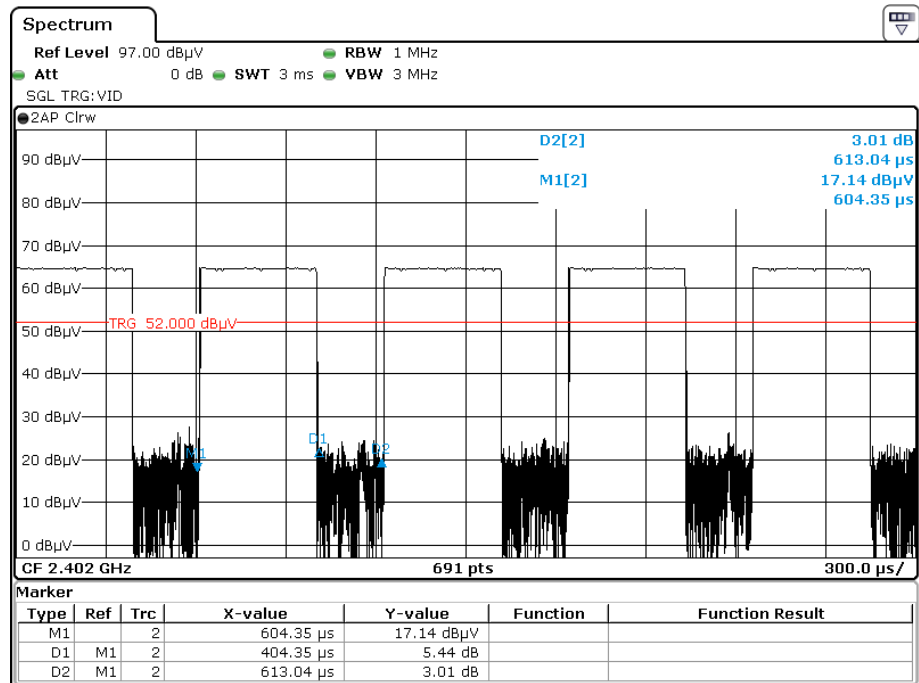

Date: 26.SEP.2019 17:58:03

## ANT 1

| Mode         | T <sub>on</sub><br>(ms) | T <sub>on+off</sub><br>(ms) | Duty Cycle<br>(%) |
|--------------|-------------------------|-----------------------------|-------------------|
| 802.11b      | 100                     | 100                         | 100               |
| 802.11g      | 100                     | 100                         | 100               |
| 802.11n-HT20 | 100                     | 100                         | 100               |
| 802.11n-HT40 | 100                     | 100                         | 100               |

## ANT 2

| Mode         | T <sub>on</sub><br>(ms) | T <sub>on+off</sub><br>(ms) | Duty Cycle<br>(%) |
|--------------|-------------------------|-----------------------------|-------------------|
| 802.11b      | 100                     | 100                         | 100               |
| 802.11g      | 100                     | 100                         | 100               |
| 802.11n-HT20 | 100                     | 100                         | 100               |
| 802.11n-HT40 | 100                     | 100                         | 100               |
| BLE          | 0.40435                 | 0.61304                     | 65.96             |

**Support Equipment List and Details**


| Manufacturer | Description | Model                                  | Serial Number |
|--------------|-------------|----------------------------------------|---------------|
| Microsoft    | Keyboard    | 1406                                   | 0200706128743 |
| DELL         | Mouse       | MOC5UO                                 | G1900NKD      |
| TECLAST      | U-disk      | Unkown                                 | Unkown        |
| ADATA        | U-disk      | Unkown                                 | Unkown        |
| SAGEM        | Router      | SAGEM F@ST <sup>TM</sup><br>2604 White | Unkown        |
| MAKEN        | Cash Drawer | MT-350T                                | Unkown        |
| YD           | PIN Pad     | YD511DA-RJ                             | Unkown        |

**External I/O Cable**

| Cable Description                               | Length (m) | From/Port | To          |
|-------------------------------------------------|------------|-----------|-------------|
| Un-Shielding Detachable USB Cable               | 1.5        | EUT       | Mouse       |
| Shielding Detachable K/B Cable With Magnet Ring | 1.5        | EUT       | Keyboard    |
| Un-Shielding Detachable AC Cable                | 1.2        | LISN      | Adapter     |
| Un-Shielding Detachable DC Cable                | 1.2        | EUT       | Adapter     |
| Un-Shielding Detachable RJ45 Cable              | 10         | EUT       | Router      |
| Un-Shielding Detachable RJ11 Cable              | 10         | EUT       | Cash Drawer |
| Un-Shielding Detachable RJ9 to RS232 Cable      | 10         | EUT       | PIN Pad     |

**Block Diagram of Test Setup**

For conducted emission:

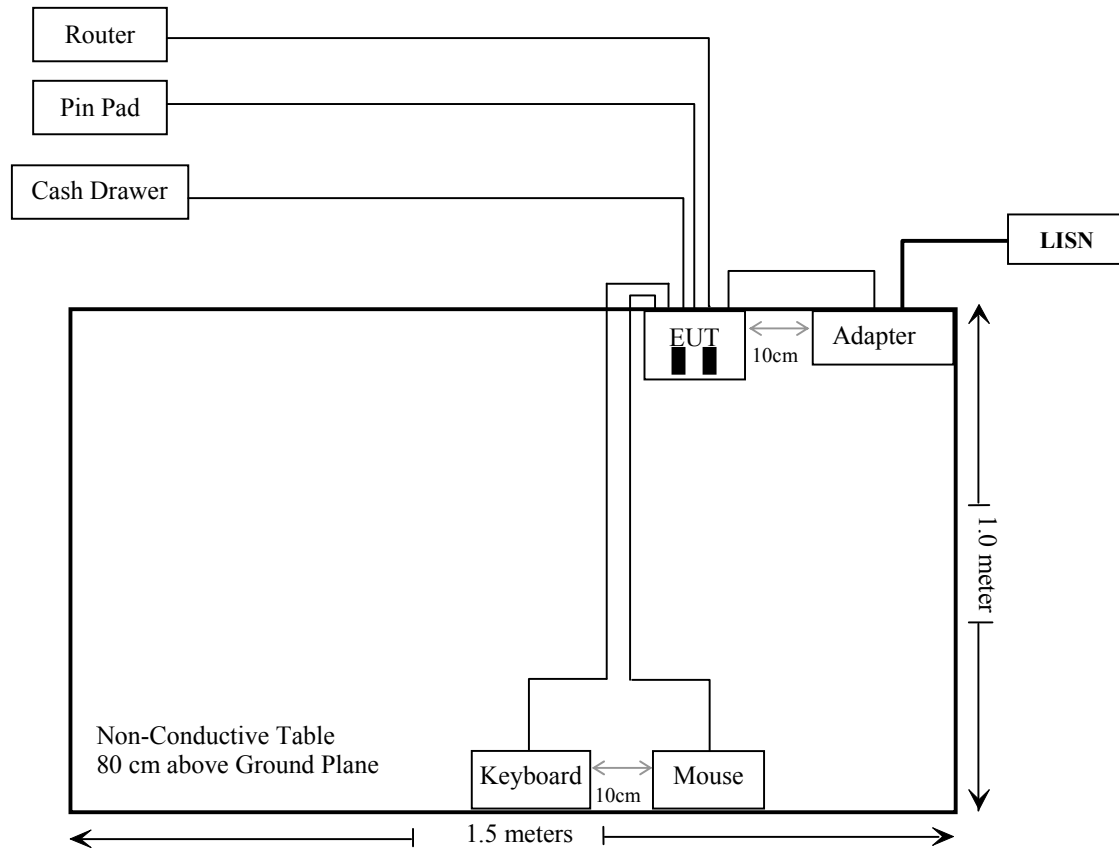

Note: ■ mark U-disk

**SUMMARY OF TEST RESULTS**

| FCC Rules                       | Description of Test                      | Result     |
|---------------------------------|------------------------------------------|------------|
| §15.247 (i), §2.1091            | Maximum Permissible Exposure(MPE)        | Compliance |
| §15.203                         | Antenna Requirement                      | Compliance |
| §15.207 (a)                     | AC Line Conducted Emissions              | Compliance |
| §15.205, §15.209,<br>§15.247(d) | Spurious Emissions                       | Compliance |
| §15.247 (a)(2)                  | 6 dB Emission Bandwidth                  | Compliance |
| §15.247(b)(3)                   | Maximum Conducted Output Power           | Compliance |
| §15.247(d)                      | 100 kHz Bandwidth of Frequency Band Edge | Compliance |
| §15.247(e)                      | Power Spectral Density                   | Compliance |

**TEST EQUIPMENT LIST**

| Manufacturer                    | Description              | Model                   | Serial Number          | Calibration Date | Calibration Due Date |
|---------------------------------|--------------------------|-------------------------|------------------------|------------------|----------------------|
| <b>Conducted Emissions Test</b> |                          |                         |                        |                  |                      |
| Rohde & Schwarz                 | EMI Test Receiver        | ESCS30                  | 100176                 | 2019-07-11       | 2020-07-11           |
| Rohde & Schwarz                 | LISN                     | ENV216                  | 3560.6650.12-101613-Yb | 2019-01-25       | 2020-01-25           |
| Rohde & Schwarz                 | Transient Limiter        | ESH3Z2                  | DE25985                | 2019-03-02       | 2020-03-01           |
| Rohde & Schwarz                 | CE Test software         | EMC 32                  | V8.53.0                | NCR              | NCR                  |
| Unknown                         | Conducted Emission Cable | 78652                   | UF A210B-1-0720-504504 | 2018-11-12       | 2019-11-12           |
| <b>Radiated Emission Test</b>   |                          |                         |                        |                  |                      |
| A.H. System                     | Horn Antenna             | SAS-200/571             | 135                    | 2018-09-01       | 2021-08-31           |
| Rohde & Schwarz                 | Spectrum Analyzer        | FSV40-N                 | 102259                 | 2019-07-22       | 2020-07-21           |
| Sunol Sciences                  | Broadband Antenna        | JB1                     | A040904-1              | 2017-12-22       | 2020-12-21           |
| COM-POWER                       | Pre-amplifier            | PA-122                  | 181919                 | 2018-11-12       | 2019-11-12           |
| Sonoma Instrument               | Amplifier                | 310N                    | 186238                 | 2018-11-12       | 2019-11-12           |
| Rohde & Schwarz                 | EMI Test Receiver        | ESR3                    | 102455                 | 2019-07-09       | 2020-07-08           |
| UTIFLEX MICRO-C0AX              | RF Cable                 | UFA147A-2362-100100     | MFR64639 231029-003    | 2018-11-12       | 2019-11-12           |
| Ducommun Technologies           | RF Cable                 | 104PEA                  | 218124002              | 2018-11-12       | 2019-11-12           |
| Ducommun Technologies           | RF Cable                 | RG-214                  | 1                      | 2019-05-21       | 2019-11-19           |
| Ducommun Technologies           | RF Cable                 | RG-214                  | 2                      | 2018-11-12       | 2019-11-12           |
| Ducommun Technologies           | Horn Antenna             | ARH-4223-02             | 1007726-04             | 2017-12-29       | 2020-12-28           |
| Heatsink Required               | Amplifier                | QLW-18405536-J0         | 15964001002            | 2018-11-12       | 2019-11-12           |
| Sinoscite                       | Band Reject Filter       | BSF2402-2480MN-0898-001 | 99632                  | 2018-11-12       | 2019-11-12           |
| Rohde & Schwarz                 | Auto test software       | EMC 32                  | V9.10                  | NCR              | NCR                  |

| Manufacturer             | Description              | Model   | Serial Number | Calibration Date | Calibration Due Date |
|--------------------------|--------------------------|---------|---------------|------------------|----------------------|
| <b>RF Conducted Test</b> |                          |         |               |                  |                      |
| Agilent                  | USB wideband power meter | U2021XA | MY54250003    | 2019-07-10       | 2020-07-09           |
| WEINSCHTEL               | 3dB Attenuator           | 6231    | 666           | Each Time        |                      |
| Rohde & Schwarz          | Spectrum Analyzer        | FSU26   | 200120        | 2019-03-02       | 2020-03-01           |
| Ducommun Technologies    | RF Cable                 | RG-214  | 3             | Each Time        |                      |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## FCC §15.247 (i) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

### Applicable Standard

According to subpart 15.247 (i) and subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

#### Limits for General Population/Uncontrolled Exposure

| Limits for General Population/Uncontrolled Exposure |                               |                               |                                     |                          |
|-----------------------------------------------------|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| Frequency Range (MHz)                               | Electric Field Strength (V/m) | Magnetic Field Strength (A/m) | Power Density (mW/cm <sup>2</sup> ) | Averaging Time (Minutes) |
| 0.3-1.34                                            | 614                           | 1.63                          | *(100)                              | 30                       |
| 1.34-30                                             | 824/f                         | 2.19/f                        | *(180/f <sup>2</sup> )              | 30                       |
| 30-300                                              | 27.5                          | 0.073                         | 0.2                                 | 30                       |
| 300-1500                                            | /                             | /                             | f/1500                              | 30                       |
| 1500-100,000                                        | /                             | /                             | 1.0                                 | 30                       |

f = frequency in MHz

\* = Plane-wave equivalent power density

### Result

#### Calculated Formulary:

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm<sup>2</sup>)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

| Frequency (MHz) | Antenna Gain |           | Max Conducted Power |       | Evaluation Distance (cm) | Power Density (mW/cm <sup>2</sup> ) | MPE Limit (mW/cm <sup>2</sup> ) |
|-----------------|--------------|-----------|---------------------|-------|--------------------------|-------------------------------------|---------------------------------|
|                 | (dBi)        | (numeric) | (dBm)               | (mW)  |                          |                                     |                                 |
| 2412-2462(Wifi) | 3.0          | 2.0       | 17.5                | 56.23 | 20                       | 0.0224                              | 1.0                             |
| 2402-2480(BLE)  | 3.0          | 2.0       | 2.0                 | 1.58  | 20                       | 0.0006                              | 1.0                             |

Note: Bluetooth and Wifi can not transmitting simultaneously.

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

**Result: compliance.**

---

## **FCC §15.203 - ANTENNA REQUIREMENT**

---

### **Applicable Standard**

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **Antenna Connector Construction**

The EUT has an internal antenna arrangement, which was permanently attached and the antenna gain is 3 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


**Result:** Compliance.

## FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC§15.207

### EUT Setup

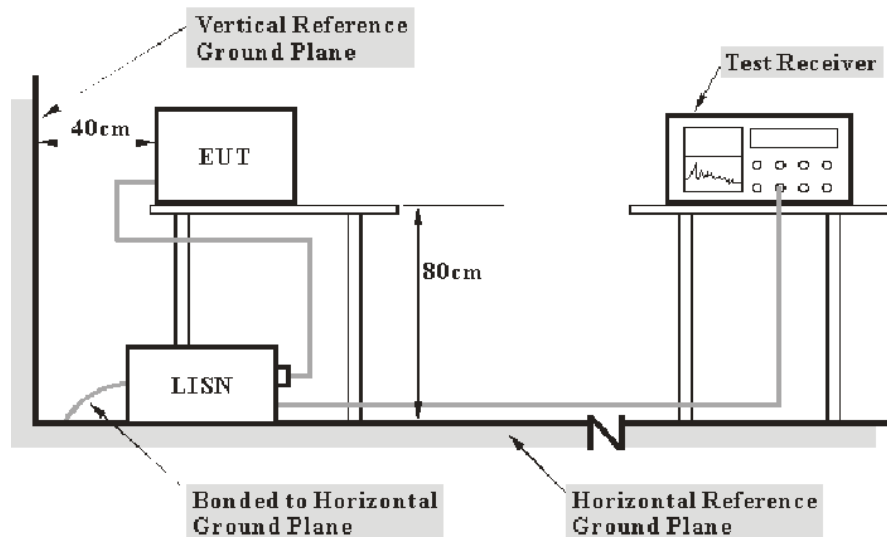

Note: 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| Frequency Range  | IF B/W |
|------------------|--------|
| 150 kHz – 30 MHz | 9 kHz  |

### Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

## Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Results Summary

According to the EUT complied with the FCC Part 15.207,


## Test Data

### Environmental Conditions


|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 25 °C     |
| <b>Relative Humidity:</b> | 52 %      |
| <b>ATM Pressure:</b>      | 101.0 kPa |

*The testing was performed by Kiki Geng on 2019-10-21.*

*EUT operation mode: Transmitting (the worst case)*

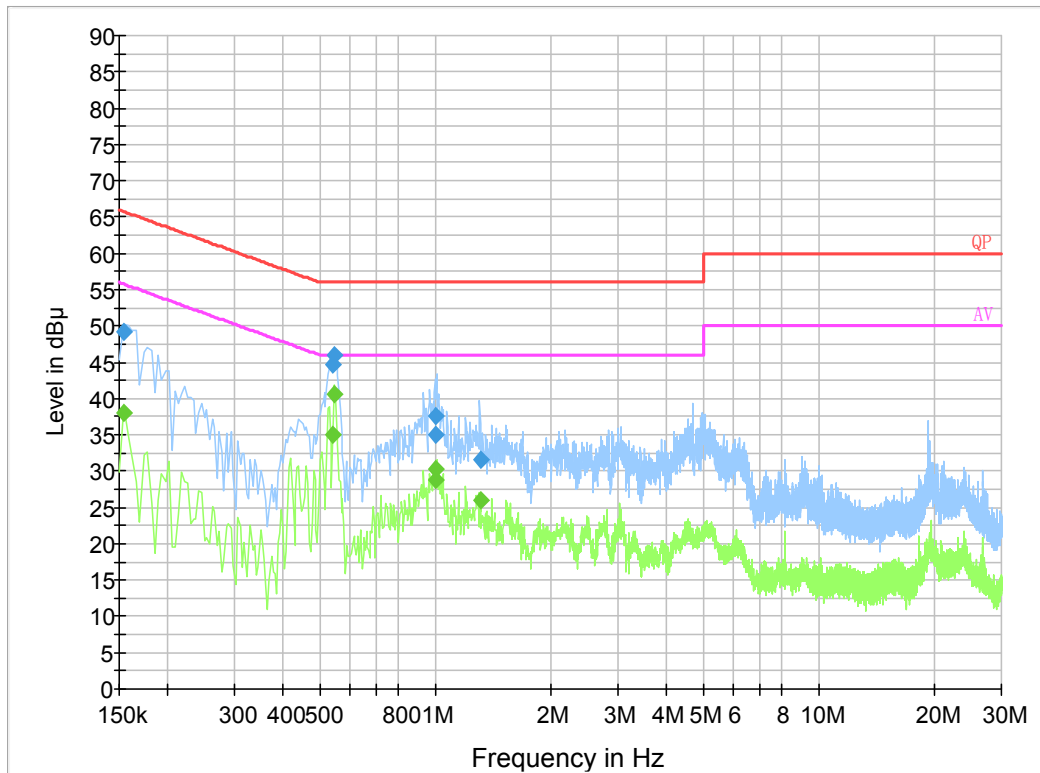**Wi-Fi Mode:****AC 120 V/60 Hz, Line:**

| Frequency (MHz) | Corrected Amplitude (dBμV) | Correction Factor (dB) | Limit (dBμV) | Margin (dB) | Detector (PK/Ave./QP) |
|-----------------|----------------------------|------------------------|--------------|-------------|-----------------------|
| 0.154000        | 49.1                       | 19.8                   | 65.8         | 16.7        | QP                    |
| 0.541990        | 44.7                       | 19.8                   | 56.0         | 11.3        | QP                    |
| 0.545810        | 45.9                       | 19.8                   | 56.0         | 10.1        | QP                    |
| 0.998850        | 37.6                       | 19.9                   | 56.0         | 18.4        | QP                    |
| 1.006670        | 35.0                       | 19.9                   | 56.0         | 21.0        | QP                    |
| 1.318410        | 31.6                       | 19.8                   | 56.0         | 24.4        | QP                    |
| 0.154000        | 37.9                       | 19.8                   | 55.8         | 17.9        | Ave.                  |
| 0.541990        | 35.1                       | 19.8                   | 46.0         | 10.9        | Ave.                  |
| 0.545810        | 40.6                       | 19.8                   | 46.0         | 5.4         | Ave.                  |
| 0.998850        | 30.2                       | 19.9                   | 46.0         | 15.8        | Ave.                  |
| 1.006670        | 28.8                       | 19.9                   | 46.0         | 17.2        | Ave.                  |
| 1.318410        | 25.9                       | 19.8                   | 46.0         | 20.1        | Ave.                  |

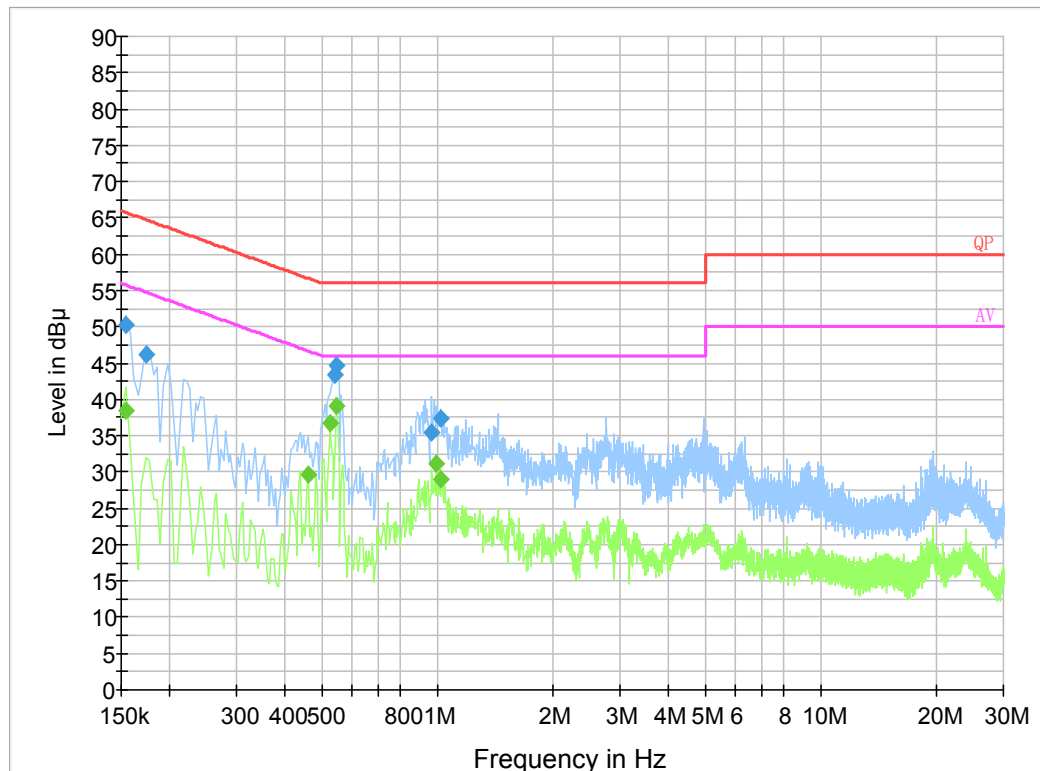**AC 120V/ 60 Hz, Neutral:**



| Frequency (MHz) | Corrected Amplitude (dBμV) | Correction Factor (dB) | Limit (dBμV) | Margin (dB) | Detector (PK/Ave./QP) |
|-----------------|----------------------------|------------------------|--------------|-------------|-----------------------|
| 0.154000        | 50.2                       | 19.8                   | 65.8         | 15.6        | QP                    |
| 0.173500        | 46.1                       | 19.8                   | 64.8         | 18.7        | QP                    |
| 0.541990        | 43.5                       | 19.8                   | 56.0         | 12.5        | QP                    |
| 0.545750        | 44.6                       | 19.8                   | 56.0         | 11.4        | QP                    |
| 0.967510        | 35.4                       | 19.8                   | 56.0         | 20.6        | QP                    |
| 1.022610        | 37.4                       | 19.8                   | 56.0         | 18.6        | QP                    |
| 0.154000        | 38.4                       | 19.8                   | 55.8         | 17.4        | Ave.                  |
| 0.462000        | 29.6                       | 19.8                   | 46.7         | 17.1        | Ave.                  |
| 0.526000        | 36.7                       | 19.8                   | 46.0         | 9.3         | Ave.                  |
| 0.546000        | 39.2                       | 19.8                   | 46.0         | 6.8         | Ave.                  |
| 0.998000        | 31.1                       | 19.8                   | 46.0         | 14.9        | Ave.                  |
| 1.022000        | 28.9                       | 19.8                   | 46.0         | 17.1        | Ave.                  |

**Note:**

- 1) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit – Corrected Amplitude

**FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS****Applicable Standard**

FCC §15.247 (d); §15.209; §15.205;

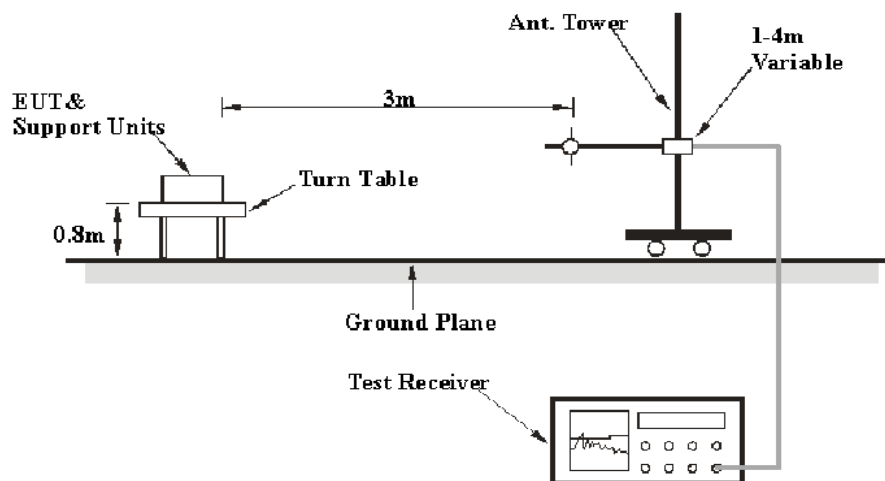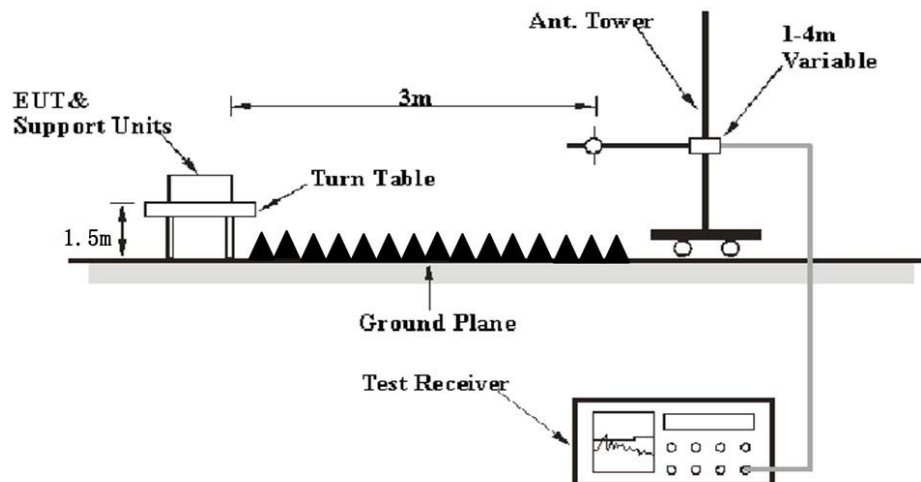**EUT Setup****Below 1 GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

## EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

| Frequency Range   | RBW     | Video B/W               | IF B/W  | Measurement |
|-------------------|---------|-------------------------|---------|-------------|
| 30 MHz – 1000 MHz | 100 kHz | 300 kHz                 | 120 kHz | QP          |
| Above 1 GHz       | 1MHz    | 3 MHz                   | /       | PK          |
|                   | 1MHz    | 10 Hz <sup>Note 1</sup> | /       | Average     |
|                   | 1MHz    | > 1/T <sup>Note 2</sup> | /       | Average     |

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Results Summary


According to the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

**Test Data****Environmental Conditions**

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 25 °C     |
| <b>Relative Humidity:</b> | 52 %      |
| <b>ATM Pressure:</b>      | 101.0 kPa |

*The testing was performed by Zero Yan on 2019-10-14 for below 1G and Curry Xiang on 2019-09-26 and 2019-10-14 for above 1G.*

*EUT operation mode: Transmitting*

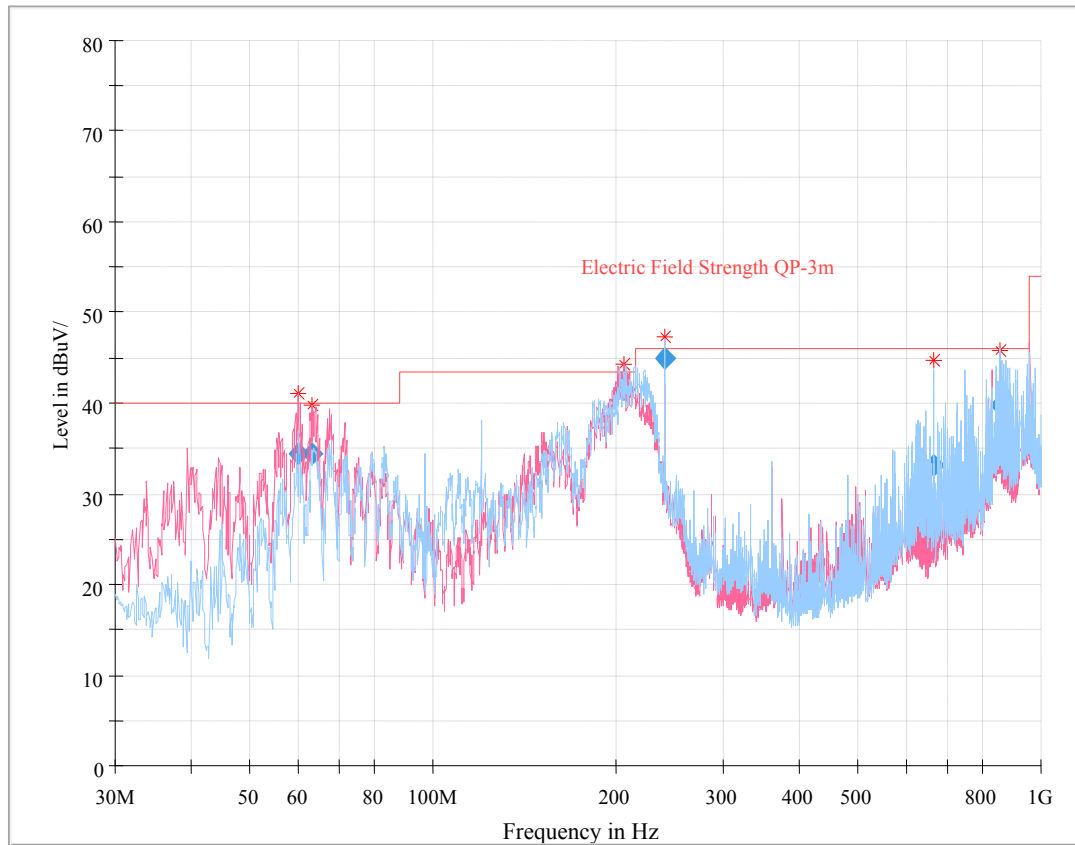**Wi-Fi Mode:** (the worst case)**30 MHz~1 GHz:**

| Frequency (MHz) | Corrected Amplitude (dBμV/m) | Antenna height (cm) | Antenna Polarity | Turntable position (degree) | Correction Factor (dB/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|------------------------------|---------------------|------------------|-----------------------------|--------------------------|----------------|-------------|
| 60.066750       | 34.48                        | 108.0               | V                | 175.0                       | -20.2                    | 40.00          | 5.52        |
| 63.397250       | 34.31                        | 109.0               | V                | 170.0                       | -20.3                    | 40.00          | 5.69        |
| 205.438000      | 41.45                        | 109.0               | V                | 146.0                       | -13.9                    | 43.50          | 2.05        |
| 240.022375      | 44.93                        | 130.0               | H                | 70.0                        | -14.1                    | 46.00          | 1.07        |
| 666.750375      | 33.02                        | 184.0               | H                | 340.0                       | -2.8                     | 46.00          | 12.98       |
| 854.267375      | 39.81                        | 203.0               | H                | 17.0                        | 6.7                      | 46.00          | 6.19        |

**1 GHz-25 GHz (Wi-Fi):****For Antenna 1:****802.11b Mode:**

| Frequency<br>(MHz)       | Receiver          |            | Turntable<br>Degree | Rx Antenna    |                | Corrected<br>Factor<br>(dB/m) | Corrected<br>Amplitude<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|--------------------------|-------------------|------------|---------------------|---------------|----------------|-------------------------------|------------------------------------|-------------------|----------------|
|                          | Reading<br>(dBμV) | PK/QP/Ave. |                     | Height<br>(m) | Polar<br>(H/V) |                               |                                    |                   |                |
| Low Channel (2412 MHz)   |                   |            |                     |               |                |                               |                                    |                   |                |
| 2351.74                  | 27.91             | PK         | 317                 | 1.1           | V              | 31.77                         | 59.68                              | 74                | 14.32          |
| 2351.74                  | 14.03             | Ave.       | 317                 | 1.1           | V              | 31.77                         | 45.80                              | 54                | 8.20           |
| 2493.90                  | 29.60             | PK         | 134                 | 2.1           | V              | 32.13                         | 61.73                              | 74                | 12.27          |
| 2493.90                  | 14.82             | Ave.       | 134                 | 2.1           | V              | 32.13                         | 46.95                              | 54                | 7.05           |
| 1657.89                  | 65.49             | PK         | 102                 | 1.5           | V              | -1.85                         | 63.64                              | 74                | 10.36          |
| 1657.89                  | 36.33             | Ave.       | 102                 | 1.5           | V              | -1.85                         | 34.48                              | 54                | 19.52          |
| 4824.00                  | 43.42             | PK         | 186                 | 1.9           | V              | 5.40                          | 48.82                              | 74                | 25.18          |
| 4824.00                  | 28.66             | Ave.       | 186                 | 1.9           | V              | 5.40                          | 34.06                              | 54                | 19.94          |
| Middle Channel (2437MHz) |                   |            |                     |               |                |                               |                                    |                   |                |
| 1657.89                  | 65.31             | PK         | 233                 | 1.3           | V              | -1.85                         | 63.46                              | 74                | 10.54          |
| 1657.89                  | 35.94             | Ave.       | 233                 | 1.3           | V              | -1.85                         | 34.09                              | 54                | 19.91          |
| 4874.00                  | 43.81             | PK         | 21                  | 2.0           | V              | 6.43                          | 50.24                              | 74                | 23.76          |
| 4874.00                  | 29.75             | Ave.       | 21                  | 2.0           | V              | 6.43                          | 36.18                              | 54                | 17.82          |
| High Channel (2462 MHz)  |                   |            |                     |               |                |                               |                                    |                   |                |
| 2359.61                  | 27.53             | PK         | 169                 | 1.0           | V              | 31.77                         | 59.30                              | 74                | 14.70          |
| 2359.61                  | 13.74             | Ave.       | 169                 | 1.0           | V              | 31.77                         | 45.51                              | 54                | 8.49           |
| 2493.33                  | 28.72             | PK         | 328                 | 2.2           | V              | 32.13                         | 60.85                              | 74                | 13.15          |
| 2493.33                  | 14.60             | Ave.       | 328                 | 2.2           | V              | 32.13                         | 46.73                              | 54                | 7.27           |
| 1657.89                  | 65.43             | PK         | 299                 | 1.5           | V              | -1.85                         | 63.58                              | 74                | 10.42          |
| 1657.89                  | 36.06             | Ave.       | 299                 | 1.5           | V              | -1.85                         | 34.21                              | 54                | 19.79          |
| 4924.00                  | 43.81             | PK         | 38                  | 1.1           | V              | 6.43                          | 50.24                              | 74                | 23.76          |
| 4924.00                  | 28.77             | Ave.       | 38                  | 1.1           | V              | 6.43                          | 35.20                              | 54                | 18.80          |

**802.11g Mode:**

| Frequency<br>(MHz)       | Receiver          |            | Turntable<br>Degree | Rx Antenna    |                | Corrected<br>Factor<br>(dB/m) | Corrected<br>Amplitude<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|--------------------------|-------------------|------------|---------------------|---------------|----------------|-------------------------------|------------------------------------|-------------------|----------------|
|                          | Reading<br>(dBμV) | PK/QP/Ave. |                     | Height<br>(m) | Polar<br>(H/V) |                               |                                    |                   |                |
| Low Channel (2412 MHz)   |                   |            |                     |               |                |                               |                                    |                   |                |
| 2389.41                  | 29.73             | PK         | 129                 | 2.4           | V              | 31.87                         | 61.60                              | 74                | 12.40          |
| 2389.41                  | 15.59             | Ave.       | 129                 | 2.4           | V              | 31.87                         | 47.46                              | 54                | 6.54           |
| 2495.26                  | 28.33             | PK         | 212                 | 1.9           | V              | 32.13                         | 60.46                              | 74                | 13.54          |
| 2495.26                  | 14.28             | Ave.       | 212                 | 1.9           | V              | 32.13                         | 46.41                              | 54                | 7.59           |
| 1657.89                  | 65.24             | PK         | 325                 | 2.0           | V              | -1.85                         | 63.39                              | 74                | 10.61          |
| 1657.89                  | 36.11             | Ave.       | 325                 | 2.0           | V              | -1.85                         | 34.26                              | 54                | 19.74          |
| 4824.00                  | 44.56             | PK         | 79                  | 2.2           | V              | 5.40                          | 49.96                              | 74                | 24.04          |
| 4824.00                  | 29.81             | Ave.       | 79                  | 2.2           | V              | 5.40                          | 35.21                              | 54                | 18.79          |
| Middle Channel (2437MHz) |                   |            |                     |               |                |                               |                                    |                   |                |
| 1657.89                  | 64.59             | PK         | 213                 | 2.2           | V              | -1.85                         | 62.74                              | 74                | 11.26          |
| 1657.89                  | 35.33             | Ave.       | 213                 | 2.2           | V              | -1.85                         | 33.48                              | 54                | 20.52          |
| 4874.00                  | 43.63             | PK         | 276                 | 1.3           | V              | 6.43                          | 50.06                              | 74                | 23.94          |
| 4874.00                  | 28.79             | Ave.       | 276                 | 1.3           | V              | 6.43                          | 35.22                              | 54                | 18.78          |
| High Channel (2462 MHz)  |                   |            |                     |               |                |                               |                                    |                   |                |
| 2345.48                  | 29.29             | PK         | 10                  | 1.7           | V              | 31.64                         | 60.93                              | 74                | 13.07          |
| 2345.48                  | 15.04             | Ave.       | 10                  | 1.7           | V              | 31.64                         | 46.68                              | 54                | 7.32           |
| 2485.99                  | 29.03             | PK         | 358                 | 1.0           | V              | 32.13                         | 61.16                              | 74                | 12.84          |
| 2485.99                  | 14.82             | Ave.       | 358                 | 1.0           | V              | 32.13                         | 46.95                              | 54                | 7.05           |
| 1657.89                  | 64.88             | PK         | 147                 | 2.3           | V              | -1.85                         | 63.03                              | 74                | 10.97          |
| 1657.89                  | 35.36             | Ave.       | 147                 | 2.3           | V              | -1.85                         | 33.51                              | 54                | 20.49          |
| 4924.00                  | 44.06             | PK         | 257                 | 2.3           | V              | 6.43                          | 50.49                              | 74                | 23.51          |
| 4924.00                  | 29.11             | Ave.       | 257                 | 2.3           | V              | 6.43                          | 35.54                              | 54                | 18.46          |

**802.11n-HT20 Mode:**

| Frequency<br>(MHz)       | Receiver          |            | Turntable<br>Degree | Rx Antenna    |                | Corrected<br>Factor<br>(dB/m) | Corrected<br>Amplitude<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|--------------------------|-------------------|------------|---------------------|---------------|----------------|-------------------------------|------------------------------------|-------------------|----------------|
|                          | Reading<br>(dBμV) | PK/QP/Ave. |                     | Height<br>(m) | Polar<br>(H/V) |                               |                                    |                   |                |
| Low Channel (2412 MHz)   |                   |            |                     |               |                |                               |                                    |                   |                |
| 2388.90                  | 30.89             | PK         | 20                  | 1.9           | V              | 31.87                         | 62.76                              | 74                | 11.24          |
| 2388.90                  | 15.85             | Ave.       | 20                  | 1.9           | V              | 31.87                         | 47.72                              | 54                | 6.28           |
| 2496.04                  | 28.44             | PK         | 319                 | 2.4           | V              | 32.13                         | 60.57                              | 74                | 13.43          |
| 2496.04                  | 14.63             | Ave.       | 319                 | 2.4           | V              | 32.13                         | 46.76                              | 54                | 7.24           |
| 1657.89                  | 65.03             | PK         | 18                  | 2.1           | V              | -1.85                         | 63.18                              | 74                | 10.82          |
| 1657.89                  | 35.80             | Ave.       | 18                  | 2.1           | V              | -1.85                         | 33.95                              | 54                | 20.05          |
| 4824.00                  | 43.53             | PK         | 335                 | 1.9           | V              | 5.40                          | 48.93                              | 74                | 25.07          |
| 4824.00                  | 28.61             | Ave.       | 335                 | 1.9           | V              | 5.40                          | 34.01                              | 54                | 19.99          |
| Middle Channel (2437MHz) |                   |            |                     |               |                |                               |                                    |                   |                |
| 1657.89                  | 65.19             | PK         | 179                 | 1.9           | V              | -1.85                         | 63.34                              | 74                | 10.66          |
| 1657.89                  | 36.08             | Ave.       | 179                 | 1.9           | V              | -1.85                         | 34.23                              | 54                | 19.77          |
| 4874.00                  | 43.46             | PK         | 101                 | 1.8           | V              | 6.43                          | 49.89                              | 74                | 24.11          |
| 4874.00                  | 28.55             | Ave.       | 101                 | 1.8           | V              | 6.43                          | 34.98                              | 54                | 19.02          |
| High Channel (2462 MHz)  |                   |            |                     |               |                |                               |                                    |                   |                |
| 2361.58                  | 28.02             | PK         | 83                  | 1.8           | V              | 31.87                         | 59.89                              | 74                | 14.11          |
| 2361.58                  | 13.95             | Ave.       | 83                  | 1.8           | V              | 31.87                         | 45.82                              | 54                | 8.18           |
| 2484.61                  | 29.54             | PK         | 221                 | 1.1           | V              | 32.13                         | 61.67                              | 74                | 12.33          |
| 2484.61                  | 15.09             | Ave.       | 221                 | 1.1           | V              | 32.13                         | 47.22                              | 54                | 6.78           |
| 1657.89                  | 64.39             | PK         | 203                 | 1.7           | V              | -1.85                         | 62.54                              | 74                | 11.46          |
| 1657.89                  | 35.26             | Ave.       | 203                 | 1.7           | V              | -1.85                         | 33.41                              | 54                | 20.59          |
| 4924.00                  | 44.35             | PK         | 135                 | 2.2           | V              | 6.43                          | 50.78                              | 74                | 23.22          |
| 4924.00                  | 29.20             | Ave.       | 135                 | 2.2           | V              | 6.43                          | 35.63                              | 54                | 18.37          |

**802.11n-HT40 Mode:**

| Frequency<br>(MHz)       | Receiver          |            | Turntable<br>Degree | Rx Antenna    |                | Corrected<br>Factor<br>(dB/m) | Corrected<br>Amplitude<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|--------------------------|-------------------|------------|---------------------|---------------|----------------|-------------------------------|------------------------------------|-------------------|----------------|
|                          | Reading<br>(dBμV) | PK/QP/Ave. |                     | Height<br>(m) | Polar<br>(H/V) |                               |                                    |                   |                |
| Low Channel (2422 MHz)   |                   |            |                     |               |                |                               |                                    |                   |                |
| 2389.44                  | 33.03             | PK         | 217                 | 2.1           | V              | 31.87                         | 64.90                              | 74                | 9.10           |
| 2389.44                  | 18.98             | Ave.       | 217                 | 2.1           | V              | 31.87                         | 50.85                              | 54                | 3.15           |
| 2484.56                  | 28.84             | PK         | 31                  | 1.7           | V              | 32.13                         | 60.97                              | 74                | 13.03          |
| 2484.56                  | 15.01             | Ave.       | 31                  | 1.7           | V              | 32.13                         | 47.14                              | 54                | 6.86           |
| 1657.89                  | 64.98             | PK         | 253                 | 1.6           | V              | -1.85                         | 63.13                              | 74                | 10.87          |
| 1657.89                  | 35.82             | Ave.       | 253                 | 1.6           | V              | -1.85                         | 33.97                              | 54                | 20.03          |
| 4844.00                  | 43.78             | PK         | 148                 | 1.6           | V              | 5.40                          | 49.18                              | 74                | 24.82          |
| 4844.00                  | 28.97             | Ave.       | 148                 | 1.6           | V              | 5.40                          | 34.37                              | 54                | 19.63          |
| Middle Channel (2437MHz) |                   |            |                     |               |                |                               |                                    |                   |                |
| 1657.89                  | 65.15             | PK         | 250                 | 1.2           | V              | -1.85                         | 63.30                              | 74                | 10.70          |
| 1657.89                  | 36.22             | Ave.       | 250                 | 1.2           | V              | -1.85                         | 34.37                              | 54                | 19.63          |
| 4874.00                  | 43.71             | PK         | 332                 | 2.0           | V              | 6.43                          | 50.14                              | 74                | 23.86          |
| 4874.00                  | 28.66             | Ave.       | 332                 | 2.0           | V              | 6.43                          | 35.09                              | 54                | 18.91          |
| High Channel (2452 MHz)  |                   |            |                     |               |                |                               |                                    |                   |                |
| 2312.26                  | 28.16             | PK         | 228                 | 1.7           | V              | 31.64                         | 59.80                              | 74                | 14.20          |
| 2312.26                  | 14.38             | Ave.       | 228                 | 1.7           | V              | 31.64                         | 46.02                              | 54                | 7.98           |
| 2488.12                  | 28.49             | PK         | 86                  | 2.5           | V              | 32.13                         | 60.62                              | 74                | 13.38          |
| 2488.12                  | 14.67             | Ave.       | 86                  | 2.5           | V              | 32.13                         | 46.80                              | 54                | 7.20           |
| 1657.89                  | 65.28             | PK         | 91                  | 2.3           | V              | -1.85                         | 63.43                              | 74                | 10.57          |
| 1657.89                  | 36.33             | Ave.       | 91                  | 2.3           | V              | -1.85                         | 34.48                              | 54                | 19.52          |
| 4904.00                  | 44.08             | PK         | 87                  | 2.5           | V              | 6.43                          | 50.51                              | 74                | 23.49          |
| 4904.00                  | 29.15             | Ave.       | 87                  | 2.5           | V              | 6.43                          | 35.58                              | 54                | 18.42          |

**For Antenna 2:****802.11b Mode:**

| Frequency<br>(MHz)        | Receiver          |            | Turntable<br>Degree | Rx Antenna    |                | Corrected<br>Factor<br>(dB/m) | Corrected<br>Amplitude<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|---------------------------|-------------------|------------|---------------------|---------------|----------------|-------------------------------|------------------------------------|-------------------|----------------|
|                           | Reading<br>(dBμV) | PK/QP/Ave. |                     | Height<br>(m) | Polar<br>(H/V) |                               |                                    |                   |                |
| Low Channel (2412 MHz)    |                   |            |                     |               |                |                               |                                    |                   |                |
| 2381.94                   | 32.18             | PK         | 139                 | 2.3           | V              | 31.87                         | 64.05                              | 74                | 9.95           |
| 2381.94                   | 17.27             | Ave.       | 139                 | 2.3           | V              | 31.87                         | 49.14                              | 54                | 4.86           |
| 2491.05                   | 28.24             | PK         | 103                 | 1.6           | V              | 32.13                         | 60.37                              | 74                | 13.63          |
| 2491.05                   | 14.05             | Ave.       | 103                 | 1.6           | V              | 32.13                         | 46.18                              | 54                | 7.82           |
| 1657.89                   | 65.01             | PK         | 359                 | 1.3           | V              | -1.85                         | 63.16                              | 74                | 10.84          |
| 1657.89                   | 36.12             | Ave.       | 359                 | 1.3           | V              | -1.85                         | 34.27                              | 54                | 19.73          |
| 4824.00                   | 47.11             | PK         | 37                  | 1.4           | V              | 5.40                          | 52.51                              | 74                | 21.49          |
| 4824.00                   | 38.71             | Ave.       | 37                  | 1.4           | V              | 5.40                          | 44.11                              | 54                | 9.89           |
| Middle Channel (2437MHz)- |                   |            |                     |               |                |                               |                                    |                   |                |
| 1657.89                   | 64.28             | PK         | 106                 | 1.0           | V              | -1.85                         | 62.43                              | 74                | 11.57          |
| 1657.89                   | 35.44             | Ave.       | 106                 | 1.0           | V              | -1.85                         | 33.59                              | 54                | 20.41          |
| 4874.00                   | 47.40             | PK         | 142                 | 2.0           | V              | 6.43                          | 53.83                              | 74                | 20.17          |
| 4874.00                   | 39.98             | Ave.       | 142                 | 2.0           | V              | 6.43                          | 46.41                              | 54                | 7.59           |
| High Channel (2462 MHz)   |                   |            |                     |               |                |                               |                                    |                   |                |
| 2348.28                   | 28.81             | PK         | 108                 | 1.5           | V              | 31.64                         | 60.45                              | 74                | 13.55          |
| 2348.28                   | 13.66             | Ave.       | 108                 | 1.5           | V              | 31.64                         | 45.30                              | 54                | 8.70           |
| 2488.26                   | 29.59             | PK         | 209                 | 2.1           | V              | 32.13                         | 61.72                              | 74                | 12.28          |
| 2488.26                   | 17.21             | Ave.       | 209                 | 2.1           | V              | 32.13                         | 49.34                              | 54                | 4.66           |
| 1657.89                   | 64.50             | PK         | 174                 | 1.2           | V              | -1.85                         | 62.65                              | 74                | 11.35          |
| 1657.89                   | 36.11             | Ave.       | 174                 | 1.2           | V              | -1.85                         | 34.26                              | 54                | 19.74          |
| 4924.00                   | 46.84             | PK         | 290                 | 1.4           | V              | 6.43                          | 53.27                              | 74                | 20.73          |
| 4924.00                   | 40.53             | Ave.       | 290                 | 1.4           | V              | 6.43                          | 46.96                              | 54                | 7.04           |

**802.11g Mode:**

| Frequency<br>(MHz)       | Receiver          |            | Turntable<br>Degree | Rx Antenna    |                | Corrected<br>Factor<br>(dB/m) | Corrected<br>Amplitude<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|--------------------------|-------------------|------------|---------------------|---------------|----------------|-------------------------------|------------------------------------|-------------------|----------------|
|                          | Reading<br>(dBμV) | PK/QP/Ave. |                     | Height<br>(m) | Polar<br>(H/V) |                               |                                    |                   |                |
| Low Channel (2412 MHz)   |                   |            |                     |               |                |                               |                                    |                   |                |
| 2388.89                  | 33.67             | PK         | 143                 | 2.2           | V              | 31.87                         | 65.54                              | 74                | 8.46           |
| 2388.89                  | 17.51             | Ave.       | 143                 | 2.2           | V              | 31.87                         | 49.38                              | 54                | 4.62           |
| 2487.11                  | 28.81             | PK         | 304                 | 2.0           | V              | 32.13                         | 60.94                              | 74                | 13.06          |
| 2487.11                  | 14.93             | Ave.       | 304                 | 2.0           | V              | 32.13                         | 47.06                              | 54                | 6.94           |
| 1657.89                  | 65.03             | PK         | 187                 | 1.9           | V              | -1.85                         | 63.18                              | 74                | 10.82          |
| 1657.89                  | 36.12             | Ave.       | 187                 | 1.9           | V              | -1.85                         | 34.27                              | 54                | 19.73          |
| 4824.00                  | 44.11             | PK         | 216                 | 1.4           | V              | 5.40                          | 49.51                              | 74                | 24.49          |
| 4824.00                  | 29.64             | Ave.       | 216                 | 1.4           | V              | 5.40                          | 35.04                              | 54                | 18.96          |
| Middle Channel (2437MHz) |                   |            |                     |               |                |                               |                                    |                   |                |
| 1657.89                  | 64.59             | PK         | 213                 | 2.2           | V              | -1.85                         | 62.74                              | 74                | 11.26          |
| 1657.89                  | 35.33             | Ave.       | 213                 | 2.2           | V              | -1.85                         | 33.48                              | 54                | 20.52          |
| 4874.00                  | 47.83             | PK         | 113                 | 2.2           | V              | 6.43                          | 54.26                              | 74                | 19.74          |
| 4874.00                  | 33.40             | Ave.       | 113                 | 2.2           | V              | 6.43                          | 39.83                              | 54                | 14.17          |
| High Channel (2462 MHz)  |                   |            |                     |               |                |                               |                                    |                   |                |
| 2360.07                  | 28.52             | PK         | 34                  | 1.7           | V              | 31.77                         | 60.29                              | 74                | 13.71          |
| 2360.07                  | 14.21             | Ave.       | 34                  | 1.7           | V              | 31.77                         | 45.98                              | 54                | 8.02           |
| 2484.65                  | 33.07             | PK         | 19                  | 2.3           | V              | 32.13                         | 65.20                              | 74                | 8.80           |
| 2484.65                  | 18.45             | Ave.       | 19                  | 2.3           | V              | 32.13                         | 50.58                              | 54                | 3.42           |
| 1657.89                  | 64.88             | PK         | 147                 | 2.3           | V              | -1.85                         | 63.03                              | 74                | 10.97          |
| 1657.89                  | 35.36             | Ave.       | 147                 | 2.3           | V              | -1.85                         | 33.51                              | 54                | 20.49          |
| 4924.00                  | 43.93             | PK         | 275                 | 2.3           | V              | 6.43                          | 50.36                              | 74                | 23.64          |
| 4924.00                  | 29.10             | Ave.       | 275                 | 2.3           | V              | 6.43                          | 35.53                              | 54                | 18.47          |

**802.11n-HT20 Mode:**

| Frequency<br>(MHz)       | Receiver          |            | Turntable<br>Degree | Rx Antenna    |                | Corrected<br>Factor<br>(dB/m) | Corrected<br>Amplitude<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|--------------------------|-------------------|------------|---------------------|---------------|----------------|-------------------------------|------------------------------------|-------------------|----------------|
|                          | Reading<br>(dBμV) | PK/QP/Ave. |                     | Height<br>(m) | Polar<br>(H/V) |                               |                                    |                   |                |
| Low Channel (2412 MHz)   |                   |            |                     |               |                |                               |                                    |                   |                |
| 2389.13                  | 33.03             | PK         | 42                  | 1.3           | V              | 31.87                         | 64.90                              | 74                | 9.10           |
| 2389.13                  | 17.19             | Ave.       | 42                  | 1.3           | V              | 31.87                         | 49.06                              | 54                | 4.94           |
| 2492.63                  | 28.63             | PK         | 162                 | 2.0           | V              | 32.13                         | 60.76                              | 74                | 13.24          |
| 2492.63                  | 14.52             | Ave.       | 162                 | 2.0           | V              | 32.13                         | 46.65                              | 54                | 7.35           |
| 1657.89                  | 64.58             | PK         | 30                  | 1.0           | V              | -1.85                         | 62.73                              | 74                | 11.27          |
| 1657.89                  | 35.82             | Ave.       | 30                  | 1.0           | V              | -1.85                         | 33.97                              | 54                | 20.03          |
| 4824.00                  | 44.14             | PK         | 300                 | 1.8           | V              | 5.40                          | 49.54                              | 74                | 24.46          |
| 4824.00                  | 29.41             | Ave.       | 300                 | 1.8           | V              | 5.40                          | 34.81                              | 54                | 19.19          |
| Middle Channel (2437MHz) |                   |            |                     |               |                |                               |                                    |                   |                |
| 1657.89                  | 64.89             | PK         | 44                  | 1.9           | V              | -1.85                         | 63.04                              | 74                | 10.96          |
| 1657.89                  | 35.68             | Ave.       | 44                  | 1.9           | V              | -1.85                         | 33.83                              | 54                | 20.17          |
| 4874.00                  | 48.04             | PK         | 61                  | 1.2           | V              | 6.43                          | 54.47                              | 74                | 19.53          |
| 4874.00                  | 33.07             | Ave.       | 61                  | 1.2           | V              | 6.43                          | 39.50                              | 54                | 14.50          |
| High Channel (2462 MHz)  |                   |            |                     |               |                |                               |                                    |                   |                |
| 2341.81                  | 28.66             | PK         | 223                 | 1.4           | V              | 31.64                         | 60.30                              | 74                | 13.70          |
| 2341.81                  | 14.48             | Ave.       | 223                 | 1.4           | V              | 31.64                         | 46.12                              | 54                | 7.88           |
| 2483.67                  | 34.85             | PK         | 34                  | 1.8           | V              | 32.13                         | 66.98                              | 74                | 7.02           |
| 2483.67                  | 18.20             | Ave.       | 34                  | 1.8           | V              | 32.13                         | 50.33                              | 54                | 3.67           |
| 1657.89                  | 65.18             | PK         | 267                 | 1.8           | V              | -1.85                         | 63.33                              | 74                | 10.67          |
| 1657.89                  | 36.44             | Ave.       | 267                 | 1.8           | V              | -1.85                         | 34.59                              | 54                | 19.41          |
| 4924.00                  | 43.61             | PK         | 15                  | 1.2           | V              | 6.43                          | 50.04                              | 74                | 23.96          |
| 4924.00                  | 28.55             | Ave.       | 15                  | 1.2           | V              | 6.43                          | 34.98                              | 54                | 19.02          |

**802.11n-HT40 Mode:**

| Frequency<br>(MHz)       | Receiver          |            | Turntable<br>Degree | Rx Antenna    |                | Corrected<br>Factor<br>(dB/m) | Corrected<br>Amplitude<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|--------------------------|-------------------|------------|---------------------|---------------|----------------|-------------------------------|------------------------------------|-------------------|----------------|
|                          | Reading<br>(dBμV) | PK/QP/Ave. |                     | Height<br>(m) | Polar<br>(H/V) |                               |                                    |                   |                |
| Low Channel (2422 MHz)   |                   |            |                     |               |                |                               |                                    |                   |                |
| 2388.78                  | 33.11             | PK         | 183                 | 2.4           | V              | 31.87                         | 64.98                              | 74                | 9.02           |
| 2388.78                  | 18.58             | Ave.       | 183                 | 2.4           | V              | 31.87                         | 50.45                              | 54                | 3.55           |
| 2485.01                  | 28.19             | PK         | 222                 | 2.1           | V              | 32.13                         | 60.32                              | 74                | 13.68          |
| 2485.01                  | 14.33             | Ave.       | 222                 | 2.1           | V              | 32.13                         | 46.46                              | 54                | 7.54           |
| 1657.89                  | 64.24             | PK         | 228                 | 1.9           | V              | -1.85                         | 62.39                              | 74                | 11.61          |
| 1657.89                  | 35.38             | Ave.       | 228                 | 1.9           | V              | -1.85                         | 33.53                              | 54                | 20.47          |
| 4844.00                  | 43.98             | PK         | 228                 | 1.7           | V              | 5.40                          | 49.38                              | 74                | 24.62          |
| 4844.00                  | 29.13             | Ave.       | 228                 | 1.7           | V              | 5.40                          | 34.53                              | 54                | 19.47          |
| Middle Channel (2437MHz) |                   |            |                     |               |                |                               |                                    |                   |                |
| 1657.89                  | 65.18             | PK         | 248                 | 2.3           | V              | -1.85                         | 63.33                              | 74                | 10.67          |
| 1657.89                  | 35.22             | Ave.       | 248                 | 2.3           | V              | -1.85                         | 33.37                              | 54                | 20.63          |
| 4874.00                  | 47.81             | PK         | 112                 | 1.7           | V              | 6.43                          | 54.24                              | 74                | 19.76          |
| 4874.00                  | 33.87             | Ave.       | 112                 | 1.7           | V              | 6.43                          | 40.30                              | 54                | 13.70          |
| High Channel (2452 MHz)  |                   |            |                     |               |                |                               |                                    |                   |                |
| 2318.86                  | 28.39             | PK         | 183                 | 1.8           | V              | 31.64                         | 60.03                              | 74                | 13.97          |
| 2318.86                  | 14.45             | Ave.       | 183                 | 1.8           | V              | 31.64                         | 46.09                              | 54                | 7.91           |
| 2485.78                  | 32.13             | PK         | 350                 | 2.0           | V              | 32.13                         | 64.26                              | 74                | 9.74           |
| 2485.78                  | 17.80             | Ave.       | 350                 | 2.0           | V              | 32.13                         | 49.93                              | 54                | 4.07           |
| 1657.89                  | 65.29             | PK         | 93                  | 2.3           | V              | -1.85                         | 63.44                              | 74                | 10.56          |
| 1657.89                  | 36.17             | Ave.       | 93                  | 2.3           | V              | -1.85                         | 34.32                              | 54                | 19.68          |
| 4904.00                  | 43.25             | PK         | 140                 | 1.6           | V              | 6.43                          | 49.68                              | 74                | 24.32          |
| 4904.00                  | 28.33             | Ave.       | 140                 | 1.6           | V              | 6.43                          | 34.76                              | 54                | 19.24          |

**1 GHz-25 GHz(BLE):**

| Frequency<br>(MHz)        | Receiver          |            | Turntable<br>Degree | Rx Antenna    |                | Corrected<br>Factor<br>(dB/m) | Corrected<br>Amplitude<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|---------------------------|-------------------|------------|---------------------|---------------|----------------|-------------------------------|------------------------------------|-------------------|----------------|
|                           | Reading<br>(dBμV) | PK/QP/Ave. |                     | Height<br>(m) | Polar<br>(H/V) |                               |                                    |                   |                |
| Low Channel (2402 MHz)    |                   |            |                     |               |                |                               |                                    |                   |                |
| 2313.99                   | 27.58             | PK         | 288                 | 2.2           | V              | 31.64                         | 59.22                              | 74                | 14.78          |
| 2313.99                   | 14.86             | Ave.       | 288                 | 2.2           | V              | 31.64                         | 46.50                              | 54                | 7.50           |
| 2496.57                   | 28.82             | PK         | 183                 | 1.2           | V              | 32.13                         | 60.95                              | 74                | 13.05          |
| 2496.57                   | 15.63             | Ave.       | 183                 | 1.2           | V              | 32.13                         | 47.76                              | 54                | 6.24           |
| 1627.12                   | 58.19             | PK         | 46                  | 1.2           | V              | -2.40                         | 55.79                              | 74                | 18.21          |
| 1627.12                   | 44.83             | Ave.       | 46                  | 1.2           | V              | -2.40                         | 42.43                              | 54                | 11.57          |
| 4804.00                   | 43.95             | PK         | 32                  | 2.4           | V              | 5.40                          | 49.35                              | 74                | 24.65          |
| 4804.00                   | 32.89             | Ave.       | 32                  | 2.4           | V              | 5.40                          | 38.29                              | 54                | 15.71          |
| Middle Channel (2440 MHz) |                   |            |                     |               |                |                               |                                    |                   |                |
| 1627.00                   | 65.11             | PK         | 166                 | 1.6           | V              | -2.40                         | 62.71                              | 74                | 11.29          |
| 1627.00                   | 47.34             | Ave.       | 166                 | 1.6           | V              | -2.40                         | 44.94                              | 54                | 9.06           |
| 4880.00                   | 43.62             | PK         | 11                  | 1.5           | V              | 6.43                          | 50.05                              | 74                | 23.95          |
| 4880.00                   | 32.78             | Ave.       | 11                  | 1.5           | V              | 6.43                          | 39.21                              | 54                | 14.79          |
| High Channel (2480 MHz)   |                   |            |                     |               |                |                               |                                    |                   |                |
| 2356.48                   | 29.14             | PK         | 142                 | 2.5           | V              | 31.77                         | 60.91                              | 74                | 13.09          |
| 2356.48                   | 15.31             | Ave.       | 142                 | 2.5           | V              | 31.77                         | 47.08                              | 54                | 6.92           |
| 2498.72                   | 28.21             | PK         | 74                  | 2.4           | V              | 32.13                         | 60.34                              | 74                | 13.66          |
| 2498.72                   | 15.11             | Ave.       | 74                  | 2.4           | V              | 32.13                         | 47.24                              | 54                | 6.76           |
| 1627.00                   | 63.80             | PK         | 253                 | 1.5           | V              | -2.40                         | 61.40                              | 74                | 12.60          |
| 1627.00                   | 46.47             | Ave.       | 253                 | 1.5           | V              | -2.40                         | 44.07                              | 54                | 9.93           |
| 4960.00                   | 43.30             | PK         | 15                  | 1.7           | V              | 6.95                          | 50.25                              | 74                | 23.75          |
| 4960.00                   | 32.54             | Ave.       | 15                  | 1.7           | V              | 6.95                          | 39.49                              | 54                | 14.51          |

**Note:**

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor


Corrected Amplitude = Corrected Factor + Reading

Margin = Limit - Corrected. Amplitude


The other spurious emission which is 20dB to the limit was not recorded.

And for the pre-scan is performed with the 2400-2483.5MHz band filter.

**Pre-scan with 802.11B Mode, Antenna 2, High channel  
Horizontal**

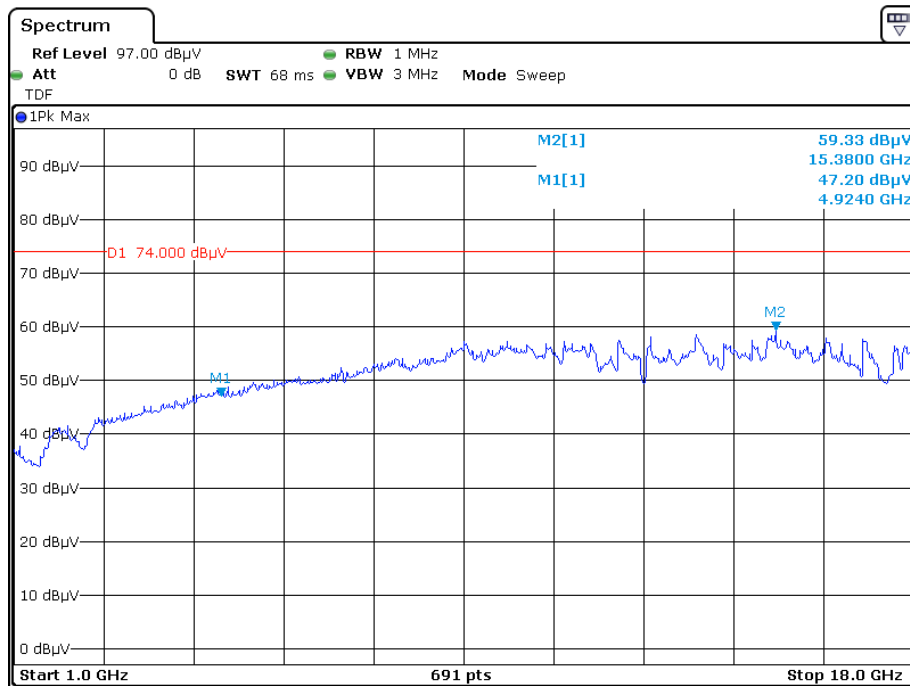


Date: 26.SEP.2019 18:42:18

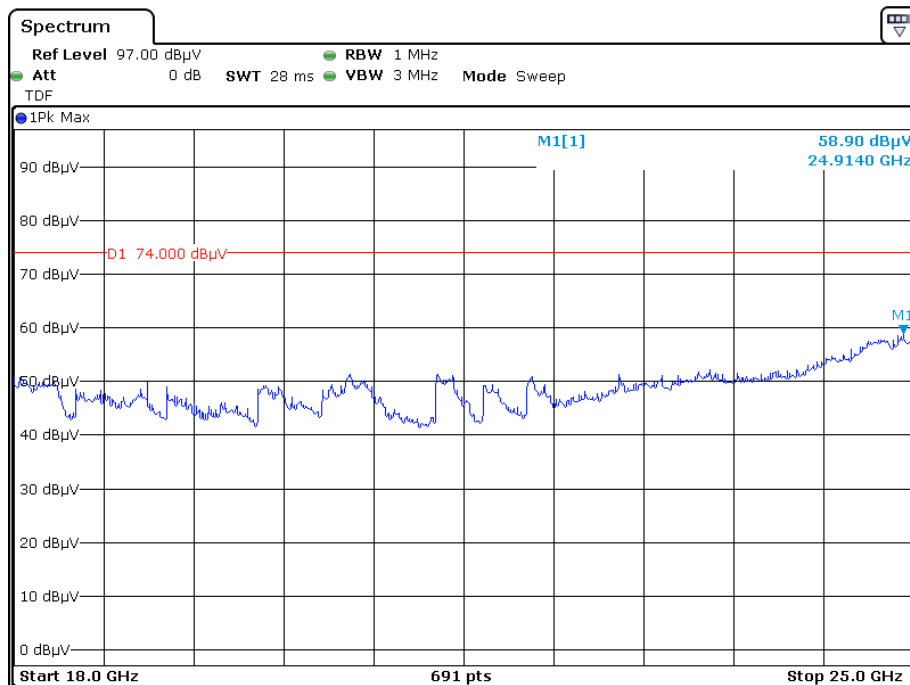


Date: 26.SEP.2019 19:30:21

# Vertical

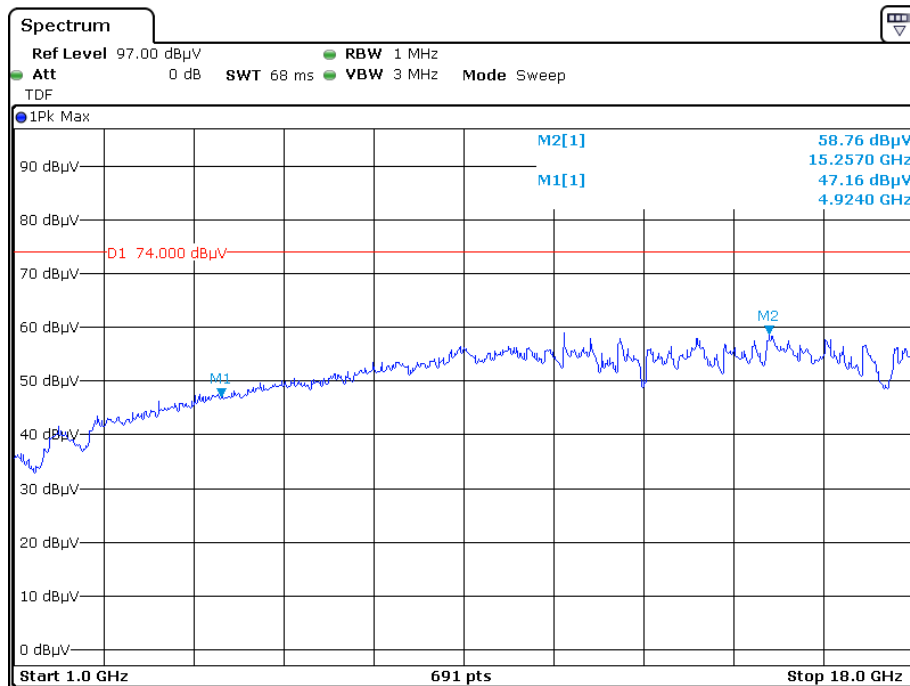


Date: 26.SEP.2019 18:51:33

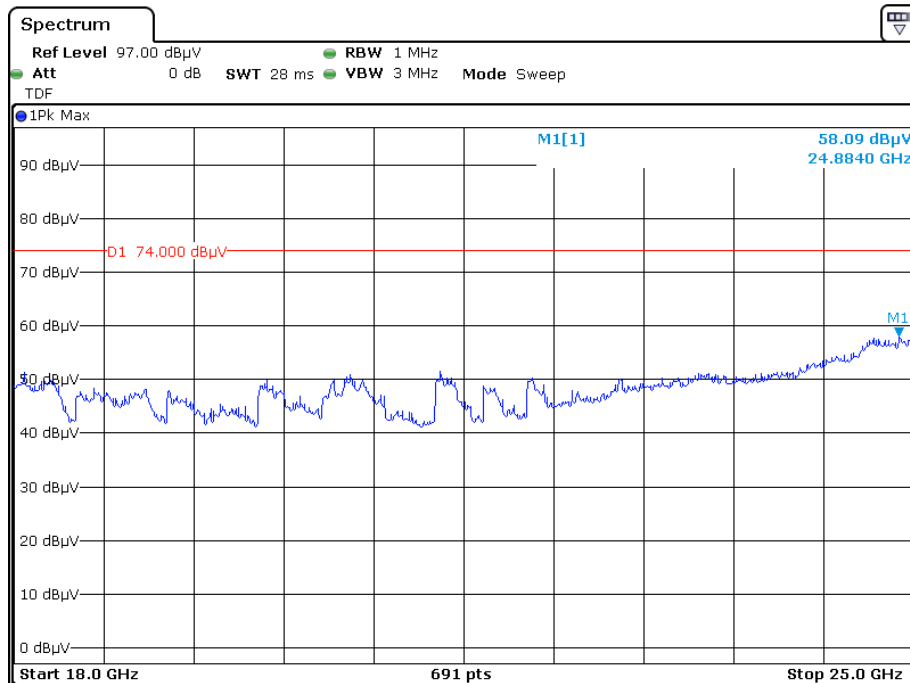


Date: 26.SEP.2019 19:39:49

### Pre-scan for Average Horizontal

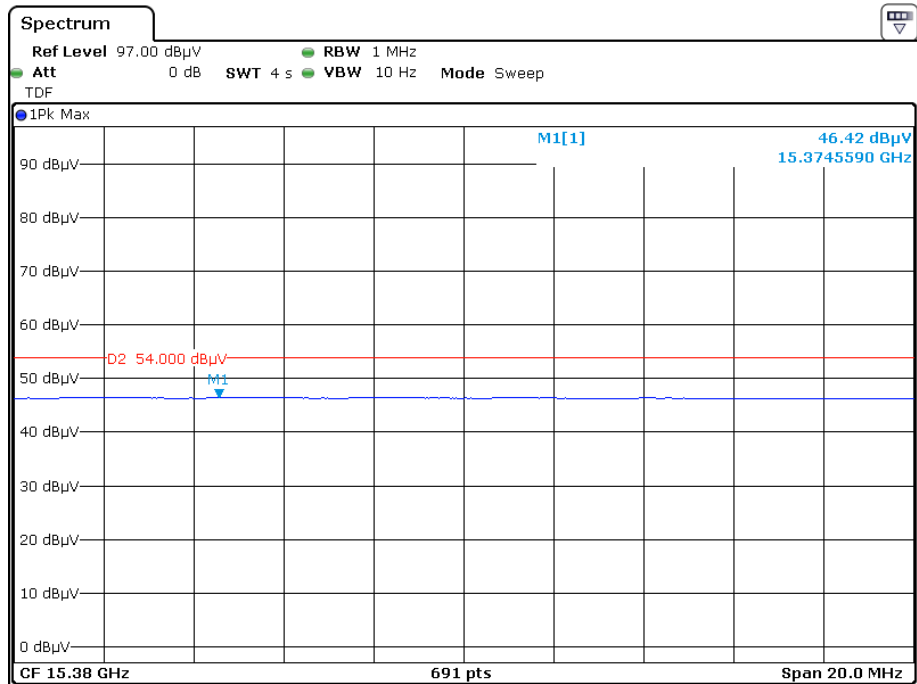


Date: 26.SEP.2019 18:45:06

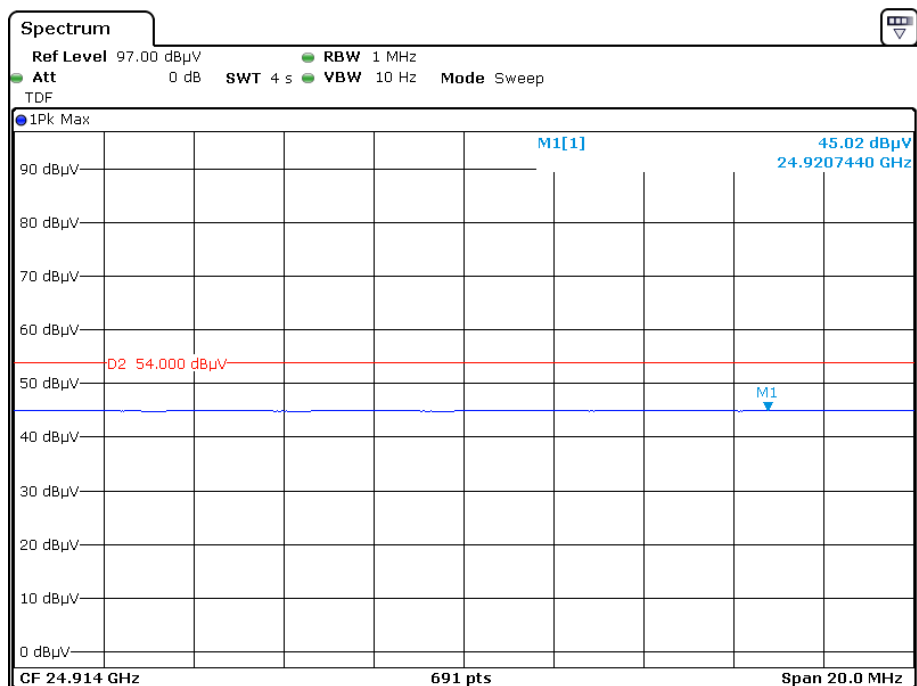


Date: 26.SEP.2019 19:34:35

## Vertical

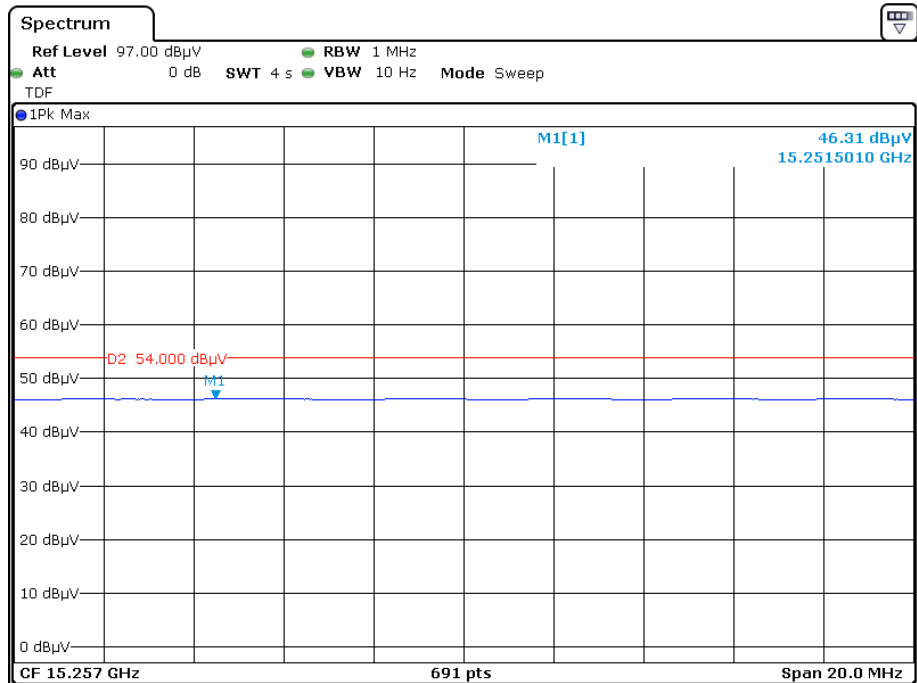

Date: 26.SEP.2019 18:54:47

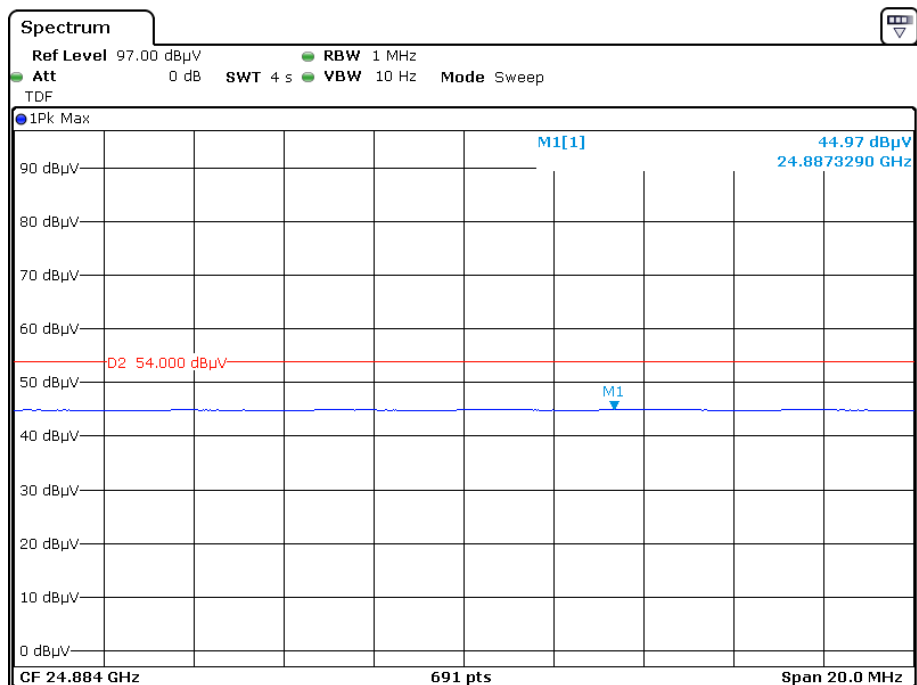


Date: 26.SEP.2019 19:43:09

**FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH****Applicable Standard**

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

**Test Procedure**

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

**Test Data****Environmental Conditions**

|                           |                 |
|---------------------------|-----------------|
| <b>Temperature:</b>       | 24~25 °C        |
| <b>Relative Humidity:</b> | 50~52 %         |
| <b>ATM Pressure:</b>      | 100.0~101.0 kPa |

*The testing was performed by Leo Huang from 2019-09-26 to 2019-10-25.*

**Test Result:** Pass.

Please refer to the following table and plots.

*EUT operation mode: Transmitting*

Antenna 1

| Channel           | Frequency (MHz) | 6 dB Emission Bandwidth (MHz) | Limit (kHz) |
|-------------------|-----------------|-------------------------------|-------------|
| 802.11b mode      |                 |                               |             |
| Low               | 2412            | 10.013                        | $\geq 500$  |
| Middle            | 2437            | 10.051                        | $\geq 500$  |
| High              | 2462            | 10.051                        | $\geq 500$  |
| 802.11g mode      |                 |                               |             |
| Low               | 2412            | 15.231                        | $\geq 500$  |
| Middle            | 2437            | 15.744                        | $\geq 500$  |
| High              | 2462            | 15.295                        | $\geq 500$  |
| 802.11n-HT20 mode |                 |                               |             |
| Low               | 2412            | 15.962                        | $\geq 500$  |
| Middle            | 2437            | 15.154                        | $\geq 500$  |
| High              | 2462            | 15.808                        | $\geq 500$  |
| 802.11n-HT40 mode |                 |                               |             |
| Low               | 2422            | 35.256                        | $\geq 500$  |
| Middle            | 2437            | 35.256                        | $\geq 500$  |
| High              | 2452            | 35.256                        | $\geq 500$  |


## Antenna 2

| Channel           | Frequency (MHz) | 6 dB Emission Bandwidth (MHz) | Limit (kHz) |
|-------------------|-----------------|-------------------------------|-------------|
| 802.11b mode      |                 |                               |             |
| Low               | 2412            | 10.026                        | $\geq 500$  |
| Middle            | 2437            | 10.051                        | $\geq 500$  |
| High              | 2462            | 10.051                        | $\geq 500$  |
| 802.11g mode      |                 |                               |             |
| Low               | 2412            | 15.346                        | $\geq 500$  |
| Middle            | 2437            | 15.359                        | $\geq 500$  |
| High              | 2462            | 15.551                        | $\geq 500$  |
| 802.11n-HT20 mode |                 |                               |             |
| Low               | 2412            | 16.244                        | $\geq 500$  |
| Middle            | 2437            | 16.538                        | $\geq 500$  |
| High              | 2462            | 16.833                        | $\geq 500$  |
| 802.11n-HT40 mode |                 |                               |             |
| Low               | 2422            | 35.256                        | $\geq 500$  |
| Middle            | 2442            | 35.256                        | $\geq 500$  |
| High              | 2452            | 35.256                        | $\geq 500$  |

| Channel  | Frequency (MHz) | 6 dB Emission Bandwidth(MHz) | Limit (kHz) |
|----------|-----------------|------------------------------|-------------|
| BLE mode |                 |                              |             |
| Low      | 2402            | 0.660                        | $\geq 500$  |
| Middle   | 2440            | 0.663                        | $\geq 500$  |
| High     | 2480            | 0.670                        | $\geq 500$  |


Antenna 1

802.11b Low Channel

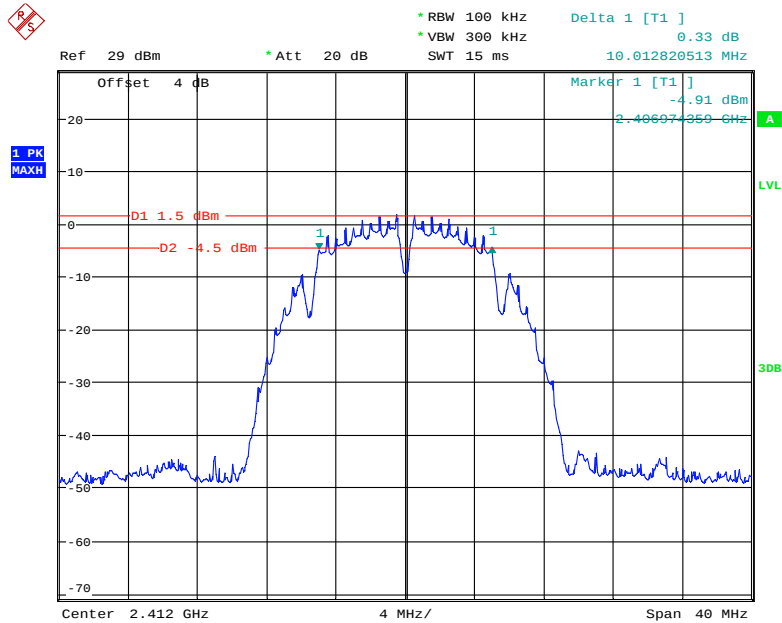


Date: 25.OCT.2019 14:18:38

802.11b Middle Channel

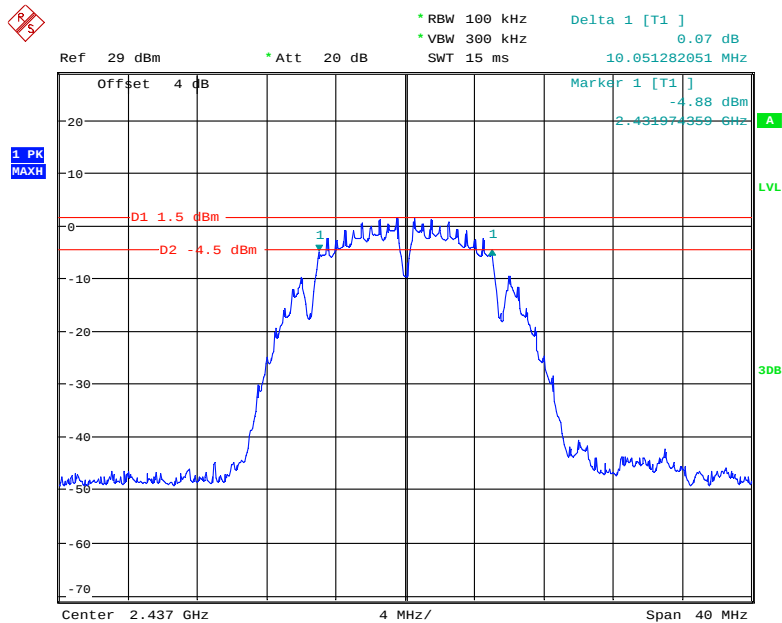


Date: 25.OCT.2019 14:17:09

### 802.11b High Channel

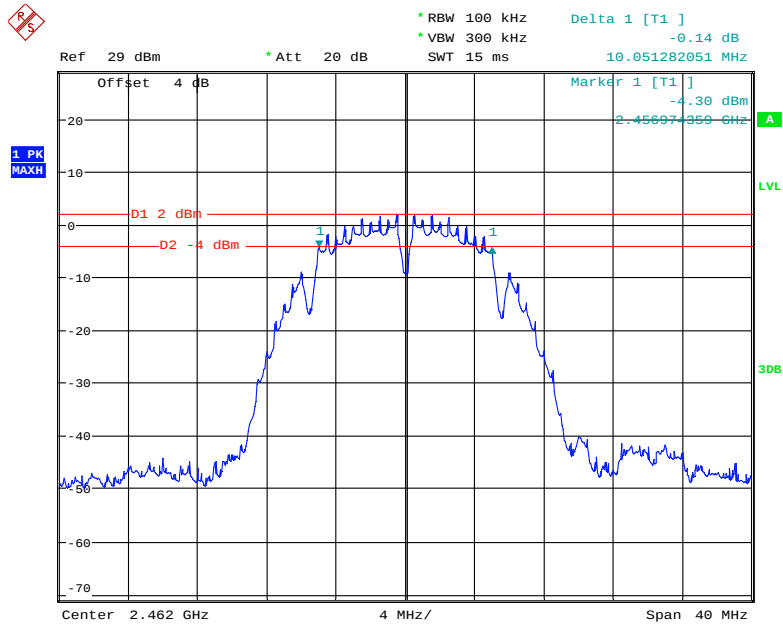


Date: 25.OCT.2019 14:15:39

### 802.11g Low Channel

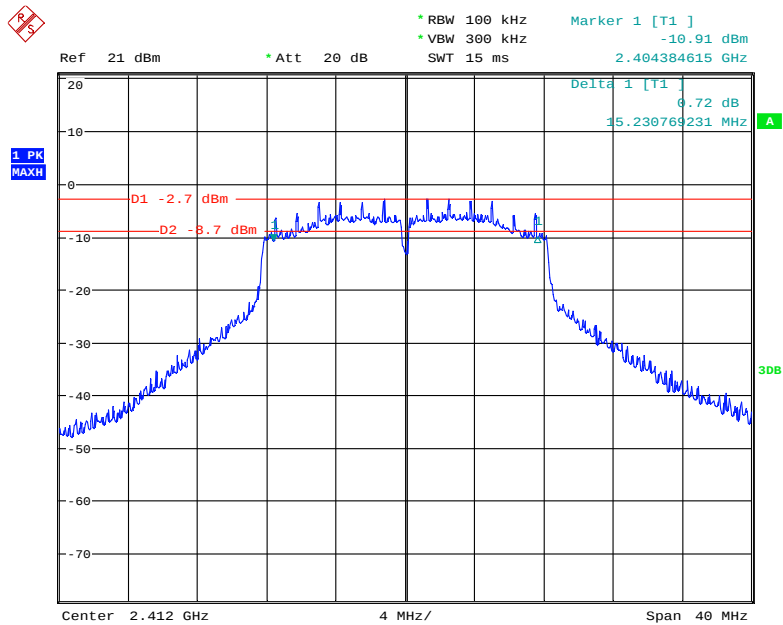


Date: 26.SEP.2019 09:46:44

### 802.11g Middle Channel

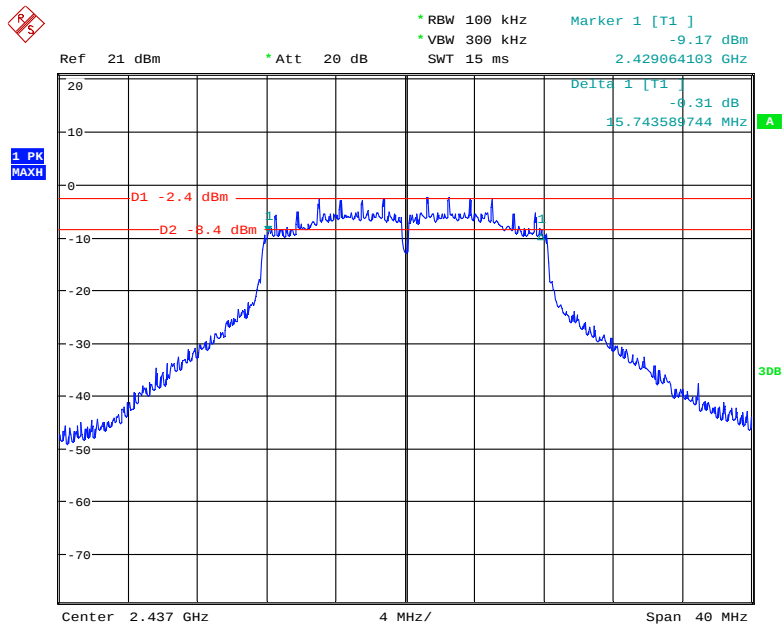


Date: 26.SEP.2019 09:52:38

### 802.11g High Channel

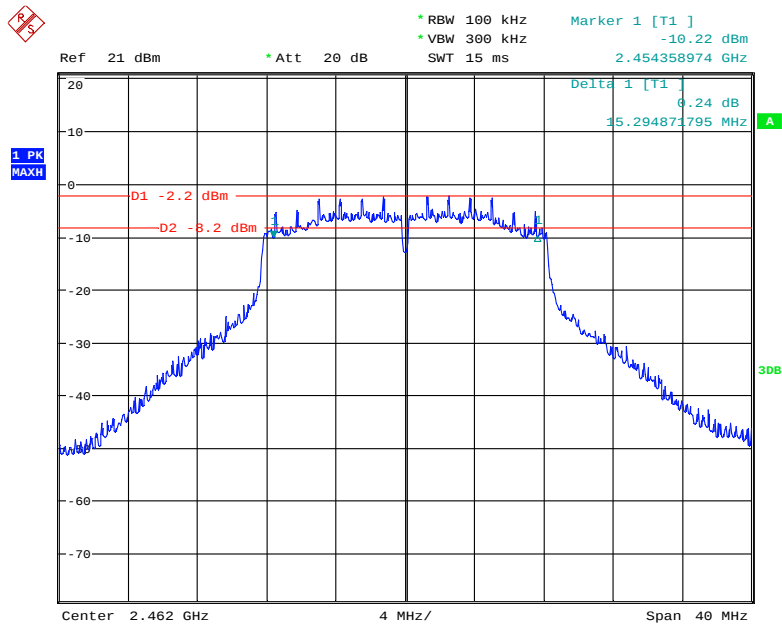


Date: 26.SEP.2019 09:50:45

### 802.11n-HT20 Low Channel

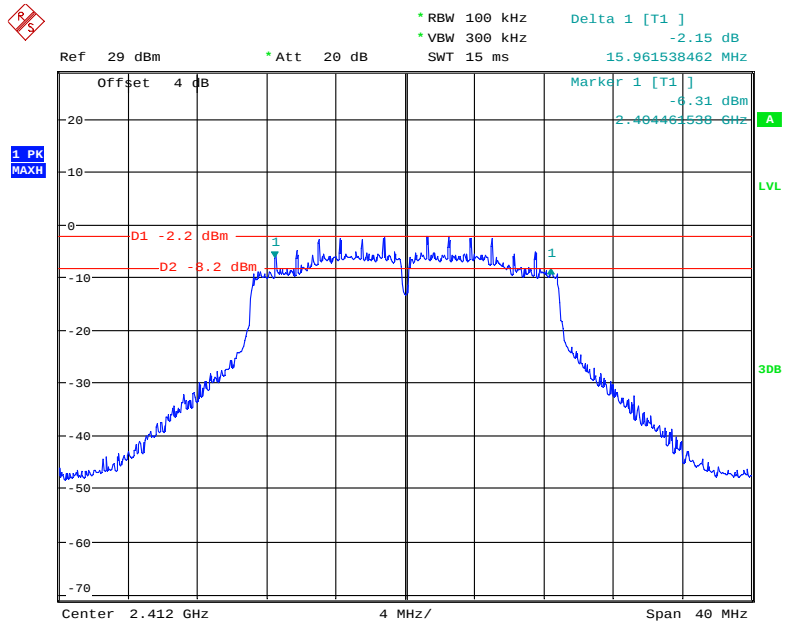


Date: 25.OCT.2019 14:01:51

### 802.11n-HT20 Middle Channel

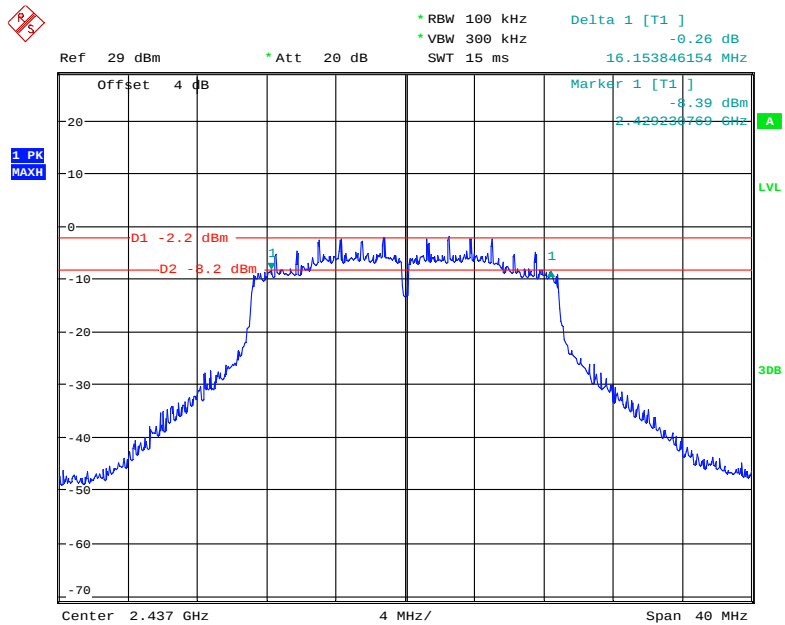


Date: 25.OCT.2019 14:03:16

### 802.11n-HT20 High Channel

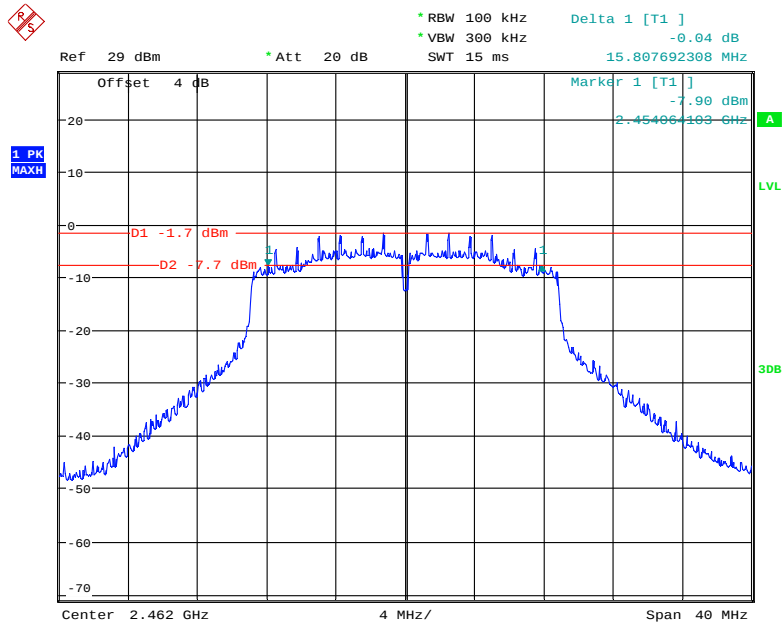


Date: 25.OCT.2019 14:05:25

### 802.11n-HT40 Low Channel

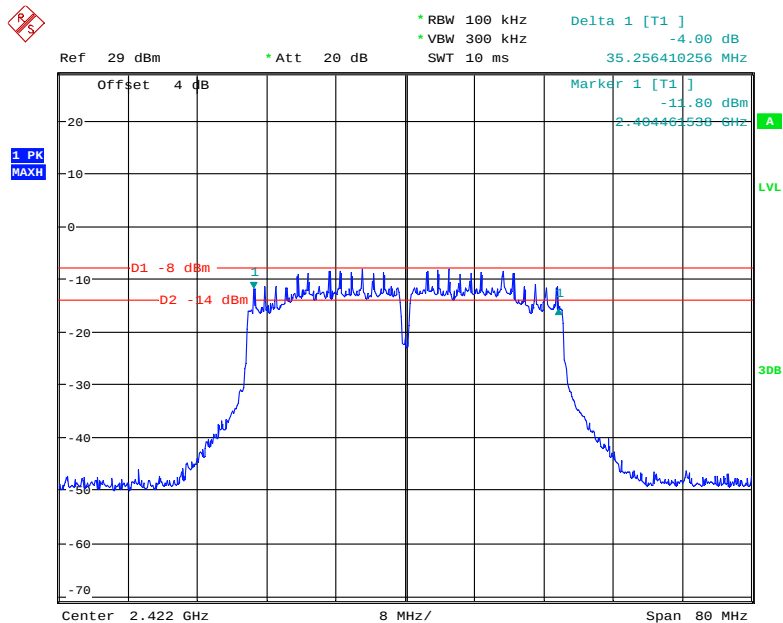


Date: 25.OCT.2019 13:59:12

### 802.11n-HT40 Middle Channel

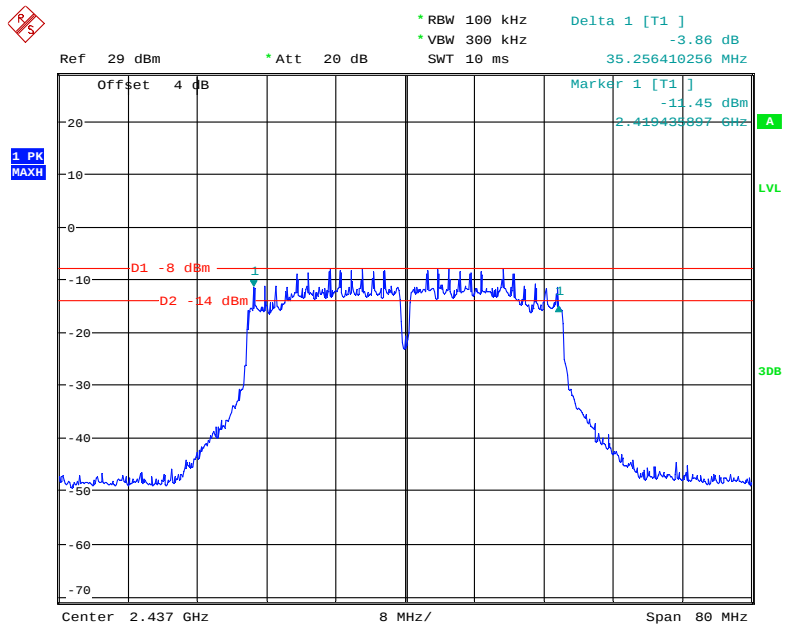

Date: 25.OCT.2019 13:58:36

### 802.11n-HT40 High Channel

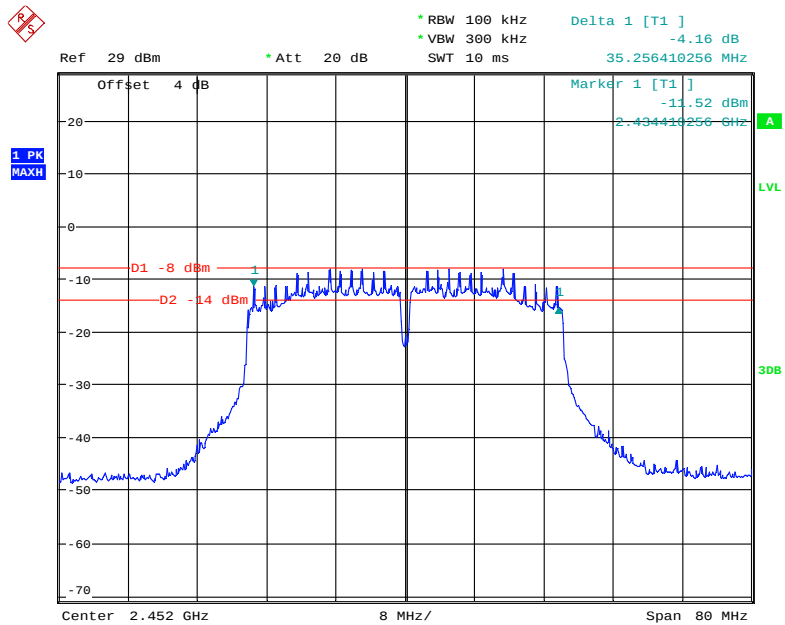

Date: 25.OCT.2019 13:57:00


Antenna 2

802.11b Low Channel




Date: 25.OCT.2019 15:23:26

802.11b Middle Channel

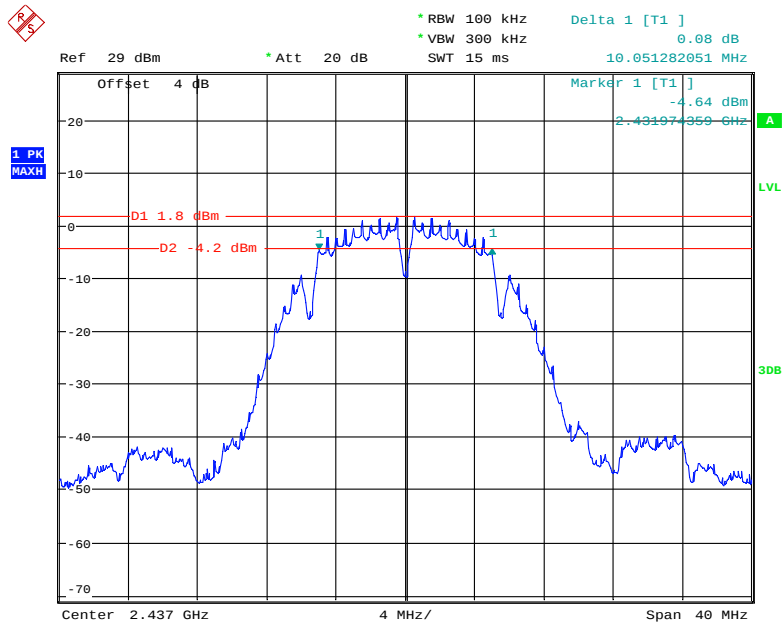


Date: 25.OCT.2019 15:21:25

### 802.11b High Channel

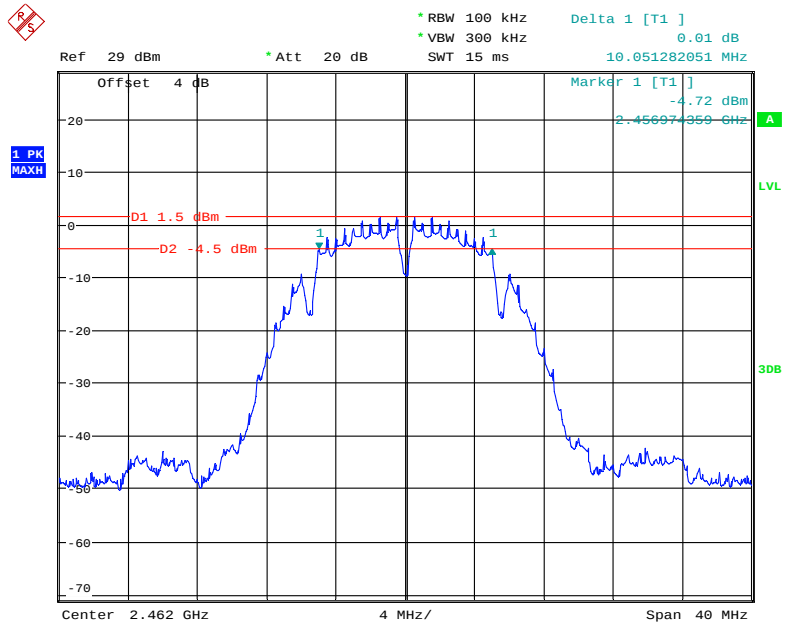


Date: 25.OCT.2019 15:20:14

### 802.11g Low Channel

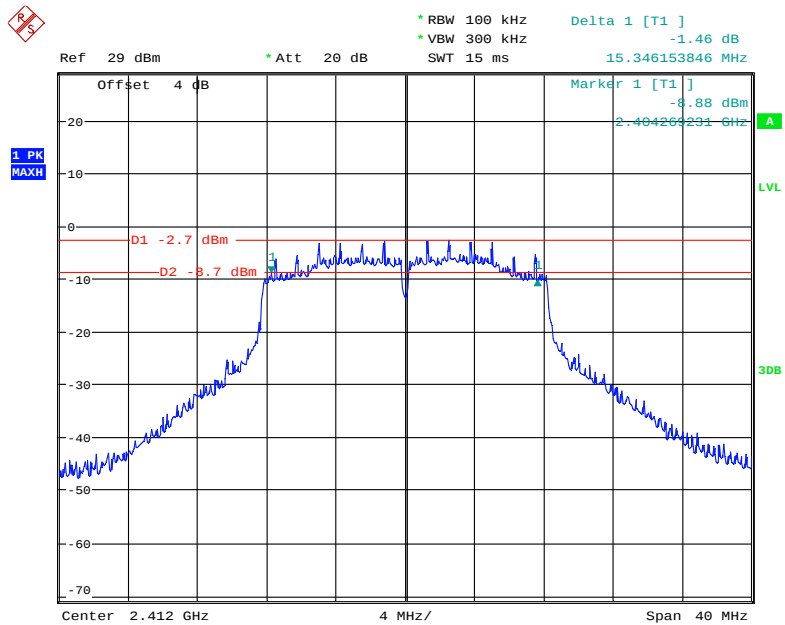


Date: 25.OCT.2019 15:42:27

### 802.11g Middle Channel

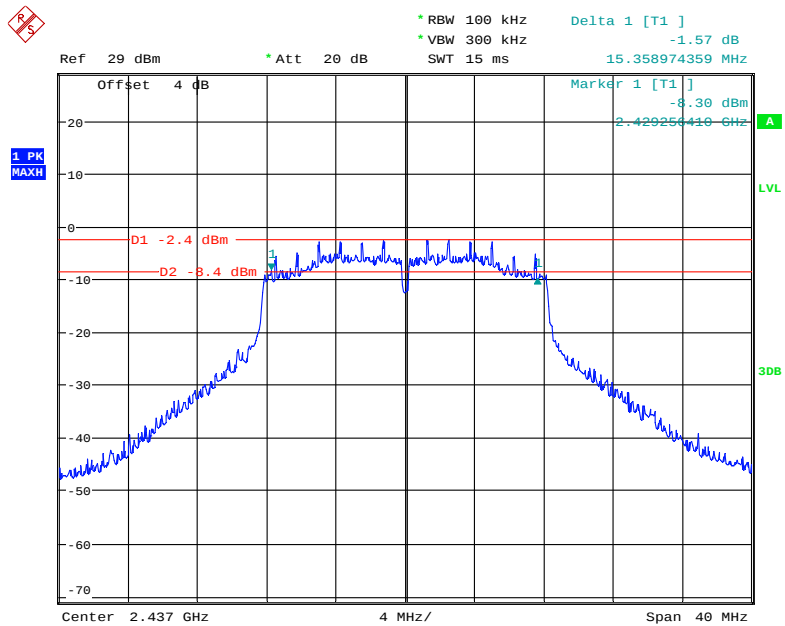


Date: 25.OCT.2019 15:43:20

### 802.11g High Channel

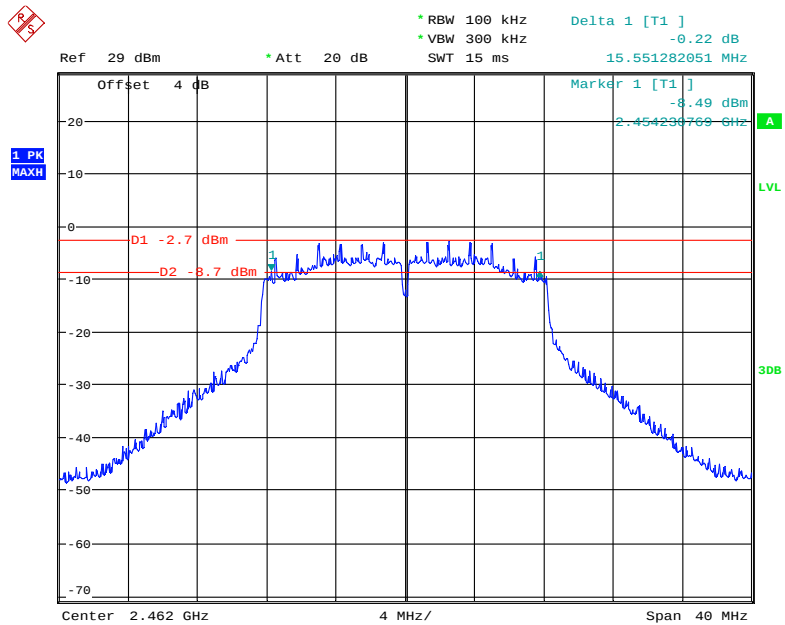


Date: 25.OCT.2019 15:44:47

### 802.11n-HT20 Low Channel

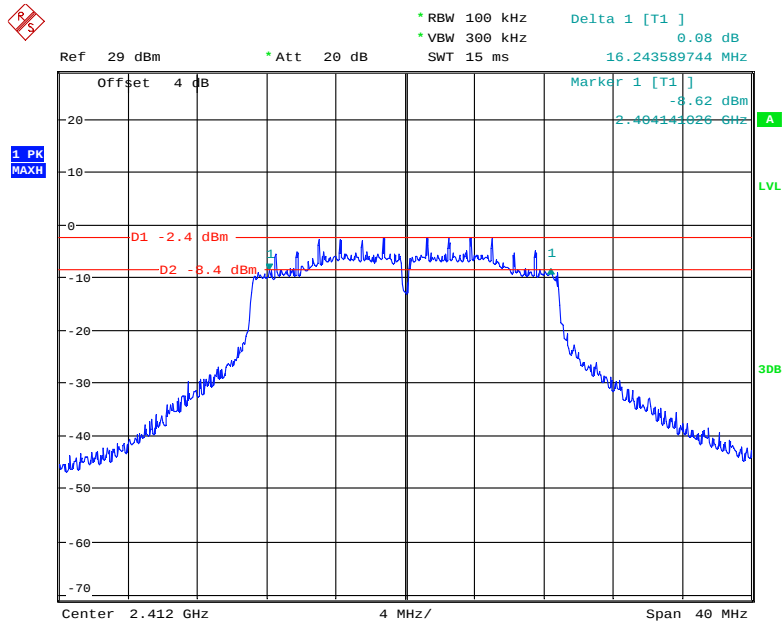


Date: 25.OCT.2019 15:41:25

### 802.11n-HT20 Middle Channel

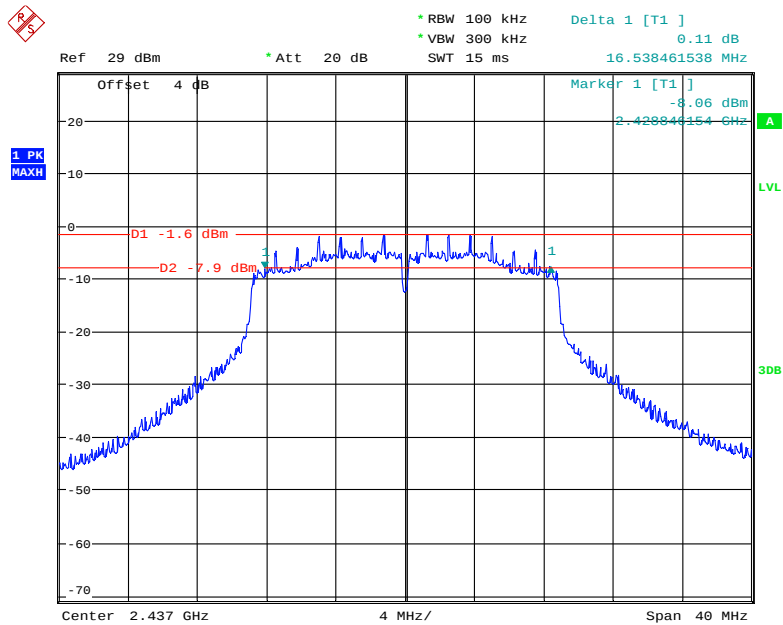


Date: 25.OCT.2019 15:40:02

### 802.11n-HT20 High Channel

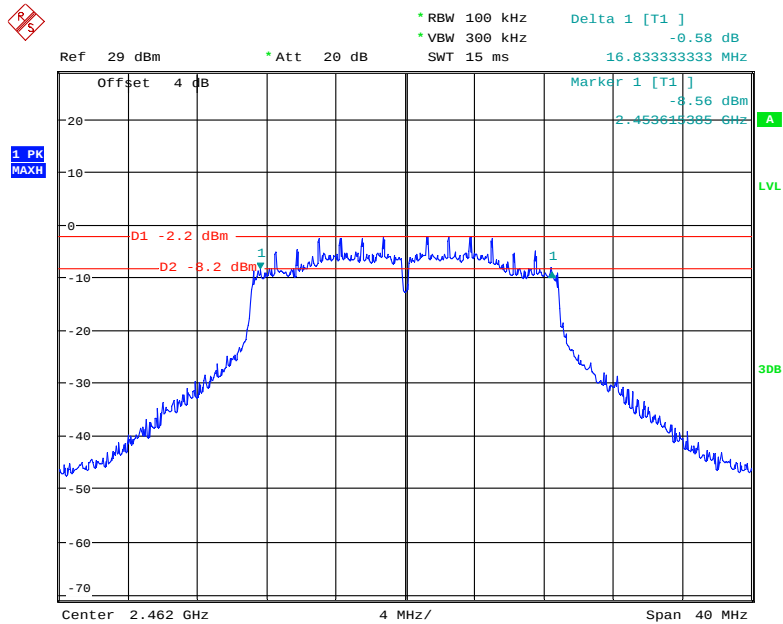


Date: 25.OCT.2019 15:37:22

### 802.11n-HT40 Low Channel

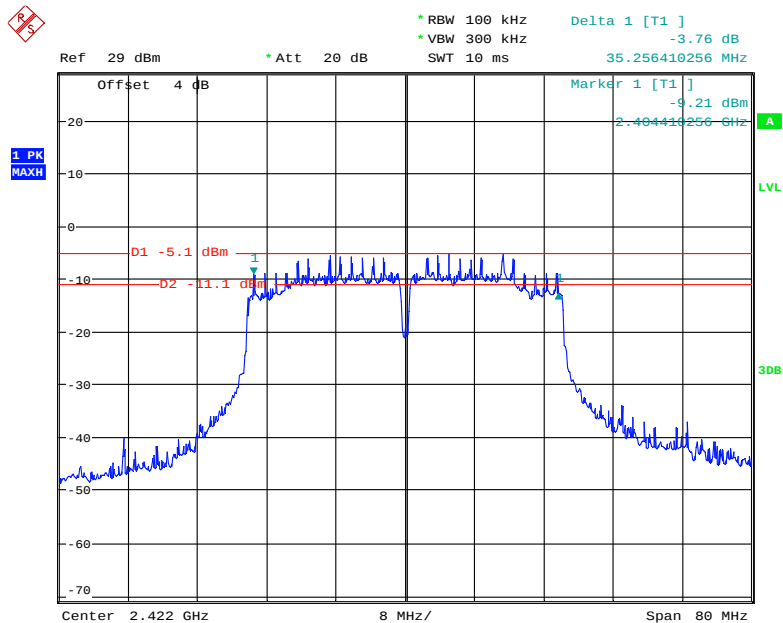


Date: 25.OCT.2019 15:56:25

### 802.11n-HT40 Middle Channel

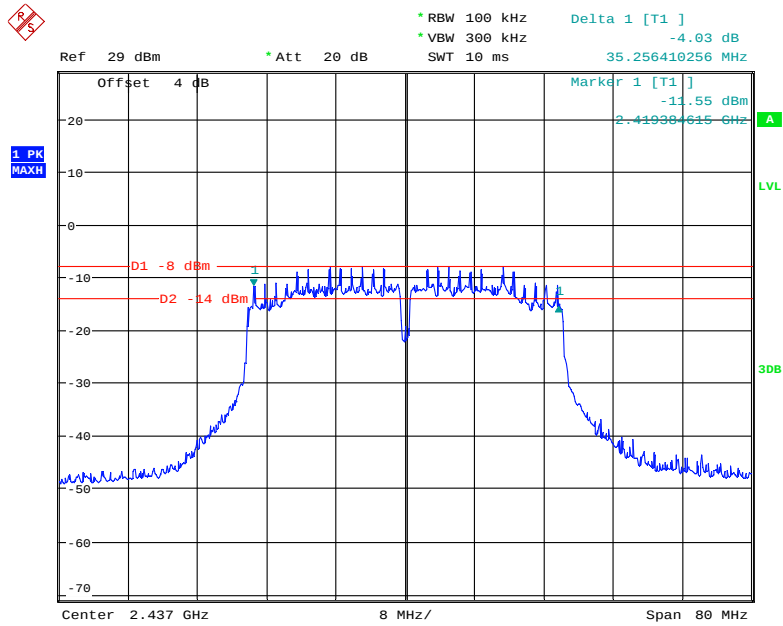


Date: 25.OCT.2019 15:57:57

### 802.11n-HT40 High Channel

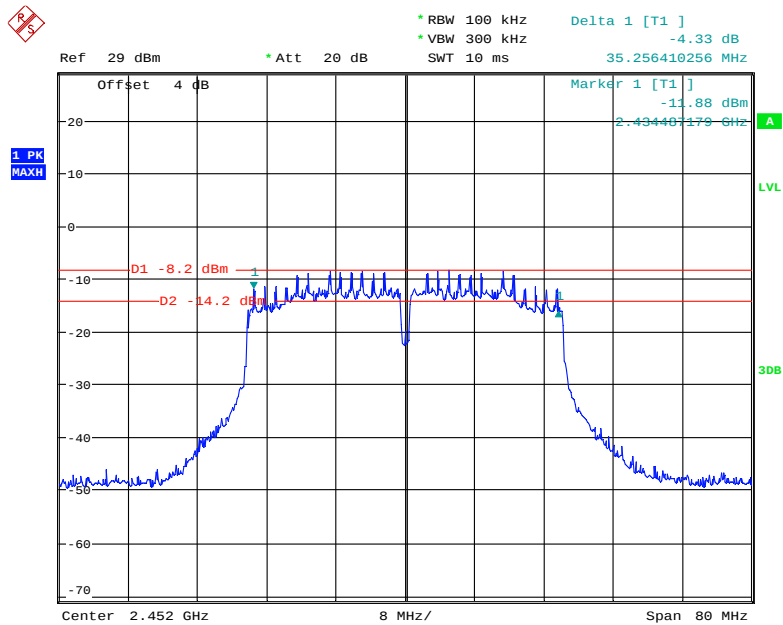


Date: 25.OCT.2019 15:58:40

### BLE Low Channel

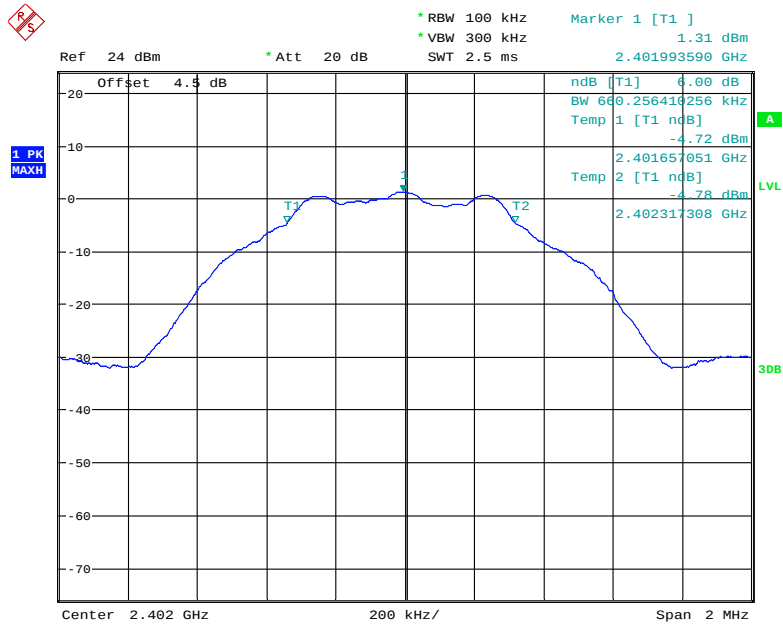


Date: 22.OCT.2019 22:15:23

### BLE Middle Channel

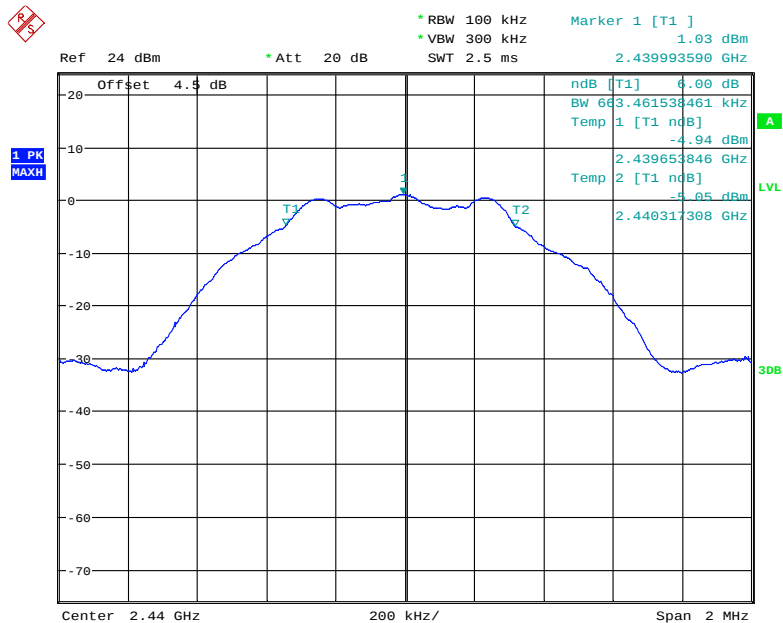

Date: 22.OCT.2019 22:16:20

BLE High Channel

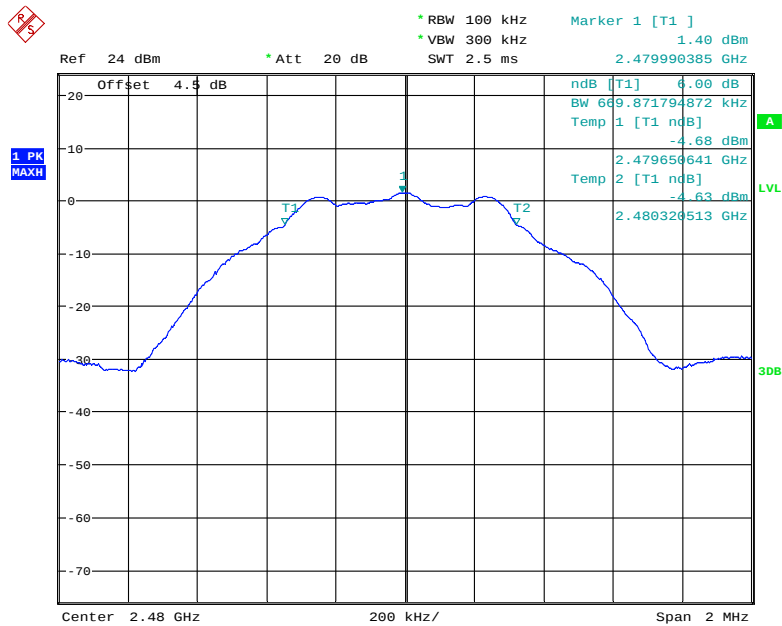

Date: 22.OCT.2019 22:17:31


## FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

### Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

### Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



### Test Data

#### Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 25 °C     |
| Relative Humidity: | 52 %      |
| ATM Pressure:      | 101.0 kPa |

*The testing was performed by Leo Huang on 2019-10-22 and 2019-10-25.*

*EUT operation mode: Transmitting*

**Wi-Fi mode, Antenna 1**

| Channel           | Frequency (MHz) | Max Conducted Peak Output Power (dBm) | Limit (dBm) |
|-------------------|-----------------|---------------------------------------|-------------|
| 802.11b mode      |                 |                                       |             |
| Low               | 2412            | 14.32                                 | 30          |
| Middle            | 2437            | 14.15                                 | 30          |
| High              | 2462            | 15.09                                 | 30          |
| 802.11g mode      |                 |                                       |             |
| Low               | 2412            | 15.91                                 | 30          |
| Middle            | 2437            | 16.31                                 | 30          |
| High              | 2462            | 16.45                                 | 30          |
| 802.11n-HT20 mode |                 |                                       |             |
| Low               | 2412            | 16.60                                 | 30          |
| Middle            | 2437            | 16.64                                 | 30          |
| High              | 2462            | 17.11                                 | 30          |
| 802.11n-HT40 mode |                 |                                       |             |
| Low               | 2422            | 13.77                                 | 30          |
| Middle            | 2437            | 13.85                                 | 30          |
| High              | 2452            | 13.97                                 | 30          |

**Wi-Fi mode, Antenna 2**

| Channel           | Frequency (MHz) | Max Conducted Peak Output Power (dBm) | Limit (dBm) |
|-------------------|-----------------|---------------------------------------|-------------|
| 802.11b mode      |                 |                                       |             |
| Low               | 2412            | 14.36                                 | 30          |
| Middle            | 2437            | 14.88                                 | 30          |
| High              | 2462            | 14.35                                 | 30          |
| 802.11g mode      |                 |                                       |             |
| Low               | 2412            | 16.41                                 | 30          |
| Middle            | 2437            | 16.39                                 | 30          |
| High              | 2462            | 15.94                                 | 30          |
| 802.11n-HT20 mode |                 |                                       |             |
| Low               | 2412            | 16.43                                 | 30          |
| Middle            | 2437            | 16.78                                 | 30          |
| High              | 2462            | 16.19                                 | 30          |
| 802.11n-HT40 mode |                 |                                       |             |
| Low               | 2422            | 13.97                                 | 30          |
| Middle            | 2437            | 14.12                                 | 30          |
| High              | 2452            | 13.81                                 | 30          |

**BLE mode**

| Channel | Frequency (MHz) | Max Peak Output Power (dBm) | Limit (dBm) | Result |
|---------|-----------------|-----------------------------|-------------|--------|
| Low     | 2402            | 1.59                        | 30          | Pass   |
| Middle  | 2440            | 1.29                        | 30          | Pass   |
| High    | 2480            | 1.69                        | 30          | Pass   |


## FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

### Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



### Test Data

#### Environmental Conditions

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 25 °C     |
| <b>Relative Humidity:</b> | 52 %      |
| <b>ATM Pressure:</b>      | 101.0 kPa |

*The testing was performed by Leo Huang on 2019-10-22 and 2019-10-25.*


*EUT operation mode: Transmitting*

**Test Result:** Compliance

Please refer to the following plots.


Antenna 1

802.11b: Band Edge, Left Side

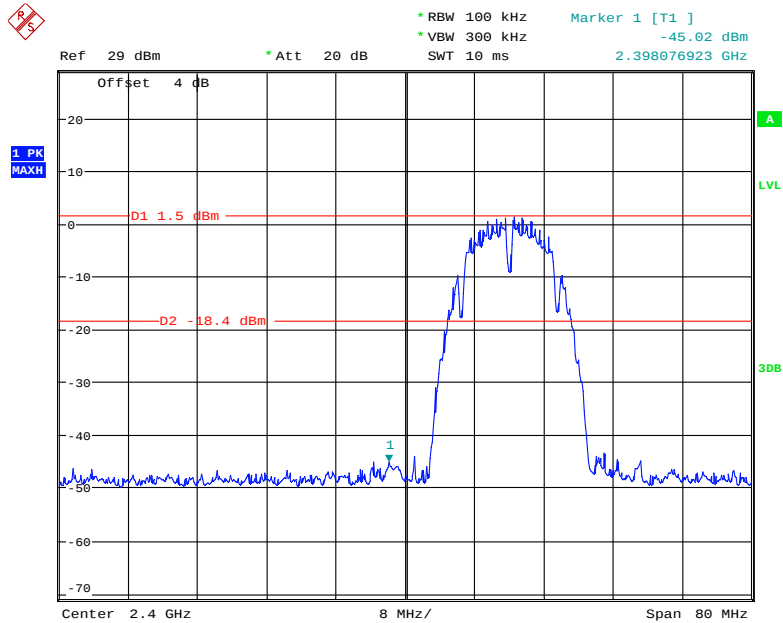


Date: 25.OCT.2019 14:30:12

802.11b: Band Edge, Right Side

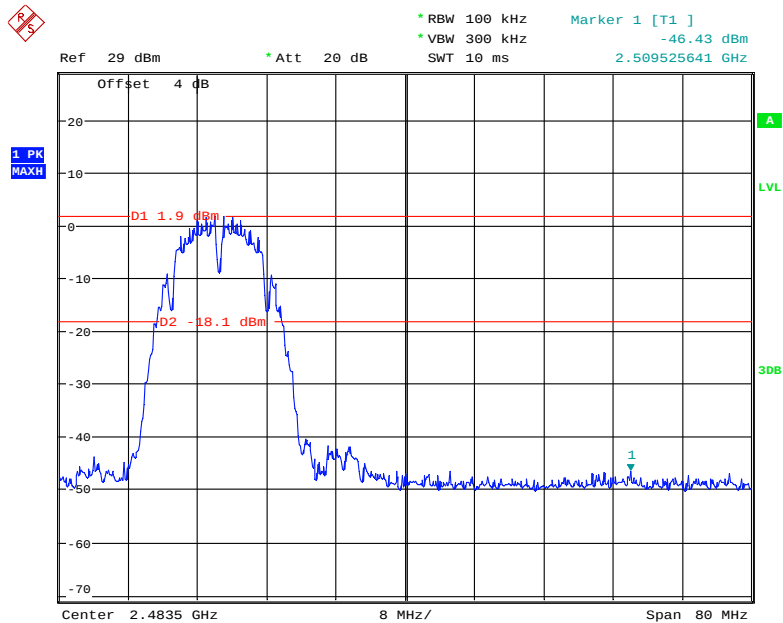


Date: 25.OCT.2019 14:27:39

### 802.11g: Band Edge, Left Side

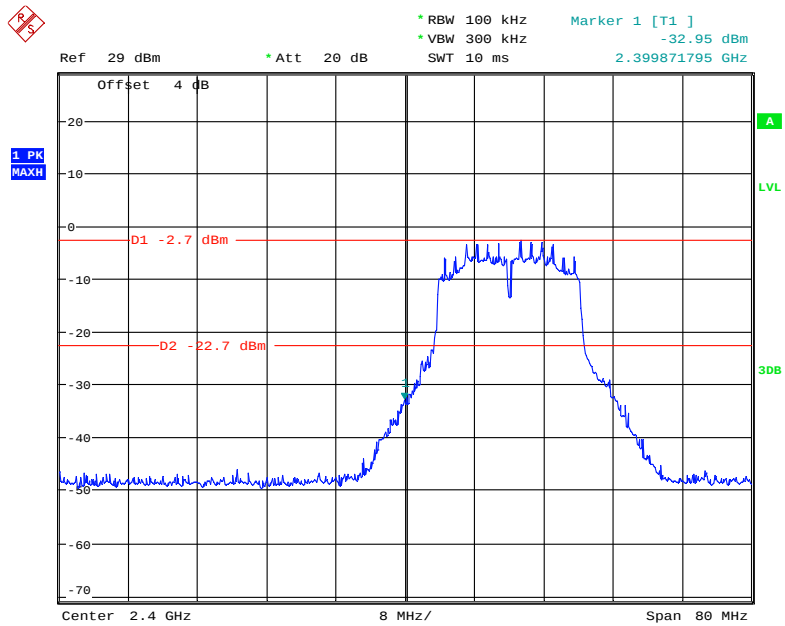


Date: 25.OCT.2019 14:31:08

### 802.11g: Band Edge, Right Side

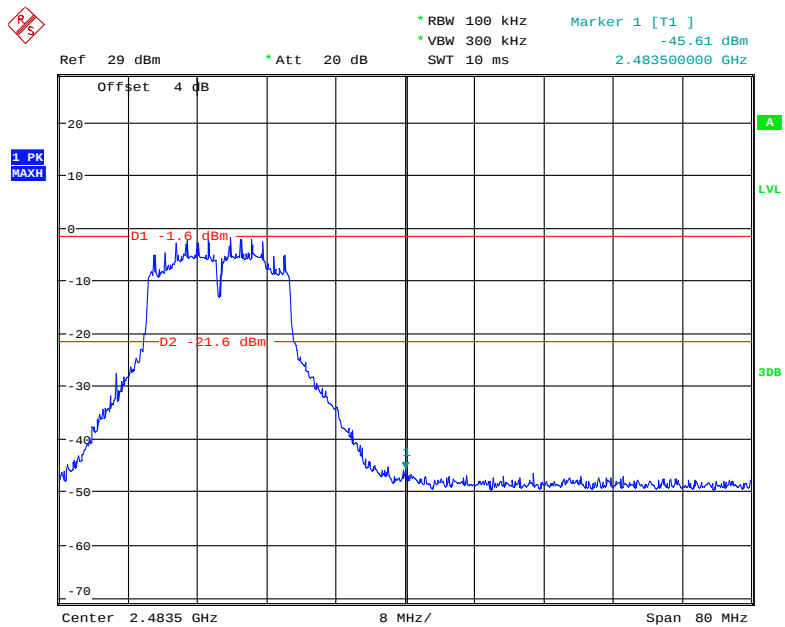


Date: 25.OCT.2019 14:32:00

### 802.11n-HT20: Band Edge, Left Side

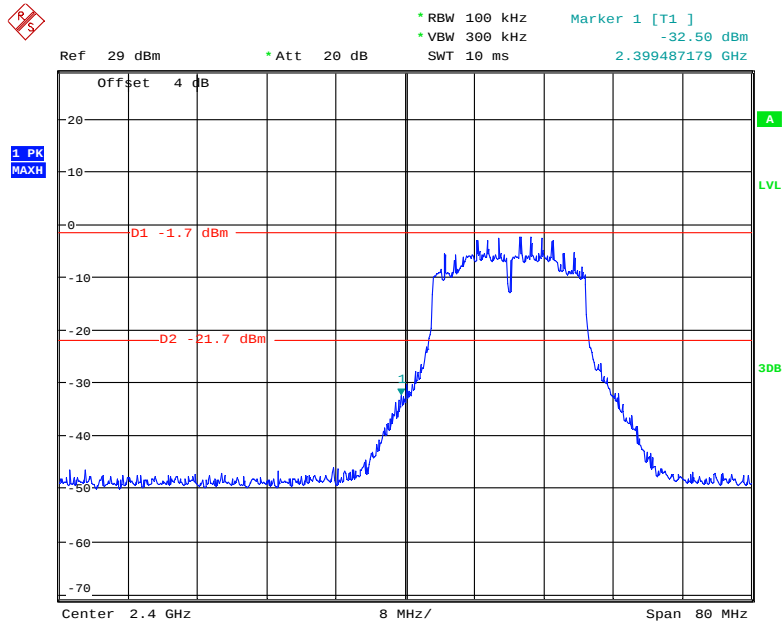


Date: 25.OCT.2019 14:33:43

### 802.11n-HT20: Band Edge, Right Side

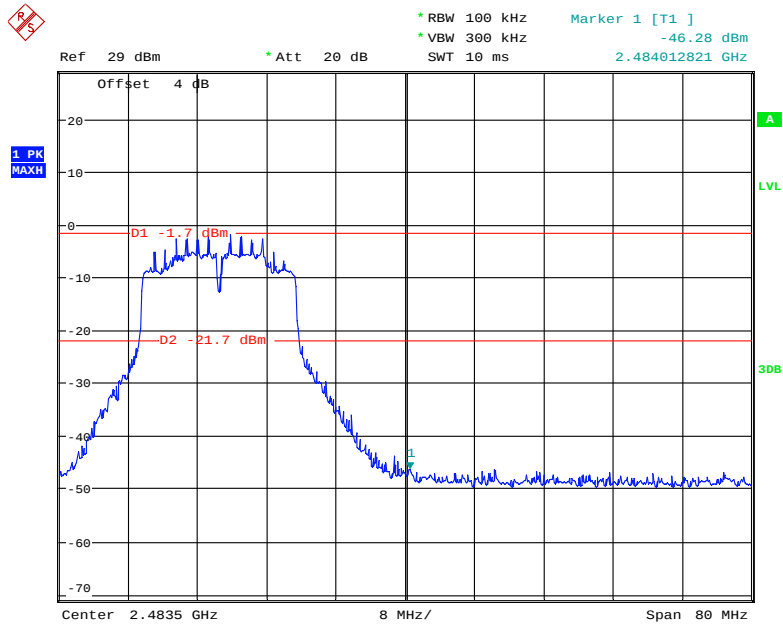


Date: 25.OCT.2019 14:33:08

### 802.11n-HT40: Band Edge, Left Side

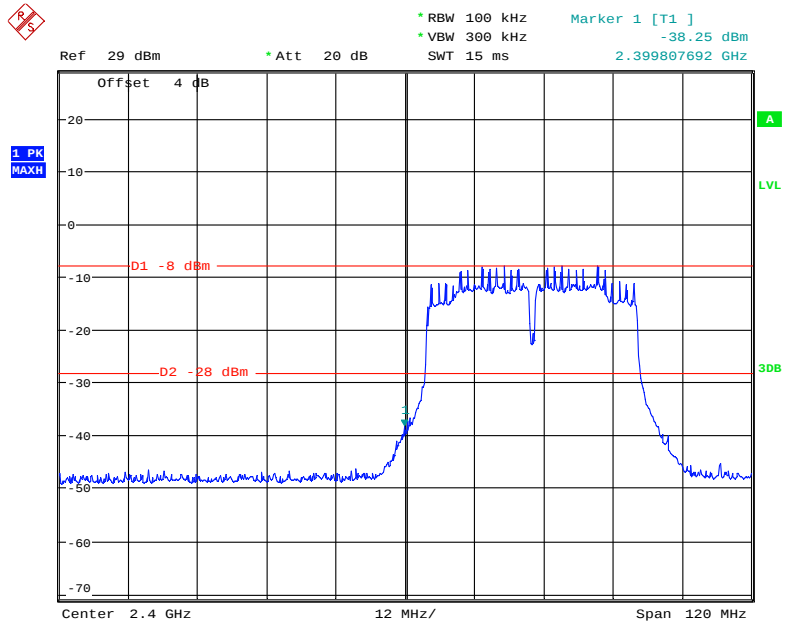

Date: 25.OCT.2019 14:35:25


### 802.11n-HT40: Band Edge, Right Side

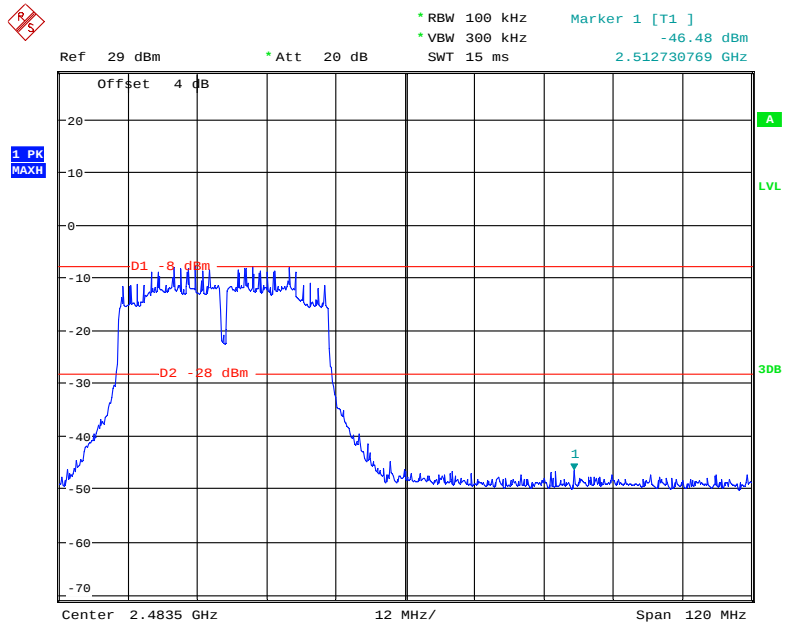

Date: 25.OCT.2019 14:36:07


Antenna 2

802.11b: Band Edge, Left Side

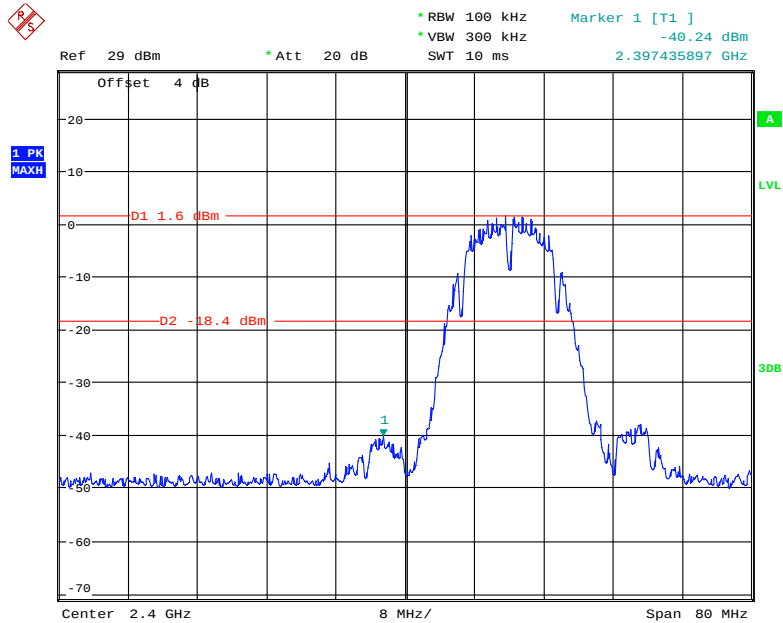


Date: 25.OCT.2019 16:06:32

802.11b: Band Edge, Right Side

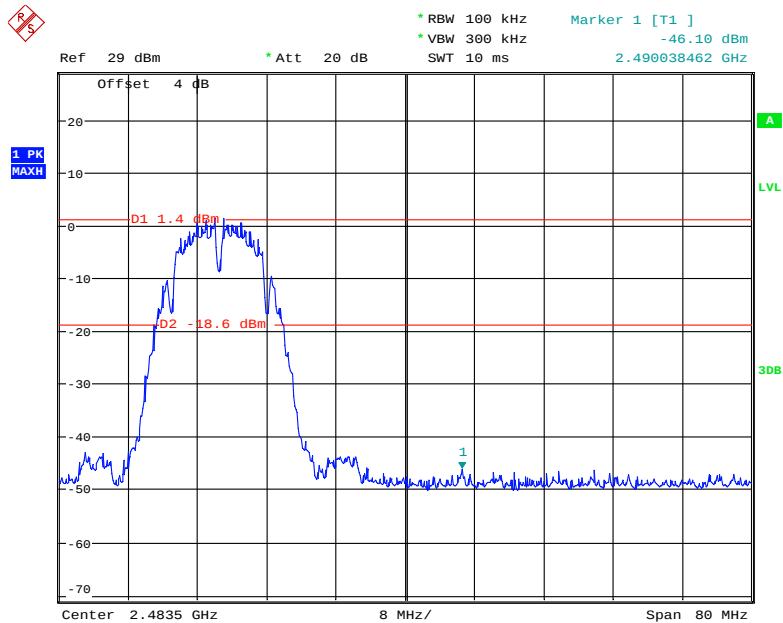


Date: 25.OCT.2019 16:07:22

### 802.11g: Band Edge, Left Side

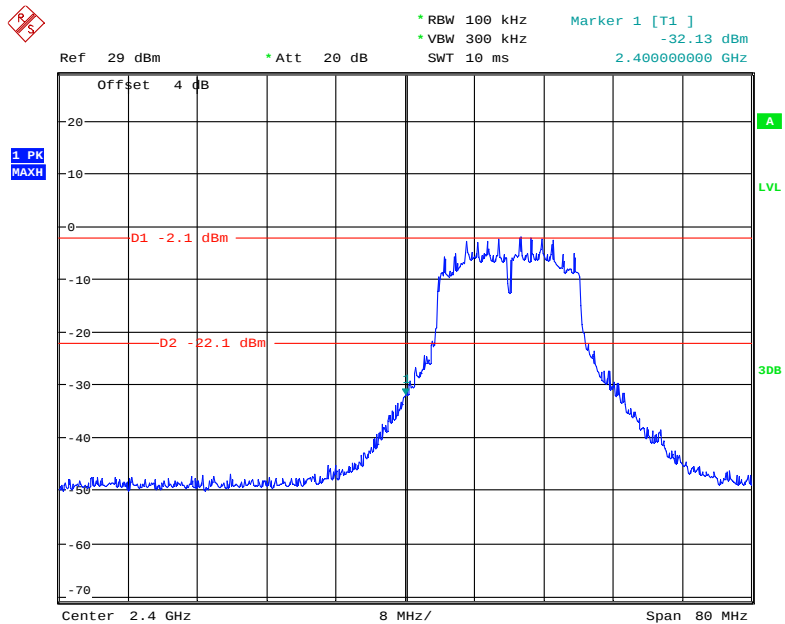


Date: 25.OCT.2019 16:05:26

### 802.11g: Band Edge, Right Side

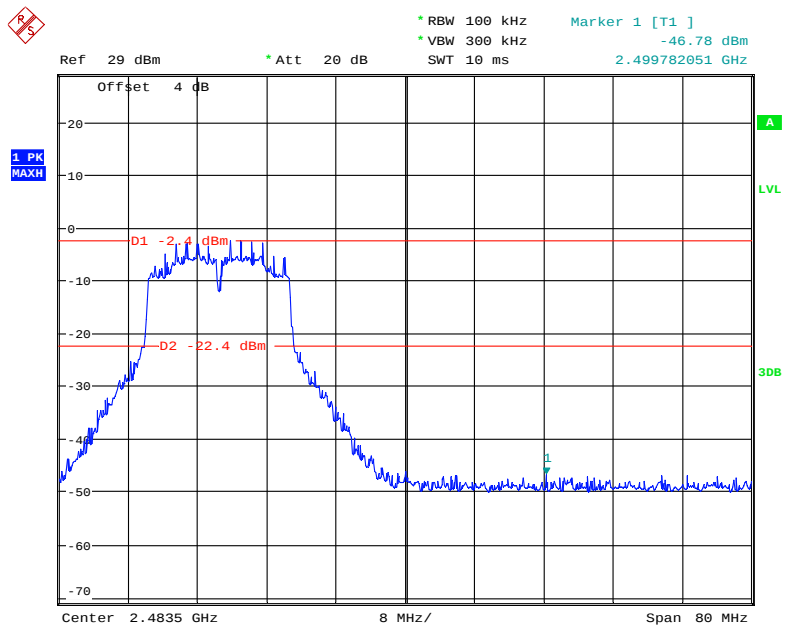


Date: 25.OCT.2019 16:04:43

### 802.11n-HT20: Band Edge, Left Side

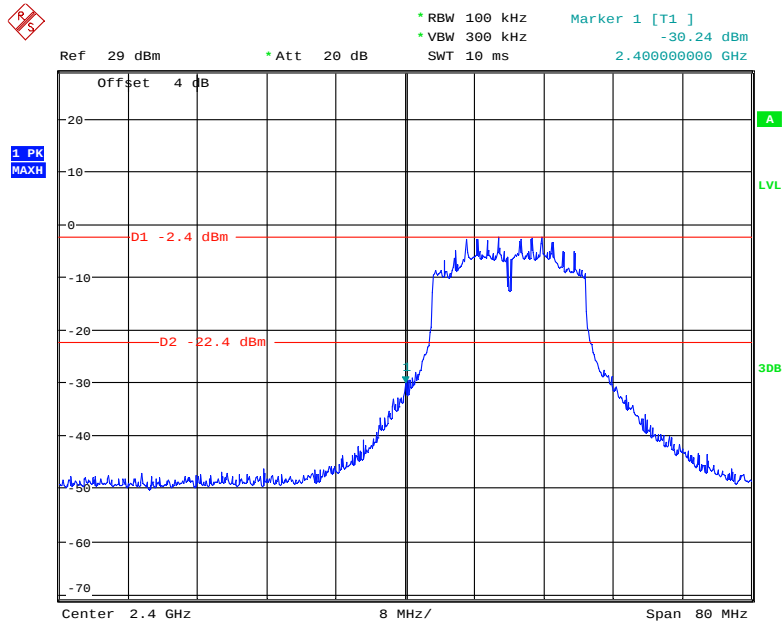


Date: 25.OCT.2019 16:03:23

### 802.11n-HT20: Band Edge, Right Side

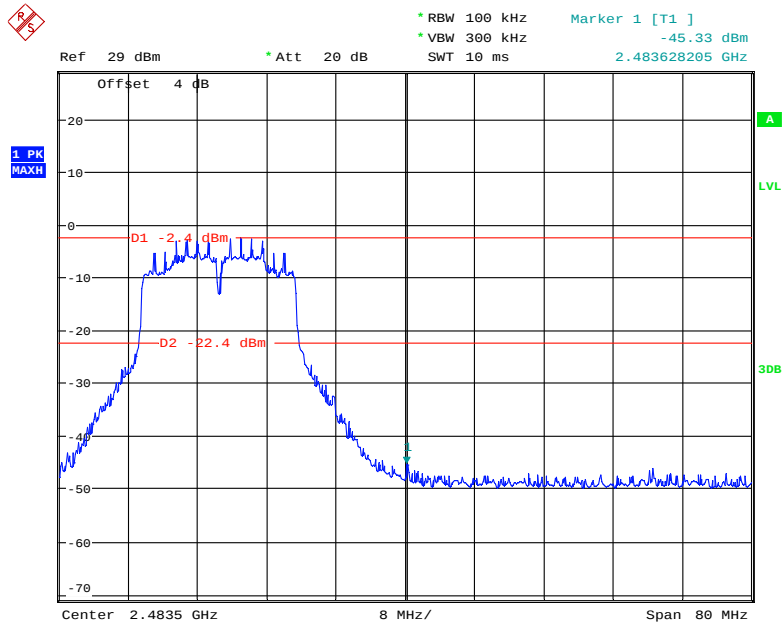


Date: 25.OCT.2019 16:04:00

### 802.11n-HT40: Band Edge, Left Side

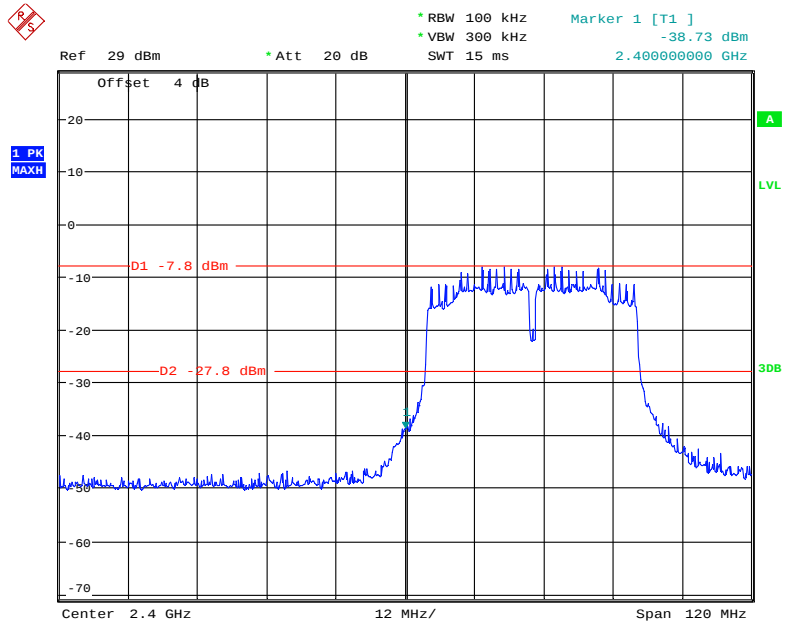


Date: 25.OCT.2019 16:01:11

### 802.11n-HT40: Band Edge, Right Side

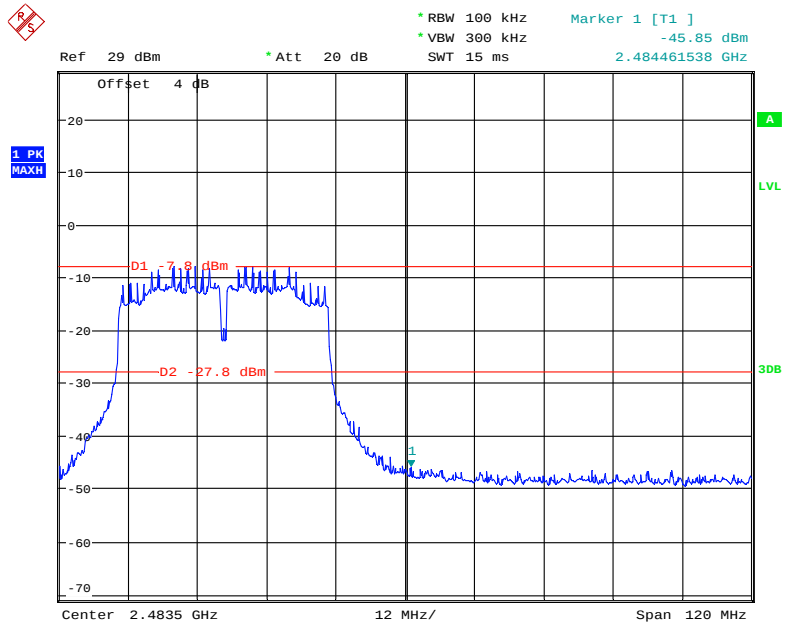


Date: 25.OCT.2019 16:00:03

### BLE: Band Edge, Left Side

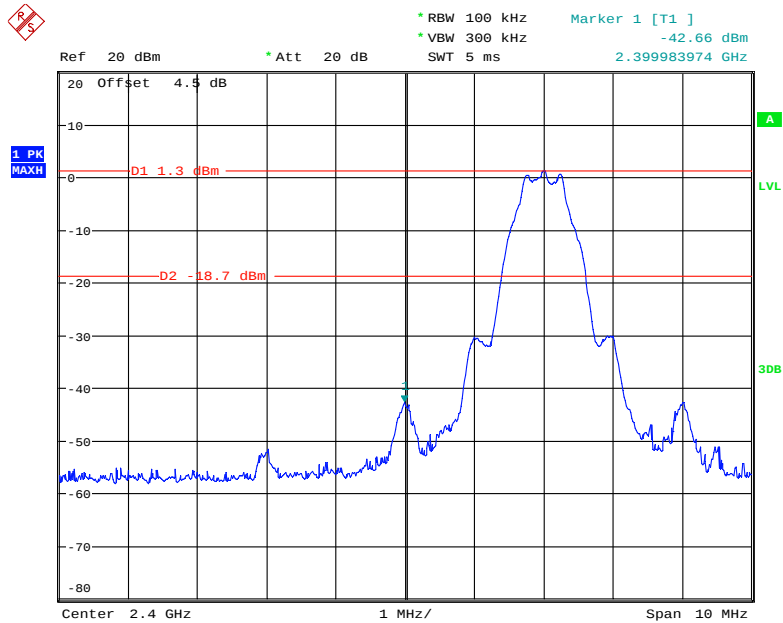

Date: 22.OCT.2019 22:13:50

### BLE: Band Edge, Right Side

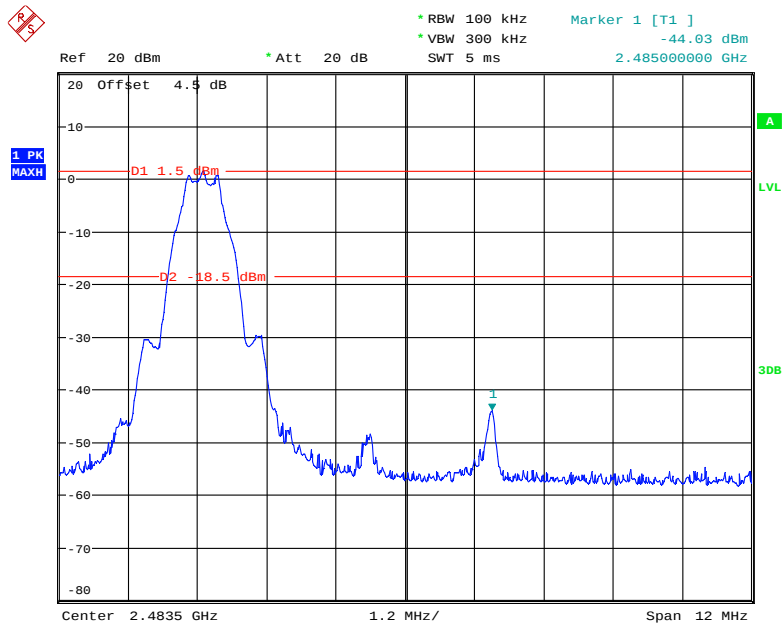

Date: 22.OCT.2019 22:12:43


## FCC §15.247(e) - POWER SPECTRAL DENSITY

### Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to:  $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$ .
3. Set the VBW  $\geq 3 \times \text{RBW}$ .
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



### Test Data

#### Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 25 °C     |
| Relative Humidity: | 52 %      |
| ATM Pressure:      | 101.0 kPa |

*The testing was performed by Leo Huang on 2019-10-22 and 2019-10-25.*

*EUT operation mode: Transmitting*

**Test Result:** Pass

## Antenna 1

| Channel           | Frequency (MHz) | PSD (dBm/3kHz) | Limit (dBm/3kHz) |
|-------------------|-----------------|----------------|------------------|
| 802.11b mode      |                 |                |                  |
| Low               | 2412            | -13.72         | $\leq 8$         |
| Middle            | 2437            | -12.79         | $\leq 8$         |
| High              | 2462            | -13.17         | $\leq 8$         |
| 802.11g mode      |                 |                |                  |
| Low               | 2412            | -18.13         | $\leq 8$         |
| Middle            | 2437            | -16.09         | $\leq 8$         |
| High              | 2462            | -16.80         | $\leq 8$         |
| 802.11n-HT20 mode |                 |                |                  |
| Low               | 2412            | -17.25         | $\leq 8$         |
| Middle            | 2437            | -16.16         | $\leq 8$         |
| High              | 2462            | -16.91         | $\leq 8$         |
| 802.11n-HT40 mode |                 |                |                  |
| Low               | 2422            | -23.39         | $\leq 8$         |
| Middle            | 2437            | -23.43         | $\leq 8$         |
| High              | 2452            | -21.05         | $\leq 8$         |


## Antenna 2

| Channel           | Frequency (MHz) | PSD (dBm/3kHz) | Limit (dBm/3kHz) |
|-------------------|-----------------|----------------|------------------|
| 802.11b mode      |                 |                |                  |
| Low               | 2412            | -13.84         | $\leq 8$         |
| Middle            | 2437            | -13.15         | $\leq 8$         |
| High              | 2462            | -13.60         | $\leq 8$         |
| 802.11g mode      |                 |                |                  |
| Low               | 2412            | -17.50         | $\leq 8$         |
| Middle            | 2437            | -17.31         | $\leq 8$         |
| High              | 2462            | -17.19         | $\leq 8$         |
| 802.11n-HT20 mode |                 |                |                  |
| Low               | 2412            | -16.69         | $\leq 8$         |
| Middle            | 2437            | -16.60         | $\leq 8$         |
| High              | 2462            | -17.00         | $\leq 8$         |
| 802.11n-HT40 mode |                 |                |                  |
| Low               | 2422            | -22.42         | $\leq 8$         |
| Middle            | 2437            | -22.30         | $\leq 8$         |
| High              | 2452            | -21.25         | $\leq 8$         |

| Channel  | Frequency (MHz) | PSD (dBm/3kHz) | Limit (dBm/3kHz) |
|----------|-----------------|----------------|------------------|
| BLE mode |                 |                |                  |
| Low      | 2402            | -13.97         | $\leq 8$         |
| Middle   | 2440            | -14.43         | $\leq 8$         |
| High     | 2480            | -13.98         | $\leq 8$         |


Antenna 1

Power Spectral Density, 802.11b Low Channel

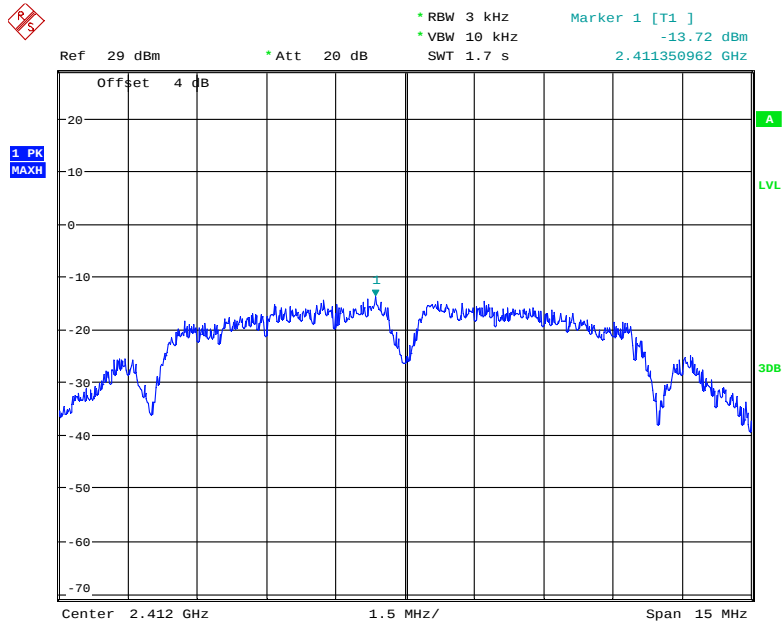


Date: 25.OCT.2019 14:48:18

Power Spectral Density, 802.11b Middle Channel

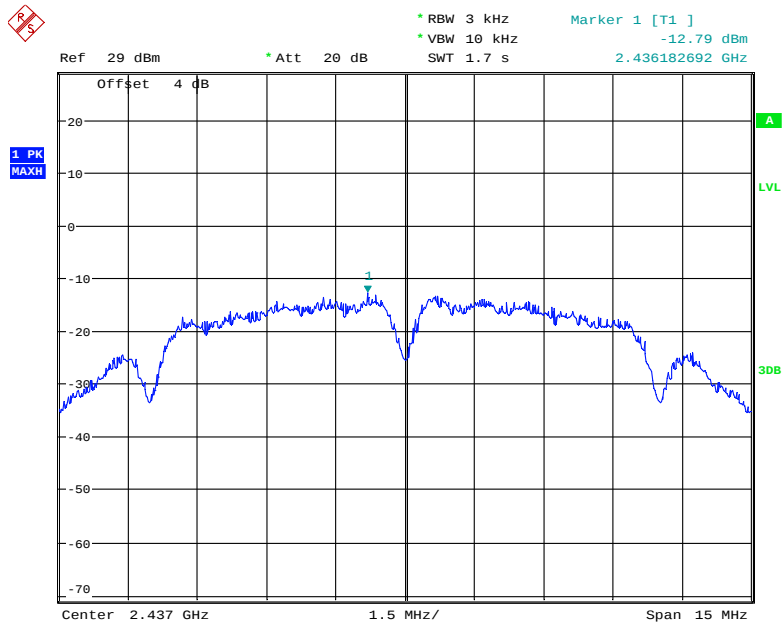


Date: 25.OCT.2019 14:47:39

### Power Spectral Density, 802.11b High Channel

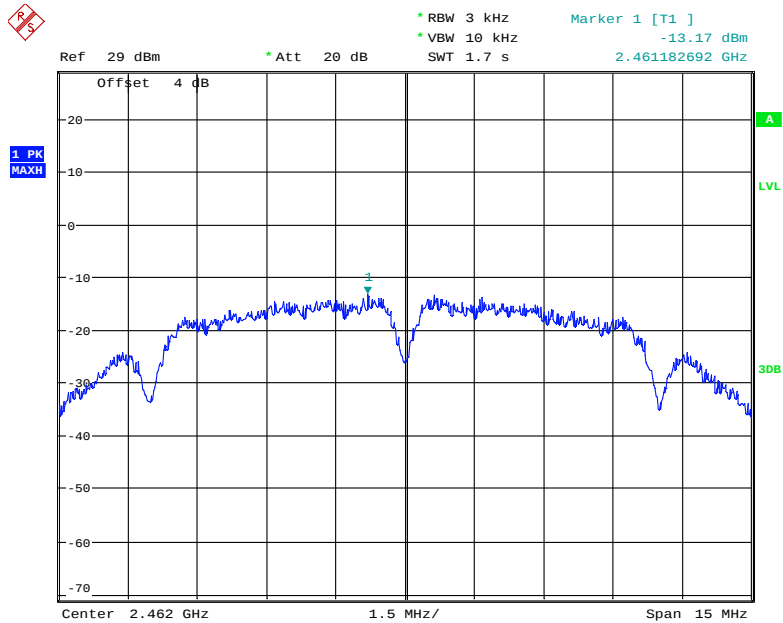


Date: 25.OCT.2019 14:49:06

### Power Spectral Density, 802.11g Low Channel

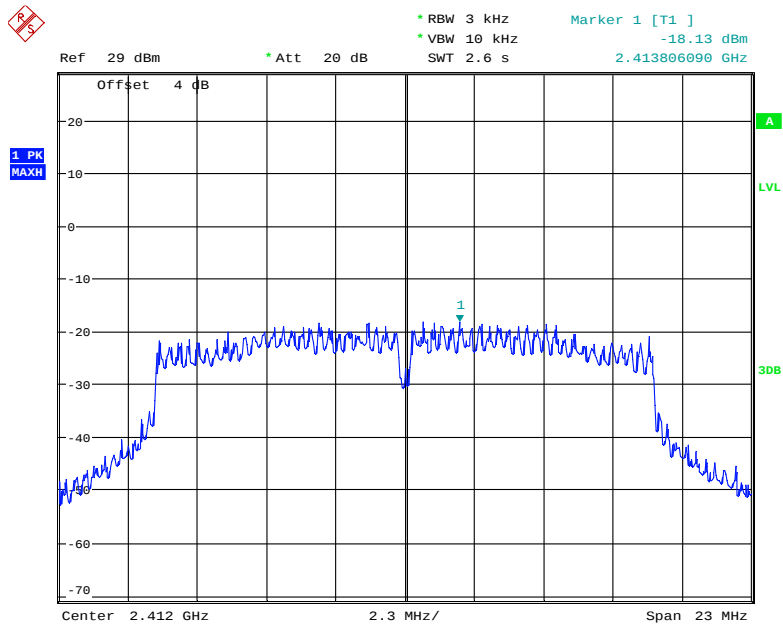


Date: 25.OCT.2019 14:52:16

### Power Spectral Density, 802.11g Middle Channel

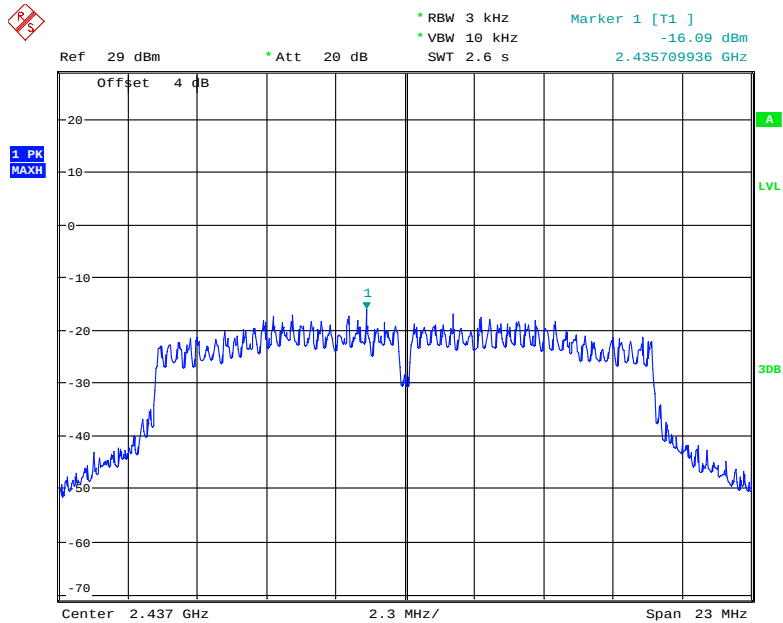


Date: 25.OCT.2019 14:51:29

### Power Spectral Density, 802.11g High Channel

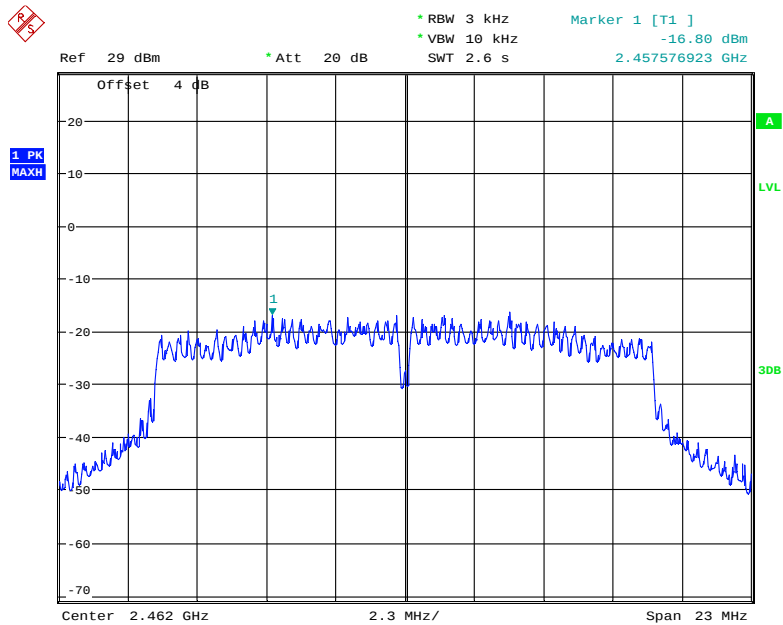


Date: 25.OCT.2019 14:50:55

### Power Spectral Density, 802.11n-HT20 Low Channel

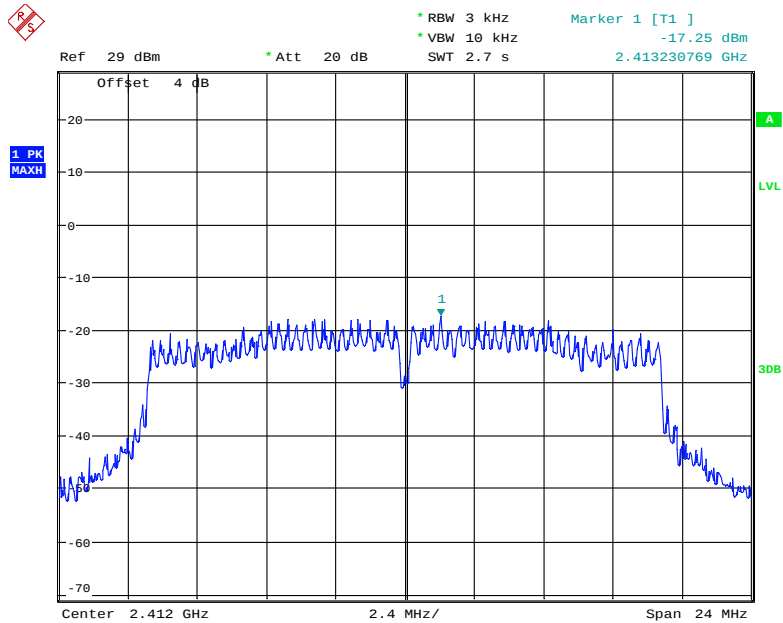


Date: 25.OCT.2019 14:54:06

### Power Spectral Density, 802.11n-HT20 Middle Channel

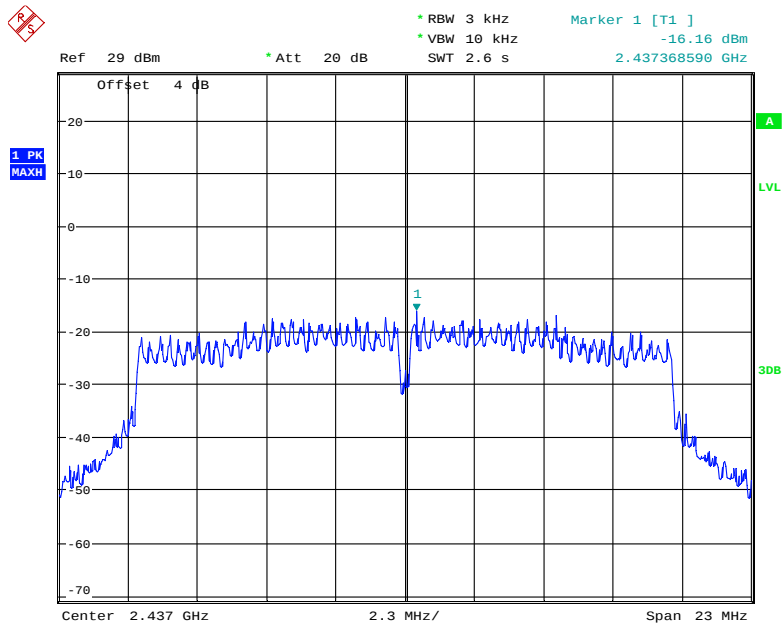


Date: 25.OCT.2019 14:54:49

### Power Spectral Density, 802.11n-HT20 High Channel

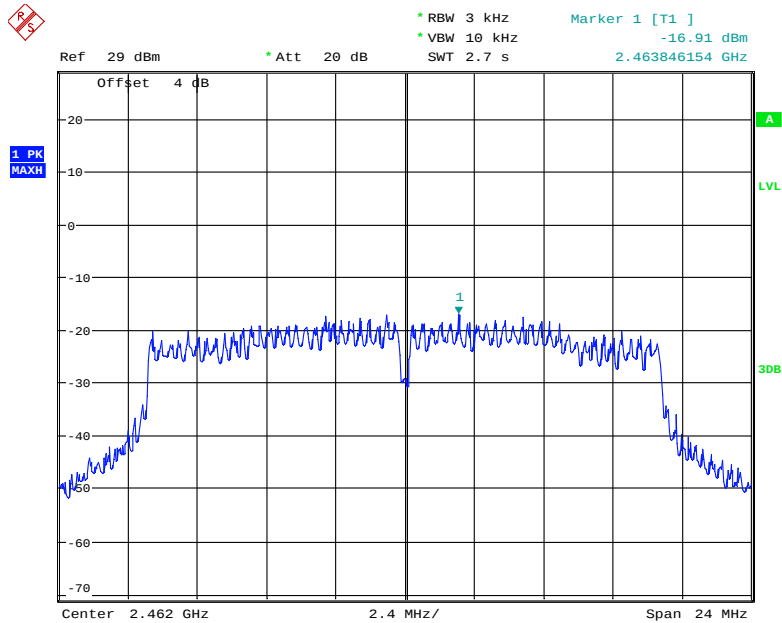


Date: 25.OCT.2019 14:55:42

### Power Spectral Density, 802.11n-HT40 Low Channel

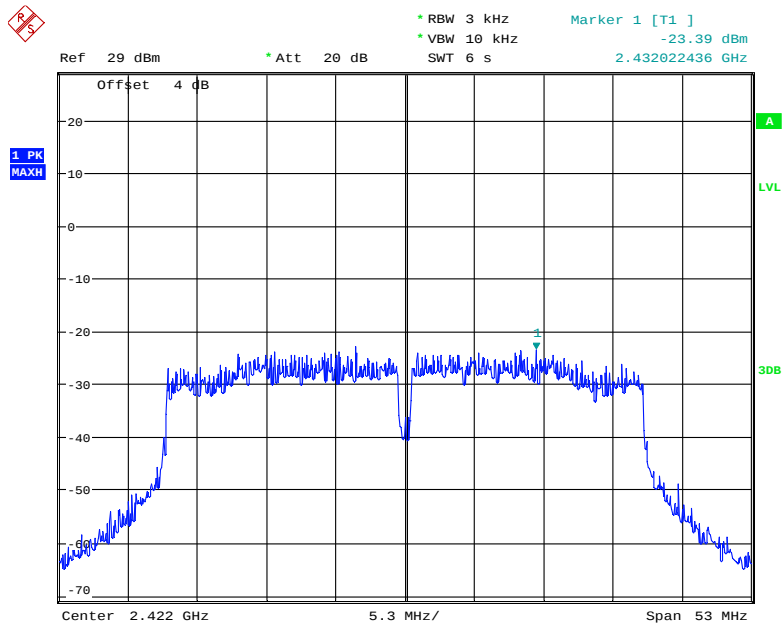


Date: 25.OCT.2019 14:56:54

### Power Spectral Density, 802.11n-HT40 Middle Channel

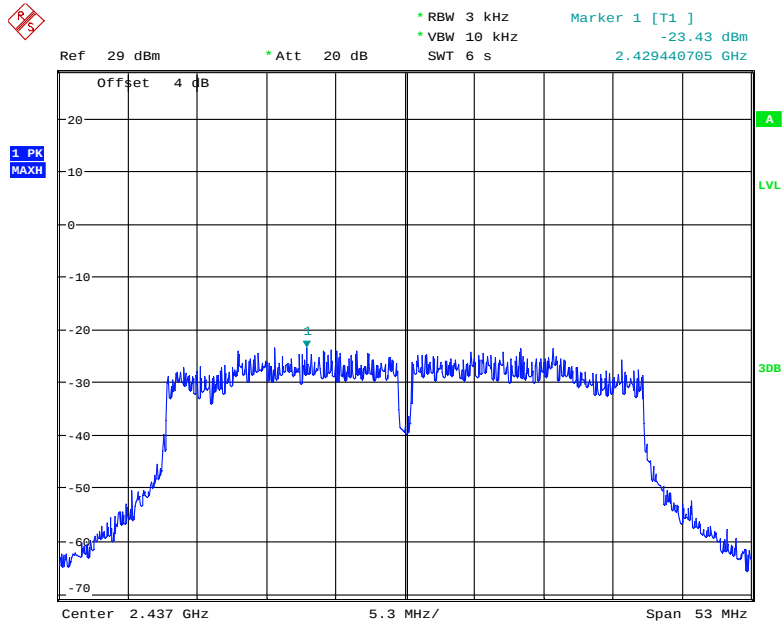

Date: 25.OCT.2019 14:58:15


### Power Spectral Density, 802.11n-HT40 High Channel

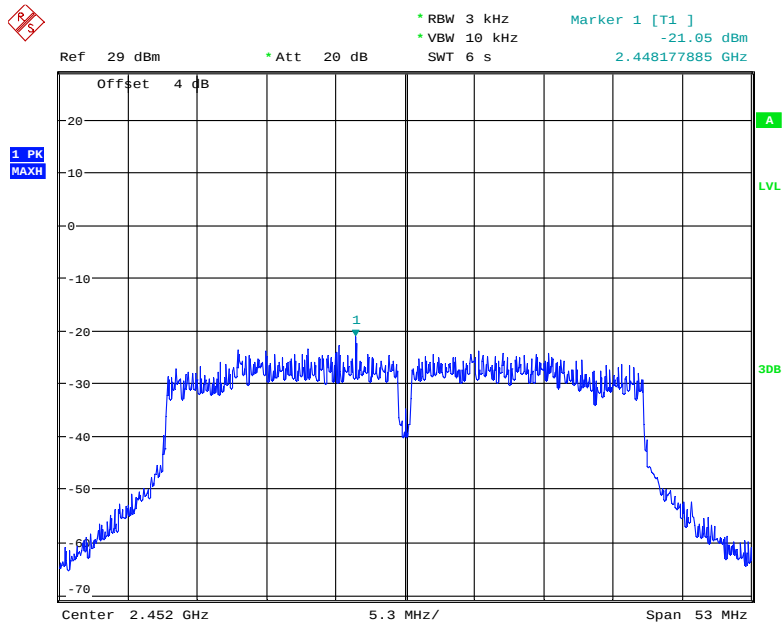

Date: 25.OCT.2019 14:58:54


Antenna 2

Power Spectral Density, 802.11b Low Channel

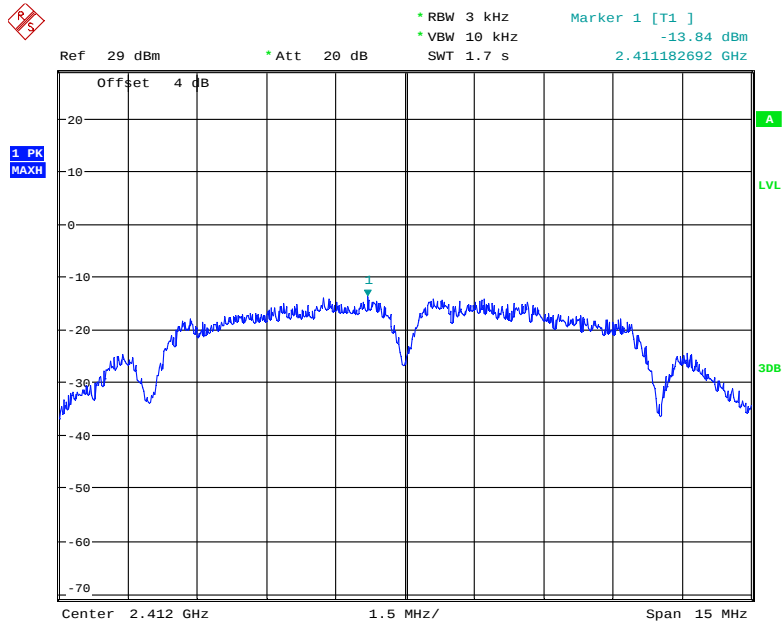


Date: 25.OCT.2019 16:12:19

Power Spectral Density, 802.11b Middle Channel

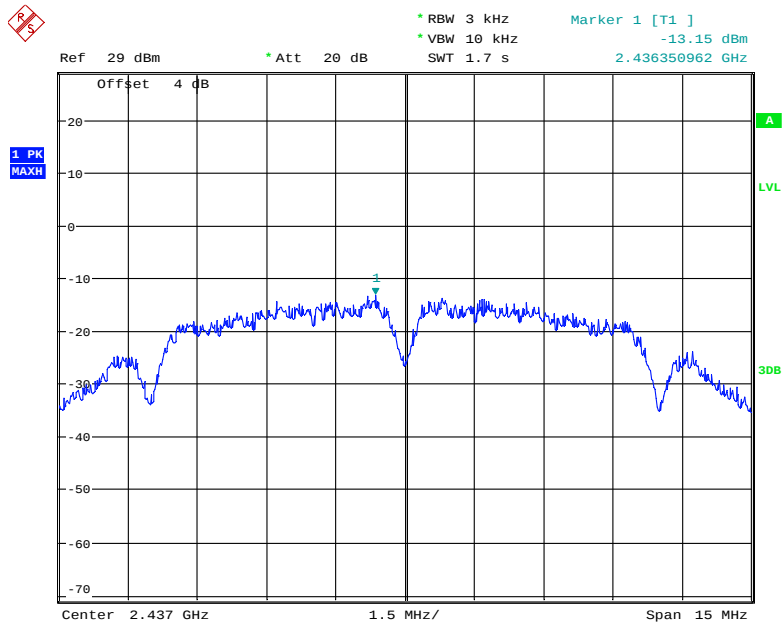


Date: 25.OCT.2019 16:11:46

### Power Spectral Density, 802.11b High Channel

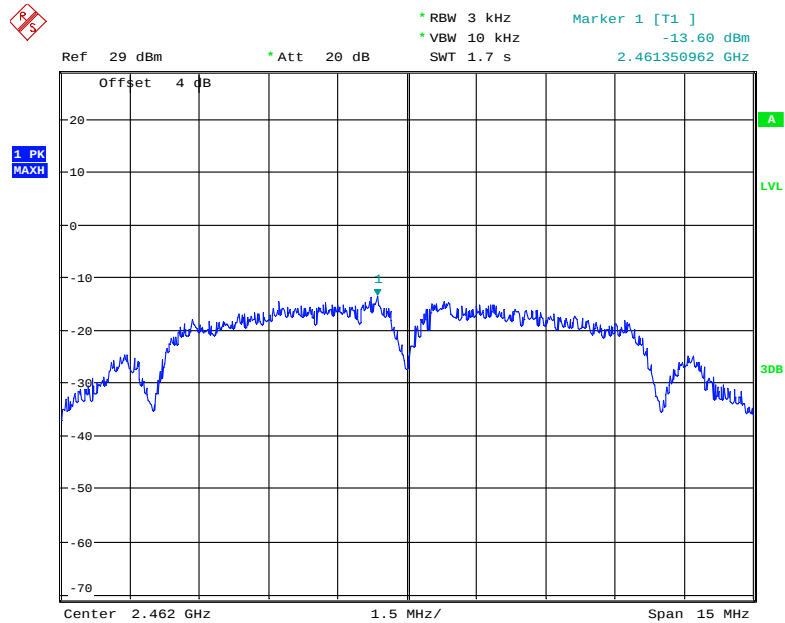


Date: 25.OCT.2019 16:11:12

### Power Spectral Density, 802.11g Low Channel

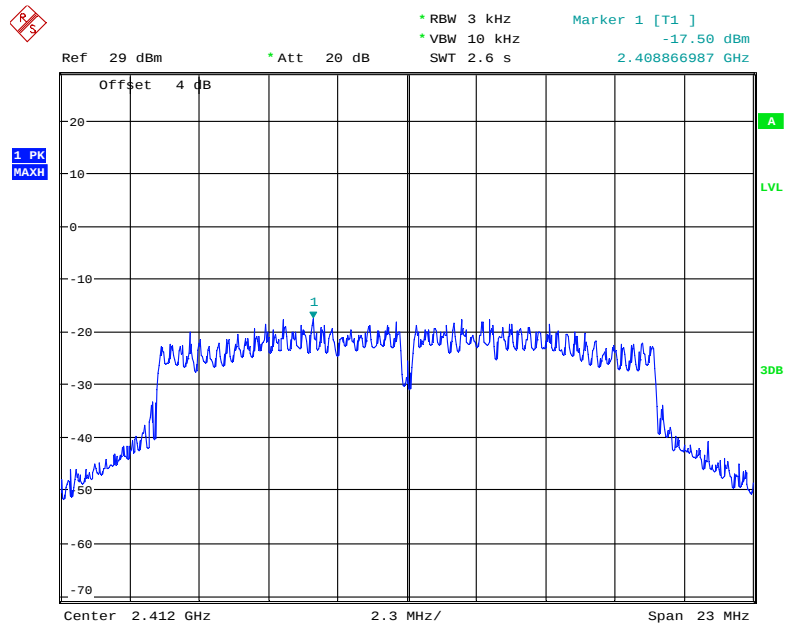


Date: 25.OCT.2019 16:13:19

### Power Spectral Density, 802.11g Middle Channel

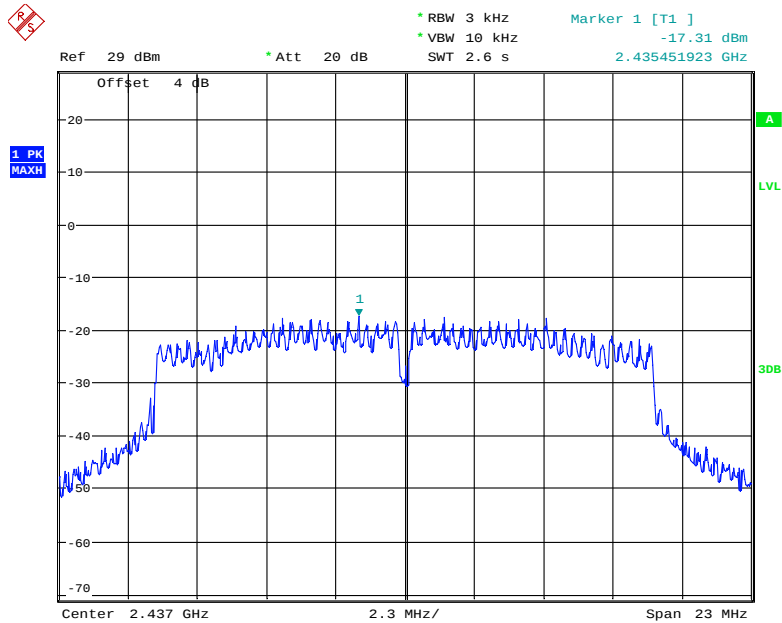


Date: 25.OCT.2019 16:14:00

### Power Spectral Density, 802.11g High Channel

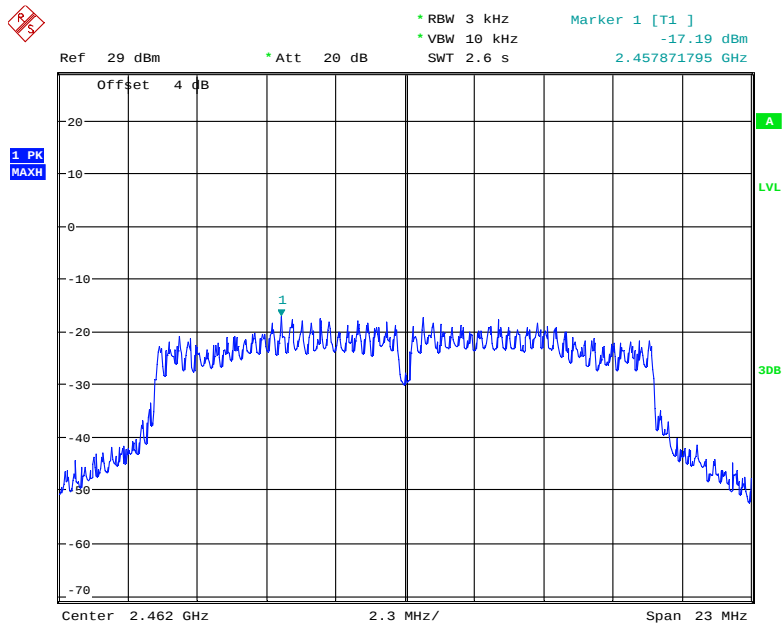


Date: 25.OCT.2019 16:14:43

### Power Spectral Density, 802.11n-HT20 Low Channel

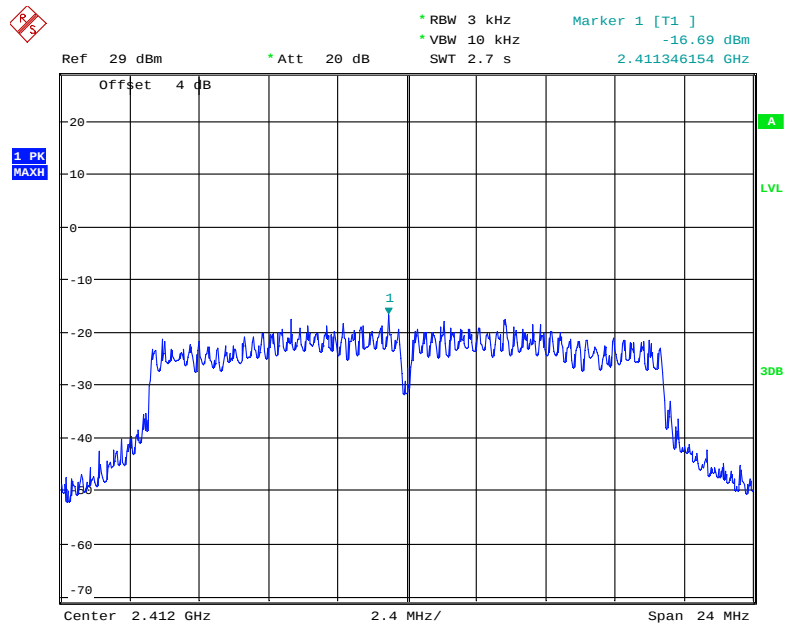


Date: 25.OCT.2019 16:16:53

### Power Spectral Density, 802.11n-HT20 Middle Channel

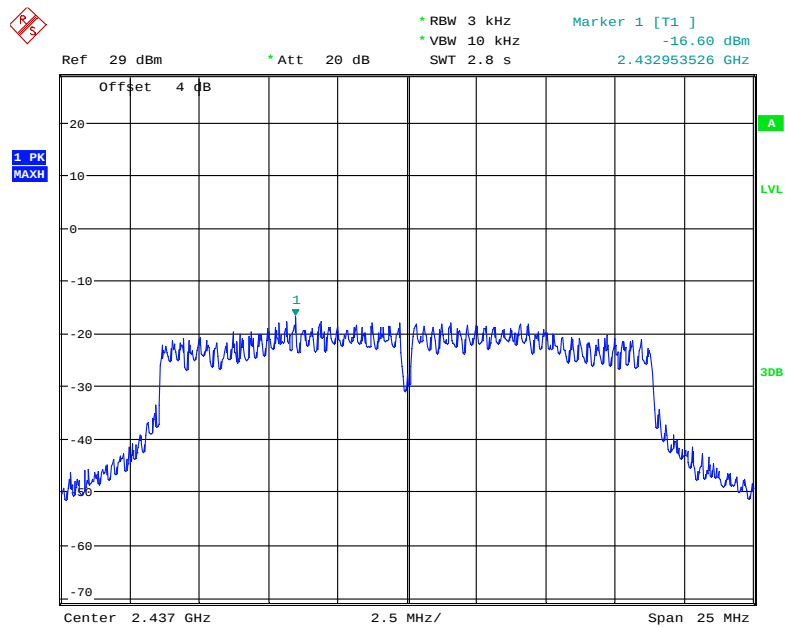


Date: 25.OCT.2019 16:18:52

### Power Spectral Density, 802.11n-HT20 High Channel

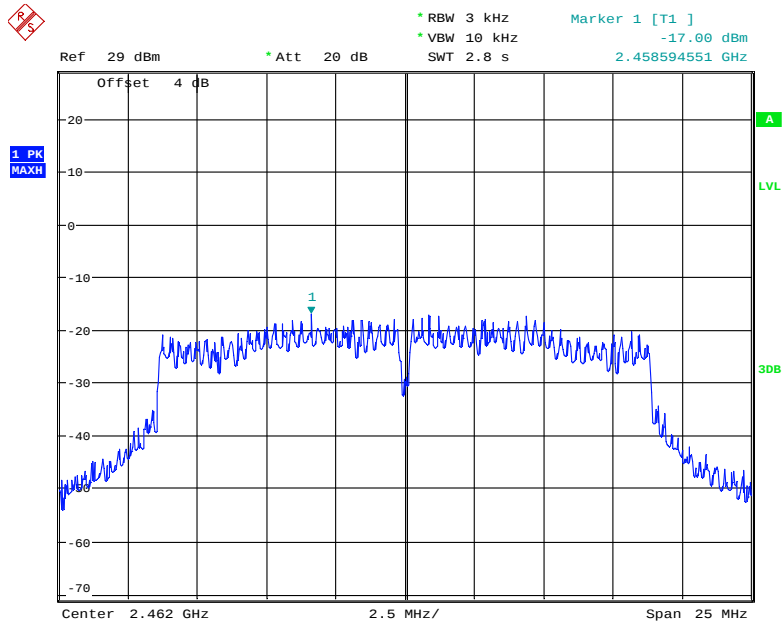


Date: 25.OCT.2019 16:19:48

### Power Spectral Density, 802.11n-HT40 Low Channel

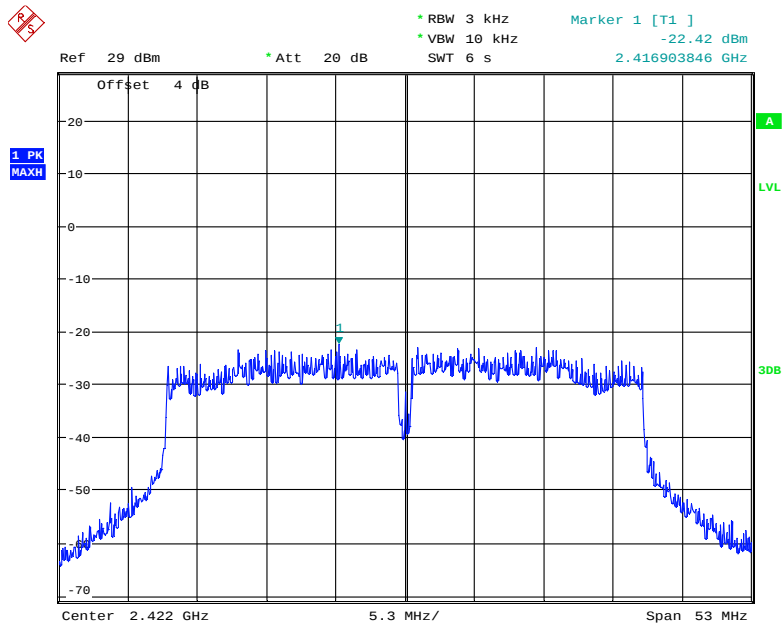


Date: 25.OCT.2019 16:21:31

### Power Spectral Density, 802.11n-HT40 Middle Channel

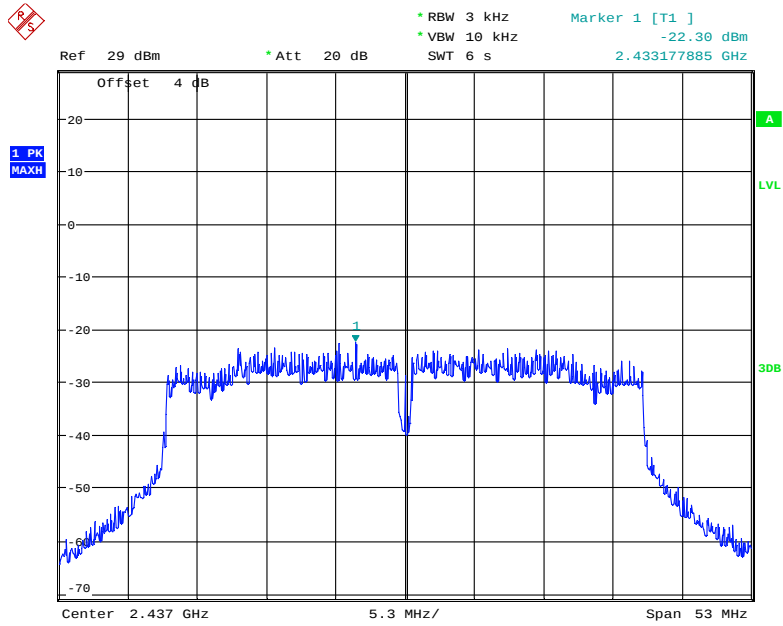


Date: 25.OCT.2019 16:22:35

### Power Spectral Density, 802.11n-HT40 High Channel

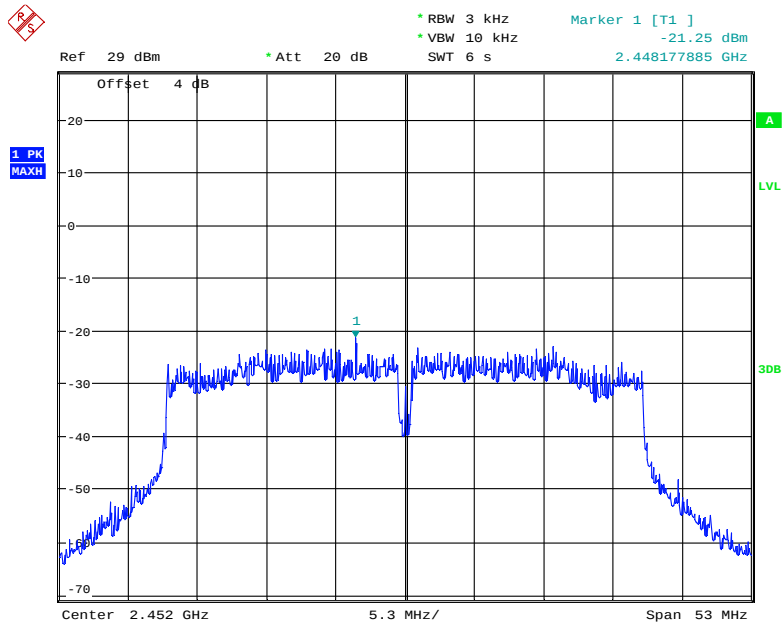


Date: 25.OCT.2019 16:23:30

### Power Spectral Density, BLE Low Channel

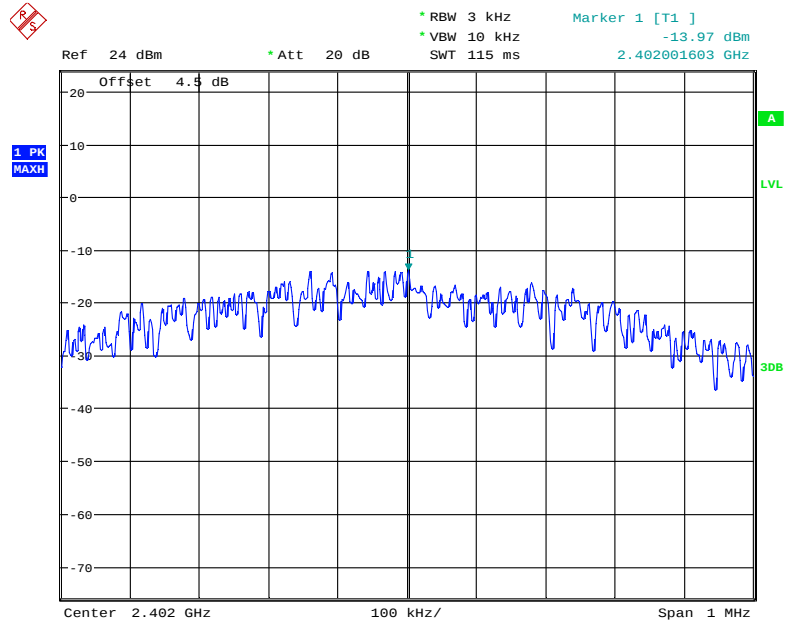


Date: 22.OCT.2019 22:20:49

### Power Spectral Density, BLE Middle Channel

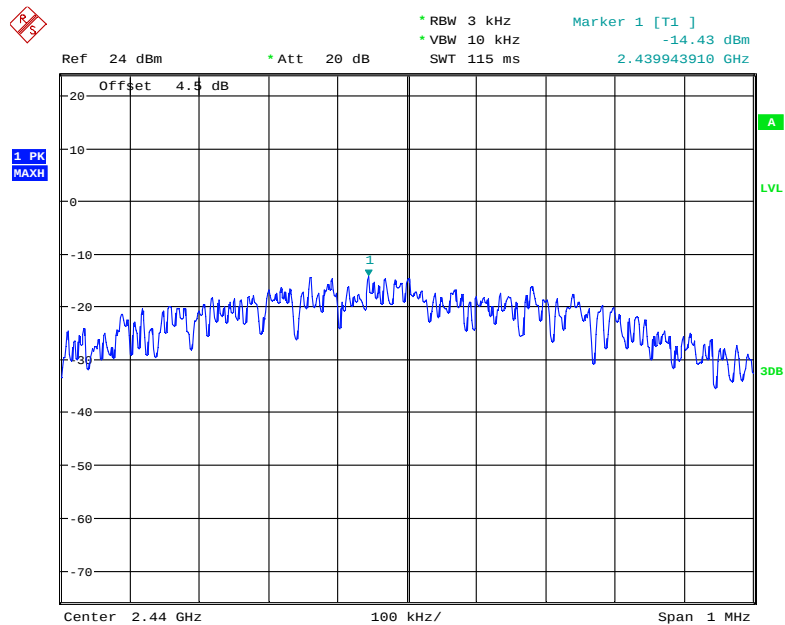

Date: 22.OCT.2019 22:21:26

Power Spectral Density, BLE High Channel

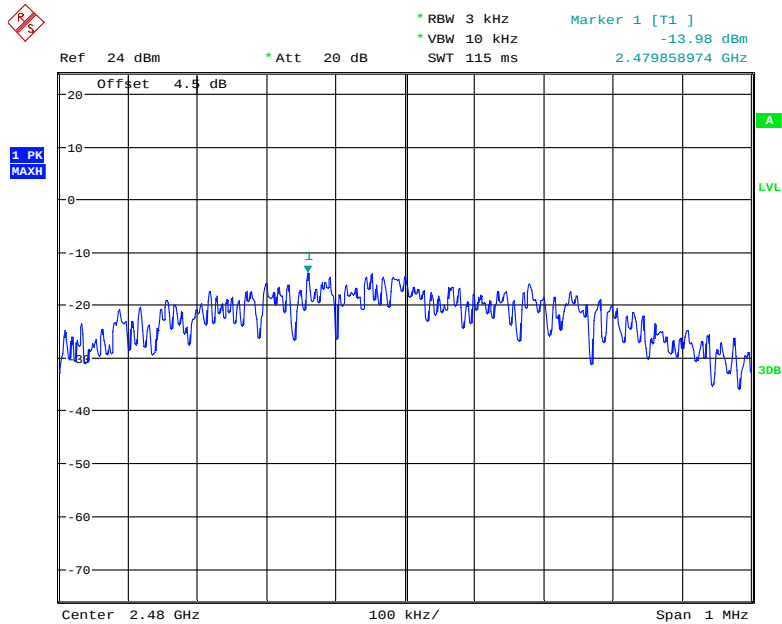

Date: 22.OCT.2019 22:20:07

\*\*\*\*\* END OF REPORT \*\*\*\*\*