



TEST REPORT

Applicant: vivo Mobile Communication Co., Ltd.
Address: No.1, vivo Road, Chang'an, Dongguan, Guangdong, China
Equipment Type: Mobile Phone
Model Name: V2441
Brand Name: vivo
FCC ID: 2AUCY-V2441
Test Standard: 47 CFR Part 15 Subpart C (refer to section 3.1)
Sample Arrival Date: Jan. 07, 2025
Test Date: Jan. 07, 2025 - Feb. 08, 2025
Date of Issue: Feb. 11, 2025

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

Tested by: Yu Yingyuan**Checked by:** Ye Hongji**Approved by:** Sunny Zou
(Technical Director)

Revision History

Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>Feb. 11, 2025</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION	4
1.1	Test Laboratory	4
1.2	Test Location	4
2	PRODUCT INFORMATION	5
2.1	Applicant Information	5
2.2	Manufacturer Information	5
2.3	General Description for Equipment under Test (EUT)	5
2.4	Technical Information	6
3	SUMMARY OF TEST RESULTS	8
3.1	Test Standards	8
3.2	Test Verdict	8
4	GENERAL TEST CONFIGURATIONS	9
4.1	Test Environments	9
4.2	Test Equipment List	9
4.3	Test Software List	10
4.4	Measurement Uncertainty	11
4.5	Description of Test Setup	11
4.6	Measurement Results Explanation Example	14
5	TEST ITEMS	15
5.1	Antenna Requirements	15
5.2	Output Power	16
5.3	Occupied Bandwidth	18
5.4	Conducted Spurious Emission	19
5.5	Band Edge (Authorized-band band-edge)	21

5.6	Conducted Emission	23
5.7	Radiated Spurious Emission	24
5.8	Band Edge (Restricted-band band-edge).....	29
5.9	Power Spectral density (PSD).....	30
ANNEX A	TEST RESULT	31
A.1	Output Power	31
A.2	Occupied Bandwidth	35
A.3	Conducted Spurious Emissions	43
A.4	Band Edge (Authorized-band band-edge).....	65
A.5	Conducted Emissions.....	75
A.6	Radiated Emission	78
A.7	Band Edge (Restricted-band band-edge).....	109
A.8	Power Spectral Density (PSD)	114
ANNEX B	TEST SETUP PHOTOS	119
ANNEX C	EUT EXTERNAL PHOTOS	119
ANNEX D	EUT INTERNAL PHOTOS	119

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	☒ Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	☐ 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	vivo Mobile Communication Co., Ltd.
Address	No.1, vivo Road, Chang'an, Dongguan, Guangdong, China

2.2 Manufacturer Information

Manufacturer	vivo Mobile Communication Co., Ltd.
Address	No.1, vivo Road, Chang'an, Dongguan, Guangdong, China

2.3 General Description for Equipment under Test (EUT)

EUT Name	Mobile Phone
Model Name Under Test	V2441
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	MP_0.1
Software Version	N/A
Dimensions (Approx.)	163.96*75.3*8.495mm
Weight (Approx.)	193g
EUT ID	S01, S02
IMEI Number	S01: 86101607997171
	S02: 86101607998633

2.4 Technical Information

Network and Wireless connectivity	2.4G WIFI 802.11b, 802.11g, 802.11n20/40, VHT20/40
-----------------------------------	--

The requirement for the following technical information of the EUT was tested in this report:

Frequency Range	802.11b/g/n (20 MHz) /VHT20: 2.412 GHz - 2.462 GHz $f_c = 2412 \text{ MHz} + (N-1)*5 \text{ MHz}$, where - f_c = "Operating Frequency" in MHz, - N = "Channel Number" with the range from 1 to 11. 802.11n (40 MHz) /VHT40: 2.422 GHz - 2.452 GHz $f_c = 2412 \text{ MHz} + (N-1)*5 \text{ MHz}$, where - f_c = "Operating Frequency" in MHz, - N = "Channel Number" with the range from 3 to 9.
Modulation Type	DSSS, OFDM
Product Type	☐ Mobile ☒ Portable ☐ Fix Location
Antenna System (eg., MIMO, Smart Antenna)	N/A
Categorization as Correlated or Completely Uncorrelated	N/A
Antenna Type	PIFA Antenna
Antenna Gain	0.59 dBi
About the Product	Only the WIFI 802.11b, 802.11g, 802.11n (HT20/40), VHT20/40 was tested in this report.

Modulation technology	Modulation Type	Transfer Rate (Mbps)(Single RF path)
DSSS (802.11b)	DBPSK	1
	DQPSK	2
	CCK	5.5/11
OFDM (802.11g)	BPSK	6/9
	QPSK	12/18
	16QAM	24/36
	64QAM	48/54
OFDM (802.11n-20/VHT20 MHz)	BPSK	6.5/7.2
	QPSK	13/19.5/14.4/21.7
	16QAM	26/39/28.9/43.3
	64QAM	52/58.5/65/57.8/65/72.2
OFDM (802.11n-40/VHT40 MHz)	BPSK	13.5/15
	QPSK	27/40.5/30/45
	16QAM	54/81/60/90
	64QAM	108/121.5/135/120/150

Note: Preliminary tests were performed in different data rate in above table to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	
Output Power	11b/11g/11n20/11n40/ VHT20/40	1/6/6.5/13.5/ 6.5/13.5 Mbps	1/6/11	3/6/9
Occupied Bandwidth	11b/11g/11n20/11n40/ VHT20/40	1/6/6.5/13.5/ 6.5/13.5 Mbps	1/6/11	3/6/9
Conducted Spurious Emission	11b/11g/11n20/11n40/ VHT20/40	1/6/6.5/13.5/ 6.5/13.5 Mbps	1/6/11	3/6/9
Conducted Emission	11b/11g/11n20/11n40/ VHT20/40	1/6/6.5/13.5/ 6.5/13.5 Mbps	1/6/11	3/6/9
Radiated Spurious Emission	11b/11g/11n20/11n40/ VHT20/40	1/6/6.5/13.5/ 6.5/13.5 Mbps	1/6/11	3/6/9
Band Edge	11b/11g/11n20/11n40/ VHT20/40	1/6/6.5/13.5/ 6.5/13.5 Mbps	1/6/11	3/6/9
Power spectral density (PSD)	11b/11g/11n20/11n40/ VHT20/40	1/6/6.5/13.5/ 6.5/13.5 Mbps	1/6/11	3/6/9

Note: The above EUT information in section 2.4 was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Intentional radiators of radio frequency equipment
2	ANSI C63.10-2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
3	KDB Publication 558074 D01v05r02	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES

3.2 Test Verdict

No.	Description	FCC PART No.	Test Result	Verdict
1	Antenna Requirement	15.203	N/A	Pass ^{Note 1}
2	Output Power	15.247 (b)	ANNEX A.1	Pass
3	Occupied Bandwidth	15.247 (a)	ANNEX A.2	Pass
4	Conducted Spurious Emission	15.247 (d)	ANNEX A.3	Pass
5	Band Edge(Authorized-band band-edge)	15.247 (d)	ANNEX A.4	Pass
6	Conducted Emission	15.207	ANNEX A.5	Pass
7	Radiated Spurious Emission	15.209; 15.247 (d)	ANNEX A.6	Pass
8	Band Edge(Restricted-band band-edge)	15.209; 15.247 (d)	ANNEX A.7	Pass
9	Power spectral density (PSD)	15.247 (e)	ANNEX A.8	Pass

Note 1: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	39% to 54%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+19.4℃ to +24.1℃
Working Voltage of the EUT	NV (Normal Voltage)	3.91 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-40	101544	2024.12.16	2025.12.15
Spectrum Analyzer	KEYSIGHT	N9020A	MY56060183	2024.08.01	2025.07.31
Spectrum Analyzer	KEYSIGHT	N9020A	MY52510065	2024.08.01	2025.07.31
Signaling Unit	ROHDE&SCHWARZ	CMW500	171150	2024.05.22	2025.05.21
Test Antenna-Horn	SCHWARZBECK	BBHA 9120D	01631	2022.02.23	2025.02.22
Test Antenna-Horn	A-INFO	LB-180400KF	J211060273	2024.06.15	2027.06.14
Anechoic Chamber	RAINFORD	9m*6m*6m	144	2022.02.19	2025.09.03
Amplifier	COM-MV	LSCX_LNA1-12G-01	180602	2024.08.01	2025.07.31
Amplifier	COM-MV	XKu_LNA7-18G-01	180601	2024.08.01	2025.07.31
Amplifier	COM-MV	KA LNA18 40G-01	18050001	2024.12.05	2025.12.04
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2024.08.01	2025.07.31
Test Antenna-Loop	SCHWARZBECK	FMZB 1519	1519-037	2024.01.23	2027.01.22
Amplifier	COM-MV	ZT30-1000M	B2018054558	2024.11.28	2025.11.27
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	130	2024.07.13	2027.07.12
EMI Receiver	Agilent	N9038A	MY55330120	2024.08.01	2025.07.31
Test Antenna-Bi-Log	SCHWARZBECK	VULB 9168	9168-00867	2022.04.12	2025.04.11
Amplifier	COM-MV	ZT30-1000M	B2017119081	2024.11.28	2025.11.27
Anechoic Chamber	YiHeng	9m*6m*6m	142	2024.07.21	2027.07.20
EMI Receiver	KEYSIGHT	N9010B	MY57110309	2024.08.01	2025.07.31
LISN	SCHWARZBECK	NSLK 8127	8127-687	2024.05.09	2025.05.08
Shielded Enclosure	YiHeng Electronic Co., Ltd	3.5m*3.1m*2.8m	112	2022.02.19	2025.02.18

4.3 Test Software List

Description	Manufacturer	Software Version	Serial No.	Applicable test Setup
BL410R	BALUN	V2.1.1.488	N/A	The section 4.5.1
BL410E	BALUN	V22.930	N/A	The section 4.5.2&4.5.3&4.5.4&4.5.5

4.4 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Parameters	Uncertainty
Occupied Channel Bandwidth	2.8%
RF output power, conducted	1.28 dB
Power Spectral Density, conducted	1.30 dB
Unwanted Emissions, conducted	1.84 dB
All emissions, radiated	5.36 dB
Temperature	0.8°C
Humidity	4%


4.5 Description of Test Setup

4.5.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)


For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

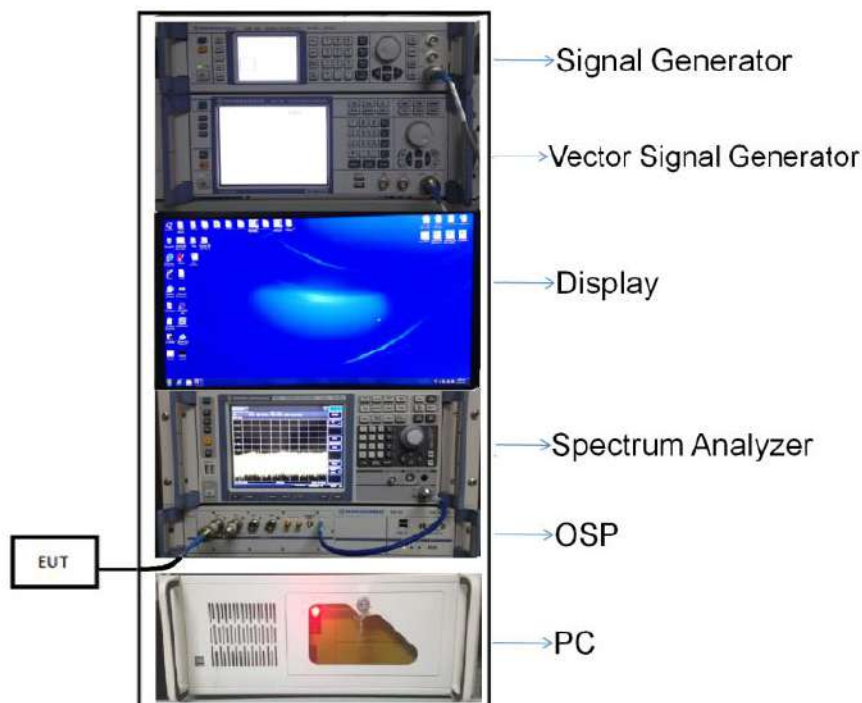


(Diagram 1)

4.5.2 For AC Power Supply Port Test

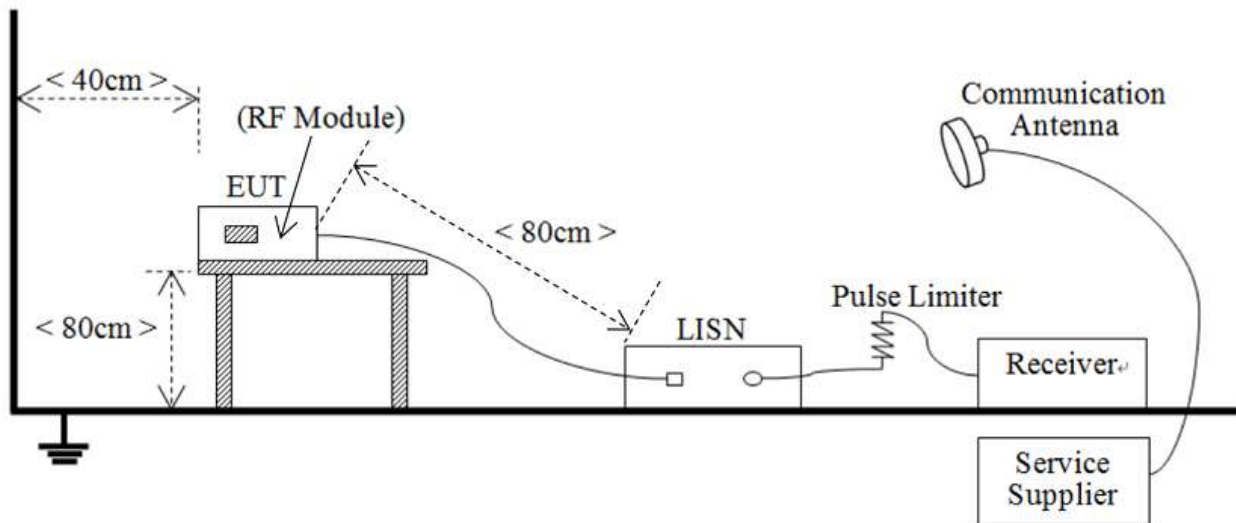


(Diagram 2)

4.5.3 For Radiated Test (Below 30 MHz)

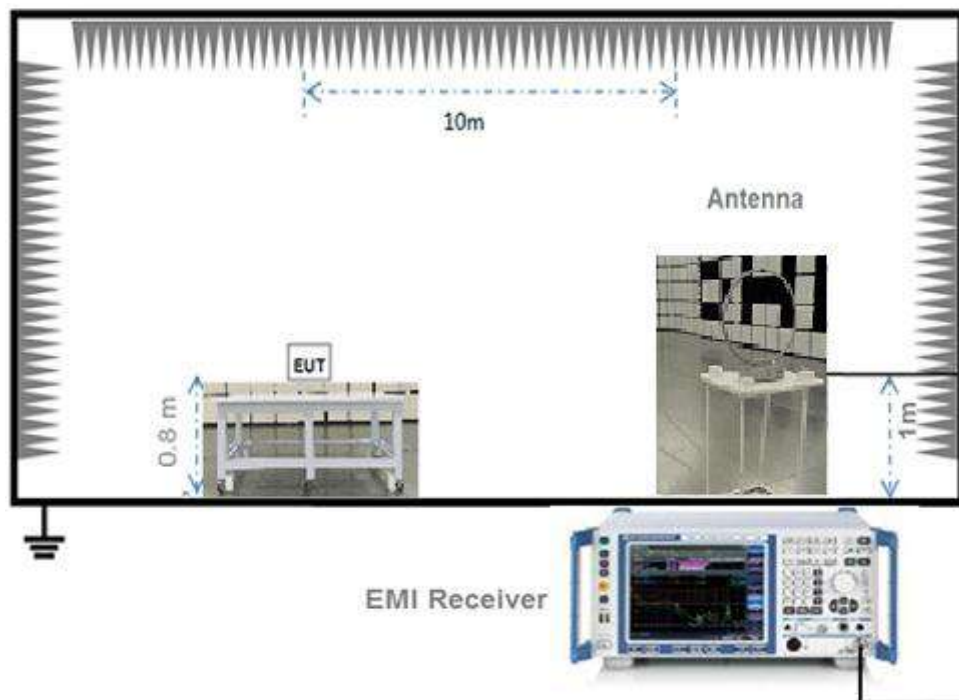


(Diagram 3)

4.5.4 For Radiated Test (30 MHz-1 GHz)

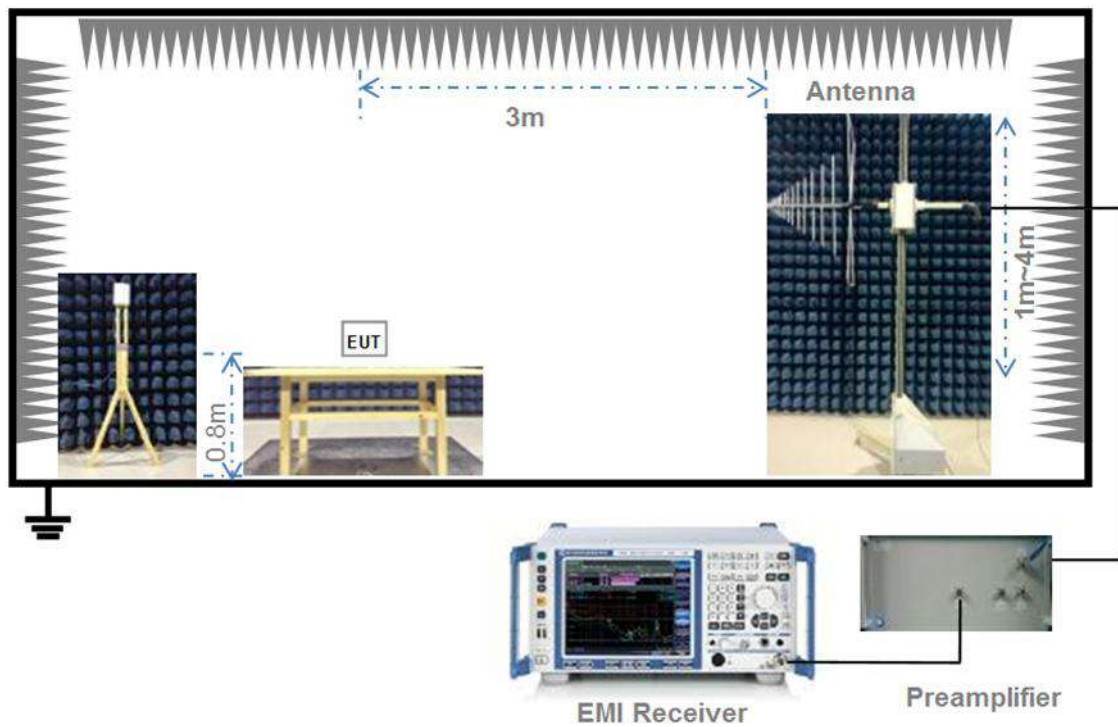

(Diagram 4)

4.5.5 For Radiated Test (Above 1 GHz)

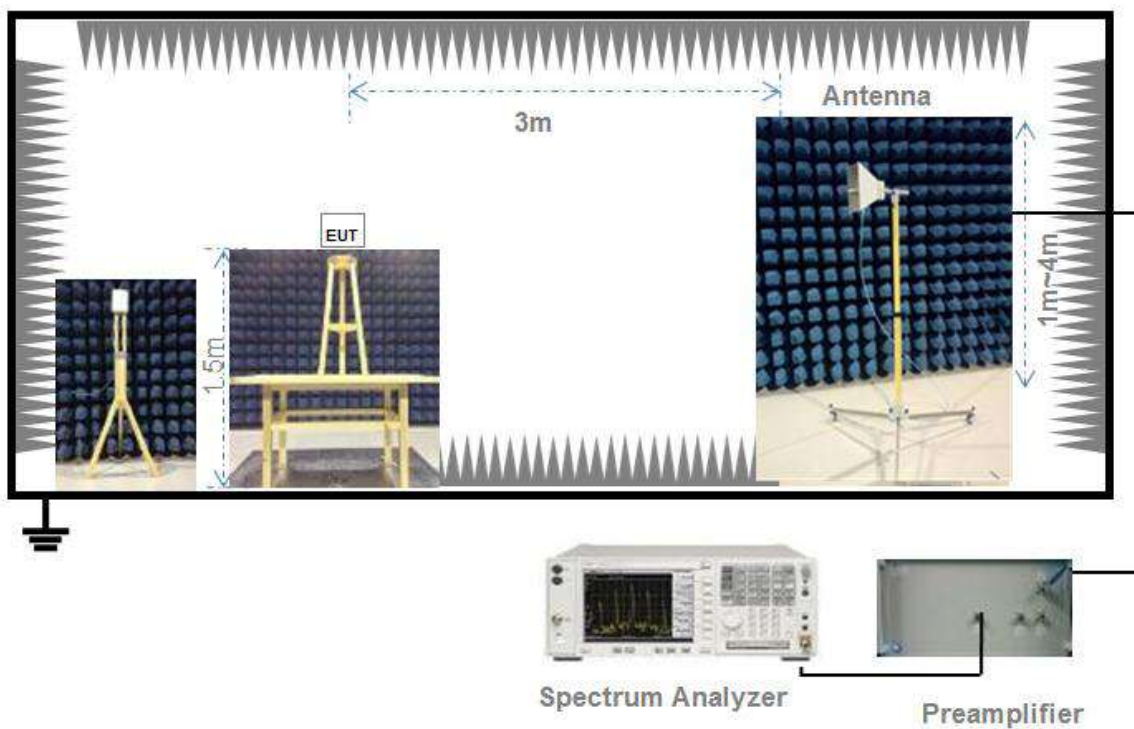

(Diagram 5)

4.6 Measurement Results Explanation Example

4.6.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

4.6.2 For radiated band edges and spurious emission test:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

EIRP = Measure Conducted output power Value (dBm) + Maximum transmit antenna gain (dBi) + the appropriate maximum ground reflection factor (dB)

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	An embedded-in antenna design is used.

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Output Power

5.2.1 Test Limit

FCC § 15.247(b)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements.

5.2.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.2.3 Test Procedure

Maximum peak conducted output power

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

The EUT shall be transmitted at its maximum power control level.

Maximum conducted (average) output power (Reporting Only)

a) As an alternative to spectrum analyzer or EMI receiver measurements, measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied.

- 1) The EUT is configured to transmit continuously, or to transmit with a constant duty factor.
 - 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
 - 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- b) If the transmitter does not transmit continuously, measure the duty cycle (x) of the transmitter output signal.
- c) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
- d) Adjust the measurement in dBm by adding $10\log(1/x)$, where x is the duty cycle.

Measurements of duty cycle

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between

bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal.

Set the center frequency of the instrument to the center frequency of the transmission.

Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.

Set $VBW \geq RBW$. Set detector = peak or average.

The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

5.2.4 Test Result

Please refer to ANNEX A.1.

5.3 Occupied Bandwidth

5.3.1 Limit

FCC §15.247(a)

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.

5.3.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

Use the following spectrum analyzer settings:

Set RBW = 100 kHz.

Set the video bandwidth (VBW) ≥ 3 RBW.

Detector = Peak.

Trace mode = max hold.

Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.3.4 Test Result

Please refer to ANNEX A.2.

5.4 Conducted Spurious Emission

5.4.1 Limit

FCC §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.4.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

The DTS rules specify that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

- a) If the maximum peak conducted output power procedure was used to demonstrate compliance as described in 9.1, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).
- b) If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).
- c) In either case, attenuation to levels below the 15.209 general radiated emissions limits is not required.

The following procedures shall be used to demonstrate compliance to these limits. Note that these procedures can be used in either an antenna-port conducted or radiated test set-up. Radiated tests must conform to the test site requirements and utilize maximization procedures defined herein.

Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to ≥ 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Emission level measurement

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

5.4.4 Test Result

Please refer to ANNEX A.3.

5.5 Band Edge (Authorized-band band-edge)

5.5.1 Limit

FCC §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.5.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

The following procedures may be used to determine the peak or average field strength or power of an unwanted emission that is within 2 MHz of the authorized band edge. If a peak detector is utilized, use the procedure described in 13.2.1. Use the procedure described in 13.2.2 when using an average detector and the EUT can be configured to transmit continuously (i.e., duty cycle $\geq 98\%$). Use the procedure described in 13.2.3 when using an average detector and the EUT cannot be configured to transmit continuously but the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent). Use the procedure described in 13.2.4 when using an average detector for those cases where the EUT cannot be configured to transmit continuously and the duty cycle is not constant (duty cycle variations equal or exceed 2 percent).

When using a peak detector to measure unwanted emissions at or near the band edge (within 2 MHz of the authorized band), the following integration procedure can be used.

Set instrument center frequency to the frequency of the emission to be measured (must be within 2 MHz of the authorized band edge).

Set span to 2 MHz

RBW = 100 kHz.

VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweep to continue until the trace stabilizes (required measurement time may increase for low duty cycle applications)

Compute the power by integrating the spectrum over 1 MHz using the analyzer's band power measurement function with band limits set equal to the emission frequency (femission) ± 0.5 MHz. If the instrument does not have a band power function, then sum the amplitude levels (in power units) at 100 kHz intervals extending across the 1 MHz spectrum defined by femission ± 0.5 MHz.

Standard method(The 99% OBW of the fundamental emission is without 2 MHz of the authorized band):

Span: Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products that fall outside of the authorized band of operation.

Reference level: As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW/RBW})]$ below the reference level. Specific guidance is given in 4.1.5.2.

Attenuation: Auto (at least 10 dB preferred).

Sweep time: Coupled.

Resolution bandwidth: 100 kHz.

Video bandwidth: 300 kHz.

Detector: Peak.

Trace: Max hold.

5.5.4 Test Result

Please refer to ANNEX A.4.

5.6 Conducted Emission

5.6.1 Limit

FCC §15.207

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.6.2 Test Setup

See section 4.5.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.6.4 Test Result

Please refer to ANNEX A.5.

5.7 Radiated Spurious Emission

5.7.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000 MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).

5.7.2 Test Setup

See section 4.5.3 to 4.5.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

Since the emission limits are specified in terms of radiated field strength levels, measurements performed to demonstrate compliance have traditionally relied on a radiated test configuration. Radiated measurements remain the principal method for demonstrating compliance to the specified limits; however antenna-port conducted measurements are also now acceptable to demonstrate compliance (see below for details). When radiated measurements are utilized, test site requirements and procedures for maximizing and measuring radiated emissions that are described in ANSI C63.10 shall be followed.

Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

General Procedure for conducted measurements in restricted bands

- a) Measure the conducted output power (in dBm) using the detector specified (see guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
- b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see guidance on determining the applicable antenna gain)
- c) Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).
- d) For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
- e) Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

- f) Compare the resultant electric field strength level to the applicable limit.
- g) Perform radiated spurious emission test.

Quasi-Peak measurement procedure

The specifications for measurements using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Frequency Interference (CISPR) of the International Electrotechnical Commission.

As an alternative to CISPR quasi-peak measurement, compliance can be demonstrated to the applicable emission limits using a peak detector.

Peak power measurement procedure

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 1.
- b) VBW $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be

longer for low duty cycle applications).

Table 1—RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Trace averaging across on and off times of the EUT transmissions followed by duty cycle correction

If continuous transmission of the EUT (i.e., duty cycle ≥ 98 percent) cannot be achieved and the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent), then the following procedure shall be used:

- a) The EUT shall be configured to operate at the maximum achievable duty cycle.
- b) Measure the duty cycle, x , of the transmitter output signal as described in section 6.0.
- c) RBW = 1 MHz (unless otherwise specified).
- d) VBW $\geq 3 \times$ RBW.
- e) Detector = RMS, if $\text{span}/(\# \text{ of points in sweep}) \leq (\text{RBW}/2)$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
- f) Averaging type = power (i.e., RMS).
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- g) Sweep time = auto.
- h) Perform a trace average of at least 100 traces.
- i) A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (RMS) mode was used in step f), then the applicable correction factor is $10 \log(1/x)$, where x is the duty cycle.
 - 2) If linear voltage averaging mode was used in step f), then the applicable correction factor is $20 \log(1/x)$, where x is the duty cycle.
 - 3) If a specific emission is demonstrated to be continuous (≥ 98 percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

NOTE: Reduction of the measured emission amplitude levels to account for operational duty factor is not permitted. Compliance is based on emission levels occurring during transmission - not on an average across on and off times of the transmitter.

Determining the applicable transmit antenna gain

A conducted power measurement will determine the maximum output power associated with a restricted band emission; however, in order to determine the associated EIRP level, the gain of the transmitting antenna (in dBi) must be added to the measured output power (in dBm).

Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.

See KDB 662911 for guidance on calculating the additional array gain term when determining the effective antenna gain for a EUT with multiple outputs occupying the same or overlapping frequency ranges in the same band.

Radiated spurious emission test

An additional consideration when performing conducted measurements of restricted band emissions is that unwanted emissions radiating from the EUT cabinet, control circuits, power leads, or intermediate circuit elements will likely go undetected in a conducted measurement configuration. To address this concern, a radiated test shall be performed to ensure that emissions emanating from the EUT cabinet (rather than the antenna port) also comply with the applicable limits.

For these cabinet radiated spurious emission measurements the EUT transmit antenna may be replaced with a termination matching the nominal impedance of the antenna. Procedures for performing radiated measurements are specified in ANSI C63.10. All detected emissions shall comply with the applicable limits.

The measurement frequency range is from 30 MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

5.7.4 Test Result

Please refer to ANNEX A.6.

5.8 Band Edge (Restricted-band band-edge)

5.8.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.8.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

For transmitters operating above 1 GHz repeat the measurement with an average detector.

5.8.4 Test Result

Please refer to ANNEX A.7.

5.9 Power Spectral density (PSD)

5.9.1 Limit

FCC §15.247(e)

The same method of determining the conducted output power shall be used to determine the power spectral density. If a peak output power is measured, then a peak power spectral density measurement is required. If an average output power is measured, then an average power spectral density measurement should be used.

5.9.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.

Set the VBW $\geq 3 \text{ RBW}$.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.9.4 Test Result

Please refer to ANNEX A.8.

ANNEX A TEST RESULT

A.1 Output Power

Duty Cycle

Test Mode	On Time (ms)	On+Off time (ms)	Duty Cycle	Duty Factor
802.11b	13.20	13.53	97.56%	0.11
802.11g	2.20	2.24	98.17%	0.08
802.11n-20 MHz	2.05	2.09	98.08%	0.08
802.11n-40 MHz	1.00	1.05	94.97%	0.22
VHT-20 MHz	2.05	2.09	98.09%	0.08
VHT-40 MHz	1.01	1.06	95.02%	0.22

Peak Power Test Data

802.11b Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH 1	21.85	153.11	30	1000	Pass
CH 6	22.46	176.20			Pass
CH 11	21.93	155.96			Pass

802.11g Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH 1	22.66	184.50	30	1000	Pass
CH 2	24.28	267.92			Pass
CH 6	24.80	302.00			Pass
CH 11	24.17	261.22			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH 1	22.95	197.24	30	1000	Pass
CH 2	23.55	226.46			Pass
CH 6	23.90	245.47			Pass
CH 11	23.61	229.61			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH 3	17.61	57.68	30	1000	Pass
CH 4	22.27	168.66			Pass
CH 5	23.44	220.80			Pass
CH 6	24.13	258.82			Pass
CH 7	23.02	200.45			Pass
CH 8	22.26	168.27			Pass
CH 9	20.77	119.40			Pass

VHT-20 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH 1	22.46	176.20	30	1000	Pass
CH 2	23.46	221.82			Pass
CH 6	23.93	247.17			Pass
CH 11	23.65	231.74			Pass

VHT-40 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH 3	19.16	82.41	30	1000	Pass
CH 4	22.35	171.79			Pass
CH 5	23.47	222.33			Pass
CH 6	24.02	252.35			Pass
CH 7	22.99	199.07			Pass
CH 8	22.28	169.04			Pass
CH 9	21.12	129.42			Pass

Average Power Test Data

802.11b Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH 1	18.74	18.74	30	1000	Pass
CH 6	19.36	19.36			Pass
CH 11	18.87	18.87			Pass

802.11g Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH 1	15.99	15.99	30	1000	Pass
CH 2	17.63	17.63			Pass
CH 6	18.12	18.12			Pass
CH 11	17.57	17.57			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH 1	16.29	16.29	30	1000	Pass
CH 2	16.84	16.84			Pass
CH 6	17.24	17.24			Pass
CH 11	16.95	16.95			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH 3	10.74	10.74	30	1000	Pass
CH 4	15.39	15.39			Pass
CH 5	16.54	16.54			Pass
CH 6	17.43	17.43			Pass
CH 7	16.06	16.06			Pass
CH 8	15.35	15.35			Pass
CH 9	13.85	13.85			Pass

VHT-20 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH 1	15.92	15.92	30	1000	Pass
CH 2	16.89	16.89			Pass
CH 6	17.30	17.30			Pass
CH 11	17.01	17.01			Pass

VHT-40 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH 3	12.25	12.25	30	1000	Pass
CH 4	15.45	15.45			Pass
CH 5	16.59	16.59			Pass
CH 6	17.21	17.21			Pass
CH 7	16.15	16.15			Pass
CH 8	15.37	15.37			Pass
CH 9	14.24	14.24			Pass

A.2 Occupied Bandwidth

Test Data

802.11b Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
CH 1	8.600000	13.952000	≥500
CH 6	9.100000	14.024000	≥500
CH 11	9.100000	13.924000	≥500

802.11g Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
CH 1	15.400000	17.136000	≥500
CH 6	15.700000	17.161000	≥500
CH 11	15.400000	17.120000	≥500

802.11n-20MHz Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
CH 1	15.200000	18.214000	≥500
CH 6	15.200000	18.276000	≥500
CH 11	15.800000	18.266000	≥500

802.11n-40MHz Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
CH 3	35.600000	36.267000	≥500
CH 6	35.500000	36.300000	≥500
CH 9	35.150000	36.237000	≥500

VHT-20 MHz Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
CH 1	15.200000	18.205000	≥500
CH 6	16.050000	18.260000	≥500
CH 11	15.200000	18.246000	≥500

VHT-40 MHz Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
CH 3	35.550000	36.310000	≥ 500
CH 6	36.050000	36.337000	≥ 500
CH 9	35.900000	36.258000	≥ 500

Test Plots

6 dB Bandwidth

802.11b LOW CHANNEL



802.11b MIDDLE CHANNEL



802.11b HIGH CHANNEL



802.11g LOW CHANNEL



802.11g MIDDLE CHANNEL



802.11g HIGH CHANNEL



802.11n-20 MHz LOW CHANNEL




802.11n-20 MHz MIDDLE CHANNEL




802.11n-20 MHz HIGH CHANNEL




802.11n-40 MHz LOW CHANNEL

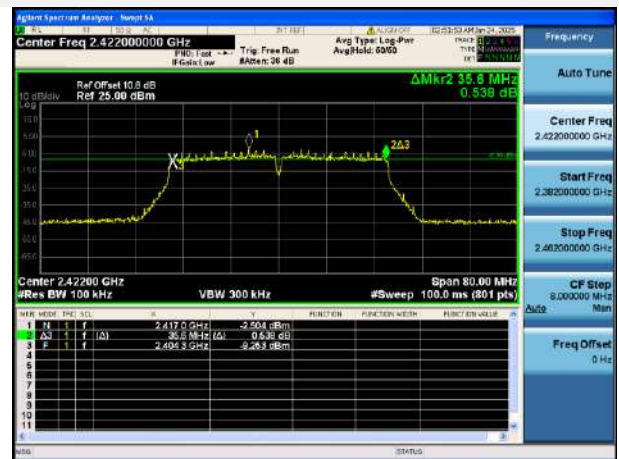

802.11n-40 MHz MIDDLE CHANNEL

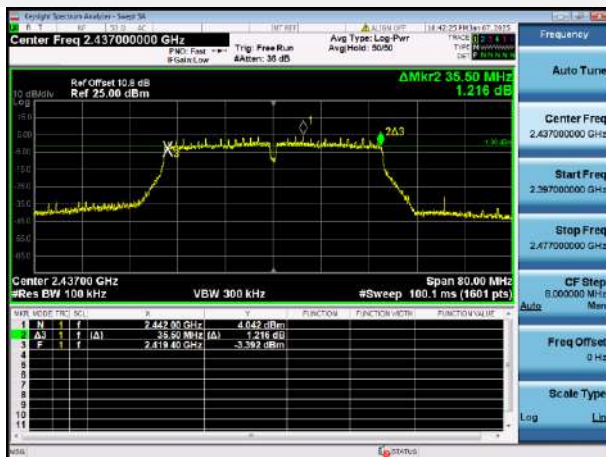

802.11n-40 MHz HIGH CHANNEL

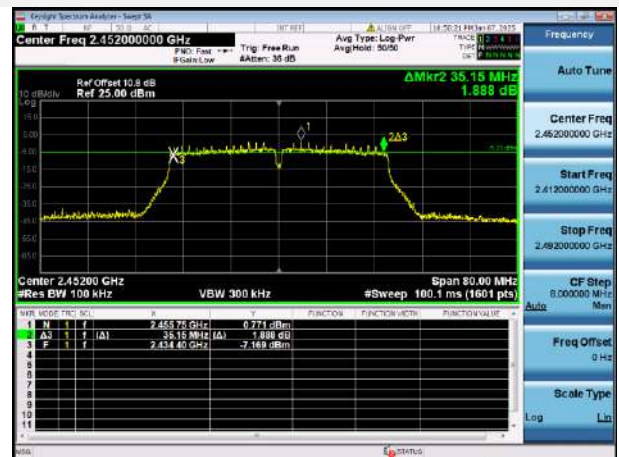

VHT-20 MHz LOW CHANNEL




VHT-20 MHz MIDDLE CHANNEL




VHT-20 MHz HIGH CHANNEL




VHT-40 MHz LOW CHANNEL

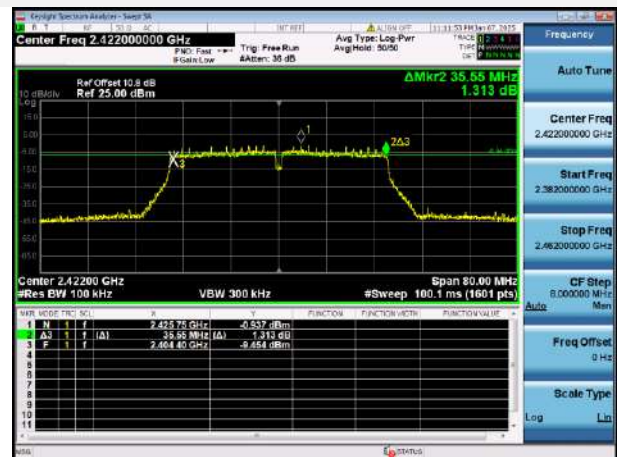

VHT-40 MHz MIDDLE CHANNEL

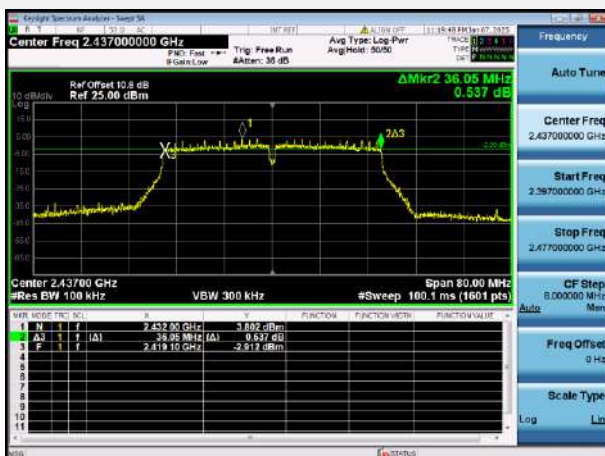

VHT-40 MHz HIGH CHANNEL

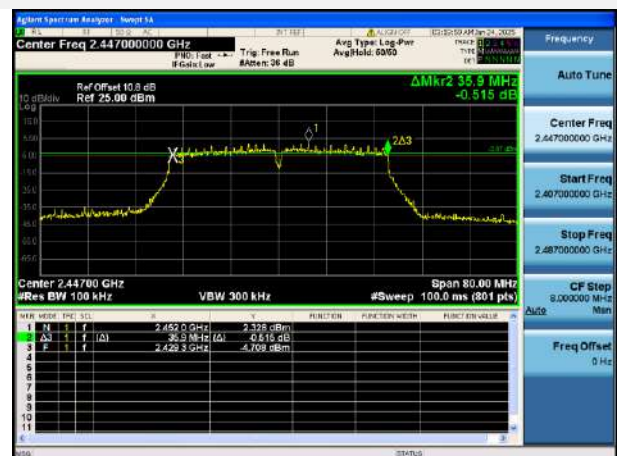

99% Bandwidth

802.11b LOW CHANNEL



802.11b MIDDLE CHANNEL



802.11b HIGH CHANNEL



802.11g LOW CHANNEL




802.11g MIDDLE CHANNEL



802.11g HIGH CHANNEL



802.11n-20 MHz LOW CHANNEL

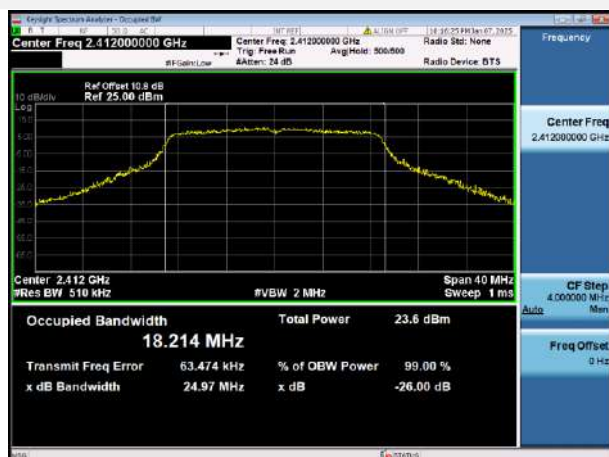

802.11n-20 MHz MIDDLE CHANNEL



802.11n-20 MHz HIGH CHANNEL



802.11n-40 MHz LOW CHANNEL



802.11n-40 MHz MIDDLE CHANNEL



802.11n-40 MHz HIGH CHANNEL



VHT-20 MHz LOW CHANNEL



VHT-20 MHz MIDDLE CHANNEL



VHT-20 MHz HIGH CHANNEL



VHT-40 MHz LOW CHANNEL



VHT-40 MHz MIDDLE CHANNEL



VHT-40 MHz HIGH CHANNEL



A.3 Conducted Spurious Emissions

Test Data

802.11b Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
CH 1	-36.07	10.60	-9.40	Pass
CH 6	-37.49	11.24	-8.76	Pass
CH 11	-38.49	10.48	-9.52	Pass

802.11g Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
CH 1	-38.50	6.35	-13.65	Pass
CH 2	-36.75	8.71	-11.29	Pass
CH 6	-37.54	9.07	-10.93	Pass
CH 11	-37.25	7.85	-12.15	Pass

802.11n-20MHz Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
CH 1	-37.07	6.71	-13.29	Pass
CH 2	-37.49	7.74	-12.26	Pass
CH 6	-36.93	8.42	-11.58	Pass
CH 11	-38.48	8.06	-11.94	Pass

802.11n-40MHz Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
CH 3	-37.00	-2.26	-22.26	Pass
CH 4	-37.19	2.26	-17.74	Pass
CH 5	-38.69	3.47	-16.53	Pass
CH 6	-37.54	4.23	-15.77	Pass
CH 7	-35.30	3.15	-16.85	Pass
CH 8	-37.11	2.53	-17.47	Pass
CH 9	-38.59	1.12	-18.88	Pass

VHT-20 MHz Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
CH 1	-37.58	7.04	-12.96	Pass
CH 2	-37.75	7.93	-12.08	Pass
CH 6	-37.91	8.20	-11.80	Pass
CH 11	-37.88	8.06	-11.94	Pass

VHT-40 MHz Mode:



Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
CH 3	-38.11	-0.81	-20.81	Pass
CH 4	-37.90	2.28	-17.72	Pass
CH 5	-38.78	3.50	-16.50	Pass
CH 6	-37.84	4.16	-15.84	Pass
CH 7	-37.65	3.15	-16.85	Pass
CH 8	-38.15	2.54	-17.46	Pass
CH 9	-41.12	1.42	-18.58	Pass

Test Plots

802.11b LOW CHANNEL CARRIER LEVEL




802.11b LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz 802.11b LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

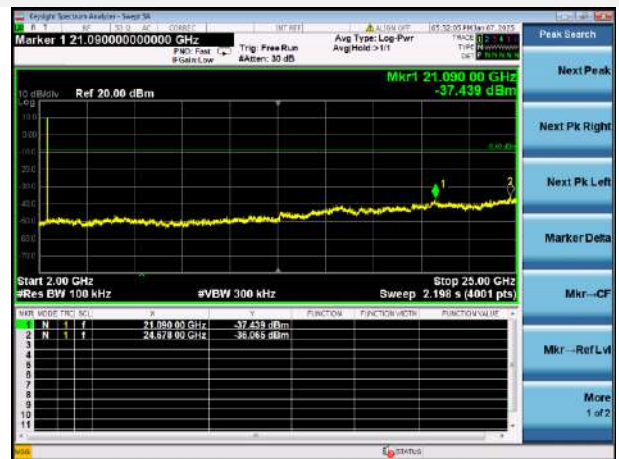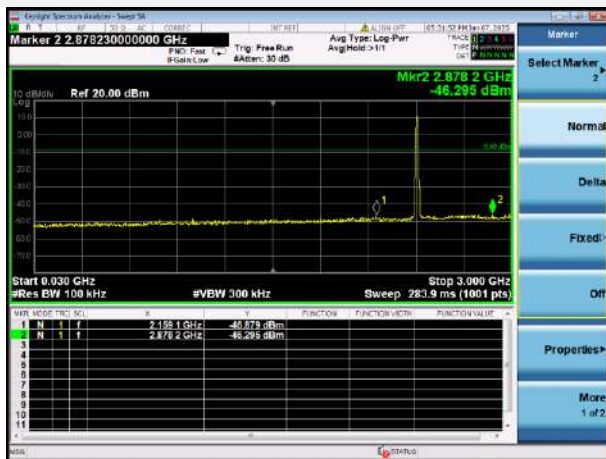


802.11b MIDDLE CHANNEL CARRIER LEVEL



802.11b MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

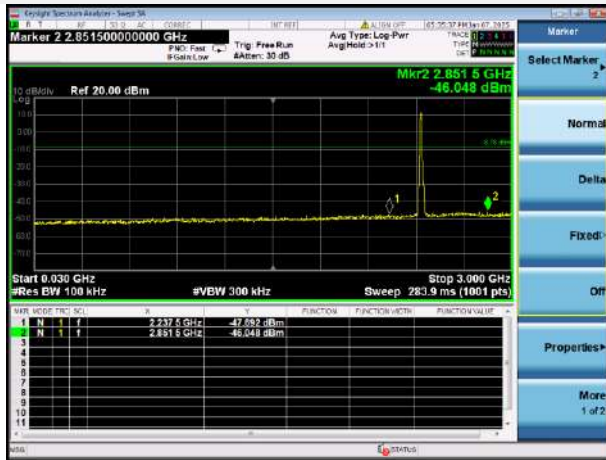


802.11b MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

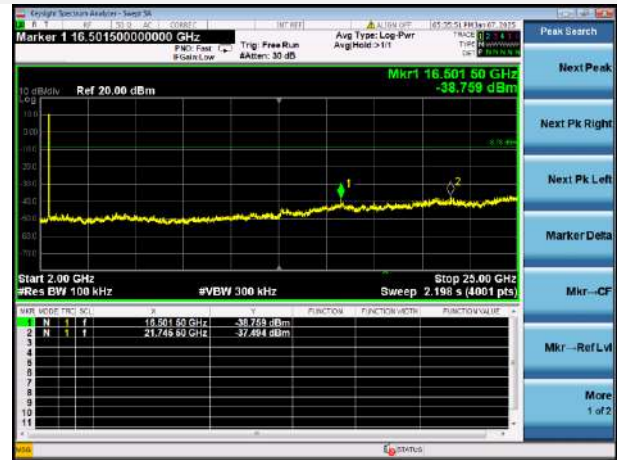

802.11b HIGH CHANNEL CARRIER LEVEL



802.11b HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

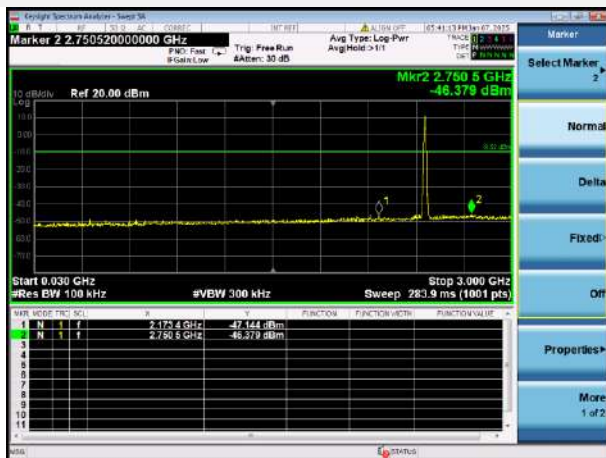



802.11b HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz



802.11g LOW CHANNEL CARRIER LEVEL




802.11g LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz 802.11g LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

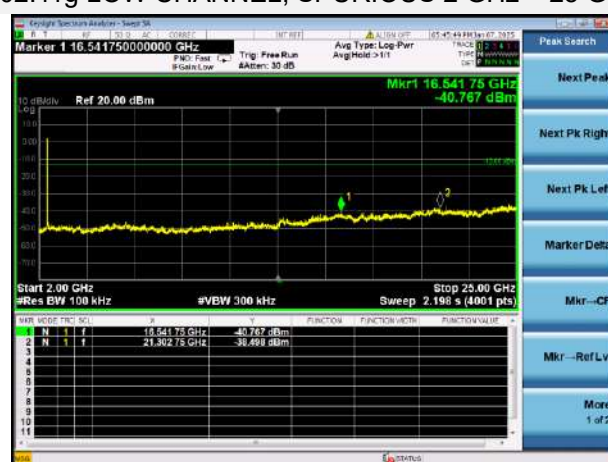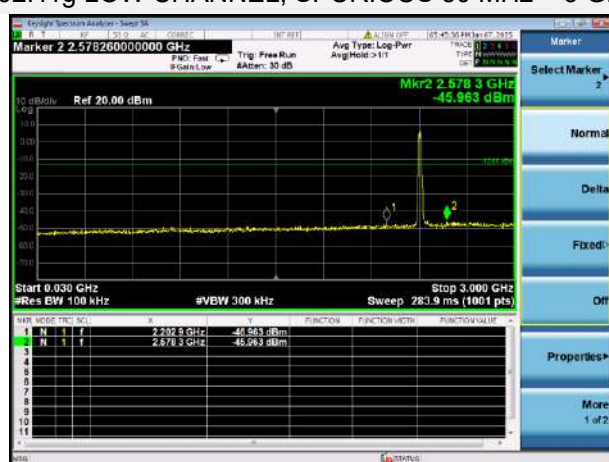


802.11g CHANNEL 2, CARRIER LEVEL



802.11g CHANNEL 2, SPURIOUS 30 MHz ~ 3 GHz

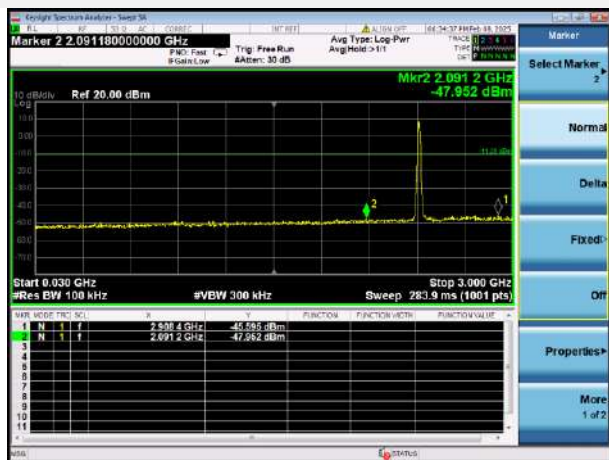


802.11g CHANNEL 2, SPURIOUS 2 GHz ~ 25 GHz

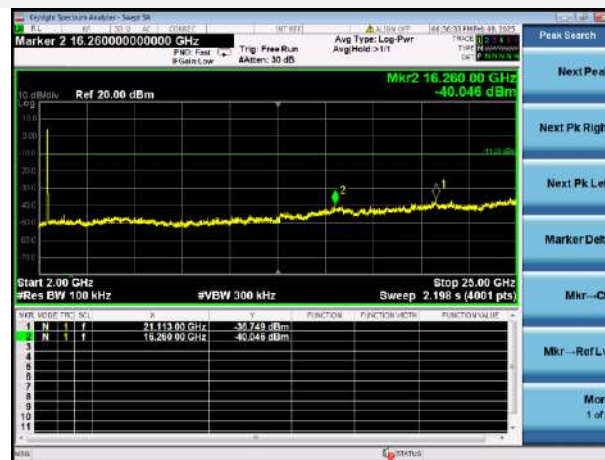


802.11g MIDDLE CHANNEL CARRIER LEVEL




802.11g MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

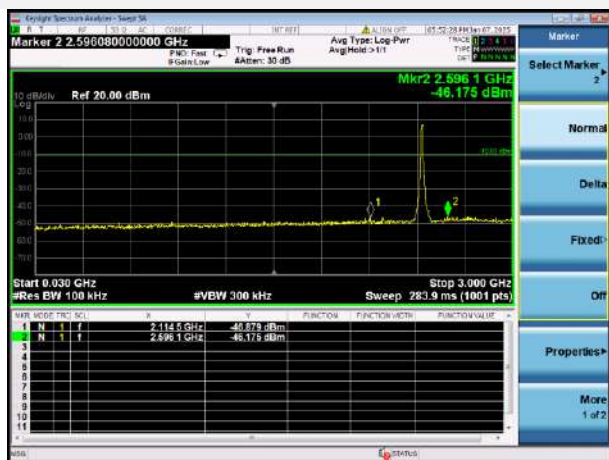


802.11g MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

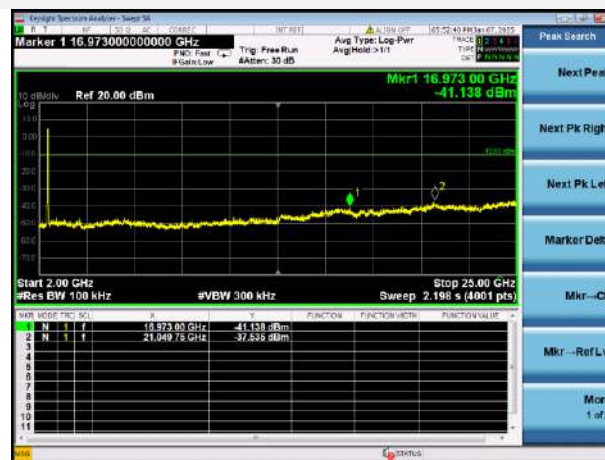


802.11g HIGH CHANNEL CARRIER LEVEL

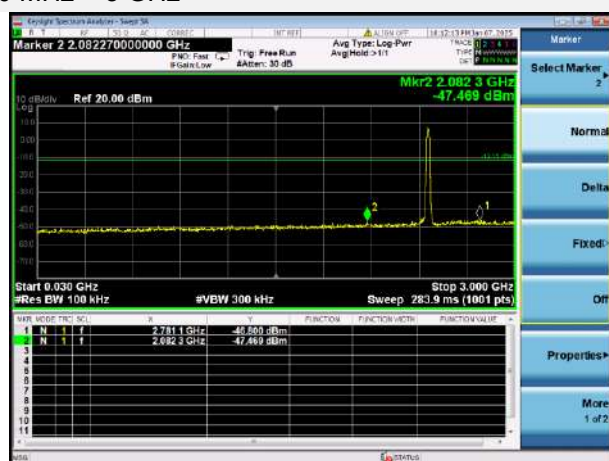802.11g HIGH CHANNEL, SPURIOUS
30 MHz ~ 3 GHz802.11g HIGH CHANNEL, SPURIOUS
2 GHz ~ 25 GHz

802.11n-20 MHz LOW CHANNEL CARRIER LEVEL

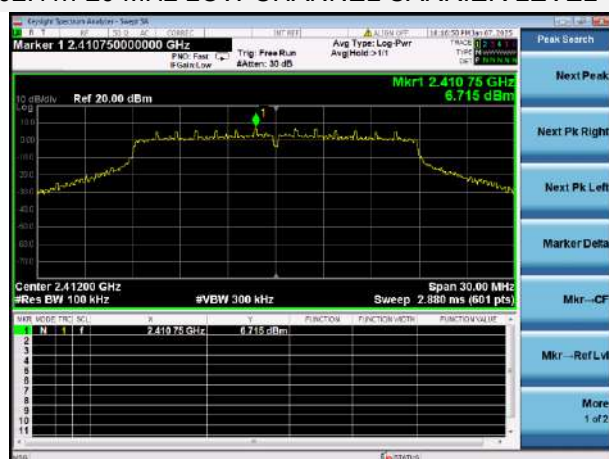


802.11n-20 MHz LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

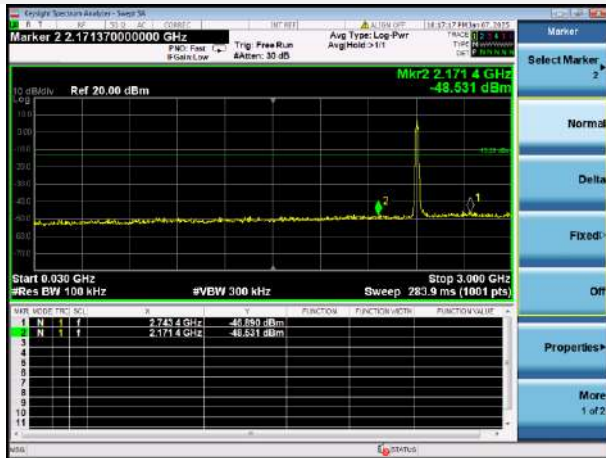


802.11n-20 MHz LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz



802.11n-20 MHz CHANNEL 2, CARRIER LEVEL

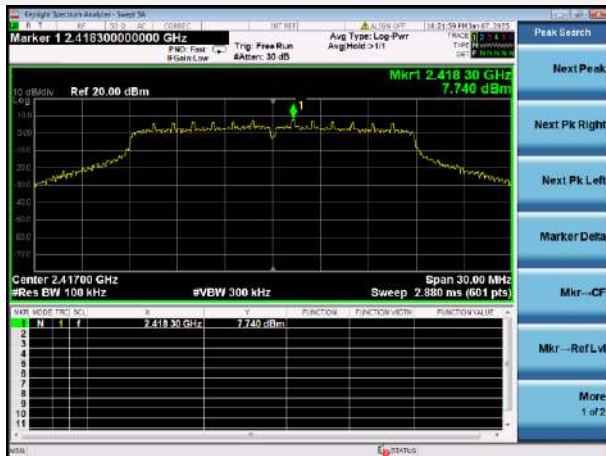



802.11n-20 MHz CHANNEL 2, SPURIOUS 30 MHz ~ 3 GHz

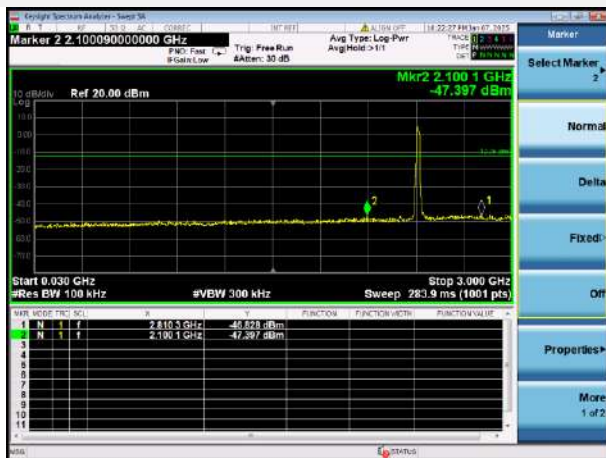


802.11n-20 MHz CHANNEL 2, SPURIOUS 2 GHz ~ 25 GHz




802.11n-20 MHz MIDDLE CHANNEL CARRIER LEVEL

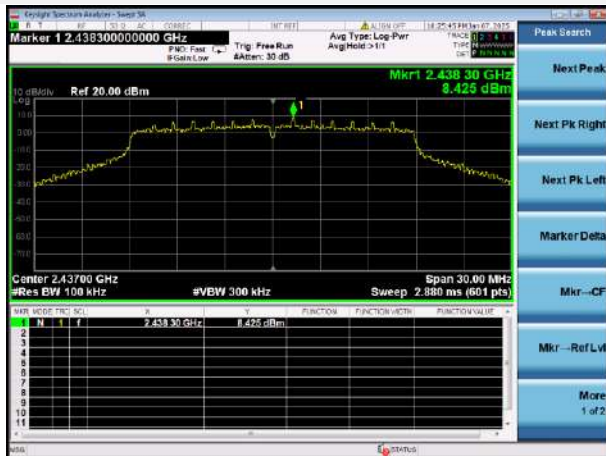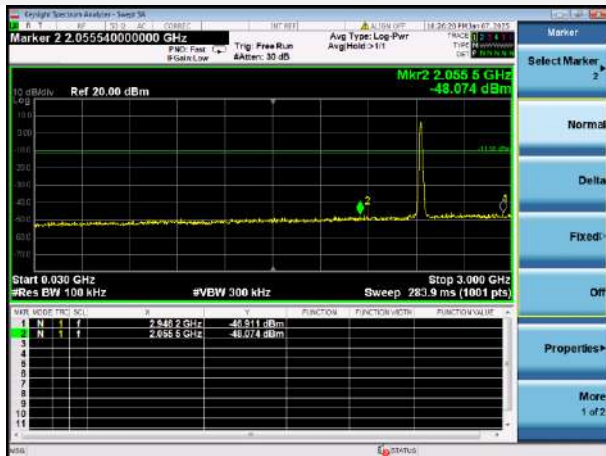802.11n-20 MHz MIDDLE CHANNEL, SPURIOUS
30 MHz ~ 3 GHz802.11n-20 MHz MIDDLE CHANNEL, SPURIOUS
2 GHz ~ 25 GHz


802.11n-20 MHz HIGH CHANNEL CARRIER LEVEL

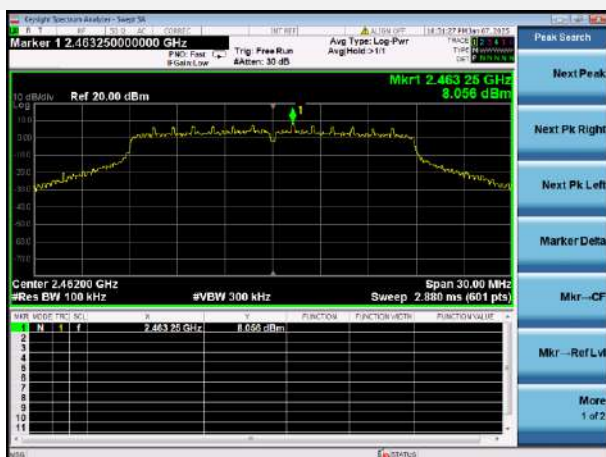


802.11n-20 MHz HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

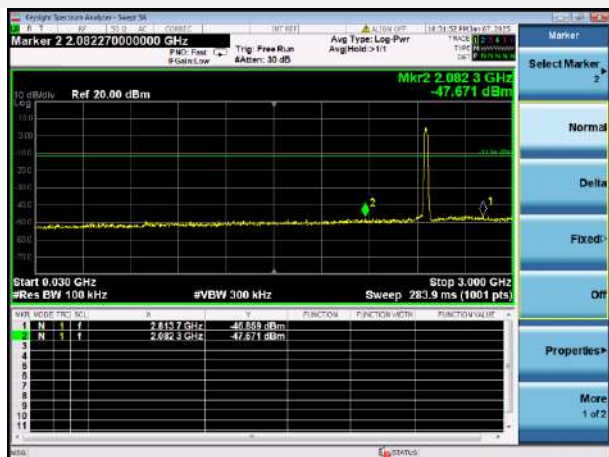


802.11n-20 MHz HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

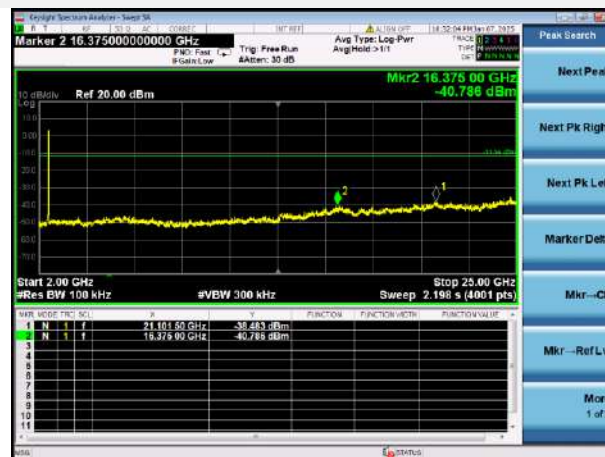


802.11n-40 MHz LOW CHANNEL CARRIER LEVEL

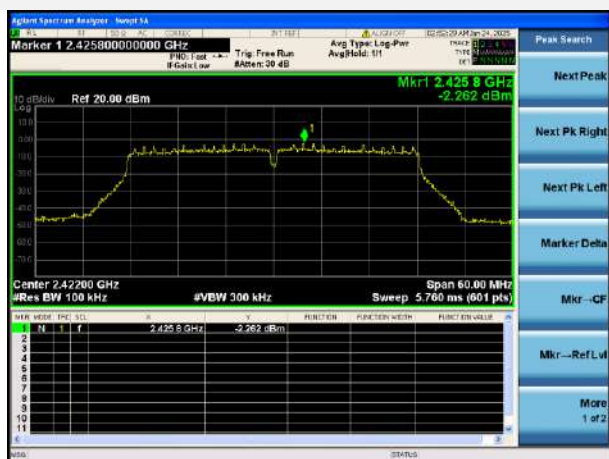




802.11n-40 MHz LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

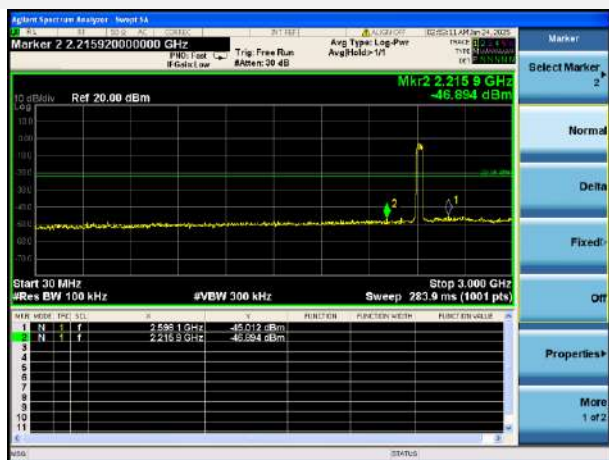


802.11n-40 MHz LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

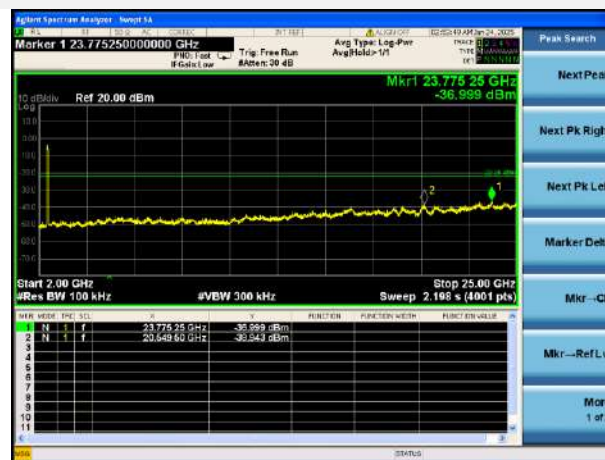


802.11n-40 MHz CHANNEL 4, CARRIER LEVEL

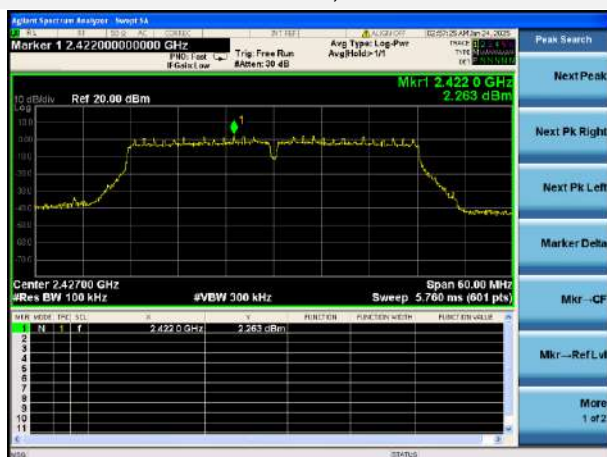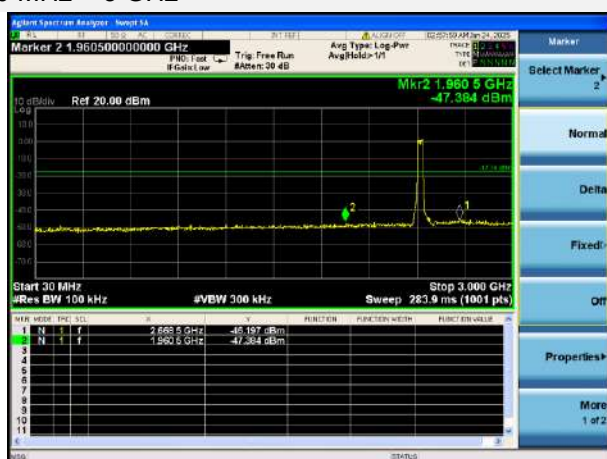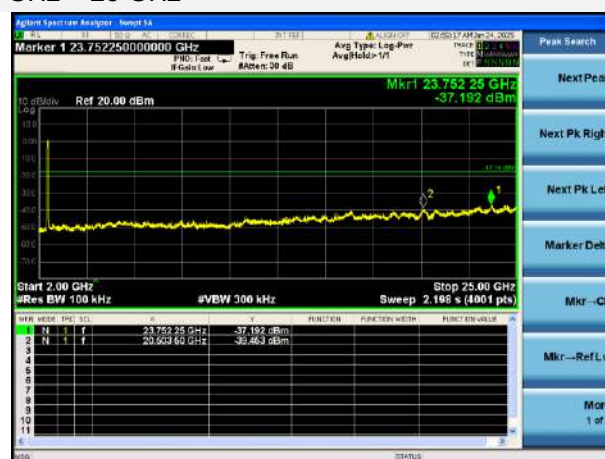802.11n-40 MHz CHANNEL 4, SPURIOUS
30 MHz ~ 3 GHz802.11n-40 MHz CHANNEL 4, SPURIOUS
2 GHz ~ 25 GHz


802.11n-40 MHz CHANNEL 5, CARRIER LEVEL

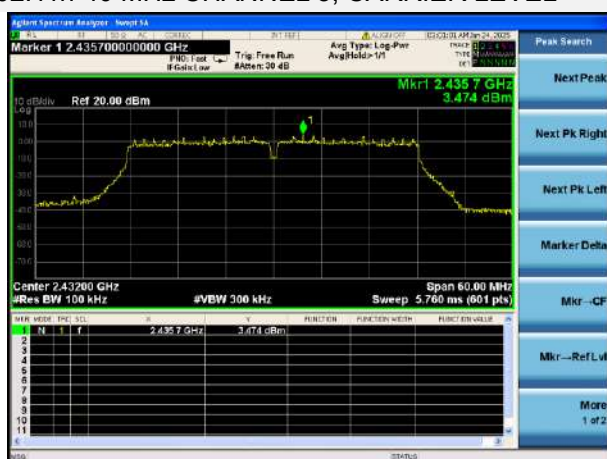


802.11n-40 MHz CHANNEL 5, SPURIOUS 30 MHz ~ 3 GHz

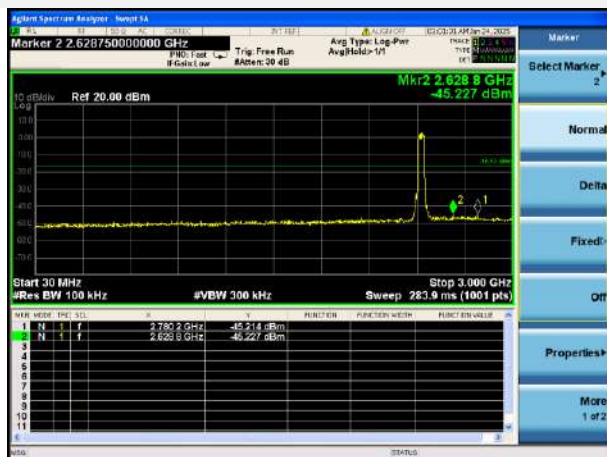


802.11n-40 MHz CHANNEL 5, SPURIOUS 2 GHz ~ 25 GHz

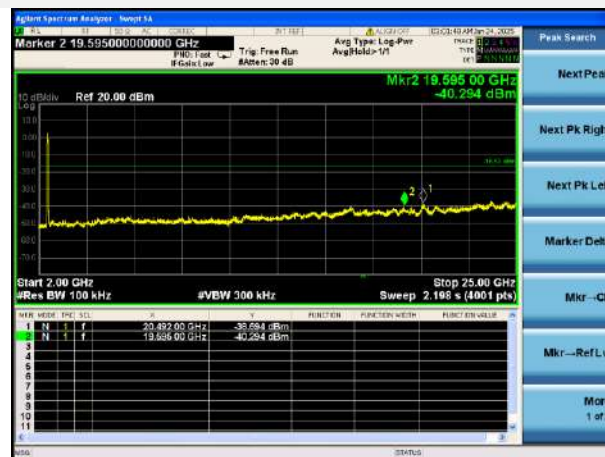


802.11n-40 MHz MIDDLE CHANNEL CARRIER LEVEL

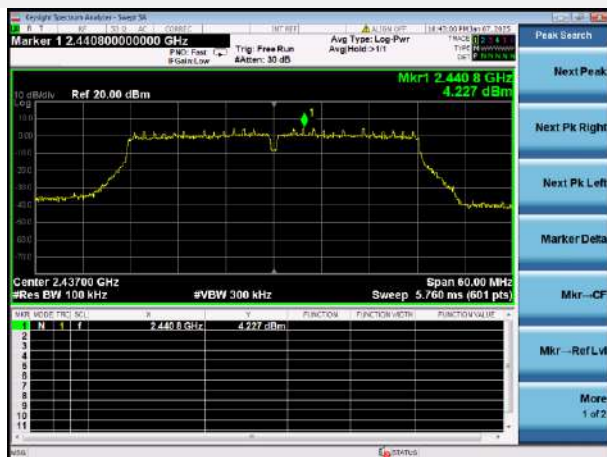



802.11n-40 MHz MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

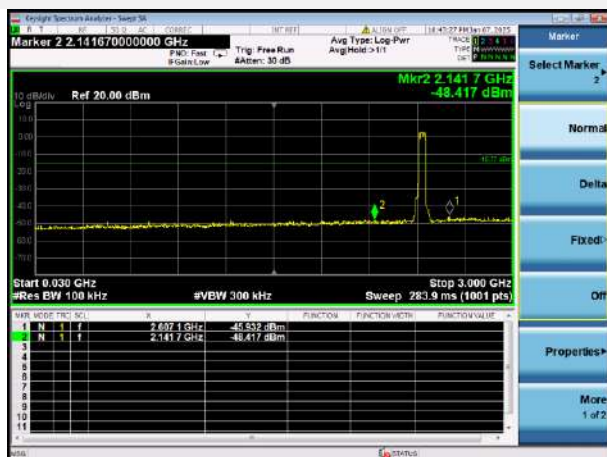


802.11n-40 MHz MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

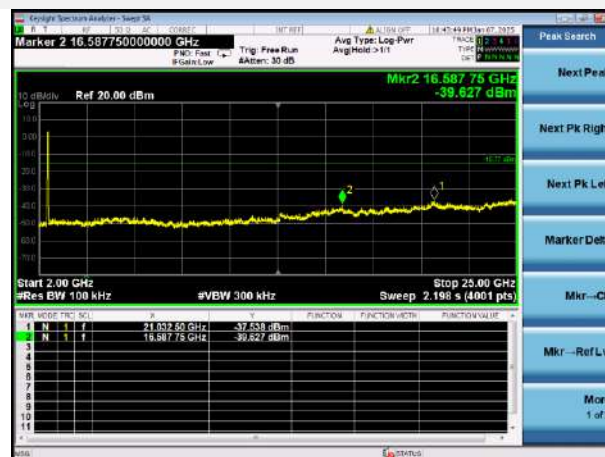


802.11n-40 MHz CHANNEL 7, CARRIER LEVEL

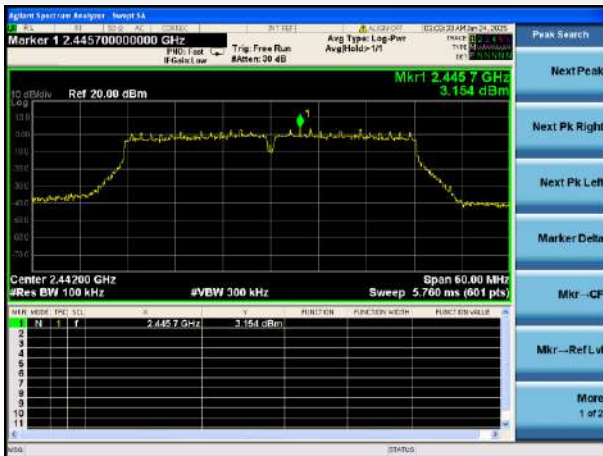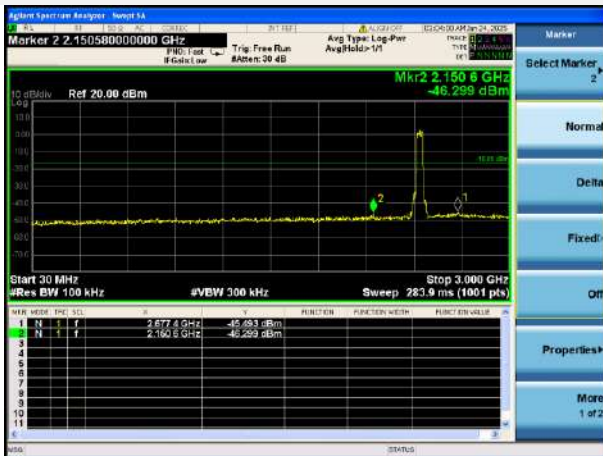802.11n-40 MHz CHANNEL 7, SPURIOUS
30 MHz ~ 3 GHz802.11n-40 MHz CHANNEL 7, SPURIOUS
2 GHz ~ 25 GHz


802.11n-40 MHz CHANNEL 8, CARRIER LEVEL

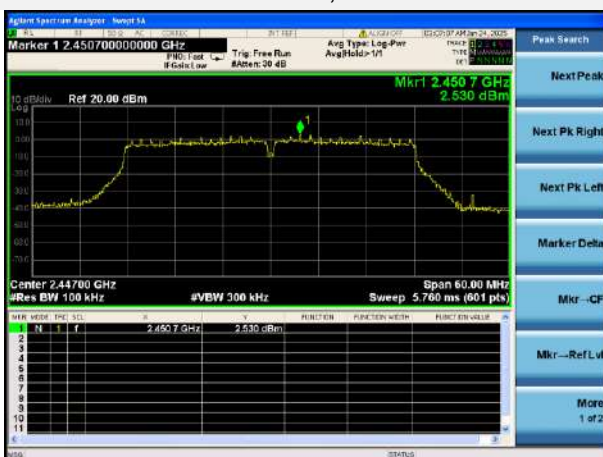


802.11n-40 MHz CHANNEL 8, SPURIOUS 30 MHz ~ 3 GHz

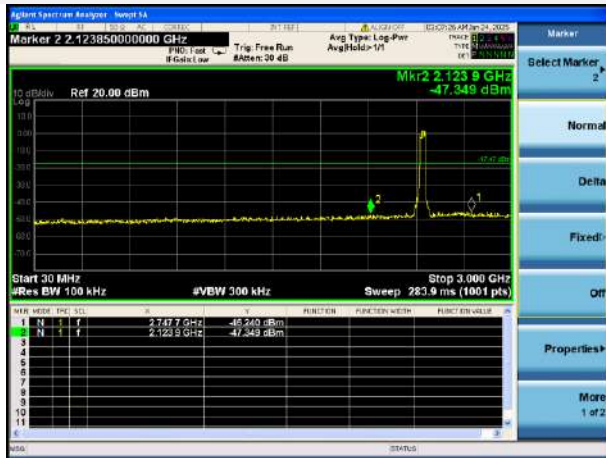


802.11n-40 MHz CHANNEL 8, SPURIOUS 2 GHz ~ 25 GHz

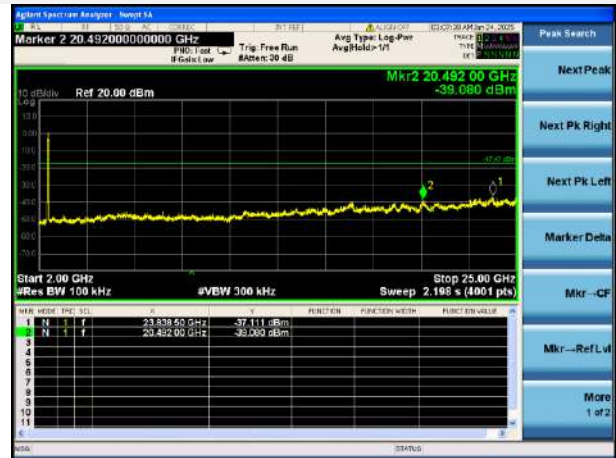

802.11n-40 MHz HIGH CHANNEL CARRIER LEVEL

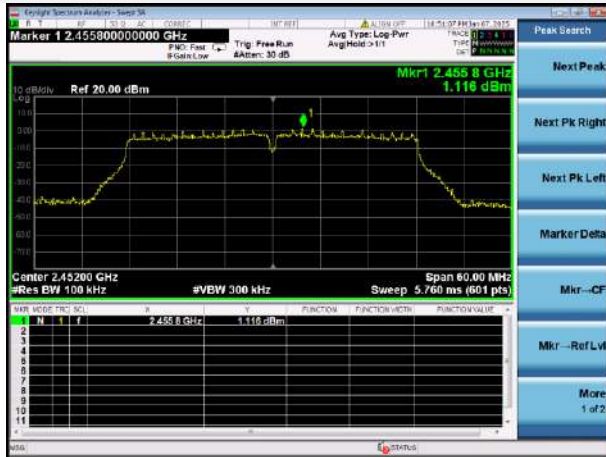




802.11n-40 MHz HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

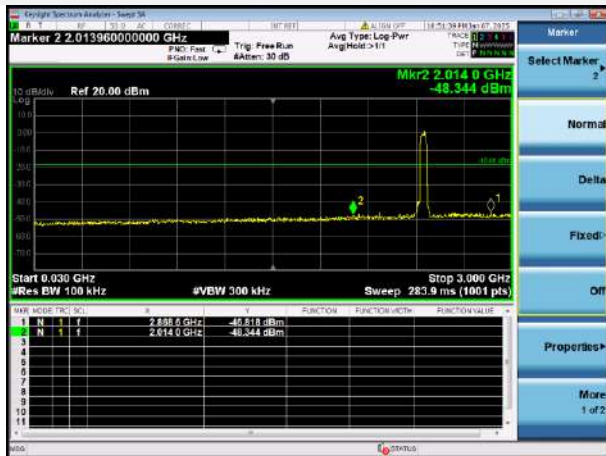


802.11n-40 MHz HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz




VHT-20 MHz LOW CHANNEL CARRIER LEVEL

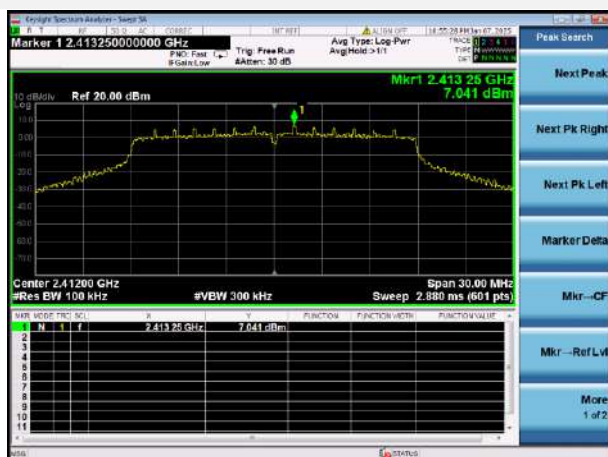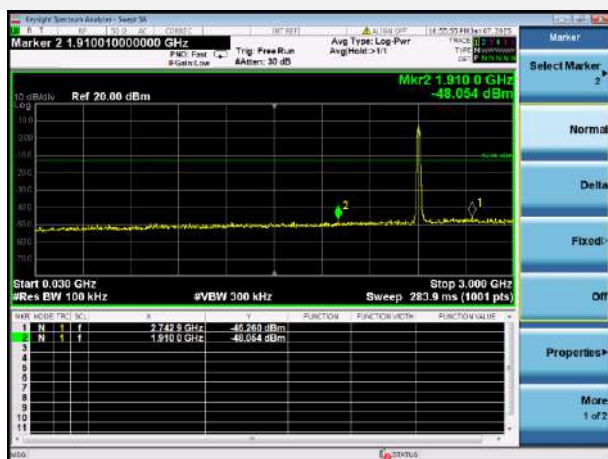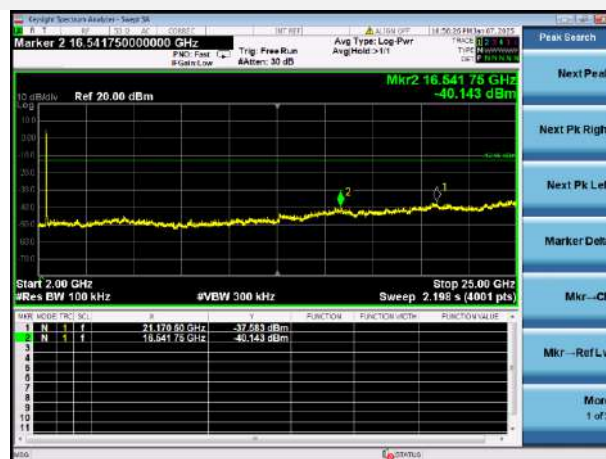VHT-20 MHz LOW CHANNEL, SPURIOUS
30 MHz ~ 3 GHzVHT-20 MHz LOW CHANNEL, SPURIOUS
2 GHz ~ 25 GHz


VHT-20 MHz CHANNEL 2, CARRIER LEVEL

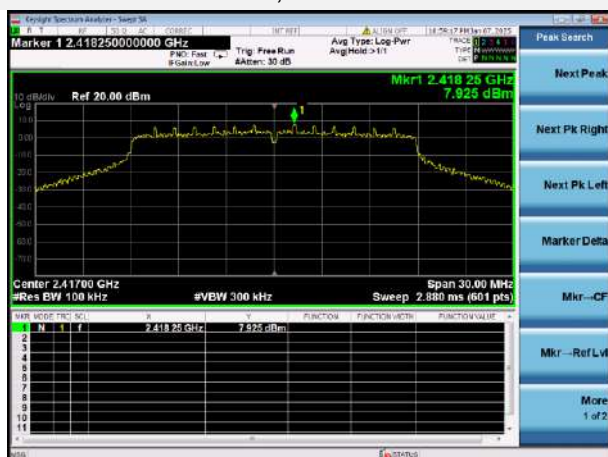


VHT-20 MHz CHANNEL 2, SPURIOUS 30 MHz ~ 3 GHz

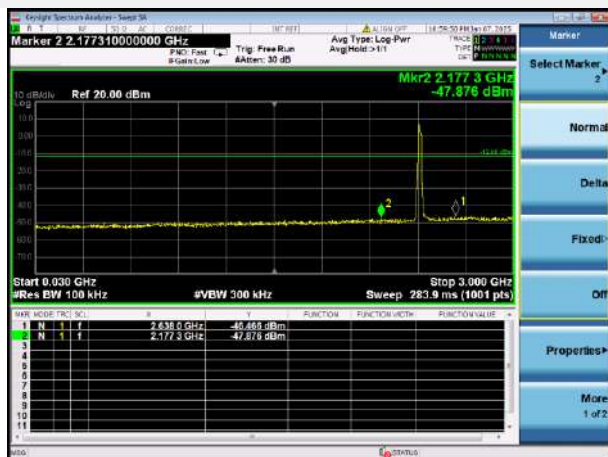


VHT-20 MHz CHANNEL 2, SPURIOUS 2 GHz ~ 25 GHz

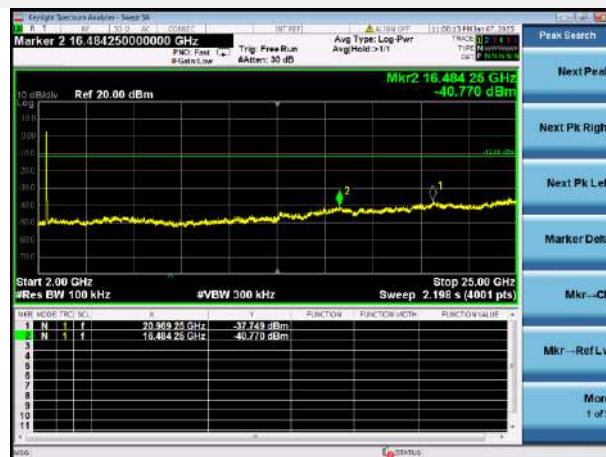


VHT-20 MHz MIDDLE CHANNEL CARRIER LEVEL

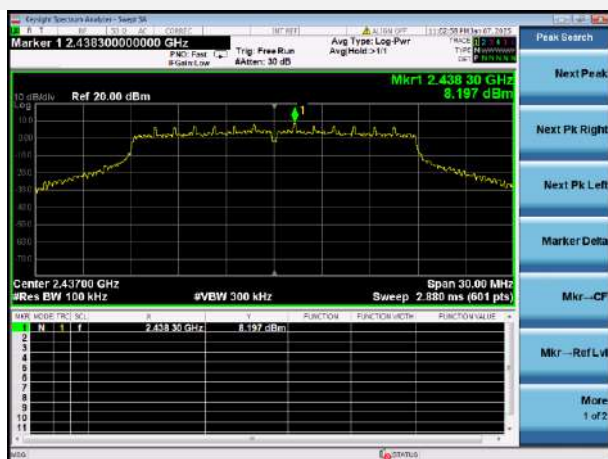




VHT-20 MHz MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

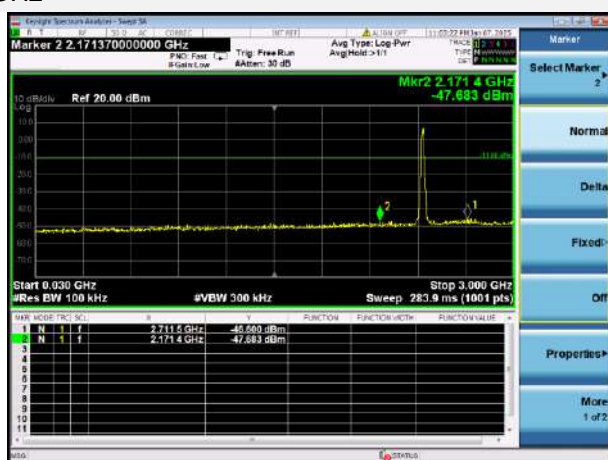


VHT-20 MHz MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

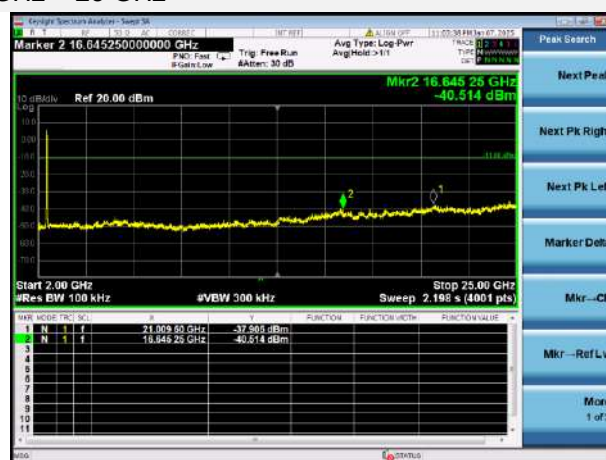


VHT-20 MHz HIGH CHANNEL CARRIER LEVEL

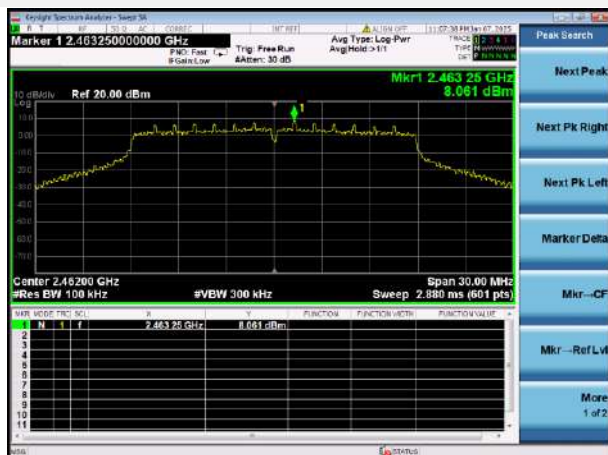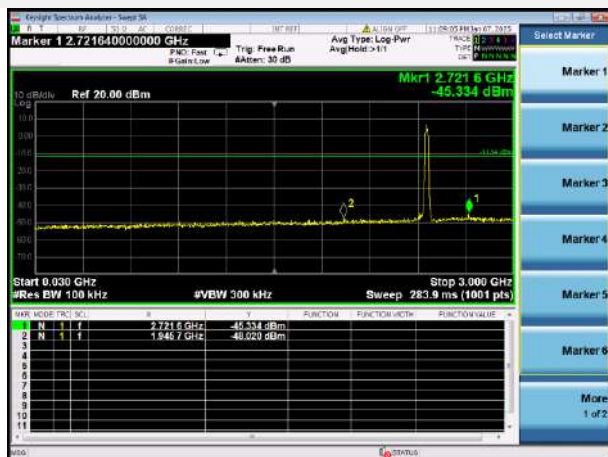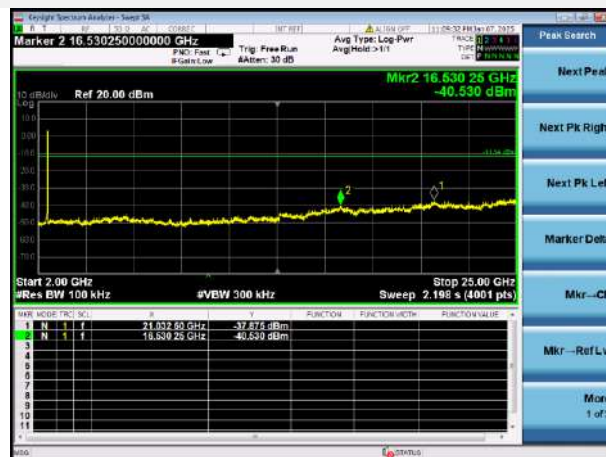VHT-20 MHz HIGH CHANNEL, SPURIOUS
30 MHz ~ 3 GHzVHT-20 MHz HIGH CHANNEL, SPURIOUS
2 GHz ~ 25 GHz


VHT-40 MHz LOW CHANNEL CARRIER LEVEL

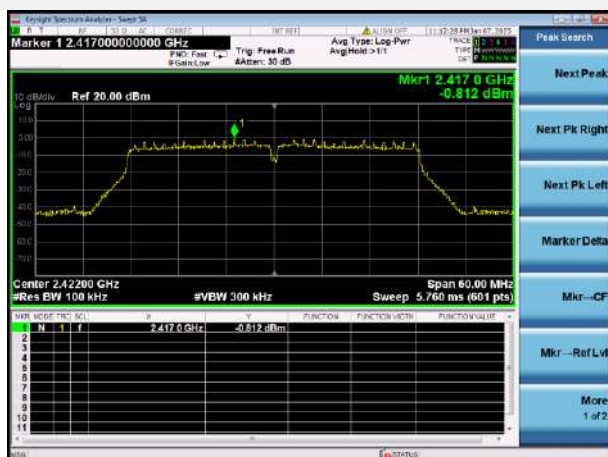


VHT-40 MHz LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

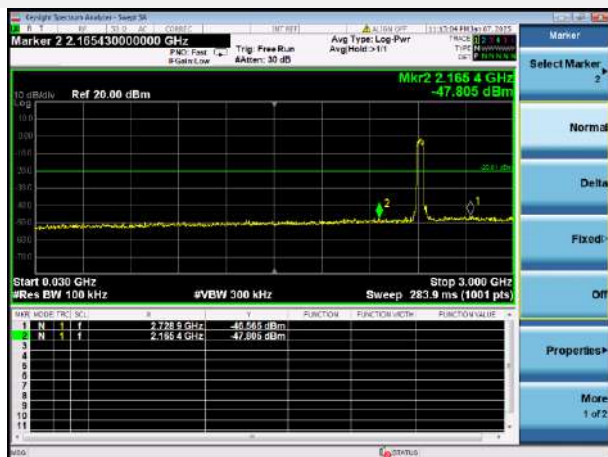


VHT-40 MHz LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

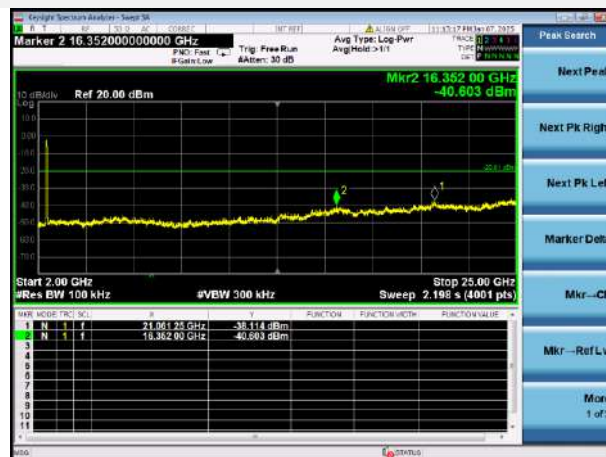


VHT-40 MHz CHANNEL 4, CARRIER LEVEL

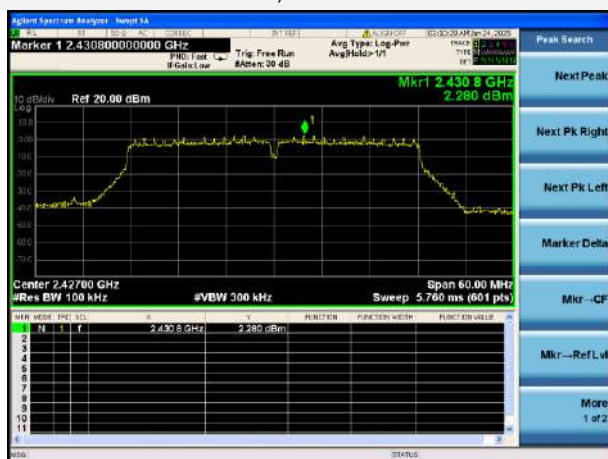




VHT-40 MHz CHANNEL 4, SPURIOUS 30 MHz ~ 3 GHz

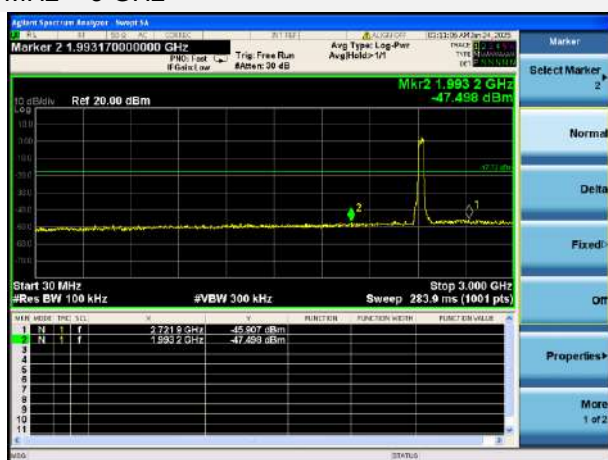


VHT-40 MHz CHANNEL 4, SPURIOUS 2 GHz ~ 25 GHz

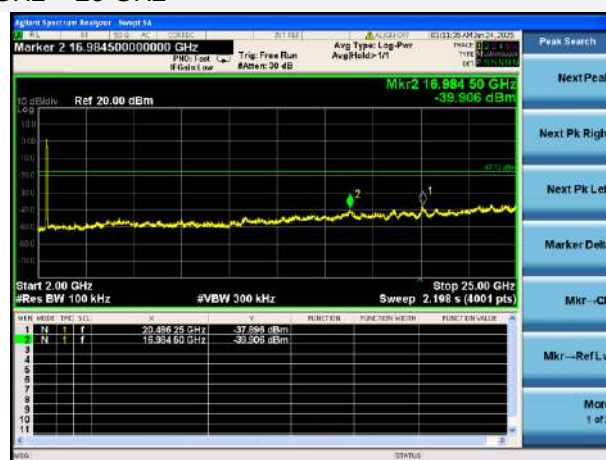


VHT-40 MHz CHANNEL 5, CARRIER LEVEL

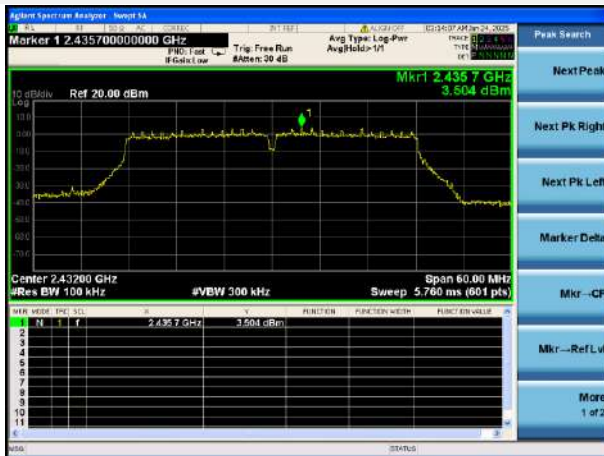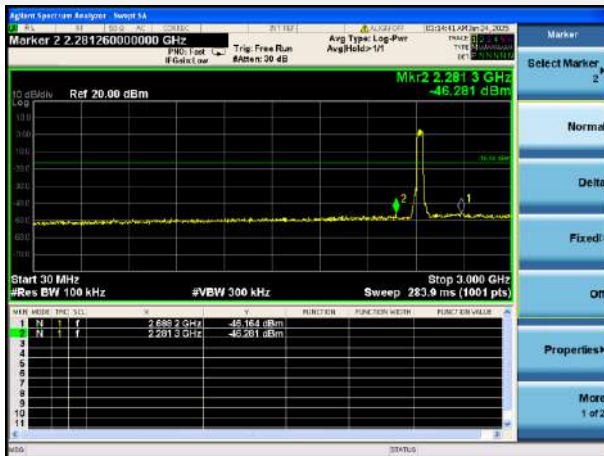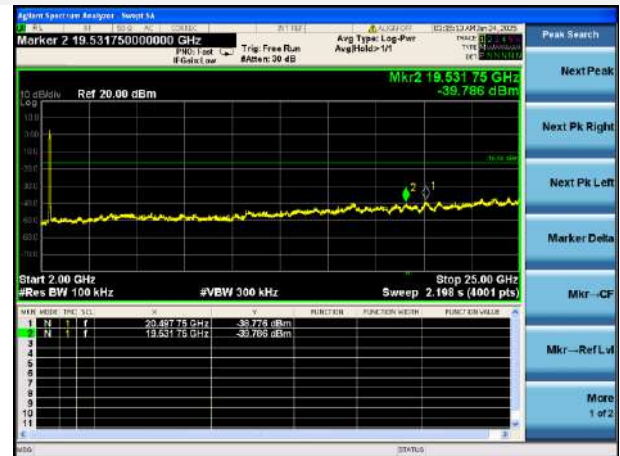VHT-40 MHz CHANNEL 5, SPURIOUS
30 MHz ~ 3 GHzVHT-40 MHz CHANNEL 5, SPURIOUS
2 GHz ~ 25 GHz

VHT-40 MHz MIDDLE CHANNEL CARRIER LEVEL

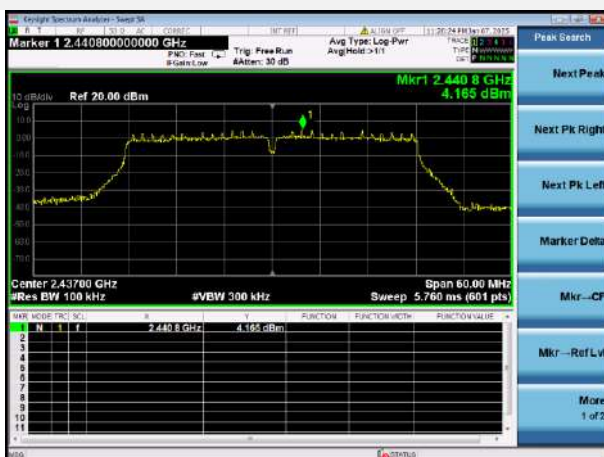


VHT-40 MHz MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

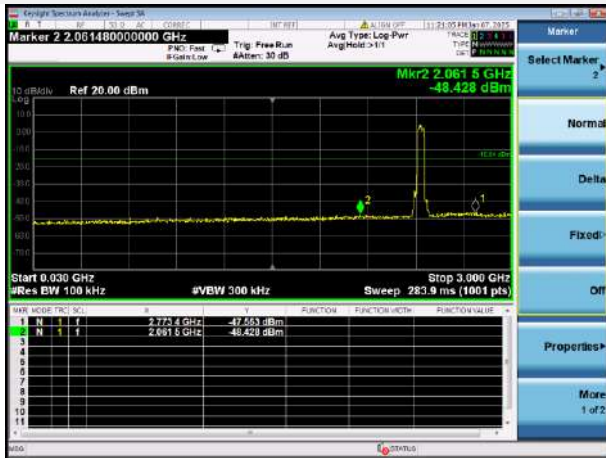


VHT-40 MHz MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz




VHT-40 MHz CHANNEL 7, CARRIER LEVEL

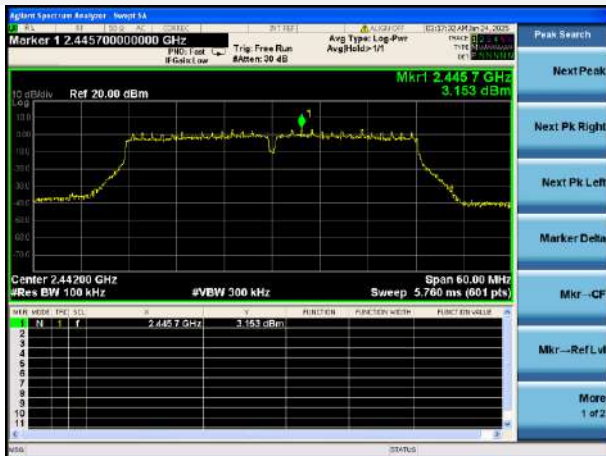



VHT-40 MHz CHANNEL 7, SPURIOUS 30 MHz ~ 3 GHz

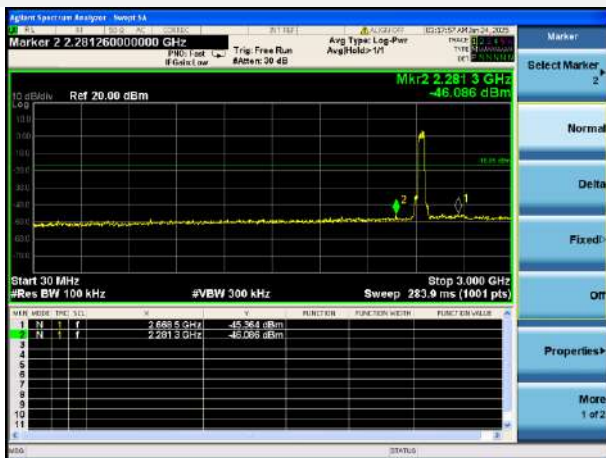


VHT-40 MHz CHANNEL 7, SPURIOUS 2 GHz ~ 25 GHz

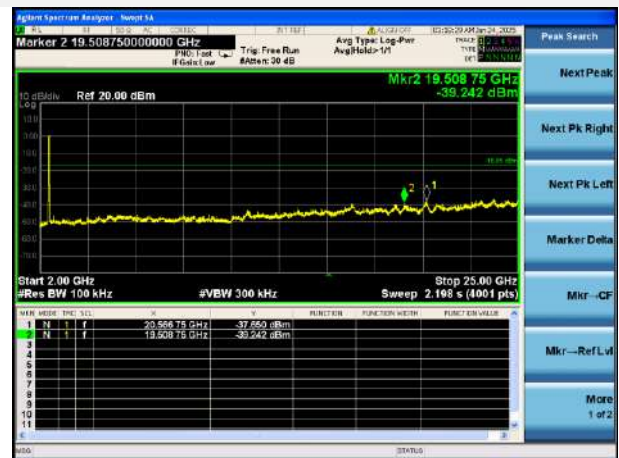


VHT-40 MHz CHANNEL 8, CARRIER LEVEL

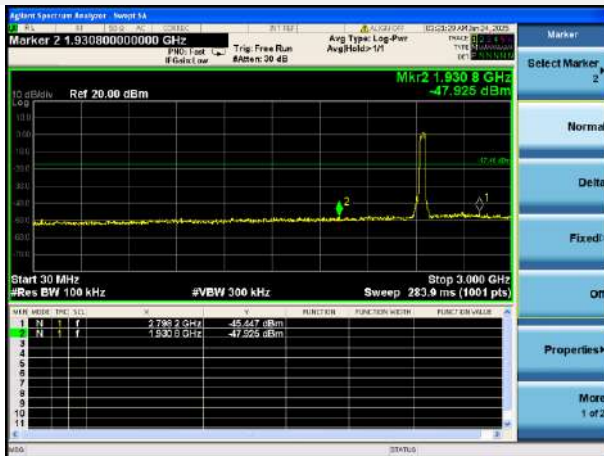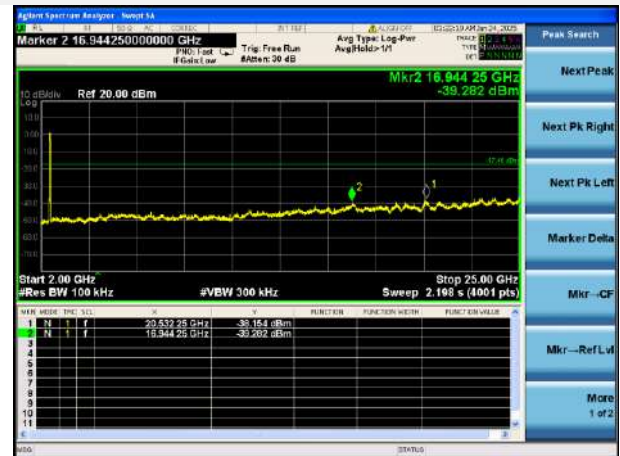VHT-40 MHz CHANNEL 8, SPURIOUS
30 MHz ~ 3 GHzVHT-40 MHz CHANNEL 8, SPURIOUS
2 GHz ~ 25 GHz

VHT-40 MHz HIGH CHANNEL CARRIER LEVEL

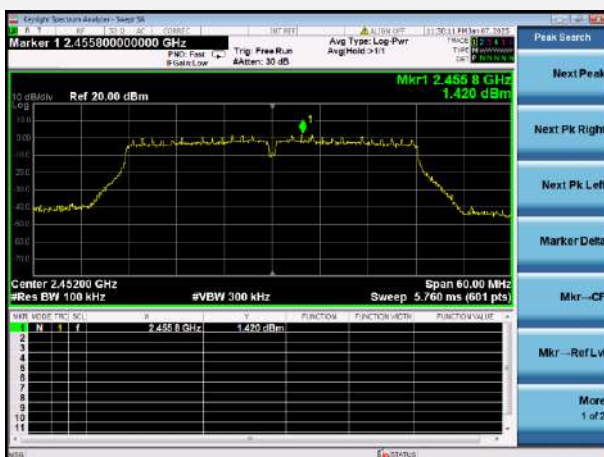

VHT-40 MHz HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

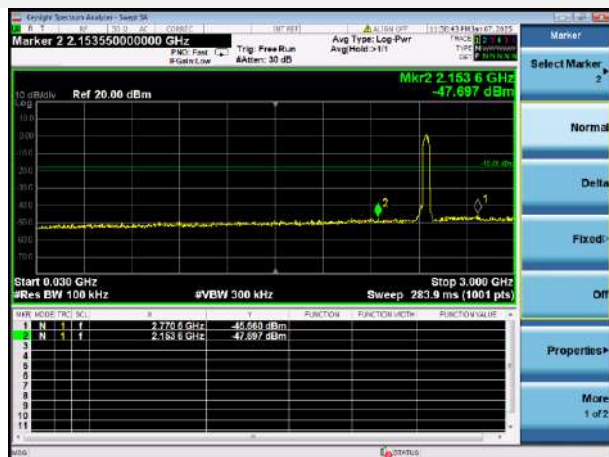

VHT-40 MHz HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz



A.4 Band Edge (Authorized-band band-edge)

Note ¹: The 99% OBW of the fundamental emission is without 2 MHz of the authorized band.

Test Data

802.11b Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
CH 1	-32.90	10.60	-9.40	Pass
CH 11	-47.50	10.48	-9.52	Pass

802.11g Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
CH 1	-22.31	6.35	-13.65	Pass
CH 2	-33.62	8.71	-11.29	Pass
CH 11	-43.91	7.86	-12.15	Pass

802.11n-20 MHz Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
CH 1	-22.31	6.35	-13.65	Pass
CH 2	-33.62	8.71	-11.29	Pass
CH 11	-43.91	7.86	-12.15	Pass

802.11n-40 MHz Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
CH 3	-39.31	-2.26	-22.26	Pass
CH 4	-32.67	2.26	-17.74	Pass
CH 5	-33.68	3.47	-16.53	Pass
CH 7	-44.86	3.15	-16.85	Pass
CH 8	-39.33	2.53	-17.47	Pass
CH 9	-41.73	1.12	-18.88	Pass

VHT-20 MHz Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
CH 1	-23.20	7.04	-12.96	Pass
CH 2	-33.15	7.93	-12.08	Pass
CH 11	-41.89	8.06	-11.94	Pass

VHT-40 MHz Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
CH 3	-36.33	-0.81	-20.81	Pass
CH 4	-34.76	2.28	-17.72	Pass
CH 5	-32.86	3.50	-16.50	Pass
CH 7	-44.68	3.15	-16.85	Pass
CH 8	-39.06	2.54	-17.46	Pass
CH 9	-43.81	1.42	-18.58	Pass

Test Plots

802.11b LOW CHANNEL, CARRIER LEVEL




802.11b LOW CHANNEL, BAND EDGE




802.11b HIGH CHANNEL, CARRIER LEVEL



802.11b HIGH CHANNEL, BAND EDGE

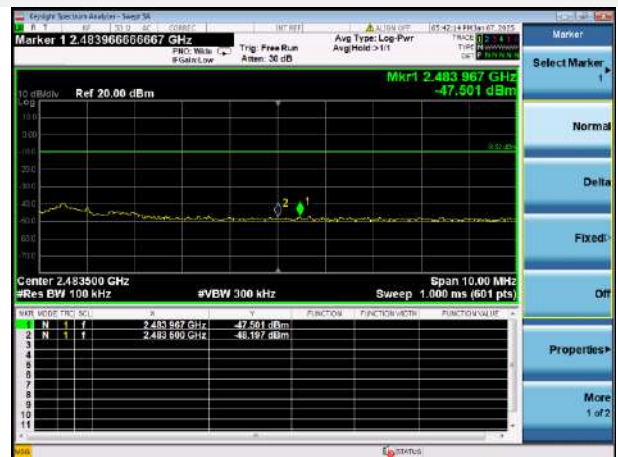

802.11g LOW CHANNEL, CARRIER LEVEL

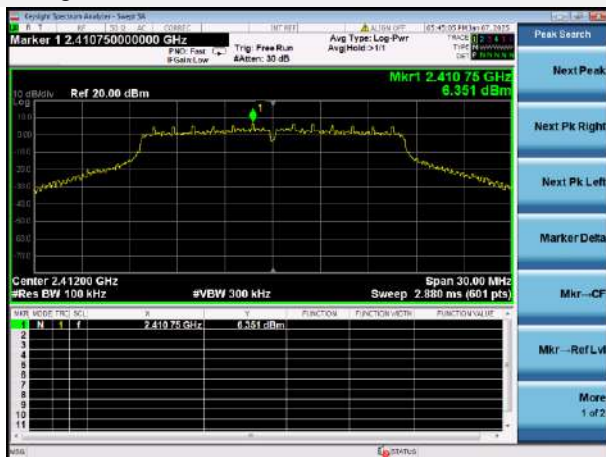


802.11g LOW CHANNEL, BAND EDGE




802.11g CHANNEL 2, CARRIER LEVEL




802.11g CHANNEL 2, BAND EDGE

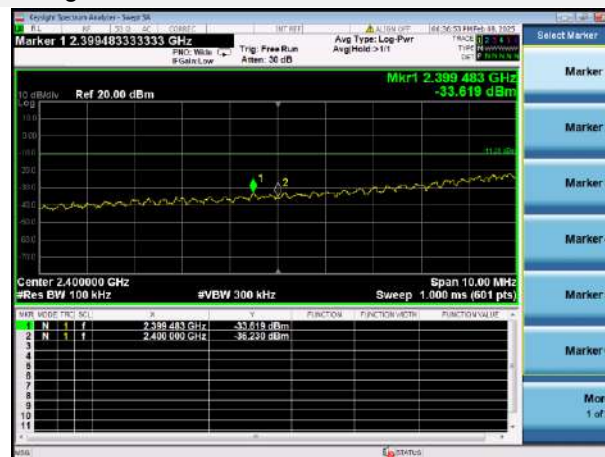


802.11g HIGH CHANNEL, CARRIER LEVEL

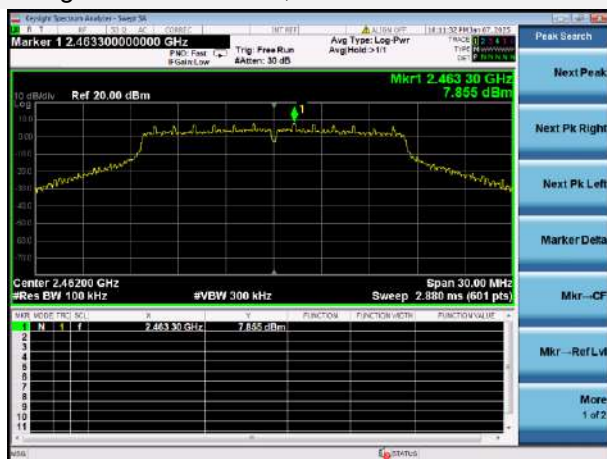

802.11g HIGH CHANNEL, BAND EDGE

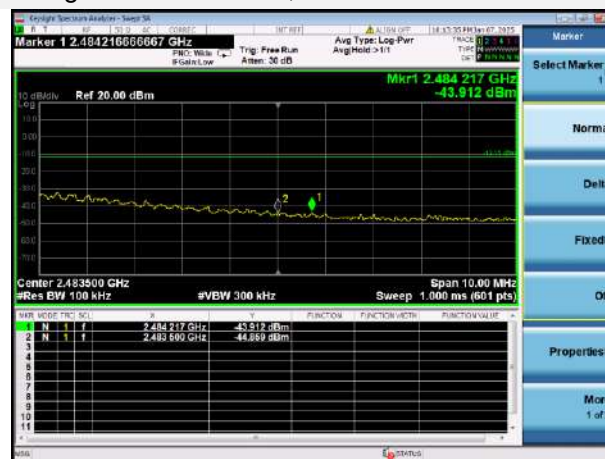


802.11n-20 MHz LOW CHANNEL, CARRIER LEVEL

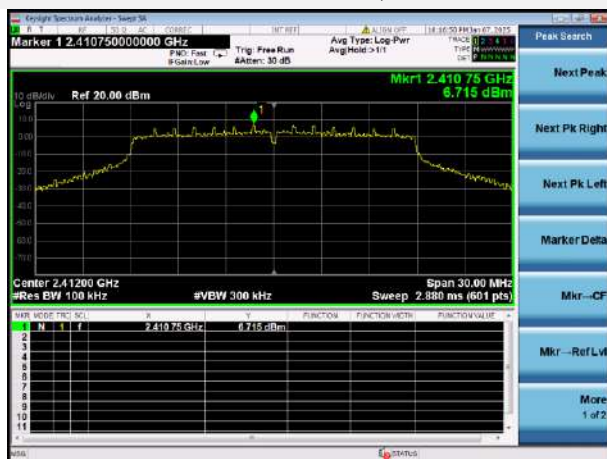


802.11n-20 MHz LOW CHANNEL, BAND EDGE




802.11n-20 MHz CHANNEL 2, CARRIER LEVEL

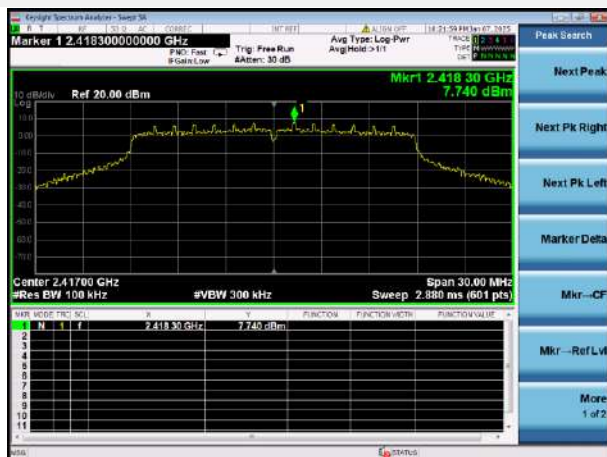


802.11n-20 MHz CHANNEL 2, BAND EDGE

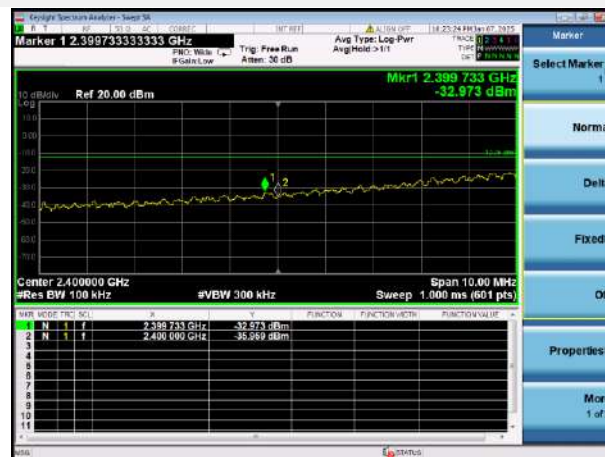


802.11n-20 MHz HIGH CHANNEL, CARRIER LEVEL

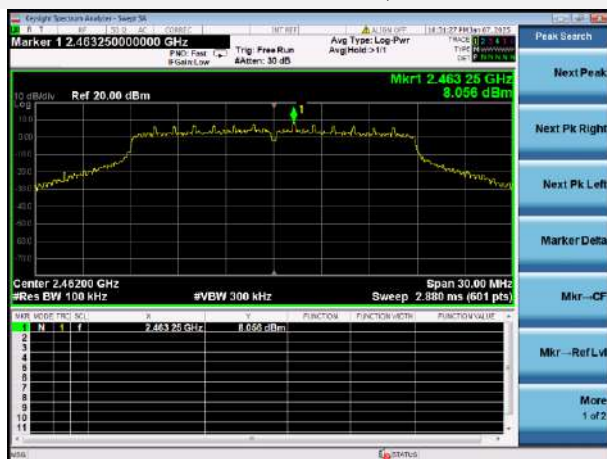

802.11n-20 MHz HIGH CHANNEL, BAND EDGE

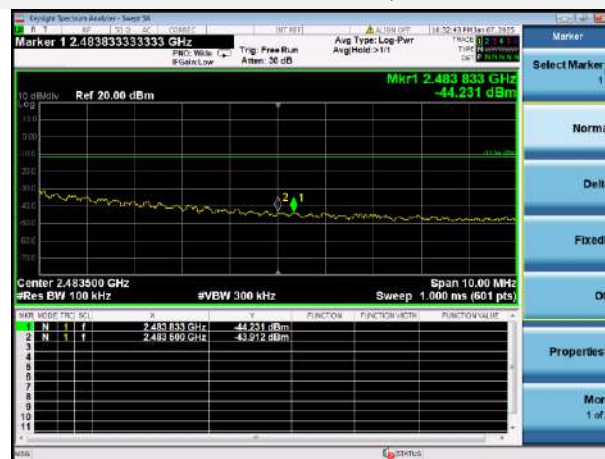


802.11n-40 MHz LOW CHANNEL, CARRIER LEVEL

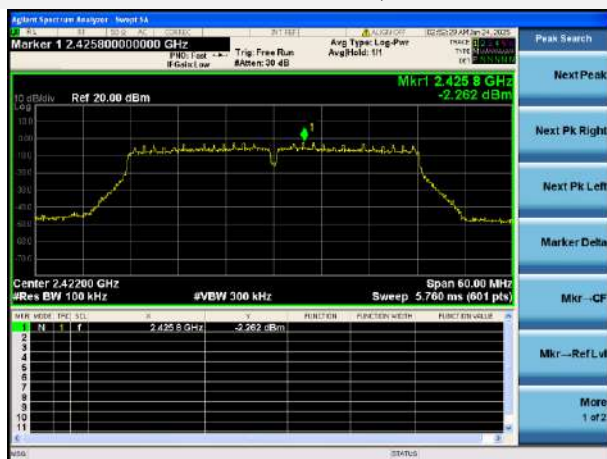


802.11n-40 MHz LOW CHANNEL, BAND EDGE




802.11n-40 MHz CHANNEL 4, CARRIER LEVEL

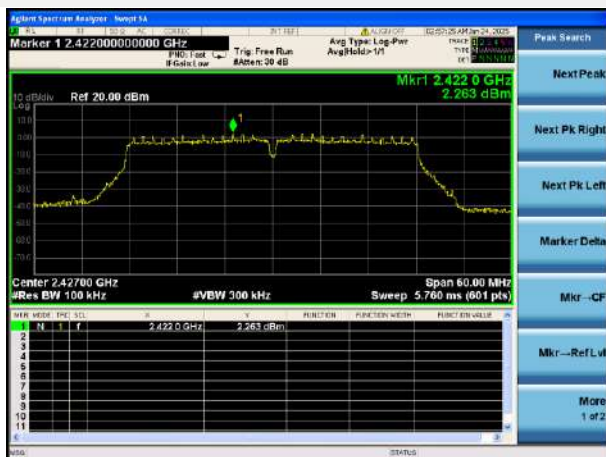


802.11n-40 MHz CHANNEL 4, BAND EDGE

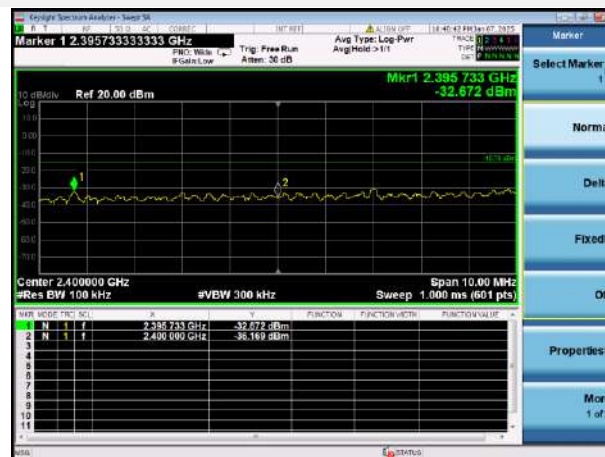


802.11n-40 MHz CHANNEL 5, CARRIER LEVEL

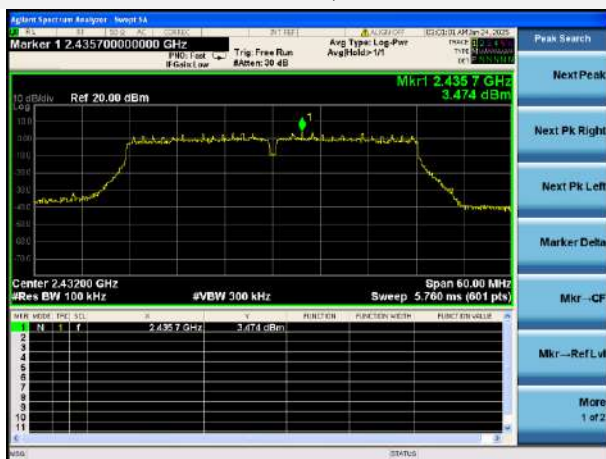


802.11n-40 MHz CHANNEL 5, BAND EDGE

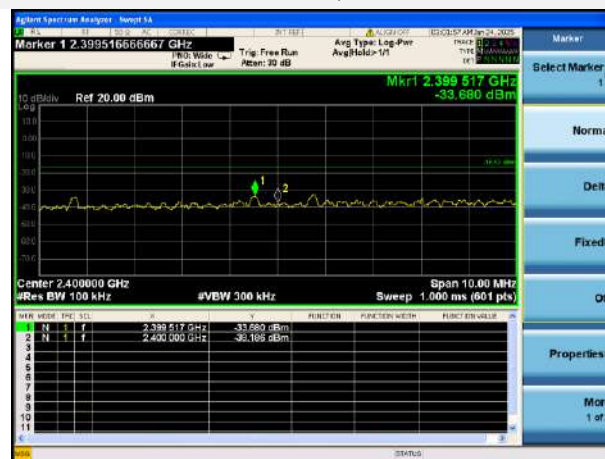


802.11n-40 MHz CHANNEL 7, CARRIER LEVEL

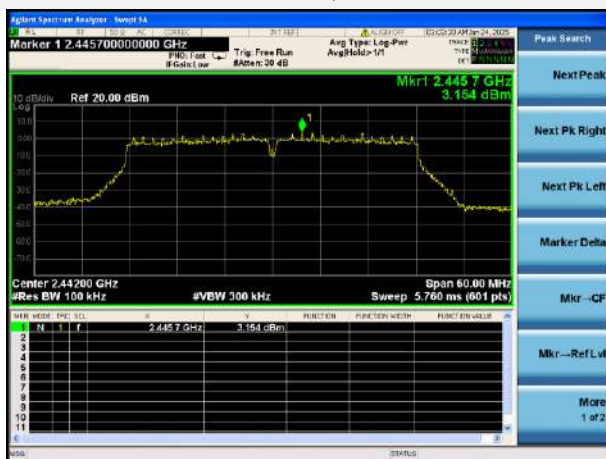


802.11n-40 MHz CHANNEL 7, BAND EDGE

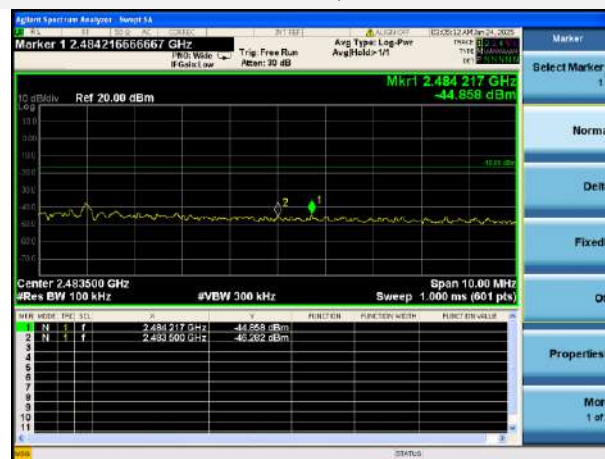


802.11n-40 MHz CHANNEL 8, CARRIER LEVEL

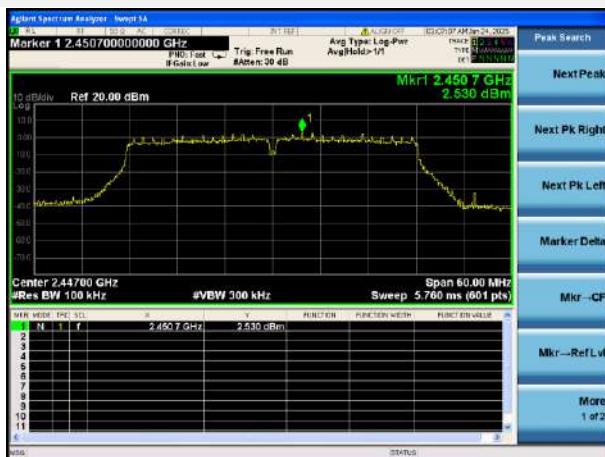


802.11n-40 MHz CHANNEL 8, BAND EDGE

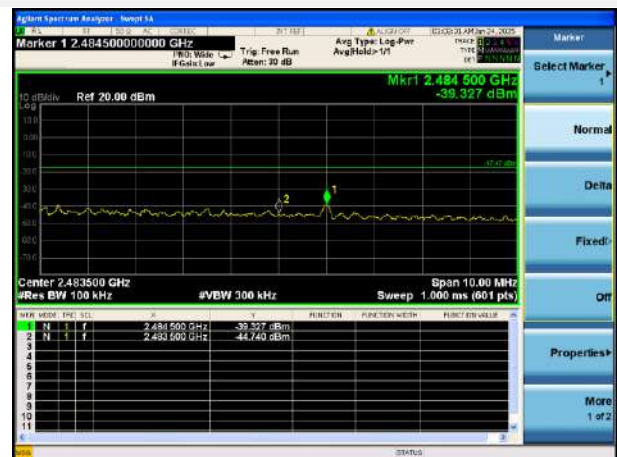


802.11n-40 MHz HIGH CHANNEL, CARRIER LEVEL

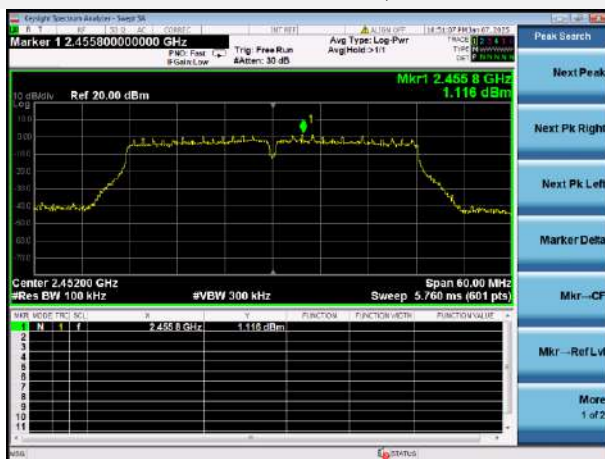

802.11n-40 MHz HIGH CHANNEL, BAND EDGE

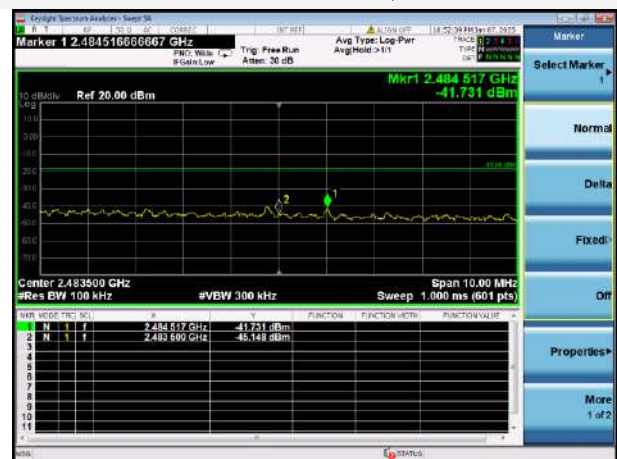

VHT-20 MHz LOW CHANNEL, CARRIER LEVEL

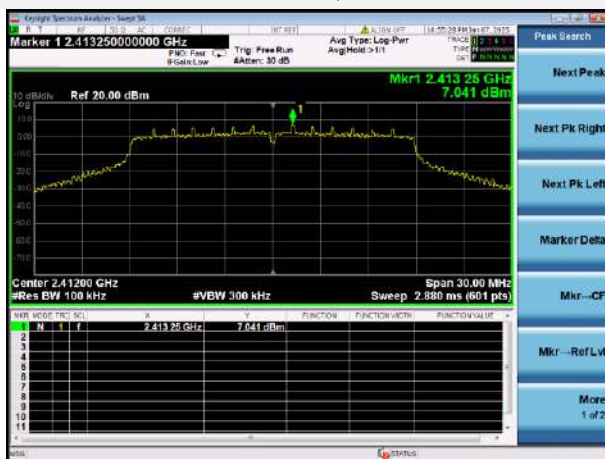


VHT-20 MHz LOW CHANNEL, BAND EDGE




VHT-20 MHz CHANNEL 2, CARRIER LEVEL




VHT-20 MHz CHANNEL 2, BAND EDGE

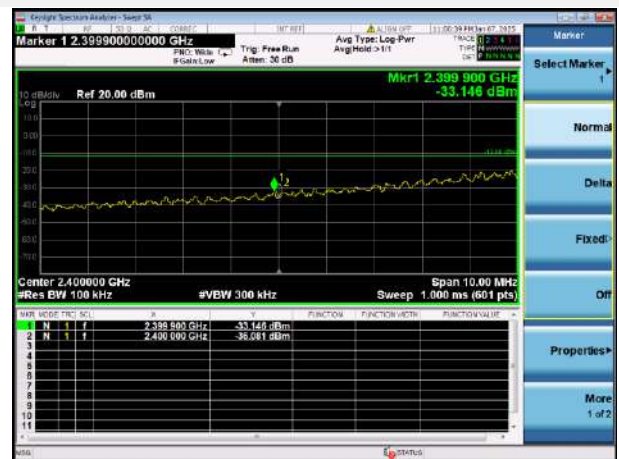


VHT-20 MHz HIGH CHANNEL, CARRIER LEVEL

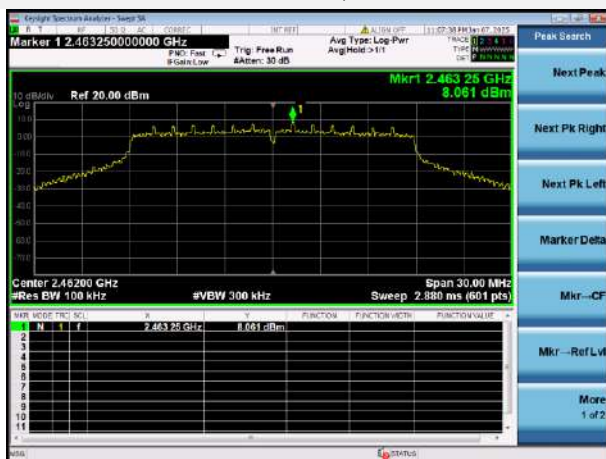

VHT-20 MHz HIGH CHANNEL, BAND EDGE

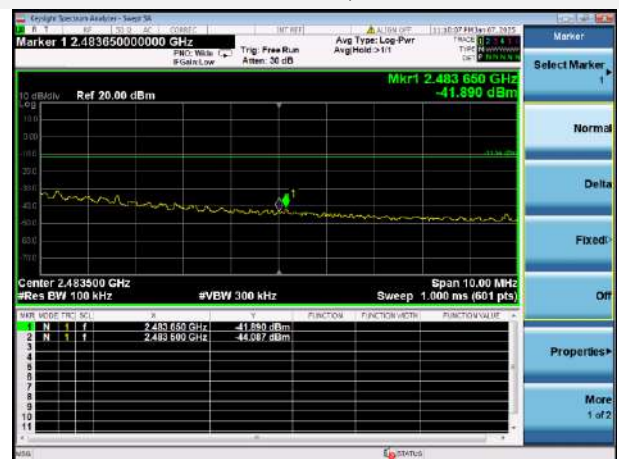


VHT-40 MHz LOW CHANNEL, CARRIER LEVEL

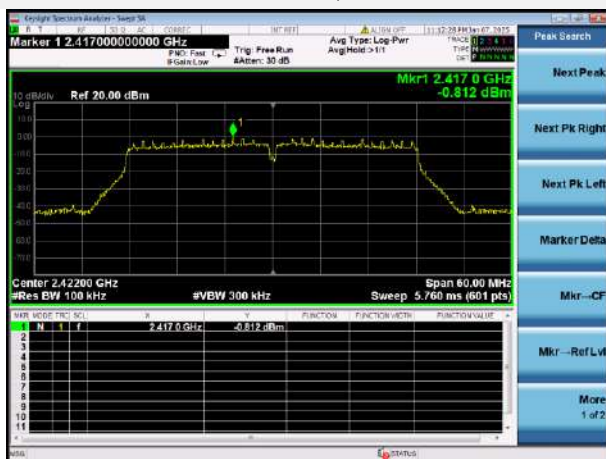


VHT-40 MHz LOW CHANNEL, BAND EDGE




VHT-40 MHz CHANNEL 4, CARRIER LEVEL

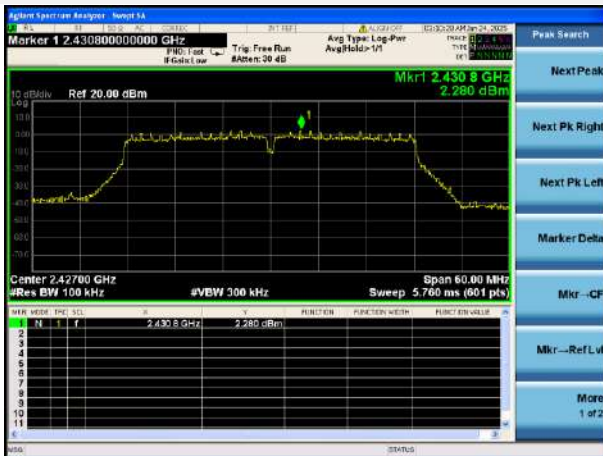


VHT-40 MHz CHANNEL 4, BAND EDGE

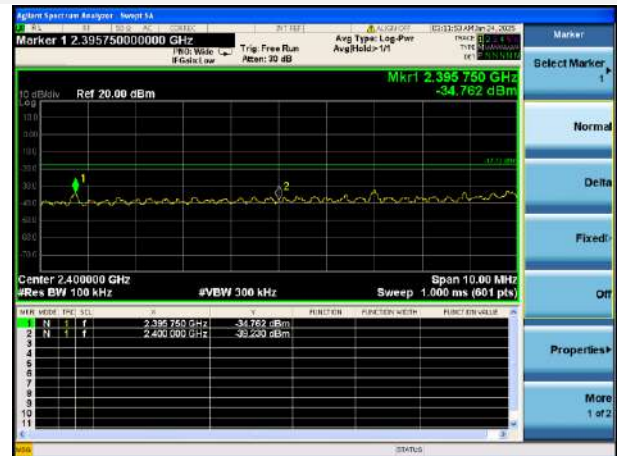


VHT-40 MHz CHANNEL 5, CARRIER LEVEL

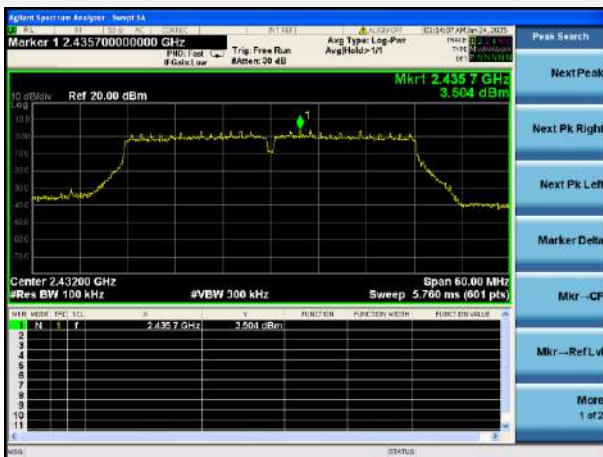


VHT-40 MHz CHANNEL 5, BAND EDGE

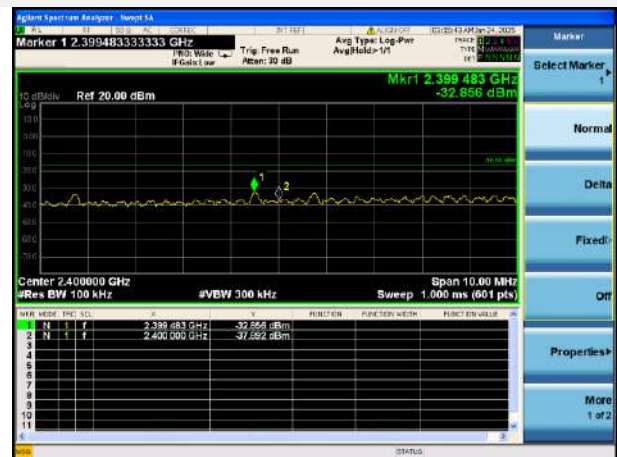


VHT-40 MHz CHANNEL 7, CARRIER LEVEL

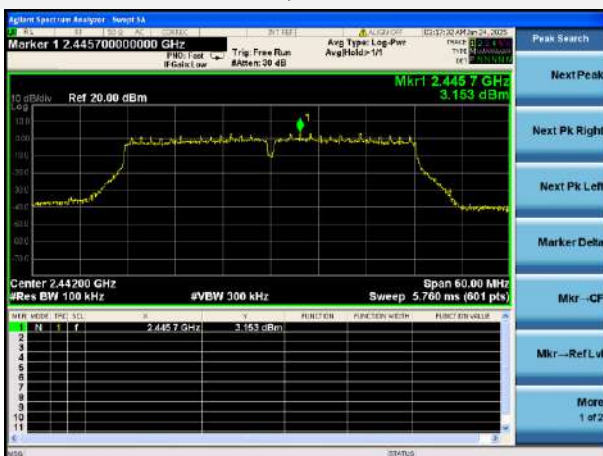


VHT-40 MHz CHANNEL 7, BAND EDGE

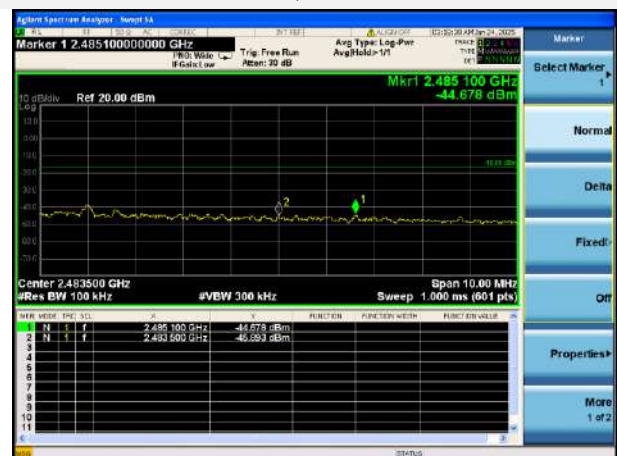


VHT-40 MHz CHANNEL 8, CARRIER LEVEL

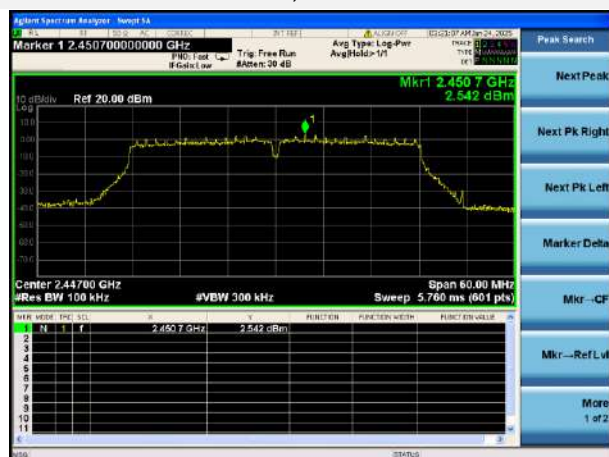


VHT-40 MHz CHANNEL 8, BAND EDGE

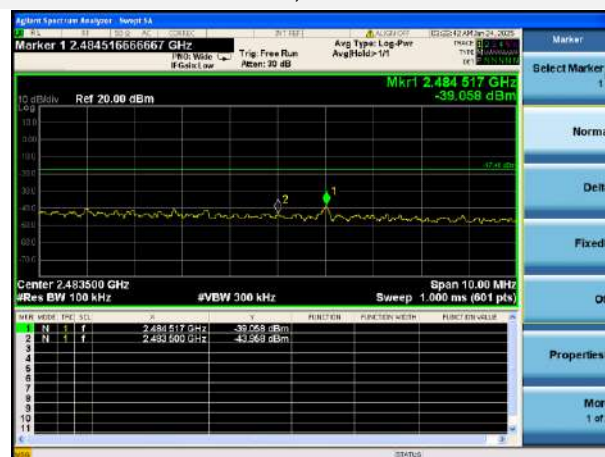

VHT-40 MHz HIGH CHANNEL, CARRIER LEVEL

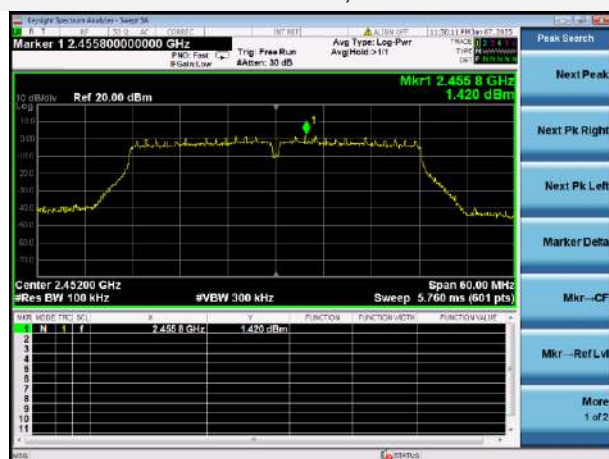

VHT-40 MHz HIGH CHANNEL, BAND EDGE

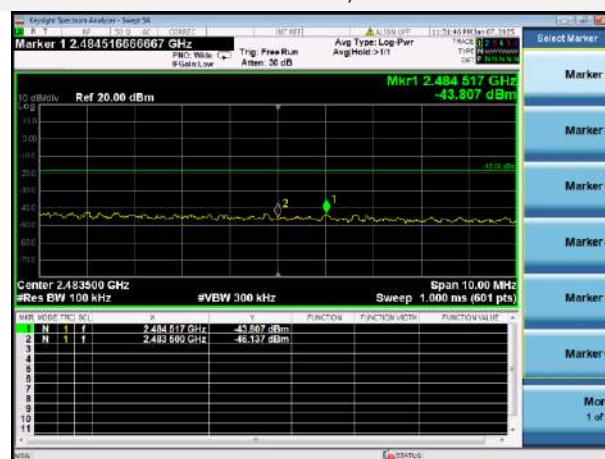

A.5 Conducted Emissions

Note ¹: The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.


Note ²: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Note ³: Results (dBuV) = Original reading level of Spectrum Analyzer (dBuV) + Factor (dB)

Test Data and Plots

PHASE L


CE Test case_FCC_CE_FCC PART 15B_Class B

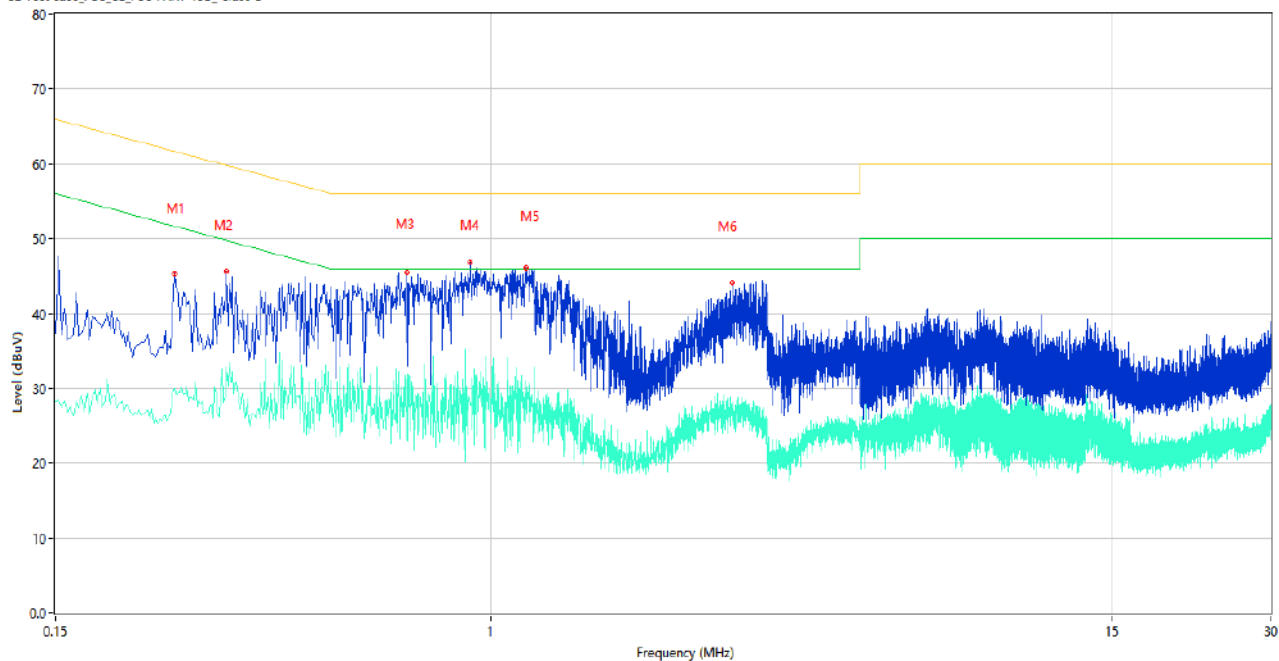

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.252	45.32	10.03	61.69	16.37	Peak	L	Pass
1**	0.252	29.91	10.03	51.69	21.78	AV	L	Pass
2	0.316	45.65	10.01	59.81	14.16	Peak	L	Pass
2**	0.316	32.88	10.01	49.81	16.93	AV	L	Pass
3	0.692	45.54	10.69	56.00	10.46	Peak	L	Pass
3**	0.692	30.63	10.69	46.00	15.37	AV	L	Pass
4	0.914	46.85	10.33	56.00	9.15	Peak	L	Pass
4**	0.914	27.88	10.33	46.00	18.12	AV	L	Pass
5	1.166	46.05	10.48	56.00	9.95	Peak	L	Pass
5**	1.166	28.62	10.48	46.00	17.38	AV	L	Pass
6	2.868	44.20	10.57	56.00	11.80	Peak	L	Pass
6**	2.868	27.17	10.57	46.00	18.83	AV	L	Pass

PHASE N

CE Test case_FCC_CE_FCC PART 15B_Class B

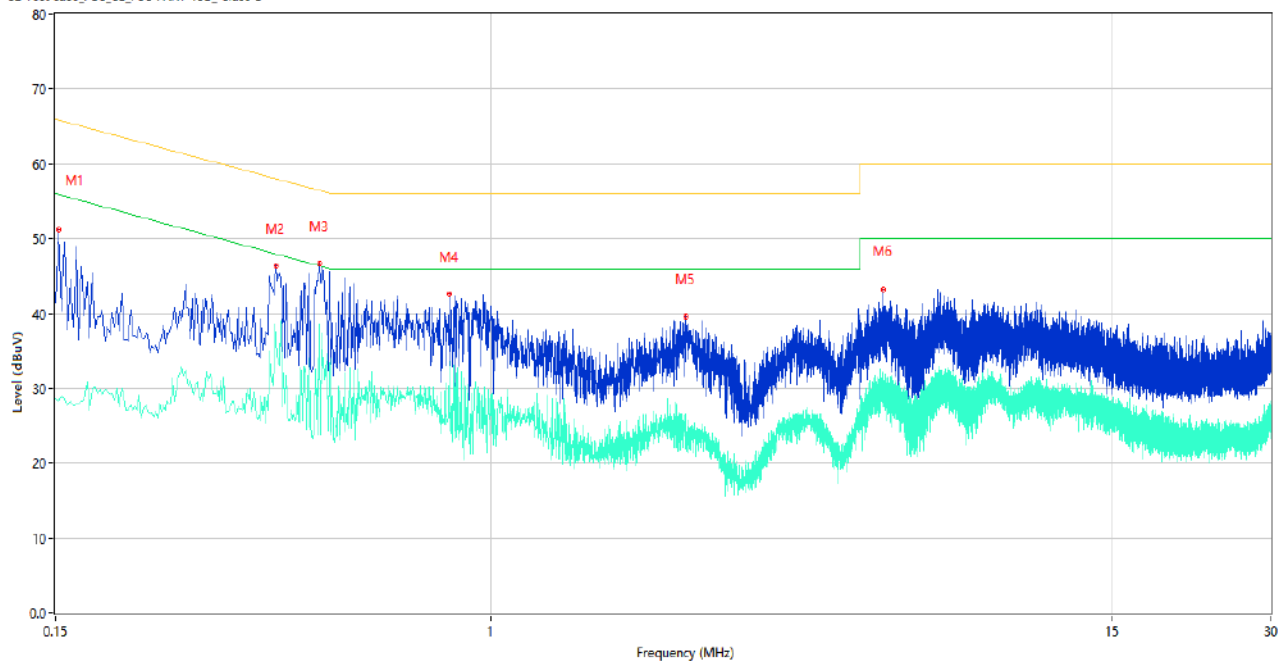

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.152	51.17	10.12	65.89	14.72	Peak	N	Pass
1**	0.152	28.31	10.12	55.89	27.58	AV	N	Pass
2	0.392	46.44	10.51	58.02	11.58	Peak	N	Pass
2**	0.392	36.60	10.51	48.02	11.42	AV	N	Pass
3	0.474	46.68	10.43	56.44	9.76	Peak	N	Pass
3**	0.474	38.58	10.43	46.44	7.86	AV	N	Pass
4	0.834	42.57	10.39	56.00	13.43	Peak	N	Pass
4**	0.834	33.59	10.39	46.00	12.41	AV	N	Pass
5	2.334	39.65	10.68	56.00	16.35	Peak	N	Pass
5**	2.334	26.64	10.68	46.00	19.36	AV	N	Pass
6	5.528	43.30	11.37	60.00	16.70	Peak	N	Pass
6**	5.528	32.18	11.37	50.00	17.82	AV	N	Pass

A.6 Radiated Emission

Note¹: The symbol of “--” in the table which means not application.

Note²: For the test data above 1 GHz, According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.


Note³: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Note⁴: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and normal link mode is worst.

Test Data and Plots

30 MHz to 1 GHz, ANT H


RE Test case_FCC Part 15B_FCC Part 15B Class B 30MHz-1GHz

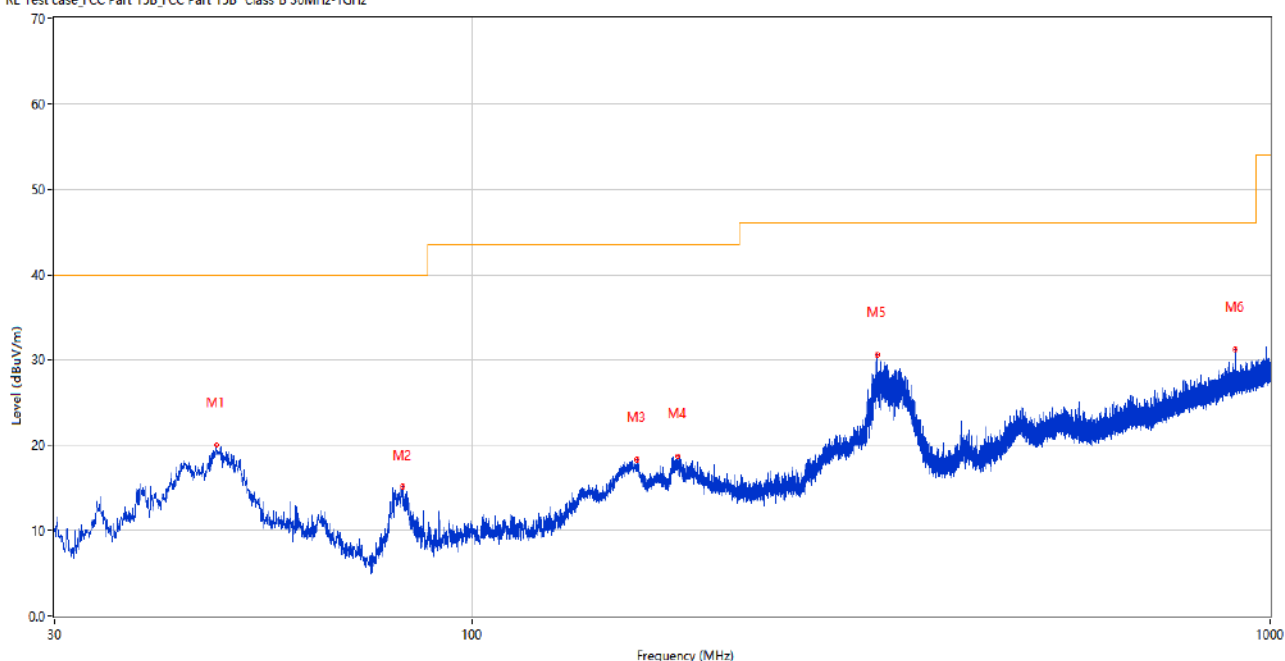

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	47.848	20.05	-24.86	40.0	19.95	Peak	360.00	100	Horizontal	Pass
2	81.943	15.12	-30.26	40.0	24.88	Peak	124.00	200	Horizontal	Pass
3	160.999	18.31	-29.40	43.5	25.19	Peak	179.00	100	Horizontal	Pass
4	181.174	18.72	-28.19	43.5	24.78	Peak	228.00	100	Horizontal	Pass
5	321.728	30.53	-23.08	46.0	15.47	Peak	59.00	100	Horizontal	Pass
6	904.552	31.29	-9.82	46.0	14.71	Peak	226.00	100	Horizontal	Pass

30 MHz to 1 GHz, ANT V

RE Test case_FCC Part 15B_FCC Part 15B Class B 30MHz-1GHz

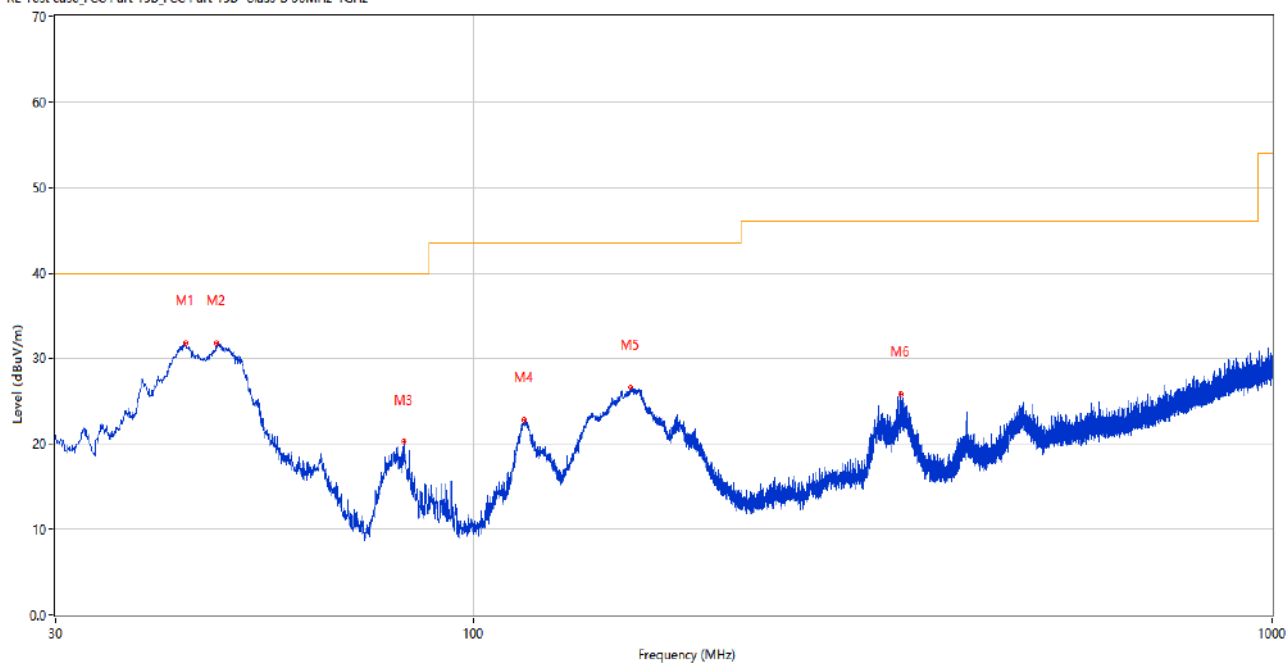

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	43.629	31.77	-25.18	40.0	8.23	Peak	309.00	100	Vertical	Pass
2	47.751	31.76	-24.97	40.0	8.24	Peak	173.00	100	Vertical	Pass
3	81.846	20.24	-30.29	40.0	19.76	Peak	30.00	100	Vertical	Pass
4	115.700	22.87	-27.69	43.5	20.63	Peak	282.00	100	Vertical	Pass
5	157.555	26.62	-29.67	43.5	16.88	Peak	243.00	100	Vertical	Pass
6	343.019	25.90	-22.13	46.0	20.10	Peak	319.00	100	Vertical	Pass

Note ¹: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note ²: The spurious above 18G is noise only, do not show on the report.

1 GHz to 18 GHz, ANT H 802.11b Channel 1

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1328.800	42.31	-17.44	74.0	31.69	Peak	219.00	100	Horizontal	Pass
1**	1328.800	33.84	-17.44	54.0	20.16	AV	219.00	100	Horizontal	Pass
2	2412.000	104.42	-12.89	74.0	-30.42	Peak	226.00	150	Horizontal	N/A
2**	2412.000	100.56	-12.89	54.0	-46.56	AV	226.00	150	Horizontal	N/A
3	2995.100	50.42	-9.93	74.0	23.58	Peak	219.00	100	Horizontal	Pass
3**	2995.100	41.51	-9.93	54.0	12.49	AV	219.00	100	Horizontal	Pass
4	4867.000	49.28	-3.35	74.0	24.72	Peak	49.00	200	Horizontal	Pass
4**	4867.000	40.27	-3.35	54.0	13.73	AV	49.00	200	Horizontal	Pass
5	6450.000	52.56	-1.58	74.0	21.44	Peak	1.00	100	Horizontal	Pass
5**	6450.000	42.30	-1.58	54.0	11.70	AV	1.00	100	Horizontal	Pass
6	15499.425	53.76	5.17	74.0	20.24	Peak	145.00	100	Horizontal	Pass
6**	15499.425	43.86	5.17	54.0	10.14	AV	145.00	100	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b Channel 1

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1329.000	42.90	-17.46	74.0	31.10	Peak	225.00	100	Vertical	Pass
1**	1329.000	33.24	-17.46	54.0	20.76	AV	225.00	100	Vertical	Pass
2	2413.100	99.36	-12.85	74.0	-25.36	Peak	109.00	150	Vertical	N/A
2**	2413.100	96.53	-12.85	54.0	-42.53	AV	109.00	150	Vertical	N/A
3	2991.300	50.68	-9.97	74.0	23.32	Peak	83.00	100	Vertical	Pass
3**	2991.300	41.62	-9.97	54.0	12.38	AV	83.00	100	Vertical	Pass
4	5054.000	50.43	-2.89	74.0	23.57	Peak	360.00	150	Vertical	Pass
4**	5054.000	41.20	-2.89	54.0	12.80	AV	360.00	150	Vertical	Pass
5	6979.800	53.05	-0.37	74.0	20.95	Peak	2.00	400	Vertical	Pass
5**	6979.800	43.95	-0.37	54.0	10.05	AV	2.00	400	Vertical	Pass
6	14842.912	53.49	4.48	74.0	20.51	Peak	129.00	300	Vertical	Pass
6**	14842.912	44.53	4.48	54.0	9.47	AV	129.00	300	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11b Channel 6

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1574.800	41.58	-17.39	74.0	32.42	Peak	294.00	200	Horizontal	Pass
1**	1574.800	31.87	-17.39	54.0	22.13	AV	294.00	200	Horizontal	Pass
2	2438.200	105.05	-11.78	74.0	-31.05	Peak	216.00	150	Horizontal	N/A
2**	2438.200	102.15	-11.78	54.0	-48.15	AV	216.00	150	Horizontal	N/A
3	2982.000	50.88	-10.21	74.0	23.12	Peak	70.00	100	Horizontal	Pass
3**	2982.000	41.29	-10.21	54.0	12.71	AV	70.00	100	Horizontal	Pass
4	4874.000	48.69	-3.50	74.0	25.31	Peak	350.00	150	Horizontal	Pass
4**	4874.000	42.98	-3.50	54.0	11.02	AV	350.00	150	Horizontal	Pass
5	6949.000	52.45	-0.49	74.0	21.55	Peak	62.00	100	Horizontal	Pass
5**	6949.000	42.73	-0.49	54.0	11.27	AV	62.00	100	Horizontal	Pass
6	16235.737	53.72	5.25	74.0	20.28	Peak	360.00	300	Horizontal	Pass
6**	16235.737	43.81	5.25	54.0	10.19	AV	360.00	300	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b Channel 6

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1332.000	43.32	-17.61	74.0	30.68	Peak	324.00	300	Vertical	Pass
1**	1332.000	31.48	-17.61	54.0	22.52	AV	324.00	300	Vertical	Pass
2	2438.300	100.01	-11.77	74.0	-26.01	Peak	120.00	150	Vertical	N/A
2**	2438.300	97.06	-11.77	54.0	-43.06	AV	120.00	150	Vertical	N/A
3	2956.900	50.34	-10.07	74.0	23.66	Peak	61.00	100	Vertical	Pass
3**	2956.900	41.57	-10.07	54.0	12.43	AV	61.00	100	Vertical	Pass
4	4875.400	49.45	-3.52	74.0	24.55	Peak	200.00	400	Vertical	Pass
4**	4875.400	40.02	-3.52	54.0	13.98	AV	200.00	400	Vertical	Pass
5	6468.400	53.21	-1.71	74.0	20.79	Peak	269.00	400	Vertical	Pass
5**	6468.400	42.15	-1.71	54.0	11.85	AV	269.00	400	Vertical	Pass
6	16064.326	53.99	5.59	74.0	20.01	Peak	119.00	400	Vertical	Pass
6**	16064.326	44.24	5.59	54.0	9.76	AV	119.00	400	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11b Channel 11

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1612.600	41.73	-17.35	74.0	32.27	Peak	79.00	400	Horizontal	Pass
1**	1612.600	31.81	-17.35	54.0	22.19	AV	79.00	400	Horizontal	Pass
2	2460.800	104.35	-12.69	74.0	-30.35	Peak	223.00	100	Horizontal	N/A
2**	2460.800	101.42	-12.69	54.0	-47.42	AV	223.00	100	Horizontal	N/A
3	2972.200	50.30	-10.23	74.0	23.70	Peak	58.00	150	Horizontal	Pass
3**	2972.200	40.87	-10.23	54.0	13.13	AV	58.00	150	Horizontal	Pass
4	4924.200	48.14	-3.61	74.0	25.86	Peak	86.00	100	Horizontal	Pass
4**	4924.200	43.33	-3.61	54.0	10.67	AV	86.00	100	Horizontal	Pass
5	7387.837	46.82	-2.61	74.0	27.18	Peak	131.00	100	Horizontal	Pass
5**	7387.837	42.46	-2.61	54.0	11.54	AV	131.00	100	Horizontal	Pass
6	14912.737	53.36	4.47	74.0	20.64	Peak	117.00	200	Horizontal	Pass
6**	14912.737	43.69	4.47	54.0	10.31	AV	117.00	200	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b Channel 11

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1581.400	41.92	-17.49	74.0	32.08	Peak	352.00	200	Vertical	Pass
1**	1581.400	32.75	-17.49	54.0	21.25	AV	352.00	200	Vertical	Pass
2	2460.800	99.56	-12.69	74.0	-25.56	Peak	120.00	200	Vertical	N/A
2**	2460.800	96.60	-12.69	54.0	-42.60	AV	120.00	200	Vertical	Fail
3	2993.400	50.37	-9.92	74.0	23.63	Peak	61.00	200	Vertical	Pass
3**	2993.400	41.51	-9.92	54.0	12.49	AV	61.00	200	Vertical	Pass
4	4944.200	49.29	-3.77	74.0	24.71	Peak	39.00	300	Vertical	Pass
4**	4944.200	39.33	-3.77	54.0	14.67	AV	39.00	300	Vertical	Pass
5	6949.000	52.45	-0.49	74.0	21.55	Peak	359.00	200	Vertical	Pass
5**	6949.000	43.25	-0.49	54.0	10.75	AV	359.00	200	Vertical	Pass
6	16040.438	53.91	6.13	74.0	20.09	Peak	7.00	200	Vertical	Pass
6**	16040.438	44.13	6.13	54.0	9.87	AV	7.00	200	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g Channel 1

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1331.600	42.23	-17.59	74.0	31.77	Peak	225.00	200	Horizontal	Pass
1**	1331.600	33.22	-17.59	54.0	20.78	AV	225.00	200	Horizontal	Pass
2	2411.400	105.04	-12.95	74.0	-31.04	Peak	3.00	150	Horizontal	N/A
2**	2411.400	97.23	-12.95	54.0	-43.23	AV	3.00	150	Horizontal	N/A
3	2983.300	50.06	-10.19	74.0	23.94	Peak	0.00	150	Horizontal	Pass
3**	2983.300	41.08	-10.19	54.0	12.92	AV	0.00	150	Horizontal	Pass
4	4919.800	49.35	-3.58	74.0	24.65	Peak	168.00	100	Horizontal	Pass
4**	4919.800	40.15	-3.58	54.0	13.85	AV	168.00	100	Horizontal	Pass
5	6923.400	52.97	-0.36	74.0	21.03	Peak	2.00	300	Horizontal	Pass
5**	6923.400	43.47	-0.36	54.0	10.53	AV	2.00	300	Horizontal	Pass
6	16042.537	53.61	6.14	74.0	20.39	Peak	116.00	300	Horizontal	Pass
6**	16042.537	45.30	6.14	54.0	8.70	AV	116.00	300	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g Channel 1

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1329.900	44.04	-17.52	74.0	29.96	Peak	179.00	300	Vertical	Pass
1**	1329.900	31.70	-17.52	54.0	22.30	AV	179.00	300	Vertical	Pass
2	2410.800	98.58	-13.01	74.0	-24.58	Peak	110.00	150	Vertical	N/A
2**	2410.800	90.48	-13.01	54.0	-36.48	AV	110.00	150	Vertical	N/A
3	2955.900	50.26	-10.07	74.0	23.74	Peak	353.00	100	Vertical	Pass
3**	2955.900	41.56	-10.07	54.0	12.44	AV	353.00	100	Vertical	Pass
4	4877.200	48.83	-3.44	74.0	25.17	Peak	257.00	400	Vertical	Pass
4**	4877.200	39.70	-3.44	54.0	14.30	AV	257.00	400	Vertical	Pass
5	6898.200	52.48	-0.46	74.0	21.52	Peak	177.00	400	Vertical	Pass
5**	6898.200	42.55	-0.46	54.0	11.45	AV	177.00	400	Vertical	Pass
6	16117.613	54.20	5.68	74.0	19.80	Peak	93.00	100	Vertical	Pass
6**	16117.613	43.80	5.68	54.0	10.20	AV	93.00	100	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g Channel 2

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1330.800	42.36	-17.56	74.0	31.64	Peak	243.00	100	Horizontal	Pass
1**	1330.800	31.64	-17.56	54.0	22.36	AV	243.00	100	Horizontal	Pass
2	2415.300	107.38	-12.75	74.0	-33.38	Peak	223.00	200	Horizontal	N/A
2**	2415.300	99.28	-12.75	54.0	-45.28	AV	223.00	200	Horizontal	N/A
3	2957.800	50.50	-10.07	74.0	23.50	Peak	7.00	100	Horizontal	Pass
3**	2957.800	41.32	-10.07	54.0	12.68	AV	7.00	100	Horizontal	Pass
4	4803.000	49.28	-3.48	74.0	24.72	Peak	0.00	400	Horizontal	Pass
4**	4803.000	40.10	-3.48	54.0	13.90	AV	0.00	400	Horizontal	Pass
5	6997.400	53.02	-0.43	74.0	20.98	Peak	360.00	400	Horizontal	Pass
5**	6997.400	43.79	-0.43	54.0	10.21	AV	360.00	400	Horizontal	Pass
6	16049.625	53.86	6.09	74.0	20.14	Peak	166.00	200	Horizontal	Pass
6**	16049.625	44.19	6.09	54.0	9.81	AV	166.00	200	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g Channel 2

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1594.100	42.27	-17.74	74.0	31.73	Peak	220.00	400	Vertical	Pass
1**	1594.100	33.15	-17.74	54.0	20.85	AV	220.00	400	Vertical	Pass
2	2415.500	98.97	-12.74	74.0	-24.97	Peak	67.00	100	Vertical	N/A
2**	2415.500	91.50	-12.74	54.0	-37.50	AV	67.00	100	Vertical	N/A
3	2987.000	50.22	-10.02	74.0	23.78	Peak	119.00	100	Vertical	Pass
3**	2987.000	42.17	-10.02	54.0	11.83	AV	119.00	100	Vertical	Pass
4	4966.200	49.23	-3.53	74.0	24.77	Peak	283.00	100	Vertical	Pass
4**	4966.200	40.48	-3.53	54.0	13.52	AV	283.00	100	Vertical	Pass
5	6941.800	53.14	-0.52	74.0	20.86	Peak	26.00	400	Vertical	Pass
5**	6941.800	42.71	-0.52	54.0	11.29	AV	26.00	400	Vertical	Pass
6	16164.600	53.43	5.66	74.0	20.57	Peak	62.00	400	Vertical	Pass
6**	16164.600	43.40	5.66	54.0	10.60	AV	62.00	400	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g Channel 6

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1685.600	41.57	-17.60	74.0	32.43	Peak	351.00	300	Horizontal	Pass
1**	1685.600	31.59	-17.60	54.0	22.41	AV	351.00	300	Horizontal	Pass
2	2438.100	106.44	-11.78	74.0	-32.44	Peak	214.00	200	Horizontal	N/A
2**	2438.100	99.08	-11.78	54.0	-45.08	AV	214.00	200	Horizontal	N/A
3	2975.600	50.52	-10.16	74.0	23.48	Peak	0.00	100	Horizontal	Pass
3**	2975.600	40.72	-10.16	54.0	13.28	AV	0.00	100	Horizontal	Pass
4	4908.200	49.69	-3.44	74.0	24.31	Peak	360.00	100	Horizontal	Pass
4**	4908.200	40.84	-3.44	54.0	13.16	AV	360.00	100	Horizontal	Pass
5	6349.800	52.37	-1.49	74.0	21.63	Peak	86.00	300	Horizontal	Pass
5**	6349.800	42.13	-1.49	54.0	11.87	AV	86.00	300	Horizontal	Pass
6	16170.900	54.40	5.76	74.0	19.60	Peak	1.00	200	Horizontal	Pass
6**	16170.900	43.15	5.76	54.0	10.85	AV	1.00	200	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g Channel 6

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1332.400	44.26	-17.62	74.0	29.74	Peak	235.00	100	Vertical	Pass
1**	1332.400	36.76	-17.62	54.0	17.24	AV	235.00	100	Vertical	Pass
2	2435.800	100.82	-11.86	74.0	-26.82	Peak	120.00	200	Vertical	N/A
2**	2435.800	93.03	-11.86	54.0	-39.03	AV	120.00	200	Vertical	N/A
3	2989.700	50.70	-10.03	74.0	23.30	Peak	158.00	150	Vertical	Pass
3**	2989.700	41.37	-10.03	54.0	12.63	AV	158.00	150	Vertical	Pass
4	4928.800	49.75	-3.66	74.0	24.25	Peak	10.00	300	Vertical	Pass
4**	4928.800	39.74	-3.66	54.0	14.26	AV	10.00	300	Vertical	Pass
5	6920.800	52.89	-0.31	74.0	21.11	Peak	1.00	100	Vertical	Pass
5**	6920.800	43.13	-0.31	54.0	10.87	AV	1.00	100	Vertical	Pass
6	14595.637	53.36	5.17	74.0	20.64	Peak	360.00	400	Vertical	Pass
6**	14595.637	44.18	5.17	54.0	9.82	AV	360.00	400	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g Channel 11

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1330.200	44.28	-17.54	74.0	29.72	Peak	183.00	300	Horizontal	Pass
1**	1330.200	31.31	-17.54	54.0	22.69	AV	183.00	300	Horizontal	Pass
2	2463.100	105.86	-12.78	74.0	-31.86	Peak	223.00	200	Horizontal	N/A
2**	2463.100	98.56	-12.78	54.0	-44.56	AV	223.00	200	Horizontal	N/A
3	2994.300	50.16	-9.92	74.0	23.84	Peak	329.00	150	Horizontal	Pass
3**	2994.300	41.22	-9.92	54.0	12.78	AV	329.00	150	Horizontal	Pass
4	4833.200	49.46	-3.38	74.0	24.54	Peak	2.00	400	Horizontal	Pass
4**	4833.200	40.08	-3.38	54.0	13.92	AV	2.00	400	Horizontal	Pass
5	6956.400	53.54	-0.48	74.0	20.46	Peak	274.00	300	Horizontal	Pass
5**	6956.400	42.93	-0.48	54.0	11.07	AV	274.00	300	Horizontal	Pass
6	14829.000	54.04	4.82	74.0	19.96	Peak	359.00	200	Horizontal	Pass
6**	14829.000	44.41	4.82	54.0	9.59	AV	359.00	200	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g Channel 11

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1264.700	42.45	-17.48	74.0	31.55	Peak	174.00	100	Vertical	Pass
1**	1264.700	32.41	-17.48	54.0	21.59	AV	174.00	100	Vertical	Pass
2	2460.500	100.30	-12.70	74.0	-26.30	Peak	117.00	100	Vertical	N/A
2**	2460.500	92.57	-12.70	54.0	-38.57	AV	117.00	100	Vertical	N/A
3	2967.300	50.94	-10.20	74.0	23.06	Peak	211.00	150	Vertical	Pass
3**	2967.300	41.62	-10.20	54.0	12.38	AV	211.00	150	Vertical	Pass
4	4905.200	49.38	-3.43	74.0	24.62	Peak	11.00	400	Vertical	Pass
4**	4905.200	40.39	-3.43	54.0	13.61	AV	11.00	400	Vertical	Pass
5	6583.600	52.86	-1.04	74.0	21.14	Peak	93.00	100	Vertical	Pass
5**	6583.600	42.74	-1.04	54.0	11.26	AV	93.00	100	Vertical	Pass
6	15671.099	53.63	4.95	74.0	20.37	Peak	186.00	100	Vertical	Pass
6**	15671.099	44.02	4.95	54.0	9.98	AV	186.00	100	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 Channel 1

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1335.900	42.34	-17.59	74.0	31.66	Peak	68.00	200	Horizontal	Pass
1**	1335.900	32.17	-17.59	54.0	21.83	AV	68.00	200	Horizontal	Pass
2	2413.500	105.30	-12.84	74.0	-31.30	Peak	317.00	100	Horizontal	N/A
2**	2413.500	97.56	-12.84	54.0	-43.56	AV	317.00	100	Horizontal	N/A
3	2931.900	50.10	-10.44	74.0	23.90	Peak	30.00	100	Horizontal	Pass
3**	2931.900	39.70	-10.44	54.0	14.30	AV	30.00	100	Horizontal	Pass
4	4861.400	49.09	-3.25	74.0	24.91	Peak	329.00	200	Horizontal	Pass
4**	4861.400	40.80	-3.25	54.0	13.20	AV	329.00	200	Horizontal	Pass
5	6979.800	52.39	-0.37	74.0	21.61	Peak	360.00	400	Horizontal	Pass
5**	6979.800	43.35	-0.37	54.0	10.65	AV	360.00	400	Horizontal	Pass
6	16035.188	53.70	5.97	74.0	20.30	Peak	64.00	150	Horizontal	Pass
6**	16035.188	45.06	5.97	54.0	8.94	AV	64.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 Channel 1

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1328.800	43.35	-17.44	74.0	30.65	Peak	272.00	400	Vertical	Pass
1**	1328.800	32.66	-17.44	54.0	21.34	AV	272.00	400	Vertical	Pass
2	2413.600	98.21	-12.83	74.0	-24.21	Peak	108.00	200	Vertical	N/A
2**	2413.600	91.39	-12.83	54.0	-37.39	AV	108.00	200	Vertical	N/A
3	2973.500	50.90	-10.23	74.0	23.10	Peak	0.00	100	Vertical	Pass
3**	2973.500	40.99	-10.23	54.0	13.01	AV	0.00	100	Vertical	Pass
4	4833.200	49.86	-3.38	74.0	24.14	Peak	360.00	300	Vertical	Pass
4**	4833.200	40.12	-3.38	54.0	13.88	AV	360.00	300	Vertical	Pass
5	6988.800	53.48	-0.41	74.0	20.52	Peak	88.00	200	Vertical	Pass
5**	6988.800	43.61	-0.41	54.0	10.39	AV	88.00	200	Vertical	Pass
6	16152.263	53.96	5.39	74.0	20.04	Peak	231.00	300	Vertical	Pass
6**	16152.263	43.95	5.39	54.0	10.05	AV	231.00	300	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 Channel 2

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1252.900	41.54	-17.61	74.0	32.46	Peak	248.00	300	Horizontal	Pass
1**	1252.900	32.00	-17.61	54.0	22.00	AV	248.00	300	Horizontal	Pass
2	2414.600	105.94	-12.79	74.0	-31.94	Peak	227.00	100	Horizontal	N/A
2**	2414.600	98.68	-12.79	54.0	-44.68	AV	227.00	100	Horizontal	N/A
3	2991.200	50.63	-9.98	74.0	23.37	Peak	2.00	200	Horizontal	Pass
3**	2991.200	41.15	-9.98	54.0	12.85	AV	2.00	200	Horizontal	Pass
4	4983.800	49.36	-3.55	74.0	24.64	Peak	22.00	100	Horizontal	Pass
4**	4983.800	40.17	-3.55	54.0	13.83	AV	22.00	100	Horizontal	Pass
5	6653.600	52.64	-1.07	74.0	21.36	Peak	271.00	200	Horizontal	Pass
5**	6653.600	42.43	-1.07	54.0	11.57	AV	271.00	200	Horizontal	Pass
6	15457.424	53.60	4.87	74.0	20.40	Peak	353.00	200	Horizontal	Pass
6**	15457.424	43.75	4.87	54.0	10.25	AV	353.00	200	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 Channel 2

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1597.700	41.77	-17.63	74.0	32.23	Peak	183.00	200	Vertical	Pass
1**	1597.700	32.79	-17.63	54.0	21.21	AV	183.00	200	Vertical	Pass
2	2415.800	97.96	-12.72	74.0	-23.96	Peak	16.00	150	Vertical	N/A
2**	2415.800	89.99	-12.72	54.0	-35.99	AV	16.00	150	Vertical	N/A
3	2995.200	50.54	-9.93	74.0	23.46	Peak	360.00	100	Vertical	Pass
3**	2995.200	42.11	-9.93	54.0	11.89	AV	360.00	100	Vertical	Pass
4	4966.800	49.45	-3.54	74.0	24.55	Peak	256.00	300	Vertical	Pass
4**	4966.800	40.60	-3.54	54.0	13.40	AV	256.00	300	Vertical	Pass
5	6971.200	52.61	-0.33	74.0	21.39	Peak	47.00	400	Vertical	Pass
5**	6971.200	43.44	-0.33	54.0	10.56	AV	47.00	400	Vertical	Pass
6	15504.938	54.15	5.07	74.0	19.85	Peak	318.00	300	Vertical	Pass
6**	15504.938	43.69	5.07	54.0	10.31	AV	318.00	300	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 Channel 6

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1676.100	41.55	-17.44	74.0	32.45	Peak	235.00	200	Horizontal	Pass
1**	1676.100	32.18	-17.44	54.0	21.82	AV	235.00	200	Horizontal	Pass
2	2438.800	105.92	-11.74	74.0	-31.92	Peak	312.00	100	Horizontal	N/A
2**	2438.800	98.32	-11.74	54.0	-44.32	AV	312.00	100	Horizontal	N/A
3	2989.600	50.20	-10.03	74.0	23.80	Peak	186.00	200	Horizontal	Pass
3**	2989.600	40.87	-10.03	54.0	13.13	AV	186.00	200	Horizontal	Pass
4	5069.800	50.65	-2.88	74.0	23.35	Peak	360.00	150	Horizontal	Pass
4**	5069.800	41.31	-2.88	54.0	12.69	AV	360.00	150	Horizontal	Pass
5	6737.200	52.71	-0.98	74.0	21.29	Peak	238.00	200	Horizontal	Pass
5**	6737.200	44.02	-0.98	54.0	9.98	AV	238.00	200	Horizontal	Pass
6	14921.400	54.10	4.48	74.0	19.90	Peak	360.00	100	Horizontal	Pass
6**	14921.400	44.31	4.48	54.0	9.69	AV	360.00	100	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 Channel 6

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1572.200	41.81	-17.40	74.0	32.19	Peak	129.00	200	Vertical	Pass
1**	1572.200	31.82	-17.40	54.0	22.18	AV	129.00	200	Vertical	Pass
2	2438.900	99.72	-11.73	74.0	-25.72	Peak	119.00	100	Vertical	N/A
2**	2438.900	92.76	-11.73	54.0	-38.76	AV	119.00	100	Vertical	N/A
3	2994.800	50.29	-9.92	74.0	23.71	Peak	89.00	200	Vertical	Pass
3**	2994.800	41.89	-9.92	54.0	12.11	AV	89.00	200	Vertical	Pass
4	4967.600	50.19	-3.56	74.0	23.81	Peak	224.00	200	Vertical	Pass
4**	4967.600	40.00	-3.56	54.0	14.00	AV	224.00	200	Vertical	Pass
5	6901.200	52.56	-0.49	74.0	21.44	Peak	86.00	400	Vertical	Pass
5**	6901.200	43.54	-0.49	54.0	10.46	AV	86.00	400	Vertical	Pass
6	16260.150	53.72	5.39	74.0	20.28	Peak	360.00	400	Vertical	Pass
6**	16260.150	43.60	5.39	54.0	10.40	AV	360.00	400	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 Channel 11

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1327.900	44.69	-17.42	74.0	29.31	Peak	52.00	300	Horizontal	Pass
1**	1327.900	37.71	-17.42	54.0	16.29	AV	52.00	300	Horizontal	Pass
2	2460.900	105.12	-12.69	74.0	-31.12	Peak	225.00	150	Horizontal	N/A
2**	2460.900	97.79	-12.69	54.0	-43.79	AV	225.00	150	Horizontal	N/A
3	2991.500	50.05	-9.96	74.0	23.95	Peak	225.00	200	Horizontal	Pass
3**	2991.500	41.26	-9.96	54.0	12.74	AV	225.00	200	Horizontal	Pass
4	4988.200	49.53	-3.52	74.0	24.47	Peak	360.00	400	Horizontal	Pass
4**	4988.200	40.42	-3.52	54.0	13.58	AV	360.00	400	Horizontal	Pass
5	6931.800	52.26	-0.53	74.0	21.74	Peak	12.00	400	Horizontal	Pass
5**	6931.800	43.50	-0.53	54.0	10.50	AV	12.00	400	Horizontal	Pass
6	15994.237	54.37	5.02	74.0	19.63	Peak	0.00	100	Horizontal	Pass
6**	15994.237	44.07	5.02	54.0	9.93	AV	0.00	100	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 Channel 11

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1329.400	41.86	-17.48	74.0	32.14	Peak	312.00	300	Vertical	Pass
1**	1329.400	33.09	-17.48	54.0	20.91	AV	312.00	300	Vertical	Pass
2	2460.100	99.22	-12.71	74.0	-25.22	Peak	110.00	150	Vertical	N/A
2**	2460.100	92.03	-12.71	54.0	-38.03	AV	110.00	150	Vertical	N/A
3	2896.400	50.71	-9.52	74.0	23.29	Peak	0.00	150	Vertical	Pass
3**	2896.400	41.47	-9.52	54.0	12.53	AV	0.00	150	Vertical	Pass
4	4962.400	49.51	-3.61	74.0	24.49	Peak	9.00	200	Vertical	Pass
4**	4962.400	39.91	-3.61	54.0	14.09	AV	9.00	200	Vertical	Pass
5	6914.200	52.32	-0.31	74.0	21.68	Peak	62.00	100	Vertical	Pass
5**	6914.200	43.38	-0.31	54.0	10.62	AV	62.00	100	Vertical	Pass
6	16085.850	53.67	5.47	74.0	20.33	Peak	136.00	100	Vertical	Pass
6**	16085.850	44.05	5.47	54.0	9.95	AV	136.00	100	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n40 Channel 3

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1667.800	42.01	-17.17	74.0	31.99	Peak	0.00	400	Horizontal	Pass
1**	1667.800	32.72	-17.17	54.0	21.28	AV	0.00	400	Horizontal	Pass
2	2419.200	100.29	-12.52	74.0	-26.29	Peak	3.00	150	Horizontal	N/A
2**	2419.200	92.06	-12.52	54.0	-38.06	AV	3.00	150	Horizontal	N/A
3	2958.900	50.91	-10.09	74.0	23.09	Peak	350.00	200	Horizontal	Pass
3**	2958.900	41.54	-10.09	54.0	12.46	AV	350.00	200	Horizontal	Pass
4	4961.400	49.95	-3.57	74.0	24.05	Peak	98.00	200	Horizontal	Pass
4**	4961.400	39.78	-3.57	54.0	14.22	AV	98.00	200	Horizontal	Pass
5	6990.400	52.33	-0.37	74.0	21.67	Peak	98.00	200	Horizontal	Pass
5**	6990.400	43.51	-0.37	54.0	10.49	AV	98.00	200	Horizontal	Pass
6	16044.637	54.54	6.15	74.0	19.46	Peak	116.00	300	Horizontal	Pass
6**	16044.637	44.30	6.15	54.0	9.70	AV	116.00	300	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n40 Channel 3

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1516.100	41.94	-17.57	74.0	32.06	Peak	273.00	300	Vertical	Pass
1**	1516.100	31.35	-17.57	54.0	22.65	AV	273.00	300	Vertical	Pass
2	2416.400	92.60	-12.69	74.0	-18.60	Peak	108.00	200	Vertical	N/A
2**	2416.400	85.32	-12.69	54.0	-31.32	AV	108.00	200	Vertical	N/A
3	2994.200	50.48	-9.92	74.0	23.52	Peak	263.00	150	Vertical	Pass
3**	2994.200	41.48	-9.92	54.0	12.52	AV	263.00	150	Vertical	Pass
4	4930.800	49.01	-3.67	74.0	24.99	Peak	83.00	200	Vertical	Pass
4**	4930.800	40.41	-3.67	54.0	13.59	AV	83.00	200	Vertical	Pass
5	6989.000	52.67	-0.41	74.0	21.33	Peak	339.00	100	Vertical	Pass
5**	6989.000	43.51	-0.41	54.0	10.49	AV	339.00	100	Vertical	Pass
6	16024.950	54.22	5.54	74.0	19.78	Peak	229.00	200	Vertical	Pass
6**	16024.950	44.29	5.54	54.0	9.71	AV	229.00	200	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n40 Channel 4

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1327.400	43.08	-17.44	74.0	30.92	Peak	176.00	100	Horizontal	Pass
1**	1327.400	31.59	-17.44	54.0	22.41	AV	176.00	100	Horizontal	Pass
2	2414.800	102.87	-12.78	74.0	-28.87	Peak	12.00	150	Horizontal	N/A
2**	2414.800	94.68	-12.78	54.0	-40.68	AV	12.00	150	Horizontal	N/A
3	2988.800	50.15	-10.01	74.0	23.85	Peak	207.00	200	Horizontal	Pass
3**	2988.800	41.07	-10.01	54.0	12.93	AV	207.00	200	Horizontal	Pass
4	4894.800	49.00	-3.55	74.0	25.00	Peak	18.00	400	Horizontal	Pass
4**	4894.800	40.72	-3.55	54.0	13.28	AV	18.00	400	Horizontal	Pass
5	6990.200	52.33	-0.38	74.0	21.67	Peak	360.00	400	Horizontal	Pass
5**	6990.200	43.64	-0.38	54.0	10.36	AV	360.00	400	Horizontal	Pass
6	16044.375	54.58	6.14	74.0	19.42	Peak	119.00	100	Horizontal	Pass
6**	16044.375	44.48	6.14	54.0	9.52	AV	119.00	100	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n40 Channel 4

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1524.100	42.93	-17.48	74.0	31.07	Peak	79.00	100	Vertical	Pass
1**	1524.100	32.37	-17.48	54.0	21.63	AV	79.00	100	Vertical	Pass
2	2439.800	97.18	-11.70	74.0	-23.18	Peak	119.00	100	Vertical	N/A
2**	2439.800	88.44	-11.70	54.0	-34.44	AV	119.00	100	Vertical	N/A
3	2979.600	50.33	-10.28	74.0	23.67	Peak	188.00	200	Vertical	Pass
3**	2979.600	40.90	-10.28	54.0	13.10	AV	188.00	200	Vertical	Pass
4	4911.200	49.47	-3.45	74.0	24.53	Peak	156.00	300	Vertical	Pass
4**	4911.200	40.87	-3.45	54.0	13.13	AV	156.00	300	Vertical	Pass
5	6967.200	52.68	-0.47	74.0	21.32	Peak	123.00	200	Vertical	Pass
5**	6967.200	42.88	-0.47	54.0	11.12	AV	123.00	200	Vertical	Pass
6	14829.525	53.71	4.80	74.0	20.29	Peak	320.00	200	Vertical	Pass
6**	14829.525	44.01	4.80	54.0	9.99	AV	320.00	200	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n40 Channel 5

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1329.000	42.55	-17.46	74.0	31.45	Peak	340.00	400	Horizontal	Pass
1**	1329.000	32.18	-17.46	54.0	21.82	AV	340.00	400	Horizontal	Pass
2	2442.800	103.73	-11.70	74.0	-29.73	Peak	133.00	150	Horizontal	N/A
2**	2442.800	95.47	-11.70	54.0	-41.47	AV	133.00	150	Horizontal	N/A
3	2977.800	50.21	-10.25	74.0	23.79	Peak	45.00	100	Horizontal	Pass
3**	2977.800	40.97	-10.25	54.0	13.03	AV	45.00	100	Horizontal	Pass
4	4967.200	50.27	-3.55	74.0	23.73	Peak	223.00	200	Horizontal	Pass
4**	4967.200	40.46	-3.55	54.0	13.54	AV	223.00	200	Horizontal	Pass
5	6922.200	53.03	-0.34	74.0	20.97	Peak	304.00	300	Horizontal	Pass
5**	6922.200	43.31	-0.34	54.0	10.69	AV	304.00	300	Horizontal	Pass
6	15543.525	54.02	4.75	74.0	19.98	Peak	134.00	200	Horizontal	Pass
6**	15543.525	44.22	4.75	54.0	9.78	AV	134.00	200	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n40 Channel 5

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1328.000	44.16	-17.41	74.0	29.84	Peak	296.00	400	Vertical	Pass
1**	1328.000	32.73	-17.41	54.0	21.27	AV	296.00	400	Vertical	Pass
2	2433.800	96.42	-11.97	74.0	-22.42	Peak	47.00	200	Vertical	N/A
2**	2433.800	87.94	-11.97	54.0	-33.94	AV	47.00	200	Vertical	N/A
3	2974.600	51.16	-10.16	74.0	22.84	Peak	318.00	200	Vertical	Pass
3**	2974.600	41.73	-10.16	54.0	12.27	AV	318.00	200	Vertical	Pass
4	4901.800	49.59	-3.53	74.0	24.41	Peak	344.00	300	Vertical	Pass
4**	4901.800	40.39	-3.53	54.0	13.61	AV	344.00	300	Vertical	Pass
5	6867.800	53.38	-0.97	74.0	20.62	Peak	240.00	200	Vertical	Pass
5**	6867.800	44.64	-0.97	54.0	9.36	AV	240.00	200	Vertical	Pass
6	16103.175	53.82	5.63	74.0	20.18	Peak	117.00	200	Vertical	Pass
6**	16103.175	45.07	5.63	54.0	8.93	AV	117.00	200	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n40 Channel 6

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1655.000	42.89	-17.40	74.0	31.11	Peak	347.00	100	Horizontal	Pass
1**	1655.000	32.99	-17.40	54.0	21.01	AV	347.00	100	Horizontal	Pass
2	2441.300	103.10	-11.74	74.0	-29.10	Peak	237.00	200	Horizontal	N/A
2**	2441.300	95.18	-11.74	54.0	-41.18	AV	237.00	200	Horizontal	N/A
3	2986.200	50.62	-10.05	74.0	23.38	Peak	327.00	100	Horizontal	Pass
3**	2986.200	41.16	-10.05	54.0	12.84	AV	327.00	100	Horizontal	Pass
4	4995.200	49.23	-3.33	74.0	24.77	Peak	186.00	100	Horizontal	Pass
4**	4995.200	39.66	-3.33	54.0	14.34	AV	186.00	100	Horizontal	Pass
5	6969.600	52.69	-0.27	74.0	21.31	Peak	118.00	300	Horizontal	Pass
5**	6969.600	43.69	-0.27	54.0	10.31	AV	118.00	300	Horizontal	Pass
6	15468.450	54.47	4.84	74.0	19.53	Peak	359.00	200	Horizontal	Pass
6**	15468.450	43.90	4.84	54.0	10.10	AV	359.00	200	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n40 Channel 6

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1595.500	42.44	-17.66	74.0	31.56	Peak	0.00	200	Vertical	Pass
1**	1595.500	32.82	-17.66	54.0	21.18	AV	0.00	200	Vertical	Pass
2	2439.800	97.14	-11.70	74.0	-23.14	Peak	122.00	150	Vertical	N/A
2**	2439.800	90.67	-11.70	54.0	-36.67	AV	122.00	150	Vertical	N/A
3	2992.600	50.55	-9.93	74.0	23.45	Peak	14.00	100	Vertical	Pass
3**	2992.600	40.87	-9.93	54.0	13.13	AV	14.00	100	Vertical	Pass
4	4803.000	49.89	-3.48	74.0	24.11	Peak	74.00	400	Vertical	Pass
4**	4803.000	40.87	-3.48	54.0	13.13	AV	74.00	400	Vertical	Pass
5	6823.000	52.50	-0.94	74.0	21.50	Peak	156.00	300	Vertical	Pass
5**	6823.000	42.67	-0.94	54.0	11.33	AV	156.00	300	Vertical	Pass
6	14844.750	53.90	4.48	74.0	20.10	Peak	297.00	200	Vertical	Pass
6**	14844.750	43.41	4.48	54.0	10.59	AV	297.00	200	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n40 Channel 7

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1481.100	42.23	-17.62	74.0	31.77	Peak	338.00	200	Horizontal	Pass
1**	1481.100	32.26	-17.62	54.0	21.74	AV	338.00	200	Horizontal	Pass
2	2440.700	103.69	-11.72	74.0	-29.69	Peak	135.00	100	Horizontal	N/A
2**	2440.700	95.47	-11.72	54.0	-41.47	AV	135.00	100	Horizontal	N/A
3	2986.000	50.73	-10.06	74.0	23.27	Peak	13.00	100	Horizontal	Pass
3**	2986.000	42.05	-10.06	54.0	11.95	AV	13.00	100	Horizontal	Pass
4	4945.400	49.94	-3.80	74.0	24.06	Peak	352.00	100	Horizontal	Pass
4**	4945.400	40.16	-3.80	54.0	13.84	AV	352.00	100	Horizontal	Pass
5	6948.200	53.07	-0.51	74.0	20.93	Peak	2.00	100	Horizontal	Pass
5**	6948.200	43.24	-0.51	54.0	10.76	AV	2.00	100	Horizontal	Pass
6	16098.975	53.62	5.61	74.0	20.38	Peak	254.00	400	Horizontal	Pass
6**	16098.975	44.37	5.61	54.0	9.63	AV	254.00	400	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n40 Channel 7

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1332.600	43.36	-17.63	74.0	30.64	Peak	297.00	100	Vertical	Pass
1**	1332.600	31.52	-17.63	54.0	22.48	AV	297.00	100	Vertical	Pass
2	2445.800	95.99	-11.85	74.0	-21.99	Peak	242.00	200	Vertical	N/A
2**	2445.800	87.66	-11.85	54.0	-33.66	AV	242.00	200	Vertical	N/A
3	2970.300	50.44	-10.18	74.0	23.56	Peak	34.00	150	Vertical	Pass
3**	2970.300	41.07	-10.18	54.0	12.93	AV	34.00	150	Vertical	Pass
4	4821.200	50.51	-3.50	74.0	23.49	Peak	209.00	400	Vertical	Pass
4**	4821.200	40.26	-3.50	54.0	13.74	AV	209.00	400	Vertical	Pass
5	6690.400	52.82	-1.26	74.0	21.18	Peak	13.00	100	Vertical	Pass
5**	6690.400	43.68	-1.26	54.0	10.32	AV	13.00	100	Vertical	Pass
6	15989.512	53.71	5.00	74.0	20.29	Peak	2.00	300	Vertical	Pass
6**	15989.512	43.95	5.00	54.0	10.05	AV	2.00	300	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n40 Channel 8

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1329.300	42.10	-17.48	74.0	31.90	Peak	129.00	200	Horizontal	Pass
1**	1329.300	31.53	-17.48	54.0	22.47	AV	129.00	200	Horizontal	Pass
2	2442.800	102.52	-11.70	74.0	-28.52	Peak	235.00	200	Horizontal	N/A
2**	2442.800	94.19	-11.70	54.0	-40.19	AV	235.00	200	Horizontal	N/A
3	2991.600	51.29	-9.96	74.0	22.71	Peak	216.00	150	Horizontal	Pass
3**	2991.600	42.25	-9.96	54.0	11.75	AV	216.00	150	Horizontal	Pass
4	4961.800	49.05	-3.58	74.0	24.95	Peak	78.00	300	Horizontal	Pass
4**	4961.800	40.25	-3.58	54.0	13.75	AV	78.00	300	Horizontal	Pass
5	6989.600	52.65	-0.40	74.0	21.35	Peak	7.00	100	Horizontal	Pass
5**	6989.600	43.44	-0.40	54.0	10.56	AV	7.00	100	Horizontal	Pass
6	16021.800	53.91	5.40	74.0	20.09	Peak	69.00	300	Horizontal	Pass
6**	16021.800	44.99	5.40	54.0	9.01	AV	69.00	300	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n40 Channel 8

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1598.900	42.47	-17.62	74.0	31.53	Peak	253.00	400	Vertical	Pass
1**	1598.900	32.47	-17.62	54.0	21.53	AV	253.00	400	Vertical	Pass
2	2442.900	96.76	-11.70	74.0	-22.76	Peak	119.00	200	Vertical	N/A
2**	2442.900	88.51	-11.70	54.0	-34.51	AV	119.00	200	Vertical	N/A
3	2994.400	50.04	-9.92	74.0	23.96	Peak	129.00	150	Vertical	Pass
3**	2994.400	41.57	-9.92	54.0	12.43	AV	129.00	150	Vertical	Pass
4	4793.000	50.11	-3.66	74.0	23.89	Peak	38.00	150	Vertical	Pass
4**	4793.000	40.70	-3.66	54.0	13.30	AV	38.00	150	Vertical	Pass
5	6989.200	53.37	-0.41	74.0	20.63	Peak	224.00	300	Vertical	Pass
5**	6989.200	42.98	-0.41	54.0	11.02	AV	224.00	300	Vertical	Pass
6	14837.137	53.99	4.56	74.0	20.01	Peak	360.00	400	Vertical	Pass
6**	14837.137	44.86	4.56	54.0	9.14	AV	360.00	400	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n40 Channel 9

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1327.700	42.08	-17.43	74.0	31.92	Peak	179.00	400	Horizontal	Pass
1**	1327.700	32.70	-17.43	54.0	21.30	AV	179.00	400	Horizontal	Pass
2	2453.300	102.28	-12.37	74.0	-28.28	Peak	216.00	150	Horizontal	N/A
2**	2453.300	94.39	-12.37	54.0	-40.39	AV	216.00	150	Horizontal	Fail
3	2968.400	50.65	-10.17	74.0	23.35	Peak	120.00	200	Horizontal	Pass
3**	2968.400	41.65	-10.17	54.0	12.35	AV	120.00	200	Horizontal	Pass
4	4978.600	49.20	-3.55	74.0	24.80	Peak	9.00	400	Horizontal	Pass
4**	4978.600	40.62	-3.55	54.0	13.38	AV	9.00	400	Horizontal	Pass
5	6759.600	52.46	-1.12	74.0	21.54	Peak	330.00	400	Horizontal	Pass
5**	6759.600	41.99	-1.12	54.0	12.01	AV	330.00	400	Horizontal	Pass
6	16087.162	54.08	5.48	74.0	19.92	Peak	119.00	400	Horizontal	Pass
6**	16087.162	45.15	5.48	54.0	8.85	AV	119.00	400	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n40 Channel 9

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1599.500	42.62	-17.62	74.0	31.38	Peak	355.00	100	Vertical	Pass
1**	1599.500	33.88	-17.62	54.0	20.12	AV	355.00	100	Vertical	Pass
2	2454.900	96.24	-12.50	74.0	-22.24	Peak	110.00	200	Vertical	N/A
2**	2454.900	88.92	-12.50	54.0	-34.92	AV	110.00	200	Vertical	N/A
3	2977.200	50.83	-10.23	74.0	23.17	Peak	315.00	100	Vertical	Pass
3**	2977.200	41.42	-10.23	54.0	12.58	AV	315.00	100	Vertical	Pass
4	4841.000	49.30	-3.48	74.0	24.70	Peak	166.00	100	Vertical	Pass
4**	4841.000	40.39	-3.48	54.0	13.61	AV	166.00	100	Vertical	Pass
5	6838.800	52.75	-0.98	74.0	21.25	Peak	119.00	100	Vertical	Pass
5**	6838.800	42.49	-0.98	54.0	11.51	AV	119.00	100	Vertical	Pass
6	16337.849	53.74	5.04	74.0	20.26	Peak	95.00	100	Vertical	Pass
6**	16337.849	43.54	5.04	54.0	10.46	AV	95.00	100	Vertical	Pass

1 GHz to 18 GHz, ANT H VHT20 Channel 1

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1330.400	44.08	-17.55	74.0	29.92	Peak	158.00	300	Horizontal	Pass
1**	1330.400	33.78	-17.55	54.0	20.22	AV	158.00	300	Horizontal	Pass
2	2413.400	105.37	-12.84	74.0	-31.37	Peak	21.00	200	Horizontal	N/A
2**	2413.400	98.25	-12.84	54.0	-44.25	AV	21.00	200	Horizontal	N/A
3	2950.900	50.88	-10.16	74.0	23.12	Peak	312.00	200	Horizontal	Pass
3**	2950.900	40.96	-10.16	54.0	13.04	AV	312.00	200	Horizontal	Pass
4	4964.000	49.56	-3.67	74.0	24.44	Peak	109.00	100	Horizontal	Pass
4**	4964.000	40.85	-3.67	54.0	13.15	AV	109.00	100	Horizontal	Pass
5	6964.000	52.86	-0.47	74.0	21.14	Peak	1.00	100	Horizontal	Pass
5**	6964.000	43.00	-0.47	54.0	11.00	AV	1.00	100	Horizontal	Pass
6	16006.313	55.21	5.08	74.0	18.79	Peak	252.00	100	Horizontal	Pass
6**	16006.313	44.27	5.08	54.0	9.73	AV	252.00	100	Horizontal	Pass

1 GHz to 18 GHz, ANT V VHT20 Channel 1

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1331.600	44.75	-17.59	74.0	29.25	Peak	60.00	300	Vertical	Pass
1**	1331.600	32.75	-17.59	54.0	21.25	AV	60.00	300	Vertical	Pass
2	2413.200	98.76	-12.85	74.0	-24.76	Peak	119.00	100	Vertical	N/A
2**	2413.200	90.74	-12.85	54.0	-36.74	AV	119.00	100	Vertical	N/A
3	2954.000	51.09	-10.01	74.0	22.91	Peak	355.00	200	Vertical	Pass
3**	2954.000	42.14	-10.01	54.0	11.86	AV	355.00	200	Vertical	Pass
4	4851.000	50.23	-3.33	74.0	23.77	Peak	2.00	100	Vertical	Pass
4**	4851.000	39.98	-3.33	54.0	14.02	AV	2.00	100	Vertical	Pass
5	6983.200	53.32	-0.33	74.0	20.68	Peak	360.00	200	Vertical	Pass
5**	6983.200	43.34	-0.33	54.0	10.66	AV	360.00	200	Vertical	Pass
6	15593.662	53.82	4.53	74.0	20.18	Peak	0.00	100	Vertical	Pass
6**	15593.662	44.99	4.53	54.0	9.01	AV	0.00	100	Vertical	Pass

1 GHz to 18 GHz, ANT H VHT20 Channel 2

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1347.700	42.14	-17.44	74.0	31.86	Peak	15.00	400	Horizontal	Pass
1**	1347.700	31.71	-17.44	54.0	22.29	AV	15.00	400	Horizontal	Pass
2	2415.600	106.46	-12.73	74.0	-32.46	Peak	278.00	150	Horizontal	N/A
2**	2415.600	98.90	-12.73	54.0	-44.90	AV	278.00	150	Horizontal	N/A
3	2988.000	50.47	-9.99	74.0	23.53	Peak	82.00	150	Horizontal	Pass
3**	2988.000	41.36	-9.99	54.0	12.64	AV	82.00	150	Horizontal	Pass
4	4894.400	49.40	-3.56	74.0	24.60	Peak	307.00	300	Horizontal	Pass
4**	4894.400	39.91	-3.56	54.0	14.09	AV	307.00	300	Horizontal	Pass
5	6985.400	52.55	-0.41	74.0	21.45	Peak	40.00	300	Horizontal	Pass
5**	6985.400	43.44	-0.41	54.0	10.56	AV	40.00	300	Horizontal	Pass
6	14746.575	53.96	4.26	74.0	20.04	Peak	152.00	300	Horizontal	Pass
6**	14746.575	43.62	4.26	54.0	10.38	AV	152.00	300	Horizontal	Pass

1 GHz to 18 GHz, ANT V VHT20 Channel 2

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1333.900	43.33	-17.63	74.0	30.67	Peak	121.00	100	Vertical	Pass
1**	1333.900	32.01	-17.63	54.0	21.99	AV	121.00	100	Vertical	Pass
2	2415.600	98.05	-12.73	74.0	-24.05	Peak	60.00	150	Vertical	N/A
2**	2415.600	90.10	-12.73	54.0	-36.10	AV	60.00	150	Vertical	N/A
3	2986.200	51.31	-10.05	74.0	22.69	Peak	142.00	100	Vertical	Pass
3**	2986.200	40.87	-10.05	54.0	13.13	AV	142.00	100	Vertical	Pass
4	5228.000	50.89	-3.46	74.0	23.11	Peak	0.00	150	Vertical	Pass
4**	5228.000	40.56	-3.46	54.0	13.44	AV	0.00	150	Vertical	Pass
5	6979.400	52.75	-0.35	74.0	21.25	Peak	348.00	400	Vertical	Pass
5**	6979.400	43.15	-0.35	54.0	10.85	AV	348.00	400	Vertical	Pass
6	15995.288	53.65	5.05	74.0	20.35	Peak	121.00	400	Vertical	Pass
6**	15995.288	43.36	5.05	54.0	10.64	AV	121.00	400	Vertical	Pass

1 GHz to 18 GHz, ANT HVHT20 Channel 6

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1658.600	41.85	-17.24	74.0	32.15	Peak	1.00	300	Horizontal	Pass
1**	1658.600	33.21	-17.24	54.0	20.79	AV	1.00	300	Horizontal	Pass
2	2440.400	105.60	-11.71	74.0	-31.60	Peak	237.00	150	Horizontal	N/A
2**	2440.400	97.87	-11.71	54.0	-43.87	AV	237.00	150	Horizontal	N/A
3	2959.700	50.79	-10.10	74.0	23.21	Peak	327.00	200	Horizontal	Pass
3**	2959.700	41.18	-10.10	54.0	12.82	AV	327.00	200	Horizontal	Pass
4	4856.800	49.59	-3.27	74.0	24.41	Peak	177.00	300	Horizontal	Pass
4**	4856.800	40.11	-3.27	54.0	13.89	AV	177.00	300	Horizontal	Pass
5	6660.000	52.90	-1.03	74.0	21.10	Peak	50.00	300	Horizontal	Pass
5**	6660.000	43.01	-1.03	54.0	10.99	AV	50.00	300	Horizontal	Pass
6	15442.201	54.24	4.51	74.0	19.76	Peak	357.00	300	Horizontal	Pass
6**	15442.201	43.60	4.51	54.0	10.40	AV	357.00	300	Horizontal	Pass

1 GHz to 18 GHz, ANT V VHT20 Channel 6

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1329.900	43.16	-17.52	74.0	30.84	Peak	286.00	300	Vertical	Pass
1**	1329.900	32.62	-17.52	54.0	21.38	AV	286.00	300	Vertical	Pass
2	2438.100	100.75	-11.78	74.0	-26.75	Peak	110.00	200	Vertical	N/A
2**	2438.100	92.39	-11.78	54.0	-38.39	AV	110.00	200	Vertical	N/A
3	2955.900	50.64	-10.07	74.0	23.36	Peak	296.00	150	Vertical	Pass
3**	2955.900	41.76	-10.07	54.0	12.24	AV	296.00	150	Vertical	Pass
4	4856.000	49.53	-3.34	74.0	24.47	Peak	212.00	100	Vertical	Pass
4**	4856.000	40.29	-3.34	54.0	13.71	AV	212.00	100	Vertical	Pass
5	6946.000	52.70	-0.56	74.0	21.30	Peak	259.00	100	Vertical	Pass
5**	6946.000	43.18	-0.56	54.0	10.82	AV	259.00	100	Vertical	Pass
6	14817.450	53.59	5.05	74.0	20.41	Peak	321.00	200	Vertical	Pass
6**	14817.450	43.75	5.05	54.0	10.25	AV	321.00	200	Vertical	Pass

1 GHz to 18 GHz, ANT HVHT20 Channel 11

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1554.700	42.46	-17.55	74.0	31.54	Peak	357.00	100	Horizontal	Pass
1**	1554.700	32.46	-17.55	54.0	21.54	AV	357.00	100	Horizontal	Pass
2	2460.500	105.26	-12.70	74.0	-31.26	Peak	315.00	150	Horizontal	N/A
2**	2460.500	97.79	-12.70	54.0	-43.79	AV	315.00	150	Horizontal	N/A
3	2989.600	50.84	-10.03	74.0	23.16	Peak	129.00	200	Horizontal	Pass
3**	2989.600	41.34	-10.03	54.0	12.66	AV	129.00	200	Horizontal	Pass
4	4927.200	49.99	-3.63	74.0	24.01	Peak	272.00	300	Horizontal	Pass
4**	4927.200	39.69	-3.63	54.0	14.31	AV	272.00	300	Horizontal	Pass
5	6718.000	52.76	-1.33	74.0	21.24	Peak	226.00	200	Horizontal	Pass
5**	6718.000	42.45	-1.33	54.0	11.55	AV	226.00	200	Horizontal	Pass
6	16041.224	53.61	6.14	74.0	20.39	Peak	95.00	100	Horizontal	Pass
6**	16041.224	44.61	6.14	54.0	9.39	AV	95.00	100	Horizontal	Pass

1 GHz to 18 GHz, ANT V VHT20 Channel 11

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1330.400	43.46	-17.55	74.0	30.54	Peak	178.00	100	Vertical	Pass
1**	1330.400	31.82	-17.55	54.0	22.18	AV	178.00	100	Vertical	Pass
2	2460.100	99.83	-12.71	74.0	-25.83	Peak	110.00	200	Vertical	N/A
2**	2460.100	91.58	-12.71	54.0	-37.58	AV	110.00	200	Vertical	N/A
3	2959.500	50.55	-10.10	74.0	23.45	Peak	42.00	200	Vertical	Pass
3**	2959.500	41.15	-10.10	54.0	12.85	AV	42.00	200	Vertical	Pass
4	4454.400	49.18	-4.07	74.0	24.82	Peak	120.00	150	Vertical	Pass
4**	4454.400	39.30	-4.07	54.0	14.70	AV	120.00	150	Vertical	Pass
5	6990.000	53.10	-0.38	74.0	20.90	Peak	132.00	400	Vertical	Pass
5**	6990.000	44.19	-0.38	54.0	9.81	AV	132.00	400	Vertical	Pass
6	16121.026	53.68	5.67	74.0	20.32	Peak	229.00	300	Vertical	Pass
6**	16121.026	43.95	5.67	54.0	10.05	AV	229.00	300	Vertical	Pass

1 GHz to 18 GHz, ANT H VHT40 Channel 3

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1652.400	41.82	-17.57	74.0	32.18	Peak	30.00	300	Horizontal	Pass
1**	1652.400	31.70	-17.57	54.0	22.30	AV	30.00	300	Horizontal	Pass
2	2413.000	100.88	-12.85	74.0	-26.88	Peak	21.00	150	Horizontal	N/A
2**	2413.000	92.98	-12.85	54.0	-38.98	AV	21.00	150	Horizontal	N/A
3	2971.900	51.09	-10.22	74.0	22.91	Peak	0.00	200	Horizontal	Pass
3**	2971.900	41.43	-10.22	54.0	12.57	AV	0.00	200	Horizontal	Pass
4	4857.400	50.13	-3.21	74.0	23.87	Peak	145.00	200	Horizontal	Pass
4**	4857.400	40.95	-3.21	54.0	13.05	AV	145.00	200	Horizontal	Pass
5	6991.400	52.77	-0.34	74.0	21.23	Peak	74.00	200	Horizontal	Pass
5**	6991.400	43.47	-0.34	54.0	10.53	AV	74.00	200	Horizontal	Pass
6	14824.275	53.70	4.96	74.0	20.30	Peak	274.00	300	Horizontal	Pass
6**	14824.275	44.54	4.96	54.0	9.46	AV	274.00	300	Horizontal	Pass

1 GHz to 18 GHz, ANT V VHT40 Channel 3

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1416.200	42.31	-17.30	74.0	31.69	Peak	14.00	300	Vertical	Pass
1**	1416.200	32.08	-17.30	54.0	21.92	AV	14.00	300	Vertical	Pass
2	2418.500	94.43	-12.59	74.0	-20.43	Peak	113.00	150	Vertical	N/A
2**	2418.500	86.41	-12.59	54.0	-32.41	AV	113.00	150	Vertical	N/A
3	2964.400	50.92	-10.24	74.0	23.08	Peak	0.00	100	Vertical	Pass
3**	2964.400	41.93	-10.24	54.0	12.07	AV	0.00	100	Vertical	Pass
4	4884.400	49.22	-3.55	74.0	24.78	Peak	260.00	400	Vertical	Pass
4**	4884.400	39.90	-3.55	54.0	14.10	AV	260.00	400	Vertical	Pass
5	6970.000	53.48	-0.22	74.0	20.52	Peak	2.00	100	Vertical	Pass
5**	6970.000	42.91	-0.22	54.0	11.09	AV	2.00	100	Vertical	Pass
6	16004.213	53.74	5.06	74.0	20.26	Peak	13.00	200	Vertical	Pass
6**	16004.213	44.21	5.06	54.0	9.79	AV	13.00	200	Vertical	Pass

1 GHz to 18 GHz, ANT H VHT40 Channel 4

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1332.700	42.53	-17.63	74.0	31.47	Peak	204.00	100	Horizontal	Pass
1**	1332.700	31.59	-17.63	54.0	22.41	AV	204.00	100	Horizontal	Pass
2	2422.600	102.96	-12.26	74.0	-28.96	Peak	317.00	200	Horizontal	N/A
2**	2422.600	95.16	-12.26	54.0	-41.16	AV	317.00	200	Horizontal	N/A
3	2995.800	50.85	-9.93	74.0	23.15	Peak	136.00	100	Horizontal	Pass
3**	2995.800	40.66	-9.93	54.0	13.34	AV	136.00	100	Horizontal	Pass
4	4946.600	49.55	-3.76	74.0	24.45	Peak	360.00	400	Horizontal	Pass
4**	4946.600	39.87	-3.76	54.0	14.13	AV	360.00	400	Horizontal	Pass
5	6978.400	52.63	-0.31	74.0	21.37	Peak	226.00	300	Horizontal	Pass
5**	6978.400	43.07	-0.31	54.0	10.93	AV	226.00	300	Horizontal	Pass
6	14814.825	54.23	5.03	74.0	19.77	Peak	52.00	400	Horizontal	Pass
6**	14814.825	43.93	5.03	54.0	10.07	AV	52.00	400	Horizontal	Pass

1 GHz to 18 GHz, ANT V VHT40 Channel 4

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1330.000	42.21	-17.52	74.0	31.79	Peak	51.00	300	Vertical	Pass
1**	1330.000	33.09	-17.52	54.0	20.91	AV	51.00	300	Vertical	Pass
2	2434.700	97.37	-11.91	74.0	-23.37	Peak	119.00	100	Vertical	N/A
2**	2434.700	88.22	-11.91	54.0	-34.22	AV	119.00	100	Vertical	N/A
3	2969.300	50.15	-10.17	74.0	23.85	Peak	33.00	100	Vertical	Pass
3**	2969.300	41.66	-10.17	54.0	12.34	AV	33.00	100	Vertical	Pass
4	4999.400	50.03	-3.21	74.0	23.97	Peak	60.00	100	Vertical	Pass
4**	4999.400	40.66	-3.21	54.0	13.34	AV	60.00	100	Vertical	Pass
5	6984.600	52.98	-0.40	74.0	21.02	Peak	346.00	200	Vertical	Pass
5**	6984.600	43.81	-0.40	54.0	10.19	AV	346.00	200	Vertical	Pass
6	14907.225	53.82	4.48	74.0	20.18	Peak	1.00	300	Vertical	Pass
6**	14907.225	43.26	4.48	54.0	10.74	AV	1.00	300	Vertical	Pass

1 GHz to 18 GHz, ANT H VHT40 Channel 5

No.	Frequency (MHz)	Results (dBUV/m)	Factor (dB)	Limit (dBUV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1393.200	41.90	-17.33	74.0	32.10	Peak	26.00	100	Horizontal	Pass
1**	1393.200	31.62	-17.33	54.0	22.38	AV	26.00	100	Horizontal	Pass
2	2441.800	103.68	-11.74	74.0	-29.68	Peak	133.00	100	Horizontal	N/A
2**	2441.800	95.07	-11.74	54.0	-41.07	AV	133.00	100	Horizontal	N/A
3	2992.200	50.41	-9.93	74.0	23.59	Peak	358.00	150	Horizontal	Pass
3**	2992.200	41.18	-9.93	54.0	12.82	AV	358.00	150	Horizontal	Pass
4	4861.200	50.13	-3.25	74.0	23.87	Peak	225.00	100	Horizontal	Pass
4**	4861.200	40.43	-3.25	54.0	13.57	AV	225.00	100	Horizontal	Pass
5	6765.600	52.78	-0.95	74.0	21.22	Peak	112.00	300	Horizontal	Pass
5**	6765.600	42.66	-0.95	54.0	11.34	AV	112.00	300	Horizontal	Pass
6	16092.675	55.10	5.55	74.0	18.90	Peak	2.00	100	Horizontal	Pass
6**	16092.675	44.86	5.55	54.0	9.14	AV	2.00	100	Horizontal	Pass

1 GHz to 18 GHz, ANT V VHT40 Channel 5

No.	Frequency (MHz)	Results (dBUV/m)	Factor (dB)	Limit (dBUV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1331.900	44.34	-17.60	74.0	29.66	Peak	285.00	200	Vertical	Pass
1**	1331.900	34.99	-17.60	54.0	19.01	AV	285.00	200	Vertical	Pass
2	2442.300	96.38	-11.72	74.0	-22.38	Peak	19.00	200	Vertical	N/A
2**	2442.300	87.81	-11.72	54.0	-33.81	AV	19.00	200	Vertical	N/A
3	2979.900	50.95	-10.27	74.0	23.05	Peak	54.00	100	Vertical	Pass
3**	2979.900	40.96	-10.27	54.0	13.04	AV	54.00	100	Vertical	Pass
4	4833.400	49.32	-3.39	74.0	24.68	Peak	88.00	200	Vertical	Pass
4**	4833.400	40.46	-3.39	54.0	13.54	AV	88.00	200	Vertical	Pass
5	6959.400	52.98	-0.43	74.0	21.02	Peak	9.00	400	Vertical	Pass
5**	6959.400	43.89	-0.43	54.0	10.11	AV	9.00	400	Vertical	Pass
6	14837.662	53.89	4.55	74.0	20.11	Peak	176.00	100	Vertical	Pass
6**	14837.662	44.95	4.55	54.0	9.05	AV	176.00	100	Vertical	Pass

1 GHz to 18 GHz, ANT H VHT40 Channel 6

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1333.100	43.15	-17.63	74.0	30.85	Peak	49.00	200	Horizontal	Pass
1**	1333.100	31.54	-17.63	54.0	22.46	AV	49.00	200	Horizontal	Pass
2	2435.800	103.14	-11.86	74.0	-29.14	Peak	0.00	200	Horizontal	N/A
2**	2435.800	94.90	-11.86	54.0	-40.90	AV	0.00	200	Horizontal	N/A
3	2959.500	50.24	-10.10	74.0	23.76	Peak	174.00	100	Horizontal	Pass
3**	2959.500	41.70	-10.10	54.0	12.30	AV	174.00	100	Horizontal	Pass
4	4861.600	50.62	-3.25	74.0	23.38	Peak	329.00	400	Horizontal	Pass
4**	4861.600	40.17	-3.25	54.0	13.83	AV	329.00	400	Horizontal	Pass
5	6971.200	52.33	-0.33	74.0	21.67	Peak	170.00	200	Horizontal	Pass
5**	6971.200	43.61	-0.33	54.0	10.39	AV	170.00	200	Horizontal	Pass
6	16103.437	53.72	5.63	74.0	20.28	Peak	163.00	200	Horizontal	Pass
6**	16103.437	44.51	5.63	54.0	9.49	AV	163.00	200	Horizontal	Pass

1 GHz to 18 GHz, ANT V VHT40 Channel 6

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1332.300	43.00	-17.62	74.0	31.00	Peak	225.00	400	Vertical	Pass
1**	1332.300	31.97	-17.62	54.0	22.03	AV	225.00	400	Vertical	Pass
2	2438.900	98.10	-11.73	74.0	-24.10	Peak	119.00	150	Vertical	N/A
2**	2438.900	89.71	-11.73	54.0	-35.71	AV	119.00	150	Vertical	N/A
3	2955.200	50.00	-10.05	74.0	24.00	Peak	234.00	100	Vertical	Pass
3**	2955.200	41.99	-10.05	54.0	12.01	AV	234.00	100	Vertical	Pass
4	4849.800	49.41	-3.28	74.0	24.59	Peak	200.00	300	Vertical	Pass
4**	4849.800	39.91	-3.28	54.0	14.09	AV	200.00	300	Vertical	Pass
5	6994.400	53.07	-0.38	74.0	20.93	Peak	360.00	100	Vertical	Pass
5**	6994.400	43.15	-0.38	54.0	10.85	AV	360.00	100	Vertical	Pass
6	17314.349	55.71	4.94	74.0	18.29	Peak	359.00	150	Vertical	Pass
6**	17314.349	43.73	4.94	54.0	10.27	AV	359.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H VHT40 Channel 7

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1306.600	41.51	-17.28	74.0	32.49	Peak	257.00	300	Horizontal	Pass
1**	1306.600	32.25	-17.28	54.0	21.75	AV	257.00	300	Horizontal	Pass
2	2438.700	103.84	-11.75	74.0	-29.84	Peak	128.00	200	Horizontal	N/A
2**	2438.700	96.48	-11.75	54.0	-42.48	AV	128.00	200	Horizontal	N/A
3	2998.000	50.41	-10.02	74.0	23.59	Peak	61.00	150	Horizontal	Pass
3**	2998.000	40.90	-10.02	54.0	13.10	AV	61.00	150	Horizontal	Pass
4	4867.000	49.54	-3.35	74.0	24.46	Peak	1.00	400	Horizontal	Pass
4**	4867.000	41.04	-3.35	54.0	12.96	AV	1.00	400	Horizontal	Pass
5	6984.400	53.32	-0.39	74.0	20.68	Peak	360.00	400	Horizontal	Pass
5**	6984.400	44.03	-0.39	54.0	9.97	AV	360.00	400	Horizontal	Pass
6	16098.713	54.34	5.61	74.0	19.66	Peak	26.00	200	Horizontal	Pass
6**	16098.713	44.66	5.61	54.0	9.34	AV	26.00	200	Horizontal	Pass

1 GHz to 18 GHz, ANT V VHT40 Channel 7

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1329.100	43.08	-17.46	74.0	30.92	Peak	282.00	300	Vertical	Pass
1**	1329.100	32.04	-17.46	54.0	21.96	AV	282.00	300	Vertical	Pass
2	2453.200	96.30	-12.36	74.0	-22.30	Peak	19.00	200	Vertical	N/A
2**	2453.200	86.80	-12.36	54.0	-32.80	AV	19.00	200	Vertical	N/A
3	2948.500	50.54	-10.18	74.0	23.46	Peak	6.00	200	Vertical	Pass
3**	2948.500	42.18	-10.18	54.0	11.82	AV	6.00	200	Vertical	Pass
4	4941.000	49.73	-3.69	74.0	24.27	Peak	240.00	100	Vertical	Pass
4**	4941.000	40.57	-3.69	54.0	13.43	AV	240.00	100	Vertical	Pass
5	6441.400	53.08	-1.44	74.0	20.92	Peak	178.00	100	Vertical	Pass
5**	6441.400	43.91	-1.44	54.0	10.09	AV	178.00	100	Vertical	Pass
6	16010.776	54.20	5.09	74.0	19.80	Peak	59.00	300	Vertical	Pass
6**	16010.776	44.11	5.09	54.0	9.89	AV	59.00	300	Vertical	Pass

1 GHz to 18 GHz, ANT H VHT40 Channel 8

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1328.000	42.35	-17.41	74.0	31.65	Peak	176.00	100	Horizontal	Pass
1**	1328.000	31.80	-17.41	54.0	22.20	AV	176.00	100	Horizontal	Pass
2	2450.400	102.66	-12.15	74.0	-28.66	Peak	234.00	100	Horizontal	N/A
2**	2450.400	94.13	-12.15	54.0	-40.13	AV	234.00	100	Horizontal	N/A
3	2976.100	50.50	-10.18	74.0	23.50	Peak	272.00	200	Horizontal	Pass
3**	2976.100	41.43	-10.18	54.0	12.57	AV	272.00	200	Horizontal	Pass
4	5069.600	50.67	-2.89	74.0	23.33	Peak	318.00	150	Horizontal	Pass
4**	5069.600	40.62	-2.89	54.0	13.38	AV	318.00	150	Horizontal	Pass
5	6958.800	52.28	-0.43	74.0	21.72	Peak	124.00	400	Horizontal	Pass
5**	6958.800	43.75	-0.43	54.0	10.25	AV	124.00	400	Horizontal	Pass
6	14608.763	53.20	5.03	74.0	20.80	Peak	163.00	150	Horizontal	Pass
6**	14608.763	43.30	5.03	54.0	10.70	AV	163.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V VHT40 Channel 8

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1597.800	42.61	-17.63	74.0	31.39	Peak	358.00	300	Vertical	Pass
1**	1597.800	32.58	-17.63	54.0	21.42	AV	358.00	300	Vertical	Pass
2	2442.400	97.71	-11.72	74.0	-23.71	Peak	119.00	200	Vertical	N/A
2**	2442.400	88.89	-11.72	54.0	-34.89	AV	119.00	200	Vertical	N/A
3	2980.200	50.99	-10.26	74.0	23.01	Peak	336.00	100	Vertical	Pass
3**	2980.200	40.97	-10.26	54.0	13.03	AV	336.00	100	Vertical	Pass
4	4904.000	49.53	-3.47	74.0	24.47	Peak	76.00	400	Vertical	Pass
4**	4904.000	40.15	-3.47	54.0	13.85	AV	76.00	400	Vertical	Pass
5	6581.200	52.57	-1.14	74.0	21.43	Peak	238.00	100	Vertical	Pass
5**	6581.200	44.46	-1.14	54.0	9.54	AV	238.00	100	Vertical	Pass
6	16090.838	53.67	5.53	74.0	20.33	Peak	208.00	400	Vertical	Pass
6**	16090.838	44.44	5.53	54.0	9.56	AV	208.00	400	Vertical	Pass

1 GHz to 18 GHz, ANT H VHT40 Channel 9

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1330.900	43.08	-17.57	74.0	30.92	Peak	52.00	100	Horizontal	Pass
1**	1330.900	31.73	-17.57	54.0	22.27	AV	52.00	100	Horizontal	Pass
2	2454.300	100.41	-12.44	74.0	-26.41	Peak	232.00	100	Horizontal	N/A
2**	2454.300	93.33	-12.44	54.0	-39.33	AV	232.00	100	Horizontal	N/A
3	2995.800	50.53	-9.93	74.0	23.47	Peak	331.00	100	Horizontal	Pass
3**	2995.800	42.09	-9.93	54.0	11.91	AV	331.00	100	Horizontal	Pass
4	4804.600	49.50	-3.58	74.0	24.50	Peak	145.00	200	Horizontal	Pass
4**	4804.600	39.67	-3.58	54.0	14.33	AV	145.00	200	Horizontal	Pass
5	6964.600	53.38	-0.46	74.0	20.62	Peak	10.00	100	Horizontal	Pass
5**	6964.600	43.33	-0.46	54.0	10.67	AV	10.00	100	Horizontal	Pass
6	14769.937	53.68	4.95	74.0	20.32	Peak	252.00	400	Horizontal	Pass
6**	14769.937	44.30	4.95	54.0	9.70	AV	252.00	400	Horizontal	Pass

1 GHz to 18 GHz, ANT V VHT40 Channel 9

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1195.900	42.48	-17.97	74.0	31.52	Peak	342.00	400	Vertical	Pass
1**	1195.900	34.83	-17.97	54.0	19.17	AV	342.00	400	Vertical	Pass
2	2454.200	94.35	-12.43	74.0	-20.35	Peak	122.00	200	Vertical	N/A
2**	2454.200	86.70	-12.43	54.0	-32.70	AV	122.00	200	Vertical	N/A
3	2962.200	50.71	-10.26	74.0	23.29	Peak	218.00	150	Vertical	Pass
3**	2962.200	40.88	-10.26	54.0	13.12	AV	218.00	150	Vertical	Pass
4	4985.200	50.35	-3.43	74.0	23.65	Peak	351.00	300	Vertical	Pass
4**	4985.200	40.16	-3.43	54.0	13.84	AV	351.00	300	Vertical	Pass
5	6970.200	52.47	-0.24	74.0	21.53	Peak	168.00	300	Vertical	Pass
5**	6970.200	43.62	-0.24	54.0	10.38	AV	168.00	300	Vertical	Pass
6	14777.550	54.73	4.78	74.0	19.27	Peak	358.00	200	Vertical	Pass
6**	14777.550	43.67	4.78	54.0	10.33	AV	358.00	200	Vertical	Pass

A.7 Band Edge (Restricted-band band-edge)

Note ¹: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note ²: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note ³: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Test Data and Plots

802.11b CHANNEL 1

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2322.000	56.18	-1.06	74.0	17.82	Peak	295.00	200	Horizontal	Pass
1**	2322.000	42.85	-1.06	54.0	11.15	AV	295.00	200	Horizontal	Pass
2	2389.833	53.64	-1.15	74.0	20.36	Peak	207.00	100	Horizontal	Pass
2**	2389.833	43.57	-1.15	54.0	10.43	AV	207.00	100	Horizontal	Pass

802.11b CHANNEL 11

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.550	54.28	-0.51	74.0	19.72	Peak	277.00	400	Horizontal	Pass
1**	2483.550	44.63	-0.51	54.0	9.37	AV	277.00	400	Horizontal	Pass
2	2485.250	55.67	-0.62	74.0	18.33	Peak	99.00	200	Horizontal	Pass
2**	2485.250	44.11	-0.62	54.0	9.89	AV	99.00	200	Horizontal	Pass

802.11g CHANNEL 1

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2389.667	59.70	-1.15	74.0	14.30	Peak	298.00	400	Horizontal	Pass
1**	2389.667	46.99	-1.15	54.0	7.01	AV	298.00	400	Horizontal	Pass
2	2389.833	58.51	-1.15	74.0	15.49	Peak	160.00	300	Horizontal	Pass
2**	2389.833	47.19	-1.15	54.0	6.81	AV	160.00	300	Horizontal	Pass

802.11g CHANNEL 2

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2388.000	56.04	-1.13	74.0	17.96	Peak	10.00	300	Horizontal	Pass
1**	2388.000	44.28	-1.13	54.0	9.72	AV	10.00	300	Horizontal	Pass
2	2389.833	54.44	-1.15	74.0	19.56	Peak	220.00	100	Horizontal	Pass
2**	2389.833	45.07	-1.15	54.0	8.93	AV	220.00	100	Horizontal	Pass

802.11g CHANNEL 11

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	60.10	-0.51	74.0	13.90	Peak	189.00	100	Horizontal	Pass
1**	2483.500	48.64	-0.51	54.0	5.36	AV	189.00	100	Horizontal	Pass
2	2483.800	61.78	-0.51	74.0	12.22	Peak	132.00	200	Horizontal	Pass
2**	2483.800	48.00	-0.51	54.0	6.00	AV	132.00	200	Horizontal	Pass

802.11n20 CHANNEL 1

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2389.333	57.86	-1.15	74.0	16.14	Peak	227.00	300	Horizontal	Pass
1**	2389.333	46.57	-1.15	54.0	7.43	AV	227.00	300	Horizontal	Pass
2	2389.833	57.85	-1.15	74.0	16.15	Peak	290.00	200	Horizontal	Pass
2**	2389.833	47.43	-1.15	54.0	6.57	AV	290.00	200	Horizontal	Pass

802.11n20 CHANNEL 2

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2389.667	56.28	-1.15	74.0	17.72	Peak	279.00	100	Horizontal	Pass
1**	2389.667	44.94	-1.15	54.0	9.06	AV	279.00	100	Horizontal	Pass
2	2389.833	55.26	-1.15	74.0	18.74	Peak	282.00	200	Horizontal	Pass
2**	2389.833	45.11	-1.15	54.0	8.89	AV	282.00	200	Horizontal	Pass

802.11n20 CHANNEL 11

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	60.09	-0.51	74.0	13.91	Peak	136.00	100	Horizontal	Pass
1**	2483.500	49.02	-0.51	54.0	4.98	AV	136.00	100	Horizontal	Pass
2	2483.750	60.67	-0.51	74.0	13.33	Peak	136.00	200	Horizontal	Pass
2**	2483.750	48.99	-0.51	54.0	5.01	AV	136.00	200	Horizontal	Pass
3	2483.550	60.04	-0.51	74.0	13.96	Peak	143.00	100	Horizontal	Pass
3**	2483.550	49.31	-0.51	54.0	4.69	AV	143.00	100	Horizontal	Pass

802.11n40 CHANNEL 3

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2389.833	58.83	-1.15	74.0	15.17	Peak	130.00	400	Horizontal	Pass
1**	2389.833	48.61	-1.15	54.0	5.39	AV	130.00	400	Horizontal	Pass

802.11n40 CHANNEL 4

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2389.333	62.43	-1.15	74.0	11.57	Peak	224.00	400	Horizontal	Pass
1**	2389.333	50.88	-1.15	54.0	3.12	AV	224.00	400	Horizontal	Pass
2	2389.833	62.10	-1.15	74.0	11.90	Peak	293.00	200	Horizontal	Pass
2**	2389.833	51.22	-1.15	54.0	2.78	AV	293.00	200	Horizontal	Pass

802.11n40 CHANNEL 5

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2389.000	60.93	-1.16	74.0	13.07	Peak	134.00	100	Horizontal	Pass
1**	2389.000	49.26	-1.16	54.0	4.74	AV	134.00	100	Horizontal	Pass
2	2389.833	60.30	-1.15	74.0	13.70	Peak	233.00	300	Horizontal	Pass
2**	2389.833	49.80	-1.15	54.0	4.20	AV	233.00	300	Horizontal	Pass

802.11n40 CHANNEL 7

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	57.99	-0.51	74.0	16.01	Peak	145.00	300	Horizontal	Pass
1**	2483.500	47.90	-0.51	54.0	6.10	AV	145.00	300	Horizontal	Pass
2	2484.050	59.05	-0.50	74.0	14.95	Peak	137.00	200	Horizontal	Pass
2**	2484.050	47.86	-0.50	54.0	6.14	AV	137.00	200	Horizontal	Pass

802.11n40 CHANNEL 8

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	62.73	-0.51	74.0	11.27	Peak	135.00	300	Horizontal	Pass
1**	2483.500	50.34	-0.51	54.0	3.66	AV	135.00	300	Horizontal	Pass
2	2484.200	59.53	-0.50	74.0	14.47	Peak	135.00	100	Horizontal	Pass
2**	2484.200	50.81	-0.50	54.0	3.19	AV	135.00	100	Horizontal	Pass

802.11n40 CHANNEL 9

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	56.15	-0.51	74.0	17.85	Peak	137.00	400	Horizontal	Pass
1**	2483.500	46.23	-0.51	54.0	7.77	AV	137.00	400	Horizontal	Pass
2	2484.300	56.91	-0.51	74.0	17.09	Peak	276.00	400	Horizontal	Pass
2**	2484.300	45.69	-0.51	54.0	8.31	AV	276.00	400	Horizontal	Pass

VHT20 CHANNEL 1

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2389.667	60.52	-1.15	74.0	13.48	Peak	132.00	200	Horizontal	Pass
1**	2389.667	47.52	-1.15	54.0	6.48	AV	132.00	200	Horizontal	Pass
2	2389.833	60.37	-1.15	74.0	13.63	Peak	278.00	400	Horizontal	Pass
2**	2389.833	47.36	-1.15	54.0	6.64	AV	278.00	400	Horizontal	Pass

VHT20 CHANNEL 2

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2389.667	55.76	-1.15	74.0	18.24	Peak	230.00	100	Horizontal	Pass
1**	2389.667	44.82	-1.15	54.0	9.18	AV	230.00	100	Horizontal	Pass
2	2389.833	55.25	-1.15	74.0	18.75	Peak	279.00	300	Horizontal	Pass
2**	2389.833	45.02	-1.15	54.0	8.98	AV	279.00	300	Horizontal	Pass

VHT20 CHANNEL 11

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.550	59.44	-0.51	74.0	14.56	Peak	215.00	300	Horizontal	Pass
1**	2483.550	49.04	-0.51	54.0	4.96	AV	215.00	300	Horizontal	Pass
2	2483.800	60.24	-0.51	74.0	13.76	Peak	135.00	200	Horizontal	Pass
2**	2483.800	48.34	-0.51	54.0	5.66	AV	135.00	200	Horizontal	Pass

VHT40 CHANNEL 3

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2389.333	58.87	-1.15	74.0	15.13	Peak	287.00	400	Horizontal	Pass
1**	2389.333	47.61	-1.15	54.0	6.39	AV	287.00	400	Horizontal	Pass
2	2389.833	57.62	-1.15	74.0	16.38	Peak	296.00	100	Horizontal	Pass
2**	2389.833	47.77	-1.15	54.0	6.23	AV	296.00	100	Horizontal	Pass

VHT40 CHANNEL 4

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2389.333	62.27	-1.15	74.0	11.73	Peak	285.00	100	Horizontal	Pass
1**	2389.333	50.81	-1.15	54.0	3.19	AV	285.00	100	Horizontal	Pass
2	2389.833	61.35	-1.15	74.0	12.65	Peak	287.00	400	Horizontal	Pass
2**	2389.833	51.50	-1.15	54.0	2.50	AV	287.00	400	Horizontal	Pass

VHT40 CHANNEL 5

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2389.500	63.44	-1.15	74.0	10.56	Peak	285.00	100	Horizontal	Pass
1**	2389.500	49.30	-1.15	54.0	4.70	AV	285.00	100	Horizontal	Pass
2	2389.833	63.01	-1.15	74.0	10.99	Peak	287.00	400	Horizontal	Pass
2**	2389.833	49.76	-1.15	54.0	4.24	AV	287.00	400	Horizontal	Pass

VHT40 CHANNEL 7

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.550	57.70	-0.51	74.0	16.30	Peak	132.00	200	Horizontal	Pass
1**	2483.550	47.89	-0.51	54.0	6.11	AV	132.00	200	Horizontal	Pass
2	2484.350	58.91	-0.52	74.0	15.09	Peak	132.00	300	Horizontal	Pass
2**	2484.350	46.99	-0.52	54.0	7.01	AV	132.00	300	Horizontal	Pass

VHT40 CHANNEL 8

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	61.23	-0.51	74.0	12.77	Peak	132.00	100	Horizontal	Pass
1**	2483.500	50.39	-0.51	54.0	3.61	AV	132.00	100	Horizontal	Pass
2	2484.400	62.17	-0.52	74.0	11.83	Peak	132.00	200	Horizontal	Pass
2**	2484.400	49.56	-0.52	54.0	4.44	AV	132.00	200	Horizontal	Pass

VHT40 CHANNEL 9

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	57.02	-0.51	74.0	16.98	Peak	137.00	100	Horizontal	Pass
1**	2483.500	47.74	-0.51	54.0	6.26	AV	137.00	100	Horizontal	Pass
2	2484.200	58.14	-0.50	74.0	15.86	Peak	148.00	100	Horizontal	Pass
2**	2484.200	47.05	-0.50	54.0	6.95	AV	148.00	100	Horizontal	Pass

A.8 Power Spectral Density (PSD)

Test Data

802.11b Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
CH 1	-2.86	8
CH 6	-3.61	8
CH 11	-4.42	8

802.11g Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
CH 1	-9.21	8
CH 6	-5.67	8
CH 11	-6.90	8

802.11n-20 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
CH 1	-8.30	8
CH 6	-7.90	8
CH 11	-7.66	8

802.11n-40 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
CH 3	-16.83	8
CH 6	-10.59	8
CH 9	-15.04	8

VHT-20 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
CH 1	-8.65	8
CH 6	-6.70	8
CH 11	-8.77	8

VHT-40 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
CH 3	-15.99	8
CH 6	-10.65	8
CH 9	-13.46	8

Test Plots

802.11b LOW CHANNEL




802.11b MIDDLE CHANNEL




802.11b HIGH CHANNEL




802.11g LOW CHANNEL

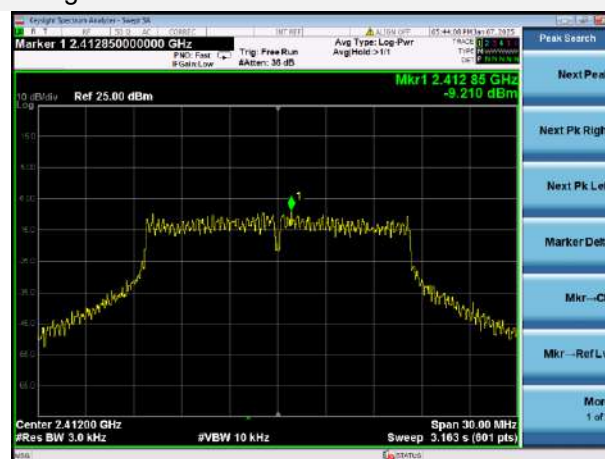


802.11g MIDDLE CHANNEL

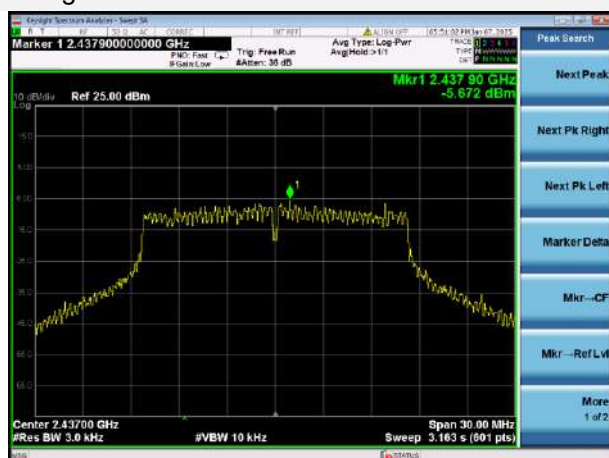


802.11g HIGH CHANNEL

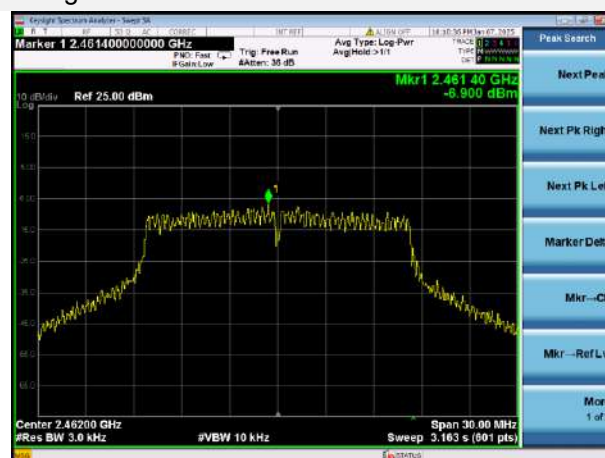


802.11n-20 MHz LOW CHANNEL

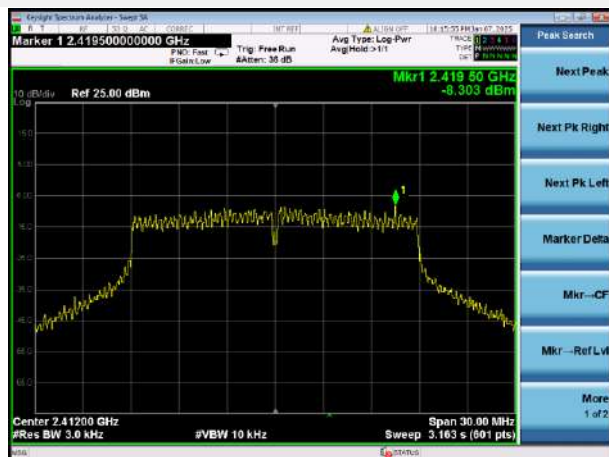


802.11n-20 MHz MIDDLE CHANNEL

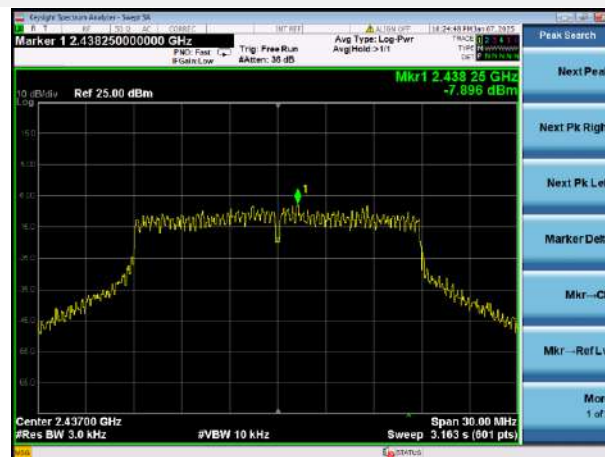


802.11n-20 MHz HIGH CHANNEL

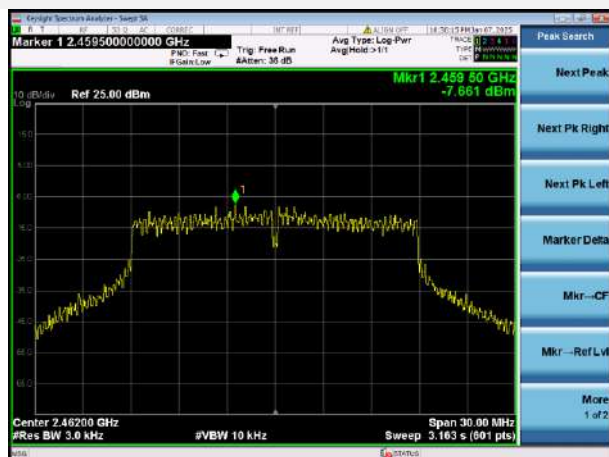


802.11n-40 MHz LOW CHANNEL

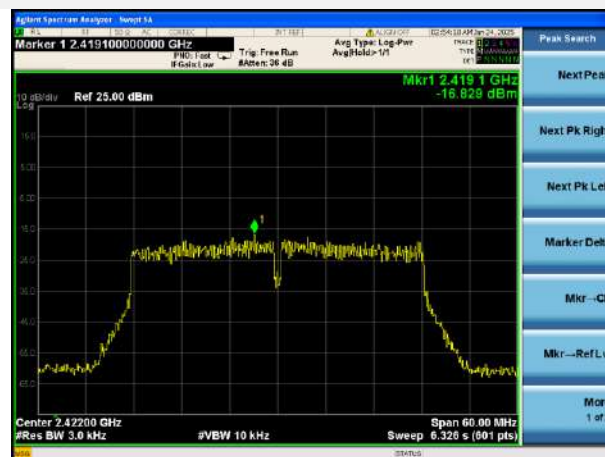

802.11n-40 MHz MIDDLE CHANNEL

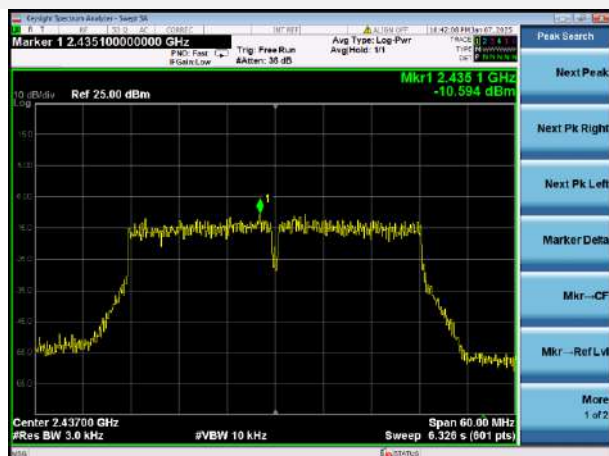


802.11n-40 MHz HIGH CHANNEL

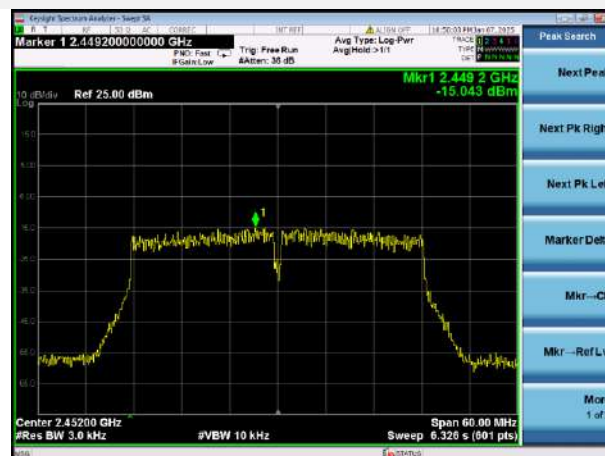


VHT-20 MHz LOW CHANNEL



VHT-20 MHz MIDDLE CHANNEL

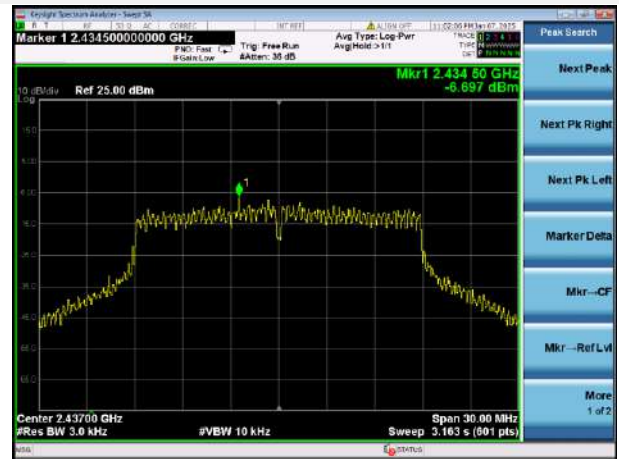

VHT-20 MHz HIGH CHANNEL

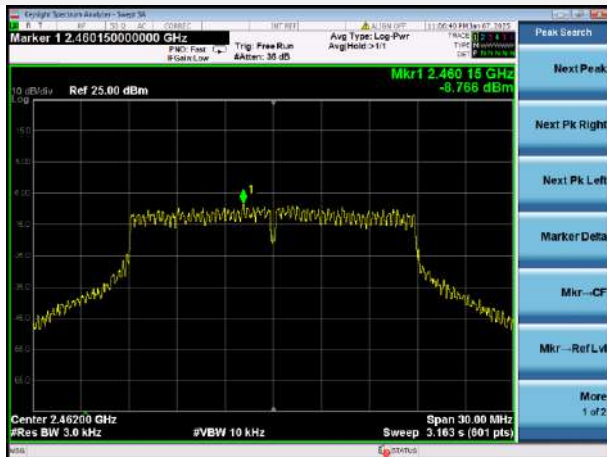

VHT-40 MHz LOW CHANNEL



VHT-40 MHz MIDDLE CHANNEL



VHT-40 MHz HIGH CHANNEL



ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SZ2510222-AR-2.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SZ2510222-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SZ2510222-AI.PDF”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--