


Label and label location

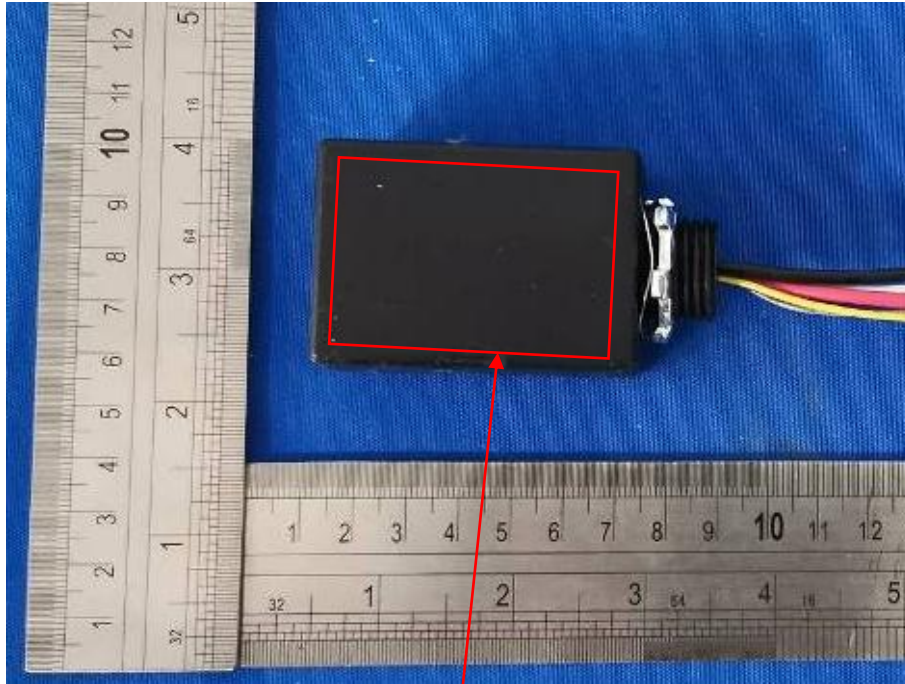

ESL VISION

ESL-KNX-RPP-001

KX KONEX MESH

UL LISTED

WWW.ESLVISION.COM

FCC ID: 2AUVL-RPP-001

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference that may cause undesired operation.

Input Voltage: 120-277 VAC
Frequency: 50/60Hz
Input Current: 2.6A Max.
Output Voltage: 120-277 VAC

Output Current: 2.0A Max.
AUX Voltage: 12VDC/0.02A
Dimming: 0-10V
AUX & Dimming: Class 2

Use Copper Wire Only
Conforms to UL Std. 244A & 1272
Cert. to CAN/CSA Std. C22.2 No. 184
For Permanently Installed Fixtures only

Wire Color Legend:
O DIM+ (PUR)
O DIM- (GRY)
O DC12V (YEL)
O AC L1 (RED)
O AC L2 (BLK)
O AC N (WHI)