

Specification

Date : 2025-03-04

Controlled number : DZ-QF-RD004

PAGE NUMBER: S-1 Page 1 of 10

Material Name	DU1H_WIFI-1 Antenna		
Material Code	01.1W07-DU1TX1-1000	Supplier Code	
Specification and model	DU1_WIFI-1Antenna, 2.4G/5G/6G Antenna,black line length 480MM±2MM,FPC black	Applicable models	DU1H
Manufacturer	Shenzhen nanoant Communication Technology Co.,Ltd.	Agent	
Supplier : Jiangxixi Check : Liguodong Approver : Qizhonglin			
Supplier Address/Contact information : Shenzhen Baoan District Xixiang Street Chentian Industrial Zone Chentian 4th ,Building 34,Room 2001 , 0755-82928581			
Reason for approval	1、 New material : New model 2、 New Supplier : Improve quality <input type="checkbox"/> Cut down the cost <input type="checkbox"/> Improve delivery <input type="checkbox"/> Supplier Resource Reserve <input type="checkbox"/>		
Material confirmation	Material Status	<input type="checkbox"/> Approve <input type="checkbox"/> Disagree <input type="checkbox"/> Limited approval Limited quantity : Reason for limit :	
	Submission of date	<input type="checkbox"/> Specification/Drawing Confirmation <input type="checkbox"/> Relevant test reports have been submitted and qualified <input type="checkbox"/> Device design problems and quality problems are solved	
	Buyer :	Date :	Supervisor review : Date :
	Structure/ID :	Date :	Supervisor review : Date :
	Hardware :	Date :	Supervisor review : Date :
	Quality :	Date :	Supervisor review : Date :
	PM :	Date :	Supervisor review : Date :
Judgment result of product department :			
<input type="checkbox"/> Approve <input type="checkbox"/> Disapprove			
Product Validation :		Date :	

Date : 2025-03-04

Controlled number : DZ-QF-RD004

PAGE NUMBER: S-1 Page 2 of 10

1.0 DESCRIPTIONS AND PART NUMBER:

1.1 DESCRIPTION;

The antenna mounts to the housing of the projector, And after that, the feed point on the prolongation of metal plate should firmly touch the contact provided on the PCB in the respective area.

1.2 PART NUMBER

Part number	Frequency Band	HH Part Number
	2.4G /5G/6G	

2.0 ELECTRICAL SPECIFICATIONS:

2.1 FREQUENCY BAND

WIFI 2.4G /5G/6G


2.2 IMPEDANCE - Nominal impedance: 50

2.3 ACTIVE TEST REPORT


Test equipment:

E5071C Network analyzer

SG24 Microwave anechoic chamber

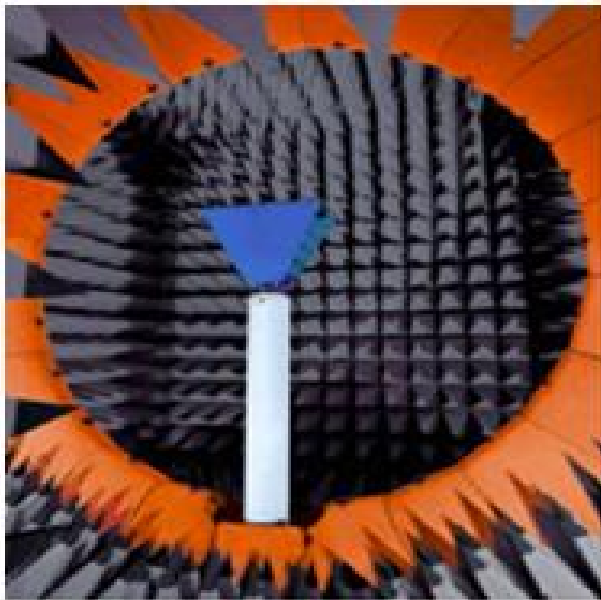

1) Antenna position

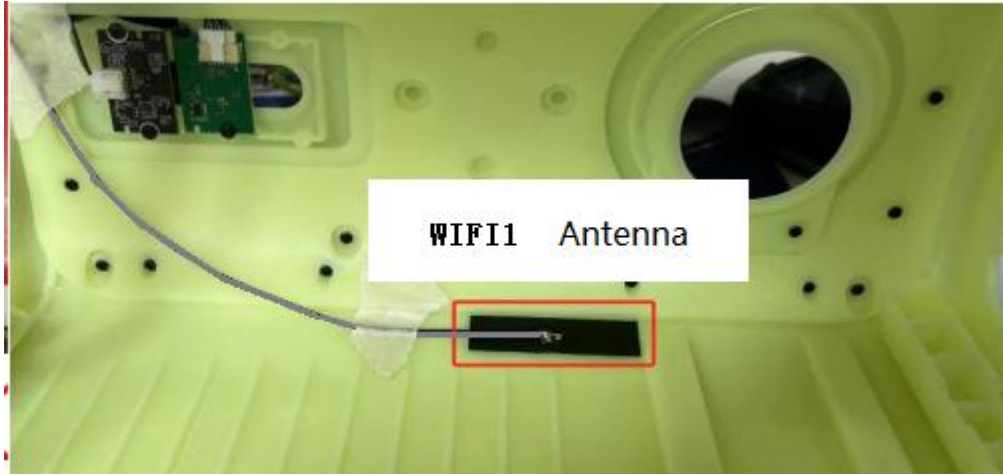

2) Antenna Efficiency

WIFI 1-2. 4G/5G /6G

Gain&Efficiency 增益和效率			
frequency 频率(Hz)	gain 增益(dB)	efficiency 效率(dB)	efficiency 效率
2400M	3.75	-2.97	50.44%
2410M	3.37	-3.07	49.37%
2420M	2.78	-3.14	48.48%
2430M	2.41	-3.3	46.75%
2440M	2.33	-3.38	45.89%
2450M	2.55	-3.3	46.77%
2460M	2.9	-3.25	47.27%
2470M	2.89	-3.28	47.03%
2480M	2.44	-3.38	45.91%
2490M	2.4	-3.39	45.81%
2500M	2.5	-3.52	44.5%

Gain&Efficiency 增益和效率			
frequency 频率(Hz)	gain 增益(dB)	efficiency 效率(dB)	efficiency 效率
5150M	5.45	-4.05	39.35%
5175M	5.27	-4.22	37.83%
5200M	5.71	-4.31	37.04%
5225M	5.07	-4.61	34.59%
5250M	5.29	-4.21	37.94%
5275M	4.91	-4.3	37.14%
5300M	5.37	-4.75	33.48%
5325M	4.97	-4.54	35.15%
5350M	5	-4.13	38.66%
5375M	5.11	-4.12	38.74%
5400M	5.24	-4.26	37.48%
5425M	6.16	-3.84	41.33%
5450M	5.34	-4.15	38.48%

Specification

Date : 2025-03-04

Controlled number : DZ-QF-RD004

PAGE NUMBER: S-1 Page 4 of 10

Gain&Efficiency增益和效率			
frequency 频率(Hz)	gain 增益(dB)	efficiency 效率(dB)	efficiency 效率
5500M	5.23	-3.95	40.28%
5575M	5.23	-3.95	40.28%
5600M	5.24	-4.12	38.77%
5625M	5.01	-4.29	37.28%
5650M	5.2	-4.05	39.36%
5675M	5.2	-3.72	42.46%
5700M	5.25	-3.78	41.9%
5725M	5.35	-3.66	43.07%
5750M	5.3	-3.91	40.67%
5775M	4.75	-4.3	37.14%
5800M	4.85	-3.89	40.86%
5825M	4.95	-3.97	40.07%
5850M	4.36	-4.18	38.17%
6000M	3.41	-4.23	37.75%
6025M	3.51	-4.29	37.28%
6050M	3.82	-4.22	37.88%
6075M	3.97	-4.25	37.60%
6100M	4.02	-4.31	37.06%
6125M	4.09	-4.38	36.45%
6150M	4.14	-4.31	37.03%
6175M	4.06	-4.34	36.85%
6200M	3.95	-4.26	37.48%
6225M	3.81	-4.3	37.17%
6250M	3.88	-4.31	37.10%
6275M	3.98	-4.23	37.76%
6300M	3.8	-4.29	37.22%
6325M	4.07	-4.19	38.12%
6350M	4.3	-4.16	38.33%
6375M	4.13	-4.31	37.06%
6400M	4.08	-4.39	36.42%
6425M	4.37	-4.38	36.47%
6450M	4.61	-4.4	36.32%
6475M	4.84	-4.48	35.63%
6500M	4.88	-4.6	34.68%
6525M	5.01	-4.67	34.14%
6550M	5.12	-4.61	34.61%


Date : 2025-03-04

Controlled number : DZ-QF-RD004

PAGE NUMBER: S-1 Page 5 of 10

6575M	5.07	-4.53	35.26%
6600M	4.72	-4.71	33.81%
6625M	4.53	-4.73	33.68%
6650M	4.42	-4.74	33.61%
6675M	4.33	-4.72	33.70%
6700M	4.27	-4.73	33.68%
6725M	4.26	-4.72	33.75%
6750M	4.03	-4.83	32.91%
6775M	3.89	-4.89	32.44%
6800M	3.98	-4.94	32.04%
6825M	4.19	-4.88	32.51%
6850M	4.38	-4.95	31.98%
6875M	4.31	-5.05	31.28%
6900M	4.22	-5.16	30.48%
6925M	4.49	-5.06	31.17%
6950M	4.67	-5.06	31.20%
6975M	4.76	-5.07	31.15%
7000M	4.52	-5.26	30.76%
7025M	4.52	-5.26	30.82%
7050M	4.4	-5.4	29.87%
7075M	4.41	-5.49	29.25%
7100M	4.14	-5.7	28.93%
7125M	4.15	-5.72	28.78%
7150M	4.01	-5.71	28.89%

3) Pattern

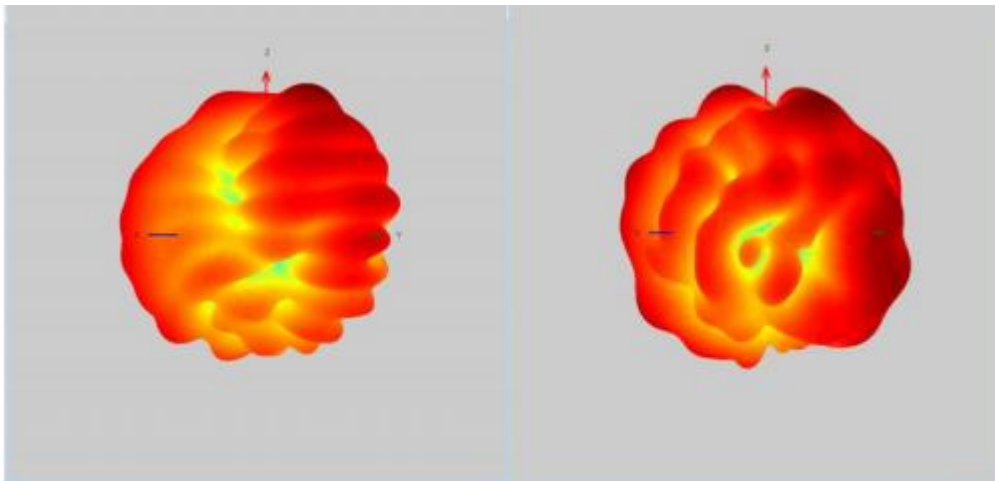

WIFI 1 | 2.4G 5G


4) Passive result

Band	Channel	Freespace	Channel	Freespace	PASS
		TRP		TIS(-)	
WIFI B	1	16.09	2412	-79.43	≤-78
	6	14.81	2437	-80.88	≤-78
	13	14.75	2472	-80.47	≤-78
	AVE	15.22	AVE	-80.26	
WIFI A	36	13.05	5180	-70.78	≤-68
	100	12.21	5500	-69.29	≤-68
	165	13.44	5825	-68.18	≤-68
	AVE	12.90	16.09	-69.42	


5) Antenna S11




6) Isolation
WIFI0 /WIFI1

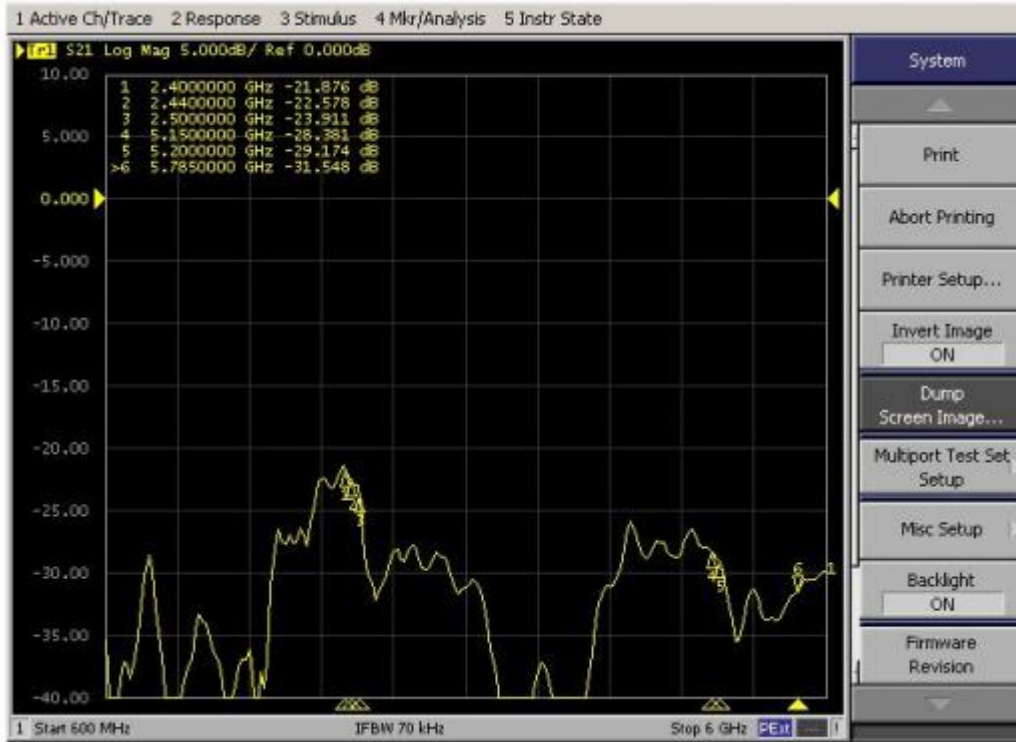

WIFI0/BT

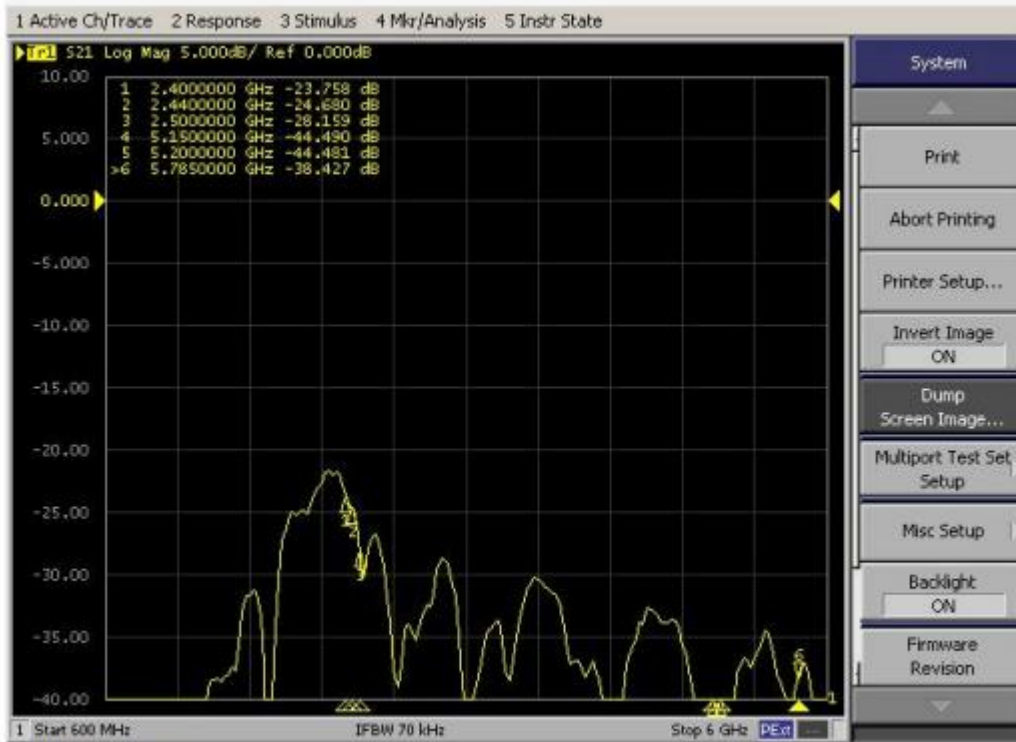


WiFi1/BT

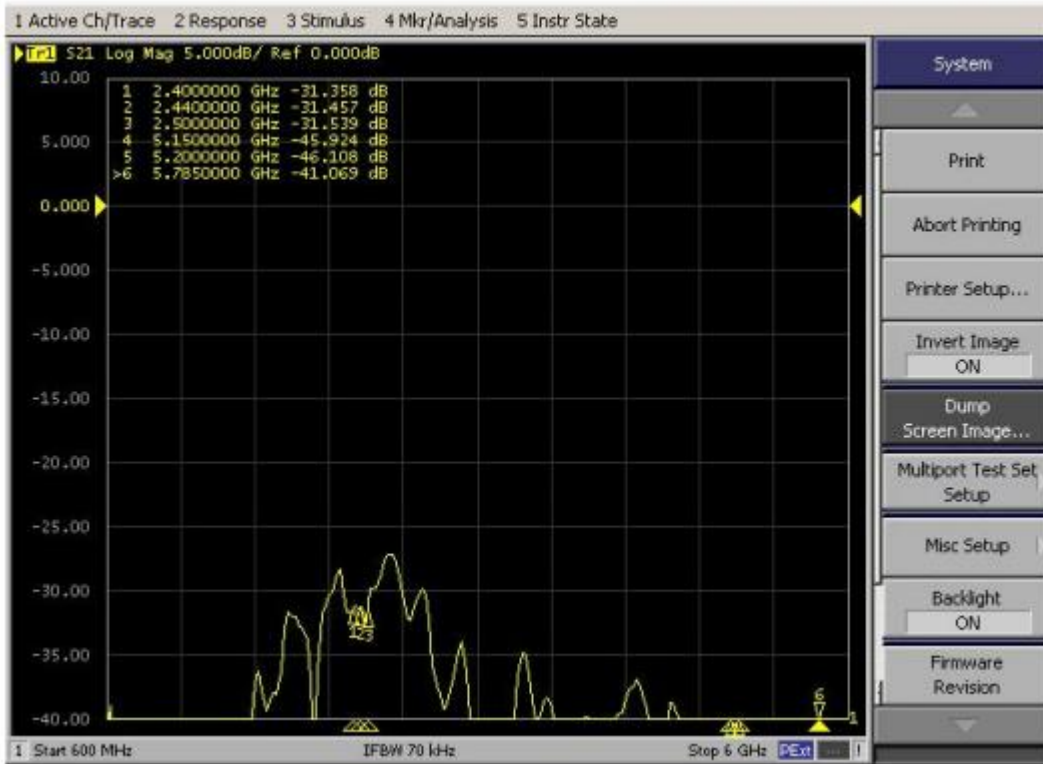


7) Treatment and suggestions



DLP cable shall be covered with conductive cloth for shielding

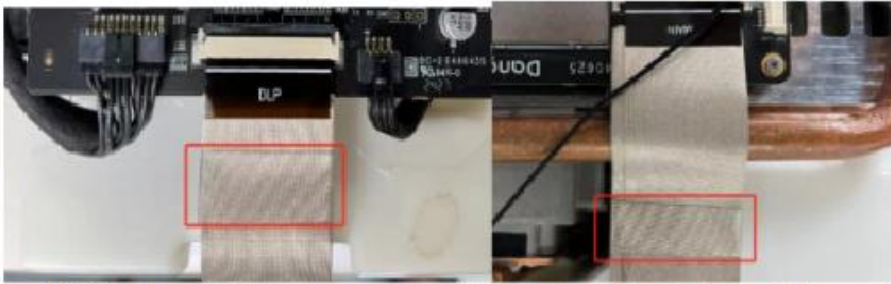

DLP cable shall be wrapped with conductive cloth and the meta frame shall be well grounded

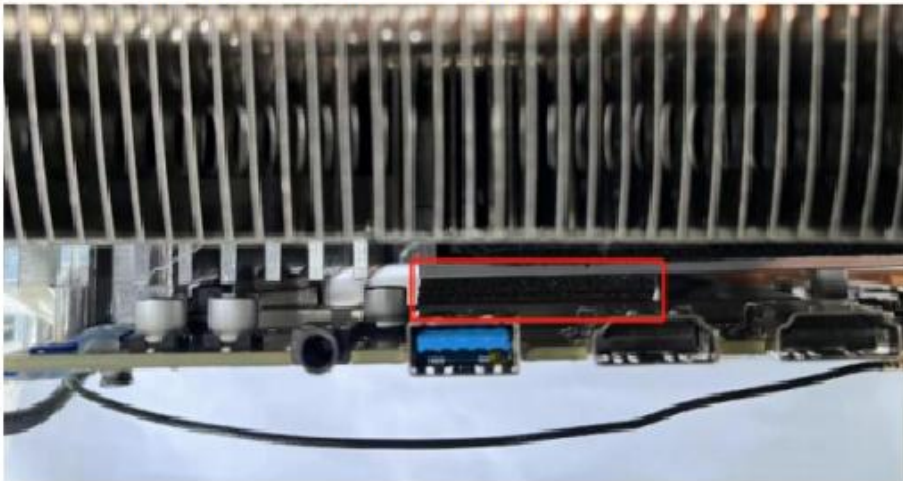

The main chip needs to be pasted with conductive wool to ensure good shielding

3.0 MECHANICAL SPECIFICATIONS;

3.1 MECHANICAL CONFIGURATION

The appearance of the antenna is in accordance with drawing

3.2 CONNECTOR TYPE

The connector type is an embedded type

4.0 ENVIRONMENTAL SPECIFICATIONS

4.1 TEMPERATURE

Operating Temperature Range: -40 C~ +85 C

Storage Temperature Range: -40 C~ +120 C

4.2 SALT SPRAY TEST

Antenna be exposed in a 35°C, 5% salt fog chamber for 24 hours then check the appearance and performance against the specifications in normal temperature.

4.3 STATIC HUMIDITY TEST

The antenna is subjected to the following test:

Temperatures: +70°C and 90%--95%RH


Test Duration: 24 Hours

The antenna should not undergo any structural or functional change and remain within the electrical/mechanical specification.

5.0 PACKAGING

The antennas will be packed in bags, There are 100 or 200 /300antennas per bag. The bags are packed in corrugated fibreboard over box. \

Drawing :

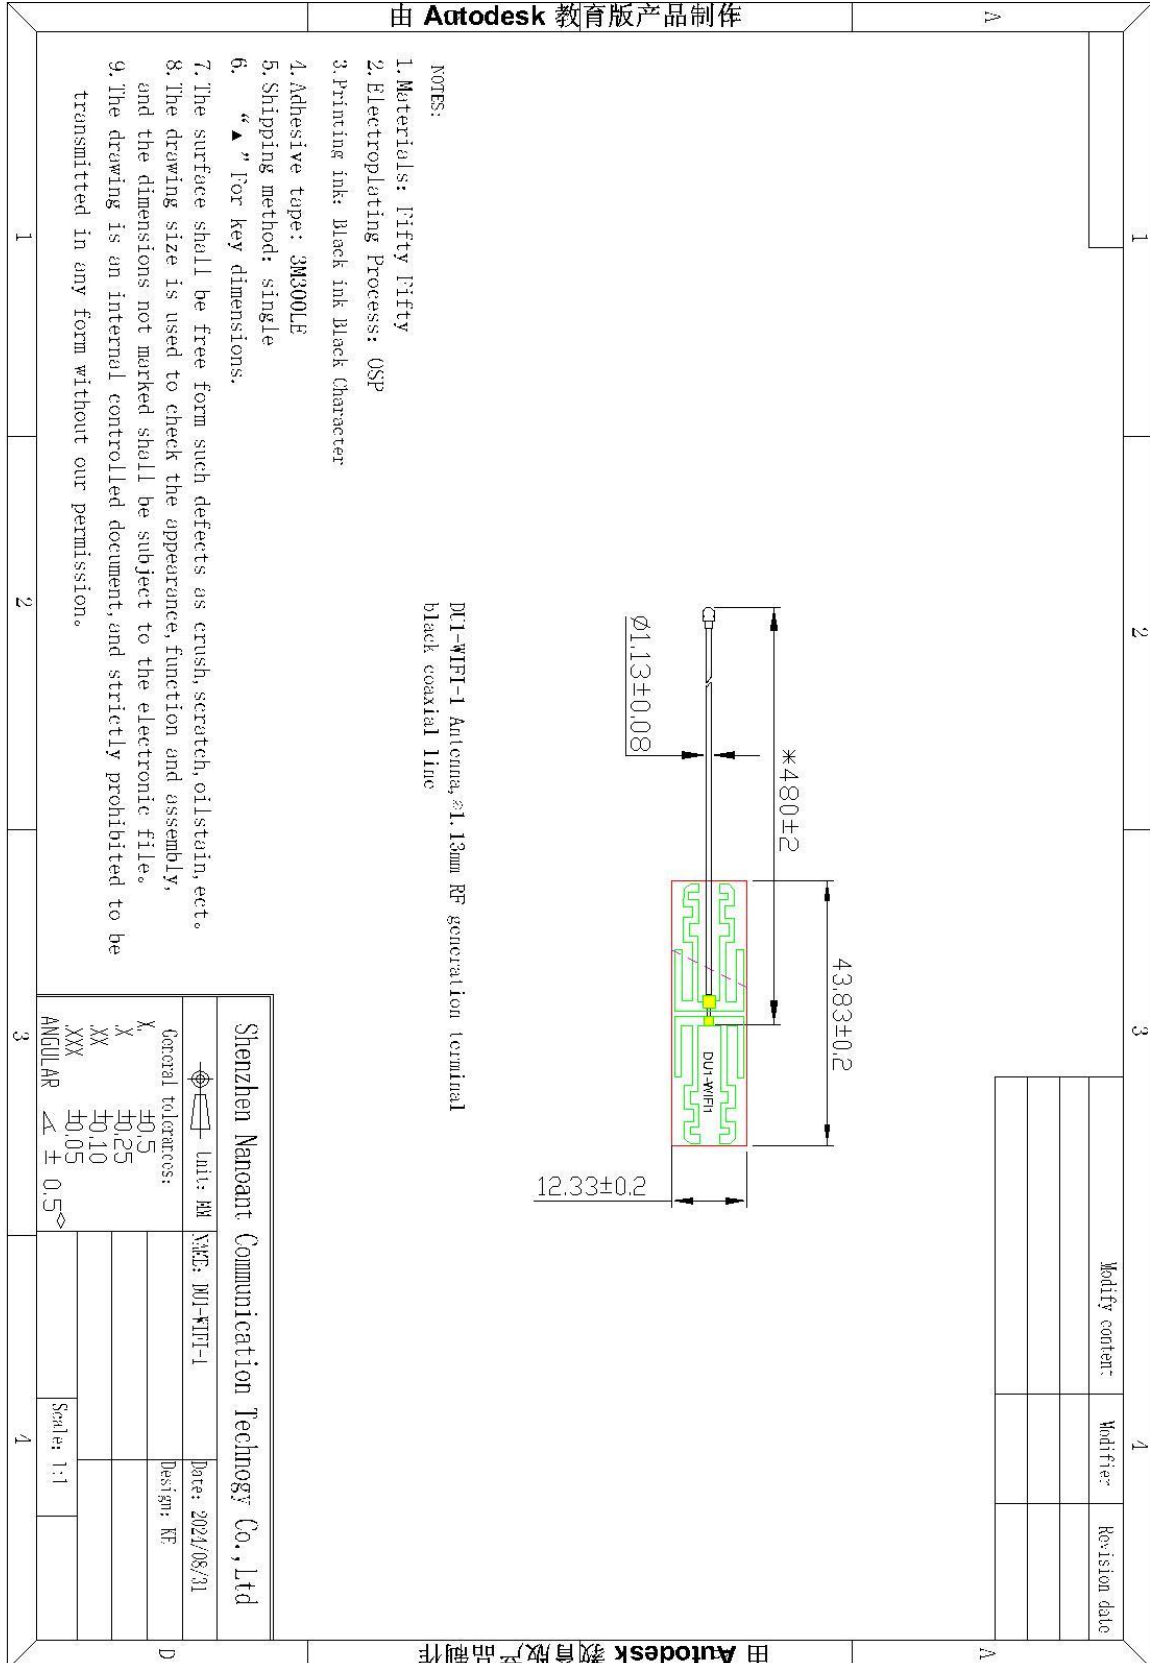

由 Autodesk 教育版产品制作