

FCC Part 22H & 24E & 27 Measurement and Test Report

For

Qingsong youmi (Beijing) Technology Co., Ltd.

121, 1st Floor, Building 16, Beijie jiayuan , Changping District, Beijing,

China.

FCC ID: 2AVK5-BST-0204-MG

FCC Rules: FCC Part 22H, FCC Part 24E, FCC Part 27

Product Description: Power Bank Cabinet

Tested Model: BST-0204-MG

Report No.: WTD20X01001596W-1

Sample Receipt Date: Jan.07, 2020

Tested Date: Jan.07, 2020 to Feb.28, 2020

Issued Date: Feb.28, 2020

Tested By: Jason Su / Engineer

Jason Su

Reviewed By: Lion Cai / RF Manager

Lion Cai

Approved & Authorized By: Silin Chen / Manager

Silin Chen

Prepared By:

Shenzhen SEM Test Technology Co., Ltd.

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn



Note: This test report is limited to the above client company and the product model only. It



may not be duplicated without prior permitted by Shenzhen SEM Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION.....4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....4
1.2 TEST STANDARDS.....6
1.3 TEST METHODOLOGY.....6
1.4 TEST FACILITY.....6
1.5 EUT SETUP AND TEST MODE.....7
1.6 MEASUREMENT UNCERTAINTY.....8
1.7 TEST EQUIPMENT LIST AND DETAILS.....8

2. SUMMARY OF TEST RESULTS10

3. RF EXPOSURE11
3.1 STANDARD APPLICABLE.....11
3.2 TEST RESULT.....11

4. RF OUTPUT POWER12
4.1 STANDARD APPLICABLE.....12
4.2 TEST PROCEDURE.....12
4.3 SUMMARY OF TEST RESULTS/PLOTS.....12

5. PEAK-TO-AVERAGE RATIO (PAR) OF TRANSMITTER.....15
5.1 STANDARD APPLICABLE.....15
5.2 TEST PROCEDURE.....15
5.3 SUMMARY OF TEST RESULTS.....15

6. EMISSION BANDWIDTH.....17
6.1 STANDARD APPLICABLE.....17
6.2 TEST PROCEDURE.....17
6.3 SUMMARY OF TEST RESULTS/PLOTS.....17

7. OUT OF BAND EMISSIONS AT ANTENNA TERMINAL.....28
7.1 STANDARD APPLICABLE.....28
7.2 TEST PROCEDURE.....28
7.3 SUMMARY OF TEST RESULTS/PLOTS.....28

8. SPURIOUS RADIATED EMISSIONS.....41
8.1 STANDARD APPLICABLE.....41
8.2 TEST PROCEDURE.....41
8.3 SUMMARY OF TEST RESULTS/PLOTS.....41

9. FREQUENCY STABILITY50
9.1 STANDARD APPLICABLE.....50
9.2 TEST PROCEDURE.....50
9.3 SUMMARY OF TEST RESULTS/PLOTS.....50

10. MODULATION CHARACTERISTICS53
10.1 STANDARD APPLICABLE.....53
10.2 TEST PROCEDURE.....53
10.3 SUMMARY OF TEST RESULTS/PLOTS.....53



Report version

Version No.	Date of issue	Description
Rev.00	Feb.28, 2020	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Qingsong youmi (Beijing) Technology Co., Ltd.
Address of applicant: 121, 1st Floor, Building 16, Beijie jiyuan , Changping District, Beijing, China.

Manufacturer: Dongguan Best New Energy Technology co. LTD
Address of manufacturer: 101, no.2, north industrial road 2, songshan lake high-tech development zone, dongguan city, China.

General Description of EUT:	
Product Name:	Power Bank Cabinet
Brand Name:	/
Model No.:	BST-0204-MG
Adding Model(s):	/
Rated Voltage:	AC120V/60Hz
Battery:	/
Adapter Model:	MN0741-X050148 Input: AC100-240V, 50/60Hz, 1.5A, Max; Output: DC5.0V, 14.8A
Software Version:	/
Hardware Version:	/
<i>Note: The test data is gathered from a production sample provided by the manufacturer.</i>	



Technical Characteristics of EUT:	
3G	
Support Networks:	WCDMA, HSDPA, HSUPA
Support Band:	WCDMA Band 2, WCDMA Band 4, WCDMA Band 5
Uplink Frequency:	WCDMA Band 2: 1850~1910MHz WCDMA Band 4: 1710~1755MHz WCDMA Band 5: 824~849MHz
Downlink Frequency:	WCDMA Band 2: 1930~1990MHz WCDMA Band 4: 2110~2155MHz WCDMA Band 5: 869~894MHz
RF Output Power:	WCDMA Band 2: 23.56dBm, WCDMA Band 4: 21.93dBm WCDMA Band 5: 23.68dBm
Type of Emission:	WCDMA Band 2: 4M14F9W WCDMA Band 4: 4M16F9W WCDMA Band 5: 4M18F9W
Type of Modulation:	BPSK
Antenna Type:	Integral Antenna
Antenna Gain:	WCDMA Band 2: 2.0dBi, WCDMA Band 4: 2.0dBi, WCDMA Band 5: 2.0dBi

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 2: FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS

FCC Rules Part 22: PRIVATE LAND MOBILE RADIO SERVICES.

FCC Rules Part 24: PUBLIC MOBILE SERVICES

FCC Rules Part 27: MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES

TIA/EIA 603 E March 2016: Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

ANSI C63.26-2015: American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

KDB 971168 D01 Power Meas License Digital Systems v03r01: MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with TIA/EIA 603 E/ KDB 971168/ ANSI C63.26 The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

Address of the test laboratory

Laboratory: Shenzhen SEM Test Technology Co., Ltd.

Address: 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101)

FCC – Registration No.: 125990

Shenzhen SEM Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.



1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	WCDMA Band 5	Low, Middle, High Channels
TM2	HSDPA Band 5	Low, Middle, High Channels
TM3	HSUPA Band 5	Low, Middle, High Channels
TM4	WCDMA Band 4	Low, Middle, High Channels
TM5	HSDPA Band 4	Low, Middle, High Channels
TM6	HSUPA Band 4	Low, Middle, High Channels
TM7	WCDMA Band 2	Low, Middle, High Channels
TM8	HSDPA Band 2	Low, Middle, High Channels
TM9	HSUPA Band 2	Low, Middle, High Channels

Testing Configure			
Support Band	Support Standard	Channel Frequency	Channel Number
WCDMA Band 5	WCDMA/HSDPA/HSUPA	826.4 MHz	4132
		836.6 MHz	4183
		846.6 MHz	4233
WCDMA Band 4	WCDMA/HSDPA/HSUPA	1712.4 MHz	1312
		1732.4 MHz	1412
		1752.6 MHz	1513
WCDMA Band 2	WCDMA/HSDPA/HSUPA	1852.4 MHz	9262
		1880.0 MHz	9400
		1907.6 MHz	9538

Note: the transmitter has been tested on the communications mode of, WCDMA, HSDPA, HSUPA compliance test and record the worst case.

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
AC Cable	1.5	Unshielded	Without Ferrite
DC Cable	0.28	Unshielded	Without Ferrite



Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Frequency Stability	Conducted	2.3%
Transmitter Spurious Emissions	Conducted	$\pm 0.42\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2019-04-30	2020-04-29
SEMT-1063	GSM Tester	Rohde & Schwarz	CMU200	114403	2019-04-30	2020-04-29
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2019-04-30	2020-04-29
SEMT-1079	Spectrum Analyzer	Agilent	N9020A	US47140102	2019-04-30	2020-04-29
SEMT-1080	Signal Generator	Agilent	83752A	3610A01453	2019-04-30	2020-04-29
SEMT-1081	Vector Signal Generator	Agilent	N5182A	MY47070202	2019-04-30	2020-04-29
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2019-04-30	2020-04-29
SEMT-1082	Power Divider	RF-Lambda	RFLT4W5M18G	14110400027	2019-04-30	2020-04-29
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2019-04-30	2020-04-29
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2019-04-30	2020-04-29
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2019-04-30	2020-04-29



SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2019-04-30	2020-04-29
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2019-05-05	2021-05-04
SEMT-1068	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2019-05-05	2021-05-04
SEMT-1042	Horn Antenna	ETS	3117	00086197	2019-05-05	2021-05-04
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2019-05-05	2021-05-04
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2019-04-30	2020-04-29
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2019-04-30	2020-04-29
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2019-04-30	2020-04-29
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2019-05-05	2021-05-04
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2019-04-30	2020-04-29
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2019-04-30	2020-04-29
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2019-04-30	2020-04-29
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2019-03-18	2020-03-17
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2019-03-18	2020-03-17
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2019-03-18	2020-03-17
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2019-03-18	2020-03-17
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2019-03-18	2020-03-17
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2019-03-18	2020-03-17

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing



2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§1.1307, §2.1091	RF Exposure	Compliant
§22.913(a), §24.232(c), §27.50(d)	RF Output Power	Compliant
§24.51, §27.50	Peak-to-average Ratio (PAR) of Transmitter	Compliant
§22.917(b), §24.238(b), §27.53	Emission Bandwidth	Compliant
§22.917(a), §24.238(a), §27.53(h)	Spurious Emissions at Antenna Terminal	Compliant
§22.917(a), §24.238(a), §27.53(h)	Spurious Radiation Emissions	Compliant
§22.917(a), §24.238(a), §27.53(h)	Out of Band Emissions	Compliant
§22.355, §24.235, §27.54	Frequency Stability	Compliant



3. RF Exposure

3.1 Standard Applicable

According to §1.1307 and §2.1091, the fixed transmitter must comply the RF exposure requirements.

3.2 Test Result

This product complied with the requirement of the RF exposure, please see the RF exposure report.

4. RF Output Power

4.1 Standard Applicable


According to §22.913(a)(2), the ERP of mobile and portable stations transmitters and auxiliary test transmitters must not exceed 7 Watts.

According to §24.232(c), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to §27.50(d)(4), fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

4.2 Test Procedure

- Conducted output power test method:

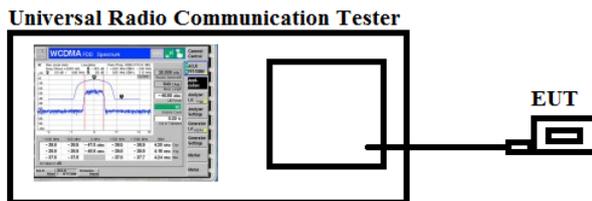

- Radiated power test method:

1. The setup of EUT is according with per ANSI/TIA Standard 603E and ANSI C63.26 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

4.3 Summary of Test Results/Plots



➤ **Max. Radiated Power**

Mode	Channel	Antenna Polar	ERP	Limit (dBm)	Result
WCDMA Band V	4132	V	20.47	<38.45	Pass
		H	13.52		
	4183	V	20.73		
		H	13.72		
	4233	V	20.12		
		H	13.39		

Mode	Channel	Antenna Polar	EIRP	Limit (dBm)	Result
WCDMA Band IV	1312	V	20.47	<30.00	Pass
		H	13.32		
	1412	V	20.98		
		H	14.04		
	1513	V	20.85		
		H	14.01		

Mode	Channel	Antenna Polar	EIRP	Limit (dBm)	Result
WCDMA Band II	9262	V	20.29	<33.00	Pass
		H	13.18		
	9400	V	20.52		
		H	13.36		
	9538	V	20.28		
		H	13.72		

Note: Pre-scan mode WCDMA/HSDPA/HSUPA find the worst case at WCDMA mode and recorded in the test report.



➤ **Max. Conducted Power (Average power)**

Conducted Average power (dBm)						
Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4183	4233	9262	9400	9538
Frequency(MHz)	826.4	836.6	846.6	1852.4	1880.0	1907.6
RMC 12.2k	23.61	23.57	23.68	23.56	23.32	23.36
HSDPA Subtest-1	22.62	22.64	22.66	21.80	21.87	21.93
HSDPA Subtest-2	22.59	22.61	22.63	21.76	21.85	21.92
HSDPA Subtest-3	22.57	22.62	22.64	21.78	21.86	21.91
HSDPA Subtest-4	22.58	22.62	22.65	21.79	21.85	21.91
HSUPA Subtest-1	22.07	22.08	22.16	21.31	21.40	21.51
HSUPA Subtest-2	22.05	22.06	22.13	21.29	21.38	21.46
HSUPA Subtest-3	22.01	22.07	22.14	21.27	21.37	21.47
HSUPA Subtest-4	22.04	22.05	22.15	21.27	21.38	21.48
HSUPA Subtest-5	22.03	22.05	22.13	21.29	21.37	21.49

Conducted Average power (dBm)						
Band	WCDMA Band IV					
Channel	1312	1412	1513			
Frequency(MHz)	1712.4	1733.4	1752.6			
RMC 12.2k	21.49	21.93	21.78			
HSDPA Subtest-1	21.14	21.35	21.40			
HSDPA Subtest-2	21.11	21.32	21.38			
HSDPA Subtest-3	21.13	21.32	21.37			
HSDPA Subtest-4	21.12	21.33	21.38			
HSUPA Subtest-1	21.13	21.35	21.32			
HSUPA Subtest-2	21.12	21.32	21.29			
HSUPA Subtest-3	21.11	21.33	21.28			
HSUPA Subtest-4	21.12	21.34	21.29			
HSUPA Subtest-5	21.11	21.34	21.29			

5. Peak-to-average Ratio (PAR) of Transmitter

5.1 Standard Applicable

According to §24.232(d), power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51, in measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


According to §27.50(B), the peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

5.2 Test Procedure

According with KDB 971168

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

Test Configuration for the emission bandwidth testing:

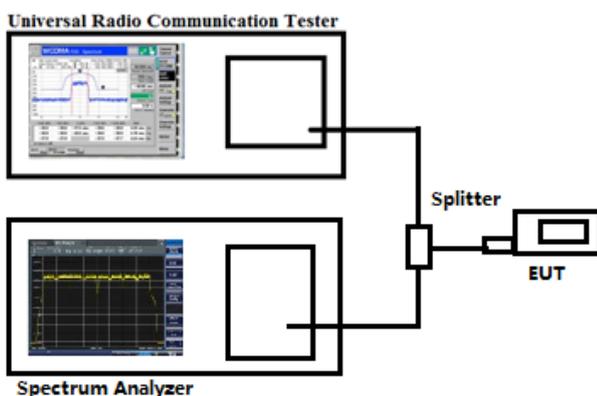

5.3 Summary of Test Results



WCDMA Band IV				
Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
WCDMA	1312	1712.4	4.38	13
	1412	1733.4	4.72	13
	1513	1752.6	3.93	13

WCDMA Band II				
Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
WCDMA	9262	1852.4	4.02	13
	9400	1880.0	3.75	13
	9538	1907.6	3.69	13

Note: Only the worst case was selected to record.

6. Emission Bandwidth

6.1 Standard Applicable

According to §22.917(b), the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


According to §24.238(b), the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

According to §27.53, the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

6.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 10kHz for GSM mode and 100kHz for WCDMA mode, VBW shall be at least 3 times the RBW, and the 26dB bandwidth was recorded.

Test Configuration for the emission bandwidth testing:

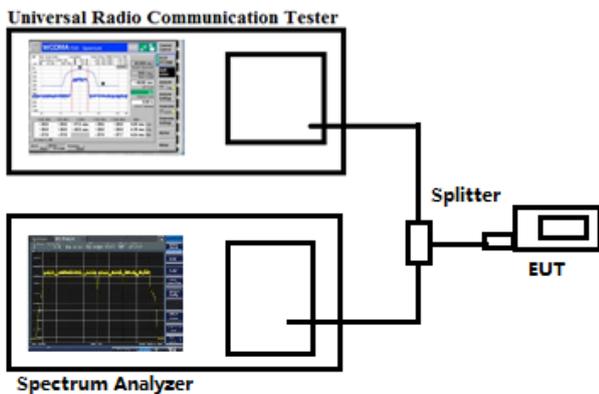

6.3 Summary of Test Results/Plots




EUT Mode	Channel	Frequency (MHz)	99% Occupy bandwidth (kHz)	-26dB bandwidth (kHz)
WCDMA Band V	4132	826.40	4118.4	4672
	4183	836.60	4121.4	4704
	4233	846.60	4143.5	4747
HSDPA	4132	826.40	4177.6	6501
	4183	836.60	4138.9	6423
	4233	846.60	4132.9	5728
HSUPA	4132	826.40	4158.6	6680
	4183	836.60	4177.7	6427
	4233	846.60	4153.2	5650
WCDMA Band II	9262	1852.40	4143.5	4740
	9400	1880.00	4122.0	4717
	9538	1907.60	4144.2	4726
HSDPA	9262	1852.40	4136.2	4735
	9400	1880.00	4138.4	4705
	9538	1907.60	4137.1	4709
HSUPA	9262	1852.40	4129.5	4697
	9400	1880.00	4133.8	4736
	9538	1907.60	4133.5	4705
WCDMA Band IV	1312	1712.4	4156.4	4741
	1412	1733.4	4131.7	4699
	1513	1752.6	4143.2	4767
HSDPA	1312	1712.4	4150.8	4743
	1412	1733.4	4128.3	4711
	1513	1752.6	4142.5	4712
HSUPA	1312	1712.4	4135.3	4692
	1412	1733.4	4125.9	4696
	1513	1752.6	4151.1	4709




WCDMA Band V


Low Channel

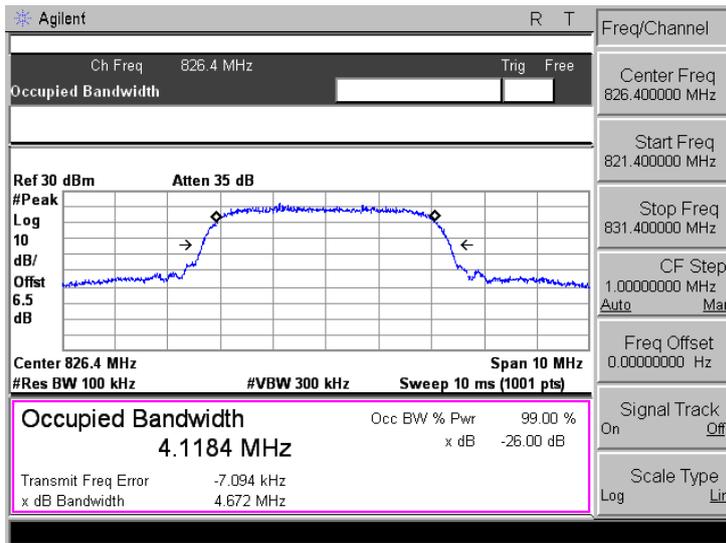

Middle Channel

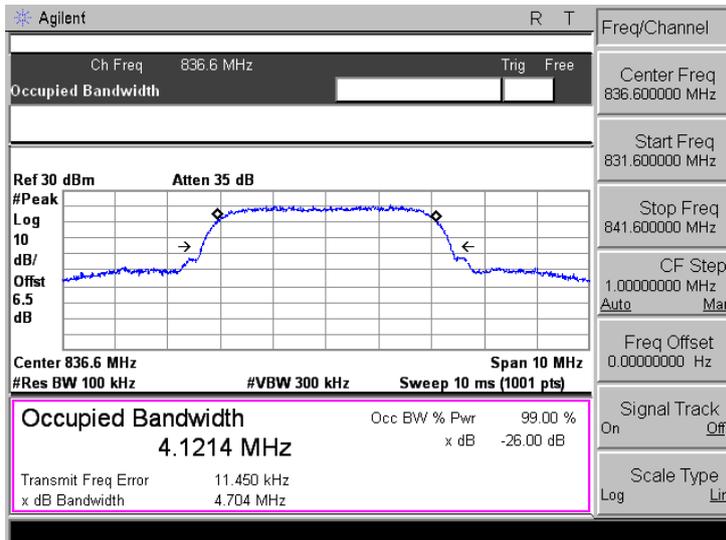


High Channel

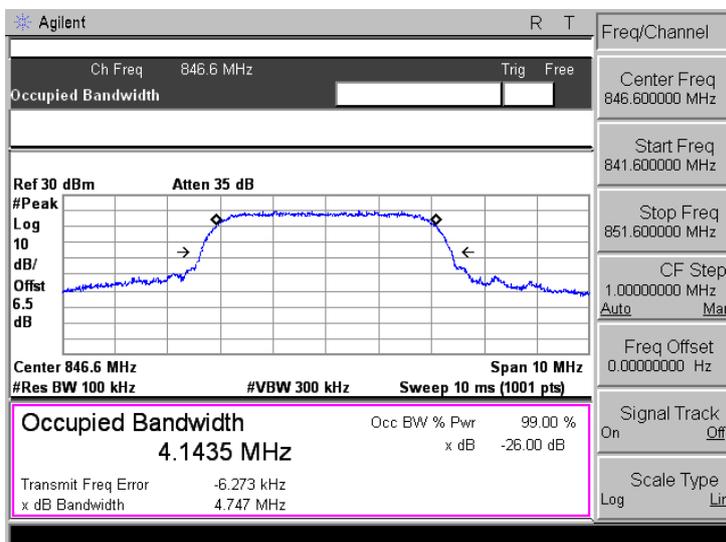




WCDMA Band V- HSDPA


Low Channel

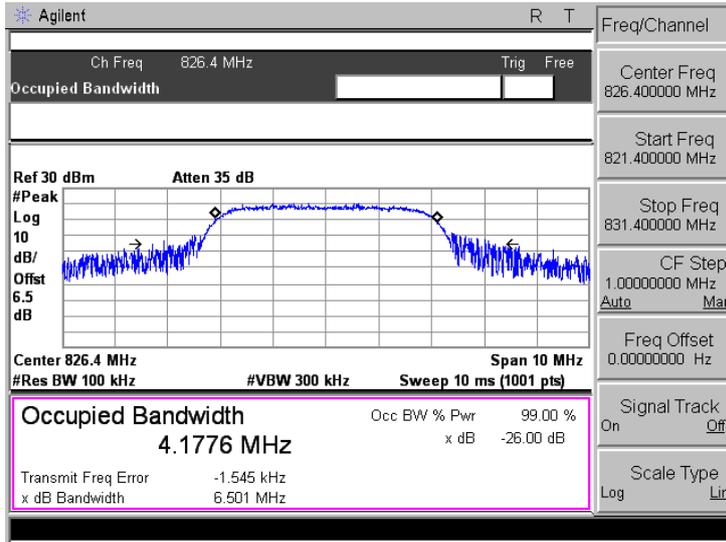

Middle Channel

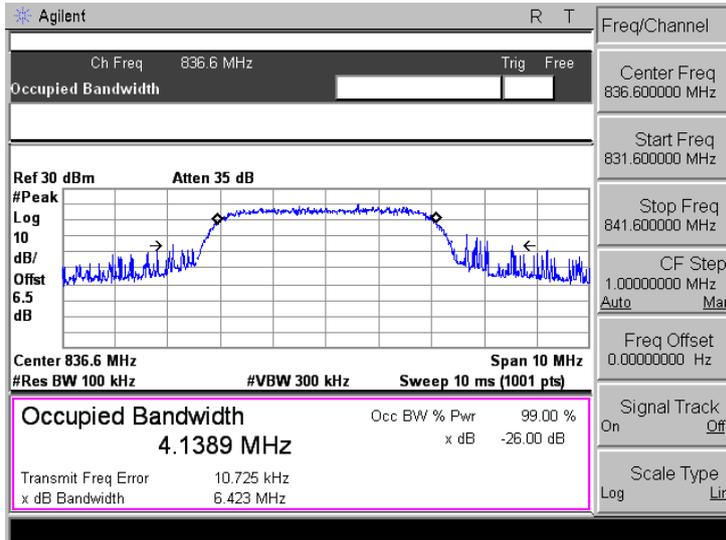


High Channel

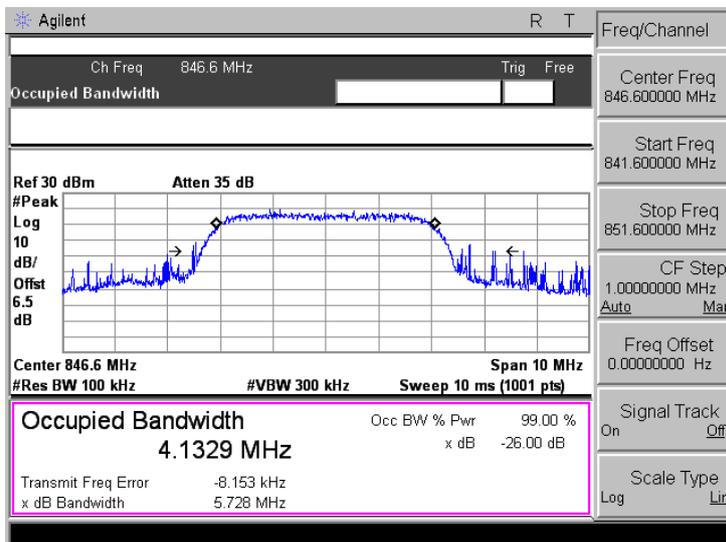




WCDMA Band V- HSUPA


Low Channel

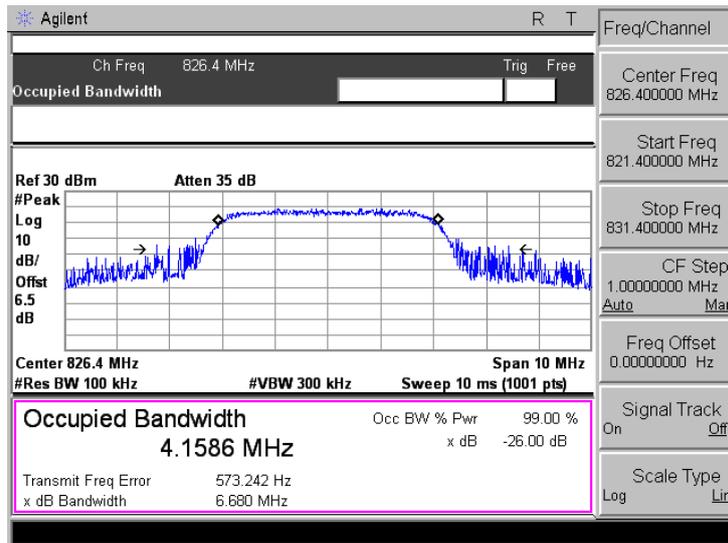

Middle Channel

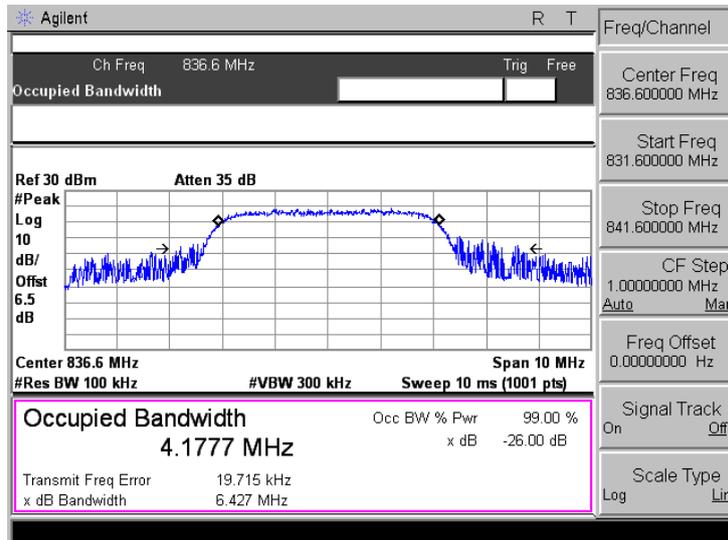


High Channel

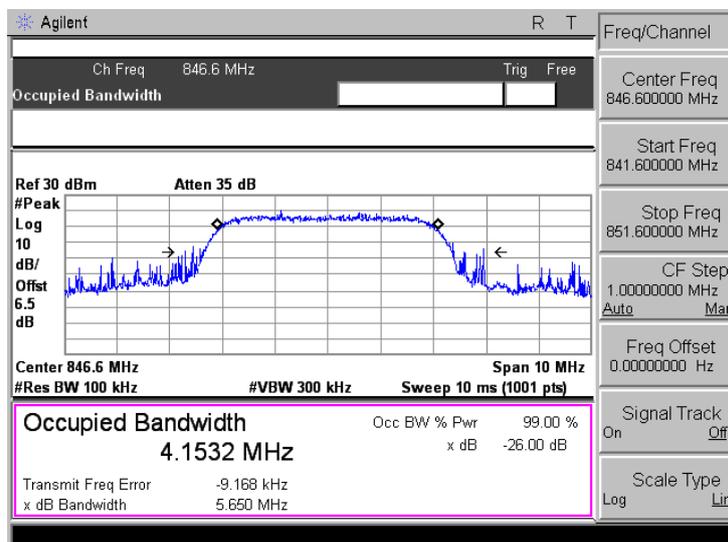




WCDMA Band IV


Low Channel

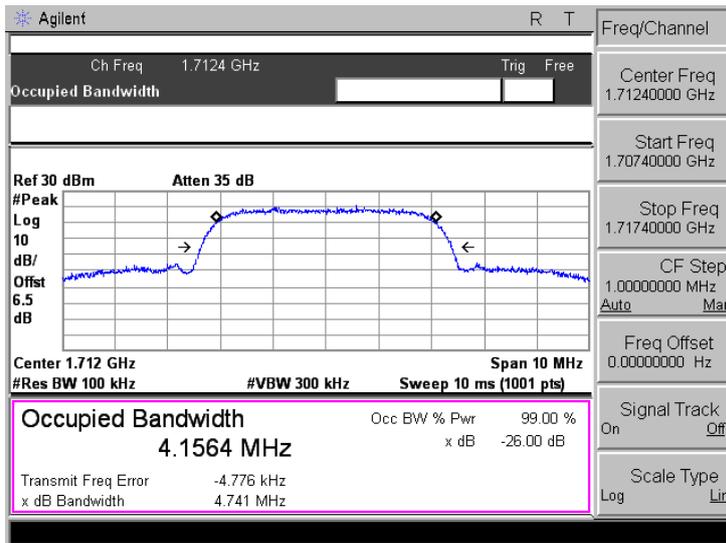

Middle Channel

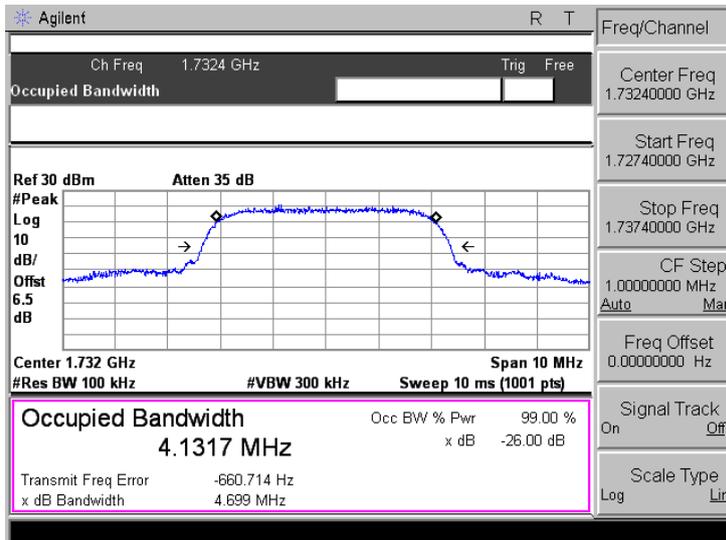


High Channel

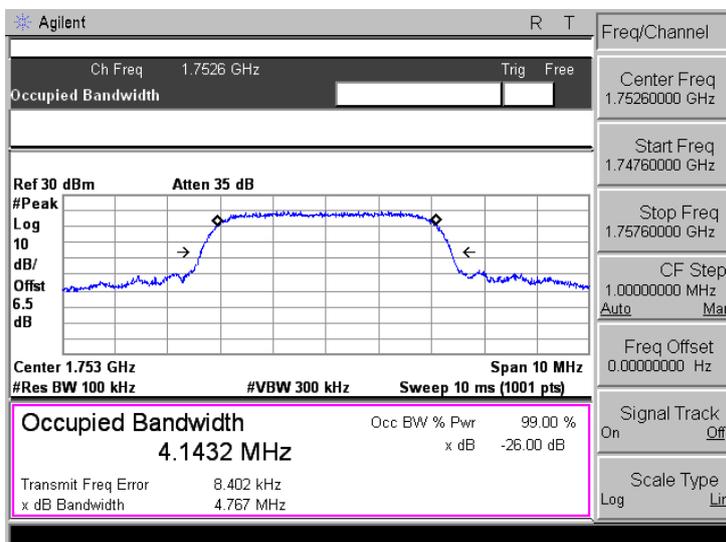




WCDMA Band IV- HSDPA


Low Channel

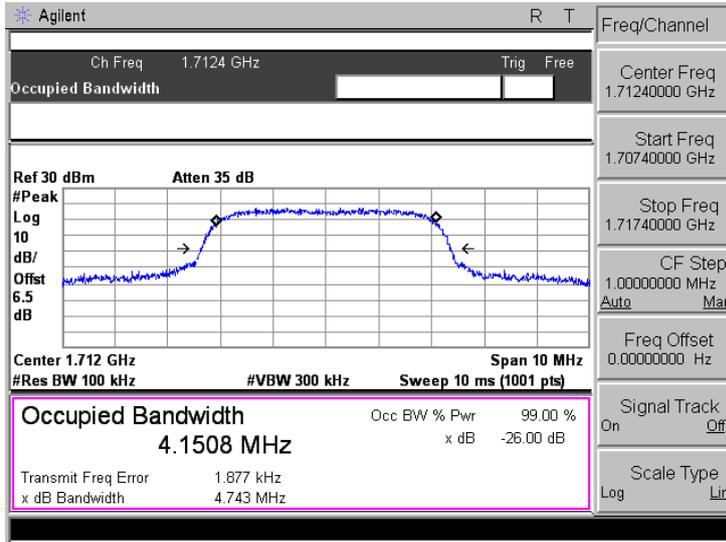

Middle Channel

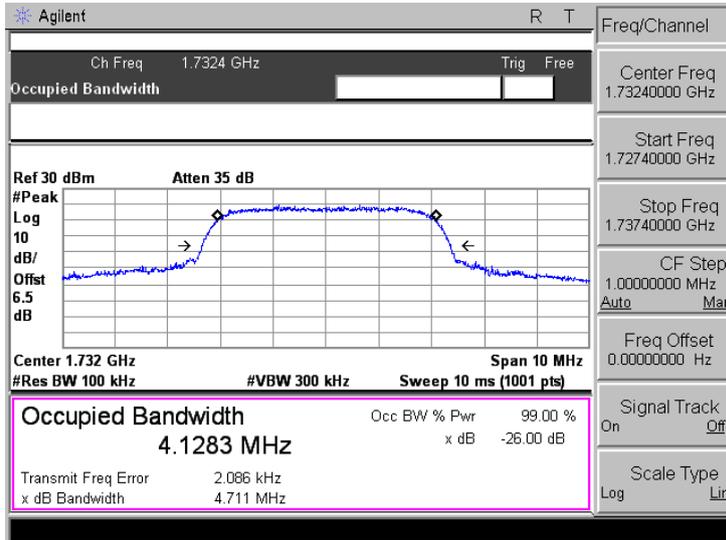


High Channel

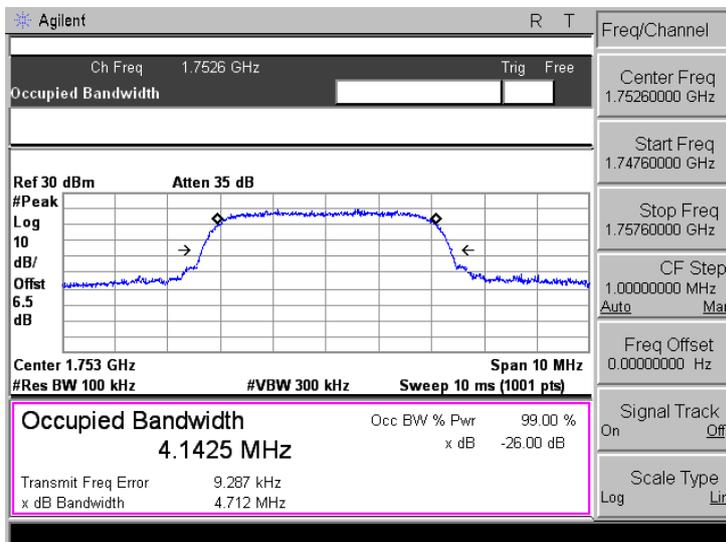




WCDMA Band IV- HSUPA


Low Channel

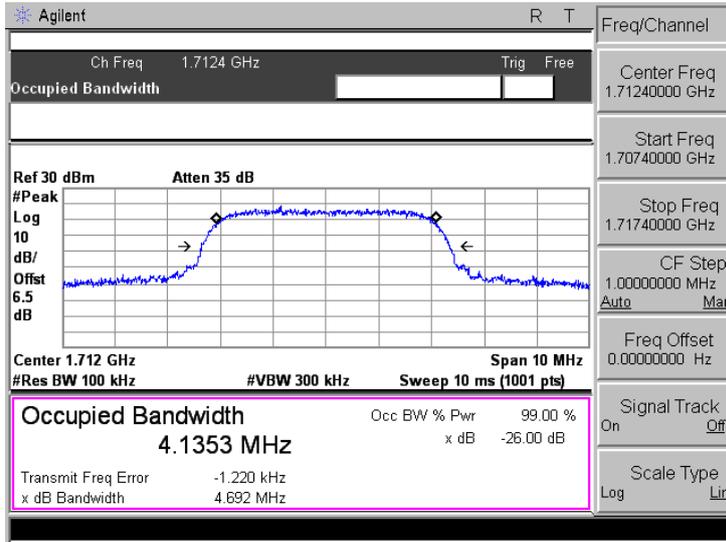

Middle Channel

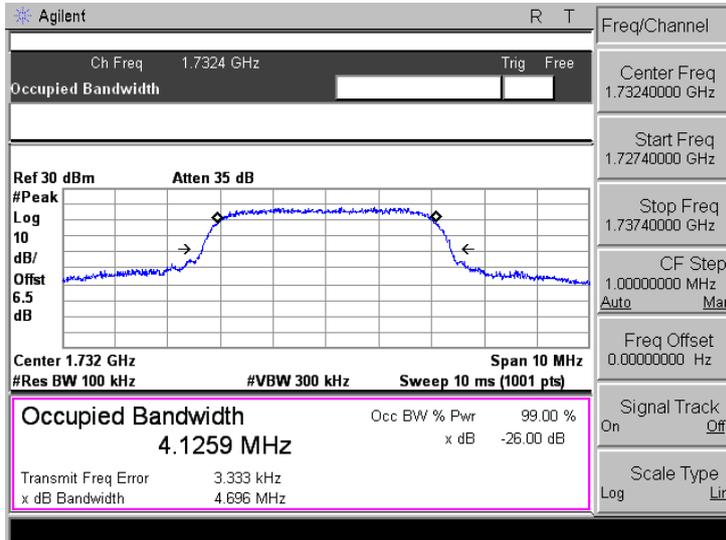


High Channel

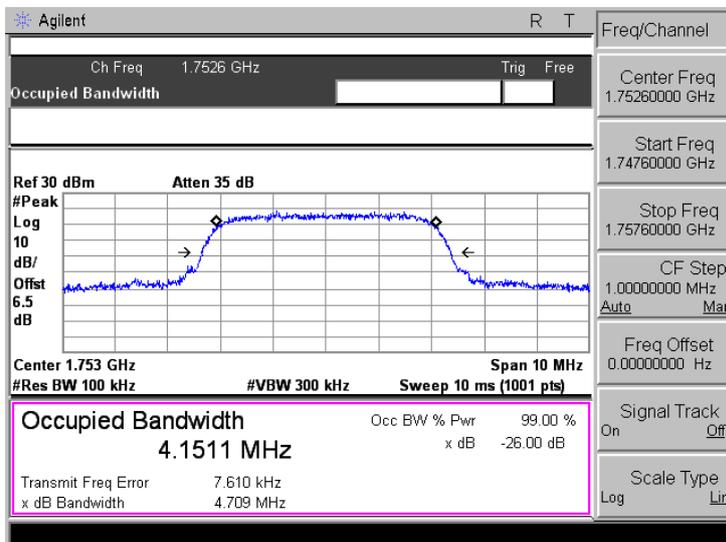




WCDMA Band II


Low Channel

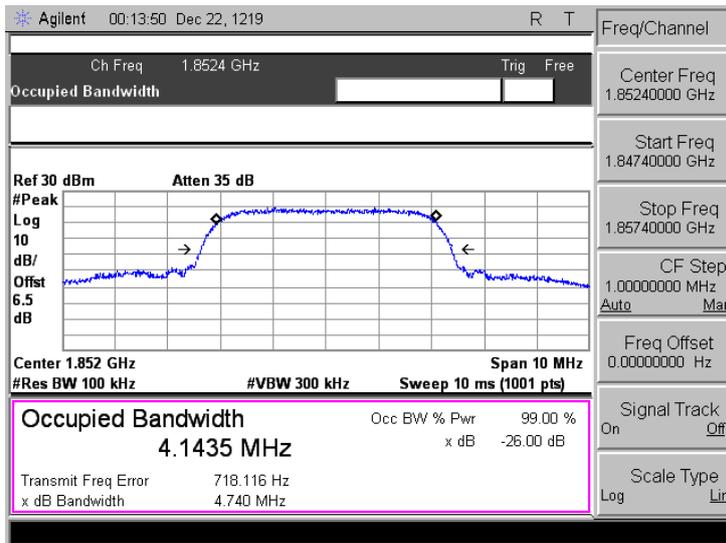

Middle Channel

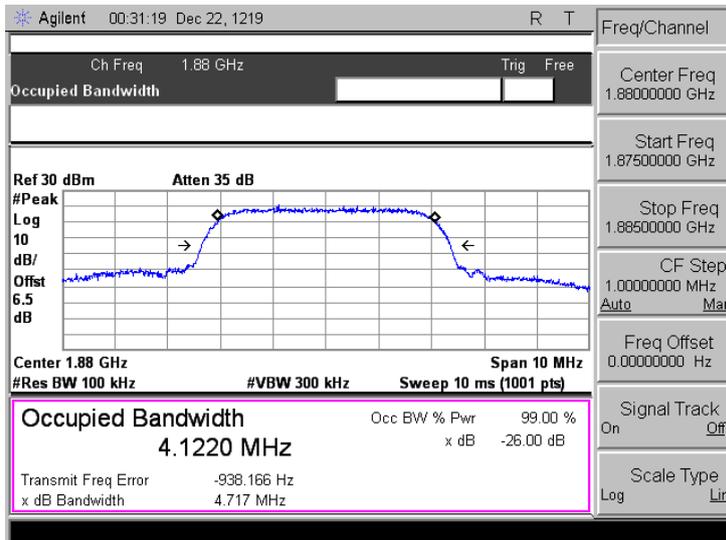


High Channel

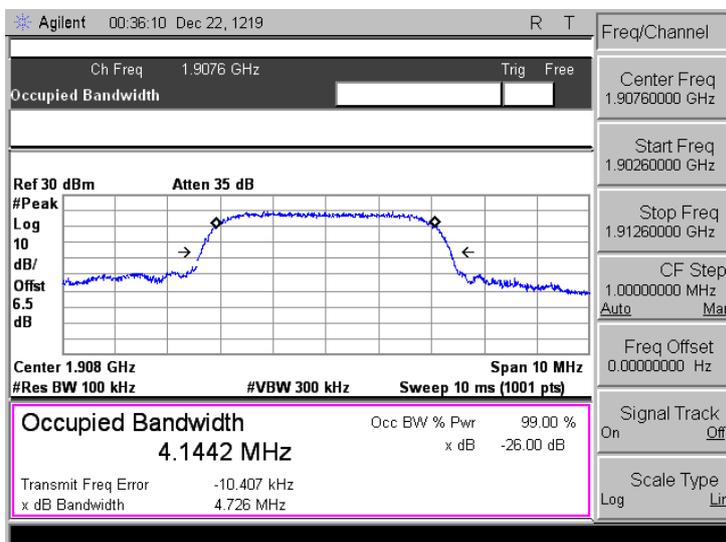




WCDMA Band II- HSDPA


Low Channel

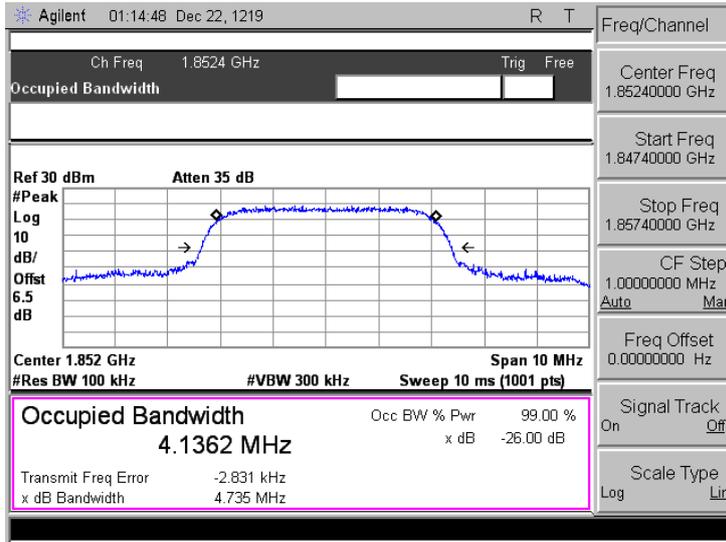

Middle Channel

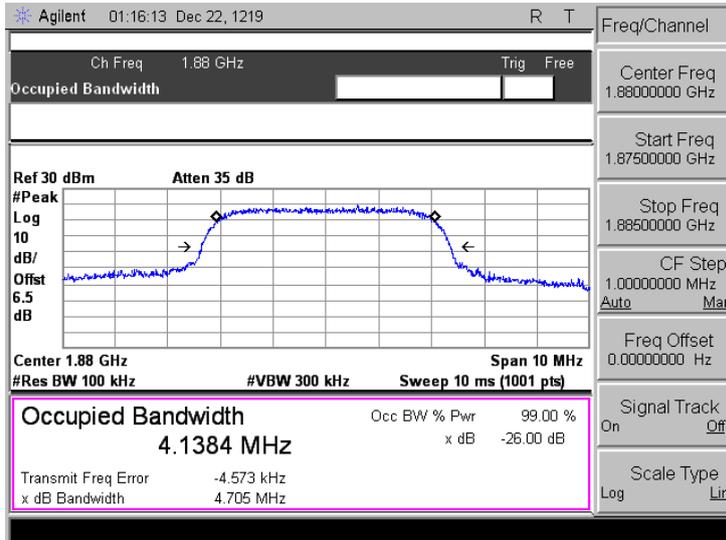


High Channel

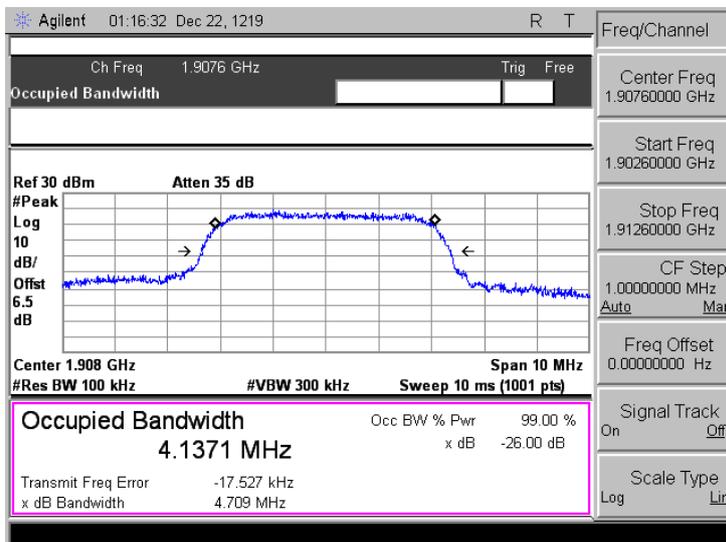




WCDMA Band II- HSUPA


Low Channel

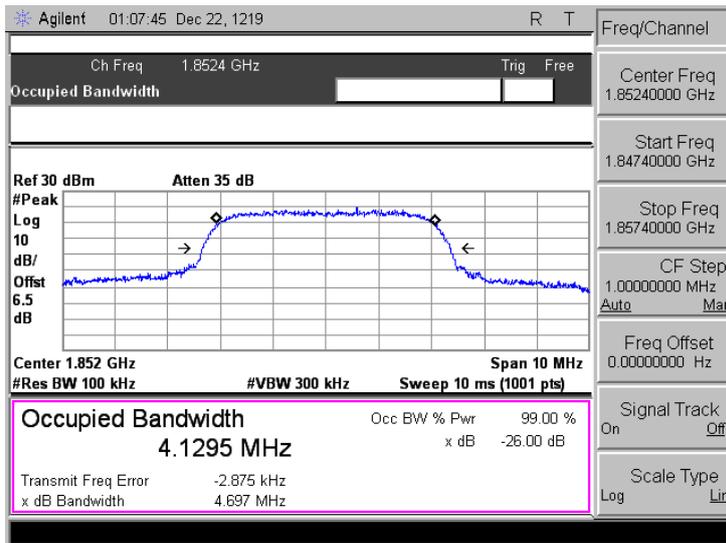

Middle Channel

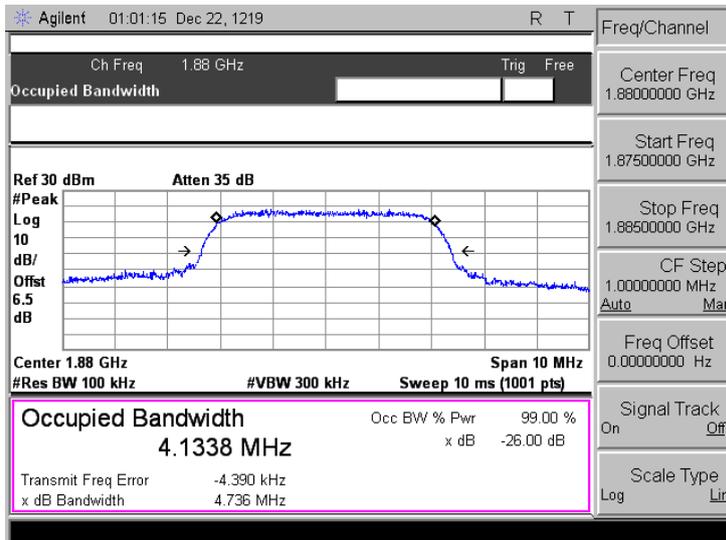

High Channel

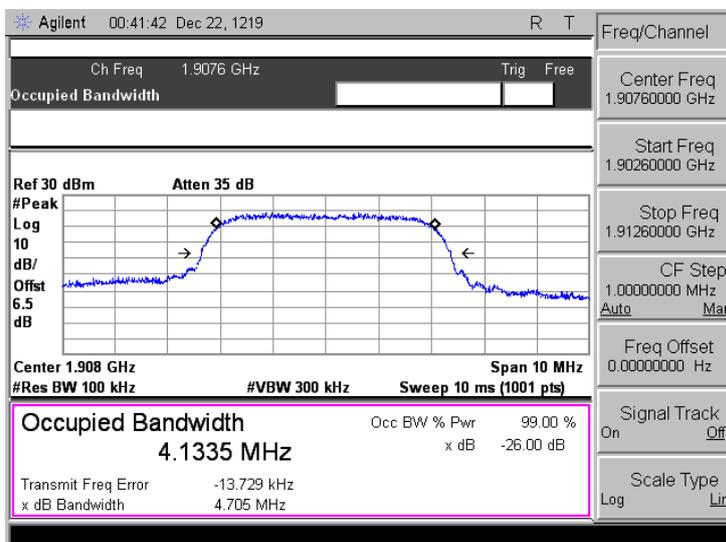

7. Out of Band Emissions at Antenna Terminal

7.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §27.53 (h), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

7.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 100kHz and 1MHz for the scan frequency from 30MHz to 1GHz and the scan frequency from 1GHz to up to 10th harmonic.

Test Configuration for the out of band emissions testing:

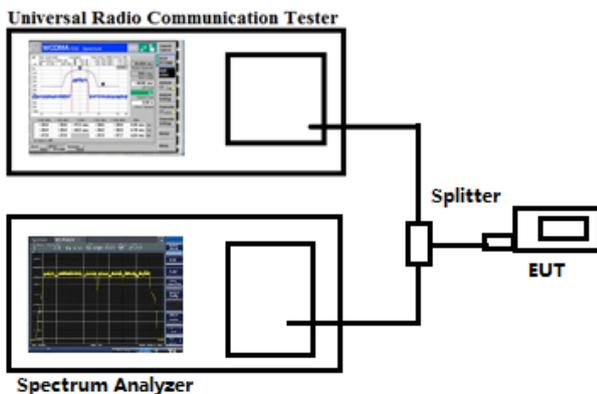

7.3 Summary of Test Results/Plots



Note: Pre-scan mode WCDMA/HSDPA/HSUPA find the worst case at WCDMA mode and recorded in the test report.

Please refer to the following test plots



WCDMA Band V



Low Channel

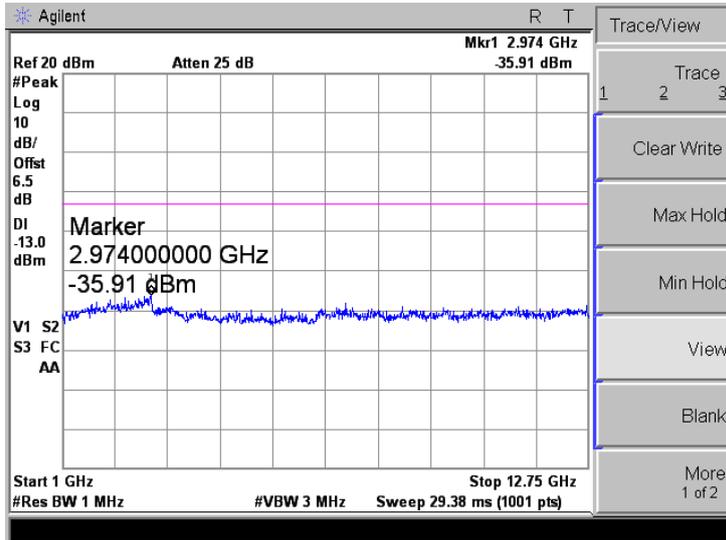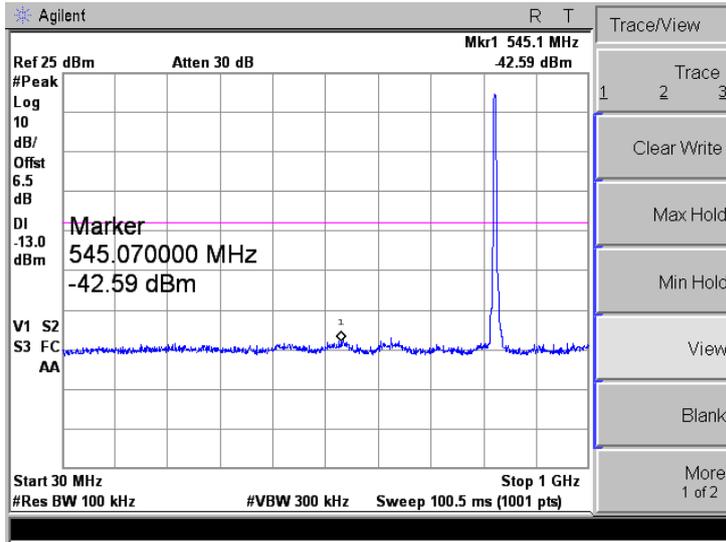



WCDMA Band V



Middle Channel

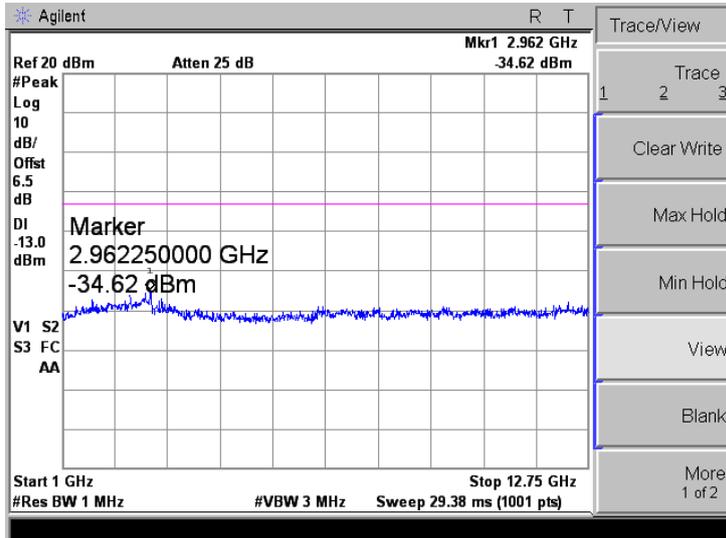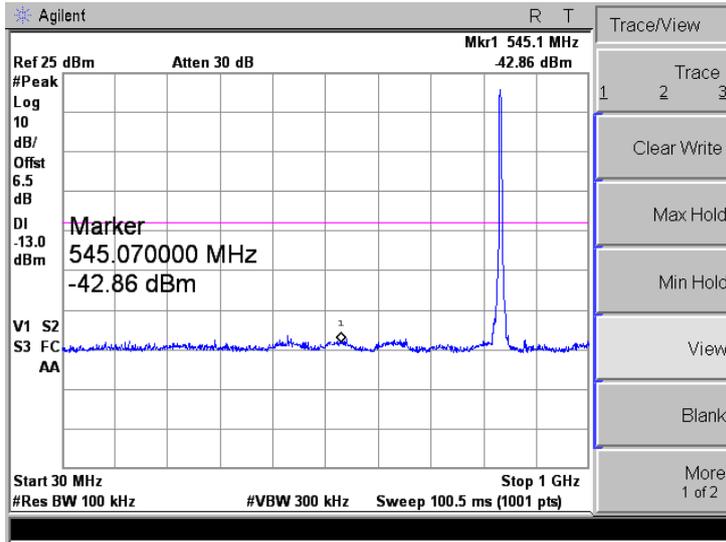



WCDMA Band V


High Channel

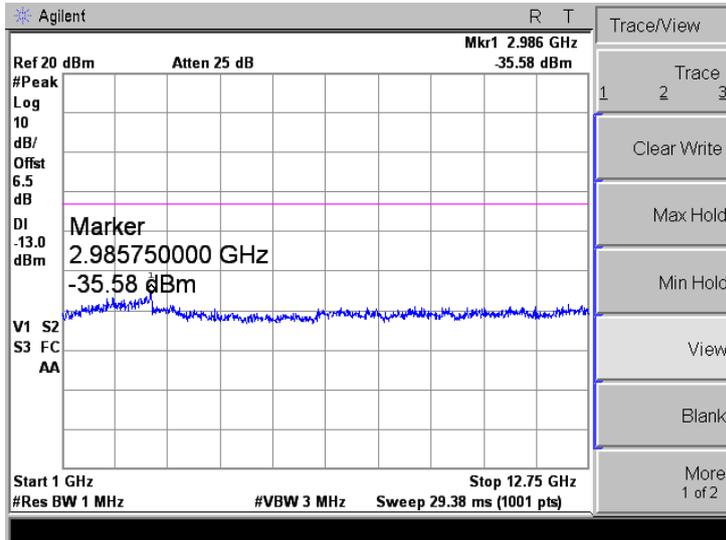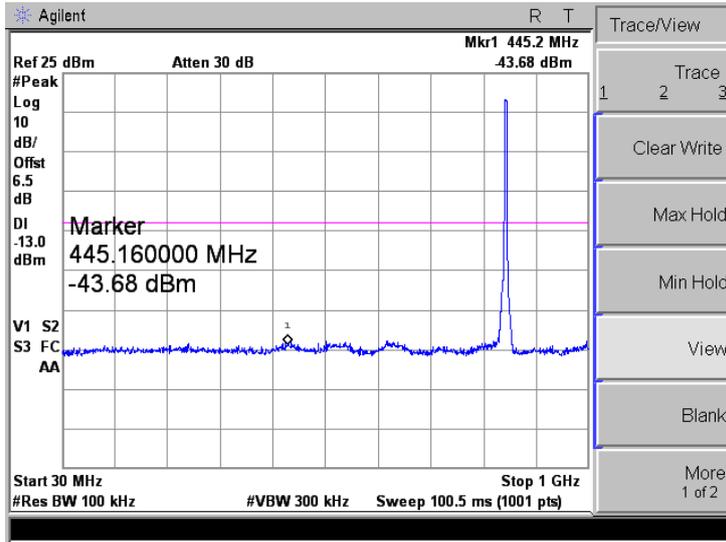




WCDMA Band V

Low Band Emission

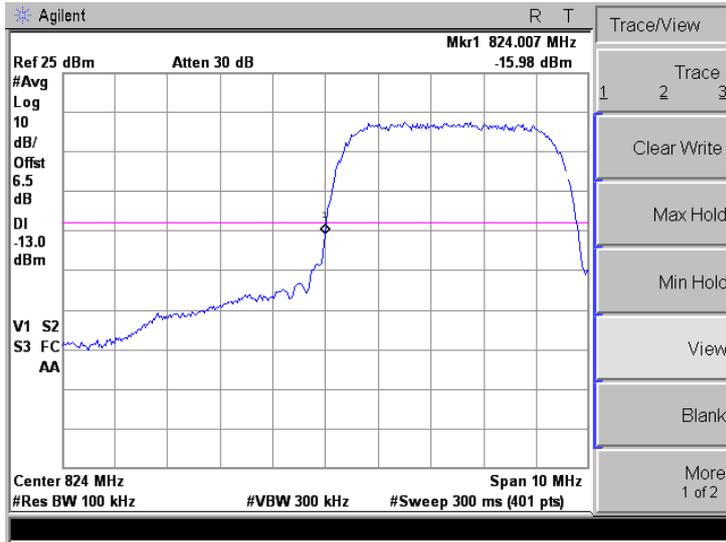




High Band Emission

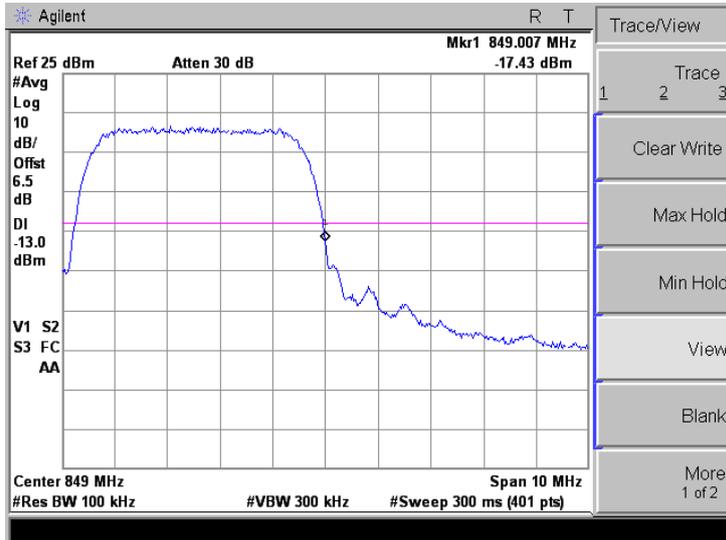



WCDMA Band IV




Low Channel

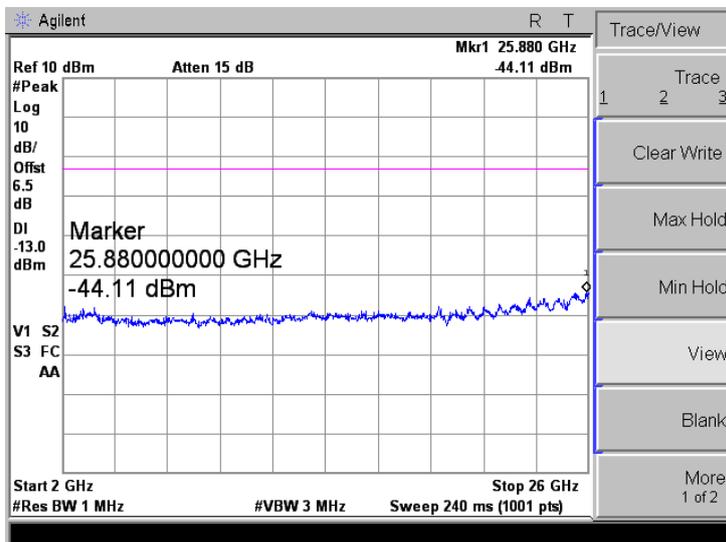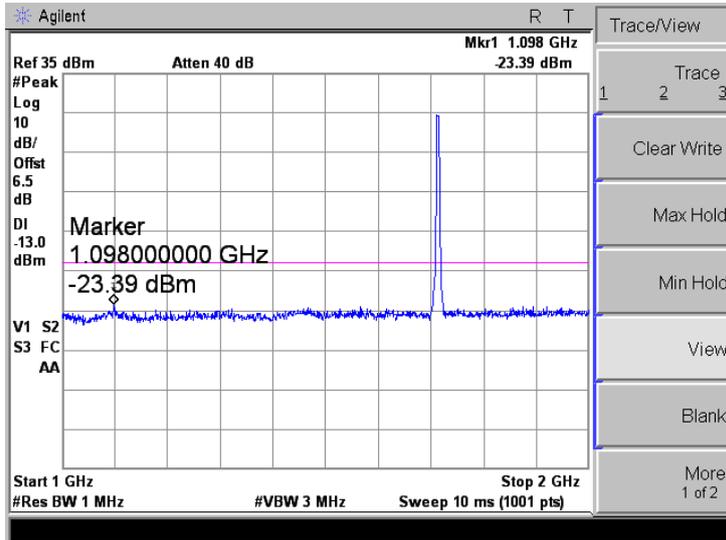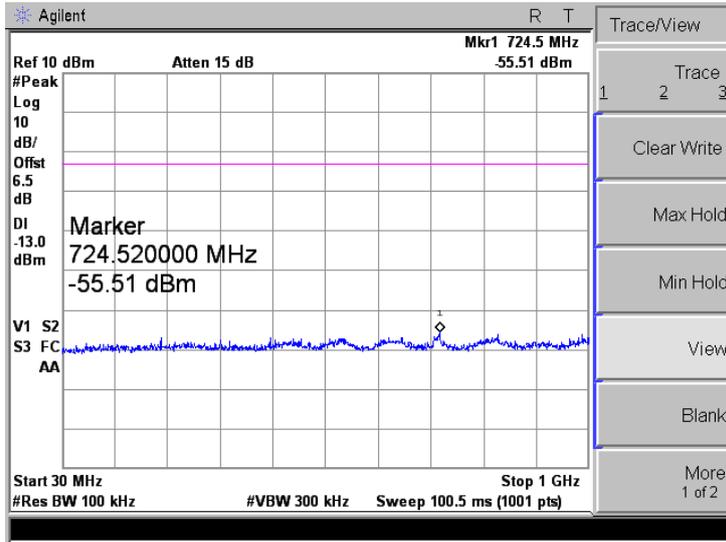



WCDMA Band IV




Middle Channel

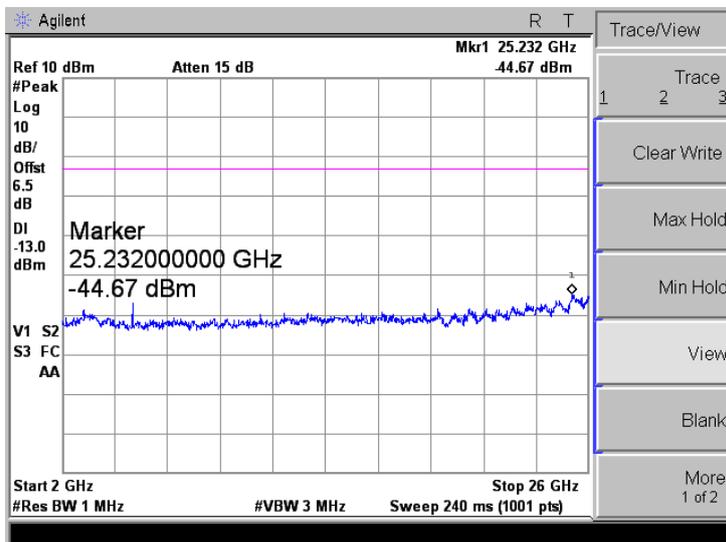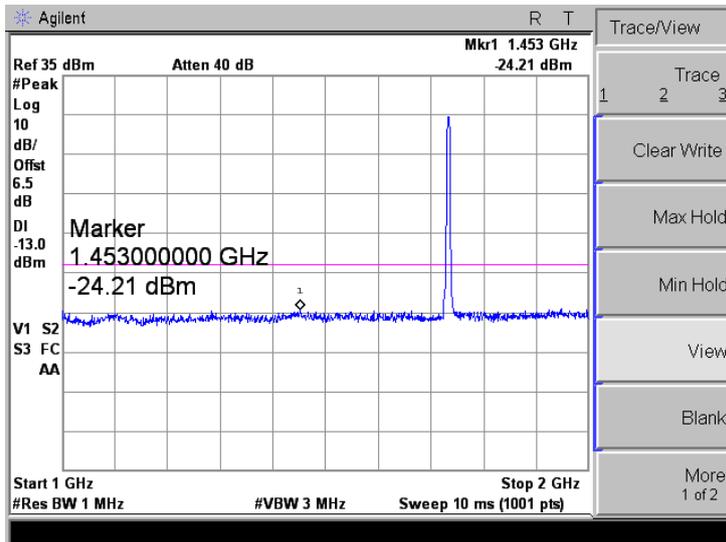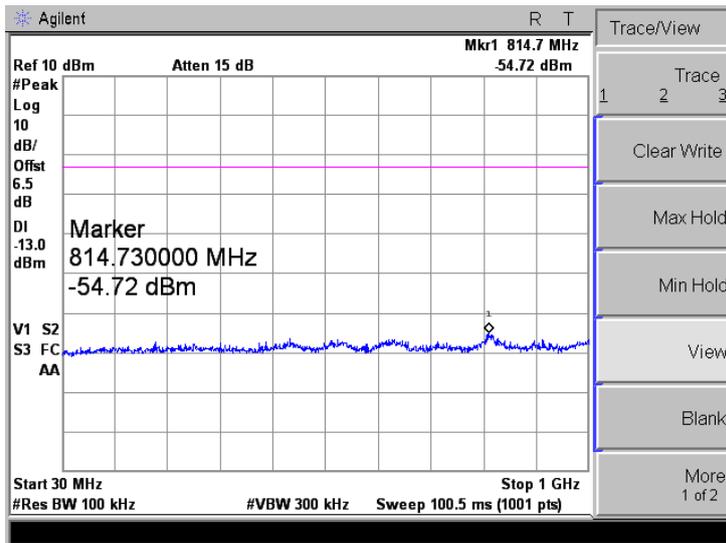



WCDMA Band IV


High Channel

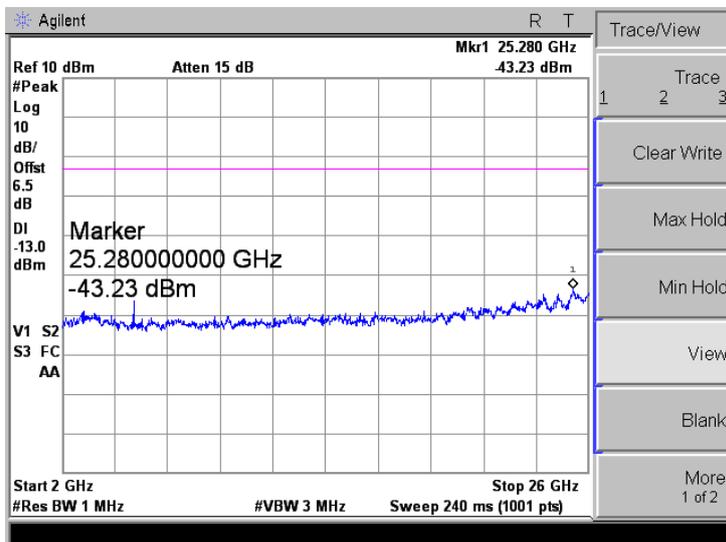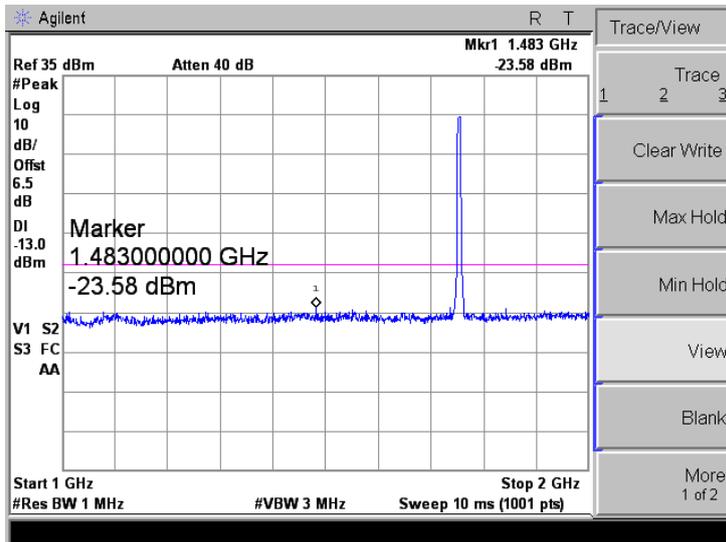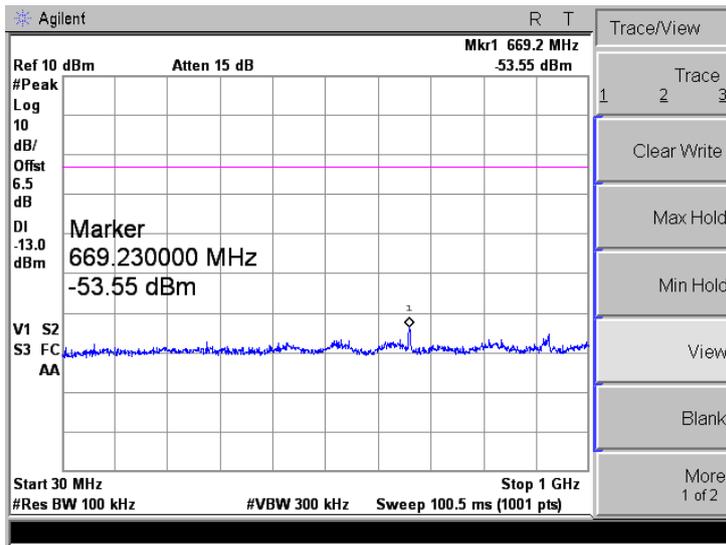




WCDMA Band IV

Low Band Emission

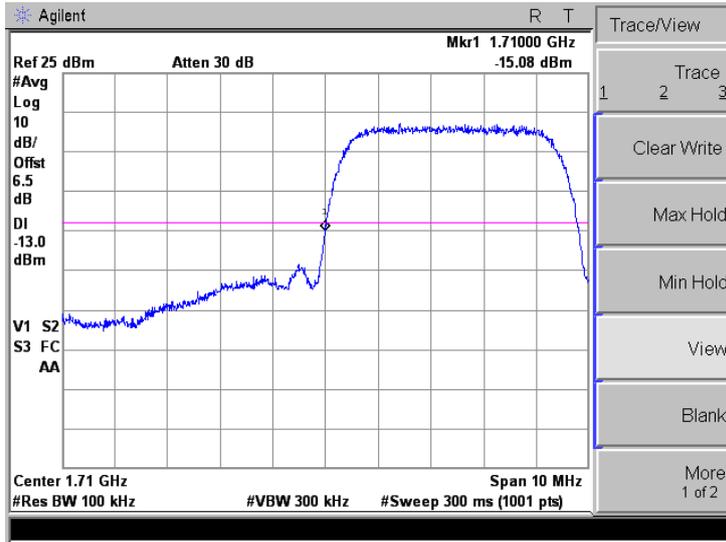




High Band Emission

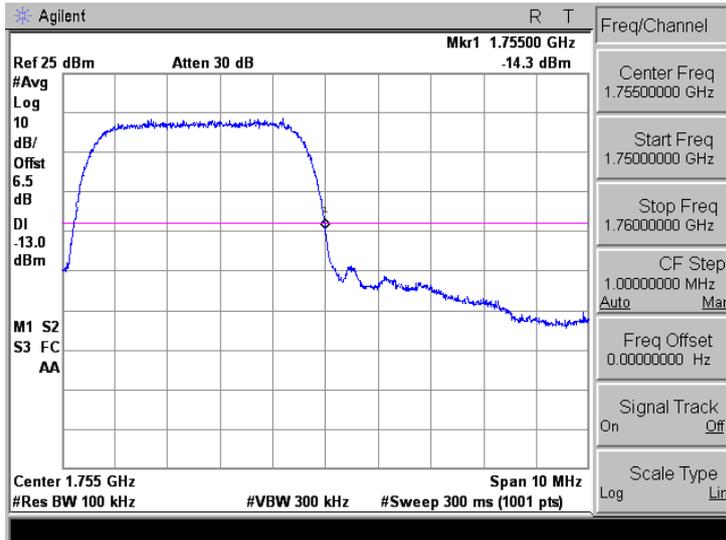



WCDMA Band II




Low Channel

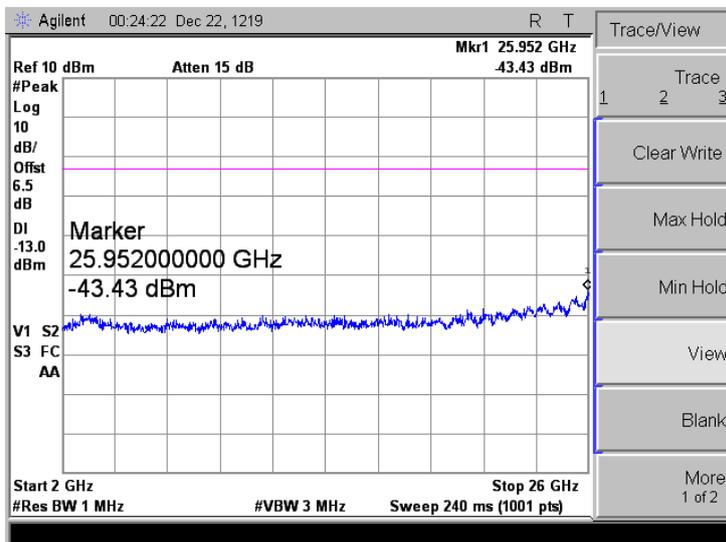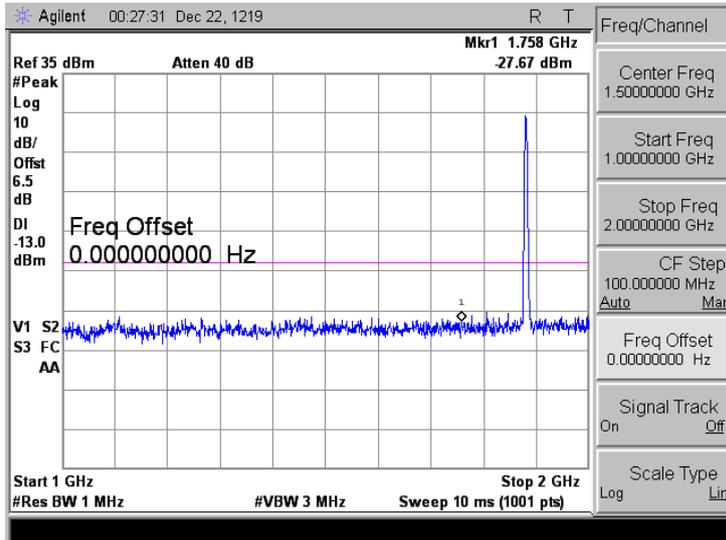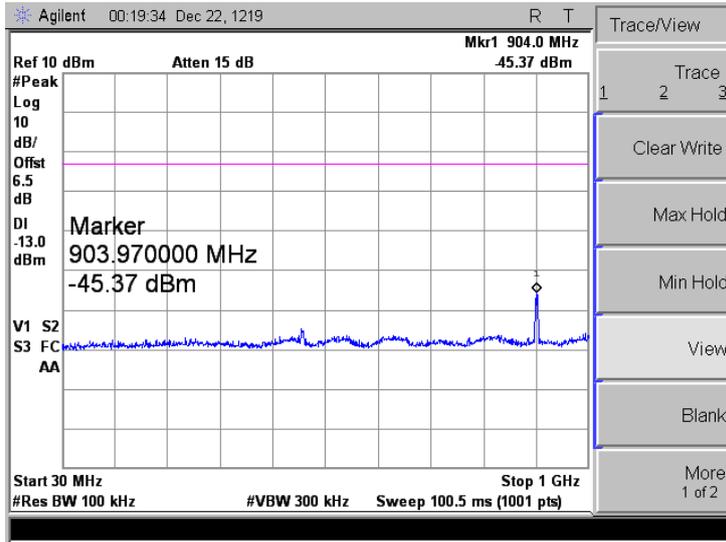



WCDMA Band II




Middle Channel

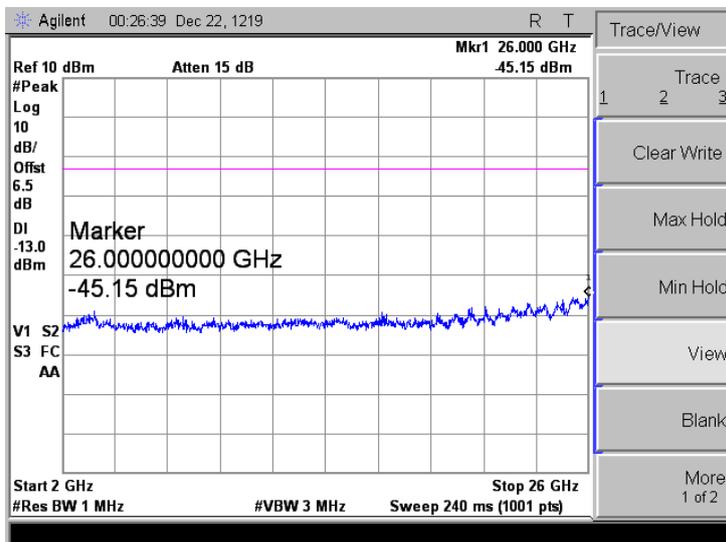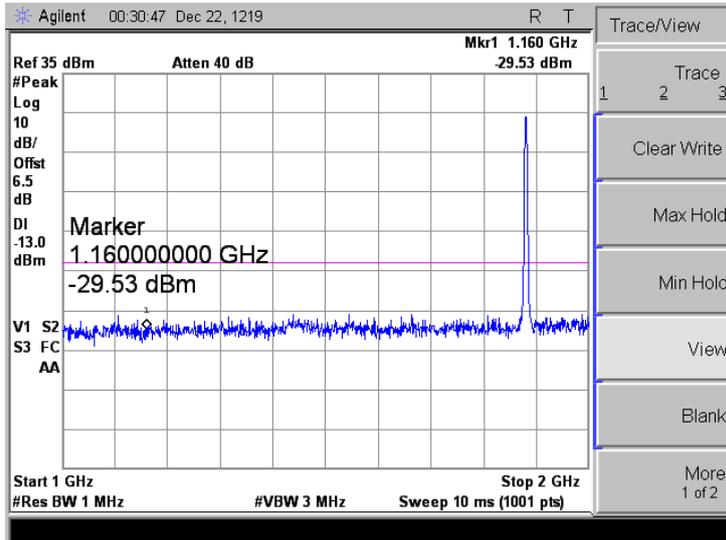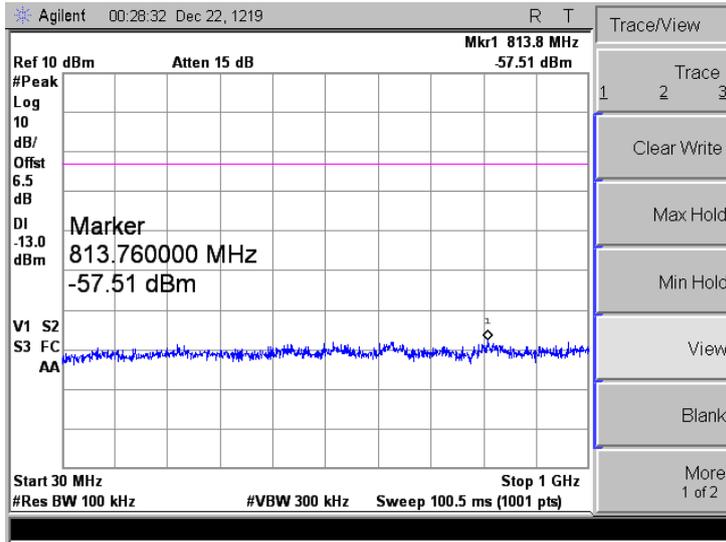



WCDMA Band II


High Channel

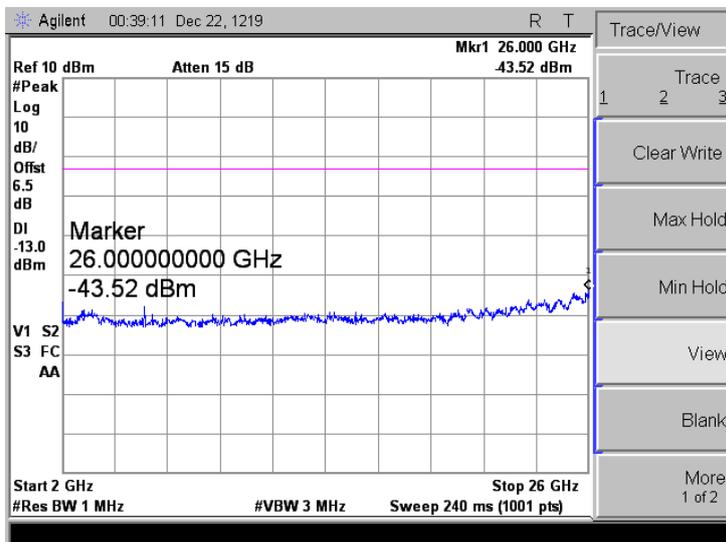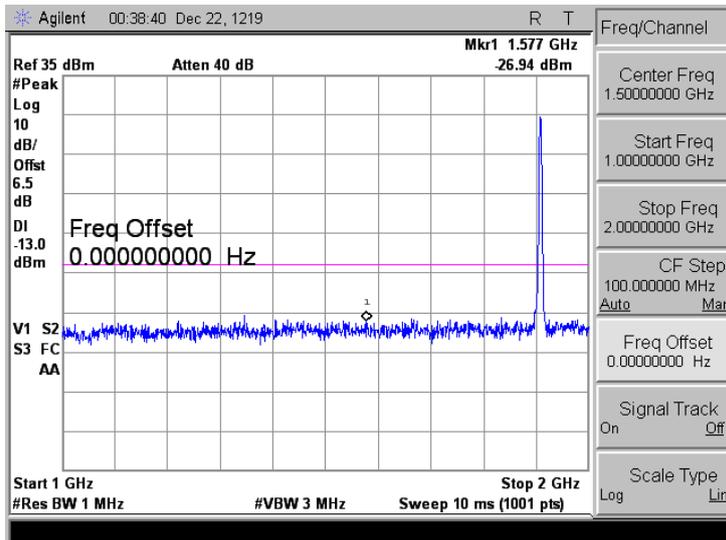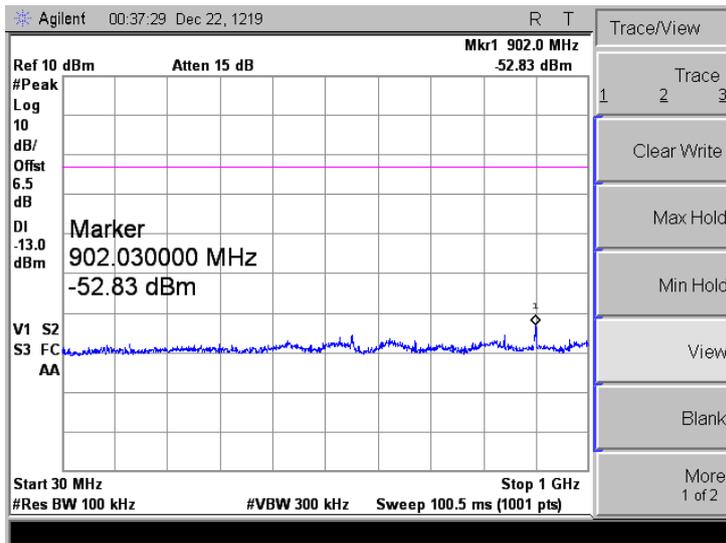




WCDMA Band II

Low Band Emission

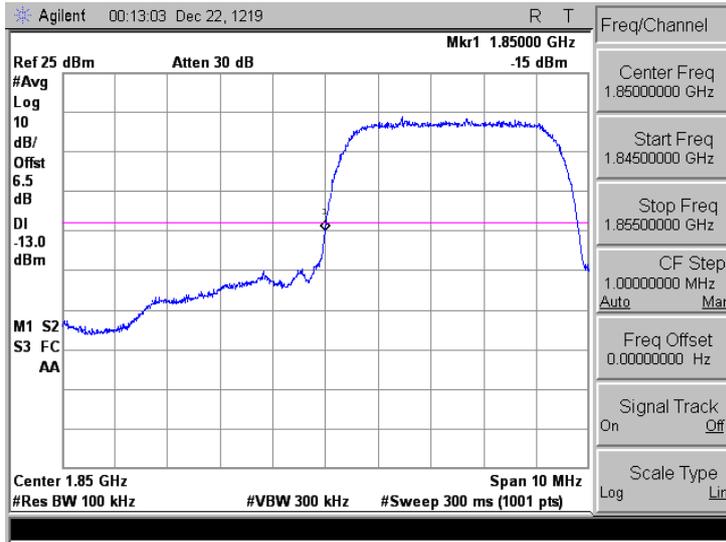

High Band Emission

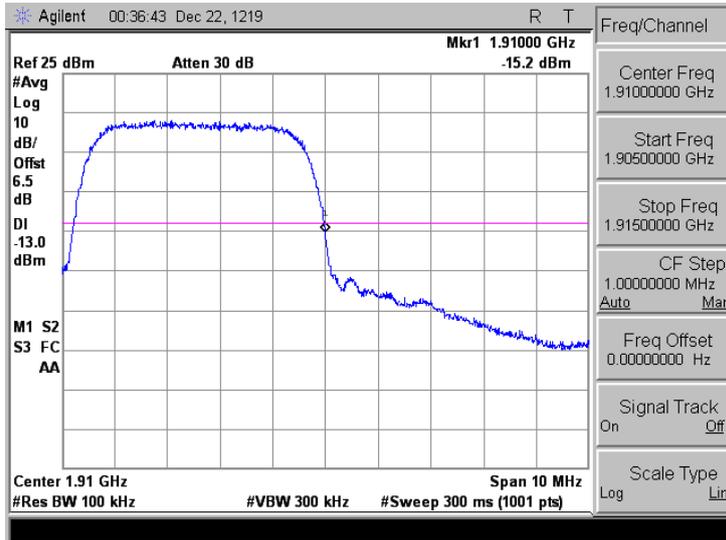

8. Spurious Radiated Emissions

8.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §27.53 (h), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

8.2 Test Procedure

1. The setup of EUT is according with per ANSI/TIA Standard 603E and ANSI C63.26 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious attenuation limit in dB = $43 + 10 \log_{10}(\text{power out in Watts})$


8.3 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.



➤ Spurious Emissions Below 1GHz


Test Channel	WCDMA Band V	Polarity:	Horizontal
--------------	--------------	-----------	------------

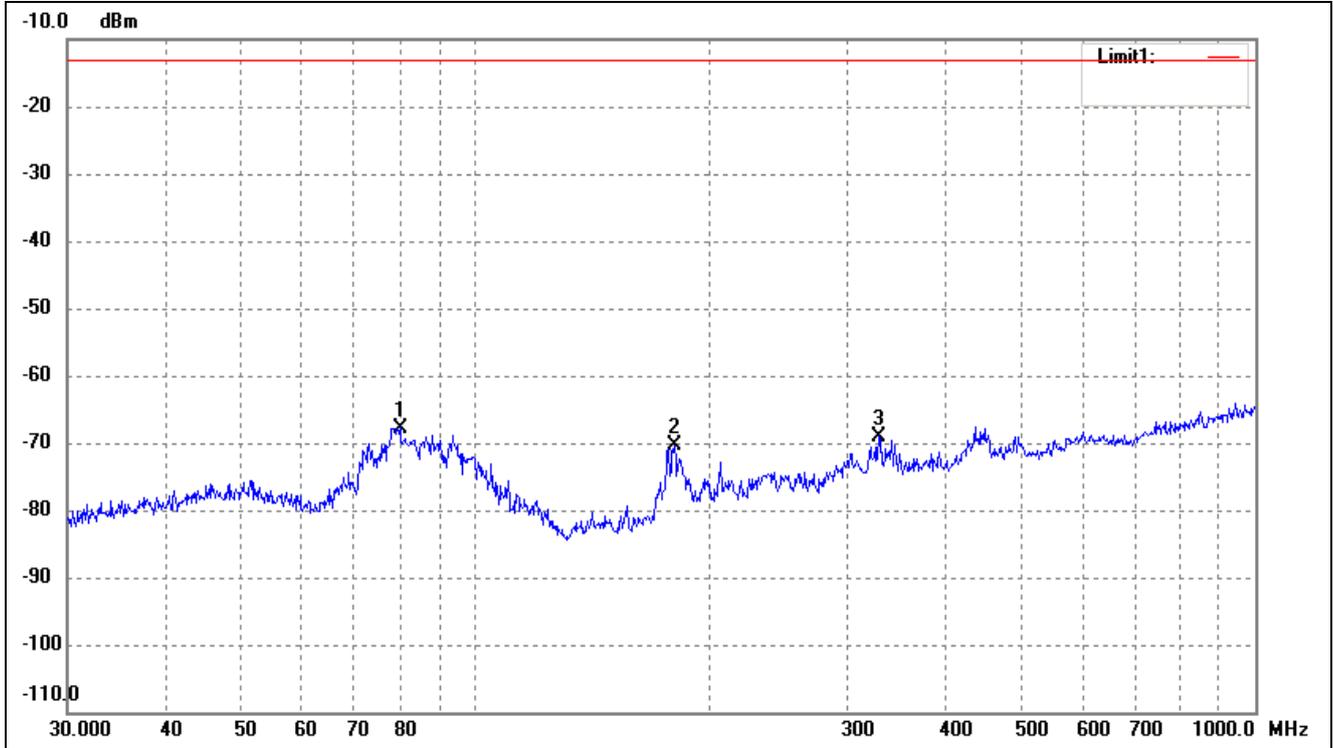

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	80.0806	-64.08	-3.67	-67.75	-13.00	-54.75	ERP
2	180.0165	-67.46	-2.80	-70.26	-13.00	-57.26	ERP
3	329.0390	-71.63	2.63	-69.00	-13.00	-56.00	ERP




Test Channel	WCDMA Band V	Polarity:	Vertical
--------------	--------------	-----------	----------

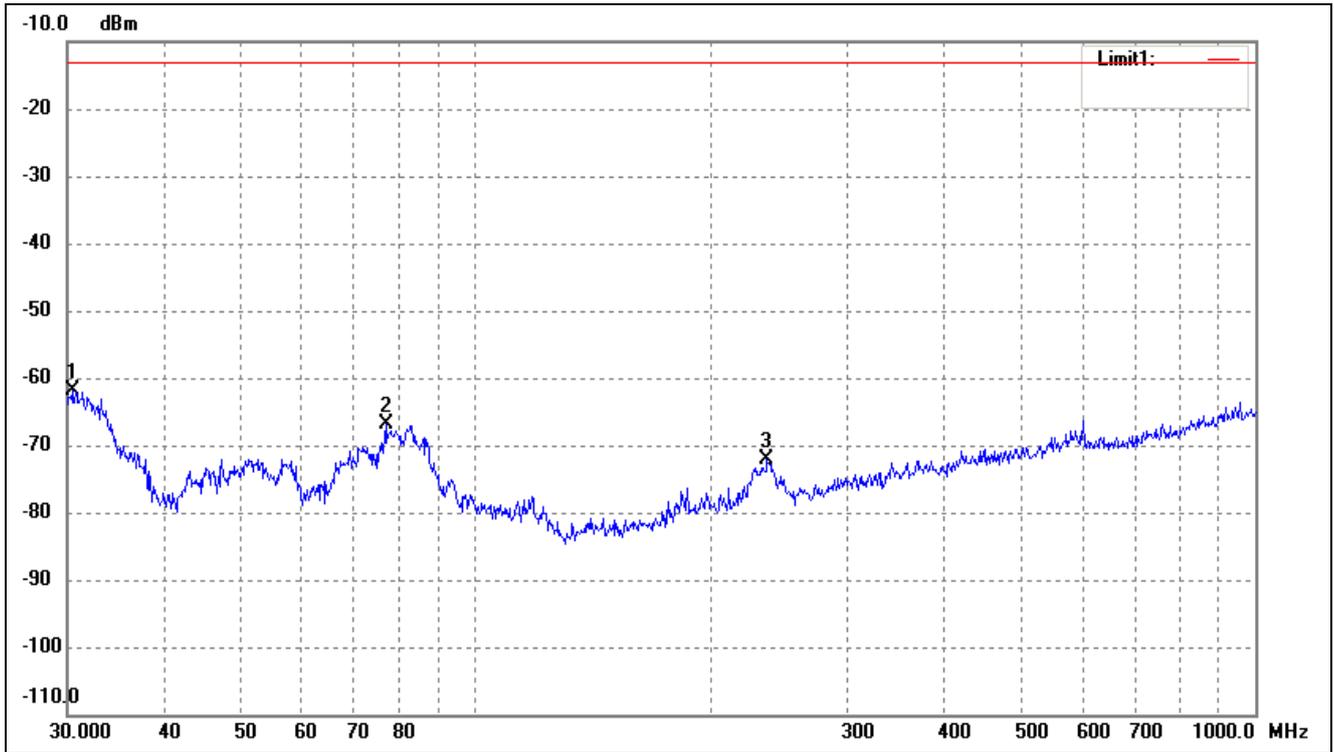

No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	30.5306	-59.34	-2.64	-61.98	-13.00	-48.98	ERP
2	76.7808	-63.43	-3.46	-66.89	-13.00	-53.89	ERP
3	236.6447	-72.11	0.09	-72.02	-13.00	-59.02	ERP




Test Channel	WCDMA Band IV	Polarity:	Horizontal
--------------	---------------	-----------	------------

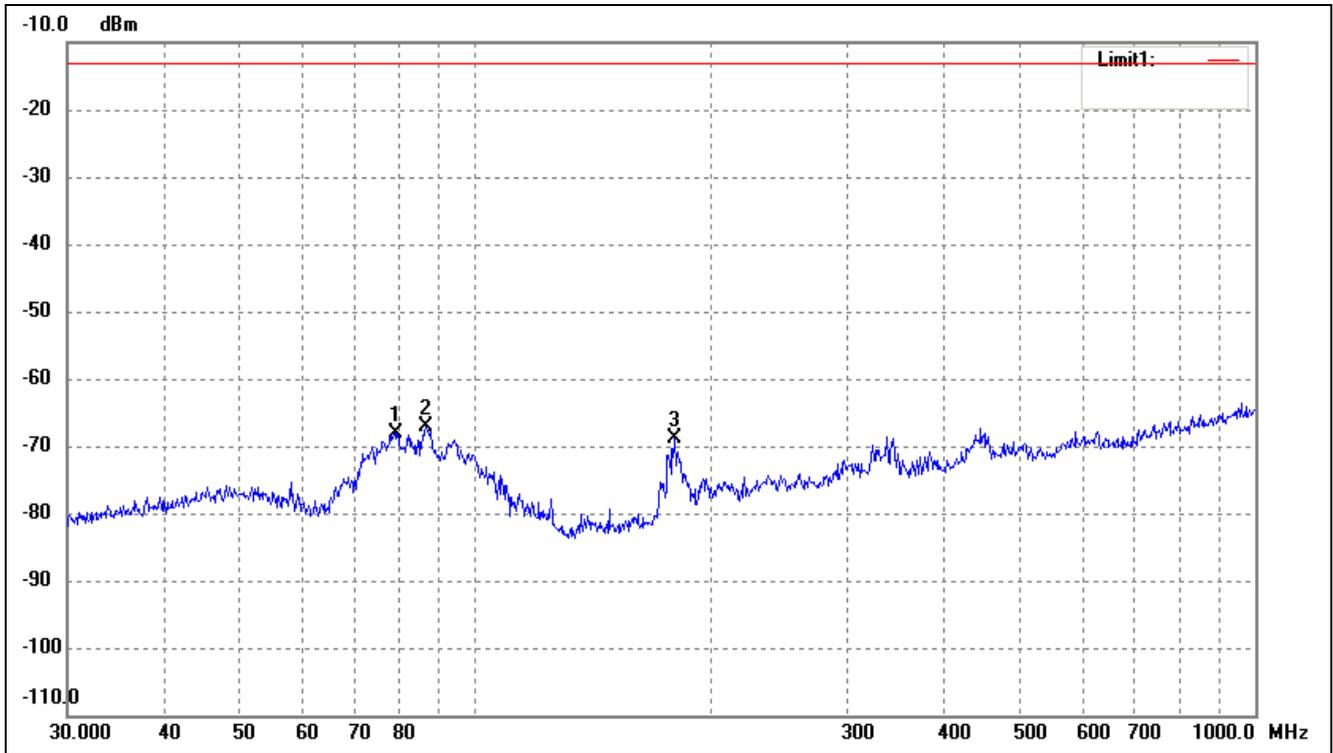

No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	79.2426	-64.46	-3.62	-68.08	-13.00	-55.08	ERP
2	86.5029	-63.24	-3.79	-67.03	-13.00	-54.03	ERP
3	180.0165	-66.07	-2.80	-68.87	-13.00	-55.87	ERP



Test Channel	WCDMA Band IV	Polarity:	Vertical
--------------	---------------	-----------	----------

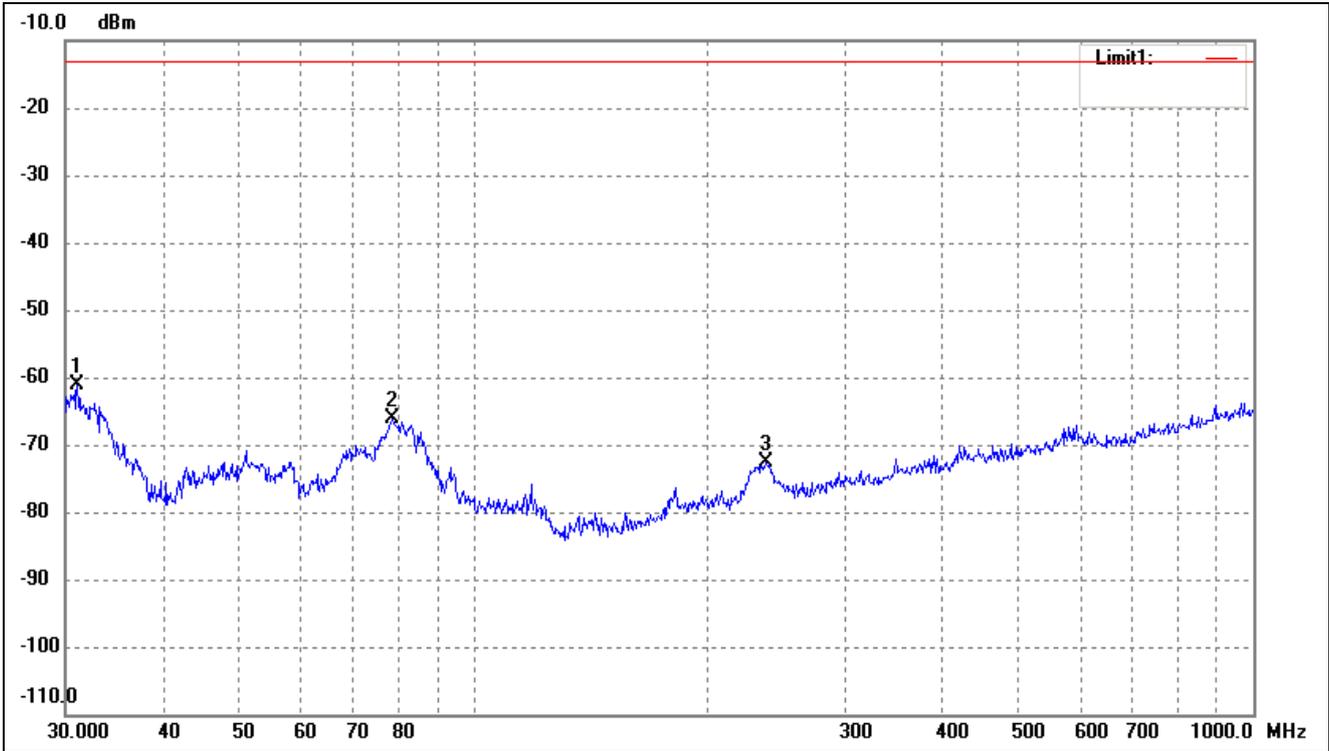


No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	31.0706	-58.70	-2.51	-61.21	-13.00	-48.21	ERP
2	78.6888	-62.59	-3.59	-66.18	-13.00	-53.18	ERP
3	237.4760	-72.78	0.14	-72.64	-13.00	-59.64	ERP

Note: Margin= (Reading+ Correct)- Limit




Test Channel	WCDMA Band II	Polarity:	Horizontal
--------------	---------------	-----------	------------

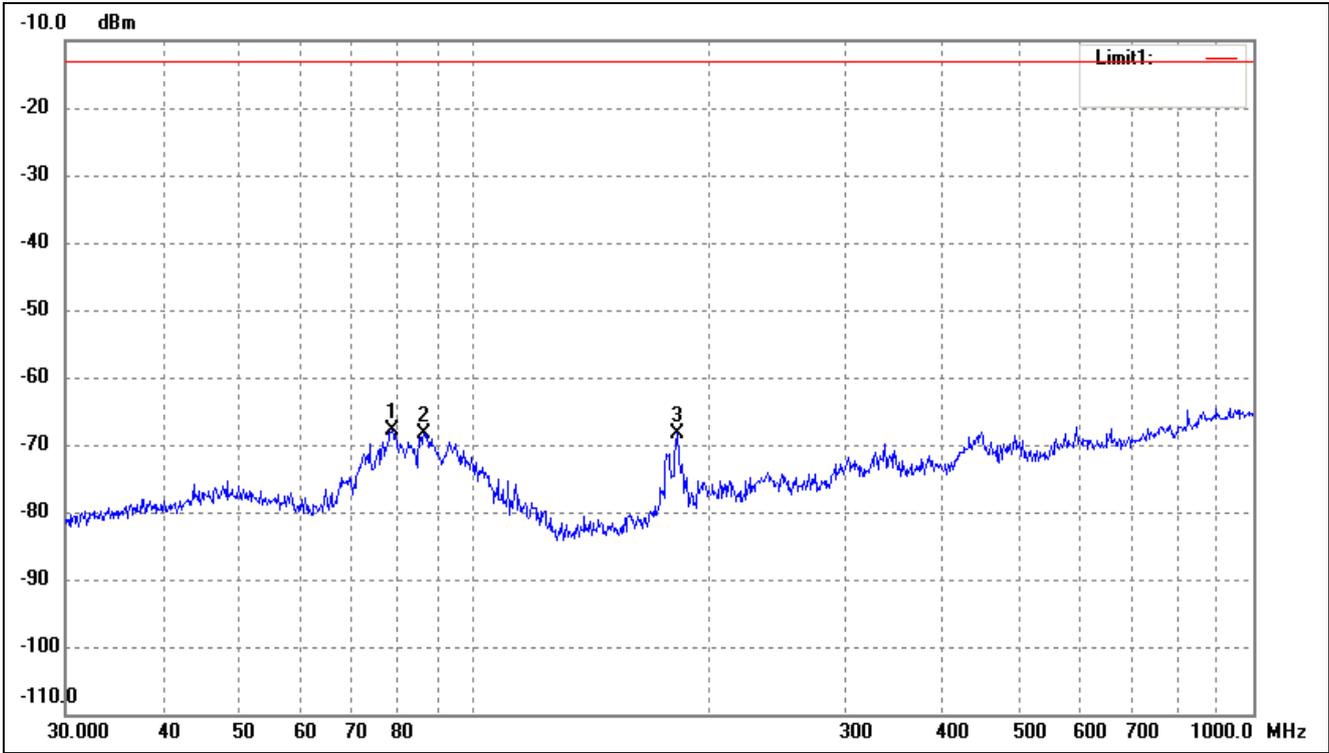

No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	78.6888	-64.26	-3.59	-67.85	-13.00	-54.85	ERP
2	86.5029	-64.47	-3.79	-68.26	-13.00	-55.26	ERP
3	182.5592	-65.76	-2.49	-68.25	-13.00	-55.25	ERP



Test Channel	WCDMA Band II	Polarity:	Vertical
--------------	---------------	-----------	----------

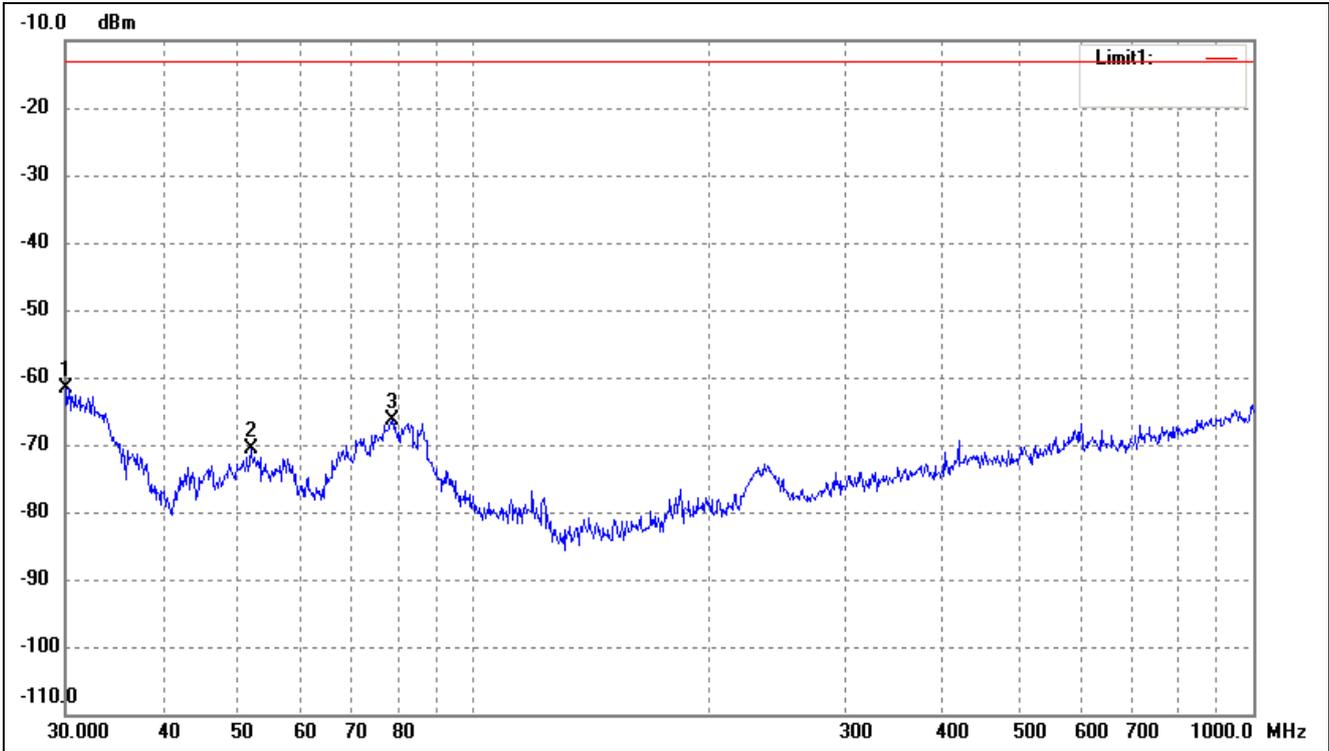

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	30.1054	-58.77	-2.75	-61.52	-13.00	-48.52	ERP
2	51.8430	-71.02	0.38	-70.64	-13.00	-57.64	ERP
3	78.6888	-62.86	-3.59	-66.45	-13.00	-53.45	ERP

Note: Margin= (Reading+ Correct)- Limit



- Spurious Emissions Above 1GHz
- For WCDMA Band V Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (826.4MHz)						
1652.8	-35.8	4.94	-30.86	-13	-17.86	H
2479.2	-43.29	8.46	-34.83	-13	-21.83	H
1652.8	-35.59	4.94	-30.65	-13	-17.65	V
2479.2	-44.27	8.46	-35.81	-13	-22.81	V
Middle Channel (836.6MHz)						
1672.8	-37.47	5.11	-32.36	-13	-19.36	H
2509.2	-43.18	8.54	-34.64	-13	-21.64	H
1672.8	-34.6	5.11	-29.49	-13	-16.49	V
2509.2	-42.77	8.54	-34.23	-13	-21.23	V
High Channel (846.6MHz)						
1693.2	-35.87	5.25	-30.62	-13	-17.62	H
2539.8	-42.36	8.57	-33.79	-13	-20.79	H
1693.2	-34.85	5.25	-29.60	-13	-16.60	V
2539.8	-43.47	8.57	-34.90	-13	-21.90	V

- For WCDMA Band IV Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (1712.4MHz)						
3424.8	-36.94	8.65	-28.29	-13	-15.29	H
5137.2	-42.49	12.03	-30.46	-13	-17.46	H
3424.8	-35.4	8.65	-26.75	-13	-13.75	V
5137.2	-43.15	12.03	-31.12	-13	-18.12	V
Middle Channel (1732.4MHz)						
3466.8	-35.39	8.91	-26.48	-13	-13.48	H
5200.2	-42.73	12.29	-30.44	-13	-17.44	H
3466.8	-36.62	8.91	-27.71	-13	-14.71	V
5200.2	-43.91	12.29	-31.62	-13	-18.62	V
High Channel (1752.6MHz)						
3505.2	-36.28	9.11	-27.17	-13	-14.17	H
5257.8	-44.34	12.56	-31.78	-13	-18.78	H
3505.2	-37.88	9.11	-28.77	-13	-15.77	V
5257.8	-42.43	12.56	-29.87	-13	-16.87	V



➤ For WCDMA Band II Mode

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (1852.4MHz)						
3704.8	-39.36	10.17	-29.19	-13	-16.19	H
5557.2	-49.7	14.69	-35.01	-13	-22.01	H
3704.8	-40.02	10.17	-29.85	-13	-16.85	V
5557.2	-46.87	14.69	-32.18	-13	-19.18	V
Middle Channel (1880MHz)						
3760.8	-39.89	10.26	-29.63	-13	-16.63	H
5640.0	-46.54	14.78	-31.76	-13	-18.76	H
3760.8	-39.27	10.26	-29.01	-13	-16.01	V
5640.0	-46.5	14.78	-31.72	-13	-18.72	V
High Channel (1907.6MHz)						
3815.2	-39.63	10.59	-29.04	-13	-16.04	H
5722.8	-46.86	15.03	-31.83	-13	-18.83	H
3815.2	-39.02	10.59	-28.43	-13	-15.43	V
5722.8	-46.41	15.03	-31.38	-13	-18.38	H

Note: Result=Reading+ Correct, Margin= Result- Limit

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.



9. Frequency Stability

9.1 Standard Applicable

According to §22.355, §24.235, §27.54 the limit is 2.5ppm.

9.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode.

9.3 Summary of Test Results/Plots

Note: 1. Worst case at WCDMA B2/B4/B5 middle channel

2. Normal Voltage NV=AC120V; Low Voltage LV=AC100V; High Voltage HV=AC240V



➤ Frequency stability V.S. Temperature measurement

Reference Frequency: WCDMA Band V Middle channel=4183 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
NV	-30	52	0.0625	2.50	Pass
	-20	44	0.0524		
	-10	38	0.0451		
	0	32	0.0386		
	10	27	0.0322		
	20	23	0.0276		
	30	28	0.0340		
	40	35	0.0414		
	50	42	0.0506		
Reference Frequency: WCDMA Band IV Middle channel=1412 channel=1733.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
NV	-30	66	0.0382	2.50	Pass
	-20	52	0.0302		
	-10	42	0.0244		
	0	38	0.0222		
	10	35	0.0200		
	20	29	0.0169		
	30	36	0.0209		
	40	42	0.0240		
	50	48	0.0280		
Reference Frequency: WCDMA Band II Middle channel=9400 channel=1880MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
NV	-30	57	0.0303	2.50	Pass
	-20	52	0.0274		
	-10	42	0.0225		
	0	36	0.0192		
	10	31	0.0164		
	20	23	0.0123		
	30	30	0.0160		



	40	35	0.0188		
	50	43	0.0229		

➤ Frequency stability V.S. Voltage measurement

Reference Frequency: WCDMA Band V Middle channel=4183 channel=836.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	
		Hz	ppm	Result	
25	HV	59	0.0708	2.50	Pass
	NV	55	0.0653		
	LV	44	0.0524		
Reference Frequency: WCDMA Band IV Middle channel=1412 channel=1733.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	HV	67	0.0386	2.50	Pass
	NV	55	0.0320		
	LV	44	0.0253		
Reference Frequency: WCDMA Band II Middle channel=9400 channel=1880MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	HV	70	0.0372	2.50	Pass
	NV	59	0.0315		
	LV	55	0.0291		

10. Modulation characteristics


10.1 Standard Applicable

According to §2.1047, measurements required: Modulation characteristics is given below:

- (a) Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter, or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.
- (b) Equipment which employs modulation limiting. A curve or family of curves showing the percentage of modulation versus the modulation input voltage shall be supplied. The information submitted shall be sufficient to show modulation limiting capability throughout the range of modulating frequencies and input modulating signal levels employed.
- (c) Single sideband and independent sideband radiotelephone transmitters which employ a device or circuit to limit peak envelope power. A curve showing the peak envelope power output versus the modulation input voltage shall be supplied. The modulating signals shall be the same in frequency as specified in paragraph (c) of §2.1049 for the occupied bandwidth tests.
- (d) Other types of equipment. A curve or equivalent data which shows that the equipment will meet the modulation requirements of the rules under which the equipment is to be licensed.

10.2 Test Procedure

According to ANSI C63.26-2015 section 5.3.2, the following test setup was performed.

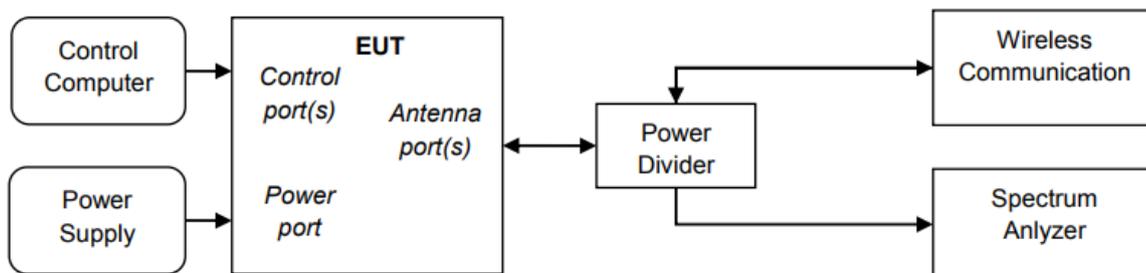


10.3 Summary of Test Results/Plots


Only the worst case was selected to record




WCDMA B5

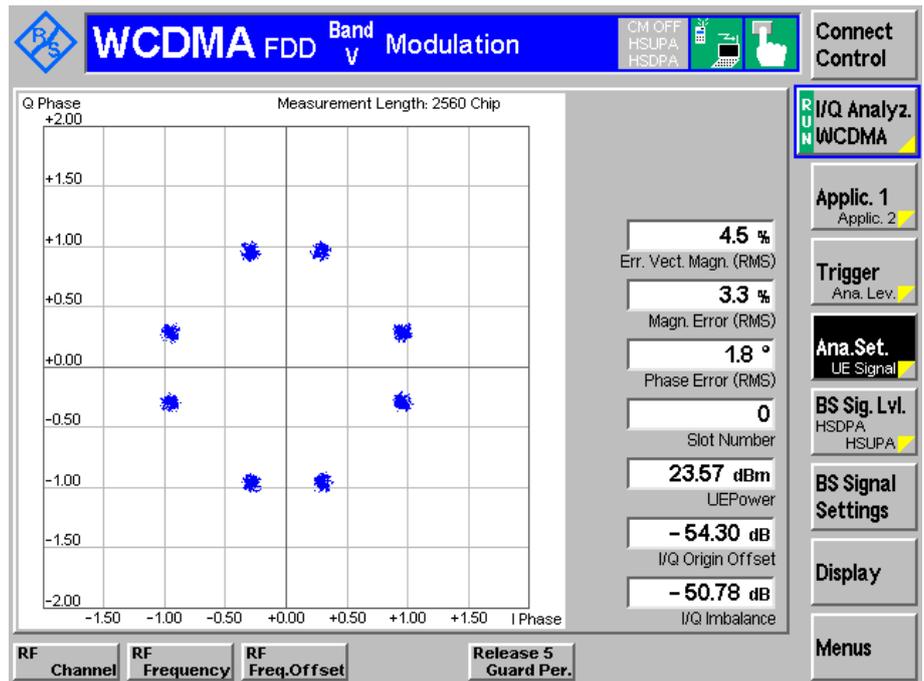

WCDMA B2

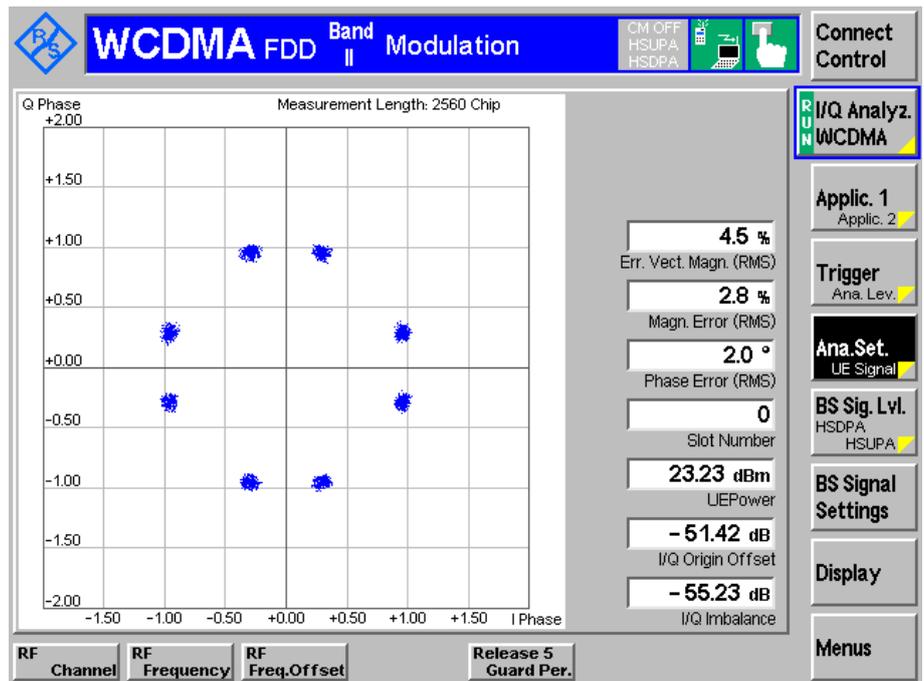

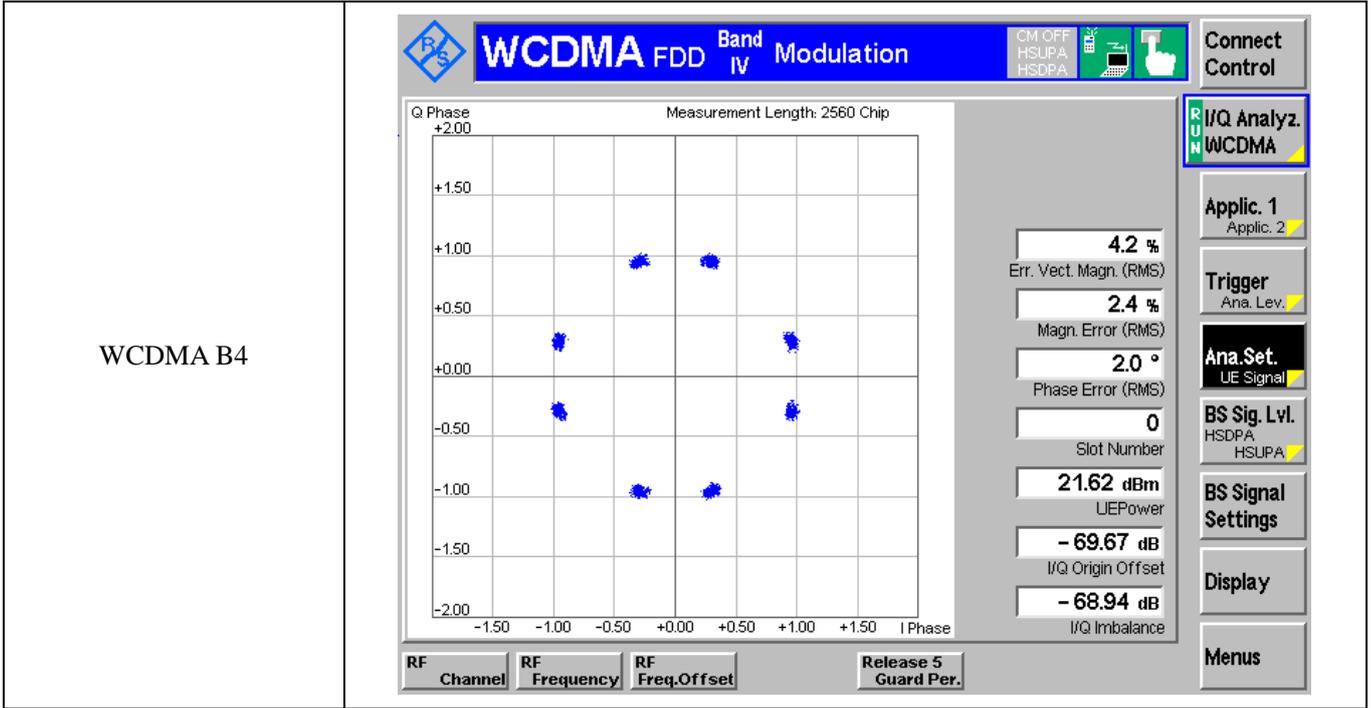

***** END OF REPORT *****