





802.11ac(HT40)

U-NII 1

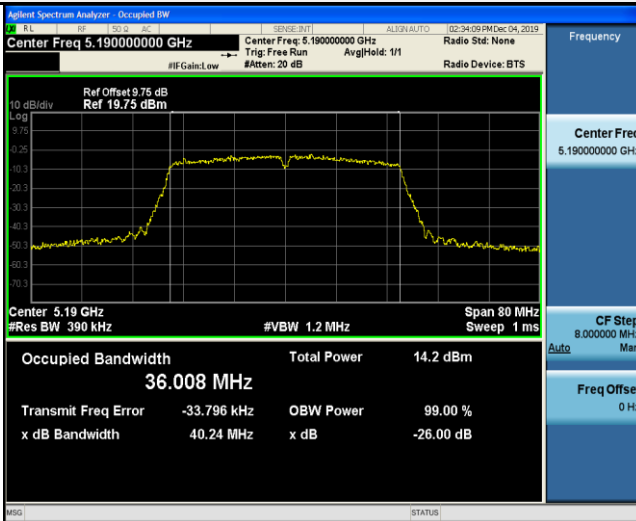

802.11ac(HT80)


U-NII 1

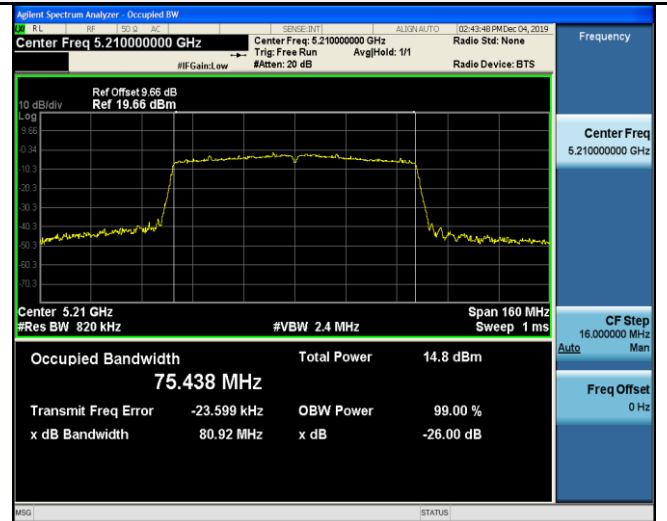

CH38



CH42





CH46





For ANT2:

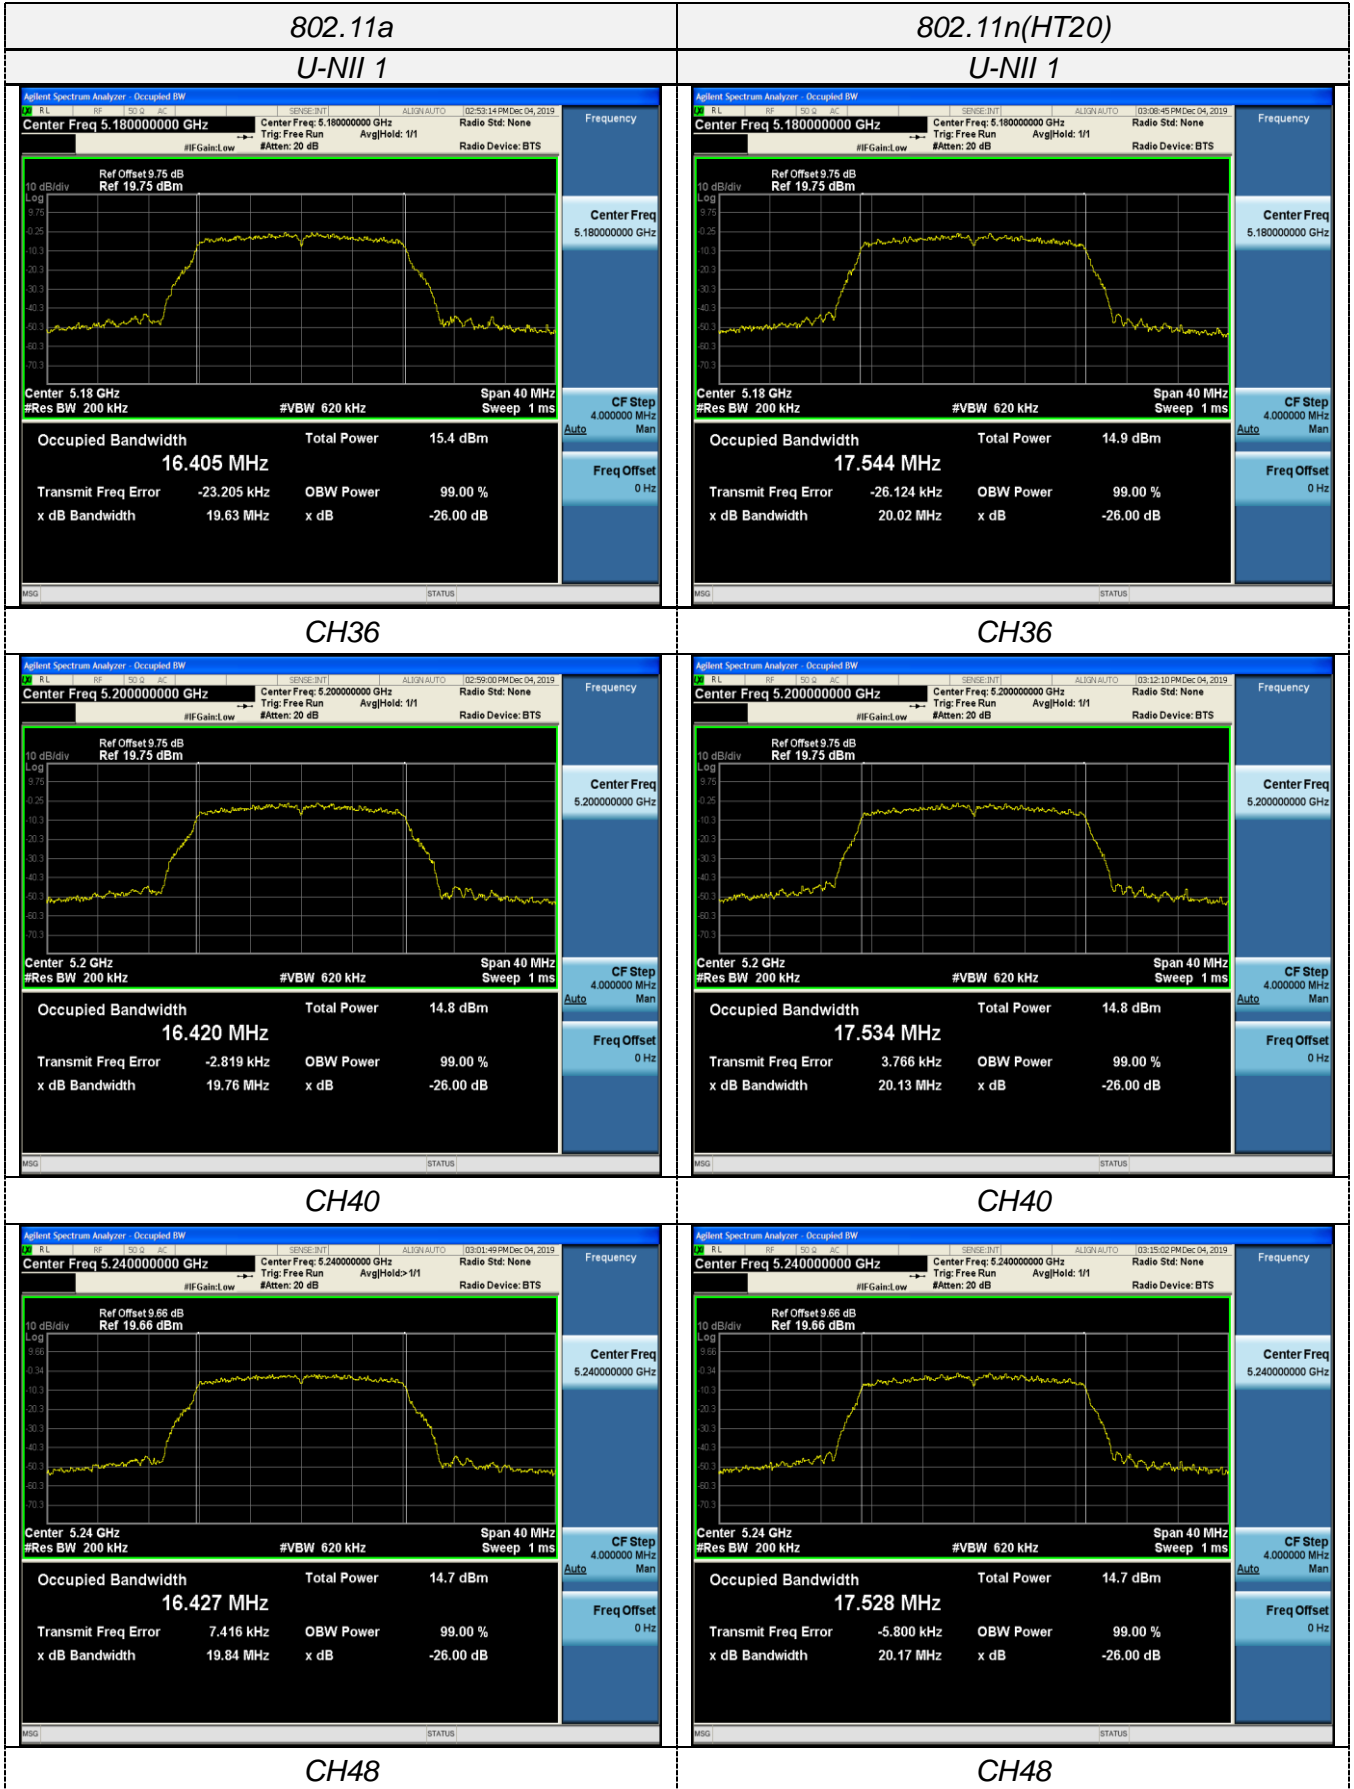


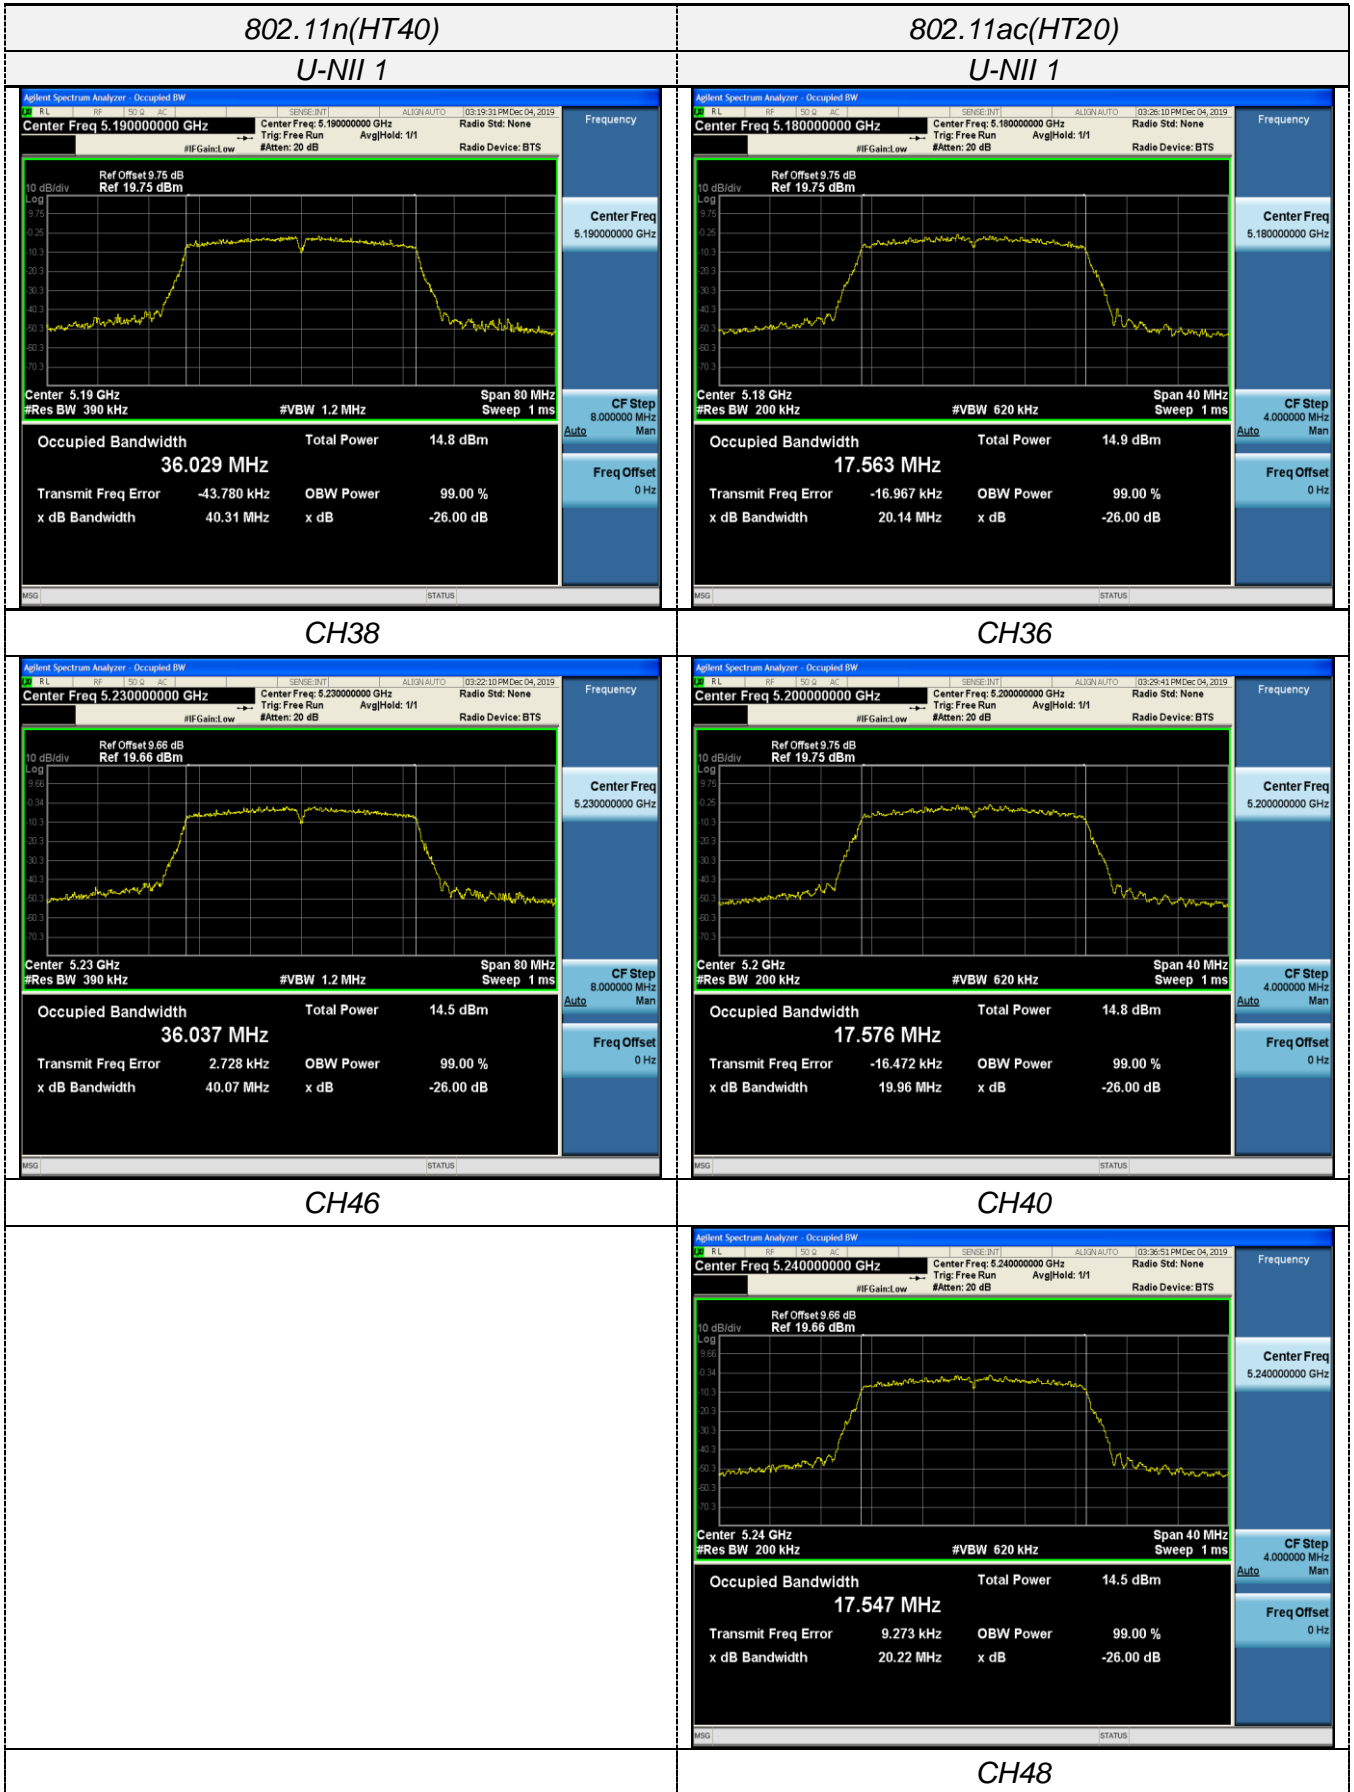




802.11ac(HT40)

U-NII 1

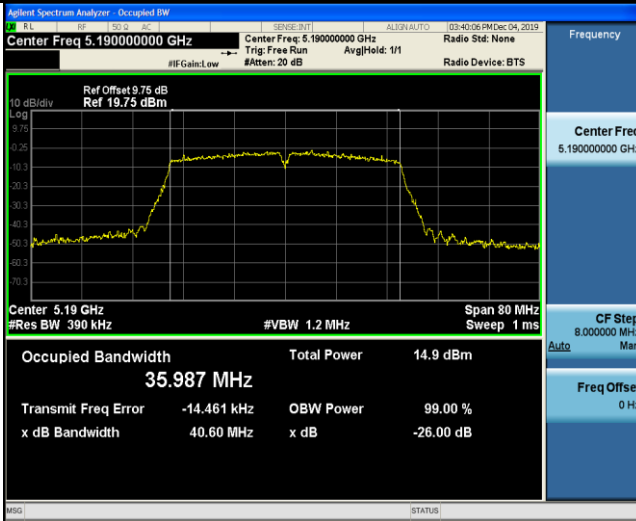

802.11ac(HT80)

U-NII 1

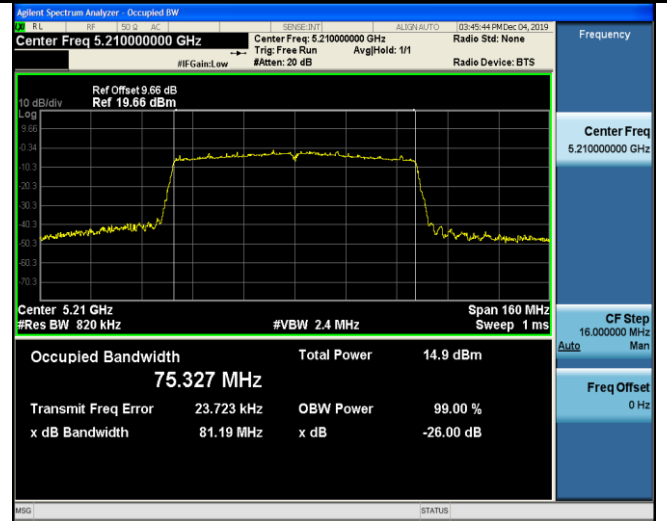

CH38



CH42



CH46





### 3.6. Minimum Emission Bandwidth (6dBm Bandwidth)


#### Limit

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

#### Test Procedure

1. Set resolution bandwidth (RBW) = 100 kHz
2. Set the video bandwidth 3 x RBW.
3. Detector = Peak.
4. Trace mode = Max hold.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### Test Configuration



#### Test Results

For ANT1:

Type	Bands	Channel	6dB Bandwidth (MHz)	Limit (KHz)	Result
802.11a	U-NII 3	149	14.72	≥500KHz	Pass
		157	14.89		
		165	13.86		
802.11n(HT20)	U-NII 3	149	15.18		
		157	12.60		
		165	14.64		
802.11n(HT40)	U-NII 3	151	35.16		
		159	35.19		
802.11ac(HT20)	U-NII 3	149	15.15		
		157	15.17		
		165	15.16		
802.11ac(HT40)	U-NII 3	151	35.17		
		159	35.20		
802.11ac(HT80)	U-NII 3	155	75.33		

**For ANT2:**

Type	Bands	Channel	6dB Bandwidth (MHz)	Limit (KHz)	Result
802.11a	U-NII 3	149	15.11	≥500KHz	Pass
		157	14.43		
		165	15.13		
802.11n(HT20)	U-NII 3	149	13.92		
		157	15.12		
		165	15.50		
802.11n(HT40)	U-NII 3	151	35.16		
		159	35.19		
802.11ac(HT20)	U-NII 3	149	15.11		
		157	15.07		
		165	14.79		
802.11ac(HT40)	U-NII 3	151	35.19		
		159	35.13		
802.11ac(HT80)	U-NII 3	155	75.34		


*Note:*

1. Measured 26dB bandwidth at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 6Mbps at IEEE 802.11a; MCS0 at IEEE 802.11n HT20, IEEE 802.11n HT40, IEEE 802.11ac VHT20 ,IEEE 802.11ac VHT40 and IEEE 802.11ac VHT80;



Please refer to following test plots;


For ANT1:

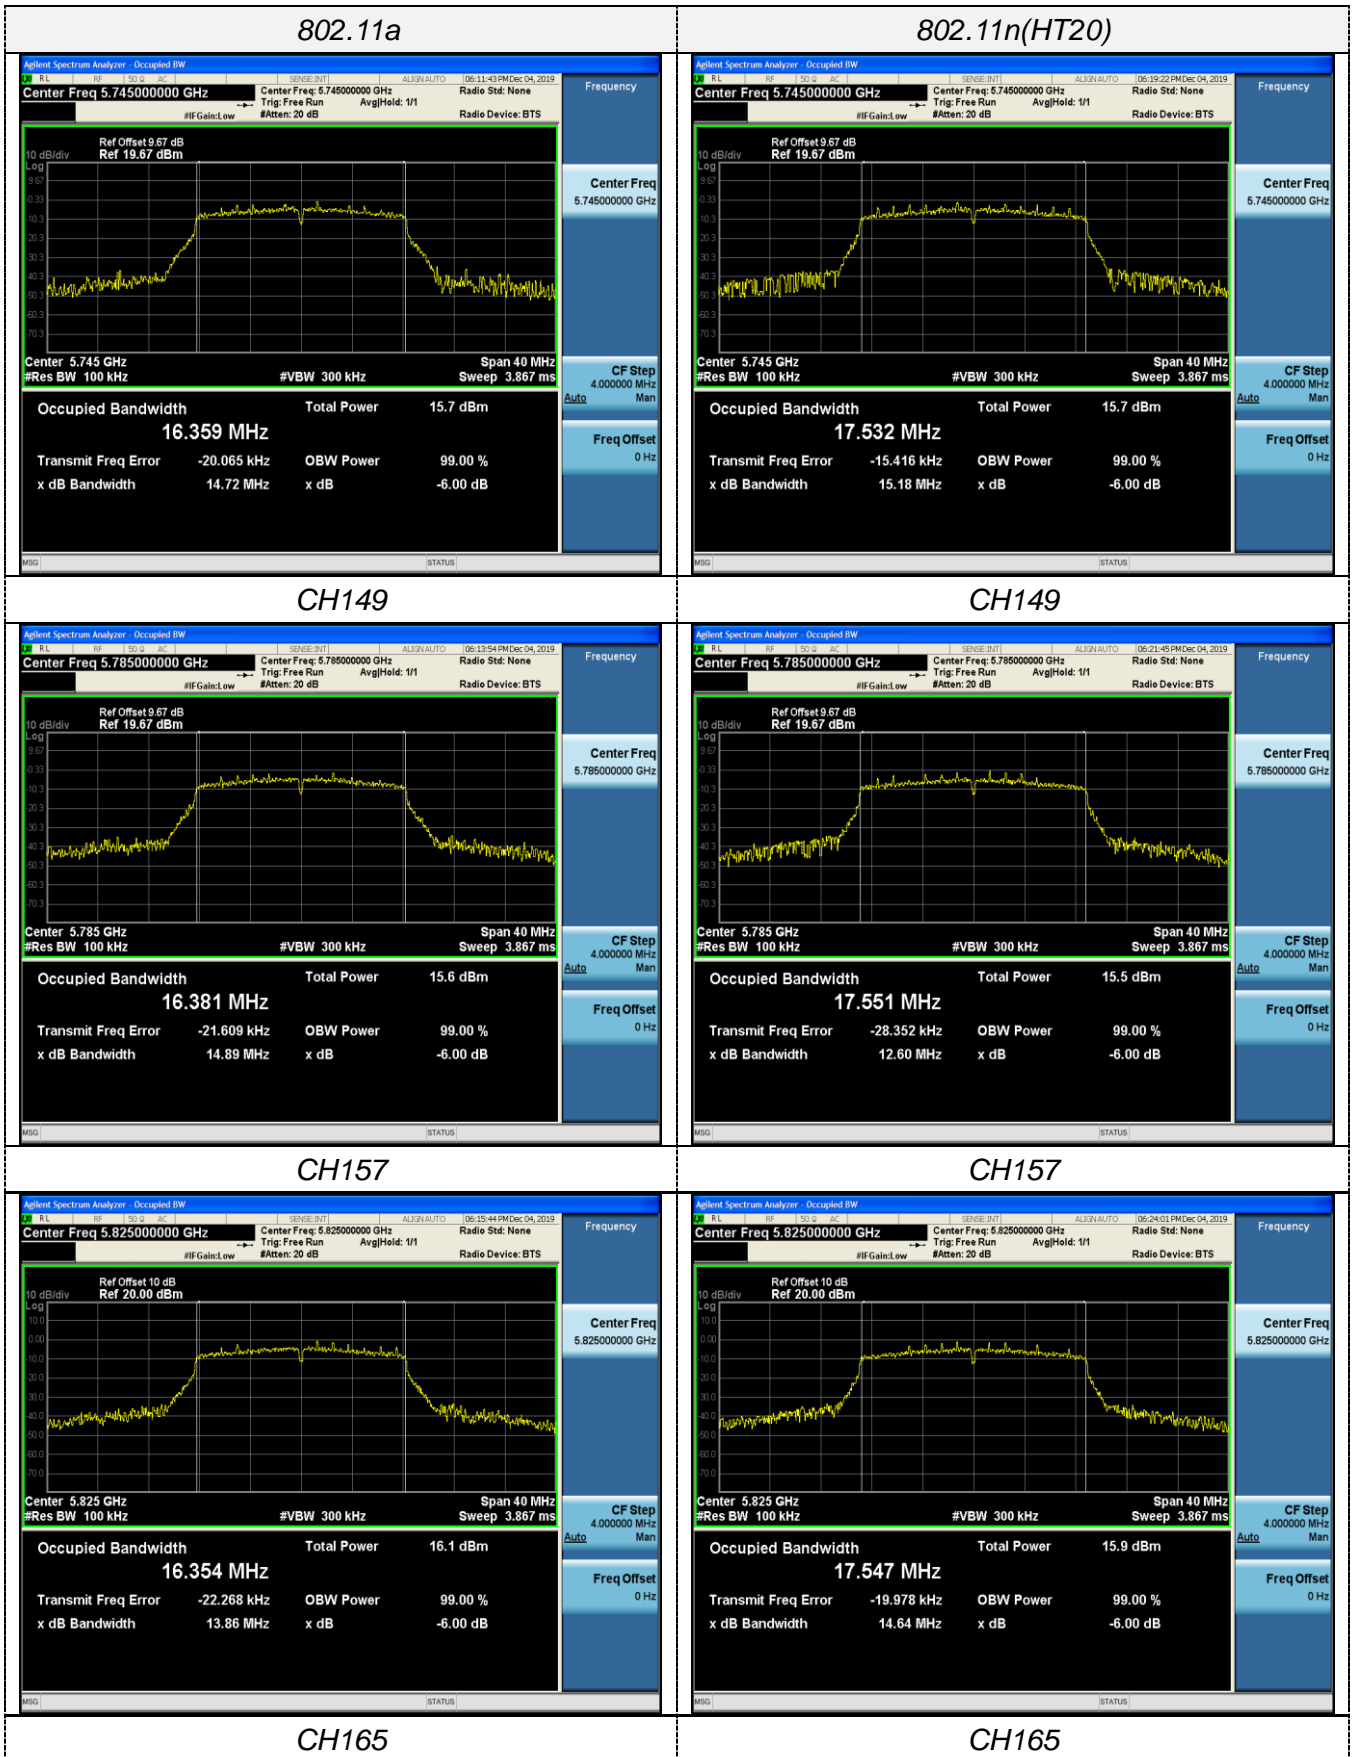







### 802.11n(HT40)

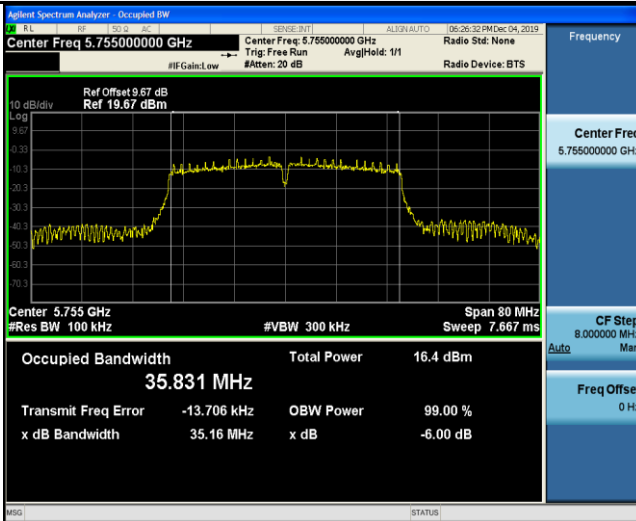


### 802.11ac(HT20)

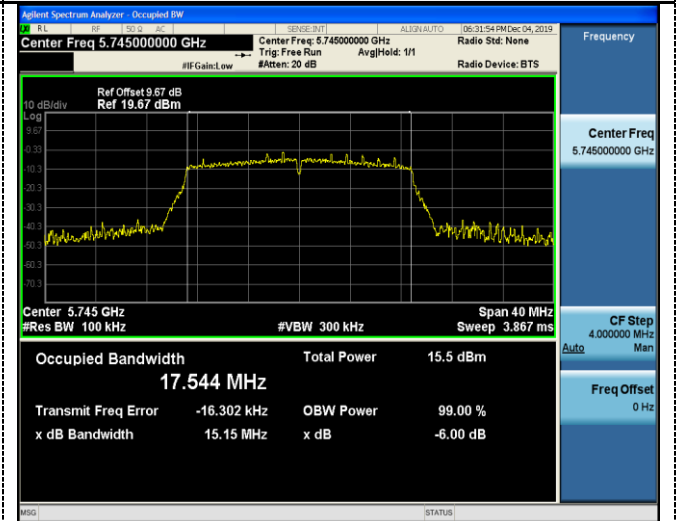

### CH151

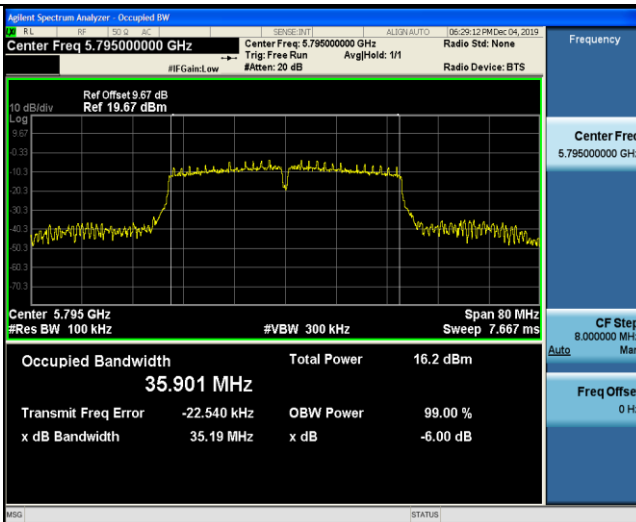


### CH149

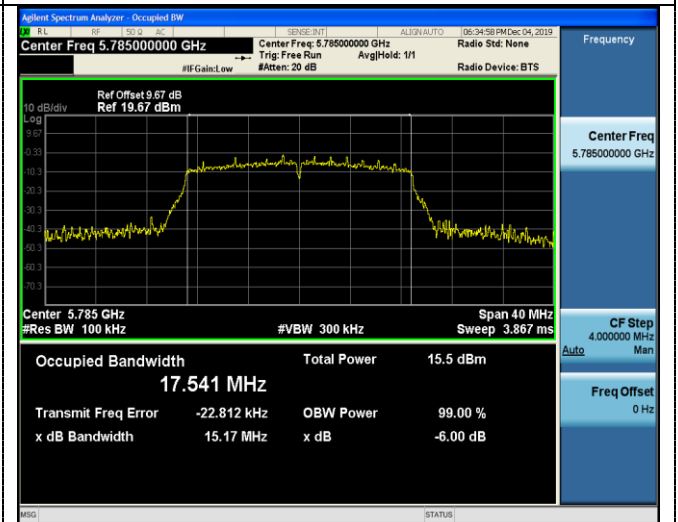

### CH159


### CH157

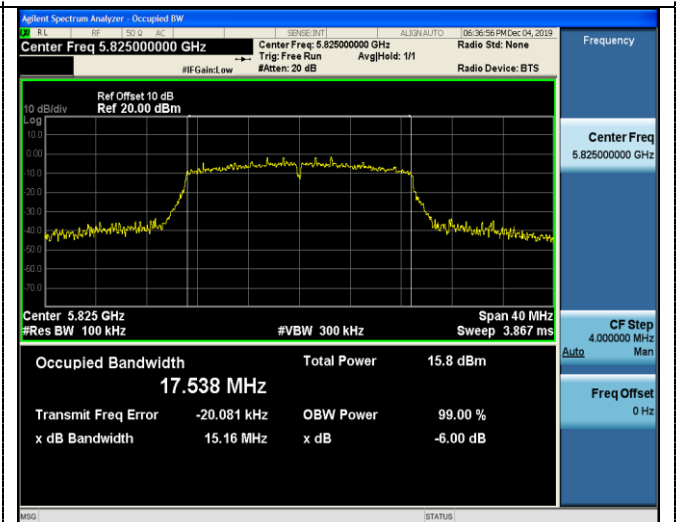


### CH165




### 802.11ac(HT40)

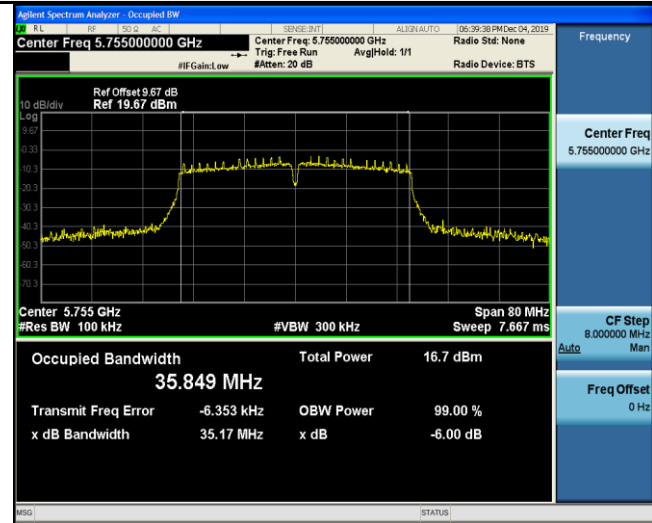


### 802.11ac(HT80)

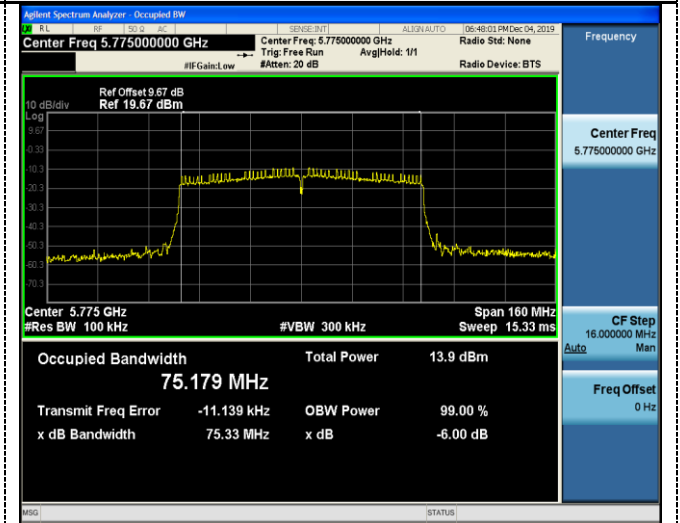

### CH151

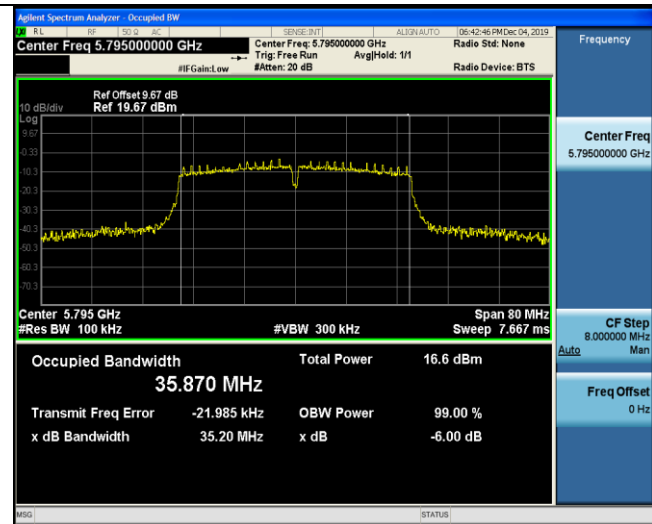

### CH155




### CH159






For ANT2:


802.11a

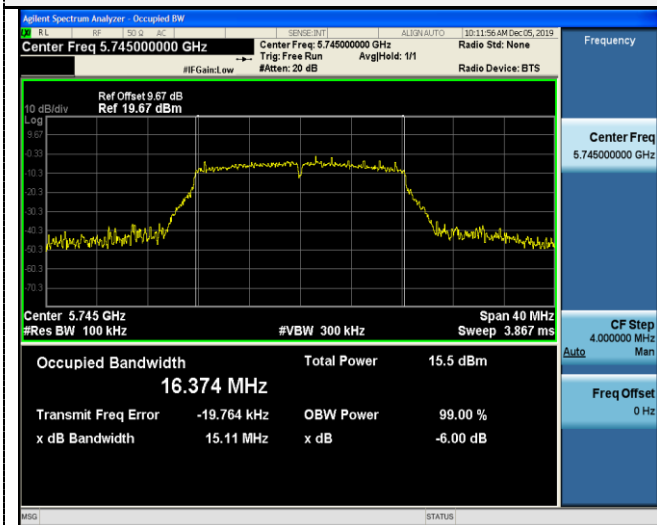


802.11n(HT20)

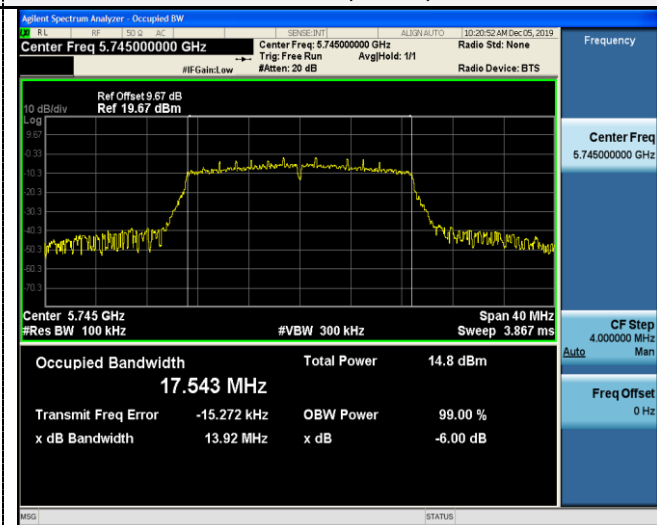


CH149

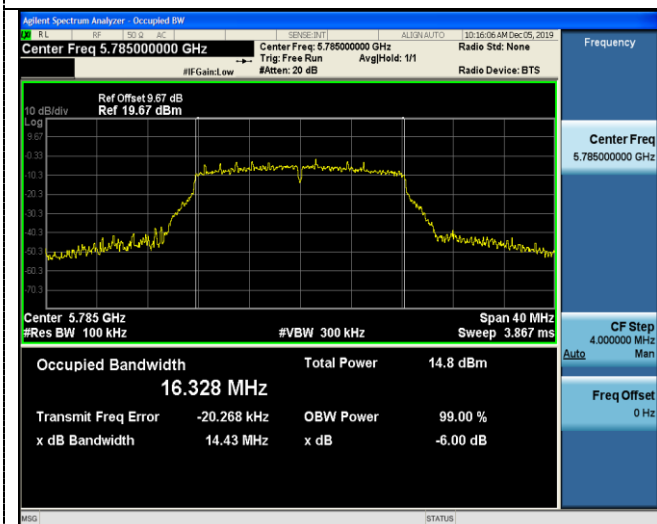


CH149

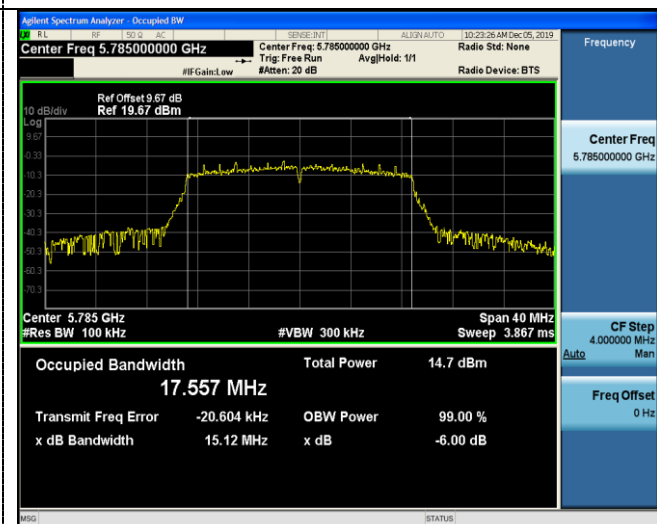

CH157

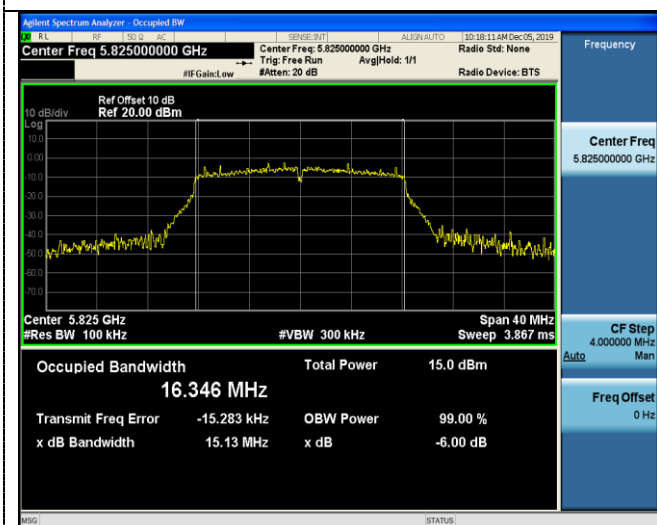

CH157

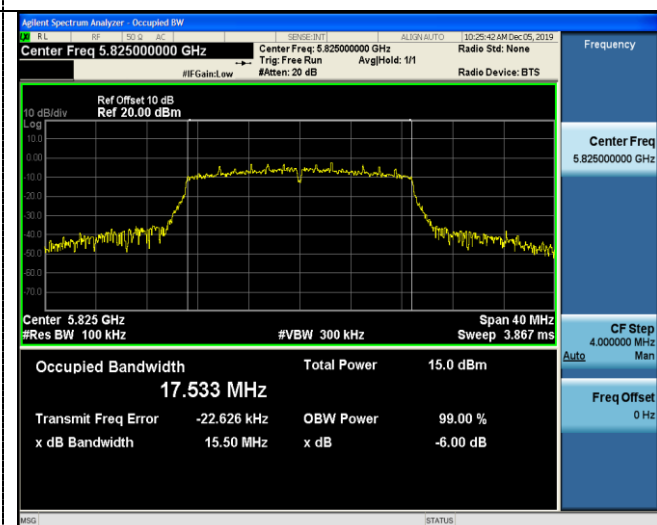


CH165


CH165




### 802.11n(HT40)

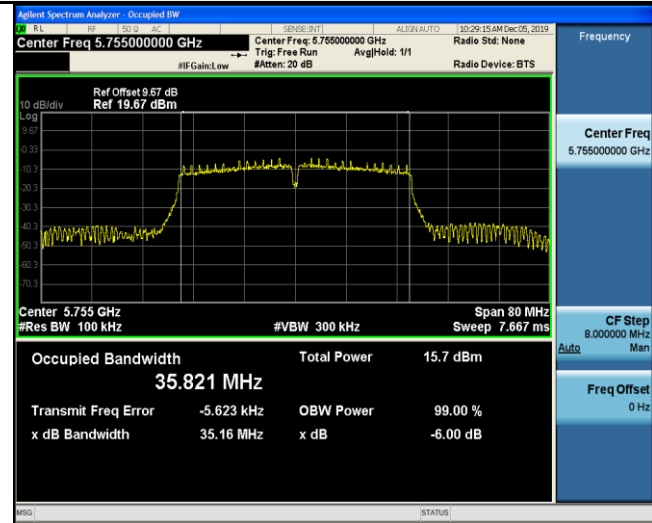


### 802.11ac(HT20)

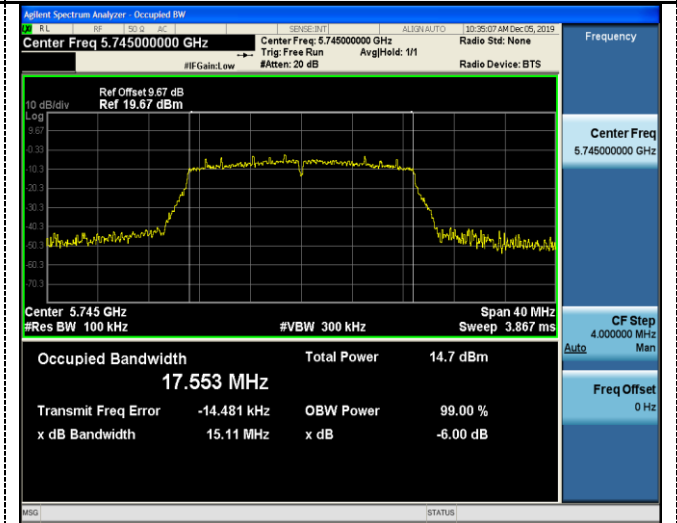

### CH151

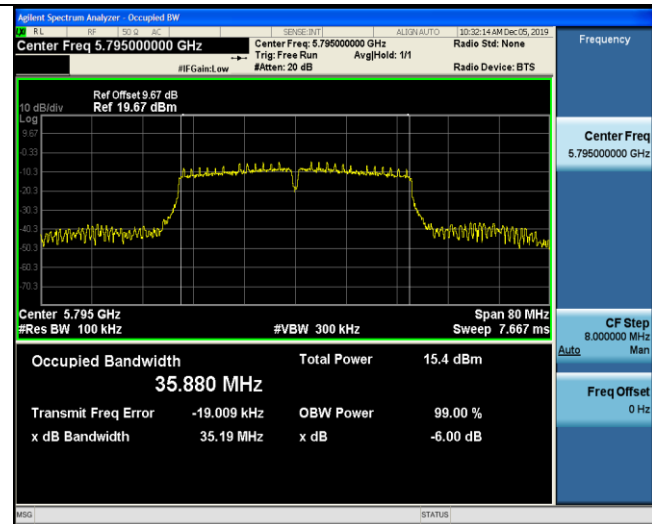


### CH149

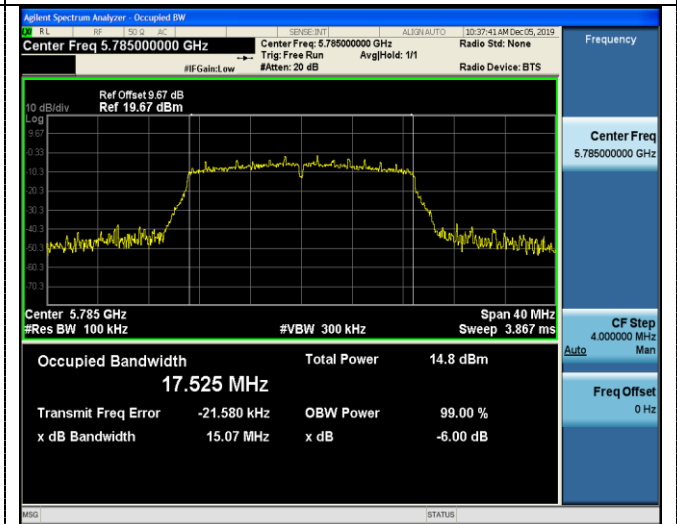

### CH159


### CH157

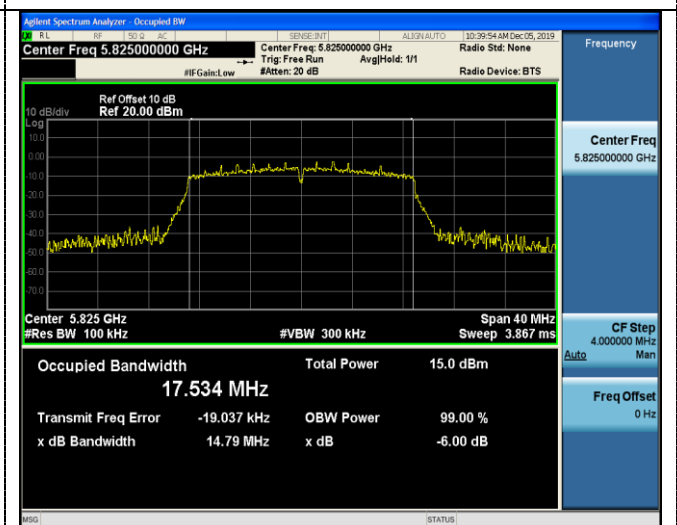


### CH165




### 802.11ac(HT40)

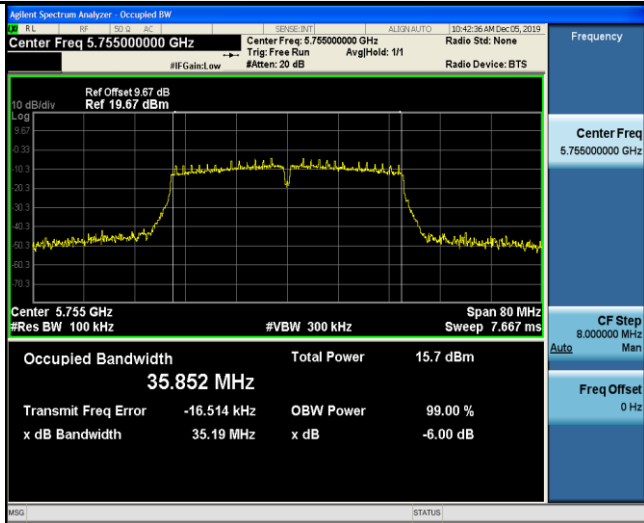


### 802.11ac(HT80)

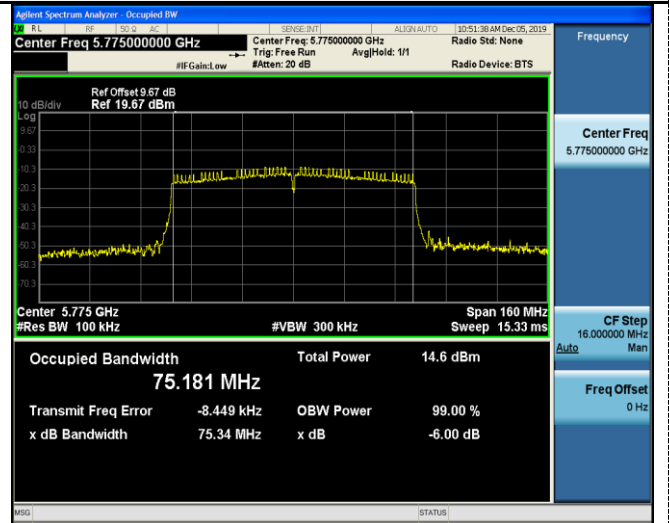

### CH151

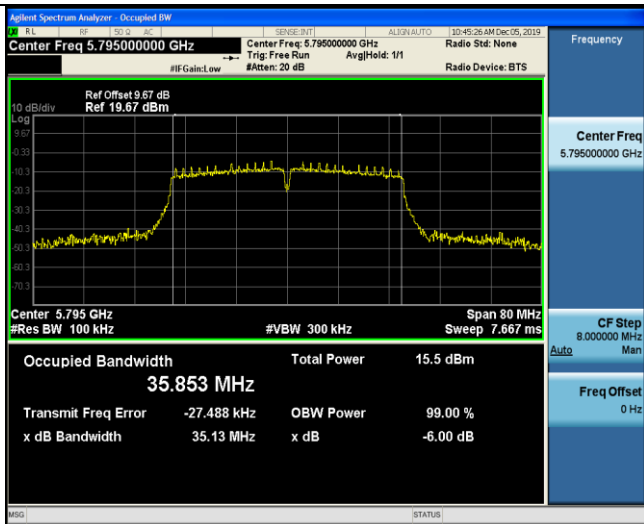

### CH155




### CH159

### 3.7. Frequency Stability

#### LIMIT

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

#### TEST CONFIGURATION

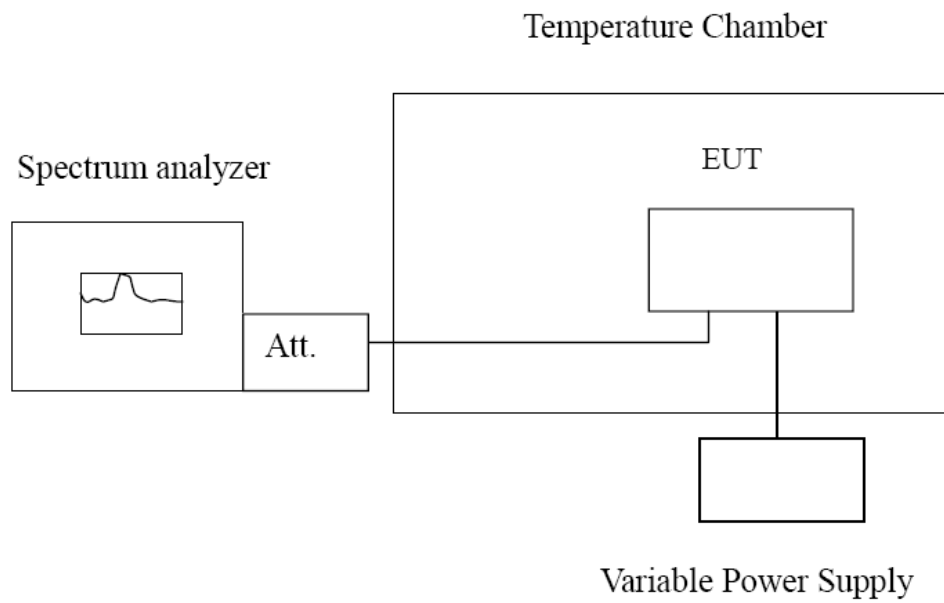

#### TEST PROCEDURE

##### **Frequency Stability under Temperature Variations:**

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

##### **Frequency Stability under Voltage Variations:**

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ( $\pm 15\%$ ) and endpoint, record the maximum frequency change.

#### TEST RESULTS

Record worst case as below:



For ANT1:

Reference Frequency: 802.11ac channel=36 frequency=5180MHz					
Voltage ( V )	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
230	-30	629	0.121	Within the band of operation	Pass
	-20	578	0.112		
	-10	387	0.075		
	0	219	0.042		
	10	308	0.059		
	20	125	0.024		
	30	116	0.022		
	40	478	0.092		
	50	769	0.148		
240	25	805	0.155		
207	25	719	0.139		

Reference Frequency: 802.11ac channel=149 frequency=5745MHz					
Voltage ( V )	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
230	-30	609	0.106	Within the band of operation	Pass
	-20	724	0.126		
	-10	511	0.089		
	0	387	0.067		
	10	254	0.044		
	20	109	0.019		
	30	127	0.022		
	40	359	0.062		
	50	776	0.135		
240	25	718	0.125		
207	25	692	0.120		



For ANT2:

Reference Frequency: 802.11ac channel=36 frequency=5180MHz					
Voltage ( V )	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
230	-30	548	0.106	Within the band of operation	Pass
	-20	529	0.102		
	-10	411	0.079		
	0	358	0.069		
	10	401	0.077		
	20	553	0.107		
	30	404	0.078		
	40	526	0.102		
	50	682	0.132		
240	25	792	0.153		
207	25	674	0.130		

Reference Frequency: 802.11ac channel=149 frequency=5745MHz					
Voltage ( V )	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
230	-30	677	0.118	Within the band of operation	Pass
	-20	702	0.122		
	-10	495	0.086		
	0	414	0.072		
	10	272	0.047		
	20	191	0.033		
	30	147	0.026		
	40	362	0.063		
	50	677	0.118		
240	25	669	0.116		
207	25	709	0.123		





### **3.8. Antenna Requirement**

#### **Standard Applicable**

**For intentional device, according to FCC 47 CFR Section 15.203:**



An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may d

esign the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited

#### **Test Result:**

The antenna is External antenna, The maximum gain of antenna was 2.00dBi for 2.4GHz WIFI.

## 4. Test Setup Photos of the EUT

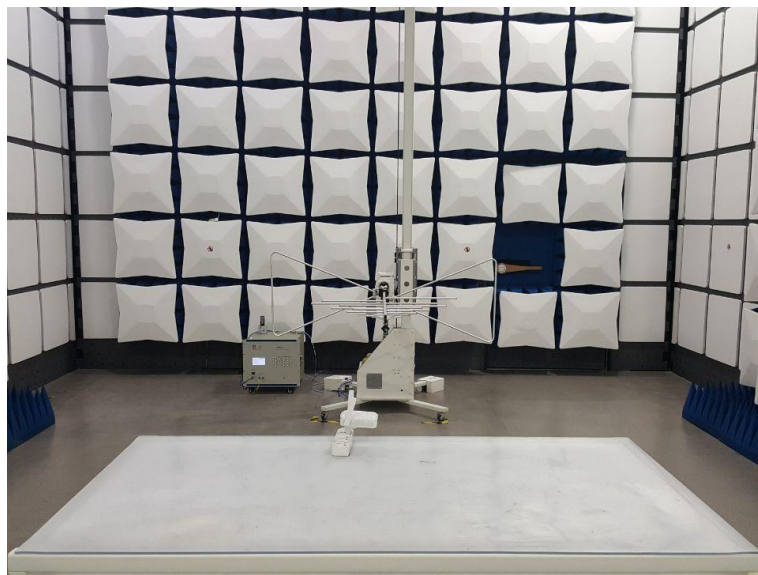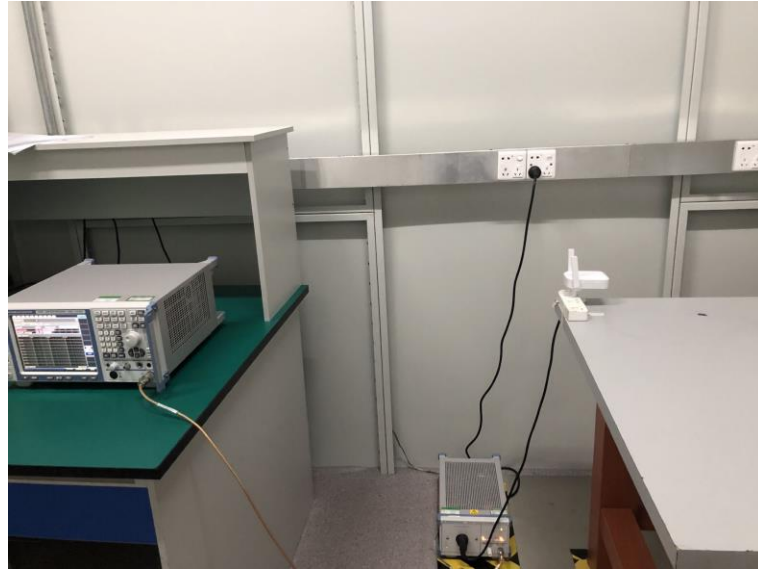



## 5. The Photos of the EUT

### External photos

Please refer to separated files for External Photos of the EUT.

### Internal photos

Please refer to separated files for Internal Photos of the EUT.

\*\*\*\*\* **End of Report** \*\*\*\*\*