

FCC RADIO TEST REPORT

FCC ID: 2AVLP-JB200

Product: Projector

Trade Mark: AOFU

Model No.: JB200

Family Model: N/A

Report No.: S19121904103004

Issue Date: 06 Mar. 2020

Prepared for

shenzhen weizhisheng electronic commerce co., ltd
Building 1, Creative and Industrial Park, Qingqing Road, Longhua
District, Shenzhen

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.
1/F, Building E, Fenda Science Park, Sanwei Community,
Xixiang Street Bao'an District, Shenzhen 518126 P.R. China
Tel.: +86-755-6115 6588
Fax.: +86-755-6115 6599
Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION**Applicant's name** : shenzhen weizhisheng electronic commerce co., ltd

Address : Building 1, Creative and Industrial Park, Qingqing Road, Longhua District, Shenzhen

Manufacturer's Name : Shenzhen YAKESI Technology Co., Ltd

Address : 402B, building 30, Zhiheng Industrial Park, No. 15, Guankou Second Road, Anle community, Nantou street, Nanshan District, Shenzhen

Product description

Product name : Projector

Model and/or type reference : JB200

Family Model..... : N/A

Standards : FCC Part15.407

Test procedure ANSI C63.10-2013 and KDB 789033 D02 General UNII Test Procedures New Rules v02r01

FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02

KDB 905462 D03 Client Without DFS New Rules v01r02

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

FCC KDB 662911 D02 MIMO With Cross Polarized Antenna V01

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements/ the Industry Canada requirements.. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personnel only, and shall be noted in the revision of the document.


Date of Test

Date (s) of performance of tests 30 Dec. 2019 ~ 05 Mar, 2020

Date of Issue 06 Mar, 2020


Test Result..... **Pass**

Testing Engineer : _____




(Jerry Xie)

Technical Manager : _____



(Jason Chen)

Authorized Signatory : _____



(Sam Chen)

Table of Contents

	Page
1. SUMMARY OF TEST RESULTS	7
1.1 FACILITIES AND ACCREDITATIONS	8
1.2 MEASUREMENT UNCERTAINTY	8
1 . GENERAL INFORMATION	9
1.1 GENERAL DESCRIPTION OF EUT	9
1.2 DESCRIPTION OF TEST MODES	11
1.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	12
1.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	13
1.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	14
2 . EMC EMISSION TEST	16
2.1 CONDUCTED EMISSION MEASUREMENT	16
2.1.1 APPLICABLE STANDARD	16
2.1.2 CONFORMANCE LIMIT	16
2.1.3 TEST CONFIGURATION	16
2.1.4 TEST PROCEDURE	16
2.2 RADIATED EMISSION MEASUREMENT	19
2.2.1 APPLICABLE STANDARD	19
2.2.2 CONFORMANCE LIMIT	19
2.2.3 MEASURING INSTRUMENTS	19
2.2.4 TEST CONFIGURATION	20
2.2.5 TEST PROCEDURE	21
2.2.6 TEST RESULTS (9KHZ – 30 MHZ)	22
2.2.7 TEST RESULTS (30MHZ – 1GHZ)	23
2.2.8 TEST RESULTS (1GHZ-18GHZ)	31
2.2.9 TEST RESULTS (18GHZ-40GHZ)	39
3 . POWER SPECTRAL DENSITY TEST	48
3.1 APPLIED PROCEDURES / LIMIT	48
3.2 TEST PROCEDURE	49
3.3 DEVIATION FROM STANDARD	49
3.4 TEST SETUP	49
3.5 EUT OPERATION CONDITIONS	49
3.6 TEST RESULTS	50
4 . 26DB & 99% EMISSION BANDWIDTH	51
4.1 APPLIED PROCEDURES / LIMIT	51
4.2 TEST PROCEDURE	51
4.3 EUT OPERATION CONDITIONS	52
4.4 TEST RESULTS	53

Table of Contents

	Page
5 . MINIMUM 6 DB BANDWIDTH	54
5.1 APPLIED PROCEDURES / LIMIT	54
5.2 TEST PROCEDURE	54
5.3 DEVIATION FROM STANDARD	54
5.4 TEST SETUP	54
5.5 EUT OPERATION CONDITIONS	54
5.6 TEST RESULTS	55
6 . MAXIMUM CONDUCTED OUTPUT POWER	56
6.1 PPLIED PROCEDURES / LIMIT	56
6.2 TEST RESULTS	58
7 . OUT OF BAND EMISSIONS	59
7.1 APPLICABLE STANDARD	59
7.2 TEST PROCEDURE	59
7.3 DEVIATION FROM STANDARD	59
7.4 TEST SETUP	59
7.5 EUT OPERATION CONDITIONS	60
7.6 TEST RESULTS	61
9.SPURIOUS RF CONDUCTED EMISSIONS	62
9.1CONFORMANCE LIMIT	62
10. FREQUENCY STABILITY MEASUREMENT	63
10.1 LIMIT	63
10.2 TEST PROCEDURES	63
10.3 TEST SETUP LAYOUT	63
10.4 EUT OPERATION DURING TEST	63
10.5 TEST RESULTS	64
11. DYNAMIC FREQUENCY SELECTION(DFS)	76
11.1 APPLICABILITY OF DFS REQUIREMENTS	76
11.2 INTERFERENCE THRESHOLD VALUES, MASTER OR CLIENT INCORPORATING IN-SERVICE MONITORING	76
11.3 DFS RESPONSE REQUIREMENT VALUES	77
11.4 SHORT PULSE RADAR TEST WAVEFORMS	77
11.5 CALIBRATION SETUP AND DFS TEST RESULTS	78
11.6 CONDUCTED CALIBRATION SETUP	78
11.7 RADAR WAVEFORM CALIBRATION RESULT	79
11.8 IN-SERVICE MONITORING: CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME AND NON-OCCUPANCY PERIOD	80

Table of Contents

	Page
11.9 RESULT OF CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME AND NON-OCCUPANCY PERIOD FOR CLIENT BEACON TEST	81
12. ANTENNA REQUIREMENT	82
12.1 STANDARD REQUIREMENT	82
12.2 EUT ANTENNA	82
13. TEST RESULTS	83
13.1 DUTY CYCLE	83
13.2 MAXIMUM CONDUCTED OUTPUT POWER	146
13.3 OCCUPIED CHANNEL BANDWIDTH	150
13.4 - 6DB EMISSION BANDWIDTH	272
13.5 MAXIMUM POWER SPECTRAL DENSITY LEVEL	287
13.6 BAND EDGE	350
13.7 CONDUCTED RF SPURIOUS EMISSION	401
13.8 DFS	464

Revision History

[illegible]

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.407) , Subpart E			
Standard Section	Test Item	Judgment	Remark
15.207	AC Power Line Conducted Emissions	PASS	
15.209(a), 15.407 (b)(1) 15.407 (b)(2) 15.407 (b)(3) 15.407 (b)(4) 15.407 (b)(6)	Spurious Radiated Emissions	PASS	
15.407 (a)	26 dB and 99% Emission Bandwidth	PASS	
15.407(e)	Minimum 6 dB bandwidth	PASS	
15.407 (a)	Maximum Conducted Output Power	PASS	
15.407 (b)(1) 15.407 (b)(2) 15.407 (b)(3) 15.407 (b)(4)	Band Edge	PASS	
15.407 (a)	Power Spectral Density	PASS	
15.407(b)	Spurious Emissions at Antenna Terminals	PASS	
15.407(g)	Frequency Stability Measurement	PASS	
15.407(h)	Dynamic Frequency Selection(DFS)	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report
- (2) This device operates with a duty cycle greater than 99%

1.1 FACILITIES AND ACCREDITATIONS

FACILITIES

All measurement facilities used to collect the measurement data are located at
1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen
518126 P.R. China.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and
CISPR Publication 22.

LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

CNAS-Lab. : The Laboratory has been assessed and proved to be in compliance with
CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)
The Certificate Registration Number is L5516.

IC-Registration : The Certificate Registration Number is 9270A.
CAB identifier: CN0074

FCC- Accredited : Test Firm Registration Number: 463705.
Designation Number: CN1184

A2LA-Lab. : The Certificate Registration Number is 4298.01
This laboratory is accredited in accordance with the recognized
International Standard ISO/IEC 17025:2005 General requirements for the
competence of testing and calibration laboratories.
This accreditation demonstrates technical competence for a defined
scope and the operation of a laboratory quality management system
(refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

Name of Firm : Shenzhen NTEK Testing Technology Co., Ltd.

Site Location : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street,
Bao'an District, Shenzhen 518126 P.R. China.

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a
standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of
approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.80\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(30MHz~1GHz)	$\pm 2.64\text{dB}$
5	All emissions, radiated(1GHz~6GHz)	$\pm 2.40\text{dB}$
6	All emissions, radiated(> 6GHz)	$\pm 2.52\text{dB}$
7	Temperature	$\pm 0.5^\circ\text{C}$
8	Humidity	$\pm 2\%$

1. GENERAL INFORMATION

1.1 GENERAL DESCRIPTION OF EUT

Equipment	Projector																				
Trade Mark	AOFU																				
Model Name	JB200																				
Family Model	N/A																				
Model Difference	N/A																				
FCC ID	2AVLP-JB200																				
Product Description	<table border="1"> <tr> <td>Mode Supported</td><td> ☒802.11a ☒802.11n(HT20) ☒802.11n(HT40) ☒802.11ac(HT20) ☒802.11ac(HT40) ☒802.11ac(HT80) </td></tr> <tr> <td>Data Rate</td><td> 802.11a: 6,9,12,18,24,36,48,54Mbps; 802.11n(HT20/HT40):MCS0-MCS15; 802.11ac(VHT20): NSS1, MCS0-MCS8 802.11ac(VHT40/VHT80):NSS1, MCS0-MCS9 </td></tr> <tr> <td>Modulation</td><td>OFDM with BPSK/QPSK/16QAM/64QAM</td></tr> <tr> <td>Operating Frequency Range</td><td> ☒ U-NII-1: 5180 MHz ~5240MHz ☒ U-NII-2A: 5260MHz~5320MHz ☒ U-NII-2C: 5500MHz~5700MHz ☒ U-NII-3: 5745 MHz ~5825 MHz </td></tr> <tr> <td>Function:</td><td> ☐Outdoor AP ☐Indoor AP ☐Fixed P2P ☒Client </td></tr> <tr> <td>DFS type:</td><td> ☐master devices ☐Slave devices with radar detection ☒Slave devices without radar detection </td></tr> <tr> <td>Support TPC</td><td> ☐YES ☒NO </td></tr> <tr> <td>Antenna Type</td><td>Antenna :FPC Print Antenna</td></tr> <tr> <td>Antenna Gain</td><td> Antenna 1: 0.83dBi Antenna 2: 0.55dBi </td></tr> <tr> <td>Smart system</td><td> ☒SISO for 802.11a ☒MIMO for 802.11n/ac </td></tr> </table> Based on the application, features, or specification exhibited in User's Manual, More details of EUT technical specification, please refer to the User's Manual.	Mode Supported	☒ 802.11a ☒ 802.11n(HT20) ☒ 802.11n(HT40) ☒ 802.11ac(HT20) ☒ 802.11ac(HT40) ☒ 802.11ac(HT80)	Data Rate	802.11a: 6,9,12,18,24,36,48,54Mbps; 802.11n(HT20/HT40):MCS0-MCS15; 802.11ac(VHT20): NSS1, MCS0-MCS8 802.11ac(VHT40/VHT80):NSS1, MCS0-MCS9	Modulation	OFDM with BPSK/QPSK/16QAM/64QAM	Operating Frequency Range	☒ U-NII-1: 5180 MHz ~5240MHz ☒ U-NII-2A: 5260MHz~5320MHz ☒ U-NII-2C: 5500MHz~5700MHz ☒ U-NII-3: 5745 MHz ~5825 MHz	Function:	☐ Outdoor AP ☐ Indoor AP ☐ Fixed P2P ☒ Client	DFS type:	☐ master devices ☐ Slave devices with radar detection ☒ Slave devices without radar detection	Support TPC	☐ YES ☒ NO	Antenna Type	Antenna :FPC Print Antenna	Antenna Gain	Antenna 1: 0.83dBi Antenna 2: 0.55dBi	Smart system	☒ SISO for 802.11a ☒ MIMO for 802.11n/ac
Mode Supported	☒ 802.11a ☒ 802.11n(HT20) ☒ 802.11n(HT40) ☒ 802.11ac(HT20) ☒ 802.11ac(HT40) ☒ 802.11ac(HT80)																				
Data Rate	802.11a: 6,9,12,18,24,36,48,54Mbps; 802.11n(HT20/HT40):MCS0-MCS15; 802.11ac(VHT20): NSS1, MCS0-MCS8 802.11ac(VHT40/VHT80):NSS1, MCS0-MCS9																				
Modulation	OFDM with BPSK/QPSK/16QAM/64QAM																				
Operating Frequency Range	☒ U-NII-1: 5180 MHz ~5240MHz ☒ U-NII-2A: 5260MHz~5320MHz ☒ U-NII-2C: 5500MHz~5700MHz ☒ U-NII-3: 5745 MHz ~5825 MHz																				
Function:	☐ Outdoor AP ☐ Indoor AP ☐ Fixed P2P ☒ Client																				
DFS type:	☐ master devices ☐ Slave devices with radar detection ☒ Slave devices without radar detection																				
Support TPC	☐ YES ☒ NO																				
Antenna Type	Antenna :FPC Print Antenna																				
Antenna Gain	Antenna 1: 0.83dBi Antenna 2: 0.55dBi																				
Smart system	☒ SISO for 802.11a ☒ MIMO for 802.11n/ac																				
Ratings	DC 7.6V from Battery or DC 12V from Adapter																				
Adapter	☒ Adapter supply: Model: YNQX30T120250UL Input: 100-240V~50/60Hz 1A Output: 12V---2.5A																				
Battery	DC 7.6V																				
Connecting I/O Port(s)	Please refer to the User's Manual																				
HW Version	JB200-MB JB200-DB JB200-KEY																				
SW Version	N/A																				

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- Frequency and Channel list:

Band	20MHz		40MHz		80MHz	
	Channel	Frequency	Channel	Frequency	Channel	Frequency
U-NII-1	36	5180 MHz	38	5190 MHz	42	5210 MHz
	40	5200 MHz	46	5230 MHz	-	-
	44	5220 MHz				
	48	5240 MHz				
U-NII-2A	52	5260 MHz	54	5270 MHz	58	5290 MHz
	56	5280 MHz	62	5310 MHz		
	60	5300 MHz				
	64	5320 MHz				
U-NII-2C	100	5500 MHz	102	5510 MHz	106	5530 MHz
	104	5520 MHz	110	5550 MHz	122	5610 MHz
	108	5540 MHz	118	5590 MHz		
	112	5560 MHz	126	5630 MHz		
	116	5580 MHz	134	5670 MHz		
	120	5600 MHz				
	124	5620 MHz				
	128	5640 MHz				
	132	5660 MHz				
U-NII-3	140	5700 MHz				
	149	5745 MHz	151	5755 MHz	155	5775 MHz
	153	5765 MHz	159	5795 MHz		
	157	5785 MHz				
	161	5805 MHz				
	165	5825 MHz				

1.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Normal Link Mode
Mode 2	802.11a / n/ ac 20 CH36/ CH40/ CH 48 802.11a /n/ ac 20 CH149/ CH157/ CH 165
Mode 3	802.11n/ ac40 CH38/ CH 46 802.11n/ ac40 CH 151 / CH 159
Mode 4	802.11 ac80 CH 42/CH 155

For Radiated Emission	
Final Test Mode	Description
Mode 1	Normal Link Mode
Mode 2	802.11a / n/ ac 20 CH36/ CH40/ CH 48 802.11a /n/ ac 20 CH149/ CH157/ CH 165
Mode 3	802.11n/ ac40 CH38/ CH 46 802.11n/ ac40 CH 151 / CH 159
Mode 4	802.11 ac80 CH 42/CH 155

For MIMO mode, Directional gain= $10\log[(10^{G1/20}+10^{G2/20})^2/N_{ANT}]$ dBi =3.72 dbi in 5.0GHz
802.11n/ac 5GHz has MIMO mode.

Note: G1 means antenna gain for ANT 0.86 in dBi.

G2 means antenna gain for ANT 0.55 in dBi.


N_{ANT} means the number of Antennas.

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported

1.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


For AC Conducted Emission Mode

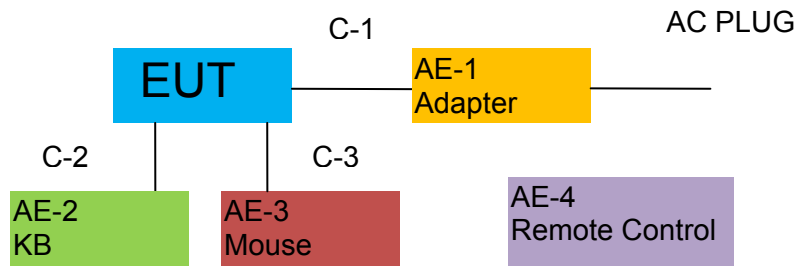

For Radiated Test Cases



For Conducted Test Cases



Note: 1. The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

1. EUT built-in battery-powered, the battery is fully-charged.

1.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
AE-1	Adapter	N/A	YNQX30T120250UL	N/A	Peripherals
AE-2	KB	N/A	N/A	N/A	Peripherals
AE-3	Mouse	N/A	N/A	N/A	Peripherals
AE-4	Remote Control	N/A	N/A	N/A	Peripherals

Item	Cable Type	Shielded Type	Ferrite Core	Length	Note
C-1	Power Cable	NO	NO	1.2m	
C-2	KB Cable	NO	NO	1.2m	
C-3	Mouse Cable	NO	NO	1.2m	
C-4	RF Cable	YES	NO	0.1m	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

1.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation& Conducted Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2019.05.13	2020.05.12	1 year
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2019.08.28	2020.08.27	1 year
3	Spectrum Analyzer	R&S	FSV40	101417	2019.08.28	2020.08.27	1 year
4	Test Receiver	R&S	ESPI7	101318	2019.05.13	2020.05.12	1 year
5	Bilog Antenna	TESEQ	CBL6111D	31216	2019.04.15	2020.04.14	1 year
6	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2018.05.19	2020.05.18	2 year
7	Horn Antenna	EM	EM-AH-10180	2011071402	2019.04.15	2020.04.14	1 year
8	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	803	2019.12.11	2020.12.10	1 year
9	Amplifier	EMC	EMC051835SE	980246	2019.08.06	2020.08.05	1 year
10	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	055	2019.12.11	2020.12.10	1 year
11	Power Meter	DARE	RPR3006W	15100041SN084	2019.08.06	2020.08.05	1 year
12	Test Cable (9KHz-30MHz)	N/A	R-01	N/A	2017.04.21	2020.04.20	3 year
13	Test Cable (30MHz-1GHz)	N/A	R-02	N/A	2017.04.21	2020.04.20	3 year
14	High Test Cable(1G-40GHz)	N/A	R-03	N/A	2017.04.21	2020.04.20	3 year
15	High Test Cable(1G-40GHz)	N/A	R-04	N/A	2017.04.21	2020.04.20	3 year
16	Filter	TRILTHIC	2400MHz	29	2017.04.19	2020.04.18	3 year
17	temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A
18	MXG Vector Signal Generator	Agilent	N5182A	MY47070317	2019.03.28	2020.03.27	1 year

Note:

We will use the temporary antenna connector (soldered on the PCB board) When conducted test
And this temporary antenna connector is listed within the instrument list

AC Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2019.05.13	2020.05.12	1 year
2	LISN	R&S	ENV216	101313	2019.04.15	2020.04.14	1 year
3	LISN	SCHWARZBECK	NNLK 8129	8129245	2019.05.13	2020.05.12	1 year
4	50Ω Coaxial Switch	ANRITSU CORP	MP59B	6200983704	2018.05.19	2020.05.18	2 year
5	Test Cable (9KHz-30MHz)	N/A	C01	N/A	2017.04.21	2020.04.20	3 year
6	Test Cable (9KHz-30MHz)	N/A	C02	N/A	2017.04.21	2020.04.20	3 year
7	Test Cable (9KHz-30MHz)	N/A	C03	N/A	2017.04.21	2020.04.20	3 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable& Aux Equipment which is scheduled for calibration every 3 years.

2. EMC EMISSION TEST

2.1 CONDUCTED EMISSION MEASUREMENT

2.1.1 APPLICABLE STANDARD


According to FCC Part 15.207(a)

2.1.2 CONFORMANCE LIMIT

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56*	56-46*
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. *Decreases with the logarithm of the frequency
2. The lower limit shall apply at the transition frequencies
3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

2.1.3 TEST CONFIGURATION

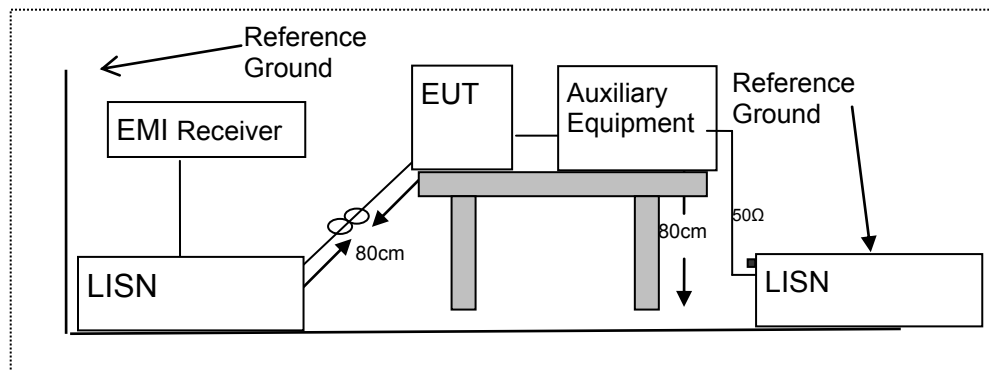

2.1.4 TEST PROCEDURE

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room.
2. The EUT was placed on a table which is 0.8m above ground plane.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. LISN at least 80 cm from nearest part of EUT chassis.
7. The frequency range from 150KHz to 30MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth(IF bandwidth=9KHz) with Maximum Hold Mode
9. For the actual test configuration, please refer to the related Item –EUT Test Photos.

EUT :	Projector	Model Name :	JB200
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 12V from Adapter AC 120V/60Hz	Test Mode :	Mode 1

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1620	40.70	9.76	50.46	65.36	-14.90	QP
0.1620	20.59	9.76	30.35	55.36	-25.01	AVG
0.2220	35.90	9.76	45.66	62.74	-17.08	QP
0.2220	17.31	9.76	27.07	52.74	-25.67	AVG
0.6300	30.22	9.74	39.96	56.00	-16.04	QP
0.6300	19.87	9.74	29.61	46.00	-16.39	AVG
1.3420	30.84	9.75	40.59	56.00	-15.41	QP
1.3420	18.40	9.75	28.15	46.00	-17.85	AVG
3.1899	24.20	9.83	34.03	56.00	-21.97	QP
3.1899	12.21	9.83	22.04	46.00	-23.96	AVG
15.7898	32.85	10.12	42.97	60.00	-17.03	QP
15.7898	14.78	10.12	24.90	50.00	-25.10	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

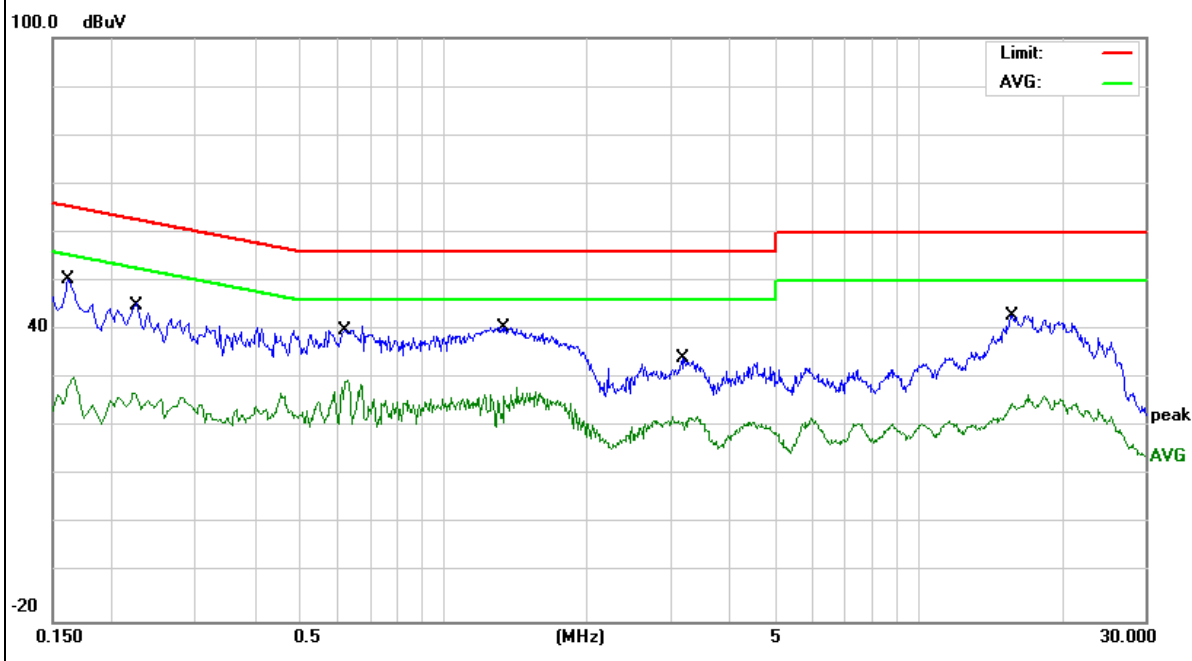


EUT :	Projector	Model Name :	JB200
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 12V from Adapter AC 120V/60Hz	Test Mode :	Mode 1

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1580	39.71	9.74	49.45	65.56	-16.11	QP
0.1580	19.66	9.74	29.40	55.56	-26.16	AVG
0.2059	35.56	9.73	45.29	63.37	-18.08	QP
0.2059	18.53	9.73	28.26	53.37	-25.11	AVG
0.6300	31.92	9.75	41.67	56.00	-14.33	QP
0.6300	16.68	9.75	26.43	46.00	-19.57	AVG
1.3020	30.23	9.76	39.99	56.00	-16.01	QP
1.3020	16.57	9.76	26.33	46.00	-19.67	AVG
2.5659	25.24	9.83	35.07	56.00	-20.93	QP
2.5659	7.58	9.83	17.41	46.00	-28.59	AVG
4.5058	26.74	9.93	36.67	56.00	-19.33	QP
4.5058	4.60	9.93	14.53	46.00	-31.47	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

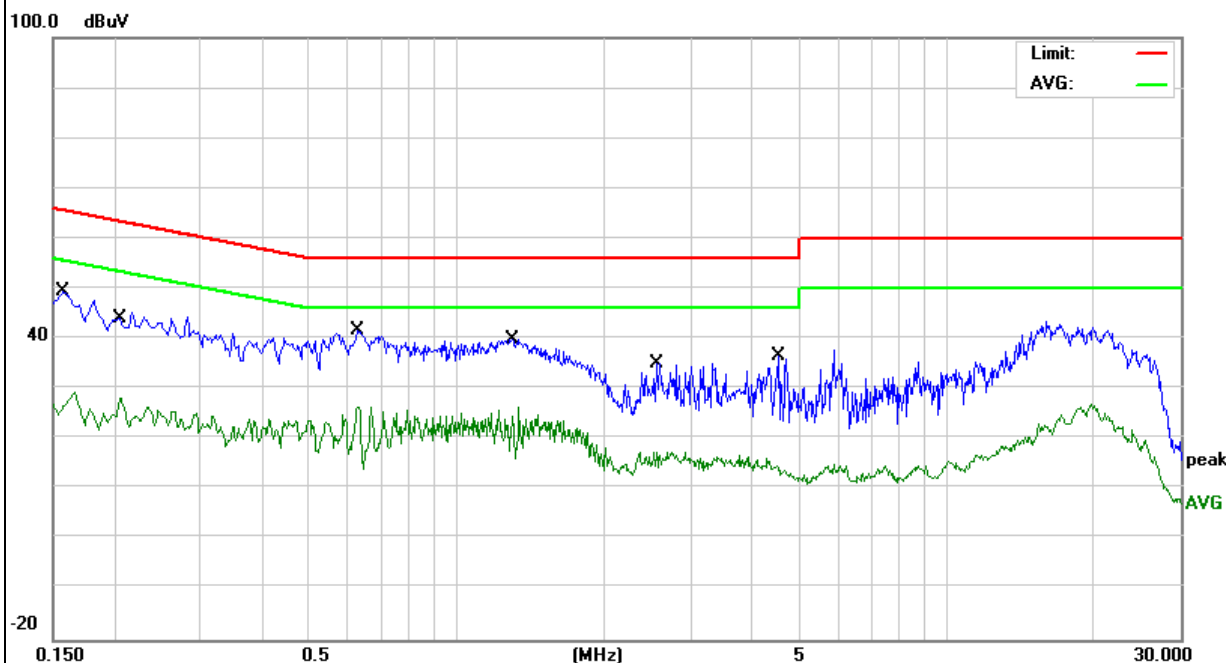

2.2 RADIATED EMISSION MEASUREMENT

2.2.1 APPLICABLE STANDARD

According to FCC Part 15.407(d) and 15.209

2.2.2 CONFORMANCE LIMIT

According to FCC Part 15.407(b)(7): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009~0.490	2400/F(KHz)	20 log (uV/m)	300
0.490~1.705	24000/F(KHz)	20 log (uV/m)	30
1.705~30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Remark :1. Emission level in dBuV/m=20 log (uV/m)

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. For Frequency 9kHz~30MHz:

Distance extrapolation factor =40log(Specific distance/ test distance)(dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor.

For Frequency above 30MHz:

Distance extrapolation factor =20log(Specific distance/ test distance)(dB);


Limit line=Specific limits(dBuV) + distance extrapolation factor.

2.2.3 MEASURING INSTRUMENTS


The Measuring equipment is listed in the section 6.3 of this test report.

2.2.4 TEST CONFIGURATION


(a) For radiated emissions below 30MHz

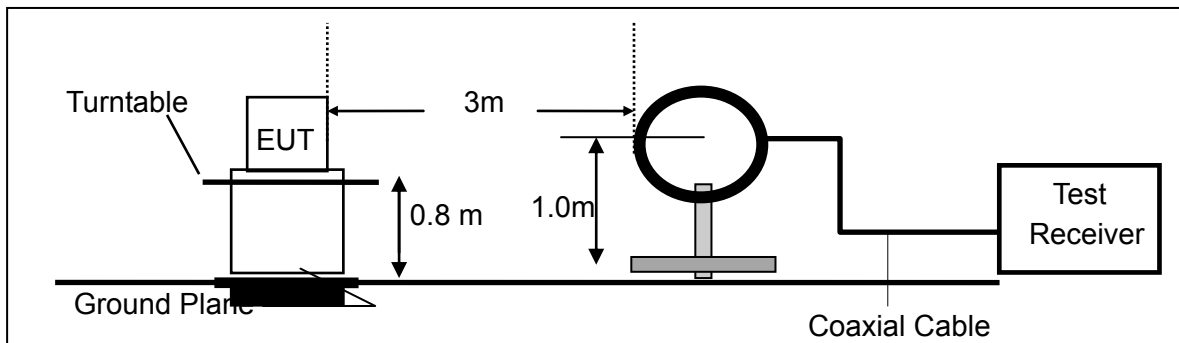

(b) For radiated emissions from 30MHz to 1000MHz

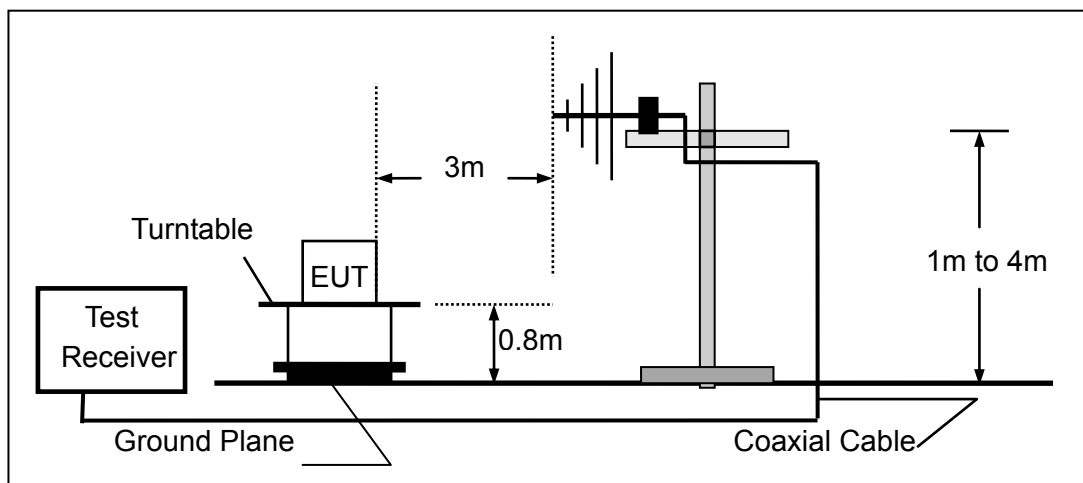

(c) For radiated emissions above 1000MHz

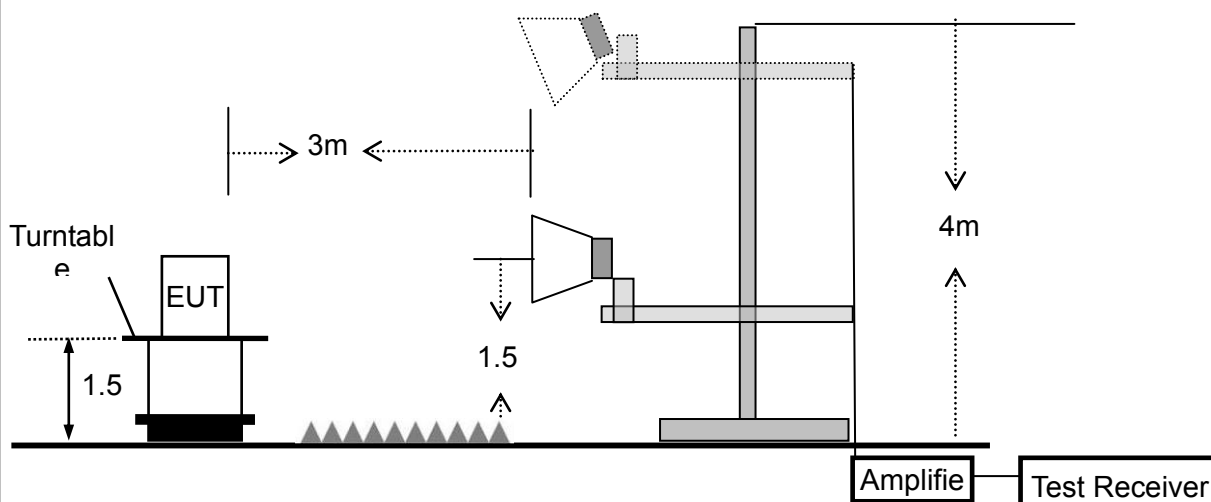

2.2.5 TEST PROCEDURE

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW [kHz]})$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

2.2.6 TEST RESULTS (9KHZ – 30 MHZ)

EUT :	Projector	Model Name :	JB200
Temperature :	26 °C	Relative Humidity :	54%
Pressure:	1010 hPa	Test Voltage :	DC 7.6V
Test Mode :	TX	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	N/A
--	--	--	--	N/A

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

2.2.7 TEST RESULTS (30MHZ – 1GHZ)


EUT :	Projector	Model Name :	JB200
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 7.6V
Test Mode :	TX(5.2G)- 802.11ac40 (High CH)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	34.0363	13.50	16.70	30.20	40.00	-9.80	QP
V	48.5016	20.27	10.38	30.65	40.00	-9.35	QP
V	58.6126	19.27	6.18	25.45	40.00	-14.55	QP
V	83.8156	21.61	8.63	30.24	40.00	-9.76	QP
V	199.9856	24.04	8.55	32.59	43.50	-10.91	QP
V	297.2241	21.26	14.32	35.58	46.00	-10.42	QP

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit


72.0 dBuV/m

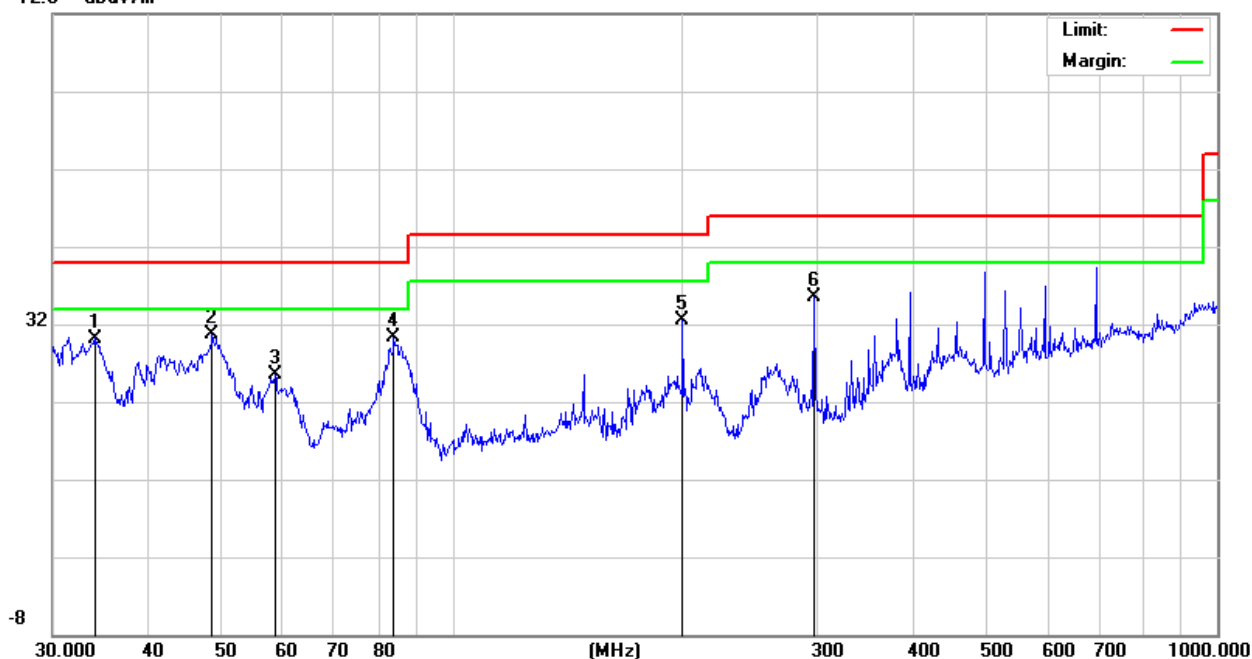

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	85.8983	19.97	9.32	29.29	40.00	-10.71	QP
H	130.8369	18.61	12.55	31.16	43.50	-12.34	QP
H	148.4410	19.83	11.90	31.73	43.50	-11.77	QP
H	222.9499	21.80	10.74	32.54	46.00	-13.46	QP
H	463.9696	12.35	18.88	31.23	46.00	-14.77	QP
H	595.1326	11.24	21.48	32.72	46.00	-13.28	QP

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

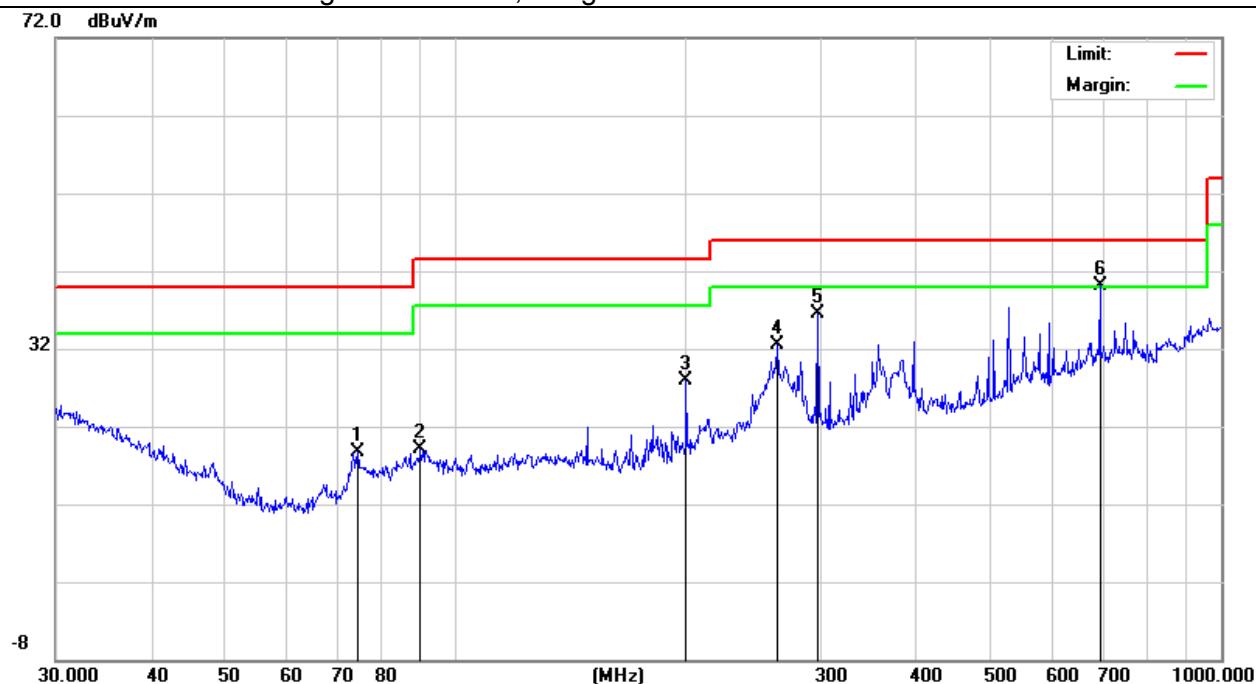


EUT :	Projector	Model Name :	JB200
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 7.6V
Test Mode :	TX(5.3G)- 802.11n40 (High CH)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	32.2924	15.17	17.68	32.85	40.00	-7.15	QP
V	110.9569	18.15	11.67	29.82	43.50	-13.68	QP
V	158.6673	15.49	10.96	26.45	43.50	-17.05	QP
V	197.1999	18.14	8.58	26.72	43.50	-16.78	QP
V	319.9370	13.13	14.97	28.10	46.00	-17.90	QP
V	487.3149	13.54	19.60	33.14	46.00	-12.86	QP

Remark:


Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

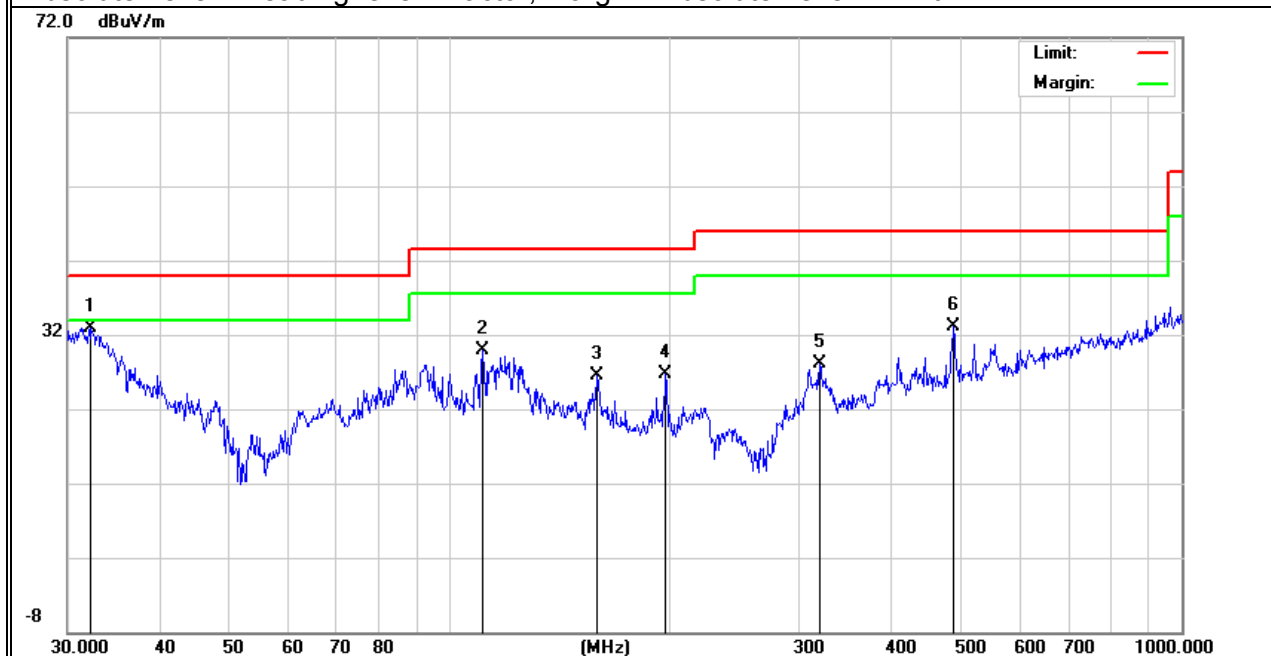

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	91.8161	19.29	10.05	29.34	43.50	-14.16	QP
H	142.3240	19.14	12.27	31.41	43.50	-12.09	QP
H	222.9499	18.60	10.74	29.34	46.00	-16.66	QP
H	297.2241	18.64	14.32	32.96	46.00	-13.04	QP
H	382.5878	13.92	17.02	30.94	46.00	-15.06	QP
H	614.2142	10.75	22.38	33.13	46.00	-12.87	QP

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

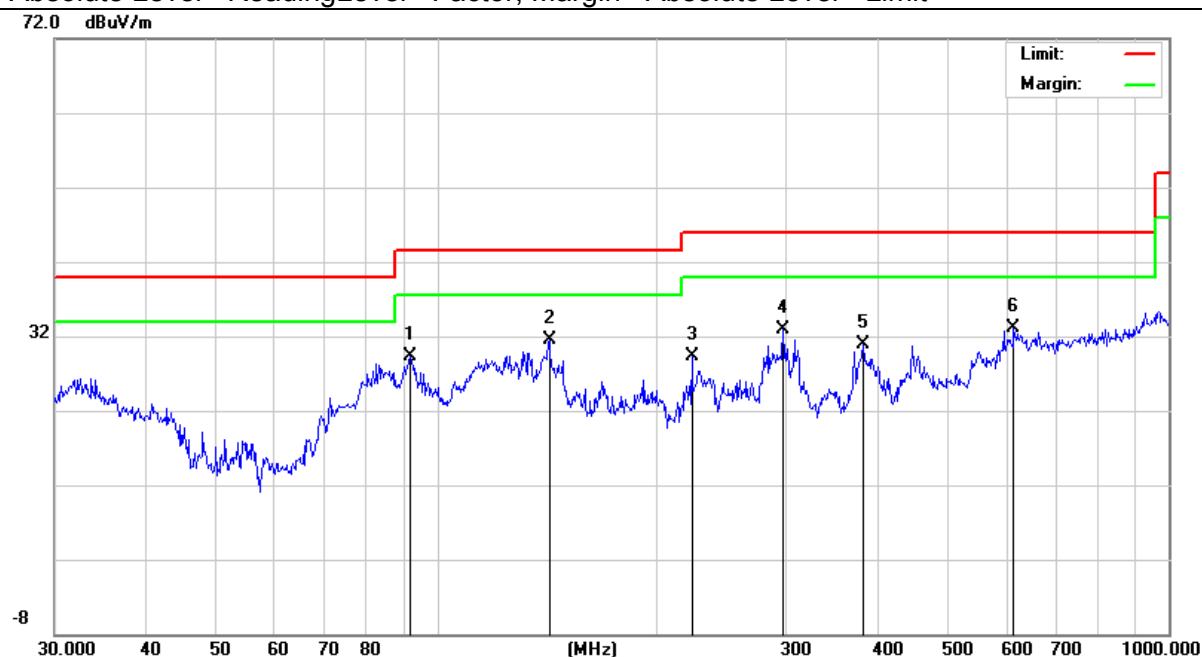


EUT :	Projector	Model Name :	JB200
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 7.6V
Test Mode :	TX(5.6G)- 802.11n40 (High CH)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	32.2924	16.17	17.68	33.85	40.00	-6.15	QP
V	47.6584	15.12	10.88	26.00	40.00	-14.00	QP
V	92.7870	18.27	10.22	28.49	43.50	-15.01	QP
V	119.0180	16.72	12.33	29.05	43.50	-14.45	QP
V	197.1999	18.14	8.58	26.72	43.50	-16.78	QP
V	410.3824	12.21	18.22	30.43	46.00	-15.57	QP

Remark:


Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

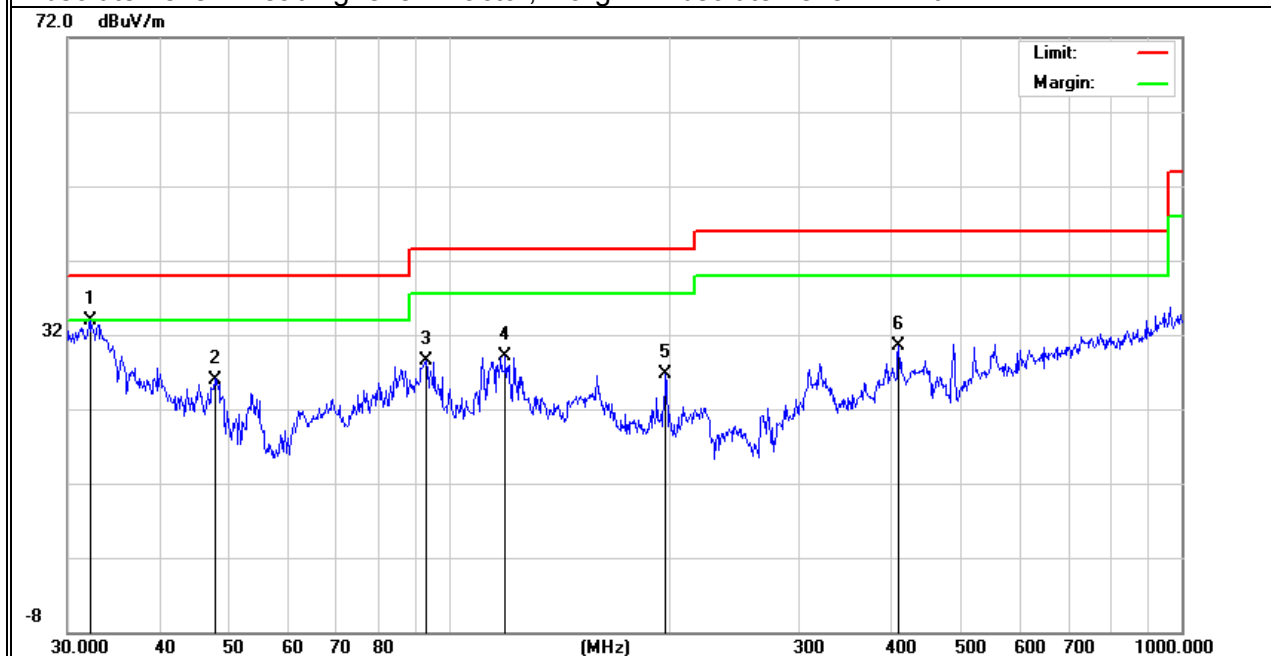

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	33.6802	12.34	16.90	29.24	40.00	-10.76	QP
H	91.8161	19.29	10.05	29.34	43.50	-14.16	QP
H	142.3240	18.14	12.27	30.41	43.50	-13.09	QP
H	297.2241	18.14	14.32	32.46	46.00	-13.54	QP
H	382.5878	13.92	17.02	30.94	46.00	-15.06	QP
H	614.2142	10.25	22.38	32.63	46.00	-13.37	QP

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

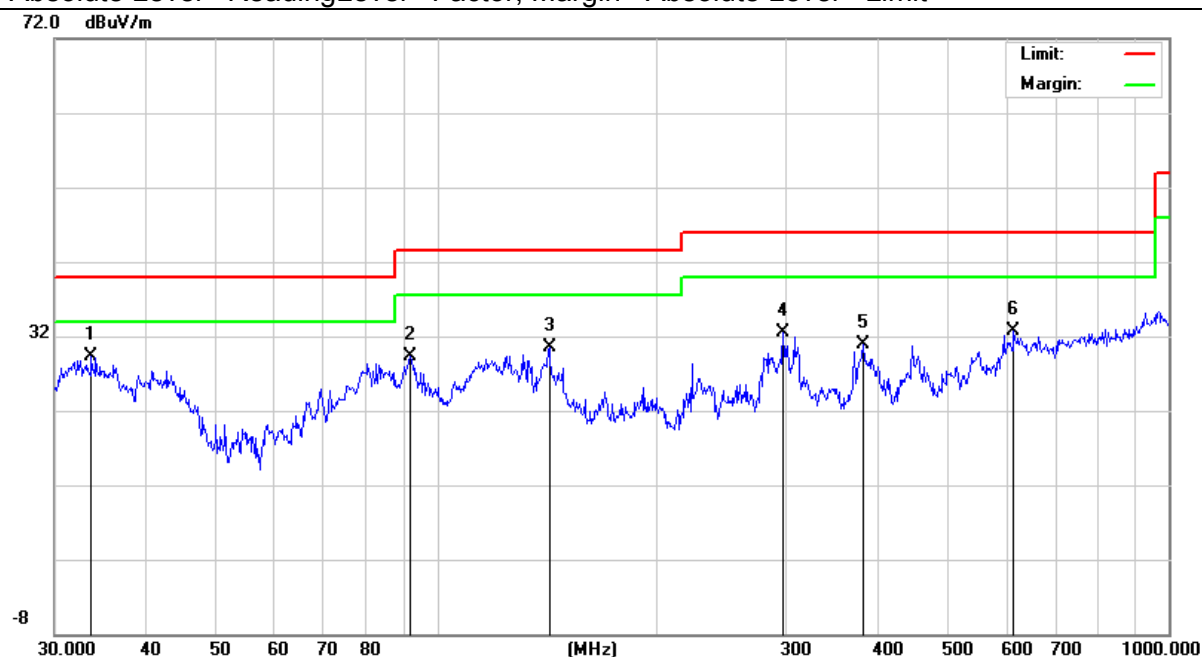


EUT :	Projector	Model Name :	JB200
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 7.6V
Test Mode :	TX(5.8G) - 802.11ac40 (High CH)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	31.2893	14.82	18.11	32.93	40.00	-7.07	QP
V	84.1098	20.59	8.71	29.30	40.00	-10.70	QP
V	119.0180	17.72	12.33	30.05	43.50	-13.45	QP
V	212.2692	20.45	9.69	30.14	43.50	-13.36	QP
V	564.6389	12.20	21.89	34.09	46.00	-11.91	QP
V	737.0714	9.50	25.02	34.52	46.00	-11.48	QP

Remark:


Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

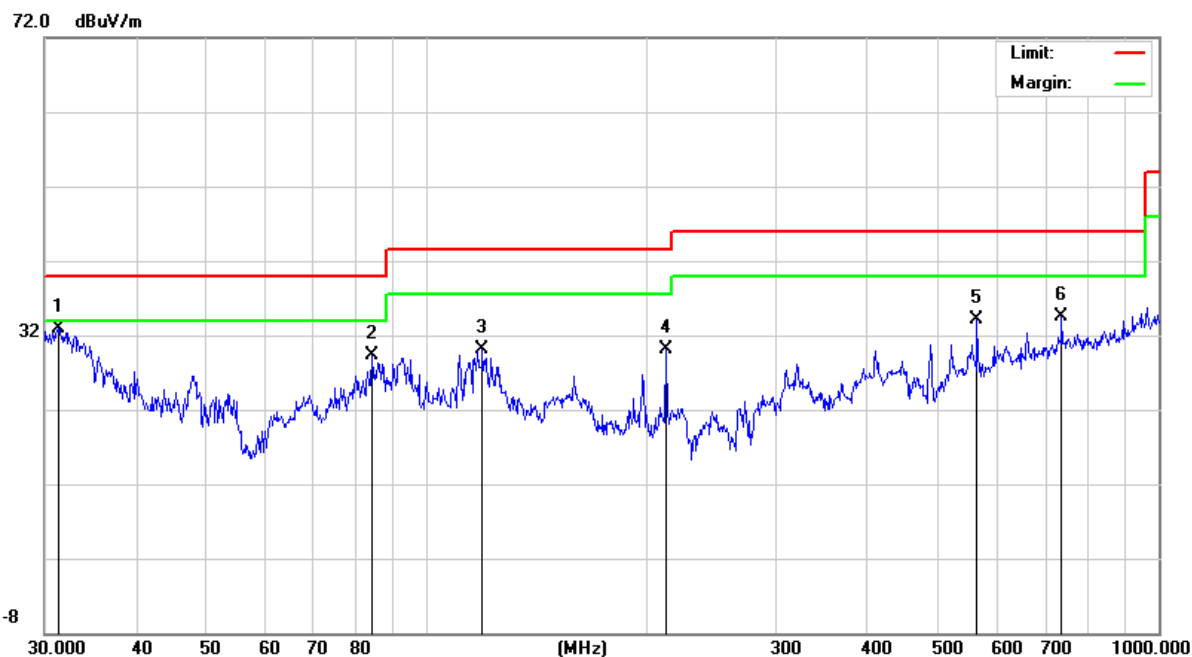

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	33.6802	15.34	16.90	32.24	40.00	-7.76	QP
H	91.8161	20.79	10.05	30.84	43.50	-12.66	QP
H	116.5400	16.51	12.38	28.89	43.50	-14.61	QP
H	222.9499	17.60	10.74	28.34	46.00	-17.66	QP
H	307.8312	17.19	14.79	31.98	46.00	-14.02	QP
H	446.4141	12.37	18.42	30.79	46.00	-15.21	QP

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

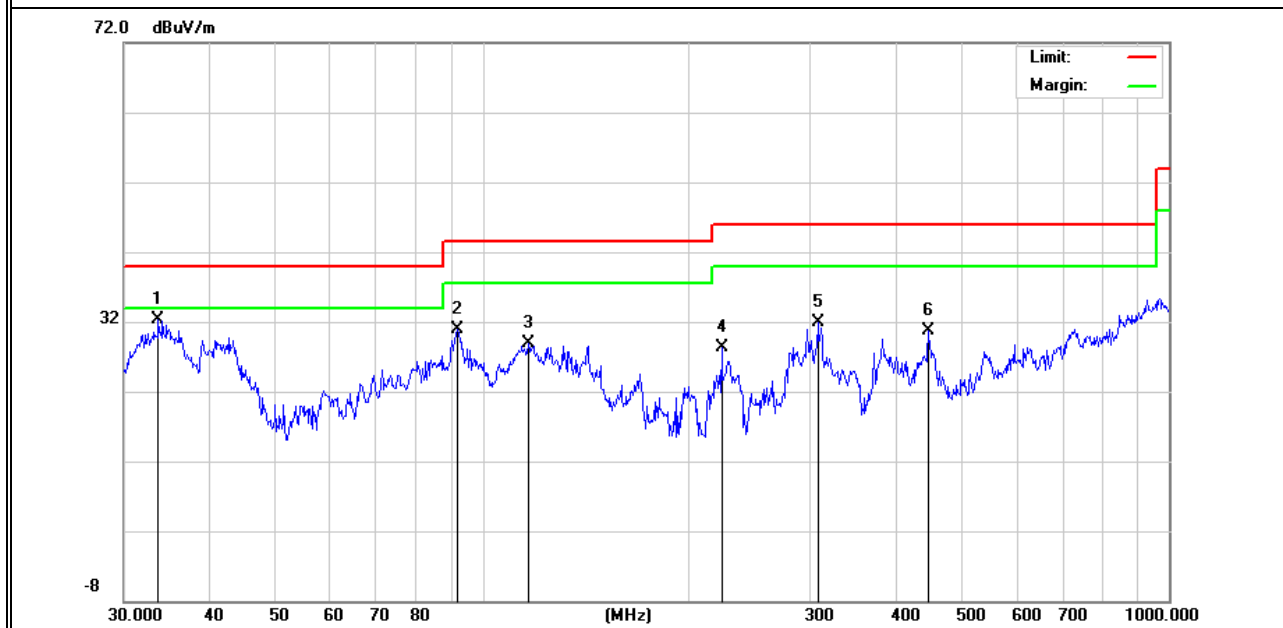

2.2.8 TEST RESULTS (1GHz-18GHz)

EUT :	Projector	Model Name :	JB200
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 7.6V
Test Mode :	TX(5.2G) - 802.11ac40 _5180~5240MHz		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5180 MHz)-Above 1G									
Vertical	5150.00	66.69	5.94	35.40	44.00	64.03	74.00	-9.97	Pk
Vertical	5150.00	52.90	5.94	35.40	44.00	50.24	54.00	-3.76	AV
Vertical	10360.15	56.83	8.46	39.75	44.50	60.54	74.00	-13.46	Pk
Vertical	10360.15	42.16	8.46	39.75	44.50	45.87	54.00	-8.13	AV
Vertical	15540.22	57.63	10.12	38.80	44.10	62.45	74.00	-11.55	Pk
Vertical	15540.22	41.91	10.12	38.80	42.70	48.13	54.00	-5.87	AV
Horizontal	5150.00	62.01	5.94	35.18	44.00	59.13	74.00	-14.87	Pk
Horizontal	5150.00	44.86	5.94	35.18	44.00	41.98	54.00	-12.02	AV
Horizontal	10360.47	57.63	8.46	38.71	44.50	60.30	74.00	-13.70	Pk
Horizontal	10360.47	42.50	8.46	38.71	44.50	45.17	54.00	-8.83	AV
Horizontal	15540.38	53.84	10.12	38.38	44.10	58.24	74.00	-15.76	Pk
Horizontal	15540.38	43.03	10.12	38.38	44.10	47.43	54.00	-6.57	AV
Middle Channel (5200 MHz)-Above 1G									
Vertical	10400.09	53.74	8.47	37.88	44.51	55.58	74.00	-18.42	Pk
Vertical	10400.09	34.54	8.47	37.88	44.51	36.38	54.00	-17.62	AV
Vertical	15600.15	58.98	10.12	38.80	44.10	63.80	74.00	-10.20	Pk
Vertical	15600.15	40.80	10.12	38.80	42.70	47.02	54.00	-6.98	AV
Horizontal	10400.14	57.42	8.47	38.64	44.50	60.03	74.00	-13.97	Pk
Horizontal	10400.14	43.83	8.47	38.64	44.50	46.44	54.00	-7.56	AV
Horizontal	15600.51	59.80	10.12	38.38	44.10	64.20	74.00	-9.80	Pk
Horizontal	15600.51	37.39	10.12	38.38	44.10	41.79	54.00	-12.21	AV
High Channel (5240 MHz)-Above 1G									
Vertical	5350.00	62.72	7.10	37.24	43.50	63.56	74.00	-10.44	Pk
Vertical	5350.00	45.73	7.10	37.24	43.50	46.57	54.00	-7.43	AV
Vertical	10480.23	57.89	8.46	37.68	44.50	59.53	74.00	-14.47	Pk
Vertical	10480.23	44.41	8.46	37.68	44.50	46.05	54.00	-7.95	AV
Vertical	15720.15	60.73	10.12	38.80	44.10	65.55	74.00	-8.45	Pk
Vertical	15720.15	41.24	10.12	38.80	42.70	47.46	54.00	-6.54	AV
Horizontal	5350.00	58.13	7.10	37.24	43.50	58.97	74.00	-15.03	Pk
Horizontal	5350.00	40.21	7.10	37.24	43.50	41.05	54.00	-12.95	AV
Horizontal	10480.59	57.21	8.46	38.57	44.50	59.74	74.00	-14.26	Pk
Horizontal	10480.59	39.08	8.46	38.57	44.50	41.61	54.00	-12.39	AV
Horizontal	15720.18	57.73	10.12	38.38	44.10	62.13	74.00	-11.87	Pk
Horizontal	15720.18	40.85	10.12	38.38	44.10	45.25	54.00	-8.75	AV

Note:"802.11ac40 (5G)" mode is the worst mode.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

EUT :	Projector	Model Name :	JB200
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 7.6V
Test Mode :	TX(5.3G) - 802.11n40 _5260~5320MHz		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5260 MHz)-Above 1G									
Vertical	5150.00	63.85	5.44	35.40	44.00	60.69	74.00	-13.31	Pk
Vertical	5150.00	43.00	5.74	35.40	44.00	40.15	54.00	-13.85	AV
Vertical	10520.12	65.25	8.26	39.75	44.50	68.76	74.00	-5.24	Pk
Vertical	10520.12	41.06	8.01	39.75	44.50	44.33	54.00	-9.67	AV
Vertical	15780.34	62.06	10.12	38.80	44.10	66.87	74.00	-7.13	Pk
Vertical	15780.34	43.25	9.62	38.80	42.70	48.97	54.00	-5.03	AV
Horizontal	5150.00	57.24	5.57	35.18	44.00	53.99	74.00	-20.01	Pk
Horizontal	5150.00	40.90	5.74	35.18	44.00	37.82	54.00	-16.18	AV
Horizontal	10520.26	58.35	8.38	38.71	44.50	60.94	74.00	-13.06	Pk
Horizontal	10520.26	41.96	8.45	38.71	44.50	44.63	54.00	-9.37	AV
Horizontal	15780.34	57.51	9.88	38.38	44.10	61.67	74.00	-12.33	Pk
Horizontal	15780.34	41.98	9.94	38.38	44.10	46.20	54.00	-7.80	AV
Middle Channel (5280 MHz)-Above 1G									
Vertical	10560.19	62.16	8.28	37.88	44.51	63.81	74.00	-10.19	Pk
Vertical	10560.19	38.71	7.99	37.88	44.51	40.08	54.00	-13.92	AV
Vertical	15840.36	62.78	9.79	38.8	44.10	67.27	74.00	-6.73	Pk
Vertical	15840.36	39.81	9.70	38.8	42.70	45.60	54.00	-8.40	AV
Horizontal	10560.74	62.06	8.33	38.64	44.50	64.53	74.00	-9.47	Pk
Horizontal	10560.74	42.60	8.07	38.64	44.50	44.80	54.00	-9.20	AV
Horizontal	15840.37	60.79	9.99	38.38	44.10	65.06	74.00	-8.94	Pk
Horizontal	15840.37	41.91	9.81	38.38	44.10	46.00	54.00	-8.00	AV
High Channel (5320 MHz)-Above 1G									
Vertical	5350.00	69.08	6.96	37.24	43.50	69.78	74.00	-4.22	Pk
Vertical	5350.00	43.05	7.07	37.24	43.50	43.86	54.00	-10.14	AV
Vertical	10640.58	65.60	8.14	37.68	44.50	66.92	74.00	-7.08	Pk
Vertical	10640.58	41.89	8.35	37.68	44.50	43.43	54.00	-10.57	AV
Vertical	15960.41	59.38	10.11	38.8	44.10	64.18	74.00	-9.82	Pk
Vertical	15960.41	38.47	9.64	38.8	42.70	44.22	54.00	-9.78	AV
Horizontal	5350.00	69.78	7.05	37.24	43.50	70.57	74.00	-3.43	Pk
Horizontal	5350.00	44.24	7.05	37.24	43.50	45.03	54.00	-8.97	AV
Horizontal	10640.17	63.37	8.20	38.57	44.50	65.63	74.00	-8.37	Pk
Horizontal	10640.17	42.79	8.03	38.57	44.50	44.90	54.00	-9.10	AV
Horizontal	15960.15	56.37	9.81	38.38	44.10	60.46	74.00	-13.54	Pk
Horizontal	15960.15	40.88	9.96	38.38	44.10	45.12	54.00	-8.88	AV

Note:"802.11n40 (5G)" mode is the worst mode.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

EUT :	Projector	Model Name :	JB200
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 7.6V
Test Mode :	TX (5.6G) -- 802.11n40 _5500~5700MHz		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5500 MHz)-Above 1G									
Vertical	5460.00	62.43	5.61	35.40	44.00	59.44	74.00	-14.6	Pk
Vertical	5460.00	42.95	5.76	35.40	44.00	40.11	54.00	-13.9	AV
Vertical	11000.01	55.71	8.24	39.75	44.50	59.21	74.00	-14.8	Pk
Vertical	11000.01	43.44	8.35	39.75	44.50	47.04	54.00	-7.0	AV
Vertical	16500.74	51.41	10.05	38.80	44.10	56.16	74.00	-17.8	Pk
Vertical	16500.74	42.16	9.65	38.80	42.70	47.91	54.00	-6.1	AV
Horizontal	5460.00	59.86	5.78	35.18	44.00	56.82	74.00	-17.2	Pk
Horizontal	5460.00	40.40	5.66	35.18	44.00	37.25	54.00	-16.8	AV
Horizontal	11000.33	58.94	8.22	38.71	44.50	61.37	74.00	-12.6	Pk
Horizontal	11000.33	39.15	8.14	38.71	44.50	41.50	54.00	-12.5	AV
Horizontal	16500.45	61.77	10.04	38.38	44.10	66.09	74.00	-7.9	Pk
Horizontal	16500.45	39.80	9.73	38.38	44.10	43.81	54.00	-10.2	AV
Middle Channel (5600 MHz)-Above 1G									
Vertical	11200.58	57.75	8.24	37.88	44.51	59.36	74.00	-14.64	Pk
Vertical	11200.58	41.57	8.13	37.88	44.51	43.06	54.00	-10.94	AV
Vertical	16800.45	54.17	9.71	38.8	44.10	58.57	74.00	-15.43	Pk
Vertical	16800.45	37.68	10.12	38.8	42.70	43.90	54.00	-10.10	AV
Horizontal	11200.45	56.69	8.31	38.64	44.50	59.13	74.00	-14.87	Pk
Horizontal	11200.45	40.14	8.04	38.64	44.50	42.33	54.00	-11.67	AV
Horizontal	16800.33	58.71	10.09	38.38	44.10	63.07	74.00	-10.93	Pk
Horizontal	16800.33	40.22	9.63	38.38	44.10	44.13	54.00	-9.87	AV
High Channel (5700 MHz)-Above 1G									
Vertical	5725.00	63.73	6.79	37.24	43.50	64.26	74.00	-9.74	Pk
Vertical	5725.00	44.38	6.85	37.24	43.50	44.97	54.00	-9.03	AV
Vertical	11400.29	55.52	8.10	37.68	44.50	56.80	74.00	-17.20	Pk
Vertical	11400.29	40.79	8.23	37.68	44.50	42.20	54.00	-11.80	AV
Vertical	17100.54	63.40	9.70	38.8	44.10	67.80	74.00	-6.20	Pk
Vertical	17100.54	38.90	9.70	38.8	42.70	44.69	54.00	-9.31	AV
Horizontal	5725.00	65.65	6.74	37.24	43.50	66.14	74.00	-7.86	Pk
Horizontal	5725.00	44.01	6.74	37.24	43.50	44.49	54.00	-9.51	AV
Horizontal	11400.43	59.79	8.25	38.57	44.50	62.11	74.00	-11.89	Pk
Horizontal	11400.43	39.10	8.35	38.57	44.50	41.52	54.00	-12.48	AV
Horizontal	17100.58	58.05	9.70	38.38	44.10	62.03	74.00	-11.97	Pk
Horizontal	17100.58	40.96	9.63	38.38	44.10	44.87	54.00	-9.13	AV

Note:"802.11n40 (5G)" mode is the worst mode.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

EUT :	Projector	Model Name :	JB200
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 7.6V
Test Mode :	TX (5.8G) -- 802.11ac40_5745~5825MHz		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5745 MHz)-Above 1G									
Vertical	5122.51	60.02	5.94	35.40	44.00	57.36	74.00	-16.64	Pk
Vertical	5122.51	43.49	5.94	35.40	44.00	40.83	54.00	-13.17	AV
Vertical	11490.60	58.37	8.46	39.75	44.50	62.08	74.00	-11.92	Pk
Vertical	11490.60	38.80	8.46	39.75	44.50	42.51	54.00	-11.49	AV
Vertical	17235.65	51.87	10.12	38.80	44.10	56.69	74.00	-17.31	Pk
Vertical	17235.65	36.30	10.12	38.80	42.70	42.52	54.00	-11.48	AV
Horizontal	5166.60	57.88	5.94	35.18	44.00	55.00	74.00	-19.00	Pk
Horizontal	5166.60	38.79	5.94	35.18	44.00	35.91	54.00	-18.09	AV
Horizontal	11490.47	58.41	8.46	38.71	44.50	61.08	74.00	-12.92	Pk
Horizontal	11490.47	43.15	8.46	38.71	44.50	45.82	54.00	-8.18	AV
Horizontal	17235.47	56.97	10.12	38.38	44.10	61.37	74.00	-12.63	Pk
Horizontal	17235.47	38.09	10.12	38.38	44.10	42.49	54.00	-11.51	AV
Middle Channel (5785 MHz)-Above 1G									
Vertical	5433.40	60.23	6.48	36.35	44.05	59.01	74.00	-14.99	Pk
Vertical	5433.40	38.61	6.48	36.35	44.05	37.39	54.00	-16.61	AV
Vertical	11570.41	59.33	8.47	37.88	44.51	61.17	74.00	-12.83	Pk
Vertical	11570.41	46.09	8.47	37.88	44.51	47.93	54.00	-6.07	AV
Vertical	17355.84	63.44	10.12	38.8	44.10	68.26	74.00	-5.74	Pk
Vertical	17355.84	39.04	10.12	38.8	42.70	45.26	54.00	-8.74	AV
Horizontal	4866.60	59.73	6.48	36.37	44.05	58.53	74.00	-15.47	Pk
Horizontal	4866.60	40.78	6.48	36.37	44.05	39.58	54.00	-14.42	AV
Horizontal	11570.28	58.68	8.47	38.64	44.50	61.29	74.00	-12.71	Pk
Horizontal	11570.28	47.01	8.47	38.64	44.50	49.62	54.00	-4.38	AV
Horizontal	17355.49	64.80	10.12	38.38	44.10	69.20	74.00	-4.80	Pk
Horizontal	17355.49	39.97	10.12	38.38	44.10	44.37	54.00	-9.63	AV
High Channel (5825 MHz)-Above 1G									
Vertical	5244.48	61.29	7.10	37.24	43.50	62.13	74.00	-11.87	Pk
Vertical	5244.48	45.27	7.10	37.24	43.50	46.11	54.00	-7.89	AV
Vertical	11652.42	66.19	8.46	37.68	44.50	67.83	74.00	-6.17	Pk
Vertical	11652.42	42.94	8.46	37.68	44.50	44.58	54.00	-9.42	AV
Vertical	17473.74	60.03	10.12	38.8	44.10	64.85	74.00	-9.15	Pk
Vertical	17473.74	39.10	10.12	38.8	42.70	45.32	54.00	-8.68	AV
Horizontal	5285.29	56.83	7.10	37.24	43.50	57.67	74.00	-16.33	Pk
Horizontal	5285.29	40.10	7.10	37.24	43.50	40.94	54.00	-13.06	AV
Horizontal	11652.67	59.30	8.46	38.57	44.50	61.83	74.00	-12.17	Pk
Horizontal	11652.67	43.24	8.46	38.57	44.50	45.77	54.00	-8.23	AV
Horizontal	17474.68	58.30	10.12	38.38	44.10	62.70	74.00	-11.30	Pk
Horizontal	17474.68	39.44	10.12	38.38	44.10	43.84	54.00	-10.16	AV

Note:"802.11ac40(5G)" mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value

has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

EUT :	Projector	Model Name :	JB200
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 7.6V
Test Mode :	TX(5.2G) - 802.11ac40 _5180~5240MHz		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5180 MHz)-Above 1G									
Vertical	10360.15	58.81	8.46	39.75	44.50	62.52	74.00	-11.48	Pk
Vertical	10360.15	39.98	8.46	39.75	44.50	43.69	54.00	-10.31	AV
Vertical	15540.22	57.44	10.12	38.80	44.10	62.26	74.00	-11.74	Pk
Vertical	15540.22	41.61	10.12	38.80	42.70	47.83	54.00	-6.17	AV
Vertical	10360.15	58.81	8.46	39.75	44.50	62.52	74.00	-11.48	Pk
Vertical	10360.15	39.98	8.46	39.75	44.50	43.69	54.00	-10.31	AV
Vertical	15540.22	57.44	10.12	38.80	44.10	62.26	74.00	-11.74	Pk
Vertical	15540.22	41.61	10.12	38.80	42.70	47.83	54.00	-6.17	AV
middle Channel (5200 MHz)-Above 1G									
Vertical	10400.09	55.58	8.47	37.88	44.51	57.42	74.00	-16.58	Pk
Vertical	10400.09	36.20	8.47	37.88	44.51	38.04	54.00	-15.96	AV
Vertical	15600.15	57.75	10.12	38.80	44.10	62.57	74.00	-11.43	Pk
Vertical	15600.15	37.86	10.12	38.80	42.70	44.08	54.00	-9.92	AV
Horizontal	10400.14	57.41	8.47	38.64	44.50	60.02	74.00	-13.98	Pk
Horizontal	10400.14	42.13	8.47	38.64	44.50	44.74	54.00	-9.26	AV
Horizontal	15600.51	61.27	10.12	38.38	44.10	65.67	74.00	-8.33	Pk
Horizontal	15600.51	37.78	10.12	38.38	44.10	42.18	54.00	-11.82	AV
High Channel (5240 MHz)-Above 1G									
Vertical	10480.23	56.13	8.46	37.68	44.50	57.77	74.00	-16.23	Pk
Vertical	10480.23	43.37	8.46	37.68	44.50	45.01	54.00	-8.99	AV
Vertical	15720.15	60.11	10.12	38.80	44.10	64.93	74.00	-9.07	Pk
Vertical	15720.15	41.69	10.12	38.80	42.70	47.91	54.00	-6.09	AV
Horizontal	10480.59	58.85	8.46	38.57	44.50	61.38	74.00	-12.62	Pk
Horizontal	10480.59	39.61	8.46	38.57	44.50	42.14	54.00	-11.86	AV
Horizontal	15720.18	58.20	10.12	38.38	44.10	62.60	74.00	-11.40	Pk
Horizontal	15720.18	39.69	10.12	38.38	44.10	44.09	54.00	-9.91	AV

Note:"802.11ac40(5G)" mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value

has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

EUT :	Projector	Model Name :	JB200
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 7.6V
Test Mode :	TX(5.3G) - 802.11n40_5260~5320MHz		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5260 MHz)-Above 1G									
Vertical	10520.12	63.71	8.26	39.75	44.50	67.22	74.00	-6.78	Pk
Vertical	10520.12	41.78	8.01	39.75	44.50	45.04	54.00	-8.96	AV
Vertical	15780.34	63.85	10.12	38.80	44.10	68.67	74.00	-5.33	Pk
Vertical	15780.34	42.90	9.62	38.80	42.70	48.62	54.00	-5.38	AV
Horizontal	10520.26	58.71	8.38	38.71	44.50	61.30	74.00	-12.70	Pk
Horizontal	10520.26	41.00	8.45	38.71	44.50	43.67	54.00	-10.33	AV
Horizontal	15780.34	57.88	9.88	38.38	44.10	62.04	74.00	-11.96	Pk
Horizontal	15780.34	43.15	9.94	38.38	44.10	47.37	54.00	-6.63	AV
middle Channel (5280 MHz)-Above 1G									
Vertical	10560.19	59.32	8.28	37.88	44.51	60.97	74.00	-13.03	Pk
Vertical	10560.19	40.27	7.99	37.88	44.51	41.64	54.00	-12.36	AV
Vertical	15840.36	61.02	9.79	38.8	44.10	65.51	74.00	-8.49	Pk
Vertical	15840.36	37.93	9.70	38.8	42.70	43.73	54.00	-10.27	AV
Horizontal	10560.74	59.83	8.33	38.64	44.50	62.29	74.00	-11.71	Pk
Horizontal	10560.74	41.40	8.07	38.64	44.50	43.61	54.00	-10.39	AV
Horizontal	15840.37	61.00	9.99	38.38	44.10	65.27	74.00	-8.73	Pk
Horizontal	15840.37	40.36	9.81	38.38	44.10	44.45	54.00	-9.55	AV
High Channel (5320 MHz)-Above 1G									
Vertical	10640.58	62.98	8.14	37.68	44.50	64.30	74.00	-9.70	Pk
Vertical	10640.58	39.73	8.35	37.68	44.50	41.27	54.00	-12.73	AV
Vertical	15960.41	58.97	10.11	38.8	44.10	63.78	74.00	-10.22	Pk
Vertical	15960.41	39.64	9.64	38.8	42.70	45.39	54.00	-8.61	AV
Horizontal	10640.24	60.85	8.20	38.57	44.50	63.12	74.00	-10.88	Pk
Horizontal	10640.24	40.67	8.03	38.57	44.50	42.78	54.00	-11.22	AV
Horizontal	15960.88	57.92	9.81	38.38	44.10	62.01	74.00	-11.99	Pk
Horizontal	15960.88	40.55	9.96	38.38	44.10	44.79	54.00	-9.21	AV

Note:"802.11n40(5G)" mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

EUT :	Projector	Model Name :	JB200
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 7.6V
Test Mode :	TX (5.6G) -- 802.11n40 _5500~5700MHz		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5500 MHz)-Above 1G									
Vertical	11000.25	56.42	8.24	39.75	44.50	59.91	74.00	-14.1	Pk
Vertical	11000.25	41.66	8.35	39.75	44.50	45.26	54.00	-8.7	AV
Vertical	16500.41	51.06	10.05	38.80	44.10	55.81	74.00	-18.2	Pk
Vertical	16500.41	40.73	9.65	38.80	42.70	46.49	54.00	-7.5	AV
Horizontal	11000.32	58.34	8.22	38.71	44.50	60.78	74.00	-13.2	Pk
Horizontal	11000.32	41.04	8.14	38.71	44.50	43.39	54.00	-10.6	AV
Horizontal	16500.47	61.49	10.04	38.38	44.10	65.81	74.00	-8.2	Pk
Horizontal	16500.47	36.93	9.73	38.38	44.10	40.94	54.00	-13.1	AV
Middle Channel (5600 MHz)-Above 1G									
Vertical	11200.58	59.75	8.24	37.88	44.51	61.36	74.00	-12.64	Pk
Vertical	11200.58	42.49	8.13	37.88	44.51	43.99	54.00	-10.01	AV
Vertical	16800.45	55.63	9.71	38.8	44.10	60.04	74.00	-13.96	Pk
Vertical	16800.45	36.49	10.12	38.8	42.70	42.70	54.00	-11.30	AV
Horizontal	11200.45	56.94	8.31	38.64	44.50	59.38	74.00	-14.62	Pk
Horizontal	11200.45	40.29	8.04	38.64	44.50	42.47	54.00	-11.53	AV
Horizontal	16800.33	59.31	10.09	38.38	44.10	63.68	74.00	-10.32	Pk
Horizontal	16800.33	39.43	9.63	38.38	44.10	43.34	54.00	-10.66	AV
High Channel (5700 MHz)-Above 1G									
Vertical	11400.29	57.38	8.10	37.68	44.50	58.66	74.00	-15.34	Pk
Vertical	11400.29	42.72	8.23	37.68	44.50	44.13	54.00	-9.87	AV
Vertical	17100.54	61.08	9.70	38.8	44.10	65.48	74.00	-8.52	Pk
Vertical	17100.54	38.29	9.70	38.8	42.70	44.09	54.00	-9.91	AV
Horizontal	11400.43	58.07	8.25	38.57	44.50	60.39	74.00	-13.61	Pk
Horizontal	11400.43	38.41	8.35	38.57	44.50	40.83	54.00	-13.17	AV
Horizontal	17100.58	59.87	9.70	38.38	44.10	63.84	74.00	-10.16	Pk
Horizontal	17100.58	39.22	9.63	38.38	44.10	43.13	54.00	-10.87	AV

Note:"802.11n40(5G)" mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value

has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

EUT :	Projector	Model Name :	JB200
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 7.6V
Test Mode :	TX (5.8G) -- 802.11ac40_5745~5825MHz		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5745 MHz)-Above 1G									
Vertical	11490.60	58.37	8.46	39.75	44.50	62.08	74.00	-11.92	Pk
Vertical	11490.60	38.80	8.46	39.75	44.50	42.51	54.00	-11.49	AV
Vertical	17235.65	51.87	10.12	38.80	44.10	56.69	74.00	-17.31	Pk
Vertical	17235.65	36.30	10.12	38.80	42.70	42.52	54.00	-11.48	AV
Horizontal	11490.47	58.41	8.46	38.71	44.50	61.08	74.00	-12.92	Pk
Horizontal	11490.47	43.15	8.46	38.71	44.50	45.82	54.00	-8.18	AV
Horizontal	17235.47	56.97	10.12	38.38	44.10	61.37	74.00	-12.63	Pk
Horizontal	17235.47	38.09	10.12	38.38	44.10	42.49	54.00	-11.51	AV
middle Channel (5785 MHz)-Above 1G									
Vertical	11570.41	59.33	8.47	37.88	44.51	61.17	74.00	-12.83	Pk
Vertical	11570.41	46.09	8.47	37.88	44.51	47.93	54.00	-6.07	AV
Vertical	17355.84	63.44	10.12	38.8	44.10	68.26	74.00	-5.74	Pk
Vertical	17355.84	39.04	10.12	38.8	42.70	45.26	54.00	-8.74	AV
Horizontal	11570.28	58.68	8.47	38.64	44.50	61.29	74.00	-12.71	Pk
Horizontal	11570.28	47.01	8.47	38.64	44.50	49.62	54.00	-4.38	AV
Horizontal	17355.49	64.80	10.12	38.38	44.10	69.20	74.00	-4.80	Pk
Horizontal	17355.49	39.97	10.12	38.38	44.10	44.37	54.00	-9.63	AV
High Channel (5825 MHz)-Above 1G									
Vertical	11652.42	66.19	8.46	37.68	44.50	67.83	74.00	-6.17	Pk
Vertical	11652.42	42.94	8.46	37.68	44.50	44.58	54.00	-9.42	AV
Vertical	17473.74	60.03	10.12	38.8	44.10	64.85	74.00	-9.15	Pk
Vertical	17473.74	39.10	10.12	38.8	42.70	45.32	54.00	-8.68	AV
Horizontal	11652.67	59.30	8.46	38.57	44.50	61.83	74.00	-12.17	Pk
Horizontal	11652.67	43.24	8.46	38.57	44.50	45.77	54.00	-8.23	AV
Horizontal	17474.68	58.30	10.12	38.38	44.10	62.70	74.00	-11.30	Pk
Horizontal	17474.68	39.44	10.12	38.38	44.10	43.84	54.00	-10.16	AV

Note:"802.11ac40(5G)" mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value

has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

2.2.9 TEST RESULTS (18GHZ-40GHZ)

EUT :	Projector	Model Name :	JB200
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 7.6V
Test Mode :	TX (5.2G)-802.11a 5180MHz~5240MHz; TX (5.3G)-802.11a 5260MHz~5320MHz; TX (5.6G)-802.11a 5500MHz~5700MHz; TX (5.8G)-802.11a 5745MHz~5825MHz		

All the modulation modes have been tested, and the worst result was report as below:


Low Channel (5180 MHz)-Above 18G Horizontal

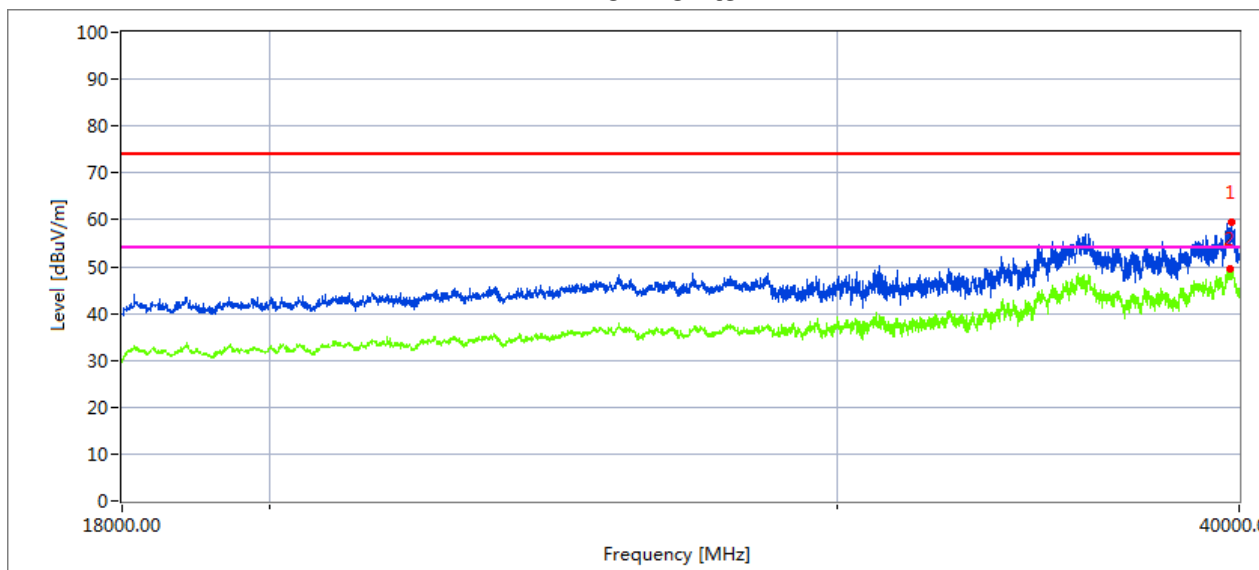

Measurement Result:

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamplifier Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin dB	Detector Type
39769.23	38.67	20.09	44.07	43.48	59.35	74	14.65	Peak
39767.18	26.94	20.09	44.04	43.48	47.59	54	6.41	AVG


Vertical

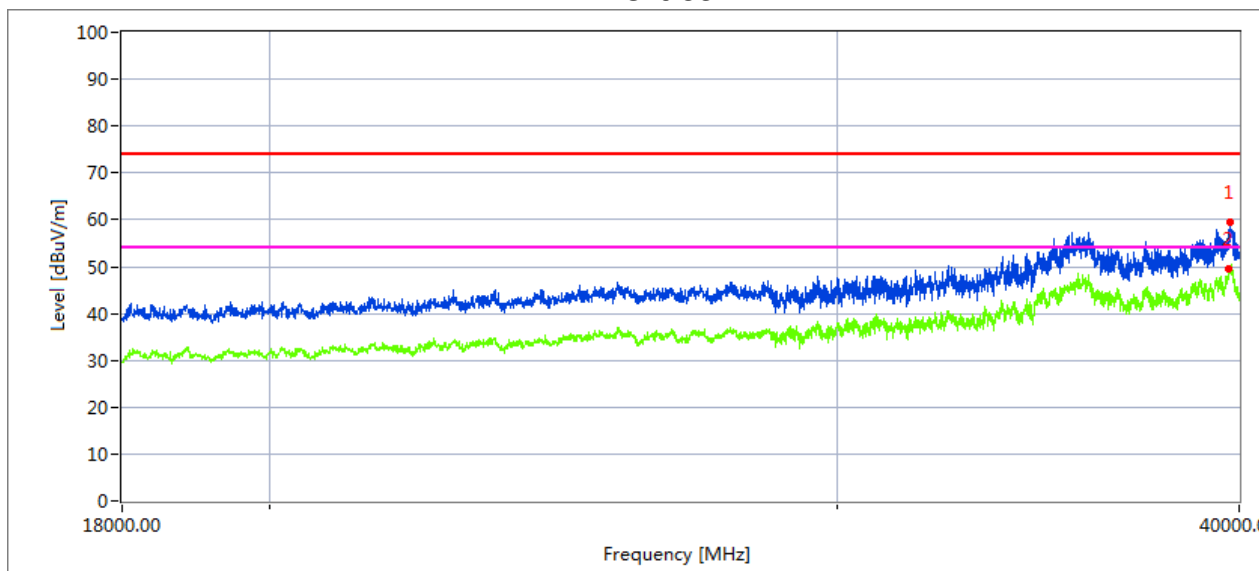

Measurement Result:

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamplifier Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin dB	Detector Type
39769.533	35.62	20.09	44.07	43.48	56.3	74	17.7	Peak
39769.376	26.92	20.09	44.04	43.48	47.57	54	6.43	AVG


High Channel (5240 MHz)-Above 18G Horizontal

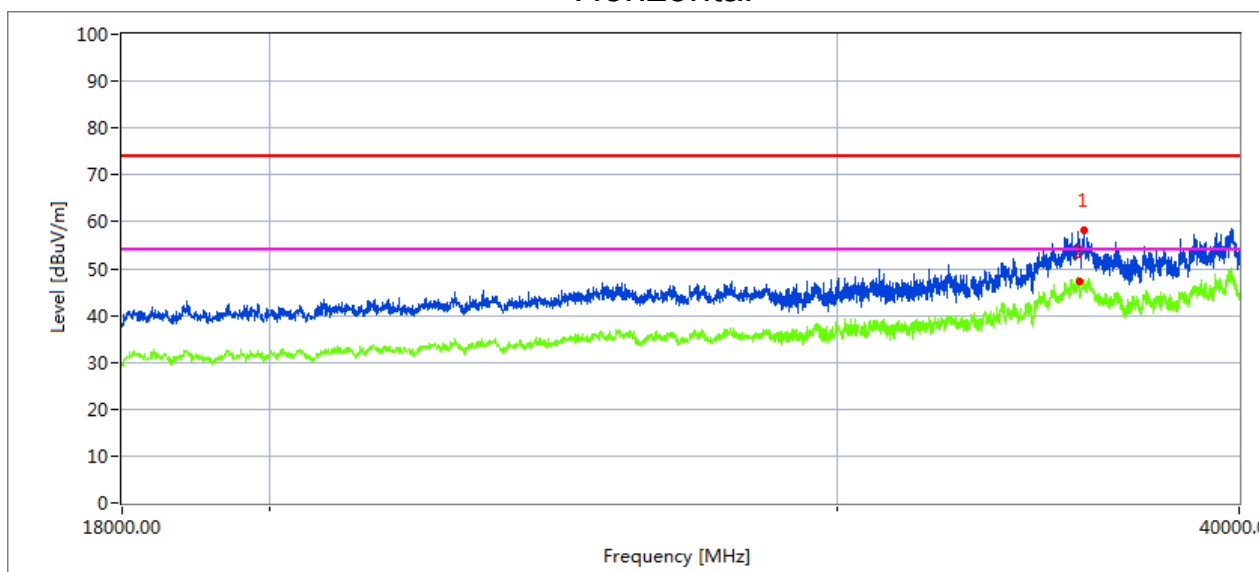

Measurement Result:

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin dB	Detector Type
35628.375	40.67	19.11	42.73	44.61	57.9	74	16.1	Peak
35596.876	31.25	19.11	42.73	44.61	48.48	54	5.52	AVG


Vertical

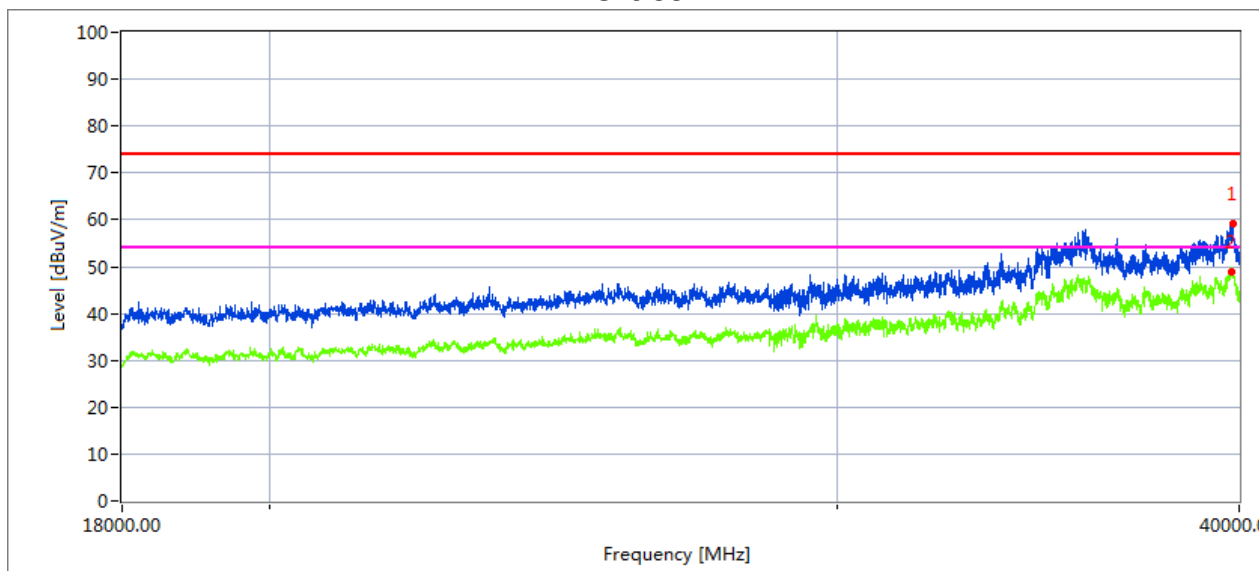

Measurement Result:

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin dB	Detector Type
39769.453	36.81	20.09	44.07	43.48	57.49	74	16.51	Peak
39769.453	24.17	20.09	44.04	43.48	44.82	54	9.18	AVG


Low Channel (5260 MHz)-Above 18G Horizontal

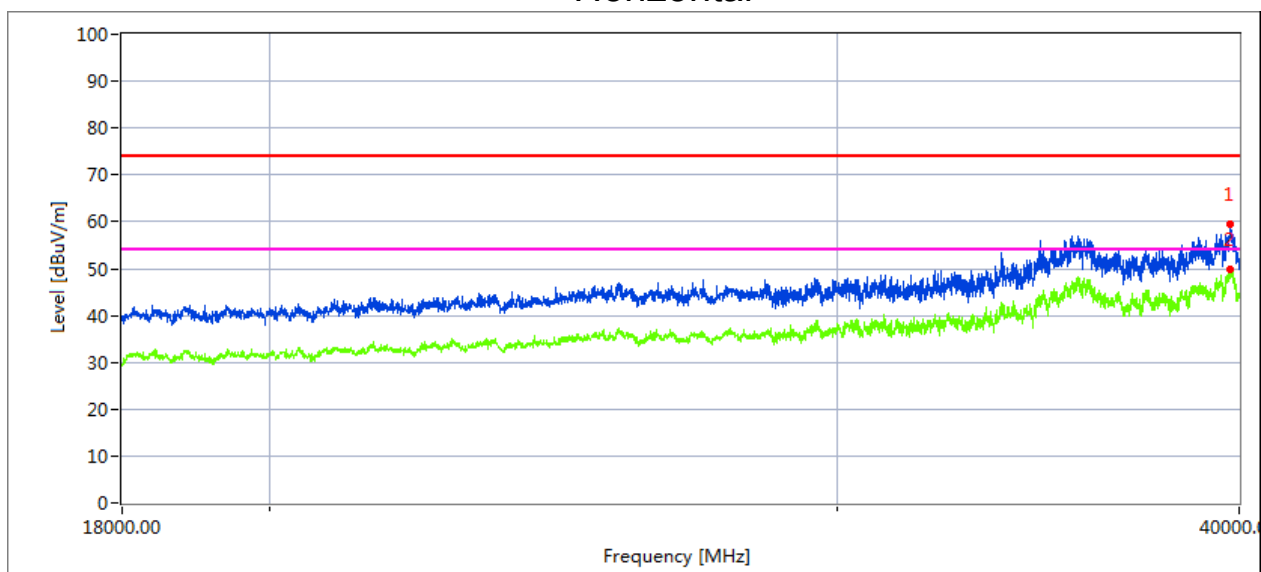

Measurement Result:

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin dB	Detector Type
39176.21	38.27	19.98	43.84	44.62	57.47	74	16.53	Peak
39176.21	29.44	19.98	43.84	44.62	48.64	54	5.36	AVG


Vertical

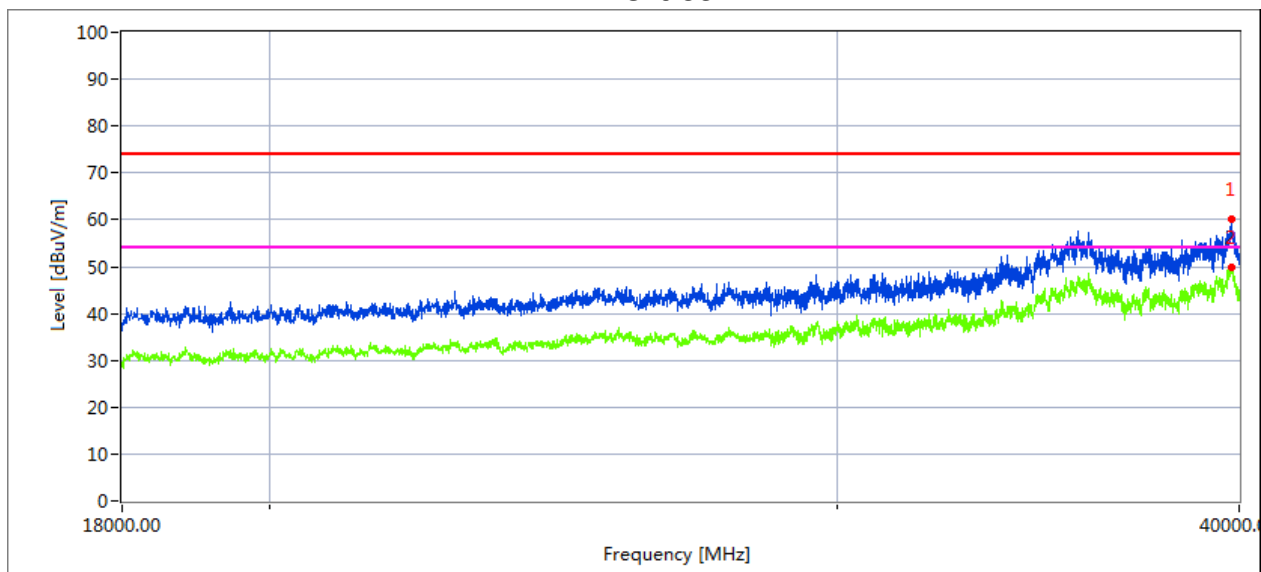

Measurement Result:

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin dB	Detector Type
39385.8	38.56	20.01	44.06	42.69	59.94	74	14.06	Peak
39385.8	28.33	20.01	44.06	42.69	49.71	54	4.29	AVG


High Channel (5320 MHz)-Above 18G Horizontal

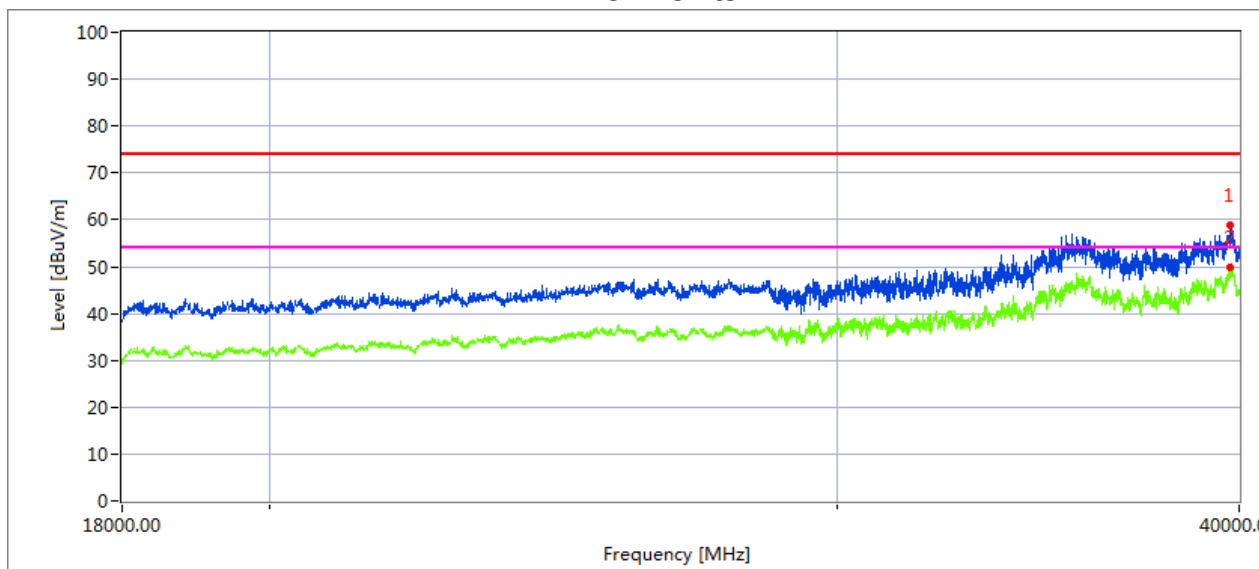

Measurement Result:

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin dB	Detector Type
39176.95	38.44	19.98	43.84	44.62	57.64	74	16.36	Peak
39176.95	30.21	19.98	43.84	44.62	49.41	54	4.59	AVG


Vertical

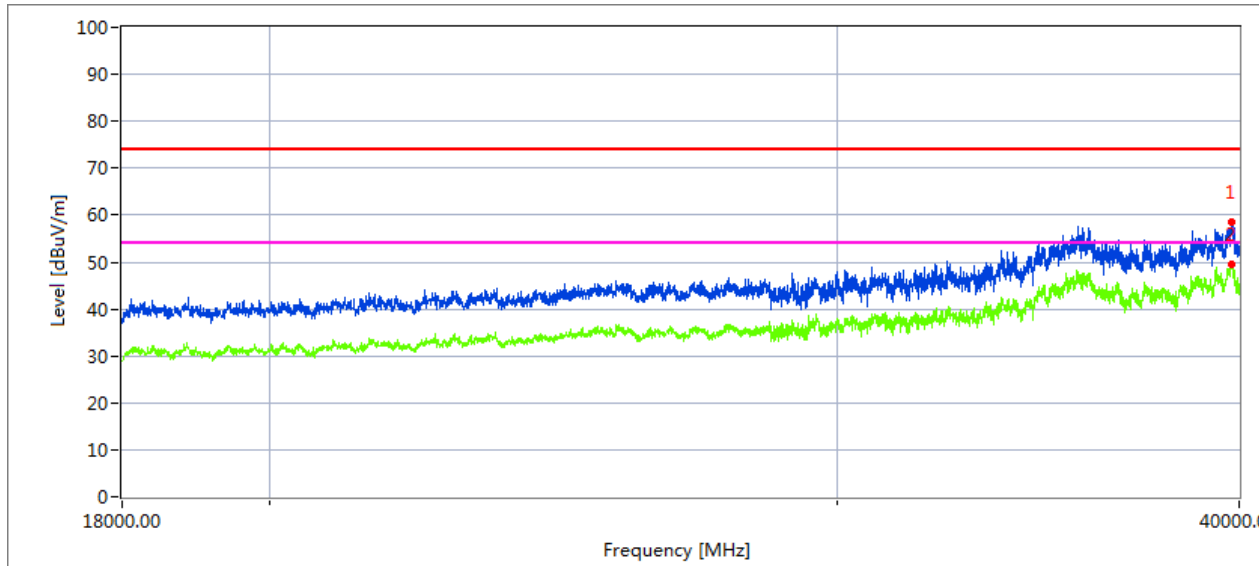

Measurement Result:

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin dB	Detector Type
39369.18	35.33	20.01	44.06	42.69	56.71	74	17.29	Peak
39369.18	27.12	20.01	44.06	42.69	48.5	54	5.5	AVG


Low Channel (5500 MHz)-Above 18G Horizontal

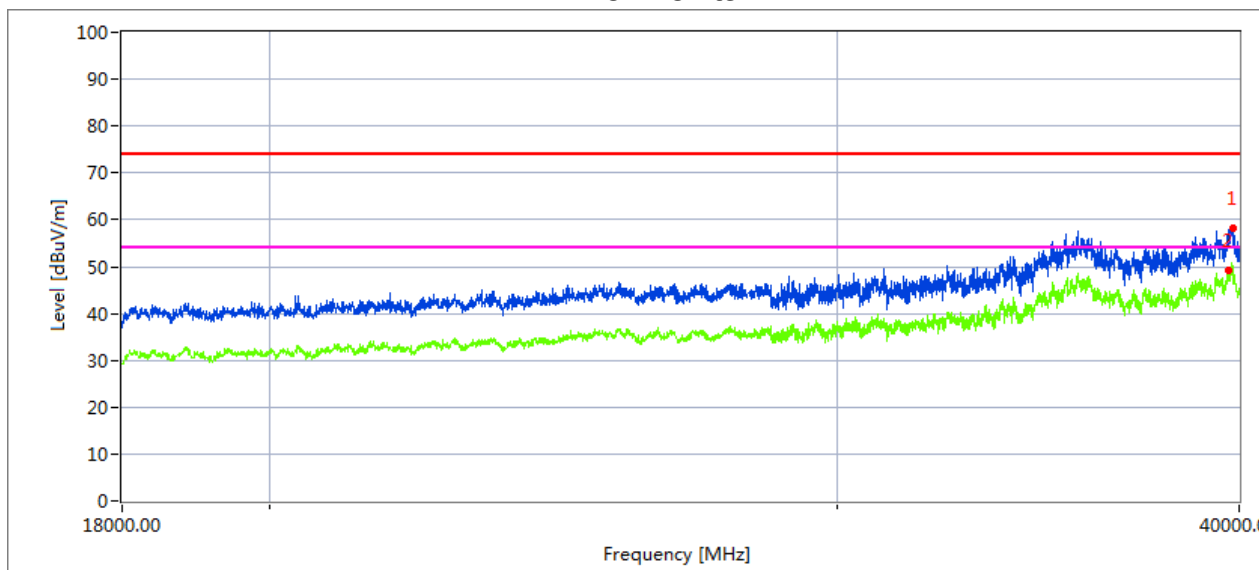

Measurement Result:

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin dB	Detector Type
39696.46	36.46	20.09	44.07	43.48	57.14	74	16.86	Peak
39653.17	28.13	20.07	44.06	43.48	48.78	54	5.22	AVG

Vertical

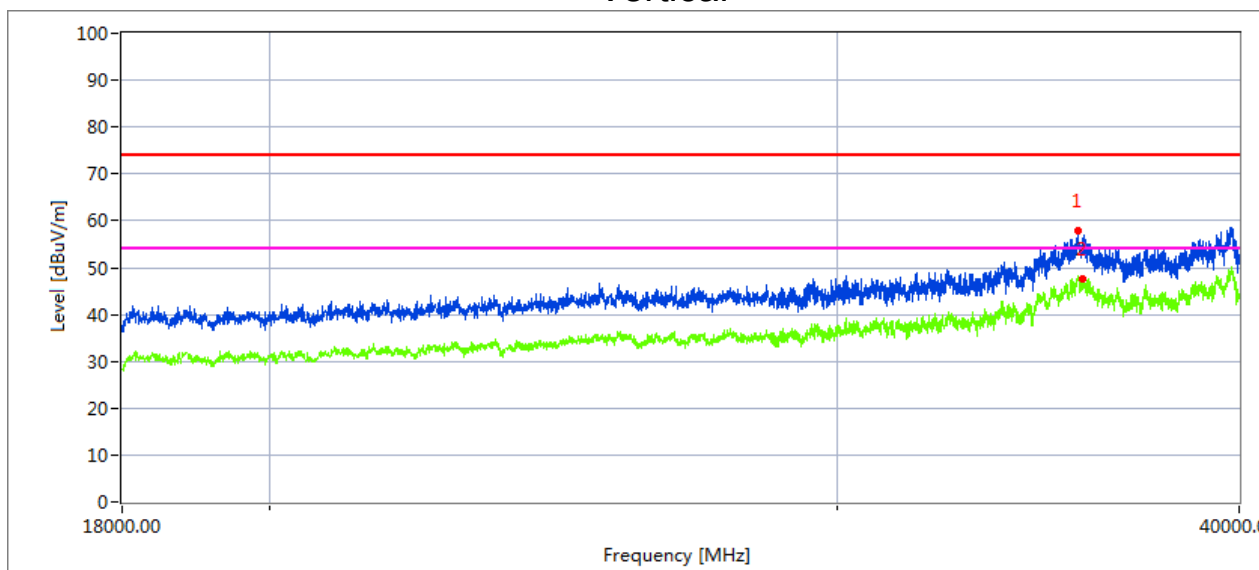


Measurement Result:

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin dB	Detector Type
36575.65	36.86	19.16	42.61	41.56	57.07	74	16.93	Peak
36575.65	26.18	19.16	42.61	41.56	46.39	54	7.61	AVG

High Channel (5700 MHz)-Above 18G


Horizontal

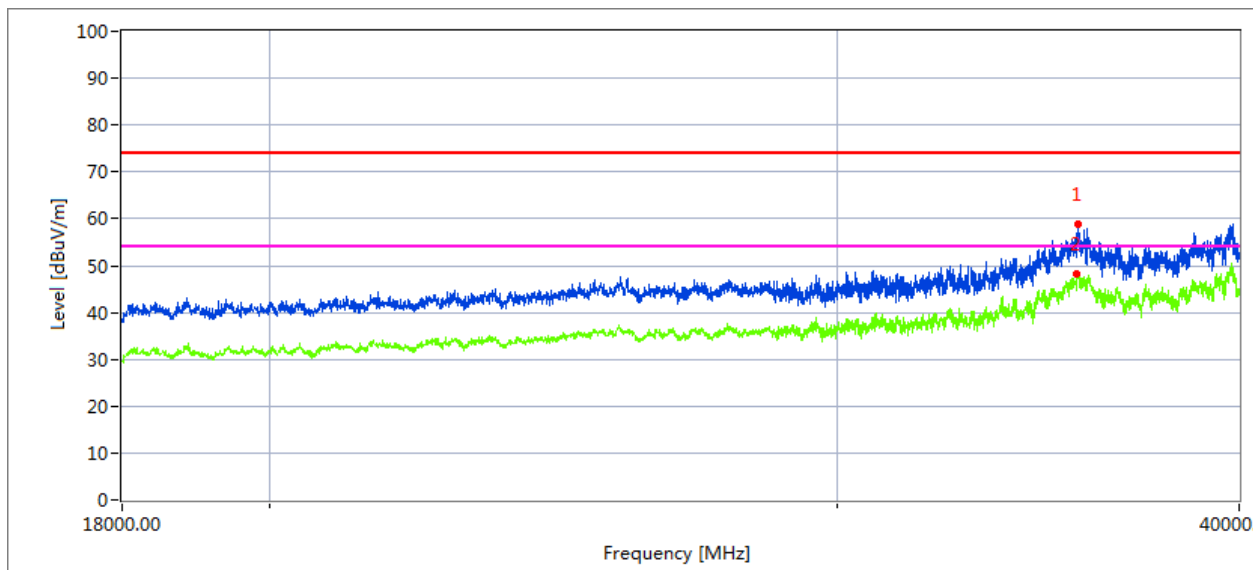

Measurement Result:

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin dB	Detector Type
35794.51	37.15	19.17	42.63	42.74	56.21	74	17.79	Peak
35763.24	28.55	19.14	42.61	42.71	47.59	54	6.41	AVG

Vertical

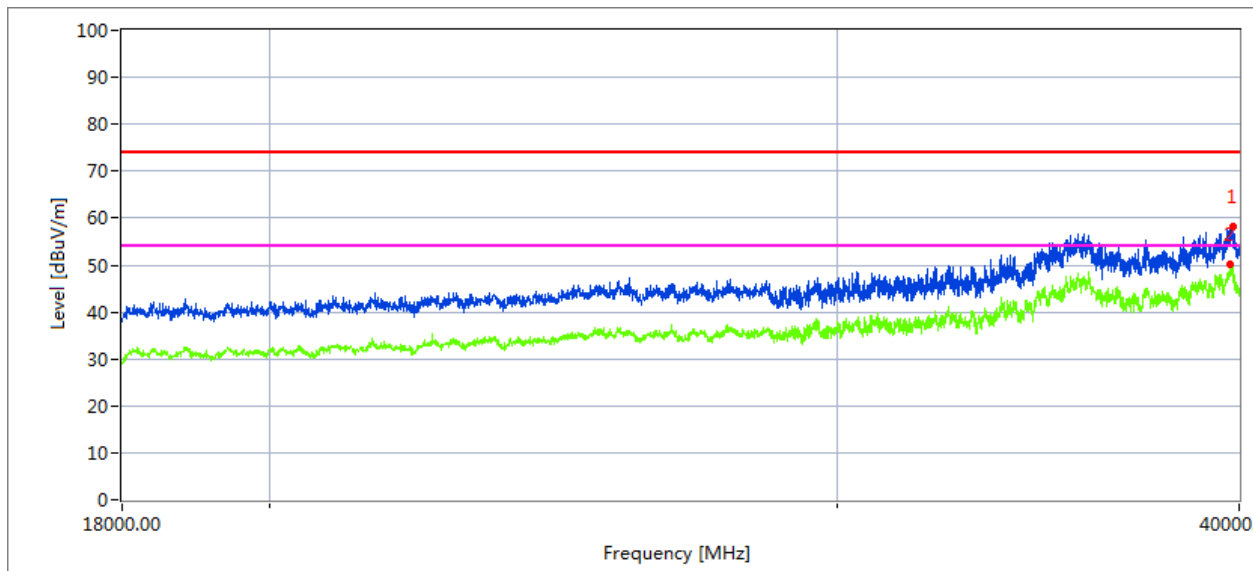


Measurement Result:

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin dB	Detector Type
39816.74	38.37	20.09	42.63	43.48	57.61	74	16.39	Peak
39804.08	30.25	20.09	42.61	43.48	49.47	54	4.53	AVG

Low Channel (5745 MHz)-Above 18G


Horizontal

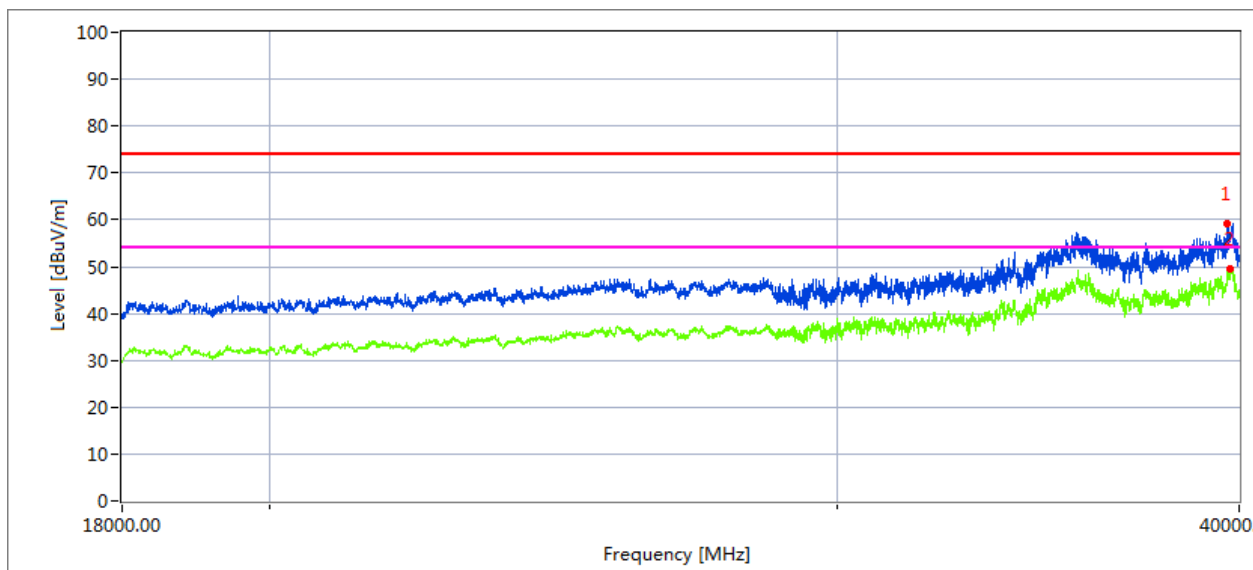

Measurement Result:

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamplifier Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin dB	Detector Type
39670.16	38.14	20.09	44.16	43.48	58.91	74	15.09	Peak
39670.16	29.21	20.09	44.16	43.48	49.98	54	4.02	AVG

Vertical

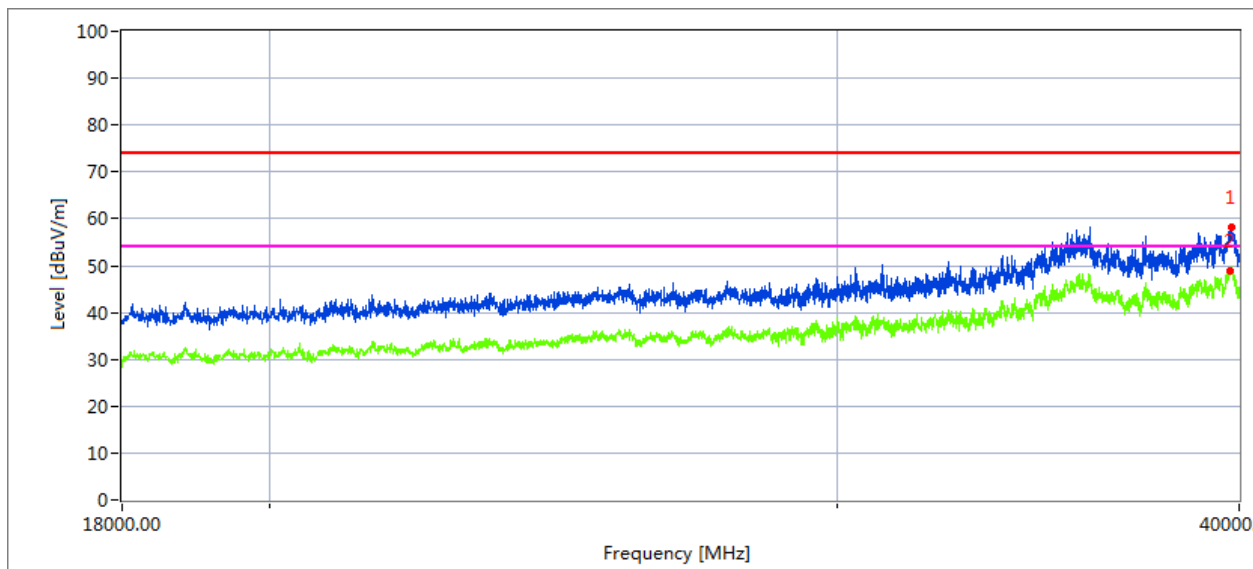


Measurement Result:

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamplifier Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin dB	Detector Type
39731.33	37.22	20.06	44.07	43.21	58.14	74	15.86	Peak
39731.33	27.48	20.06	44.07	43.21	48.4	54	5.6	AVG

High Channel (5825 MHz)-Above 18G


Horizontal

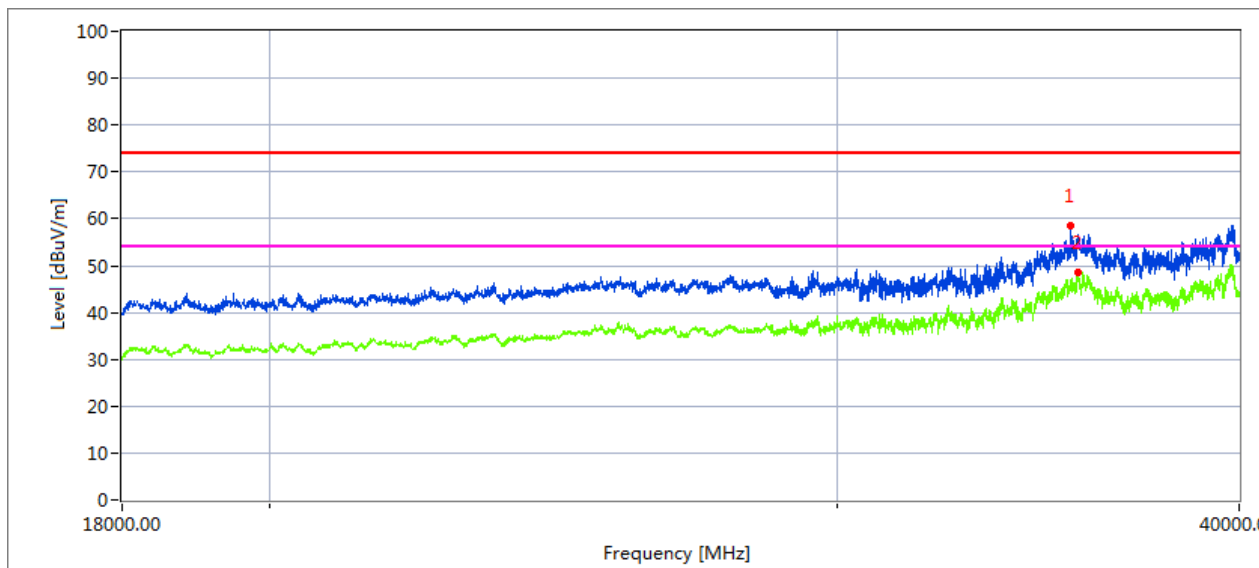

Measurement Result:

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin dB	Detector Type
35628.52	39.25	19.11	42.63	43.48	57.51	74	16.49	Peak
35636.17	29.76	19.12	42.63	43.48	48.03	54	5.97	AVG

Vertical

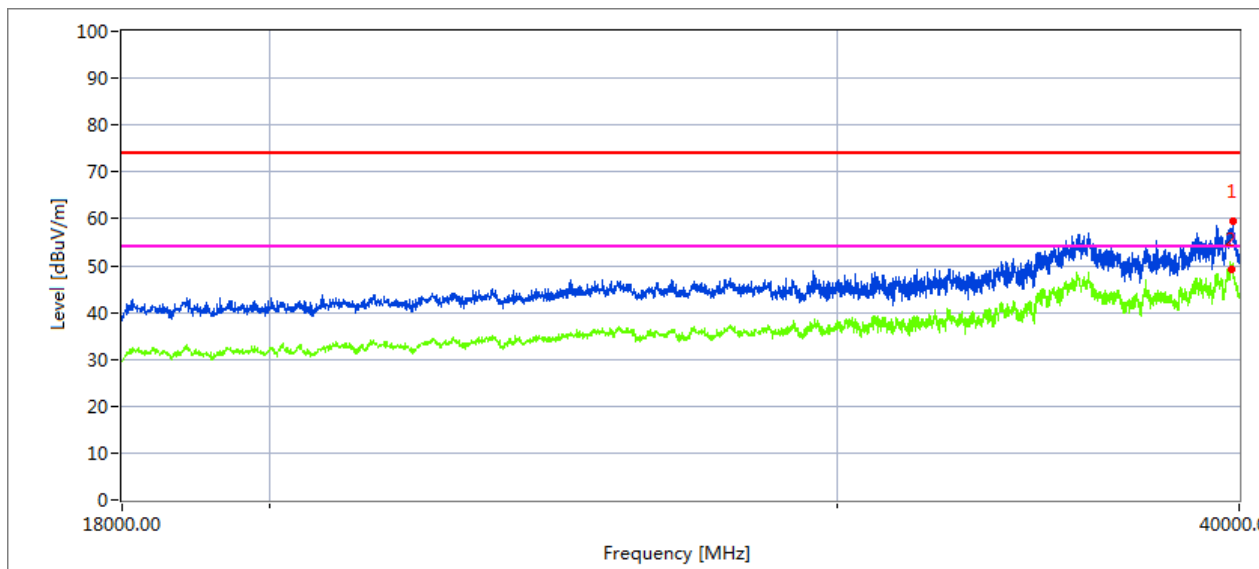

Measurement Result:

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin dB	Detector Type
39821.75	37.46	20.1	44.1	43.22	58.44	74	15.56	Peak
39821.75	28.15	20.1	44.1	43.22	49.13	54	4.87	AVG

3. POWER SPECTRAL DENSITY TEST

3.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407(a)

For the band 5.15-5.25 GHz,

- (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
- (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
- (iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz

- (3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

,

3.2 TEST PROCEDURE

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:


- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ KHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since $RBW=100 \text{ KHz}$ is available on nearly all spectrum analyzers.

3.3 DEVIATION FROM STANDARD

No deviation.

3.4 TEST SETUP

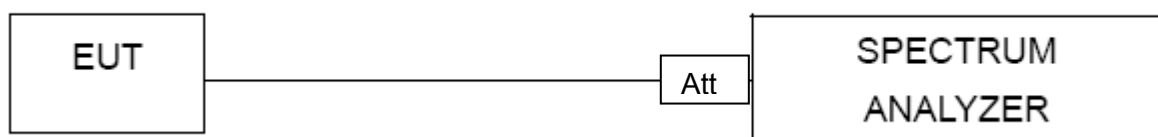

3.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

3.6 TEST RESULTS

EUT :	Projector	Model Name :	JB200
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1015 hPa	Test Voltage :	DC 7.6V
Test Mode :	TX Frequency Band 1 (5150-5250MHz), Band 2A (5250-5350MHz), Band 2C (5470-5725MHz), Band 3 (5745-5825MHz)		

Note: For 802.11n/ac 5GHz has MIMO mode. Directional gain=3.72dbi
 3.72dbi<6.0dbi so power density limit= 8 in dBm

Test data reference attachment.

4. 26DB & 99% EMISSION BANDWIDTH

4.1 APPLIED PROCEDURES / LIMIT


The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

4.2 TEST PROCEDURE

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

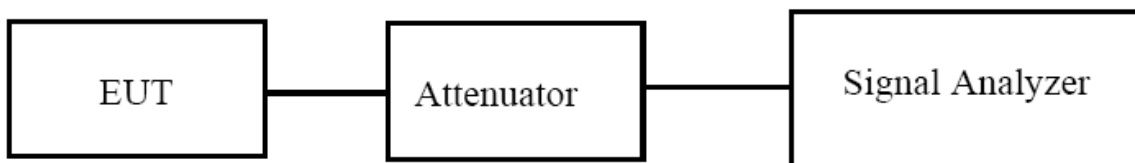

4.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

4.4 TEST RESULTS

EUT :	Projector	Model Name :	JB200
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 7.6V
Test Mode :	TX Frequency Band 1 (5150-5250MHz), Band 2A (5250-5350MHz), Band 2C(5470-5725MHz), Band 3(5725-5850MHz)		

Test data reference attachment.

5. MINIMUM 6 DB BANDWIDTH

5.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407(e)

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

5.2 TEST PROCEDURE


Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP

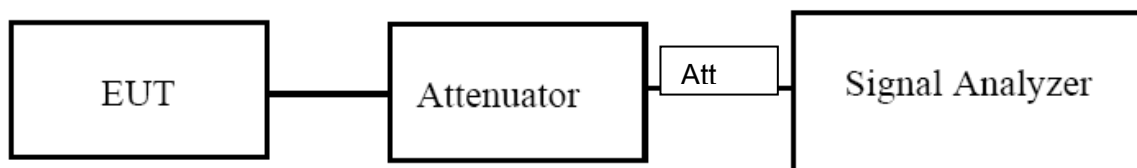

5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULTS

EUT :	Projector	Model Name :	JB200
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 7.6V
Test Mode :	TX (5G) Mode Frequency Band 3 (5725-5850MHz)		

Test data reference attachment.

6. MAXIMUM CONDUCTED OUTPUT POWER

6.1 PPLIED PROCEDURES / LIMIT

According to FCC §15.407

The maximum conducted output power should not exceed:

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	250mW
5725~5850	1W

The maximum e.i.r.p should not exceed:

Frequency Band(MHz)	Limit
5150~5250	200mW or 10dBm +10logB whichever is less
5725~5850	N/A

Note: Where "B" is the 99% emission bandwidth in MHz


6.2 TEST PROCEDURE

- Method PM is Measurement using an RF average power meter. The procedure for this method is as follows:
 - a) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:
 - 1) The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
 - 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
 - 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
 - b) If the transmitter does not transmit continuously, measure the duty cycle D of the transmitter output signal as described in 12.2.
 - c) Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
 - d) Adjust the measurement in dBm by adding $[10 \log (1 / D)]$, where D is the duty cycle {e.g., $[10 \log (1 / 0.25)]$, if the duty cycle is 25%}.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

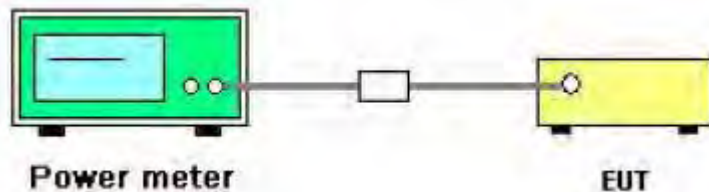

6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.2 TEST RESULTS

EUT :	Projector	Model Name :	JB200
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 7.6V
Test Mode :	TX (5G) Mode Frequency Band 1 (5150-5250MHz), Band 2A (5250-5350MHz) Band 2C, (5470-5725MHz), Band 3 (5725-5850MHz)		

Note: For 802.11n/ac 5GHz has MIMO mode. Directional gain=3.72dbi
3.7dbi<6.0dbi so power limit=24 in dBm

Test data reference attachment.

7. OUT OF BAND EMISSIONS

7.1 APPLICABLE STANDARD

According to FCC §15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.


7.2 TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

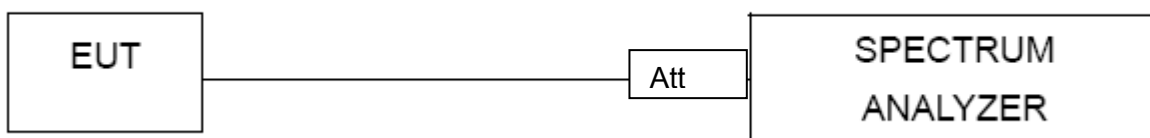

7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.6 TEST RESULTS

EUT :	Projector	Model Name :	JB200
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 7.6V

Test data reference attachment.

9.SPURIOUS RF CONDUCTED EMISSIONS**9.1 CONFORMANCE LIMIT**

According to FCC §15.407(b)(1) (2) (3)

9.2 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

9.3 Test Setup

Please refer to Section 6.1 of this test report.

9.4 Test Procedure

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300KHz to measure the peak field strength , and measure frequency range from 1GHz to 26.5GHz.

9.5 Test Results

Remark: The measurement frequency range is from 1GHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data.

10. Frequency Stability Measurement

10.1 LIMIT


Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification).

10.2 TEST PROCEDURES

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is $-20^\circ\text{C} \sim 70^\circ\text{C}$.

10.3 TEST SETUP LAYOUT

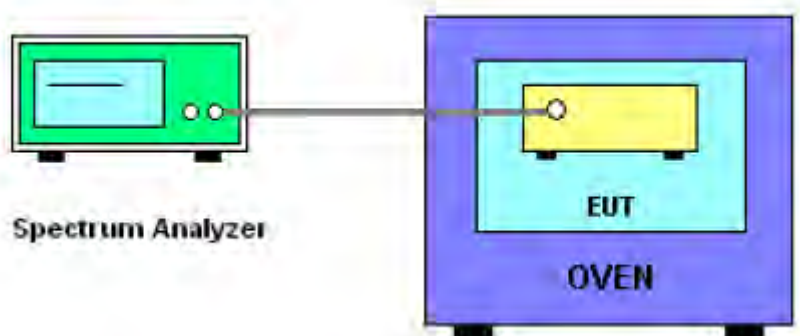

10.4 EUT OPERATION DURING TEST

1. The EUT was programmed to be in continuously un-modulation transmitting mode.
2. The module has two antennas, and the worst data is Antenna 1, only shown Antenna 1 Plot.

10.5 TEST RESULTS

EUT :	Projector	Model Name :	JB200
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 7.6V
Test Mode :	TX Frequency Band I (5150-5250MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	7.60	5180.0110	5180	0.0110	2.1264
		V max (V)	8.70	5180.0299	5180	0.0299	5.7795
		V min (V)	6.50	5180.0328	5180	0.0328	6.3342
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	7.6	T (°C)	-30	5179.9355	5180	-0.0645	-12.449
		T (°C)	-20	5180.0464	5180	0.0464	8.951
		T (°C)	-10	5179.9584	5180	-0.0416	-8.022
		T (°C)	0	5180.0469	5180	0.0469	9.062
		T (°C)	10	5180.0009	5180	0.0009	0.182
		T (°C)	20	5179.9992	5180	-0.0008	-0.153
		T (°C)	30	5180.0065	5180	0.0065	1.255
		T (°C)	40	5180.0417	5180	0.0417	8.059
		T (°C)	50	5180.0176	5180	0.0176	3.400
		T (°C)	60	5179.9225	5180	-0.0775	-14.957
		T (°C)	70	5180.0194	5180	0.0194	3.736
		T (°C)	80	5180.0436	5180	0.0436	8.423
Limits				Within 5150-5250MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	7.60	5199.9843	5200	-0.0157	-3.021
		V max (V)	8.70	5200.0153	5200	0.0153	2.941
		V min (V)	6.50	5199.9183	5200	-0.0817	-15.717
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	7.6	T (°C)	-30	5200.01029	5200	0.0103	1.979
		T (°C)	-20	5199.9637	5200	-0.0363	-6.973
		T (°C)	-10	5200.0213	5200	0.0213	4.104
		T (°C)	0	5200.0061	5200	0.0061	1.165
		T (°C)	10	5199.9335	5200	-0.0665	-12.795
		T (°C)	20	5199.9490	5200	-0.0510	-9.817
		T (°C)	30	5200.0135	5200	0.0135	2.595
		T (°C)	40	5199.9543	5200	-0.0457	-8.786
		T (°C)	50	5199.9636	5200	-0.0364	-7.005
		T (°C)	60	5200.0403	5200	0.0403	7.756
		T (°C)	70	5199.9342	5200	-0.0658	-12.653
		T (°C)	80	5199.9292	5200	-0.0708	-13.618
Limits				Within 5150-5250MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	7.60	5240.0482	5240	0.0482	9.199
		V max (V)	8.70	5239.9653	5240	-0.0347	-6.621
		V min (V)	6.50	5240.0331	5240	0.0331	6.321
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	7.6	T (°C)	-30	5239.9286	5240	-0.0714	-13.626
		T (°C)	-20	5239.9549	5240	-0.0451	-8.605
		T (°C)	-10	5239.9803	5240	-0.0197	-3.764
		T (°C)	0	5239.9638	5240	-0.0362	-6.901
		T (°C)	10	5239.9362	5240	-0.0638	-12.169
		T (°C)	20	5239.9583	5240	-0.0417	-7.961
		T (°C)	30	5240.0047	5240	0.0047	0.898
		T (°C)	40	5239.9927	5240	-0.0073	-1.388
		T (°C)	50	5239.9302	5240	-0.0698	-13.320
		T (°C)	60	5240.0195	5240	0.0195	3.730
		T (°C)	70	5239.9303	5240	-0.0697	-13.304
		T (°C)	80	5239.9251	5240	-0.0749	-14.297
Limits				Within 5150-5250MHz			
Result				Complies			

EUT :	Projector	Model Name :	JB200
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 7.6V
Test Mode :	TX Frequency Band 2A (5250-5350MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5260MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	7.60	5259.9541	5260	-0.0459	-8.731
		V max (V)	8.70	5259.9517	5260	-0.0483	-9.177
		V min (V)	6.50	5260.0318	5260	0.0318	6.045
Limits				Within 5250-5350MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5260MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	7.6	T (°C)	-30	5259.9800	5260	-0.0200	-3.807
		T (°C)	-20	5259.9718	5260	-0.0282	-5.366
		T (°C)	-10	5260.0204	5260	0.0204	3.881
		T (°C)	0	5259.9365	5260	-0.0635	-12.078
		T (°C)	10	5259.9165	5260	-0.0835	-15.875
		T (°C)	20	5259.9424	5260	-0.0576	-10.959
		T (°C)	30	5259.9565	5260	-0.0435	-8.261
		T (°C)	40	5259.9471	5260	-0.0529	-10.059
		T (°C)	50	5259.9343	5260	-0.0657	-12.500
		T (°C)	60	5259.9791	5260	-0.0209	-3.965
		T (°C)	70	5259.9266	5260	-0.0734	-13.954
		T (°C)	80	5259.9600	5260	-0.0400	-7.612
Limits				Within 5250-5350MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5280MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	7.60	5279.9955	5280	-0.0045	-0.854
		V max (V)	8.70	5280.0448	5280	0.0448	8.477
		V min (V)	6.50	5280.0045	5280	0.0045	0.849
Limits				Within 5250-5350MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5280MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	7.6	T (°C)	-30	5279.9751	5280	-0.0249	-4.724
		T (°C)	-20	5279.9764	5280	-0.0236	-4.473
		T (°C)	-10	5280.0114	5280	0.0114	2.156
		T (°C)	0	5279.9304	5280	-0.0696	-13.190
		T (°C)	10	5280.0273	5280	0.0273	5.162
		T (°C)	20	5280.0493	5280	0.0493	9.341
		T (°C)	30	5280.0284	5280	0.0284	5.370
		T (°C)	40	5279.9958	5280	-0.0042	-0.788
		T (°C)	50	5280.0164	5280	0.0164	3.110
		T (°C)	60	5279.9506	5280	-0.0494	-9.363
		T (°C)	70	5280.0026	5280	0.0026	0.488
		T (°C)	80	5279.9596	5280	-0.0404	-7.657
Limits				Within 5250-5350MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5320MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	7.60	5320.0225	5320	0.0225	4.225
		V max (V)	8.70	5319.9749	5320	-0.0251	-4.726
		V min (V)	6.50	5319.9985	5320	-0.0015	-0.273
Limits				Within 5250-5350MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5320MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	7.6	T (°C)	-30	5319.9636	5320	-0.0364	-6.838
		T (°C)	-20	5319.9705	5320	-0.0295	-5.536
		T (°C)	-10	5319.9355	5320	-0.0645	-12.117
		T (°C)	0	5320.0474	5320	0.0474	8.904
		T (°C)	10	5319.9864	5320	-0.0136	-2.558
		T (°C)	20	5319.9304	5320	-0.0696	-13.078
		T (°C)	30	5320.0222	5320	0.0222	4.179
		T (°C)	40	5320.0397	5320	0.0397	7.466
		T (°C)	50	5319.9306	5320	-0.0694	-13.039
		T (°C)	60	5319.9963	5320	-0.0037	-0.698
		T (°C)	70	5319.9256	5320	-0.0744	-13.989
		T (°C)	80	5319.9295	5320	-0.0705	-13.255
Limits				Within 5250-5350MHz			
Result				Complies			

EUT :	Projector	Model Name :	JB200
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 7.6V
Test Mode :	TX Frequency Band 2C (5470-5725MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5500MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	7.60	5499.9328	5500	-0.0672	-12.225
		V max (V)	8.70	5500.0229	5500	0.0229	4.161
		V min (V)	6.50	5500.0258	5500	0.0258	4.693
Limits				Within 5470-5725MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5500MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	7.6	T (°C)	-30	5499.9450	5500	-0.0550	-10.007
		T (°C)	-20	5499.9760	5500	-0.0240	-4.357
		T (°C)	-10	5499.9847	5500	-0.0153	-2.778
		T (°C)	0	5499.9421	5500	-0.0579	-10.521
		T (°C)	10	5499.9423	5500	-0.0577	-10.493
		T (°C)	20	5500.0236	5500	0.0236	4.296
		T (°C)	30	5500.0348	5500	0.0348	6.324
		T (°C)	40	5499.9899	5500	-0.0101	-1.836
		T (°C)	50	5499.9323	5500	-0.0677	-12.313
		T (°C)	60	5499.9602	5500	-0.0398	-7.236
		T (°C)	70	5500.0189	5500	0.0189	3.443
		T (°C)	80	5500.0278	5500	0.0278	5.051
Limits				Within 5470-5725MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5600MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	7.60	5599.9636	5600	-0.0364	-6.502
		V max (V)	8.70	5599.9560	5600	-0.0440	-7.853
		V min (V)	6.50	5600.0000	5600	0.0000	0.000
Limits				Within 5470-5725MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5600MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	7.6	T (°C)	-30	5600.0253	5600	0.0253	-4.512
		T (°C)	-20	5599.9630	5600	-0.0370	6.604
		T (°C)	-10	5600.0161	5600	0.0161	-2.874
		T (°C)	0	5599.9436	5600	-0.0564	10.075
		T (°C)	10	5599.9866	5600	-0.0134	2.385
		T (°C)	20	5599.9807	5600	-0.0193	3.442
		T (°C)	30	5600.0288	5600	0.0288	-5.148
		T (°C)	40	5599.9662	5600	-0.0338	6.034
		T (°C)	50	5599.9693	5600	-0.0307	5.477
		T (°C)	60	5599.9974	5600	-0.0026	0.460
		T (°C)	70	5599.9400	5600	-0.0600	10.723
		T (°C)	80	5599.9828	5600	-0.0172	3.080
Limits				Within 5470-5725MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5700MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	7.60	5699.9869	5700	-0.0131	-2.296
		V max (V)	8.70	5699.9885	5700	-0.0115	-2.023
		V min (V)	6.50	5699.9699	5700	-0.0301	-5.274
Limits				Within 5470-5725MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5700MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	7.6	T (°C)	-30	5699.9848	5700	-0.0152	-2.665
		T (°C)	-20	5699.9939	5700	-0.0061	-1.062
		T (°C)	-10	5700.0401	5700	0.0401	7.041
		T (°C)	0	5700.0496	5700	0.0496	8.703
		T (°C)	10	5699.9331	5700	-0.0669	-11.741
		T (°C)	20	5699.9619	5700	-0.0381	-6.691
		T (°C)	30	5699.9982	5700	-0.0018	-0.315
		T (°C)	40	5699.9813	5700	-0.0187	-3.272
		T (°C)	50	5699.9860	5700	-0.0140	-2.452
		T (°C)	60	5700.0002	5700	0.0002	0.039
		T (°C)	70	5700.0252	5700	0.0252	4.425
		T (°C)	80	5699.9711	5700	-0.0289	-5.078
Limits				Within 5470-5725MHz			
Result				Complies			

EUT :	Projector	Model Name :	JB200
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 7.6V
Test Mode :	TX Frequency(5745-5825MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	7.60	5744.9983	5745	-0.0017	-0.292
		V max (V)	8.70	5744.9671	5745	-0.0329	-5.719
		V min (V)	6.50	5744.9561	5745	-0.0439	-7.646
Limits				Within 5725-5850MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	7.6	T (°C)	-30	5745.0444	5745	0.0444	7.727
		T (°C)	-20	5744.9854	5745	-0.0146	-2.544
		T (°C)	-10	5744.9868	5745	-0.0132	-2.301
		T (°C)	0	5744.9423	5745	-0.0577	-10.052
		T (°C)	10	5744.9424	5745	-0.0576	-10.018
		T (°C)	20	5744.9517	5745	-0.0483	-8.408
		T (°C)	30	5744.9808	5745	-0.0192	-3.345
		T (°C)	40	5745.0019	5745	0.0019	0.334
		T (°C)	50	5744.9951	5745	-0.0049	-0.846
		T (°C)	60	5744.9808	5745	-0.0192	-3.346
		T (°C)	70	5745.0225	5745	0.0225	3.917
		T (°C)	80	5744.9867	5745	-0.0133	-2.321
Limits				Within 5725-5850MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	7.60	5785.0363	5785	0.0363	6.278
		V max (V)	8.70	5785.0213	5785	0.0213	3.689
		V min (V)	6.50	5785.0028	5785	0.0028	0.481
Limits				Within 5725-5850MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	7.6	T (°C)	-30	5784.9679	5785	-0.0321	-5.547
		T (°C)	-20	5785.0134	5785	0.0134	2.313
		T (°C)	-10	5785.0331	5785	0.0331	5.720
		T (°C)	0	5785.0089	5785	0.0089	1.537
		T (°C)	10	5785.0322	5785	0.0322	5.569
		T (°C)	20	5784.9936	5785	-0.0064	-1.100
		T (°C)	30	5784.9719	5785	-0.0281	-4.854
		T (°C)	40	5784.9498	5785	-0.0502	-8.674
		T (°C)	50	5785.0111	5785	0.0111	1.912
		T (°C)	60	5785.0327	5785	0.0327	5.650
		T (°C)	70	5784.9576	5785	-0.0424	-7.336
		T (°C)	80	5785.0199	5785	0.0199	3.448
Limits				Within 5725-5850MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	7.60	5824.9497	5825	-0.0503	-8.636
		V max (V)	8.70	5824.9301	5825	-0.0699	-11.993
		V min (V)	6.50	5824.9309	5825	-0.0691	-11.865
Limits				Within 5725-5850MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	7.6	T (°C)	-30	5824.9781	5825	-0.0219	-3.762
		T (°C)	-20	5824.9479	5825	-0.0521	-8.951
		T (°C)	-10	5825.0296	5825	0.0296	5.088
		T (°C)	0	5824.9354	5825	-0.0646	-11.085
		T (°C)	10	5825.0126	5825	0.0126	2.161
		T (°C)	20	5824.9465	5825	-0.0535	-9.183
		T (°C)	30	5824.9630	5825	-0.0370	-6.344
		T (°C)	40	5824.9377	5825	-0.0623	-10.691
		T (°C)	50	5824.9483	5825	-0.0517	-8.883
		T (°C)	60	5824.9605	5825	-0.0395	-6.774
		T (°C)	70	5824.9918	5825	-0.0082	-1.405
		T (°C)	80	5824.9993	5825	-0.0007	-0.117
Limits				Within 5725-5850MHz			
Result				Complies			

11. DYNAMIC FREQUENCY SELECTION(DFS)

11.1 APPLICABILITY OF DFS REQUIREMENTS

EUT is client and operates as client without radar detection function.

Table 1: Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
DFS Detection Threshold	Yes	Not required	Yes
Channel Closing Transmission Time	Yes	Yes	Yes
Channel Move Time	Yes	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required	Yes
Client Beacon Test	N/A	Yes	Yes

Additional requirements for devices with multiple bandwidth modes	Operational Mode	
	Master or Client With Radar Detection	Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required
Note Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.		

11.2 INTERFERENCE THRESHOLD VALUES, MASTER OR CLIENT INCORPORATING IN-SERVICE MONITORING

Maximum Transmit Power	Value (see notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note 3: EIRP is based on the highest antenna gain.	

11.3 DFS RESPONSE REQUIREMENT VALUES

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the 99% power bandwidth See Note 3.

Note 1: The instant that the Channel Move Time and the Channel Closing Transmission Time begins is as follows:

- For the Short pulse radar Test Signals this instant is the end of the Burst.
- For the Frequency Hopping radar Test Signal, this instant is the end of the last radar Burst generated.
- For the Long Pulse radar Test Signal this instant is the end of the 12 second period defining the radar transmission.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate Channel changes (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 is used and for each frequency step the minimum percentage of detection is 90%. Measurements are performed with no data traffic.

11.4 SHORT PULSE RADAR TEST WAVEFORMS

As the EUT is a Client Device with no Radar Detection, only one type radar pulse is required for the testing. Radar Pulse type 0 was used in the evaluation of the Client device for the purpose of measuring the Channel Move Time and the Channel Closing Transmission Time.

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Trials
0	1	1428	18	60%	30
1	1	Test A Test B	$\text{Roundup}\left(\frac{1}{360} \cdot \frac{19 \cdot 10^6}{\text{PRI}_{\text{max}}}\right)$	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120

Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a

Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A

A minimum of 30 unique waveforms are required for each of the short pulse radar types 2 through 4. For short pulse radar type 1, the same waveform is used a minimum of 30 times. If more than 30 waveforms are used for short pulse radar types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms.


If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B. The aggregate is the average of the percentage of successful detections of short pulse radar types 1-4.

11.5 CALIBRATION SETUP AND DFS TEST RESULTS

Radar Waveform Calibration Procedure

- 1) A 50 ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected to place of the master
- 2) The interference Radar Detection Threshold Level is $-62\text{dBm} + 0\text{dBi} + 1\text{dB} = -61\text{dBm}$ that had been taken into account the output power range and antenna gain.
- 3) The following equipment setup was used to calibrate the conducted radar waveform. A vector signal generator was utilized to establish the test signal level for radar type 0. During this process there were no transmissions by either the master or client device. The spectrum analyzer was switched to the zero spans (time domain) at the frequency of the radar waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 3 MHz. The spectrum analyzer had offset -1.0dB to compensate RF cable loss 1.0dB.
- 4) The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was $-62\text{dBm} + 0\text{dBi} + 1\text{dB} = -61\text{dBm}$. Capture the spectrum analyzer plots on short pulse radar waveform.

11.6 CONDUCTED CALIBRATION SETUP

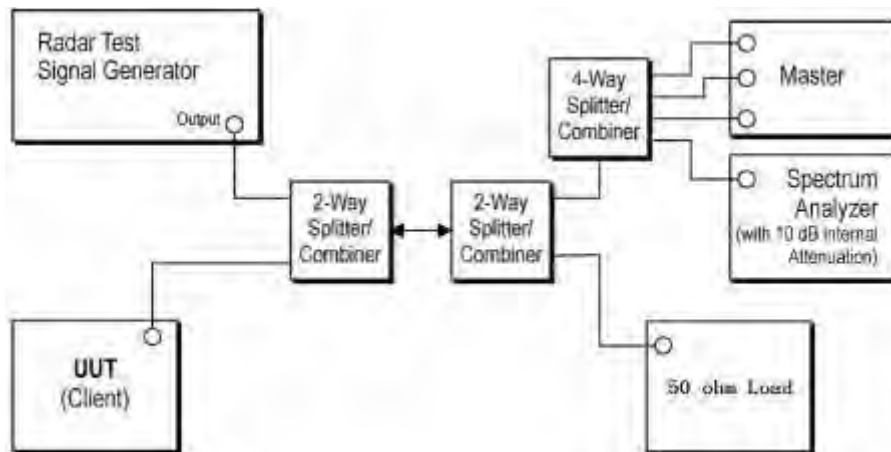

Wireless AP	Manufacturer	LINKSYS LLC
	Model NO.	WRT32X
	FCC ID	Q87-WRT3200ACM


11.7 RADAR WAVEFORM CALIBRATION RESULT

Test data reference attachment.

11.8 IN-SERVICE MONITORING: CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME AND NON-OCCUPANCY PERIOD

TEST CONFIGURATION:

Setup for Client with injection at the Master

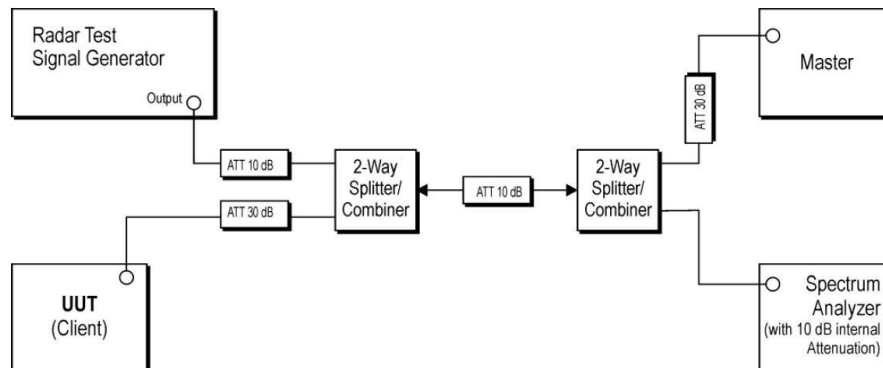

TEST PROCEDURE:

1. The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
2. The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device
3. A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
4. EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is Streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
5. When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
6. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom In 600ms plot of the Short Pulse Radar Type
7. Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell (0.3ms) = S (12000ms) / B (4000)$; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C (ms) = N \times Dwell (0.3ms)$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
8. Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

TEST MODE:

Please refer to the clause 2.2

11.9 RESULT OF CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME AND NON-OCCUPANCY PERIOD FOR CLIENT BEACON TEST

BW/ Channel	Maximum EIRP Power(dBm)	Test Item	Test Result	Limit	Result
80MHz/ 5290MHz	12.4	Channel Move Time	2208.05ms	< 10s	PASS
		Channel Closing Transmission Time	52.00ms	< 260ms	PASS
80MHz/ 5530MHz	12.5	Channel Move Time	1321.45ms	< 10s	PASS
		Channel Closing Transmission Time	56.55ms	< 260ms	PASS

Test data reference attachment.

12. ANTENNA REQUIREMENT

12.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

12.2 EUT ANTENNA

The EUT antenna is permanent attached FPC antenna(Antenna 1: 0.83dBi, Antenna 2: 0.55dBi). It comply with the standard requirement.


13. TEST RESULTS

13.1 DUTY CYCLE


5.2G:

Antenna	Condition	Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)
Ant 1	NVNT	802.11a	5180	100	0
Ant 1	NVNT	802.11a	5200	100	0
Ant 1	NVNT	802.11a	5240	100	0
Ant 2	NVNT	802.11a	5180	100	0
Ant 2	NVNT	802.11a	5200	100	0
Ant 2	NVNT	802.11a	5240	100	0
Ant 1	NVNT	802.11ac20	5180	100	0
Ant 1	NVNT	802.11ac20	5200	100	0
Ant 1	NVNT	802.11ac20	5240	100	0
Ant 2	NVNT	802.11ac20	5180	100	0
Ant 2	NVNT	802.11ac20	5200	100	0
Ant 2	NVNT	802.11ac20	5240	100	0
Ant 1	NVNT	802.11ac40	5190	100	0
Ant 1	NVNT	802.11ac40	5230	99.74	0.01
Ant 2	NVNT	802.11ac40	5190	100	0
Ant 2	NVNT	802.11ac40	5230	99.79	0.01
Ant 1	NVNT	802.11ac80	5210	100	0
Ant 2	NVNT	802.11ac80	5210	100	0
Ant 1	NVNT	802.11n(HT20)	5180	100	0
Ant 1	NVNT	802.11n(HT20)	5200	100	0
Ant 1	NVNT	802.11n(HT20)	5240	100	0
Ant 2	NVNT	802.11n(HT20)	5180	100	0
Ant 2	NVNT	802.11n(HT20)	5200	100	0
Ant 2	NVNT	802.11n(HT20)	5240	100	0
Ant 1	NVNT	802.11n(HT40)	5190	100	0
Ant 1	NVNT	802.11n(HT40)	5230	100	0
Ant 2	NVNT	802.11n(HT40)	5190	100	0
Ant 2	NVNT	802.11n(HT40)	5230	100	0


Duty Cycle NVNT 802.11a 5180MHz Ant 1

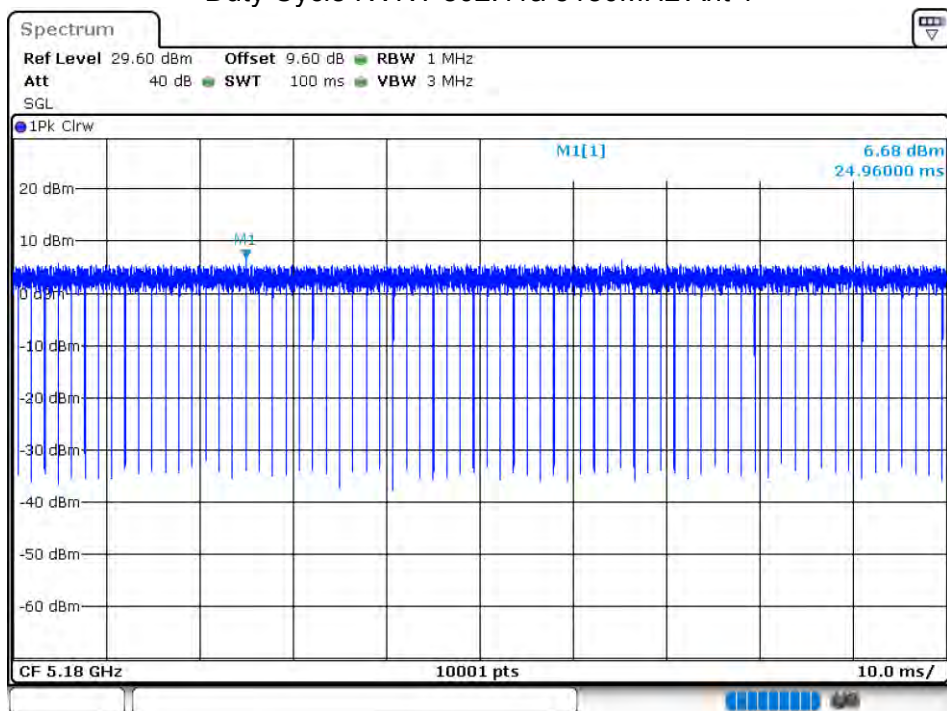


Duty Cycle NVNT 802.11a 5200MHz Ant 1

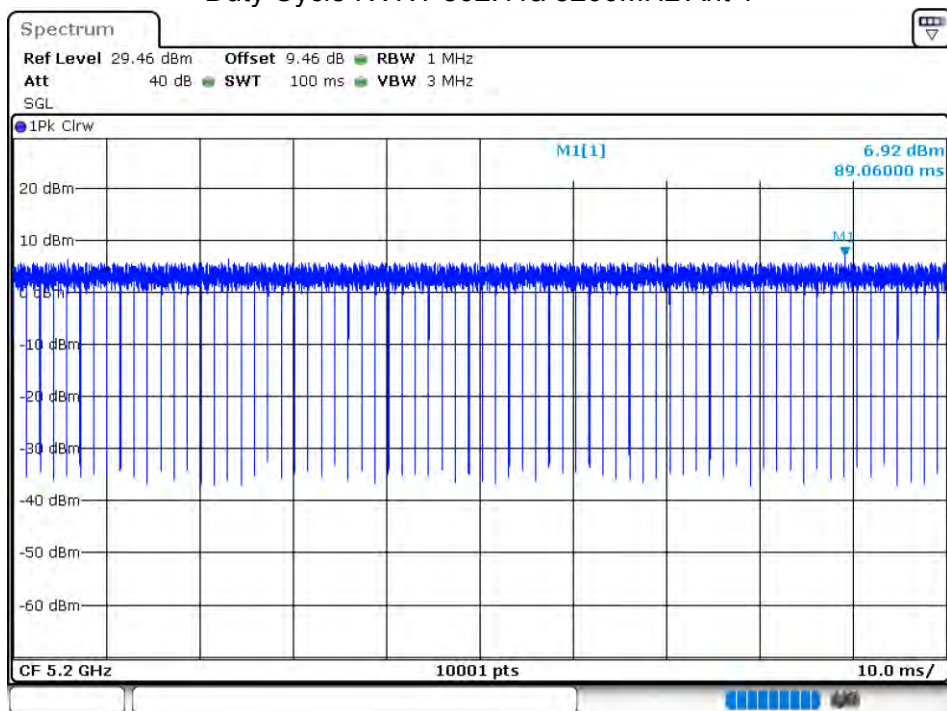


Duty Cycle NVNT 802.11a 5240MHz Ant 1

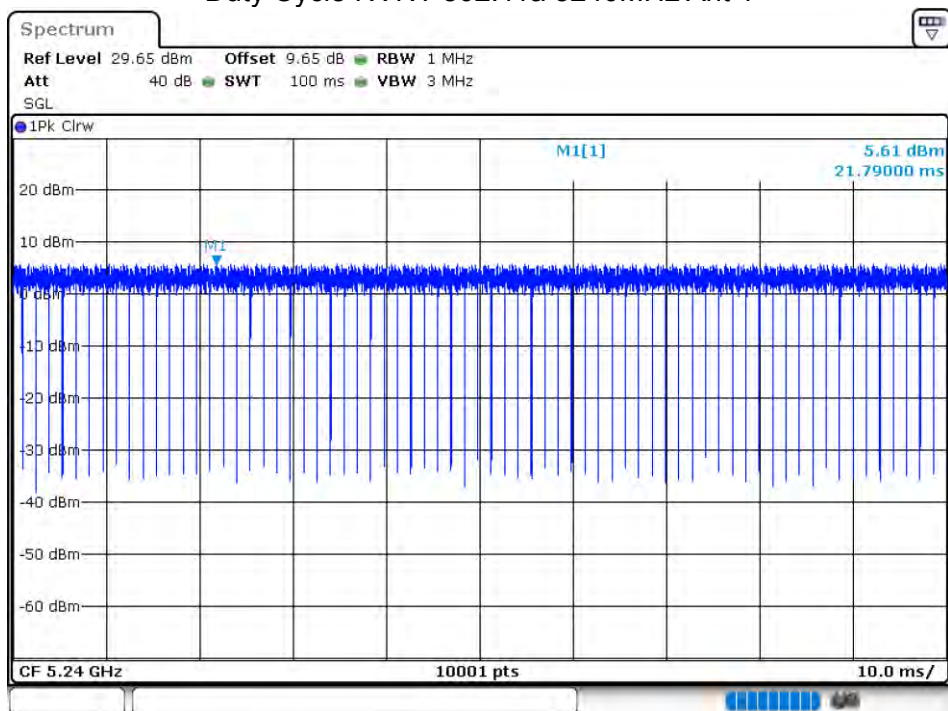


Duty Cycle NVNT 802.11a 5180MHz Ant 2

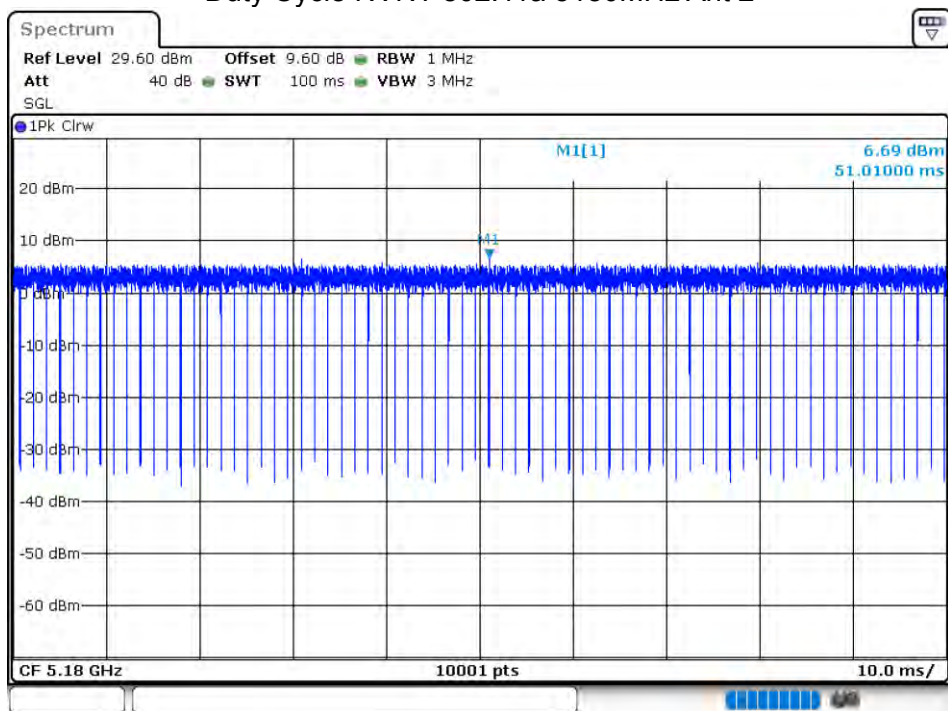


Duty Cycle NVNT 802.11a 5200MHz Ant 2

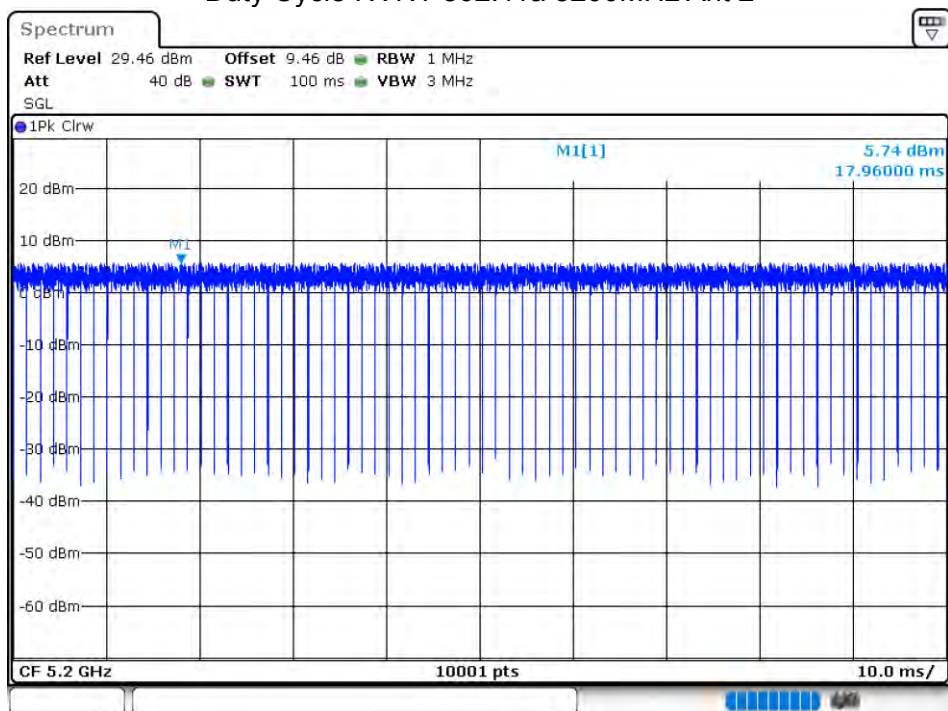


Duty Cycle NVNT 802.11a 5240MHz Ant 2

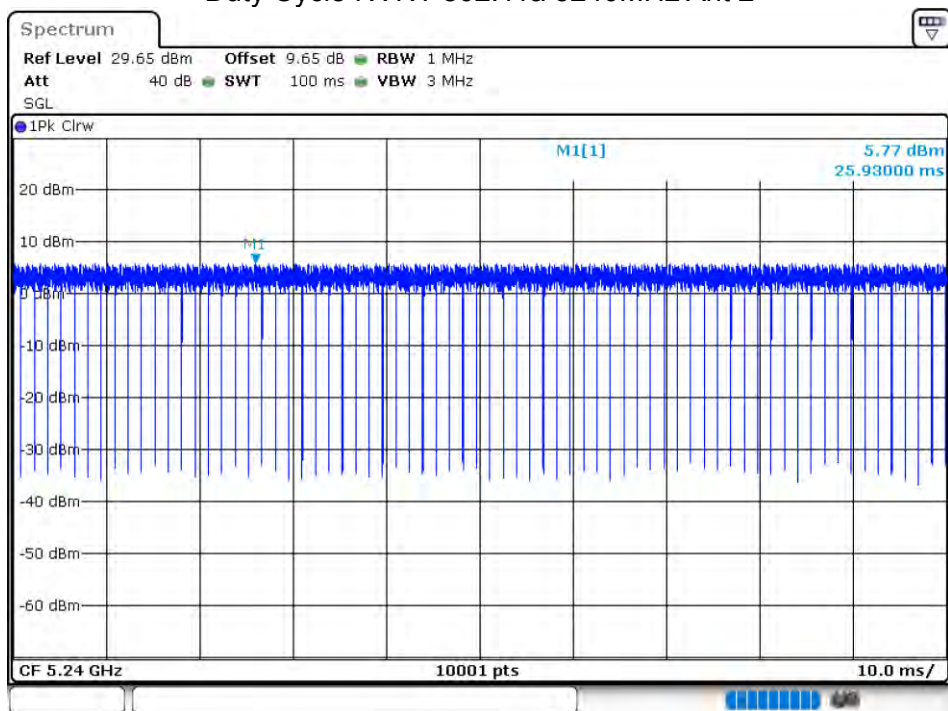


Duty Cycle NVNT 802.11ac20 5180MHz Ant 1

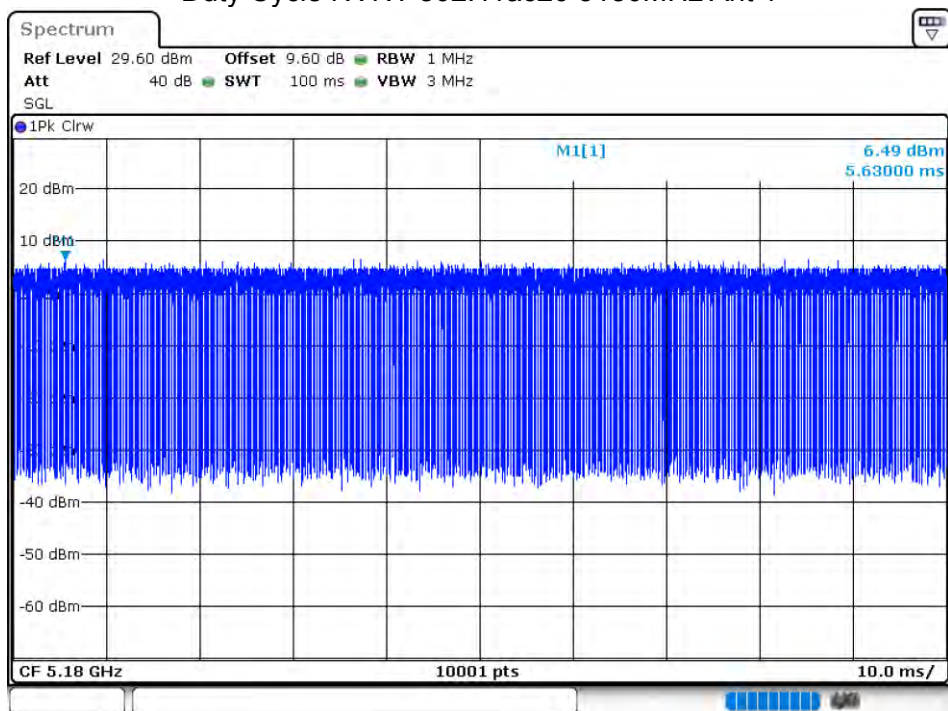


Duty Cycle NVNT 802.11ac20 5200MHz Ant 1

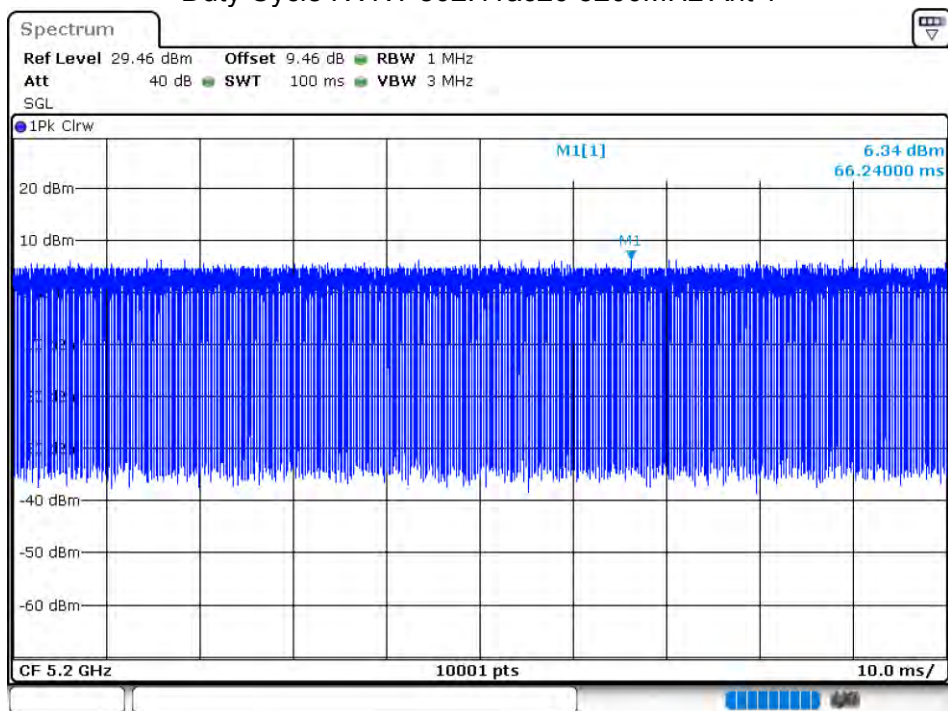


Duty Cycle NVNT 802.11ac20 5240MHz Ant 1

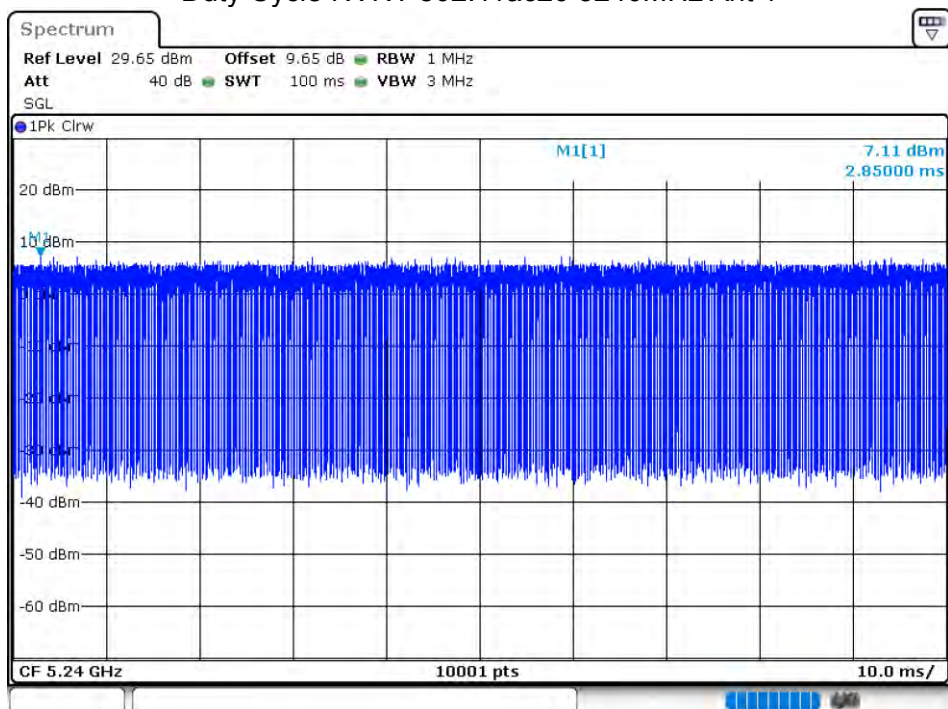


Duty Cycle NVNT 802.11ac20 5180MHz Ant 2

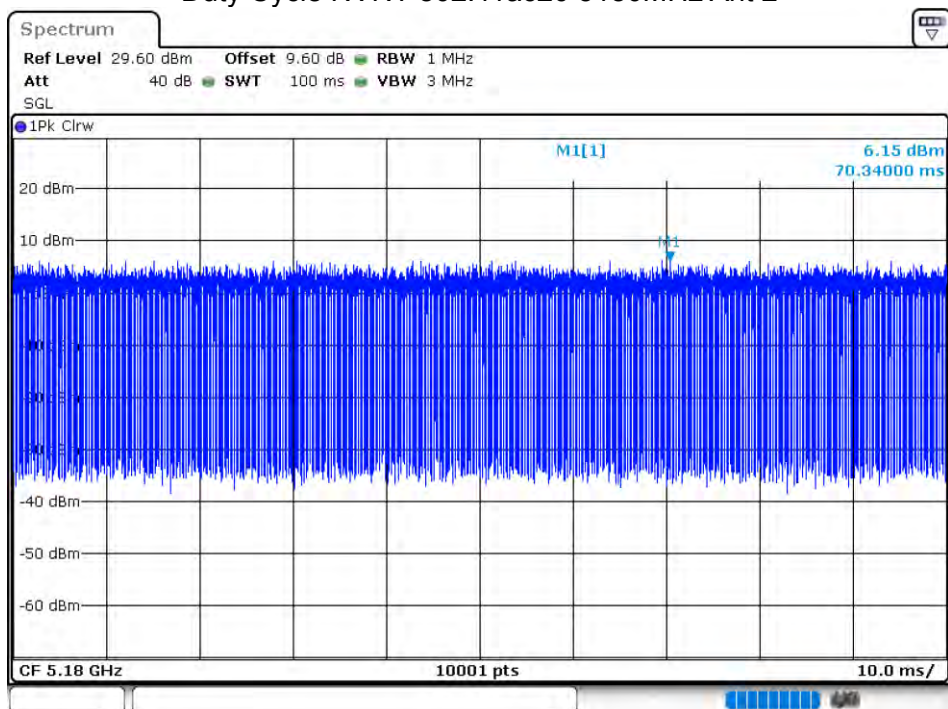


Duty Cycle NVNT 802.11ac20 5200MHz Ant 2

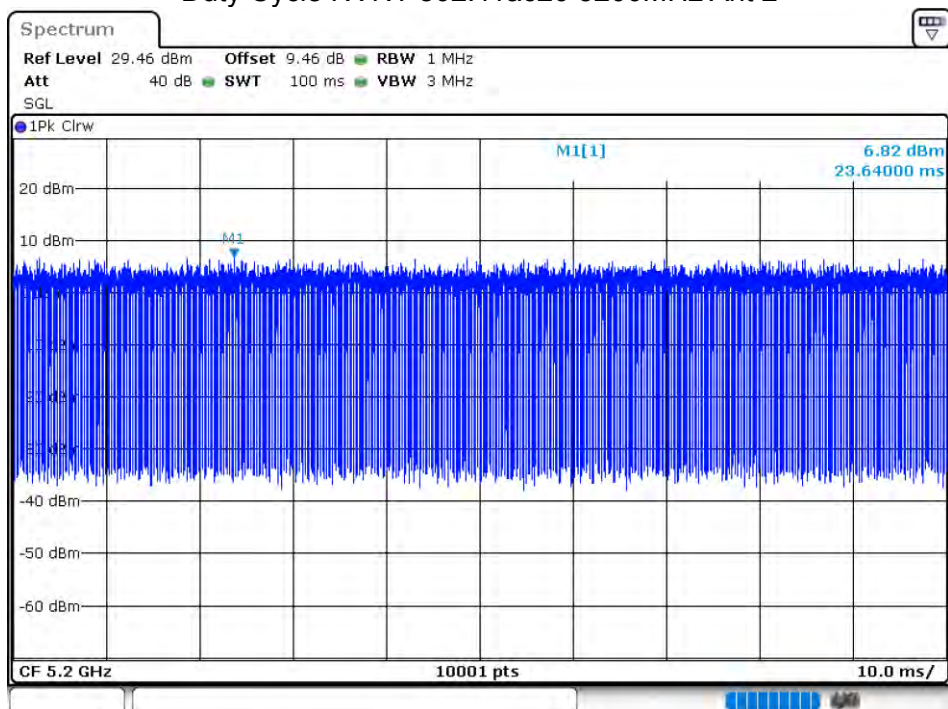


Duty Cycle NVNT 802.11ac20 5240MHz Ant 2

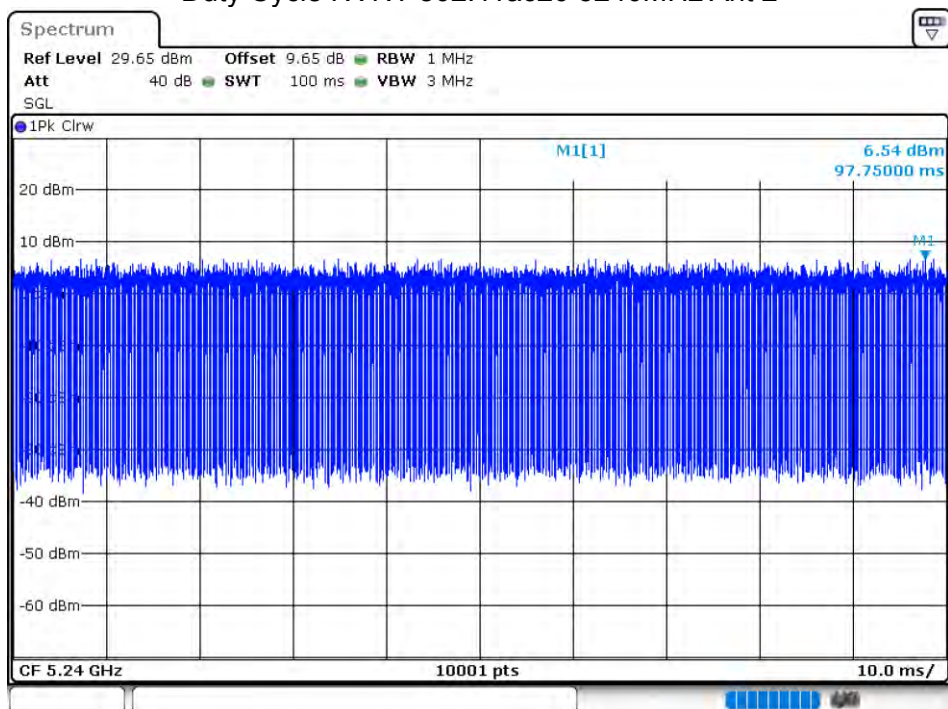


Duty Cycle NVNT 802.11ac40 5190MHz Ant 1

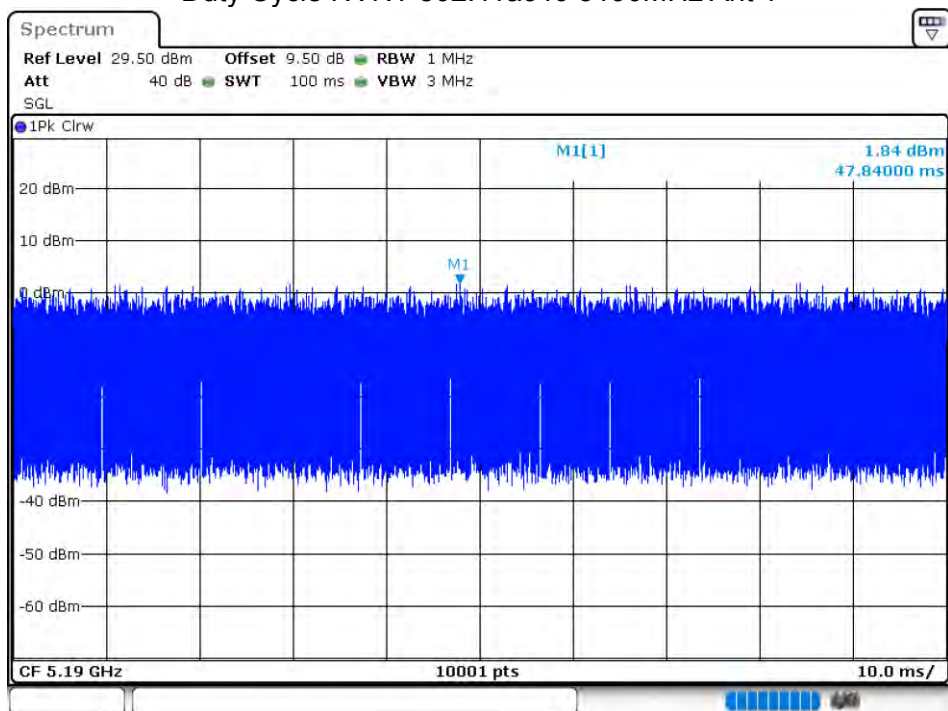


Duty Cycle NVNT 802.11ac40 5230MHz Ant 1

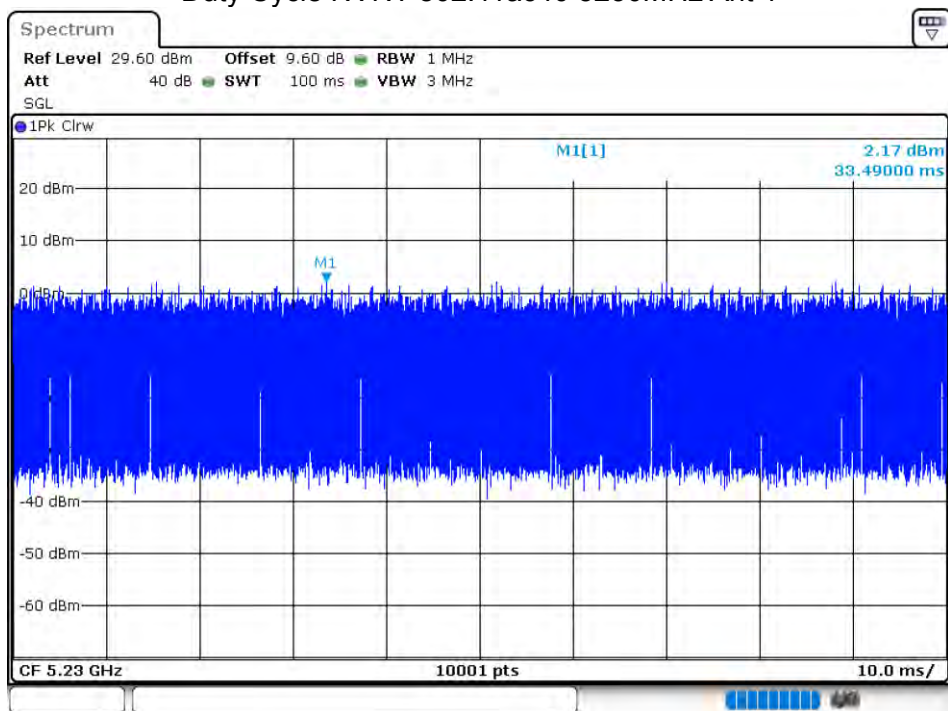


Duty Cycle NVNT 802.11ac40 5190MHz Ant 2

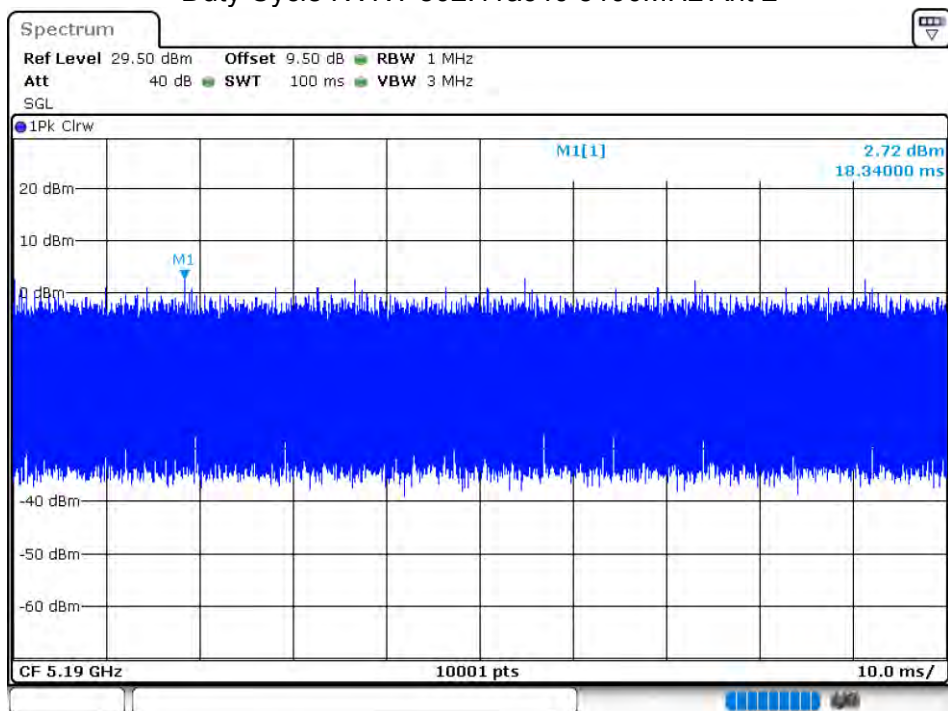


Duty Cycle NVNT 802.11ac40 5230MHz Ant 2

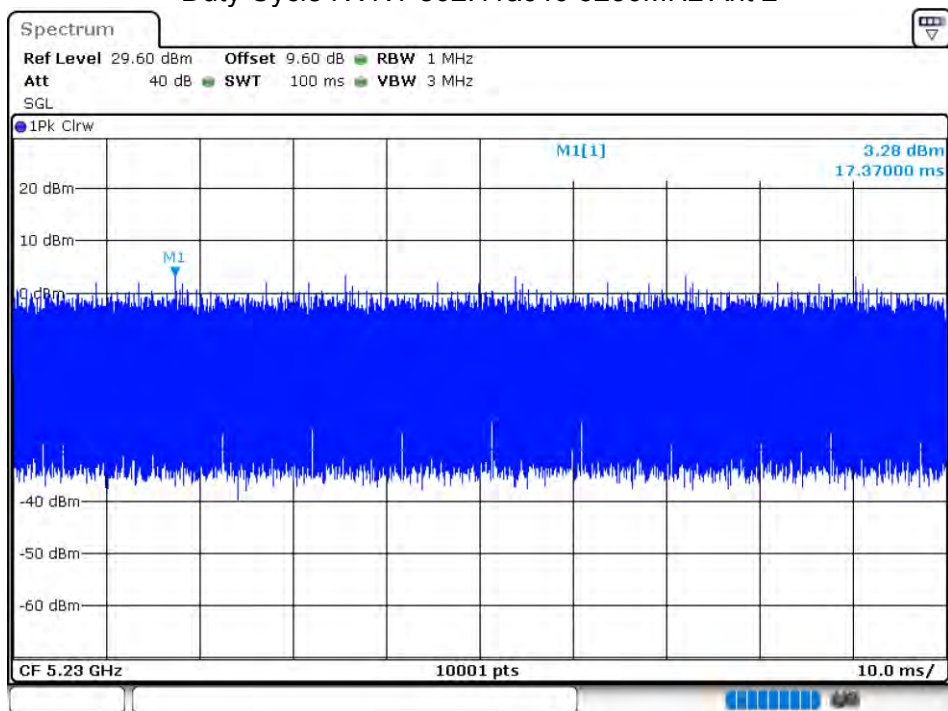


Duty Cycle NVNT 802.11ac80 5210MHz Ant 1

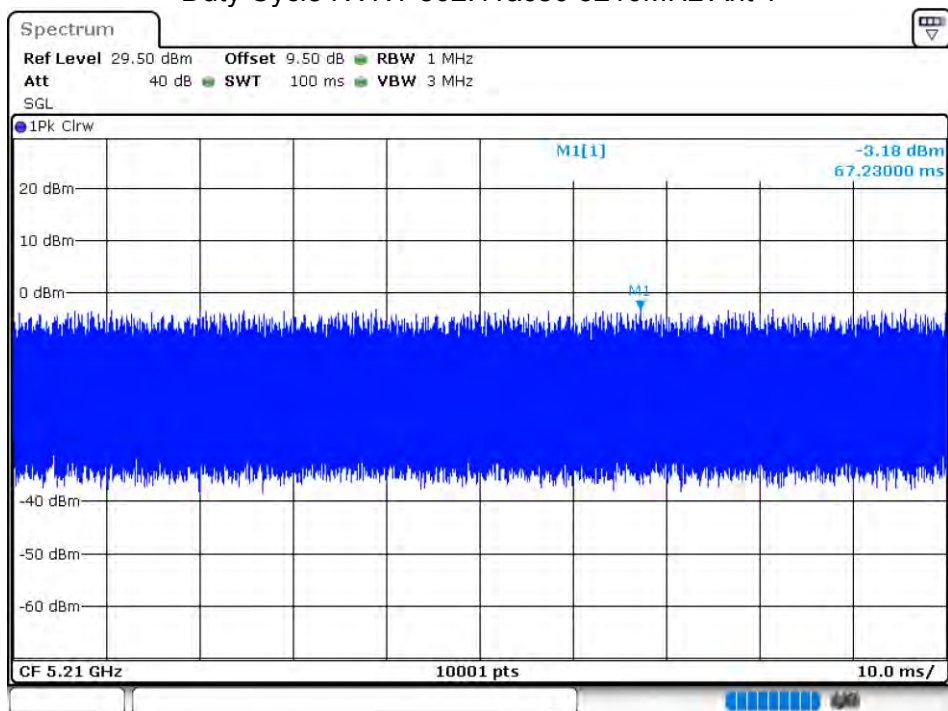


Duty Cycle NVNT 802.11ac80 5210MHz Ant 2

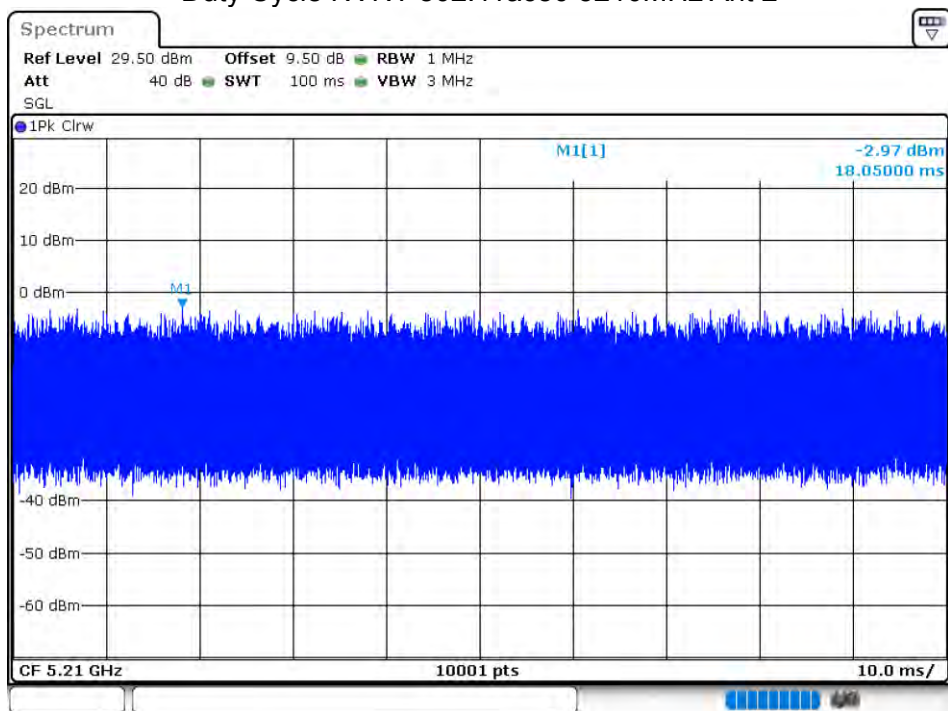


Duty Cycle NVNT 802.11n(HT20) 5180MHz Ant 1

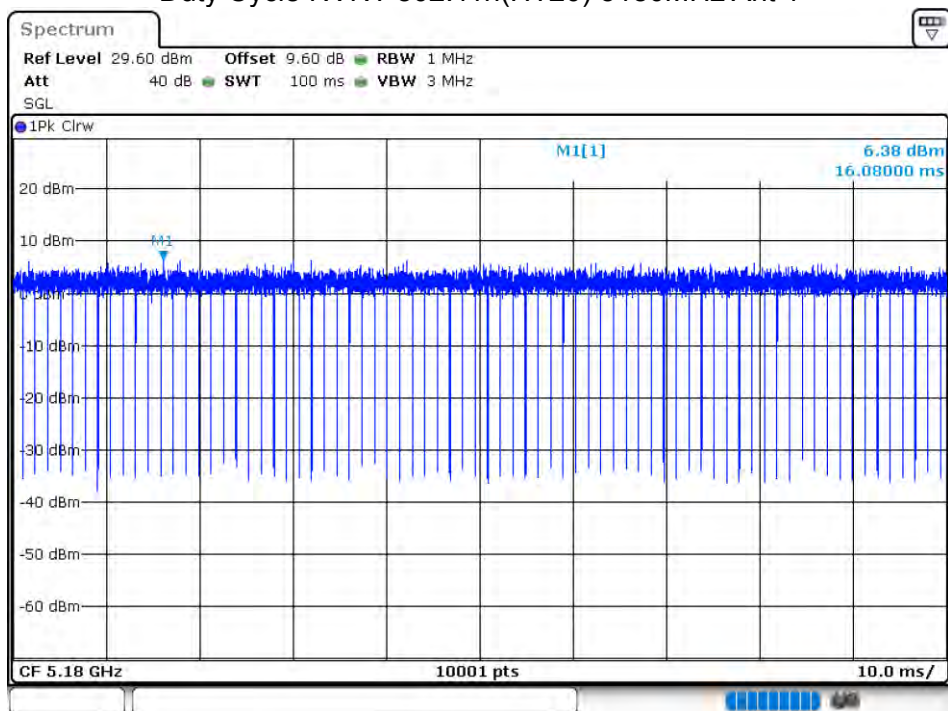


Duty Cycle NVNT 802.11n(HT20) 5200MHz Ant 1

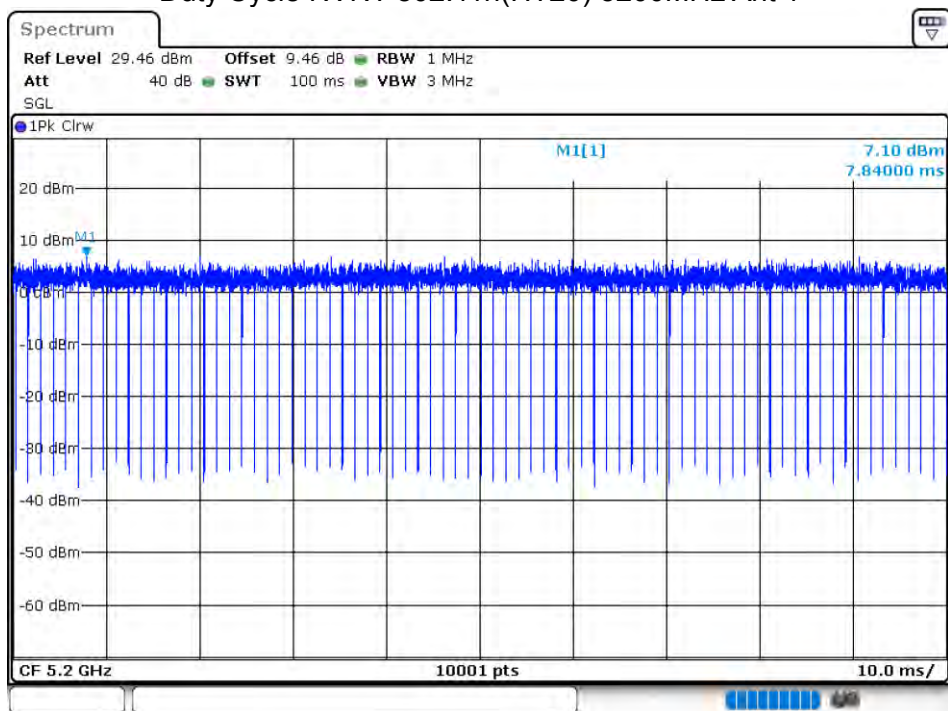


Duty Cycle NVNT 802.11n(HT20) 5240MHz Ant 1

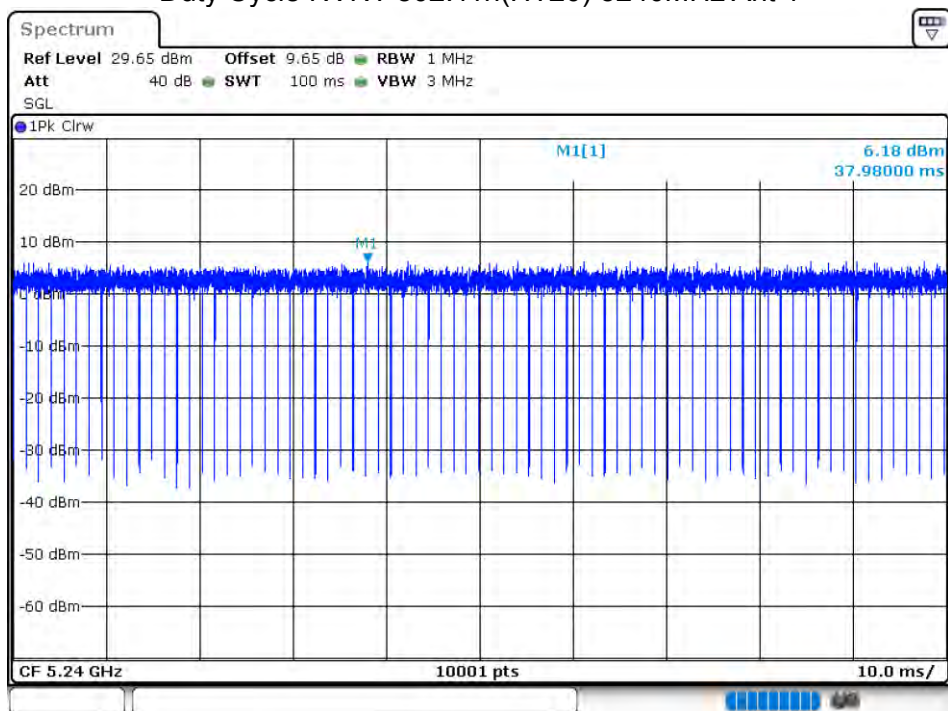


Duty Cycle NVNT 802.11n(HT20) 5180MHz Ant 2

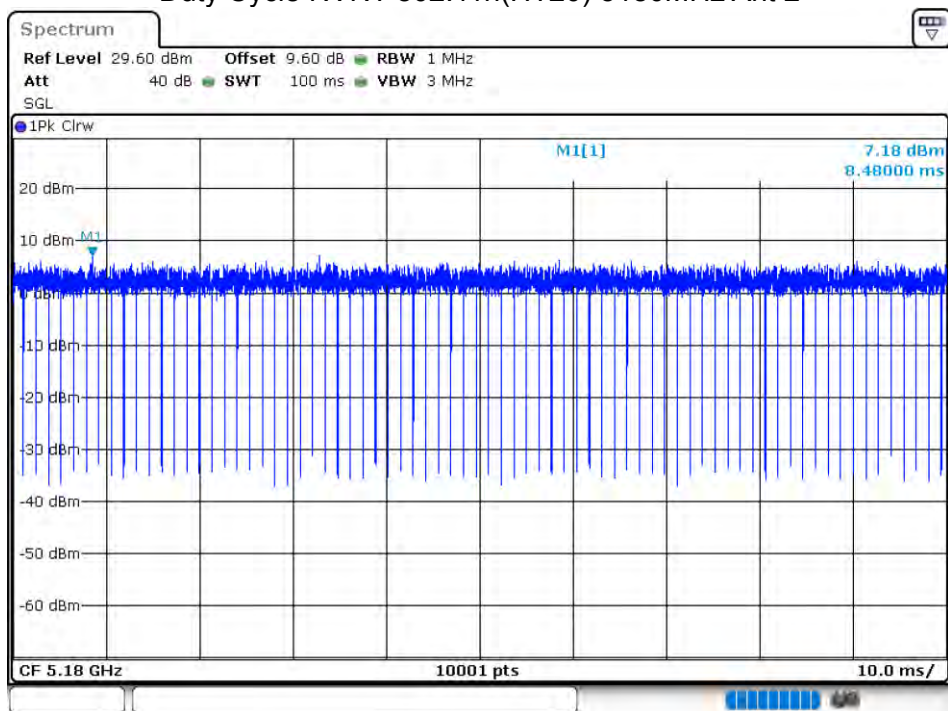


Duty Cycle NVNT 802.11n(HT20) 5200MHz Ant 2

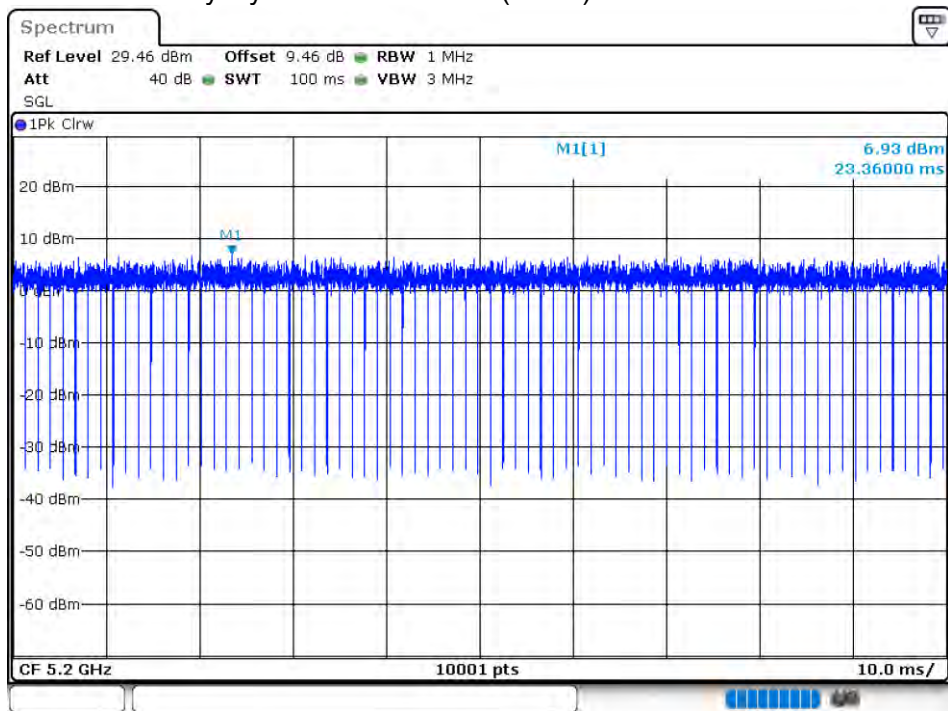


Duty Cycle NVNT 802.11n(HT20) 5240MHz Ant 2

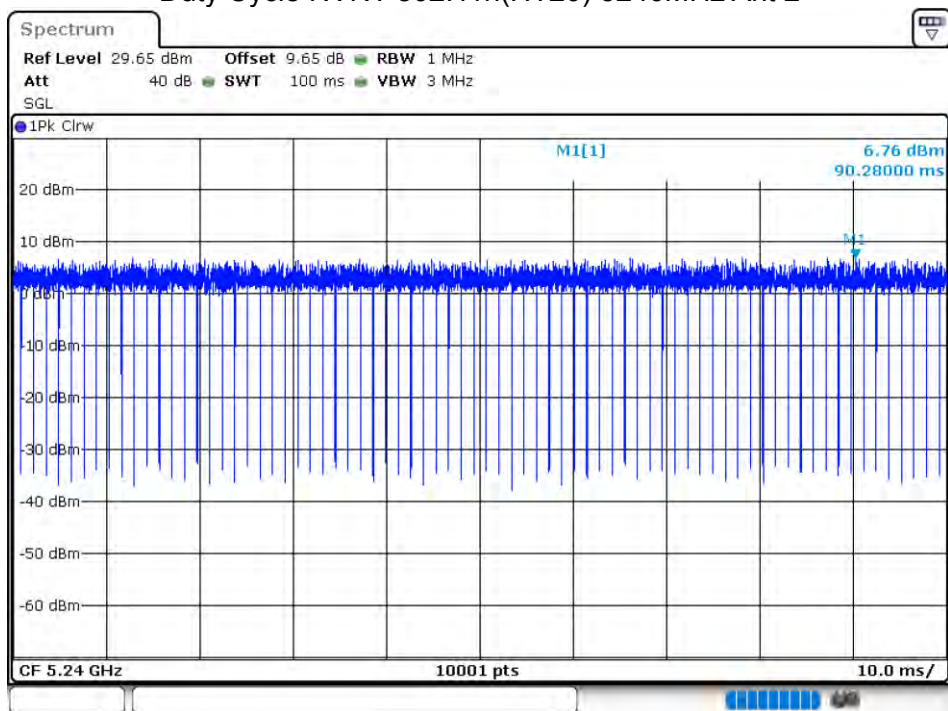


Duty Cycle NVNT 802.11n(HT40) 5190MHz Ant 1

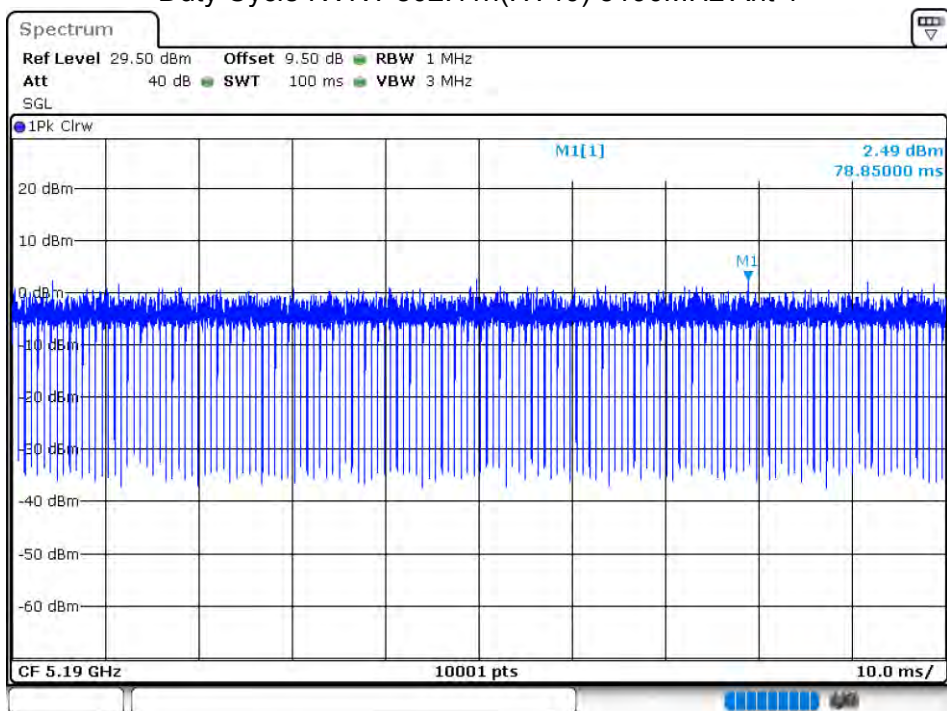


Duty Cycle NVNT 802.11n(HT40) 5230MHz Ant 1

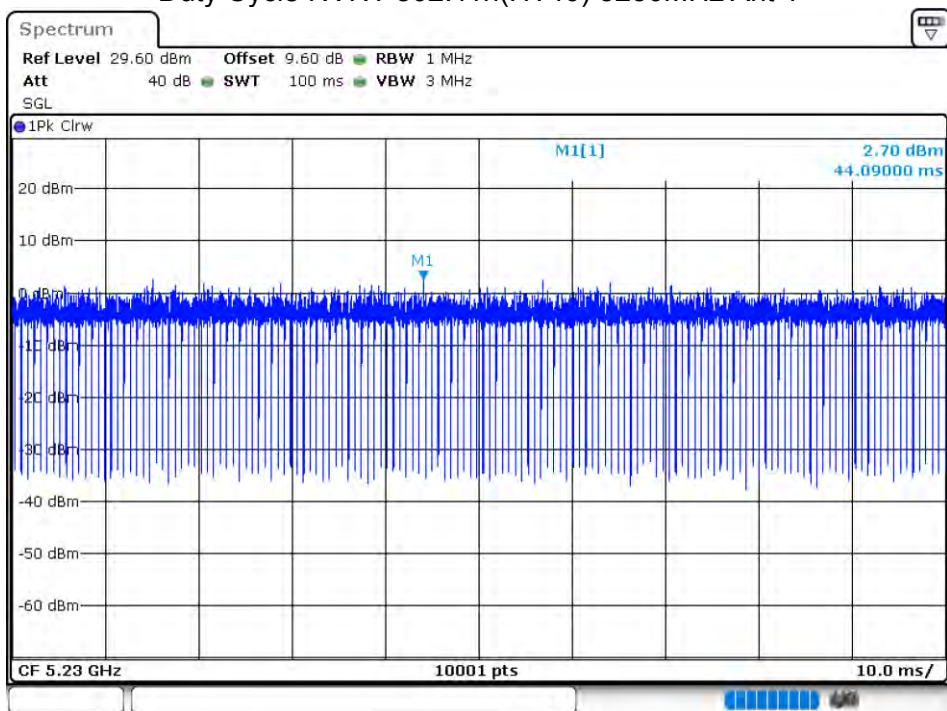

Duty Cycle NVNT 802.11n(HT40) 5190MHz Ant 2

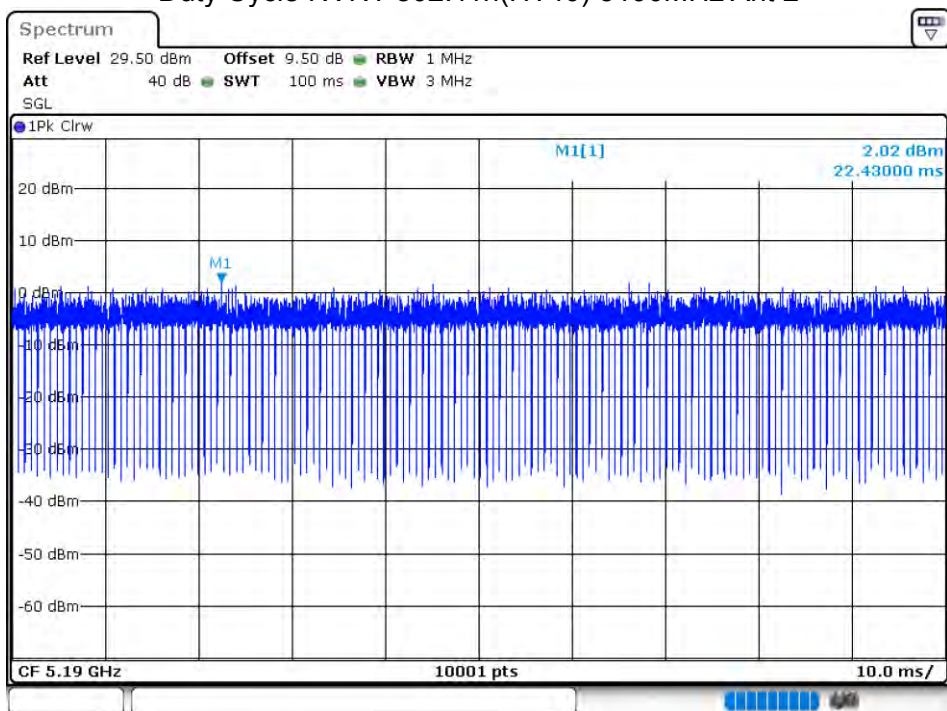


Duty Cycle NVNT 802.11n(HT40) 5230MHz Ant 2

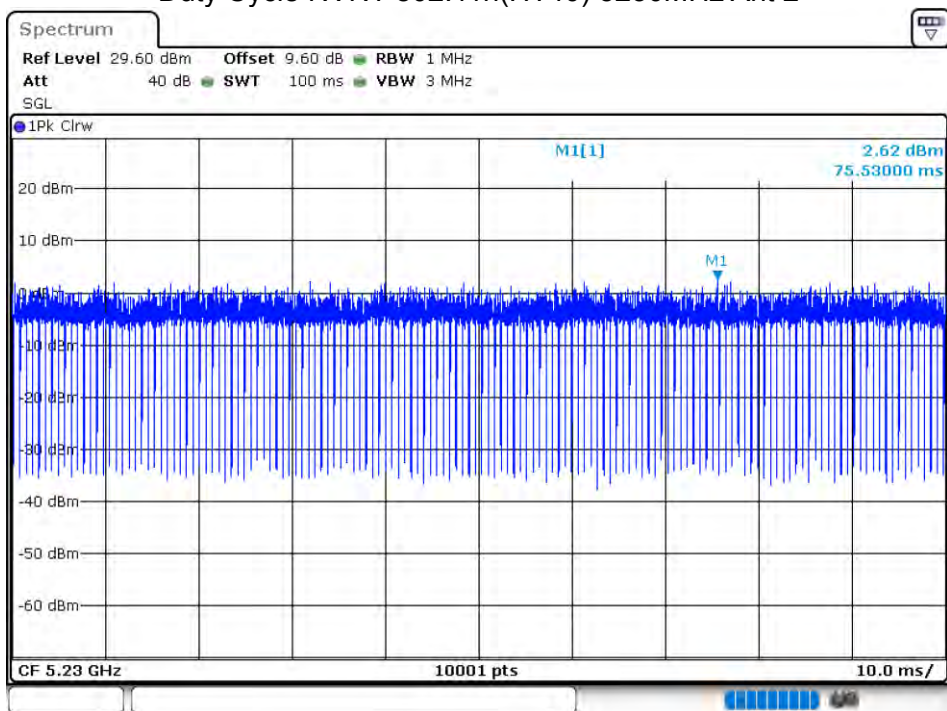


5.3G:

Antenna	Condition	Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)
Ant 1	NVNT	802.11a	5260	100	0
Ant 1	NVNT	802.11a	5280	100	0
Ant 1	NVNT	802.11a	5320	100	0
Ant 2	NVNT	802.11a	5260	100	0
Ant 2	NVNT	802.11a	5280	100	0
Ant 2	NVNT	802.11a	5320	100	0
Ant 1	NVNT	802.11ac20	5260	100	0
Ant 1	NVNT	802.11ac20	5280	100	0
Ant 1	NVNT	802.11ac20	5320	100	0
Ant 2	NVNT	802.11ac20	5260	100	0
Ant 2	NVNT	802.11ac20	5280	100	0
Ant 2	NVNT	802.11ac20	5320	100	0
Ant 1	NVNT	802.11ac40	5270	100	0
Ant 1	NVNT	802.11ac40	5310	100	0
Ant 2	NVNT	802.11ac40	5270	100	0
Ant 2	NVNT	802.11ac40	5310	100	0
Ant 1	NVNT	802.11ac80	5290	100	0
Ant 2	NVNT	802.11ac80	5290	100	0
Ant 1	NVNT	802.11n(HT20)	5260	100	0
Ant 1	NVNT	802.11n(HT20)	5280	100	0
Ant 1	NVNT	802.11n(HT20)	5320	100	0
Ant 2	NVNT	802.11n(HT20)	5260	100	0
Ant 2	NVNT	802.11n(HT20)	5280	100	0
Ant 2	NVNT	802.11n(HT20)	5320	100	0
Ant 1	NVNT	802.11n(HT40)	5270	100	0
Ant 1	NVNT	802.11n(HT40)	5310	100	0
Ant 2	NVNT	802.11n(HT40)	5270	100	0
Ant 2	NVNT	802.11n(HT40)	5310	100	0


Duty Cycle NVNT 802.11a 5260MHz Ant 1

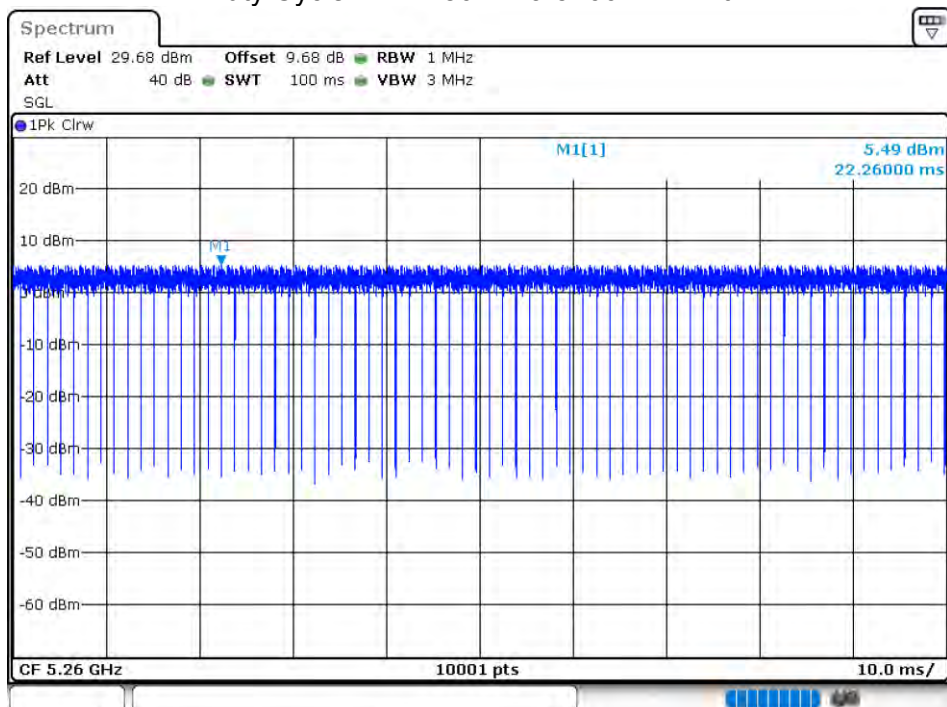


Duty Cycle NVNT 802.11a 5280MHz Ant 1

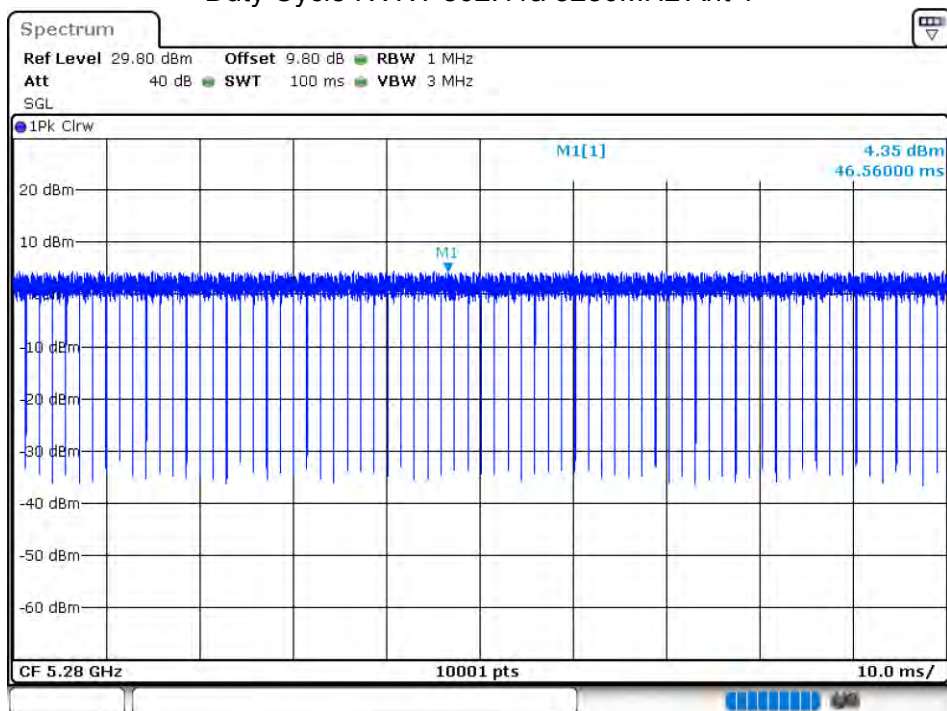


Duty Cycle NVNT 802.11a 5320MHz Ant 1

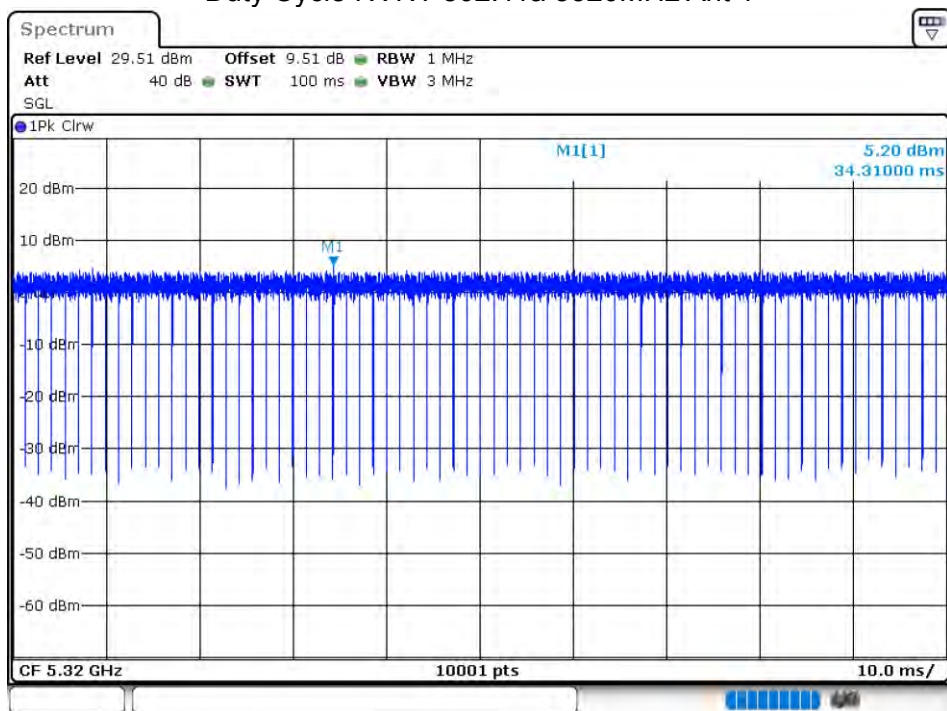


Duty Cycle NVNT 802.11a 5260MHz Ant 2

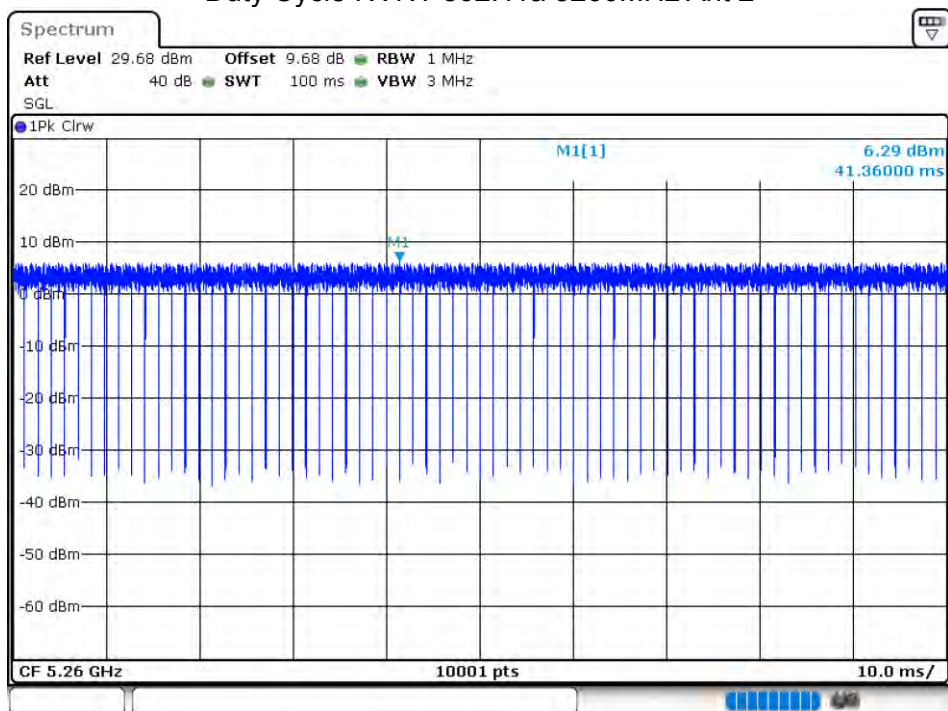


Duty Cycle NVNT 802.11a 5280MHz Ant 2

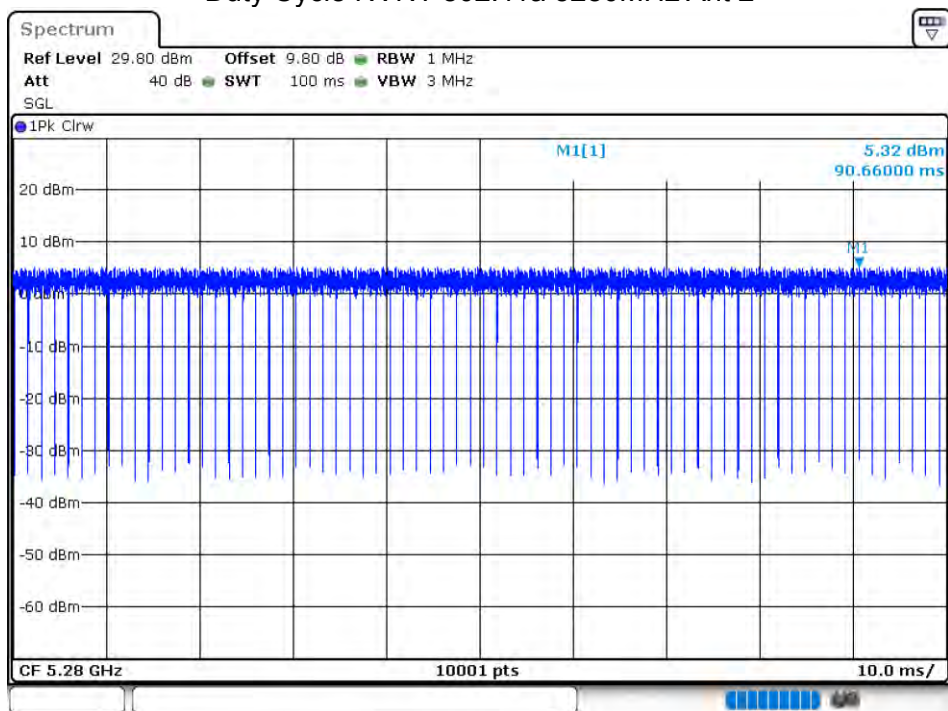


Duty Cycle NVNT 802.11a 5320MHz Ant 2

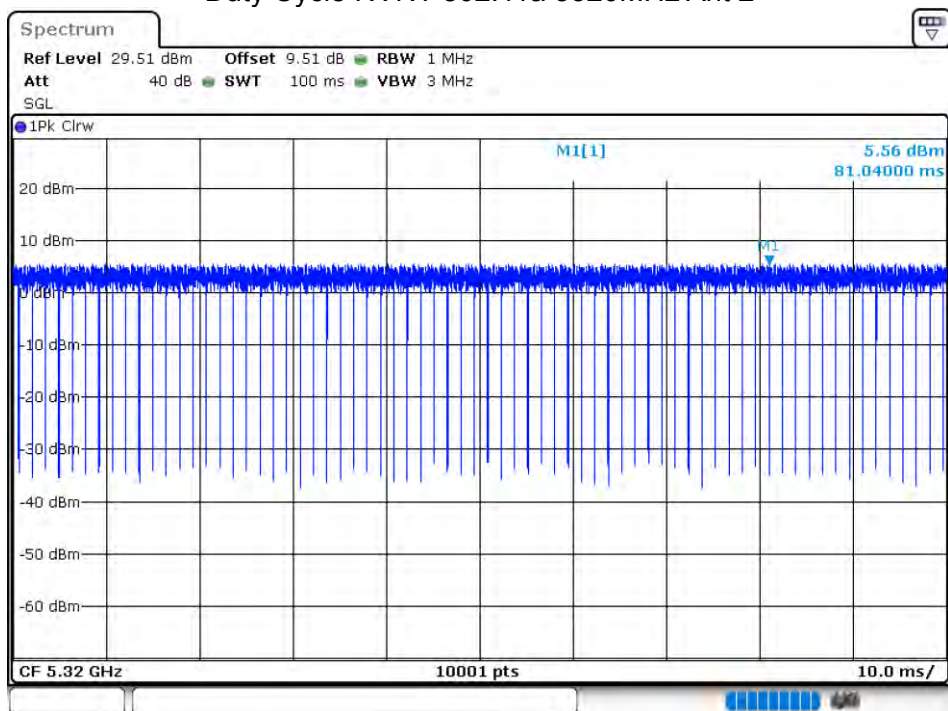


Duty Cycle NVNT 802.11ac20 5260MHz Ant 1

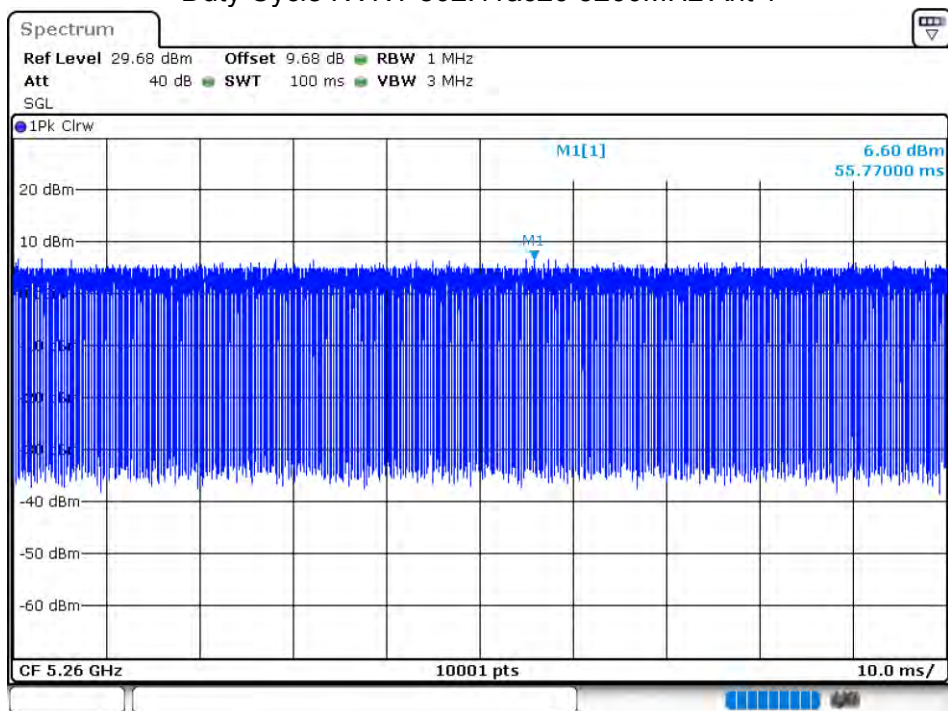


Duty Cycle NVNT 802.11ac20 5280MHz Ant 1

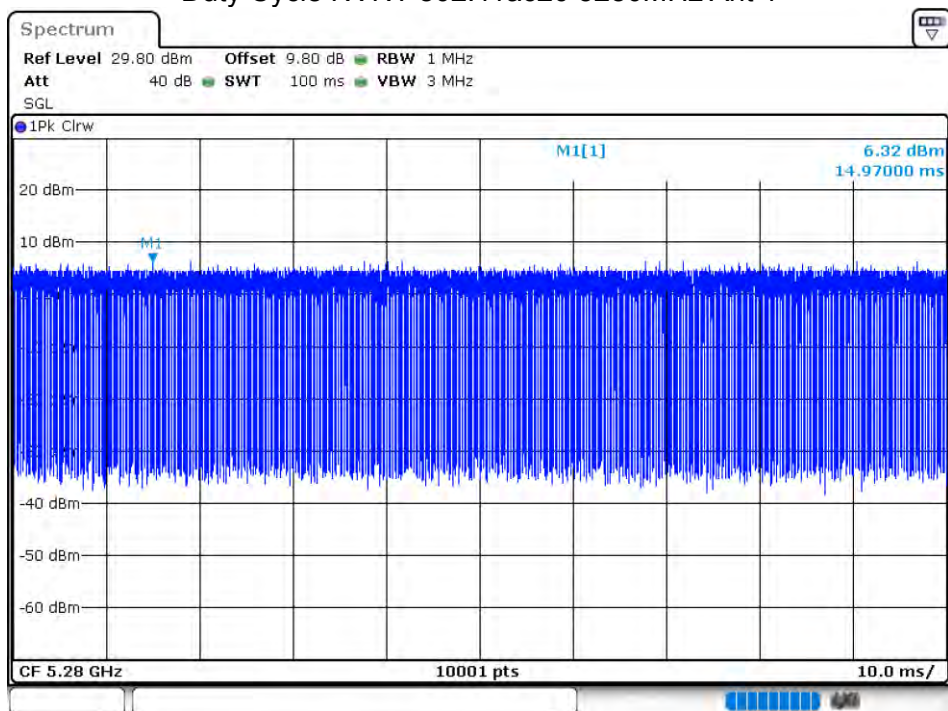


Duty Cycle NVNT 802.11ac20 5320MHz Ant 1

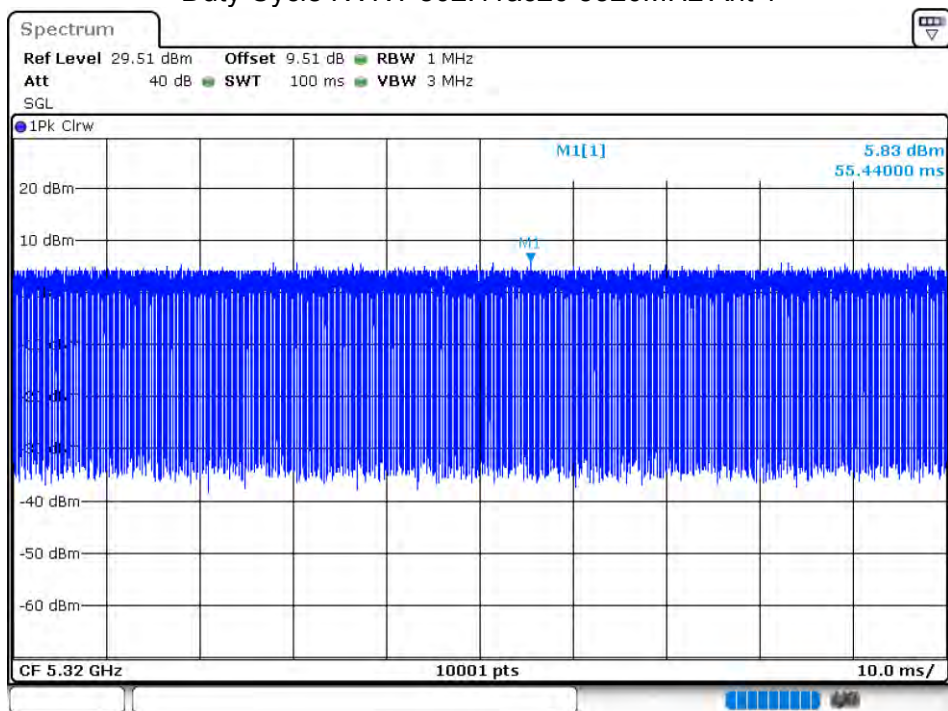


Duty Cycle NVNT 802.11ac20 5260MHz Ant 2

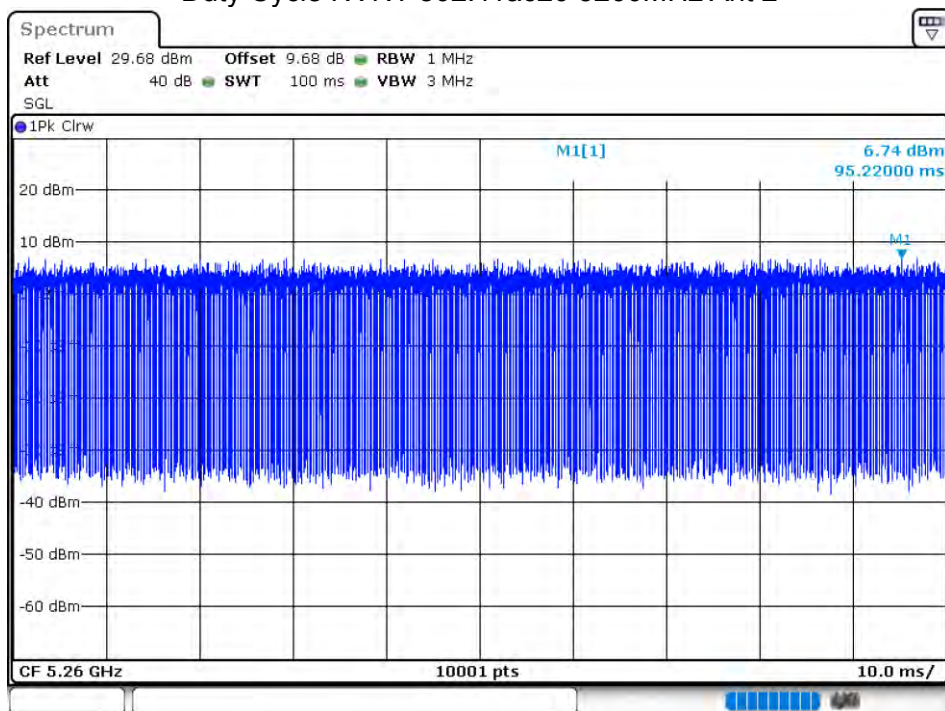


Duty Cycle NVNT 802.11ac20 5280MHz Ant 2

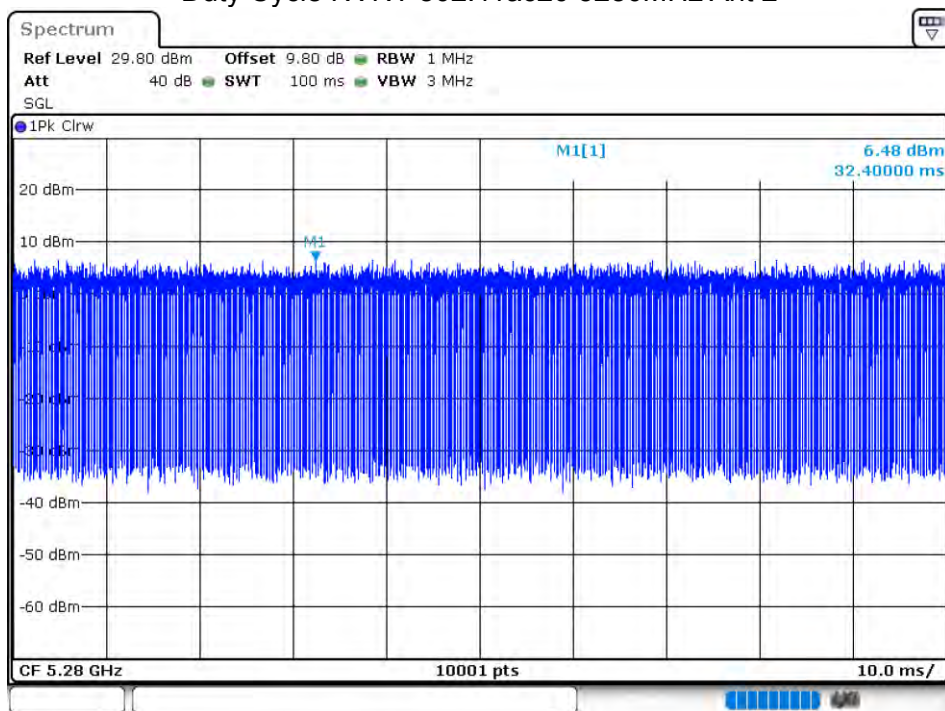


Duty Cycle NVNT 802.11ac20 5320MHz Ant 2

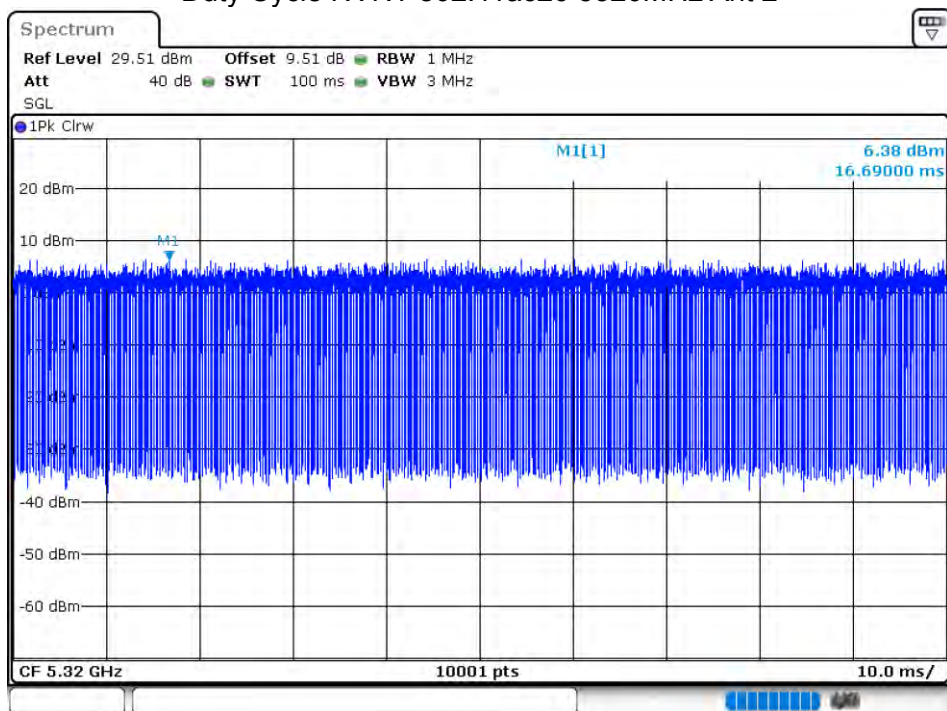


Duty Cycle NVNT 802.11ac40 5270MHz Ant 1

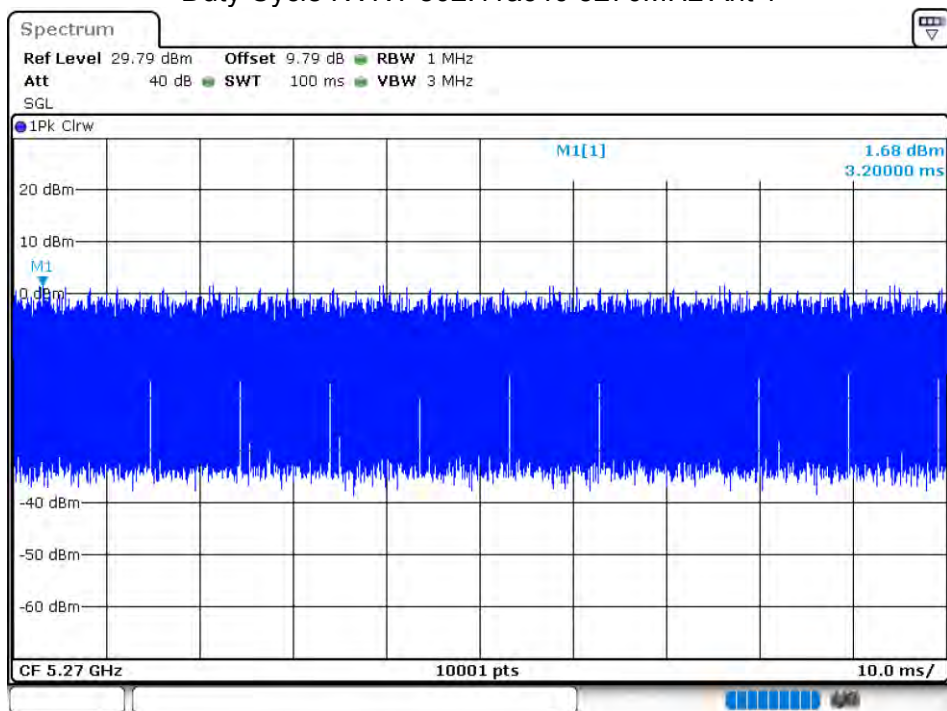


Duty Cycle NVNT 802.11ac40 5310MHz Ant 1

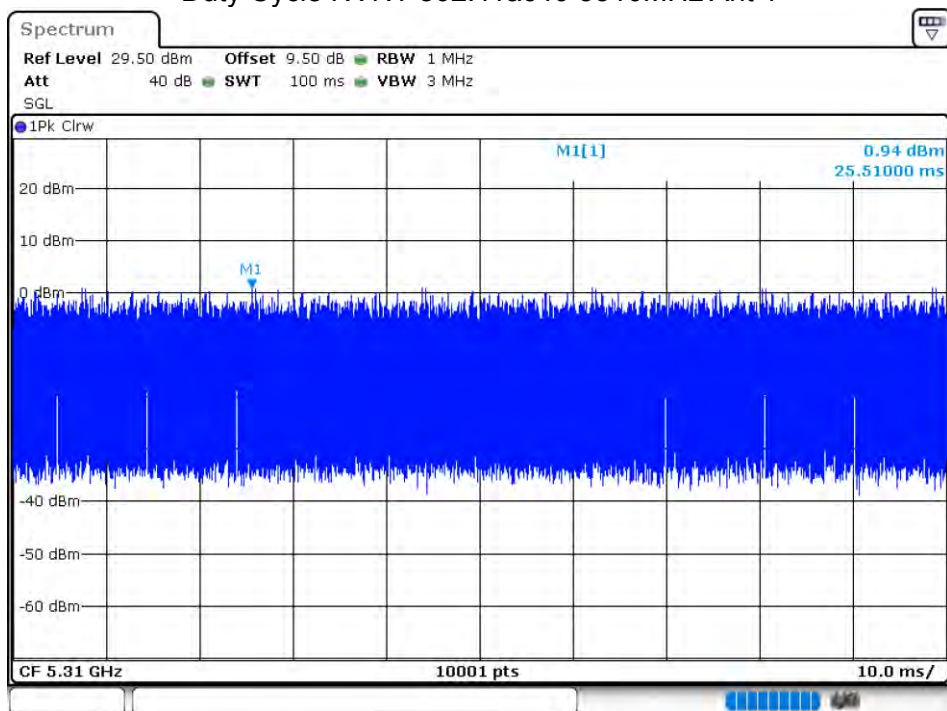


Duty Cycle NVNT 802.11ac40 5270MHz Ant 2

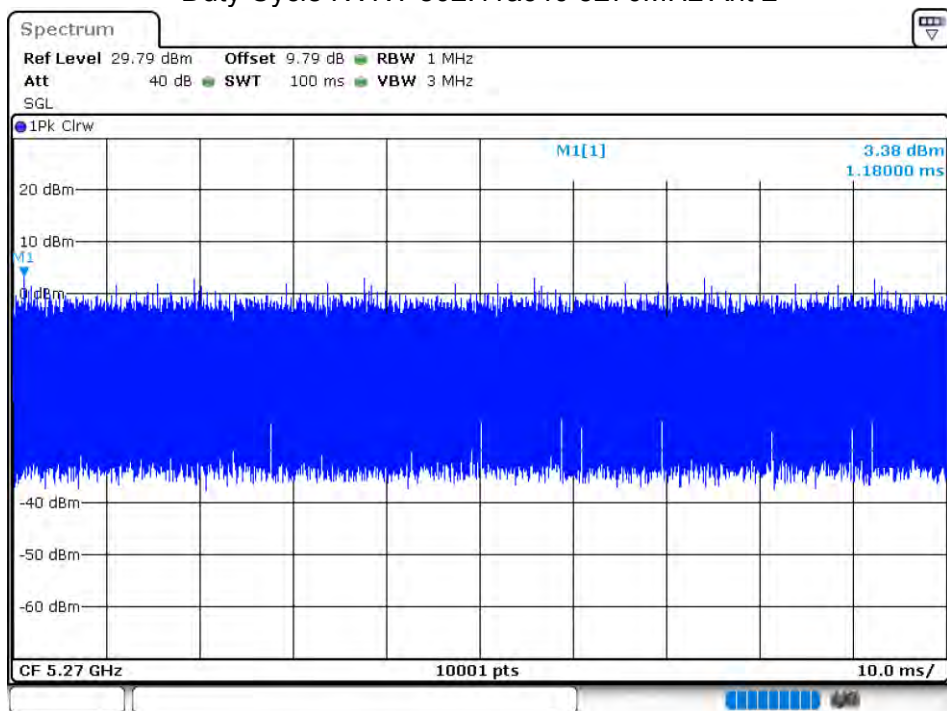


Duty Cycle NVNT 802.11ac40 5310MHz Ant 2

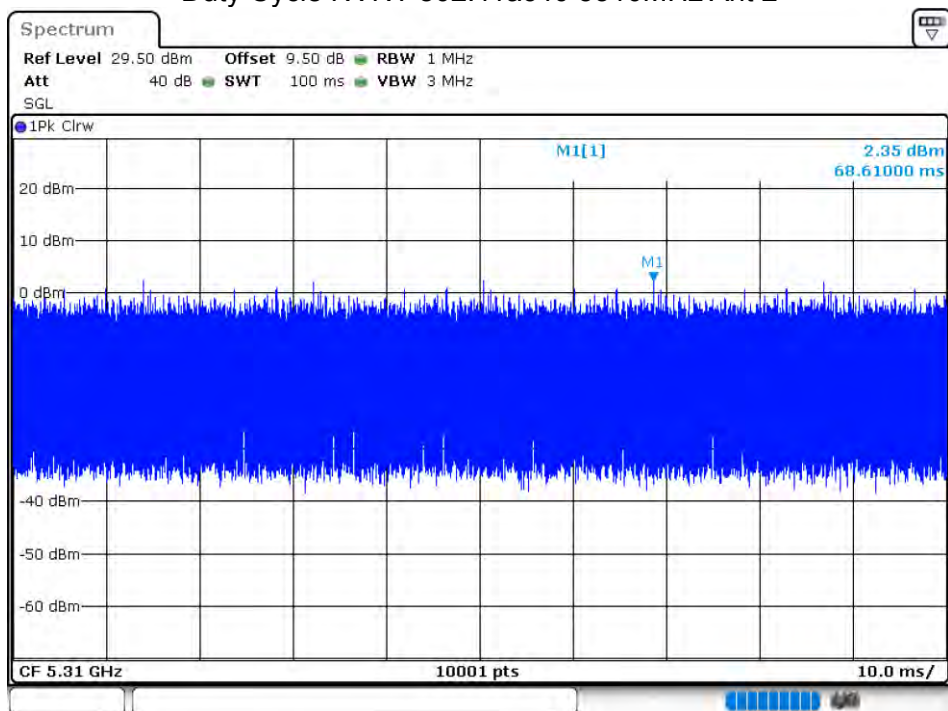


Duty Cycle NVNT 802.11ac80 5290MHz Ant 1

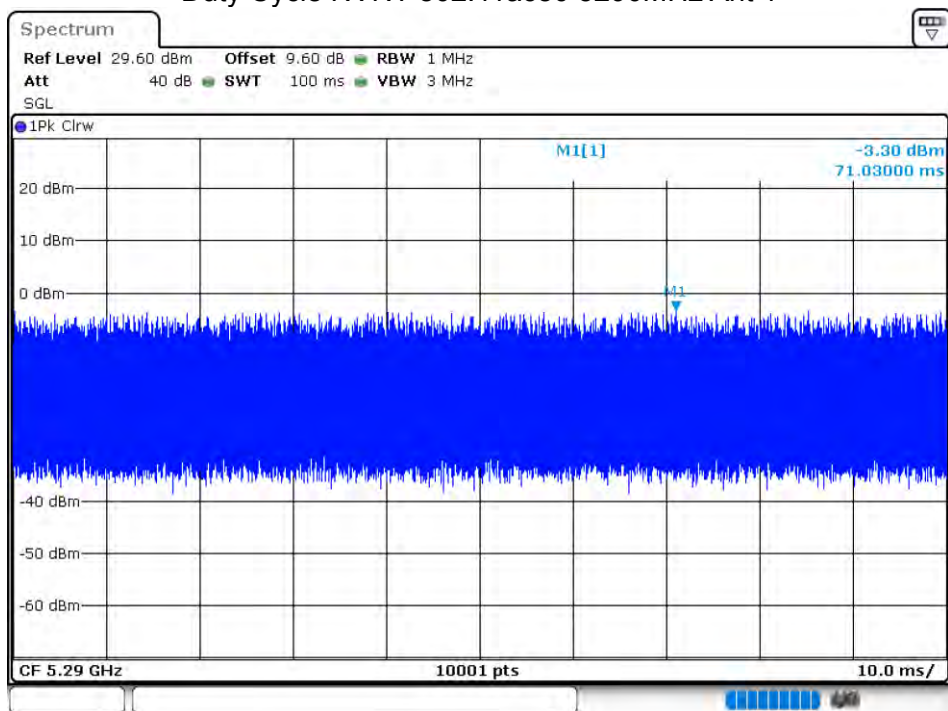


Duty Cycle NVNT 802.11ac80 5290MHz Ant 2

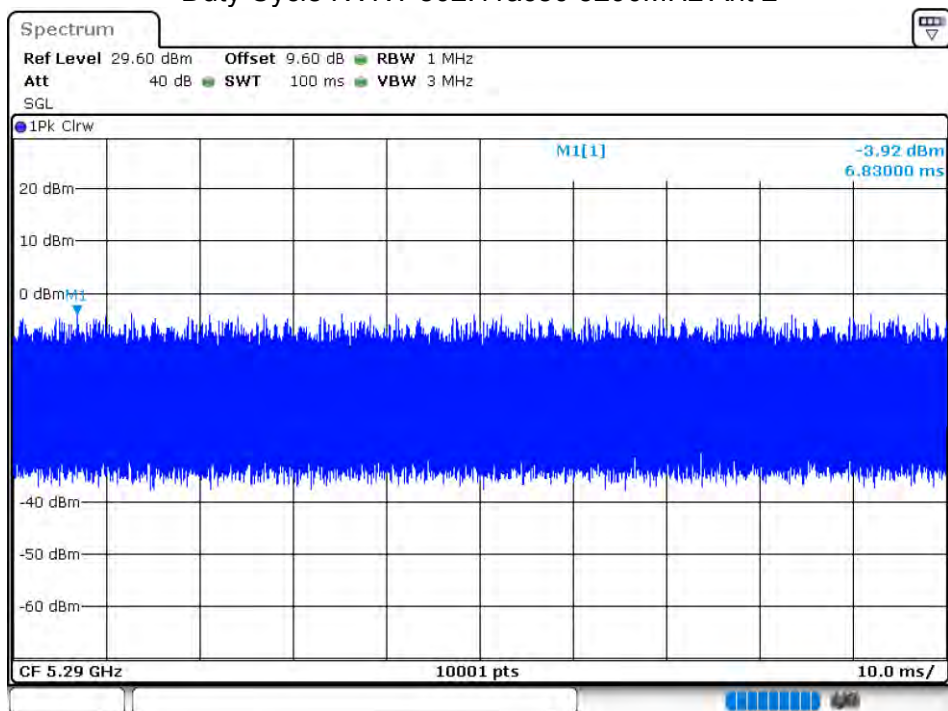


Duty Cycle NVNT 802.11n(HT20) 5260MHz Ant 1

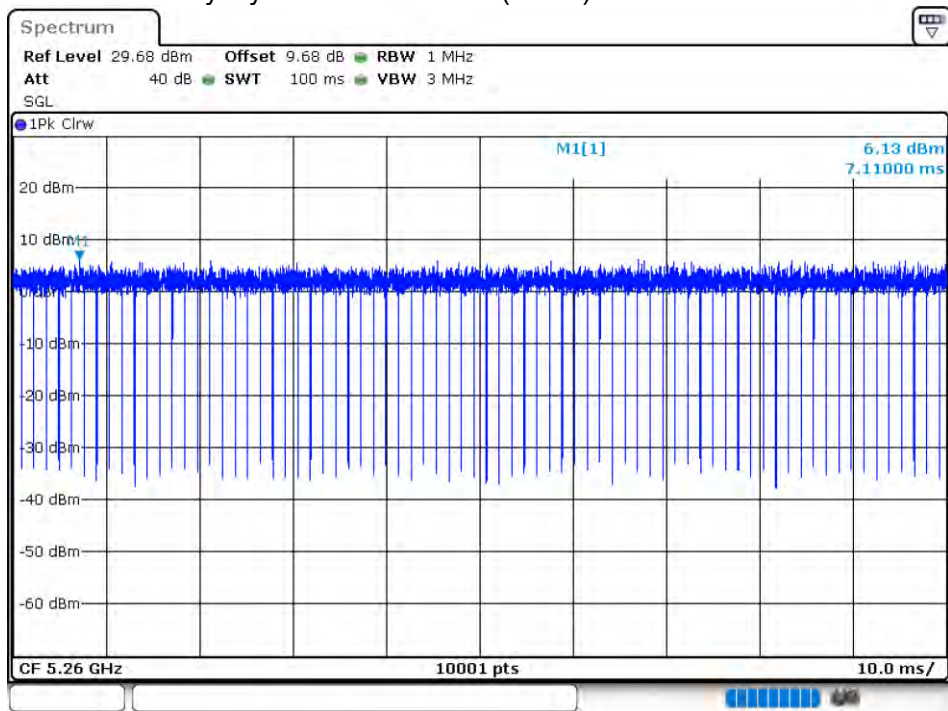


Duty Cycle NVNT 802.11n(HT20) 5280MHz Ant 1

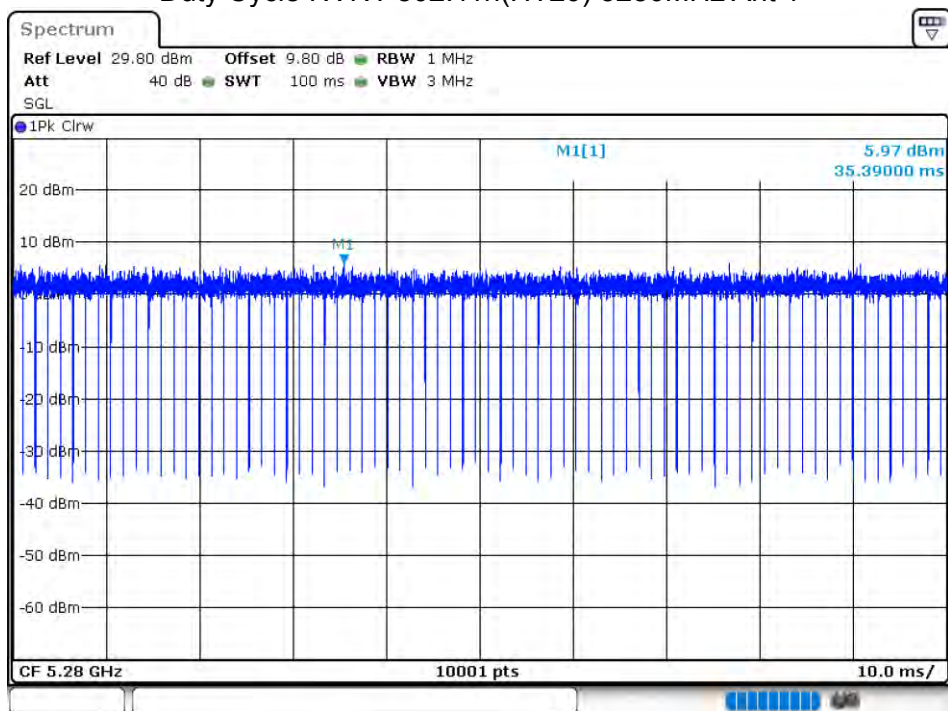


Duty Cycle NVNT 802.11n(HT20) 5320MHz Ant 1

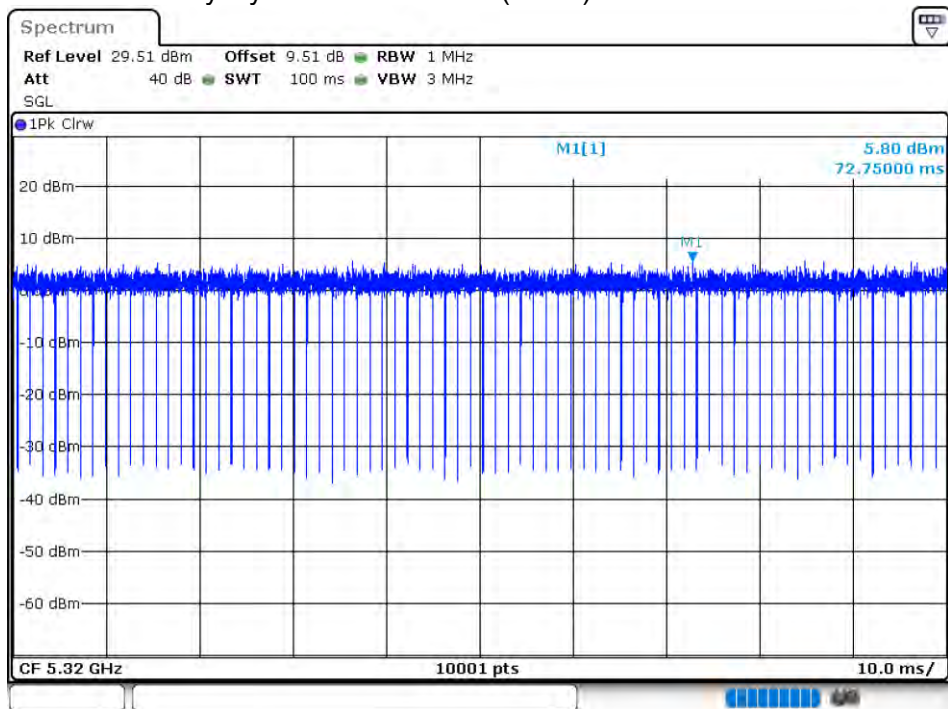


Duty Cycle NVNT 802.11n(HT20) 5260MHz Ant 2

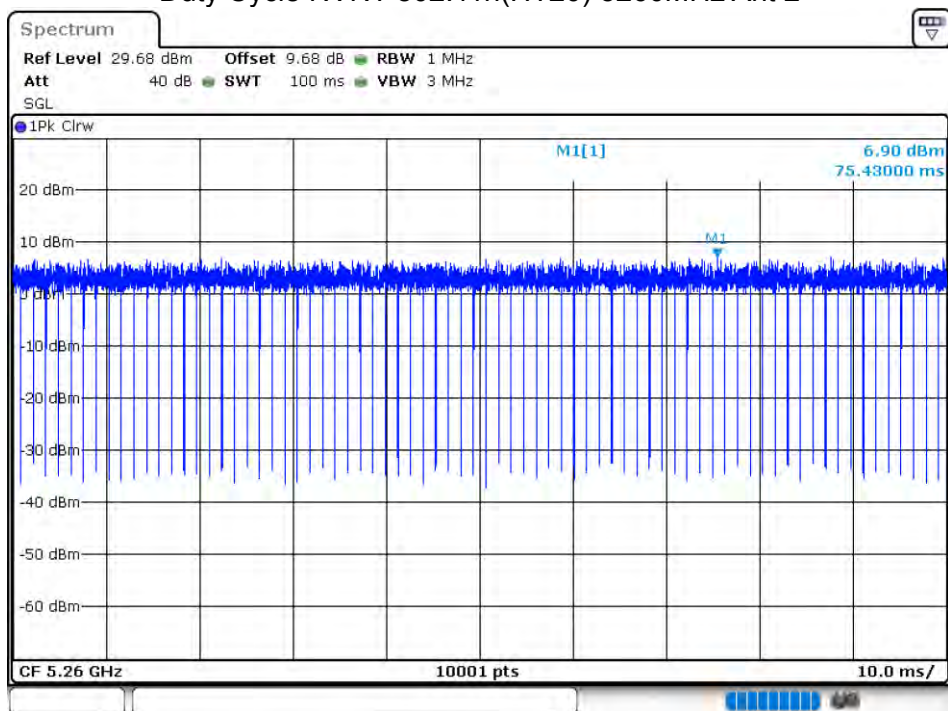


Duty Cycle NVNT 802.11n(HT20) 5280MHz Ant 2

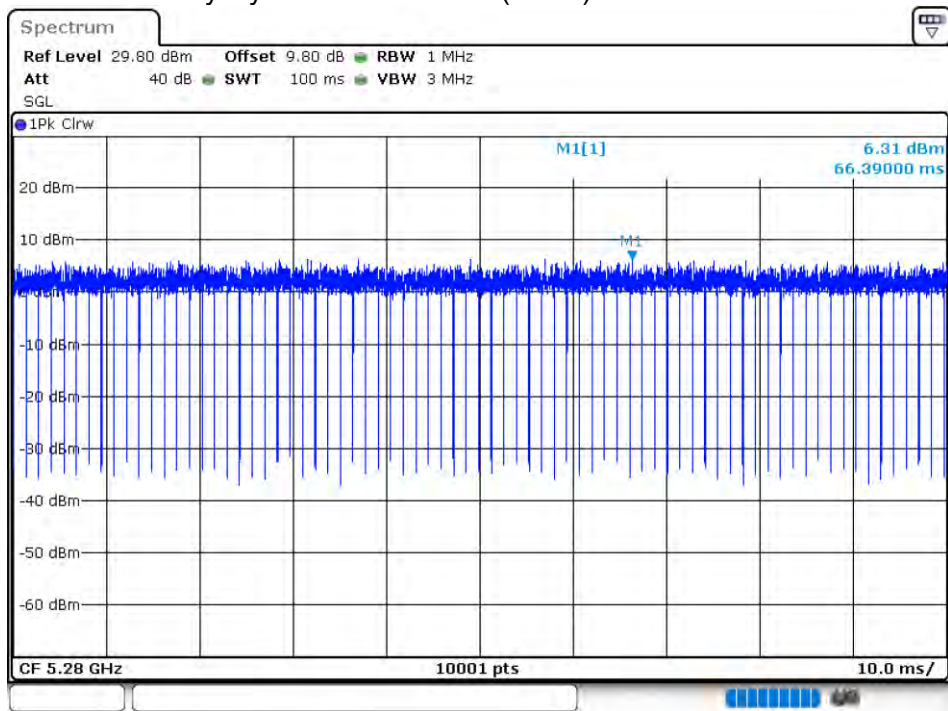


Duty Cycle NVNT 802.11n(HT20) 5320MHz Ant 2

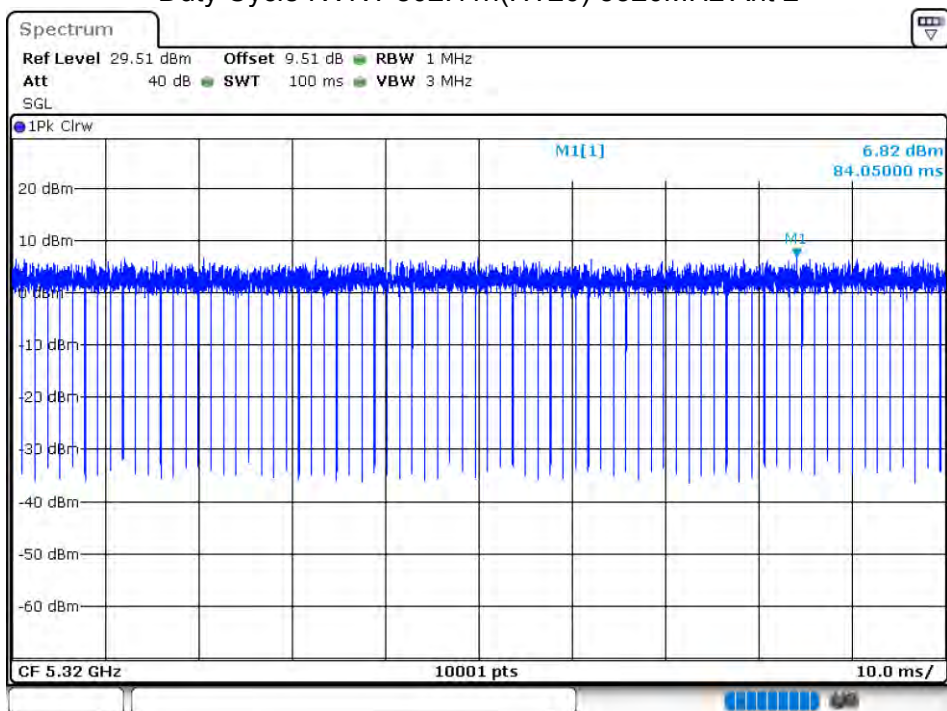


Duty Cycle NVNT 802.11n(HT40) 5270MHz Ant 1

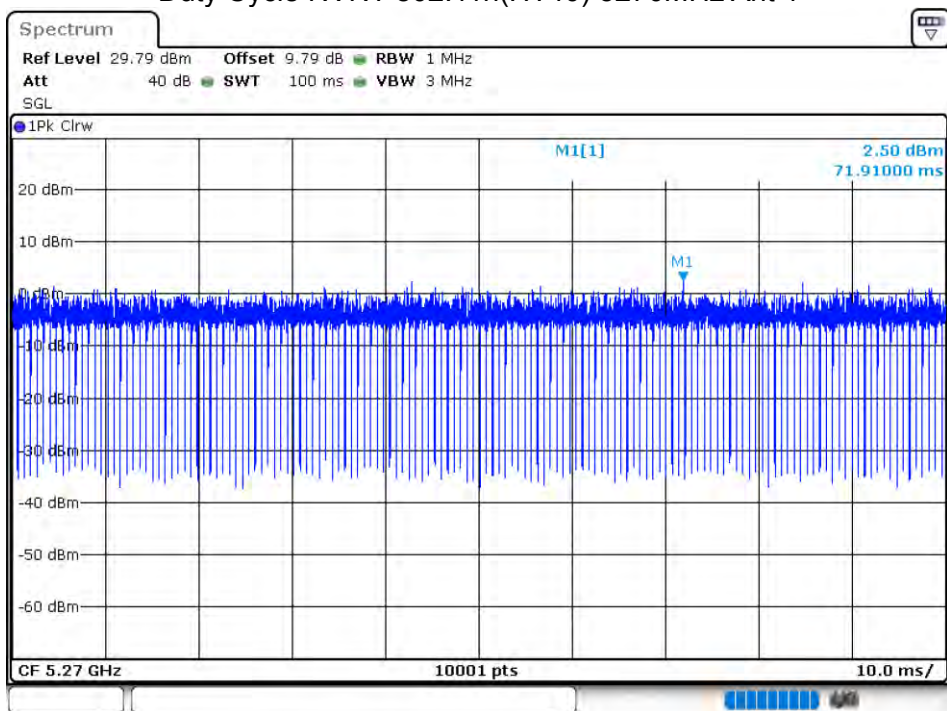


Duty Cycle NVNT 802.11n(HT40) 5310MHz Ant 1

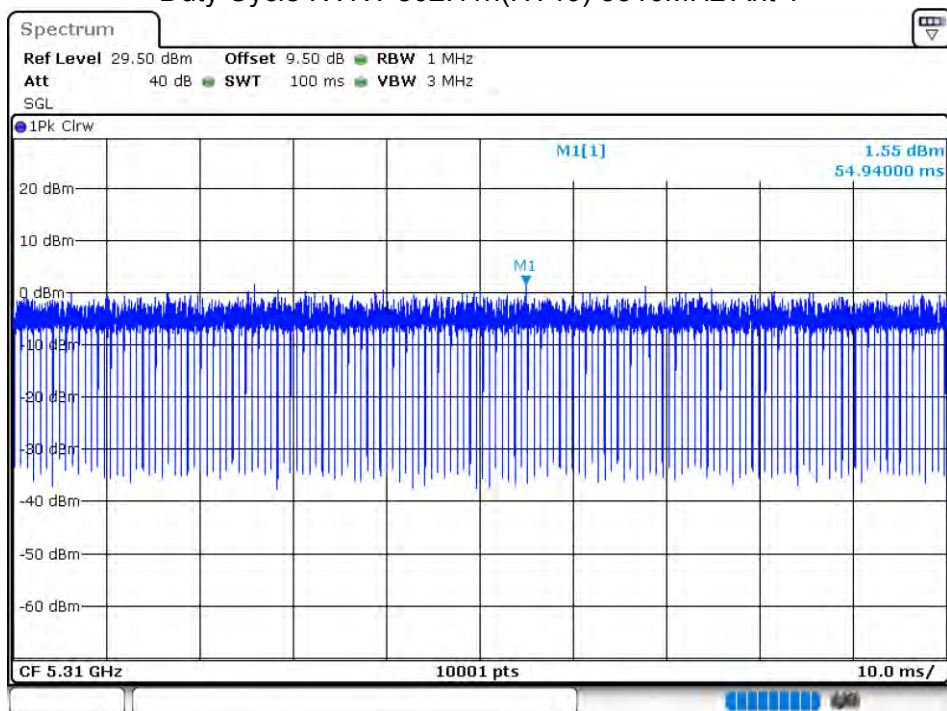

Duty Cycle NVNT 802.11n(HT40) 5270MHz Ant 2

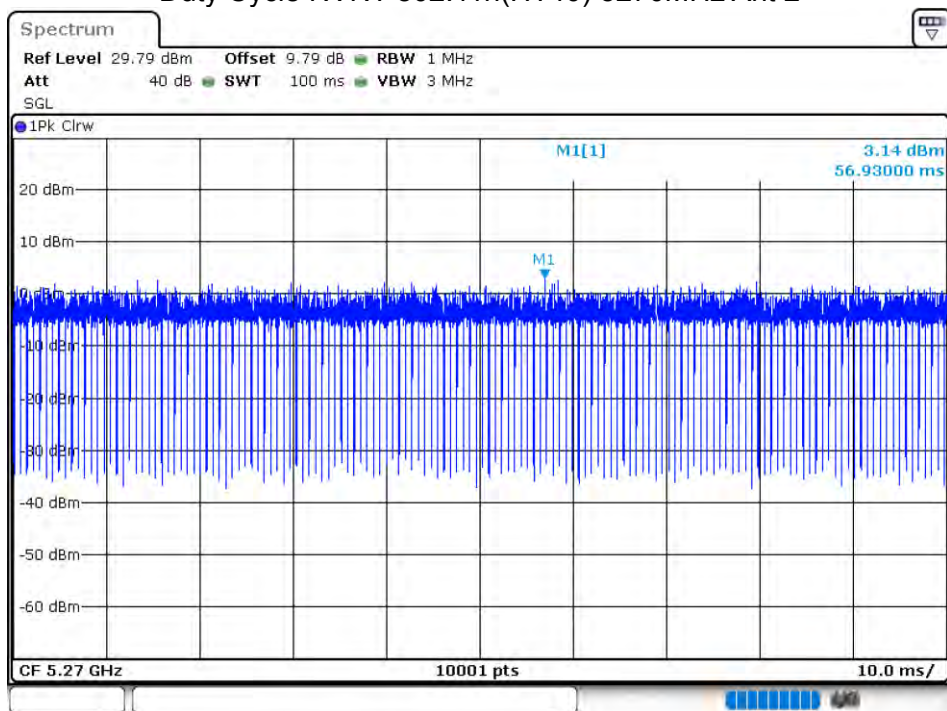


Duty Cycle NVNT 802.11n(HT40) 5310MHz Ant 2

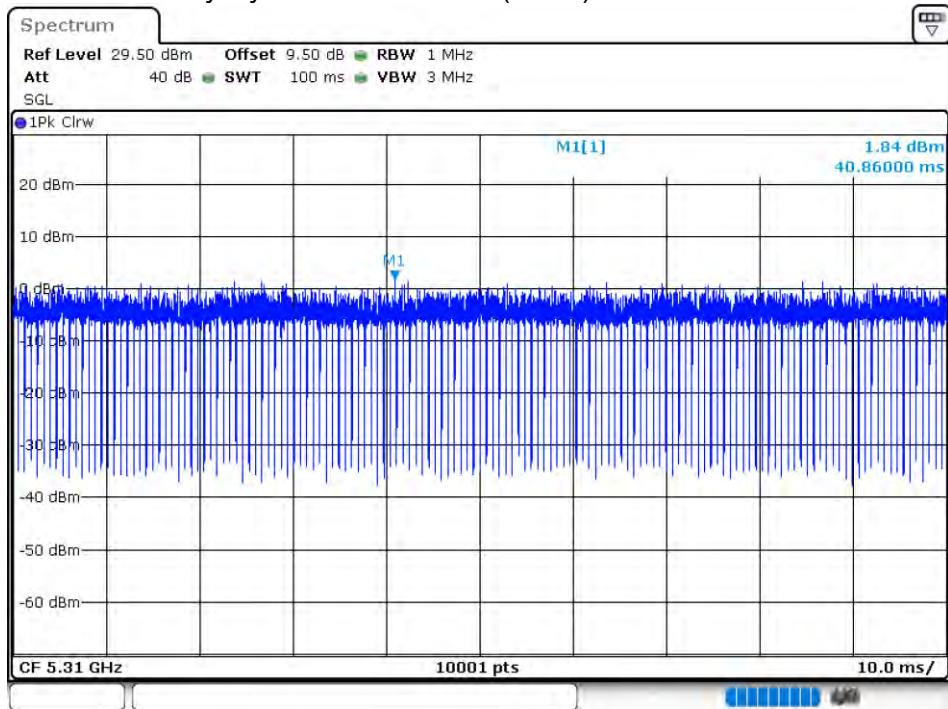


5.6G:

Antenna	Condition	Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)
Ant 1	NVNT	802.11a	5500	100	0
Ant 1	NVNT	802.11a	5600	100	0
Ant 1	NVNT	802.11a	5700	100	0
Ant 2	NVNT	802.11a	5500	100	0
Ant 2	NVNT	802.11a	5600	100	0
Ant 2	NVNT	802.11a	5700	100	0
Ant 1	NVNT	802.11ac20	5500	100	0
Ant 1	NVNT	802.11ac20	5600	100	0
Ant 1	NVNT	802.11ac20	5700	100	0
Ant 2	NVNT	802.11ac20	5500	100	0
Ant 2	NVNT	802.11ac20	5600	100	0
Ant 2	NVNT	802.11ac20	5700	100	0
Ant 1	NVNT	802.11ac40	5510	100	0
Ant 1	NVNT	802.11ac40	5590	100	0
Ant 1	NVNT	802.11ac40	5670	100	0
Ant 2	NVNT	802.11ac40	5510	100	0
Ant 2	NVNT	802.11ac40	5590	100	0
Ant 2	NVNT	802.11ac40	5670	100	0
Ant 1	NVNT	802.11ac80	5530	100	0
Ant 1	NVNT	802.11ac80	5610	100	0
Ant 2	NVNT	802.11ac80	5530	100	0
Ant 2	NVNT	802.11ac80	5610	100	0
Ant 1	NVNT	802.11n(HT20)	5500	100	0
Ant 1	NVNT	802.11n(HT20)	5600	100	0
Ant 1	NVNT	802.11n(HT20)	5700	100	0
Ant 2	NVNT	802.11n(HT20)	5500	100	0
Ant 2	NVNT	802.11n(HT20)	5600	100	0
Ant 2	NVNT	802.11n(HT20)	5700	100	0
Ant 1	NVNT	802.11n(HT40)	5510	100	0
Ant 1	NVNT	802.11n(HT40)	5590	100	0
Ant 1	NVNT	802.11n(HT40)	5670	100	0
Ant 2	NVNT	802.11n(HT40)	5510	100	0
Ant 2	NVNT	802.11n(HT40)	5590	100	0
Ant 2	NVNT	802.11n(HT40)	5670	100	0


Duty Cycle NVNT 802.11a 5500MHz Ant 1

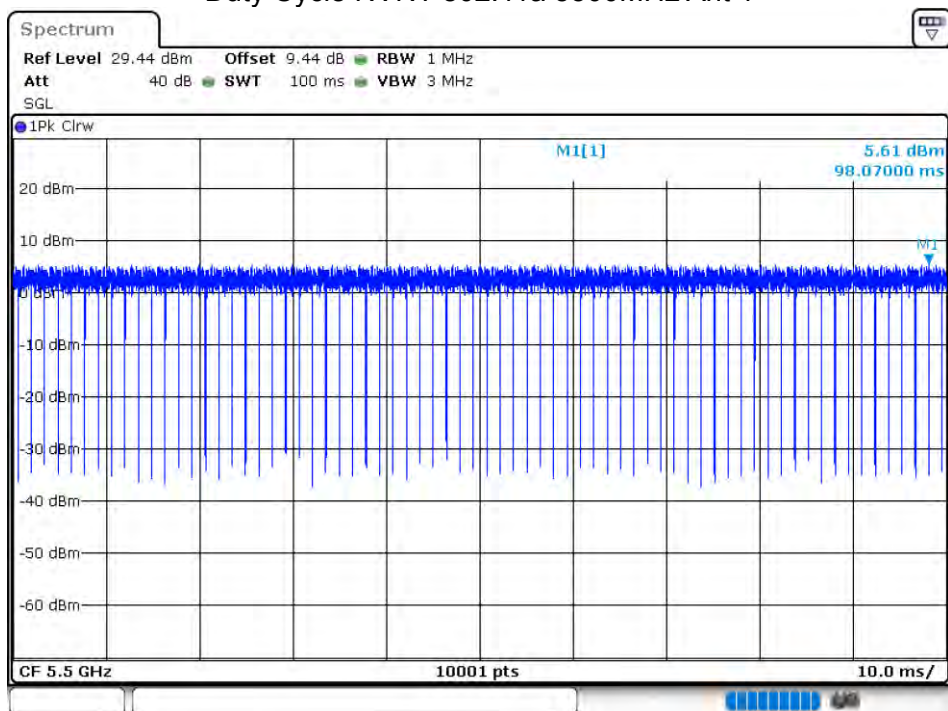


Duty Cycle NVNT 802.11a 5600MHz Ant 1

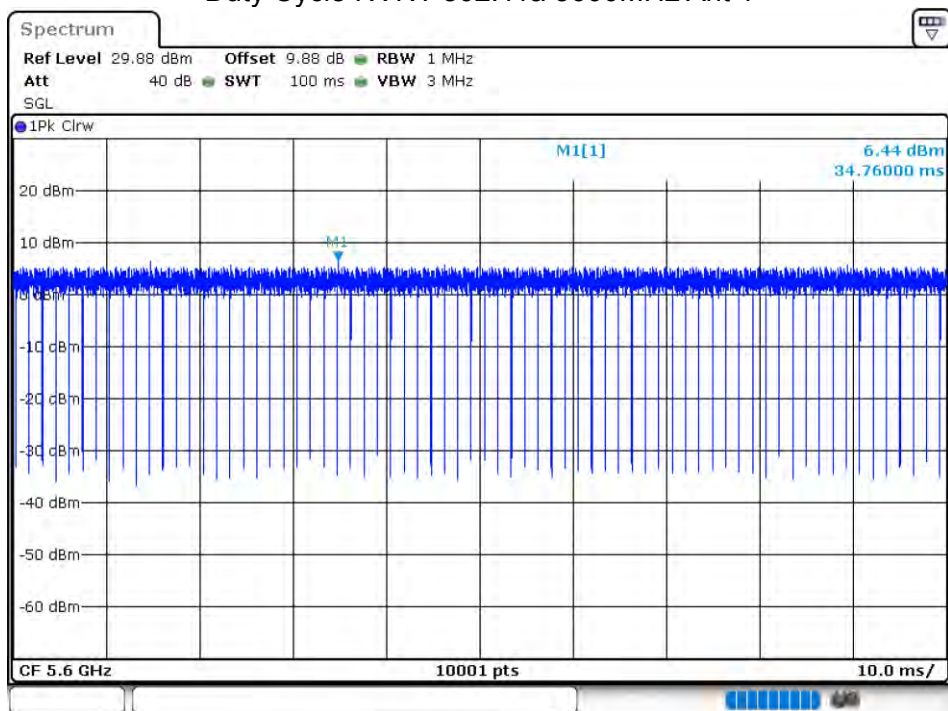


Duty Cycle NVNT 802.11a 5700MHz Ant 1

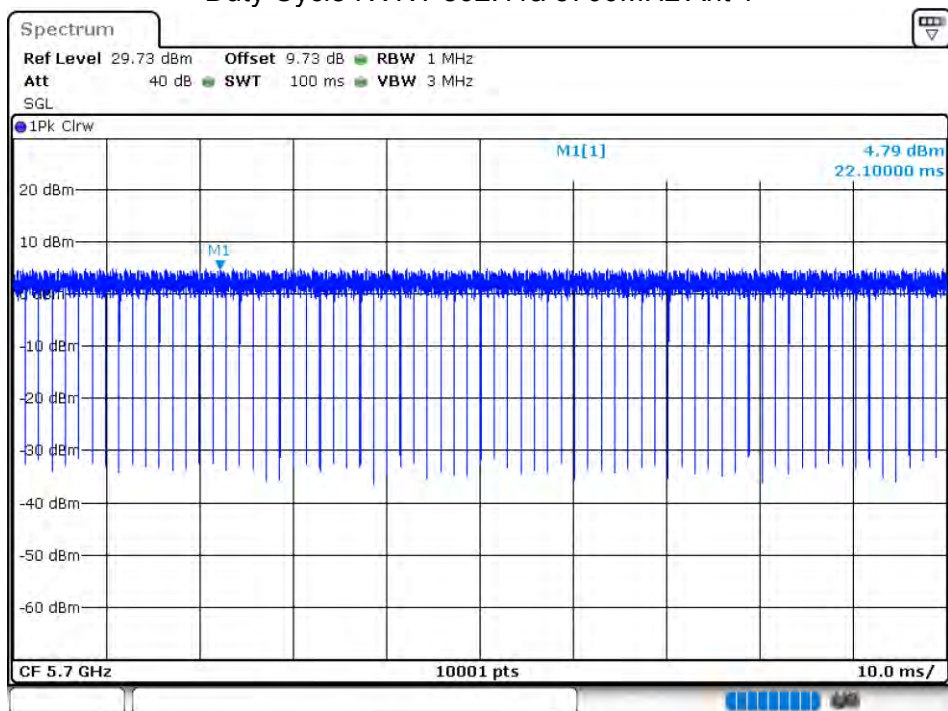


Duty Cycle NVNT 802.11a 5500MHz Ant 2

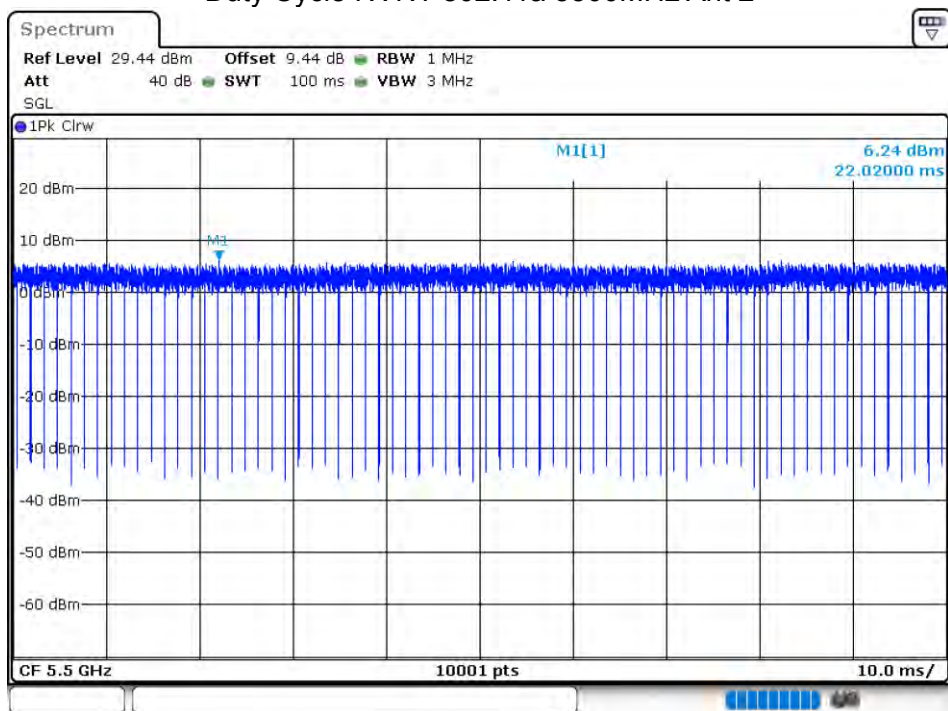


Duty Cycle NVNT 802.11a 5600MHz Ant 2

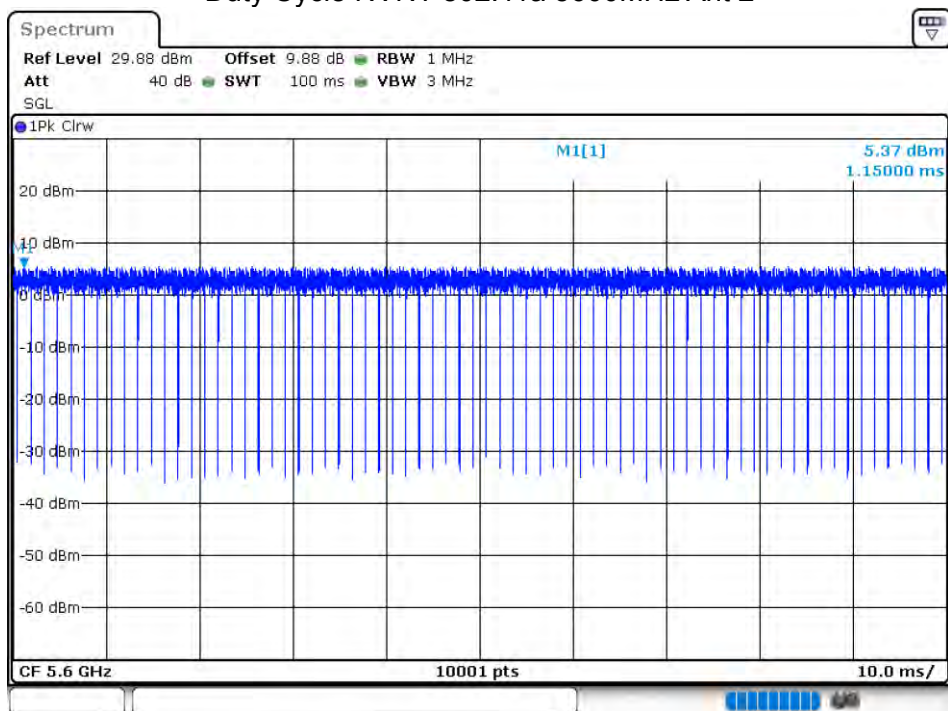


Duty Cycle NVNT 802.11a 5700MHz Ant 2

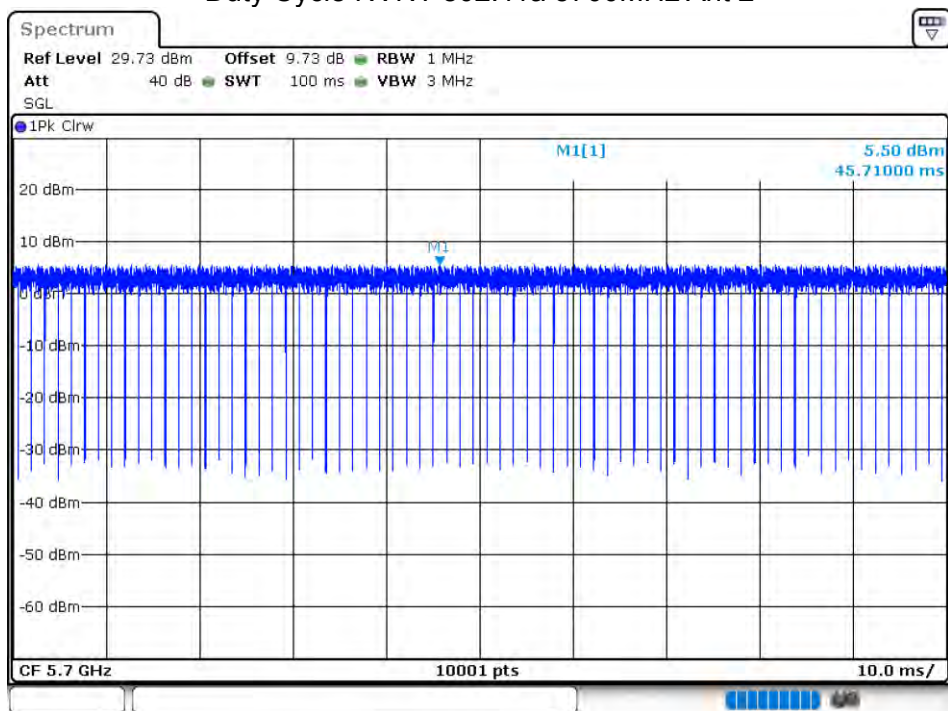


Duty Cycle NVNT 802.11ac20 5500MHz Ant 1

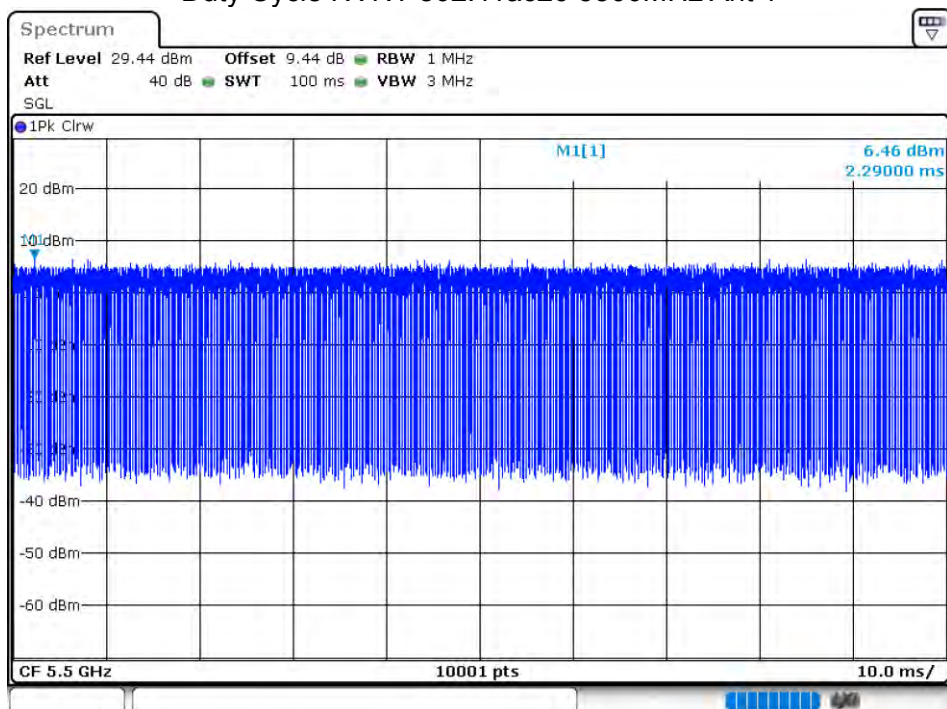


Duty Cycle NVNT 802.11ac20 5600MHz Ant 1

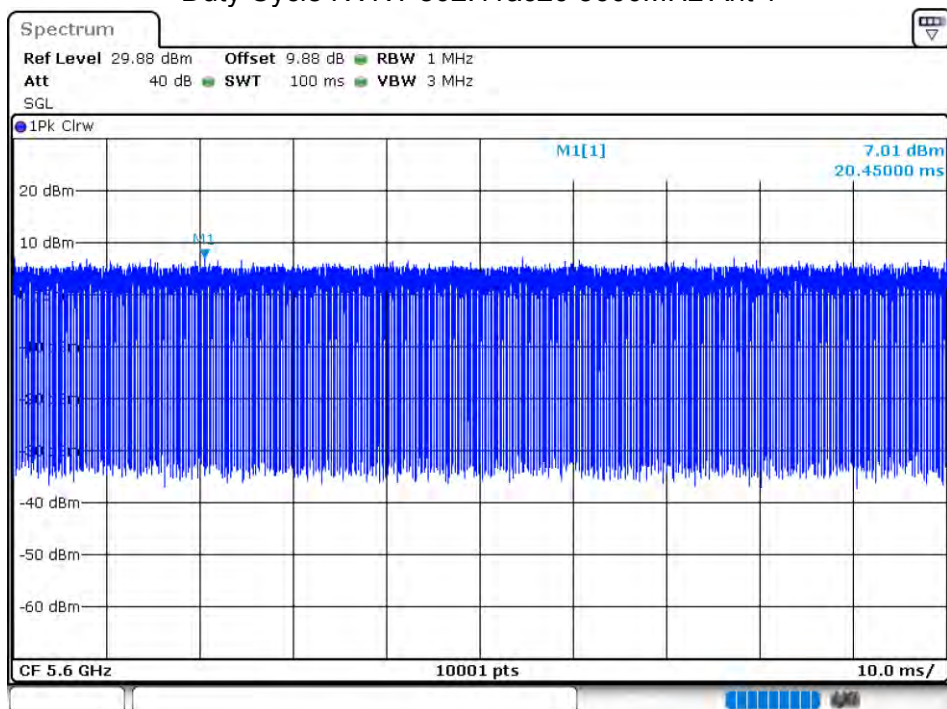


Duty Cycle NVNT 802.11ac20 5700MHz Ant 1

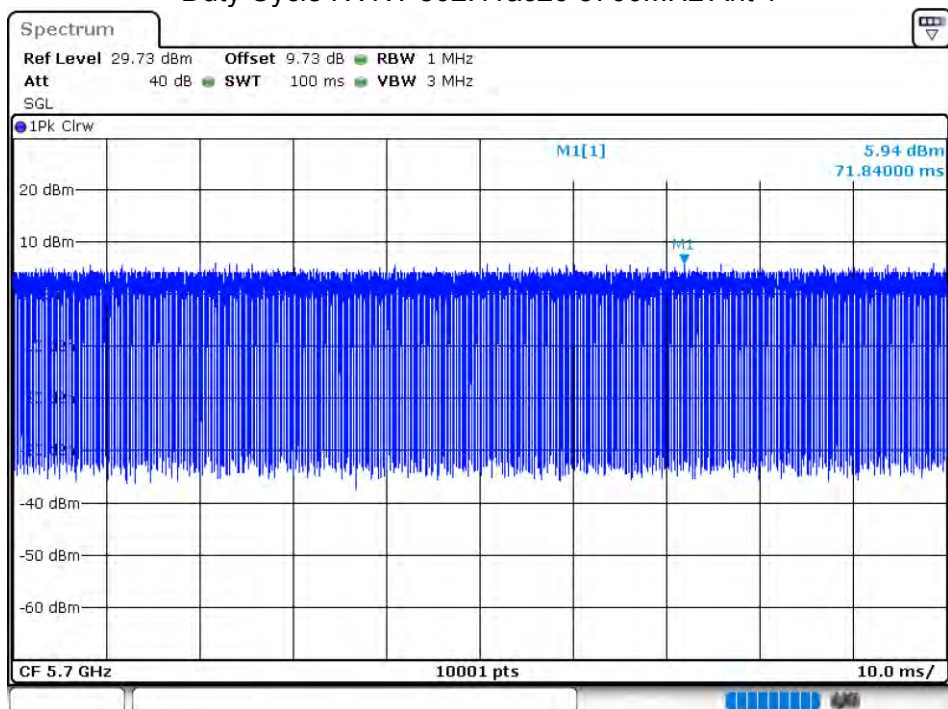

Duty Cycle NVNT 802.11ac20 5500MHz Ant 2

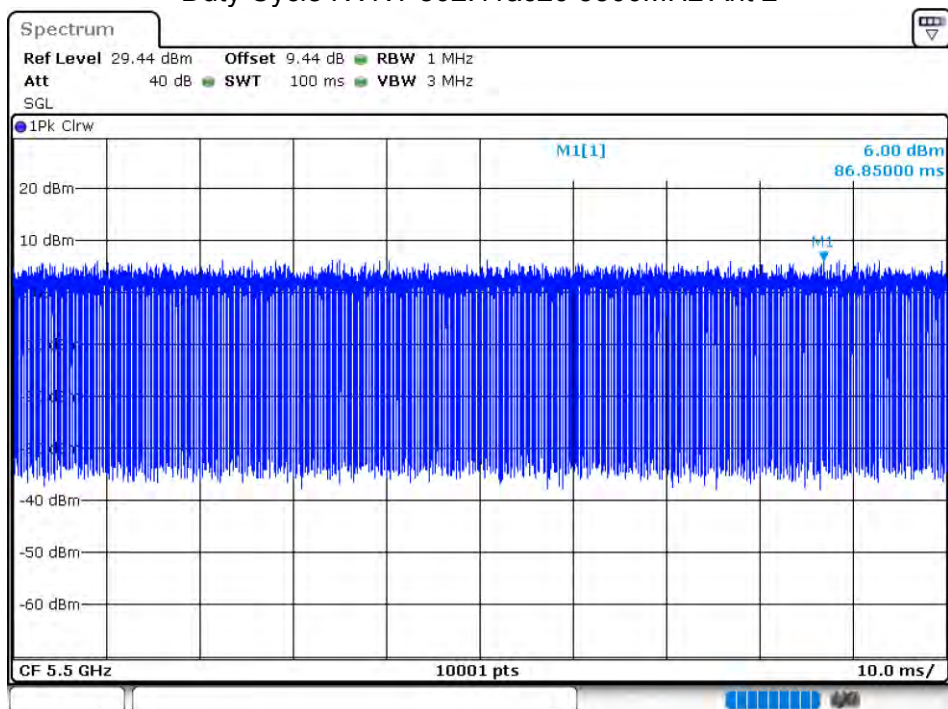

Duty Cycle NVNT 802.11ac20 5600MHz Ant 2

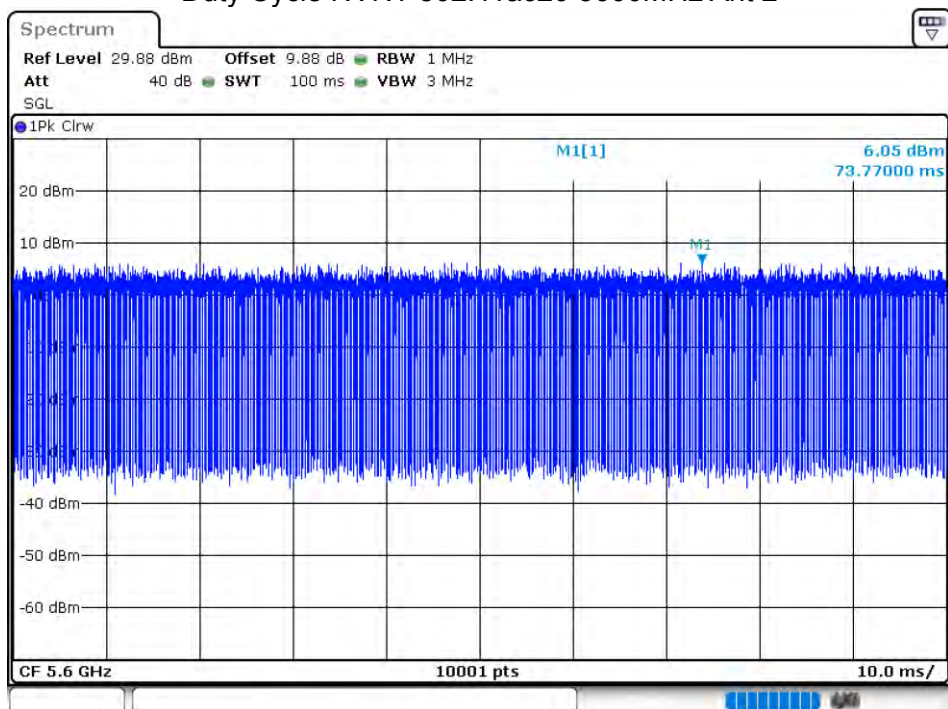

Duty Cycle NVNT 802.11ac20 5700MHz Ant 2

