

BITA-INTERNATIONAL CO., LTD

Handheld Computer

HC61 User Manual



Content

Content.....	1
Statement.....	3
Chapter 1 Product intro	4
1.1 Intro.....	4
1.2 Precaution before using battery.....	5
1.3 Charger.....	6
1.4 Notes	7
Chapter 2 Installation instructions.....	8
2.1 Appearance	8
2.2 Install Micro SD and SIM cards.....	10
2.3 Battery charge	11
2.4 Buttons and function area display.....	12
Chapter 3 Call function.....	13
3.1 Calling numbers.....	13
3.2 Contacts	13
3.3 SMS and MMS.....	13
Chapter 4 Barcode reader-writer	14
Chapter 5 RFID reader.....	16
5.1 NFC	16
Chapter 6 Other functions	17
6.1 PING tool	17
6.2 Bluetooth	18
6.3 GPS.....	19
6.4 Volume setup.....	20
6.5 Sensor	21
6.6 Keyboard	22

6.7 Network	23
6.8 Keyboard emulator	24
Chapter 7 Device Characteristic.....	25

Statement

2020 by Bita-International Co., Ltd. All rights reserved.

No part of this publication may be reproduced or used in any form, or by any electrical or mechanical means, without permission written from Bita-International. This includes electronic or mechanical means, such as photocopying, recording, or information storage and retrieval systems. The material in this manual is subject to change without notice.

The software is provided strictly on an “as is” basis. All software, including firmware, furnished to the user is on a licensed basis. Bita-International grants to the user a non-transferable and non-exclusive license to use each software or firmware program delivered hereunder (licensed program). Except as noted below, such license may not be assigned, sublicensed, or otherwise transferred by the user without prior written consent of Bita-International. No right to copy a licensed program in whole or in part is granted, except as permitted under copyright law. The user shall not modify, merge, or incorporate any form or portion of a licensed program with other program material, create a derivative work from a licensed program, or use a licensed program in a network without written permission from Bita-International.

Bita-International reserves the right to make changes to any software or product to improve reliability, function, or design.

Bita-International does not assume any product liability arising out of, or in connection with, the application or use of any product, circuit, or application described herein.

No license is granted, either expressly or by implication, estoppel, or otherwise under any Bita-International intellectual property rights. An implied license only exists for equipment, circuits, and subsystems contained in Bita-International products.

Chapter 1 Product intro

1.1 Intro

Bitra-International HC61 is a new generation rugged handheld computer with robust performance. Built with Android™ 9 OS and Qualcomm Octa-Core processor, it supports numeric/QWERTY keypad, abundant accessories like trigger handle, and features powerful removable battery. And it delivers optional barcode scanning, RFID, NFC, etc. This mobile computer can fulfill applications in logistics, warehousing, retail, etc.

1.2 Precaution before using battery

- Do not leave battery unused for long time, no matter it is in device or inventory. If battery has been used for 6 months already, it should be check for charging function or it should be disposed correctly.
- The lifespan of Li-ion battery is around 2 to 3 years, it can be circularly charged for 300 to 500 times. (One full battery charge period means completely charged and completely discharged.)
- When Li-ion battery is not in used, it will continue discharge slowly. Therefore, battery charging status should be checked frequently and take reference of the related battery charging information on the manuals.
- Observe and record the information of a new unused and non-fully charged battery. On the basis of operating time of new battery and compare with a battery that has been used for long time. According to product configuration and application program, the operating time of battery would be different.
- Check battery charging status at regular intervals.
- When battery operating time drops below about 80%, charging time will be increased remarkably.
- If a battery is stored or otherwise unused for an extended period, be sure to follow the storage instructions in this document. If you do not follow the instructions, and the battery has no charge remaining when you check it, consider it to be damaged. Do not attempt to recharge it or to use it. Replace it with a new battery.
- Store the battery at temperatures between 5 °C and 20 °C (41 °F and 68 °F).

1.3 Charger

The charger type is GME10D-050200FGu, output voltage/current is 5V DC/2A. The plug considered as disconnect device of adapter.

1.4 Notes

Note:

Using the incorrect type battery has danger of explosion.
Please dispose the used battery according to instructions.

Note:

Due to the used enclosure material, the product shall only be connected to a USB Interface of version 2.0 or higher. The connection to so called power USB is prohibited.

Note:

The adapter shall be installed near the equipment and shall be easily accessible.

Note:

The suitable temperature for the product and accessories is 0-10°C to 50°C.

Note:

CAUTION RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE. DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS.


Chapter 2 Installation instructions

2.1 Appearance

HC61 back and front appearances are showing as follows:




Buttons instruction

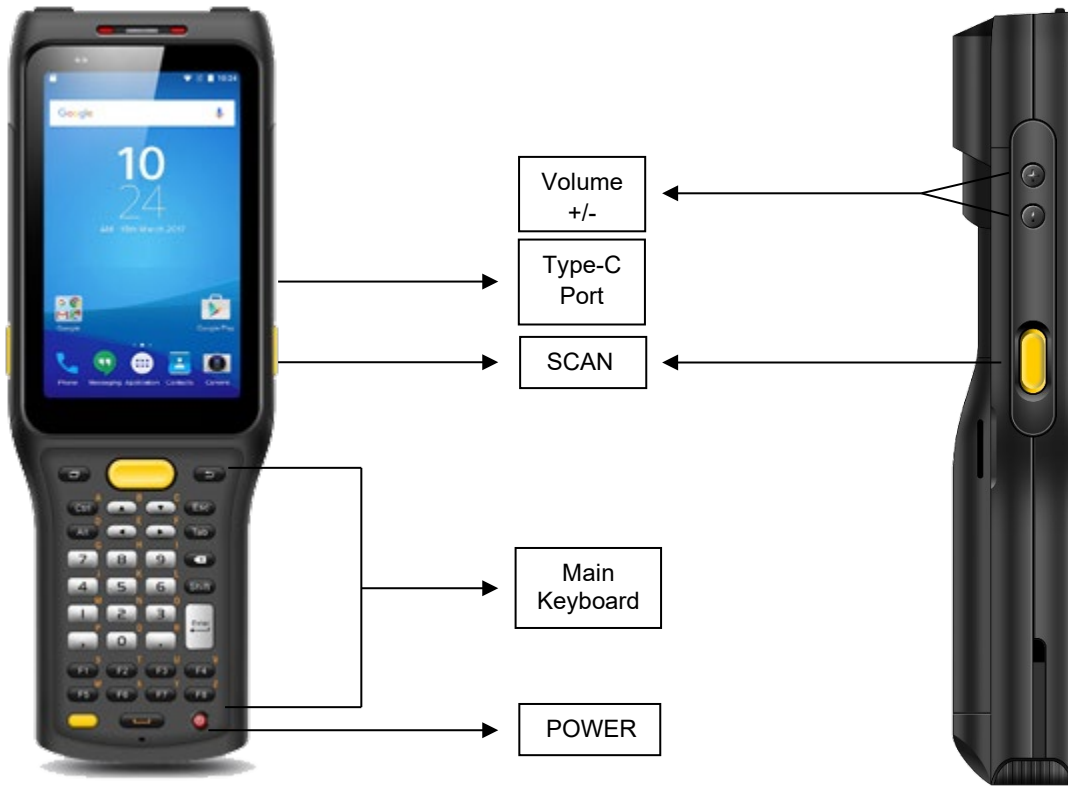

2.2 Install Micro SD and SIM cards

The cards sockets are showing as follows:

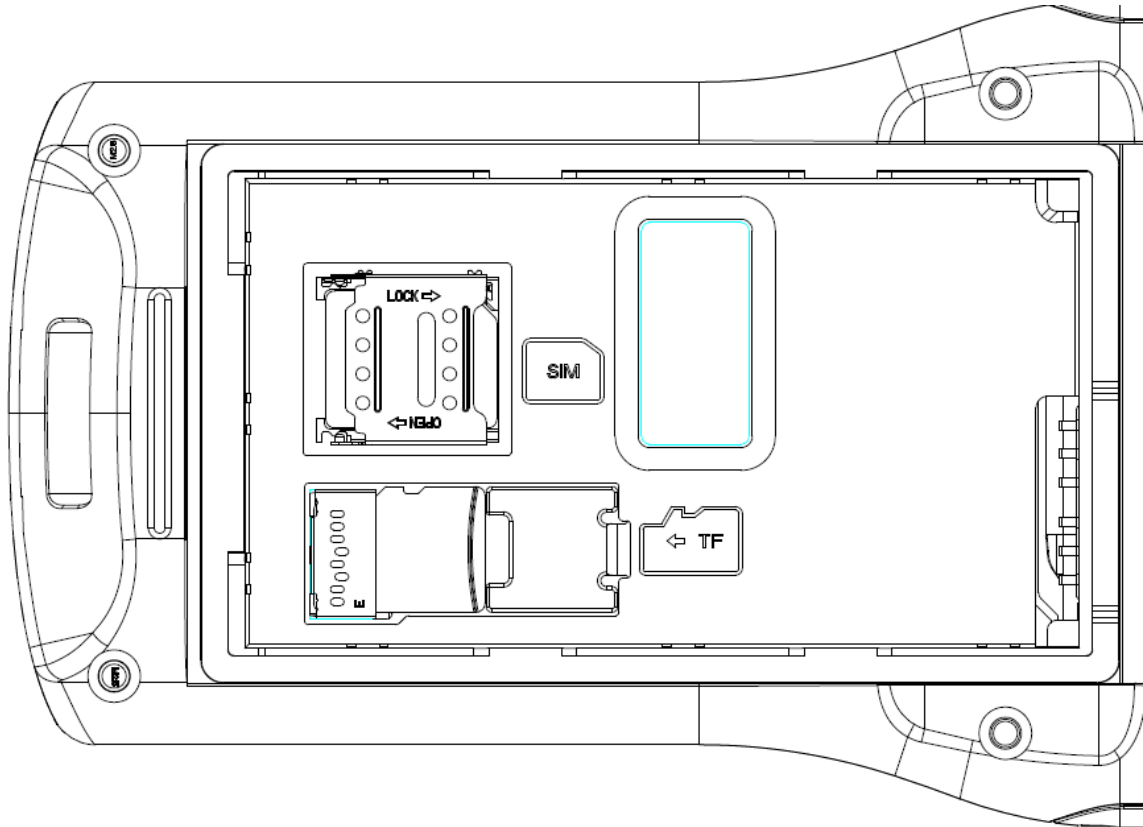

2.3 Battery charge

By using USB Type-C contact, the original adaptor should be used for charging the device. Make sure not to use other adaptors to charge the device.

2.4 Buttons and function area display




HC61 has main keyboard that contains

10 numeric keys+2 symbolic keys, 4 direction keys, 2 Android function keys, ENTER/ESC/TAB/ALT/CTRL/BACK/DELETE, 10 user-defined function keys (reuse with letter keys), 1 POWER key, 1 SCAN key, 1 Alt key, 27keys, 37 keys or 47keys in total.



Side keys: 2 SCAN keys+2 volume keys+1 user-defined key, 2D scanning module locates on the top. HD camera and flashlight locate at rear. NFC identification surrounds the camera.

Chapter 3 Call function





3.1 Calling numbers

1. Click icon .
2. Click number key to input phone numbers.
3. Click icon  to call.
4. Click icon  to end call.

3.2 Contacts


1. Click contacts to open contacts list.
2. Click icon  to add new contacts.
3. Click icon  to import/export contacts.


3.3 SMS and MMS

1. Click  to open message window.
2. Click  to input message receiver and contents.
3. Click  to send out messages.
4. Click  to add attachment pictures and videos.

Chapter 4 Barcode reader-writer

1. In App Center, to open 2D barcode scan test.
2. Press "SCAN" button or click scan key to start scanning, the parameter "Auto interval" can be adjusted.

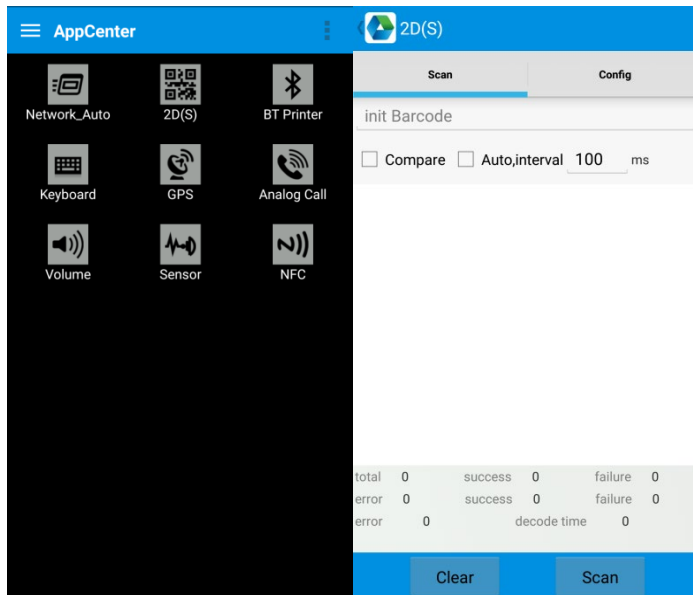

 Caution: Please scan codes in correct way otherwise the scanning will be failed.

2D code:



Correct



Incorrect



Max. radiant power: 0.6mW

Wave length: 655nm


IEC 60825-1 (Ed.2.0).

21CFR 1040.10 and 1040.11 standard.

Chapter 5 RFID reader

5.1 NFC


Click App Center, open “NFC” to read and write tag information.

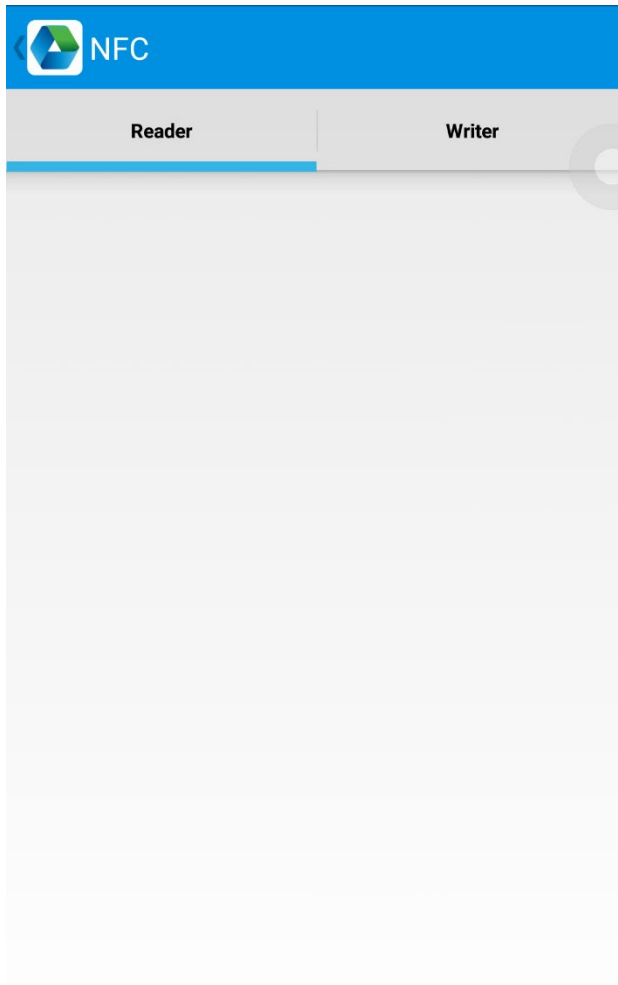

Chapter 6 Other functions


6.1 PING tool

1. Open "PING" in App Center.
2. Setup PING parameter and select external/internal address.

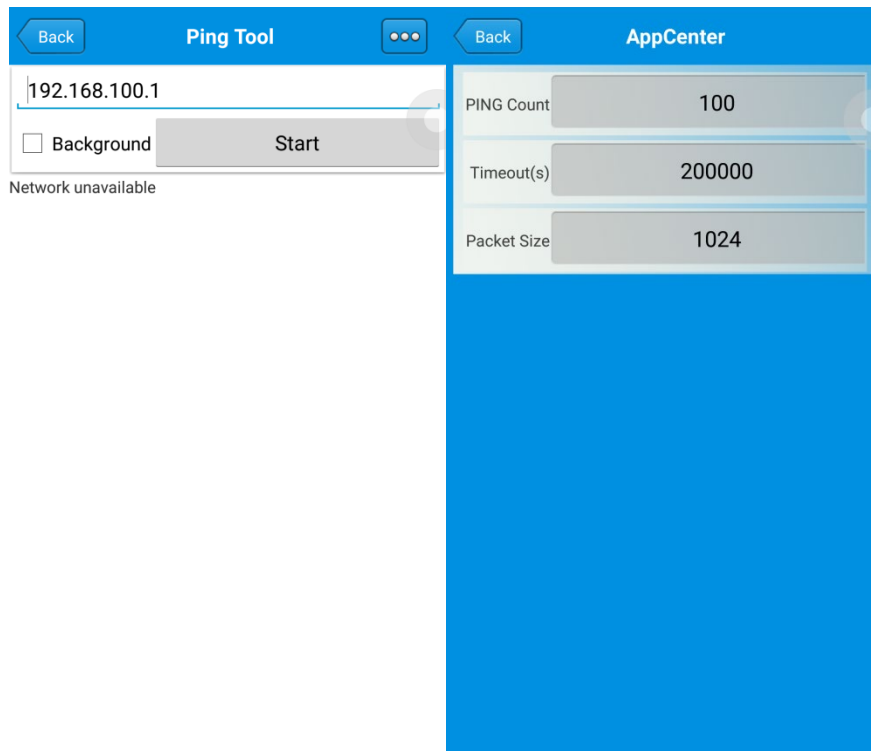


6.2 Bluetooth

1. Open “BT Printer” in App Center.
2. In the list of detected devices, click the device that you want to pair.
3. Select printer and click “Print” to start printing contents.

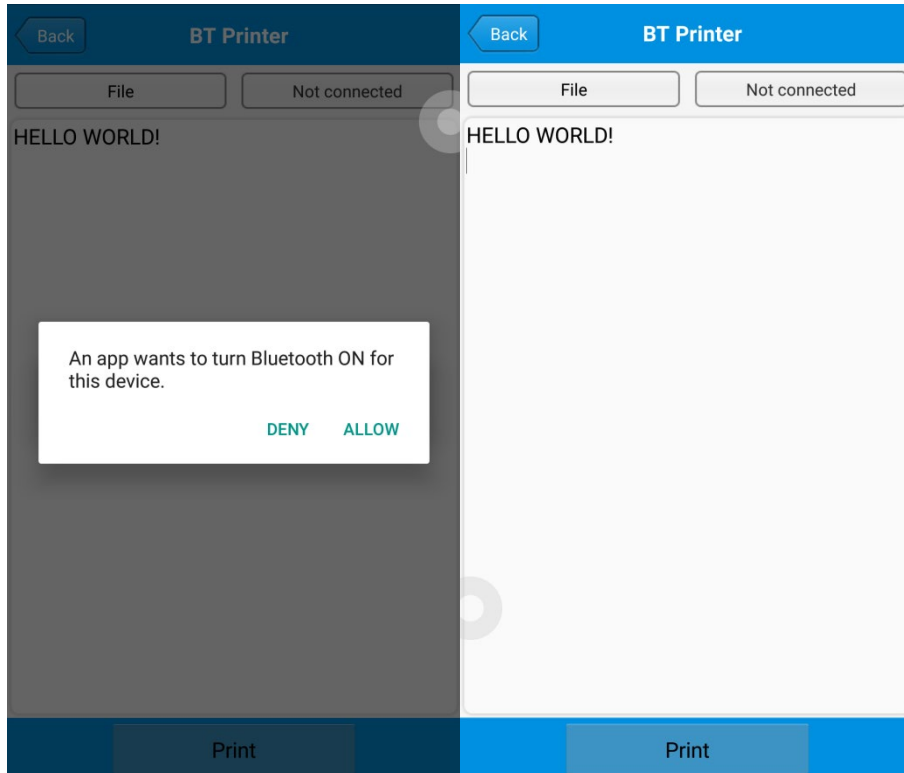


6.3 GPS

1. Click “GPS” in App Center to open GPS test.
2. Setup GPS parameters to access GPS information.

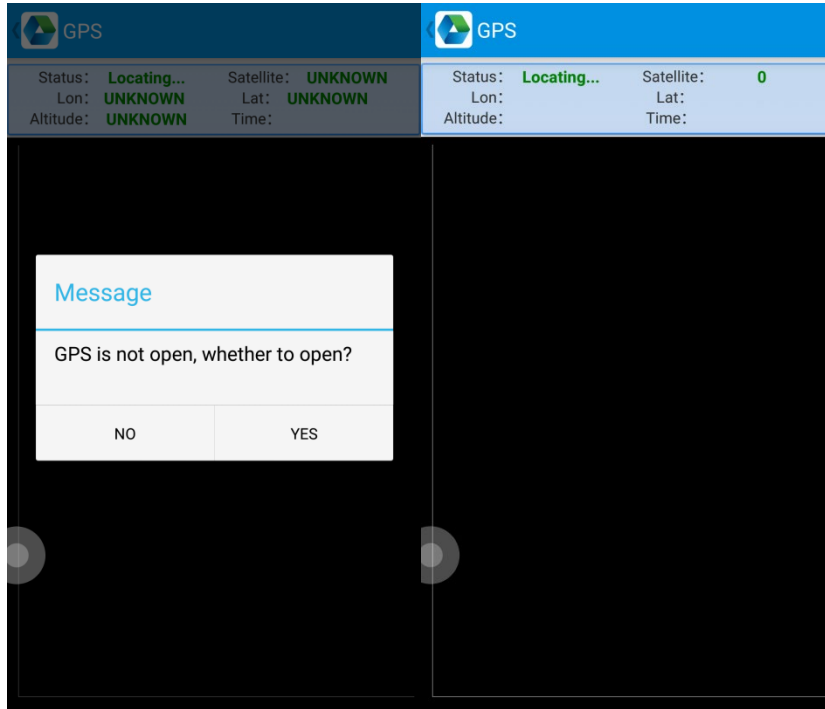


6.4 Volume setup

1. Click “Volume” in App Center.
2. Setup volume by requirements.

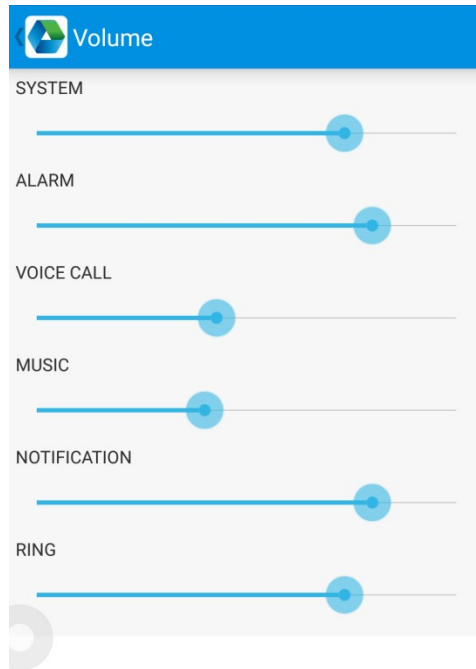


6.5 Sensor

1. Click “Sensor” in App Center.
2. Setup the sensor by requirements.

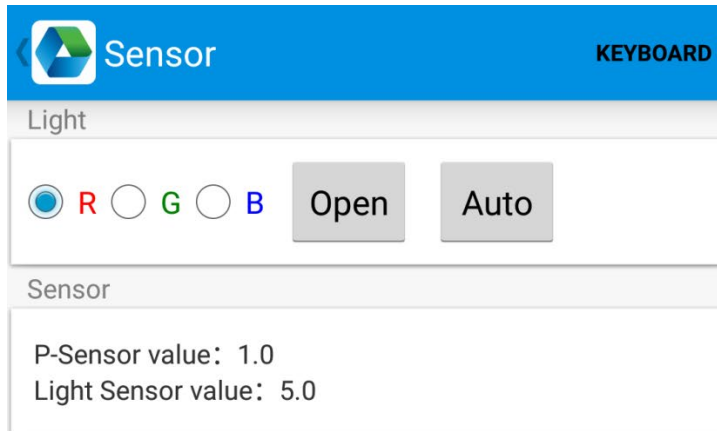


6.6 Keyboard

1. Click “Keyboard” in App Center.
2. Setup and test the main value of the device.

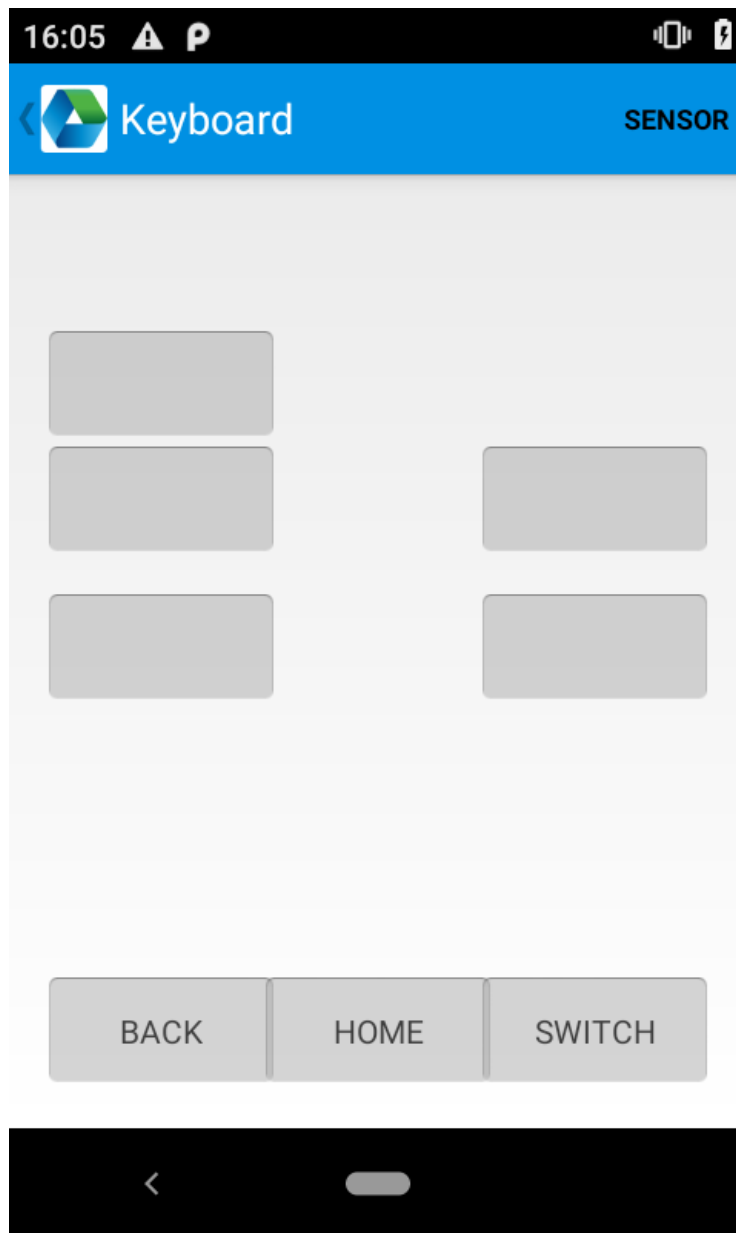

6.7 Network

1. Click “Network” in App Center.
2. Test WIFI/Mobile signal by requirements.

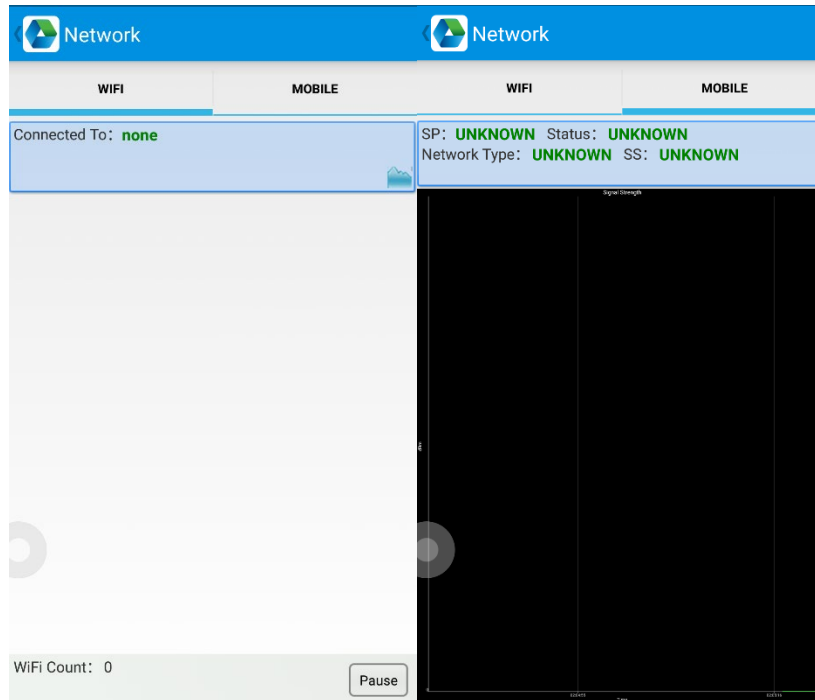

6.8 Keyboard emulator

The keyboard emulator can be used in multiple operating background and output formats directly. And it includes Prefix/Suffix/Enter/TAB.

Please check Keyboard emulator manual for more details.

The screenshot shows the 'keyboardemulator v2.2.9.6.2' application interface. At the top, there is a navigation bar with icons for 'Function', 'AppSettings', '2DSettings', and 'Test'. Below this, there is a toggle for 'Enable Scanner' set to 'OFF'. The main content area is divided into sections for different scanner types: Barcode, RFID, UHF, and LF. Each section has a 'Barcode' or 'RFID' label and a 'KeyCode' input field. The 'Barcode2D' option is checked, and its 'KeyCode' is set to '280'. The 'Barcode1D' option is unchecked. The 'RFID' section has two options: '14443A' and '15693', both with '280' in the 'KeyCode' field. The 'UHF' section has one option: 'UHF', with '280' in the 'KeyCode' field. The 'LF' section has seven options: 'IDCard', 'Animal', 'HiTag', 'HDX', 'EM4450', 'TinyAniTag', and 'EM4305', with '280' in the 'KeyCode' field.

Barcode	KeyCode
<input type="checkbox"/> Barcode1D	
<input checked="" type="checkbox"/> Barcode2D	280

RFID	KeyCode
<input type="checkbox"/> 14443A	280
<input type="checkbox"/> 15693	280

UHF	KeyCode
<input type="checkbox"/> UHF	280

LF	KeyCode
<input type="checkbox"/> IDCard	
<input type="checkbox"/> Animal	
<input type="checkbox"/> HiTag	
<input type="checkbox"/> HDX	280
<input type="checkbox"/> EM4450	
<input type="checkbox"/> TinyAniTag	
<input type="checkbox"/> EM4305	

Chapter 7 Device Characteristic

Physical Characteristics

Size	202.0 x 72.5 x 32.0 mm / 7.95 x 2.85 x 1.26 in.
Weight	390 g / 13.76 oz.
Display	4-inch display, LTPS LCD screen
Main Keyboard	27 keys, 37 keys or 47 keys in total Side keys: 2 SCAN keys + 2 volume keys + 1 user-defined key
Battery	5200 mAh removable main battery, 5200 mAh optional pistol battery, support QC3.0 and RTC Standby: over 300 hours (only main battery) Continuous use: over 12 hours (depending on user environment) Charging time: 2.5hours (charge device by standard adaptor and USB cable)
Expansion	Supports up to 128 GB Micro SD card
Expansion Slot	1 slot for SIM card, 1 slot for TF card
Audio	1 Microphones, 1 Speaker
Camera	13MP autofocus camera with flashlight

Performance

CPU	Qualcomm 1.8 GHz Octa-core
OS	Android 9
RAM	3GB
Communication Interface	USB3.0, Type-C
ROM	32GB
Max. expansion	Supports up to 128 GB Micro SD card

User Environment

Operating temp.	-20°C to 50°C
Storage Temp.	-40°C to 70°C
Humidity	5%RH - 95%RH non condensing
Sealing	IP65, IEC sealing standard
Drop specification	Multiple 1.8 m / 5.9 ft. drops (at least 20 times) to the concrete across the operating temperature range

Communication

WAN	EU/ASIA: GSM900 & DCS1800 3G: WCDMA: B1/B8 4G: B7/B20/B38 US: 2G: 850/900/1800/1900MHz 3G: 850/900/1900/2100MHz 4G: B2/B4/B5/B7
WLAN	Support 802.11 a/b/g/n/ac, IPV4, IPV6; (2.4G/5G Dual frequency) Fast roaming: PMKID caching, 802.11r, OKC; Secure encryption: WEP, WPA/WPA2-PSK(TKIP and AES), WAPI-PSK-EAP-TTLS, EAP-TLS, PEAP-MSCHAPv2, PEAP-LTS, PEAP-GTC, etc.
Bluetooth	Bluetooth EDR+BDR
GPS	Support GPS, Internal antenna

Data Collection

Barcode scanning	SE4710/SE4750/SE4850
RFID	NFC 13.56Mhz


Developing Environment

SDK	Bit-International software develop kit
Language	Java
Develop	Eclipse/Android Studio

This radio equipment operates with the following frequency bands and maximum radio-frequency power :

Operating Mode	Operating Frequency Range		Maximum Transmit Power (Conducted) dBm
	TX(MHz)	RX(MHz)	
GSM900	880 - 915	925 - 960	33.12
DCS1800	1710 - 1785	1805 - 1880	29.43
WCDMA BAND 1	1920 - 1980	2110 - 2170	22.7
WCDMA BAND 8	880 - 915	925 - 960	24.3
LTE BAND 7	2500~2570	2620~2690	21.9
LTE BAND 20	832~862	791~821	23.9
LTE BAND 38	2570~2620		22.7
Operating Mode	Operating Frequency Range		Maximum Transmit Power (EIRP) dBm
	TX(MHz)	RX(MHz)	
Bluetooth EDR+BDR	2402 - 2480		7.18
Bluetooth	2402 - 2480		2.89
WLAN 2.4GHz	2412 - 2472		16.63
WLAN 5GHz Band 1	5150 - 5250		16.0
WLAN 5GHz Band 4	5725 - 5850		11.53
Operating Mode	Operating Frequency Range		Strength Field
NFC	13.56		10.74dBuA/m at 10m

The device is restricted to indoor use only when operating in the 5150 to 5250 MHz frequency range.

	AT	BE	BG	CH	CY	CZ	DE	DK	EE	EL	ES	FI
	FR	HR	HU	IE	IS	IT	LI	LT	LU	LV	MT	NL
	NO	PO	PT	RO	SE	SI	SK	TR	UK(NI)	UK		

The device could be used with a separation distance of 5mm to the human body.

Hereby, [Bita-International Co., Ltd.] declares that the radio equipment type [HC61] is in compliance with Directive 2014/53/EU.

Bit-a-International Co., Ltd Address: 2F, No. 36 Park ST., Nangang Dist.,
Taipei City 115, Taiwan R.O.C.

FCC Caution

15.19 Labeling requirements. This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

15.105 Information to the user. Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: -Reorient or relocate the receiving antenna. - Increase the separation between the equipment and receiver. -Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. -Consult the dealer or an experienced radio/TV technician for help.

15.21 Information to user. Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

27 Specific Absorption Rate (SAR) information: This wireless phone meets the government's requirements for exposure to radio waves. The guidelines are based on standards that were developed by independent scientific organizations through periodic and thorough evaluation of scientific studies. The standards include a substantial safety margin designed to assure the safety of all persons regardless of age or health. The highest SAR value reported under this standard during product certification for use at the ear is 0.31W/kg and when properly worn on the body is 1.14W/kg. This device was tested for typical body-worn operations with the back of the handset kept 1.0cm from the body. To maintain compliance with FCC RF exposure requirements, use accessories that maintain a 1.0cm separation distance between the user's body and the back of the handset. The use of belt clips, holsters and similar accessories should not contain metallic components in its assembly. The use of accessories that do not

satisfy these requirements may not comply with FCC RF exposure requirements, and should be avoided. Body-worn Operation This device was tested for typical body-worn operations. To comply with RF exposure requirements, a minimum separation distance of 1.0 cm must be maintained between the user's body and the handset, including the antenna. Third-party belt-clips, holsters, and similar accessories used by this device should not contain any metallic components. Body-worn accessories that do not meet these requirements may not comply with RF exposure requirements and should be avoided. Use only the supplied or an approved antenna.