



11AC40SISO-Ant1-5230-30~5140-PASS



11AC40SISO-Ant1-5230-5360~27000-PASS



11AC40SISO-Ant1-5755-30~5650-PASS



11AC40SISO-Ant1-5755-5925~27000-PASS



11AC40SISO-Ant1-5795-30~5650-PASS



11AC40SISO-Ant1-5795-5925~27000-PASS



11AC80SISO-Ant1-5210-30~5140-PASS



11AC80SISO-Ant1-5210-5360~27000-PASS



11AC80SISO-Ant1-5775-30~5650-PASS



11AC80SISO-Ant1-5775-5925~27000-PASS

Note: 27~40GHz at least have 20dB margin. No recording in the test report.



6.6 Band edge measurements

Test Result:

TestMode	Antenna	ChName	Frequency[MHz]	Result[dBm]	Limit[dBm]	Verdict
11A	Ant1	Low	5180	-29.05	≤-27	PASS
11A	Ant1	High	5240	-28.87	≤-27	PASS
11N20SISO	Ant1	Low	5180	-28.35	≤-27	PASS
11N20SISO	Ant1	High	5240	-28.04	≤-27	PASS
11N40SISO	Ant1	Low	5190	-28.7	≤-27	PASS
11N40SISO	Ant1	High	5230	-28.51	≤-27	PASS
11AC20SISO	Ant1	Low	5180	-29.38	≤-27	PASS
11AC20SISO	Ant1	High	5240	-28.72	≤-27	PASS
11AC40SISO	Ant1	Low	5190	-28.68	≤-27	PASS
11AC40SISO	Ant1	High	5230	-28.24	≤-27	PASS
11AC80SISO	Ant1	Low	5210	-29.03	≤-27	PASS
11AC80SISO	Ant1	High	5210	-29.19	≤-27	PASS

TestMode	Antenna	ChName	Frequency[MHz]	FreqRange [MHz]	Result [dBm]	Limit [dBm]	Verdict
11A	Ant1	Low	5745	5720~5725	-31.19	≤21.32	PASS
11A	Ant1	Low	5745	5700~5720	-30.79	≤14.56	PASS
11A	Ant1	Low	5745	5650~5700	-30.9	≤5.04	PASS
11A	Ant1	Low	5745	5760~5650	-32.09	≤-27	PASS
11A	Ant1	High	5825	5850~5855	-29.57	≤26.87	PASS
11A	Ant1	High	5825	5855~5875	-29.61	≤14.79	PASS
11A	Ant1	High	5825	5875~5925	-29.03	≤-8.57	PASS
11A	Ant1	High	5825	5925~5935	-29.78	≤-27	PASS
11N20SISO	Ant1	Low	5745	5720~5725	-31.23	≤20.80	PASS
11N20SISO	Ant1	Low	5745	5700~5720	-30.7	≤10.96	PASS
11N20SISO	Ant1	Low	5745	5650~5700	-31.14	≤-24.40	PASS
11N20SISO	Ant1	Low	5745	5760~5650	-31.97	≤-27	PASS
11N20SISO	Ant1	High	5825	5850~5855	-29.77	≤20.72	PASS
11N20SISO	Ant1	High	5825	5855~5875	-29.29	≤13.46	PASS
11N20SISO	Ant1	High	5825	5875~5925	-29.29	≤-14.87	PASS
11N20SISO	Ant1	High	5825	5925~5935	-29.78	≤-27	PASS
11N40SISO	Ant1	Low	5755	5720~5725	-28.18	≤24.66	PASS
11N40SISO	Ant1	Low	5755	5700~5720	-29.24	≤13.99	PASS
11N40SISO	Ant1	Low	5755	5650~5700	-30.18	≤9.36	PASS
11N40SISO	Ant1	Low	5755	5780~5650	-32.47	≤-27	PASS
11N40SISO	Ant1	High	5795	5850~5855	-30.15	≤16.41	PASS
11N40SISO	Ant1	High	5795	5855~5875	-29.72	≤13.74	PASS
11N40SISO	Ant1	High	5795	5875~5925	-28.45	≤2.14	PASS
11N40SISO	Ant1	High	5795	5925~5935	-29.42	≤-27	PASS
11AC20SISO	Ant1	Low	5745	5720~5725	-29.12	≤24.99	PASS
11AC20SISO	Ant1	Low	5745	5700~5720	-31.14	≤12.08	PASS
11AC20SISO	Ant1	Low	5745	5650~5700	-30.96	≤-21.93	PASS
11AC20SISO	Ant1	Low	5745	5760~5650	-32.18	≤-27	PASS
11AC20SISO	Ant1	High	5825	5850~5855	-29.51	≤21.03	PASS



11AC20SIS O	Ant1	High	5825	5855~5875	-28.63	≤12.86	PASS
11AC20SIS O	Ant1	High	5825	5875~5925	-28.68	≤-25.16	PASS
11AC20SIS O	Ant1	High	5825	5925~5935	-29.78	≤-27	PASS
11AC40SIS O	Ant1	Low	5755	5720~5725	-30.51	≤18.81	PASS
11AC40SIS O	Ant1	Low	5755	5700~5720	-30.42	≤14.33	PASS
11AC40SIS O	Ant1	Low	5755	5650~5700	-30.54	≤-24.31	PASS
11AC40SIS O	Ant1	Low	5755	5780~5650	-32.33	≤-27	PASS
11AC40SIS O	Ant1	High	5795	5850~5855	-29.01	≤22.80	PASS
11AC40SIS O	Ant1	High	5795	5855~5875	-28.62	≤12.12	PASS
11AC40SIS O	Ant1	High	5795	5875~5925	-29.06	≤7.63	PASS
11AC40SIS O	Ant1	High	5795	5925~5935	-29.07	≤-27	PASS
11AC80SIS O	Ant1	Low	5775	5720~5725	-29.69	≤19.89	PASS
11AC80SIS O	Ant1	Low	5775	5700~5720	-28.44	≤15.43	PASS
11AC80SIS O	Ant1	Low	5775	5650~5700	-29.31	≤8.64	PASS
11AC80SIS O	Ant1	Low	5775	5800~5650	-32.25	≤-27	PASS
11AC80SIS O	Ant1	High	5775	5850~5855	-29.44	≤23.81	PASS
11AC80SIS O	Ant1	High	5775	5855~5875	-29.27	≤12.30	PASS
11AC80SIS O	Ant1	High	5775	5875~5925	-29.34	≤-16.96	PASS
11AC80SIS O	Ant1	High	5775	5925~5935	-29	≤-27	PASS

Note: 27~40GHz at least have 20dB margin. No recording in the test report.

Test Graphs:



11A-Ant1-5180-PASS




11A-Ant1-5240-PASS



11N20SISO-Ant1-5180-PASS



11N20SISO-Ant1-5240-PASS

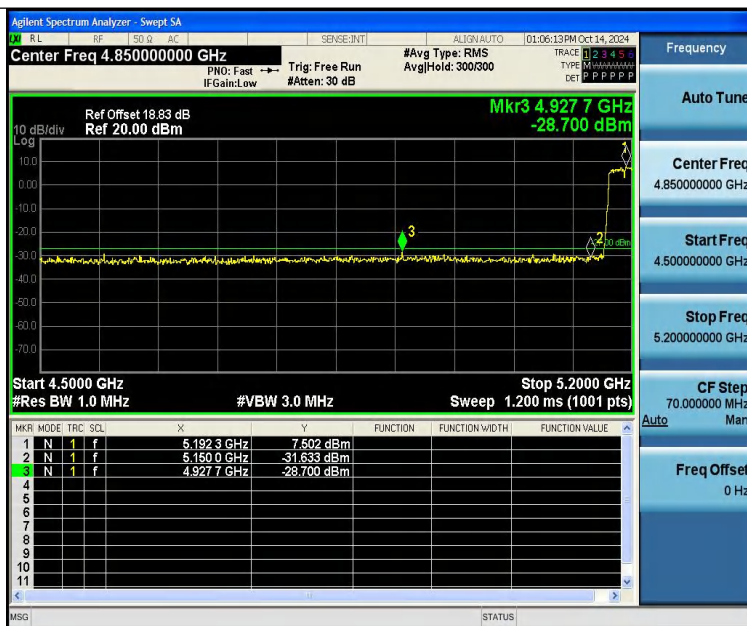

11N40SISO-Ant1-5190-PASS




11N40SISO-Ant1-5230-PASS




11AC20SISO-Ant1-5180-PASS




11AC20SISO-Ant1-5240-PASS

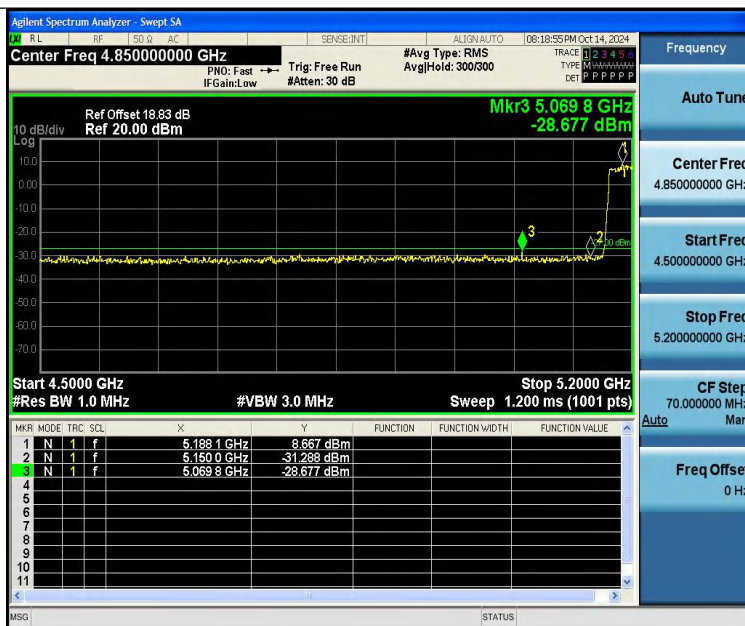

11AC40SISO-Ant1-5190-PASS

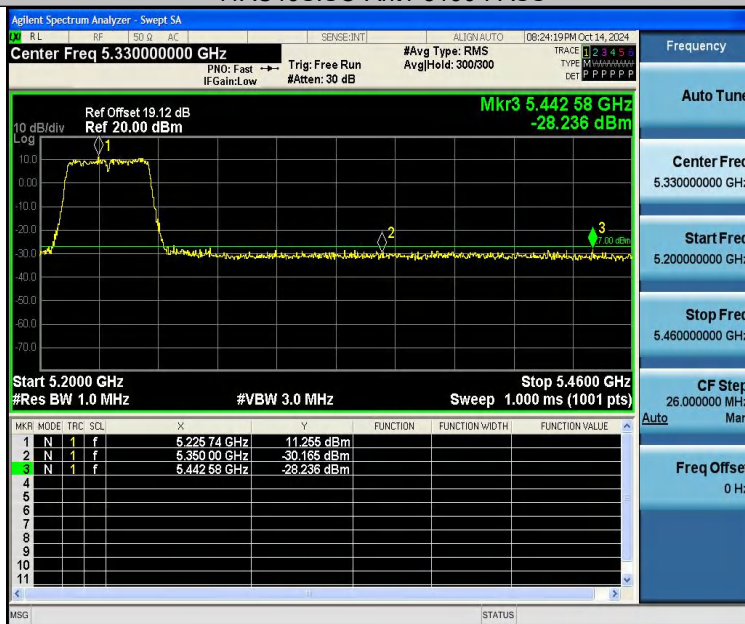

11AC40SISO-Ant1-5230-PASS

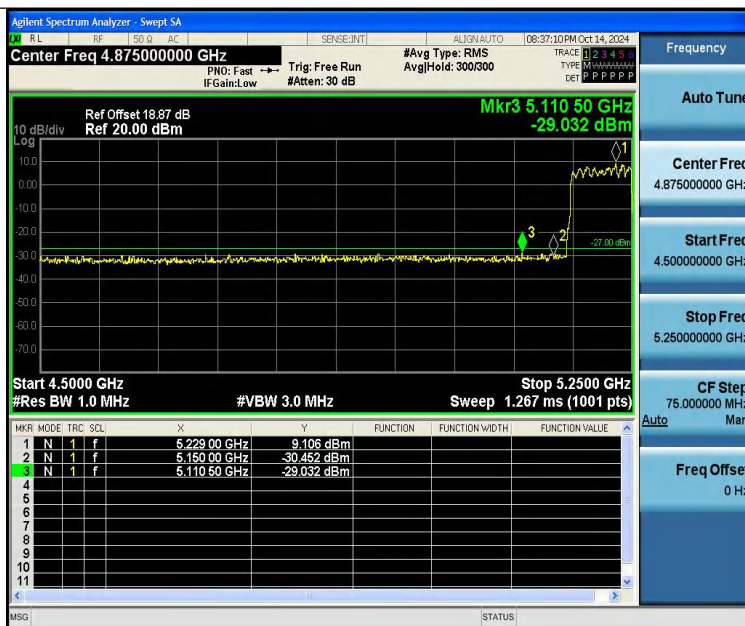

11AC80SISO-Ant1-5210-PASS



11AC80SISO-Ant1-5210-PASS

Note: 27~40GHz at least have 20dB margin. No recording in the test report.



Test plots B4:



11A-Ant1-5745-PASS



11A-Ant1-5825-PASS



11N20SISO-Ant1-5745-PASS



11N20SISO-Ant1-5825-PASS



11N40SISO-Ant1-5755-PASS



11N40SISO-Ant1-5795-PASS



11AC20SISO-Ant1-5745-PASS



11AC20SISO-Ant1-5825-PASS



11AC40SISO-Ant1-5755-PASS



11AC40SISO-Ant1-5795-PASS



11AC80SISO-Ant1-5775-PASS



11AC80SISO-Ant1-5775-PASS



6.7 Restricted Band

Test Requirement : FCC Part15 E Section 15.407(b)

Test site : Measurement Distance: 3m

Test Limit :

Frequency	Limit (dBuV/m @3m)	Remark
Above 1GHz	74	Peak Value
	54	Average Value

Test Procedure:

1. The EUT was placed on a styrofoam table which is 1.5m above ground plane.
2. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.
8. The test above 1GHz must be use the fully anechoic room, and the test below 1GHz use the half anechoic room

Test Result:

Worst case mode:		802.11a(6Mbps)		Test channel:		36		
NO.	Freq. [MHz]	level [dBμV/m]	Factor [dB]	Emission level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector Type
1	5150	50.28	6.53	56.81	68.23	11.42	H	Peak
2	5150	39.77	6.53	46.3	54	7.7	H	Average
3	5150	49.1	6.53	55.63	68.23	12.6	V	Peak
4	5150	38.52	6.53	45.05	54	8.95	V	Average



Worst case mode:		802.11a(6Mbps)		Test channel:		48		
NO.	Freq. [MHz]	level [dBμV/m]	Factor [dB]	Emission level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector Type
1	5350	50.76	6.56	57.32	68.23	10.91	H	Peak
2	5350	39.79	6.56	46.35	54	7.65	H	Average
3	5350	49.5	6.56	56.06	68.23	12.17	V	Peak
4	5350	38.24	6.56	44.8	54	9.2	V	Average

Worst case mode:		802.11a(6Mbps)		Test channel:		165		
NO.	Freq. [MHz]	level [dBμV/m]	Factor [dB]	Emission level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector Type
1	5850	49.96	6.64	56.6	68.23	11.63	H	Peak
2	5850	39.78	6.64	46.42	54	7.58	H	Average
3	5850	48.92	6.64	55.56	68.23	12.67	V	Peak
4	5850	38.54	6.64	45.18	54	8.82	V	Average

Note: Only recorded the worst case in the report.



7 Emission Bandwidth and Occupied Bandwidth

Test Requirement	: FCC CFR47 Part 15 Section 15.407(a)(e)
Test Method	: ANSI C63.10:2013
Test Limit	According to FCC §15.407(a), The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth. As per FCC §15.407(e): for equipment operating in the band 5725 – 5850 MHz, the minimum 6 dB bandwidth of U-NII devices shall be 500 kHz.

7.1 Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01,
Emission Bandwidth (EBW)

a) Set RBW = approximately 1% of the emission bandwidth; b) Set the VBW > RBW; c) Detector = Peak; d) Trace mode = max hold; e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%; 99% Occupied Bandwidth
The 99% occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99% occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in II.G.3.d). Measurements of 99% occupied bandwidth may also optionally be used in lieu of the EBW to define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).


The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set $VBW \geq 3 \cdot RBW$
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency.



The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

7.2 Test setup



7.3 Test Result


PASS

Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations / data rates and antenna ports.

Following channel was selected for the final test as listed below.

26 dB emission bandwidth:

TestMode	Antenna	Frequency[MHz]	26db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	20.520	5169.680	5190.200	---	---
11A	Ant1	5200	20.680	5189.720	5210.400	---	---
11A	Ant1	5240	21.280	5229.640	5250.920	---	---
11A	Ant1	5745	21.000	5734.400	5755.400	---	---
11A	Ant1	5785	21.080	5774.320	5795.400	---	---
11A	Ant1	5825	20.760	5814.600	5835.360	---	---
11N20SISO	Ant1	5180	20.800	5169.800	5190.600	---	---
11N20SISO	Ant1	5200	20.680	5189.720	5210.400	---	---
11N20SISO	Ant1	5240	21.040	5229.600	5250.640	---	---
11N20SISO	Ant1	5745	20.920	5734.840	5755.760	---	---
11N20SISO	Ant1	5785	21.320	5774.200	5795.520	---	---
11N20SISO	Ant1	5825	21.200	5814.760	5835.960	---	---
11N40SISO	Ant1	5190	41.520	5169.600	5211.120	---	---
11N40SISO	Ant1	5230	41.040	5209.280	5250.320	---	---
11N40SISO	Ant1	5755	42.080	5733.960	5776.040	---	---
11N40SISO	Ant1	5795	41.440	5774.520	5815.960	---	---
11AC20SISO	Ant1	5180	21.440	5169.360	5190.800	---	---
11AC20SISO	Ant1	5200	21.000	5189.600	5210.600	---	---
11AC20SISO	Ant1	5240	21.480	5229.520	5251.000	---	---
11AC20SISO	Ant1	5745	21.240	5734.520	5755.760	---	---
11AC20SISO	Ant1	5785	20.840	5774.560	5795.400	---	---
11AC20SISO	Ant1	5825	21.160	5814.480	5835.640	---	---
11AC40SISO	Ant1	5190	41.040	5169.600	5210.640	---	---
11AC40SISO	Ant1	5230	42.000	5209.520	5251.520	---	---
11AC40SISO	Ant1	5755	41.760	5734.040	5775.800	---	---
11AC40SISO	Ant1	5795	41.520	5774.200	5815.720	---	---
11AC80SISO	Ant1	5210	80.320	5169.840	5250.160	---	---
11AC80SISO	Ant1	5775	80.800	5735.000	5815.800	---	---



TestMode	Antenna	Frequency[MHz]	6db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5745	16.320	5736.800	5753.120	0.5	PASS
11A	Ant1	5785	16.320	5776.800	5793.120	0.5	PASS
11A	Ant1	5825	16.360	5816.800	5833.160	0.5	PASS
11N20SISO	Ant1	5745	16.840	5736.520	5753.360	0.5	PASS
11N20SISO	Ant1	5785	17.320	5776.200	5793.520	0.5	PASS
11N20SISO	Ant1	5825	17.040	5816.440	5833.480	0.5	PASS
11N40SISO	Ant1	5755	35.600	5737.480	5773.080	0.5	PASS
11N40SISO	Ant1	5795	35.120	5777.400	5812.520	0.5	PASS
11AC20SISO	Ant1	5745	16.680	5736.800	5753.480	0.5	PASS
11AC20SISO	Ant1	5785	17.040	5776.440	5793.480	0.5	PASS
11AC20SISO	Ant1	5825	17.320	5816.440	5833.760	0.5	PASS
11AC40SISO	Ant1	5755	35.840	5737.080	5772.920	0.5	PASS
11AC40SISO	Ant1	5795	35.440	5777.080	5812.520	0.5	PASS
11AC80SISO	Ant1	5775	75.040	5737.400	5812.440	0.5	PASS

Agilent Spectrum Analyzer - Swept SA

Center Freq 5.18000000 GHz

Ref Offset 16.75 dB
Ref 20.00 dBm

ΔMkr3 20.52 MHz
-0.522 dB

21.88 dBm

Center 5.18000 GHz

#Res BW 220 kHz

#VBW 680 kHz

Span 40.00 MHz

Sweep 1.000 ms (1001 pts)

MKR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	5.169 68 GHz	-21.686 dBm			
2	N	1	f	5.197 48 GHz	4.242 dBm			
3	Δ	1	f (Δ)	20.52 MHz (Δ)	-0.522 dB			

Frequency

Auto Tune

Center Freq
5.18000000 GHz

Start Freq
5.16000000 GHz

Stop Freq
5.20000000 GHz

CF Step
4.000000 MHz

Auto Man

Frequency Offset
0 Hz



11A-Ant1-5200



11A-Ant1-5240



11A-Ant1-5745



11A-Ant1-5785



11A-Ant1-5825



11N20SISO-Ant1-5180



11N20SISO-Ant1-5200



11N20SISO-Ant1-5240



11N20SISO-Ant1-5745



11N20SISO-Ant1-5785



11N20SISO-Ant1-5825



11N40SISO-Ant1-5190



11N40SISO-Ant1-5230



11N40SISO-Ant1-5755



11N40SISO-Ant1-5795



11AC20SISO-Ant1-5180