

## TEST REPORT

<b>Application No.:</b>	KSCR2505001155AT
<b>FCC ID:</b>	2AW2R-RV101203
<b>Applicant:</b>	Hangzhou Lingban Technology Co., Ltd.
<b>Address of Applicant:</b>	Room 101, Building 8, No.1288, Liangmu Road, Cangqian Street, Yuhang District, Hangzhou, Zhejiang, China
<b>Manufacturer:</b>	Hangzhou Lingban Technology Co., Ltd.
<b>Address of Manufacturer:</b>	Room 101, Building 8, No.1288, Liangmu Road, Cangqian Street, Yuhang District, Hangzhou, Zhejiang, China
<b>Factory:</b>	Lens Technology (XiangTan) Co., Ltd.
<b>Address of Factory:</b>	NO.16 Baishi West Road, Xiangtan Economic and Technological Development Zone, Xiangtan City, Hunan Province, P.R. China
<b>Equipment Under Test (EUT):</b>	
<b>EUT Name:</b>	Rokid Ai Glasses/Rokid Glasses
<b>Model No.:</b>	RV203, RV101, RV102*
*	Please refer to section 2 of this report which indicates which model was actually tested and which were electrically identical.
<b>Trade Mark:</b>	Rokid
<b>Standard(s) :</b>	47 CFR Part 15, Subpart C 15.247
<b>Date of Receipt:</b>	2025-05-30
<b>Date of Test:</b>	2025-06-24 to 2025-07-30
<b>Date of Issue:</b>	2025-08-01

<b>Test Result:</b>	<b>Pass*</b>
---------------------	--------------

\* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

<b>Revision Record</b>			
<b>Version</b>	<b>Description</b>	<b>Date</b>	<b>Remark</b>
00	Original	2025-08-01	/

Authorized for issue by:			
Tested By			
		Eric_Liu/Project Engineer	
Approved By			
		Terry Hou /Reviewer	

## 2 Test Summary

Radio Spectrum Technical Requirement					
Item	Standard	Method	FCC Requirement	Result	Test Lab
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass	A

N/A: Not applicable

Radio Spectrum Matter Part					
Item	Standard	Method	FCC Requirement	Result	Test Lab
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2020) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass	A
Conducted Peak Output Power		ANSI C63.10 (2020) Section 11.9.1	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass	A
Power Spectrum Density		ANSI C63.10 (2020) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass	A
Conducted Band Edges Measurement		ANSI C63.10 (2020) Section 6.10.4	47 CFR Part 15, Subpart C 15.247(d)	Pass	A
Conducted Spurious Emissions		ANSI C63.10 (2020) Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass	A
Radiated Emissions which fall in the restricted bands		ANSI C63.10 (2020) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass	B
Radiated Spurious Emissions		ANSI C63.10 (2020) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass	B

Note: There are series models mentioned in this report, and they are the identical in electrical and electronic characters. Only the model RV203 was tested since their differences were the model number and lens.

### 3 Contents

	Page
1 COVER PAGE .....	1
2 Test Summary .....	3
3 Contents.....	4
4 General Information.....	5
4.1 Details of E.U.T .....	5
4.2 Power level setting using in test:.....	5
4.3 Description of Support Units .....	5
4.4 Measurement Uncertainty .....	6
4.5 Test Location.....	7
4.6 Test Facility .....	8
4.7 Deviation from Standards.....	8
4.8 Abnormalities from Standard Conditions.....	8
5 Equipment List .....	9
6 Radio Spectrum Technical Requirement.....	11
6.1 Antenna Requirement .....	11
7 Radio Spectrum Matter Test Results.....	12
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz).....	12
7.2 Radiated Emissions which fall in the restricted bands .....	16
7.3 Radiated Spurious Emissions Below 1GHz .....	35
7.4 Radiated Spurious Emissions Above 1GHz.....	39
7.5 Conducted Peak Output Power.....	53
7.6 Minimum 6dB Bandwidth .....	54
7.7 Power Spectrum Density.....	55
7.8 Conducted Band Edges Measurement .....	56
7.9 Conducted Spurious Emissions .....	58
8 Test Setup Photo .....	59
9 EUT Constructional Details (EUT Photos).....	59
10 Appendix.....	60

## 4 General Information

### 4.1 Details of E.U.T.

Test Voltage:	Pre-test AC 120V/50-60Hz&AC 240V/50-60Hz then choose the AC 120/60Hz as worst case
Power supply:	DC 3.92V by battery
Operation Frequency:	2402MHz to 2480MHz
Bluetooth Version:	V5.0 Dual mode
Modulation Type:	GFSK
Number of Channels:	40
Channel Spacing:	2MHz
Antenna Type:	Ceramic Chip Loop Antenna
Antenna Gain:	0.41dBi (Provided by the manufacturer)

### 4.2 Power level setting using in test:

Channel	BLE 1M	BLE 2M
	Ant 1	Ant 1
0	8	8
19	8	8
39	8	8

### 4.3 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Notebook	LENOVO	K27	EB24537645

#### 4.4 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	$8.4 \times 10^{-8}$
2	Timeout	2s
3	Duty Cycle	0.37%
4	Occupied Bandwidth	3%
5	RF Conducted Power	0.6dB
6	RF Power Density	2.9dB
7	Conducted Spurious Emissions	0.75dB
8	RF Radiated Power	5.2dB (Below 1GHz)
		5.9dB (Above 1GHz)
9	Radiated Spurious Emission Test	4.2dB (Below 30MHz)
		4.5dB (30MHz-1GHz)
		5.1dB (1GHz-18GHz)
		5.4dB (Above 18GHz)
10	Temperature Test	1°C
11	Humidity Test	3%
12	Supply Voltages	1.5%
13	Time	3%

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 4.5 Test Location

All tests were performed at:

**Test Lab: A**

Compliance Certification Services (Kunshan) Inc.

No.10 Weiye Rd, Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, China.

Tel: +86 512 5735 5888 Fax: +86 512 5737 0818

**Test Lab: B**

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu)

Pilot Free Trade Zone

No tests were sub-contracted.

Note:

1. SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).
2. SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).
3. Sample source: sent by customer.

## 4.6 Test Facility

### Test Lab: A

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA**

Compliance Certification Services (Kunshan) Inc. is accredited by the American Association for Laboratory Accreditation (A2LA). Certificate No. 2541.01.

- **FCC**

Compliance Certification Services (Kunshan) Inc. has been recognized as an accredited testing laboratory. Designation Number: CN1172.

- **ISED**

Compliance Certification Services (Kunshan) Inc. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory. Company Number: 2324E

- **VCCI**

The 3m and 10m Semi-anechoic chamber and Shielded Room of Compliance Certification Services (Kunshan) Inc. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-20134, R-11600, C-11707, T-11499, G-10216 respectively.

### Test Lab: B

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 6336.01)**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

- **Innovation, Science and Economic Development Canada**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

- **FCC –Designation Number: CN1312**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an accredited testing laboratory.

Designation Number: CN1312.

Test Firm Registration Number: 717327

## 4.7 Deviation from Standards

None

## 4.8 Abnormalities from Standard Conditions

None

## 5 Equipment List

### Test Lab: A

Item	Equipment	Manufacturer	Model	Inventory No	Cal Date	Cal. Due Date
<b>Conducted Emission at Mains Terminals</b>						
1	EMI Test Receive	R&S	ESCI	KS301196	08/01/2024	07/31/2025
2	LISN	R&S	ENV216	KS301197	01/15/2025	01/14/2026
3	LISN	Schwarzbeck	NNLK 8129	KS301091	01/15/2025	01/14/2026
4	Pulse Limiter	R&S	ESH3-Z2	KUS1902E001	12/05/2024	12/04/2025
5	CE test Cable	Thermax	/	CZ301102	01/14/2025	01/13/2026
6	Test Software	Farad	EZ-EMC	/	N.C.R	N.C.R
<b>RF Conducted Test</b>						
1	Spectrum Analyzer	Keysight	N9020A	KUS1911E004-2	08/01/2024	07/31/2025
2	Spectrum Analyzer	Keysight	N9020A	KUS2001M001-2	08/01/2024	07/31/2025
3	Spectrum Analyzer	Keysight	N9030B	KSEM021-1	01/15/2025	01/14/2026
4	Signal Generator	R&S	SMBV100B	KSEM032	02/19/2025	02/18/2026
5	Signal Generator	R&S	SMW200A	KSEM020-1	08/02/2024	08/01/2025
6	Signal Generator	Agilent	N5182A	KUS2001M001-1	08/01/2024	07/31/2025
7	Signal Generator	Agilent	E8257C	KS301066	08/06/2024	08/05/2025
8	Radio Communication Test Station	Anritsu	MT8000A	KSEM001-1	08/01/2024	07/31/2025
9	Radio Communication Analyzer	Anritsu	MT8821C	KSEM002-1	02/19/2025	02/18/2026
10	Universal Radio Communication Tester	R&S	CMW500	KUS1911E004-1	08/13/2024	08/12/2025
11	Switcher	TST	FY562	KUS2001M001-4	01/15/2025	01/14/2026
12	Conducted Test Cable	Thermax	RF01-RF04	CZ301111-CZ301120	01/14/2025	01/13/2026
13	Temp. / Humidity Chamber	TERCHY	MHK-120AK	KSES104904	08/26/2024	08/25/2025
14	Temperature & Humidity Recorder	Renke Control	RS-WS-N01-6J	KSEM024-5	02/26/2025	02/25/2026
15	Software	BST	TST-PASS	/	NCR	NCR

**Test Lab: B**

Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-01	6/3/2023	6/2/2026
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-05	2/13/2025	2/12/2026
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	1/20/2025	1/19/2026
Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-07	11/21/2024	11/20/2025
Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	1/15/2025	1/14/2026
Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	VULB 9168	SUWI-01-11-04	8/22/2024	8/21/2026
Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	BBHA 9120D	SUWI-01-11-02	5/7/2025	5/6/2027
Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	BBHA 9170	SUWI-01-11-03	5/7/2025	5/6/2027
Active Loop Antenna	SCHWRZBECK MESS-ELEKTRONIK	FMZB 1519B	SUWI-01-21-01	5/7/2025	5/6/2027
Amplifier	Tonscend	TAP9K3G40	SUWI-01-14-01	1/15/2025	1/14/2026
Amplifier	Tonscend	TAP01018050	SUWI-01-14-02	1/15/2025	1/14/2026
Amplifier	Tonscend	TAP18040048	SUWI-01-14-03	1/20/2025	1/19/2026
Measurement Software	Tonscend	JS32-RE	SUWI-02-09-04	NCR	NCR
Measurement Software		V4.0.0.0			
Measurement Software	Tonscend	JS32-RSE	SUWI-02-09-06	NCR	NCR
Router		4.0.0.1			
Router	PLANET	FSD-803	SUWI-03-14-01	NCR	NCR

## 6 Radio Spectrum Technical Requirement

### 6.1 Antenna Requirement

#### 6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

#### 6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is Ceramic Chip Loop Antenna on the main PCB and no consideration of replacement. The best case gain of the antenna is 0.41dBi.

Antenna location: Refer to internal photo.

## 7 Radio Spectrum Matter Test Results

### 7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207

Test Method: ANSI C63.10 (2020) Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz

#### 7.1.1 E.U.T. Operation


Operating Environment:

Temperature: 20.5 °C      Humidity: 50.5 % RH      Atmospheric Pressure: 1010 mbar

#### 7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	03	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

#### 7.1.3 Test Setup Diagram

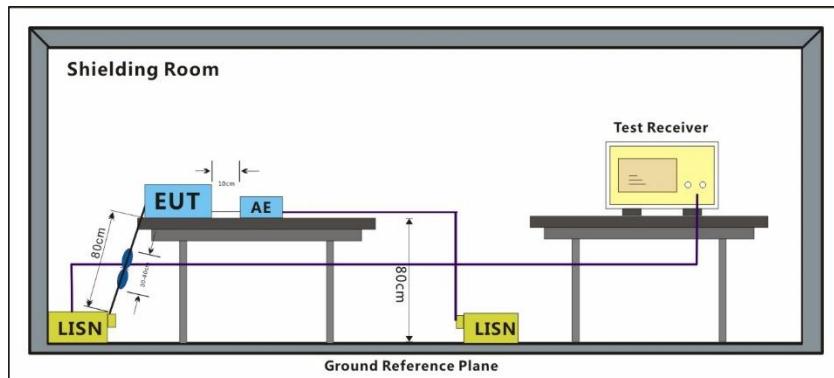


#### 7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50 $\mu$ H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark : Level=Read Level+ Cable Loss+ LISN Factor

Test Mode: 02; Line: Live line


**Test Data :**

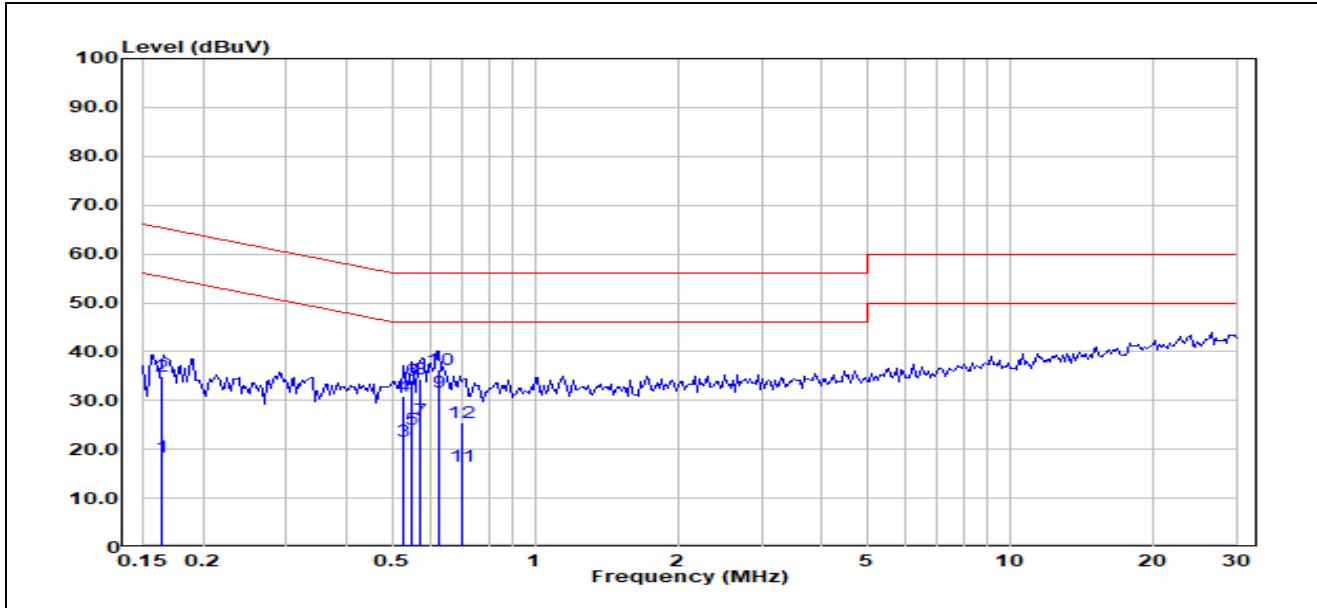

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1639	-1.73	20.22	18.49	55.26	-36.77	Average
2	0.1639	14.74	20.22	34.96	65.26	-30.30	QP
3	0.5288	1.59	20.07	21.66	46.00	-24.34	Average
4	0.5288	10.85	20.07	30.92	56.00	-25.08	QP
5	0.5511	4.18	20.07	24.25	46.00	-21.75	Average
6	0.5511	14.21	20.07	34.28	56.00	-21.72	QP
7	0.5755	6.01	20.07	26.08	46.00	-19.92	Average
8	0.5755	14.36	20.07	34.43	56.00	-21.57	QP
9	0.6256	11.57	20.06	31.63	46.00	-14.37	Average
10	0.6256	16.16	20.06	36.22	56.00	-19.78	QP
11	0.6995	-3.49	20.06	16.57	46.00	-29.43	Average
12	0.6995	5.54	20.06	25.60	56.00	-30.40	QP

Test Mode: 02; Line: Neutral Line

**Test Data :**

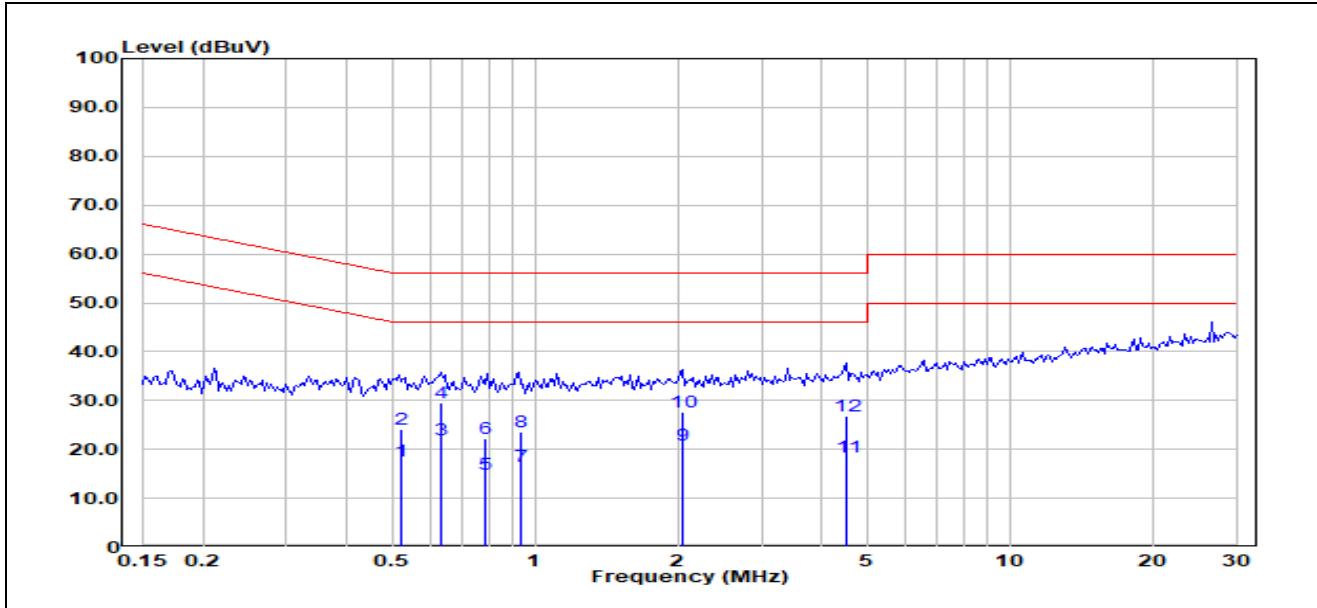

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.5208	-2.56	20.04	17.48	46.00	-28.52	Average
2	0.5208	3.98	20.04	24.02	56.00	-31.98	QP
3	0.6338	2.02	20.02	22.04	46.00	-23.96	Average
4	0.6338	9.46	20.02	29.48	56.00	-26.52	QP
5	0.7866	-5.09	20.00	14.91	46.00	-31.09	Average
6	0.7866	2.21	20.00	22.21	56.00	-33.79	QP
7	0.9332	-3.35	19.99	16.64	46.00	-29.36	Average
8	0.9332	3.54	19.99	23.53	56.00	-32.47	QP
9	2.0460	0.57	20.22	20.79	46.00	-25.21	Average
10	2.0460	7.51	20.22	27.73	56.00	-28.27	QP
11	4.5400	-2.63	21.17	18.54	46.00	-27.46	Average
12	4.5400	5.60	21.17	26.77	56.00	-29.23	QP

## 7.2 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2020) Section 6.10.5

Measurement Distance: 3M

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

### 7.2.1 E.U.T. Operation


Operating Environment:

Temperature: 22.5 °C      Humidity: 50.6 % RH      Atmospheric Pressure: 1010 mbar

### 7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	03	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

### 7.2.3 Test Setup Diagram

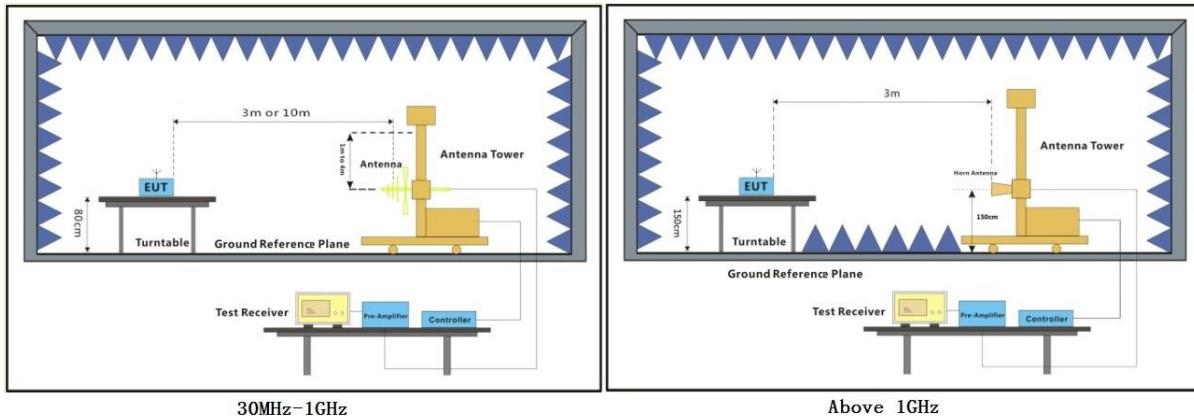

#### 7.2.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Remark 3: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.


Remark 4: For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle  $< 98\%$ ) or 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.

BLE 1M\_Channel 00 Average

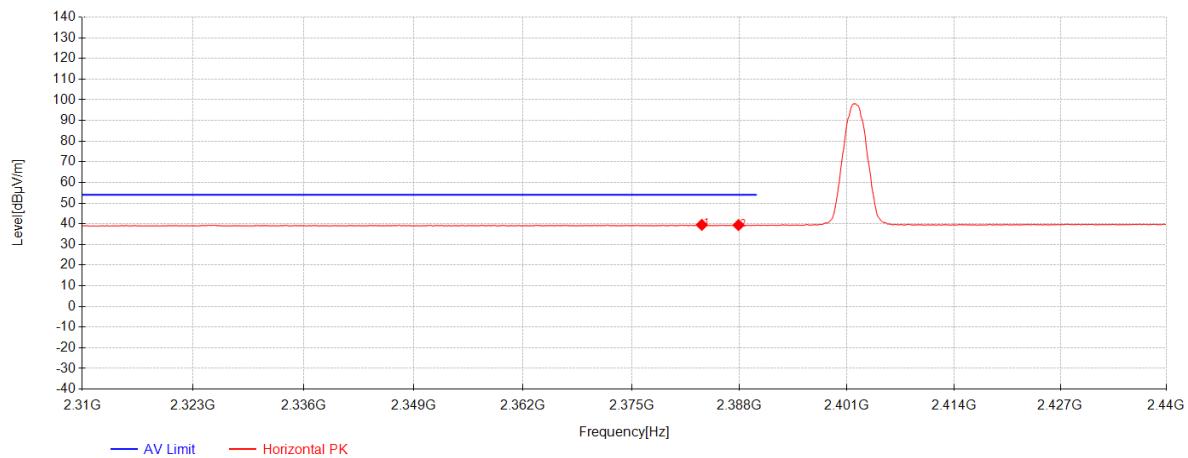


Data List								
NO.	Frequency [MHz]	Reading [dB $\mu$ V]	AF [dB/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity
1	2383.45	35.64	27.14	-23.31	39.48	54.00	14.52	Horizontal
2	2387.87	35.52	27.15	-23.31	39.36	54.00	14.64	Horizontal

### BLE 1M\_Channel 00 Peak

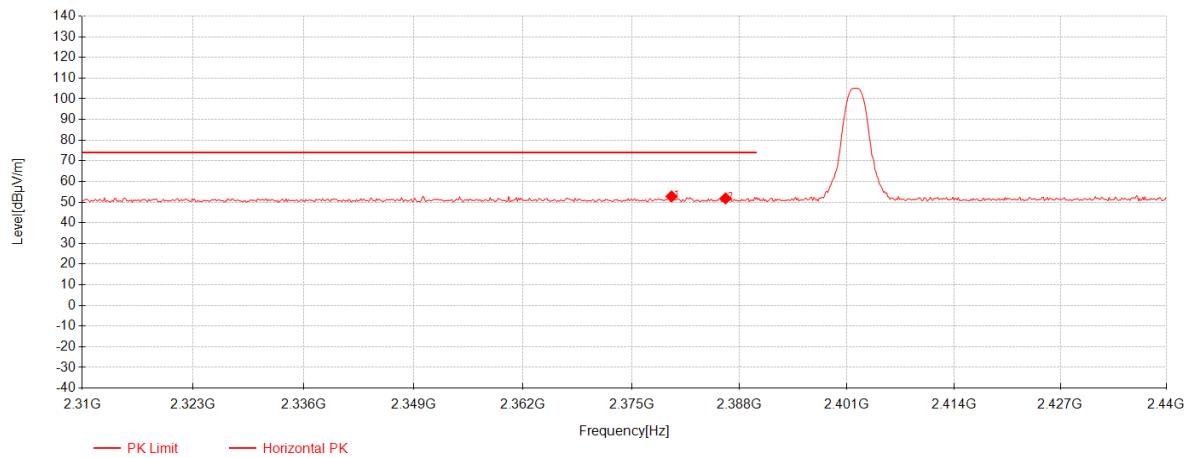


Data List								
NO.	Frequency [MHz]	Reading [dB $\mu$ V]	AF [dB/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity
1	2379.81	48.95	27.14	-23.31	52.78	74.00	21.22	Horizontal
2	2386.31	47.98	27.15	-23.31	51.82	74.00	22.18	Horizontal

BLE 1M\_Channel 00 Average

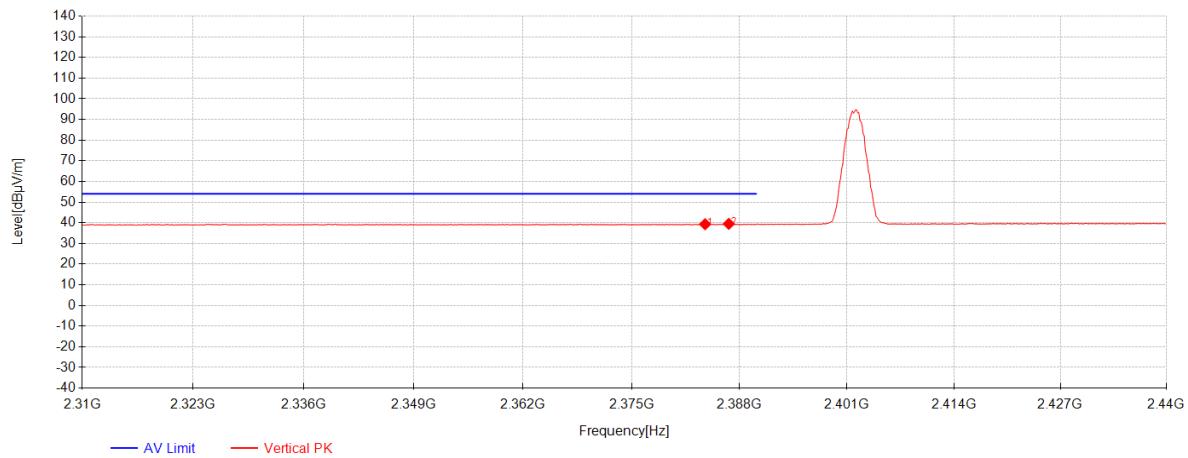


Data List								
NO.	Frequency [MHz]	Reading [dB $\mu$ V]	AF [dB/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity
1	2383.84	35.48	27.14	-23.31	39.32	54.00	14.68	Vertical
2	2386.7	35.65	27.15	-23.31	39.49	54.00	14.51	Vertical

BLE 1M\_Channel 00 Average

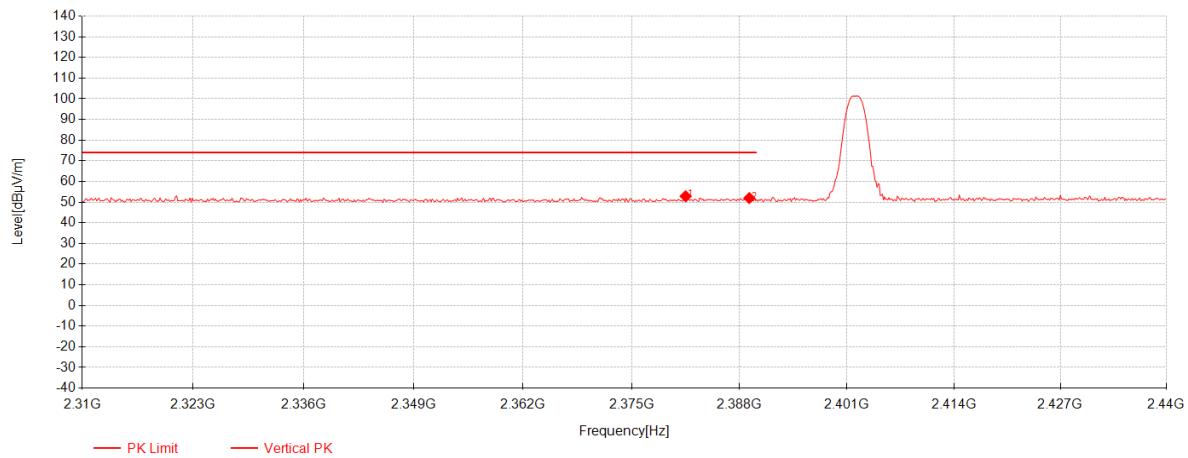


Data List								
NO.	Frequency [MHz]	Reading [dB $\mu$ V]	AF [dB/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity
1	2381.5	49.02	27.14	-23.31	52.85	74.00	21.15	Vertical
2	2389.17	48.14	27.16	-23.31	51.98	74.00	22.02	Vertical

BLE 1M\_Channel 39 Average

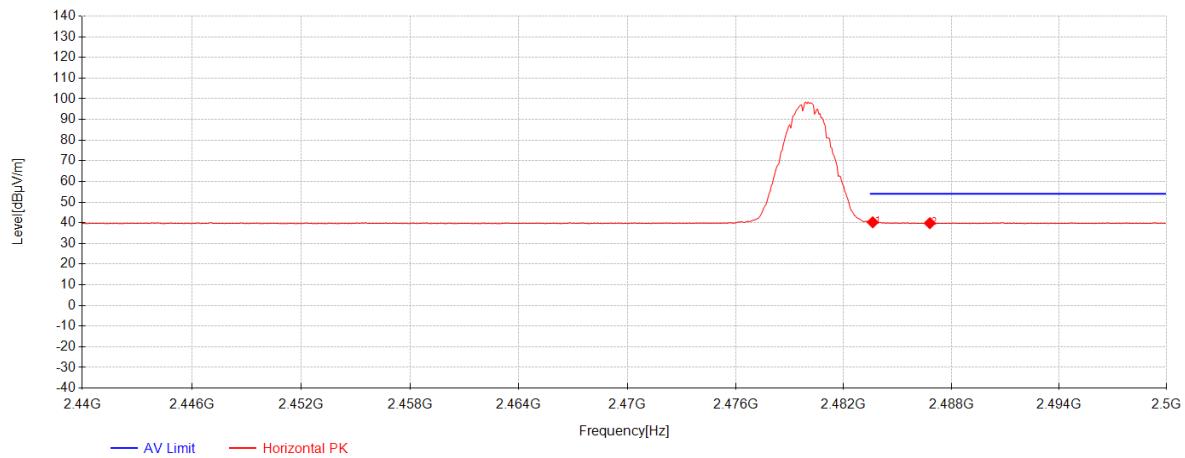


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.62	36.15	27.36	-23.27	40.24	54.00	13.76	Horizontal
2	2486.8	35.73	27.37	-23.27	39.83	54.00	14.17	Horizontal

### BLE 1M\_Channel 39 Peak

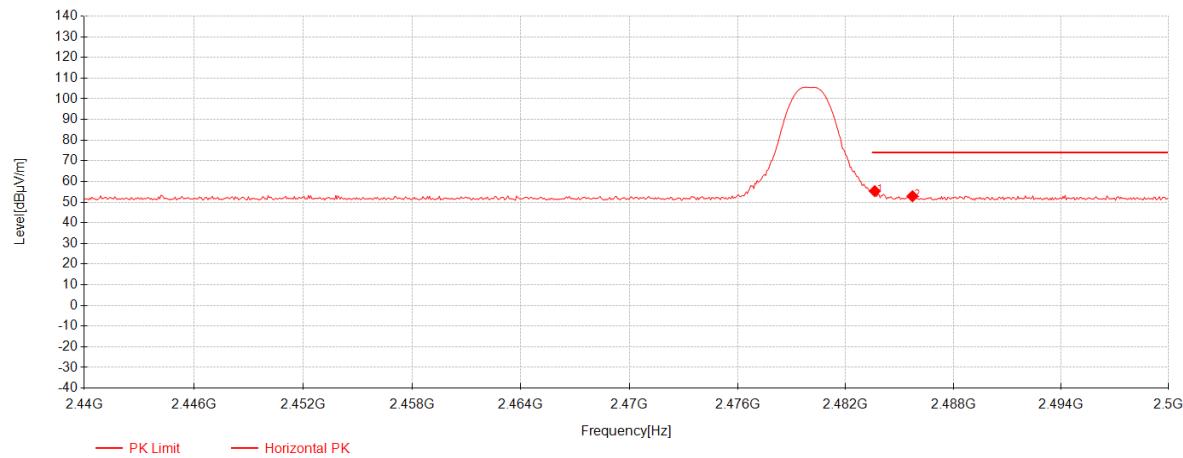


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.62	51.23	27.36	-23.27	55.32	74.00	18.68	Horizontal
2	2485.72	48.76	27.37	-23.27	52.86	74.00	21.14	Horizontal

BLE 1M\_Channel 39 Average

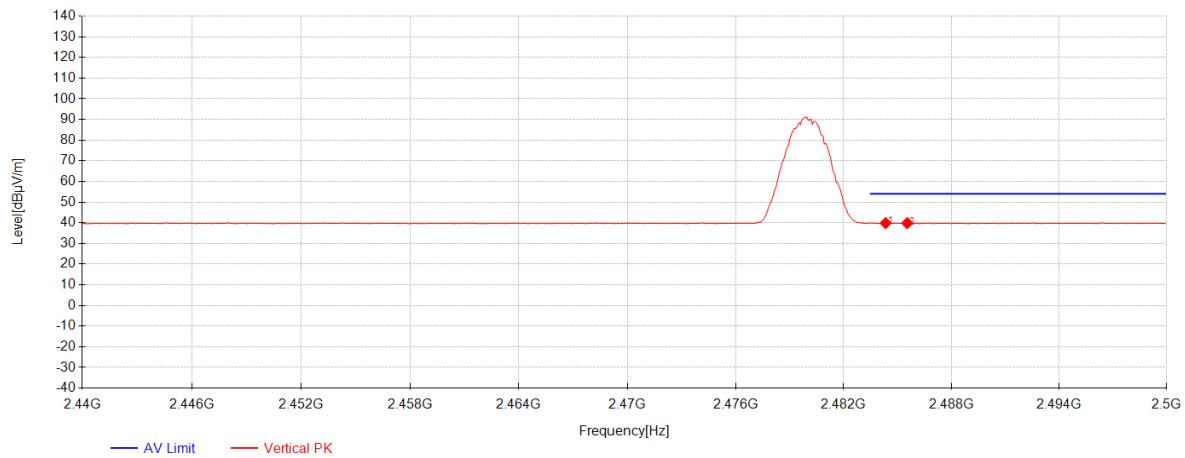


Data List								
NO.	Frequency [MHz]	Reading [dB $\mu$ V]	AF [dB/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity
1	2484.34	35.75	27.37	-23.27	39.85	54.00	14.15	Vertical
2	2485.54	35.72	27.37	-23.27	39.82	54.00	14.18	Vertical

## BLE 1M\_Channel 39 Peak

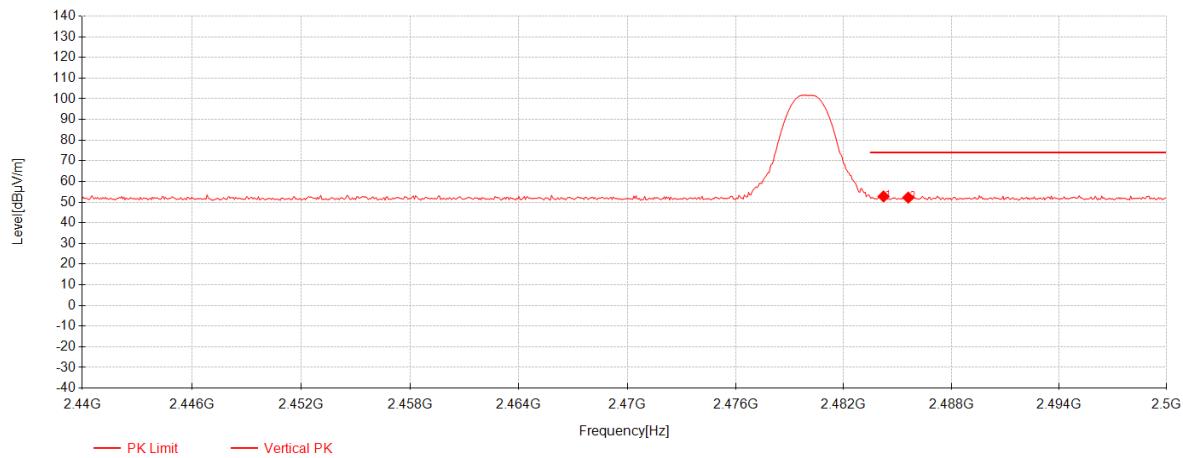


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2484.22	48.64	27.37	-23.27	52.74	74.00	21.26	Vertical
2	2485.6	48.09	27.37	-23.27	52.19	74.00	21.81	Vertical

BLE 2M\_Channel 00 Average

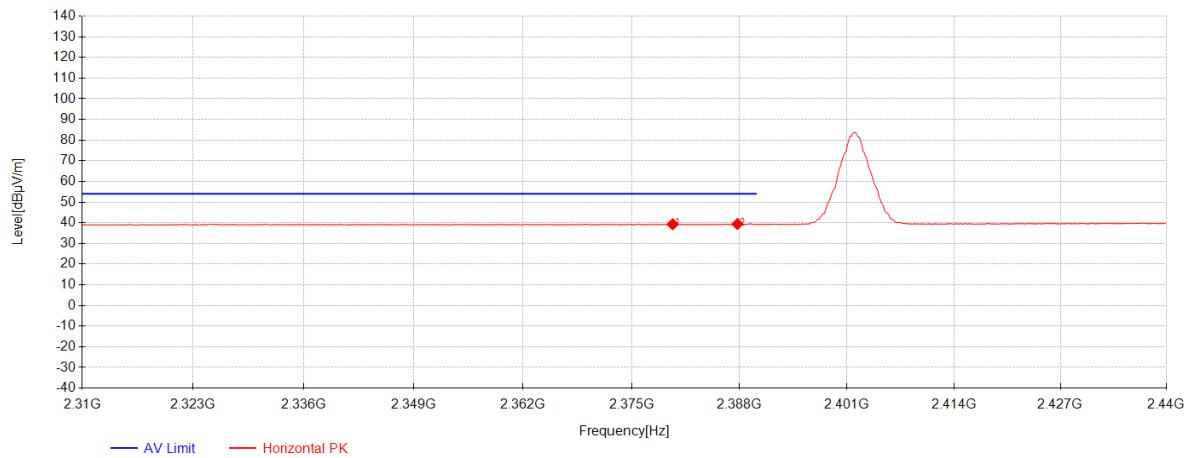


Data List								
NO.	Frequency [MHz]	Reading [dB $\mu$ V]	AF [dB/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity
1	2379.94	35.47	27.14	-23.31	39.30	54.00	14.70	Horizontal
2	2387.74	35.57	27.15	-23.31	39.41	54.00	14.59	Horizontal

### BLE 2M\_Channel 00 Peak

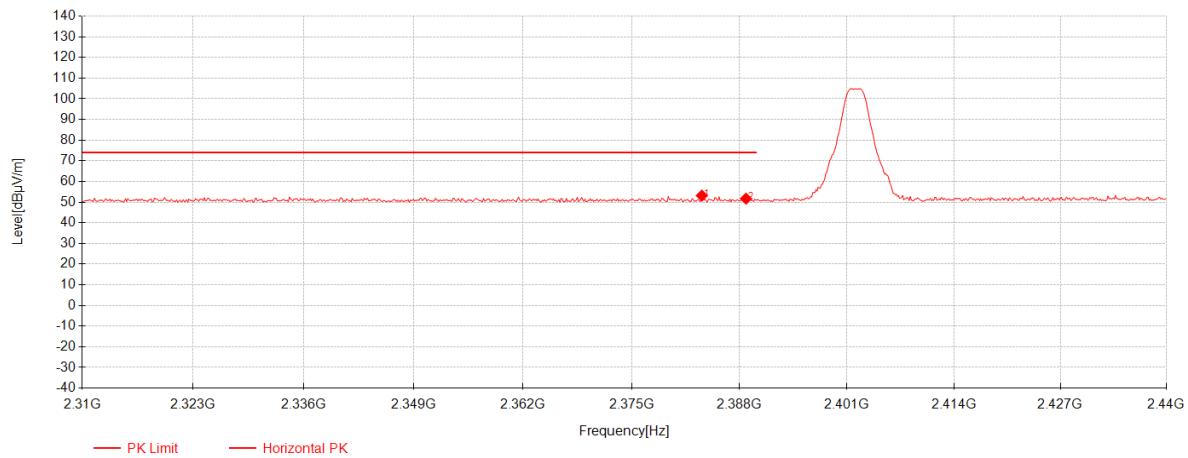


Data List								
NO.	Frequency [MHz]	Reading [dB $\mu$ V]	AF [dB/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity
1	2383.45	49.33	27.14	-23.31	53.17	74.00	20.83	Horizontal
2	2388.78	47.82	27.16	-23.31	51.66	74.00	22.34	Horizontal

BLE 2M\_Channel 00 Average

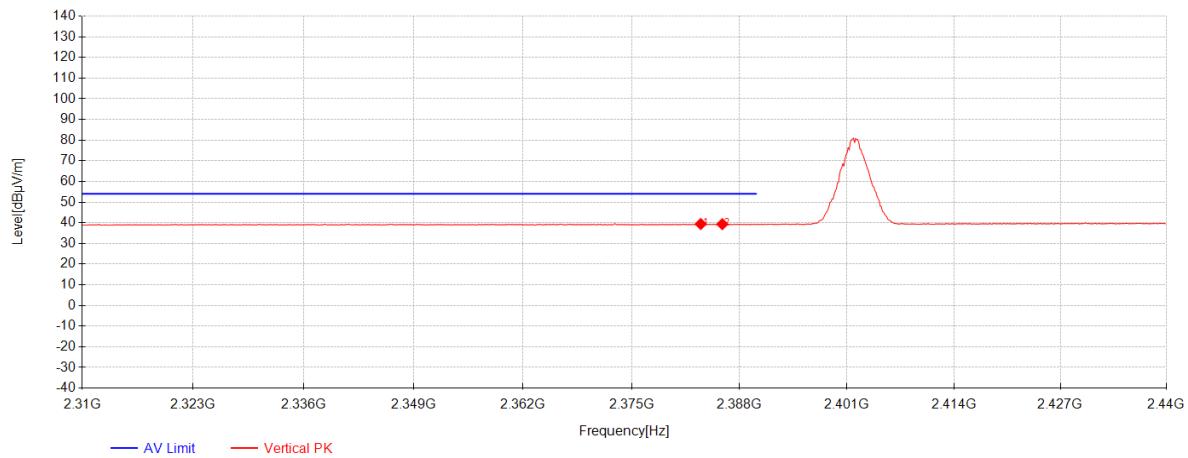


Data List								
NO.	Frequency [MHz]	Reading [dB $\mu$ V]	AF [dB/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity
1	2383.32	35.59	27.14	-23.31	39.42	54.00	14.58	Vertical
2	2385.92	35.50	27.15	-23.31	39.34	54.00	14.66	Vertical

### BLE 2M\_Channel 00 Peak

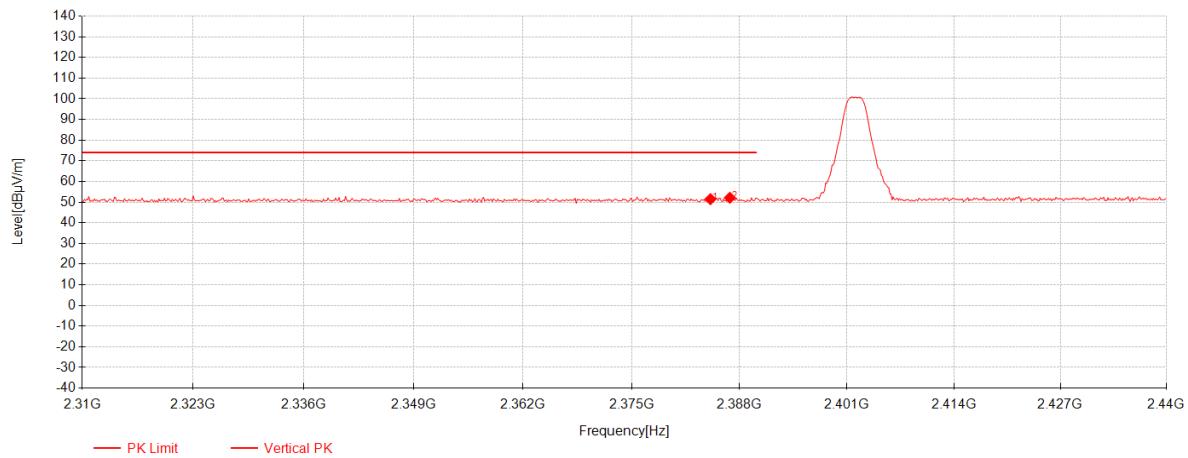


Data List								
NO.	Frequency [MHz]	Reading [dB $\mu$ V]	AF [dB/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity
1	2384.49	47.61	27.15	-23.31	51.45	74.00	22.55	Vertical
2	2386.83	48.28	27.15	-23.31	52.12	74.00	21.88	Vertical

BLE 2M\_Channel 39 Average

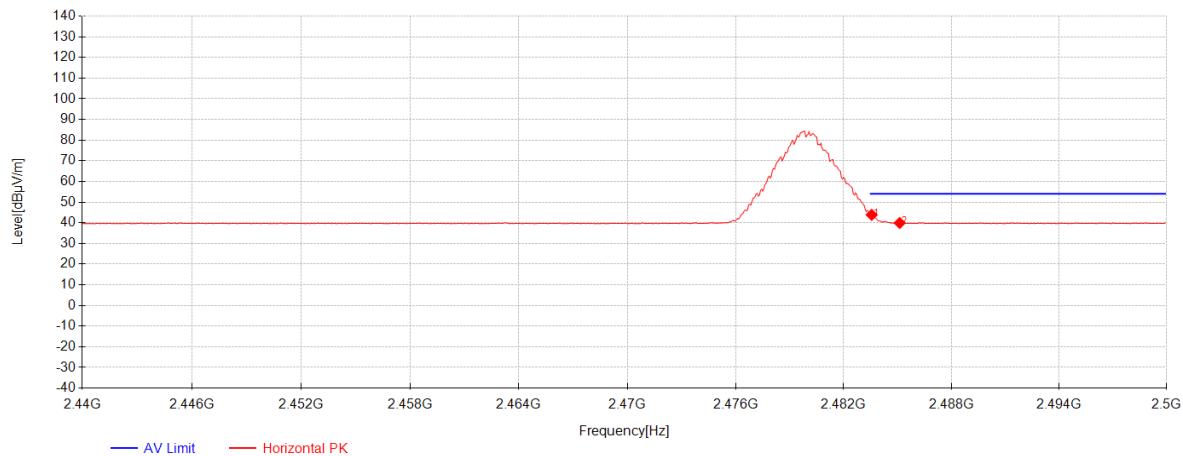


Data List								
NO.	Frequency [MHz]	Reading [dB $\mu$ V]	AF [dB/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity
1	2483.56	39.75	27.36	-23.27	43.84	54.00	10.16	Horizontal
2	2485.12	35.82	27.37	-23.27	39.92	54.00	14.08	Horizontal

### BLE 2M\_Channel 39 Peak

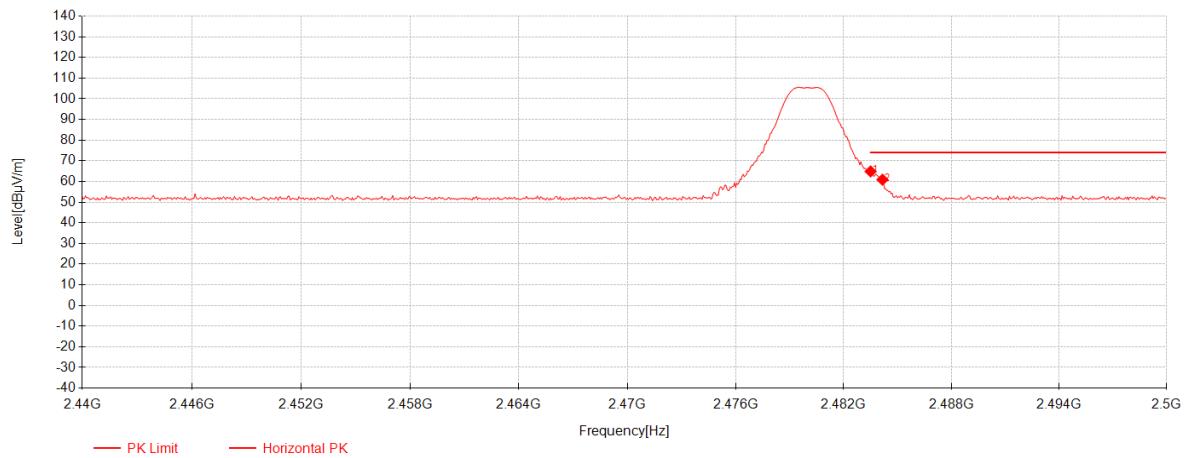


Data List								
NO.	Frequency [MHz]	Reading [dB $\mu$ V]	AF [dB/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity
1	2483.5	60.78	27.36	-23.27	64.87	74.00	9.13	Horizontal
2	2484.16	56.77	27.37	-23.27	60.87	74.00	13.13	Horizontal

BLE 2M\_Channel 39 Average

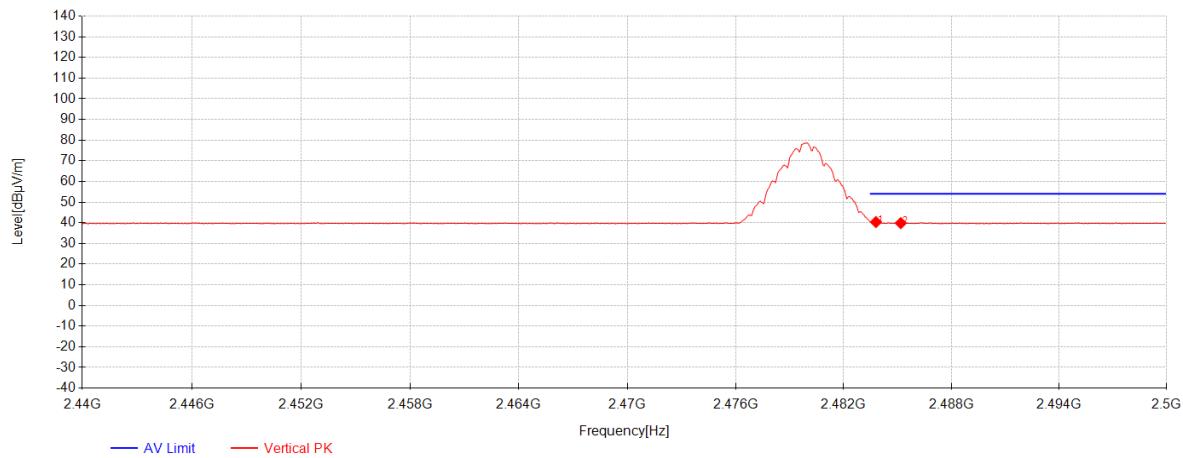

Data List								
NO.	Frequency [MHz]	Reading [dB $\mu$ V]	AF [dB/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity
1	2483.8	36.27	27.36	-23.27	40.36	54.00	13.64	Vertical
2	2485.18	35.75	27.37	-23.27	39.85	54.00	14.15	Vertical

## BLE 2M\_Channel 39 Peak

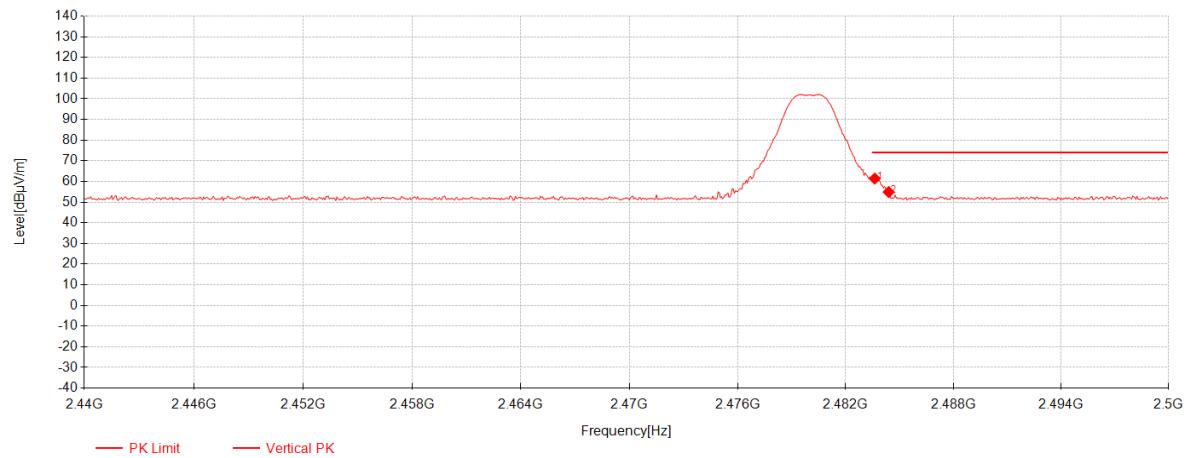

Data List								
NO.	Frequency [MHz]	Reading [dB $\mu$ V]	AF [dB/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity
1	2483.62	57.30	27.36	-23.27	61.39	74.00	12.61	Vertical
2	2484.4	50.78	27.37	-23.27	54.88	74.00	19.12	Vertical

### 7.3 Radiated Spurious Emissions Below 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2020) Section 6.4,6.5

Measurement Distance: 3M

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

#### 7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 22.5 °C


Humidity: 50.6 % RH

Atmospheric Pressure: 1010 mbar

#### 7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	03	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

#### 7.3.3 Test Setup Diagram

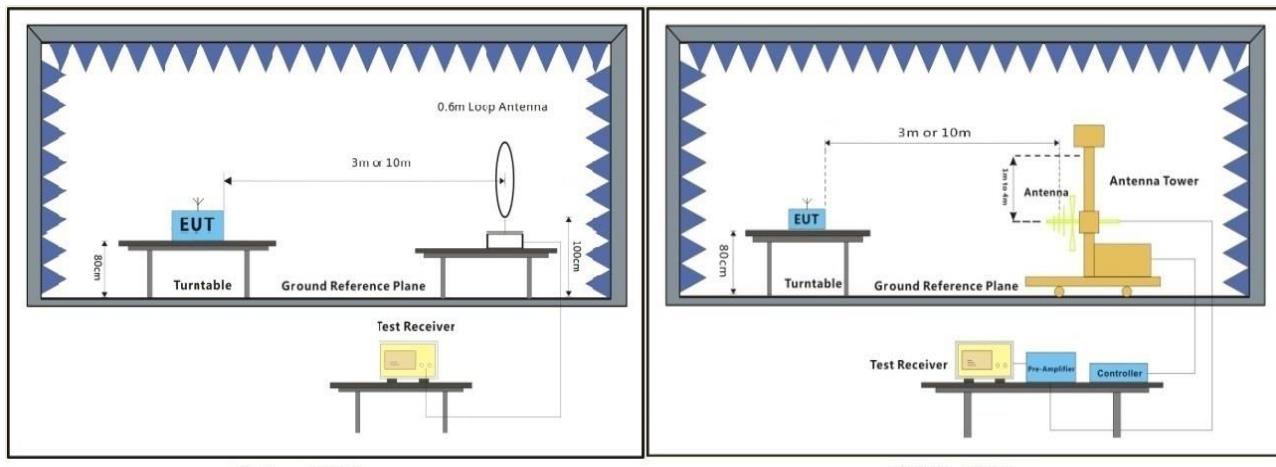

#### 7.3.4 Measurement Procedure and Data


- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

Test Mode: 02; Polarity: Horizontal


**Test Data :**

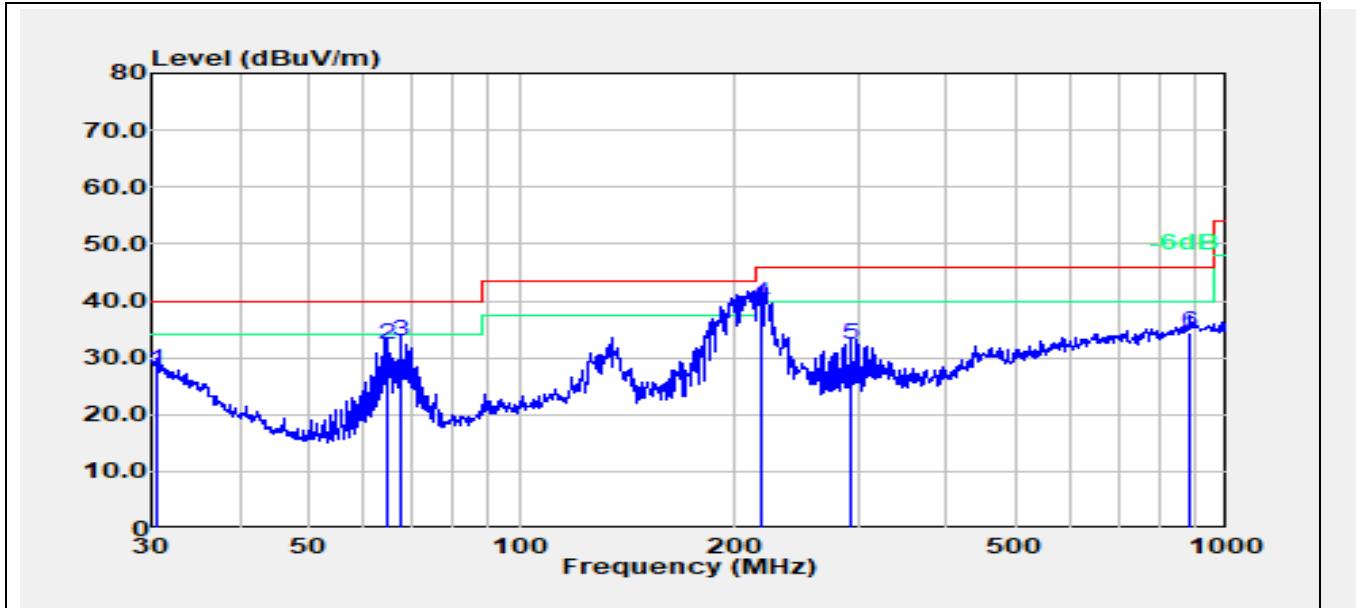

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	30.424	2.96	24.78	27.74	40.00	-12.26	100	123	QP
2	64.433	20.06	12.22	32.28	40.00	-7.72	200	40	QP
3	67.438	20.45	12.60	33.05	40.00	-6.95	100	52	QP
4	219.075	21.16	18.24	39.40	46.00	-6.60	100	25	QP
5	293.084	11.02	21.35	32.37	46.00	-13.63	200	187	QP
6	884.503	3.02	31.28	34.30	46.00	-11.70	100	320	QP

Test Mode: 02; Polarity: Vertical

**Test Data :**

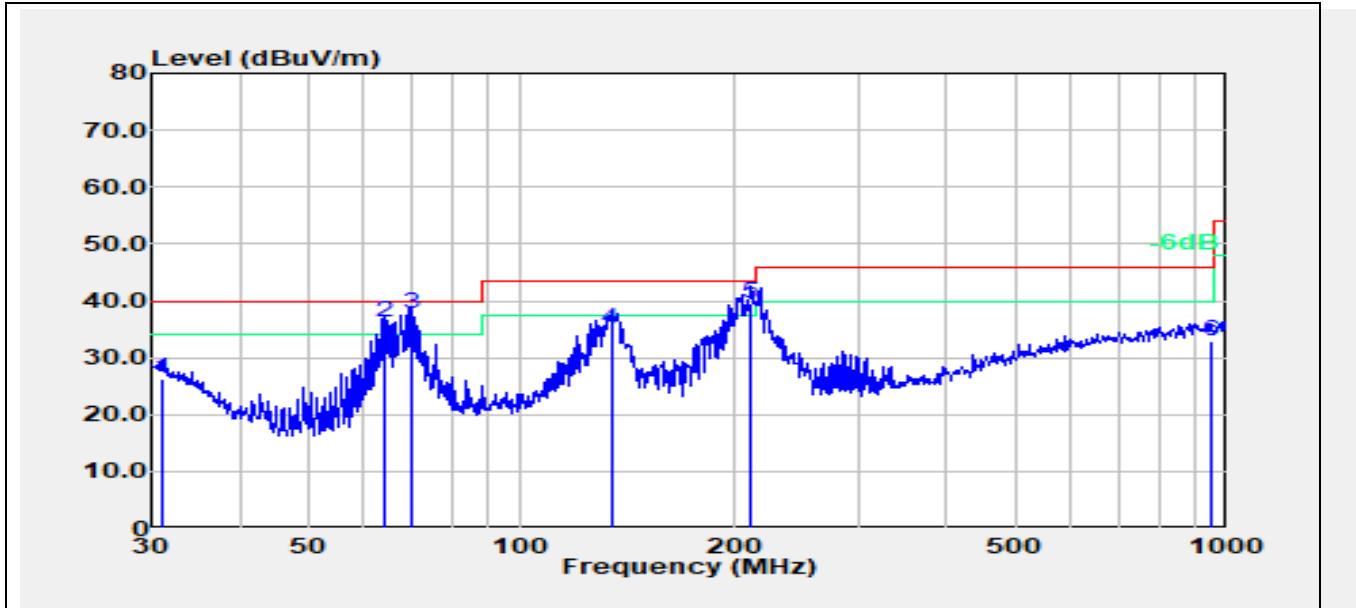

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	30.962	1.85	24.36	26.21	40.00	-13.79	100	47	QP
2	64.208	23.84	12.29	36.13	40.00	-3.87	100	19	QP
3	69.845	24.12	13.54	37.66	40.00	-2.34	100	110	QP
4	134.088	15.14	20.02	35.16	43.50	-8.34	100	245	QP
5	211.527	21.36	18.05	39.41	43.50	-4.09	100	343	QP
6	948.761	1.69	31.18	32.87	46.00	-13.13	100	89	QP

## 7.4 Radiated Spurious Emissions Above 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2020) Section 6.6

Measurement Distance: 3M

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
Above 1000	500	3

### 7.4.1 E.U.T. Operation


Operating Environment:

Temperature: 22.5 °C      Humidity: 50.6 % RH      Atmospheric Pressure: 1010 mbar

### 7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	03	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

### 7.4.3 Test Setup Diagram

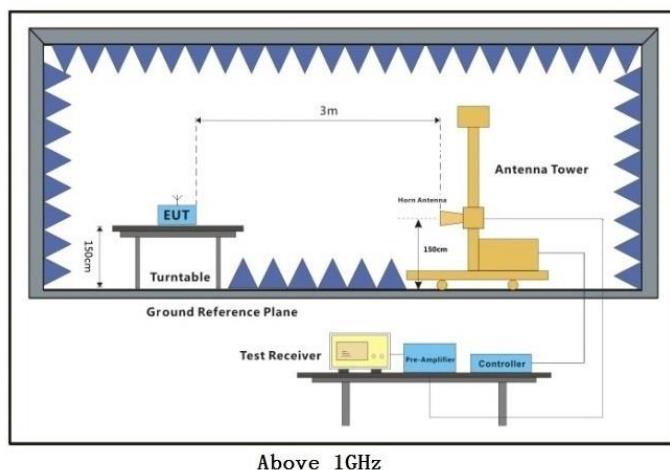


#### 7.4.4 Measurement Procedure and Data

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 1GHz to 25GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
- 4: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.
- 5:For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle  $< 98\%$ ) or 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.


## BLE 1M\_Channel 00

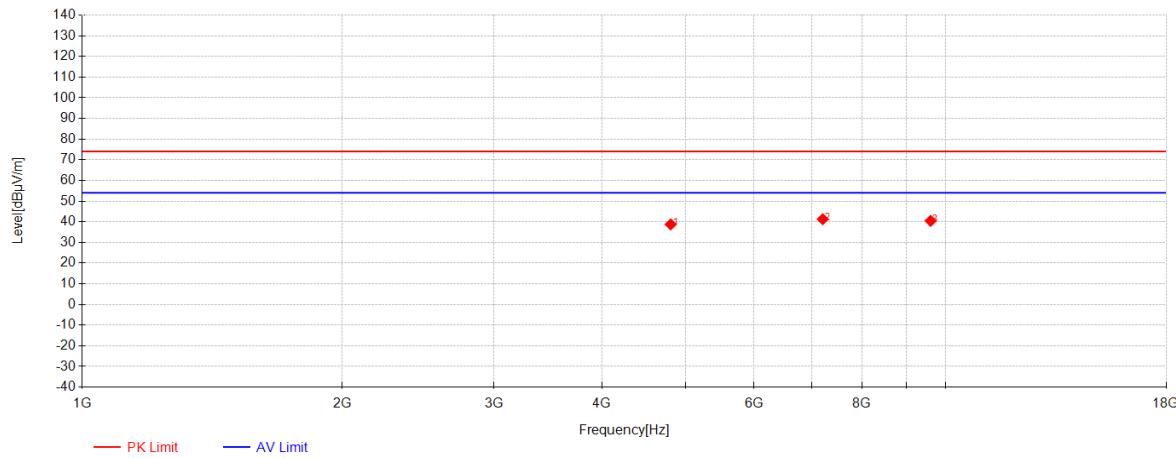

Data List								
NO.	Frequency [MHz]	Reading [dB $\mu$ V]	AF [dB/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity
1	4804	47.47	32.77	-41.49	38.75	74.00	35.25	Horizontal
2	7206	43.04	36.25	-38.02	41.27	74.00	32.73	Horizontal
3	9608	36.12	37.78	-33.45	40.45	74.00	33.55	Horizontal

BLE\_1M\_TX\_CH\_00\_Horizontal


## BLE 1M\_Channel 00

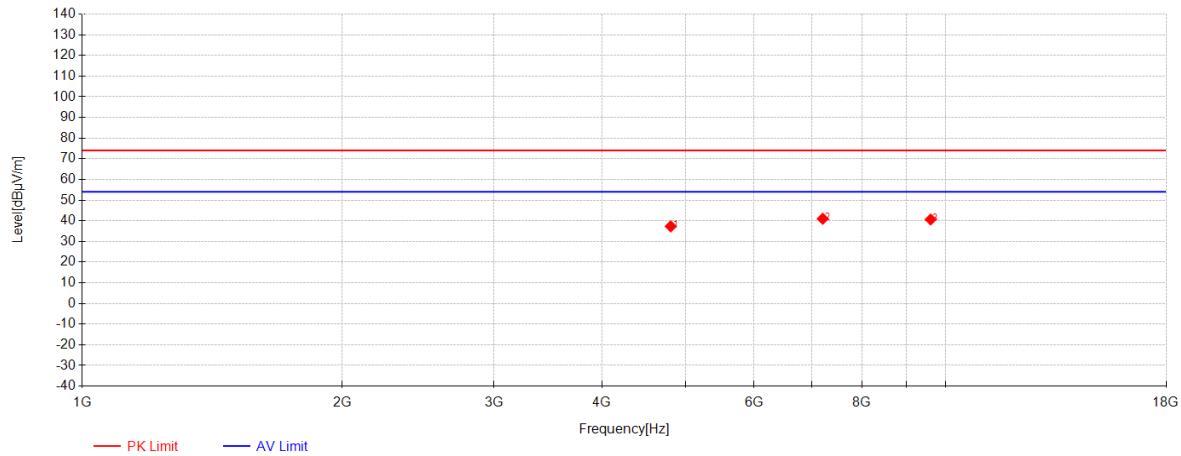

Data List								
NO.	Frequency [MHz]	Reading [dB $\mu$ V]	AF [dB/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity
1	4804	46.03	32.77	-41.49	37.31	74.00	36.69	Vertical
2	7206	42.77	36.25	-38.02	41.00	74.00	33.00	Vertical
3	9608	36.30	37.78	-33.45	40.63	74.00	33.37	Vertical

BLE\_1M\_TX\_CH\_00\_Vertical


BLE 1M\_Channel 19

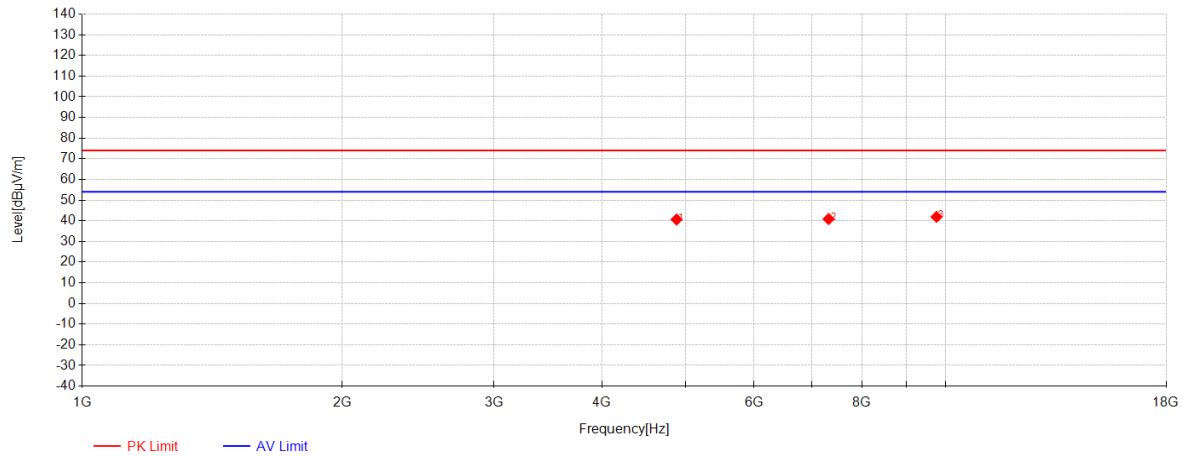

Data List								
NO.	Frequency [MHz]	Reading [dB $\mu$ V]	AF [dB/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity
1	4880	48.94	32.94	-41.26	40.62	74.00	33.38	Horizontal
2	7320	41.94	36.38	-37.47	40.86	74.00	33.14	Horizontal
3	9760	37.14	37.83	-33.07	41.90	74.00	32.10	Horizontal

BLE\_1M\_TX\_CH\_19\_Horizontal


## BLE 1M\_Channel 19

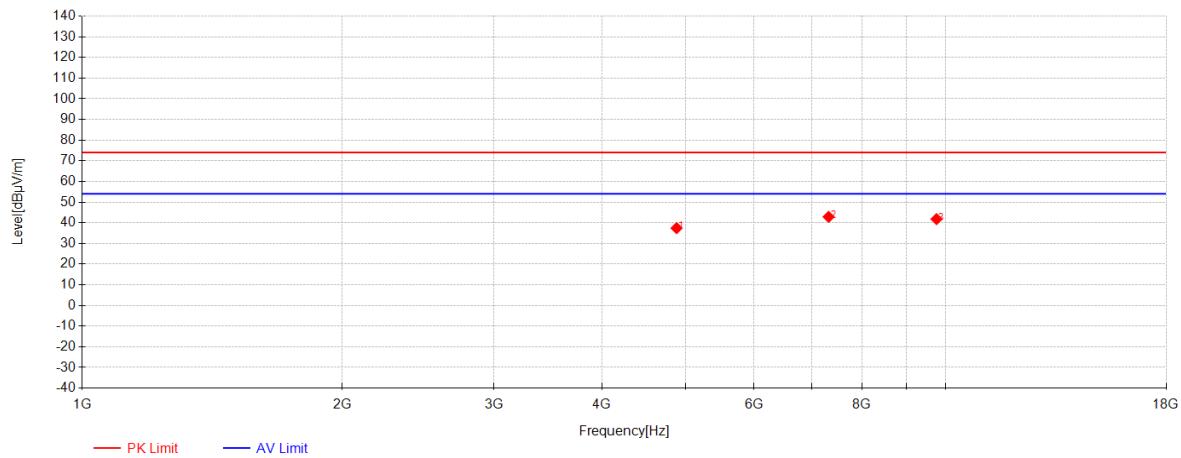

Data List								
NO.	Frequency [MHz]	Reading [dB $\mu$ V]	AF [dB/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity
1	4880	45.73	32.94	-41.26	37.41	74.00	36.59	Vertical
2	7320	43.96	36.38	-37.47	42.88	74.00	31.12	Vertical
3	9760	37.04	37.83	-33.07	41.80	74.00	32.20	Vertical

BLE\_1M\_TX\_CH\_19\_Vertical


BLE 1M\_Channel 39

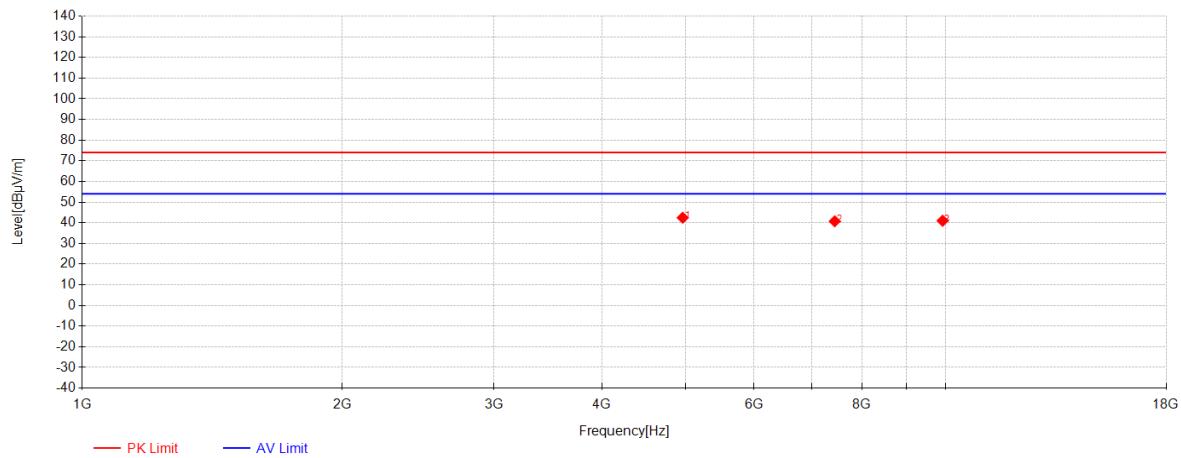

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4960	50.70	33.11	-41.36	42.45	74.00	31.55	Horizontal
2	7440	42.06	36.53	-37.85	40.74	74.00	33.26	Horizontal
3	9920	35.67	37.88	-32.55	41.00	74.00	33.00	Horizontal

BLE\_1M\_TX\_CH\_39\_Horizontal


## BLE 1M\_Channel 39

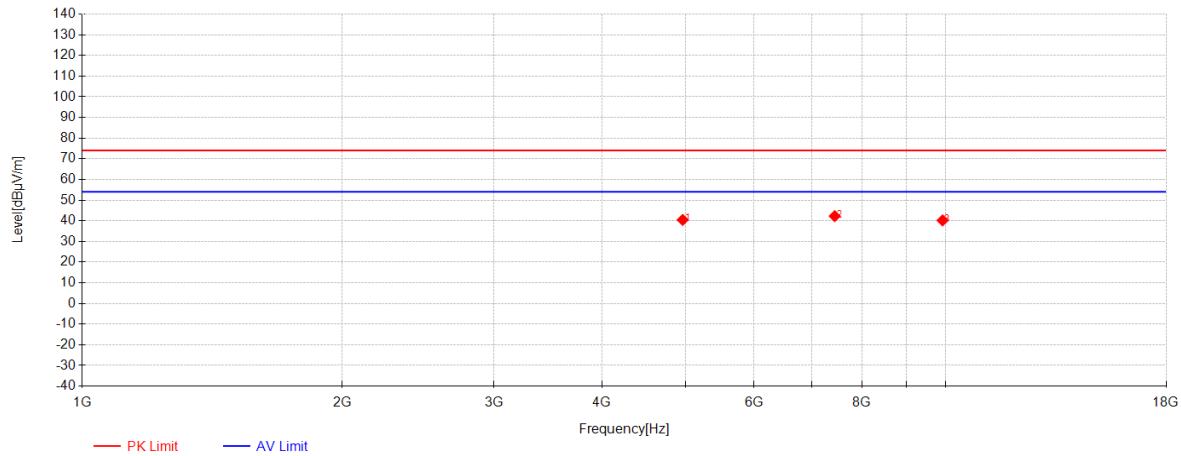

Data List								
NO.	Frequency [MHz]	Reading [dB $\mu$ V]	AF [dB/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity
1	4960	48.70	33.11	-41.36	40.45	74.00	33.55	Vertical
2	7440	43.57	36.53	-37.85	42.25	74.00	31.75	Vertical
3	9920	34.87	37.88	-32.55	40.20	74.00	33.80	Vertical

BLE\_1M\_TX\_CH\_39\_Vertical


## BLE 2M\_Channel 00

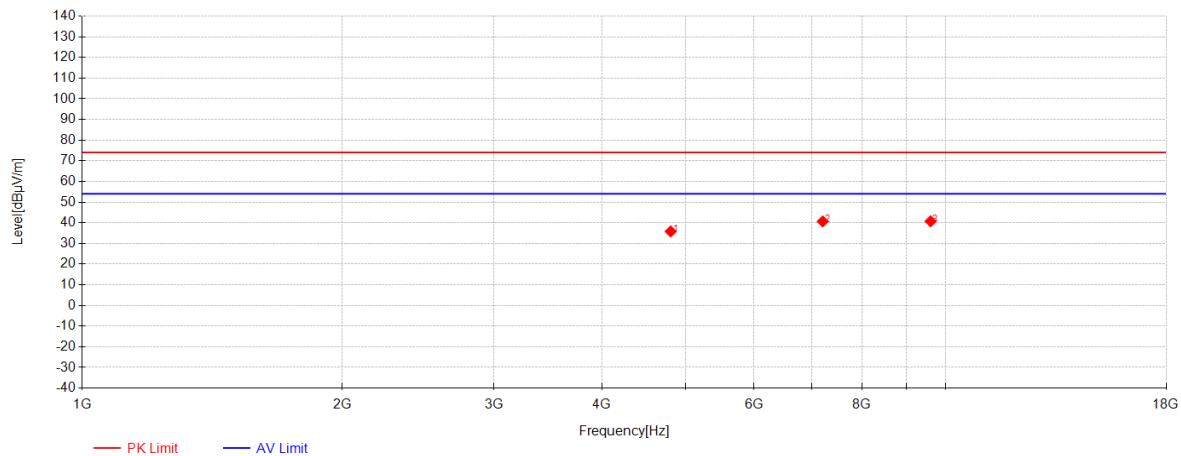

Data List								
NO.	Frequency [MHz]	Reading [dB $\mu$ V]	AF [dB/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity
1	4804	44.55	32.77	-41.49	35.83	74.00	38.17	Horizontal
2	7206	42.42	36.25	-38.02	40.65	74.00	33.35	Horizontal
3	9608	36.38	37.78	-33.45	40.71	74.00	33.29	Horizontal

BLE\_2M\_TX\_CH\_00\_Horizontal


## BLE 2M\_Channel 00

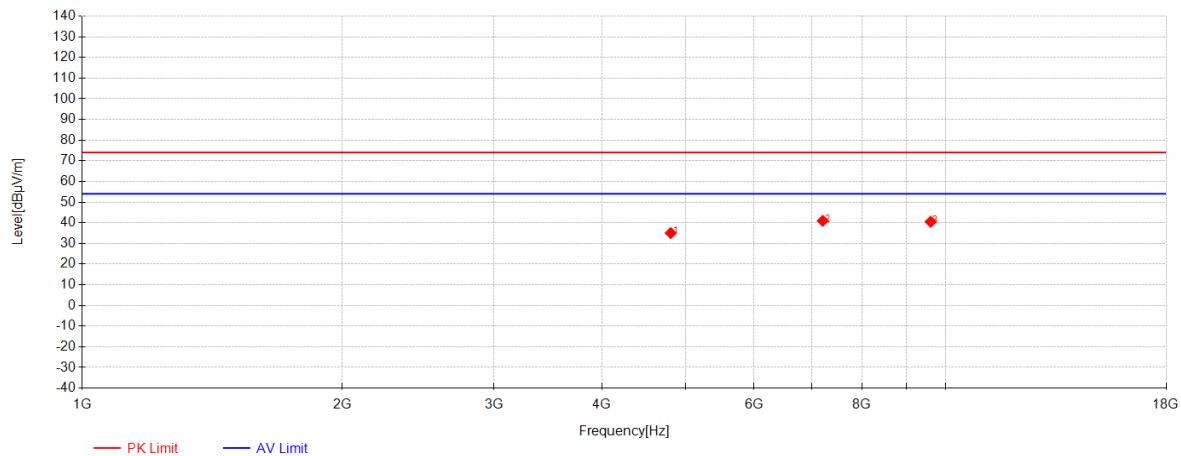

Data List								
NO.	Frequency [MHz]	Reading [dB $\mu$ V]	AF [dB/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity
1	4804	43.76	32.77	-41.49	35.04	74.00	38.96	Vertical
2	7206	42.73	36.25	-38.02	40.96	74.00	33.04	Vertical
3	9608	36.19	37.78	-33.45	40.52	74.00	33.48	Vertical

BLE\_2M\_TX\_CH\_00\_Vertical


## BLE 2M\_Channel 19

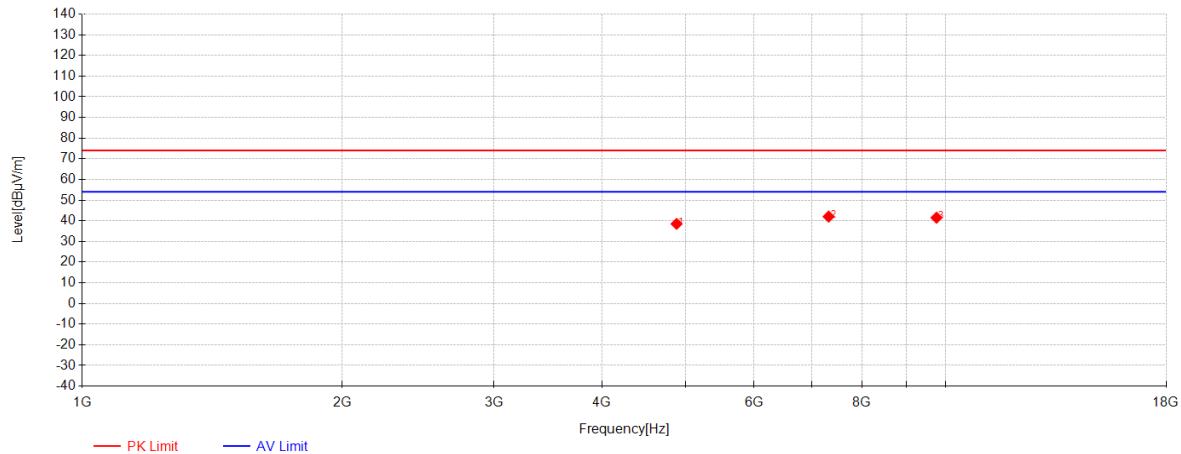

Data List								
NO.	Frequency [MHz]	Reading [dB $\mu$ V]	AF [dB/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity
1	4880	46.82	32.94	-41.26	38.50	74.00	35.50	Horizontal
2	7320	43.11	36.38	-37.47	42.03	74.00	31.97	Horizontal
3	9760	36.74	37.83	-33.07	41.50	74.00	32.50	Horizontal

BLE\_2M\_TX\_CH\_19\_Horizontal


## BLE 2M\_Channel 19

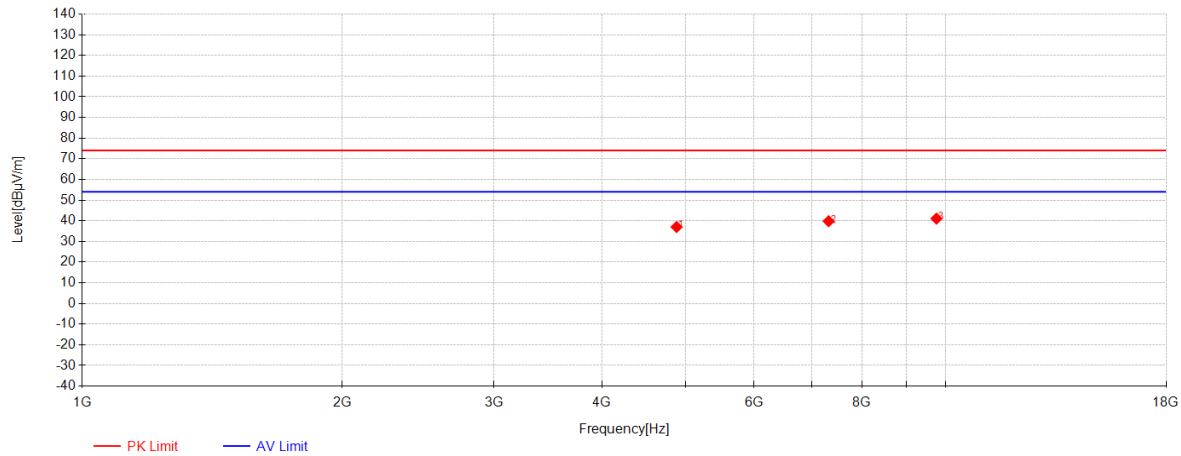

Data List								
NO.	Frequency [MHz]	Reading [dB $\mu$ V]	AF [dB/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity
1	4880	45.32	32.94	-41.26	37.00	74.00	37.00	Vertical
2	7320	40.89	36.38	-37.47	39.81	74.00	34.19	Vertical
3	9760	36.31	37.83	-33.07	41.07	74.00	32.93	Vertical

BLE\_2M\_TX\_CH\_19\_Vertical


## BLE 2M\_Channel 39

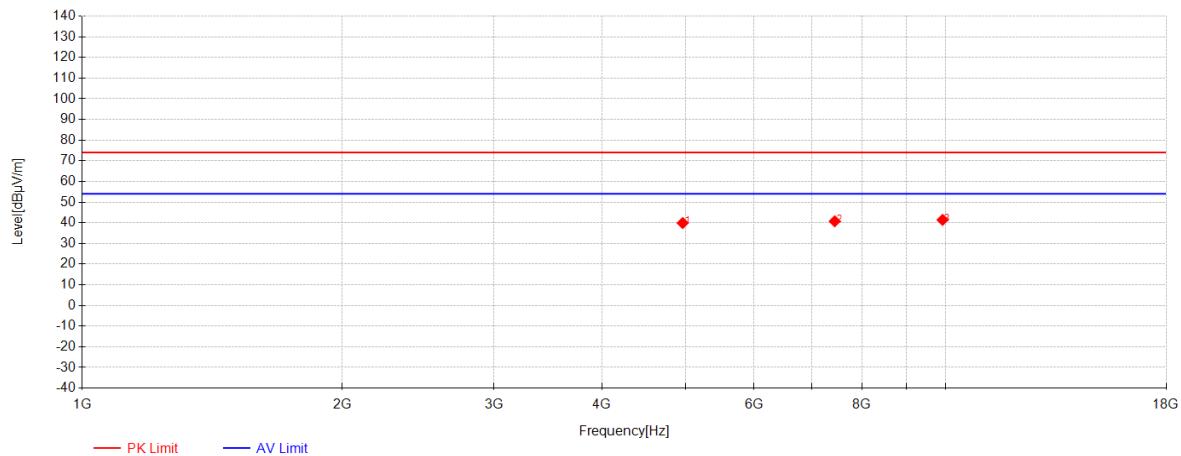

Data List								
NO.	Frequency [MHz]	Reading [dB $\mu$ V]	AF [dB/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity
1	4960	48.13	33.11	-41.36	39.88	74.00	34.12	Horizontal
2	7440	42.05	36.53	-37.85	40.73	74.00	33.27	Horizontal
3	9920	36.09	37.88	-32.55	41.42	74.00	32.58	Horizontal

BLE\_2M\_TX\_CH\_39\_Horizontal

## BLE 2M\_Channel 39

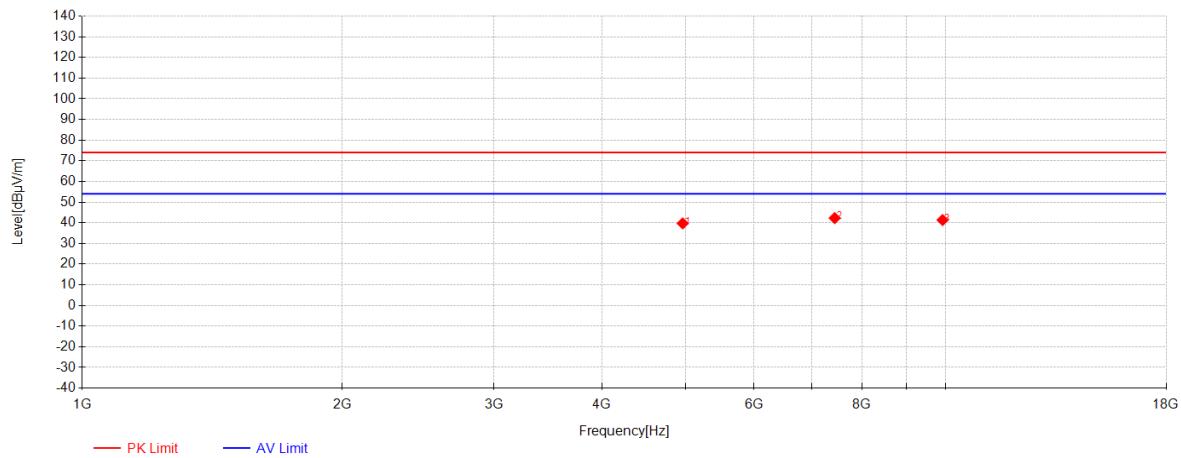

Data List								
NO.	Frequency [MHz]	Reading [dB $\mu$ V]	AF [dB/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity
1	4960	47.96	33.11	-41.36	39.71	74.00	34.29	Vertical
2	7440	43.60	36.53	-37.85	42.28	74.00	31.72	Vertical
3	9920	36.00	37.88	-32.55	41.33	74.00	32.67	Vertical

BLE\_2M\_TX\_CH\_39\_Vertical

## 7.5 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)  
Test Method: ANSI C63.10 (2020) Section 11.9.1


Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for $\geq 50$ hopping channels
	0.25 for $25 \leq$ hopping channels $< 50$
	1 for digital modulation
2400-2483.5	1 for $\geq 75$ non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

### 7.5.1 E.U.T. Operation

Operating Environment:  
Temperature: 20.5 °C      Humidity: 50.5 % RH      Atmospheric Pressure: 1010 mbar

### 7.5.2 Test Setup Diagram

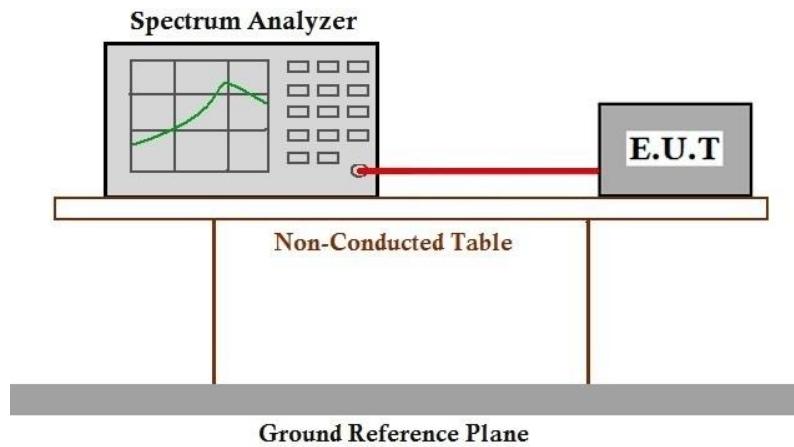

### 7.5.3 Measurement Procedure and Data

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

Please Refer to Appendix for Details

## 7.6 Minimum 6dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247a(2)  
Test Method: ANSI C63.10 (2020) Section 11.8.1

Limit:  
≥500 kHz


### 7.6.1 E.U.T. Operation

Operating Environment:  
Temperature: 20.5 °C      Humidity: 50.5 % RH      Atmospheric Pressure: 1010 mbar

### 7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	03	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

### 7.6.3 Test Setup Diagram

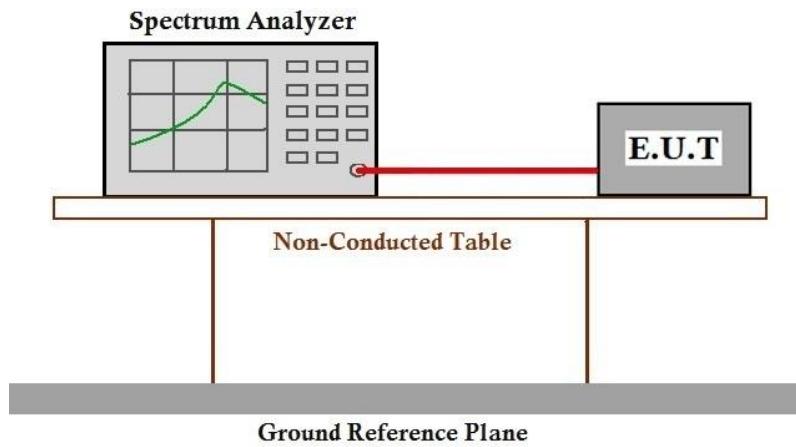

### 7.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details

## 7.7 Power Spectrum Density

Test Requirement 47 CFR Part 15, Subpart C 15.247(e)  
Test Method: ANSI C63.10 (2020) Section 11.10.2

Limit:

≤8dBm in any 3 kHz band during any time interval of continuous transmission

### 7.7.1 E.U.T. Operation


Operating Environment:

Temperature: 20.5 °C      Humidity: 50.5 % RH      Atmospheric Pressure: 1010 mbar

### 7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	03	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

### 7.7.3 Test Setup Diagram

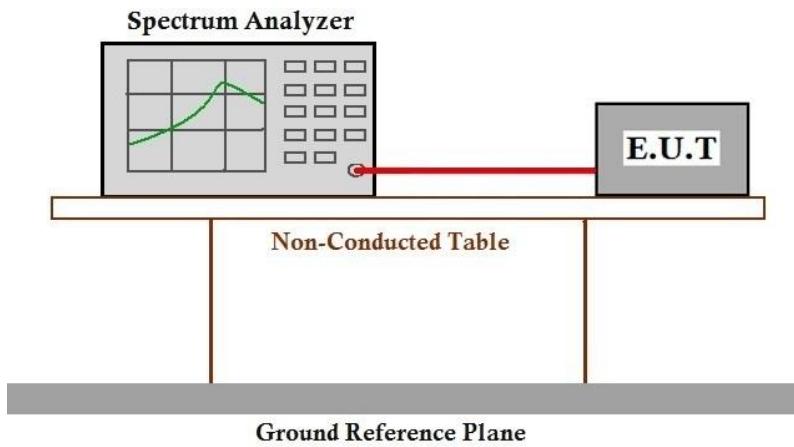

### 7.7.4 Measurement Procedure and Data

Please Refer to Appendix for Details

## 7.8 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)  
Test Method: ANSI C63.10 (2020) Section 11.13.3.2

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 7.8.1 E.U.T. Operation


Operating Environment:

Temperature: 20.5 °C      Humidity: 50.5 % RH      Atmospheric Pressure: 1010 mbar

### 7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	03	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

### 7.8.3 Test Setup Diagram

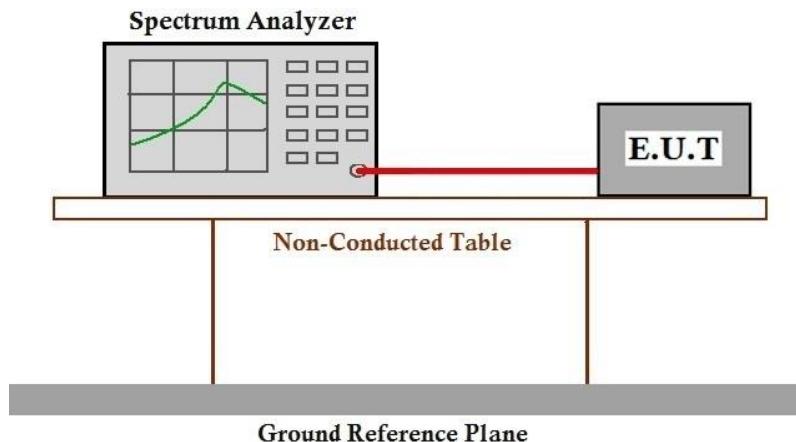

#### **7.8.4 Measurement Procedure and Data**

Please Refer to Appendix for Details

## 7.9 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)  
Test Method: ANSI C63.10 (2020) Section 11.11

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


### 7.9.1 E.U.T. Operation

Operating Environment:  
Temperature: 20.5 °C      Humidity: 50.5 % RH      Atmospheric Pressure: 1010 mbar

### 7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	03	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

### 7.9.3 Test Setup Diagram

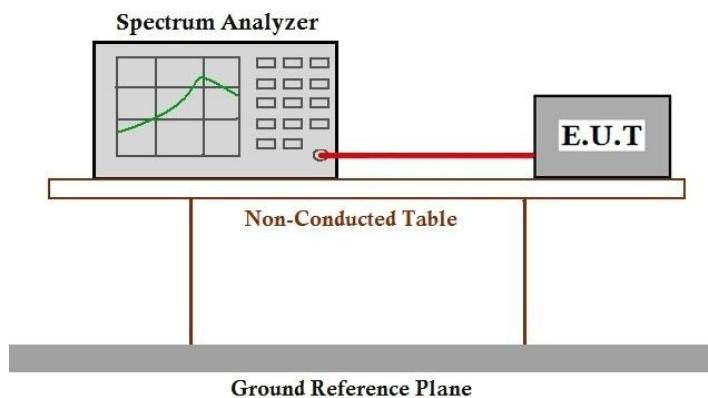

### 7.9.4 Measurement Procedure and Data

Please Refer to Appendix for Details

## 8 Test Setup Photo

Refer to Appendix - Test Setup Photo for KSCR2505001155AT

## 9 EUT Constructional Details (EUT Photos)

Refer to Appendix\_Photos of EUT Constructional Details for KSCR2505001155AT

## 10 Appendix

### 1. Duty Cycle


#### 1.1 Test Result


##### 1.1.1 Ant1


Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
1M	SISO	2402	2.142	3.126	68.52	1.64	0.03
		2440	2.141	3.124	68.53	1.64	0.04
		2480	2.142	3.126	68.52	1.64	0.03
2M	SISO	2402	1.086	2.500	43.44	3.62	0.03
		2440	1.086	2.501	43.42	3.62	0.03
		2480	1.085	2.499	43.42	3.62	0.05

## 1.2 Test Graph

### 1.2.1 Ant1

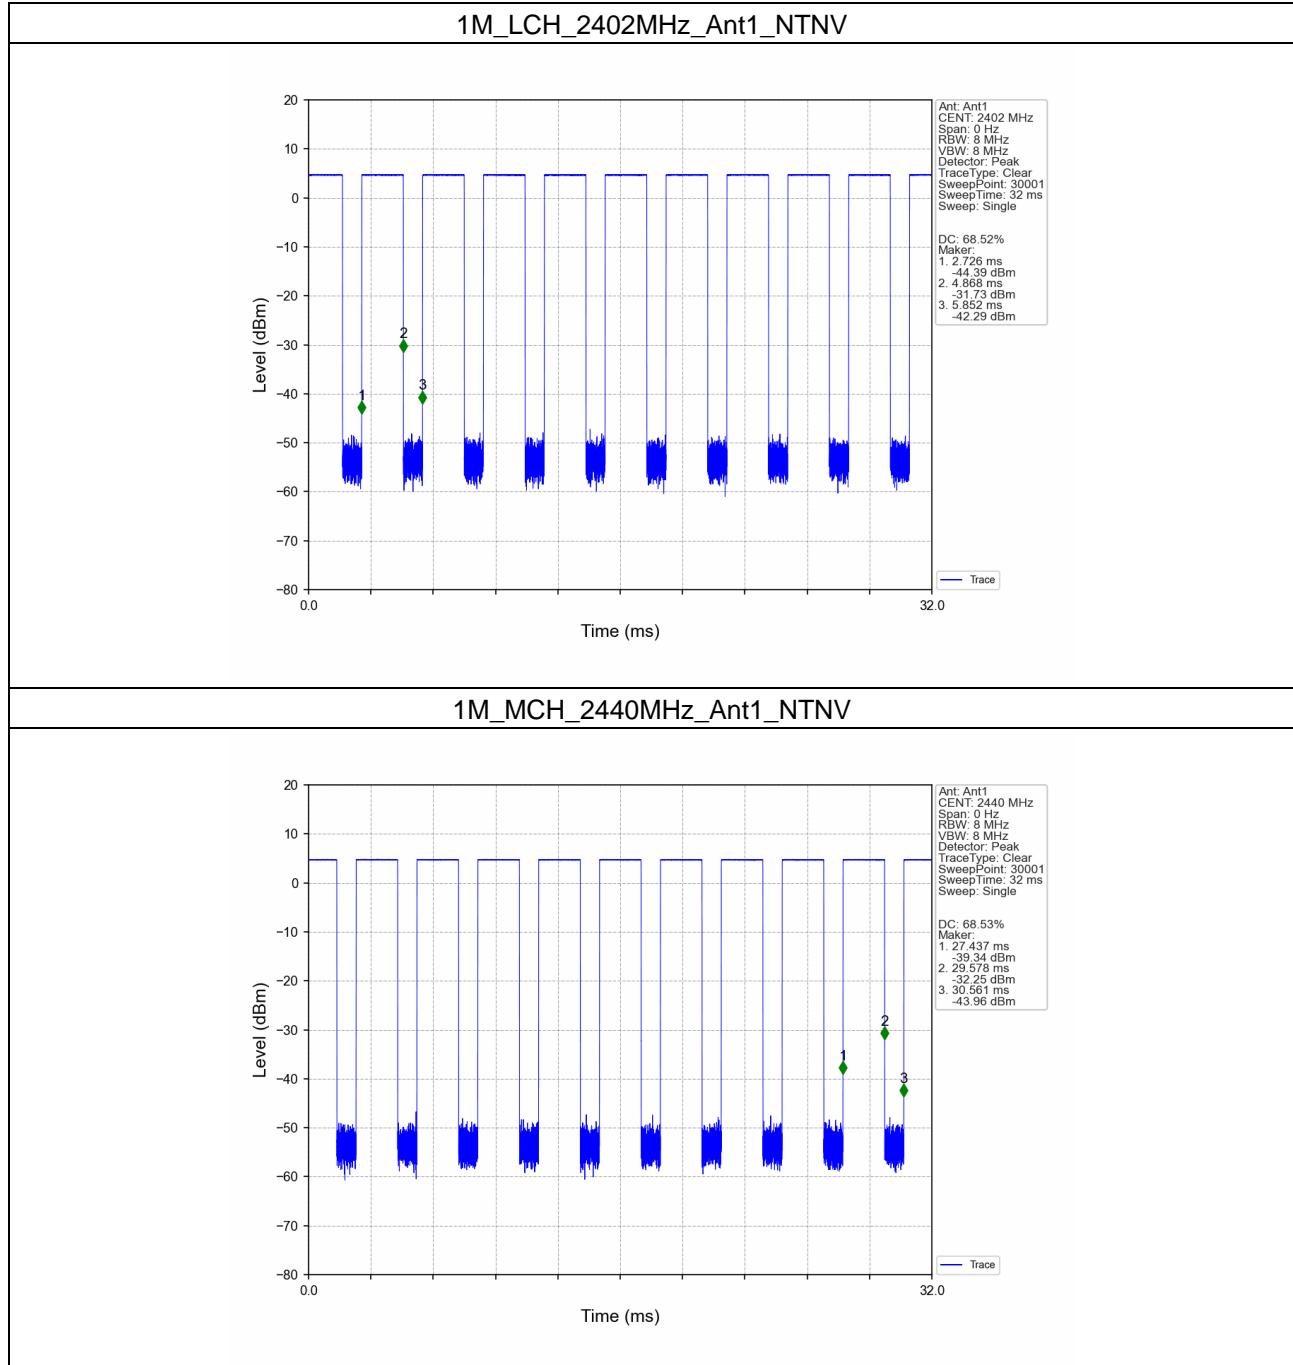

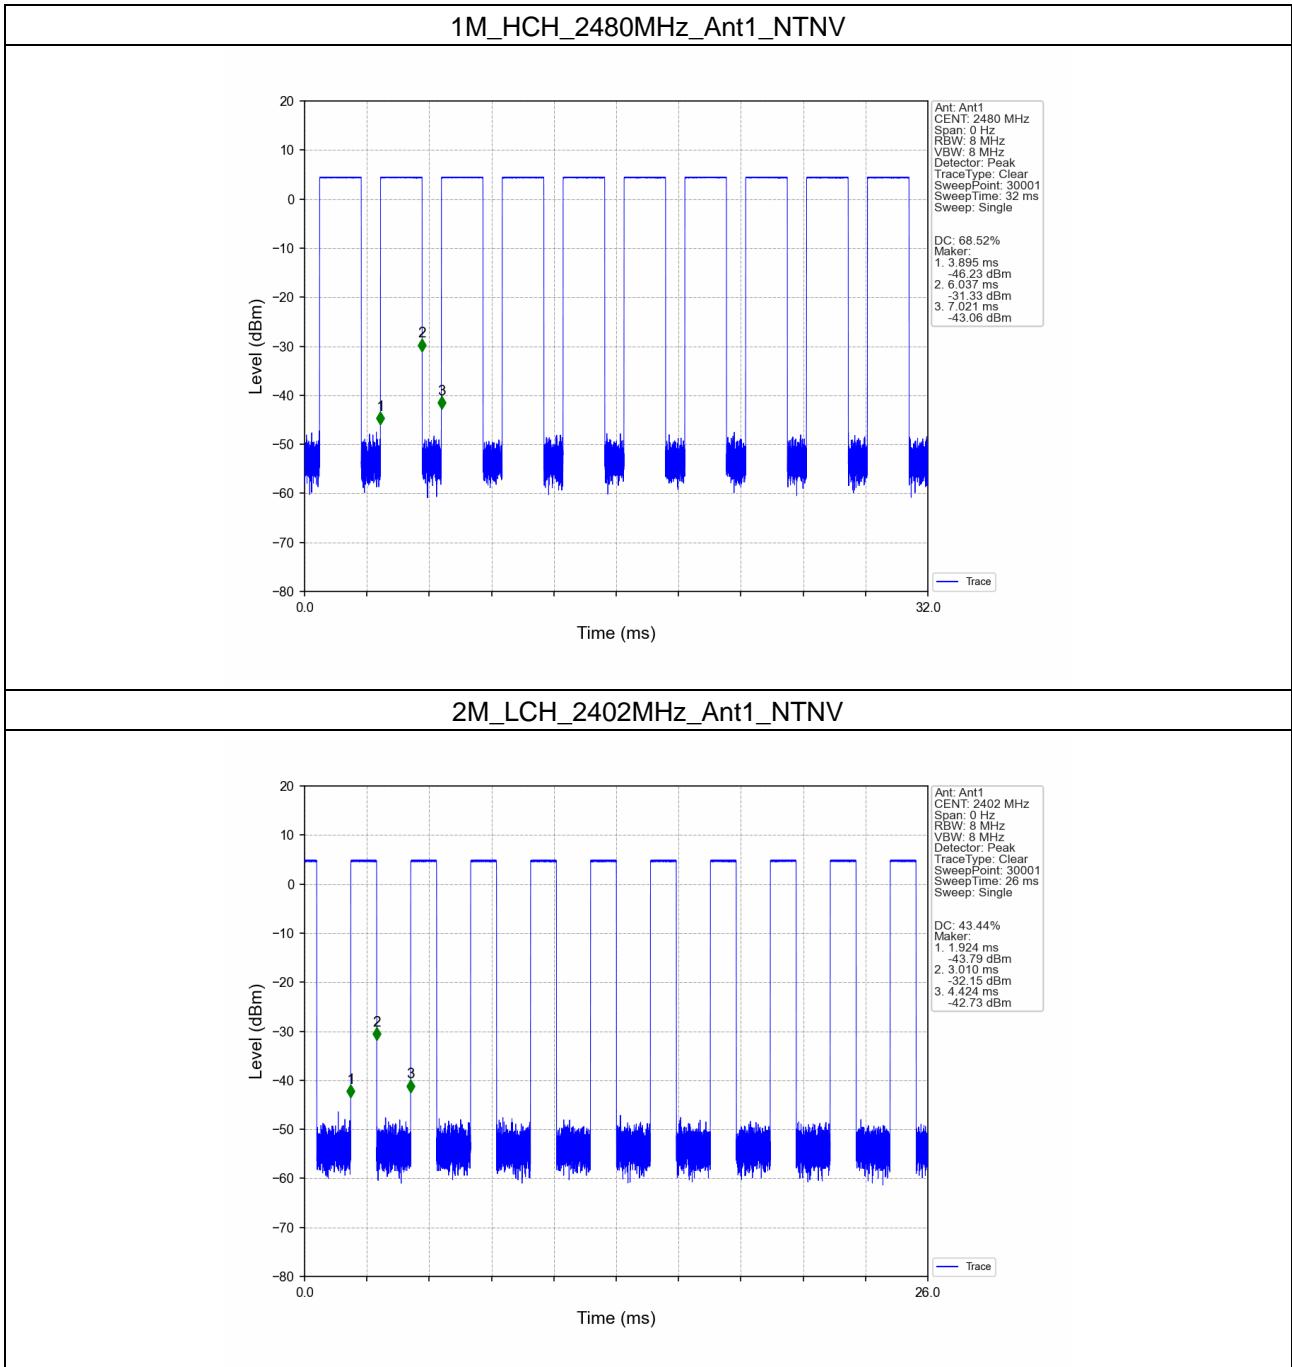

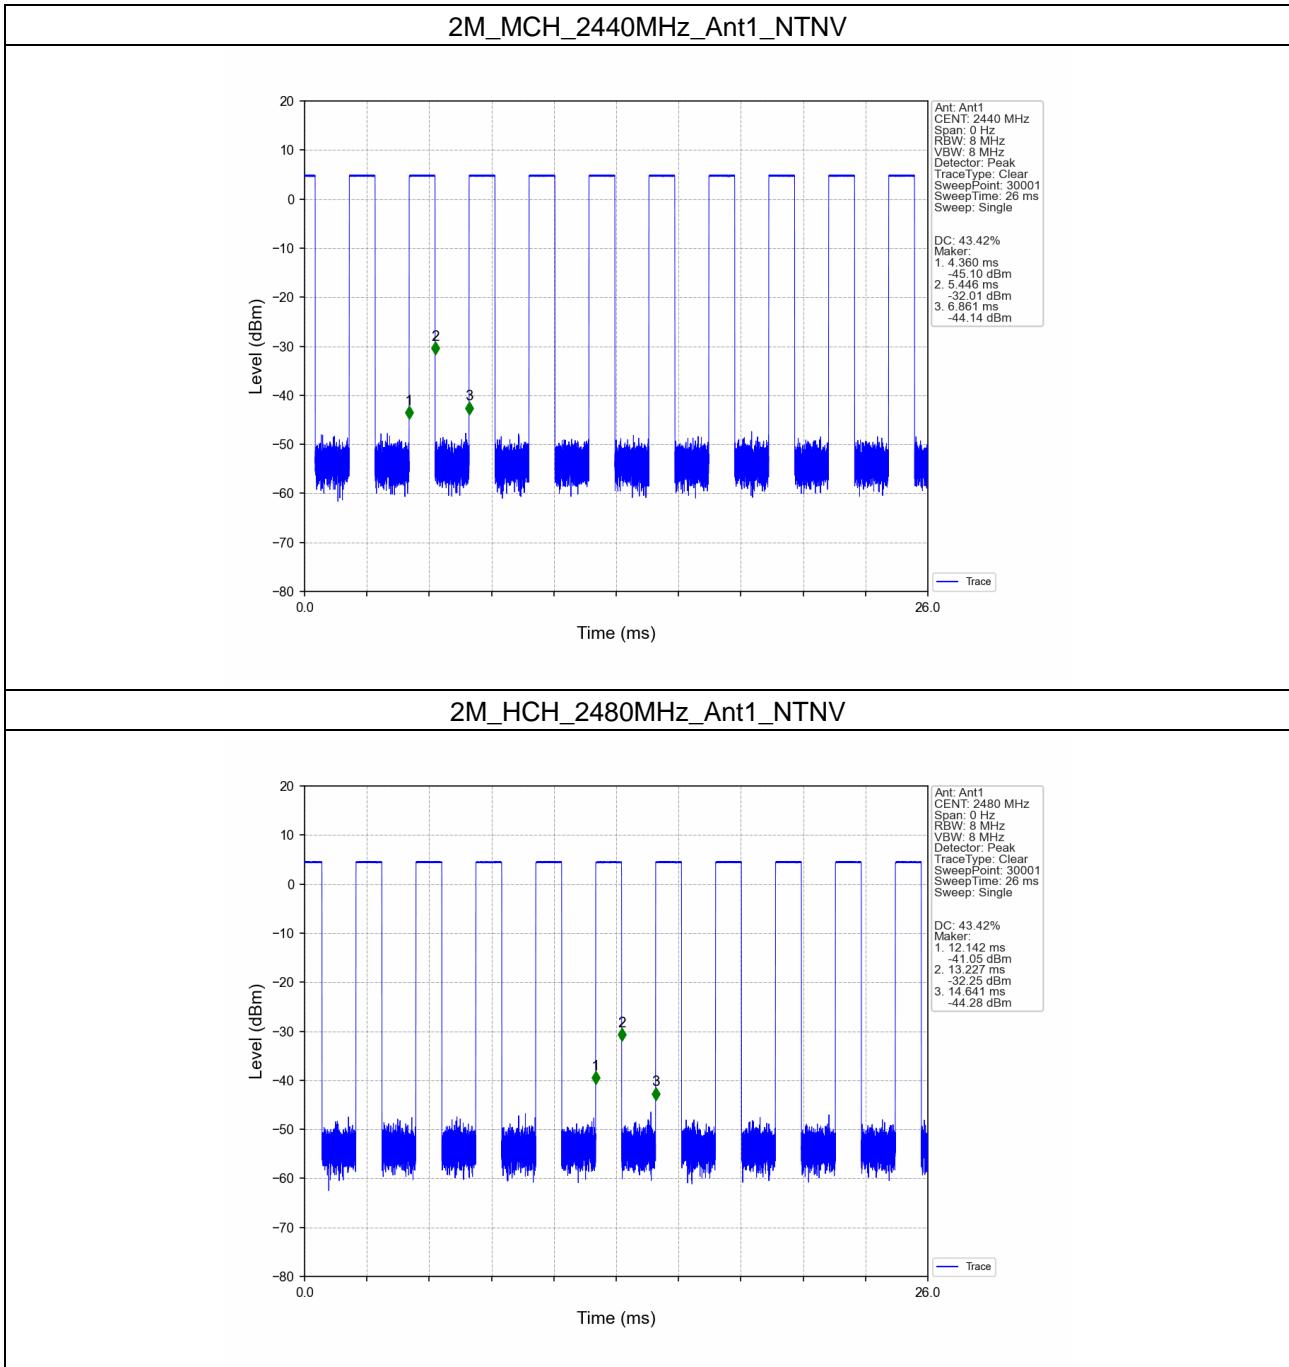

## 2. Bandwidth

### 2.1 Test Result

#### 2.1.1 OBW


Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	1.029	/	Pass
		2440	1	1.027	/	Pass
		2480	1	1.028	/	Pass
2M	SISO	2402	1	2.038	/	Pass
		2440	1	2.046	/	Pass
		2480	1	2.044	/	Pass

#### 2.1.2 6dB BW


Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.663	>=0.5	Pass
		2440	1	0.666	>=0.5	Pass
		2480	1	0.658	>=0.5	Pass
2M	SISO	2402	1	1.172	>=0.5	Pass
		2440	1	1.152	>=0.5	Pass
		2480	1	1.162	>=0.5	Pass

## 2.2 Test Graph


### 2.2.1 OBW

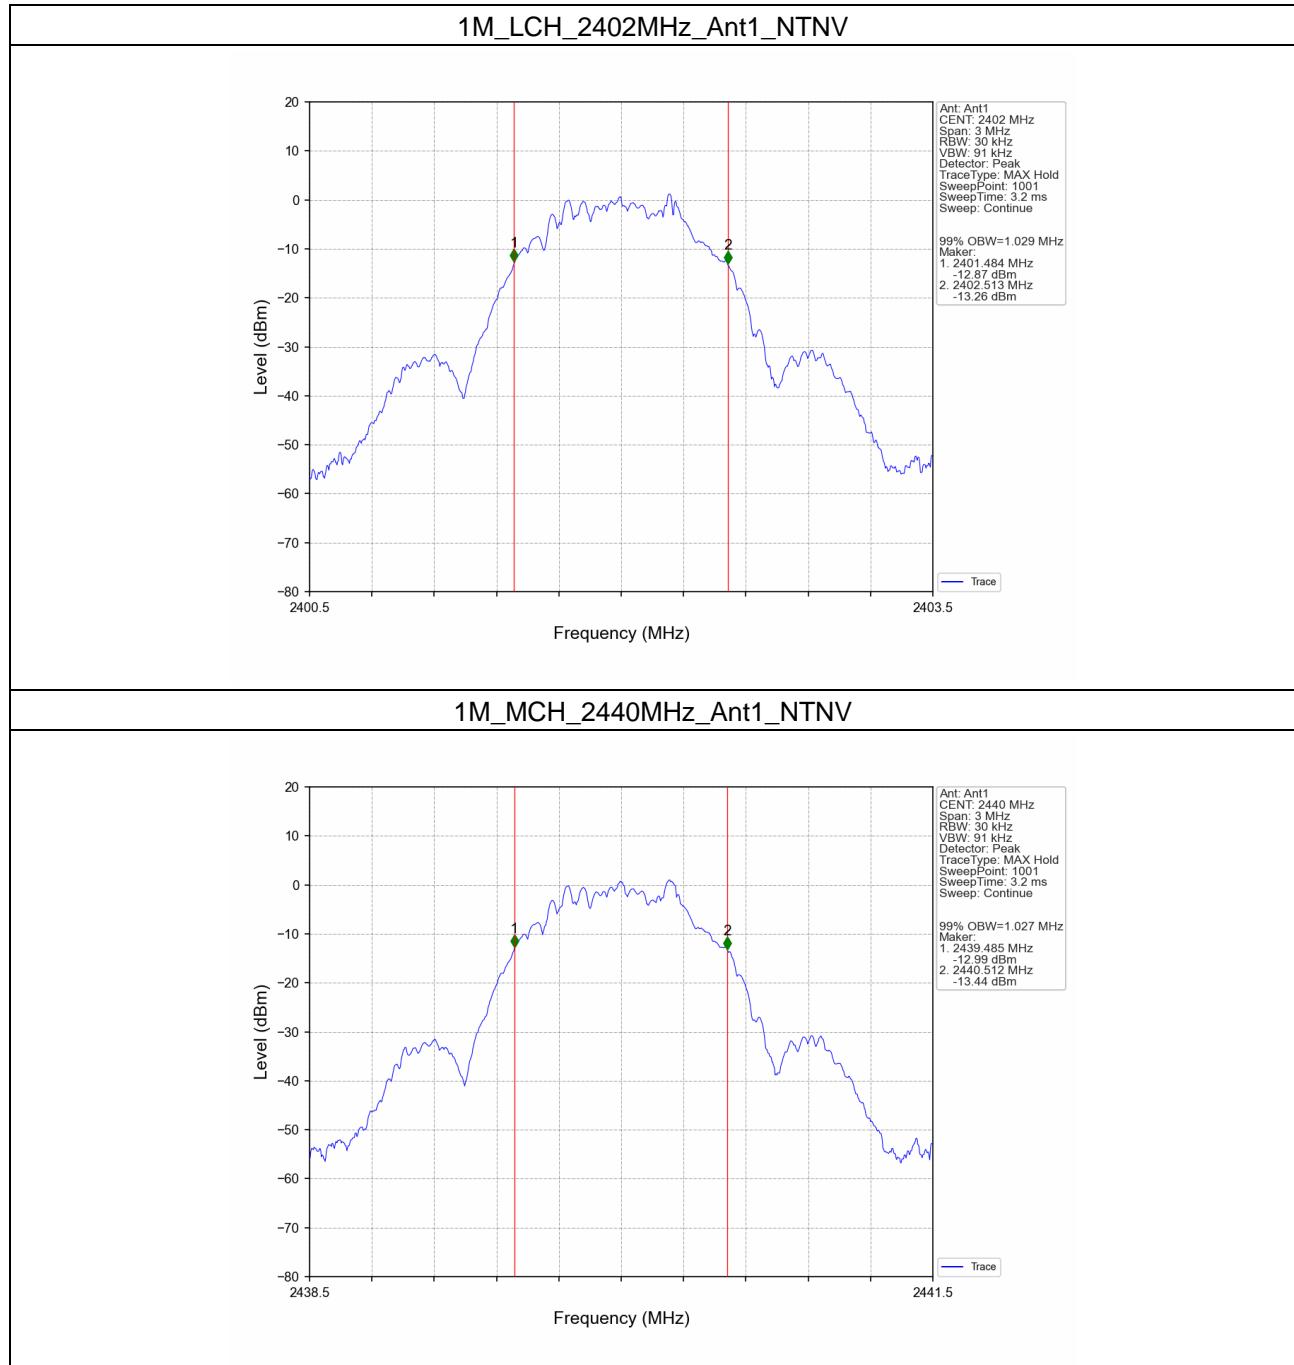


## 1M\_HCH\_2480MHz\_Ant1\_NTNV

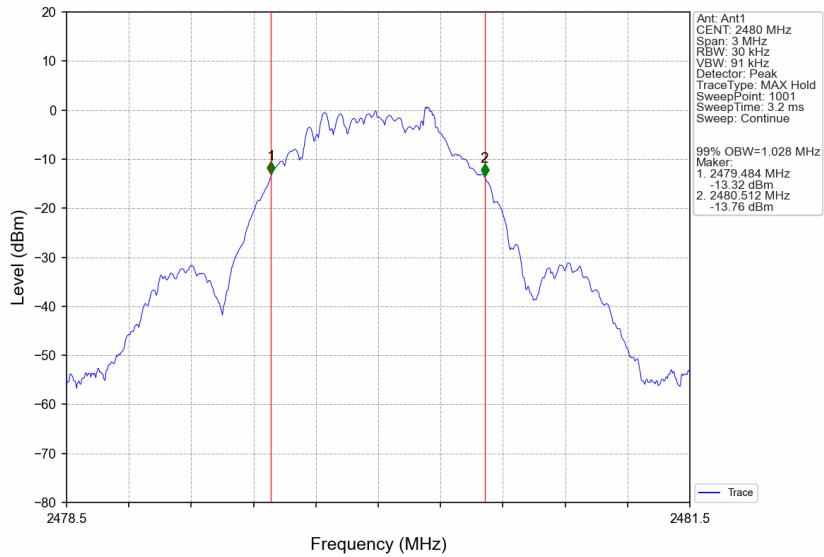



## 2M\_LCH\_2402MHz\_Ant1\_NTNV

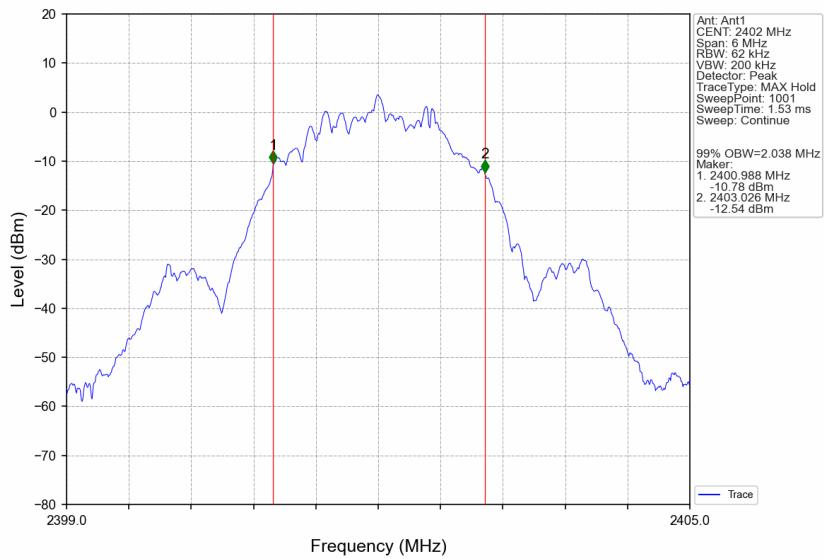


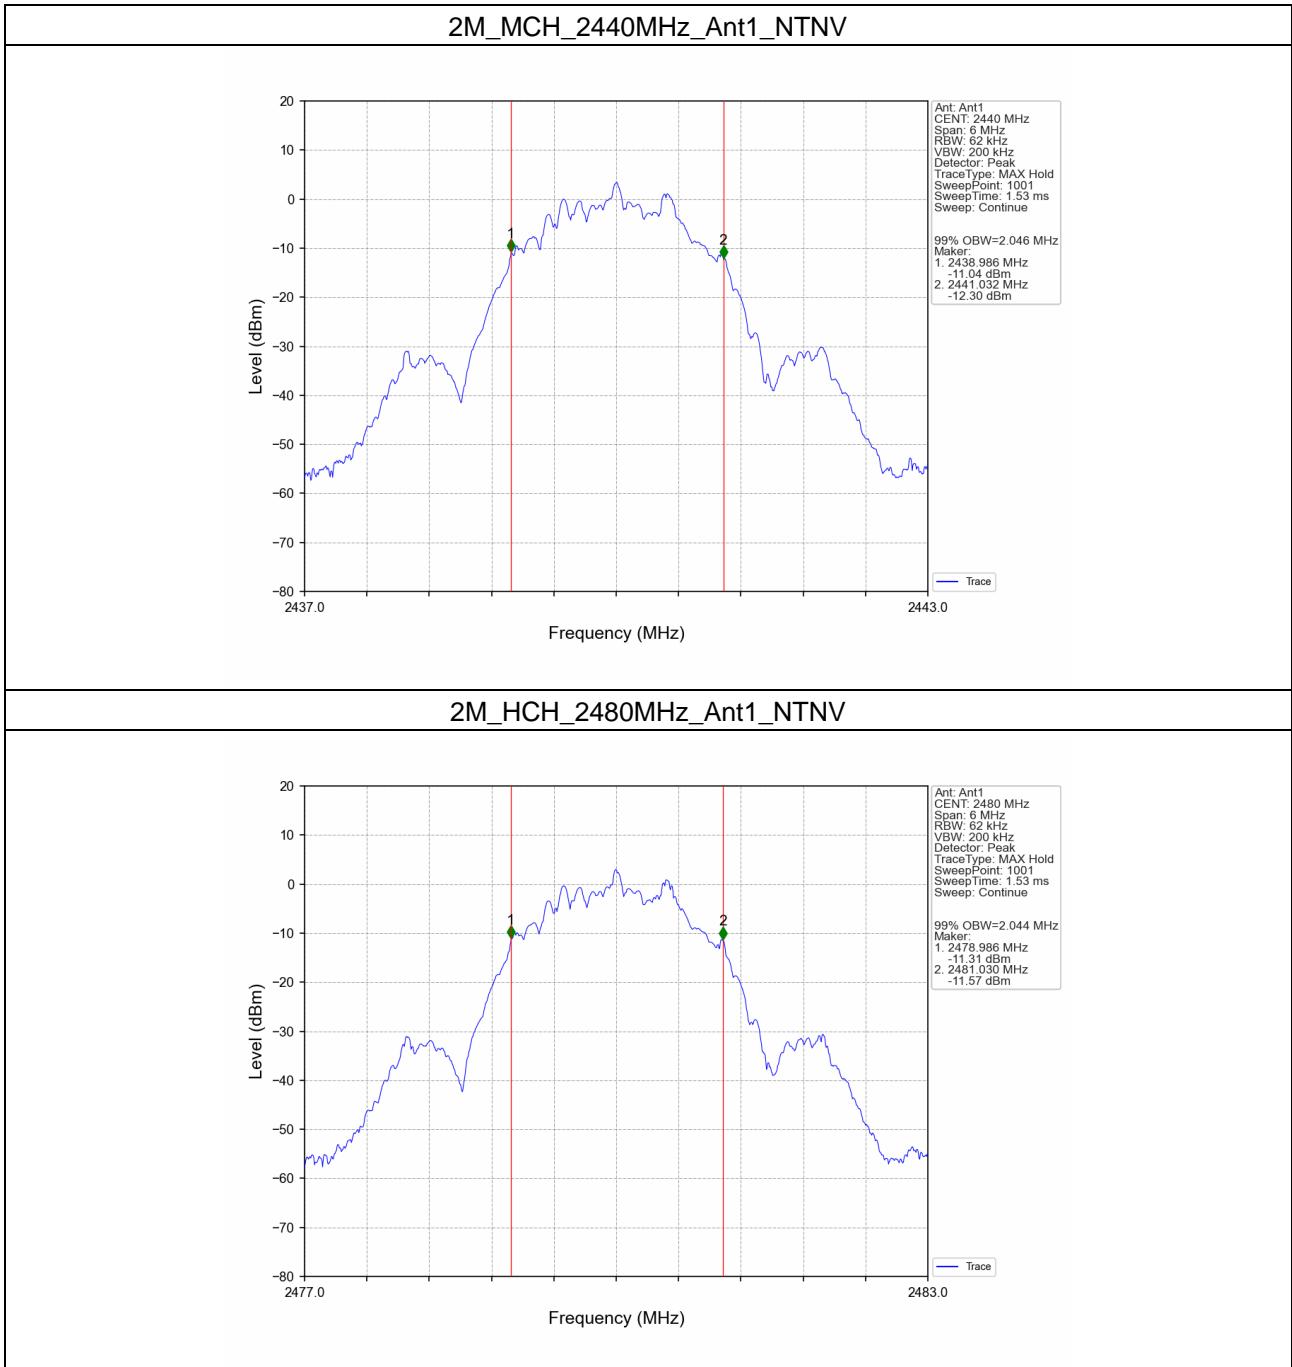

## 2.2.2 6dB BW

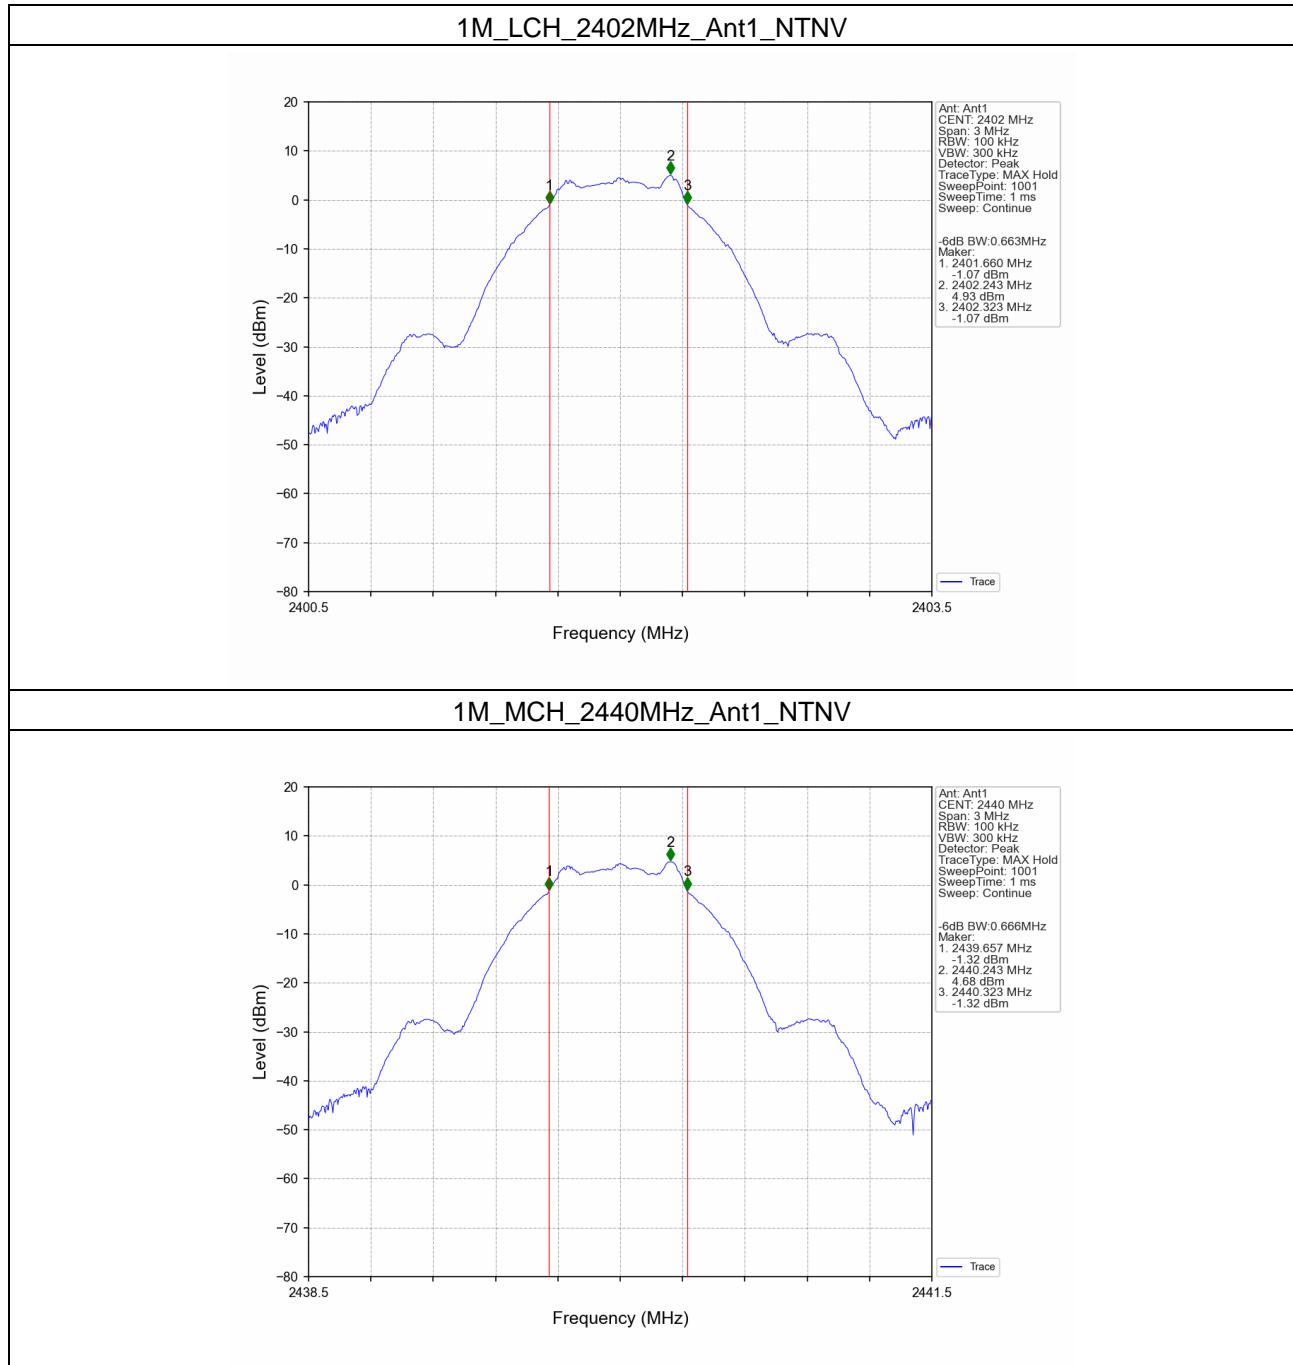

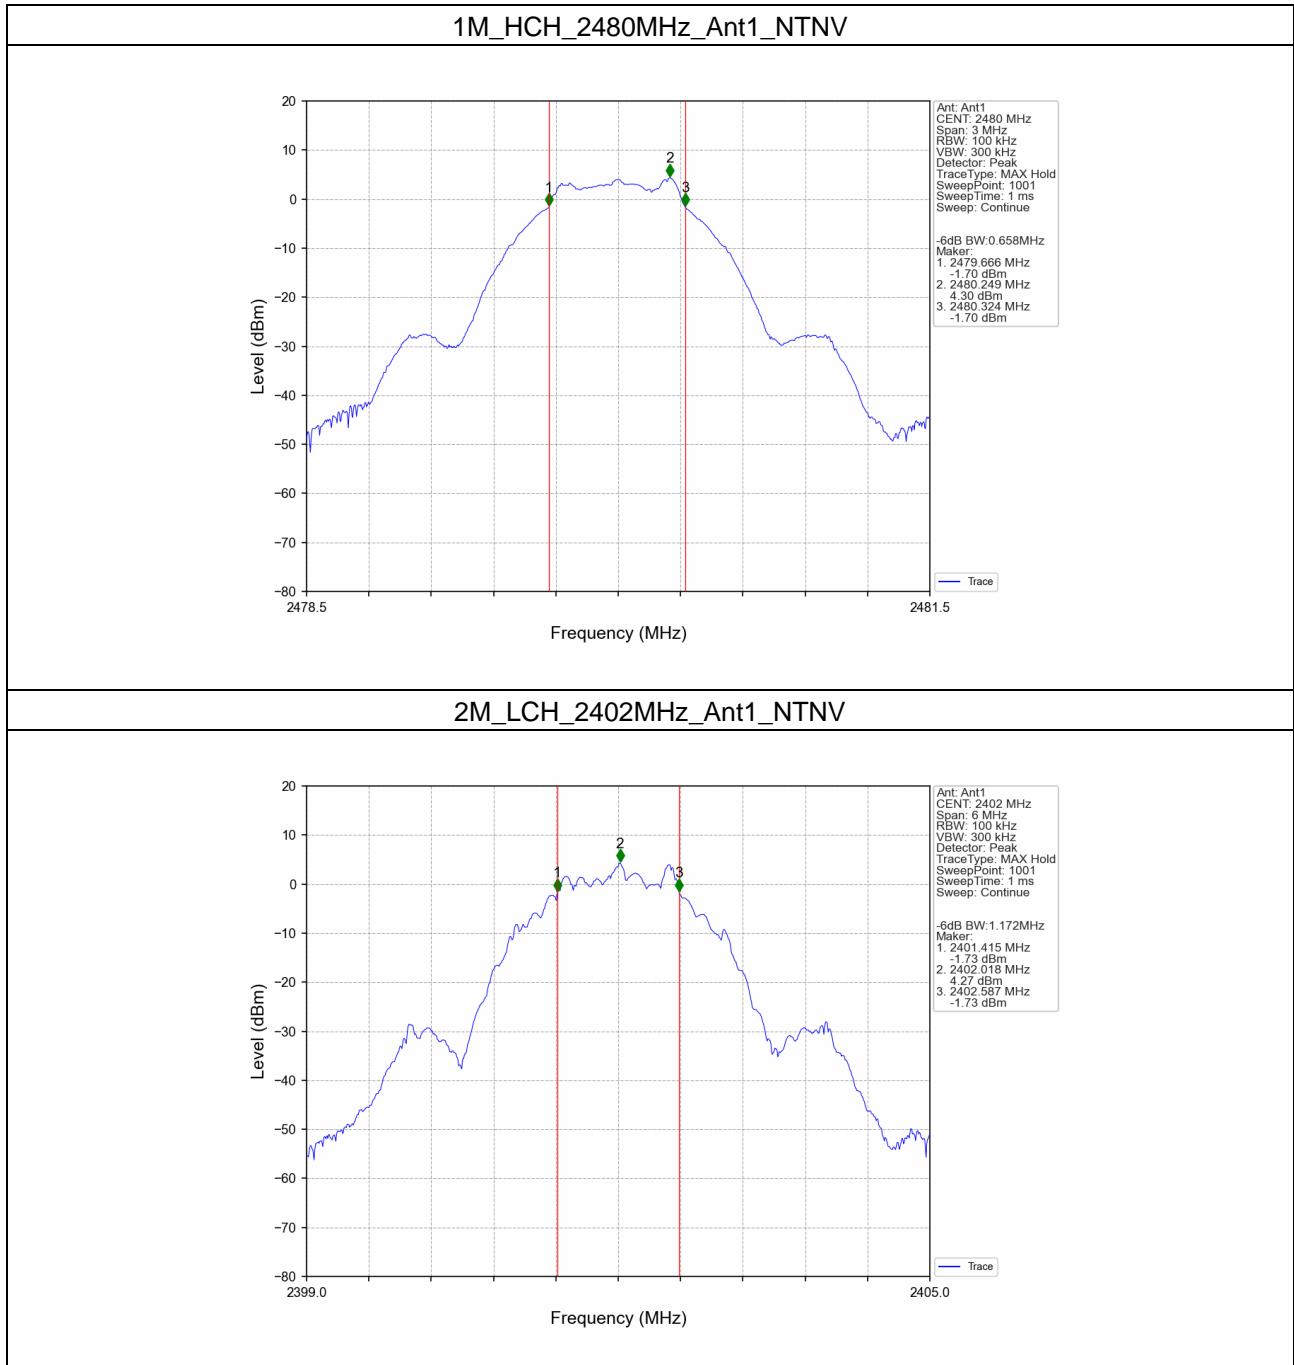

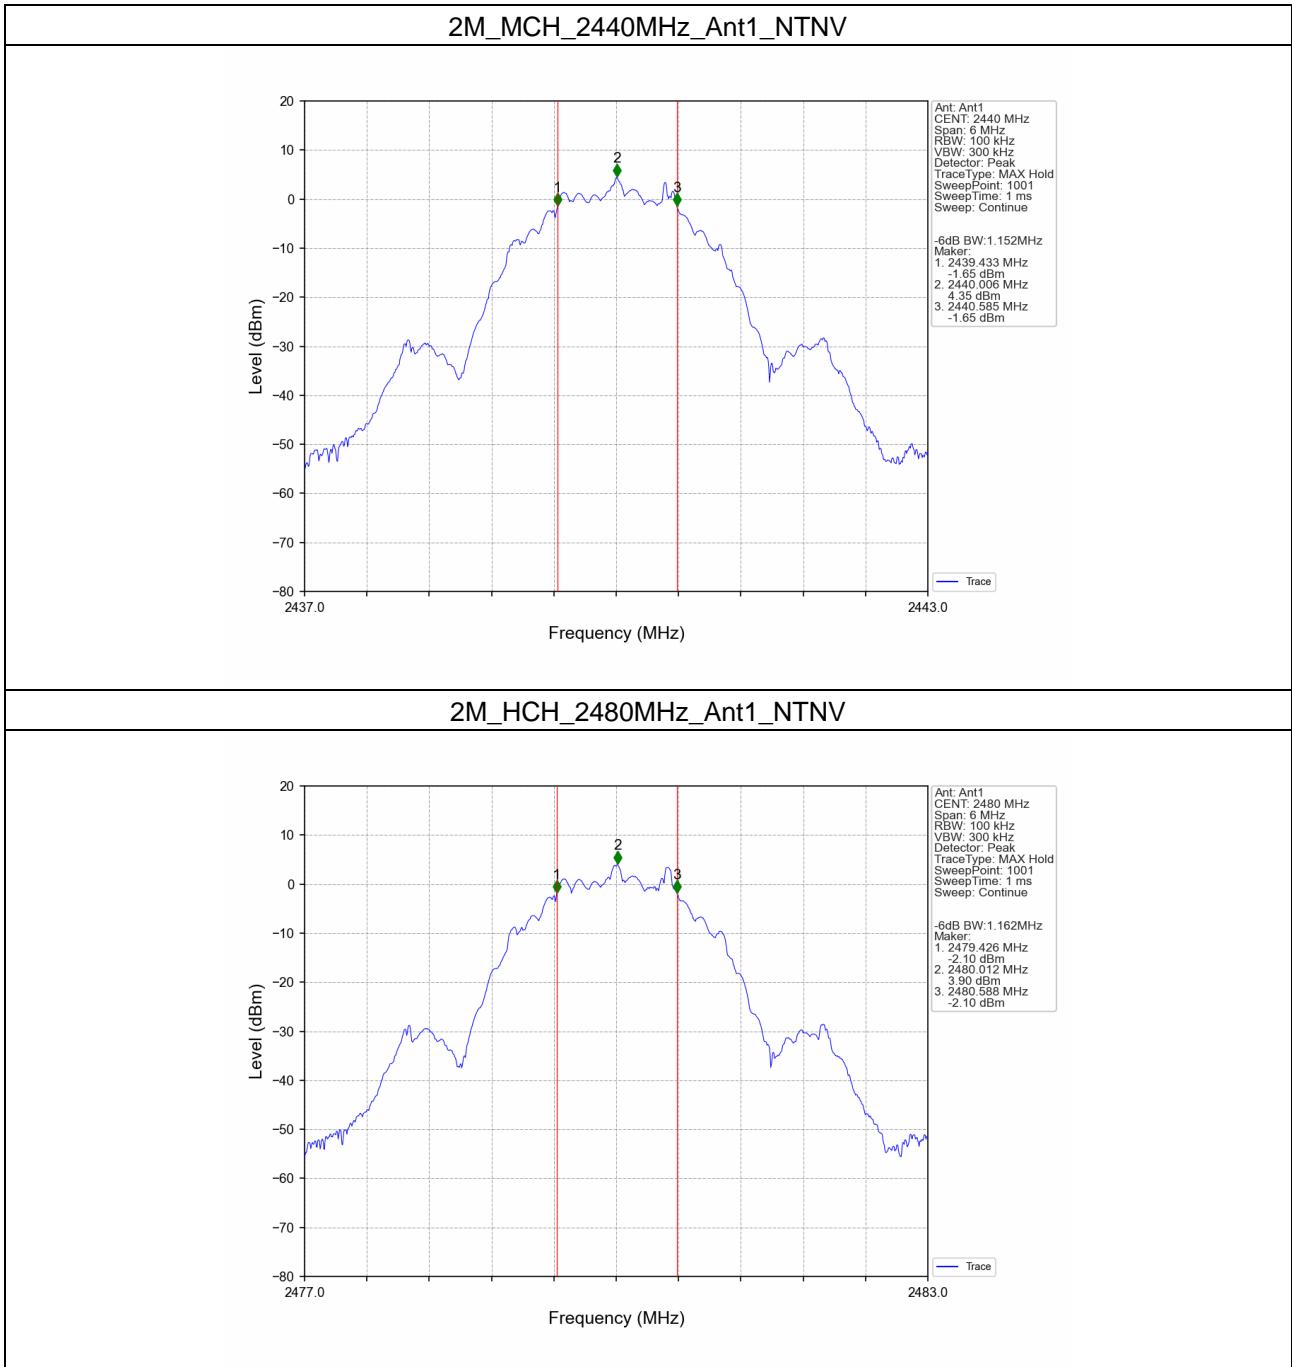

### 3. Maximum Conducted Output Power

#### 3.1 Test Result

##### 3.1.1 Power

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	4.99	<=30	Pass
		2440	4.76	<=30	Pass
		2480	4.46	<=30	Pass
2M	SISO	2402	5.06	<=30	Pass
		2440	4.81	<=30	Pass
		2480	4.50	<=30	Pass

Note1: Antenna Gain: Ant1: 0.41dBi;

##### 3.1.2 EIRP


Mode	TX Type	Frequency (MHz)	E.I.R.P (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	5.40	<=36.02	Pass
		2440	5.17	<=36.02	Pass
		2480	4.87	<=36.02	Pass
2M	SISO	2402	5.47	<=36.02	Pass
		2440	5.22	<=36.02	Pass
		2480	4.91	<=36.02	Pass



Note1: Antenna Gain: Ant1: 0.41dBi;



Note2: E.I.R.P = Measured Power + Antenna Gain

## 3.2 Test Graph

### 3.2.1 Power

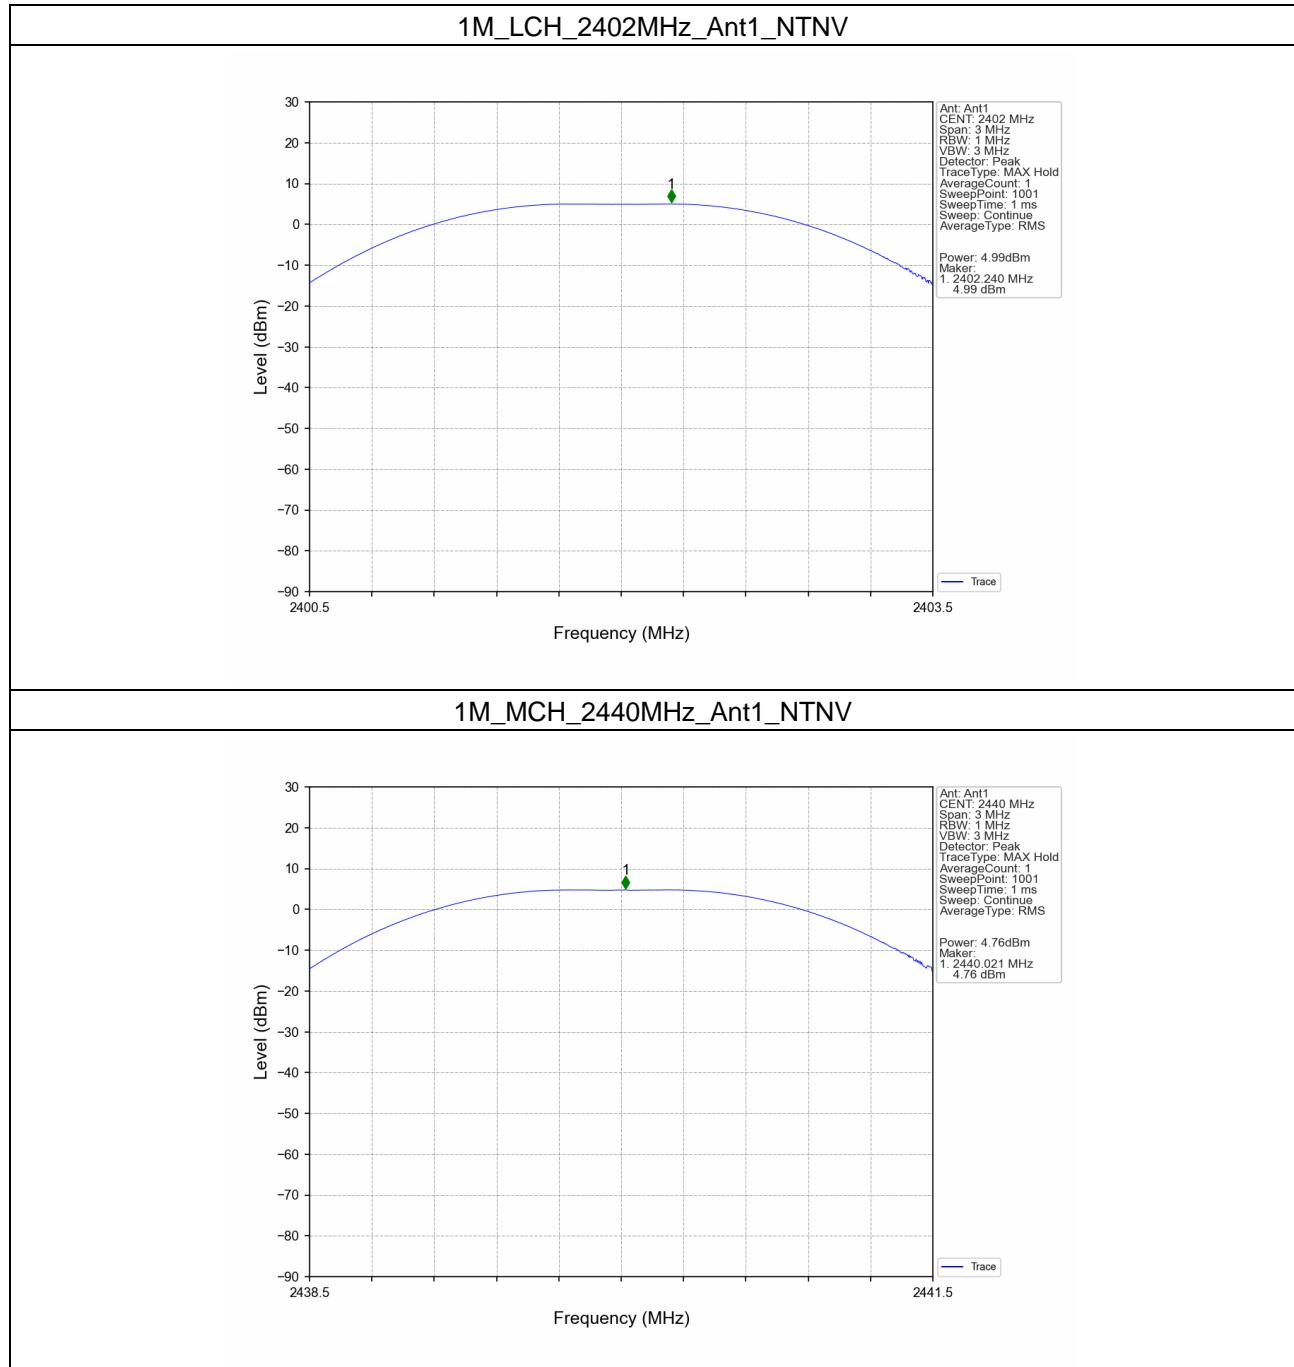

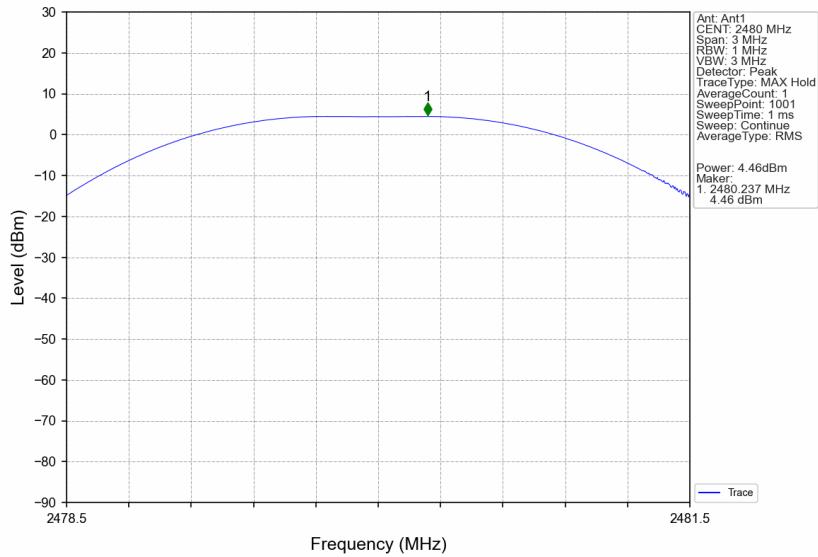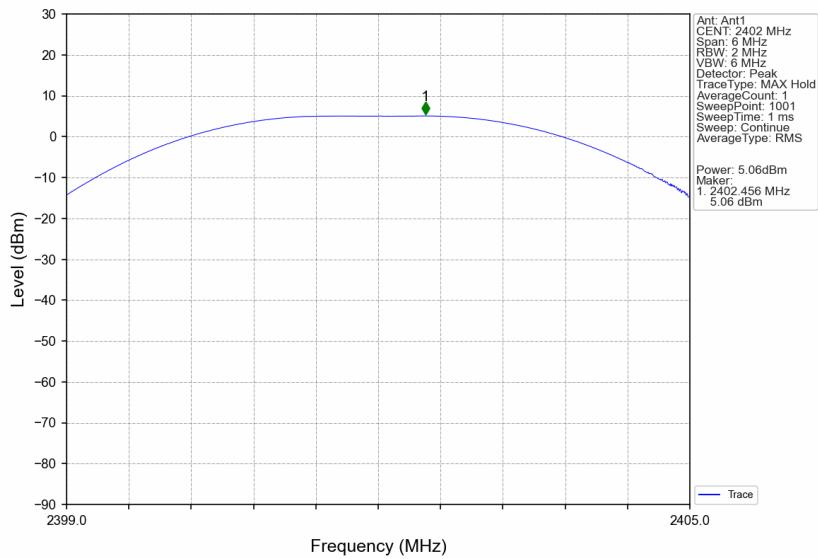**1M\_HCH\_2480MHz\_Ant1\_NTNV****2M\_LCH\_2402MHz\_Ant1\_NTNV**

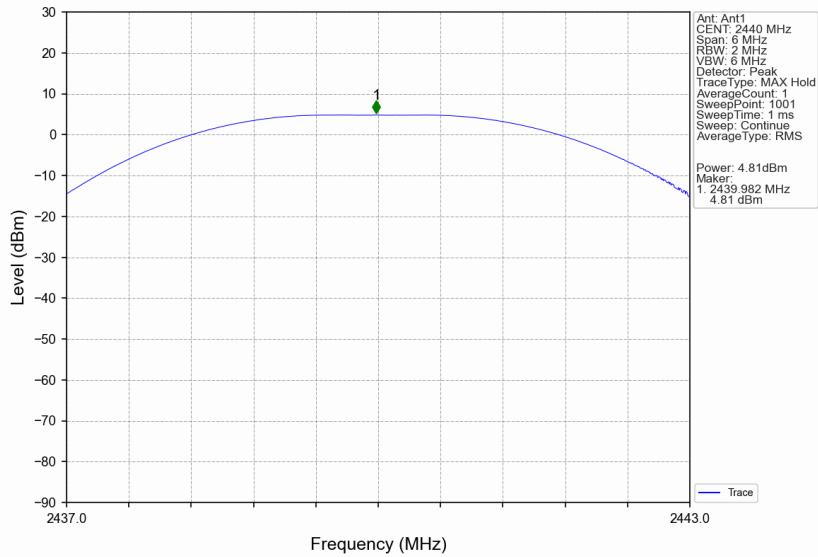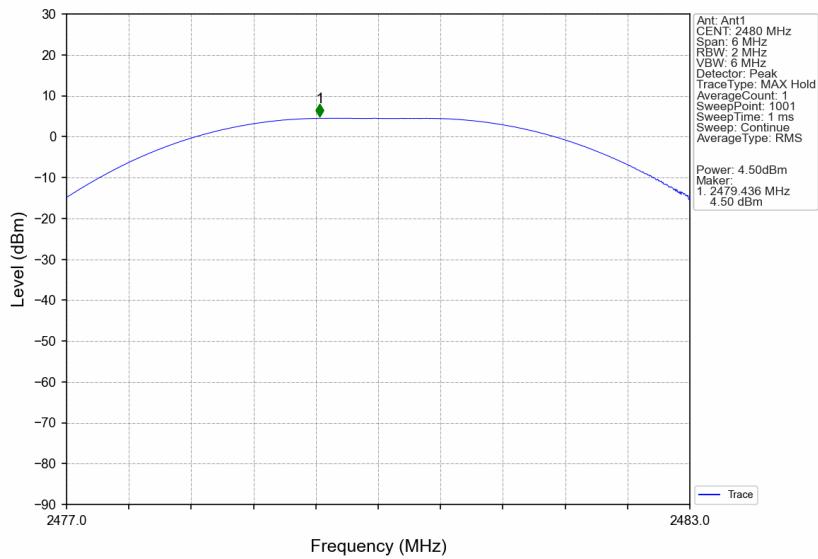**2M\_MCH\_2440MHz\_Ant1\_NTNV****2M\_HCH\_2480MHz\_Ant1\_NTNV**

## 4. Maximum Power Spectral Density

### 4.1 Test Result


#### 4.1.1 PSD

Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			ANT1	Limit	
1M	SISO	2402	-10.58	<=8	Pass
		2440	-10.76	<=8	Pass
		2480	-11.05	<=8	Pass
2M	SISO	2402	-13.96	<=8	Pass
		2440	-14.15	<=8	Pass
		2480	-14.60	<=8	Pass


Note1: Antenna Gain: Ant1: 0.41dBi;

## 4.2 Test Graph


### 4.2.1 PSD

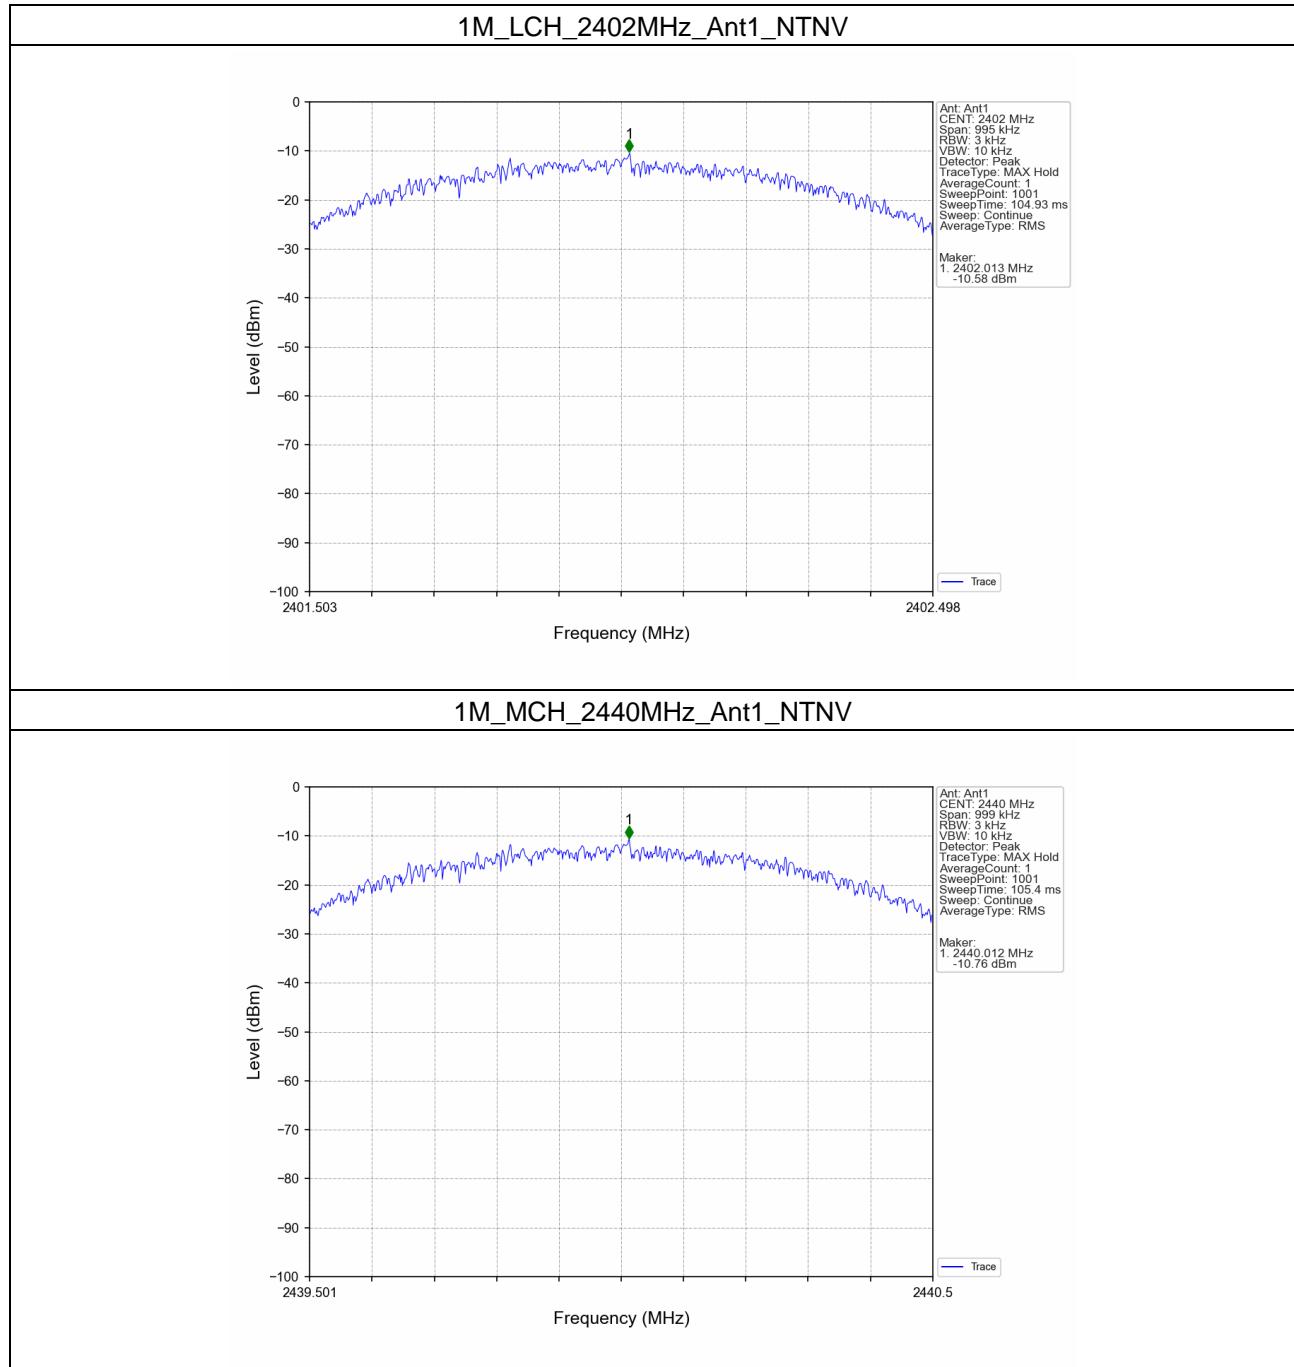


## 1M\_HCH\_2480MHz\_Ant1\_NTNV

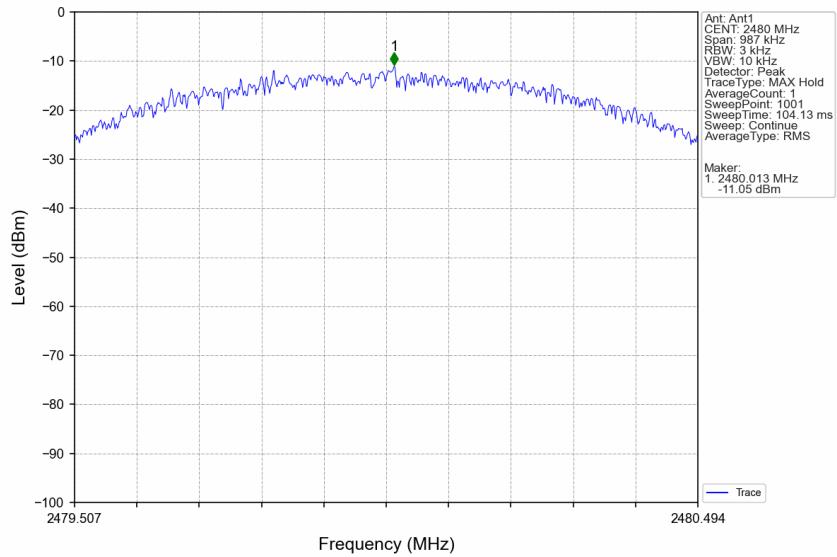


## 2M\_LCH\_2402MHz\_Ant1\_NTNV

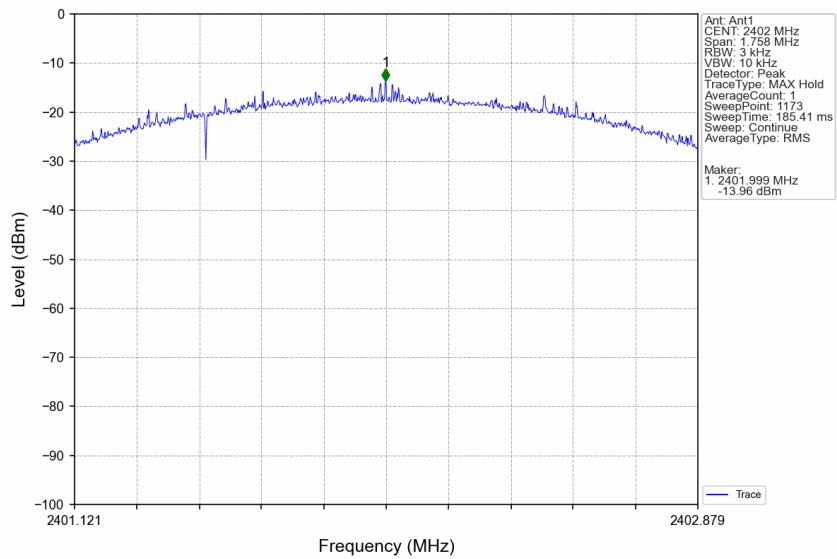

## 2M\_MCH\_2440MHz\_Ant1\_NTNV

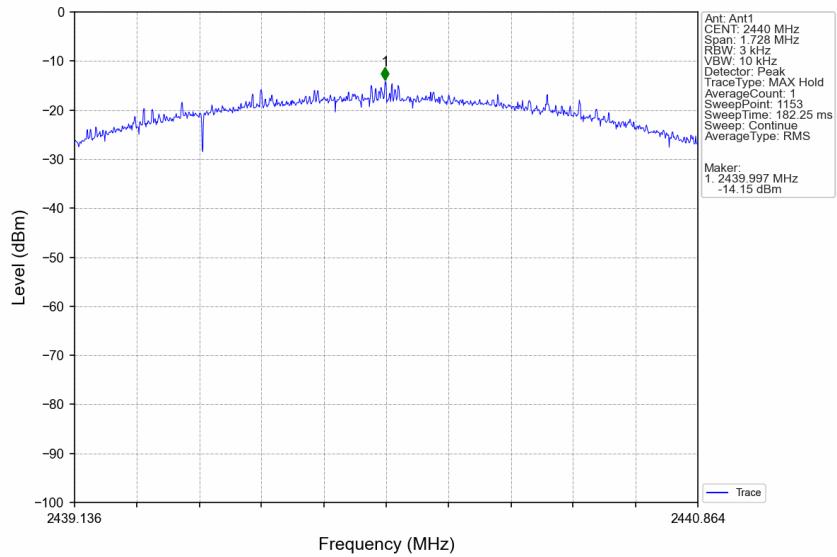

## 2M\_HCH\_2480MHz\_Ant1\_NTNV

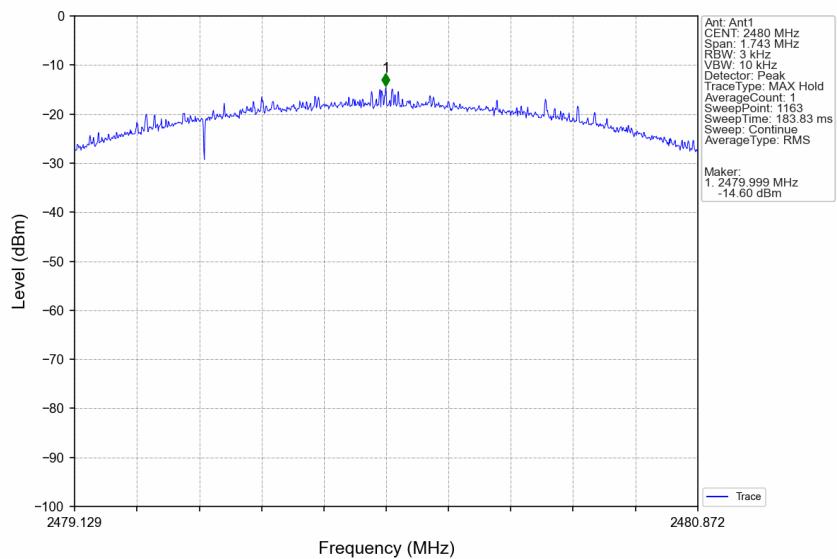

## 5. Unwanted Emissions In Non-restricted Frequency Bands

### 5.1 Test Result

#### 5.1.1 Ref

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	1	4.91
		2440	1	4.70
		2480	1	4.39
2M	SISO	2402	1	4.61
		2440	1	4.43
		2480	1	4.11

Note1: Refer to RSS-247 Issue 3 section 5.5 and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.


#### 5.1.2 CSE


Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	4.91	-15.09	Pass
		2440	1	4.91	-15.09	Pass
		2480	1	4.91	-15.09	Pass
2M	SISO	2402	1	4.61	-15.39	Pass
		2440	1	4.61	-15.39	Pass
		2480	1	4.61	-15.39	Pass


Note1: Refer to RSS-247 Issue 3 section 5.5 and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.

## 5.2 Test Graph


### 5.2.1 Ref

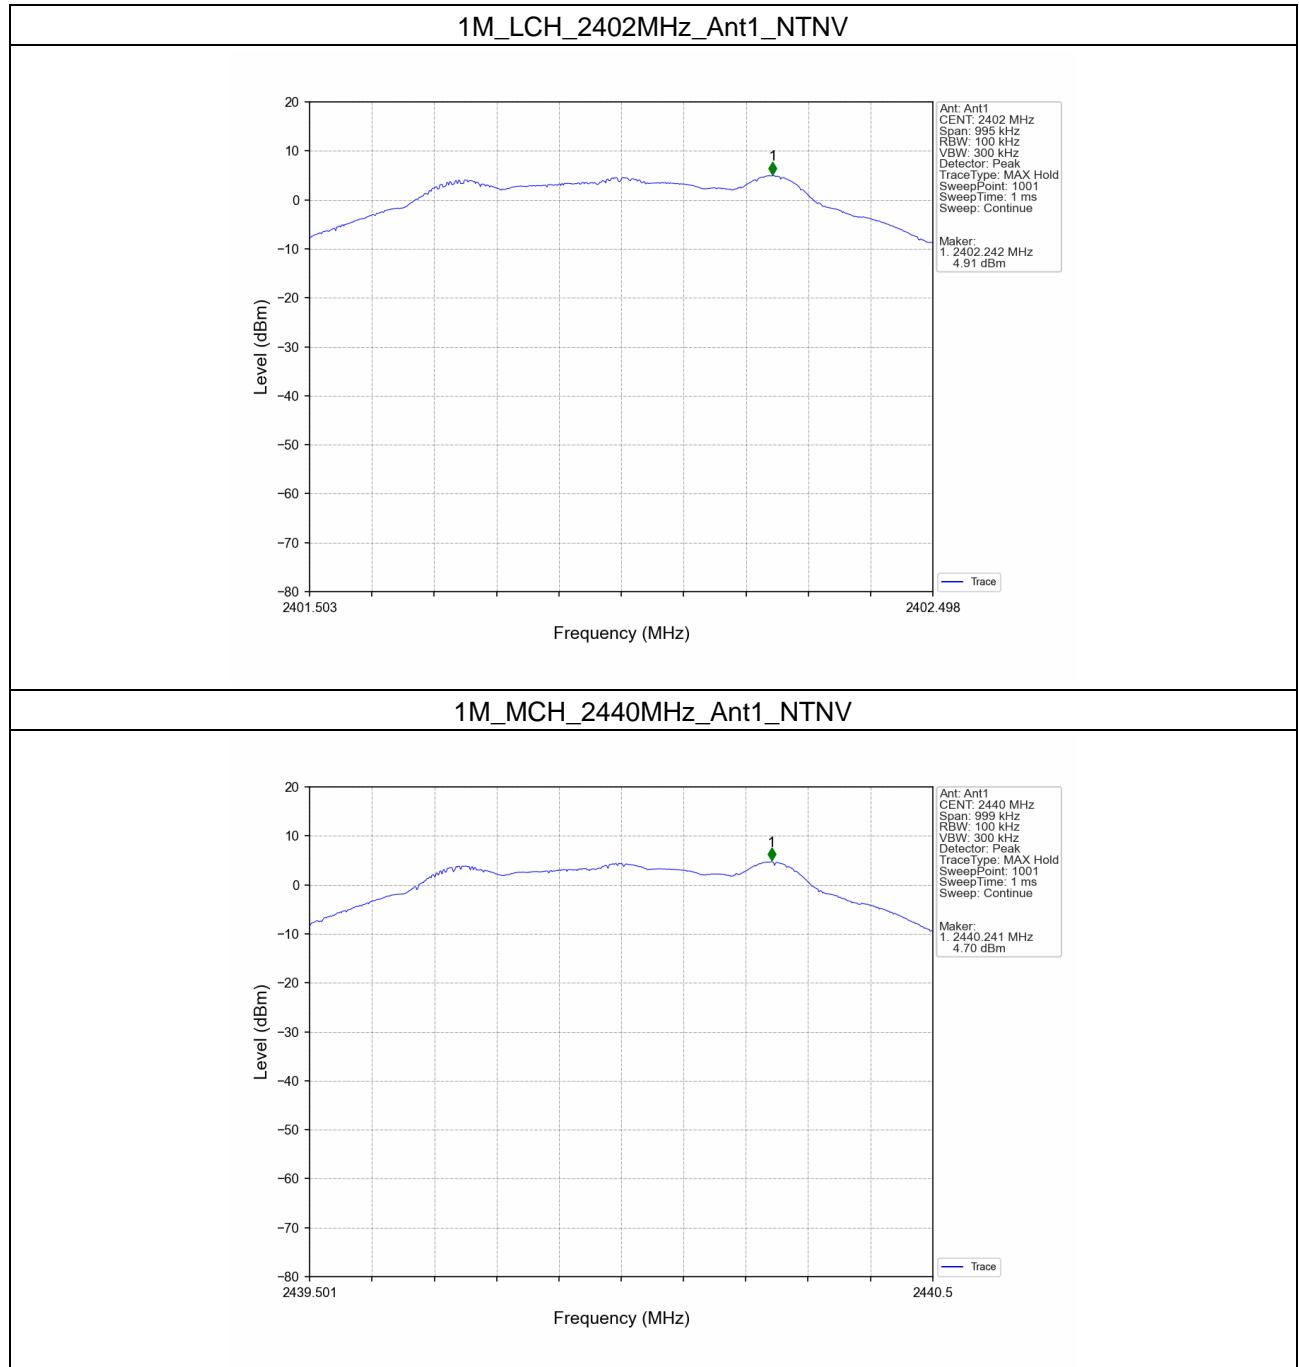

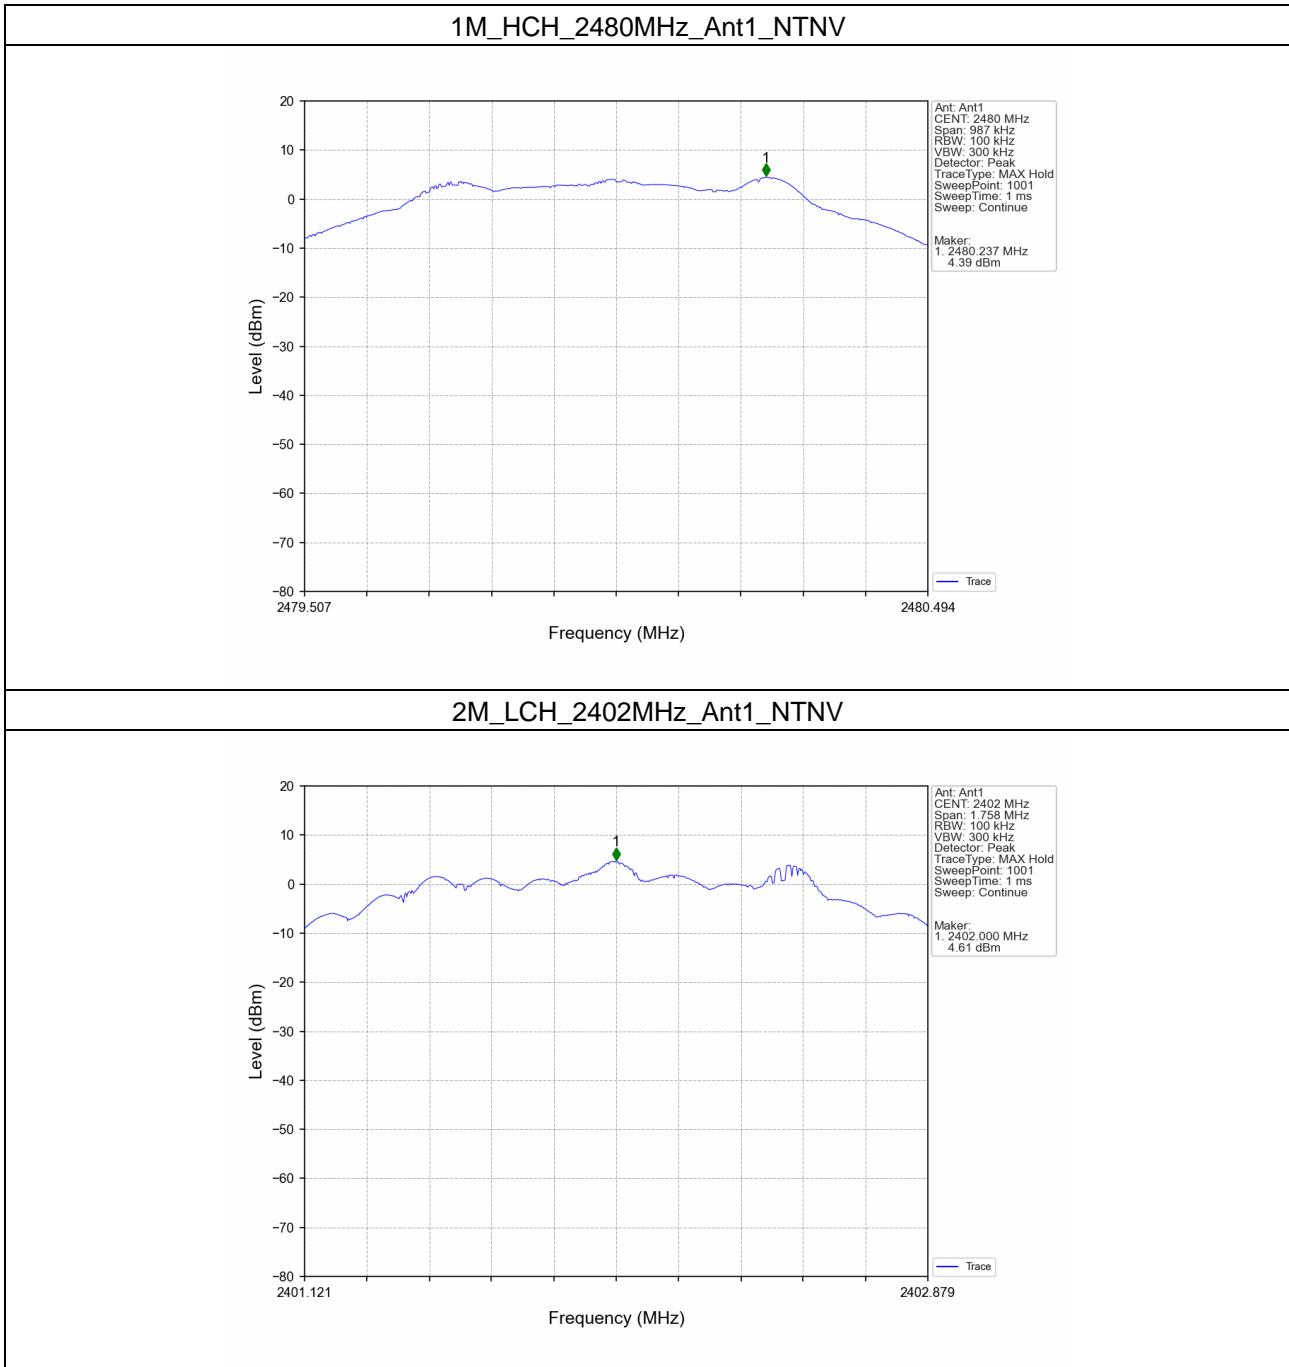


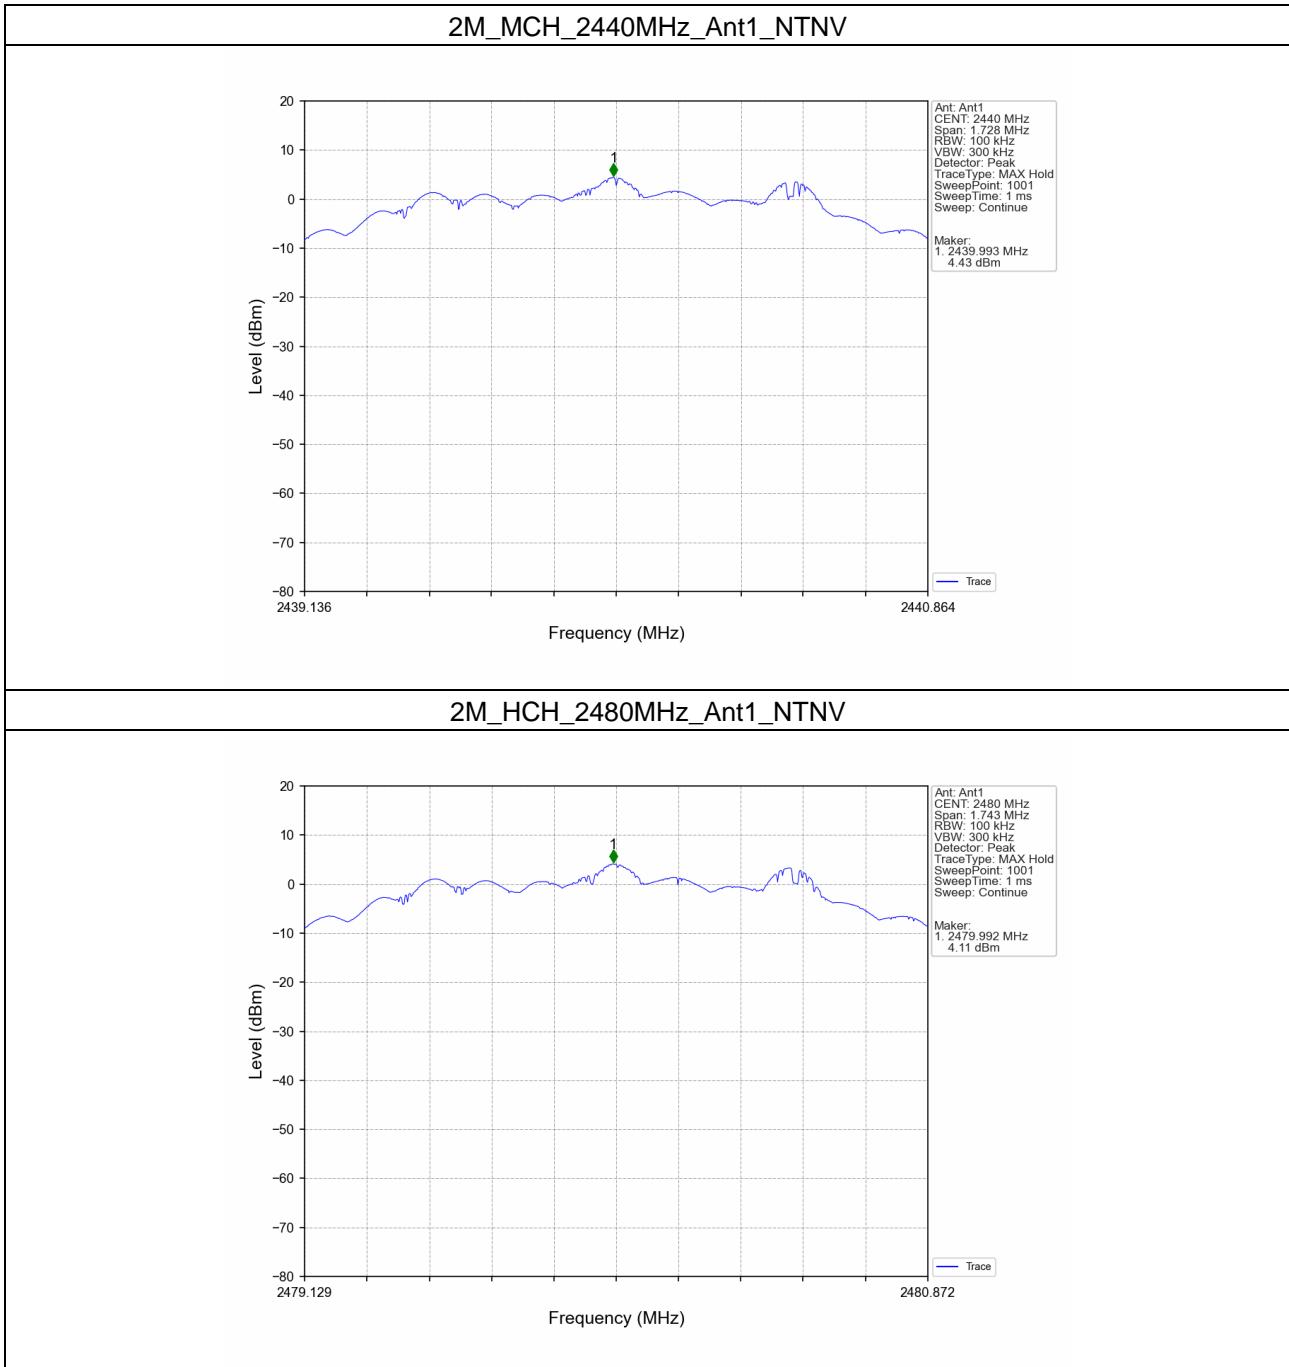


## 5.2.2 CSE

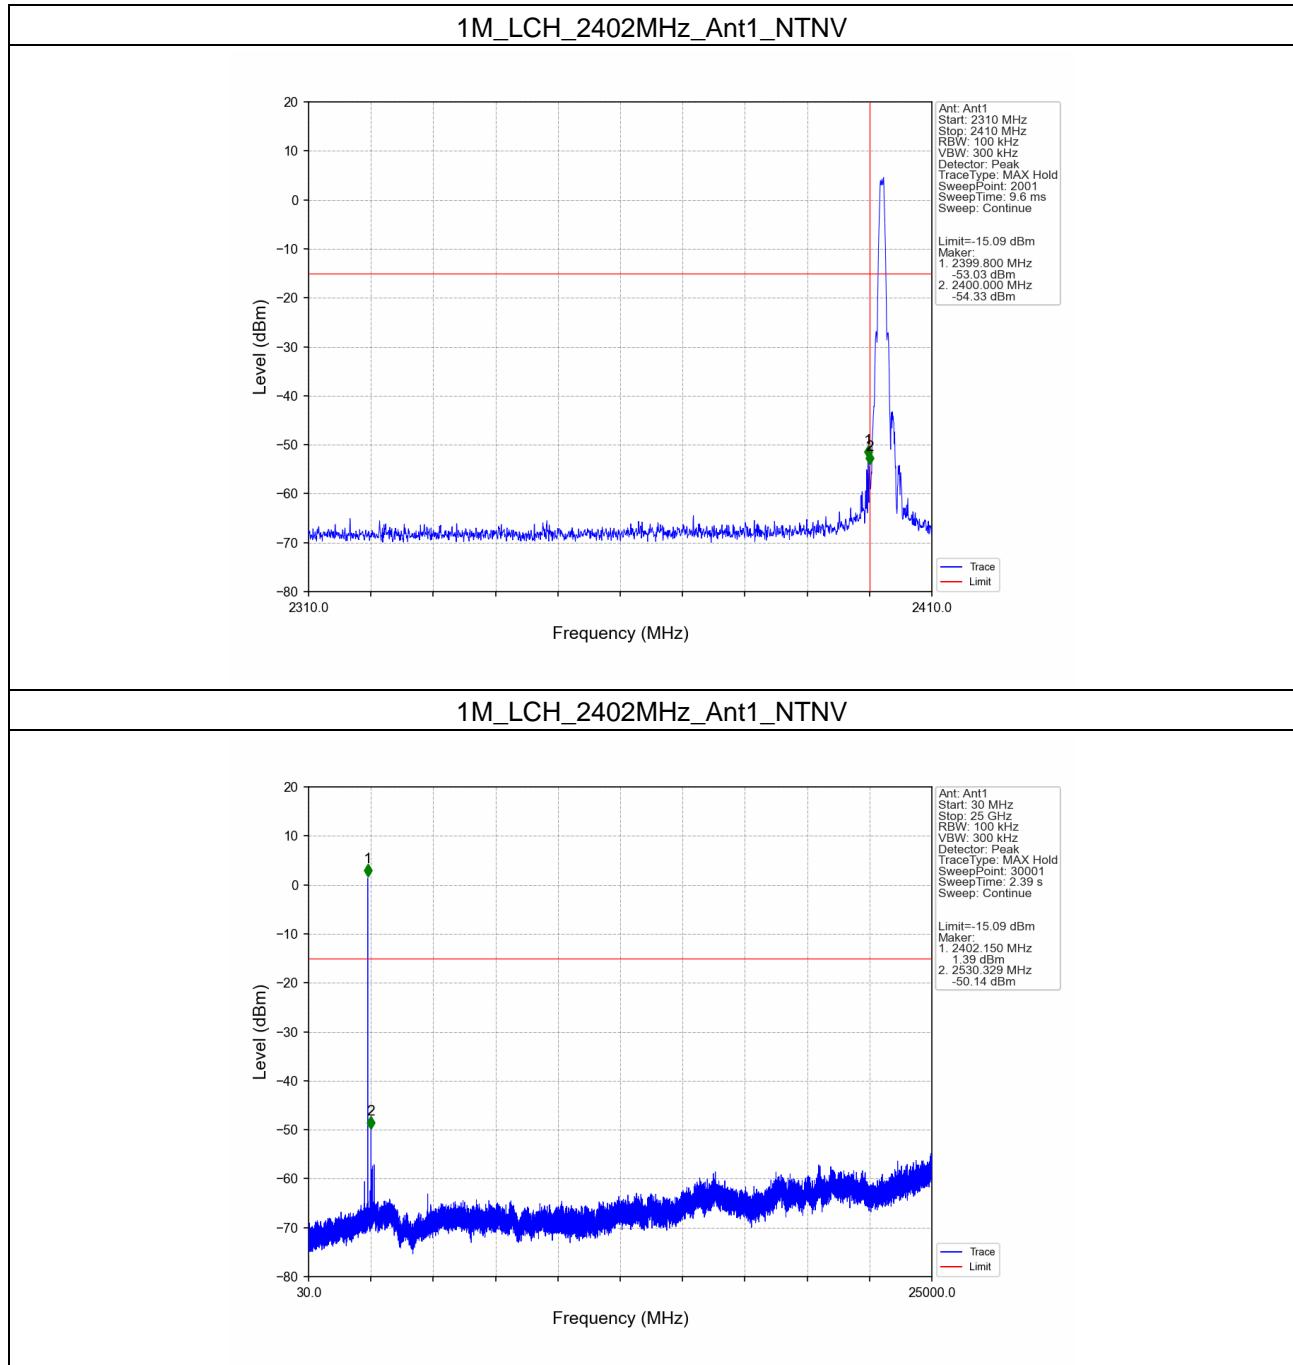


## 1M\_MCH\_2440MHz\_Ant1\_NTNV

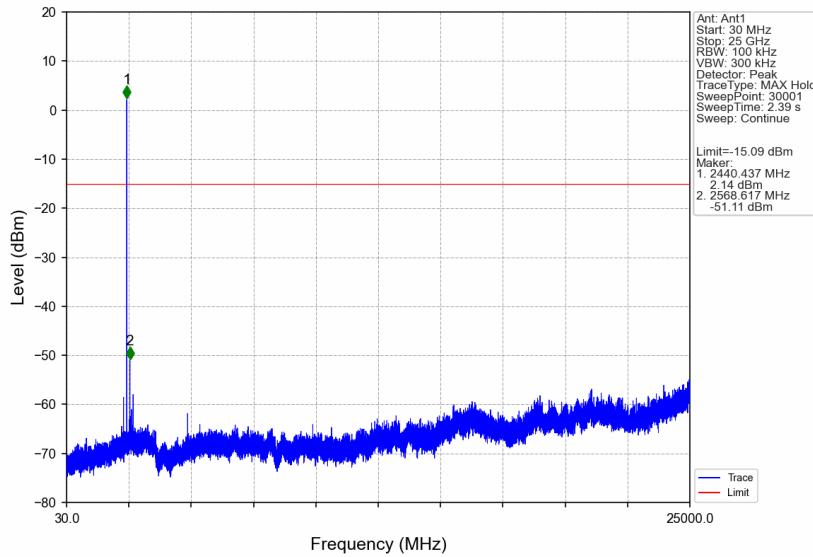


## 1M\_HCH\_2480MHz\_Ant1\_NTNV

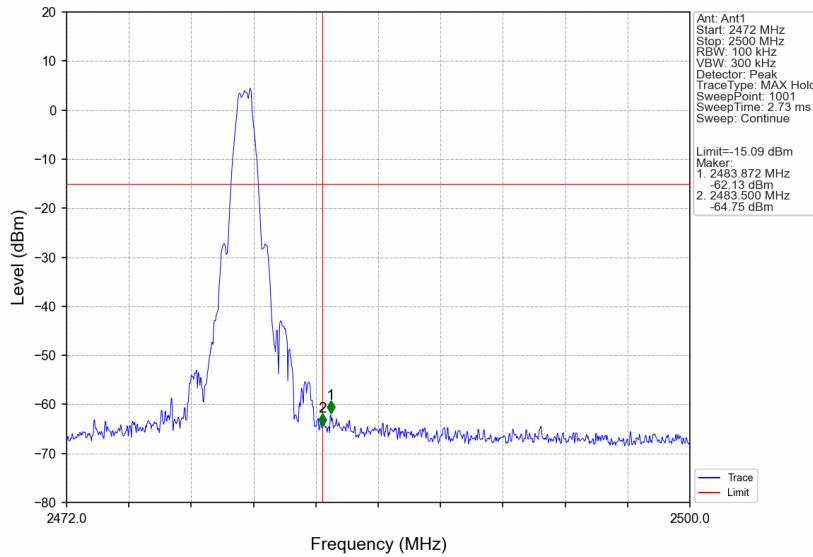


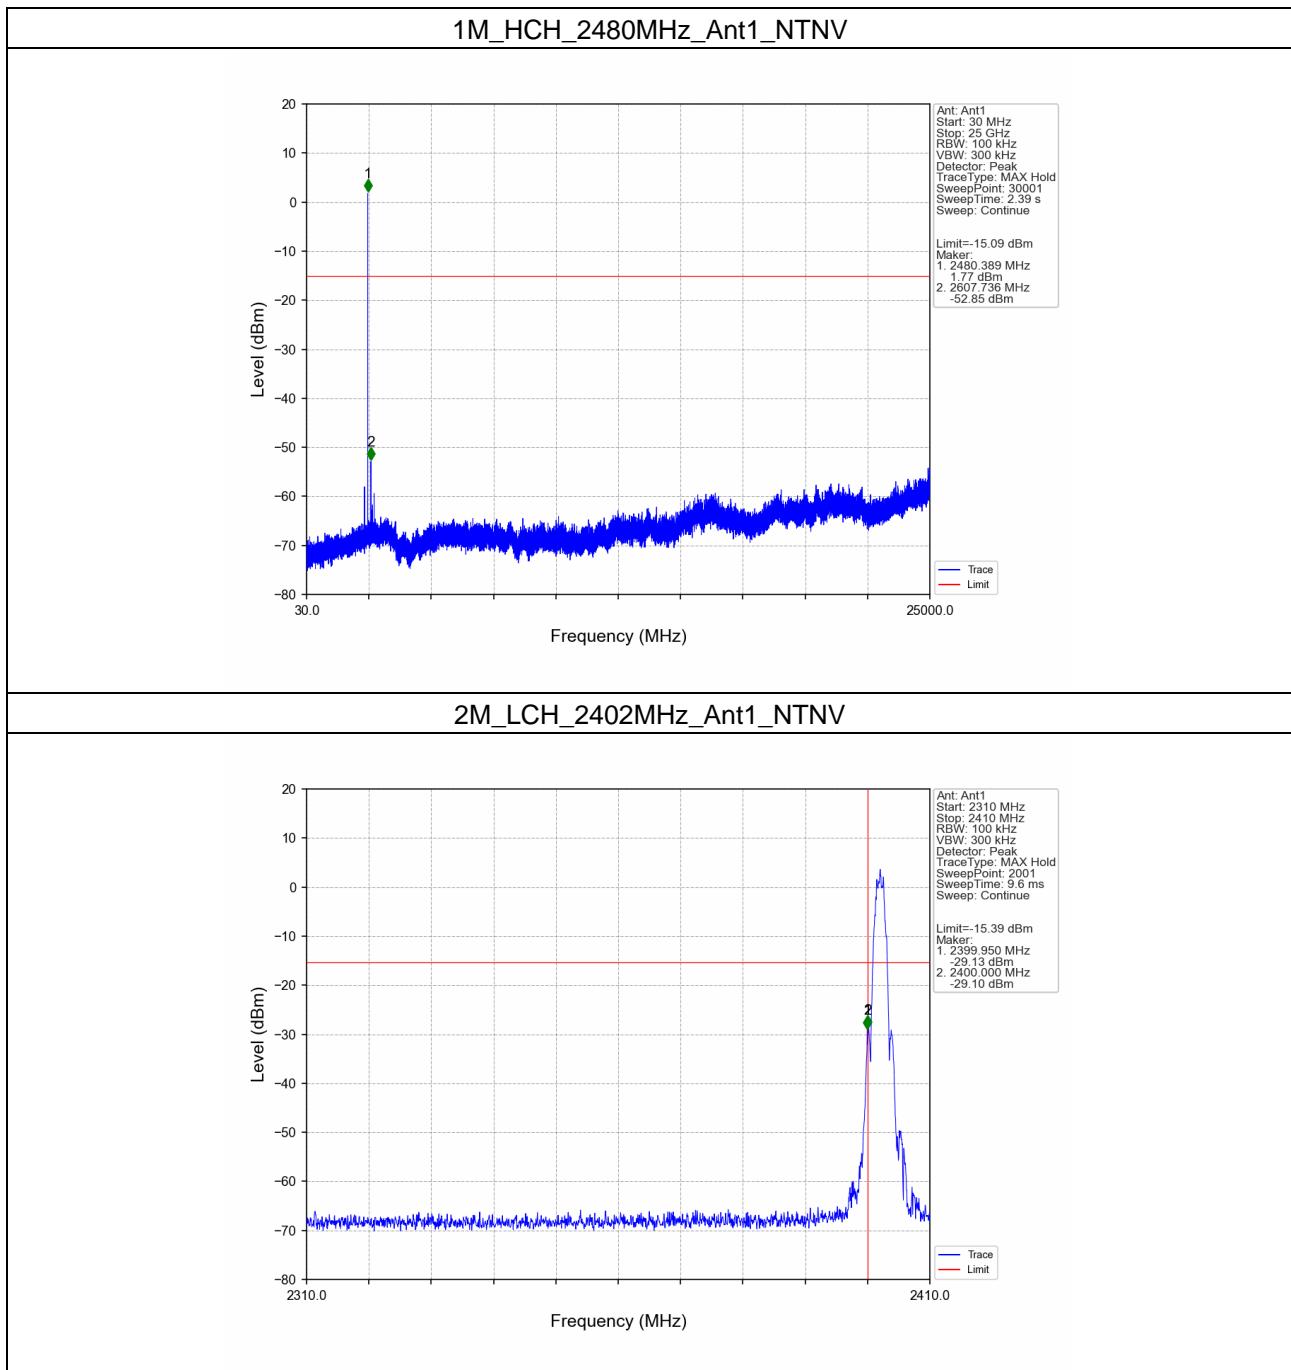


2M\_LCH\_2402MHz\_Ant1\_NTNV

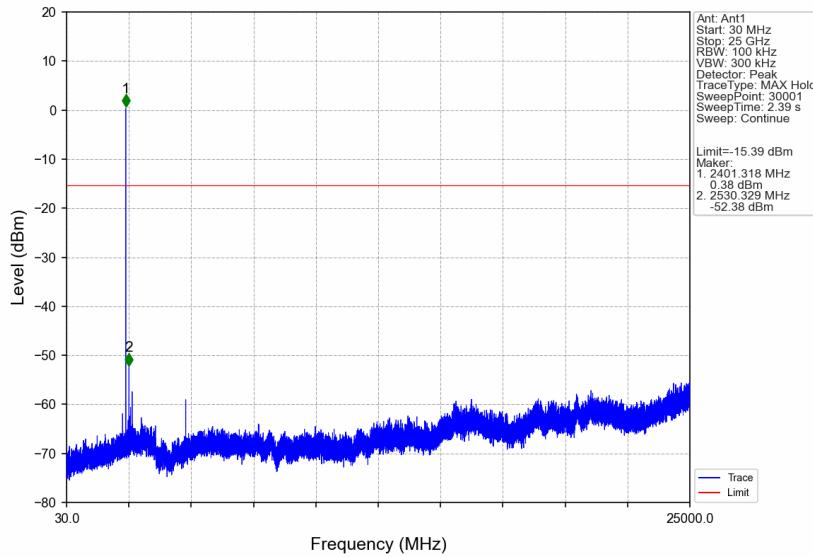


2M\_MCH\_2440MHz\_Ant1\_NTNV

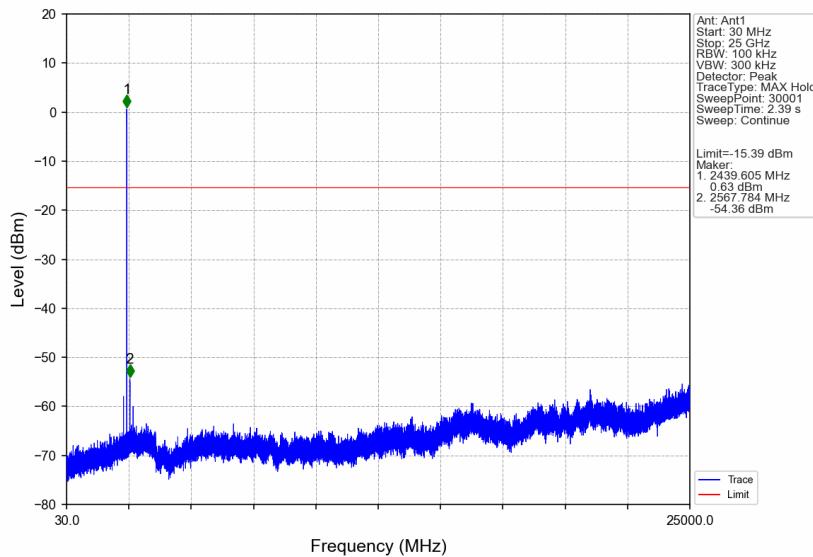

## 2M\_HCH\_2480MHz\_Ant1\_NTNV

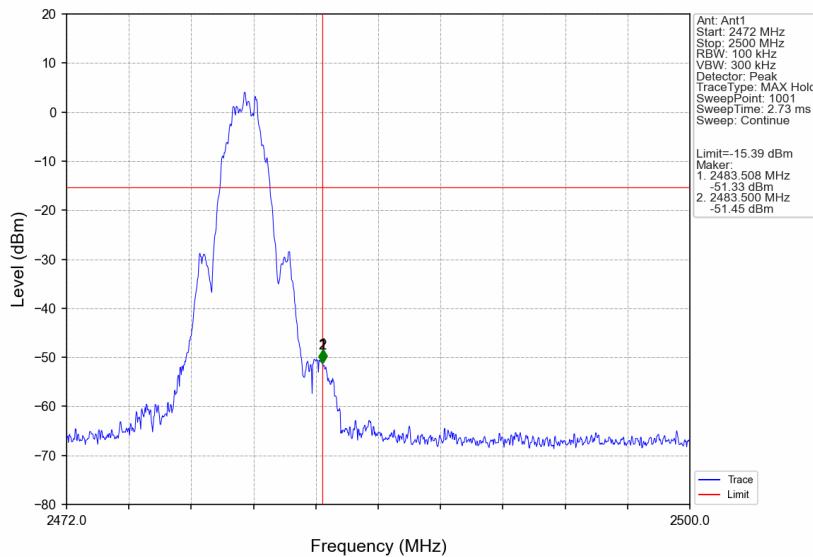

## 2M\_HCH\_2480MHz\_Ant1\_NTNV

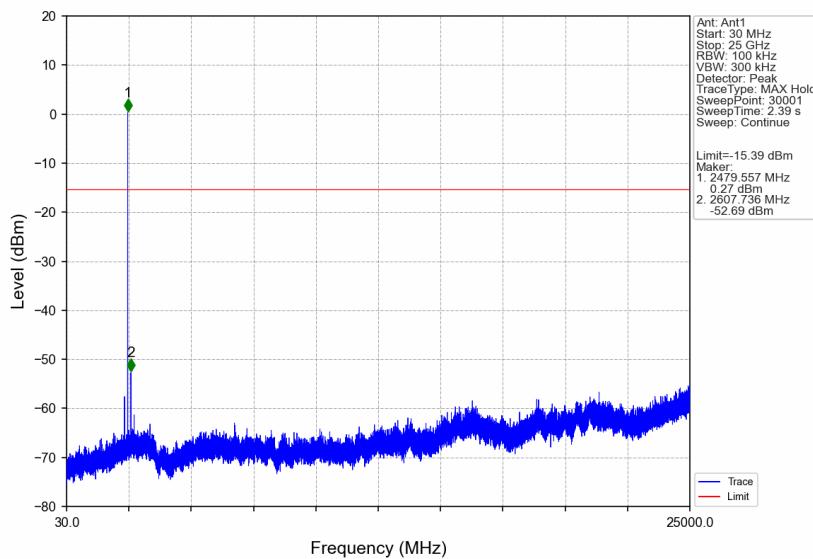

## 6. Frequency Error

### 6.1 Test Result

#### 6.1.1 Ant1

Ant1							
Mode	TX Type	Frequency (MHz)	Temperature (°C)	Voltage (VAC)	Measured Frequency (MHz)	Limit (MHz)	Verdict
1M	SISO	2402	20	102	2401.990	2401.588 to 2402.412	Pass
				120	2401.990	2401.588 to 2402.412	Pass
				138	2401.992	2401.588 to 2402.412	Pass
			-20	120	2401.990	2401.588 to 2402.412	Pass
			50	120	2401.991	2401.588 to 2402.412	Pass
		2440	20	102	2439.990	2439.589 to 2440.411	Pass
				120	2439.990	2439.589 to 2440.411	Pass
				138	2439.990	2439.589 to 2440.411	Pass
			-20	120	2439.989	2439.589 to 2440.411	Pass
			50	120	2439.990	2439.589 to 2440.411	Pass
		2480	20	102	2479.990	2479.589 to 2480.411	Pass
				120	2479.990	2479.589 to 2480.411	Pass
				138	2479.990	2479.589 to 2480.411	Pass
			-20	120	2479.989	2479.589 to 2480.411	Pass
			50	120	2479.990	2479.589 to 2480.411	Pass
2M	SISO	2402	20	102	2401.992	2401.185 to 2402.815	Pass
				120	2401.992	2401.185 to 2402.815	Pass
				138	2401.992	2401.185 to 2402.815	Pass
			-20	120	2401.996	2401.185 to 2402.815	Pass
			50	120	2401.990	2401.185 to 2402.815	Pass
		2440	20	102	2439.988	2439.182 to 2440.818	Pass
				120	2439.988	2439.182 to 2440.818	Pass
				138	2439.992	2439.182 to 2440.818	Pass
			-20	120	2439.988	2439.182 to 2440.818	Pass
			50	120	2439.994	2439.182 to 2440.818	Pass
		2480	20	102	2479.990	2479.182 to 2480.818	Pass
				120	2479.992	2479.182 to 2480.818	Pass
				138	2479.992	2479.182 to 2480.818	Pass
			-20	120	2479.990	2479.182 to 2480.818	Pass
			50	120	2479.990	2479.182 to 2480.818	Pass

- End of the Report -