

System Check_HSL2450MHz

DUT: D2450V2-SN:804

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL_2450_231021 Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 1.838$ S/m; $\epsilon_r =$

40.87 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.2°C

DASY Configuration:

- Electronics: DAE4 Sn855; Calibrated: 2023/4/25
- Probe: EX3DV4 - SN7400; ConvF(7.69, 7.69, 7.69) @ 2450 MHz; Calibrated: 2023/4/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1153
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Pin=250mW/Area Scan (8x8x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 17.6 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 101.7 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 26.3 W/kg

SAR(1 g) = 13.1 W/kg; SAR(10 g) = 6.29 W/kg

Maximum value of SAR (measured) = 21.6 W/kg

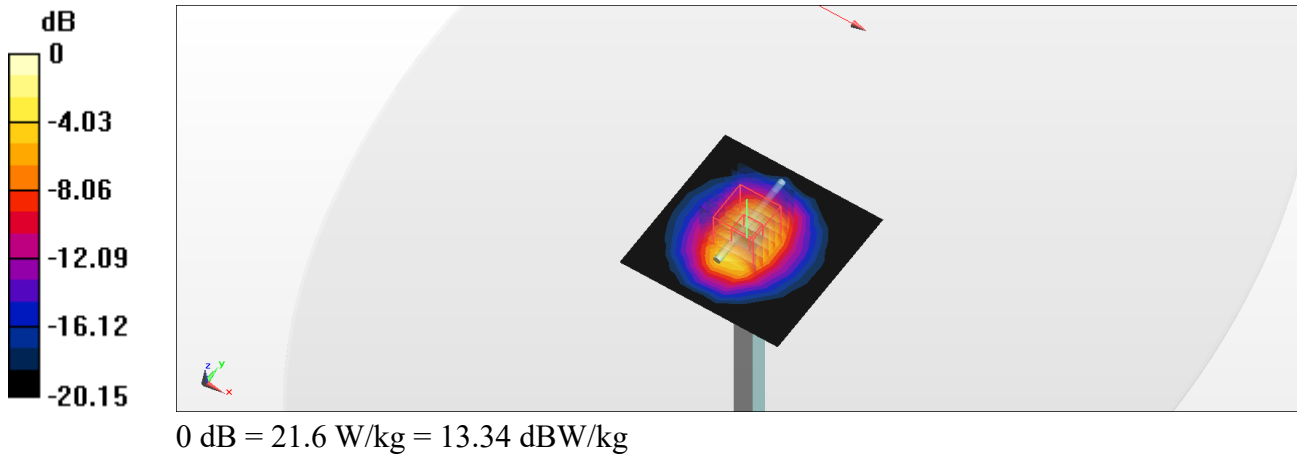

System Check_HSL5250MHz

DUT: D5GHzV2 - SN1235

Communication System: CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: HSL5G_231019 Medium parameters used: $f = 5250$ MHz; $\sigma = 4.655$ S/m; $\epsilon_r = 36.621$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6°C

DASY Configuration:

- Electronics: DAE4 Sn855; Calibrated: 2023/4/25
- Probe: EX3DV4 - SN7400; ConvF(5.07, 5.07, 5.07) @ 5250 MHz; Calibrated: 2023/4/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 23.0$
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1153
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Pin=100mW/Area Scan (9x9x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 20.3 W/kg


Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 73.31 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 32.4 W/kg

SAR(1 g) = 8.14 W/kg; SAR(10 g) = 2.36 W/kg

Maximum value of SAR (measured) = 20.4 W/kg

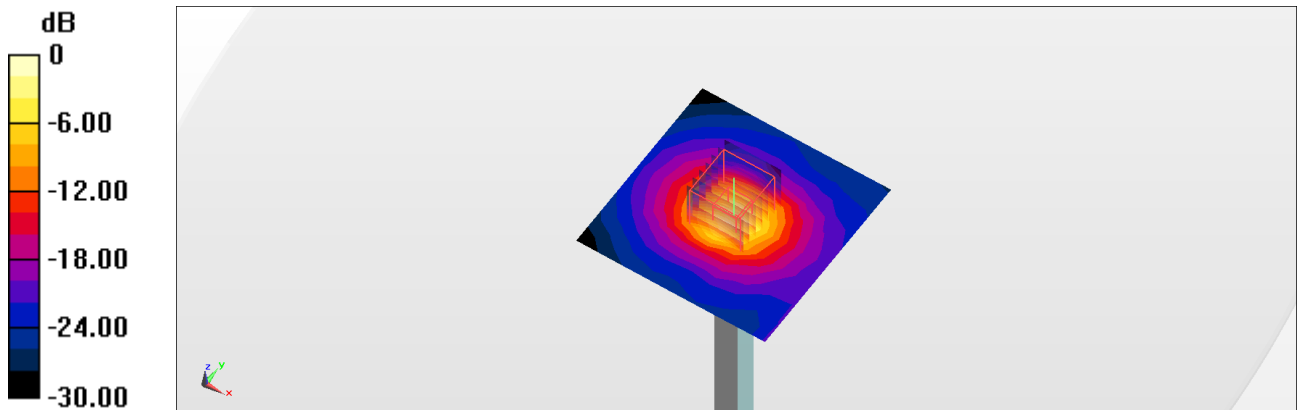

0 dB = 20.4 W/kg = 13.10 dBW/kg

System Check_HSL5600MHz

DUT: D5GHzV2 - SN1235

Communication System: CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: HSL5G_231019 Medium parameters used: $f = 5600$ MHz; $\sigma = 5.02$ S/m; $\epsilon_r = 36.169$; $\rho = 1000$

kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6°C

DASY Configuration:

- Electronics: DAE4 Sn855; Calibrated: 2023/4/25
- Probe: EX3DV4 - SN7400; ConvF(4.72, 4.72, 4.72) @ 5600 MHz; Calibrated: 2023/4/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 23.0$
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1153
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Pin=100mW/Area Scan (9x9x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 22.4 W/kg


Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 73.71 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 37.6 W/kg

SAR(1 g) = 8.67 W/kg; SAR(10 g) = 2.5 W/kg

Maximum value of SAR (measured) = 22.3 W/kg

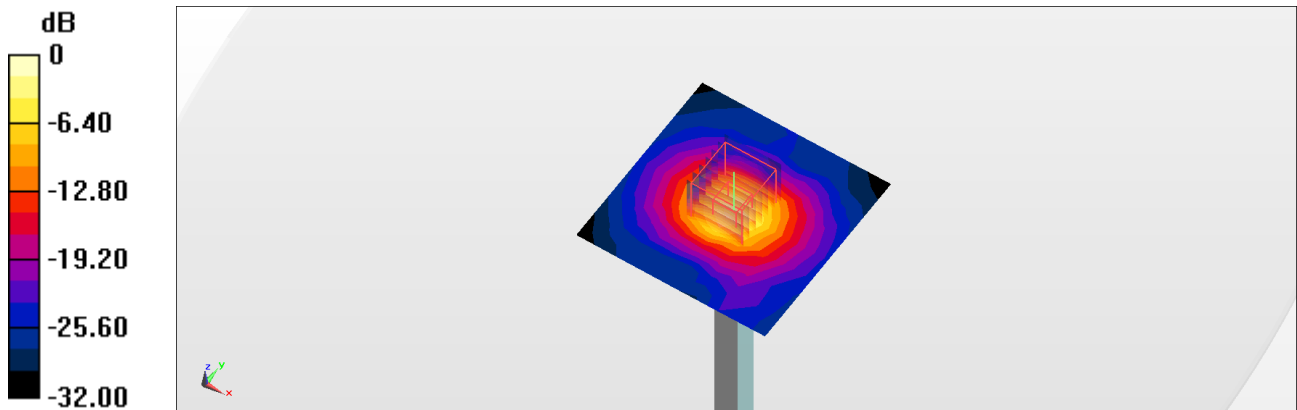

0 dB = 22.3 W/kg = 13.48 dBW/kg

System Check_HSL5750MHz

DUT: D5GHzV2 - SN1235

Communication System: CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: HSL5G_231019 Medium parameters used: $f = 5750$ MHz; $\sigma = 5.182$ S/m; $\epsilon_r = 36.004$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6°C

DASY Configuration:

- Electronics: DAE4 Sn855; Calibrated: 2023/4/25
- Probe: EX3DV4 - SN7400; ConvF(4.8, 4.8, 4.8) @ 5750 MHz; Calibrated: 2023/4/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 23.0$
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1153
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Pin=100mW/Area Scan (9x9x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 21.7 W/kg


Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 71.96 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 38.0 W/kg

SAR(1 g) = 8.28 W/kg; SAR(10 g) = 2.37 W/kg

Maximum value of SAR (measured) = 21.7 W/kg

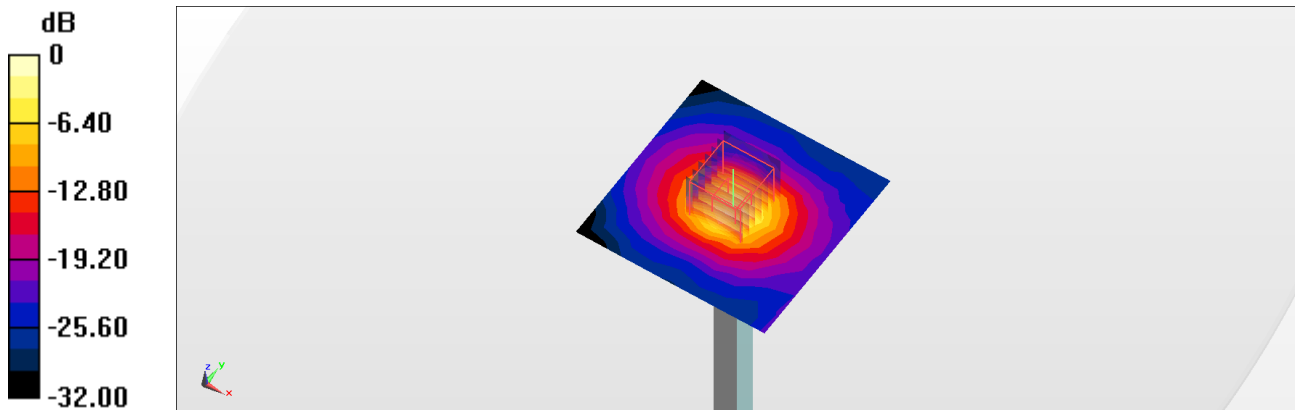

0 dB = 21.7 W/kg = 13.36 dBW/kg

Test Laboratory: TÜV Rheinland Inc.

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
D6.5GHzV2	16.0 x 6.0 x 300.0	SN: 1044	Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	5,		CW, 0--	6500.000, 0	5.3	6.14	33.8

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1153	HSL6500_231022 , --	EX3DV4 - SN7400, 2023-04-28	DAE4 Sn855, 2023-04-25

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	51.0 x 85.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-10-22, 16:11	2023-10-22, 16:40
psSAR1g [W/kg]	20.4	27.5
psSAR10g [W/kg]	4.52	5.18
Power Drift [dB]	-0.08	-0.09
Power Scaling	Enabled	Enabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		51.0
Dist 3dB Peak [mm]		4.6

