

47 CFR PART 15 SUBPART C TEST REPORT

for

Wall Reader and Controller

Model No.: R11X/R12X/R22X

FCC ID: 2AWL8-R00001

of

Applicant: WAFERLOCK Corp.

Address: No.16, Keyuan 2nd Rd., Xitun Dist., Taichung City 407, Taiwan

Tested and Prepared

by

Worldwide Testing Services (Taiwan) Co., Ltd.

FCC Registration No.: TW1477, TW0020, TW1072


Industry Canada filed test laboratory Reg. No. 20037

A2LA Accredited No.: 2732.01



Report No.: W6M21707-17197-C-1


6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU TAIPEI 114, TAIWAN, R.O.C.
TEL: 886-2-66068877 FAX: 886-2-66068879 E-mail: wtst@wtst-lab.com



Registration number: W6M21707-17197-C-1
FCC ID: 2AWL8-R00001

TABLE OF CONTENTS

1	GENERAL INFORMATION	2
1.1	NOTES.....	2
1.2	TESTING LABORATORY	3
1.2.1	Location	3
1.2.2	Details of accreditation status	3
1.3	DETAILS OF APPROVAL HOLDER.....	4
1.4	APPLICATION DETAILS	4
1.5	GENERAL INFORMATION OF TEST ITEM	4
1.6	TEST STANDARDS.....	4
2	TECHNICAL TEST	5
2.1	SUMMARY OF TEST RESULTS	5
2.2	TEST ENVIRONMENT	5
2.3	TEST EQUIPMENT LIST	6
2.4	GENERAL TEST PROCEDURE	9
3	TEST RESULTS (ENCLOSURE)	11
3.1	OUTPUT POWER (FIELD STRENGTH)	12
3.2	OUT OF BAND RADIATED EMISSIONS.....	15
3.3	OCCUPIED BANDWIDTH	19
3.4	FREQUENCY TOLERANCE	21
3.5	POWER LINE CONDUCTED EMISSION	25
	APPENDIX	27



Registration number: W6M21707-17197-C-1
FCC ID: 2AWL8-R00001

1 General Information

1.1 Notes

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems.

The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

The test results of this test report relate exclusively to the item tested as specified in 1.5.

The test report may only be reproduced or published in full.

Reproduction or publication of extracts from the report requires the prior written approval of the Worldwide Testing Services(Taiwan) Co., Ltd.

Tester:

June 12, 2020

Leon Chueh

Date

WTS-Lab.

Name

Signature

Technical responsibility for area of testing:

June 12, 2020

Kevin Wang

Date

WTS

Name

Signature



Registration number: W6M21707-17197-C-1
FCC ID: 2AWL8-R00001

1.2 Testing laboratory

1.2.1 Location

OATS

No.5-1, Lishui, Shuang Sing Village,
Wanli Dist., New Taipei City 207,
Taiwan (R.O.C.)

3 meter semi-anechoic chamber

No.35, Aly. 21, Ln. 228, Ankang Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

TEL:886-2-6613-0228

FAX:886-2-2791-5046

Company

Worldwide Testing Services(Taiwan) Co., Ltd.

6F, NO. 58, LANE 188, RUEY-KUANG RD.

NEIHU, TAIPEI 114, TAIWAN R.O.C.

Tel : 886-2-66068877

Fax : 886-2-66068879

1.2.2 Details of accreditation status

Accredited testing laboratory

A2LA accredited number: 2732.01

FCC filed test laboratory Reg. No. TW1477, TW0020, TW1072

Industry Canada filed test laboratory Reg. No. 20037

Test location, where different from Worldwide Testing Services (Taiwan) Co., Ltd. :

Name: ./.

Accredited number: ./.


Street: ./.

Town: ./.

Country: ./.

Telephone: ./.

Fax: ./.



Registration number: W6M21707-17197-C-1
FCC ID: 2AWL8-R00001

1.3 Details of approval holder

Name: WAFERLOCK Corp.
Street: No.16, Keyuan 2nd Rd., Xitun Dist.,
City: Taichung City 407,
Country: Taiwan
Telephone: +886-4-2462-0208
Fax: +886-4-2463-8457

1.4 Application details

Date of receipt of test item: July 14, 2017
Date of test: from July 17, 2017 to June 11, 2020

1.5 General information of Test item


Description of test item: Wall Reader and Controller
Type identification: R11X/R12X/R22X
Multi-listing model number: ./.
Transmitting frequency: 13.56 MHz
Operation mode: Half-duplex
Voltage supply: Adaptor (Input: 100-240V~50/60Hz 0.6A; Output: +12V, 1.5A)
Antenna type: Loop antenna
Photos: see Annex

Manufacturer: (if applicable)

Name: ./.
Street: ./.
Town: ./.
Country: ./.

1.6 Test standards

Technical standard: 47 CFR PART 15 SUBPART C § 15.225 (2019-10)



Registration number: W6M21707-17197-C-1
FCC ID: 2AWL8-R00001

2 Technical test

2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.



or

The deviations were ascertained in the course of the tests performed.



2.2 Test environment

Relative humidity content: 20 ... 75 %


Air pressure: 86 ... 103 kPa

Details of power supply: Adaptor (Input: 100-240V~50/60Hz 0.6A; Output: +12V, 1.5A)

Extreme conditions parameters: ./.

Test item Name	Measurement Uncertainty
Estimation Result of Uncertainty of Conducted Emission	Expanded Uncertainty: AMN: 1.06 dB Voltage probe: 1.12 dB
Estimation Result of Uncertainty of Radiated Emission(3M)	Expanded Uncertainty: 0.009-30 MHz: 1.88 dB 30-1000 MHz: 2.79 dB 1-18 GHz: 2.36 dB 18-40 GHz: 1.55 dB
Estimation Result of Uncertainty of Bandwidth Measurement 20 dB Bandwidth, Occupied bandwidth, Channel bandwidth, Necessary Bandwidth	Expanded Uncertainty: 0.45 kHz
Estimation Result of Uncertainty of Frequency Drift Measurement Frequency stability	Expanded Uncertainty: 6.11 Hz

Measurement uncertainty is not included in the calculation of test results.




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21707-17197-C-1

FCC ID: 2AWL8-R00001

2.3 Test Equipment List


No.	Test equipment	Type	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
ETSTW-CE 001	EMI TEST RECEIVER	ESHS10	842121/013	R&S	2020/6/2	2021/6/1
ETSTW-CE 003	AC POWER SOURCE	APS-9102	D161137	GW	Function Test	
ETSTW-CE 004	ZWEILEITER-V-NETZNACHBILDUNG TWO-LINE V-NETWORK	ESH3-Z5	840731/011	R&S	2019/11/1	2020/10/31
ETSTW-CE 006	IMPULSBEGRENZER PULSE LIMITER	ESH3-Z2	100226	R&S	2019/9/24	2020/9/23
ETSTW-CE 008	HF-EICHLEITUNG RF STEP ATTENUATOR 139dB DPSP	334.6010.02	844581/024	R&S	Function Test	
ETSTW-CE 009	TEMP.&HUMIDITY CHAMBER	GTH-225-40-1P-U	MAA0305-009	GIANT FORCE	2019/7/23	2020/7/22
ETSTW-CE 016	TWO-LINE V-NETWORK	ENV216	100050	R&S	2019/10/3	2020/10/2
ETSTW-CE 028	MXE EMI Receiver	N9038A	MY53220110	Agilent	2019/7/18	2020/7/17
ETSTW-RE 003	EMI TEST RECEIVER	ESI 26	831438/001	R&S	2020/6/2	2021/6/1
ETSTW-RE 004	EMI TEST RECEIVER	ESI 40	832427/004	R&S	2020/5/26	2021/5/25
ETSTW-RE 012	TUNABLE BANDREJECT FILTER	D.C 0309	146	K&L	Function Test	
ETSTW-RE 013	TUNABLE BANDREJECT FILTER	D.C 0336	397	K&L	Function Test	
ETSTW-RE 018	MICROWAVE HORN ANTENNA	AT4560	27212	AR	2019/7/25	2020/7/24
ETSTW-RE 027	Passive Loop Antenna	6512	00034563	ETS-Lindgren	2019/7/22	2020/7/21
ETSTW-RE 030	Double-Ridged Guide Horn Antenna	3117	00035224	ETS-Lindgren	2020/4/22	2021/4/21
ETSTW-RE 042	Biconical Antenna	HK116	100172	R&S	2020/2/18	2021/2/17
ETSTW-RE 043	Log-Periodic Dipole Antenna	HL223	100166	R&S	2020/5/8	2021/5/7
ETSTW-RE 044	Log-Periodic Antenna	HL050	100094	R&S	2020/5/8	2021/5/7
ETSTW-RE 045	ESA-E SERIES SPECTRUM ANALYZER	E4404B	MY45111242	Agilent	Pre-test Use	
ETSTW-RE 050	Attenuator 10dB	50HF-010-1	None	JFW	2020/2/20	2021/2/19
ETSTW-RE 051	Attenuator 6dB	50HF-006-1	None	JFW	2020/2/20	2021/2/19
ETSTW-RE 053	Attenuator 3dB	50HF-003-1	None	JFW	2020/2/20	2021/2/19
ETSTW-RE 055	SPECTRUM ANALYZER	FSU 26	200074	R&S	2020/3/6	2021/3/5
ETSTW-RE 060	Attenuator 30dB	5015-30	F651012z-01	ATM	2020/2/20	2021/2/19
ETSTW-RE 062	Amplifier Module	CHC 2	None	KMIC	2020/5/8	2021/5/7
ETSTW-RE 064	Bluetooth Test Set	MT8852B-042	6K00005709	Anritsu	Function Test	
ETSTW-RE 069	Double-Ridged Guide Horn Antenna	3117	00069377	ETS-Lindgren	Function Test	
ETSTW-RE 072	CELL SITE TEST SET	8921A	3339A00375	HP	2019/9/23	2020/9/22
ETSTW-RE 088	SOLID STATE AMPLIFIER	KMA180265A01	99057	KMIC	2019/9/18	2020/9/17
ETSTW-RE 091	Match Pad	MDCS1500	None	WOKEN	2020/5/8	2021/5/7
ETSTW-RE 099	DC Block	50DB-007-1	None	JFW	2020/2/20	2021/2/19
ETSTW-RE 112	AC POWER SOURCE	TFC-1005	T-0A023536	T-Power	Function test	
ETSTW-RE 115	2.4GHz Notch Filter	N0124411	473874	MICROWAVE CIRCUITS	2020/1/13	2021/1/12



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21707-17197-C-1
FCC ID: 2AWL8-R00001

ETSTW-RE 120	RF Player	MP9200	MP9210-111022	ADIVIC	Function test	
ETSTW-RE 122	SIGNAL GENERATOR	SMF100A	102149	R&S	2020/6/2	2021/6/1
ETSTW-RE 125	5GHz Notch filter	5NSL11-5200/E221.3-O/O	1	K&L Microwave	2019/8/8	2020/8/7
ETSTW-RE 126	5GHz Notch filter	5NSL12-5800/E221.3-O/O	1	K&L Microwave	2019/8/8	2020/8/7
ETSTW-RE 127	RF Switch Box	RFS-01	None	WTS	2020/2/20	2021/2/19
ETSTW-RE 128	5.3GHz Notch filter	N0153001	SN487233	Microwave Circuits	2019/8/8	2020/8/7
ETSTW-RE 129	5.5GHz Notch filter	N0555984	SN487234	Microwave Circuits	2019/8/8	2020/8/7
ETSTW-RE 130	Handheld RF Spectrum Analyzer	N9340A	CN0147000204	Agilent	Pre-test Use	
ETSTW-RE 142	Amplifier	8447D	2805A03378	Agilent	2020/5/8	2021/5/7
ETSTW-RE 147	Bi-log Hybrid Antenna	MCTD 2786B	BLB16M04005	ETC	2020/4/9	2021/4/8
ETSTW-RF 002	Electromagnetic field probe	LF-30	K-0007	STT	2020/5/26	2021/5/25
ETSTW-EMI 011	USB Compact Modulator	SFC-U	101689	R&S	2020/5/8	2021/5/7
ETSTW-GSM 002	Universal Radio Communication Tester	CMU 200	109439	R&S	2020/3/9	2021/3/8
ETSTW-GSM 003	Radio Communication Analyzer	MT8820C	6201342073	Anritsu	2020/4/20	2021/4/19
ETSTW-GSM 004	Wideband Radio Communication Tester	CMW500	128092	R&S	2019/10/25	2020/10/24
ETSTW-GSM 019	Band Reject Filter	WRCTF824/849-822/851-40 /12+9SS	3	WI	2020/1/13	2021/1/12
ETSTW-GSM 020	Band Reject Filter	WRCD1747/1748-1743/1752-32/5SS	1	WI	2020/1/13	2021/1/12
ETSTW-GSM 021	Band Reject Filter	WRCD1879.5/1880.5-1875.5/1884.5-32/5SS	3	WI	2020/1/13	2021/1/12
ETSTW-GSM 022	Band Reject Filter	WRCT901.9/903.1-904.25-50/8SS	1	WI	2020/1/13	2021/1/12
ETSTW-GSM 023	Power Divider	4901.19.A	None	SUHNER	2019/9/12	2020/9/11
ETSTW-GSM 024	Radio Communication Analyzer	MT8821C	None	Anritsu	2020/3/27	2021/3/26
ETSTW-GSM 025	Band Reject Filter	BRM19835	001	Micro-Tronics	2019/8/9	2020/8/8
ETSTW-Cable 011	SMA to N type Cable	RGU-400	None	THERMAX	Pre-test Use NCR	
ETSTW-Cable 016	BNC Cable	Switch Box	B Cable 1	Schwarz beck	2020/2/20	2021/2/19
ETSTW-Cable 017	BNC Cable	X Cable	B Cable 2	Schwarz beck	2020/2/20	2021/2/19
ETSTW-Cable 018	BNC Cable	Y Cable	B Cable 3	Schwarz beck	2020/2/20	2021/2/19
ETSTW-Cable 019	BNC Cable	Z Cable	B Cable 4	Schwarz beck	2020/2/20	2021/2/19
ETSTW-Cable 020	N TYPE Cable	OATS Cable 1	N30N30-L335-15M	JYE BAO CO.,LTD.	2019/7/2	2020/7/1
ETSTW-Cable 027	Microwave Cable	SUCOFLEX 104	279083	HUBER+SUHNER	2020/5/8	2021/5/7
ETSTW-Cable 028	Microwave Cable	FA147A0015M2020	30064-2	UTIFLEX	2019/9/18	2020/9/17
ETSTW-Cable 029	Microwave Cable	FA147A0015M2020	30064-3	UTIFLEX	2019/9/18	2020/9/17
ETSTW-Cable 030	Microwave Cable	SUCOFLEX 104 (S Cable 9)	279067	HUBER+SUHNER	2020/2/20	2021/2/19
ETSTW-Cable 043	Microwave Cable	SUCOFLEX 104	317576	HUBER+SUHNER	2020/5/8	2021/5/7
ETSTW-Cable 058	Microwave Cable	SUCOFLEX 104	none	HUBER+SUHNER	2020/6/2	2021/6/1
ETSTW-Cable 064	Microwave Cable	SUCOFLEX 104	MY28891	HUBER+SUHNER	2020/5/8	2021/5/7
ETSTW-Cable 066	SMA type cable	32022	None	ASTROLAB	2019/9/24	2020/9/23
ETSTW-Cable 071	N TYPE CABLE	EMCCFD400-NM-NM-25000	170239	EMCI	2020/6/2	2021/6/1



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21707-17197-C-1

FCC ID: 2AWL8-R00001

ETSTW-Cable 072	SMA type cable (8m)	SUCOFLEX 104	805800/4	HUBER+SUHNER	2020/5/8	2021/5/7
ETSTW-Cable 074	SMA type cable (2m)	SUCOFLEX 104	802563/4	HUBER+SUHNER	2020/5/8	2021/5/7
WTSTW-SW 002	EMI TEST SOFTWARE	EZ EMC	None	Farad	Version ETS-03A1	
WTSTW-SW 006	EMI TEST SOFTWARE	e3	None	AUDIX	Version 9.161014	
WTSTW-SW 008	Signal studio	Agilent	None	AUDIX	Version 2.0.0.1	
ETSTW-TH 001	Thermohygrometer	608-H1	45204316	Testo	2019/9/9	2020/9/8
ETSTW-TH 002	Thermohygrometer	608-H1	45204317	Testo	2019/9/9	2020/9/8



Registration number: W6M21707-17197-C-1
FCC ID: 2AWL8-R00001

2.4 General Test Procedure

POWER LINE CONDUCTED INTERFERENCE: The procedure used was ANSI STANDARD C63.10-2013 6.2 using a LISN (if necessary). Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

RADIATION INTERFERENCE: The test procedure used was according to ANSI STANDARD C63.10-2013 6.3 employing a spectrum analyzer. For investigated frequency is equal to or below 1GHz, the RBW and VBW of the spectrum analyzer was 100 kHz and 100kHz respectively with an appropriate sweep speed. For investigated frequency is above 1GHz, both of RBW and VBW of the spectrum analyzer were 1 MHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBμV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB.

Example:

Freq (MHz) METER READING + ACF + CABLE LOSS (to the receiver) = FS
33 20 dBμV + 10.36 dB + 6 dB = 36.36 dBμV/m @3m

The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m (non metallic table) and arranged according to ANSI C63.10-2013 Section 6.2.2. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to the frequency specified as follows:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1)-(a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this Section, whichever is the higher frequency range of investigation.

For hand-held devices, a exploratory test was performed with three (3) orthogonal planes to determine the highest emissions.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.



Registration number: W6M21707-17197-C-1

FCC ID: 2AWL8-R00001

When the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

The formula is as follows:


Average = Peak + Duty Factor

Duty Factor = $20 \log (\text{dwell time}/T)$

$T = 100\text{ms}$ when the pulse train period is over 100 ms or the period of the pulse train.

Modified Limits for peak according to 15.35 (b) = Max Permitted average Limits + 20dB

ANSI STANDARD C63.10-2013 B.2.7: Any measurements that utilize special test software shall be indicated and referenced in the test report. During testing, test software 'EZ EMC' was used for setting up different operation modes.



Registration number: W6M21707-17197-C-1
FCC ID: 2AWL8-R00001

3 Test results (enclosure)

TEST CASE	Para. Number	Required	Test passed	Test failed
Output Power Field Strength	15.225 (a) (b) (c)	☒	☒	☐
Out of Band Radiated Emissions	15.225 (d)	☒	☒	☐
Band Edge	15.225 (d)	☒	☒	☐
Occupied Bandwidth	2.1049	☒	☒	☐
Frequency Stability	15.225 (e)	☒	☒	☐
Power Line Conducted Emission	15.207 (a)	☒	☒	☐

The following is intentionally left blank.



Registration number: W6M21707-17197-C-1

FCC ID: 2AWL8-R00001

3.1 Output Power (Field Strength)

FCC Rules: 15.225 (a) (b) (c), 15.205, 15.209, 15.35

Operation within the band 13.110 - 14.010 MHz

Limit

(a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.


(b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

Measurement Results:

R11X+R12X+R22X

The field strength at 3 meter distance as 67.05 dBμV/m. Extrapolated with 40dB to 30 meter distance it would be 27.05 dBμV/m.

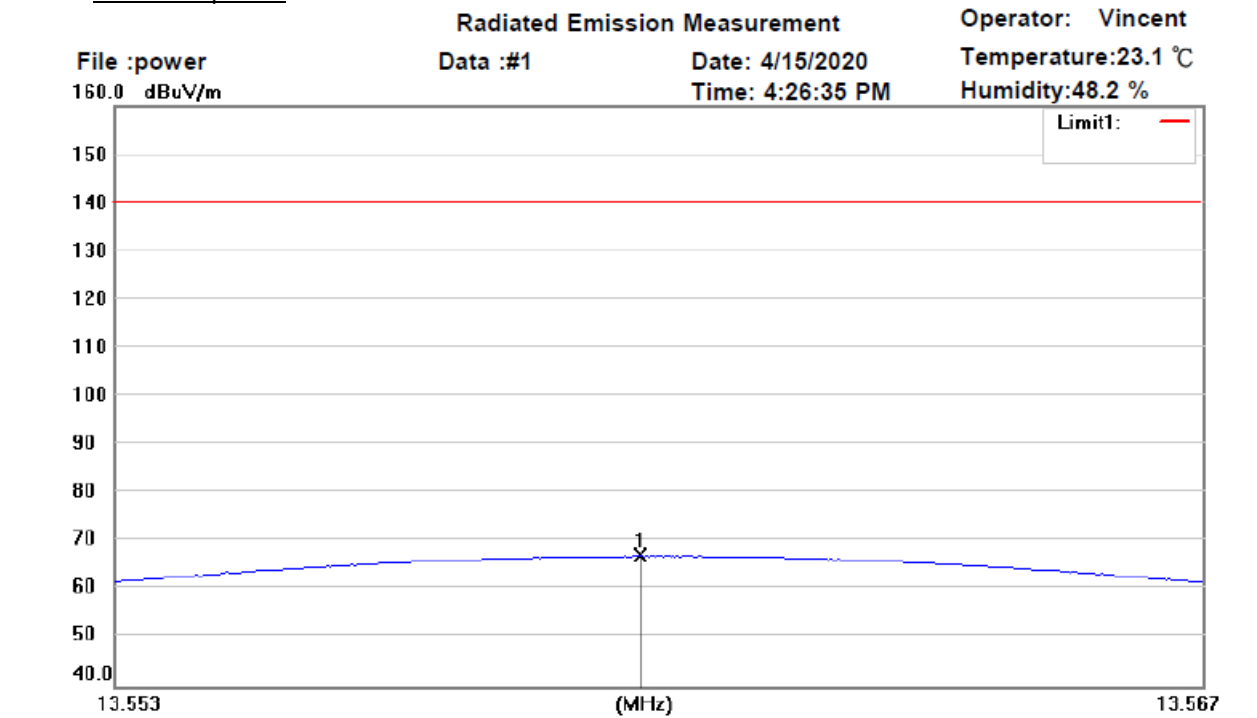

Site : Chamber

Condition : FCC part 15.225 power (13.56MHz)

EUT : W6M21707-17197

M/N:

Test Mode : TX 13.56MHz

Note :

Polarization:

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	13.5598	33.32	peak	33.73	67.05	139.92	100	0	-72.87	




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21707-17197-C-1

FCC ID: 2AWL8-R00001

R11X+R22X

The field strength at 3 meter distance as 65.50 dB μ V/m. Extrapolated with 40dB to 30 meter distance it would be 25.50 dB μ V/m.

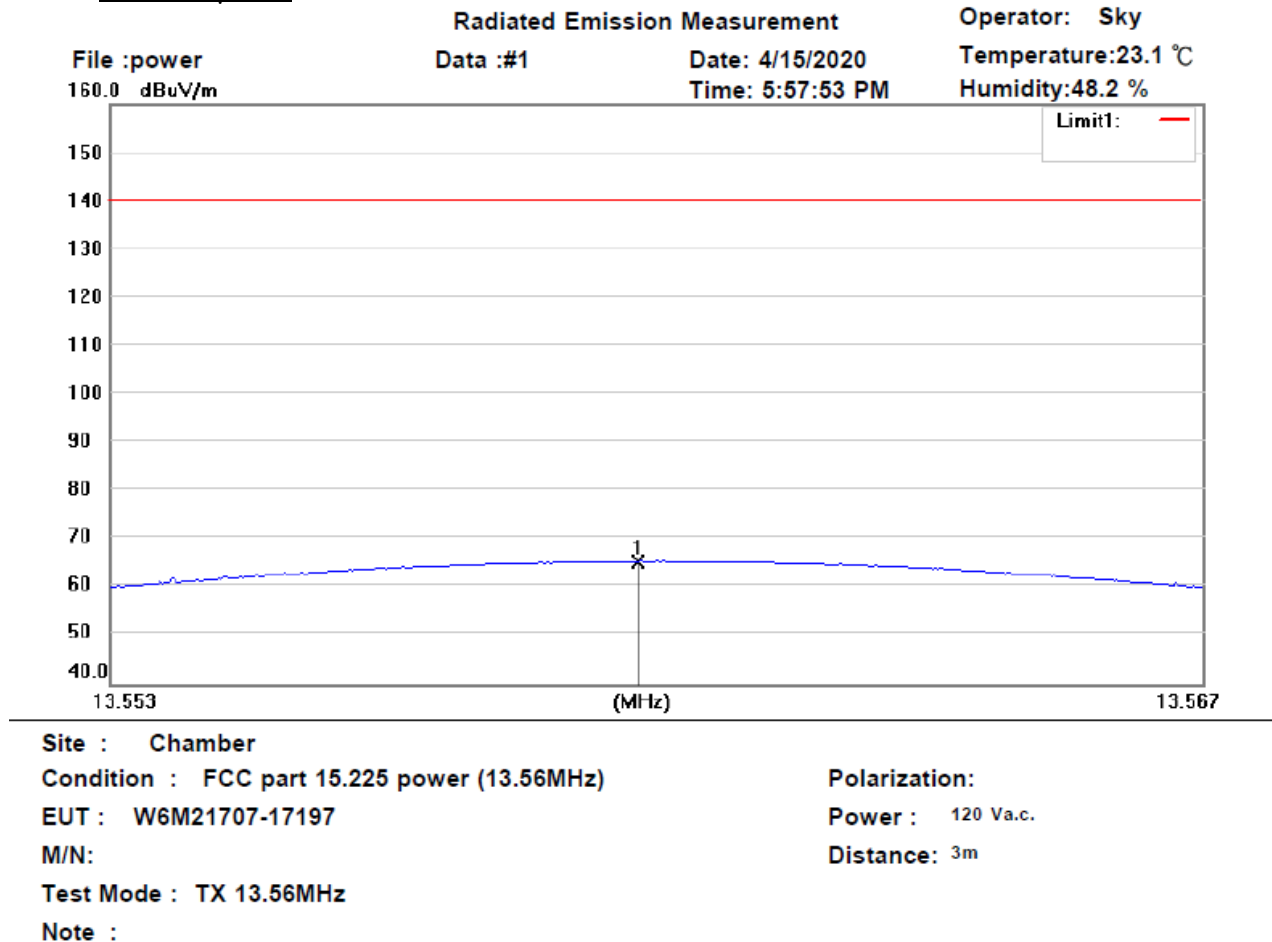

Mk.	Frequency (MHz)	Reading (dB μ V)	Detector	Corr. factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	13.5598	31.77	peak	33.73	65.50	139.92	100	0	-74.42	




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21707-17197-C-1
FCC ID: 2AWL8-R00001

R12X+R22X

The field strength at 3 meter distance as 58.59 dB μ V/m. Extrapolated with 40dB to 30 meter distance it would be 18.59 dB μ V/m.

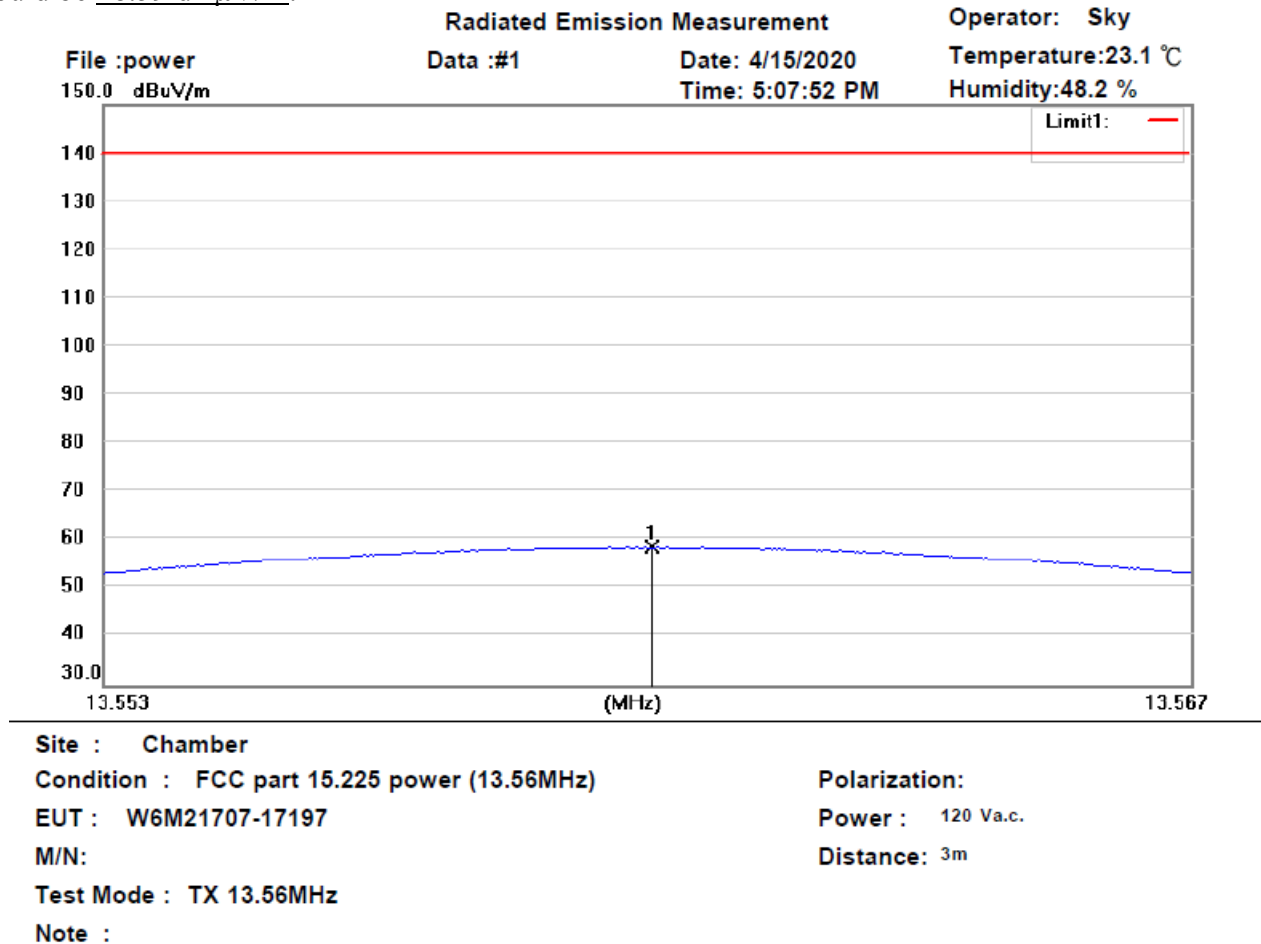

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	13.5601	24.86	peak	33.73	58.59	139.92	100	0	-81.33	

Test equipment used: ETSTW-RE 027, ETSTW-RE 055



Registration number: W6M21707-17197-C-1
FCC ID: 2AWL8-R00001

3.2 Out of Band Radiated Emissions

(d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

Frequency of Emission (MHz)	Limit	Measurement distance
0.009 – 0.490	2400 / f (KHz)	300
0.49 – 1.705	24000 / f (KHz)	30
1.705 – 30	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

Calculation of test results:

Such factors like antenna correction, cable loss, external attenuation etc. are already included in the provided measurement results. This is done by using validated test software and calibrated test system according the accreditation requirements.

Summary table with radiated data of the test plots

Model: R11X/R12X/R22X Date: --
Mode: -- Temperature: -- °C Engineer: --
Polarization: Horizontal Humidity: -- %

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--


Note

1. Correction Factor = Antenna factor + Cable loss - Preamplifier
2. The formula of measured value as: Test Result = Reading + Correction Factor
3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
4. All not in the table noted test results are more than 20 dB below the relevant limits.
5. See attached diagrams in appendix.

All other not noted test plots do not contain significant test results in relation to the limits

Test results: The unit meet the FCC requirements.

Test equipment used: ETSTW-RE 004, ETSTW-RE 027, ETSTW-RE 142, ETSTW-RE 147, ETSTW-RE 062




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21707-17197-C-1

FCC ID: 2AWL8-R00001

Test result of Band Edge

R11X+R12X+R22X

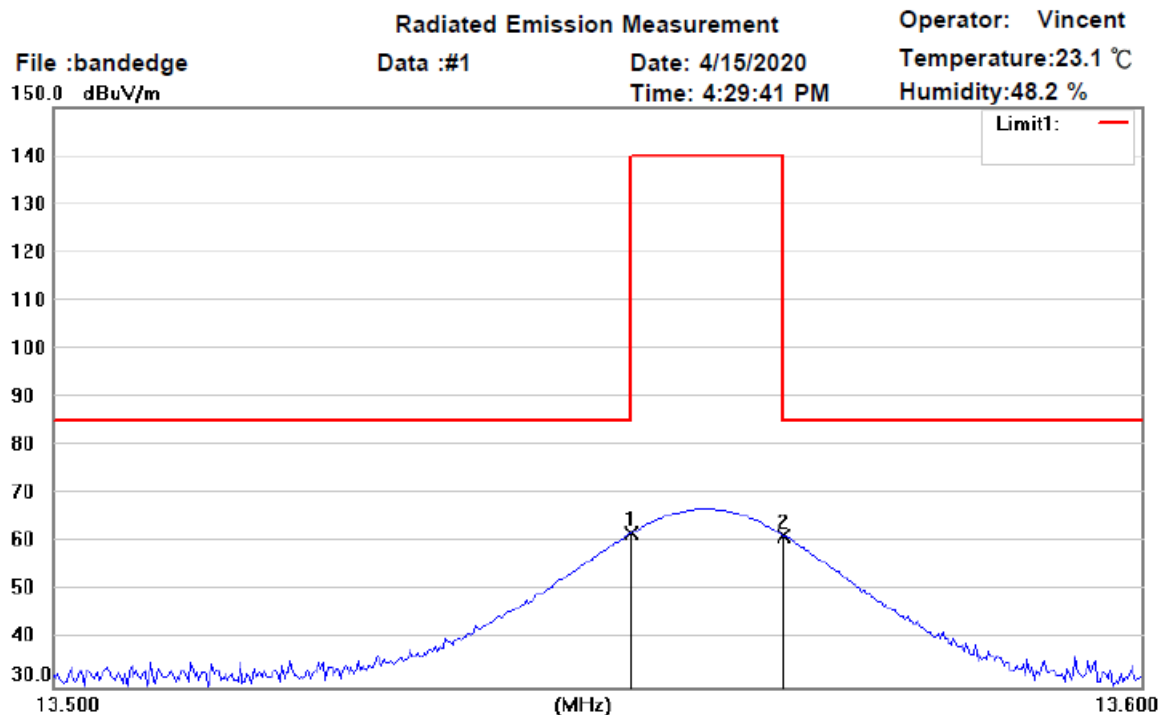

Site : Chamber

Condition : FCC part 15.225 bandedge (13.56MHz)

EUT : W6M21707-17197

M/N:

Test Mode : TX 13.56MHz

Note :

Polarization:

Power : 120 Va.c.


Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	13.5530	28.11	peak	33.73	61.84	85.46	100	0	-23.62	
	13.5670	27.74	peak	33.73	61.47	85.46	100	0	-23.99	



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21707-17197-C-1
FCC ID: 2AWL8-R00001
R11X+R22X

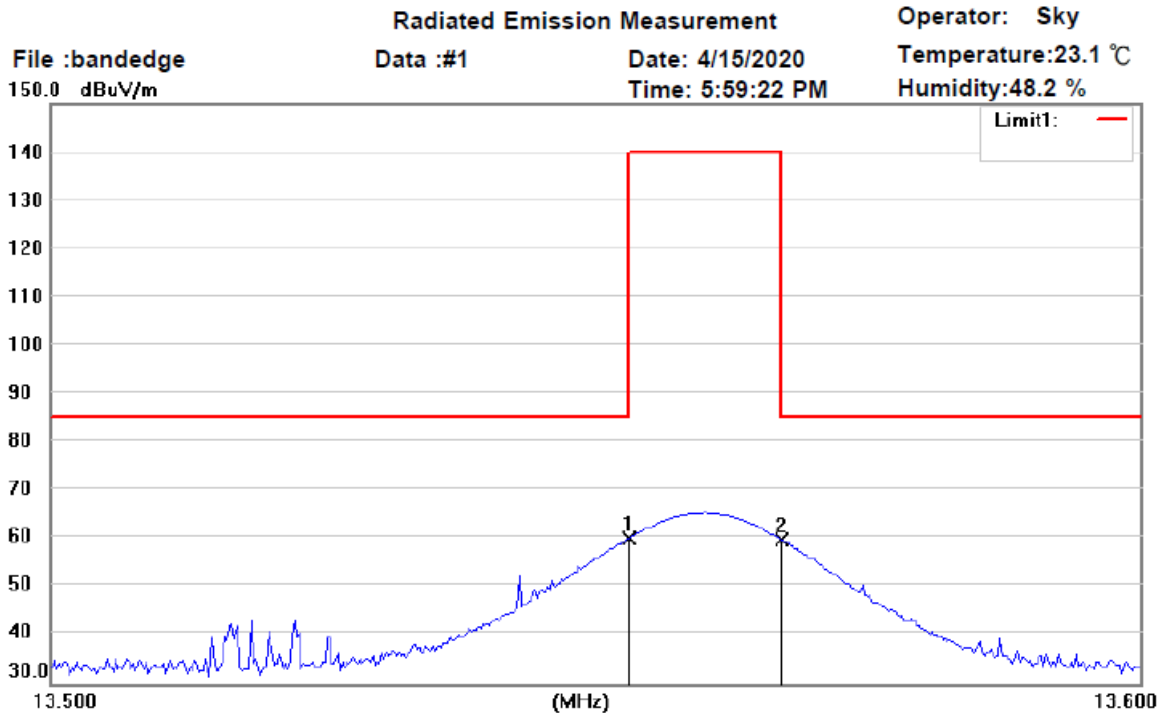

Site : Chamber

Condition : FCC part 15.225 bandedge (13.56MHz)

EUT : W6M21707-17197

M/N:

Test Mode : TX 13.56MHz


Note :

Polarization:

Power : 120 Va.c.


Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	13.5530	26.49	peak	33.73	60.22	85.46	100	0	-25.24	
	13.5670	26.19	peak	33.73	59.92	85.46	100	0	-25.54	



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21707-17197-C-1
FCC ID: 2AWL8-R00001
R12X+R22X

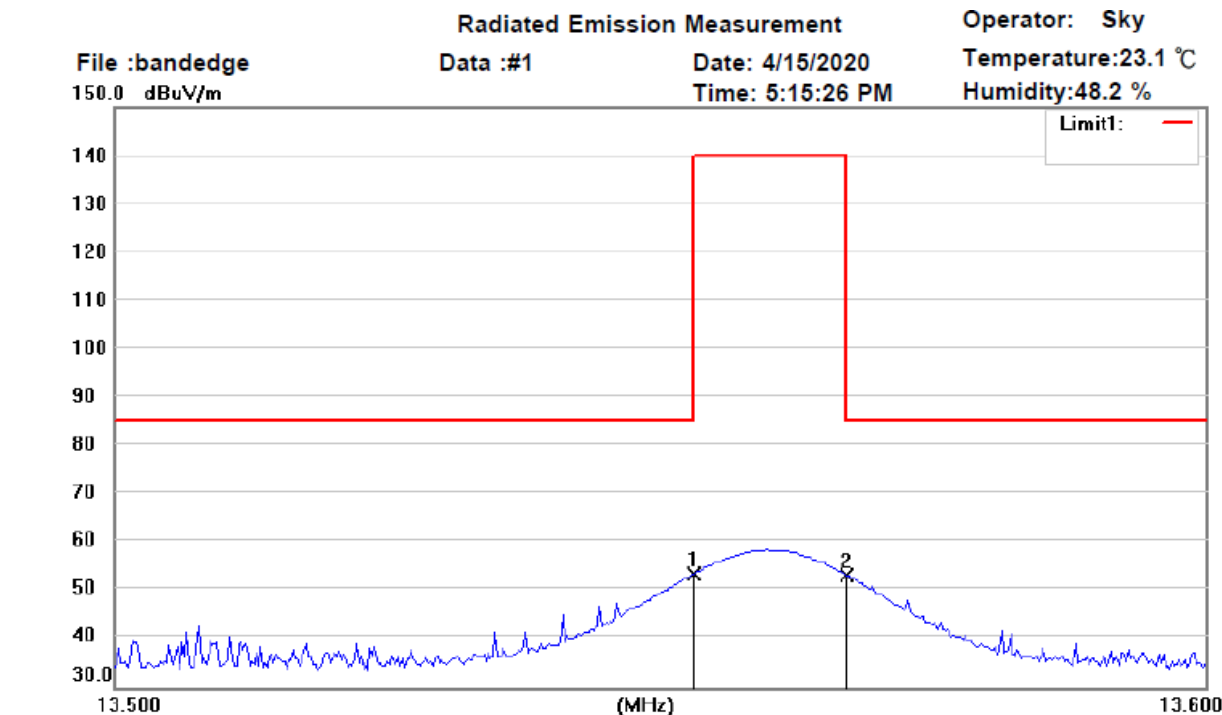

Site : Chamber

Condition : FCC part 15.225 bandedge (13.56MHz)

EUT : W6M21707-17197

M/N:

Test Mode : TX 13.56MHz

Note :

Polarization:

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	13.5530	19.82	peak	33.73	53.55	85.46	100	360	-31.91	
	13.5670	19.59	peak	33.73	53.32	85.46	100	360	-32.14	

Test equipment used: ETSTW-RE 055

Registration number: W6M21707-17197-C-1
FCC ID: 2AWL8-R00001

3.3 Occupied Bandwidth


Test date: April 15, 2020

Temperature: 23.1 °C


Humidity: 55.2 %

Tester: Leon


R11X+R12X+R22X

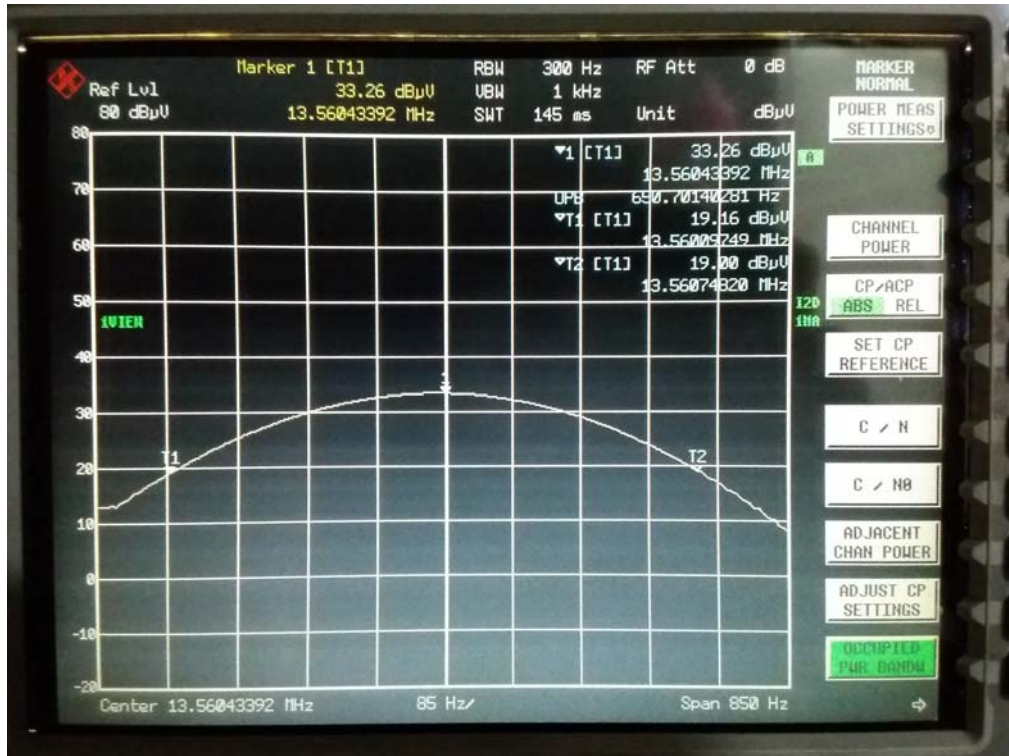

R11X+R22X

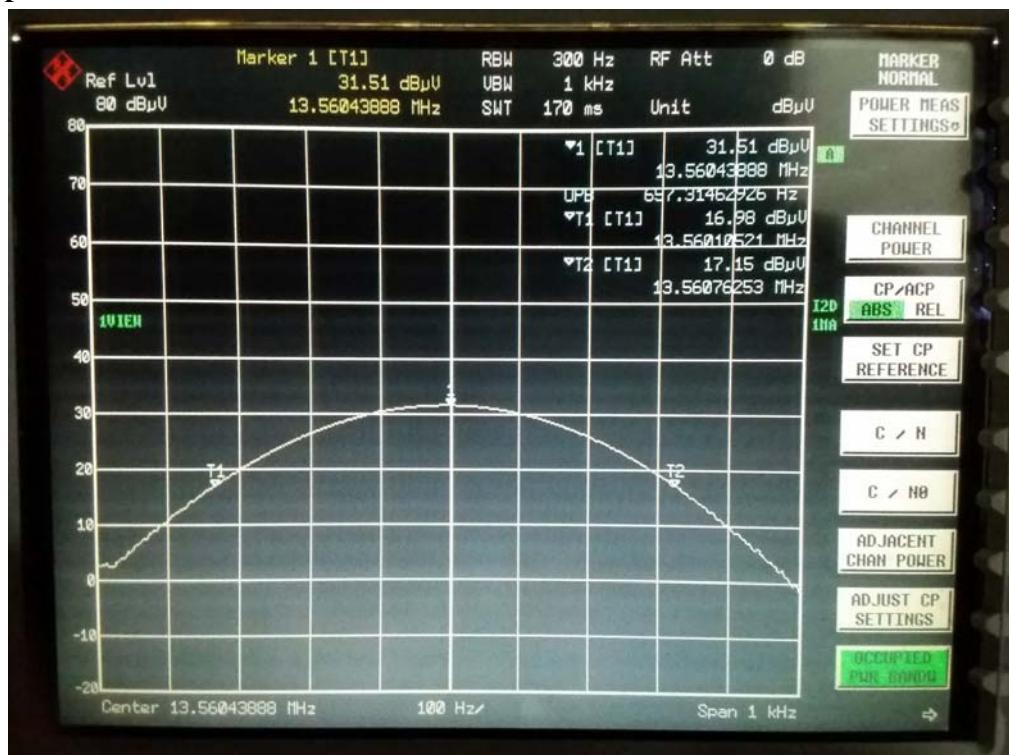

Registration number: W6M21707-17197-C-1
FCC ID: 2AWL8-R00001
R12X+R22X

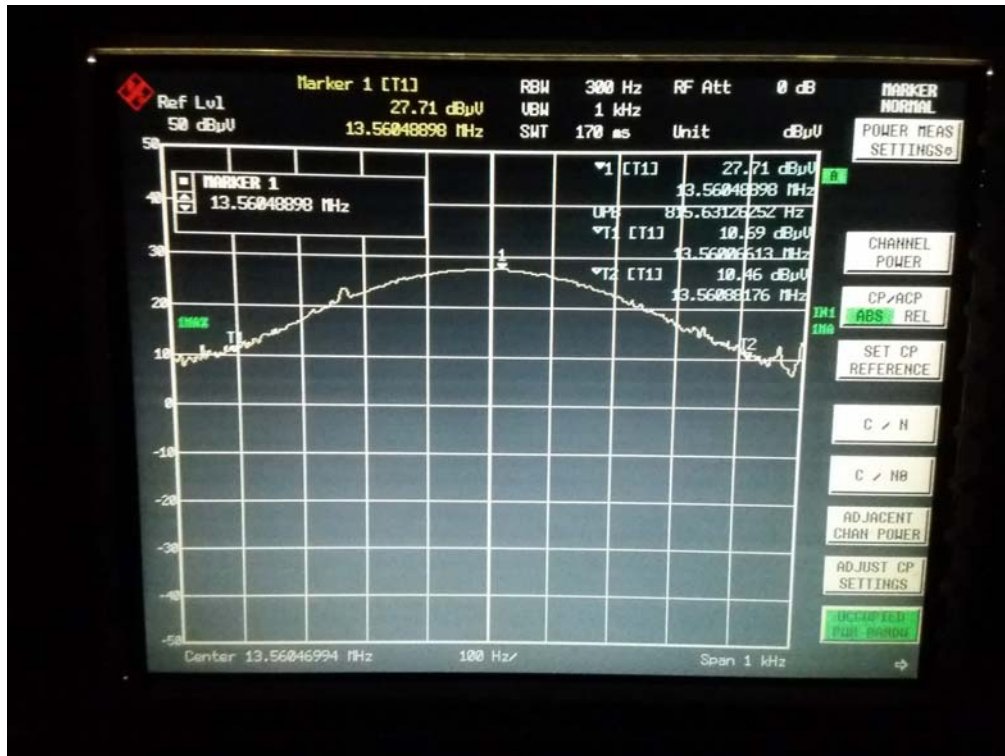

Test equipment used: ETSTW-RE 055, ETSTW-RE 064



Registration number: W6M21707-17197-C-1
FCC ID: 2AWL8-R00001

3.4 Frequency tolerance

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20°C to +50°C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20°C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Test date: April 10, 2020

Temperature: 23.6 °C

Humidity: 58.9 %

Tester: Kent

R11X+R22X

Measurement Results:

Test Voltage 120V	On time	Carrier Freq.	Deviation	Result
	0 min	13.560421	0.000	0 ppm
	*2min	13.560421	0.000	0 ppm
	5min	13.560421	0.000	0 ppm
	10min	13.560421	0.000	0 ppm
Test Voltage 102V	On time	Carrier Freq.	Deviation	Result
	0 min	13.560416	-0.005	-0.37 ppm
	2min	13.560416	-0.005	-0.37 ppm
	5min	13.560416	-0.005	-0.37 ppm
	10min	13.560412	-0.009	-0.66 ppm
Test Voltage 138V	On time	Carrier Freq.	Deviation	Result
	0 min	13.560414	-0.007	-0.52 ppm
	2min	13.560414	-0.007	-0.52 ppm
	5min	13.560419	-0.002	-0.15 ppm
	10min	13.560419	-0.002	-0.15 ppm

*Represent test standard frequency



Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M21707-17197-C-1

FCC ID: 2AWL8-R00001

R12X+R22X

Measurement Results:

Test Voltage 120V	On time	Carrier Freq.	Deviation	Result
	0 min	13.560464	0.000	0 ppm
	*2min	13.560464	0.000	0 ppm
	5min	13.560464	0.000	0 ppm
	10min	13.560464	0.000	0 ppm
Test Voltage 102V	On time	Carrier Freq.	Deviation	Result
	0 min	13.560461	-0.003	-0.22 ppm
	2min	13.560461	-0.003	-0.22 ppm
	5min	13.560461	-0.003	-0.22 ppm
	10min	13.560460	-0.004	-0.29 ppm
Test Voltage 138V	On time	Carrier Freq.	Deviation	Result
	0 min	13.560464	0.000	0 ppm
	2min	13.560464	0.000	0 ppm
	5min	13.560464	0.000	0 ppm
	10min	13.560466	0.002	0.15 ppm



Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M21707-17197-C-1

FCC ID: 2AWL8-R00001

R11X+R22X

Test Temp	On time	Carrier Freq.	Deviation	Result
50°C	0 min	13.560441	0.020	1.47 ppm
50°C	2min	13.560441	0.020	1.47 ppm
50°C	5min	13.560441	0.020	1.47 ppm
50°C	10min	13.560445	0.024	1.77 ppm
40°C	0 min	13.560431	0.010	0.74 ppm
40°C	2min	13.560431	0.010	0.74 ppm
40°C	5min	13.560436	0.015	1.11 ppm
40°C	10min	13.560436	0.015	1.11 ppm
30°C	0 min	13.560421	0.000	0 ppm
30°C	2min	13.560421	0.000	0 ppm
30°C	5min	13.560421	0.000	0 ppm
30°C	10min	13.560429	0.008	0.59 ppm
20°C	0 min	13.560421	0.000	0 ppm
*20°C	2min	13.560421	0.000	0 ppm
20°C	5min	13.560421	0.000	0 ppm
20°C	10min	13.560421	0.000	0 ppm
10°C	0 min	13.560421	0.000	0 ppm
10°C	2min	13.560421	0.000	0 ppm
10°C	5min	13.560393	-0.028	-2.06 ppm
10°C	10min	13.560393	-0.028	-2.06 ppm
0°C	0 min	13.560388	-0.033	-2.43 ppm
0°C	2min	13.560385	-0.036	-2.65 ppm
0°C	5min	13.560385	-0.036	-2.65 ppm
0°C	10min	13.560385	-0.036	-2.65 ppm
-10°C	0 min	13.560385	-0.036	-2.65 ppm
-10°C	2min	13.560385	-0.036	-2.65 ppm
-10°C	5min	13.560385	-0.036	-2.65 ppm
-10°C	10min	13.560377	-0.044	-3.24 ppm
-20°C	0 min	13.560377	-0.044	-3.24 ppm
-20°C	2min	13.560377	-0.044	-3.24 ppm
-20°C	5min	13.560372	-0.049	-3.61 ppm
-20°C	10min	13.560372	-0.049	-3.61 ppm

*Represent test standard frequency



Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M21707-17197-C-1

FCC ID: 2AWL8-R00001

R12X+R22X

Test Temp	On time	Carrier Freq.	Deviation	Result
50°C	0 min	13.560481	0.017	1.25 ppm
50°C	2min	13.560481	0.017	1.25 ppm
50°C	5min	13.560481	0.017	1.25 ppm
50°C	10min	13.560485	0.021	1.55 ppm
40°C	0 min	13.560471	0.007	0.52 ppm
40°C	2min	13.560471	0.007	0.52 ppm
40°C	5min	13.560475	0.011	0.81 ppm
40°C	10min	13.560477	0.013	0.96 ppm
30°C	0 min	13.560464	0.000	0 ppm
30°C	2min	13.560464	0.000	0 ppm
30°C	5min	13.560464	0.000	0 ppm
30°C	10min	13.560464	0.000	0 ppm
20°C	0 min	13.560464	0.000	0 ppm
*20°C	2min	13.560464	0.000	0 ppm
20°C	5min	13.560464	0.000	0 ppm
20°C	10min	13.560464	0.000	0 ppm
10°C	0 min	13.560464	0.000	0 ppm
10°C	2min	13.560464	0.000	0 ppm
10°C	5min	13.560461	-0.003	-0.22 ppm
10°C	10min	13.560461	-0.003	-0.22 ppm
0°C	0 min	13.560461	-0.003	-0.22 ppm
0°C	2min	13.560461	-0.003	-0.22 ppm
0°C	5min	13.560461	-0.003	-0.22 ppm
0°C	10min	13.560453	-0.011	-0.81 ppm
-10°C	0 min	13.560451	-0.013	-0.96 ppm
-10°C	2min	13.560451	-0.013	-0.96 ppm
-10°C	5min	13.560451	-0.013	-0.96 ppm
-10°C	10min	13.560449	-0.015	-1.11 ppm
-20°C	0 min	13.560449	-0.015	-1.11 ppm
-20°C	2min	13.560449	-0.015	-1.11 ppm
-20°C	5min	13.560443	-0.021	-1.55 ppm
-20°C	10min	13.560439	-0.025	-1.84 ppm

Test equipment used: ETSTW-RE 055, ETSTW-CE 009




Registration number: W6M21707-17197-C-1

FCC ID: 2AWL8-R00001

3.5 Power Line Conducted Emission

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the table bellows with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

This measurement was transact first with instrumentation using an average and peak detector and a 10 kHz bandwidth. If the peak detector achieves a calculated level, the measurement is repeated by an instrumentation using a quasi-peak detector.

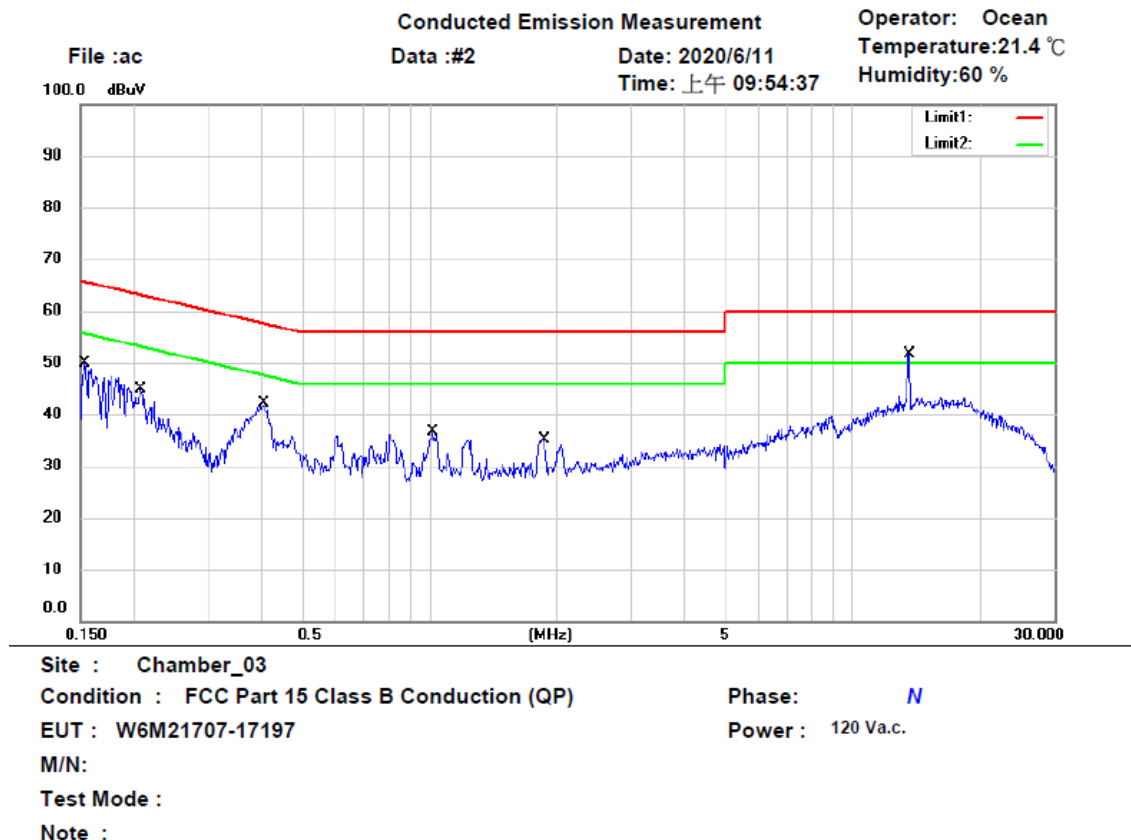


Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corrected factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Comment
	0.1535	33.93	QP	9.75	43.68	65.81	-22.13	
	0.1535	27.93	AVG	9.75	37.68	55.81	-18.13	
	0.2083	31.22	QP	9.73	40.95	63.27	-22.32	
	0.2083	23.03	AVG	9.73	32.76	53.27	-20.51	
	0.4083	30.32	QP	9.69	40.01	57.68	-17.67	
	0.4083	25.26	AVG	9.69	34.95	47.68	-12.73	
	1.0196	24.92	QP	9.63	34.55	56.00	-21.45	
	1.0196	17.30	AVG	9.63	26.93	46.00	-19.07	
	1.8590	22.86	QP	9.55	32.41	56.00	-23.59	
	1.8590	10.66	AVG	9.55	20.21	46.00	-25.79	
*	13.5625	39.26	QP	10.68	49.94	60.00	-10.06	
	13.5625	26.75	AVG	10.68	37.43	50.00	-12.57	



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21707-17197-C-1
FCC ID: 2AWL8-R00001

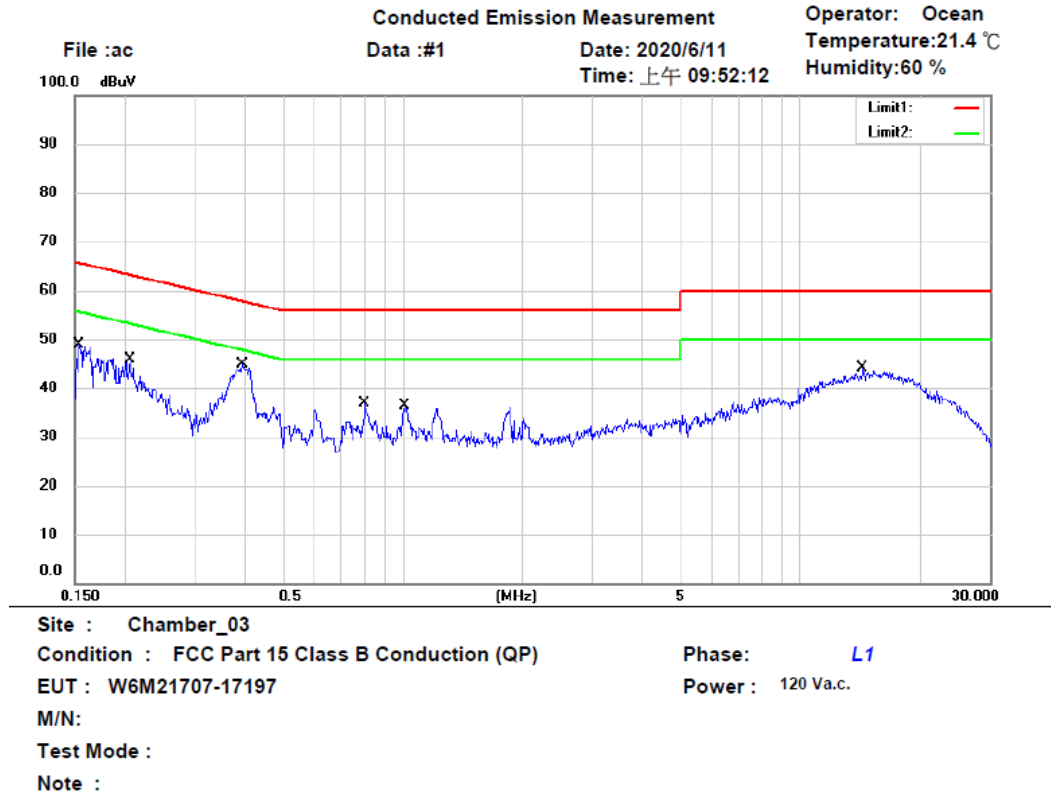


Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corrected factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Comment
	0.1540	38.57	QP	9.77	48.34	65.78	-17.44	
	0.1540	36.11	AVG	9.77	45.88	55.78	-9.90	
	0.2055	38.19	QP	9.75	47.94	63.39	-15.45	
*	0.2055	35.73	AVG	9.75	45.48	53.39	-7.91	
	0.3941	33.16	QP	9.71	42.87	57.98	-15.11	
	0.3941	24.84	AVG	9.71	34.55	47.98	-13.43	
	0.8037	32.84	QP	9.67	42.51	56.00	-13.49	
	0.8037	21.26	AVG	9.67	30.93	46.00	-15.07	
	1.0152	34.05	QP	9.65	43.70	56.00	-12.30	
	1.0152	27.15	AVG	9.65	36.80	46.00	-9.20	
	14.3250	28.47	QP	10.57	39.04	60.00	-20.96	
	14.3250	22.64	AVG	10.57	33.21	50.00	-16.79	

- Note: 1. The formula of measured value as: Test Result = Reading + Correction Factor
2. The Correction Factor = Cable Loss + LISN Insertion Loss + Pulse Limit Loss
3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
4. All not in the table noted test results are more than 20 dB below the relevant limits.
5. Up Line: QP Limit Line, Down Line: Ave Limit Line.

Limits:

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi Peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Test equipment used: ETSTW-CE 001, ETSTW-CE 016, ETSTW-RE 045.



Appendix

A. Photos

1. External Photos
2. Internal Photos
3. Set Up Photo of Radiated Emission
4. Set Up Photo of Conducted Emission

B. Measurement diagrams

Radiated Emissions



Radiated Emission Measurement

Operator: Vincent

File :1

Data :#1


Date: 4/15/2020

Temperature: 23.1 °C

152.0 dBuV/m

Time: 4:37:43 PM

Humidity: 48.2 %

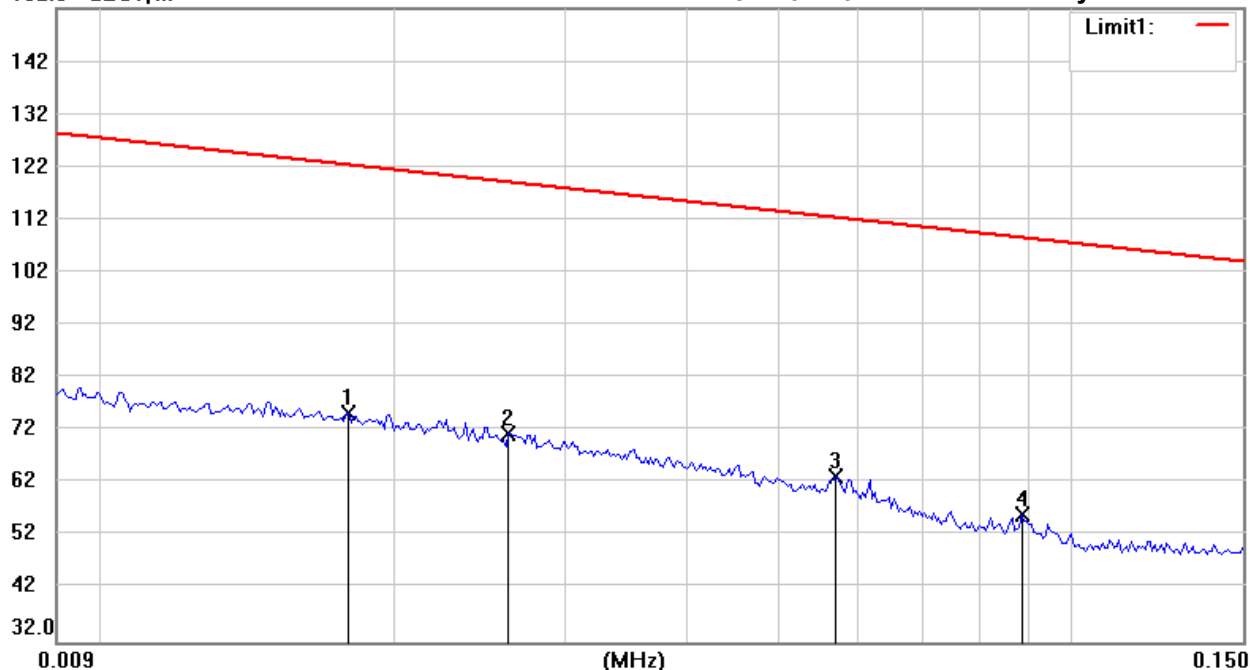

Site : Chamber

Condition : FCC part 15.225 (3m)(<30MHz)

EUT : W6M21707-17197

M/N:

Test Mode : TX 13.56MHz

Polarization:

Power : 120 Va.c.

Distance: 3m

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	0.0180	-5.85	peak	81.26	75.41	122.49	100	120	-47.08	
	0.0263	-6.63	peak	78.04	71.41	119.20	100	300	-47.79	
	0.0572	-8.05	peak	71.37	63.32	112.45	100	265	-49.13	
	0.0888	-10.60	peak	66.87	56.27	108.63	100	195	-52.36	



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File : 2

Data : #1


Date: 4/15/2020

Temperature: 23.1 °C

132.0 dBuV/m

Time: 4:40:08 PM

Humidity: 48.2 %

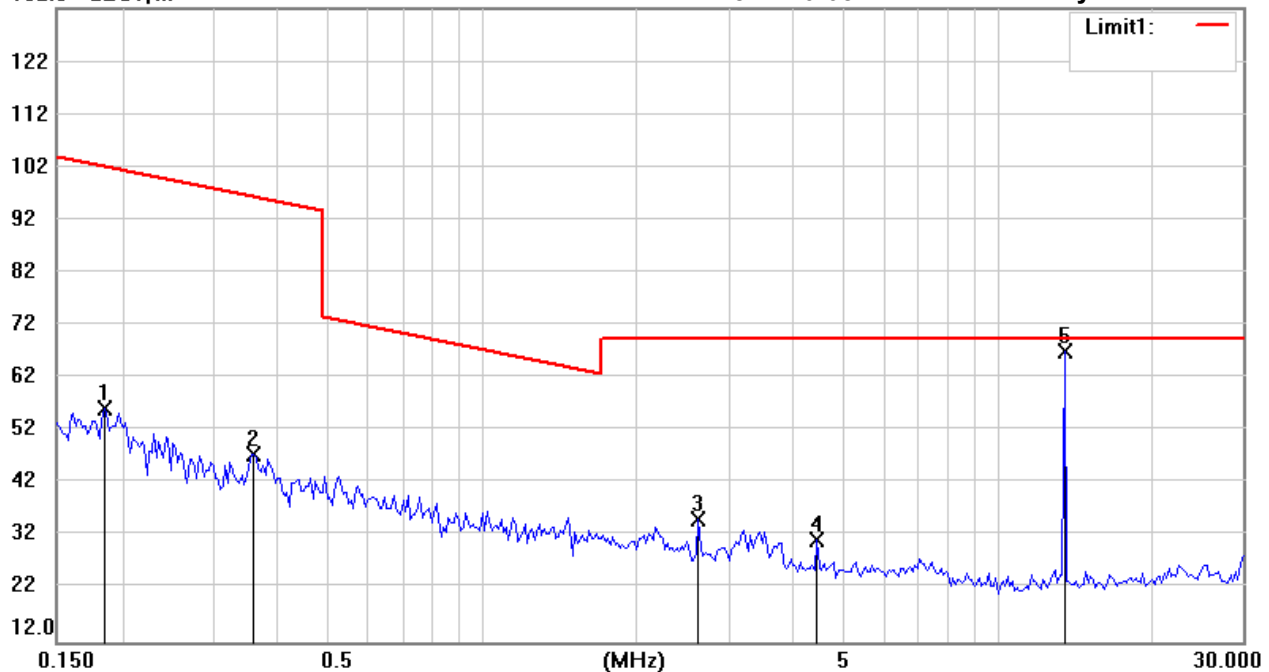

Site : Chamber

Condition : FCC part 15.225 (3m)(<30MHz)

EUT : W6M21707-17197

M/N:

Test Mode : TX 13.56MHz

Note :

Polarization:

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	0.1855	-5.64	peak	61.98	56.34	102.23	100	230	-45.89	
	0.3621	-8.39	peak	56.04	47.65	96.43	100	55	-48.78	
	2.6371	-4.13	peak	39.52	35.39	69.54	100	295	-34.15	
	4.4844	-4.33	peak	35.60	31.27	69.54	100	140	-38.27	
*	13.5290	33.24	peak	33.73	66.97	69.54			-2.57	RF Power

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #1


Date: 4/15/2020

Temperature: 23.1 °C

80.0 dBuV/m

Time: 9:18:02 PM

Humidity: 48.2 %

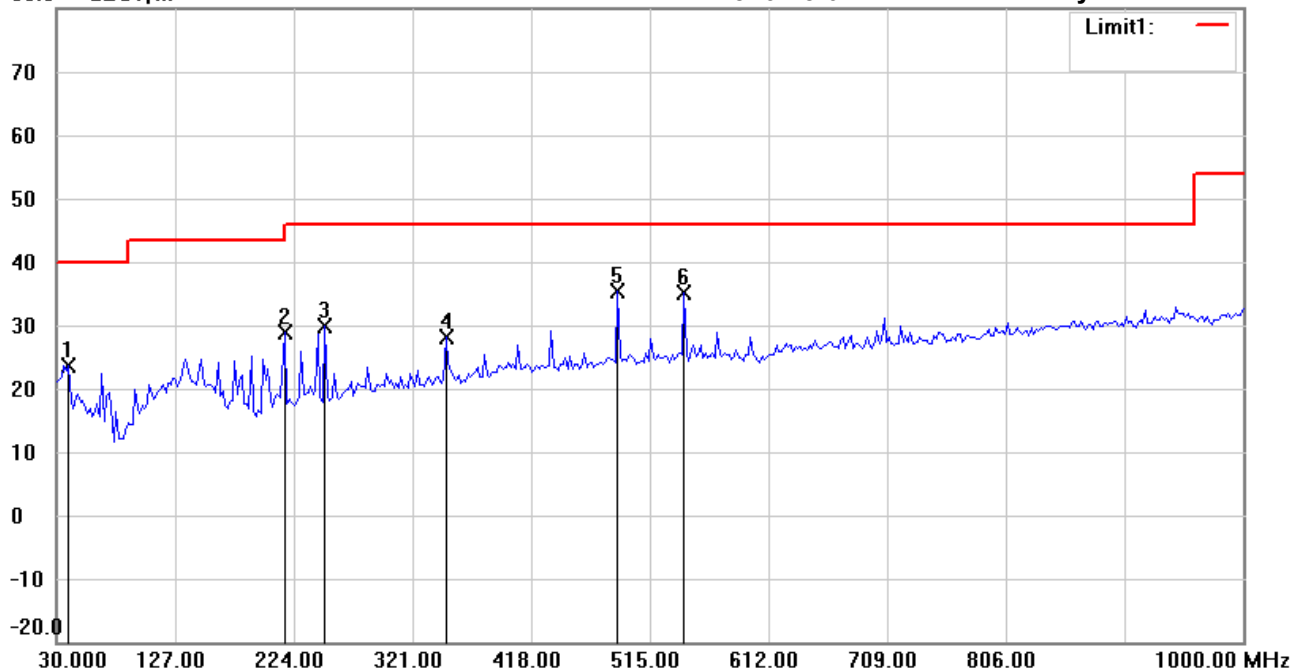

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M21707-17197

M/N:

Test Mode : TX 13.56MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	39.7194	33.19	peak	-9.48	23.71	40.00	100	115	-16.29	
	216.6132	39.19	peak	-10.41	28.78	46.00	100	315	-17.22	
	249.6593	37.69	peak	-7.82	29.87	46.00	100	280	-16.13	
	348.7976	33.37	peak	-5.18	28.19	46.00	100	45	-17.81	
*	488.7575	38.34	peak	-2.99	35.35	46.00	100	160	-10.65	
	543.1864	37.32	peak	-2.07	35.25	46.00	100	90	-10.75	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #2


Date: 4/15/2020

Temperature: 23.1 °C

80.0 dBuV/m

Time: 9:19:37 PM

Humidity: 48.2 %

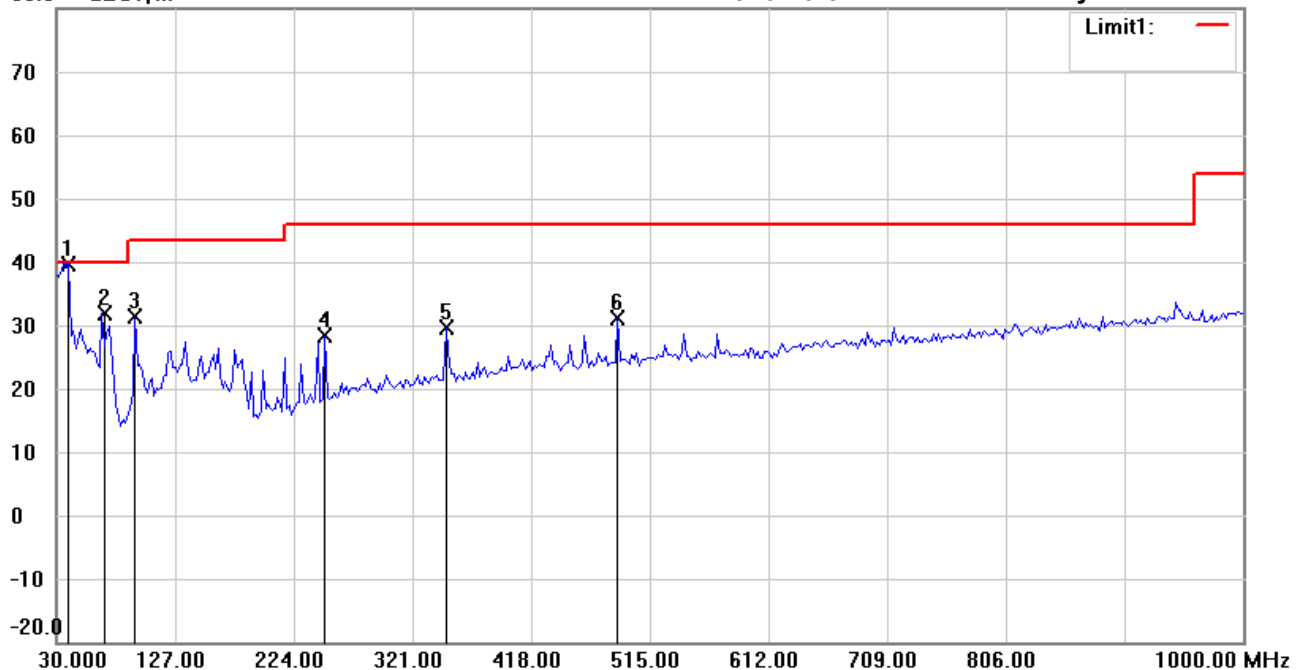

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M21707-17197

M/N:

Test Mode : TX 13.56MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	39.7194	49.01	QP	-9.48	39.53	40.00	100	40	-0.47	
	66.9340	45.20	peak	-13.34	31.86	40.00	100	255	-8.14	
	94.1483	43.65	peak	-12.25	31.40	43.50	100	160	-12.10	
	249.6593	36.28	peak	-7.82	28.46	46.00	100	310	-17.54	
	348.7976	34.77	peak	-5.18	29.59	46.00	100	50	-16.41	
	488.7575	34.17	peak	-2.99	31.18	46.00	100	270	-14.82	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :1

Data :#1


Date: 4/15/2020

Temperature:23.1 °C

142.0 dBuV/m

Time: 6:39:58 PM

Humidity:48.2 %

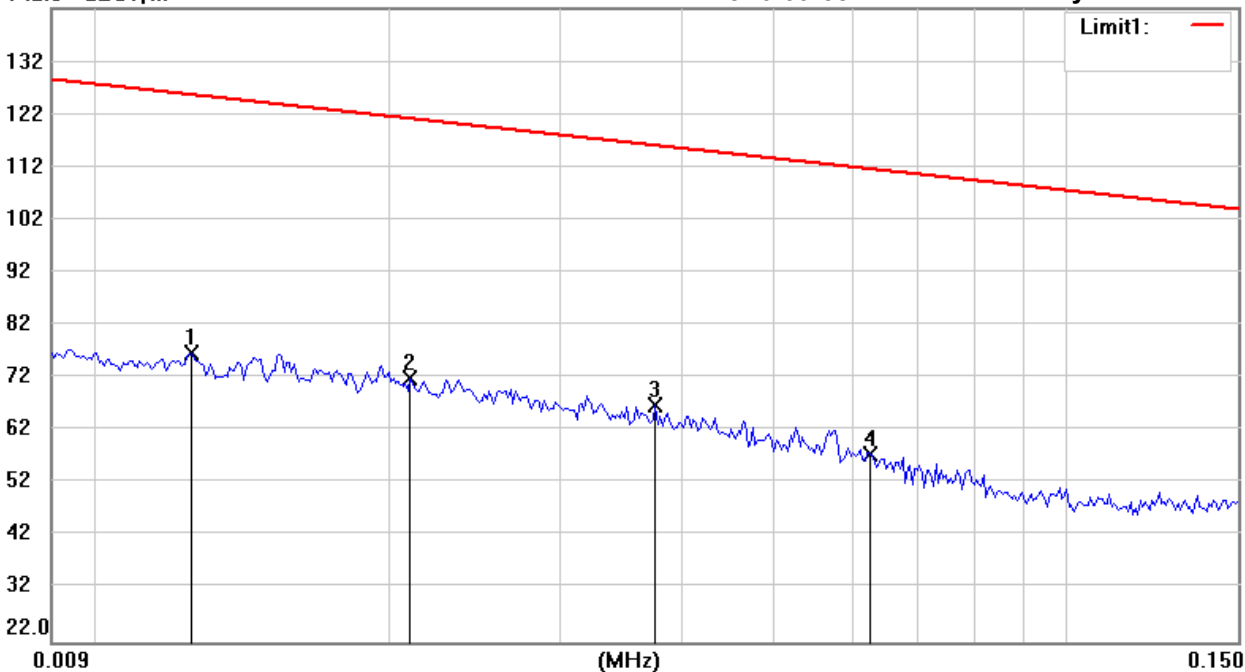

Site : Chamber

Condition : FCC part 15.225 (3m)(<30MHz)

EUT : W6M21707-17197

M/N:

Test Mode : TX 13.56MHz

Note :

Polarization:

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	0.0126	-6.66	peak	83.35	76.69	125.59	100	60	-48.90	
	0.0211	-8.22	peak	80.06	71.84	121.11	100	315	-49.27	
	0.0377	-8.20	peak	74.99	66.79	116.07	100	225	-49.28	
	0.0626	-12.96	peak	70.60	57.64	111.67	100	10	-54.03	



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 2

Data : #1


Date: 4/15/2020

Temperature: 23.1 °C

122.0 dBuV/m

Time: 6:52:16 PM

Humidity: 48.2 %

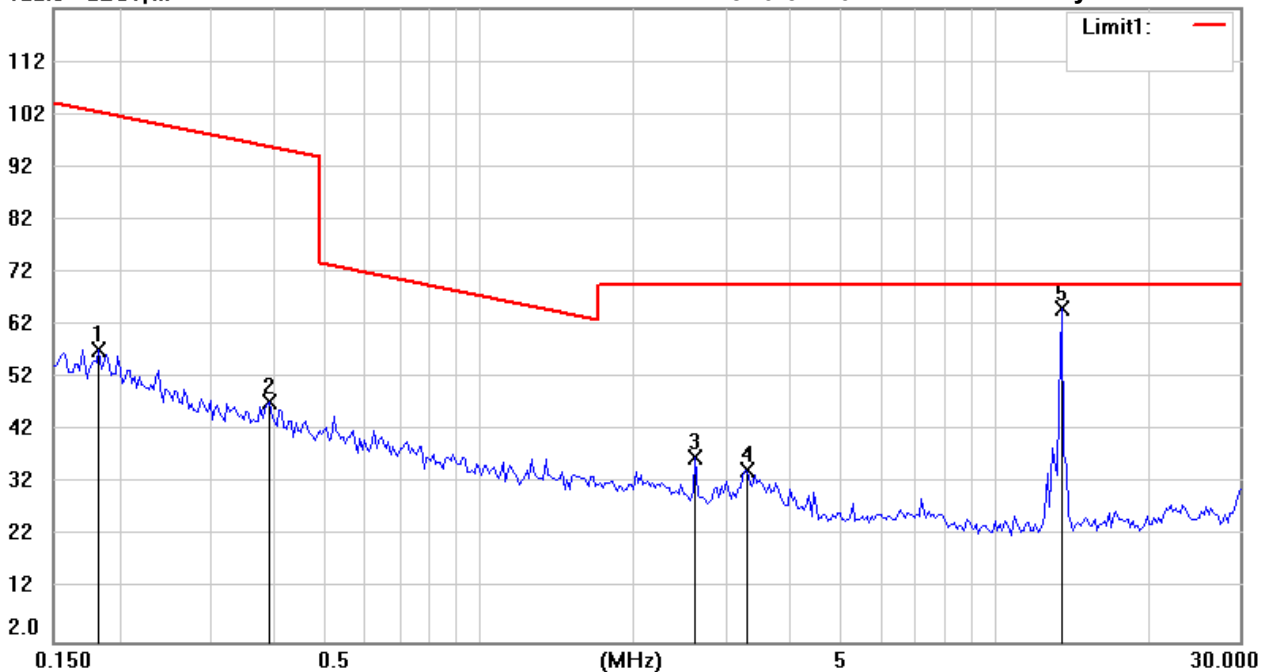

Site : Chamber

Condition : FCC part 15.225 (3m)(<30MHz)

EUT : W6M21707-17197

M/N:

Test Mode : TX 13.56MHz

Note :

Polarization:

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	0.1835	-4.69	peak	62.06	57.37	102.33	100	40	-44.96	
	0.3942	-7.76	peak	55.24	47.48	95.69	100	355	-48.21	
	2.6371	-2.63	peak	39.52	36.89	69.54	100	115	-32.65	
	3.2960	-2.96	peak	37.48	34.52	69.54	100	280	-35.02	
*	13.5291	31.53	peak	33.73	65.26	69.54			-4.28	RF Power

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#1


Date: 4/15/2020

Temperature: 23.1 °C

80.0 dBuV/m

Time: 7:53:38 PM

Humidity: 48.2 %

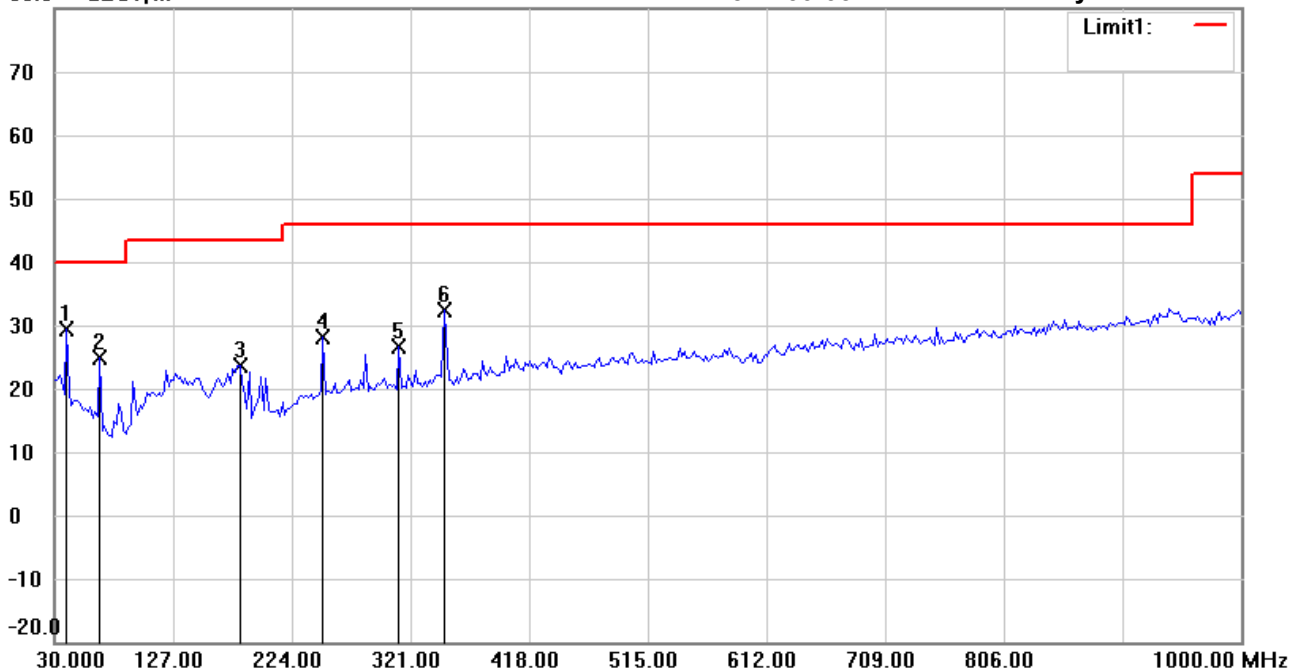

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M21707-17197

M/N:

Test Mode : TX 13.56MHz

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	39.7194	38.96	peak	-9.48	29.48	40.00	100	310	-10.52	
	66.9338	38.10	peak	-13.34	24.76	40.00	100	225	-15.24	
	181.6230	34.51	peak	-10.97	23.54	43.50	100	60	-19.96	
	249.6593	35.86	peak	-7.82	28.04	46.00	100	190	-17.96	
	311.8636	32.43	peak	-5.79	26.64	46.00	100	150	-19.36	
	348.7974	37.49	peak	-5.18	32.31	46.00	100	65	-13.69	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #2


Date: 4/15/2020

Temperature: 23.1 °C

80.0 dBuV/m

Time: 8:02:24 PM

Humidity: 48.2 %

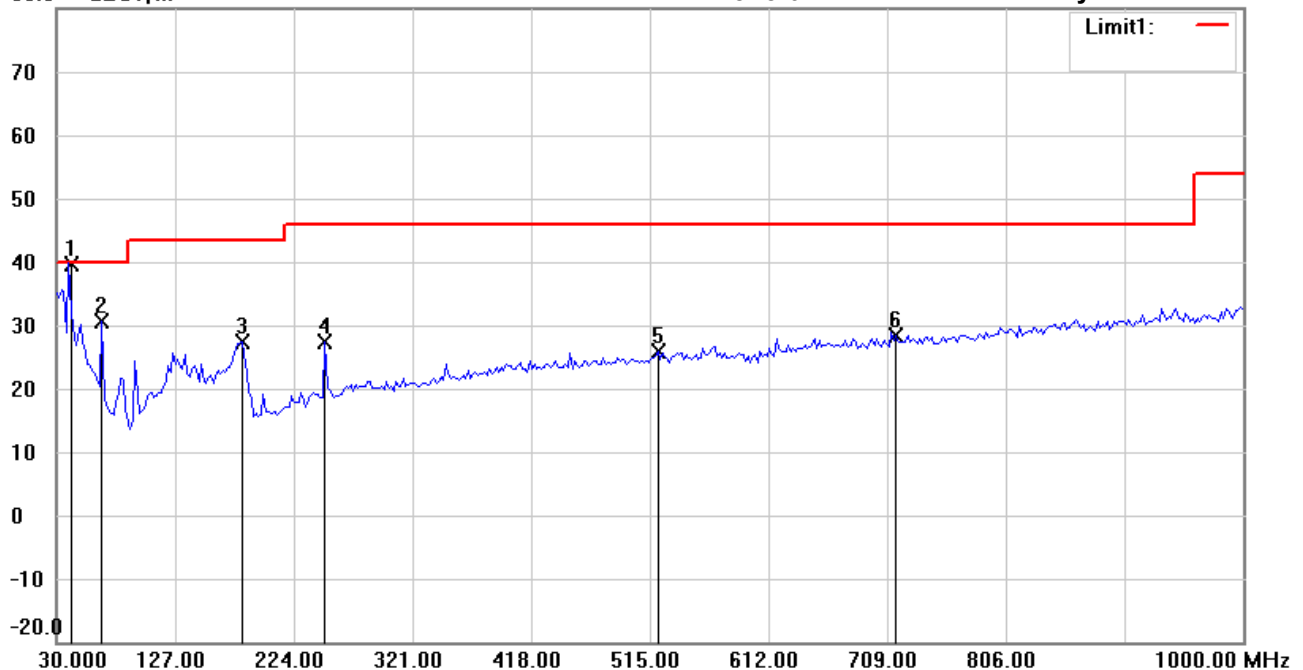

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M21707-17197

M/N:

Test Mode : TX 13.56MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	40.6923	49.25	QP	-9.59	39.66	40.00	100	260	-0.34	
	66.9338	43.88	peak	-13.34	30.54	40.00	100	160	-9.46	
	181.6230	38.34	peak	-10.97	27.37	43.50	100	290	-16.13	
	249.6593	35.13	peak	-7.82	27.31	46.00	100	330	-18.69	
	521.8034	28.25	peak	-2.40	25.85	46.00	100	5	-20.15	
	716.1924	28.34	peak	0.12	28.46	46.00	100	280	-17.54	

*:Maximum data x:Over limit !:over margin



Radiated Emission Measurement

Operator: Sky

File :1

Data :#1


Date: 4/15/2020

Temperature: 23.1 °C

142.0 dBuV/m

Time: 5:34:10 PM

Humidity: 48.2 %

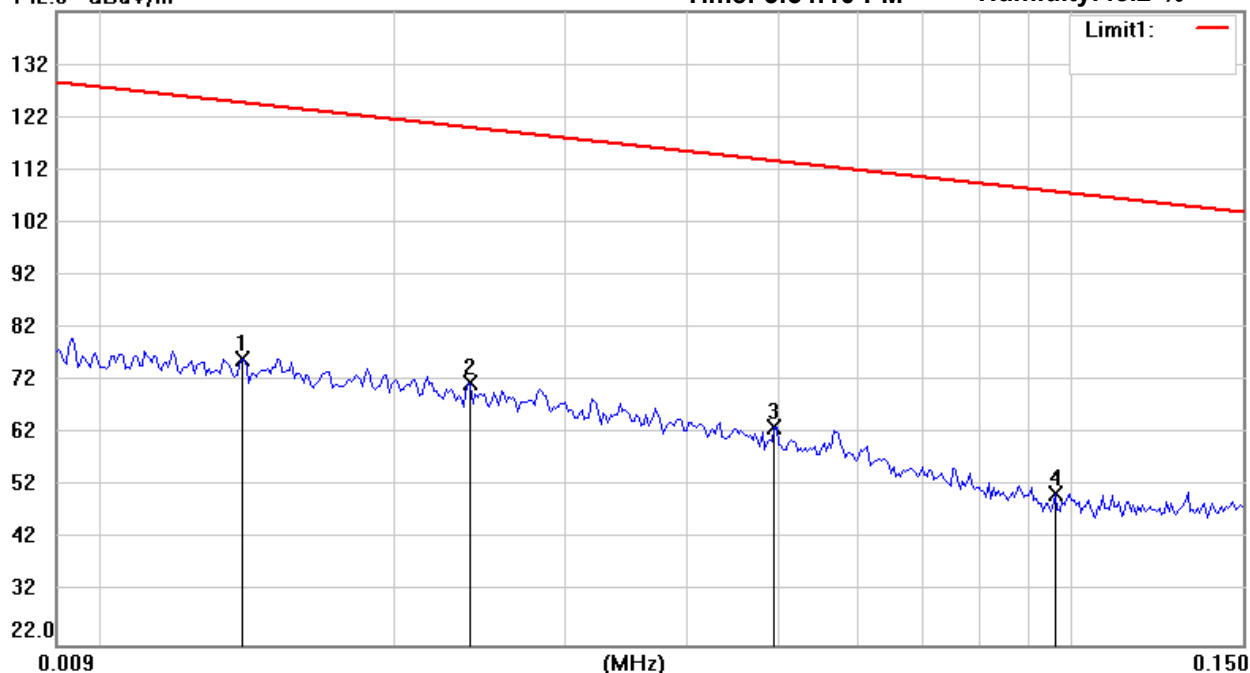

Site : Chamber

Condition : FCC part 15.225 (3m)(<30MHz)

EUT : W6M21707-17197

M/N:

Test Mode : TX 13.56MHz

Note :

Polarization:

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	0.0140	-6.59	peak	82.81	76.22	124.67	100	140	-48.45	
*	0.0240	-7.32	peak	78.94	71.62	119.99	100	355	-48.37	
	0.0493	-9.38	peak	72.55	63.17	113.74	100	225	-50.57	
	0.0961	-15.05	peak	65.83	50.78	107.95	100	10	-57.17	



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 2

Data : #1


Date: 4/15/2020

Temperature: 23.1 °C

122.0 dBuV/m

Time: 5:42:28 PM

Humidity: 48.2 %

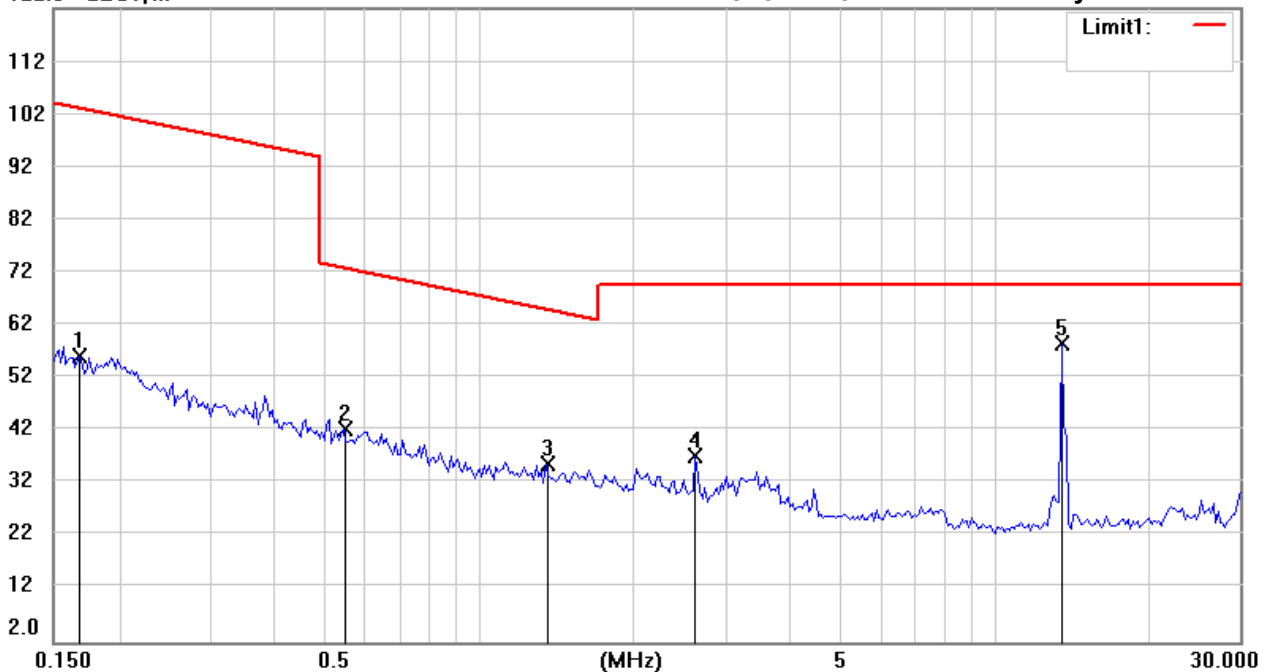

Site : Chamber

Condition : FCC part 15.225 (3m)(<30MHz)

EUT : W6M21707-17197

M/N:

Test Mode : TX 13.56MHz

Note :

Polarization:

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	0.1686	-6.59	peak	62.63	56.04	103.06	100	150	-47.02	
	0.5480	-9.74	peak	52.05	42.31	72.83	100	30	-30.52	
	1.3510	-9.46	peak	45.07	35.61	64.98	100	225	-29.37	
	2.6371	-2.32	peak	39.52	37.20	69.54	100	110	-32.34	
*	13.5293	24.80	peak	33.73	58.53	69.54			-11.01	RF Power

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #1


Date: 4/15/2020

Temperature: 23.1 °C

80.0 dBuV/m

Time: 8:48:51 PM

Humidity: 48.2 %

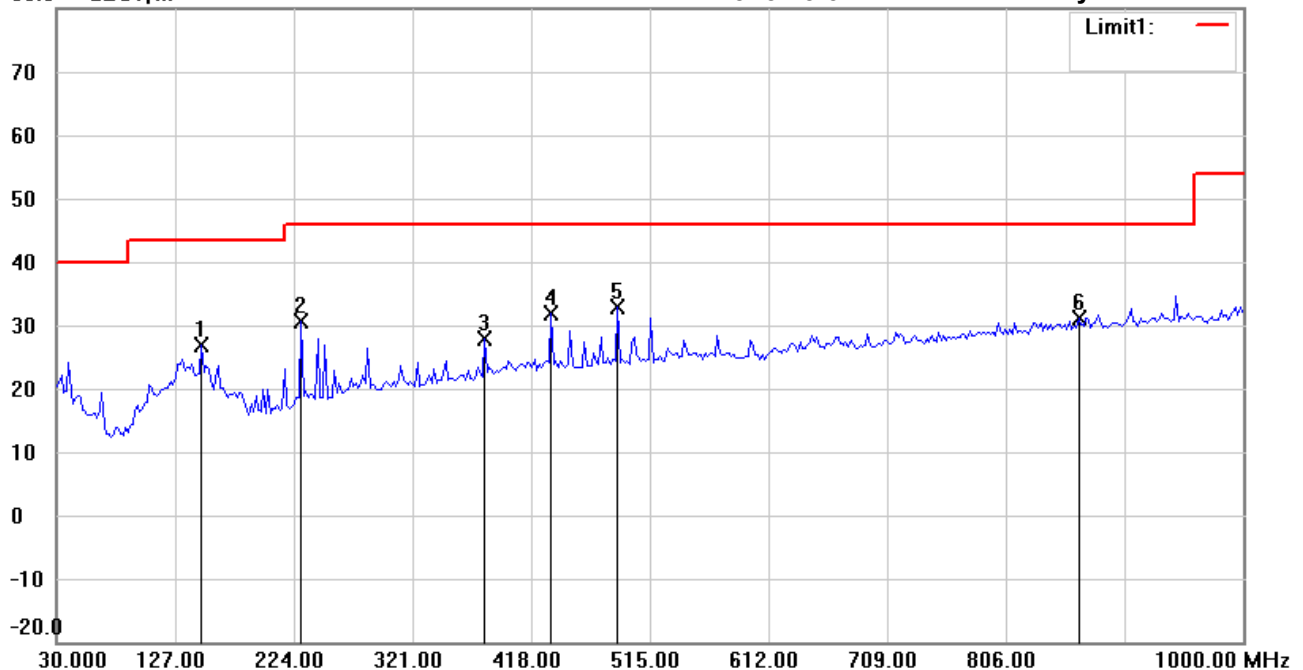

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M21707-17197

M/N:

Test Mode : TX 13.56MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	148.5772	34.01	peak	-7.25	26.76	43.50	100	115	-16.74	
	230.2204	39.51	peak	-8.96	30.55	46.00	100	190	-15.45	
	379.8998	32.08	peak	-4.27	27.81	46.00	100	65	-18.19	
	434.3287	35.41	peak	-3.42	31.99	46.00	100	40	-14.01	
*	488.7575	35.85	peak	-2.99	32.86	46.00	100	70	-13.14	
	865.8717	28.13	peak	2.98	31.11	46.00	100	310	-14.89	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#2


Date: 4/15/2020

Temperature: 23.1 °C

80.0 dBuV/m

Time: 8:53:14 PM

Humidity: 48.2 %

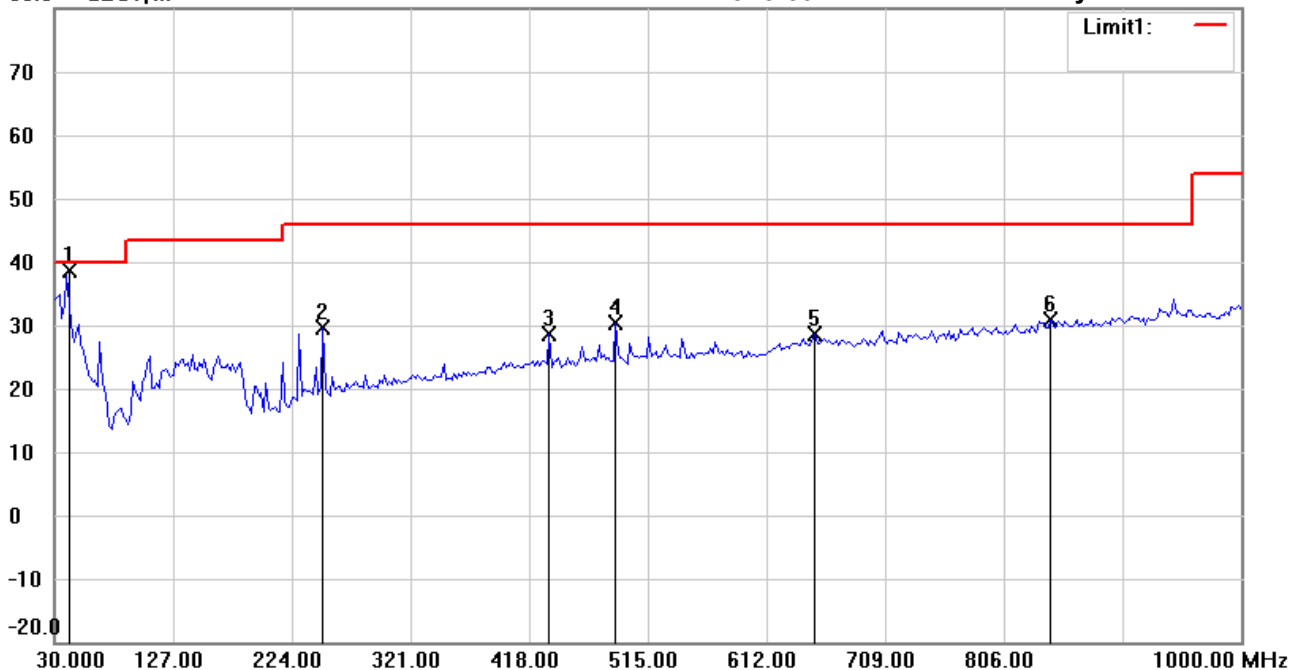

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M21707-17197

M/N:

Test Mode : TX 13.56MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	40.6892	48.22	QP	-9.59	38.63	40.00	100	260	-1.37	
	249.6593	37.36	peak	-7.82	29.54	46.00	100	90	-16.46	
	434.3287	31.93	peak	-3.42	28.51	46.00	100	60	-17.49	
	488.7575	33.33	peak	-2.99	30.34	46.00	100	310	-15.66	
	652.0440	28.83	peak	-0.30	28.53	46.00	100	225	-17.47	
	844.4890	28.20	peak	2.61	30.81	46.00	100	105	-15.19	

*:Maximum data x:Over limit !:over margin



Radiated Emission Measurement

Operator: Vincent

File :1

Data :#1


Date: 4/15/2020

Temperature:23.1 °C

152.0 dBuV/m

Time: 4:42:41 PM

Humidity:48.2 %

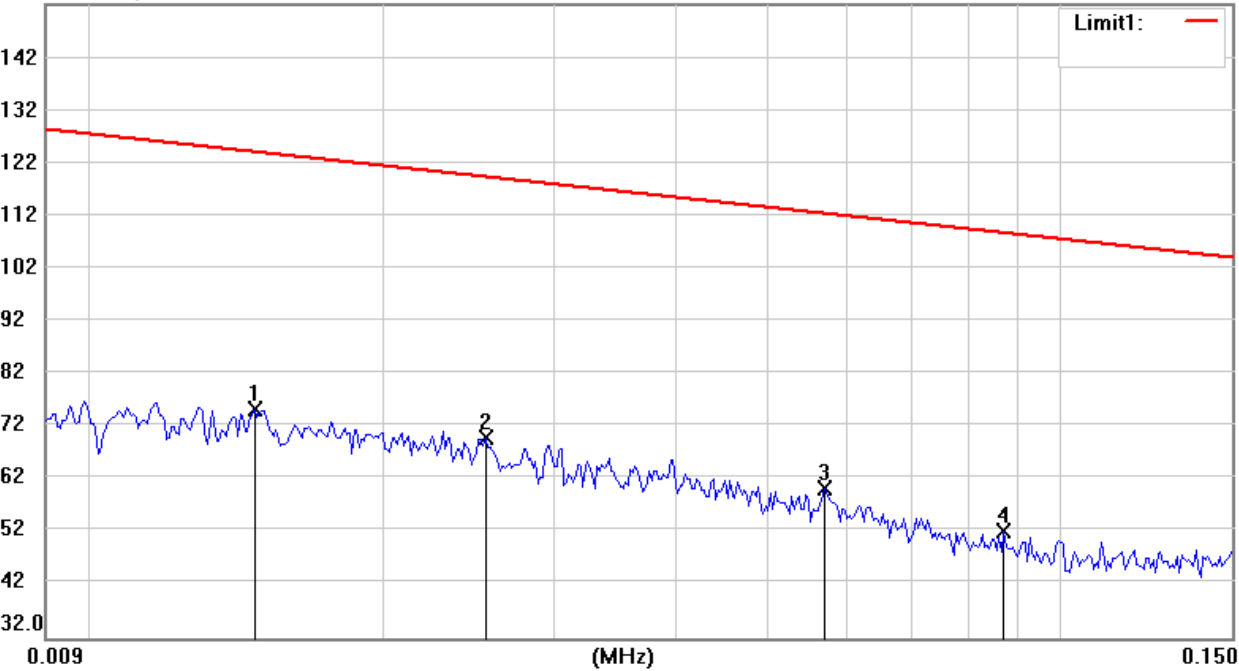

Site : Chamber

Condition : FCC part 15.225 (3m)(<30MHz)

EUT : W6M21707-17197

M/N:

Test Mode : RX 13.56MHz

Note :

Polarization:

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	0.0148	-7.01	peak	82.50	75.49	124.19	100	250	-48.70	
	0.0255	-8.35	peak	78.35	70.00	119.47	100	10	-49.47	
	0.0572	-11.06	peak	71.37	60.31	112.45	100	125	-52.14	
	0.0873	-14.89	peak	67.08	52.19	108.78	100	60	-56.59	



Radiated Emission Measurement

Operator: Vincent

File : 2

Data : #1


Date: 4/15/2020

Temperature: 23.1 °C

132.0 dBuV/m

Time: 4:41:26 PM

Humidity: 48.2 %

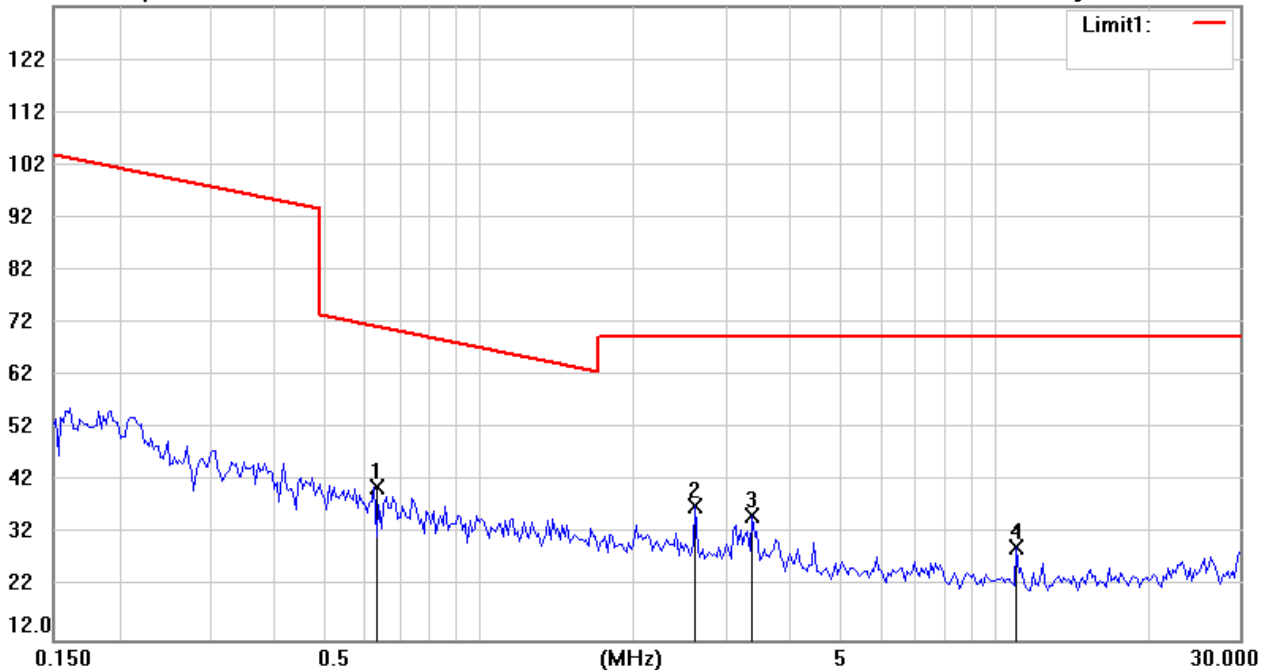

Site : Chamber

Condition : FCC part 15.225 (3m)(<30MHz)

EUT : W6M21707-17197

M/N:

Test Mode : RX 13.56MHz

Note :

Polarization:

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	0.6290	-10.06	peak	51.07	41.01	71.63	100	255	-30.62	
	2.6371	-2.17	peak	39.52	37.35	69.54	100	180	-32.19	
	3.4026	-1.86	peak	37.31	35.45	69.54	100	300	-34.09	
	11.0576	-4.52	peak	33.98	29.46	69.54	100	70	-40.08	



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#1


Date: 4/15/2020

Temperature: 23.1 °C

80.0 dBuV/m

Time: 9:22:30 PM

Humidity: 48.2 %

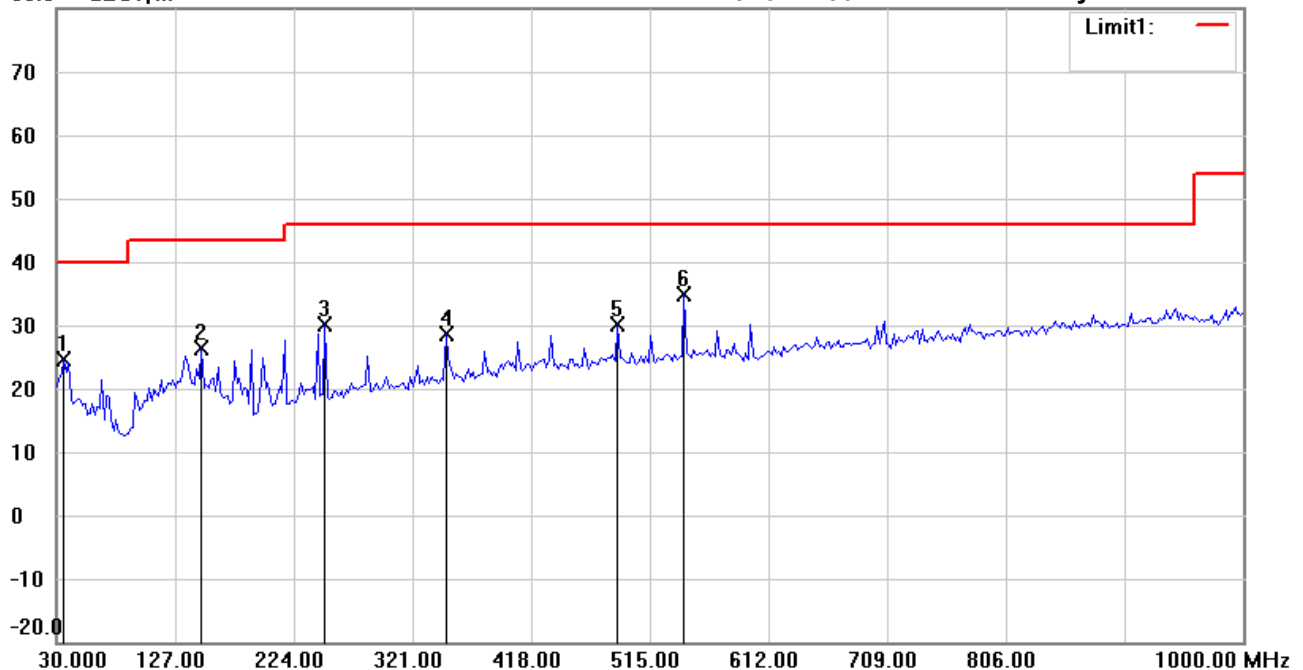

Site : Chamber

Condition : FCC_part 15 RE-Class B_30-1000MHz

EUT : W6M21707-17197

M/N:

Test Mode : RX 13.56MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	35.8316	33.56	peak	-8.99	24.57	40.00	100	180	-15.43	
	148.5772	33.57	peak	-7.25	26.32	43.50	100	295	-17.18	
	249.6593	37.86	peak	-7.82	30.04	46.00	100	355	-15.96	
	348.7976	33.75	peak	-5.18	28.57	46.00	100	140	-17.43	
	488.7575	33.00	peak	-2.99	30.01	46.00	100	70	-15.99	
*	543.1864	36.83	peak	-2.07	34.76	46.00	100	25	-11.24	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #2


Date: 4/15/2020

Temperature: 23.1 °C

80.0 dBuV/m

Time: 9:23:38 PM

Humidity: 48.2 %

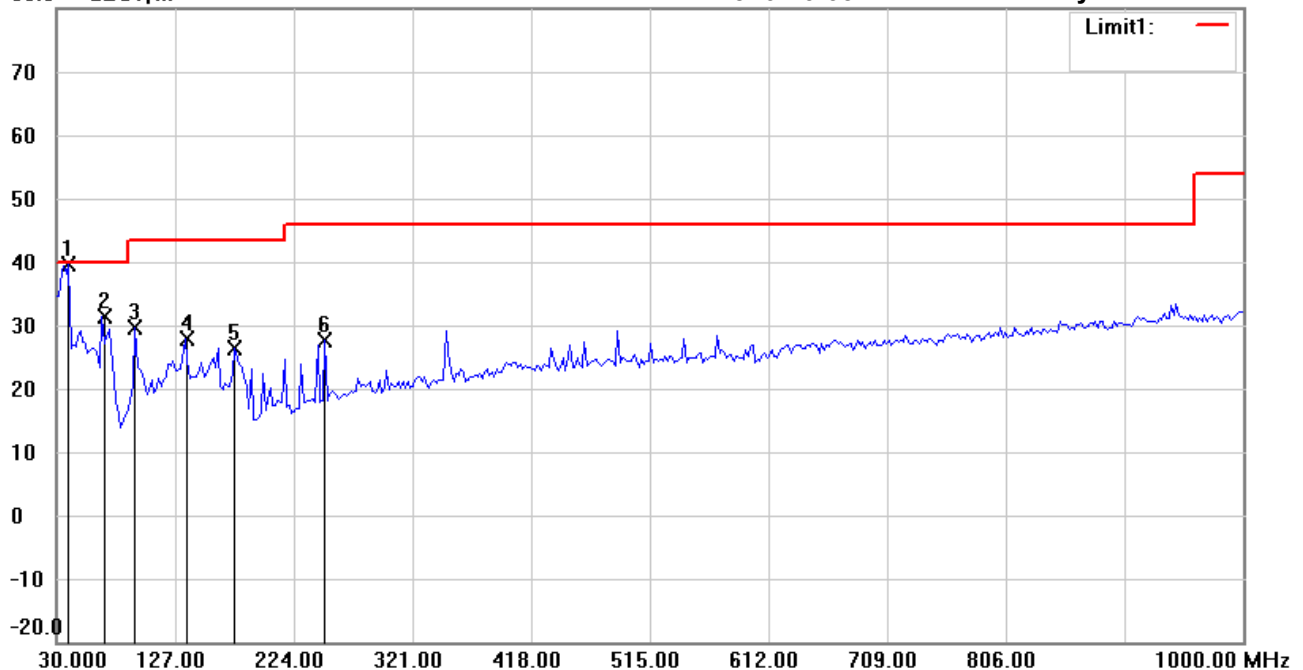

Site : Chamber

Condition : FCC_part 15 RE-Class B_30-1000MHz

EUT : W6M21707-17197

M/N:

Test Mode : RX 13.56MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	39.7194	49.22	QP	-9.48	39.74	40.00	100	30	-0.26	
	66.9340	44.81	peak	-13.34	31.47	40.00	100	190	-8.53	
	94.1483	41.89	peak	-12.25	29.64	43.50	100	60	-13.86	
	134.9700	34.67	peak	-6.80	27.87	43.50	100	225	-15.63	
	175.7916	37.02	peak	-10.57	26.45	43.50	100	315	-17.05	
	249.6593	35.45	peak	-7.82	27.63	46.00	100	10	-18.37	

*:Maximum data x:Over limit !:over margin



Radiated Emission Measurement

Operator: Sky

File :1

Data :#1


Date: 4/15/2020

Temperature:23.1 °C

Time: 6:50:45 PM

Humidity:48.2 %

142.0 dBuV/m

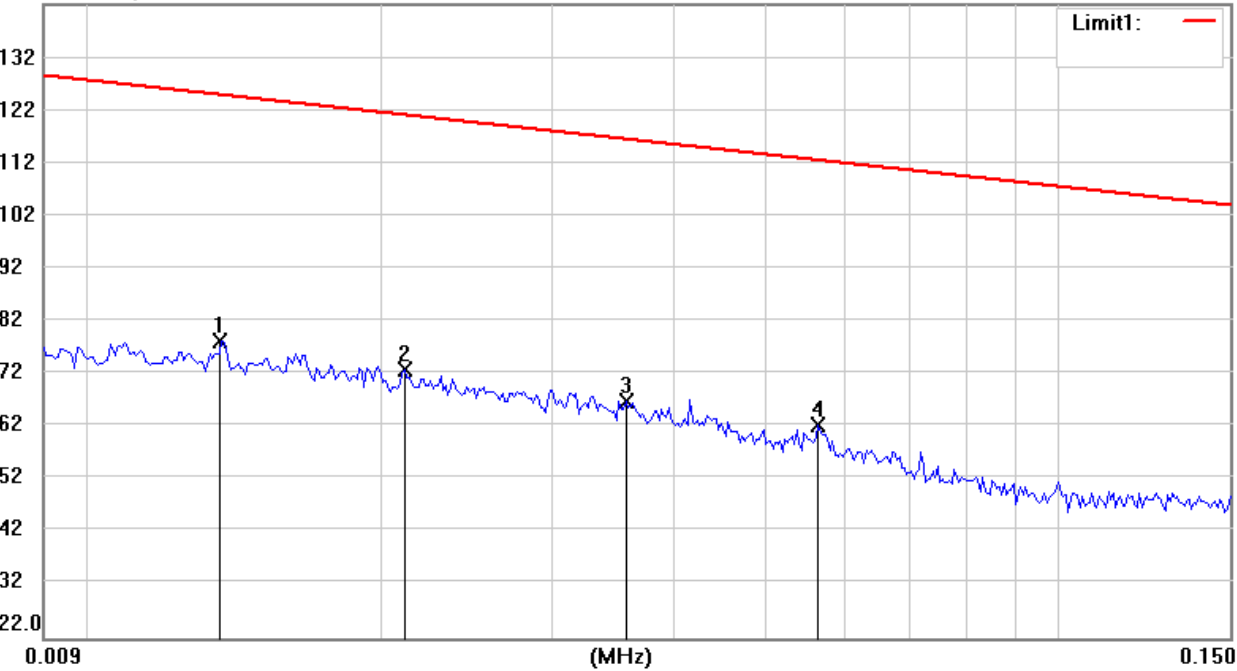

Site : Chamber

Condition : FCC part 15.225 (3m)(<30MHz)

EUT : W6M21707-17197

M/N:

Test Mode : RX 13.56MHz

Note :

Polarization:

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	0.0137	-4.82	peak	82.93	78.11	124.86	100	60	-46.75	
	0.0212	-7.15	peak	80.02	72.87	121.07	100	190	-48.20	
	0.0358	-8.57	peak	75.39	66.82	116.52	100	225	-49.70	
	0.0566	-9.05	peak	71.46	62.41	112.54	100	130	-50.13	



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 2

Data : #1


Date: 4/15/2020

Temperature: 23.1 °C

122.0 dBuV/m

Time: 6:53:29 PM

Humidity: 48.2 %

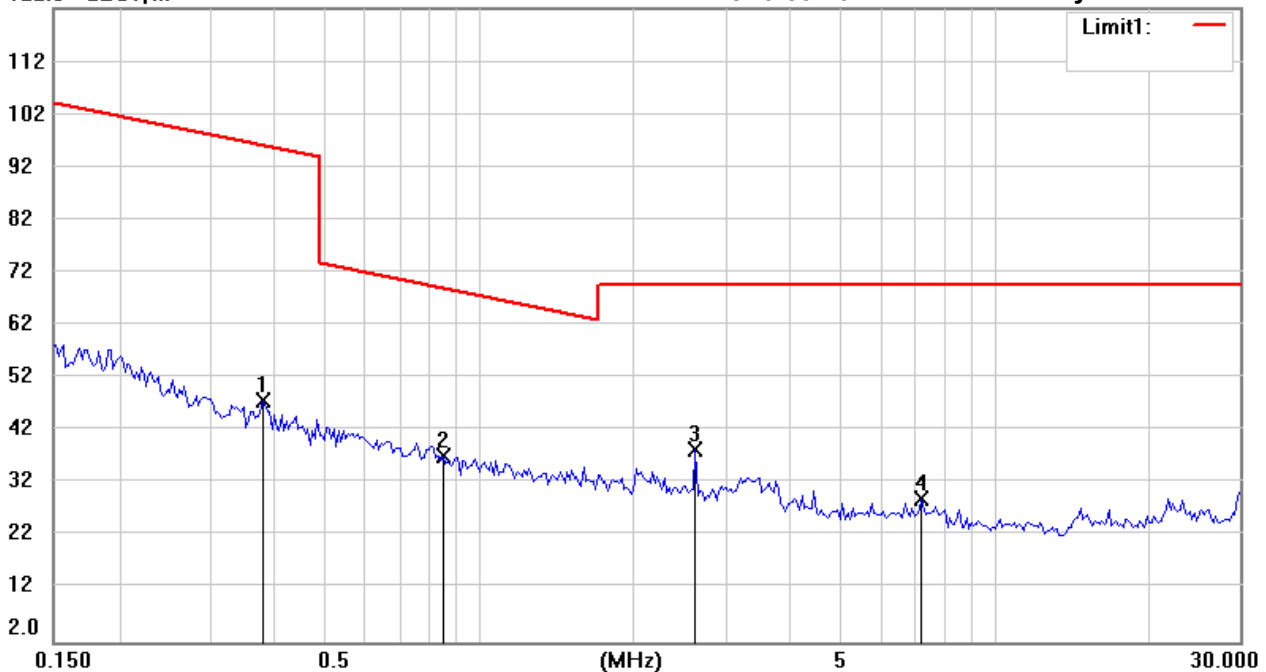

Site : Chamber

Condition : FCC part 15.225 (3m)(<30MHz)

EUT : W6M21707-17197

M/N:

Test Mode : RX 13.56MHz

Note :

Polarization:

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	0.3818	-7.79	peak	55.55	47.76	95.97	100	60	-48.21	
	0.8557	-11.19	peak	48.33	37.14	68.95	100	115	-31.81	
*	2.6371	-1.09	peak	39.52	38.43	69.54	100	140	-31.11	
	7.2312	-5.35	peak	34.48	29.13	69.54	100	315	-40.41	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#1


Date: 4/15/2020

Temperature: 23.1 °C

80.0 dBuV/m

Time: 8:27:18 PM

Humidity: 48.2 %

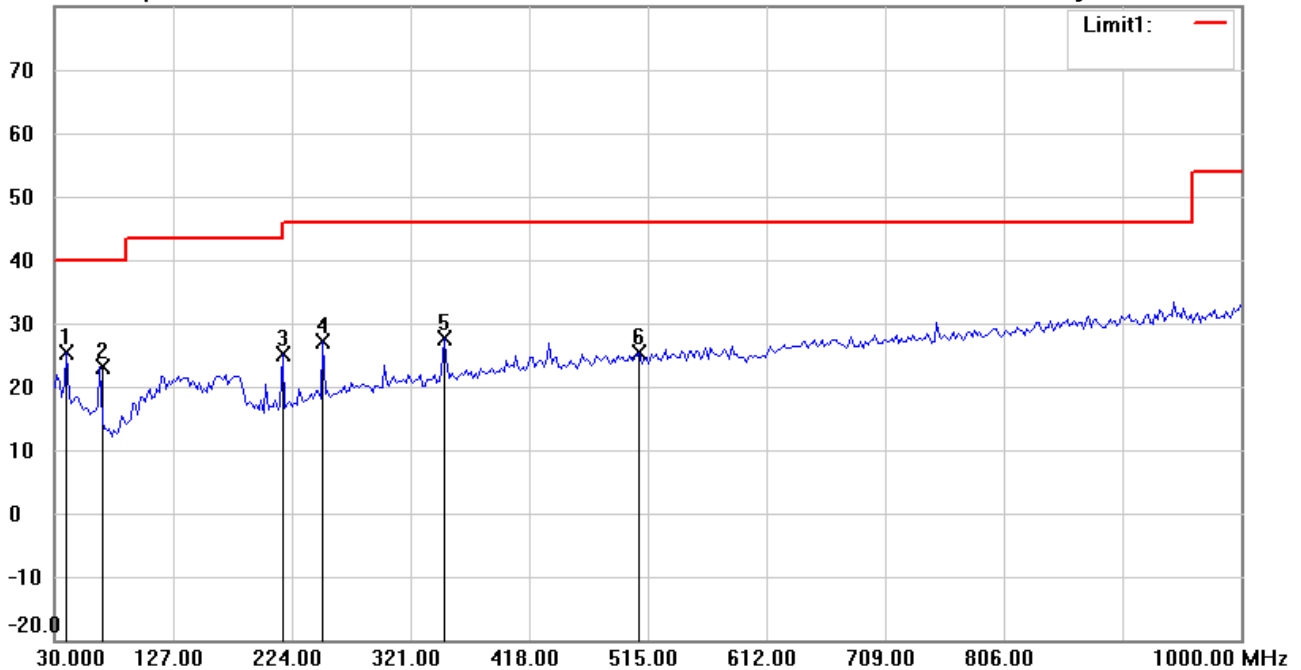

Site : Chamber

Condition : FCC_part 15 RE-Class B_30-1000MHz

EUT : W6M21707-17197

M/N:

Test Mode : RX 13.56MHz

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	39.7194	34.74	peak	-9.48	25.26	40.00	100	315	-14.74	
	66.9340	36.46	peak	-13.34	23.12	40.00	100	60	-16.88	
	216.6132	35.47	peak	-10.41	25.06	46.00	100	150	-20.94	
	249.6593	34.89	peak	-7.82	27.07	46.00	100	225	-18.93	
	348.7976	32.80	peak	-5.18	27.62	46.00	100	190	-18.38	
	508.1964	28.18	peak	-2.69	25.49	46.00	100	280	-20.51	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #2


Date: 4/15/2020

Temperature: 23.1 °C

80.0 dBuV/m

Time: 8:28:18 PM

Humidity: 48.2 %

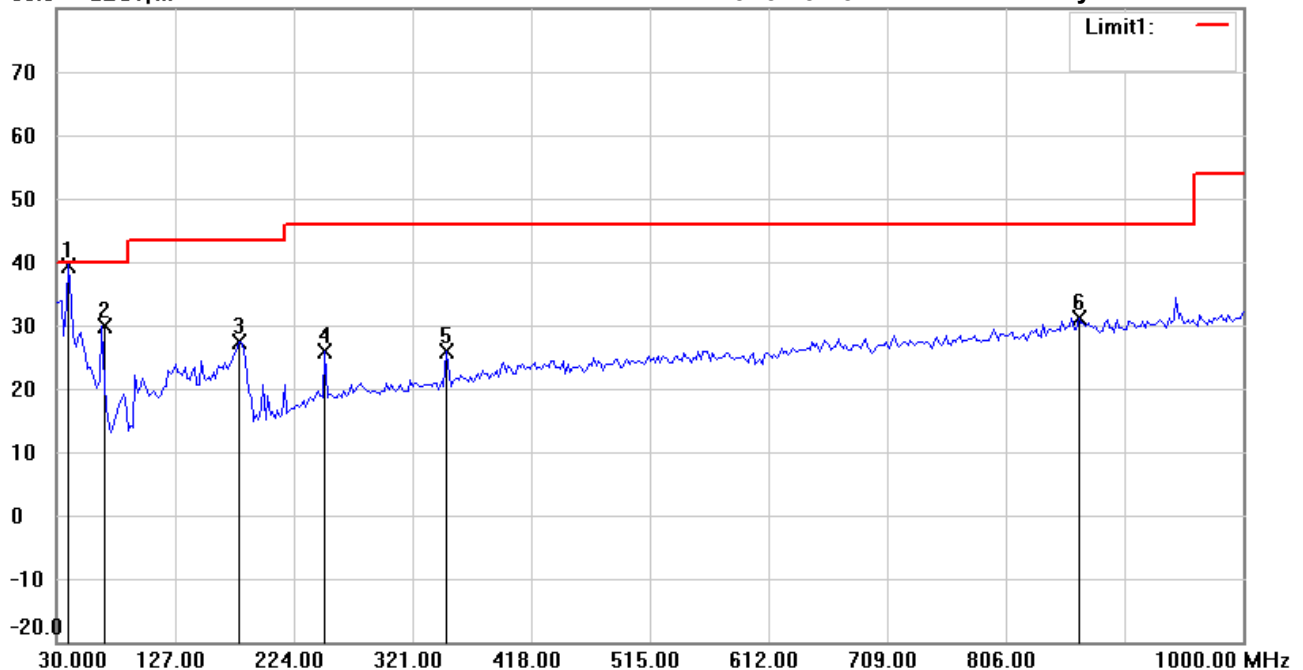

Site : Chamber

Condition : FCC_part 15 RE-Class B_30-1000MHz

EUT : W6M21707-17197

M/N:

Test Mode : RX 13.56MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	39.7194	48.92	QP	-9.48	39.44	40.00	100	225	-0.56	
	66.9340	43.18	peak	-13.34	29.84	40.00	100	160	-10.16	
	179.6794	38.26	peak	-10.91	27.35	43.50	100	310	-16.15	
	249.6593	33.71	peak	-7.82	25.89	46.00	100	50	-20.11	
	348.7976	31.02	peak	-5.18	25.84	46.00	100	270	-20.16	
	865.8717	28.25	peak	2.98	31.23	46.00	100	40	-14.77	

*:Maximum data x:Over limit !:over margin



Radiated Emission Measurement

Operator: Sky

File :1

Data :#1


Date: 4/15/2020

Temperature: 23.1 °C

142.0 dBuV/m

Time: 5:35:04 PM

Humidity: 48.2 %

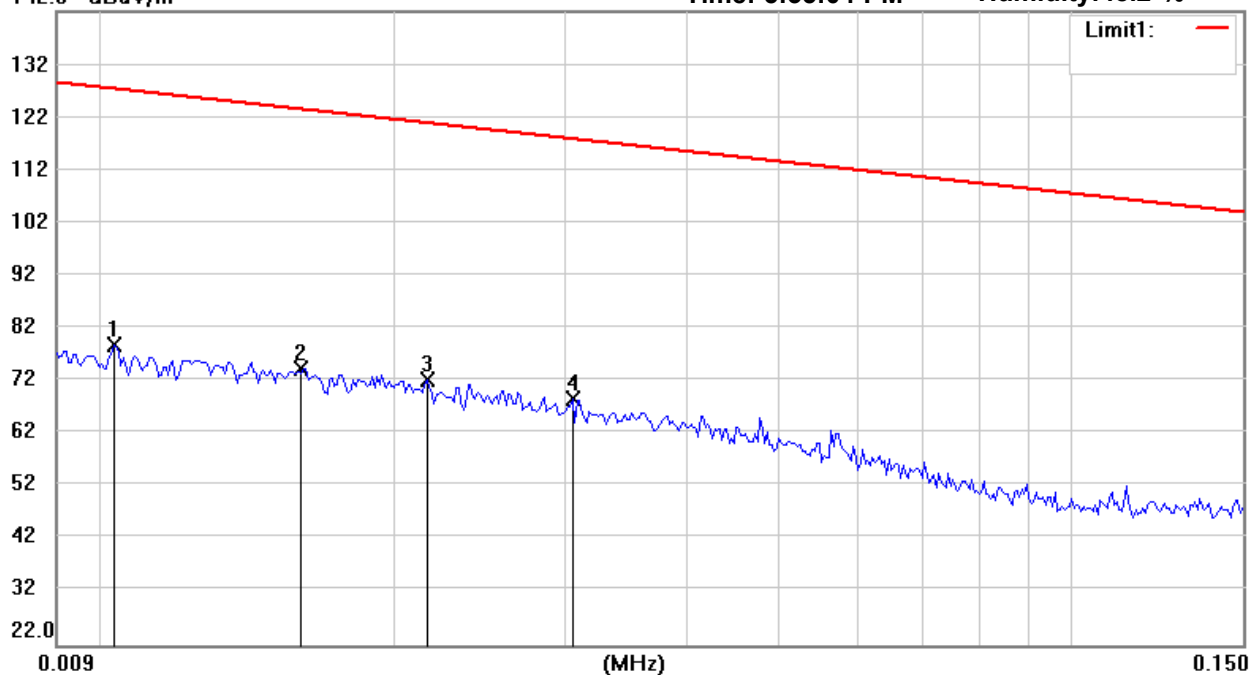

Site : Chamber

Condition : FCC part 15.225 (3m)(<30MHz)

EUT : W6M21707-17197

M/N:

Test Mode : RX 13.56MHz

Note :

Polarization:

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	0.0103	-5.53	peak	84.24	78.71	127.34	100	137	-48.63	
	0.0161	-7.66	peak	82.00	74.34	123.46	100	59	-49.12	
*	0.0217	-7.58	peak	79.83	72.25	120.87	100	225	-48.62	
	0.0305	-7.94	peak	76.50	68.56	117.91	100	80	-49.35	



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :2

Data :#1


Date: 4/15/2020

Temperature: 23.1 °C

122.0 dBuV/m

Time: 5:44:09 PM

Humidity: 48.2 %

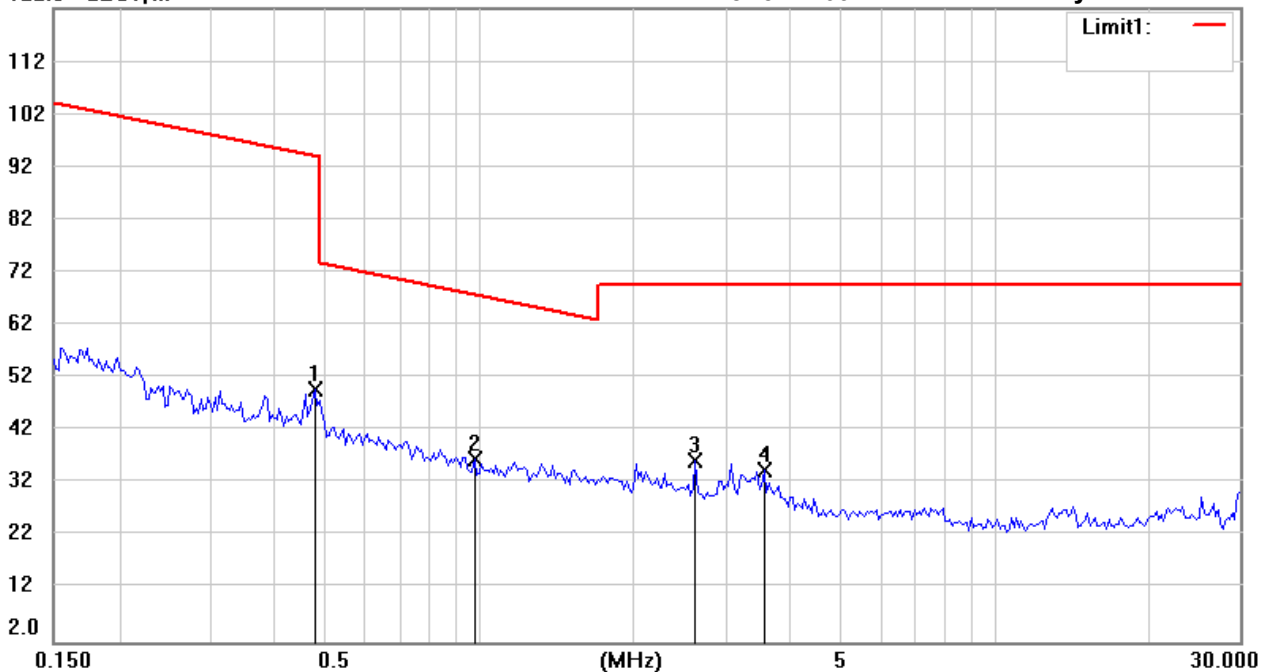

Site : Chamber

Condition : FCC part 15.225 (3m)(<30MHz)

EUT : W6M21707-17197

M/N:

Test Mode : RX 13.56MHz

Note :

Polarization:

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	0.4823	-3.14	peak	53.07	49.93	93.94	100	60	-44.01	
*	0.9824	-10.21	peak	46.79	36.58	67.75	100	225	-31.17	
	2.6371	-3.27	peak	39.52	36.25	69.54	100	310	-33.29	
	3.5880	-2.57	peak	37.02	34.45	69.54	100	10	-35.09	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#1


Date: 4/15/2020

Temperature: 23.1 °C

80.0 dBuV/m

Time: 8:57:52 PM

Humidity: 48.2 %

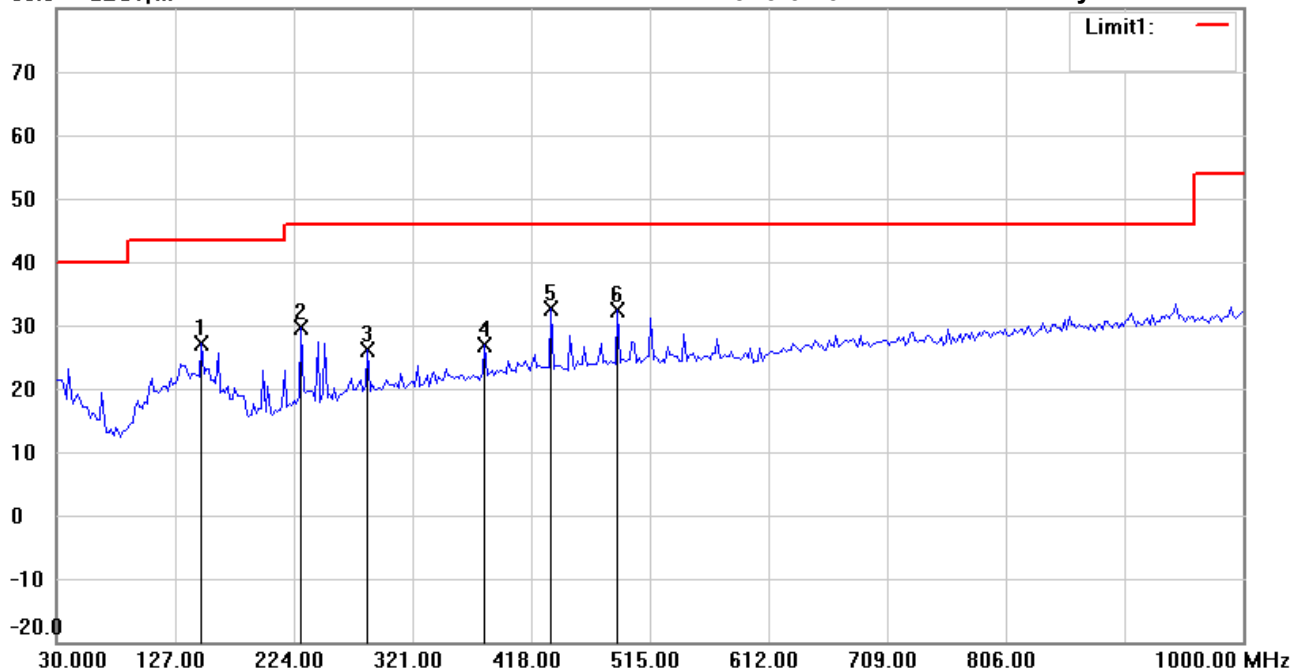

Site : Chamber

Condition : FCC_part 15 RE-Class B_30-1000MHz

EUT : W6M21707-17197

M/N:

Test Mode : RX 13.56MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	148.5772	34.26	peak	-7.25	27.01	43.50	100	190	-16.49	
	230.2204	38.58	peak	-8.96	29.62	46.00	100	310	-16.38	
	284.6492	32.47	peak	-6.27	26.20	46.00	100	60	-19.80	
	379.8998	31.23	peak	-4.27	26.96	46.00	100	70	-19.04	
*	434.3287	36.06	peak	-3.42	32.64	46.00	100	225	-13.36	
	488.7575	35.37	peak	-2.99	32.38	46.00	100	150	-13.62	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #2


Date: 4/15/2020

Temperature: 23.1 °C

80.0 dBuV/m

Time: 8:59:20 PM

Humidity: 48.2 %

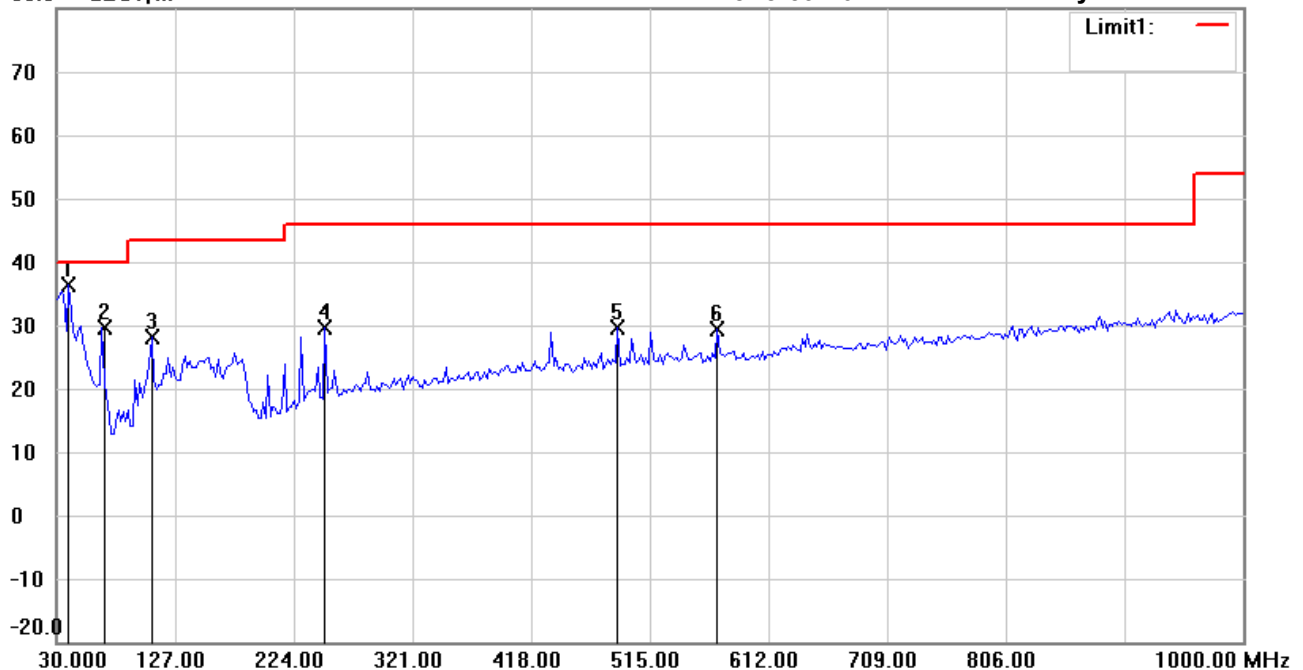

Site : Chamber

Condition : FCC_part 15 RE-Class B_30-1000MHz

EUT : W6M21707-17197

M/N:

Test Mode : RX 13.56MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	39.7194	45.86	QP	-9.48	36.38	40.00	100	60	-3.62	
	66.9340	43.05	peak	-13.34	29.71	40.00	100	70	-10.29	
	107.7555	36.83	peak	-8.69	28.14	43.50	100	310	-15.36	
	249.6593	37.56	peak	-7.82	29.74	46.00	100	245	-16.26	
	488.7575	32.61	peak	-2.99	29.62	46.00	100	225	-16.38	
	570.4008	31.64	peak	-2.14	29.50	46.00	100	130	-16.50	

*:Maximum data x:Over limit !:over margin