



**中认信通**  
CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



## SAR TEST REPORT

**Applicant:** Evolve 3 Holdings Pty Ltd

Address: PO BOX 6222, NARRAWEENA, NSW, Australia

**FCC ID:** 2AWLG-T3P116V1

**Product Name:** Laptop

**Tested Model:** T3P116V1

**Standard(s):** 47 CFR Part 2(2.1093)

The above device has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

**Report Number:** CR231061450-20

**Date Of Issue:** 2023-12-16

**Reviewed By:** Karl Gong

*Karl Gong*

Title: SAR Engineer

**Test Laboratory:** China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,  
Guangdong, China

Tel: +86-769-82016888

**SAR TEST RESULTS SUMMARY**

Operation Frequency Bands	Highest Reported 1g SAR (W/kg)	Limits (W/kg)
	Body-Supported (0mm)	
WLAN 2.4G Chain 0	0.60	1.6
WLAN 2.4G Chain 1	0.36	
WLAN 5.2G Chain 0	0.42	
WLAN 5.2G Chain 1	0.41	
WLAN 5.3G Chain 0	0.39	
WLAN 5.3G Chain 1	0.42	
WLAN 5.6G Chain 0	0.39	
WLAN 5.6G Chain 1	0.51	
WLAN 5.8G Chain 0	0.31	
WLAN 5.8G Chain 1	0.38	
<b>Maximum Simultaneous Transmission SAR</b>		
Items	Body-Supported (0mm)	Limits
Sum SAR(W/kg)	<b>0.96</b>	<b>1.6</b>
SPLSR	N/A	<b>0.04</b>
EUT Received Date:	2023/10/25	
Tested Date:	2023/11/24	
Tested Result:	Pass	

## Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

## Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

## CONTENTS

<b>DOCUMENT REVISION HISTORY .....</b>	<b>6</b>
<b>1. GENERAL INFORMATION .....</b>	<b>7</b>
<b>1.1 PRODUCT DESCRIPTION FOR DEVICE UNDER TEST (EUT).....</b>	<b>7</b>
<b>1.2 TEST SPECIFICATION, METHODS AND PROCEDURES .....</b>	<b>8</b>
<b>1.3 SAR LIMITS.....</b>	<b>9</b>
<b>1.4 FACILITIES.....</b>	<b>10</b>
<b>2. SAR MEASUREMENT SYSTEM .....</b>	<b>11</b>
<b>3. EQUIPMENT LIST AND CALIBRATION .....</b>	<b>18</b>
<b>3.1 EQUIPMENTS LIST &amp; CALIBRATION INFORMATION .....</b>	<b>18</b>
<b>4. SAR MEASUREMENT SYSTEM VERIFICATION .....</b>	<b>19</b>
<b>4.1 LIQUID VERIFICATION .....</b>	<b>19</b>
<b>4.2 SYSTEM ACCURACY VERIFICATION .....</b>	<b>22</b>
<b>4.3 SAR SYSTEM VALIDATION DATA.....</b>	<b>23</b>
<b>5. EUT TEST STRATEGY AND METHODOLOGY .....</b>	<b>27</b>
<b>5.1 TEST POSITIONS FOR BODY-WORN AND OTHER CONFIGURATIONS .....</b>	<b>27</b>
<b>5.2 TEST DISTANCE FOR SAR EVALUATION.....</b>	<b>27</b>
<b>5.3 SAR EVALUATION PROCEDURE .....</b>	<b>28</b>
<b>6. CONDUCTED OUTPUT POWER MEASUREMENT .....</b>	<b>29</b>
<b>6.1 TEST PROCEDURE.....</b>	<b>29</b>
<b>6.2 MAXIMUM TARGET OUTPUT POWER.....</b>	<b>29</b>
<b>6.3 TEST RESULTS: .....</b>	<b>32</b>
<b>7. Standalone SAR test exclusion considerations .....</b>	<b>38</b>
<b>7.1 ANTENNA DISTANCE TO EDGE .....</b>	<b>38</b>
<b>7.2 STANDALONE SAR TEST EXCLUSION CONSIDERATIONS .....</b>	<b>38</b>
<b>7.3 STANDALONE SAR ESTIMATION: .....</b>	<b>39</b>
<b>7.4 STANDALONE SAR TEST EXCLUSION CONSIDERATIONS:.....</b>	<b>39</b>
<b>7.5 SAR TEST EXCLUSION FOR THE EUT EDGE CONSIDERATIONS RESULT .....</b>	<b>40</b>
<b>8. SAR MEASUREMENT RESULTS .....</b>	<b>41</b>
<b>8.1 SAR TEST DATA .....</b>	<b>41</b>
<b>9. Measurement Variability .....</b>	<b>50</b>
<b>10. SAR SIMULTANEOUS TRANSMISSION DESCRIPTION .....</b>	<b>51</b>

---


<b>11. SAR Plots .....</b>	<b>52</b>
<b>APPENDIX A MEASUREMENT UNCERTAINTY .....</b>	<b>72</b>
<b>APPENDIX B EUT TEST POSITION PHOTOS .....</b>	<b>74</b>
<b>APPENDIX C CALIBRATION CERTIFICATES .....</b>	<b>76</b>

## DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	CR231061450-20	Original Report	2023-12-16

## 1. GENERAL INFORMATION

### 1.1 Product Description for Device under Test (EUT)

<b>Device Type:</b>	Portable
<b>Exposure Category:</b>	Population / Uncontrolled
<b>Trade Name:</b>	<b>EVOLVE</b> 
<b>Antenna Type(s):</b>	Internal Antenna
<b>Body-Worn Accessories:</b>	None
<b>Operation modes:</b>	WLAN and Bluetooth
<b>Frequency Band:</b>	WLAN 2.4G: 2412 MHz-2472 MHz/2422-2462 MHz WLAN 5.2G: 5150 MHz-5250 MHz WLAN 5.3G: 5250 MHz-5350 MHz WLAN 5.6G: 5470 MHz-5725 MHz WLAN 5.8G: 5725 MHz-5850 MHz Bluetooth: 2402 MHz-2480 MHz
<b>Conducted RF Average Power:</b>	WLAN 2.4G: 14.91 dBm WLAN 5.2G: 11.49 dBm WLAN 5.3G: 11.34 dBm WLAN 5.6G: 11.24 dBm WLAN 5.8G: 11.08 dBm Bluetooth(BDR/EDR): 7.87 dBm BLE: 1.79 dBm
<b>Dimensions (L*W*H):</b>	280 mm (L) * 200 mm (W) * 18 mm (H)
<b>Rated Input Voltage:</b>	DC 7.6 V from Rechargeable Battery
<b>Serial Number:</b>	2CHV-4
<b>Normal Operation:</b>	Body Supported

## **1.2 Test Specification, Methods and Procedures**

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE 1528-2013, the following FCC Published RF exposure KDB procedures:

KDB 447498 D01 General RF Exposure Guidance v06  
KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04  
KDB 865664 D02 RF Exposure Reporting v01r02  
KDB 616217 D04 SAR for laptop and tablets v01r02  
KDB 248227 D01 802.11 Wi-Fi SAR v02r02

TCB Workshop October 2016: RF Exposure Procedures  
TCB Workshop April 2019: RF Exposure Procedures



**1.3 SAR Limits****FCC Limit**

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 1 g of tissue)	<b>1.60</b>	8.0
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0

Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

General Population/Uncontrolled environments Spatial Peak limit 1.6W/kg for 1g SAR applied to the EUT.

## 1.4 FACILITIES

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The test sites and measurement facilities used to collect data are located at:

<input type="checkbox"/> SAR Lab 1	<input checked="" type="checkbox"/> SAR Lab 2
------------------------------------	---


## 2. SAR MEASUREMENT SYSTEM

These measurements were performed with the automated near-field scanning system DASY5 from Schmid & Partner Engineering AG (SPEAG) which is the Fifth generation of the system shown in the figure hereinafter:



### DASY5 System Description

The DASY5 system for performing compliance tests consists of the following items:

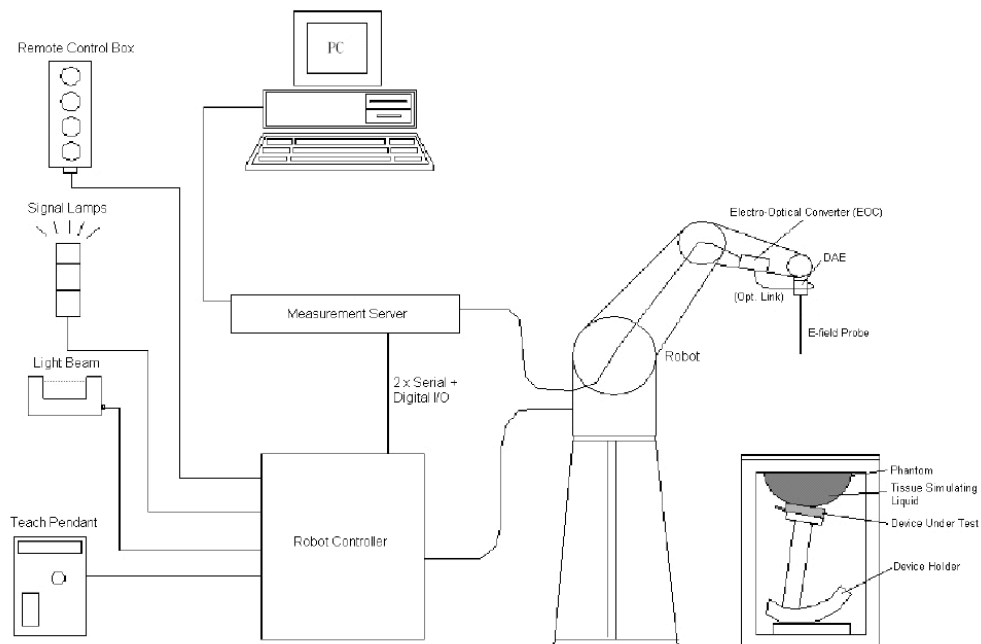

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal application, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7 professional operating system and the DASY52 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

### **DASY5 Measurement Server**

The DASY5 measurement server is based on a PC/104 CPU board with a 400MHz Intel ULV Celeron, 128MB chip-disk and 128MB RAM. The necessary circuits for communication with the DAE4 (or DAE3) electronics box, as well as the 16 bit AD-converter system for optical detection and digital I/O interface are contained on the DASY5 I/O board, which is directly connected to the PC/104 bus of the CPU board.



The measurement server performs all real-time data evaluation of field measurements and surface detection, controls robot movements and handles safety operation. The PC operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with an expansion port which is reserved for future applications. Please note that this expansion port does not have a standardized point out, and therefore only devices provided by SPEAG can be connected. Devices from any other supplier could seriously damage the measurement server.

### **Data Acquisition Electronics**

The data acquisition electronics (DAE4) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

The input impedance of both the DAE4 as well as of the DAE3 box is 200M $\Omega$ ; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

**EX3DV4 E-Field Probes**

<b>Frequency</b>	4 MHz - 10 GHz Linearity: $\pm 0.2$ dB (30 MHz to 10 GHz)
<b>Directivity</b>	$\pm 0.1$ dB in TSL (rotation around probe axis) $\pm 0.3$ dB in TSL (rotation normal to probe axis)
<b>Dynamic Range</b>	10 $\mu$ W/g to > 100 mW/g Linearity: $\pm 0.2$ dB (noise: typically < 1 $\mu$ W/g)
<b>Dimensions</b>	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
<b>Application</b>	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.
<b>Compatibility</b>	DASY3, DASY4, DASY52, DASY6, DASY8 SAR, EASY6, EASY4/MRI

**Calibration Frequency Points for EX3DV4 E-Field Probes SN: 7522 Calibrated: 2023/5/29**

Calibration Frequency Point(MHz)	Frequency Range(MHz)		Conversion Factor		
	From	To	X	Y	Z
750 Head	650	850	9.90	9.90	9.90
900 Head	850	1000	9.37	9.37	9.37
1750 Head	1650	1850	8.15	8.15	8.15
1900 Head	1850	2000	7.94	7.94	7.94
2300 Head	2200	2400	7.67	7.67	7.67
2450 Head	2400	2550	7.42	7.42	7.42
2600 Head	2550	2700	7.23	7.23	7.23
5250 Head	5140	5360	5.36	5.36	5.36
5500 Head	5390	5610	4.85	4.85	4.85
5750 Head	5640	5860	4.90	4.90	4.90

### **SAM Twin Phantom**

The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region, where shell thickness increases to 6 mm). The phantom has three measurement areas:

- \_ Left Head
- \_ Right Head
- \_ Flat phantom

The phantom table for the DASY systems based on the robots have the size of 100 x 50 x 85 cm (L x W x H). For easy dislocation these tables have fork lift cut outs at the bottom.

The bottom plate contains three pairs of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. Only one device holder is necessary if two phantoms are used (e.g., for different liquids)



A white cover is provided to cover the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on top of this phantom cover are possible. Three reference marks are provided on the phantom counter. These reference marks are used to teach the absolute phantom position relative to the robot.

### **Robots**

The DASY5 system uses the high precision industrial robot. The robot offers the same features important for our application:

- High precision (repeatability 0.02mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements (brushless synchrony motors; no stepper motors)
- Low ELF interference (motor control fields shielded via the closed metallic construction shields)

The above mentioned robots are controlled by the Staubli CS8c robot controllers. All information regarding the use and maintenance of the robot arm and the robot controller is contained on the CDs delivered along with the robot. Paper manuals are available upon request direct from Staubli.

## SAR Scan Procedures

### Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 1.4 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

### Step 2: Area Scans

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 15mm 2 step integral, with 1.5mm interpolation used to locate the peak SAR area used for zoom scan assessments.

Where the system identifies multiple SAR peaks (which are within 25% of peak value) the system will provide the user with the option of assessing each peak location individually for zoom scan averaging.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 mm ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm ± 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

### Step 3: Zoom Scan (Cube Scan Averaging)

The averaging zoom scan volume utilized in the DASY5 software is in the shape of a cube and the side dimension of a 1 g or 10 g mass is dependent on the density of the liquid representing the simulated tissue. A density of 1000 kg/m<sup>3</sup> is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1g cube is 10mm, with the side length of the 10g cube is 21.5mm.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}$ , $\Delta y_{Zoom}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$ : between subsequent points	≤ 1.5 · $\Delta z_{Zoom}(n-1)$ mm	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB Publication 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

### Step 4: Power Drift Measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

When the cube intersects with the surface of the phantom, it is oriented so that 3 vertices touch the surface of the shell or the center of a face is tangent to the surface. The face of the cube closest to the surface is modified in order to conform to the tangent surface.

The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications (including FCC) utilize a physical step of 7 x 7 x 7 (5mmx5mmx5mm) providing a volume of 30 mm in the X & Y & Z axis.



### Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEC 62209-1:2016

#### Recommended Tissue Dielectric Parameters for Head liquid

**Table A.3 – Dielectric properties of the head tissue-equivalent liquid**

Frequency MHz	Relative permittivity $\epsilon_r$	Conductivity ( $\sigma$ ) S/m
300	45,3	0,87
450	43,5	0,87
<i>750</i>	<i>41,9</i>	<i>0,89</i>
835	41,5	0,90
900	41,5	0,97
1 450	40,5	1,20
<i>1 500</i>	<i>40,4</i>	<i>1,23</i>
<i>1 640</i>	<i>40,2</i>	<i>1,31</i>
<i>1 750</i>	<i>40,1</i>	<i>1,37</i>
1 800	40,0	1,40
1 900	40,0	1,40
2 000	40,0	1,40
<i>2 100</i>	<i>39,8</i>	<i>1,49</i>
<i>2 300</i>	<i>39,5</i>	<i>1,67</i>
2 450	39,2	1,80
<i>2 600</i>	<i>39,0</i>	<i>1,96</i>
3 000	38,5	2,40
<i>3 500</i>	<i>37,9</i>	<i>2,91</i>
<i>4 000</i>	<i>37,4</i>	<i>3,43</i>
<i>4 500</i>	<i>36,8</i>	<i>3,94</i>
<i>5 000</i>	<i>36,2</i>	<i>4,45</i>
<i>5 200</i>	<i>36,0</i>	<i>4,66</i>
<i>5 400</i>	<i>35,8</i>	<i>4,86</i>
<i>5 600</i>	<i>35,5</i>	<i>5,07</i>
<i>5 800</i>	<i>35,3</i>	<i>5,27</i>
<i>6 000</i>	<i>35,1</i>	<i>5,48</i>

NOTE For convenience, permittivity and conductivity values at those frequencies which are not part of the original data provided by Drossos et al. [33] or the extension to 5 800 MHz are provided (i.e. the values shown *in italics*). These values were linearly interpolated between the values in this table that are immediately above and below these values, except the values at 6 000 MHz that were linearly extrapolated from the values at 3 000 MHz and 5 800 MHz.


### 3. EQUIPMENT LIST AND CALIBRATION

#### 3.1 Equipments List & Calibration Information

Equipment	Model	S/N	Calibration Date	Calibration Due Date
DASY5 Test Software	DASY52.8	N/A	NCR	NCR
DASY5 Measurement Server	DASY5 5.0.28	1123	NCR	NCR
Data Acquisition Electronics	DAE4	1354	2023/11/17	2024/11/16
E-Field Probe	EX3DV4	7522	2023/5/29	2024/5/28
Mounting Device	MD4HHTV5	BJPCTC0152	NCR	NCR
Twin SAM	Twin SAM V5.0	1470	NCR	NCR
Dipole, 2450 MHz	D2450V2	1102	2023/3/27	2026/3/26
Dipole,5GHz	D5GHzV2	1245	2023/8/23	2026/8/22
Simulated Tissue Liquid Head(500-9500 MHz)	HBBL600-10000V6	230728-1	Each Time	/
Network Analyzer	8753B	2828A00170	2023/10/17	2024/11/16
Dielectric assessment kit	1319	SM DAK 040 CA	NCR	NCR
Thermo-hygrometer	288-CTH	EM115	NCR	NCR
MXG Vector Signal Generator	N5182B	MY51350144	2023/3/31	2024/3/30
Power Meter	ML2495A	1106009	2023/8/4	2024/8/3
Pulse Power Sensor	MA2411A	10780	2023/8/4	2024/8/3
Power Amplifier	ZVE-6W-83+	637202210	NCR	NCR
Directional Coupler	441493	520Z	NCR	NCR
Attenuator	20dB, 100W	LN749	NCR	NCR
Attenuator	6dB, 150W	2754	NCR	NCR
Thermometer	DTM3000	3892	2023/3/31	2024/3/30
Spectrum Analyzer	FSV40	101943	2023/3/31	2024/3/30

## 4. SAR MEASUREMENT SYSTEM VERIFICATION

### 4.1 Liquid Verification

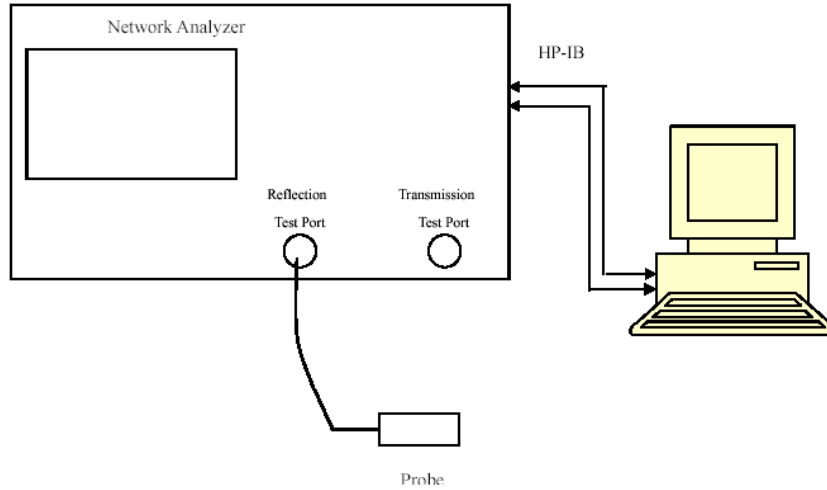

Liquid Verification Setup Block Diagram

### Liquid Verification Results

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		$\epsilon_r$	$\sigma$ (S/m)	$\epsilon_r$	$\sigma$ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$	
2400	Simulated Tissue Liquid Head	39.717	1.729	39.3	1.76	1.06	-1.76	±5
2410	Simulated Tissue Liquid Head	39.564	1.736	39.28	1.77	0.72	-1.92	±5
2420	Simulated Tissue Liquid Head	39.558	1.742	39.26	1.77	0.76	-1.58	±5
2430	Simulated Tissue Liquid Head	39.456	1.748	39.24	1.78	0.55	-1.8	±5
2440	Simulated Tissue Liquid Head	39.351	1.755	39.22	1.79	0.33	-1.96	±5
2450	Simulated Tissue Liquid Head	39.256	1.787	39.2	1.8	0.14	-0.72	±5
2460	Simulated Tissue Liquid Head	38.956	1.794	39.19	1.81	-0.6	-0.88	±5
2470	Simulated Tissue Liquid Head	38.934	1.813	39.17	1.82	-0.6	-0.38	±5
2480	Simulated Tissue Liquid Head	38.756	1.826	39.16	1.83	-1.03	-0.22	±5

\*Liquid Verification above was performed on 2023/11/24.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		$\epsilon_r$	$\sigma$ (S/m)	$\epsilon_r$	$\sigma$ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$	
5180	Simulated Tissue Liquid Head	36.885	4.588	36.02	4.64	2.4	-1.12	$\pm 5$
5190	Simulated Tissue Liquid Head	36.559	4.603	36.01	4.65	1.52	-1.01	$\pm 5$
5200	Simulated Tissue Liquid Head	36.215	4.671	36	4.66	0.6	0.24	$\pm 5$
5210	Simulated Tissue Liquid Head	36.07	4.698	35.99	4.67	0.22	0.6	$\pm 5$
5220	Simulated Tissue Liquid Head	35.904	4.717	35.98	4.68	-0.21	0.79	$\pm 5$
5230	Simulated Tissue Liquid Head	35.733	4.732	35.97	4.69	-0.66	0.9	$\pm 5$
5240	Simulated Tissue Liquid Head	35.539	4.747	35.96	4.7	-1.17	1	$\pm 5$
5250	Simulated Tissue Liquid Head	35.433	4.751	35.95	4.71	-1.44	0.87	$\pm 5$
5260	Simulated Tissue Liquid Head	35.336	4.766	35.94	4.72	-1.68	0.97	$\pm 5$
5270	Simulated Tissue Liquid Head	35.27	4.785	35.93	4.73	-1.84	1.16	$\pm 5$
5280	Simulated Tissue Liquid Head	35.095	4.792	35.92	4.74	-2.3	1.1	$\pm 5$
5290	Simulated Tissue Liquid Head	34.937	4.809	35.91	4.75	-2.71	1.24	$\pm 5$
5300	Simulated Tissue Liquid Head	34.901	4.839	35.9	4.76	-2.78	1.66	$\pm 5$
5310	Simulated Tissue Liquid Head	34.812	4.843	35.89	4.77	-3	1.53	$\pm 5$
5320	Simulated Tissue Liquid Head	34.739	4.864	35.88	4.78	-3.18	1.76	$\pm 5$

\*Liquid Verification above was performed on 2023/11/24.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		$\epsilon_r$	$\sigma$ (S/m)	$\epsilon_r$	$\sigma$ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$	
5500	Simulated Tissue Liquid Head	35.266	4.906	35.65	4.97	-1.08	-1.29	$\pm 5$
5510	Simulated Tissue Liquid Head	35.168	4.924	35.64	4.98	-1.32	-1.12	$\pm 5$
5520	Simulated Tissue Liquid Head	35.032	4.936	35.62	4.99	-1.65	-1.08	$\pm 5$
5530	Simulated Tissue Liquid Head	34.977	4.958	35.61	5	-1.78	-0.84	$\pm 5$
5540	Simulated Tissue Liquid Head	34.937	4.975	35.59	5.01	-1.83	-0.7	$\pm 5$
5550	Simulated Tissue Liquid Head	34.886	4.981	35.58	5.02	-1.95	-0.78	$\pm 5$
5560	Simulated Tissue Liquid Head	34.722	4.993	35.56	5.03	-2.36	-0.74	$\pm 5$
5570	Simulated Tissue Liquid Head	34.628	5.031	35.55	5.04	-2.59	-0.18	$\pm 5$
5580	Simulated Tissue Liquid Head	34.564	5.119	35.53	5.05	-2.72	1.37	$\pm 5$
5590	Simulated Tissue Liquid Head	34.474	5.167	35.52	5.06	-2.94	2.11	$\pm 5$
5600	Simulated Tissue Liquid Head	34.445	5.215	35.5	5.07	-2.97	2.86	$\pm 5$
5610	Simulated Tissue Liquid Head	34.314	5.238	35.49	5.08	-3.31	3.11	$\pm 5$

\*Liquid Verification above was performed on 2023/11/24.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		$\epsilon_r$	$\sigma$ (S/m)	$\epsilon_r$	$\sigma$ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$	
5640	Simulated Tissue Liquid Head	35.131	5.108	35.46	5.11	-0.93	-0.04	±5
5650	Simulated Tissue Liquid Head	35.045	5.154	35.45	5.12	-1.14	0.66	±5
5660	Simulated Tissue Liquid Head	34.981	5.172	35.44	5.13	-1.3	0.82	±5
5670	Simulated Tissue Liquid Head	34.872	5.196	35.43	5.14	-1.57	1.09	±5
5680	Simulated Tissue Liquid Head	34.839	5.212	35.42	5.15	-1.64	1.2	±5
5690	Simulated Tissue Liquid Head	34.774	5.269	35.41	5.16	-1.8	2.11	±5
5700	Simulated Tissue Liquid Head	34.691	5.281	35.4	5.17	-2	2.15	±5
5710	Simulated Tissue Liquid Head	34.593	5.296	35.39	5.18	-2.25	2.24	±5
5720	Simulated Tissue Liquid Head	34.565	5.207	35.38	5.19	-2.3	0.33	±5
5730	Simulated Tissue Liquid Head	34.505	5.214	35.37	5.2	-2.45	0.27	±5
5740	Simulated Tissue Liquid Head	34.467	5.233	35.36	5.21	-2.53	0.44	±5
5750	Simulated Tissue Liquid Head	34.452	5.244	35.35	5.22	-2.54	0.46	±5
5760	Simulated Tissue Liquid Head	34.384	5.256	35.34	5.23	-2.71	0.5	±5
5770	Simulated Tissue Liquid Head	34.357	5.261	35.33	5.24	-2.75	0.4	±5
5780	Simulated Tissue Liquid Head	34.285	5.273	35.32	5.25	-2.93	0.44	±5
5790	Simulated Tissue Liquid Head	34.233	5.289	35.31	5.26	-3.05	0.55	±5
5800	Simulated Tissue Liquid Head	34.214	5.314	35.3	5.27	-3.08	0.83	±5
5810	Simulated Tissue Liquid Head	34.195	5.348	35.29	5.28	-3.1	1.29	±5
5820	Simulated Tissue Liquid Head	34.176	5.373	35.28	5.29	-3.13	1.57	±5
5830	Simulated Tissue Liquid Head	34.013	5.381	35.27	5.3	-3.56	1.53	±5

\*Liquid Verification above was performed on 2023/11/24.


## 4.2 System Accuracy Verification

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of  $\pm 10\%$ . The validation results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

The spacing distances in the **System Verification Setup Block Diagram** is given by the following:

- $s = 15 \text{ mm} \pm 0,2 \text{ mm}$  for  $300 \text{ MHz} \leq f \leq 1\,000 \text{ MHz}$ ;
- $s = 10 \text{ mm} \pm 0,2 \text{ mm}$  for  $1\,000 \text{ MHz} < f \leq 3\,000 \text{ MHz}$ ;
- $s = 10 \text{ mm} \pm 0,2 \text{ mm}$  for  $3\,000 \text{ MHz} < f \leq 6\,000 \text{ MHz}$ .

### System Verification Setup Block Diagram

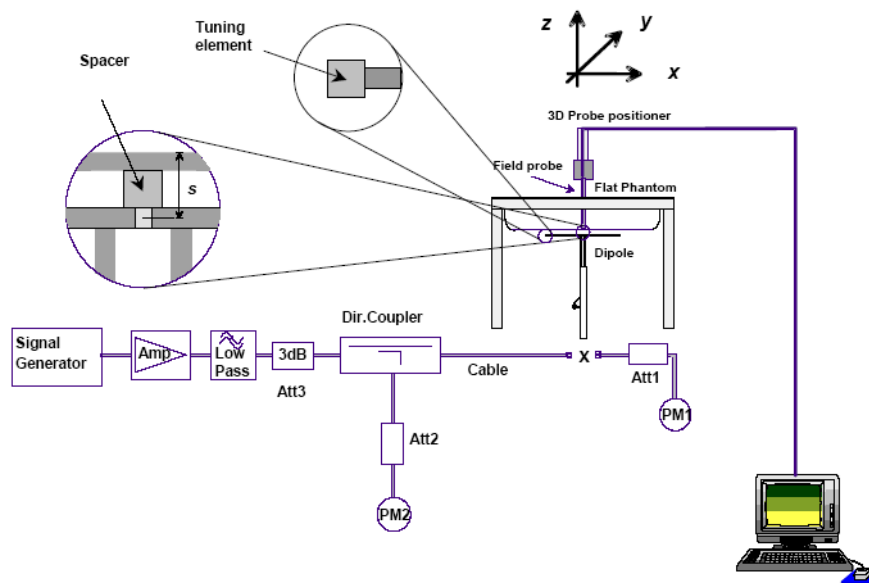

### System Accuracy Check Results

Date	Frequency Band	Liquid Type	Input Power (mW)	Measured SAR (W/kg)	Normalized to 1W (W/kg)	Target Value (W/kg)	Delta (%)	Tolerance (%)
2023/11/24	2450	Simulated Tissue Liquid Head	100	1g 4.98	49.8	50.9	-2.16	$\pm 10$
2023/11/24	5250	Simulated Tissue Liquid Head	100	1g 8.07	80.7	78	3.46	$\pm 10$
2023/11/24	5600	Simulated Tissue Liquid Head	100	1g 7.94	79.4	81	-1.98	$\pm 10$
2023/11/24	5750	Simulated Tissue Liquid Head	100	1g 7.88	78.8	77.8	1.29	$\pm 10$

\*The SAR values above are normalized to 1 Watt forward power.

### 4.3 SAR SYSTEM VALIDATION DATA

System Performance 2450MHz was performed on 2023/11/24

DUT: D2450V2; Type: 2450 MHz; Serial: 1102


Communication System: CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.787$  S/m;  $\epsilon_r = 39.256$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @ 2450 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Head 2450MHz Pin=100mW/ Area Scan (6x7x1): Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (measured) = 6.10 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 52.62 V/m; Power Drift = -0.15 dB  
Peak SAR (extrapolated) = 10.5 W/kg  
SAR(1 g) = 4.98 W/kg; SAR(10 g) = 2.32 W/kg  
Maximum value of SAR (measured) = 8.47 W/kg

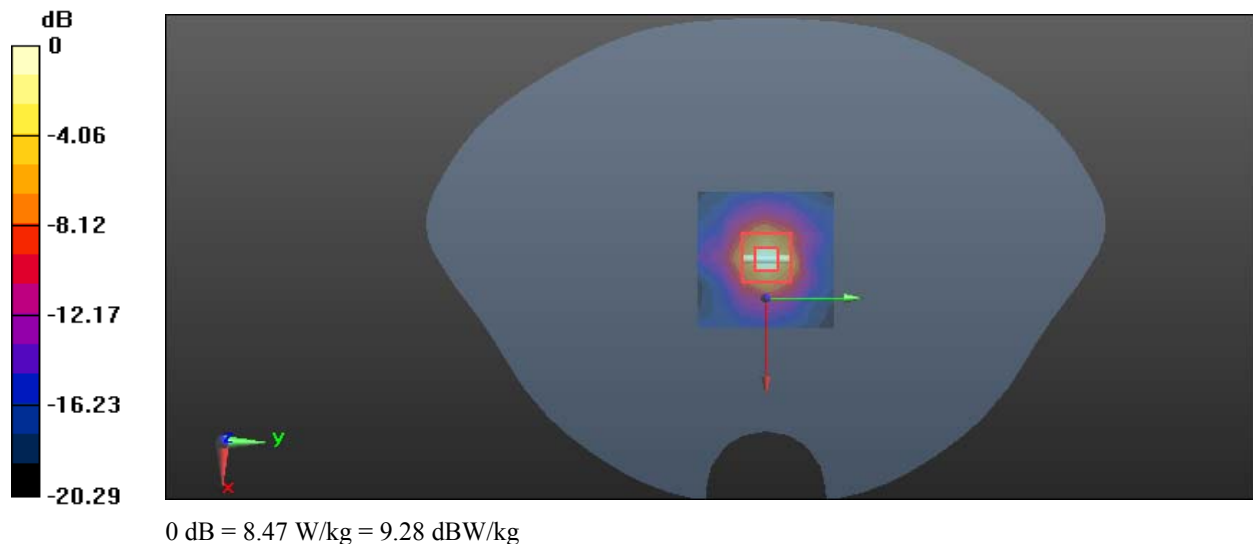

**System Performance 5250 MHz was performed on 2023/11/24****DUT: D5GHzV2; Type: 5250 MHz; Serial: 1245**


Communication System: CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 5250$  MHz;  $\sigma = 4.751$  S/m;  $\epsilon_r = 35.433$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5250 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head 5250MHz Pin=100mW/Area Scan (7x9x1):** Measurement grid: dx=10 mm, dy=10 mm  
Maximum value of SAR (measured) = 21.1 W/kg

**Zoom Scan (9x9x16)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm  
Reference Value = 44.69 V/m; Power Drift = 0.17 dB  
Peak SAR (extrapolated) = 33.5 W/kg  
**SAR(1 g) = 8.07 W/kg; SAR(10 g) = 2.32 W/kg**  
Maximum value of SAR (measured) = 20.6 W/kg

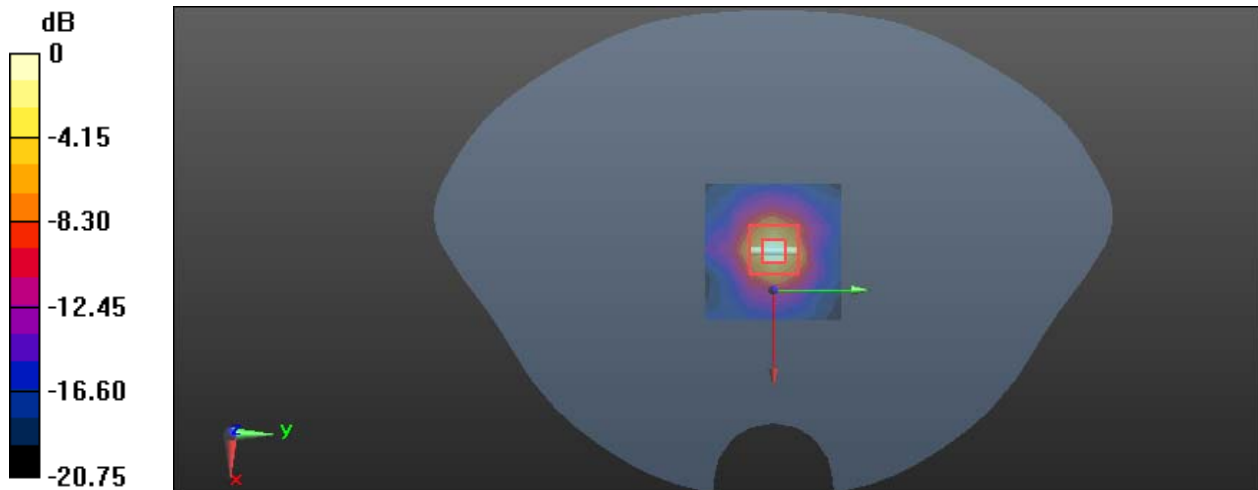



**System Performance 5600 MHz was performed on 2023/11/24****DUT: D5GHzV2; Type: 5600 MHz; Serial: 1245**


Communication System: CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 5600$  MHz;  $\sigma = 5.215$  S/m;  $\epsilon_r = 34.445$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(4.85, 4.85, 4.85) @ 5600 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head 5600MHz Pin=100mW/Area Scan (7x9x1):** Measurement grid: dx=10 mm, dy=10 mm  
Maximum value of SAR (interpolated) = 24.5 W/kg

**Zoom Scan (9x9x16)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm  
Reference Value = 45.19 V/m; Power Drift = -0.00 dB  
Peak SAR (extrapolated) = 36.6 W/kg  
**SAR(1 g) = 7.94 W/kg; SAR(10 g) = 2.27 W/kg**  
Maximum value of SAR (measured) = 20.6 W/kg

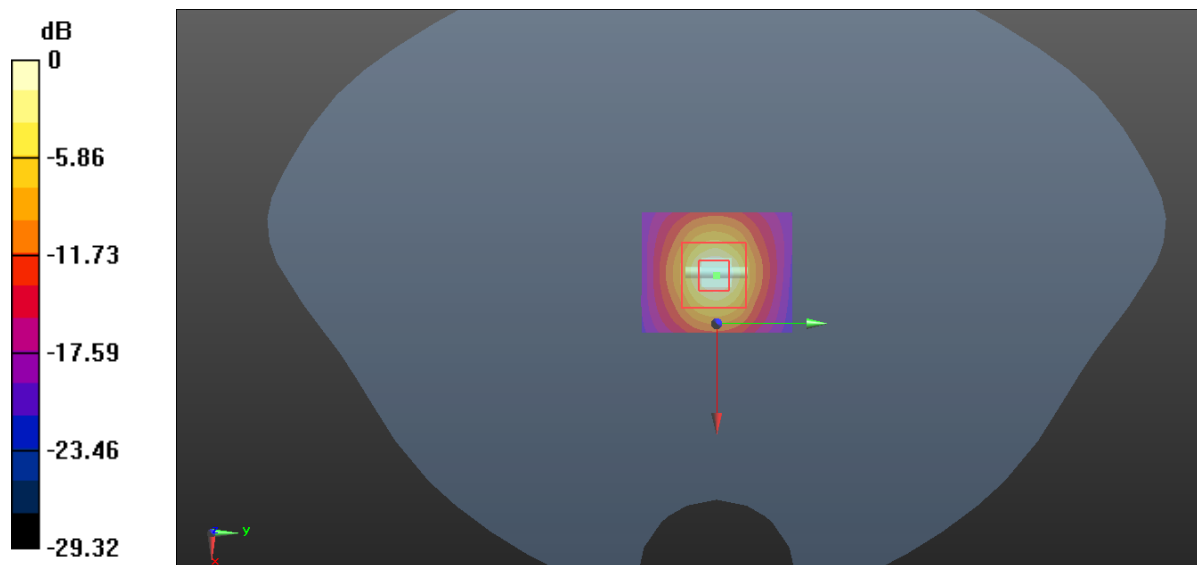

0 dB = 20.6 W/kg = 13.14 dBW/kg

**System Performance 5750 MHz was performed on 2023/11/24****DUT: D5GHzV2; Type: 5750 MHz; Serial: 1245**

Communication System: CW (0); Frequency: 5750 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 5750$  MHz;  $\sigma = 5.244$  S/m;  $\epsilon_r = 34.452$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(4.9, 4.9, 4.9) @ 5750 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head 5750MHz Pin=100mW/Area Scan (7x9x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 24.4 W/kg


**Zoom Scan (9x9x16)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 41.47 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 42.8 W/kg

**SAR(1 g) = 7.88 W/kg; SAR(10 g) = 2.27 W/kg**

Maximum value of SAR (measured) = 23.5 W/kg

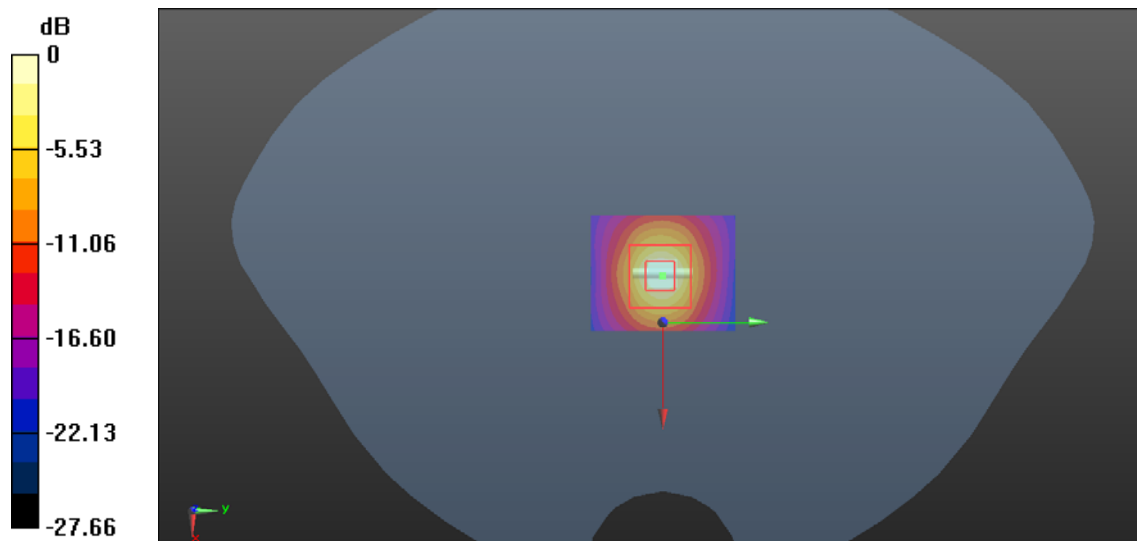

0 dB = 23.5 W/kg = 13.71 dBW/kg

## 5. EUT TEST STRATEGY AND METHODOLOGY

### 5.1 Test positions for body-worn and other configurations

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a headset output should be tested with a headset connected to the device. When multiple accessories that do not contain metallic components are supplied with the device, the device may be tested with only the accessory that dictates the closest spacing to the body. When multiple accessories that contain metallic components are supplied with the device, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (e.g., the same metallic belt-clip used with different holsters with no other metallic components), only the accessory that dictates the closest spacing to the body must be tested.

Body-worn accessories may not always be supplied or available as options for some devices that are intended to be authorized for body-worn use. A separation distance of 1.5 cm between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances. Other separation distances may be used, but they should not exceed 2.5 cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

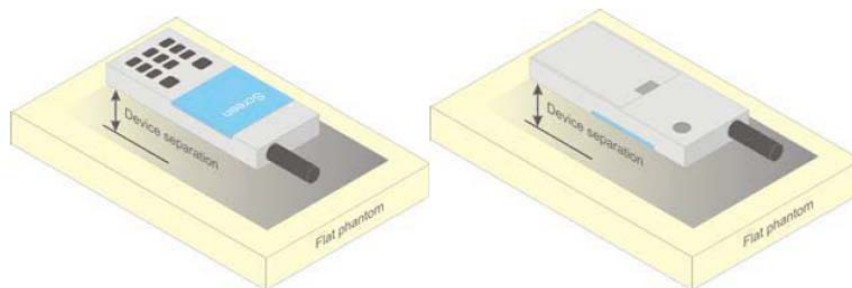


Figure 5 – Test positions for body-worn devices

### 5.2 Test Distance for SAR Evaluation

In this case the EUT(Equipment Under Test) is set 0mm away from the phantom, the test distance is 0mm.

### 5.3 SAR Evaluation Procedure

The evaluation was performed with the following procedure:

Step 1: Measurement of the SAR value at a fixed location above the ear point or central position was used as a reference value for assessing the power drop. The SAR at this point is measured at the start of the test and then again at the end of the testing.

Step 2: The SAR distribution at the exposed side of the head was measured at a distance of 4 mm from the inner surface of the shell. The area covered the entire dimension of the head or radiating structures of the EUT, the horizontal grid spacing was 15 mm x 15 mm, and the SAR distribution was determined by integrated grid of 1.5mm x 1.5mm. Based on these data, the area of the maximum absorption was determined by spline interpolation. The first Area Scan covers the entire dimension of the EUT to ensure that the hotspot was correctly identified.

Step 3: Around this point, a volume of 30 mm x 30 mm x 30 mm was assessed by measuring 7x 7 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:

1) The data at the surface were extrapolated, since the center of the dipoles is 1.2 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.

2) The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one dimensional splines with the "Not a knot"-condition (in x, y and z-directions). The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the averages.


All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement of the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation was repeated.

## 6. CONDUCTED OUTPUT POWER MEASUREMENT

### 6.1 Test Procedure

The RF output of the transmitter was connected to the input port of the Pulse Power Sensor through Connector.



BT/WLAN

### 6.2 Maximum Target Output Power

Max Target Power(dBm)			
Mode/Band	Channel		
	Low	Middle	High
WLAN 2.4G(802.11b) Chain 0	14.8	14.8	14.8
WLAN 2.4G(802.11g) Chain 0	13.9	13.9	13.9
WLAN 2.4G(802.11n ht20) Chain 0	14.5	14.5	14.5
WLAN 2.4G(802.11n ht40) Chain 0	14.2	14.2	14.2
WLAN 2.4G(802.11ax hew20) Chain 0	15	15	15
WLAN 2.4G(802.11ax hew40) Chain 0	15	15	15
WLAN 2.4G(802.11b) Chain 1	14.5	14.5	14.5
WLAN 2.4G(802.11g) Chain 1	14	14	14
WLAN 2.4G(802.11n ht20) Chain 1	15	15	15
WLAN 2.4G(802.11n ht40) Chain 1	14.8	14.8	14.8
WLAN 2.4G(802.11ax hew20) Chain 1	14.8	14.8	14.8
WLAN 2.4G(802.11ax hew40) Chain 1	14.8	14.8	14.8
WLAN 5.2G(802.11a) Chain 0	11.2	11.2	11.2
WLAN 5.2G(802.11n ht20) Chain 0	11.2	11.2	11.2
WLAN 5.2G(802.11n ht40) Chain 0	11	/	11
WLAN 5.2G(802.11ac 80) Chain 0	/	11	/
WLAN 5.2G(802.11ax hew20) Chain 0	11.2	11.2	11.2
WLAN 5.2G(802.11ax hew40) Chain 0	11.2	/	11.2
WLAN 5.2G(802.11ax hew80) Chain 0	/	11.1	/
WLAN 5.2G(802.11a) Chain 1	11.6	11.6	11.6
WLAN 5.2G(802.11n ht20) Chain 1	11.4	11.4	11.4
WLAN 5.2G(802.11n ht40) Chain 1	11.4	/	11.4
WLAN 5.2G(802.11ac 80) Chain 1	/	11.4	/
WLAN 5.2G(802.11ax hew20) Chain 1	11.5	11.5	11.5
WLAN 5.2G(802.11ax hew40) Chain 1	11.5	/	11.5
WLAN 5.2G(802.11ax hew80) Chain 1	/	11.5	/

Max Target Power(dBm)			
Mode/Band	Channel		
	Low	Middle	High
WLAN 5.3G(802.11a) Chain 0	11.3	11.3	11.3
WLAN 5.3G(802.11n ht20) Chain 0	11.2	11.2	11.2
WLAN 5.3G(802.11n ht40) Chain 0	11.1	/	11.1
WLAN 5.3G(802.11ac 80) Chain 0	/	11.1	/
WLAN 5.3G(802.11ax hew20) Chain 0	11.3	11.3	11.3
WLAN 5.3G(802.11ax hew40) Chain 0	11.2	/	11.2
WLAN 5.3G(802.11ax hew80) Chain 0	/	11.1	/
WLAN 5.3G(802.11a) Chain 1	11.3	11.3	11.3
WLAN 5.3G(802.11n ht20) Chain 1	11.2	11.2	11.2
WLAN 5.3G(802.11n ht40) Chain 1	11.4	/	11.4
WLAN 5.3G(802.11ac 80) Chain 1	/	11.2	/
WLAN 5.3G(802.11ax hew20) Chain 1	11.4	11.4	11.4
WLAN 5.3G(802.11ax hew40) Chain 1	11.4	/	11.4
WLAN 5.3G(802.11ax hew80) Chain 1	/	11.3	/
WLAN 5.6G(802.11a) Chain 0	10.9	10.9	10.9
WLAN 5.6G(802.11n ht20) Chain 0	10.9	10.9	10.9
WLAN 5.6G(802.11n ht40) Chain 0	10.6	10.6	10.6
WLAN 5.6G(802.11ac 80) Chain 0	10.9	10.9	10.9
WLAN 5.6G(802.11ax hew20) Chain 0	11	11	11
WLAN 5.6G(802.11ax hew40) Chain 0	10.7	10.7	10.7
WLAN 5.6G(802.11ax hew80) Chain 0	10.9	10.9	10.9
WLAN 5.6G(802.11a) Chain 1	10.9	10.9	10.9
WLAN 5.6G(802.11n ht20) Chain 1	11	11	11
WLAN 5.6G(802.11n ht40) Chain 1	11.2	11.2	11.2
WLAN 5.6G(802.11ac 80) Chain 1	11	11	11
WLAN 5.6G(802.11ax hew20) Chain 1	11.3	11.3	11.3
WLAN 5.6G(802.11ax hew40) Chain 1	11.3	11.3	11.3
WLAN 5.6G(802.11ax hew80) Chain 1	11.2	11.2	11.2
WLAN 5.8G(802.11a) Chain 0	10.8	10.8	10.8
WLAN 5.8G(802.11n ht20) Chain 0	11	11	11
WLAN 5.8G(802.11n ht40) Chain 0	11	/	11
WLAN 5.8G(802.11ac 80) Chain 0	/	11	/
WLAN 5.8G(802.11ax hew20) Chain 0	11.2	11.2	11.2
WLAN 5.8G(802.11ax hew40) Chain 0	11	/	11
WLAN 5.8G(802.11ax hew80) Chain 0	/	11.1	/

<b>Max Target Power(dBm)</b>			
<b>Mode/Band</b>	<b>Channel</b>		
	<b>Low</b>	<b>Middle</b>	<b>High</b>
WLAN 5.8G(802.11a) Chain 1	10.9	10.9	10.9
WLAN 5.8G(802.11n ht20) Chain 1	11.1	11.1	11.1
WLAN 5.8G(802.11n ht40) Chain 1	10.8	/	10.8
WLAN 5.8G (802.11ac 80) Chain 1	/	10.7	/
WLAN 5.8G(802.11ax hew20) Chain 1	11.2	11.2	11.2
WLAN 5.8G(802.11ax hew40) Chain 1	11	/	11
WLAN 5.8G(802.11ax hew80) Chain 1	/	10.9	/
Bluetooth BDR/EDR	6.0	8.0	8.0
BLE 1M	2.0	2.0	2.0
BLE 2M	2.0	2.0	2.0

**6.3 Test Results:****WLAN 2.4G:**

Mode	Channel frequency (MHz)	Duty cycle (%)	RF Average Output Power (dBm)		
			Chain 0	Chain 1	Total
802.11b	2412	100	13.87	14.2	/
	2437		14.54	14.42	/
	2467		13.54	13.8	/
	2472		13.53	13.79	/
802.11g	2412	75.13	13.34	13.58	/
	2437		13.71	13.75	/
	2467		12.49	12.52	/
	2472		5.49	8.39	/
802.11n ht20	2412	88.81	13.65	13	16.35
	2437		14.38	<b>14.91</b>	17.66
	2467		13.79	12.59	16.24
	2472		7.47	7.37	10.43
802.11n ht40	2422	89.01	13.71	13.35	16.54
	2437		14.01	14.64	17.35
	2457		12.11	12.25	15.19
	2462		10.85	10.14	13.52
802.11ax hew20	2412	85.02	14.83	14.02	17.45
	2437		14.89	14.56	17.74
	2467		14.16	14.07	17.13
	2472		7.73	8.16	10.96
802.11ax hew40	2422	77.36	14.79	14.52	17.67
	2437		13.94	13.81	16.89
	2457		11.55	11.63	14.60
	2462		9.91	9.98	12.96



**Wi-Fi 5.2G:**

Mode	Channel frequency (MHz)	Duty cycle (%)	RF Average Output Power (dBm)		
			Chain 0	Chain 1	Total
802.11a	5180	78.24	11.03	<b>11.49</b>	/
	5200		10.99	11.43	/
	5240		10.68	11.04	/
802.11n ht20	5180	87.99	11.01	10.94	14
	5200		10.82	10.87	13.86
	5240		10.74	11.31	14.04
802.11n ht40	5190	88.34	10.83	11.25	14.06
	5230		10.68	11.03	13.87
802.11ac vht80	5210	88.03	10.93	11.25	14.1
802.11ax hew20	5180	85.34	<b>11.07</b>	11.24	14.17
	5200		11.04	11.09	14.08
	5240		10.76	11.36	14.08
802.11ax hew40	5190	79.05	11.04	11.35	14.21
	5230		10.74	11.24	14.01
802.11ax hew80	5210	78.67	11	11.42	14.23

**Wi-Fi 5.3G:**

Mode	Channel frequency (MHz)	Duty cycle (%)	RF Average Output Power (dBm)		
			Chain 0	Chain 1	Total
802.11a	5260	78.24	10.84	11.03	/
	5280		11.03	10.80	/
	5320		11.12	11.24	/
802.11n ht20	5260	87.99	10.87	11.06	13.98
	5280		10.95	11.06	14.02
	5320		11.03	11.08	14.07
802.11n ht40	5270	88.34	10.79	11.27	14.05
	5310		10.96	11.2	14.09
802.11ac vht80	5290	88.03	10.97	11.11	14.05
802.11ax hew20	5260	85.34	10.99	11.15	14.08
	5280		11.13	11.21	14.18
	5320		<b>11.19</b>	<b>11.34</b>	14.28
802.11ax hew40	5270	79.05	10.86	11.31	14.1
	5310		11.10	11.17	14.15
802.11ax hew80	5290	78.67	10.99	11.14	14.08

**Wi-Fi 5.6G:**

Mode	Channel frequency (MHz)	Duty cycle (%)	RF Average Output Power (dBm)		
			Chain 0	Chain 1	Total
802.11a	5500	78.24	10.74	10.8	/
	5580		10.32	10.6	/
	5700		10.72	10.92	/
	5720		10.76	10.83	/
802.11n ht20	5500	87.99	10.78	10.95	13.88
	5580		10.63	10.66	13.66
	5700		10.68	10.53	13.62
	5720		10.73	10.87	13.81
802.11n ht40	5510	88.34	10.44	11.12	13.8
	5550		10.4	10.62	13.52
	5670		10.43	10.35	13.4
	5710		10.54	10.31	13.44
802.11ac vht80	5530	88.03	10.78	10.83	13.82
	5610		10.68	10.67	13.69
	5690		10.59	10.78	13.7
802.11ax hew20	5500	85.34	10.78	<b>11.24</b>	14.03
	5580		10.83	11.12	13.99
	5700		10.75	10.62	13.7
	5720		<b>10.86</b>	10.97	13.93
802.11ax hew40	5510	79.05	10.63	11.23	13.95
	5550		10.68	10.81	13.76
	5670		10.57	10.54	13.57
	5710		10.54	10.46	13.51
802.11ax hew80	5530	78.67	10.81	11.1	13.97
	5610		10.8	10.84	13.83
	5690		10.81	10.81	13.82

**Wi-Fi 5.8G:**


Mode	Channel frequency (MHz)	Duty cycle (%)	RF Average Output Power (dBm)		
			Chain 0	Chain 1	Total
802.11a	5745	78.24	10.65	10.74	/
	5785		10.48	10.8	/
	5825		10.15	10.44	/
802.11n ht20	5745	87.99	10.95	11.04	14.01
	5785		10.79	10.65	13.73
	5825		10.44	10.72	13.59
802.11n ht40	5755	88.34	10.84	10.69	13.78
	5795		10.36	10.52	13.45
802.11ac vht80	5775	88.03	10.85	10.62	13.75
802.11ax hew20	5745	85.34	<b>11.06</b>	<b>11.08</b>	14.08
	5785		10.9	10.87	13.9
	5825		10.38	11.03	13.73
802.11ax hew40	5755	79.05	10.86	10.86	13.87
	5795		10.61	10.66	13.65
802.11ax hew80	5775	78.67	11	10.74	13.88

**Bluetooth:**

Mode	Channel frequency (MHz)	Peak Conducted Output Power (dBm)
BDR(GFSK)	2402	5.68
	2441	6.3
	2480	7.03
EDR( $\pi/4$ -DQPSK)	2402	6.26
	2441	7.03
	2480	7.83
EDR(8DPSK)	2402	6.49
	2441	7.05
	2480	<b>7.87</b>
BLE_1M	2402	0.45
	2440	0.99
	2480	1.74
BLE_2M	2402	0.43
	2440	0.99
	2480	<b>1.79</b>

## 7. Standalone SAR test exclusion considerations

### Antennas Location:

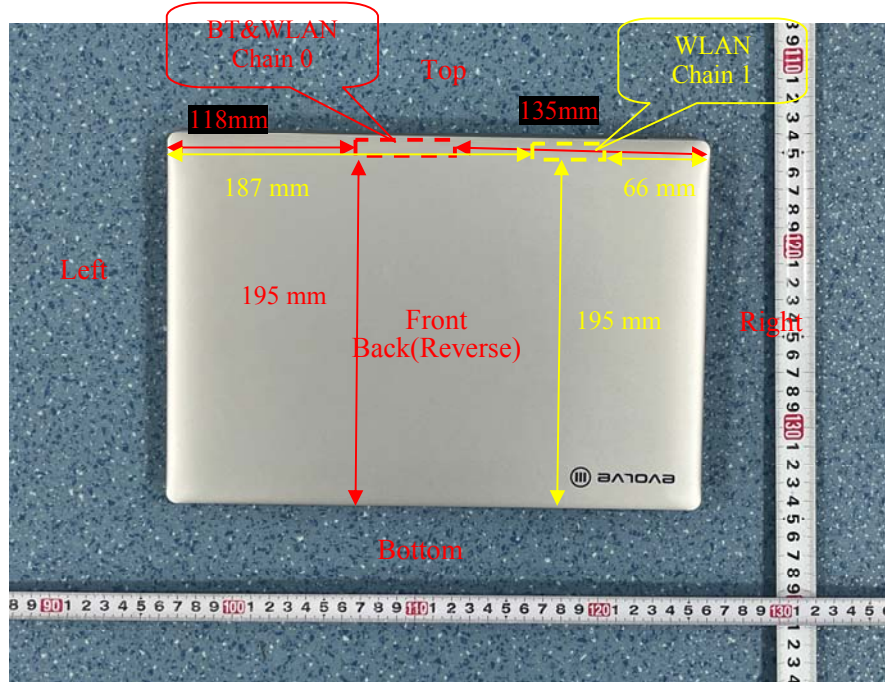

### 7.1 Antenna Distance To Edge

Antenna Distance To Edge(mm)						
Antenna	Front	Back	Left	Right	Top	Bottom
BT&WLAN Chain 0	< 5	< 5	118	135	< 5	195
WLAN Chain 1	< 5	< 5	187	66	< 5	195

### 7.2 Standalone SAR test exclusion considerations

Mode	Frequency (MHz)	Output Power (dBm)	Output Power (mW)	Distance (mm)	Calculated value	Threshold (1-g)	SAR Test Exclusion
WLAN 2.4G	2472	15	31.62	0	9.9	3	NO
WLAN 5.2G	5240	11.6	14.45	0	6.6	3	NO
WLAN 5.3G	5320	11.4	13.8	0	6.4	3	NO
WLAN 5.6G	5720	11.3	13.49	0	6.5	3	NO
WLAN 5.8G	5825	11.2	13.18	0	6.4	3	NO
Bluetooth	2480	8.0	6.31	0	2.0	3	YES

*Note: The bluetooth based peak power for calculation, and Wi-Fi based average power for calculation.*

#### NOTE:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$$\left[ \frac{(\text{max. power of channel, including tune-up tolerance, mW})}{(\text{min. test separation distance, mm})} \right] \cdot \sqrt{f(\text{GHz})} \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR, where}$$

1. f(GHz) is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

### 7.3 Standalone SAR estimation:

Mode	Frequency (MHz)	Output Power (dBm)	Output Power (mW)	Distance (mm)	Estimated 1-g (W/kg)
BT Body	2480	8.0	6.31	0	0.26

*Note: The bluetooth based peak power for calculation.*

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$$\left[ \frac{\text{max. power of channel, including tune-up tolerance, mW}}{(\text{min. test separation distance, mm})} \right] \cdot \left[ \sqrt{f(\text{GHz})} / x \right]$$

W/kg for test separation distances  $\leq 50$  mm;

where  $x = 7.5$  for 1-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion

### 7.4 Standalone SAR test exclusion considerations:

Mode	Frequency (MHz)	Pavg (dBm)	Pavg (mW)	Test exclusion Threshold (mm)
WLAN 2.4G	2472	15	31.62	16.6
WLAN 5.2G	5240	11.6	14.45	11.1
WLAN 5.3G	5320	11.4	13.8	10.7
WLAN 5.6G	5720	11.3	13.49	10.9
WLAN 5.8G	5825	11.2	13.18	10.7

**Note:** The maximum time based average power is used for calculation.

SAR test exclusion for the EUT edge considerations detail:

#### Distance < 50mm (To Edges)

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$$\left[ \frac{\text{max. power of channel, including tune-up tolerance, mW}}{(\text{min. test separation distance, mm})} \right] \cdot \left[ \sqrt{f(\text{GHz})} \right] \leq 3.0$$

for 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR, where

1. f(GHz) is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

#### Distance > 50mm (To Edges)

At 100 MHz to 6 GHz and for test separation distances > 50 mm, the SAR test exclusion threshold is determined according to the following:

- a. [Power allowed at numeric threshold for 50 mm in step 1) + (test separation distance - 50 mm) · (f(MHz)/150)] mW, at 100 MHz to 1500 MHz
- b. [Power allowed at numeric threshold for 50 mm in step 1) + (test separation distance - 50 mm) · 10] mW at > 1500 MHz and ≤ 6 GHz.

### 7.5 SAR test exclusion for the EUT edge considerations Result

According to KDB 616217 Section 4.3, SAR evaluation for the front surface of tablet display screens are generally not necessary.

Mode	Back Edge	Left Edge	Right Edge	Top Edge	Bottom Edge
WLAN 2.4G	<b>Required</b>	Exclusion	Exclusion	<b>Required</b>	Exclusion
WLAN 5.2G	<b>Required</b>	Exclusion	Exclusion	<b>Required</b>	Exclusion
WLAN 5.3G	<b>Required</b>	Exclusion	Exclusion	<b>Required</b>	Exclusion
WLAN 5.6G	<b>Required</b>	Exclusion	Exclusion	<b>Required</b>	Exclusion
WLAN 5.8G	<b>Required</b>	Exclusion	Exclusion	<b>Required</b>	Exclusion
Bluetooth	Exclusion*	Exclusion*	Exclusion*	Exclusion*	Exclusion*

**Note:**

Required: The distance is less than **Test Exclusion Distance**, the SAR test is required.

Exclusion\*: SAR test exclusion evaluation has been done above.

Exclusion: The distance is large than **Test Exclusion Distance**, SAR test is not required.



## 8. SAR MEASUREMENT RESULTS

---

This page summarizes the results of the performed dosimetric evaluation.

### 8.1 SAR Test Data

#### Environmental Conditions

<b>Temperature:</b>	22.4-23.7 °C
<b>Relative Humidity:</b>	47 %
<b>ATM Pressure:</b>	101.1 kPa
<b>Test Date:</b>	2023/11/24

*Testing was performed by Leo Lu, Aixlee Li.*

**WLAN 2.4G Chain 0:**

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)				
					Power Scaled Factor	Duty cycle Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Back (0mm)	2412	802.11b	/	/	/	/	/	/	/
	2437	802.11b	14.54	14.8	1.062	1	0.372	0.40	1#
	2467	802.11b							
	2472	802.11b	/	/	/	/	/	/	/
Body Top (0mm)	2412	802.11b	/	/	/	/	/	/	/
	2437	802.11b	14.54	14.8	1.062	1	0.569	0.60	2#
	2467	802.11b							
	2472	802.11b	/	/	/	/	/	/	/

**WLAN 2.4G Chain 1:**

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)				
					Power Scaled Factor	Duty cycle Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Back (0mm)	2412	802.11b	/	/	/	/	/	/	/
	2437	802.11b	14.42	14.5	1.019	1	0.261	0.27	3#
	2467	802.11b	/	/	/	/	/	/	/
	2472	802.11b							
Body Top (0mm)	2412	802.11b	/	/	/	/	/	/	/
	2437	802.11b	14.42	14.5	1.019	1	0.351	0.36	4#
	2467	802.11b	/	/	/	/	/	/	/
	2472	802.11b							

**Note:**

1. When the 1-g SAR is  $\leq 0.8$ W/kg, testing for other channels are optional.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
3. For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure. When OFDM tune up power is greater than DSSS, the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg, OFDM SAR is not required.
4. When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11g/n/ax mode is use for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.
5. According 2016 Oct. TCB Workshop, for SAR testing of 2.4G WIFI 802.11b signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)".

**2.4GHz 802.11g/n OFDM SAR Test Exclusion Consideration:****WLAN 2.4G Chain 0:**

Modulation Mode	Pavg (dBm)	Pavg (mW)	Reported SAR (W/Kg)	Adjusted SAR (W/kg)	Limit (W/Kg)	SAR Test Exclusion
802.11b(DSSS)	14.8	30.20	0.6	/	/	/
802.11g(OFDM)	13.9	24.55	/	0.49	1.2	Yes
802.11n(OFDM)	14.5	28.18	/	0.56	1.2	Yes
802.11ax(OFDM)	15	31.62	/	0.63	1.2	Yes

**WLAN 2.4G Chain 1:**

Modulation Mode	Pavg (dBm)	Pavg (mW)	Reported SAR (W/Kg)	Adjusted SAR (W/kg)	Limit (W/Kg)	SAR Test Exclusion
802.11b(DSSS)	14.5	28.18	0.36	/	/	/
802.11g(OFDM)	14	25.12	/	0.53	1.2	Yes
802.11n(OFDM)	15	31.62	/	0.67	1.2	Yes
802.11ax(OFDM)	14.8	30.20	/	0.64	1.2	Yes

**Note:**

According to section 5.2.2 of KDB 248227 D01, When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg, SAR is not required for 2.4 GHz OFDM conditions.

**WLAN 5.2G Chain 0:**

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)				
					Power Scaled Factor	Duty cycle Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Back (0mm)	5180	802.11n20	/	/	/	/	/	/	/
	5200	802.11n20	10.82	11.2	1.091	1.136	0.109	0.14	5#
	5240	802.11n20	/	/	/	/	/	/	/
Body Top (0mm)	5180	802.11n20	/	/	/	/	/	/	/
	5200	802.11n20	10.82	11.2	1.091	1.172	0.332	0.42	6#
	5240	802.11n20	/	/	/	/	/	/	/

**Note:**

1. When the 1-g SAR is  $\leq 0.8\text{W/kg}$ , testing for other channels are optional.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
3. When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/n20/n40/ac80/ax20/ax40/ac80 mode is use for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band, 802.11n20 is the initial position for the SAR test.
4. According to 2016 Oct. TCB Workshop, for SAR testing of 5G WIFI 802.11n20 signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)".

**WLAN 5.2G Chain 1:**

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)				
					Power Scaled Factor	Duty cycle Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Back (0mm)	5180	802.11a	/	/	/	/	/	/	/
	5200	802.11a	11.43	11.6	1.04	1.278	0.109	0.14	7#
	5240	802.11a	/	/	/	/	/	/	/
Body Top (0mm)	5180	802.11a	/	/	/	/	/	/	/
	5200	802.11a	11.43	11.6	1.04	1.278	0.311	0.41	8#
	5240	802.11a	/	/	/	/	/	/	/

**Note:**

1. When the 1-g SAR is  $\leq 0.8\text{W/kg}$ , testing for other channels are optional.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
3. When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order

802.11a/n20/n40/ac80/ax20/ax40/ac80 mode is use for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band, 802.11a is the initial position for the SAR test.  
4. According to 2016 Oct. TCB Workshop, for SAR testing of 5G WIFI 802.11a signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to “1/( duty cycle)”.

**WLAN 5.3G Chain 0:**

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)				
					Power Scaled Factor	Duty cycle Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Back (0mm)	5260	802.11a	/	/	/	/	/	/	/
	5280	802.11a	11.03	11.3	1.064	1.278	0.16	0.22	9#
	5320	802.11a	/	/	/	/	/	/	/
Body Top (0mm)	5260	802.11a	/	/	/	/	/	/	/
	5280	802.11a	11.03	11.3	1.064	1.278	0.288	0.39	10#
	5320	802.11a	/	/	/	/	/	/	/

**Note:**

1. When the 1-g SAR is  $\leq 0.8\text{W/kg}$ , testing for other channels are optional.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
3. When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/n20/n40/ac80/ax20/ax40/ac80 mode is use for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band, 802.11a is the initial position for the SAR test.
4. According to 2016 Oct. TCB Workshop, for SAR testing of 5G WIFI 802.11a signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)".

**WLAN 5.3G Chain 1:**

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)				
					Power Scaled Factor	Duty cycle Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Back (0mm)	5260	802.11ax20	/	/	/	/	/	/	/
	5280	802.11ax20	11.21	11.4	1.045	1.172	0.134	0.16	11#
	5320	802.11ax20	/	/	/	/	/	/	/
Body Top (0mm)	5260	802.11ax20	/	/	/	/	/	/	/
	5280	802.11ax20	11.21	11.4	1.045	1.172	0.345	0.42	12#
	5320	802.11ax20	/	/	/	/	/	/	/

**Note:**

1. When the 1-g SAR is  $\leq 0.8\text{W/kg}$ , testing for other channels are optional.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
3. When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/n20/n40/ac80/ax20/ax40/ac80 mode is use for SAR measurement, on the highest measured output power

channel in the initial test configuration, for each frequency band, 802.11ax20 is the initial position for the SAR test.

4. According to 2016 Oct. TCB Workshop, for SAR testing of 5G WIFI 802.11ax20 signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to “1/( duty cycle)”.

**WLAN 5.6G Chain 0:**

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)				
					Power Scaled Factor	Duty cycle Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Back (0mm)	5500	802.11ax20	/	/	/	/	/	/	/
	5580	802.11ax20	10.83	11	1.04	1.172	0.145	0.18	13#
	5700	802.11ax20	/	/	/	/	/	/	/
	5720	802.11ax20	/	/	/	/	/	/	/
Body Top (0mm)	5500	802.11ax20	/	/	/	/	/	/	/
	5580	802.11ax20	10.83	11	1.04	1.172	0.316	0.39	14#
	5700	802.11ax20	/	/	/	/	/	/	/
	5720	802.11ax20	/	/	/	/	/	/	/

**WLAN 5.6G Chain 1:**

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)				
					Power Scaled Factor	Duty cycle Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Back (0mm)	5500	802.11ax20	/	/	/	/	/	/	/
	5580	802.11ax20	11.12	11.3	1.042	1.172	0.133	0.16	15#
	5700	802.11ax20	/	/	/	/	/	/	/
Body Top (0mm)	5500	802.11ax20	/	/	/	/	/	/	/
	5580	802.11ax20	11.12	11.3	1.042	1.172	0.415	0.51	16#
	5700	802.11ax20	/	/	/	/	/	/	/

**Note:**

1. When the 1-g SAR is  $\leq 0.8\text{W/kg}$ , testing for other channels are optional.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
3. When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/n20/n40/ac80/ax20/ax40/ac80 mode is use for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band, 802.11ax20 is the initial position for the SAR test.
4. According to 2016 Oct. TCB Workshop, for SAR testing of 5G WIFI 802.11ax20 signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/( duty cycle)".



**WLAN 5.8G Chain 0:**

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)				
					Power Scaled Factor	Duty cycle Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Back (0mm)	5745	802.11ax20	/	/	/	/	/	/	/
	5785	802.11ax20	10.9	11.2	1.072	1.172	0.129	0.16	17#
	5825	802.11ax20	/	/	/	/	/	/	/
Body Top (0mm)	5745	802.11ax20	/	/	/	/	/	/	/
	5785	802.11ax20	10.9	11.2	1.072	1.172	0.243	0.31	18#
	5825	802.11ax20	/	/	/	/	/	/	/

**WLAN 5.8G Chain 1:**

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)				
					Power Scaled Factor	Duty cycle Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Back (0mm)	5745	802.11ax20	/	/	/	/	/	/	/
	5785	802.11ax20	10.87	11.2	1.079	1.172	0.122	0.15	19#
	5825	802.11ax20	/	/	/	/	/	/	/
Body Top (0mm)	5745	802.11ax20	/	/	/	/	/	/	/
	5785	802.11ax20	10.87	11.2	1.079	1.172	0.297	0.38	20#
	5825	802.11ax20	/	/	/	/	/	/	/

**Note:**

1. When the 1-g SAR is  $\leq 0.8\text{W/kg}$ , testing for other channels are optional.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
3. When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/n20/n40/ac80/ax20/ax40/ac80 mode is use for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band, 802.11ax20 is the initial position for the SAR test.
4. According to 2016 Oct. TCB Workshop, for SAR testing of 5G WIFI 802.11ax20 signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)".

## 9. Measurement Variability

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz v01. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results

- 1) Repeated measurement is not required when the original highest measured SAR is  $< 0.80$  W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$  W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

*Note: The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.*

### The Highest Measured SAR Configuration in Each Frequency Band

#### Body

SAR probe calibration point	Frequency Band	Freq.(MHz)	EUT Position	Meas. SAR (W/kg)		Largest to Smallest SAR Ratio
				Original	Repeated	
/	/	/	/	/	/	/

#### Note:

1. Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not  $> 1.20$ .
2. The measured SAR results **do not** have to be scaled to the maximum tune-up tolerance to determine if repeated measurements are required.
3. SAR measurement variability must be assessed for each frequency band, which is determined by the **SAR probe calibration point and tissue-equivalent medium** used for the device measurements.

## 10. SAR SIMULTANEOUS TRANSMISSION DESCRIPTION

### Simultaneous Transmission:

Description of Simultaneous Transmit Capabilities		
Transmitter Combination	Simultaneous?	Hotspot?
WLAN 2.4G Chain 0+ WLAN 2.4G Chain 1	√	√
WLAN 5G Chain 0+ WLAN 5G Chain 1	√	×
2.4G/5G WLAN Chain 0+ BT	×	×
2.4G/5G WLAN Chain 1+ BT	√	×

### Simultaneous SAR test exclusion considerations:

Mode(SAR1+SAR2)	Position	Reported SAR(W/kg)		$\Sigma$ SAR < 1.6W/kg
		SAR1	SAR2	
WLAN 2.4G Chain 0+ WLAN 2.4G Chain 1	Body	0.60	0.36	0.96
WLAN 5.2G Chain 0+ WLAN 5.2G Chain 1		0.42	0.41	0.83
WLAN 5.3G Chain 0+ WLAN 5.3G Chain 1		0.39	0.42	0.81
WLAN 5.6G Chain 0+ WLAN 5.6G Chain 1		0.39	0.51	0.9
WLAN 5.8G Chain 0+ WLAN 5.8G Chain 1		0.31	0.38	0.69
2.4G/5G WLAN Chain 1+ BT		0.51	0.26	0.77

### Conclusion:

Sum of SAR:  $\Sigma$ SAR  $\leq$  1.6 W/kg therefore simultaneous transmission SAR with Volume Scans is **not required**.

## 11. SAR Plots

### Plot 1#:2.4G Wi-Fi\_Mid\_Body Back Chain 0

**DUT: Laptop; Type: T3P116V1; Serial: 2CHV-4**


Communication System: 802.11 b (0); Frequency: 2437 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.753$  S/m;  $\epsilon_r = 39.383$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @ 2437 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (9x13x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (measured) = 0.660 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 3.084 V/m; Power Drift = -0.12 dB  
Peak SAR (extrapolated) = 0.728 W/kg  
**SAR(1 g) = 0.372 W/kg; SAR(10 g) = 0.160 W/kg**  
Maximum value of SAR (measured) = 0.574 W/kg

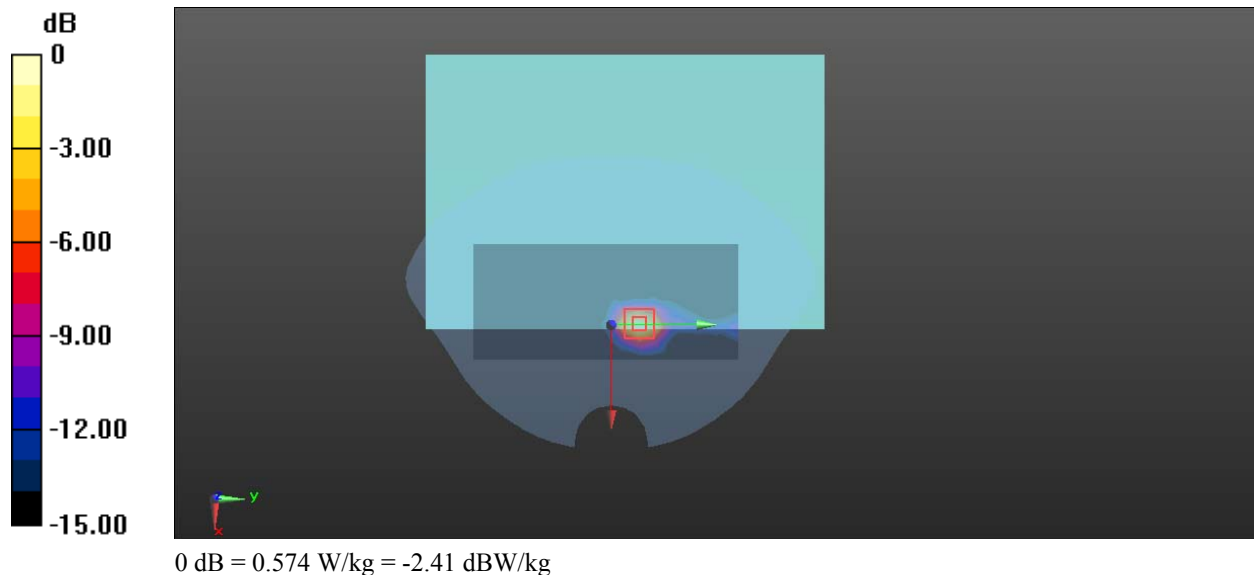

**Plot 2#:2.4G Wi-Fi\_Mid\_Body Top Chain 0****DUT: Laptop; Type: T3P116V1; Serial: 2CHV-4**


Communication System: 802.11 b (0); Frequency: 2437 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.753$  S/m;  $\epsilon_r = 39.383$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @ 2437 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (9x13x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (measured) = 0.825 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 13.83 V/m; Power Drift = 0.08 dB  
Peak SAR (extrapolated) = 0.985 W/kg  
**SAR(1 g) = 0.569 W/kg; SAR(10 g) = 0.252 W/kg**  
Maximum value of SAR (measured) = 0.860 W/kg

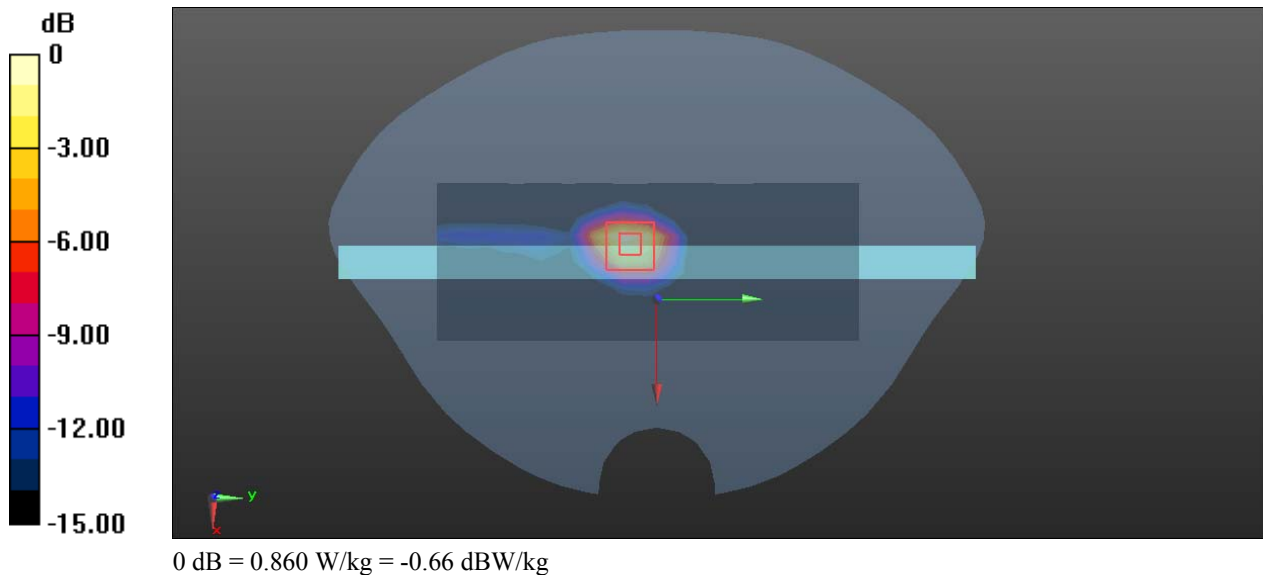

**Plot 3#:2.4G Wi-Fi\_Mid\_Body Back Chain 1****DUT: Laptop; Type: T3P116V1; Serial: 2CHV-4**


Communication System: 802.11 b (0); Frequency: 2437 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.753$  S/m;  $\epsilon_r = 39.383$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @ 2437 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (9x13x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (measured) = 0.383 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 2.331 V/m; Power Drift = 0.14 dB  
Peak SAR (extrapolated) = 0.498 W/kg  
**SAR(1 g) = 0.261 W/kg; SAR(10 g) = 0.121 W/kg**  
Maximum value of SAR (measured) = 0.391 W/kg

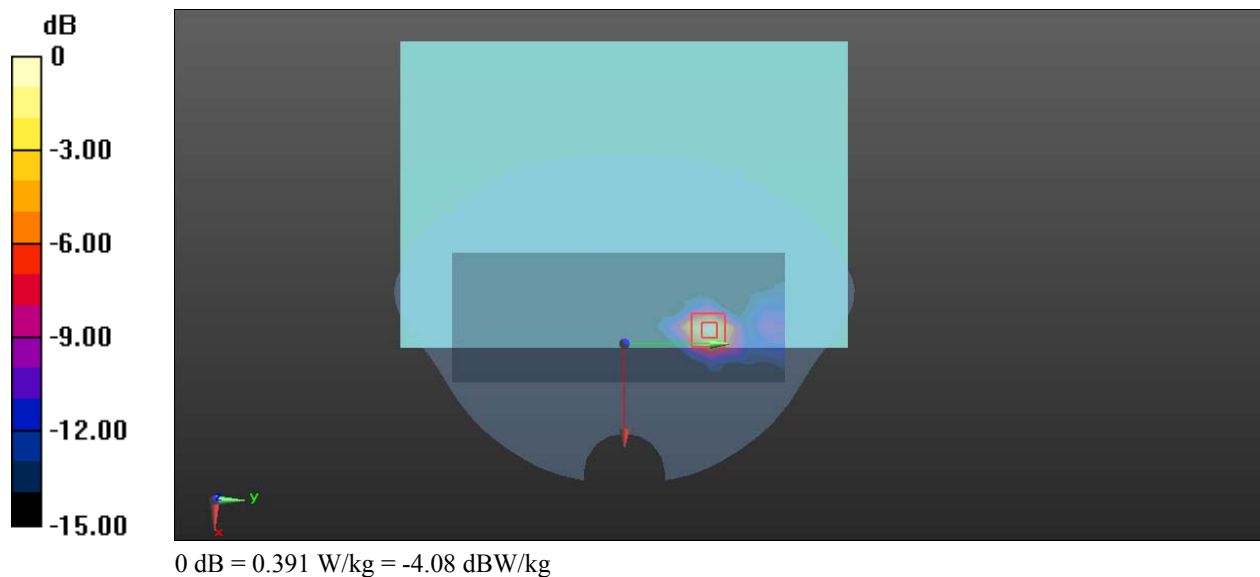

**Plot 4#:2.4G Wi-Fi\_Mid\_Body Top Chain 1****DUT: Laptop; Type: T3P116V1; Serial: 2CHV-4**


Communication System: 802.11 b (0); Frequency: 2437 MHz;Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.753$  S/m;  $\epsilon_r = 39.383$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @ 2437 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x16x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (measured) = 0.508 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 2.072 V/m; Power Drift = 0.11 dB  
Peak SAR (extrapolated) = 0.600 W/kg  
**SAR(1 g) = 0.351 W/kg; SAR(10 g) = 0.157 W/kg**  
Maximum value of SAR (measured) = 0.491 W/kg

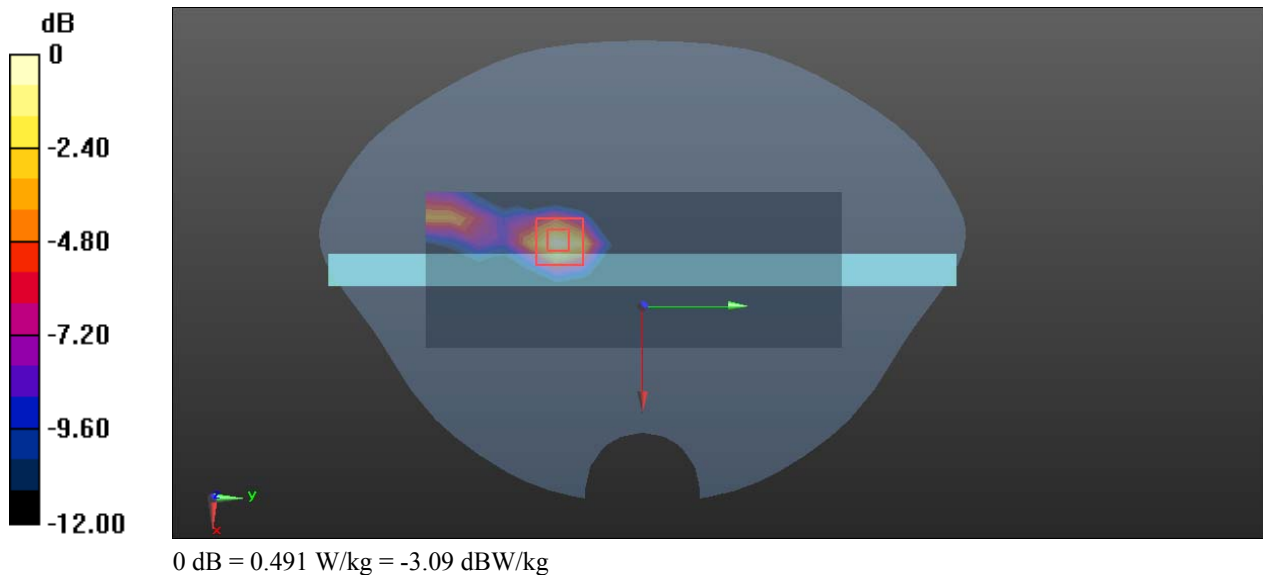

**Plot 5#:5.2G Wi-Fi\_Mid\_Body Back Chain 0****DUT: Laptop; Type: T3P116V1; Serial: 2CHV-4**


Communication System: 802.11 n20 (0); Frequency: 5200 MHz; Duty Cycle: 1:1.136  
Medium parameters used:  $f = 5200$  MHz;  $\sigma = 4.671$  S/m;  $\epsilon_r = 36.215$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5200 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x21x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 0.174 W/kg

**Zoom Scan (9x9x16)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm  
Reference Value = 2.555 V/m; Power Drift = 0.16 dB  
Peak SAR (extrapolated) = 0.339 W/kg  
**SAR(1 g) = 0.109 W/kg; SAR(10 g) = 0.071 W/kg**  
Maximum value of SAR (measured) = 0.186 W/kg

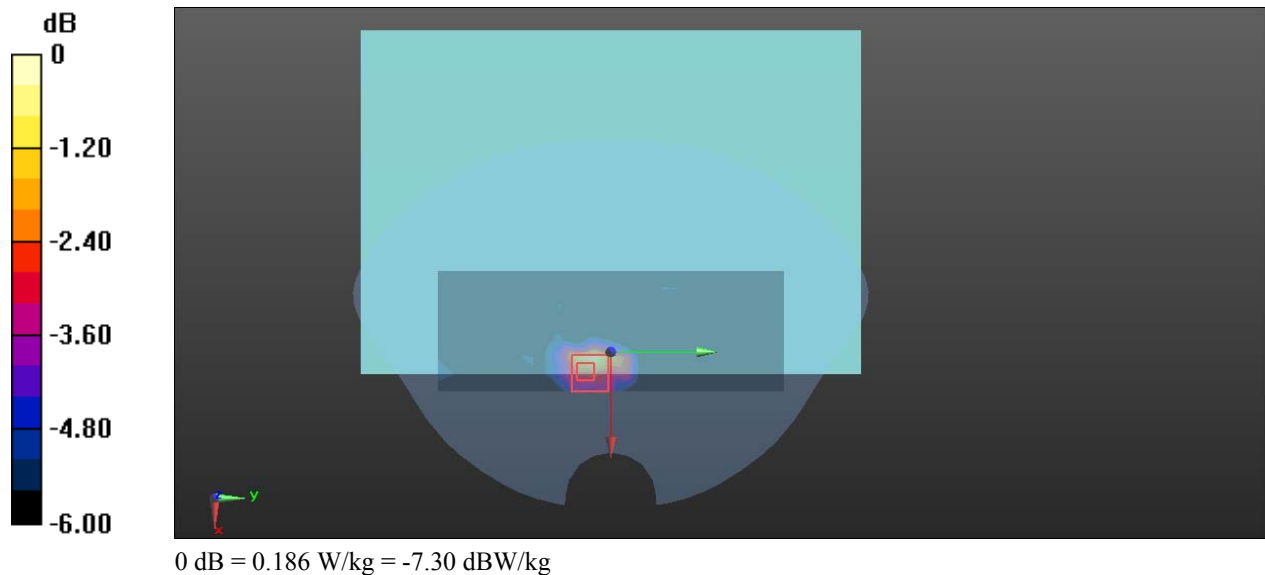



**Plot 6#:5.2G Wi-Fi\_Mid\_Body Top Chain 0****DUT: Laptop; Type: T3P116V1; Serial: 2CHV-4**


Communication System: 802.11 n20 (0); Frequency: 5200 MHz; Duty Cycle: 1:1.136  
Medium parameters used:  $f = 5200$  MHz;  $\sigma = 4.671$  S/m;  $\epsilon_r = 36.215$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5200 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x15x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 0.464 W/kg

**Zoom Scan (9x9x16)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm  
Reference Value = 13.57 V/m; Power Drift = -0.15 dB  
Peak SAR (extrapolated) = 1.35 W/kg  
**SAR(1 g) = 0.332 W/kg; SAR(10 g) = 0.181 W/kg**  
Maximum value of SAR (measured) = 0.631 W/kg

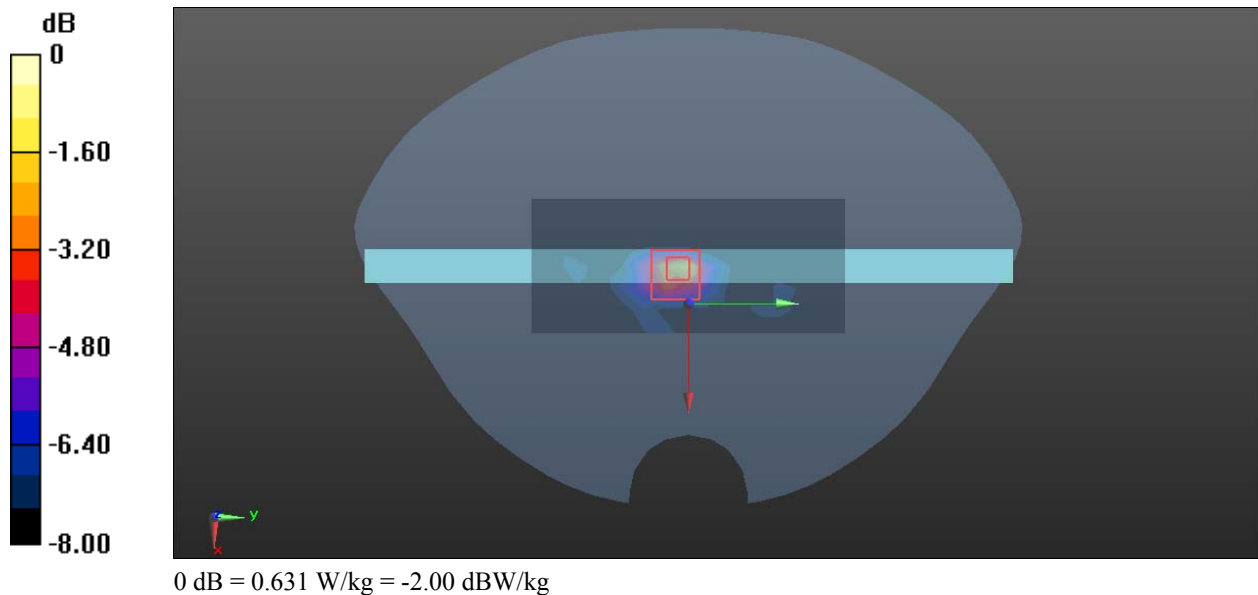

**Plot 7#:5.2G Wi-Fi\_Mid\_Body Back Chain 1****DUT: Laptop; Type: T3P116V1; Serial: 2CHV-4**


Communication System: 802.11 a (0); Frequency: 5200 MHz; Duty Cycle: 1:1.278  
Medium parameters used:  $f = 5200$  MHz;  $\sigma = 4.671$  S/m;  $\epsilon_r = 36.215$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5200 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x17x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 0.246 W/kg

**Zoom Scan (9x9x16)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm  
Reference Value = 2.772 V/m; Power Drift = -0.10 dB  
Peak SAR (extrapolated) = 0.679 W/kg  
**SAR(1 g) = 0.109 W/kg; SAR(10 g) = 0.062 W/kg**  
Maximum value of SAR (measured) = 0.205 W/kg

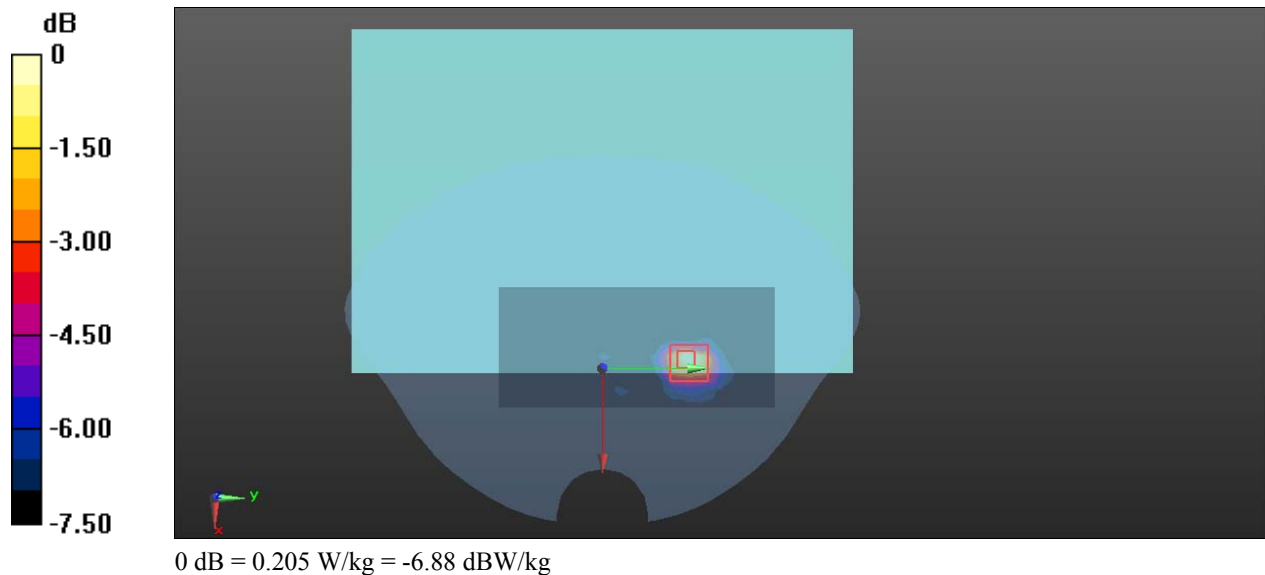

**Plot 8#:5.2G Wi-Fi\_Mid\_Body Top Chain 1****DUT: Laptop; Type: T3P116V1; Serial: 2CHV-4**


Communication System: 802.11 a (0); Frequency: 5200 MHz; Duty Cycle: 1:1.278  
Medium parameters used:  $f = 5200$  MHz;  $\sigma = 4.671$  S/m;  $\epsilon_r = 36.215$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5200 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x19x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 0.512 W/kg

**Zoom Scan (9x9x16)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm  
Reference Value = 11.57 V/m; Power Drift = -0.19 dB  
Peak SAR (extrapolated) = 1.90 W/kg  
**SAR(1 g) = 0.311 W/kg; SAR(10 g) = 0.154 W/kg**  
Maximum value of SAR (measured) = 0.573 W/kg

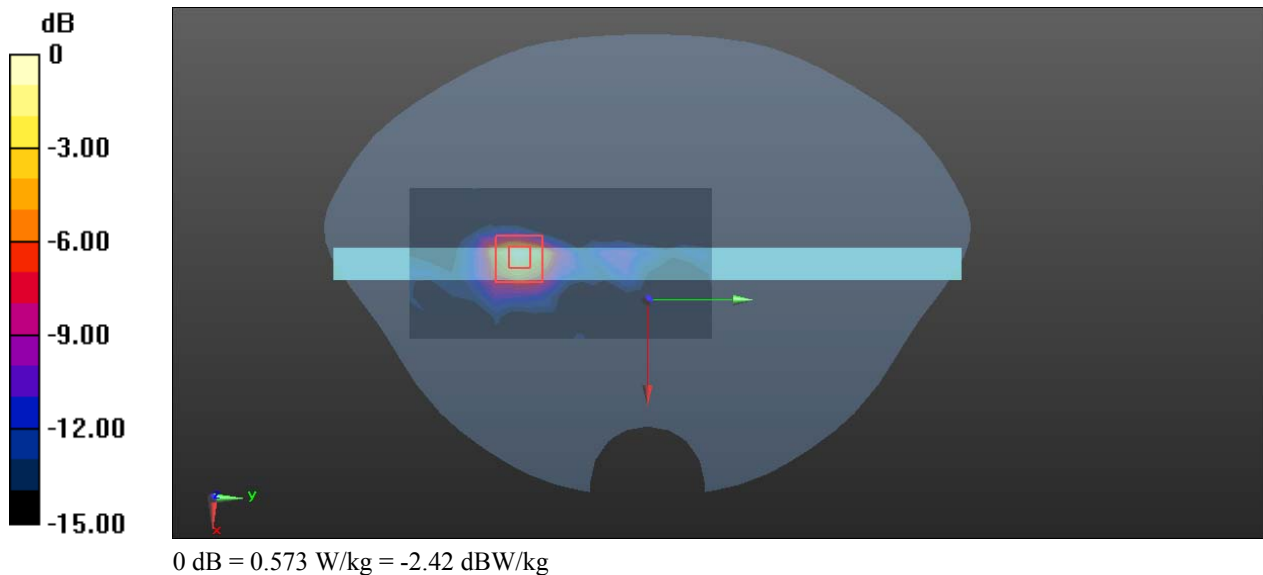

**Plot 9#:5.3G Wi-Fi\_Mid\_Body Back Chain 0****DUT: Laptop; Type: T3P116V1; Serial: 2CHV-4**


Communication System: 802.11 a (0); Frequency: 5280 MHz; Duty Cycle: 1:1.278  
Medium parameters used:  $f = 5280$  MHz;  $\sigma = 4.792$  S/m;  $\epsilon_r = 35.095$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5280 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x17x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 0.273 W/kg

**Zoom Scan (9x9x16)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm  
Reference Value = 3.092 V/m; Power Drift = 0.19 dB  
Peak SAR (extrapolated) = 1.03 W/kg  
**SAR(1 g) = 0.160 W/kg; SAR(10 g) = 0.087 W/kg**  
Maximum value of SAR (measured) = 0.308 W/kg

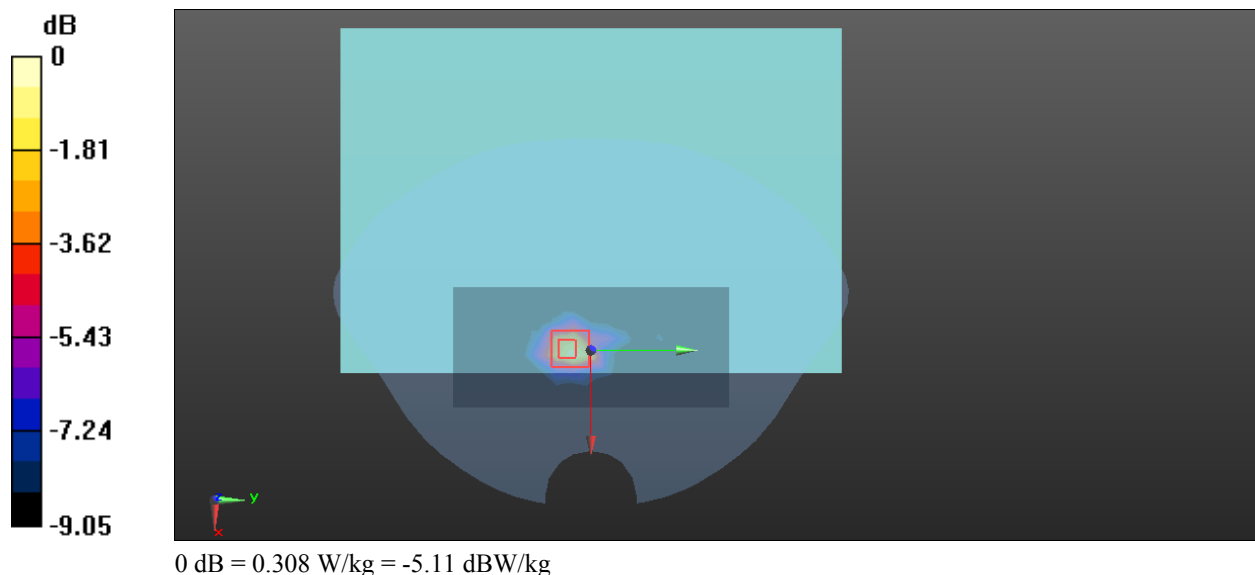

**Plot 10#:5.3G Wi-Fi\_Mid\_Body Top Chain 0****DUT: Laptop; Type: T3P116V1; Serial: 2CHV-4**


Communication System: 802.11 a (0); Frequency: 5280 MHz; Duty Cycle: 1:1.278  
Medium parameters used:  $f = 5280$  MHz;  $\sigma = 4.792$  S/m;  $\epsilon_r = 35.095$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5280 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x15x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 0.406 W/kg

**Zoom Scan (9x9x16)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm  
Reference Value = 8.240 V/m; Power Drift = 0.12 dB  
Peak SAR (extrapolated) = 1.19 W/kg  
**SAR(1 g) = 0.288 W/kg; SAR(10 g) = 0.180 W/kg**  
Maximum value of SAR (measured) = 0.568 W/kg

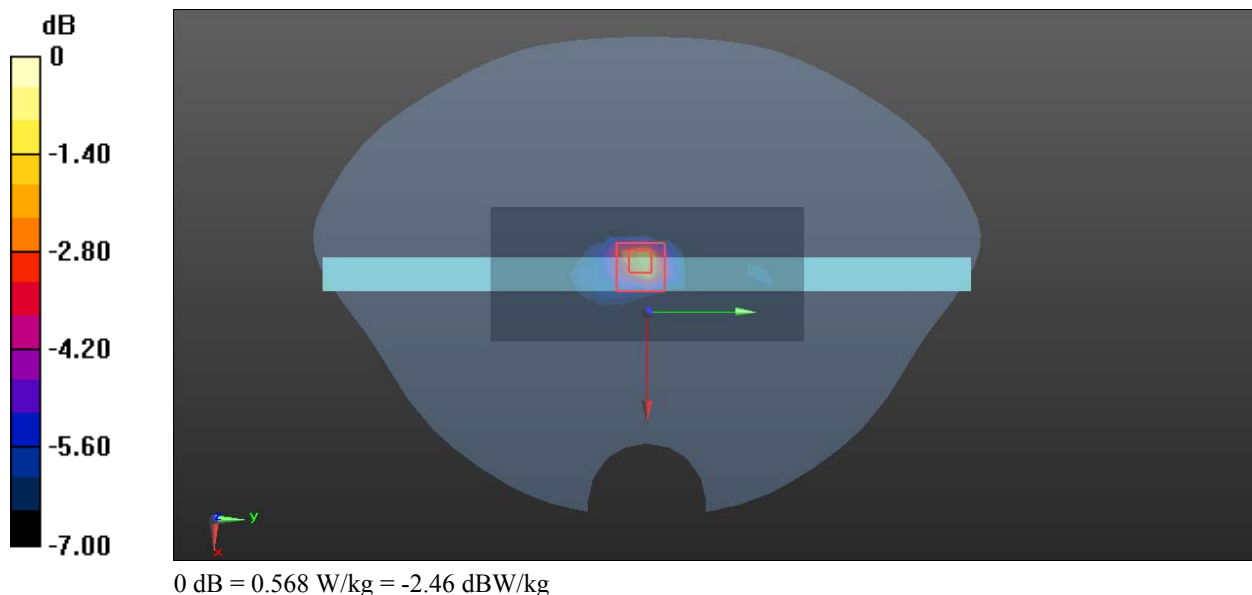

**Plot 11#:5.3G Wi-Fi\_Mid\_Body Back Chain 1****DUT: Laptop; Type: T3P116V1; Serial: 2CHV-4**


Communication System: 802.11 ax20 (0); Frequency: 5280 MHz; Duty Cycle: 1:1.172  
Medium parameters used:  $f = 5280$  MHz;  $\sigma = 4.792$  S/m;  $\epsilon_r = 35.095$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5280 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x17x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 0.249 W/kg

**Zoom Scan (9x9x16)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm  
Reference Value = 2.605 V/m; Power Drift = -0.15 dB  
Peak SAR (extrapolated) = 0.403 W/kg  
**SAR(1 g) = 0.134 W/kg; SAR(10 g) = 0.073 W/kg**  
Maximum value of SAR (measured) = 0.233 W/kg

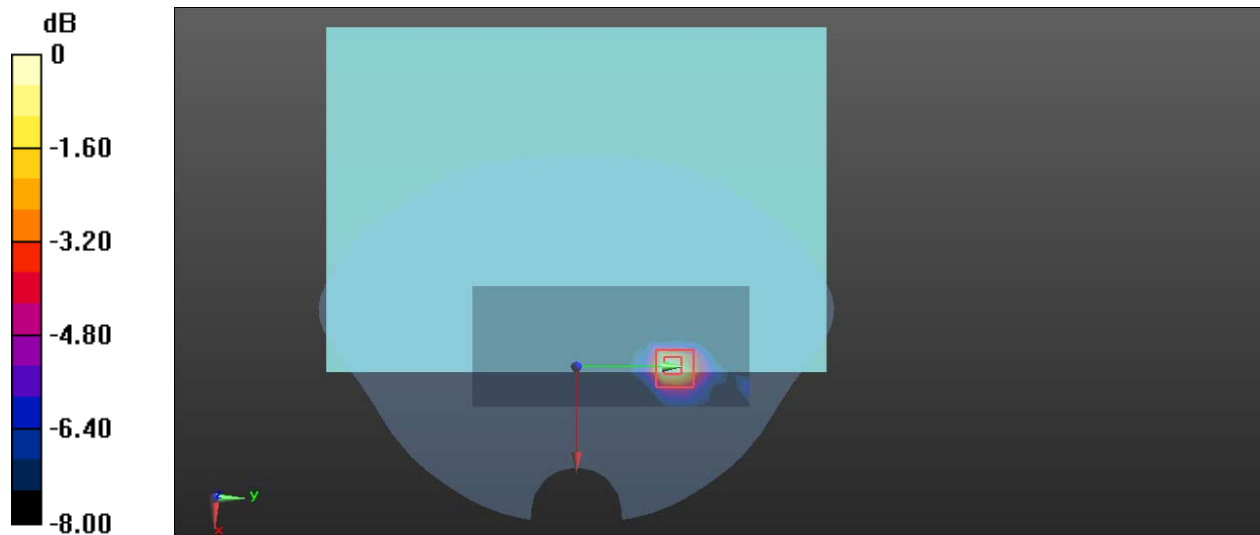

0 dB = 0.233 W/kg = -6.33 dBW/kg

**Plot 12#:5.3G Wi-Fi\_Mid\_Body Top Chain 1****DUT: Laptop; Type: T3P116V1; Serial: 2CHV-4**


Communication System: 802.11 ax20 (0); Frequency: 5280 MHz; Duty Cycle: 1:1.172  
Medium parameters used:  $f = 5280$  MHz;  $\sigma = 4.792$  S/m;  $\epsilon_r = 35.095$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5280 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x15x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 0.910 W/kg

**Zoom Scan (9x9x16)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm  
Reference Value = 4.585 V/m; Power Drift = 0.18 dB  
Peak SAR (extrapolated) = 1.70 W/kg  
**SAR(1 g) = 0.345 W/kg; SAR(10 g) = 0.177 W/kg**  
Maximum value of SAR (measured) = 0.744 W/kg

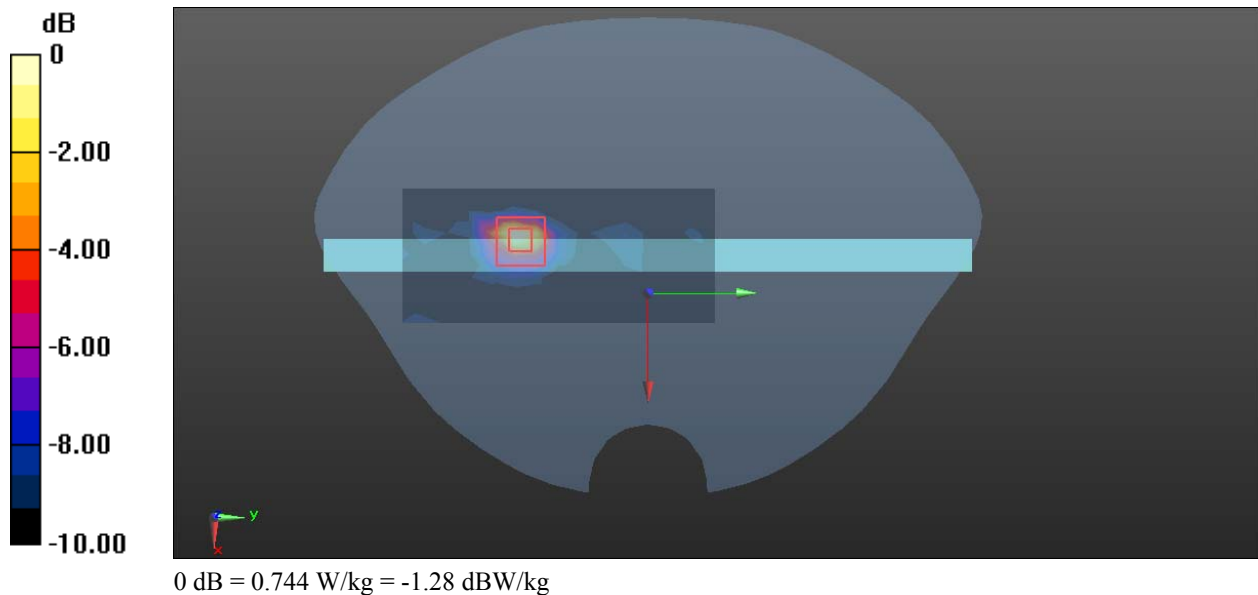

**Plot 13#:5.6G Wi-Fi\_Mid\_Body Back Chain 0****DUT: Laptop; Type: T3P116V1; Serial: 2CHV-4**


Communication System: 802.11 ax20 (0); Frequency: 5580 MHz; Duty Cycle: 1:1.172  
Medium parameters used:  $f = 5580$  MHz;  $\sigma = 5.119$  S/m;  $\epsilon_r = 34.564$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(4.85, 4.85, 4.85) @ 5580 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x17x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 0.225 W/kg

**Zoom Scan (9x9x16)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm  
Reference Value = 3.150 V/m; Power Drift = 0.12 dB  
Peak SAR (extrapolated) = 0.610 W/kg  
**SAR(1 g) = 0.145 W/kg; SAR(10 g) = 0.086 W/kg**  
Maximum value of SAR (measured) = 0.267 W/kg

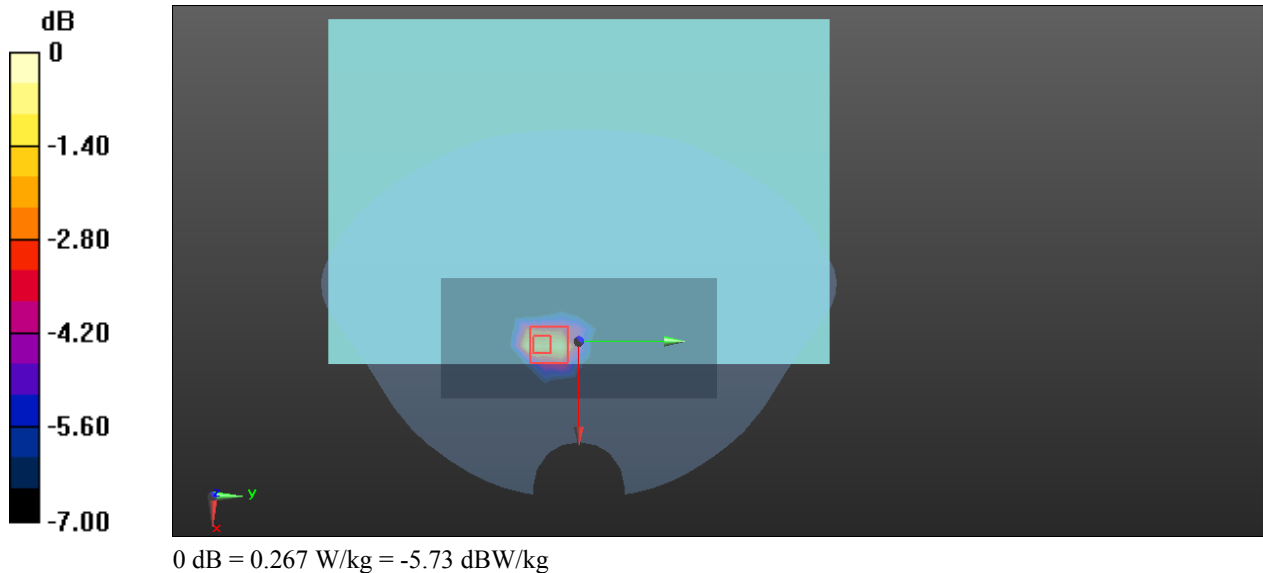



**Plot 14#:5.6G Wi-Fi\_Mid\_Body Top Chain 0****DUT: Laptop; Type: T3P116V1; Serial: 2CHV-4**


Communication System: 802.11 ax20 (0); Frequency: 5580 MHz; Duty Cycle: 1:1.172  
Medium parameters used:  $f = 5580$  MHz;  $\sigma = 5.119$  S/m;  $\epsilon_r = 34.564$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(4.85, 4.85, 4.85) @ 5580 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x15x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 0.967 W/kg

**Zoom Scan (9x9x16)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm  
Reference Value = 11.00 V/m; Power Drift = 0.16 dB  
Peak SAR (extrapolated) = 1.60 W/kg  
**SAR(1 g) = 0.316 W/kg; SAR(10 g) = 0.204 W/kg**  
Maximum value of SAR (measured) = 0.799 W/kg

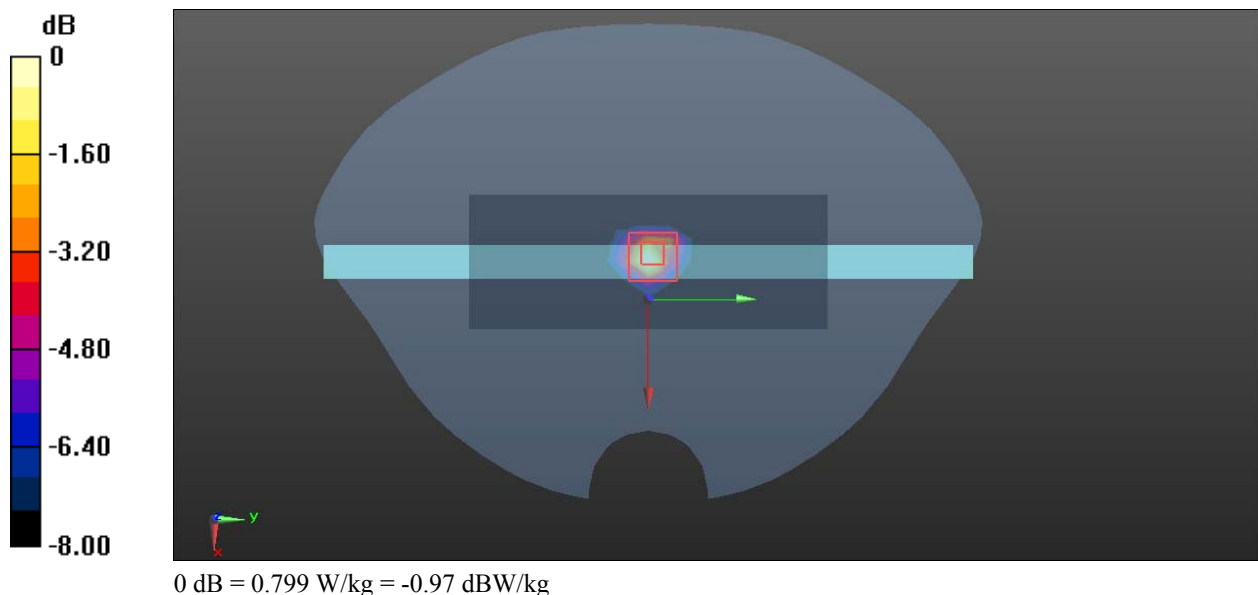

**Plot 15#:5.6G Wi-Fi\_Mid\_Body Back Chain 1****DUT: Laptop; Type: T3P116V1; Serial: 2CHV-4**


Communication System: 802.11 ax20 (0); Frequency: 5580 MHz;Duty Cycle: 1:1.172  
Medium parameters used:  $f = 5580$  MHz;  $\sigma = 5.119$  S/m;  $\epsilon_r = 34.564$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(4.85, 4.85, 4.85) @ 5580 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x17x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 0.222 W/kg

**Zoom Scan (9x9x16)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm  
Reference Value = 3.556 V/m; Power Drift = 0.14 dB  
Peak SAR (extrapolated) = 0.873 W/kg  
**SAR(1 g) = 0.133 W/kg; SAR(10 g) = 0.094 W/kg**  
Maximum value of SAR (measured) = 0.215 W/kg

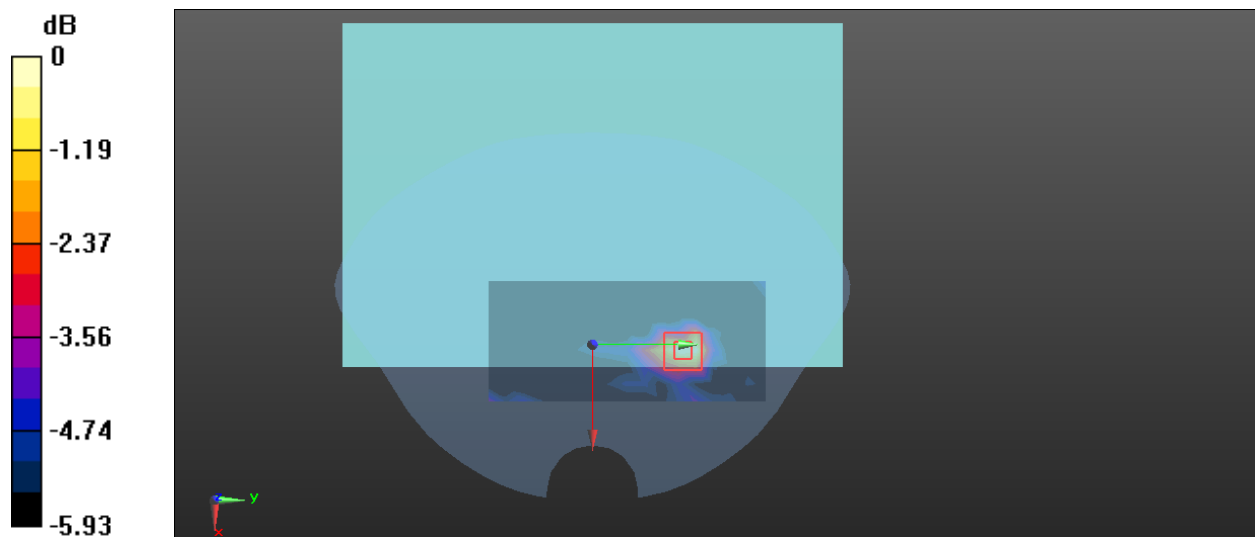

0 dB = 0.215 W/kg = -6.68 dBW/kg

**Plot 16#:5.6G Wi-Fi\_Mid\_Body Top Chain 1****DUT: Laptop; Type: T3P116V1; Serial: 2CHV-4**


Communication System: 802.11 ax20 (0); Frequency: 5580 MHz; Duty Cycle: 1:1.172  
Medium parameters used:  $f = 5580$  MHz;  $\sigma = 5.119$  S/m;  $\epsilon_r = 34.564$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(4.85, 4.85, 4.85) @ 5580 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x15x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 0.559 W/kg

**Zoom Scan (9x9x16)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm  
Reference Value = 11.48 V/m; Power Drift = -0.13 dB  
Peak SAR (extrapolated) = 1.57 W/kg  
**SAR(1 g) = 0.415 W/kg; SAR(10 g) = 0.206 W/kg**  
Maximum value of SAR (measured) = 0.792 W/kg

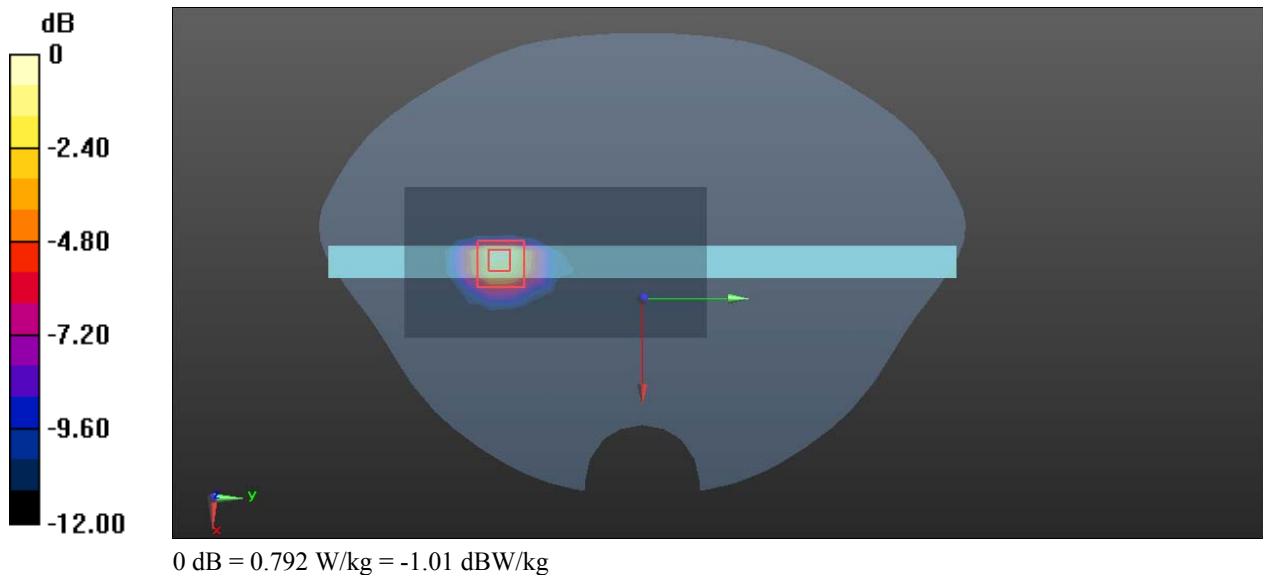

**Plot 17#:5.8G Wi-Fi\_Mid\_Body Back Chain 0****DUT: Laptop; Type: T3P116V1; Serial: 2CHV-4**


Communication System: 802.11 ax20 (0); Frequency: 5785 MHz; Duty Cycle: 1:1.172  
Medium parameters used (interpolated):  $f = 5785$  MHz;  $\sigma = 5.281$  S/m;  $\epsilon_r = 34.259$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(4.9, 4.9, 4.9) @ 5785 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x17x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 0.236 W/kg

**Zoom Scan (9x9x16)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm  
Reference Value = 3.827 V/m; Power Drift = 0.17 dB  
Peak SAR (extrapolated) = 0.346 W/kg  
**SAR(1 g) = 0.129 W/kg; SAR(10 g) = 0.092 W/kg**  
Maximum value of SAR (measured) = 0.246 W/kg

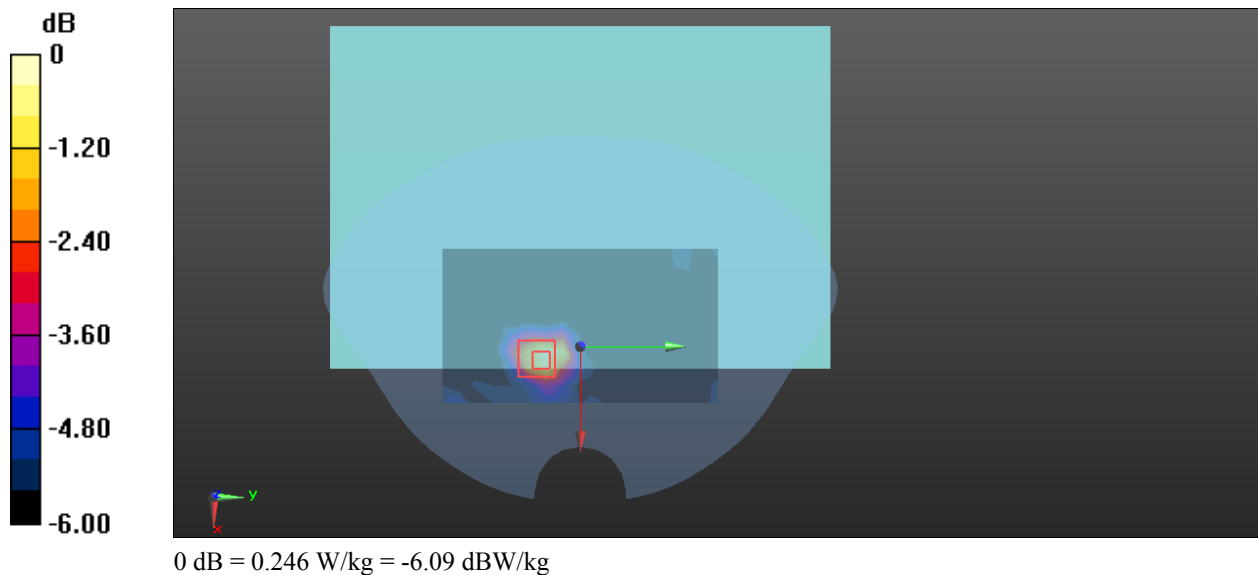

**Plot 18#:5.8G Wi-Fi\_Mid\_Body Top Chain 0****DUT: Laptop; Type: T3P116V1; Serial: 2CHV-4**


Communication System: 802.11 ax20 (0); Frequency: 5785 MHz; Duty Cycle: 1:1.172  
 Medium parameters used (interpolated):  $f = 5785$  MHz;  $\sigma = 5.281$  S/m;  $\epsilon_r = 34.259$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(4.9, 4.9, 4.9) @ 5785 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x15x1):** Measurement grid: dx=10mm, dy=10mm  
 Maximum value of SAR (measured) = 0.391 W/kg

**Zoom Scan (9x9x16)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm  
 Reference Value = 8.081 V/m; Power Drift = 0.15 dB  
 Peak SAR (extrapolated) = 0.638 W/kg  
**SAR(1 g) = 0.243 W/kg; SAR(10 g) = 0.183 W/kg**  
 Maximum value of SAR (measured) = 0.396 W/kg

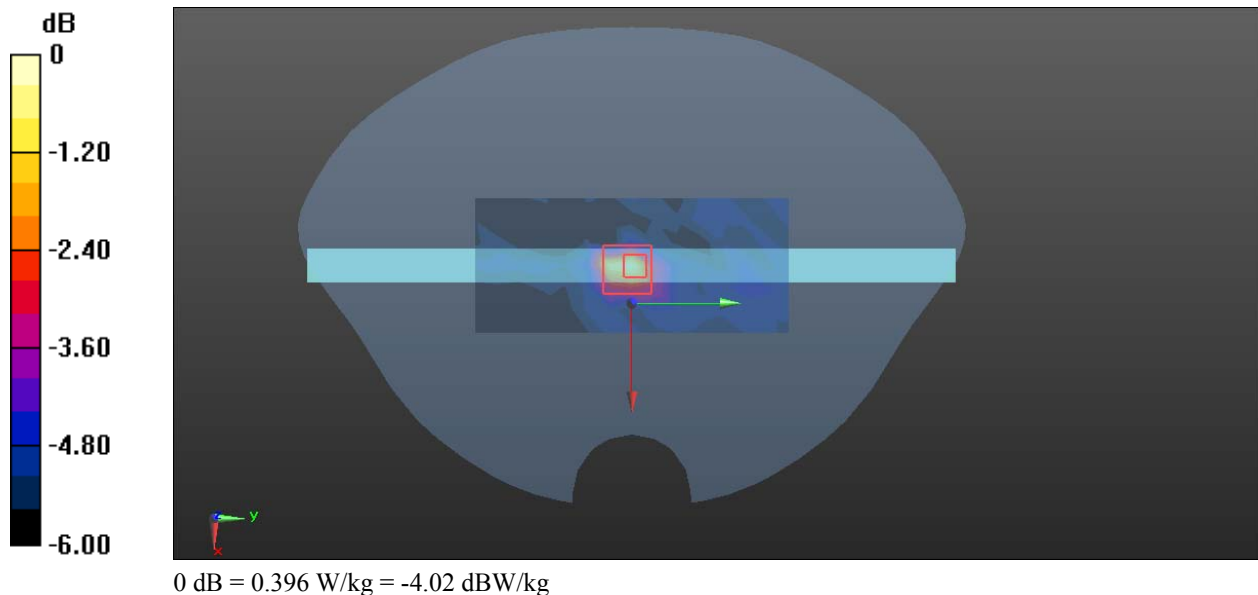

**Plot 19#:5.8G Wi-Fi\_Mid\_Body Back Chain 1****DUT: Laptop; Type: T3P116V1; Serial: 2CHV-4**


Communication System: 802.11 ax20 (0); Frequency: 5785 MHz; Duty Cycle: 1:1.172  
Medium parameters used (interpolated):  $f = 5785$  MHz;  $\sigma = 5.281$  S/m;  $\epsilon_r = 34.259$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(4.9, 4.9, 4.9) @ 5825 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x17x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 0.212 W/kg

**Zoom Scan (9x9x16)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm  
Reference Value = 3.461 V/m; Power Drift = -0.09 dB  
Peak SAR (extrapolated) = 0.411 W/kg  
**SAR(1 g) = 0.122 W/kg; SAR(10 g) = 0.089 W/kg**  
Maximum value of SAR (measured) = 0.206 W/kg

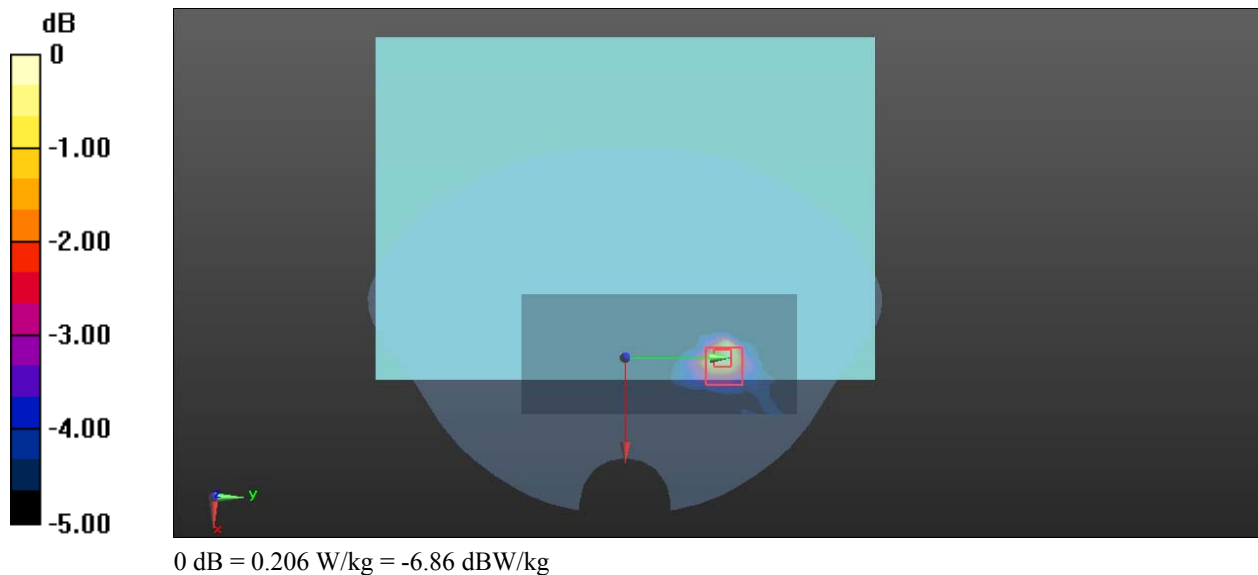

**Plot 20#:5.8G Wi-Fi\_Mid\_Body Top Chain 1****DUT: Laptop; Type: T3P116V1; Serial: 2CHV-4**

Communication System: 802.11 ax20 (0); Frequency: 5785 MHz; Duty Cycle: 1:1.172  
Medium parameters used (interpolated):  $f = 5785$  MHz;  $\sigma = 5.281$  S/m;  $\epsilon_r = 34.259$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(4.9, 4.9, 4.9) @ 5785 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x15x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 0.515 W/kg


**Zoom Scan (9x9x16)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.519 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.23 W/kg

**SAR(1 g) = 0.297 W/kg; SAR(10 g) = 0.188 W/kg**

Maximum value of SAR (measured) = 0.564 W/kg

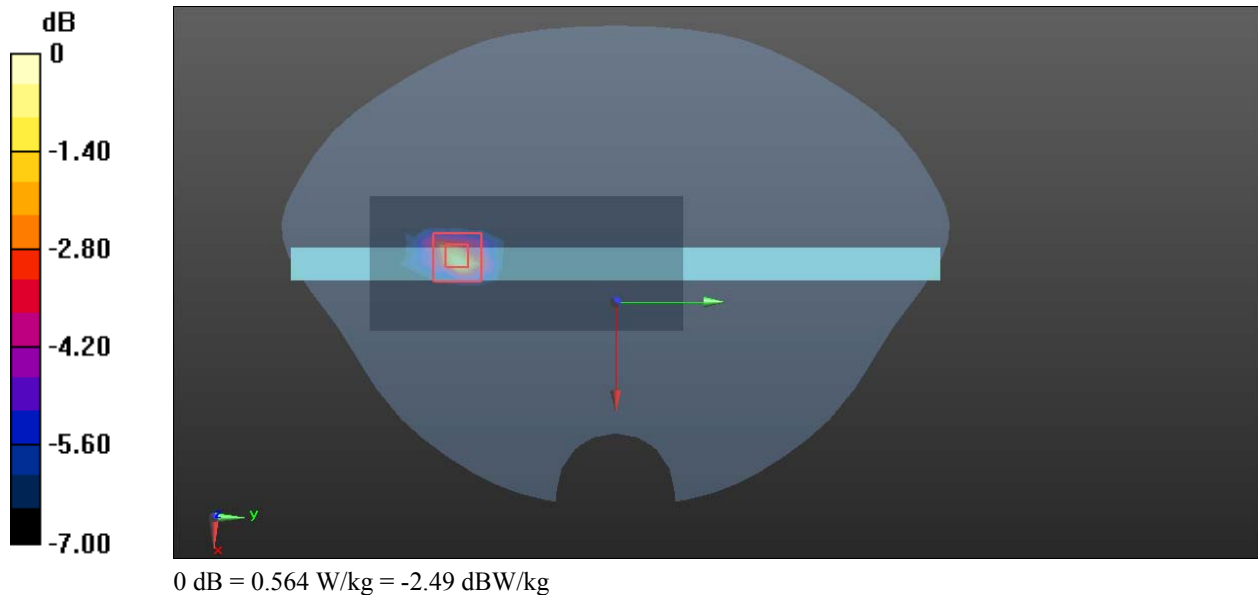

## APPENDIX A MEASUREMENT UNCERTAINTY

The uncertainty budget has been determined for the measurement system and is given in the following Table.

### Measurement uncertainty evaluation for IEEE1528-2013 SAR test

Source of uncertainty	Tolerance/uncertainty ± %	Probability distribution	Divisor	ci (1 g)	ci (10 g)	Standard uncertainty ± %, (1 g)	Standard uncertainty ± %, (10 g)
<b>Measurement system</b>							
Probe calibration	6.55	N	1	1	1	6.3	6.3
Axial Isotropy	4.7	R	$\sqrt{3}$	1	1	2.7	2.7
Hemispherical Isotropy	9.6	R	$\sqrt{3}$	0	0	0.0	0.0
Boundary effect	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Linearity	4.7	R	$\sqrt{3}$	1	1	2.7	2.7
Detection limits	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Readout electronics	0.3	N	1	1	1	0.3	0.3
Response time	0.0	R	$\sqrt{3}$	1	1	0.0	0.0
Integration time	0.0	R	$\sqrt{3}$	1	1	0.0	0.0
RF ambient conditions – noise	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
RF ambient conditions– reflections	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Probe positioner mech. Restrictions	0.8	R	$\sqrt{3}$	1	1	0.5	0.5
Probe positioning with respect to phantom shell	6.7	R	$\sqrt{3}$	1	1	3.9	3.9
Post-processing	2.0	R	$\sqrt{3}$	1	1	1.2	1.2
<b>Test sample related</b>							
Test sample positioning	2.8	N	1	1	1	2.8	2.8
Device holder uncertainty	6.3	N	1	1	1	6.3	6.3
Drift of output power	5.0	R	$\sqrt{3}$	1	1	2.9	2.9
<b>Phantom and set-up</b>							
Phantom uncertainty (shape and thickness tolerances)	4.0	R	$\sqrt{3}$	1	1	2.3	2.3
Liquid conductivity target)	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2
Liquid conductivity meas.)	2.5	N	1	0.64	0.43	1.6	1.1
Liquid permittivity target)	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4
Liquid permittivity meas.)	2.5	N	1	0.6	0.49	1.5	1.2
Combined standard uncertainty		RSS				12.2	12.0
Expanded uncertainty 95 % confidence interval)						24.1	23.7




## Measurement uncertainty evaluation for IEC62209-1 SAR test

Source of uncertainty	Tolerance/uncertainty ± %	Probability distribution	Divisor	ci (1 g)	ci (10 g)	Standard uncertainty ± %, (1 g)	Standard uncertainty ± %, (10 g)
<b>Measurement system</b>							
Probe calibration	6.55	N	1	1	1	6.3	6.3
Axial Isotropy	4.7	R	√3	1	1	2.7	2.7
Hemispherical Isotropy	9.6	R	√3	0	0	0.0	0.0
Boundary effect	1.0	R	√3	1	1	0.6	0.6
Linearity	4.7	R	√3	1	1	2.7	2.7
Detection limits	1.0	R	√3	1	1	0.6	0.6
Readout electronics	0.3	N	1	1	1	0.3	0.3
Response time	0.0	R	√3	1	1	0.0	0.0
Integration time	0.0	R	√3	1	1	0.0	0.0
RF ambient conditions – noise	1.0	R	√3	1	1	0.6	0.6
Probe positioning with respect to phantom shell	6.7	R	√3	1	1	3.9	3.9
Probe positioner mech. Restrictions	0.8	R	√3	1	1	0.5	0.5
RF ambient conditions– reflections	1.0	R	√3	1	1	0.6	0.6
Post-processing	2.0	R	√3	1	1	1.2	1.2
<b>Test sample related</b>							
Test sample positioning	2.8	N	1	1	1	2.8	2.8
Device holder uncertainty	6.3	N	1	1	1	6.3	6.3
Drift of output power	5.0	R	√3	1	1	2.9	2.9
<b>Phantom and set-up</b>							
Phantom uncertainty (shape and thickness tolerances)	4.0	R	√3	1	1	2.3	2.3
Liquid conductivity target)	5.0	R	√3	0.64	0.43	1.8	1.2
Liquid conductivity meas.)	2.5	N	1	0.64	0.43	1.6	1.1
Liquid permittivity target)	5.0	R	√3	0.6	0.49	1.7	1.4
Liquid permittivity meas.)	2.5	N	1	0.6	0.49	1.5	1.2
Combined standard uncertainty		RSS				12.2	12.0
Expanded uncertainty 95 % confidence interval)						24.0	23.6

## **APPENDIX B EUT TEST POSITION PHOTOS**

**Liquid depth  $\geq 15\text{cm}$**

Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470

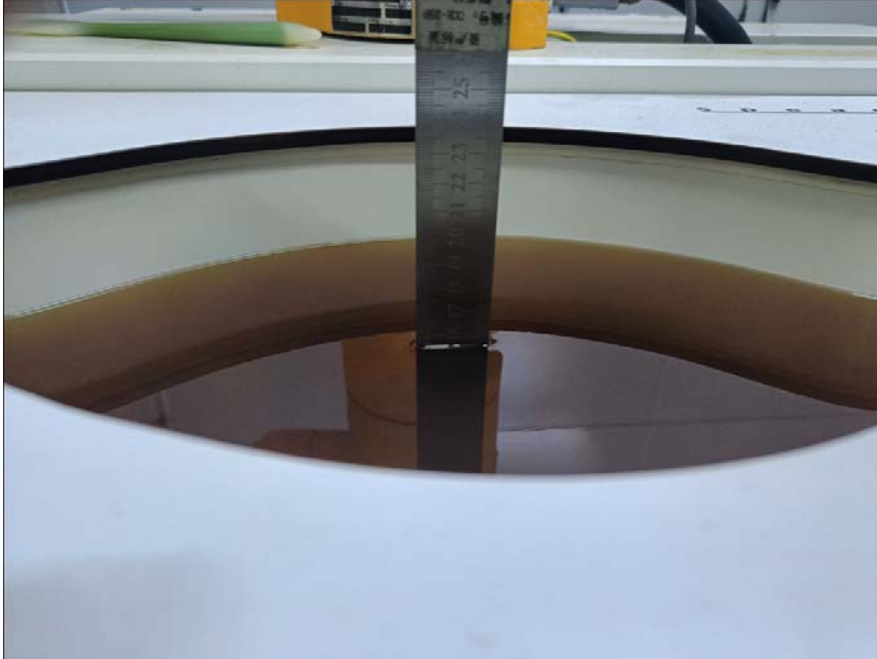

**Body Back Setup Photo (0mm)**



**Body Top Setup Photo (0mm)**



---

## **APPENDIX C CALIBRATION CERTIFICATES**

---

**Please Refer to the Attachment.**

**\*\*\*\*\* END OF REPORT \*\*\*\*\***