

Prüfbericht-Nr.: <i>Test report no.:</i>	NN20WV07(P15C-WiFi 2.4GHz) 001	Auftrags-Nr.: <i>Order no.:</i>	238491626	Seite 1 von 19 Page 1 of 19	
Kunden-Referenz-Nr.: <i>Client reference no.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	2020-09-16		
Auftraggeber: <i>Client:</i>	LAYER ONE CO., LTD. No. 84, Sec. 2, Minsheng E. Rd., Zhongshan Dist., Taipei City, Taiwan (R.O.C.)				
Prüfgegenstand: <i>Test item:</i>	Delta 3D Printer				
Bezeichnung / Typ-Nr.: <i>Identification / Type no.:</i>	Atom3.5				
Auftrags-Inhalt: <i>Order content:</i>	FCC Part 15C Test report (WiFi 2.4GHz)				
Prüfgrundlage: <i>Test specification:</i>	FCC 47CFR Part 15: Subpart C Section 15.247				
Wareneingangsdatum: <i>Date of sample receipt:</i>	2020-09-17				
Prüfmuster-Nr.: <i>Test sample no.:</i>	A002911161-001				
Prüfzeitraum: <i>Testing period:</i>	2020-09-21 ~ 2020-10-26				
Ort der Prüfung: <i>Place of testing:</i>	EMC/RF Taipei Testing Site				
Prüflaboratorium: <i>Testing laboratory:</i>	Taipei Testing Laboratories				
Prüfergebnis*: <i>Test result*:</i>	Pass				
überprüft von: <i>reviewed by:</i>		genehmigt von <i>authorized by:</i>			
Datum: 2020-12-17 <i>Date:</i>	David Huang	Datum: 2020-12-17 <i>Date:</i>	Brenda Chen		
Stellung / Position:	Project Manager	Stellung / Position:	Senior Project Manager		
Sonstiges / Other: This is a partial report that we only evaluated Radiated Spurious Emissions test item.					
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>	Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>				
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend N/A = nicht anwendbar	4 = ausreichend N/T = nicht getestet	5 = mangelhaft
* Legend:	1 = very good P(ass) = passed a.m. test specification(s)	2 = good F(ail) = failed a.m. test specification(s)	3 = satisfactory N/A = not applicable	4 = sufficient N/T = not tested	5 = poor
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>					

V05

TEST SUMMARY

Report Section	FCC Clause	Test Item	Result
5.1.1	15.247(b) & 15.203	Antenna Requirement	Pass
-	15.247(b)(3)	Peak Output Power	Not Applicable
-	15.247(a)(2)	6 dB Bandwidth	Not Applicable
-	2.1049	99% Occupied Bandwidth	Not Applicable
-	15.247(e)	Power Spectral Density	Not Applicable
-	15.247(d)	Conducted Spurious Emissions and Band Edges	Not Applicable
5.1.2	15.247(d) & 15.205 & 15.209	Radiated Spurious Emissions and Band Edges	Pass
-	15.207	Mains Conducted Emission	Not Applicable
-	2.1091	RF Exposure Compliance	Not Applicable

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

Contents

HISTORY OF THIS TEST REPORT	4
1. GENERAL REMARKS	5
1.1 COMPLEMENTARY MATERIALS.....	5
1.2 DECISION RULE OF CONFORMITY	5
2. TEST SITES	6
2.1 TEST LABORATORY	6
2.2 TEST FACILITY.....	6
2.3 TRACEABILITY	7
2.4 CALIBRATION	7
2.5 MEASUREMENT UNCERTAINTY	7
3. GENERAL PRODUCT INFORMATION.....	8
3.1 PRODUCT FUNCTION AND INTENDED USE	8
3.2 SYSTEM DETAILS AND RATINGS.....	8
3.3 NOISE GENERATING AND NOISE SUPPRESSING PARTS	9
3.4 SUBMITTED DOCUMENTS.....	9
4. TEST SET-UP AND OPERATION MODES.....	10
4.1 PRINCIPLE OF CONFIGURATION SELECTION	10
4.2 CARRIER FREQUENCY AND CHANNEL.....	10
4.3 TEST OPERATION AND TEST SOFTWARE.....	11
4.4 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	12
4.5 TEST SETUP DIAGRAM	12
4.6 DUTY CYCLE OF TEST SIGNAL	13
5. TEST RESULTS	14
5.1.1 <i>Antenna Requirement</i>	<i>14</i>
5.1.2 <i>Radiated Spurious Emissions and Band Edges</i>	<i>15</i>

APPENDIX A - TEST RESULT OF RADIATED SPURIOUS EMISSIONS

APPENDIX SP - PHOTOGRAPHS OF TEST SETUP

Prüfbericht - Nr.: NN20WV07(P15C-WiFi 2.4GHz) 001
*Test Report No.***Seite 4 von 19**
Page 4 of 19

HISTORY OF THIS TEST REPORT

Report No.	Description	Date Issued
NN20WV07(P15C-WiFi 2.4GHz) 001	Original Release	2020-12-17

1. General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A - Test Result of Radiated Spurious Emissions

Appendix SP - Photographs of Test Setup

Applied Standard and Test Levels

Radio
FCC 47CFR Part 15: Subpart C Section 15.247
FCC 47CFR Part 2: Subpart J Section 2.1091
FCC 47CFR Part 2: Subpart J Section 2.1049
ANSI C63.10:2013
KDB 558074 D01 15.247 Meas Guidance v05r02

1.2 Decision Rule of Conformity

The decision rule of conformity of this test report is following the requirements of the requested standard in the quotation, and agreed among testing laboratory and manufacturer (applicant) to exclude the consideration of Measurement Uncertainty, unless it is required by the specific standard.

2. Test Sites

2.1 Test Laboratory

Taipei Testing Laboratories

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.
Taipei City 105
Taiwan (R.O.C.)

2.2 Test Facility

Taipei Testing Laboratories

No.458-18, Sec. 2, Fenliao Rd., Linkou Dist.,
New Taipei City 244
Taiwan (R.O.C.)
FCC Registration No.: 226631
ISED Registration No.: 25563

2.3 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically in a suitably accredited Calibration Lab. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95% level of confidence.

Emission Measurement Uncertainty

Parameter	Uncertainty
Radiated Emission (9 kHz ~ 30 MHz)	± 1.15 dB
Radiated Emission (30 MHz ~ 200 MHz)	± 1.32 dB
Radiated Emission (200 MHz ~ 1 GHz)	± 1.31 dB
Radiated Emission (1 GHz ~ 18 GHz)	± 1.53 dB
Radiated Emission (18 GHz ~ 40 GHz)	± 2.50 dB
Mains Conducted Emission	± 1.65 dB

3. General Product Information

3.1 Product Function and Intended Use

The EUT is a Delta 3D Printer. It contains a WLAN compatible module enabling the user to communicate data through a Wireless interface.

For details refer to the User Guide, Data Sheet and Circuit Diagram.

3.2 System Details and Ratings

Basic Information of EUT

Item	EUT information
Kind of Equipment/Test Item	Delta 3D Printer
Type Identification	Atom3.5
FCC ID	2AWWXATOM3-5

Technical Specification of EUT

Item	EUT information
Operating Frequency	2412 MHz ~ 2462 MHz
Channel Spacing	5 MHz
Channel number	802.11b/g/n HT20: 11
Data Rate	802.11b: 11.0 / 5.5 / 2.0 / 1.0 Mbps 802.11g: 54.0 / 48.0 / 36.0 / 24.0 / 18.0 / 12.0 / 9.0 / 6.0 Mbps 802.11n: up to MCS7
Operation Voltage	120Vac
Modulation	DSSS (DBPSK, DQPSK, CCK) OFDM (BPSK, QPSK, 16QAM, 64QAM)
Maximum Output Power (mW)	802.11b: 32.58 802.11g: 143.55 802.11n HT20: 141.58
Antenna Information	Dipole antenna with 2dBi
Accessory Device	Refer to 4.4

3.3 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.4 Submitted Documents

- Circuit Diagram
- Instruction Manual
- Rating Label
- Technical Description

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The test modes were adapted accordingly in reference to the instructions for use.

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output expected by the customer and is going to be fixed on the firmware of the final end product.

Table for Parameters of Test Software Setting

802.11b				802.11g				802.11n HT20			
Channel	Power Setting	AVG (dBm)	Peak (dBm)	Channel	Power Setting	AVG (dBm)	Peak (dBm)	Channel	Power Setting	AVG (dBm)	Peak (dBm)
1	20	11.12	14.59	1	3	14.43	21.57	1	3	14.15	21.51
6	15	11.66	15.13	6	0	14.56	21.34	6	0	14.34	21.41
11	24	9.3	12.7	11	0	14.3	21.04	11	1	13.79	20.91

*The above result is tested by Dekra Laboratory.

4.2 Carrier Frequency and Channel

802.11b, 802.11g and 802.11n HT20:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432		
6	2437		
7	2442		

4.3 Test Operation and Test Software

Setup for testing: Test samples are provided with a USB interface which makes it possible to control them through a test software installed on a notebook computer.

This software was running on the laptop computer connected to the EUT. It was used to enable the operation modes listed as below.

Test Software	ESP_RF_test_tool_v2.5
---------------	-----------------------

The samples were used as follows:

A002911161-001 for radiated

Full test was applied on all test modes, but only worst case was shown.

The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and receivers.

Modulation Mode	Tx Function
802.11b	1TX (SISO)
802.11g	1TX (SISO)
802.11n HT20	1TX (SISO)

* The modulation and bandwidth are similar for 802.11n mode HT20, therefore investigated worse case as representative mode in test report.

EUT Configure Mode	Applicable To		Description
	Radiated Spurious Emissions above 1 GHz	Radiated Spurious Emissions below 1 GHz	
-	√	√	-

Note:

1. "-" means no effect.

Radiated Spurious Emissions (Above 1 GHz)

- Pre-Scan full test was applied on all test modes, but only worst case was shown.
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Date Rate (Mbps)
-	802.11b	1 to 11	1, 6, 11	1.0
-	802.11g	1 to 11	1, 6, 11	6.0
-	802.11n HT20	1 to 11	1, 6, 11	MCS0

Radiated Spurious Emissions (Below 1 GHz)

- Pre-Scan full test was applied on all test modes, but only worst case was shown.
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Date Rate (Mbps)
-	802.11g	1 to 11	11	6.0

Test Condition

Test Item	Ambient Temperature	Relative Humidity	Tested by
Radiated Spurious Emissions above 1 GHz	22-26 °C	50-65%	Eagle Tsai
Radiated Spurious Emissions below 1 GHz	22-26 °C	50-65%	Eagle Tsai

4.4 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

Accessory of EUT


No.	Product	Brand	Model	Description
C	Adapter	MEAN WELL	GST220A24	I/P: 100-240 Vac, 50/60 Hz, 4000mA O/P: 24 Vdc, 9200 mA
Radiated Test				

Support Unit

Radiated Test					
No.	Description	Brand	Model	S/N	Remark
1	Notebook	HP	TPN-C139	CND93662VF	-
A	USB Cable	FTDI	FT232BL	-	165 cm shielded cable with core
B	USB Cable	E-books	X29	-	195 cm shielded cable w/o core
-	Test fixture cable	SHIG YANG	1046A-10	-	-
-	Test fixture	FTDI	FT232BL	-	-

4.5 Test Setup Diagram

<Radiated Spurious Emissions mode>

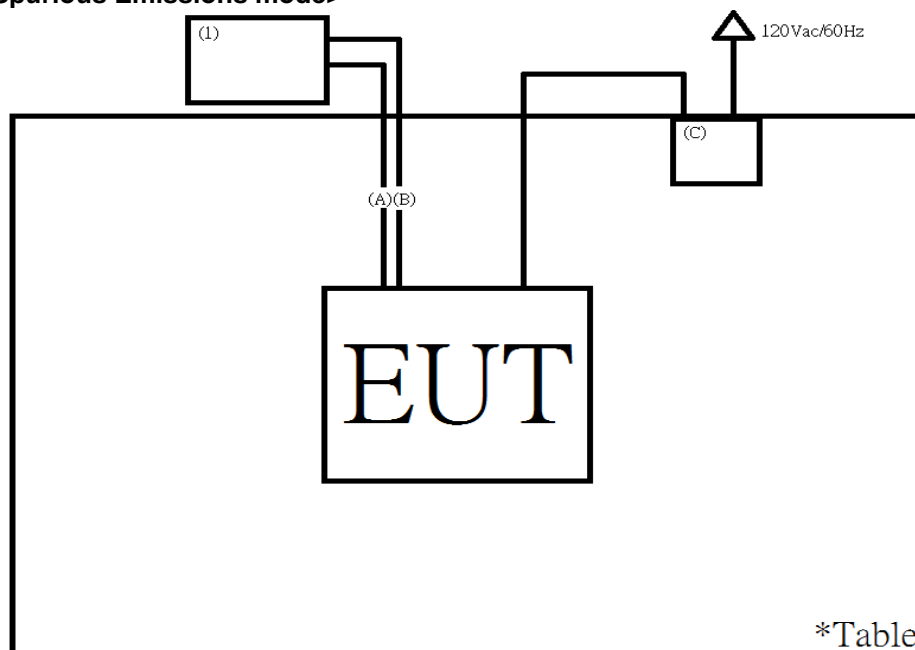


4.6 Duty Cycle of Test Signal

802.11b: Duty cycle(%) = 4.7246/4.2029 = 88.96%

802.11g: Duty cycle(%) = 804.35/673.91 = 83.78%

802.11n (HT20): Duty cycle = 762.32/ 649.28=85.17%

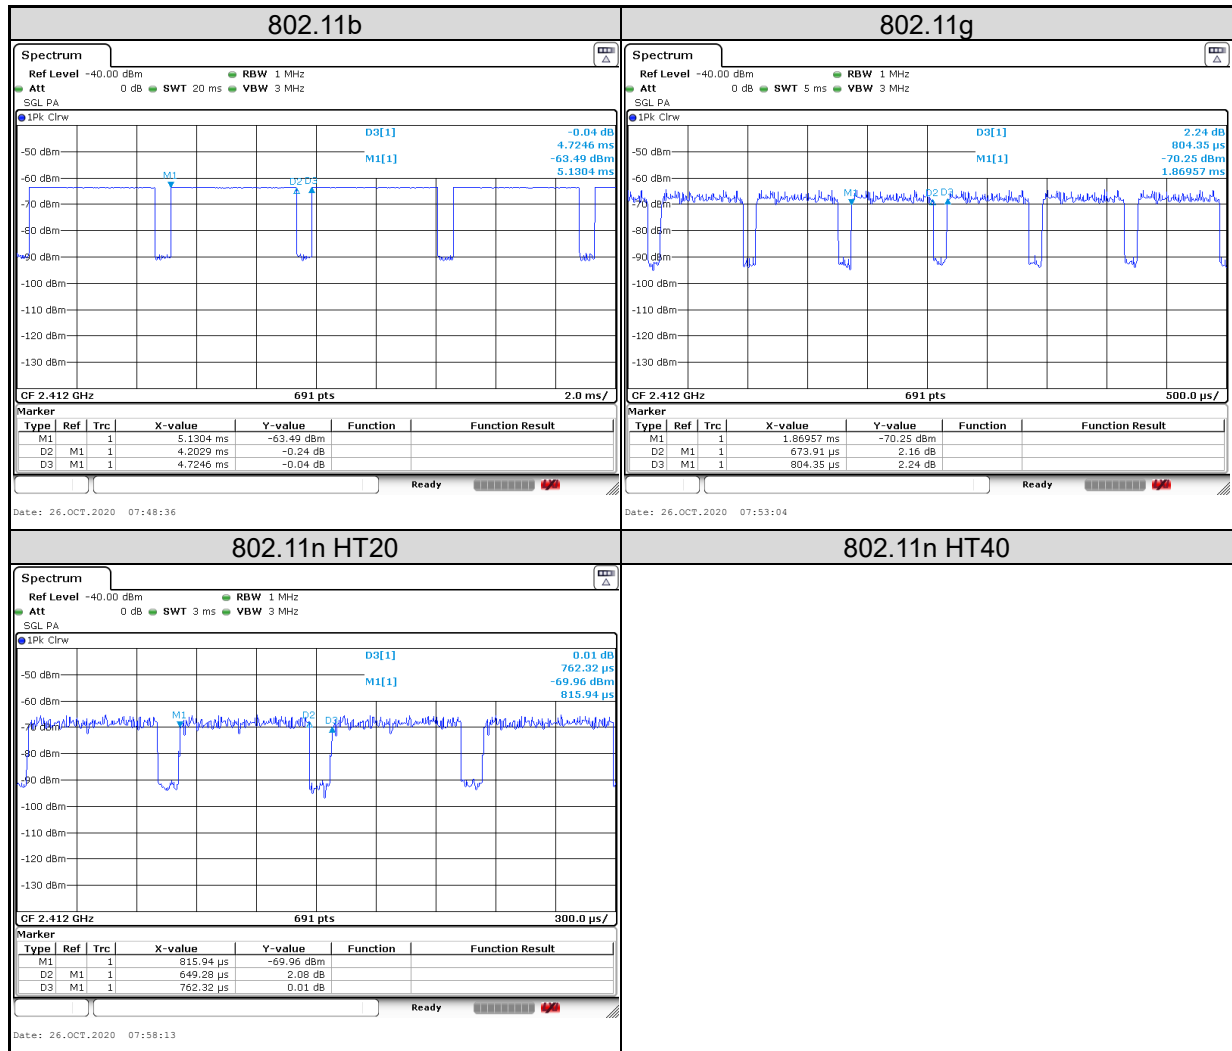

(11b: RBW = 1 MHz, VBW = 1 kHz ; 11g: RBW = 1 MHz, VBW = 1 kHz ; 11n (HT20): RBW = 1 MHz, VBW = 1 kHz)

5. Test Results

5.1.1 Antenna Requirement

Requirement Use of approved antennas only

According to the manufacturer declaration, the antenna information is as listed below. The antenna is with no possibility of replacement with a non-approved antenna by the end-user. Therefore, the EUT is considered to comply with this provision.

Brand Name	Model No.	Antenna Type	Antenna Gain (dBi)
Aosiya	GX001Z.100006.Z01	Dipole Antenna	2

Refer to EUT photo for details.

5.1.2 Radiated Spurious Emissions and Band Edges

Limit


Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must comply with the radiated emission limits specified in §15.209(a).

Emissions radiated outside the restricted and authorized frequency bands must either comply with the radiated emission limits specified for the restricted bands or in §15.247(d).


Kind of Test Site 3m Semi-Anechoic Chamber

Test Setup


<Radiated Emissions below 30 MHz>

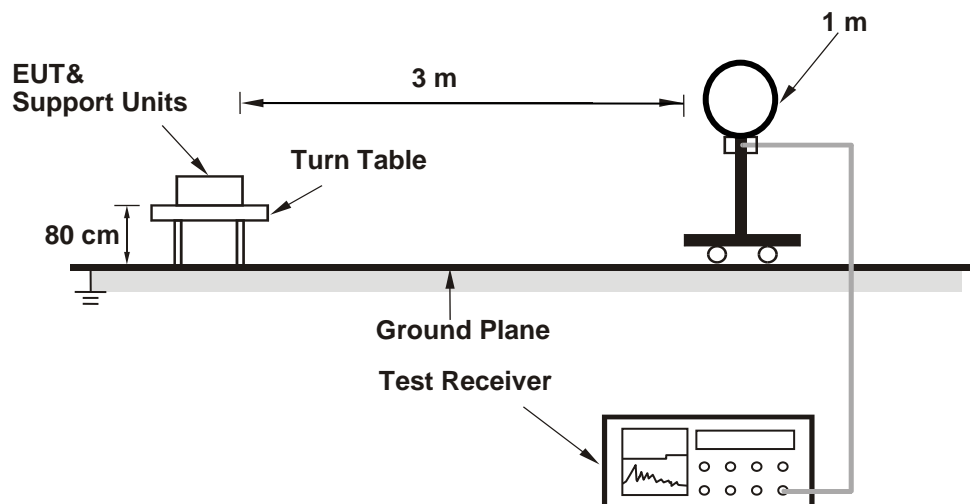

<Radiated Emissions 30 MHz to 1 GHz>

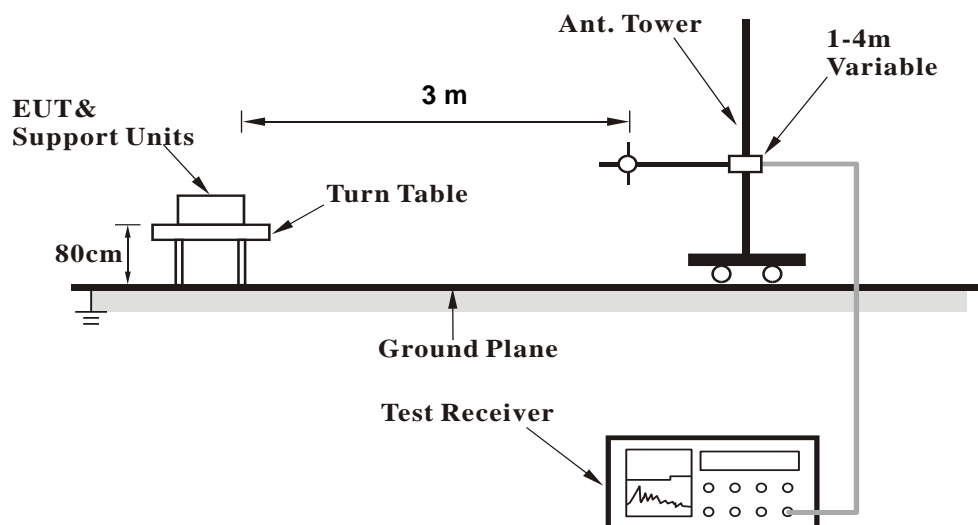

<Radiated Emissions above 1 GHz>

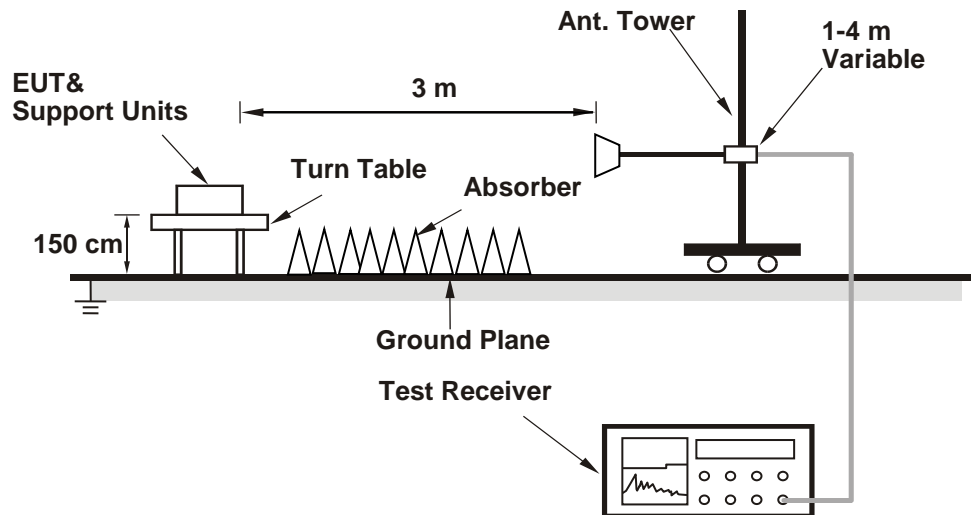

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Signal Analyzer	R&S	FSV40	101509	2020/5/5	2021/5/4
Receiver	R&S	ESR7	102109	2020/3/30	2021/3/29
Bilog Antenna	SCHWARZBECK	VULB-9168	00950	2020/1/20	2021/1/18
Horn Antenna	ETS-Lindgren	3117	00218929	2019/11/27	2020/11/25
LF-AMP	Agilent	8447D	2727A05146	2020/2/17	2021/2/15
HF-AMP + AC source	EMCI	EMC051845SE	980635	2020/2/11	2021/2/9
HF-AMP + AC source	EMCI	EMC184045SE	980656	2020/2/11	2021/2/9
Horn Antenna	SCHWARZBECK	BBHA 9170	00890	2020/4/13	2021/4/12
Microwave Cable	HUBER+SUHNER	SUCOFLEX 104EA	800057/4EA	2020/4/22	2021/4/21
Microwave Cable	HUBER+SUHNER	SUCOFLEX 104	802244/4	2020/4/22	2021/4/21
Microwave Cable	HUBER+SUHNER	SUCOFLEX 104	MY37203/4	2020/4/22	2021/4/21
Microwave Cable	HUBER+SUHNER	SUCOFLEX 102EA	800897/2EA	2020/3/25	2021/3/24
Microwave Cable	HUBER+SUHNER	SUCOFLEX 102EA	800902/2EA	2020/3/25	2021/3/24
Microwave Cable	HUBER+SUHNER	SUCOFLEX 102EA	801026/2EA	2020/3/25	2021/3/24
Loop Antenna	Chance Most	EMCILPA600 +calibration	287	2020/1/9	2021/1/7

Test Procedures**For Radiated Emissions below 30 MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel (OPEN), perpendicular (CLOSE), and ground-parallel (GROUND) orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated Emissions above 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30 MHz ~ 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) or Peak detection (PK) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98 %) or 10 Hz (Duty cycle ≥ 98 %) for Average detection (AV) at frequency above 1 GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The Radiated Emissions testing was performed in the X, Y and Z axis orientation. The worst-case Axis orientation is recorded in this test report.

Test Results

Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)
Level (dBuV/m) = Reading (dBuV) + Factor (dB/m)

Please refer to Appendix A.

Appendix A: Test Results of Radiated Spurious Emissions

Band Edges, 2.31GHz ~ 2.9GHz


802.11b

Low Channel (Horizontal) Peak

Low Channel (Vertical) Peak




TUV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

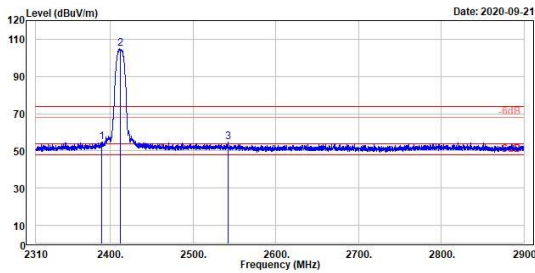

Peak	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	2389.41	54.79	17.65	37.14	74.00	-19.21	362	334	Peak	Horizontal	
2 *	2412.00	104.77	67.57	37.20	74.00	30.77	362	334	Peak	Horizontal	
3	2542.70	54.66	16.78	37.88	74.00	-19.34	362	334	Peak	Horizontal	



TUV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

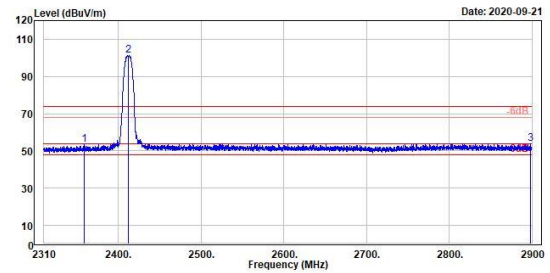

Peak	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	2358.97	53.36	16.19	37.17	74.00	-20.64	100	327	Peak	Vertical	
2 *	2412.00	101.34	64.14	37.20	74.00	27.34	100	327	Peak	Vertical	
3	2898.82	53.97	15.92	38.05	74.00	-20.03	100	327	Peak	Vertical	


802.11b

Low Channel (Horizontal) Average

Low Channel (Vertical) Average




TUV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

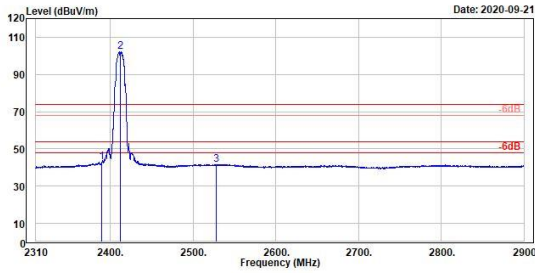

1	2	3	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
Freq	Level	Read Level Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
2390.00	42.04	5.70	37.14	54.00	-11.16	362	334 Average	Horizontal	
2412.00	102.21	65.01	37.20	54.00	48.21	362	334 Average	Horizontal	
2528.54	41.61	3.81	37.00	54.00	-12.39	362	334 Average	Horizontal	



TUV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322


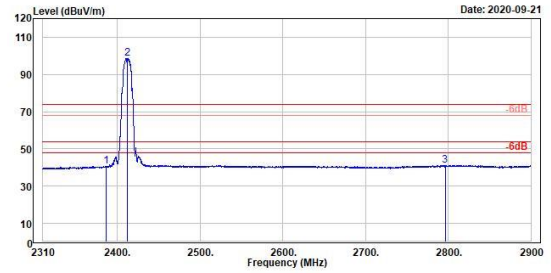


1	2	3	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
Freq	Level	Read Level Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
2386.35	40.80	3.65	37.15	54.00	-13.20	100	327 Average	Vertical	
2412.00	98.79	61.58	37.20	54.00	44.78	100	327 Average	Vertical	
2796.40	41.11	2.99	38.12	54.00	-12.89	100	327 Average	Vertical	

802.11b

High Channel (Horizontal) Peak

High Channel (Vertical) Peak

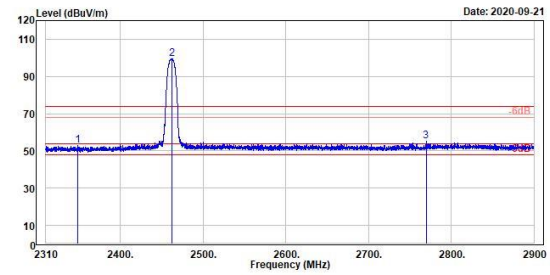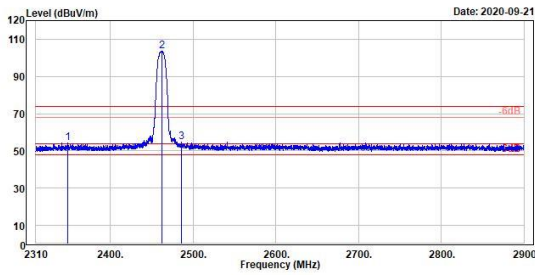

Peak	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	2348.70	54.40	17.23	37.17	74.00	-19.60	346	340	340	Peak	Horizontal	
2 *	2462.00	103.65	66.19	37.46	74.00	29.65	346	340	340	Peak	Horizontal	
3	2486.17	54.98	17.40	37.58	74.00	-19.02	346	340	340	Peak	Horizontal	

Peak	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	2348.70	52.73	15.56	37.17	74.00	-21.27	100	320	320	Peak	Vertical	
2 *	2462.00	99.58	62.12	37.46	74.00	25.58	100	320	320	Peak	Vertical	
3	2769.73	55.07	16.98	38.09	74.00	-18.93	100	320	320	Peak	Vertical	


802.11b

High Channel (Horizontal) Average

High Channel (Vertical) Average




TUV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

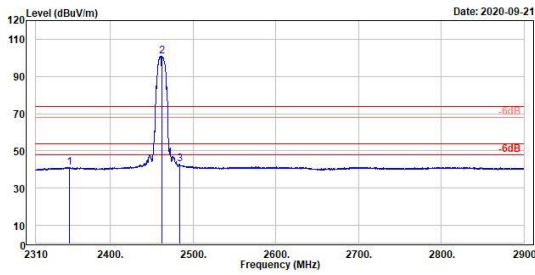

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2359.59	41.05	3.88	37.17	54.00	-12.95	346	340	Average	Horizontal	
2 *	2462.00	101.06	63.68	37.46	54.00	47.06	346	340	Average	Horizontal	
3	2483.50	42.92	5.35	37.57	54.00	-11.08	346	340	Average	Horizontal	



TUV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

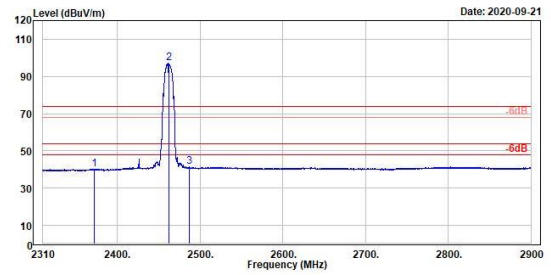

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2372.42	40.25	3.09	37.16	54.00	-13.75	100	320	Average	Vertical	
2 *	2462.00	96.97	59.51	37.46	54.00	42.97	100	320	Average	Vertical	
3	2486.88	41.46	3.87	37.59	54.00	-12.54	100	320	Average	Vertical	


802.11g

Low Channel (Horizontal) Peak

Low Channel (Vertical) Peak




TUV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

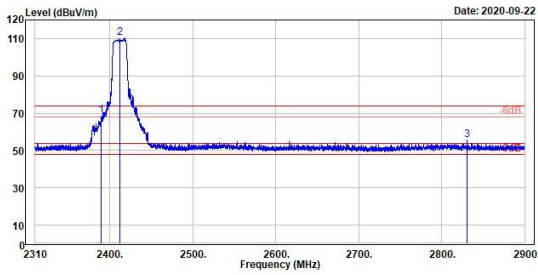

Peak	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	2389.65	68.74	31.60	37.14	74.00	-5.26	400	351	Peak	Horizontal	
2 *	2412.00	110.33	73.13	37.20	74.00	36.33	400	351	Peak	Horizontal	
3	2830.62	55.65	17.55	38.10	74.00	-18.35	400	351	Peak	Horizontal	



TUV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

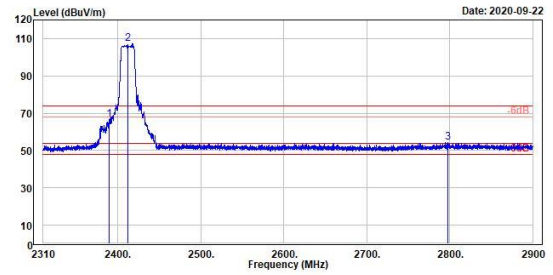

Peak	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	2389.89	66.56	29.42	37.14	74.00	-7.44	156	338	Peak	Vertical	
2 *	2412.00	107.06	69.86	37.20	74.00	33.06	156	338	Peak	Vertical	
3	2798.28	54.25	16.13	38.12	74.00	-19.75	156	338	Peak	Vertical	


802.11g

Low Channel (Horizontal) Average

Low Channel (Vertical) Average




TUV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

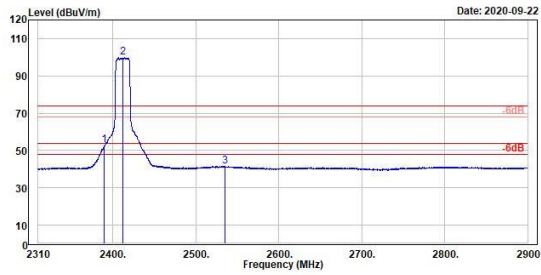

Freq	Level	Read Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1 2398.00	53.02	15.88	37.14	54.00	-0.98	400	351	Average	Horizontal	
2 * 2412.00	99.78	62.50	37.28	54.00	45.78	400	351	Average	Horizontal	
3 2534.79	41.48	3.64	37.84	54.00	-12.52	400	351	Average	Horizontal	



TUV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

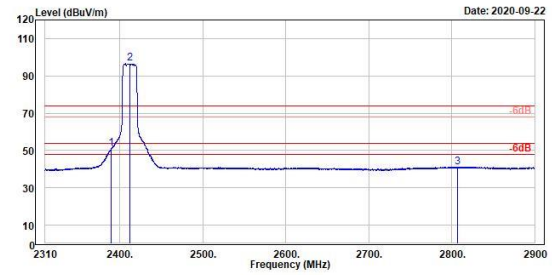

Freq	Level	Read Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1 2398.00	50.94	13.80	37.14	54.00	-3.06	156	338	Average	Vertical	
2 * 2412.00	96.86	59.66	37.20	54.00	42.86	156	338	Average	Vertical	
3 2806.78	41.14	3.02	38.12	54.00	-12.86	156	338	Average	Vertical	


802.11g

High Channel (Horizontal) Peak

High Channel (Vertical) Peak




TUV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

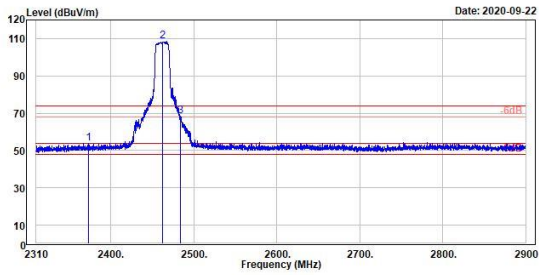

Peak	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	2373.01	53.01	16.66	37.15	74.00	-20.19	221	352	Peak	Horizontal	
2 *	2462.00	108.63	71.17	37.46	74.00	34.63	221	352	Peak	Horizontal	
3 !	2483.70	68.25	30.68	37.57	74.00	-5.75	221	352	Peak	Horizontal	



TUV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

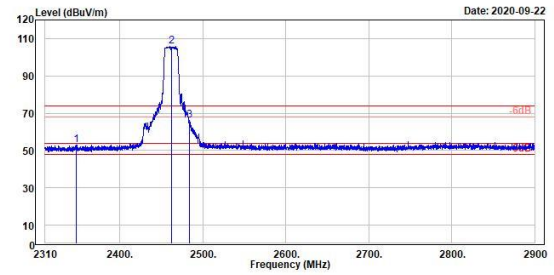

Peak	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	2347.00	53.13	15.96	37.17	74.00	-20.87	114	334	Peak	Vertical	
2 *	2462.00	105.00	68.24	37.46	74.00	31.00	114	334	Peak	Vertical	
3	2483.58	66.32	28.75	37.57	74.00	-7.68	114	334	Peak	Vertical	


802.11g

High Channel (Horizontal) Average

High Channel (Vertical) Average




TUV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

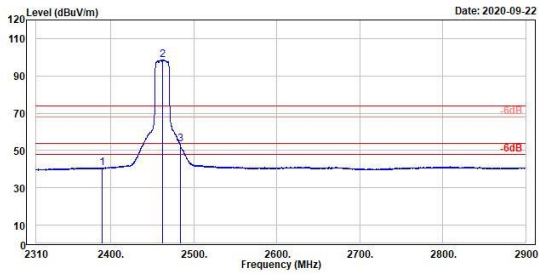

Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	2389.77	40.70	3.56	37.14	54.00	-13.30	221	352 Average	Horizontal	
2 *	2462.00	98.66	61.20	37.46	54.00	44.66	221	352 Average	Horizontal	
3 !	2483.50	53.58	16.01	37.57	54.00	-0.42	221	352 Average	Horizontal	



TUV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

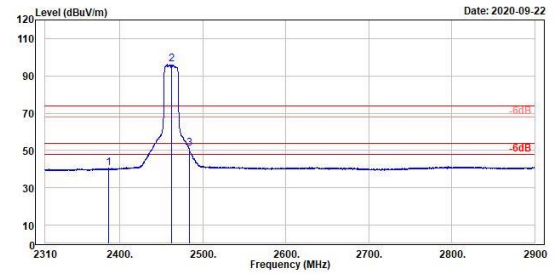

Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	2386.35	40.45	3.30	37.15	54.00	-13.55	114	334 Average	Vertical	
2 *	2462.00	96.12	58.66	37.46	54.00	42.12	114	334 Average	Vertical	
3 !	2483.50	51.29	13.72	37.57	54.00	-2.71	114	334 Average	Vertical	


802.11n HT20

Low Channel (Horizontal) Peak

Low Channel (Vertical) Peak




TUV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

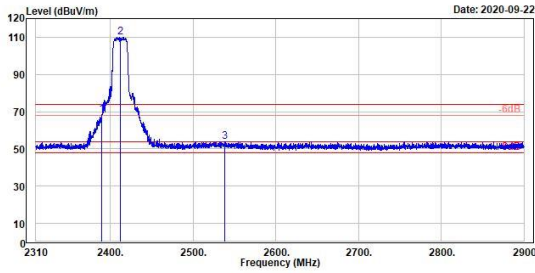

1	2	3	4	5	6	7	8	9	10	11	12
1	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
1	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2389.09	68.36	31.22	37.14	74.00	-5.64	400	349	Peak	Horizontal	
2	2412.00	110.18	72.98	37.20	74.00	36.18	400	349	Peak	Horizontal	
3	2538.09	54.03	16.17	37.86	74.00	-19.97	400	349	Peak	Horizontal	



TUV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

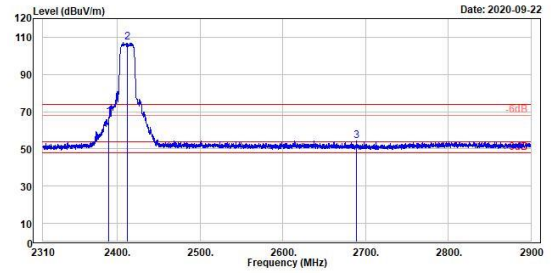

1	2	3	4	5	6	7	8	9	10	11	12
1	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
1	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2390.00	67.20	30.06	37.14	74.00	-6.80	155	340	Peak	Vertical	
2	2412.00	107.35	70.15	37.20	74.00	33.35	155	340	Peak	Vertical	
3	2689.13	54.49	16.82	37.67	74.00	-19.51	155	340	Peak	Vertical	


802.11n HT20

Low Channel (Horizontal) Average

Low Channel (Vertical) Average




TUV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

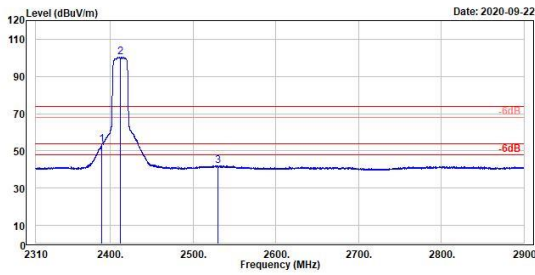

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	2390.00	53.27	16.13	37.14	54.00	-0.73	400	349	Average	Horizontal	
2	2412.00	100.42	63.22	37.20	54.00	46.42	400	349	Average	Horizontal	
3	2530.42	42.13	4.31	37.82	54.00	-11.87	400	349	Average	Horizontal	



TUV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

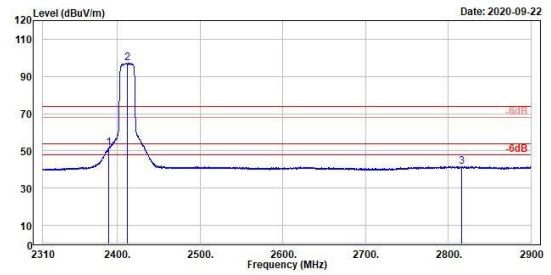

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	2390.00	51.58	14.44	37.14	54.00	-2.42	155	340	Average	Vertical	
2	2412.00	97.18	59.98	37.20	54.00	43.18	155	340	Average	Vertical	
3	2816.81	41.73	3.61	38.12	54.00	-12.27	155	340	Average	Vertical	


802.11n HT20

High Channel (Horizontal) Peak

High Channel (Vertical) Peak




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

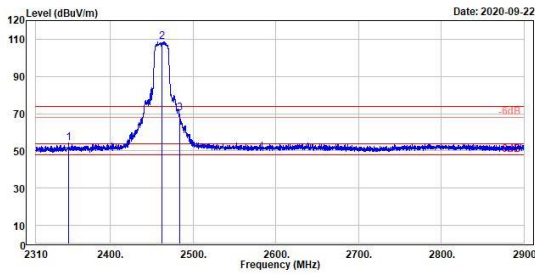

Peak	Freq (MHz)	Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit Line (dBuV/m)	Over Limit (dB)	APos (cm)	TPos (deg)	Remark	Pol/Phase	Note
1	2349.65	54.42	17.25	37.17	74.00	-19.58	222	355	Peak	Horizontal	
2 *	2462.00	108.72	71.26	37.46	74.00	34.72	222	355	Peak	Horizontal	
3 !	2483.93	70.47	32.89	37.58	74.00	-3.53	222	355	Peak	Horizontal	



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

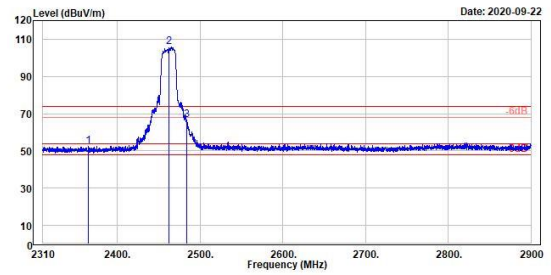

Peak	Freq (MHz)	Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit Line (dBuV/m)	Over Limit (dB)	APos (cm)	TPos (deg)	Remark	Pol/Phase	Note
1	2364.63	52.63	15.47	37.16	74.00	-21.37	212	360	Peak	Vertical	
2 *	2462.00	105.68	68.22	37.46	74.00	31.68	212	360	Peak	Vertical	
3	2483.50	66.49	28.92	37.57	74.00	-7.51	212	360	Peak	Vertical	


802.11n HT20

High Channel (Horizontal) Average

High Channel (Vertical) Average




TUV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

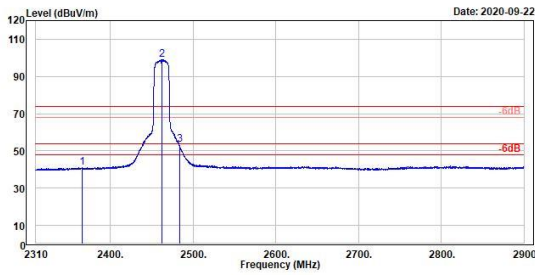

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	2365.58	41.04	3.88	37.16	54.00	-12.96	222	355	Average	Horizontal	
2 *	2462.00	99.03	61.57	37.46	54.00	45.03	222	355	Average	Horizontal	
3 !	2483.50	53.27	15.70	37.57	54.00	-0.73	222	355	Average	Horizontal	



TUV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

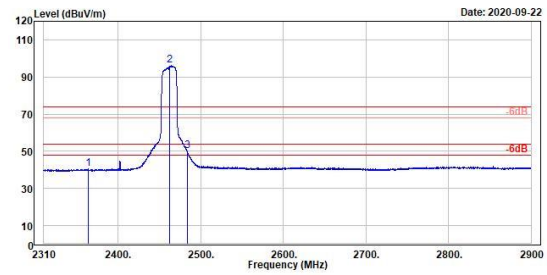

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	2363.45	40.43	3.27	37.16	54.00	-13.57	212	360	Average	Vertical	
2 *	2462.00	96.14	58.68	37.46	54.00	42.14	212	360	Average	Vertical	
3 !	2483.50	50.36	12.79	37.57	54.00	-3.64	212	360	Average	Vertical	

Spurious Emissions, Tx Mode, 9kHz ~ 30MHz


802.11g

High Channel (Open) 9kHz~150kHz

High Channel (Open) 150kHz~30MHz




TUV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

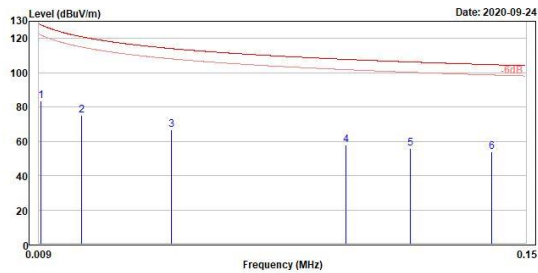

1	2	3	4	5	6
0.01	0.02	0.05	0.10	0.12	0.14
83.43	74.90	66.67	57.93	55.64	53.88
4.27	2.60	0.96	-1.57	-2.66	-3.05
79.16	72.30	65.71	59.50	58.30	56.93
127.85	121.00	114.89	107.78	106.27	104.68
-44.42	-46.18	-47.42	-49.85	-50.63	-50.80
100	100	100	100	100	100
			18	2	34
QP	QP	QP	QP	QP	QP
Open	Open	Open	Open	Open	Open



TUV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

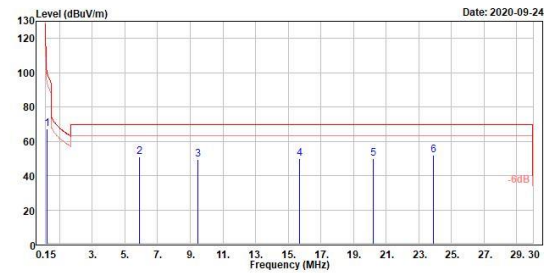

1	2	3	4	5	6
0.23	5.87	9.47	15.71	20.22	23.90
67.01	50.87	49.44	49.73	49.94	51.76
14.57	12.51	11.74	12.14	13.72	16.81
52.44	38.36	37.70	37.59	36.22	34.95
100.23	18.63	20.06	19.77	19.56	17.74
-33.22	-18.63	-20.06	-19.77	-19.56	-17.74
100	100	100	100	100	100
160	259	99	49	165	236
QP	QP	QP	QP	QP	QP
Open	Open	Open	Open	Open	Open


802.11g

High Channel (Close) 9kHz~150kHz

High Channel (Close) 150kHz~30MHz




TUV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

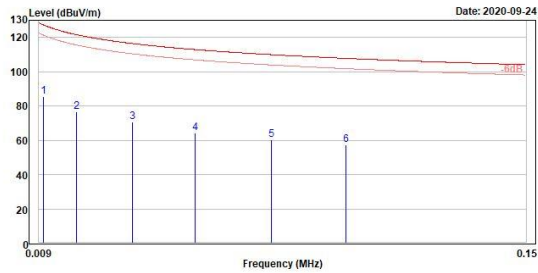

Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
dBuV/m	dBuV	dBuV/m	dB	cm	deg			
85.38	6.74	78.64	127.31	-41.93	100	243 QP	Close	
76.52	3.93	72.59	121.61	-45.09	100	348 QP	Close	
70.77	1.96	68.81	116.45	-45.68	100	28 QP	Close	
64.41	-0.06	64.47	112.92	-48.51	100	217 QP	Close	
68.28	-1.38	61.66	109.95	-49.67	100	49 QP	Close	
57.55	-1.96	59.51	107.78	-50.23	100	311 QP	Close	



TUV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

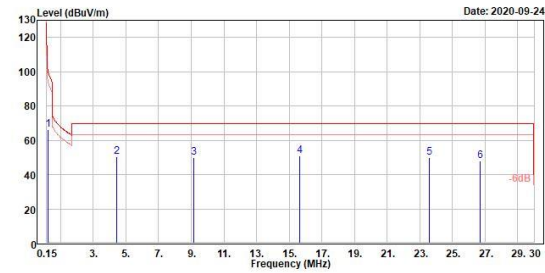

Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
dBuV/m	dBuV	dBuV/m	dB	cm	deg			
66.27	14.01	52.26	100.01	-33.74	100	0 QP	Close	
50.24	11.90	38.34	69.50	-19.26	100	343 QP	Close	
49.87	12.12	37.75	69.50	-19.63	100	162 QP	Close	
50.79	13.19	37.60	69.50	-18.71	100	250 QP	Close	
50.08	14.92	35.16	69.50	-19.42	100	8 QP	Close	
48.06	13.76	34.30	69.50	-21.44	100	289 QP	Close	

Spurious Emissions, Tx Mode, 30MHz ~ 1GHz


802.11g

High Channel (Horizontal)

High Channel (Vertical)




TUV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

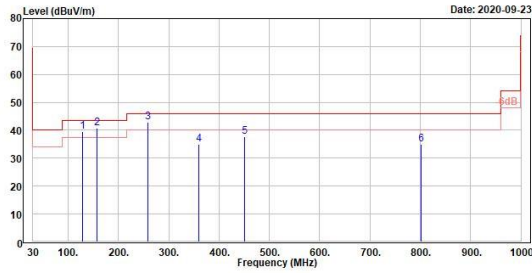

Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	129.13	39.48	47.37	-7.89	43.50	-4.02	300	295 QP	horizontal
2	156.78	40.88	47.01	-6.13	43.50	-2.62	100	88 QP	horizontal
3	259.41	42.89	49.30	-6.41	46.00	-3.11	100	287 QP	horizontal
4	359.51	34.83	38.77	-3.94	46.00	-11.17	100	17 QP	horizontal
5	451.56	37.70	39.91	-2.21	46.00	-8.30	200	104 QP	horizontal
6	692.02	35.08	32.23	2.85	46.00	-10.92	200	40 QP	horizontal



TUV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

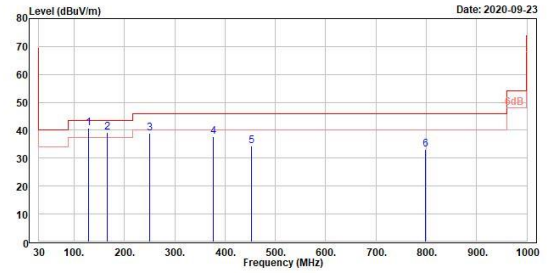

Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	129.13	40.71	48.60	-7.89	43.50	-2.79	100	220 QP	vertical
2	165.99	39.17	45.09	-5.92	43.50	-4.33	100	323 QP	vertical
3	258.77	38.97	45.59	-6.62	46.00	-7.03	300	111 QP	vertical
4	377.36	37.73	41.26	-3.53	46.00	-8.27	138	360 QP	vertical
5	452.53	34.32	36.53	-2.21	46.00	-11.68	200	133 QP	vertical
6	797.05	33.23	30.41	2.82	46.00	-12.77	126	360 QP	vertical

Spurious Emissions, Tx Mode, 1GHz ~ 26.5GHz


802.11b

Low Channel (Horizontal)

Low Channel (Vertical)




TUV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

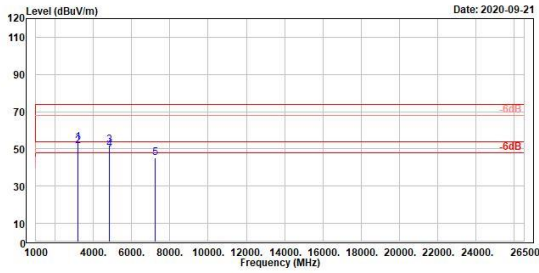

1	2	3	4	5
3215.67	3215.67	4824.00	4824.00	7236.00
53.41	51.75	52.16	49.65	45.02
65.30	63.64	61.54	59.03	51.77
-11.89	-11.89	-9.38	-9.38	-6.75
74.00	54.00	74.00	54.00	74.00
-20.59	-2.25	-21.84	-4.35	-28.98
321	321	367	367	100
327	327	356	356	318
Peak	Average	Peak	Average	Peak
horizontal	horizontal	horizontal	horizontal	horizontal



TUV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

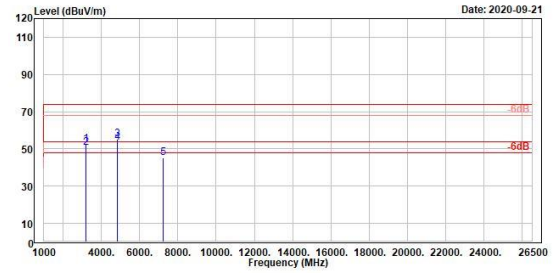

1	2	3	4	5
3215.67	3215.67	4824.00	4824.00	7236.00
52.30	50.76	55.43	53.51	45.22
64.19	62.65	64.81	62.89	51.97
-11.89	-11.89	-9.38	-9.38	-6.75
74.00	54.00	74.00	54.00	74.00
-21.70	-3.24	-18.57	-8.49	-28.78
100	100	108	108	100
314	314	352	352	317
Peak	Average	Peak	Average	Peak
vertical	vertical	vertical	vertical	vertical

802.11b

Middle Channel (Horizontal)



Middle Channel (Vertical)



TUV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322



TUV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

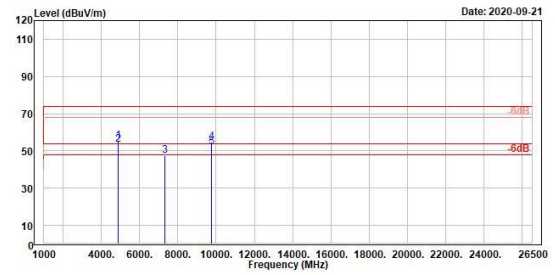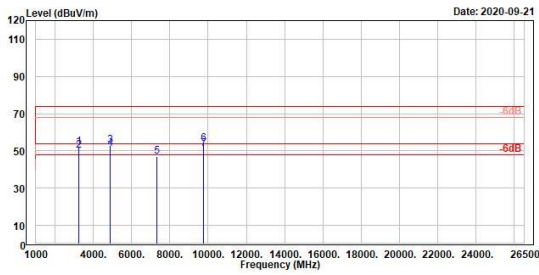

1	2	3	4	5	6	7				
MHz	Level dBuV/m	Read Level dBuV	Factor dB/m	Limit Line dBuV/m	Over Limit dB	APos cm	TPos deg	Remark	Pol/Phase	Note
3248.72	51.01	63.66	-11.85	74.00	-22.19	151	327	Peak	horizontal	
3248.72	50.15	62.00	-11.85	54.00	-3.85	151	327	Average	horizontal	
4874.00	53.09	62.39	-9.30	74.00	-20.91	197	356	Peak	horizontal	
4874.00	51.10	60.40	-9.30	54.00	-2.90	197	356	Average	horizontal	
7311.00	47.16	53.87	-6.71	74.00	-26.84	400	337	Peak	horizontal	
9748.00	53.72	57.60	-3.88	74.00	-20.28	100	13	Peak	horizontal	
9748.00	51.07	54.95	-3.88	54.00	-2.93	100	13	Average	horizontal	

1	2	3	4	5						
MHz	Level dBuV/m	Read Level dBuV	Factor dB/m	Limit Line dBuV/m	Over Limit dB	APos cm	TPos deg	Remark	Pol/Phase	Note
4874.00	55.08	64.38	-9.30	74.00	-18.92	188	350	Peak	vertical	
4874.00	53.49	62.79	-9.30	54.00	-9.51	188	350	Average	vertical	
7311.00	47.40	54.11	-6.71	74.00	-26.60	100	274	Peak	vertical	
9748.00	54.72	58.60	-3.88	74.00	-19.28	100	298	Peak	vertical	
9748.00	52.09	55.97	-3.88	54.00	-1.91	100	298	Average	vertical	


802.11b

High Channel (Horizontal)

High Channel (Vertical)




TUV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

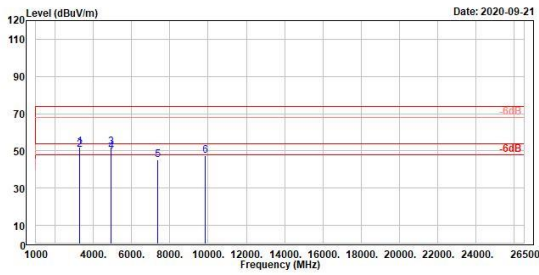

1	2	3	4	5	6
3282.72	3282.72	4924.00	4924.00	7386.00	9848.00
Level	Level	Level	Level	Level	Level
52.14	50.68	52.18	49.85	45.16	47.32
Factor	Factor	Factor	Factor	Factor	Factor
-11.87	-11.87	-9.22	-9.22	-6.76	-3.82
Limit	Limit	Limit	Limit	Limit	Limit
74.00	54.00	74.00	54.00	74.00	54.00
Over	Over	Over	Over	Over	Over
-21.86	-3.32	-21.82	-4.15	-28.84	-26.68
APos	APos	APos	APos	APos	APos
310	310	266	266	300	265
TPos	TPos	TPos	TPos	TPos	TPos
325	325	84	84	159	92
Remark	Remark	Remark	Remark	Remark	Remark
Peak	Average	Peak	Average	Peak	Peak
horizontal	horizontal	horizontal	horizontal	horizontal	horizontal
Pol/Phase	Pol/Phase	Pol/Phase	Pol/Phase	Pol/Phase	Pol/Phase
horizontal	horizontal	horizontal	horizontal	horizontal	horizontal
Note	Note	Note	Note	Note	Note



TUV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

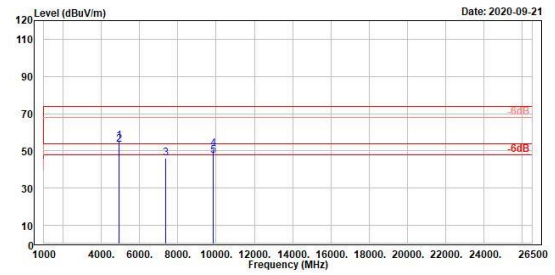

1	2	3	4	5
4924.00	4924.00	7386.00	9848.00	9848.00
Level	Level	Level	Level	Level
55.22	53.35	46.01	51.16	47.27
Factor	Factor	Factor	Factor	Factor
-9.22	-9.22	-6.76	-3.82	-3.82
Limit	Limit	Limit	Limit	Limit
74.00	54.00	74.00	74.00	54.00
Over	Over	Over	Over	Over
-18.78	-9.65	-27.99	-22.84	-6.73
APos	APos	APos	APos	APos
174	174	100	103	103
TPos	TPos	TPos	TPos	TPos
31	31	265	296	296
Remark	Remark	Remark	Remark	Remark
Peak	Average	Peak	Peak	Average
vertical	vertical	vertical	vertical	vertical
Pol/Phase	Pol/Phase	Pol/Phase	Pol/Phase	Pol/Phase
vertical	vertical	vertical	vertical	vertical
Note	Note	Note	Note	Note


802.11g

Low Channel (Horizontal)

Low Channel (Vertical)




TUV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

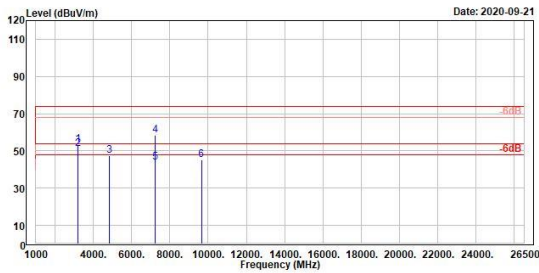

Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	3215.67	53.23	65.12	-11.89	74.00	-20.77	388	4 Peak	horizontal
2	3215.67	51.15	63.04	-11.89	54.00	-2.85	388	4 Average	horizontal
3	4824.00	47.41	56.79	-9.38	74.00	-26.59	191	360 Peak	horizontal
4	7236.00	58.48	65.23	-6.75	74.00	-15.52	100	321 Peak	horizontal
5	7236.00	43.92	50.67	-6.75	54.00	-10.08	100	321 Average	horizontal
6	9648.00	44.98	49.11	-4.13	74.00	-29.02	400	324 Peak	horizontal



TUV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

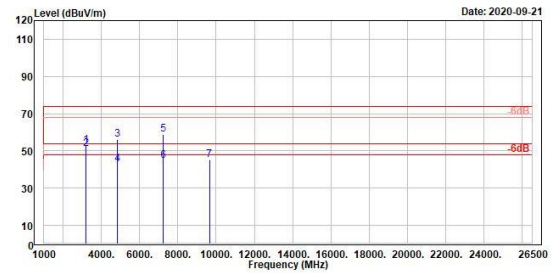

Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	3215.67	53.12	65.01	-11.89	74.00	-20.88	113	323 Peak	vertical
2	3215.67	51.07	62.96	-11.89	54.00	-2.93	113	323 Average	vertical
3	4824.00	56.31	65.69	-9.38	74.00	-17.69	109	352 Peak	vertical
4	4824.00	42.82	52.20	-9.38	54.00	-11.18	109	352 Average	vertical
5	7236.00	58.85	65.60	-6.75	74.00	-15.15	102	320 Peak	vertical
6	7236.00	44.56	51.31	-6.75	54.00	-9.44	102	320 Average	vertical
7	9648.00	45.07	49.29	-4.13	74.00	-28.93	100	52 Peak	vertical


802.11g

Middle Channel (Horizontal)

Middle Channel (Vertical)




TUV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

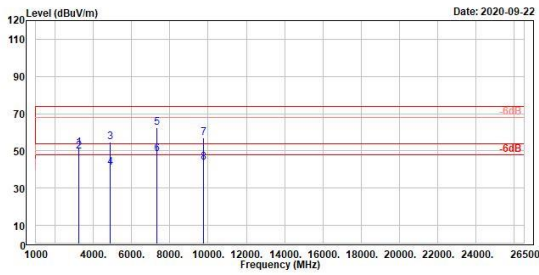

Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	3248.72	51.77	63.62	-11.85	74.00	-22.23	343	9 Peak	horizontal	
2	3248.72	49.86	61.71	-11.85	54.00	-4.14	343	9 Average	horizontal	
3	4874.00	54.88	64.18	-9.30	74.00	-19.12	371	268 Peak	horizontal	
4	4874.00	41.25	50.55	-9.30	54.00	-12.75	371	268 Average	horizontal	
5	7311.00	62.55	69.26	-6.71	74.00	-11.45	390	41 Peak	horizontal	
6	7311.00	48.38	55.09	-6.71	54.00	-5.62	390	41 Average	horizontal	
7	9748.00	56.98	60.86	-3.88	74.00	-17.02	213	360 Peak	horizontal	
8	9748.00	43.80	47.68	-3.88	54.00	-10.20	213	360 Average	horizontal	



TUV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

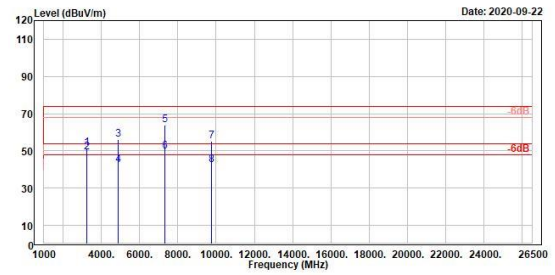

Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	3248.72	51.48	63.33	-11.85	74.00	-22.52	121	325 Peak	vertical	
2	3248.72	49.36	61.21	-11.85	54.00	-4.64	121	325 Average	vertical	
3	4874.00	55.94	65.24	-9.30	74.00	-18.06	179	360 Peak	vertical	
4	4874.00	42.33	51.63	-9.30	54.00	-11.67	179	360 Average	vertical	
5	7311.00	63.65	70.36	-6.71	74.00	-10.35	203	315 Peak	vertical	
6	7311.00	49.61	56.32	-6.71	54.00	-4.39	203	315 Average	vertical	
7	9748.00	55.42	59.30	-3.88	74.00	-18.58	259	0 Peak	vertical	
8	9748.00	42.26	46.14	-3.88	54.00	-11.74	259	0 Average	vertical	


802.11g

High Channel (Horizontal)

High Channel (Vertical)




TUV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

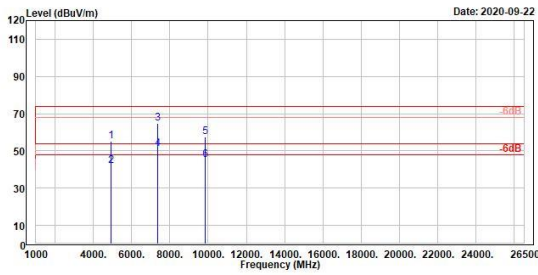

Freq	Level	Read Level	Factor	Limit	Over	Apos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	4924.00	55.32	64.54	-9.22	74.00	-18.68	267	340 Peak	horizontal	
2	4924.00	41.89	51.11	-9.22	54.00	-12.11	267	340 Average	horizontal	
3	7386.00	64.71	71.47	-6.76	74.00	-9.29	381	41 Peak	horizontal	
4	7386.00	51.15	57.91	-6.76	54.00	-2.85	381	41 Average	horizontal	
5	9848.00	57.39	61.21	-3.82	74.00	-16.61	292	360 Peak	horizontal	
6	9848.00	45.08	48.90	-3.82	54.00	-8.92	292	360 Average	horizontal	



TUV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

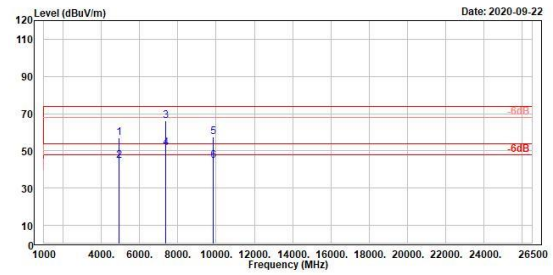

Freq	Level	Read Level	Factor	Limit	Over	Apos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	4924.00	57.09	66.31	-9.22	74.00	-16.91	198	41 Peak	vertical	
2	4924.00	44.74	53.96	-9.22	54.00	-9.26	198	41 Average	vertical	
3	7386.00	66.07	72.83	-6.76	74.00	-7.93	287	315 Peak	vertical	
4	7386.00	51.51	58.27	-6.76	54.00	-2.49	287	315 Average	vertical	
5	9848.00	57.49	61.31	-3.82	74.00	-16.51	191	274 Peak	vertical	
6	9848.00	44.67	48.49	-3.82	54.00	-9.33	191	274 Average	vertical	

802.11n HT20

Low Channel (Horizontal)



Low Channel (Vertical)



TUV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel:+886-2172-1000 Fax:+886-2172-1322



TUV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel:+886-2172-1000 Fax:+886-2172-1322

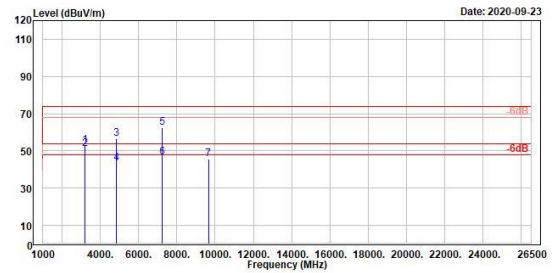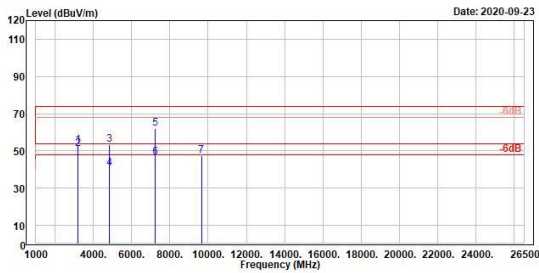

Freq	Level	Read	Level	Factor	Limit	Over	Apos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	3215.67	53.09	64.98	-11.89	74.00	-20.91	388	3	Peak	horizontal	
2	3215.67	51.29	63.18	-11.89	54.00	-2.71	388	3	Average	horizontal	
3	4824.00	53.23	62.61	-9.38	74.00	-20.77	376	2	Peak	horizontal	
4	4824.00	40.49	49.87	-6.75	54.00	-13.51	376	2	Average	horizontal	
5	7236.00	62.22	68.97	-6.75	74.00	-11.78	382	40	Peak	horizontal	
6	7236.00	46.47	53.22	-6.75	54.00	-7.53	382	40	Average	horizontal	
7	9648.00	47.41	51.54	-4.13	74.00	-26.59	328	360	Peak	horizontal	

Freq	Level	Read	Level	Factor	Limit	Over	Apos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	3215.67	53.02	64.91	-11.89	74.00	-20.98	112	323	Peak	vertical	
2	3215.67	51.29	63.18	-11.89	54.00	-2.71	112	323	Average	vertical	
3	4824.00	56.73	66.11	-9.38	74.00	-17.27	184	1	Peak	vertical	
4	4824.00	43.45	52.83	-9.38	54.00	-10.55	184	1	Average	vertical	
5	7236.00	62.31	69.06	-6.75	74.00	-11.69	199	315	Peak	vertical	
6	7236.00	46.62	53.37	-6.75	54.00	-7.38	199	315	Average	vertical	
7	9648.00	45.69	49.82	-4.13	74.00	-28.31	250	0	Peak	vertical	


802.11n HT20

Middle Channel (Horizontal)

Middle Channel (Vertical)




TUV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel:+886-2172-1000 Fax:+886-2172-1322

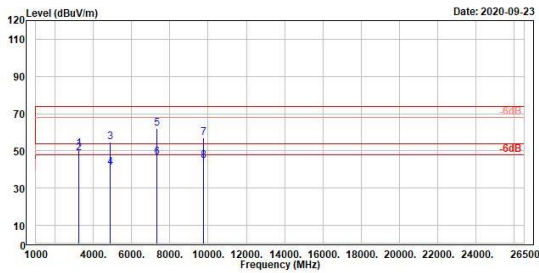

Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	3248.72	50.99	62.04	-11.05	74.00	-23.01	288	0 Peak	horizontal	
2	3248.72	49.03	60.88	-11.85	54.00	-4.97	288	0 Average	horizontal	
3	4872.22	54.77	64.07	-9.30	74.00	-19.23	394	0 Peak	horizontal	
4	4872.22	40.96	50.26	-9.30	54.00	-13.04	394	0 Average	horizontal	
5	7311.00	62.12	68.83	-6.71	74.00	-11.88	104	14 Peak	horizontal	
6	7311.00	46.48	53.19	-6.71	54.00	-7.52	104	14 Average	horizontal	
7	9748.00	56.98	60.86	-3.88	74.00	-17.02	255	0 Peak	horizontal	
8	9748.00	44.92	48.80	-3.88	54.00	-9.08	255	0 Average	horizontal	



TUV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel:+886-2172-1000 Fax:+886-2172-1322

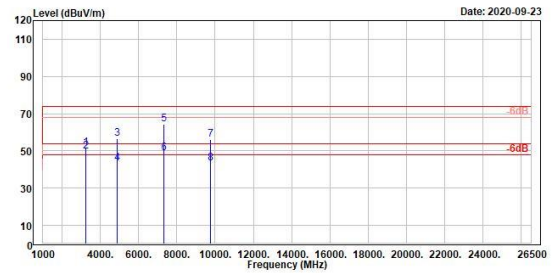

Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	3248.72	51.40	63.25	-11.85	74.00	-22.60	120	322 Peak	vertical	
2	3248.72	49.59	61.44	-11.85	54.00	-4.41	120	322 Average	vertical	
3	4874.00	56.63	65.93	-9.30	74.00	-17.37	188	360 Peak	vertical	
4	4874.00	43.24	52.54	-9.30	54.00	-10.76	188	360 Average	vertical	
5	7311.00	64.46	71.17	-6.71	74.00	-9.54	224	320 Peak	vertical	
6	7311.00	48.92	55.63	-6.71	54.00	-5.00	224	320 Average	vertical	
7	9748.00	56.18	60.06	-3.88	74.00	-17.82	182	281 Peak	vertical	
8	9748.00	43.43	47.31	-3.88	54.00	-10.57	182	281 Average	vertical	


802.11n HT20

High Channel (Horizontal)

High Channel (Vertical)




TUV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

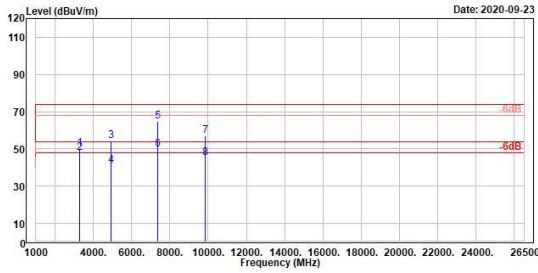

Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	3282.72	50.19	62.06	-11.87	74.00	-23.81	400	6 Peak	horizontal	
2	3282.72	47.72	59.59	-11.87	54.00	-6.28	400	6 Average	horizontal	
3	4924.00	54.10	63.32	-9.22	74.00	-19.90	399	229 Peak	horizontal	
4	4924.00	40.86	50.08	-9.22	54.00	-13.14	399	229 Average	horizontal	
5	7386.00	65.02	71.78	-6.76	74.00	-8.98	336	327 Peak	horizontal	
6	7386.00	49.65	56.41	-6.76	54.00	-4.35	336	327 Average	horizontal	
7	9848.00	56.81	60.63	-3.82	74.00	-17.19	291	0 Peak	horizontal	
8	9848.00	45.88	48.90	-3.82	54.00	-8.92	291	0 Average	horizontal	



TUV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

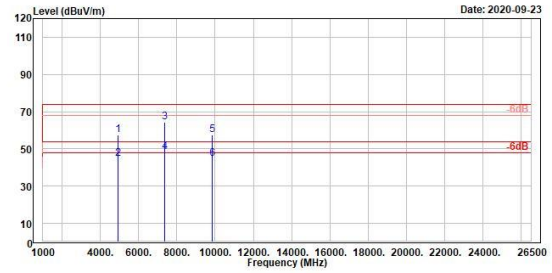

Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	4924.00	57.32	66.54	-9.22	74.00	-16.68	177	41 Peak	vertical	
2	4924.00	44.55	53.77	-9.22	54.00	-9.45	177	41 Average	vertical	
3	7386.00	64.18	70.94	-6.76	74.00	-9.82	111	66 Peak	vertical	
4	7386.00	48.48	55.24	-6.76	54.00	-5.52	111	66 Average	vertical	
5	9848.00	57.34	61.16	-3.82	74.00	-16.66	179	279 Peak	vertical	
6	9848.00	44.76	48.58	-3.82	54.00	-9.24	179	279 Average	vertical	