

TEST REPORT

Report No.: BCTC2112101340-2E

Applicant: Lunar Artefacts Ltd

Product Name: THE PULSE VOLITARI

Model/Type
reference: LAPV-C-MK1

Tested Date: 2021-12-16 to 2022-01-11

Issued Date: 2022-01-12



Shenzhen BCTC Testing Co., Ltd.



FCC ID: 2AWYJ-LAPV-C-MK1

Product Name: THE PULSE VOLITARI
Trademark: Lunar Artefacts
Model/Type reference: LAPV-C-MK1
Prepared For: Lunar Artefacts Ltd
Address: Lunar Artefacts, Third Floor, 38 Spital Square, London, E1 6DY, United Kingdom
Manufacturer: ShenZhen Fang Xin Technology Co., Ltd.
Address: Rm 503, 5F, Hengbo Innovation Science and Technology Park, No.33, Qingning Rd, Longhua St, Longhua Dist, Shenzhen, China
Prepared By: Shenzhen BCTC Testing Co., Ltd.
Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: 2021-12-16
Sample tested Date: 2021-12-16 to 2022-01-11
Issue Date: 2022-01-12
Report No.: BCTC2112101340-2E
Test Standards: FCC CFR 47 part1, 1.1307(b), 1.1310
Test Results: PASS

Tested by:



Eric Yang/Project Handler

Approved by:




Zero Zhou/Reviewer

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

Table Of Content

| Test Report Declaration | Page |
|---|------|
| 1. Version | 4 |
| 2. Product Information | 5 |
| 2.1 Product Information | 5 |
| 2.2 Support Equipment | 5 |
| 2.3 Test Mode | 5 |
| 3. Test Facility And Test Instrument Used | 6 |
| 3.1 Test Facility | 6 |
| 3.2 Test Instrument Used | 6 |
| 4. Method Of Measurement | 7 |
| 4.1 Applicable Standard | 7 |
| 4.2 Block Diagram Of Test Setup | 7 |
| 4.3 Limit | 8 |
| 4.4 Test procedure | 8 |
| 4.5 Equipment Approval Considerations | 9 |
| 4.6 E and H field Strength | 10 |
| 5. Photographs Of Test Set-Up | 11 |

(Note: N/A Means Not Applicable)

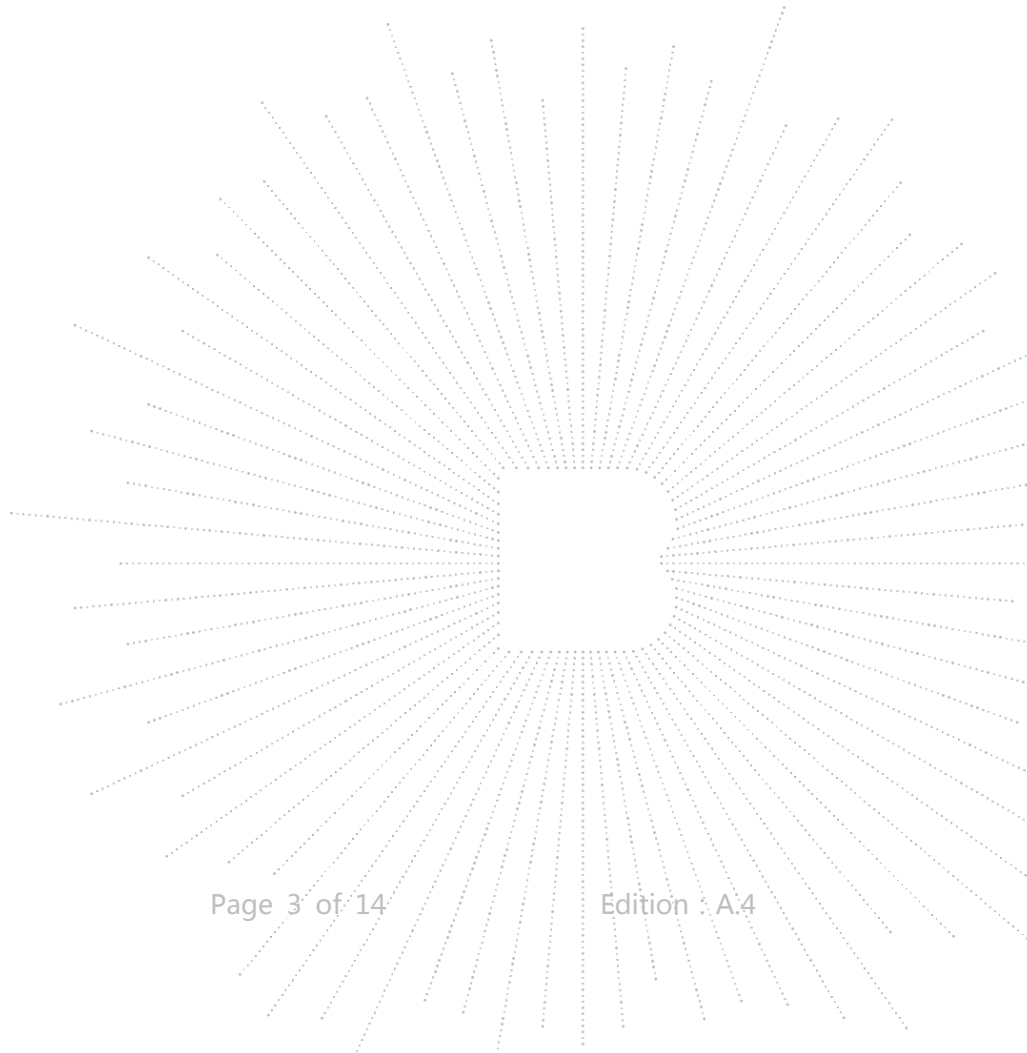

1. Version

| Report No. | Issue Date | Description | Approved |
|-------------------|------------|-------------|----------|
| BCTC2112101340-2E | 2022-01-12 | Original | Valid |
| | | | |

2. Product Information

2.1 Product Information

| | |
|-----------------------|---|
| Model/Type reference: | LAPV-C-MK1 |
| Model differences: | N/A |
| Product Description: | THE PULSE VOLITARI |
| Operation Frequency: | 115kHz-205kHz |
| Antenna installation: | loop coil antenna |
| Ratings: | Input: DC 5V/3A, 9V/3A, 12V/3A Output: 5W*2, 7.5W*2, 10W*2 |

2.2 Support Equipment

| Device Type | Brand | Model | Series No. | Note |
|--------------|--------|----------|------------|-----------|
| Mobile phone | iphone | Iphone11 | N/A | Auxiliary |

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

2.3 Test Mode

| | |
|-------------|--------------------------|
| Test Mode 1 | Wireless charger 10W+10W |
| Test Mode 2 | Wireless charger 5W |

3. Test Facility And Test Instrument Used

3.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

IC Registered No.: 23583

3.2 Test Instrument Used


| EMF Test | | | | | |
|-----------------------------------|--------------|---------|-------------|---------------|---------------|
| Equipment | Manufacturer | Model# | Serial# | Last Cal. | Next Cal. |
| Electro magnetic radiation tester | Wavecontrol | SMP160 | 19SN0980 | Aug. 30, 2021 | Aug. 29, 2022 |
| Electro magnetic field probe | Wavecontrol | WP400-3 | 20WP120082 | Aug. 30, 2021 | Aug. 29, 2022 |
| 843 Chamber | ETS | 843 | 84301 | Aug. 27, 2020 | Aug. 26, 2023 |
| Software | Frad | EZ-EMC | EMC-CON 3A1 | \ | \ |

4. Method Of Measurement

4.1 Applicable Standard

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines. According to §1.1310 and §2.1093 RF exposure is calculated. According KDB680106 D01v03: RF Exposure Wireless Charging Apps v02.

4.2 Block Diagram Of Test Setup

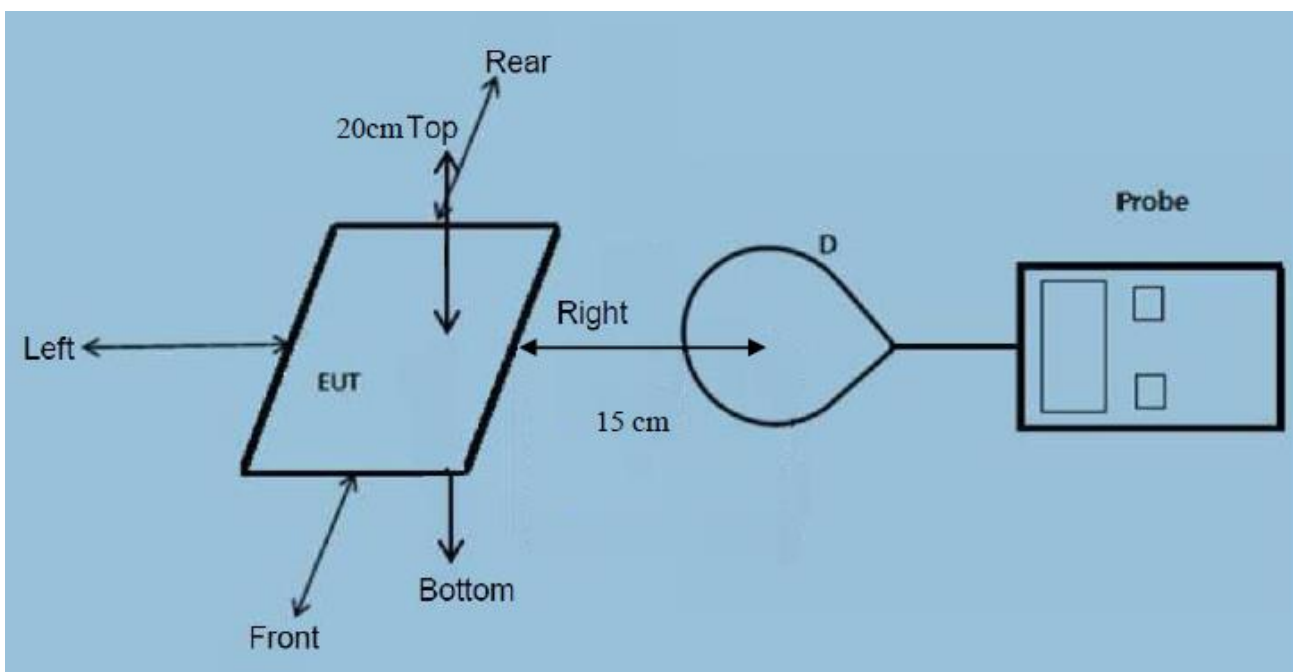

Note: Measurements should be made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device

4.3 Limit

| Limits for Occupational / Controlled Exposure | | | | |
|---|-----------------------------------|-----------------------------------|--|--|
| Frequency Range (MHz) | Electric Field Strength (E) (V/m) | Magnetic Field Strength (H) (A/m) | Power Density (S) (mW/ cm ²) | Averaging Time E ² , H ² or S (minutes) |
| 0.3-3.0 | 614 | 1.63 | (100)* | 6 |
| 3.0-30 | 1842 / f | 4.89 / f | (900 / f)* | 6 |
| 30-300 | 61.4 | 0.163 | 1.0 | 6 |
| 300-1500 | | | F/300 | 6 |
| 1500-100,000 | | | 5 | 6 |

| Limits for General Population / Uncontrolled Exposure | | | | |
|---|-----------------------------------|-----------------------------------|--|--|
| Frequency Range (MHz) | Electric Field Strength (E) (V/m) | Magnetic Field Strength (H) (A/m) | Power Density (S) (mW/ cm ²) | Averaging Time E ² , H ² or S (minutes) |
| 0.3-1.34 | 614 | 1.63 | (100)* | 30 |
| 1.34-30 | 824/f | 2.19/f | (180 / f)* | 30 |
| 30-300 | 27.5 | 0.073 | 0.2 | 30 |
| 300-1500 | | | F/1500 | 30 |
| 1500-100,000 | | | 1 | 30 |

4.4 Test procedure

- The RF exposure test was performed on 360 degree turn table in anechoic chamber.
- The measurement probe was placed at test distance (15cm) which is between the edge of the charger and the geometric centre of probe.
- The turn table was rotated 360d degree to search of highest strength.
- The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E) were completed.
- The EUT were measured according to the dictates of KDB 680106D01v03.

4.5 Equipment Approval Considerations

The EUT does comply with item 5(b) of KDB 680106 D01 v03r01

1) Power transfer frequency is less than 1MHz

Yes, the device operate in the frequency range from 115-205KHz

2) Output power from each primary coil is less than or equal to 15 watts.

Yes, the maximum output power of the primary coil is 10W.

3) The system may consist of more than one source primary coils, charging one or more clients. If more than one primary coil is present, the coil pairs may be powered on at the same time.

Yes. The EUT has five source primary coils

4) Client device is inserted in or placed directly in contact with the transmitter.

Yes, client device is placed directly in contact with the transmitter.

5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).

Yes, the EUT is wireless charge.

6) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

Yes, the EUT field strength levels are 10% x MPE limit.

4.6 E and H field Strength

(The worst data)

E-Field Strength at 15 cm surrounding the EUT and 20cm above the top surface of the EUT

| Battery level | Frequency Range (MHz) | Test Position A | Test Position B | Test Position C | Test Position D | Test Position E | 10% Limits Test (A/m) | Limits Test (A/m) |
|---------------|-----------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------------|-------------------|
| 1% | 0.115-0.205 | 0.62 | 0.92 | 0.64 | 0.47 | 0.71 | 61.4 | 614 |
| 50% | 0.115-0.205 | 0.62 | 0.59 | 0.54 | 0.40 | 0.62 | 61.4 | 614 |
| 99% | 0.115-0.205 | 0.68 | 0.84 | 0.53 | 0.47 | 0.47 | 61.4 | 614 |

H-Field Strength at 15 cm surrounding the EUT and 20cm above the top surface of the EUT

| Battery level | Frequency Range (MHz) | Test Position A | Test Position B | Test Position C | Test Position D | Test Position E | 10% Limits Test (A/m) | Limits Test (A/m) |
|---------------|-----------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------------|-------------------|
| 1% | 0.115-0.205 | 0.069 | 0.068 | 0.065 | 0.068 | 0.076 | 0.163 | 1.63 |
| 50% | 0.115-0.205 | 0.061 | 0.071 | 0.071 | 0.079 | 0.074 | 0.163 | 1.63 |
| 99% | 0.115-0.205 | 0.076 | 0.065 | 0.062 | 0.067 | 0.062 | 0.163 | 1.63 |

5. Photographs Of Test Set-Up







STATEMENT

- 1.The equipment lists are traceable to the national reference standards.
- 2.The test report can not be partially copied unless prior written approval is issued from our lab.
- 3.The test report is invalid without stamp of laboratory.
- 4.The test report is invalid without signature of person(s) testing and authorizing.
- 5.The test process and test result is only related to the Unit Under Test.
- 6.The quality system of our laboratory is in accordance with ISO/IEC17025.
- 7.If there is any objection to report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL : 400-788-9558

P.C.: 518103

FAX : 0755-33229357

Website : <http://www.chnbctc.com>

E-Mail : bctc@bctc-lab.com.cn

******* END *******