


SAR TEST REPORT

FCC ID.....:	2AX4YN60PRO	
Test Report No.....:	TCT230214E004	
Date of issue.....:	10 th Mar. 2023	
Testing laboratory.....:	SHENZHEN TONGCE TESTING LAB	
Testing location/ address.....:	2101 & 2201, Zhenchang Factory Renshan Industrial Zone, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, 518103, People's Republic of China	
Applicant's name.....:	Shenzhen DOOGEE Hengtong Technology CO., LTD	
Address.....:	B, 2/F, Building A4, Silicon Valley Power Digital Industrial Park, No. 22, Dafu Industrial Zone, Guanlan Aobei Community, Guanlan Street, Longhua New District, Shenzhen, Guangdong, China	
Manufacturer's name	Shenzhen DOOGEE Hengtong Technology CO., LTD	
Address.....:	B, 2/F, Building A4, Silicon Valley Power Digital Industrial Park, No. 22, Dafu Industrial Zone, Guanlan Aobei Community, Guanlan Street, Longhua New District, Shenzhen, Guangdong, China	
Product Name.....:	Smart Phone	
Trade Mark.....:	DOOGEE	
Model/Type reference.....:	N60Pro	
SAR Max. Values.....:	0.425 W/Kg (1g) for head; 1.141 W/Kg (1g) for hotspot (body-worn)	
Date of receipt of test item..:	13 th Feb. 2023	
Date (s) of performance of test.....:	6 th Mar. 2023 to 9 th Mar. 2023	
Tested by (+signature).....:	Karl WANG	<i>Karl Wang</i>
Check by (+signature).....:	Beryl Zhao	<i>Beryl Zhao</i>
Approved by (+signature)....:	Tomsin	<i>Tomsin</i>



General disclaimer:

This report shall not be reproduced except in full, without the written approval of SHENZHEN TONGCE TESTING LAB. This document may be altered or revised by SHENZHEN TONGCE TESTING LAB personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

TABLE OF CONTENTS

1. General Product Information	3
1.1. EUT DESCRIPTION	3
1.2. MODEL(S) LIST	4
2. Test standards	5
3. Facilities and Accreditations	6
3.1. FACILITIES	6
3.2. LOCATION	6
3.3. ENVIRONMENT CONDITION:	6
4. Test Result Summary	7
5. RF Exposure Limit	8
6. SAR Measurement System Configuration	9
6.1. SAR MEASUREMENT SET-UP	9
6.2. E-FIELD PROBE	10
6.3. PHANTOM	10
6.4. DEVICE HOLDER	11
6.5. DATA STORAGE AND EVALUATION	12
6.6. POSITION OF THE WIRELESS DEVICE IN RELATION TO THE PHANTOM	13
6.7. TISSUE DIELECTRIC PARAMETERS	16
6.8. TISSUE-EQUIVALENT LIQUID PROPERTIES	17
6.9. SYSTEM CHECK	18
7. Measurement Procedure	19
8. Conducted Output Power	22
9. Exposure Position Consideration	42
9.1. ANTENNA INFORMATION	42
9.2. TEST POSITION CONSIDERATION	42
10. SAR Test Results Summary	43
10.1. HEAD 1G SAR DATA	43
10.2. HOTSPOT/BODY-WORN 1G SAR DATA	44
10.3. SIMULTANEOUS TRANSMISSION CONCLUSION	47
10.4. MEASUREMENT UNCERTAINTY (450MHZ-3GHZ)	52
10.5. TEST EQUIPMENT LIST	54
11. System Check Results	55
12. SAR Test Data	71
Appendix A: EUT Photos	133
Appendix B: Test Setup Photos	134
Appendix C: Probe Calibration Certificate	136
Appendix D: Dipole Calibration Report	153

1. General Product Information

1.1. EUT description

Product Name:	Smart Phone
Model :	N60Pro
Trade Mark:	DOOGEE
Sample No.	BTFSN230213E002-1/1
Power Supply:	Rechargeable Battery Max Charging Voltage 3.87V
2G	
Operation Band:	GSM850, GSM1900
Supported type:	GSM/GPRS/EGPRS
Power Class:	GSM850: Power Class 5; GSM1900: Power Class 0
Modulation Type:	GMSK for GSM/GPRS; EGPRS for 8PSK
GSM Release Version:	R99
GPRS Multislot Class:	12
EGPRS Multislot Class:	12
3G	
Operation Band:	FDD Band II & FDD Band IV & FDD Band V
Power Class:	Power Class 3
Modulation Type:	QPSK for WCDMA/HSDPA/HSUPA
WCDMA Release Version:	R99
HSDPA Release Version:	Release 5
HSUPA Release Version:	Release 6
DC-HSUPA Release Version:	Not Supported
LTE	
Operation Band:	LTE Band 2 & LTE Band 4 & LTE Band 5 & LTE Band 7 & LTE Band 12 & LTE Band 17 & LTE Band 66
Power Class:	Power Class 3
Modulation Type:	QPSK & 16-QAM for LTE
Wi-Fi 2.4G	
Supported type:	802.11b/802.11g/802.11n
Modulation:	802.11b: DSSS 802.11g/802.11n: OFDM
Operation frequency:	802.11b/802.11g/802.11n(HT20): 2412MHz~2462MHz; 802.11n(HT40): 2422MHz~2452MHz;
Channel number:	802.11b/802.11g/802.11n(HT20): 11; 802.11n(HT40): 9;
Channel separation:	5MHz
Wi-Fi 5G	
Operation Frequency:	Band 1: 5180 MHz -5240 MHz Band 3: 5745 MHz -5825 MHz
Channel Bandwidth:	802.11a: 20MHz 802.11n: 20MHz, 40MHz

	802.11ac: 20MHz, 40MHz, 80MHz
Modulation Technology:	Orthogonal Frequency Division Multiplexing(OFDM)
Modulation Type	256QAM, 64QAM, 16QAM, BPSK, QPSK
Bluetooth	
Bluetooth Version:	Supported 5.0
Modulation:	GFSK(1Mbps) , $\pi/4$ -DQPSK(2Mbps) , 8-DPSK(3Mbps)
Operation frequency:	2402MHz~2480MHz
Channel number:	79/40
Channel separation:	1MHz/2MHz

1.2. Model(s) list

No.	Model No.	Tested with
1	N60Pro	<input checked="" type="checkbox"/>
Other models	N/A	<input type="checkbox"/>

Note: N60Pro is tested model, other models are derivative models. The models are identical in circuit and PCB layout, only different on the model names. So the test data of N60Pro can represent the remaining models.

2. Test standards

The tests were performed according to following standards:

FCC 47 CFR § 2.1093

IEEE1528-2013: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate in the Human Head from Wireless Communications Devices: Measurement Techniques

IEEE C95.1-2019: IEEE Standard for Safety Levels with Respect to Human Exposure to Electric, Magnetic, and Electromagnetic Fields, 0 Hz to 300 GHz

KDB447498 D01: General RF Exposure Guidance v06

KDB447498 D04: Interim General RF Exposure Guidance v01

KDB865664 D01: SAR measurement 100MHz to 6GHz v01r04

KDB865664 D02: RF Exposure Reporting v01r02

KDB941225 D01: 3G SAR Procedures v03r01

KDB941225 D05: SAR for LTE Devices v02r05

KDB248227 D01: 802.11 Wi-Fi SAR v02r02

KDB941225 D06: Hotspot Mode v02r01

KDB648474 D04: Handset SAR v01r03

KDB690783 D01: SAR Listings on Grant v01r03

3. Facilities and Accreditations

3.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 645098

Shenzhen Tongce Testing Lab

The 3m Semi-anechoic chamber has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- IC - Registration No.: 10668A-1

The 3m Semi-anechoic chamber of Shenzhen Tongce Testing Lab.. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

3.2. Location

SHENZHEN TONGCE TESTING LAB.

Address: 2101 & 2201, Zhenchang Factory Renshan Industrial Zone, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, 518103, People's Republic of China

3.3. Environment Condition:

Temperature:	18°C ~25°C
Humidity:	35%~75% RH
Atmospheric Pressure:	1011 mbar

4. Test Result Summary

The maximum results of Specific Absorption Rate (SAR) found during test as bellows:

<Highest Reported standalone SAR Summary>

Exposure Position	Frequency Band	Reported SAR (W/kg)	Equipment Class	Highest Reported SAR (W/kg)
Head 1-g SAR (0 mm Gap)	GSM 850	0.206	PCE	0.425
	GSM 1900	0.086		
	WCDMA Band II	0.072		
	WCDMA Band IV	0.425		
	WCDMA Band V	0.231		
	LTE Band 2	0.094		
	LTE Band 4	0.091		
	LTE Band 5	0.087		
	LTE Band 7	0.131		
	LTE Band 12	0.050		
	LTE Band 17	0.083		
	LTE Band 66	0.040		
	Bluetooth	0.089		
	WLAN 2.4 GHz	0.062	DTS	
	WLAN 5.2 GHz	0.184	NII	
WLAN 5.8 GHz	0.221			
Exposure Position	Frequency Band	Reported SAR (W/kg)	Equipment Class	Highest Reported SAR (W/kg)
Hotspot(Body-worn) 1-g SAR (10 mm Gap)	GSM 850	0.516	PCE	1.141
	GSM 1900	1.040		
	WCDMA Band II	0.786		
	WCDMA Band IV	0.414		
	WCDMA Band V	0.223		
	LTE Band 2	1.141		
	LTE Band 4	0.662		
	LTE Band 5	0.325		
	LTE Band 7	1.093		
	LTE Band 12	0.130		
	LTE Band 17	0.142		
	LTE Band 66	0.540		
	WLAN 2.4 GHz	0.064		
	WLAN 5.2 GHz	0.250	NII	
	WLAN 5.8 GHz	0.189		

<Highest Reported simultaneous SAR Summary>

Exposure Position	Frequency Band	Highest Reported Simultaneous Transmission SAR (W/kg)
Head 1-g SAR (0 mm Gap)	WCDMA Band IV + 5G WIFI	0.632
Hotspot/Body-worn 1-g SAR (10 mm Gap)	LTE Band 2 + 5G WIFI	1.391

Note:

1. The highest simultaneous transmission is scalar summation of Reported standalone SAR per FCC KDB 690783 D01 v01r03, and scalar SAR summation of all possible simultaneous transmission scenarios are < 1.6W/kg.
2. This device is compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-2019, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013.

5. RF Exposure Limit

Type Exposure	SAR (W/kg)
	Uncontrolled Exposure Limit
Spatial Peak SAR (averaged over any 1 g of tissue)	1.60
Spatial Peak SAR (hands/wrists/feet/ankles averaged over 10g)	4.00
Spatial Peak SAR (averaged over the whole body)	0.08

Note:

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

6. SAR Measurement System Configuration

6.1. SAR Measurement Set-up

The OPENSAR system for performing compliance tests consist of the following items:

A standard high precision 6-axis robot (KUKA) with controller and software.

KUKA Control Panel (KCP)

A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with a Video Positioning System (VPS).

The stress sensor is composed with mechanical and electronic when the electronic part detects a change on the electro-mechanical switch; it sends an “Emergency signal” to the robot controller that to stop robot’s moves A computer operating Windows XP.


OPENSAR software Remote control with teaches pendant and additional circuitry for robot safety such as warning lamps, etc.

The SAM phantom enabling testing left-hand right-hand and body usage.

The Position device for handheld EUT

Tissue simulating liquid mixed according to the given recipes.

System validation dipoles to validate the proper functioning of the system.

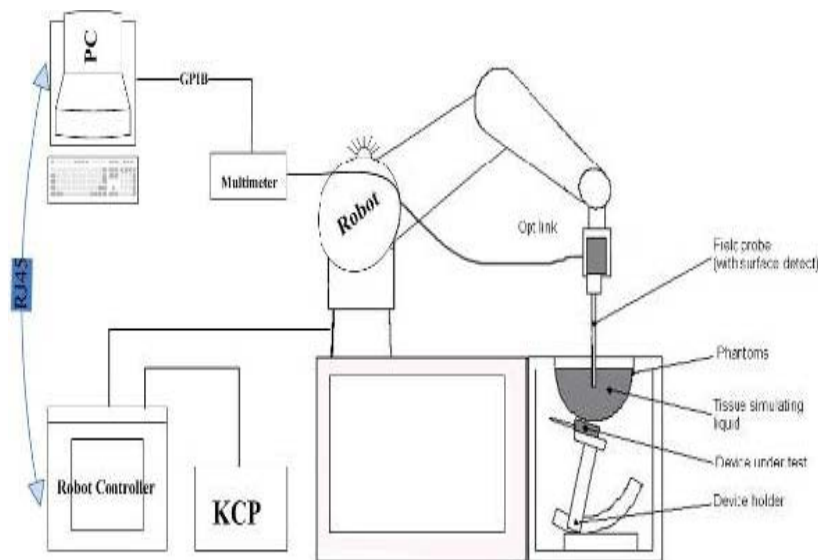

KUKA SAR Test System Configuration

6.2. E-field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by MVG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

Probe Specification

Construction Symmetrical design with triangular core
Interleaved sensors
Built-in shielding against static charges
PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration ISO/IEC 17025 calibration service available.

Device Type	COMOSAR DOSIMETRIC E FIELD PROBE
Manufacturer	MVG
Model	SSE2
Serial Number	SN 36/20 EPGO346
Frequency Range of Probe	0.15GHz-6GHz
Resistance of Three Dipoles at Connector	Dipole 1:R1=0.217MΩ Dipole 2:R3=0.245MΩ Dipole 3:R3=0.219MΩ




Photo of E-Field Probe

6.3. Phantom

The SAM Phantom SAM120 is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is in compliance with the specification set in IEEE P1528 and CENELEC IEC 62209-1, IEC 62209-2:2010.

The phantom enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region.

A cover prevents the evaporation of the liquid.

Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections.

Body SAR testing also used the flat section between the head profiles.

Name: COMOSAR IEEE SAM PHANTOM

S/N: SN 19/15 SAM 120


Manufacture: MVG



SAM Twin Phantom

6.4. Device Holder

In combination with the Generic Twin Phantom SAM120, the Mounting Device enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately, and repeatedly positioned according to the FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).

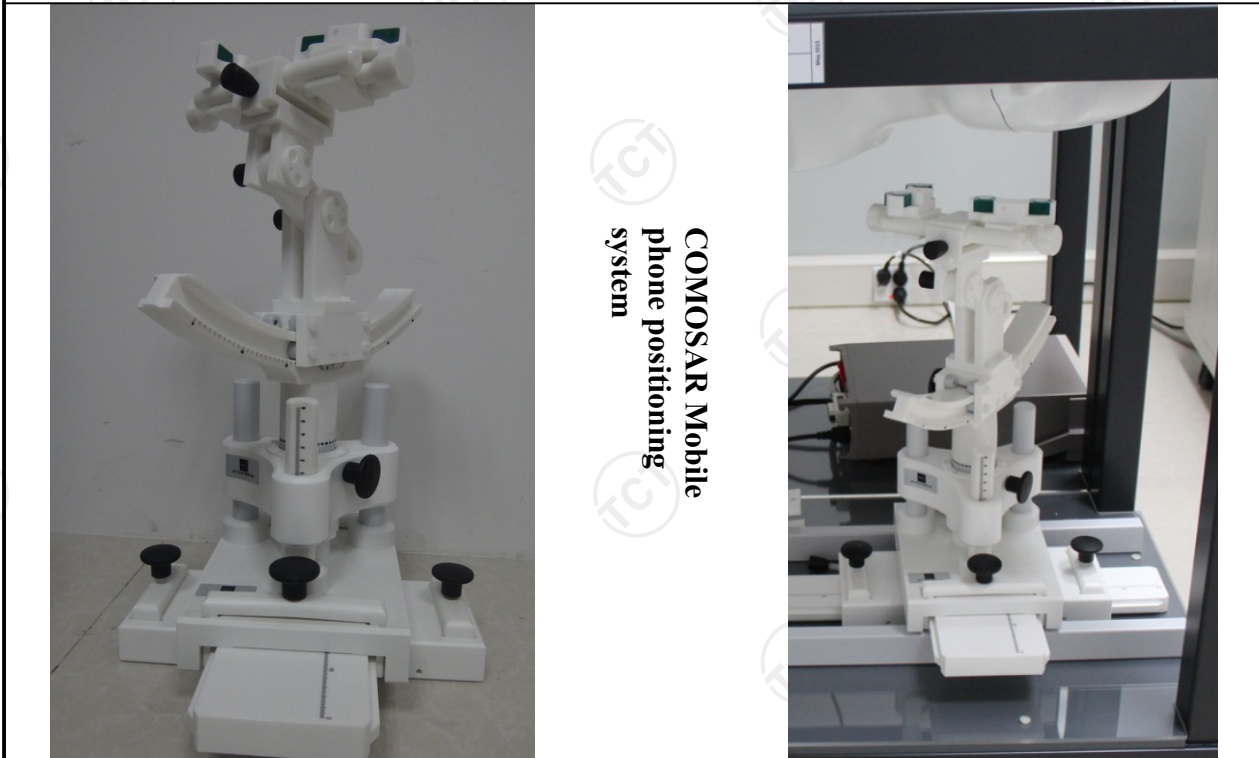

COMOSAR Mobile
phone positioning
system

6.5. Data Storage and Evaluation

Data Storage

The OPENSAR software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

Data Evaluation

The OPENSAR software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Normi, ai0, ai1, ai2
	- Conversion factor	ConvFi
	- Diode compression point	Dcpi
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the OPENSAR components. In the direct measuring mode of the millimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot c f / d c p_i$$

With	V_i	= compensated signal of channel i	(i = x, y, z)
	U_i	= input signal of channel i	(i = x, y, z)
	cf	= crest factor of exciting field	(MVG parameter)
	dcpi	= diode compression point	(MVG parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$\begin{aligned} \text{E-field probes: } E_i &= (V_i / \text{Normi} \cdot \text{ConvF})^{1/2} \\ \text{H-field probes: } H_i &= (V_i)^{1/2} \cdot (ai_0 + ai_1 f + ai_2 f^2) / f \end{aligned}$$

With	V_i	= compensated signal of channel i	(i = x, y, z)
	Normi	= sensor sensitivity of channel i	(i = x, y, z)
		[mV/(V/m) ²] for E-field Probes	
	ConvF	= sensitivity enhancement in solution	
	aij	= sensor sensitivity factors for H-field probes	
	f	= carrier frequency [GHz]	
	E_i	= electric field strength of channel i in V/m	
	H_i	= magnetic field strength of channel i in A/m	

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot})^2 \cdot \sigma / (\rho \cdot 1000)$$

- with SAR = local specific absorption rate in mW/g
- E_{tot} = total field strength in V/m
- σ = conductivity in [mho/m] or [Siemens/m]
- ρ = equivalent tissue density in g/cm³



Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

6.6. Position of the wireless device in relation to the phantom

Handset Reference Points


$$P_{pwe} = E_{tot}^2 / 3770 \text{ or } P_{pwe} = H_{tot}^2 \cdot 37.7$$

- With P_{pwe} = equivalent power density of a plane wave in mW/cm²
- E_{tot} = total electric field strength in V/m
- H_{tot} = total magnetic field strength in A/m

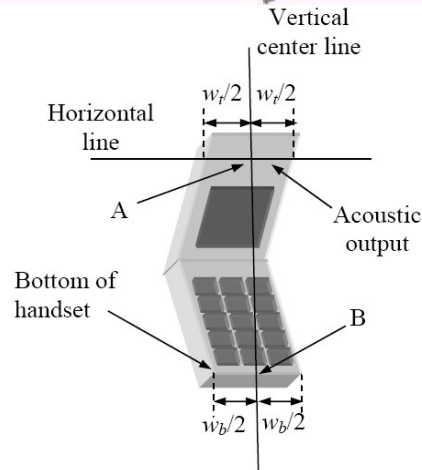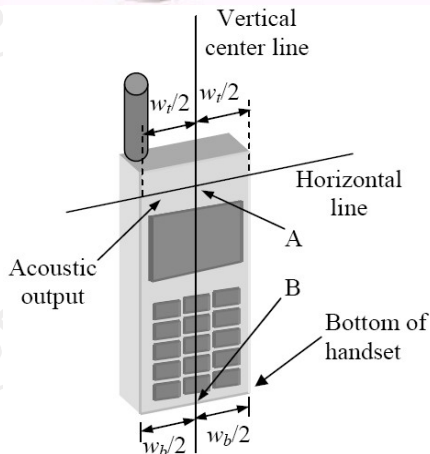


- W_t Width of the handset at the level of the acoustic
- W_b Width of the bottom of the handset
- A Midpoint of the width w_t of the handset at the level of the acoustic output
- B Midpoint of the width w_b of the bottom of the handset

Positioning for Cheek / Touch

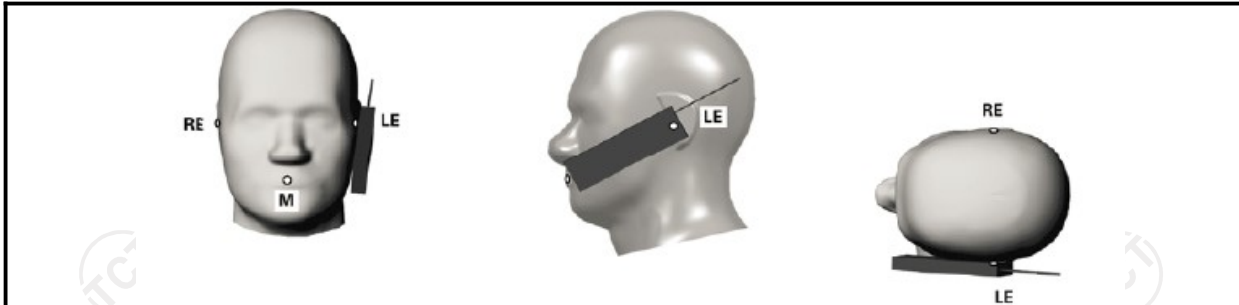

Positioning for Ear / 15° Tilt

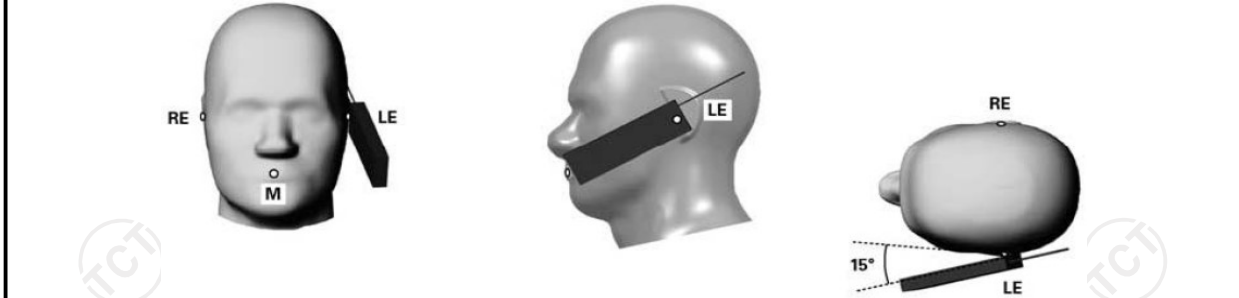

Body Worn Accessory Configurations

To position the device parallel to the phantom surface with either keypad up or down.

To adjust the device parallel to the flat phantom.

To adjust the distance between the device surface and the flat phantom to 15mm or holster surface and the flat phantom to 0 mm.

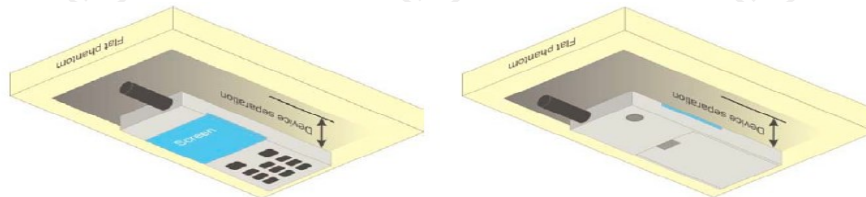


Illustration for Body Worn Position

Wireless Router (Hotspot) Configurations

Some battery-operated handsets have the capability to transmit and receive internet connectivity through simultaneous transmission of WIFI in conjunction with a separate licensed transmitter. The FCC has provided guidance in KDB Publication 941225 D06 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 mm from the front, back and edges of the device with antennas 2.5 cm or closer to the edge of the device, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions. Therefore, SAR must be evaluated for each frequency transmission and mode separately and summed with the WIFI transmitter according to KDB 648474 publication procedures. The “Portable Hotspot” feature on the handset was NOT activated, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal.


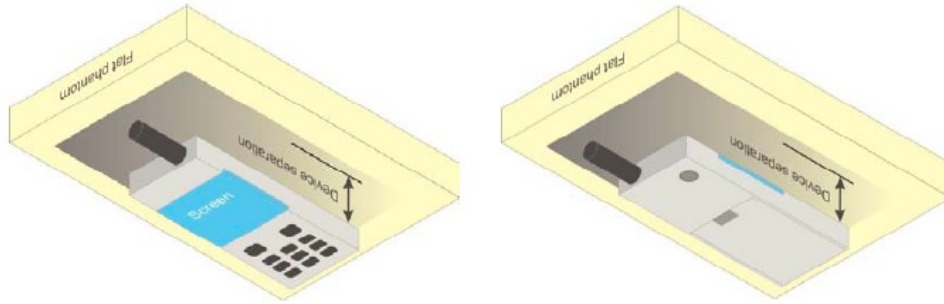


Illustration for Hotspot Position

Limb-worn device

A limb-worn device is a unit whose intended use includes being strapped to the arm or leg of the user while transmitting (except in idle mode). It is similar to a body-worn device. Therefore, the test positions of 6.1.4.4 also apply. The strap shall be opened so that it is divided into two parts as shown in Figure 9. The device shall be positioned directly against the phantom surface with the strap straightened as much as possible and the back of the device towards the phantom.

If the strap cannot normally be opened to allow placing in direct contact with the phantom surface, it may be necessary to break the strap of the device but ensuring to not damage the antenna.

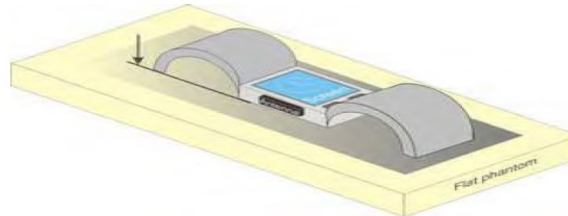

Test position for limb-worn devices

6.7. Tissue Dielectric Parameters

The liquid used for the frequency range of 100MHz-6G consisted of water, sugar, salt and Cellulose. The liquid has been previously proven to be suited for worst-case. The following Table shows the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the IEEE 1528 and IEC 62209.

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine of the determine of the dielectric parameter are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within $\pm 5\%$ of the target values.

The following materials are used for producing the tissue-equivalent materials

Targets for tissue simulating liquid

Frequency (MHz)	Liquid Type	Liquid Type (σ)	$\pm 5\%$ Range	Permittivity (ϵ)	$\pm 5\%$ Range
750	Head	0.89	0.85~0.93	41.90	39.81~44.00
835	Head	0.90	0.86~0.95	41.50	39.43~43.58
1800-2000	Head	1.40	1.33~1.47	40.00	38.00~42.00
2450	Head	1.80	1.71~1.89	39.20	37.24~41.16
2600	Head	1.96	1.86~2.06	39.00	37.05~40.95
750	Body	0.96	0.91~1.01	55.50	52.73~58.28
835	Body	0.97	0.92~1.02	55.20	52.44~57.96
1800-2000	Body	1.52	1.44~1.60	53.30	50.64~55.97
2450	Body	1.95	1.85~2.05	52.70	50.07~55.34
2600	Body	2.16	2.05~2.27	52.50	49.88~55.13
5200	Body	5.30	5.04~5.57	49.00	46.55~51.45
5300	Body	5.42	5.15~5.69	48.90	46.46~51.35
5600	Body	5.77	5.48~6.06	48.50	46.08~50.93
5800	Body	6.00	5.70~6.30	48.20	45.79~50.61

(ϵ_r = relative permittivity, σ = conductivity and $\rho = 1000 \text{ kg/m}^3$)


6.8. Tissue-equivalent Liquid Properties

Test Date dd/mm/yy	Temp °C	Tissue Type	Measured Frequency (MHz)	ϵ_r	σ (s/m)	Dev ϵ_r (%)	Dev σ (%)
03/06/2023	22°C	750B	750	56.12	0.92	1.12	-4.17
03/06/2023	22°C	835B	825	55.26	0.93	0.11	-4.12
			835	55.24	0.94	0.07	-3.09
			850	55.21	0.97	0.02	0.00
03/07/2023	22°C	1800B	1710	53.34	1.49	0.08	-1.97
			1720	53.32	1.50	0.04	-1.32
			1750	53.31	1.51	0.02	-0.66
			1800	53.29	1.53	-0.02	0.66
03/07/2023	22°C	1900B	1850	52.27	1.55	-1.93	1.97
			1880	52.25	1.56	-1.97	2.63
			1900	52.23	1.58	-2.01	3.95
			1910	52.22	1.59	-2.03	4.61
03/08/2023	22°C	2450B	2410	51.96	1.97	-1.78	1.03
			2435	51.94	1.98	-1.44	1.54
			2450	51.92	2.01	-1.48	3.08
			2460	51.91	2.03	-1.50	4.10
03/08/2023	22°C	2600B	2510	51.86	2.10	-1.22	-2.78
			2535	51.85	2.11	-1.24	-2.31
			2600	51.83	2.13	-1.28	-1.39
03/09/2023	22°C	5200B	5200	49.52	5.40	1.06	1.89
03/09/2023	22°C	5800B	5800	47.59	5.95	-1.27	-0.83

6.9. System Check

The SAR system must be validated against its performance specifications before it is deployed. When SAR probe and system component or software are changed, upgraded or recalibrated, these must be validated with the SAR system(s) that operates with such component. Reference dipoles are used with the required tissue-equivalent media for system validation. System check results have to be equal or near the values determined during dipole calibration with the relevant liquids and test system ($\pm 10\%$).

System check is performed regularly on all frequency bands where tests are performed with the OPENSAR system.

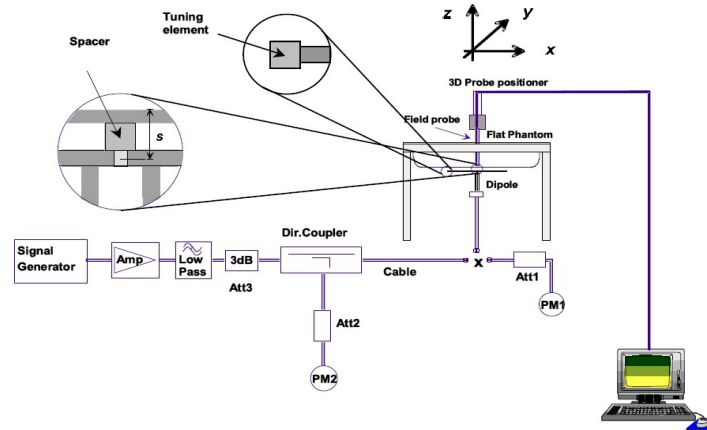

System Check Set-up

Verification Results

Frequency (MHz)	Liquid Type	Measured Value in 100mW (W/kg)		Normalized to 1W (W/kg)		Target Value (W/kg)		Deviation (%)	
		1 g Average	10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average	10 g Average
750	Body	0.87	0.60	8.70	6.00	8.46	5.81	2.84	3.27
835	Body	0.95	0.63	9.50	6.30	9.62	6.44	-1.25	-2.17
1800	Body	3.78	2.05	37.79	20.46	37.69	20.57	0.27	-0.54
1900	Body	3.77	1.99	37.70	19.90	38.71	20.53	-2.61	-3.07
2450	Body	5.07	2.42	50.70	24.16	50.63	23.40	0.14	3.25
2600	Body	5.37	2.38	53.65	23.81	53.26	23.89	0.73	-0.33
5200	Body	15.47	5.51	154.70	55.10	158.49	55.40	-2.39	-0.54
5800	Body	18.30	6.18	183.00	61.80	183.06	61.62	-0.03	0.29

Comparing to the original SAR value provided by MVG, the verification data should be within its specification of 10%. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table as below indicates the system performance check can meet the variation criterion and the plots can be referred to Section 10 of this report.

7. Measurement Procedure

Conducted power measurement

For WWAN power measurement, use base station simulator to configure EUT WWAN transition in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band. Read the WWAN RF power level from the base station simulator.

For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band.

Connect EUT RF port through RF cable to the power meter or spectrum analyser, and measure WLAN/BT output power.

Conducted power measurement

Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.

Place the EUT in positions as Appendix B demonstrates.

Set scan area, grid size and other setting on the MVG software.

Measure SAR results for the highest power channel on each testing position.

Find out the largest SAR result on these testing positions of each band.

Measure SAR results for other channels in worst SAR testing position if the Reported SAR or highest power channel is larger than 0.8 W/kg.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

Power reference measurement

Area scan

Zoom scan

Power drift measurement

Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The MVG software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a “cube” measurement. The measured volume must include the 1g and 10 g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

Extraction of the measured data (grid and values) from the Zoom Scan.

Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters).

Generation of a high-resolution mesh within the measured volume.

Interpolation of all measured values from the measurement grid to the high-resolution grid

Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface

Calculation of the averaged SAR within masses of 1g and 10g.

Power Reference Measurement

The Power Reference Measurement and Power Drift Measurement are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties

Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10g. Area scan and zoom scan resolution setting follows KDB 865664 D01v01r03 quoted below.

		≤ 3 GHz	> 3 GHz	
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5 mm ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm ± 0.5 mm	
Maximum probe angle from probe axis to phantom surface normal at the measurement location		30° ± 1°	20° ± 1°	
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$		≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm	
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.		
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	≤ 1.5 · $\Delta z_{Zoom}(n-1)$ mm	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB Publication 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD post-processor scan combine and subsequently superpose these measurement data to calculating the multiband SAR.

SAR Averaged Methods

In MVG, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The

interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1g and 10g cubes, the extrapolation distance should not be larger than 5 mm.

Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In MVG measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

Power Drift measurement

The drift job measures the field at the same location as the most recent reference job within the same procedure, and with the same settings. The drift measurement gives the field difference in dB from the reading conducted within the last reference measurement. Several drift measurements are possible for

Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100KHz to 6GHz ,when the highest measurement 1-g SAR within a frequency band is <1.5W/kg, the extensive SAR measurement uncertainty analysis described IEEE Std 1528-2013 is not required in SAR report submitted for equipment approval.

8. Conducted Output Power

Band: GSM 850		Measured Power (dBm)			Calculation (dB)	Averaged Power (dBm)		
Channel	Maximum Tune-up (dBm)	128	190	251		128	190	251
Frequency			824.2	836.6	848.8		824.2	836.6
GSM (GMSK, Voice)	34.00	33.33	33.91	33.24	-9.03	24.30	24.88	24.21
GPRS (GMSK, 1-slot)	33.00	32.12	32.45	32.52	-9.03	23.09	23.42	23.49
GPRS (GMSK, 2-slot)	31.50	30.63	31.47	31.42	-6.02	24.61	25.45	25.40
GPRS (GMSK, 3-slot)	32.00	31.12	31.84	31.51	-4.26	26.86	27.58	27.25
GPRS (GMSK, 4-slot)	34.00	32.56	33.77	33.57	-3.01	29.55	30.76	30.56
EGPRS (1-slot)	32.00	31.61	31.03	31.64	-9.03	22.58	22.00	22.61
EGPRS (2-slot)	32.00	30.85	31.37	31.86	-6.02	24.83	25.35	25.84
EGPRS (3-slot)	32.00	31.54	31.63	31.28	-4.26	27.28	27.37	27.02
EGPRS (4-slot)	32.00	31.36	31.81	31.76	-3.01	28.35	28.80	28.75

Note:

- Division Factors
To average the power, the division factor is as follows:
1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB
2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB
3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB
4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB
- According to the conducted power as above, the body measurements are performed with 4Tx slots for 850MHz for GPRS.
- The device do not support power reduction, so power of hotspot activated as the same as hotspot disabled.

Band: GSM 1900		Measured Power (dBm)			Calculation (dB)	Averaged Power (dBm)		
Channel	Maximum Tune-up(dBm)	512	661	810		512	661	810
Frequency			1850.2	1880.0	1909.8		1850.2	1880.0
GSM (GMSK, Voice)	30.00	29.22	29.50	29.40	-9.03	20.19	20.47	20.37
GPRS (GMSK, 1-slot)	29.00	28.31	28.58	28.52	-9.03	19.28	19.55	19.49
GPRS (GMSK, 2-slot)	29.00	28.04	28.52	27.70	-6.02	22.02	22.50	21.68
GPRS (GMSK, 3-slot)	28.50	27.99	28.29	28.22	-4.26	23.73	24.03	23.96
GPRS (GMSK, 4-slot)	29.50	29.03	29.28	28.83	-3.01	26.02	26.27	25.82
EGPRS (1-slot)	28.00	27.94	27.62	27.21	-9.03	18.91	18.59	18.18
EGPRS (2-slot)	28.50	27.94	28.32	26.98	-6.02	21.92	22.30	20.96
EGPRS (3-slot)	28.50	27.79	28.31	28.41	-4.26	23.53	24.05	24.15
EGPRS (4-slot)	28.00	27.53	27.43	27.69	-3.01	24.52	24.42	24.68

Note:

- Division Factors
To average the power, the division factor is as follows:
1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB
2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB
3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB
4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB
- According to the conducted power as above, the body measurements are performed with 4Tx slots for 1900MHz for GPRS.
- The device do not support power reduction, so power of hotspot activated as the same as hotspot disabled.

Band	WCDMA Band II				WCDMA Band IV				WCDMA Band V			
Channel	Maximum Tune-up (dBm)	9262	9400	9538	Maximum Tune-up (dBm)	1312	1450	1513	Maximum Tune-up (dBm)	4132	4183	4233
Frequency		1852.4	1880.0	1907.6		1712.4	1740.0	1752.6		826.4	836.6	846.6
RMC 12.2Kbps	24.00	23.20	23.80	23.79	25.00	24.73	24.90	24.63	24.00	23.90	23.86	23.48
HSDPA Subtest-1	24.00	23.35	23.75	22.35	24.50	24.41	24.49	23.74	23.50	23.24	23.46	23.04
HSDPA Subtest-2	23.50	23.23	22.76	22.18	24.50	23.78	24.48	24.05	23.50	23.28	23.22	22.83
HSDPA Subtest-3	23.00	22.49	22.72	22.20	24.50	24.00	24.40	24.10	24.00	23.70	23.39	22.77
HSDPA Subtest-4	23.50	23.08	23.17	22.92	25.00	24.23	24.74	24.29	24.00	23.67	23.30	23.60
HSUPA Subtest-1	23.50	22.50	22.74	23.03	25.00	24.57	24.55	24.23	23.50	23.17	23.27	23.27
HSUPA Subtest-2	24.00	23.00	23.57	22.44	25.00	24.50	24.76	23.98	24.00	23.93	23.66	22.96
HSUPA Subtest-3	23.50	22.84	23.10	22.41	25.00	23.77	24.70	24.30	23.50	22.78	22.98	23.34
HSUPA Subtest-4	23.50	23.20	22.83	22.07	24.50	23.97	24.47	24.02	24.00	23.72	23.61	23.23
HSUPA Subtest-5	23.00	22.50	22.84	22.34	25.00	24.29	24.54	24.22	24.00	23.59	23.36	23.39

Note:

1. According to the power listed above, the HSDPA and HSUPA were not determined for SAR testing.
2. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2kbps RMC(reference measurement channel) configuration in test loop mode
3. The device do not support power reduction, so power of hotspot activated as the same as hotspot disabled.

WLAN 2.4G								
Mode	Maximum Tune-up (dBm)	802.11b			Maximum Tune-up (dBm)	802.11g		
Channel		1	6	11		1	6	11
Frequency		2412	2437	2462		2412	2437	2462
Average Power (dBm)	17.50	17.22	16.19	16.89	18.00	16.79	16.93	17.80
Mode	Maximum Tune-up (dBm)	802.11n(HT20)			Maximum Tune-up (dBm)	802.11n(HT20) (MIMO)		
Channel		1	6	11		3	6	9
Frequency		2412	2437	2462		2422	2437	2452
Average Power (dBm)	18.00	16.74	17.83	17.63	18.00	17.30	17.80	17.28

Note

1. Per KDB 248227 D01 v02r02, choose the highest output power channel to test SAR and determine further SAR exclusion.
2. The output power of all data rate were pre-scan, just the worst case (the lowest data rate) of all mode were shown in report

WLAN 5.2G								
Mode	Maximum Tune-up (dBm)	IEEE 802.11a			Maximum Tune-up (dBm)	IEEE 802.11n HT20		
Channel		36	40	48		36	40	48
Frequency		5180	5200	5240		5180	5200	5240
Average Power (dBm)	18.00	17.07	17.65	17.54	18.00	16.43	17.64	17.21
Mode	Maximum Tune-up (dBm)	IEEE 802.11n HT40			Maximum Tune-up (dBm)	IEEE 802.11ac VHT20		
Channel		38	46			36	40	48
Frequency		5190	5230			5180	5200	5240
Average Power (dBm)	18.00	17.66	17.65		17.50	16.67	16.90	17.28
Mode	Maximum Tune-up (dBm)	IEEE 802.11ac VHT40			Maximum Tune-up (dBm)	IEEE 802.11ac VHT80		
Channel		38	46			42		
Frequency		5190	5230			5210		
Average Power (dBm)	18.00	17.83	17.16		18.00	17.68		

WLAN 5.8G								
Mode	Maximum Tune-up (dBm)	IEEE 802.11a			Maximum Tune-up (dBm)	IEEE 802.11n HT20		
Channel		149	157	165		149	157	165
Frequency		5745	5785	5825		5745	5785	5825
Average Power (dBm)	18.00	17.01	17.57	17.50	18.00	16.49	17.58	17.25
Mode	Maximum Tune-up (dBm)	IEEE 802.11n HT40			Maximum Tune-up (dBm)	IEEE 802.11ac VHT20		
Channel		151	159			149	157	165
Frequency		5755	5795			5745	5785	5825
Average Power (dBm)	18.00	17.63	17.57		17.50	16.69	16.97	17.35
Mode	Maximum Tune-up (dBm)	IEEE 802.11ac VHT40			Maximum Tune-up (dBm)	IEEE 802.11ac VHT80		
Channel		151	159			155		
Frequency		5755	5795			5775		
Average Power (dBm)	18.00	17.94	17.22		18.00	17.78		

Bluetooth								
Mode	Maximum Tune-up (dBm)	GFSK			Maximum Tune-up (dBm)	Pi/4DQPSK		
Channel		1	40	79		1	40	79
Frequency		2402	2441	2480		2402	2441	2480
Average Power (dBm)	6.50	6.14	6.30	5.58	6.00	5.95	5.71	5.63
Mode	Maximum Tune-up (dBm)	8DPSK			Maximum Tune-up (dBm)	BLE(1Mbps)		
Channel		1	40	79		1	20	40
Frequency		2402	2441	2480		2402	2440	2480
Average Power (dBm)	6.50	6.07	5.66	5.63	3.50	2.74	3.10	2.12

Channel	Frequency (GHz)	Max. Tune-up Power (dBm)	Max. Power (mW)	Test distance (mm)	Exclusion thresholds for 1-g SAR	RF exposure evaluation required
40	2.441	6.50	4.47	0	2.75	Yes
40	2.441	6.50	4.47	10	10.28	No

Note

- Per KDB 447498 D04 Interim General RF Exposure Guidance v01, the 1-g SAR test exclusion thresholds for 300 MHz to 6 GHz at test separation distances ≤ 40 cm are determined by:

$$P_{th} \text{ (mW)} = ERP_{20 \text{ cm}} \text{ (mW)} = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases} \quad (\text{B.1})$$

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}} (d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases} \quad (\text{B.2})$$

where

$$x = -\log_{10} \left(\frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right)$$

and f is in GHz, d is the separation distance (cm), and $ERP_{20 \text{ cm}}$ is per Formula (B.1).

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine estimated SAR.

- Per KDB 248227 D01 v02r02, choose the highest output power channel to test SAR and determine further SAR exclusion.
- The output power of all data rate were prescan, just the worst case (the lowest data rate) of all mode were shown in report.

LTE Band 2

Conducted Power of LTE Band 2									
Bandwidth	Modulation	RB size	RB offset	Maximum Tune-up (dBm)	Channel	Channel	Channel		
					18607	18900	19193		
1.4MHz	QPSK	1	0	24.50	24.11	24.20	23.05		
			3	24.00	22.26	23.54	22.02		
			5	24.00	23.94	23.00	22.90		
		3	0	23.50	23.30	22.31	22.04		
			2	23.50	22.62	22.37	23.40		
			3	24.00	23.91	23.31	22.67		
	6	0	23.50	22.39	23.14	23.10			
		16QAM	1	0	23.00	22.54	22.85	22.49	
				3	24.00	23.86	23.34	23.00	
	5			23.00	22.49	22.78	22.93		
	3		0	24.50	24.07	22.49	22.13		
			2	23.00	22.93	22.26	23.15		
			3	23.00	22.66	22.06	22.89		
	6	0	23.50	22.87	23.22	22.66			
Bandwidth	Modulation	RB size	RB offset	Maximum Tune-up (dBm)	Channel	Channel	Channel		
3MHz	QPSK	1	0	23.50	23.30	22.30	23.08		
			7	23.50	22.18	22.85	23.12		
			14	24.50	24.39	23.21	23.07		
		8	0	23.00	22.60	22.60	22.43		
			4	23.50	23.16	22.35	22.89		
			7	23.00	22.92	22.63	22.78		
		15	0	23.00	22.85	22.78	22.30		
		16QAM	1	0	23.00	22.89	22.62	22.13	
				7	23.00	22.97	22.90	22.77	
	14			24.00	23.57	22.69	22.02		
	8		0	23.00	22.44	22.22	22.62		
			4	23.50	23.01	22.80	22.26		
			7	23.50	23.03	23.07	22.13		
	15		0	22.50	22.27	22.34	22.47		
	Bandwidth		Modulation	RB size	RB offset	Maximum Tune-up (dBm)	Channel	Channel	Channel
	3MHz		QPSK	1	0	23.50	23.30	22.30	23.08
		7			23.50	22.18	22.85	23.12	
		14			24.50	24.39	23.21	23.07	
8		0		23.00	22.60	22.60	22.43		
		4		23.50	23.16	22.35	22.89		
		7		23.00	22.92	22.63	22.78		
15		0		23.00	22.85	22.78	22.30		
16QAM		1		0	23.00	22.89	22.62	22.13	
				7	23.00	22.97	22.90	22.77	
			14	24.00	23.57	22.69	22.02		
		8	0	23.00	22.44	22.22	22.62		
			4	23.50	23.01	22.80	22.26		
			7	23.50	23.03	23.07	22.13		
		15	0	22.50	22.27	22.34	22.47		

Conducted Power of LTE Band 2									
Bandwidth	Modulation	RB size	RB offset	Maximum Tune-up (dBm)	Channel	Channel	Channel		
					18625	18900	19175		
5MHz	QPSK	1	0	24.00	22.29	23.92	23.10		
			12	23.00	22.90	22.97	22.23		
			24	23.50	23.02	22.74	22.45		
		12	0	23.00	22.45	22.26	22.76		
			6	23.00	22.69	22.39	22.32		
			13	23.00	22.74	22.27	22.63		
	25	0	23.00	22.54	22.46	22.69			
		16QAM	1	0	24.50	22.73	24.21	22.46	
				12	24.00	22.40	23.64	22.28	
	24			22.50	22.28	22.15	22.24		
	12	0	23.00	22.43	22.86	22.90			
		6	23.00	22.40	22.40	22.68			
		13	23.00	22.16	22.79	22.37			
	25	0	23.50	22.40	22.03	23.03			
	Bandwidth	Modulation	RB size	RB offset	Maximum Tune-up (dBm)	Channel	Channel	Channel	
10MHz	QPSK	1	0	24.00	23.90	22.22	23.78		
			24	24.50	22.82	24.01	22.63		
			49	23.50	22.99	23.10	22.58		
		25	0	23.50	23.11	22.87	22.59		
			12	23.50	22.42	22.36	23.16		
			25	23.50	23.31	22.80	22.82		
		50	0	23.50	23.31	22.29	23.06		
		16QAM	1	0	24.00	23.14	23.58	22.49	
				24	24.00	22.92	23.94	22.91	
	49			23.50	22.54	22.59	23.28		
	25		0	23.50	22.20	23.05	22.39		
			12	23.00	22.96	22.25	22.61		
			25	23.00	22.83	22.26	22.56		
	50		0	23.00	22.75	22.74	22.39		
	Bandwidth		Modulation	RB size	RB offset	Maximum Tune-up (dBm)	Channel	Channel	Channel
	10MHz		QPSK	1	0	24.00	23.90	22.22	23.78
		24			24.50	22.82	24.01	22.63	
		49			23.50	22.99	23.10	22.58	
25		0		23.50	23.11	22.87	22.59		
		12		23.50	22.42	22.36	23.16		
		25		23.50	23.31	22.80	22.82		
50		0		23.50	23.31	22.29	23.06		
16QAM		1		0	24.00	23.14	23.58	22.49	
				24	24.00	22.92	23.94	22.91	
			49	23.50	22.54	22.59	23.28		
		25	0	23.50	22.20	23.05	22.39		
			12	23.00	22.96	22.25	22.61		
			25	23.00	22.83	22.26	22.56		
		50	0	23.00	22.75	22.74	22.39		

Conducted Power of LTE Band 2								
Bandwidth	Modulation	RB size	RB offset	Maximum Tune-up (dBm)	Channel	Channel	Channel	
					18675	18900	19125	
15MHz	QPSK	1	0	23.50	23.11	22.40	22.17	
			37	24.00	22.63	23.89	23.42	
			74	23.50	22.49	23.02	22.77	
		37	0	23.00	22.93	22.55	22.02	
			18	23.00	22.93	22.21	22.66	
			38	23.00	22.78	22.91	22.20	
		75	0	24.00	23.96	22.34	22.43	
		16QAM	1	0	24.00	22.78	23.74	22.68
				37	24.00	23.55	22.04	22.61
	74			23.00	22.94	22.74	22.92	
	37		0	23.00	22.23	22.68	23.00	
			18	23.00	22.47	22.85	22.83	
			38	23.50	23.08	22.54	23.04	
	75	0	23.00	22.31	22.92	22.59		
	Bandwidth	Modulation	RB size	RB offset	Maximum Tune-up (dBm)	Channel	Channel	Channel
18700						18900	19100	
20MHz	QPSK	1	0	25.00	23.31	24.19	24.98	
			49	24.00	23.31	23.65	22.45	
			99	24.50	22.61	24.29	22.47	
		50	0	24.50	22.26	24.32	23.24	
			25	24.50	23.48	24.02	23.32	
			50	25.00	22.73	23.54	24.56	
		100	0	24.00	22.51	23.60	22.38	
		16QAM	1	0	25.00	22.55	24.07	24.89
				49	24.00	23.68	22.25	22.63
	99			23.50	23.43	22.13	23.14	
	50		0	24.50	22.90	24.08	22.80	
			25	23.00	22.81	22.98	22.34	
			50	25.00	22.58	22.85	24.52	
	100		0	23.00	22.17	22.96	22.27	

LTE Band 4

Conducted Power of LTE Band 4								
Bandwidth	Modulation	RB size	RB offset	Maximum Tune-up (dBm)	Channel	Channel	Channel	
					19957	20175	20393	
1.4MHz	QPSK	1	0	24.50	24.34	23.62	22.66	
			3	24.00	23.22	23.80	22.36	
			5	24.50	24.12	23.15	22.47	
		3	0	23.50	23.44	22.67	22.99	
			2	23.50	22.51	23.05	23.25	
			3	23.50	22.87	23.34	23.16	
	16QAM	1	0	23.50	23.01	22.92	22.62	
			3	24.00	23.79	23.40	23.28	
			5	23.50	22.57	22.98	23.09	
		3	0	23.50	23.39	23.10	22.50	
			2	23.50	22.73	23.35	22.95	
			3	23.00	22.52	22.28	22.51	
		6	0	23.50	22.94	23.30	22.27	
Bandwidth	Modulation	RB size	RB offset	Maximum Tune-up (dBm)	Channel	Channel	Channel	
					19965	20175	20385	
3MHz	QPSK	1	0	24.00	23.86	22.21	22.86	
			7	23.00	22.50	22.97	22.38	
			14	24.50	24.14	23.22	22.33	
		8	0	23.50	22.24	23.23	22.12	
			4	23.00	22.27	22.82	22.74	
			7	23.50	22.11	22.34	23.01	
	16QAM	1	0	23.00	22.76	22.34	22.51	
			7	23.00	22.84	22.24	22.74	
			14	23.50	23.23	22.15	22.29	
		8	0	23.50	22.42	22.36	23.10	
			4	23.00	22.85	22.16	22.99	
			7	23.00	22.80	22.98	22.99	
		15	0	23.00	22.61	22.66	22.99	

Conducted Power of LTE Band 4								
Bandwidth	Modulation	RB size	RB offset	Maximum Tune-up (dBm)	Channel	Channel	Channel	
					19975	20175	20375	
5MHz	QPSK	1	0	25.00	22.08	24.63	23.22	
			12	23.50	23.39	23.16	22.72	
			24	23.00	22.97	22.23	22.42	
		12	0	23.00	22.47	22.53	22.17	
			6	23.00	22.37	22.90	22.46	
			13	23.00	22.91	22.36	22.67	
	25	0	23.00	22.23	22.90	22.33		
		16QAM	1	0	24.50	22.18	24.47	23.10
				12	24.00	22.53	23.61	22.65
	24			23.00	22.58	22.56	22.46	
	12	0	23.00	22.59	22.92	22.91		
		6	23.00	22.95	22.69	22.60		
		13	23.00	22.82	22.41	22.46		
	25	0	23.00	22.94	22.90	22.92		
Bandwidth		Modulation	RB size	RB offset	Maximum Tune-up (dBm)	Channel	Channel	Channel
						20000	20175	20350
10MHz	QPSK	1	0	24.50	24.32	22.77	23.59	
			24	24.00	22.99	23.88	22.45	
			49	23.00	22.24	22.88	22.84	
		25	0	23.00	22.42	22.42	22.50	
			12	23.00	22.59	22.96	22.23	
			25	23.00	22.88	22.43	22.52	
	50	0	23.50	23.35	22.84	22.86		
		16QAM	1	0	24.00	23.01	23.91	22.84
				24	24.00	23.30	23.70	23.32
	49			23.00	22.42	22.80	22.78	
	25	0	23.00	22.75	22.44	22.18		
		12	23.50	22.42	22.71	23.19		
		25	23.00	22.69	22.56	22.21		
	50	0	23.50	23.30	22.69	22.75		

Conducted Power of LTE Band 4								
Bandwidth	Modulation	RB size	RB offset	Maximum Tune-up (dBm)	Channel	Channel	Channel	
					20025	20175	20325	
15MHz	QPSK	1	0	23.50	23.15	23.05	22.36	
			37	24.50	22.56	24.26	23.61	
			74	23.00	22.64	22.84	22.11	
		37	0	23.50	23.26	22.61	22.46	
			18	23.50	22.37	23.27	22.78	
			38	23.00	22.23	22.55	22.64	
		75	0	23.50	23.49	22.16	22.03	
		16QAM	1	0	24.00	22.71	23.57	22.18
				37	24.00	23.85	22.41	22.76
	74			23.00	22.11	22.94	22.64	
	37		0	23.00	22.13	22.35	22.70	
			18	22.50	22.44	22.35	22.34	
			38	23.50	22.45	23.10	23.22	
	75	0	23.50	23.05	22.53	22.07		
	Bandwidth	Modulation	RB size	RB offset	Maximum Tune-up (dBm)	Channel	Channel	Channel
20MHz	QPSK	1	0	25.00	23.75	24.86	22.25	
			49	25.00	22.56	24.92	22.00	
			99	24.00	22.25	23.86	22.19	
		50	0	25.00	22.30	24.61	22.76	
			25	24.00	23.61	23.87	23.02	
			50	24.50	22.99	24.39	22.56	
		100	0	24.00	22.77	23.71	22.67	
		16QAM	1	0	25.00	22.68	24.59	22.10
				49	24.00	23.87	22.27	22.77
	99			23.00	22.94	22.91	22.92	
	50		0	24.00	22.00	23.68	22.75	
			25	23.50	23.27	22.85	22.57	
			50	24.50	22.22	24.43	22.27	
	100		0	23.50	23.24	22.66	22.87	

LTE Band 5

Conducted Power of LTE Band 5									
Bandwidth	Modulation	RB size	RB offset	Maximum Tune-up (dBm)	Channel	Channel	Channel		
					20407	20525	20643		
1.4MHz	QPSK	1	0	24.50	24.16	23.66	23.19		
			3	24.00	22.71	23.65	22.53		
			5	24.50	24.20	22.89	22.20		
		3	0	24.50	24.06	22.28	22.61		
			2	23.00	22.21	22.20	22.56		
			3	24.00	23.41	23.73	22.53		
		6	0	23.50	22.43	22.69	23.33		
			16QAM	1	0	23.50	22.83	23.26	22.87
					3	24.00	23.63	23.25	23.12
	5	23.50			23.26	22.92	22.45		
	3	0	24.00	23.66	22.75	22.93			
		2	23.00	22.29	22.22	22.81			
		3	23.00	22.29	22.71	22.23			
	6	0	23.00	22.96	22.70	22.30			
		Bandwidth	Modulation	RB size	RB offset	Maximum Tune-up (dBm)	Channel	Channel	Channel
							20415	20525	20635
	3MHz	QPSK	1	0	23.50	23.49	22.16	23.12	
				7	23.00	22.99	22.39	22.79	
14				24.50	24.38	22.64	22.35		
8			0	23.50	23.30	22.78	22.93		
			4	23.50	22.79	22.36	22.00		
			7	23.00	22.28	22.70	22.70		
15			0	23.00	22.63	22.70	22.43		
			16QAM	1	0	23.00	22.84	22.45	22.16
					7	23.50	23.11	22.28	22.91
14		23.50			23.27	22.27	22.25		
8		0		23.00	22.36	22.87	22.76		
		4		23.50	22.20	23.32	22.24		
		7		23.00	22.65	22.53	22.21		
15		0	23.50	22.17	22.59	23.30			

Conducted Power of LTE Band 5								
Bandwidth	Modulation	RB size	RB offset	Maximum Tune-up (dBm)	Channel	Channel	Channel	
					20425	20525	20625	
5MHz	QPSK	1	0	24.50	22.35	24.10	22.68	
			12	23.00	22.78	22.96	22.49	
			24	23.00	22.44	22.41	22.61	
		12	0	23.00	22.13	22.86	22.32	
			6	23.00	22.84	22.89	22.31	
			13	22.50	22.24	22.37	22.36	
	25	0	23.00	22.42	22.77	22.30		
		1	0	24.50	22.98	24.24	22.29	
			12	24.50	22.38	24.23	22.56	
	24		23.00	22.45	22.54	22.92		
	12	0	23.50	22.29	22.76	23.15		
		6	23.00	22.33	22.82	22.96		
		13	23.00	22.40	22.54	22.72		
	25	0	23.00	22.32	22.93	22.57		
		Bandwidth	Modulation	RB size	RB offset	Maximum Tune-up (dBm)	Channel	Channel
20450							20525	20600
10MHz	QPSK	1	0	25.00	24.81	22.37	23.85	
			24	24.50	23.09	24.08	23.02	
			49	23.00	22.30	22.66	22.83	
		25	0	24.50	24.13	22.21	23.00	
			12	23.00	22.92	22.70	22.36	
			25	23.00	22.63	22.66	22.36	
	50	0	23.50	23.12	22.26	22.57		
		1	0	25.00	24.72	23.95	22.96	
			24	25.00	24.67	23.84	23.18	
	49		23.00	22.56	22.51	22.59		
	25	0	23.50	23.49	22.99	22.07		
		12	23.50	22.98	22.43	23.35		
		25	23.00	22.49	22.08	22.96		
	50	0	23.00	22.92	22.29	22.58		

LTE Band 7

Conducted Power of LTE Band 7								
Bandwidth	Modulation	RB size	RB offset	Maximum Tune-up (dBm)	Channel	Channel	Channel	
					20775	21100	21425	
5MHz	QPSK	1	0	24.50	24.11	24.29	22.50	
			12	25.00	22.76	24.57	22.92	
			24	23.50	23.29	22.96	22.48	
		12	0	24.00	23.75	22.20	22.24	
			6	23.50	22.14	22.76	23.12	
			13	24.00	23.01	23.70	22.73	
	25	0	23.00	22.28	22.97	22.54		
	16QAM	1	0	24.00	23.69	22.92	22.27	
			12	23.50	23.06	23.25	22.92	
			24	23.50	23.24	23.09	22.76	
		12	0	24.50	24.04	22.72	22.84	
			6	23.50	23.04	22.81	23.00	
			13	23.50	22.64	22.99	23.13	
	25	0	23.50	22.95	23.02	22.76		
	Bandwidth	Modulation	RB size	RB offset	Maximum Tune-up (dBm)	Channel	Channel	Channel
10MHz	QPSK	1	0	23.50	23.29	22.48	23.04	
			24	23.00	22.82	22.78	22.41	
			49	25.00	24.57	22.89	22.25	
		25	0	23.50	23.40	22.69	22.78	
			12	23.50	23.25	22.69	22.63	
			25	23.00	22.87	22.80	22.38	
		50	0	23.50	22.45	23.05	22.21	
		16QAM	1	0	23.00	22.88	22.77	22.21
				24	23.50	23.01	22.77	22.61
	49			24.00	23.84	22.48	22.84	
	25		0	23.50	22.68	22.49	23.08	
			12	23.00	22.93	22.51	22.77	
			25	23.50	22.89	23.08	22.50	
	50		0	23.00	22.26	22.97	22.63	

Conducted Power of LTE Band 7								
Bandwidth	Modulation	RB size	RB offset	Maximum Tune-up (dBm)	Channel	Channel	Channel	
					20825	21100	21375	
15MHz	QPSK	1	0	24.50	22.15	24.49	23.03	
			37	23.50	23.34	22.53	22.31	
			74	23.50	23.08	22.86	22.77	
		37	0	23.00	22.47	22.68	22.00	
			18	23.50	22.71	22.22	23.06	
			38	23.00	22.82	22.24	22.77	
		75	0	23.00	22.94	22.51	22.28	
		16QAM	1	0	24.50	22.34	24.04	22.34
				37	23.50	22.26	23.31	22.42
	74			23.00	22.19	22.71	22.69	
	37		0	23.00	22.40	22.45	22.93	
			18	23.00	22.96	22.40	22.75	
			38	23.50	22.25	23.19	22.33	
	75	0	23.00	22.15	22.73	22.21		
	Bandwidth	Modulation	RB size	RB offset	Maximum Tune-up (dBm)	Channel	Channel	Channel
20850						21100	21350	
20MHz	QPSK	1	0	25.00	23.45	24.73	23.61	
			49	24.50	23.23	24.41	22.97	
			99	23.00	22.97	22.73	22.69	
		50	0	25.00	23.36	24.64	22.98	
			25	23.50	22.28	23.20	23.05	
			50	23.50	23.21	23.02	22.61	
		100	0	24.00	23.85	22.09	22.35	
		16QAM	1	0	25.00	22.29	24.58	22.87
				49	24.00	23.57	23.97	22.56
	99			23.00	22.47	22.65	22.90	
	50		0	24.50	22.32	24.26	22.40	
			25	23.50	22.47	22.88	23.10	
			50	23.00	22.70	22.17	22.87	
	100		0	23.00	22.86	22.76	22.91	

LTE Band 12

Conducted Power of LTE Band 12									
Bandwidth	Modulation	RB size	RB offset	Maximum Tune-up (dBm)	Channel	Channel	Channel		
					23017	23095	23173		
1.4MHz	QPSK	1	0	24.00	23.48	23.66	23.06		
			3	24.50	22.54	24.23	22.49		
			5	23.50	23.37	22.83	22.54		
		3	0	23.50	23.06	22.48	22.88		
			2	23.50	22.98	22.31	23.15		
			3	23.50	23.21	22.88	22.77		
	16QAM	1	0	24.50	24.45	23.59	22.82		
			3	24.50	22.43	24.48	22.12		
			5	24.00	23.52	22.66	22.37		
		3	0	23.50	23.19	22.45	23.07		
			2	23.50	22.87	22.40	23.09		
	6	0	23.50	23.19	23.21	22.85			
	6	0	0	23.00	22.93	22.66	22.80		
				23.00	23.05	22.55	22.85		
Bandwidth	Modulation	RB size	RB offset	Maximum Tune-up (dBm)	Channel	Channel	Channel		
3MHz	QPSK	1	0	23.50	23.30	22.64	23.12		
			7	23.50	23.04	22.46	22.37		
			14	24.50	24.04	22.83	22.22		
		8	0	23.00	22.89	22.37	22.97		
			4	23.50	22.71	23.02	22.31		
			7	23.00	22.73	22.08	22.92		
		15	0	23.00	22.23	22.64	22.79		
		16QAM	1	0	23.50	23.39	22.63	23.20	
				7	23.50	23.38	22.45	22.38	
	14			24.50	24.27	22.77	22.18		
	8		0	23.50	23.18	22.22	23.11		
			4	23.00	22.55	22.81	22.13		
			7	23.00	22.93	22.97	22.74		
	15		0	23.00	22.64	22.37	22.99		
	Bandwidth		Modulation	RB size	RB offset	Maximum Tune-up (dBm)	Channel	Channel	Channel
	3MHz		QPSK	1	0	23.50	23.30	22.64	23.12
		7			23.50	23.04	22.46	22.37	
		14			24.50	24.04	22.83	22.22	
8		0		23.00	22.89	22.37	22.97		
		4		23.50	22.71	23.02	22.31		
		7		23.00	22.73	22.08	22.92		
15		0		23.00	22.23	22.64	22.79		
16QAM		1		0	23.50	23.39	22.63	23.20	
				7	23.50	23.38	22.45	22.38	
			14	24.50	24.27	22.77	22.18		
		8	0	23.50	23.18	22.22	23.11		
			4	23.00	22.55	22.81	22.13		
			7	23.00	22.93	22.97	22.74		
		15	0	23.00	22.64	22.37	22.99		

Conducted Power of LTE Band 12								
Bandwidth	Modulation	RB size	RB offset	Maximum Tune-up (dBm)	Channel	Channel	Channel	
					23035	23095	23155	
5MHz	QPSK	1	0	24.00	22.39	23.82	22.80	
			12	23.50	23.40	22.56	22.92	
			24	23.00	22.49	22.76	22.36	
		12	0	23.00	22.75	22.66	22.64	
			6	23.00	22.65	22.96	22.37	
			13	22.50	22.01	22.30	22.46	
		25	0	23.00	22.09	22.59	22.57	
		16QAM	1	0	24.50	22.59	24.02	22.74
				12	24.00	23.61	22.63	22.95
	24			23.00	22.90	22.81	22.53	
	12		0	23.00	22.68	22.77	22.69	
			6	23.00	22.77	22.76	22.33	
			13	23.00	22.98	22.41	22.32	
	25	0	23.00	22.34	22.67	22.48		
	Bandwidth	Modulation	RB size	RB offset	Maximum Tune-up (dBm)	Channel	Channel	Channel
23060						23095	23130	
10MHz	QPSK	1	0	25.00	23.57	24.57	24.92	
			24	24.50	22.78	24.15	22.47	
			49	23.50	22.60	22.97	23.03	
		25	0	24.50	23.10	24.21	24.31	
			12	23.00	22.12	22.79	22.06	
			25	23.00	22.59	22.72	22.80	
		50	0	24.00	23.78	23.02	22.44	
		16QAM	1	0	25.00	23.63	24.41	24.72
				24	25.00	22.90	24.07	24.68
	49			23.00	22.54	22.86	22.99	
	25		0	24.50	23.06	23.79	24.15	
			12	23.00	22.24	22.58	22.94	
			25	23.00	22.67	22.59	22.78	
	50		0	24.00	23.68	23.16	22.26	

LTE Band 17

Conducted Power of LTE Band 17								
Bandwidth	Modulation	RB size	RB offset	Maximum Tune-up (dBm)	Channel	Channel	Channel	
					23755	23790	23825	
5MHz	QPSK	1	0	24.50	24.34	23.77	22.93	
			12	24.50	22.87	24.06	23.09	
			24	24.00	23.91	23.00	23.04	
		12	0	24.00	23.82	22.90	22.49	
			6	23.00	22.33	22.84	22.57	
			13	24.00	23.58	23.14	22.54	
		25	0	23.00	22.61	22.72	22.94	
		16QAM	1	0	23.50	22.96	23.28	22.15
				12	23.00	22.96	22.63	22.88
	24			23.50	23.42	22.99	22.33	
	12		0	23.50	23.35	22.66	22.94	
			6	23.00	22.72	22.97	22.76	
			13	23.00	22.36	22.24	22.65	
	25	0	23.50	22.98	23.09	22.95		
	Bandwidth	Modulation	RB size	RB offset	Maximum Tune-up (dBm)	Channel	Channel	Channel
10MHz	QPSK	1	0	25.00	23.67	22.13	24.90	
			24	23.00	22.26	22.46	22.86	
			49	24.50	24.34	22.79	22.92	
		25	0	25.00	22.76	22.11	24.51	
			12	23.00	22.52	22.65	22.71	
			25	23.00	22.62	22.28	22.97	
		50	0	23.00	22.97	22.79	22.82	
		16QAM	1	0	24.50	22.92	22.18	24.49
				24	25.00	23.28	22.12	24.64
	49			23.50	23.24	22.45	22.32	
	25		0	24.50	22.09	22.95	24.22	
			12	23.50	22.76	23.13	22.43	
			25	23.00	22.74	22.22	22.90	
	50		0	23.00	22.76	22.29	22.68	

LTE Band 66

Conducted Power of LTE Band 66							
Bandwidth	Modulation	RB size	RB offset	Maximum Tune-up (dBm)	Channel	Channel	Channel
					131979	132322	132665
1.4MHz	QPSK	1	0	24.50	24.34	23.72	22.74
			3	24.00	23.23	23.77	22.34
			5	24.50	24.14	23.26	22.35
		3	0	23.50	23.35	22.74	22.20
			2	23.50	22.59	22.94	23.23
			3	23.50	22.85	23.35	23.10
	16QAM	1	0	23.50	23.05	22.78	22.45
			3	24.00	23.84	23.35	23.25
			5	23.50	22.41	22.91	23.03
		3	0	23.50	23.43	23.19	22.63
			2	23.50	22.69	23.22	22.92
			3	23.00	22.60	22.15	22.31
	6	0	23.50	22.94	23.27	22.44	
	Bandwidth	Modulation	RB size	RB offset	Maximum Tune-up (dBm)	Channel	Channel
131987						132322	132657
3MHz	QPSK	1	0	24.00	23.84	22.23	22.71
			7	23.00	22.48	22.96	22.28
			14	24.50	24.33	23.16	22.46
		8	0	23.50	22.41	23.02	22.35
			4	23.00	22.32	22.98	22.57
			7	23.00	22.09	22.44	22.96
	15	0	23.50	22.77	22.96	23.03	
	16QAM	1	0	23.00	22.98	22.42	22.55
			7	23.00	22.68	22.04	22.79
			14	23.50	23.45	22.05	22.37
		8	0	23.00	22.36	22.20	23.00
			4	23.00	22.96	22.23	22.90
			7	23.00	22.82	22.87	22.97
		15	0	23.50	22.78	22.62	23.18


Conducted Power of LTE Band 66									
Bandwidth	Modulation	RB size	RB offset	Maximum Tune-up (dBm)	Channel	Channel	Channel		
					131997	132322	132647		
5MHz	QPSK	1	0	25.00	22.03	24.57	23.15		
			12	23.50	23.35	23.24	22.57		
			24	23.00	22.92	22.31	22.51		
		12	0	23.00	22.39	22.68	22.20		
			6	23.00	22.47	22.88	22.40		
			13	23.00	22.93	22.47	22.47		
		25	0	23.00	22.10	22.74	22.29		
			16QAM	1	0	24.50	22.28	24.46	22.94
					12	24.00	22.42	23.59	22.61
	24	23.00			22.65	22.76	22.56		
	12	0	23.00	22.39	22.72	22.86			
		6	23.50	23.07	22.80	22.50			
		13	23.00	22.81	22.44	22.46			
	25	0	23.00	22.91	22.10	22.97			
	Bandwidth	Modulation	RB size	RB offset	Maximum Tune-up (dBm)	Channel	Channel	Channel	
132022						132322	132622		
10MHz	QPSK	1	0	24.50	24.32	22.72	23.50		
			24	24.00	23.02	23.97	22.41		
			49	23.00	22.40	22.91	22.65		
		25	0	22.50	22.40	22.37	22.31		
			12	23.00	22.43	22.72	22.39		
			25	23.00	22.93	22.40	22.64		
		50	0	24.00	23.51	22.83	22.98		
		16QAM	1	0	24.00	23.03	23.91	22.74	
				24	24.00	23.20	23.58	23.37	
	49			23.00	22.45	22.68	22.95		
	25		0	23.00	22.64	22.32	22.35		
			12	23.50	22.28	22.73	23.29		
			25	23.00	22.74	22.76	22.35		
	50	0	23.50	23.41	22.69	22.65			

Conducted Power of LTE Band 66

Bandwidth	Modulation	RB size	RB offset	Maximum Tune-up (dBm)	Channel	Channel	Channel	
					132047	132322	132597	
15MHz	QPSK	1	0	23.50	23.10	23.04	22.21	
			37	24.50	22.71	24.12	23.59	
			74	23.50	22.67	23.02	22.92	
		37	0	23.50	23.11	22.49	22.30	
			18	23.50	22.38	23.20	22.74	
			38	23.00	22.20	22.47	22.77	
	16QAM	1	0	24.00	22.91	23.55	22.11	
			37	24.00	23.95	22.45	22.85	
			74	23.00	22.06	22.91	22.44	
		37	0	23.00	22.14	22.39	22.52	
			18	23.00	22.27	22.51	22.23	
			38	23.50	22.50	23.20	23.15	
75	0	23.50	23.07	22.44	22.04			
Bandwidth	Modulation	RB size	RB offset	Maximum Tune-up (dBm)	Channel	Channel	Channel	
					132072	132322	132572	
20MHz	QPSK	1	0	25.00	23.55	24.96	22.37	
			49	25.00	22.62	24.84	22.19	
			99	24.50	22.27	24.07	22.22	
		50	0	25.00	22.38	24.61	22.65	
			25	24.00	23.51	23.95	22.92	
			50	24.50	22.92	24.33	22.63	
		100	0	24.00	22.74	23.83	22.76	
		16QAM	1	0	25.00	22.54	24.72	22.05
				49	24.00	23.85	22.19	22.74
	99			23.50	23.06	22.87	23.08	
	50		0	24.00	22.03	23.57	22.59	
			25	23.50	23.08	22.81	22.33	
			50	24.50	22.04	24.40	22.24	
	100		0	23.50	23.12	22.88	22.90	

9. Exposure Position Consideration

9.1. Antenna information

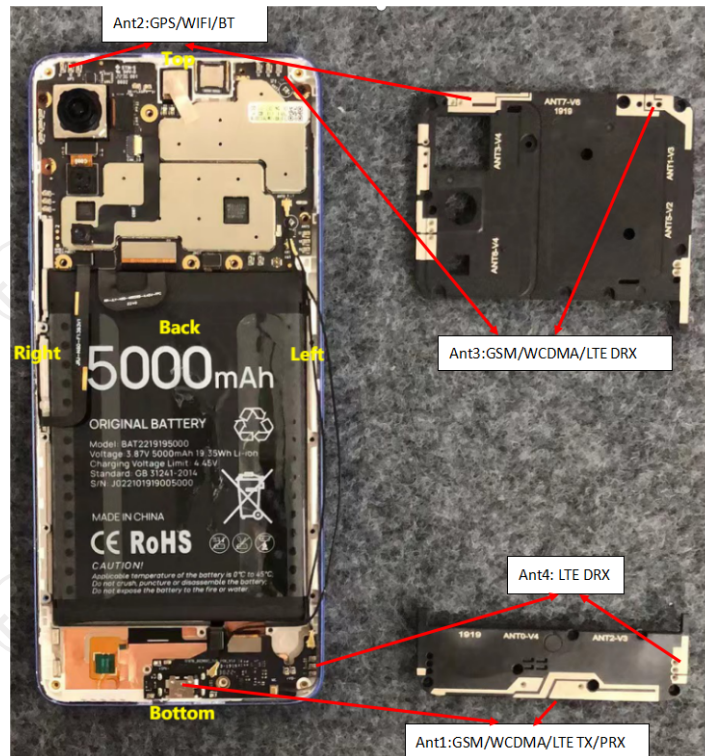

WWAN Main Antenna	GSM/UMTS/LTE FDD TX/RX
WLAN/BT Antenna	WLAN/BT TX/RX
Note:	
A) Per KDB648474 D04, 10-g extremity SAR is not required when Body-Worn mode 1-g reported SAR<1.2W/Kg.	
B) According to the KDB941225 D06 Hot Spot SAR v02, When the overall device length and width are ≥ 9cm*5cm, the test distance is 10mm, SAR must be measured for all sides and surfaces with a transmitting antenna located with 25mm from that surface or edge.	

Antenna	Distance of The Antenna to the EUT surface and edge (mm)					
	Front Side (mm)	Back Side (mm)	Left Edge (mm)	Right Edge (mm)	Top Edge (mm)	Bottom Edge (mm)
WWAN	<5	<5	<5	<5	165	<5
BT/Wifi	<5	<5	64	<5	<5	160

9.2. Test Position Consideration

Antenna	Positions for SAR tests: Hotspot mode					
	Front Side (mm)	Back Side (mm)	Left Edge (mm)	Right Edge (mm)	Top Edge (mm)	Bottom Edge (mm)
WWAN	Yes	Yes	Yes	Yes	No	Yes
BT/Wifi	Yes	Yes	No	Yes	Yes	No

10. SAR Test Results Summary

10.1. Head 1g SAR Data

Band	Mode	Test Position with 0mm	CH.	Freq. (MHz)	Ave. Power (dBm)	Tune-Up Limit (dBm)	Power Drift (%)	Meas. SAR1g (W/kg)	Scaling Factor	Reported SAR1g (W/kg)	Limit (W/Kg)
GSM850	GPRS 4slots	Left-Cheek	190	836.6	33.77	34.00	1.050	0.190	1.054	0.200	1.60
		Left-Tilt	190	836.6	33.77	34.00	0.990	0.118	1.054	0.124	
		Right-Cheek	190	836.6	33.77	34.00	-0.060	0.195	1.054	0.206	
		Right-Tilt	190	836.6	33.77	34.00	2.050	0.123	1.054	0.130	
GSM1900	GPRS 4slots	Left-Cheek	661	1880.0	29.28	29.50	-0.210	0.080	1.052	0.084	
		Left-Tilt	661	1880.0	29.28	29.50	0.225	0.064	1.052	0.067	
		Right-Cheek	661	1880.0	29.28	29.50	1.210	0.082	1.052	0.086	
		Right-Tilt	661	1880.0	29.28	29.50	1.450	0.070	1.052	0.074	
WCDMA Band II	RMC	Left-Cheek	9400	1880.0	23.80	24.00	0.830	0.066	1.047	0.069	
		Left-Tilt	9400	1880.0	23.80	24.00	-1.201	0.061	1.047	0.064	
		Right-Cheek	9400	1880.0	23.80	24.00	1.020	0.069	1.047	0.072	
		Right-Tilt	9400	1880.0	23.80	24.00	2.460	0.068	1.047	0.071	
WCDMA Band IV	RMC	Left-Cheek	1450	1740.0	24.90	25.00	-0.670	0.415	1.023	0.425	
		Left-Tilt	1450	1740.0	24.90	25.00	-3.570	0.188	1.023	0.192	
		Right-Cheek	1450	1740.0	24.90	25.00	-2.390	0.402	1.023	0.411	
		Right-Tilt	1450	1740.0	24.90	25.00	4.670	0.171	1.023	0.175	
WCDMA Band V	RMC	Left-Cheek	4132	826.4	23.90	24.00	-1.450	0.226	1.023	0.231	
		Left-Tilt	4132	826.4	23.90	24.00	-1.020	0.141	1.023	0.144	
		Right-Cheek	4132	826.4	23.90	24.00	-1.700	0.209	1.023	0.214	
		Right-Tilt	4132	826.4	23.90	24.00	1.240	0.140	1.023	0.143	
BT	Classical	Left-Cheek	40	2441	6.30	6.50	-0.280	0.085	1.047	0.089	
		Left-Tilt	40	2441	6.30	6.50	-1.300	0.050	1.047	0.052	
		Right-Cheek	40	2441	6.30	6.50	2.730	0.082	1.047	0.086	
		Right-Tilt	40	2441	6.30	6.50	1.970	0.051	1.047	0.053	
2.4G	802.11b	Left-Cheek	1	2412	17.22	17.50	-1.880	0.057	1.067	0.061	
		Left-Tilt	1	2412	17.22	17.50	-3.570	0.046	1.067	0.049	
		Right-Cheek	1	2412	17.22	17.50	1.790	0.058	1.067	0.062	
		Right-Tilt	1	2412	17.22	17.50	-1.860	0.049	1.067	0.052	
5.2G	802.11ac (VTH40)	Left-Cheek	38	5190	17.83	18.00	1.255	0.146	1.040	0.152	
		Left-Tilt	38	5190	17.83	18.00	0.700	0.047	1.040	0.049	
		Right-Cheek	38	5190	17.83	18.00	-2.980	0.177	1.040	0.184	
		Right-Tilt	38	5190	17.83	18.00	2.851	0.067	1.040	0.070	
5.8G	802.11ac (VTH40)	Left-Cheek	151	5755	17.94	18.00	-0.950	0.186	1.014	0.189	
		Left-Tilt	151	5755	17.94	18.00	-1.334	0.088	1.014	0.089	
		Right-Cheek	151	5755	17.94	18.00	-1.228	0.218	1.014	0.221	
		Right-Tilt	151	5755	17.94	18.00	-1.603	0.108	1.014	0.110	

Note:

1. The frame average of GPRS 850 (4Tx slots) & GPRS 1900 (4Tx slots) higher than GSM and sample can support VOIP function, tested at GPRS mode for head.

Band	Mode	Test Position with 0mm	CH.	Freq. (MHz)	RB allocation	RB offset	Ave. Power (dBm)	Tune-Up Limit (dBm)	Power Drift (%)	Meas. SAR1g (W/kg)	Scaling Factor	Reported SAR1g (W/kg)	Limit (W/Kg)
LTE Band 2	QPSK (20MHz)	Left-Cheek	19100	1900.0	1	0	24.98	25.00	-1.160	0.092	1.005	0.092	1.60
					50	50	24.56	25.00	0.556	0.084	1.107	0.093	
		Left-Tilt	19100	1900.0	1	0	24.98	25.00	0.980	0.086	1.005	0.086	
					50	50	24.56	25.00	-0.850	0.069	1.107	0.076	
		Right-Cheek	19100	1900.0	1	0	24.98	25.00	-3.230	0.094	1.005	0.094	
					50	50	24.56	25.00	1.500	0.084	1.107	0.093	
		Right-Tilt	19100	1900.0	1	0	24.98	25.00	-1.950	0.087	1.005	0.087	
					50	50	24.56	25.00	2.001	0.070	1.107	0.077	
LTE Band 4	QPSK (20MHz)	Left-Cheek	20175	1732.5	1	49	24.92	25.00	-1.160	0.087	1.019	0.089	
					50	0	24.61	25.00	-1.100	0.079	1.094	0.086	
		Left-Tilt	20175	1732.5	1	49	24.92	25.00	0.980	0.074	1.019	0.075	
					50	0	24.61	25.00	1.500	0.066	1.094	0.072	
		Right-Cheek	20175	1732.5	1	49	24.92	25.00	-1.330	0.089	1.019	0.091	
					50	0	24.61	25.00	2.050	0.082	1.094	0.090	
		Right-Tilt	20175	1732.5	1	49	24.92	25.00	0.550	0.078	1.019	0.079	
					50	0	24.61	25.00	2.008	0.071	1.094	0.078	

Band	Mode	Test Position	CH	Freq. (MHz)	Ave. Power (dBm)	Tune-Up Limit (dBm)	Power Drift (%)	Meas. SAR1g (W/kg)	Scaling Factor	Reported SAR1g (W/kg)	Limit (W/Kg)	
LTE Band 5	QPSK (10MHz)	Left-Cheek	20450	829.0	1	0	24.81	25.00	-1.160	0.082	1.045	0.086
					25	0	24.13	24.50	-1.300	0.079	1.089	0.086
		Left-Tilt	20450	829.0	1	0	24.81	25.00	0.980	0.076	1.045	0.079
					25	0	24.13	24.50	2.050	0.068	1.089	0.074
		Right-Cheek	20450	829.0	1	0	24.81	25.00	2.170	0.083	1.045	0.087
					25	0	24.13	24.50	3.160	0.079	1.089	0.086
		Right-Tilt	20450	829.0	1	0	24.81	25.00	2.503	0.075	1.045	0.078
					25	0	24.13	24.50	-1.056	0.070	1.089	0.076
LTE Band 7	QPSK (20MHz)	Left-Cheek	21100	2535.0	1	0	24.73	25.00	-2.000	0.123	1.064	0.131
					50	0	24.64	25.00	1.980	0.120	1.086	0.130
		Left-Tilt	21100	2535.0	1	0	24.73	25.00	0.980	0.066	1.064	0.070
					50	0	24.64	25.00	-0.622	0.065	1.086	0.071
		Right-Cheek	21100	2535.0	1	0	24.73	25.00	-1.331	0.111	1.064	0.118
					50	0	24.64	25.00	1.400	0.109	1.086	0.118
		Right-Tilt	21100	2535.0	1	0	24.73	25.00	2.503	0.064	1.064	0.068
					50	0	24.64	25.00	-3.065	0.062	1.086	0.067
LTE Band 12	QPSK (10MHz)	Left-Cheek	23130	711.0	1	0	24.92	25.00	-1.160	0.048	1.019	0.049
					25	0	24.31	24.50	-1.360	0.043	1.045	0.045
		Left-Tilt	23130	711.0	1	0	24.92	25.00	0.980	0.032	1.019	0.033
					25	0	24.31	24.50	-2.411	0.029	1.045	0.030
		Right-Cheek	23130	711.0	1	0	24.92	25.00	-3.340	0.049	1.019	0.050
					25	0	24.31	24.50	1.236	0.044	1.045	0.046
		Right-Tilt	23130	711.0	1	0	24.92	25.00	2.503	0.033	1.019	0.034
					25	0	24.31	24.50	-1.002	0.030	1.045	0.031
LTE Band 17	QPSK (10MHz)	Left-Cheek	23800	711.0	1	0	24.90	25.00	-1.160	0.080	1.023	0.082
					25	0	24.51	25.00	-0.260	0.071	1.119	0.079
		Left-Tilt	23800	711.0	1	0	24.90	25.00	0.980	0.050	1.023	0.051
					25	0	24.51	25.00	0.166	0.048	1.119	0.054
		Right-Cheek	23800	711.0	1	0	24.90	25.00	1.020	0.081	1.023	0.083
					25	0	24.51	25.00	-1.506	0.072	1.119	0.081
		Right-Tilt	23800	711.0	1	0	24.90	25.00	2.503	0.051	1.023	0.052
					25	0	24.51	25.00	-2.001	0.050	1.119	0.056
LTE Band 66	QPSK (20MHz)	Left-Cheek	132322	1745.0	1	0	24.96	25.00	-3.180	0.039	1.009	0.039
					50	0	24.61	25.00	1.112	0.036	1.094	0.039
		Left-Tilt	132322	1745.0	1	0	24.96	25.00	-0.890	0.034	1.009	0.034
					50	0	24.61	25.00	1.230	0.032	1.094	0.035
		Right-Cheek	132322	1745.0	1	0	24.96	25.00	-0.940	0.040	1.009	0.040
					50	0	24.61	25.00	2.150	0.036	1.094	0.039
		Right-Tilt	132322	1745.0	1	0	24.96	25.00	-0.510	0.035	1.009	0.035
					50	0	24.61	25.00	-1.620	0.032	1.094	0.035

10.2. Hotspot/Body-worn 1g SAR Data

Band	Mode	Test Position with 10 mm	CH	Freq. (MHz)	Ave. Power (dBm)	Tune-Up Limit (dBm)	Power Drift (%)	Meas. SAR1g (W/kg)	Scaling Factor	Reported SAR1g (W/kg)	Limit (W/Kg)
GSM 850	GPRS 4slots	Front	190	836.6	33.77	34.00	-0.440	0.120	1.054	0.126	1.60
		Back	190	836.6	33.77	34.00	-1.060	0.490	1.054	0.516	
		Left	190	836.6	33.77	34.00	0.160	0.114	1.054	0.120	
		Right	190	836.6	33.77	34.00	1.840	0.185	1.054	0.195	
		Bottom	190	836.6	33.77	34.00	1.890	0.120	1.054	0.126	
GSM 1900	GPRS 4slots	Front	661	1880.0	29.28	29.50	-0.120	0.165	1.052	0.174	
		Back	512	1850.2	29.03	29.50	1.500	0.931	1.114	1.037	
		Back	661	1880.0	29.28	29.50	-3.880	0.989	1.052	1.040	
		Back	810	1909.8	28.83	29.00	2.122	0.950	1.040	0.988	
		Left	661	1880.0	29.28	29.50	1.511	0.114	1.052	0.120	
		Right	661	1880.0	29.28	29.50	-2.322	0.067	1.052	0.070	
WCDMA Band II	RMC	Bottom	661	1880.0	29.28	29.50	0.115	0.435	1.052	0.458	
		Front	9400	1880.0	23.80	24.00	-0.220	0.108	1.047	0.113	
		Back	9400	1880.0	23.80	24.00	-2.940	0.751	1.047	0.786	
		Left	9400	1880.0	23.80	24.00	3.225	0.073	1.047	0.076	
		Right	9400	1880.0	23.80	24.00	2.300	0.065	1.047	0.068	
WCDMA Band IV	RMC	Bottom	9400	1880.0	23.80	24.00	1.098	0.301	1.047	0.315	
		Front	1450	1740.0	24.90	25.00	-0.710	0.147	1.023	0.150	
		Back	1450	1740.0	24.90	25.00	-1.430	0.405	1.023	0.414	
		Left	1450	1740.0	24.90	25.00	-0.254	0.071	1.023	0.073	
		Right	1450	1740.0	24.90	25.00	1.205	0.061	1.023	0.062	
Bottom	1450	1740.0	24.90	25.00	0.222	0.280	1.023	0.286			

Band	Mode	Test Position	CH	Freq. (MHz)	RB allocation	RB offset	Ave. Power (dBm)	Tune-Up Limit (dBm)	Power Drift (%)	Meas. SAR1g (W/kg)	Scaling Factor	Reported SAR1g (W/kg)	Limit (W/Kg)
WCDMA Band V	RMC	Front	4132	826.4	23.90	24.00	-1.660	0.101	1.023	0.103			
		Back	4132	826.4	23.90	24.00	0.060	0.218	1.023	0.223			
		Left	4132	826.4	23.90	24.00	0.121	0.061	1.023	0.062			
		Right	4132	826.4	23.90	24.00	2.160	0.056	1.023	0.057			
2.4G	802.11b	Bottom	4132	826.4	23.90	24.00	-0.102	0.143	1.023	0.146			
		Front	1	2412	17.22	17.50	-3.570	0.022	1.067	0.023			
		Back	1	2412	17.22	17.50	1.490	0.060	1.067	0.064			
		Right	1	2412	17.22	17.50	-2.390	0.018	1.067	0.019			
5.2G	802.11ac (VTH40)	Top	1	2412	17.22	17.50	4.670	0.021	1.067	0.022			
		Front	38	5190	17.83	18.00	1.520	0.233	1.040	0.242			
		Back	38	5190	17.83	18.00	2.000	0.240	1.040	0.250			
		Right	38	5190	17.83	18.00	-1.050	0.115	1.040	0.120			
5.8G	802.11ac (VTH40)	Top	38	5190	17.83	18.00	2.851	0.099	1.040	0.103			
		Front	151	5755	17.94	18.00	-1.334	0.181	1.014	0.184			
		Back	151	5755	17.94	18.00	1.540	0.186	1.014	0.189			
		Right	151	5755	17.94	18.00	-0.945	0.106	1.014	0.107			
		Top	151	5755	17.94	18.00	-1.603	0.087	1.014	0.088			

Band	Mode	Test Position	CH	Freq. (MHz)	RB allocation	RB offset	Ave. Power (dBm)	Tune-Up Limit (dBm)	Power Drift (%)	Meas. SAR1g (W/kg)	Scaling Factor	Reported SAR1g (W/kg)	Limit (W/Kg)			
LTE Band 2	QPSK (20MHz)	Front	19100	1900.0	1	0	24.98	25.00	4.860	0.171	1.005	0.172	1.60			
					50	50	24.56	25.00	-1.200	0.152	1.107	0.168				
		Back	18700	1860.0	1	0	23.31	23.50	1.205	0.994	1.045	1.039				
					50	50	22.73	23.00	3.060	0.966	1.064	1.028				
		Back	18900	1880.0	1	0	24.19	24.50	-2.004	1.050	1.074	1.128				
					50	50	23.54	24.00	0.560	1.004	1.112	1.116				
		Back	19100	1900.0	1	0	24.98	25.00	0.080	1.135	1.005	1.141				
					50	50	24.56	25.00	0.800	1.020	1.107	1.129				
		Left	19100	1900.0	1	0	24.98	25.00	-1.331	0.109	1.005	0.110				
					50	50	24.56	25.00	1.660	0.092	1.107	0.102				
		Right	19100	1900.0	1	0	24.98	25.00	3.211	0.084	1.005	0.084				
					50	50	24.56	25.00	-4.020	0.073	1.107	0.081				
Bottom	19100	1900.0	1	0	24.98	25.00	2.503	0.534	1.005	0.537						
			50	50	24.56	25.00	-2.015	0.466	1.107	0.516						
LTE Band 4	QPSK (20MHz)	Front	20175	1732.5	1	49	24.92	25.00	3.840	0.214	1.019	0.218	1.60			
					50	0	24.61	25.00	0.520	0.188	1.094	0.206				
		Back	20175	1732.5	1	49	24.92	25.00	-2.950	0.650	1.019	0.662				
					50	0	24.61	25.00	1.260	0.512	1.094	0.560				
		Left	20175	1732.5	1	49	24.92	25.00	-3.920	0.134	1.019	0.137				
					50	0	24.61	25.00	-3.600	0.115	1.094	0.126				
		Right	20175	1732.5	1	49	24.92	25.00	-1.890	0.060	1.019	0.061				
					50	0	24.61	25.00	0.322	0.053	1.094	0.058				
		Bottom	20175	1732.5	1	49	24.92	25.00	-2.880	0.438	1.019	0.446				
					50	0	24.61	25.00	-2.450	0.385	1.094	0.421				
		LTE Band 5	QPSK (10MHz)	Front	20450	829.0	1	0	24.81	25.00	-0.860	0.086		1.045	0.090	1.60
							25	0	24.13	24.50	-1.200	0.082		1.089	0.089	
Back	20450			829.0	1	0	24.81	25.00	-1.760	0.311	1.045	0.325				
					25	0	24.13	24.50	1.003	0.289	1.089	0.315				
Left	20450			829.0	1	0	24.81	25.00	-0.610	0.096	1.045	0.100				
					25	0	24.13	24.50	2.360	0.085	1.089	0.093				
Right	20450			829.0	1	0	24.81	25.00	-4.360	0.140	1.045	0.146				
					25	0	24.13	24.50	2.360	0.130	1.089	0.142				
Bottom	20450			829.0	1	0	24.81	25.00	2.390	0.088	1.045	0.092				
					25	0	24.13	24.50	-3.066	0.081	1.089	0.088				
LTE Band 7	QPSK (20MHz)			Front	21100	2535.0	1	0	24.73	25.00	-1.100	0.527	1.064	0.561	1.60	
							50	0	24.64	25.00	2.600	0.511	1.086	0.555		
		Back	20850	2510.0	1	0	23.45	23.50	2.005	0.941	1.012	0.952				
					50	0	23.36	23.50	1.205	0.833	1.033	0.860				
		Back	21100	2535.0	1	0	24.73	25.00	-3.630	1.016	1.064	1.081				
					50	0	24.64	25.00	-2.066	0.988	1.086	1.073				
		Back	21350	2560.0	1	0	23.61	24.00	2.010	0.955	1.094	1.045				
					50	0	22.98	23.00	-0.022	0.816	1.005	0.820				
		Left	20850	2510.0	1	0	23.45	23.50	0.399	0.950	1.012	0.961				
					50	0	23.36	23.50	1.500	0.834	1.033	0.862				
		Left	21100	2535.0	1	0	24.73	25.00	-1.400	1.027	1.064	1.093				
					50	0	24.64	25.00	-1.230	0.993	1.086	1.078				
Left	21350	2560.0	1	0	23.61	24.00	2.310	0.959	1.094	1.049						
			50	0	22.98	23.00	1.088	0.812	1.005	0.816						
Right	21100	2535.0	1	0	24.73	25.00	2.640	0.033	1.064	0.035						
			50	0	24.64	25.00	-1.230	0.030	1.086	0.033						
Bottom	21100	2535.0	1	0	24.73	25.00	2.503	0.535	1.064	0.569						
			50	0	24.64	25.00	-2.200	0.508	1.086	0.552						

LTE Band 12	Front	23130	711.0	1	0	24.92	25.00	-1.160	0.064	1.019	0.065
				25	0	24.31	24.50	-1.100	0.060	1.045	0.063
	Back	23130	711.0	1	0	24.92	25.00	1.880	0.128	1.019	0.130
				25	0	24.31	24.50	-0.553	0.110	1.045	0.115
	Left	23130	711.0	1	0	24.92	25.00	-1.331	0.082	1.019	0.084
				25	0	24.31	24.50	1.360	0.070	1.045	0.073
	Right	23130	711.0	1	0	24.92	25.00	-1.331	0.141	1.019	0.144
				25	0	24.31	24.50	1.360	0.130	1.045	0.136
	Bottom	23130	711.0	1	0	24.92	25.00	2.503	0.080	1.019	0.082
				25	0	24.31	24.50	2.044	0.077	1.045	0.080
LTE Band 17	Front	23800	711.0	1	0	24.90	25.00	-1.160	0.066	1.023	0.068
				25	0	24.51	25.00	-1.230	0.062	1.119	0.069
	Back	23800	711.0	1	0	24.90	25.00	1.030	0.139	1.023	0.142
				25	0	24.51	25.00	-3.500	0.120	1.119	0.134
	Left	23800	711.0	1	0	24.90	25.00	-1.331	0.085	1.023	0.087
				25	0	24.51	25.00	1.800	0.072	1.119	0.081
	Right	23800	711.0	1	0	24.90	25.00	2.220	0.144	1.023	0.147
				25	0	24.51	25.00	2.106	0.132	1.119	0.148
	Bottom	23800	711.0	1	0	24.90	25.00	2.503	0.085	1.023	0.087
				25	0	24.51	25.00	-2.411	0.082	1.119	0.092
LTE Band 66	Front	132322	1745.0	1	0	24.96	25.00	-2.050	0.195	1.009	0.197
				50	0	24.61	25.00	1.054	0.170	1.094	0.186
	Back	132322	1745.0	1	0	24.96	25.00	-2.280	0.535	1.009	0.540
				50	0	24.61	25.00	0.221	0.397	1.094	0.434
	Left	132322	1745.0	1	0	24.96	25.00	-1.003	0.115	1.009	0.116
				50	0	24.61	25.00	1.326	0.106	1.094	0.116
	Right	132322	1745.0	1	0	24.96	25.00	3.330	0.059	1.009	0.060
				50	0	24.61	25.00	2.560	0.051	1.094	0.056
	Bottom	132322	1745.0	1	0	24.96	25.00	2.006	0.416	1.009	0.420
				50	0	24.61	25.00	-0.955	0.330	1.094	0.361

Note:

- Per KDB 447498 D01 v06, for each exposure position, if the highest output power channel Reported SAR $\leq 0.8W/kg$, other channels SAR testing is not necessary.
- Per KDB 447498 D01 v06, head/body-worn use is evaluated with the device positioned at 0mm/10 mm from a head/flat phantom respectively filled with body tissue-equivalent medium.
- Per KDB Publication 941225 D06 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 mm from the front, back and edges of the device with antennas 2.5 cm or closer to the edge of the device, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.
- Per KDB 447498 D01 v06, the report SAR is measured SAR value adjusted for maximum tune-up tolerance. Scaling Factor = $10^{(tune-up \text{ limit power}(dBm) - Ave.power \text{ power}(dBm))/10}$, where tune-up limit is the maximum rated power among all production units.
Reported SAR(W/kg) = Measured SAR (W/kg) * Scaling Factor.
- Per KDB865664D01 v01r04 perform a second repeated measurement only the ratio of largest to smallest SAR for the original and first repeated measurement is >1.20 or when the original or repeated measurement is $\geq 1.45W/kg$.
- Perform a second measurement only if the original, first and second repeated measurement is $\geq 1.5w/kg$ and the ratio of largest to smallest SAR for the original, first and second repeated measurement is >1.20 .
- When the separation distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface).

10.3. Simultaneous Transmission Conclusion

Multi-Band Simultaneous Transmission Considerations

According to FCC KDB Publication 447498 D01v05r02, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds. Possible transmission paths for the EUT are shown in below Figure and are color-coded to indicate communication modes which share the same path. Modes which share the same transmission path cannot transmit simultaneously with one another.



Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB 447498 D04, simultaneous transmission SAR test exclusion may be applied when the sum of the 1-g SAR for all the simultaneous transmitting antennas in a specific a physical test configuration is ≤ 1.6 W/kg. When standalone SAR is not required to be measured, per FCC KDB 447498 D04, the following equation must be used to estimate the standalone 1g SAR and 10g extremity SAR for simultaneous transmission assessment involving that transmitter.

$$\text{Estimated SAR} = \frac{\sqrt{f(\text{GHz})}}{7.5(18.75)} \cdot \frac{\text{Max. power of channel, mW}}{\text{Min. Separation Distance, mm}}$$

Mode	Frequency (GHz)	Max. tune-up Power (dBm)	Exposure Position	Head	Body-worn
			Test Distance (mm)	5	10
BT	2.441	6.50	Estimated SAR (W/kg)	/	0.093

Note:

- When the minimum *test separation distance* is < 5 mm, a distance of 5 mm according is applied to determine estimated SAR.
- $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})}/x]$ W/kg for test separation distances ≤ 50 mm; where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
- Per KDB 648474 D04 require when the separation distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, using the same wireless mode test configuration for voice and data, such as UMTS, LTE and Wi-Fi, and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration.

Simultaneous Transmission Possibilities

The Simultaneous Transmission Possibilities of this device are as below:

NO.	Configuration	Head	Body-worn
1	WWAN+WIFI(2.4g)	Yes	Yes
2	WWAN+WIFI(5g)	Yes	Yes
3	WWAN+BT	Yes	Yes

Head

Band	Test Position	Scaled SAR				E _{max} SAR (W/kg) WWAN + WIFI 2.4G	E _{max} SAR (W/kg) WWAN + WIFI 5G	E _{max} SAR (W/kg) WWAN + BT	SPLSR	Remark
		WWAN	WIFI 2.4G	WIFI 5G	BT					
GSM850 (GPRS 4slots)	Left-Cheek	0.200	0.061	0.189	0.089	0.261	0.389	0.289	N/A	N/A
	Left-Tilt	0.124	0.049	0.089	0.052	0.173	0.213	0.176	N/A	N/A
	Right-Cheek	0.206	0.062	0.221	0.086	0.268	0.427	0.292	N/A	N/A
	Right-Tilt	0.130	0.052	0.110	0.053	0.182	0.240	0.183	N/A	N/A
GSM1900 (GPRS 4slots)	Left-Cheek	0.084	0.061	0.189	0.089	0.145	0.273	0.173	N/A	N/A
	Left-Tilt	0.067	0.049	0.089	0.052	0.116	0.156	0.119	N/A	N/A
	Right-Cheek	0.086	0.062	0.221	0.086	0.148	0.307	0.172	N/A	N/A
	Right-Tilt	0.074	0.052	0.110	0.053	0.126	0.184	0.127	N/A	N/A
WCDMA Band II	Left-Cheek	0.069	0.061	0.189	0.089	0.130	0.258	0.158	N/A	N/A
	Left-Tilt	0.064	0.049	0.089	0.052	0.113	0.153	0.116	N/A	N/A
	Right-Cheek	0.072	0.062	0.221	0.086	0.134	0.293	0.158	N/A	N/A
	Right-Tilt	0.071	0.052	0.110	0.053	0.123	0.181	0.124	N/A	N/A
WCDMA Band IV	Left-Cheek	0.425	0.061	0.189	0.089	0.486	0.614	0.514	N/A	N/A
	Left-Tilt	0.192	0.049	0.089	0.052	0.241	0.281	0.244	N/A	N/A
	Right-Cheek	0.411	0.062	0.221	0.086	0.473	0.632	0.497	N/A	N/A
	Right-Tilt	0.175	0.052	0.110	0.053	0.227	0.285	0.228	N/A	N/A
WCDMA Band V	Left-Cheek	0.231	0.061	0.189	0.089	0.292	0.420	0.320	N/A	N/A
	Left-Tilt	0.144	0.049	0.089	0.052	0.193	0.233	0.196	N/A	N/A
	Right-Cheek	0.214	0.062	0.221	0.086	0.276	0.435	0.300	N/A	N/A
	Right-Tilt	0.143	0.052	0.110	0.053	0.195	0.253	0.196	N/A	N/A

Band	Test Position	RB allocation	Scaled				Σ SAR (W/kg) WWAN + WIFI 2.4G	Σ SAR (W/kg) WWAN + WIFI 5G	Σ SAR (W/kg) WWAN + BT	SPLSR	Remark	
			WWAN	WIFI 2.4G	WIFI 5G	Bluetooth						
LTE Band 2 QPSK (20MHz)	Left-Cheek	1	0.092	0.061	0.189	0.089	0.153	0.281	0.181	N/A	N/A	
		50	0.093	0.061	0.189	0.089	0.154	0.282	0.182	N/A	N/A	
	Left-Tilt	1	0.086	0.049	0.089	0.052	0.135	0.175	0.138	N/A	N/A	
		50	0.076	0.049	0.089	0.052	0.125	0.165	0.128	N/A	N/A	
	Right-Cheek	1	0.094	0.062	0.221	0.086	0.156	0.315	0.180	N/A	N/A	
		50	0.093	0.062	0.221	0.086	0.155	0.314	0.179	N/A	N/A	
	Right-Tilt	1	0.087	0.052	0.110	0.053	0.139	0.197	0.140	N/A	N/A	
		50	0.077	0.052	0.110	0.053	0.129	0.187	0.130	N/A	N/A	
	LTE Band 4 QPSK (20MHz)	Left-Cheek	1	0.089	0.061	0.189	0.089	0.150	0.278	0.178	N/A	N/A
			50	0.086	0.061	0.189	0.089	0.147	0.275	0.175	N/A	N/A
		Left-Tilt	1	0.075	0.049	0.089	0.052	0.124	0.164	0.127	N/A	N/A
			50	0.072	0.049	0.089	0.052	0.121	0.161	0.124	N/A	N/A
Right-Cheek		1	0.091	0.062	0.221	0.086	0.153	0.312	0.177	N/A	N/A	
		50	0.090	0.062	0.221	0.086	0.152	0.311	0.176	N/A	N/A	
Right-Tilt		1	0.079	0.052	0.110	0.053	0.131	0.189	0.132	N/A	N/A	
		50	0.078	0.052	0.110	0.053	0.130	0.188	0.131	N/A	N/A	
LTE Band 5 QPSK (10MHz)		Left-Cheek	1	0.086	0.061	0.189	0.089	0.147	0.275	0.175	N/A	N/A
			25	0.086	0.061	0.189	0.089	0.147	0.275	0.175	N/A	N/A
		Left-Tilt	1	0.079	0.049	0.089	0.052	0.128	0.168	0.131	N/A	N/A
			25	0.074	0.049	0.089	0.052	0.123	0.163	0.126	N/A	N/A
	Right-Cheek	1	0.087	0.062	0.221	0.086	0.149	0.308	0.173	N/A	N/A	
		25	0.086	0.062	0.221	0.086	0.148	0.307	0.172	N/A	N/A	
	Right-Tilt	1	0.078	0.052	0.110	0.053	0.130	0.188	0.131	N/A	N/A	
		25	0.076	0.052	0.110	0.053	0.128	0.186	0.129	N/A	N/A	
	LTE Band 7 QPSK (20MHz)	Left-Cheek	1	0.131	0.061	0.189	0.089	0.192	0.320	0.220	N/A	N/A
			50	0.130	0.061	0.189	0.089	0.191	0.319	0.219	N/A	N/A
		Left-Tilt	1	0.070	0.049	0.089	0.052	0.119	0.159	0.122	N/A	N/A
			50	0.071	0.049	0.089	0.052	0.120	0.160	0.123	N/A	N/A
Right-Cheek		1	0.118	0.062	0.221	0.086	0.180	0.339	0.204	N/A	N/A	
		50	0.118	0.062	0.221	0.086	0.180	0.339	0.204	N/A	N/A	
Right-Tilt		1	0.068	0.052	0.110	0.053	0.120	0.178	0.121	N/A	N/A	
		50	0.067	0.052	0.110	0.053	0.119	0.177	0.120	N/A	N/A	

Band	Test Position	RB allocation	Scaled				Σ SAR (W/kg) WWAN + WIFI 2.4G	Σ SAR (W/kg) WWAN + WIFI 5G	Σ SAR (W/kg) WWAN + BT	SPLSR	Remark	
			WWAN	WIFI 2.4G	WIFI 5G	Bluetooth						
LTE Band 12 QPSK (10MHz)	Left-Cheek	1	0.049	0.061	0.189	0.089	0.110	0.238	0.138	N/A	N/A	
		25	0.045	0.061	0.189	0.089	0.106	0.234	0.134	N/A	N/A	
	Left-Tilt	1	0.033	0.049	0.089	0.052	0.082	0.122	0.085	N/A	N/A	
		25	0.030	0.049	0.089	0.052	0.079	0.119	0.082	N/A	N/A	
	Right-Cheek	1	0.050	0.062	0.221	0.086	0.112	0.271	0.136	N/A	N/A	
		25	0.046	0.062	0.221	0.086	0.108	0.267	0.132	N/A	N/A	
	Right-Tilt	1	0.034	0.052	0.110	0.053	0.086	0.144	0.087	N/A	N/A	
		25	0.031	0.052	0.110	0.053	0.083	0.141	0.084	N/A	N/A	
	LTE Band 17 QPSK (10MHz)	Left-Cheek	1	0.082	0.061	0.189	0.089	0.143	0.271	0.171	N/A	N/A
			25	0.079	0.061	0.189	0.089	0.140	0.268	0.168	N/A	N/A
		Left-Tilt	1	0.051	0.049	0.089	0.052	0.100	0.140	0.103	N/A	N/A
			25	0.054	0.049	0.089	0.052	0.103	0.143	0.106	N/A	N/A
Right-Cheek		1	0.083	0.062	0.221	0.086	0.145	0.304	0.169	N/A	N/A	
		25	0.081	0.062	0.221	0.086	0.143	0.302	0.167	N/A	N/A	
Right-Tilt		1	0.052	0.052	0.110	0.053	0.104	0.162	0.105	N/A	N/A	
		25	0.056	0.052	0.110	0.053	0.108	0.166	0.109	N/A	N/A	
LTE Band 66 QPSK (20MHz)		Left-Cheek	1	0.039	0.061	0.189	0.089	0.100	0.228	0.128	N/A	N/A
			50	0.039	0.061	0.189	0.089	0.100	0.228	0.128	N/A	N/A
		Left-Tilt	1	0.034	0.049	0.089	0.052	0.083	0.123	0.086	N/A	N/A
			50	0.035	0.049	0.089	0.052	0.084	0.124	0.087	N/A	N/A
	Right-Cheek	1	0.040	0.062	0.221	0.086	0.102	0.261	0.126	N/A	N/A	
		50	0.039	0.062	0.221	0.086	0.101	0.260	0.125	N/A	N/A	
	Right-Tilt	1	0.035	0.052	0.110	0.053	0.087	0.145	0.088	N/A	N/A	
		50	0.035	0.052	0.110	0.053	0.087	0.145	0.088	N/A	N/A	

Hotspot/body-worn

Band	Test Position	Scaled SAR				Σ SAR (W/kg) WWAN + WIFI 2.4G	Σ SAR (W/kg) WWAN + WIFI 5G	Σ SAR (W/kg) WWAN + BT	SPLSR	Remark
		WWAN	WIFI 2.4G	WIFI 5G	BT					
GSM850 (GPRS 4slots)	Front	0.126	0.023	0.242	0.093	0.149	0.368	0.219	N/A	N/A
	Back	0.516	0.064	0.250	0.093	0.580	0.766	0.609	N/A	N/A
	Left	0.120	/	/	/	0.120	0.120	0.120	N/A	N/A
	Right	0.195	0.019	0.120	0.093	0.214	0.315	0.288	N/A	N/A
	Top	/	0.022	0.103	0.093	0.022	0.103	0.093	N/A	N/A
	Bottom	0.126	/	/	/	0.126	0.126	0.126	N/A	N/A
GSM1900 (GPRS 4slots)	Front	0.174	0.023	0.242	0.093	0.197	0.416	0.267	N/A	N/A
	Back	1.040	0.064	0.250	0.093	1.104	1.290	1.133	N/A	N/A
	Left	0.120	/	/	/	0.120	0.120	0.120	N/A	N/A
	Right	0.070	0.019	0.120	0.093	0.089	0.190	0.163	N/A	N/A
	Top	/	0.022	0.103	0.093	0.022	0.103	0.093	N/A	N/A
	Bottom	0.458	/	/	/	0.458	0.458	0.458	N/A	N/A
WCDMA Band II	Front	0.113	0.023	0.242	0.093	0.136	0.355	0.206	N/A	N/A
	Back	0.786	0.064	0.250	0.093	0.850	1.036	0.879	N/A	N/A
	Left	0.076	/	/	/	0.076	0.076	0.076	N/A	N/A
	Right	0.068	0.019	0.120	0.093	0.087	0.188	0.161	N/A	N/A
	Top	/	0.022	0.103	0.093	0.022	0.103	0.093	N/A	N/A
	Bottom	0.315	/	/	/	0.315	0.315	0.315	N/A	N/A
WCDMA Band IV	Front	0.150	0.023	0.242	0.093	0.173	0.392	0.243	N/A	N/A
	Back	0.414	0.064	0.250	0.093	0.478	0.664	0.507	N/A	N/A
	Left	0.073	/	/	/	0.073	0.073	0.073	N/A	N/A
	Right	0.062	0.019	0.120	0.093	0.081	0.182	0.155	N/A	N/A
	Top	/	0.022	0.103	0.093	0.022	0.103	0.093	N/A	N/A
	Bottom	0.286	/	/	/	0.286	0.286	0.286	N/A	N/A

WCDMA Band V	Front	0.103	0.023	0.242	0.093	0.126	0.345	0.196	N/A	N/A
	Back	0.223	0.064	0.250	0.093	0.287	0.473	0.316	N/A	N/A
	Left	0.062	/	/	/	0.062	0.062	0.062	N/A	N/A
	Right	0.057	0.019	0.120	0.093	0.076	0.177	0.150	N/A	N/A
	Top	/	0.022	0.103	0.093	0.022	0.103	0.093	N/A	N/A
	Bottom	0.146	/	/	/	0.146	0.146	0.146	N/A	N/A

Band	Test Position	RB allocation	Scaled				Σ SAR (W/kg) WWAN + WIFI 2.4G	Σ SAR (W/kg) WWAN + WIFI 5G	Σ SAR (W/kg) WWAN + BT	SPLSR	Remark
			WWAN	WIFI 2.4G	WIFI 5G	Bluetooth					
LTE Band 2 QPSK (20MHz)	Front	1	0.172	0.023	0.242	0.093	0.195	0.414	0.265	N/A	N/A
		50	0.168	0.023	0.242	0.093	0.191	0.410	0.261	N/A	N/A
	Back	1	1.141	0.064	0.250	0.093	1.205	1.391	1.234	N/A	N/A
		50	1.129	0.064	0.250	0.093	1.193	1.379	1.222	N/A	N/A
	Left	1	0.110	/	/	/	0.110	0.110	0.110	N/A	N/A
		50	0.102	/	/	/	0.102	0.102	0.102	N/A	N/A
	Right	1	0.084	0.019	0.120	0.093	0.103	0.204	0.177	N/A	N/A
		50	0.081	0.019	0.120	0.093	0.100	0.201	0.174	N/A	N/A
	Top	1	/	0.022	0.103	0.093	0.022	0.103	0.093	N/A	N/A
		50	/	0.022	0.103	0.093	0.022	0.103	0.093	N/A	N/A
	Bottom	1	0.537	/	/	/	0.537	0.537	0.537	N/A	N/A
		50	0.516	/	/	/	0.516	0.516	0.516	N/A	N/A
LTE Band 4 QPSK (20MHz)	Front	1	0.218	0.023	0.242	0.093	0.241	0.460	0.311	N/A	N/A
		50	0.206	0.023	0.242	0.093	0.229	0.448	0.299	N/A	N/A
	Back	1	0.662	0.064	0.250	0.093	0.726	0.912	0.755	N/A	N/A
		50	0.560	0.064	0.250	0.093	0.624	0.810	0.653	N/A	N/A
	Left	1	0.137	/	/	/	0.137	0.137	0.137	N/A	N/A
		50	0.126	/	/	/	0.126	0.126	0.126	N/A	N/A
	Right	1	0.061	0.019	0.120	0.093	0.080	0.181	0.154	N/A	N/A
		50	0.058	0.019	0.120	0.093	0.077	0.178	0.151	N/A	N/A
	Top	1	/	0.022	0.103	0.093	0.022	0.103	0.093	N/A	N/A
		50	/	0.022	0.103	0.093	0.022	0.103	0.093	N/A	N/A
	Bottom	1	0.446	/	/	/	0.446	0.446	0.446	N/A	N/A
		50	0.421	/	/	/	0.421	0.421	0.421	N/A	N/A
LTE Band 5 QPSK (10MHz)	Front	1	0.090	0.023	0.242	0.093	0.113	0.332	0.183	N/A	N/A
		25	0.089	0.023	0.242	0.093	0.112	0.331	0.182	N/A	N/A
	Back	1	0.325	0.064	0.250	0.093	0.389	0.575	0.418	N/A	N/A
		25	0.315	0.064	0.250	0.093	0.379	0.565	0.408	N/A	N/A
	Left	1	0.100	/	/	/	0.100	0.100	0.100	N/A	N/A
		25	0.093	/	/	/	0.093	0.093	0.093	N/A	N/A
	Right	1	0.146	0.019	0.120	0.093	0.165	0.266	0.239	N/A	N/A
		25	0.142	0.019	0.120	0.093	0.161	0.262	0.235	N/A	N/A
	Top	1	/	0.022	0.103	0.093	0.022	0.103	0.093	N/A	N/A
		25	/	0.022	0.103	0.093	0.022	0.103	0.093	N/A	N/A
	Bottom	1	0.092	/	/	/	0.092	0.092	0.092	N/A	N/A
		25	0.088	/	/	/	0.088	0.088	0.088	N/A	N/A
LTE Band 7 QPSK (20MHz)	Front	1	0.561	0.023	0.242	0.093	0.584	0.803	0.654	N/A	N/A
		50	0.555	0.023	0.242	0.093	0.578	0.797	0.648	N/A	N/A
	Back	1	1.081	0.064	0.250	0.093	1.145	1.331	1.174	N/A	N/A
		50	1.073	0.064	0.250	0.093	1.137	1.323	1.166	N/A	N/A
	Left	1	1.093	/	/	/	1.093	1.093	1.093	N/A	N/A
		50	1.078	/	/	/	1.078	1.078	1.078	N/A	N/A
	Right	1	0.035	0.019	0.120	0.093	0.054	0.155	0.128	N/A	N/A
		50	0.033	0.019	0.120	0.093	0.052	0.153	0.126	N/A	N/A
	Top	1	/	0.022	0.103	0.093	0.022	0.103	0.093	N/A	N/A
		50	/	0.022	0.103	0.093	0.022	0.103	0.093	N/A	N/A
	Bottom	1	0.569	/	/	/	0.569	0.569	0.569	N/A	N/A
		50	0.552	/	/	/	0.552	0.552	0.552	N/A	N/A