

Product Name: Tablet	Report No: ITEZA202300323RF1
Product Model: U7, U7 Kid, U7 Pro, U7S, U7 SE, U7 Ultra, U7 Max, U7E	Security Classification: Open
Version: V1.0	Total Page: 60

TIRT Testing Report

Prepared By:	Checked By:	Approved By:	
Aaron Long	Stone Tang	Joky Wang	
<i>Aaron Long</i>	<i>Stone Tang</i>	<i>Joky Wang</i>	

RF TEST REPORT

FCC ID: 2AX4YU7

According to

47 CFR FCC Part 15, Subpart C(Section 15.247)

ANSI C63.10:2013

Equipment : Tablet
Model No. : U7, U7 Kid, U7 Pro, U7S, U7 SE, U7 Ultra, U7 Max, U7E
Trademark : DOOGEE
Applicant : Shenzhen DOOGEE Hengtong Technology CO., LTD
B, 2/F, Building A4, Silicon Valley Power Digital Industrial Park, No. 22,
Longhua New District, Shenzhen, China

- The test result referred exclusively to the presented test model /sample.
- Without written approval of TIRT Inc. the test report shall not reproduced except in full.
- Test date: 2023/10/11~2023/10/24

Lab: Beijing TIRT Technology Service Co.,Ltd Shenzhen

Add: 104 Building C, Xinmingsheng Industrial Park No.132, Zhangge Old Village East Zone, Zhangge Community, Fucheng Street, Longhua District, Shenzhen, Guangdong, P. R. China

TEL: +86-0755-27087573

TABLE OF CONTENTS

<u>Description</u>	<u>Page</u>
1. Summary of Standards And Results	5
1.1. Description of Standards and Results	5
2. General Information	6
2.1. Description of Device (EUT)	6
2.2. Accessories of Device (EUT)	7
2.3. Tested Supporting System Details	7
2.4. Block Diagram of connection between EUT and simulators	7
2.5. Test Mode Description	8
2.6. Test Conditions	9
2.7. Test Facility	9
2.8. Measurement Uncertainty	9
2.9. Test Equipment List	10
3. Spurious Emission	12
3.1. Test Limits	12
3.2. Test Procedure	13
3.3. Test Setup	13
3.4. Test Results	14
4. Power line Conducted Emission	27
4.1. Test Limits	27
4.2. Test Procedure	27
4.3. Test Setup	27
4.4. Test Results	27
5. Conducted Maximum Output Power	30
5.1. Test limits	30
5.2. Test Procedure	30
5.3. Test Setup	30
5.4. Test Results	30
6. Peak Power Spectral Density	36
6.1. Test limits	36
6.2. Test Procedure	36
6.3. Test Setup	36
6.4. Test Results	37
7. Bandwidth	42
7.1. Test limits	42
7.2. Test Procedure	42
7.3. Test Setup	42
7.4. Test Results	42
8. Band Edge Check	52
8.1. Test limits	52
8.2. Test Procedure	52
8.3. Test Setup	52
8.4. Test Results	52
9. Antenna Requirement	58
9.1. Standard Requirement	58
9.2. Antenna Connected Construction	58
9.3. Results	58
10. Test setup photo	59
10.1. Photos of Radiated emission	59
10.2. Photos of Conducted Emission test	60

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Standards Paragraph	Result
Conducted Emission	FCC Part 15: 15.207 ANSI C63.10	P
6dB Bandwidth	FCC PART 15:15.247(a)(2) ANSI C63.10	P
Output Power	FCC Part 15: 15.247(b)(3) ANSI C63.10	P
Radiated Spurious Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.10	P
Conducted Spurious & Band Edge Emission	FCC Part 15: 15.247(d) ANSI C63.10	P
Power Spectral Density	FCC PART 15:15.247(e) ANSI C63.10	P
Radiated Band Edge Emission	FCC Part 15: 15.247(d) ANSI C63.10	P
Antenna Requirement	FCC Part 15: 15.203	P

Note: 1. P is an abbreviation for Pass.

2. F is an abbreviation for Fail.

3. N/A is an abbreviation for Not Applicable.

4. The conclusion of this test report is judged by actual test data without considering measurement uncertainty.

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

EUT Name	:	Tablet
Model No.	:	U7, U7 Kid, U7 Pro, U7S, U7 SE, U7 Ultra, U7 Max, U7E
DIFF.	:	There is no difference except the name of the model. All tests are made with the U7 model
Power supply	:	DC 3.85V from battery or DC 5V from adapter

2.4G WIFI :

Operation frequency	:	2412MHz-2462MHz for IEEE 802.11 b, g, n/HT20 2422MHz~2452MHz for IEEE802.11n/HT40
Channel No.	:	802.11b/802.11g /802.11n(HT20): 11CH 802.11(HT40): 7CH
Modulation type	:	IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n :OFDM(64QAM, 16QAM, QPSK, BPSK)
Antenna Type	:	PIFA antenna, Maximum Gain is 1.5dBi. Antenna information is provided by applicant.
Software version	:	DOOGEE-U7-EEA-Android10.0-20230922
Hardware version	:	Q30-T616-V1.0-230612-L1
Intend use environment	:	Residential, commercial and light industrial environment
Note	:	/


2.2. Accessories of Device (EUT)

Accessories : Adapter
Manufacturer : /
Model : DGCDQ-BC023-02
Ratings : Input:100-240V,50/60Hz 0.35A Max
Output:5.0V 2.0A 10.0W

2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or SDOC
1	/	/	/	/	/

2.4. Block Diagram of connection between EUT and simulators

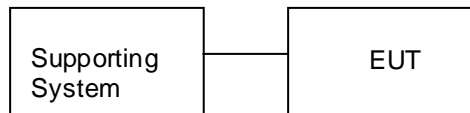

2.5. Test Mode Description

Duty cycle :100%Keeping TX			
Mode	data rate (Mbps)(see Note)	Channel	Frequency (MHz)
IEEE 802.11b	1	Low :CH1	2412
	1	Middle: CH6	2437
	1	High: CH11	2462
IEEE 802.11g	6	Low :CH1	2412
	6	Middle: CH6	2437
	6	High: CH11	2462
IEEE 802.11 n/HT20	6.5	Low :CH1	2412
	6.5	Middle: CH6	2437
	6.5	High: CH11	2462
IEEE 802.11 n/HT40	13	Low :CH3	2422
	13	Middle: CH6	2437
	13	High: CH9	2452

Note: According exploratory test, EUT will have maximum output power in those data rate. so those data rate were used for all test.

Channel list:					
For IEEE 802.11b, g, n/HT20					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
CH1	2412	CH5	2432	CH9	2452
CH2	2417	CH6	2437	CH10	2457
CH3	2422	CH7	2442	CH11	2462
CH4	2427	CH8	2447		
For IEEE 802.11 n/HT40					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
CH1	2422	CH5	2442		
CH2	2427	CH6	2447		
CH3	2432	CH7	2452		
CH4	2437				

2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35°C	24°C
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	98kPa

2.7. Test Facility

Company:	Beijing TIRT Technology Service Co.,Ltd Shenzhen
Address:	104 Building C, Xinmingsheng Industrial Park No.132, Zhangge Old Village East Zone, Zhangge Community, Fucheng Street, Longhua District, Shenzhen, Guangdong, P. R. China
CNAS Registration Number:	CNAS L14158
A2LA Registration Number:	6049.01
FCC Designation Number:	CN1366
Test Firm Registration Number:	820690
Telephone:	+86-0755-27087573

2.8. Measurement Uncertainty

Uncertainty	
Parameter	Uncertainty
Occupied Channel Bandwidth	±142.12 KHz
Power Spectral Density	±0.73 dB
RF power conducted	±0.74 dB
RF power radiated	±3.25dB
Spurious emissions, conducted	±1.78dB
Spurious emissions, radiated (9KHz~30MHz)	±4.1dB
Spurious emissions, radiated (30MHz~1GHz)	±4.6dB
Spurious emissions, radiated (1GHz ~ 18GHz)	±4.9dB
Conduction Emissions(150kHz~30MHz)	±3.1 dB
Humidity	±4.6%
Temprature	±0.7°C
Time	±1.25%

2.9. Test Equipment List

Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Receiver	Rohde&Schwarz	ESIB 40	YH-TIRT-SAC-966-20220911	2023/01/05	2024/01/06
Integral Antenna	Schwarzbeck	VULB 9163	01314	2022.12.11	2024.12.10
Integral Antenna	Rohde&Schwarz	HF907	RSM2991424	2022.12.11	2024.12.10
Preamplifier	Emtrace	RP01A	'02017	2023/01/05	2024/01/06
Preamplifier	Schwarzbeck	BBV9744	00143	2023/01/05	2024/01/06
Loop Antenna	ZHINAN	ZN30900A	12024	2023/01/05	2024/01/06
Exposure Level Tester	narda	ELT-400	N-0925	2023/01/05	2024/01/06
Horn Antenna	Schwarzbeck	BBHA9170	00956	2023/01/05	2024/01/06
RF Cable	/	LMR400UF-NMNM-7.0M	/	2023/01/05	2024/01/06
RF Cable	/	SFT2050PUR-NMNM-7.0M	/	2023/01/05	2024/01/06
EMI Receiver	Rohde&Schwarz	ESR7	1316.3003K07-102611-mk	2022/11/02	2023/11/01
LISN	Rohde&Schwarz	ENV216	3560.655.12-102915-Bp	2022/11/02	2023/11/01
ISN	Schwarzbeck	ENY81	1309.8510.03	2023/01/05	2024/01/06
ISN	Schwarzbeck	ENY81-CAT6	1309.8526.03-101976-kh	2023/01/05	2024/01/06
RF Cable	\	SFT2050PUR-NMNM-2.0M	\	2023/01/05	2024/01/06
CMW500	ROHDE&SCHWARZ	CMW500	120434	2023/01/05	2024/01/06
Spectrum analyzer	ROHDE&SCHWARZ	FSU26	200732	2023/01/05	2024/01/06
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	101722	2023/01/05	2024/01/06
vector Signal Generator	KEYSIGHT	N5182B	MY56200458	2023/01/05	2024/01/06
vector Signal Generator	HEWLETT PACKARD	83752A	3610A02458	2023/01/05	2024/01/06
Filter	HEWLETT PACKARD	JS0806-F	19K8060209	2023/01/05	2024/01/06

Wireless comprehensive tester	ANRISTU	MT8821C	SN6262170409	2023/01/05	2024/01/06
Wireless comprehensive tester	ANRISTU	MT8000A	SN6262166782	2023/01/05	2024/01/06

3. SPURIOUS EMISSION

3.1. Test Limits

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

15.209 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009-0.490	300	2400/F(KHz)	/
0.490-1.705	30	24000/F(KHz)	/
1.705-30	30	30	29.5
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	
Note 1: The peak limit is 20 dB higher than the average limit			
Note 2: Peak limit applies (AVG limit + 20 dB) as well as RSS-247 Section 5.5			

3.2. Test Procedure


The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1GHz. The EUT was placed on a rotating 0.8 m high above ground for below 1GHz and 1.5m high for above 1GHz testing, the table was rotated 360 degrees to determine the position of the highest radiation. The Test antenna shall vary between 1m and 4m, both Horizontal and Vertical antenna are set of make measurement.

The initial step in collecting radiated emission data is a spectrum analyzer Peak detector mode pre-scanning the measurement frequency range. Significant Peaks are then marked. and then Quasi Peak Detector mode premeasured


If Peak value comply with QP limit below 1GHz, the EUT deemed to comply with QP limit. But the Peak value and average value both need to comply with applicable limit above 1GHz.

For the actual test configuration, please see the test setup photo.


3.3. Test Setup

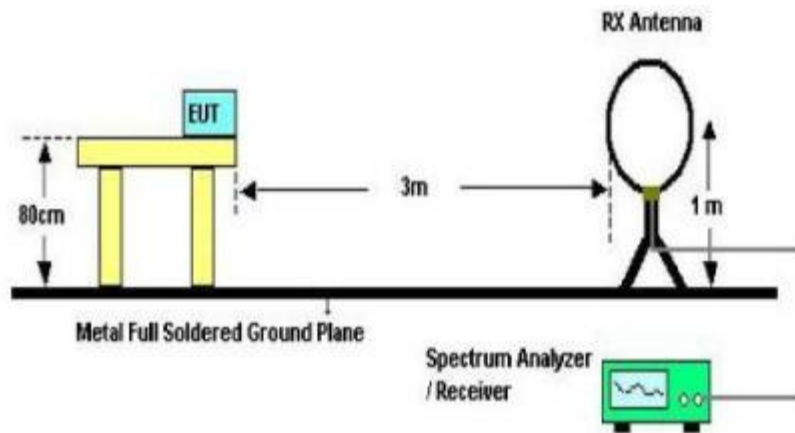

Below 30MHz Test Setup

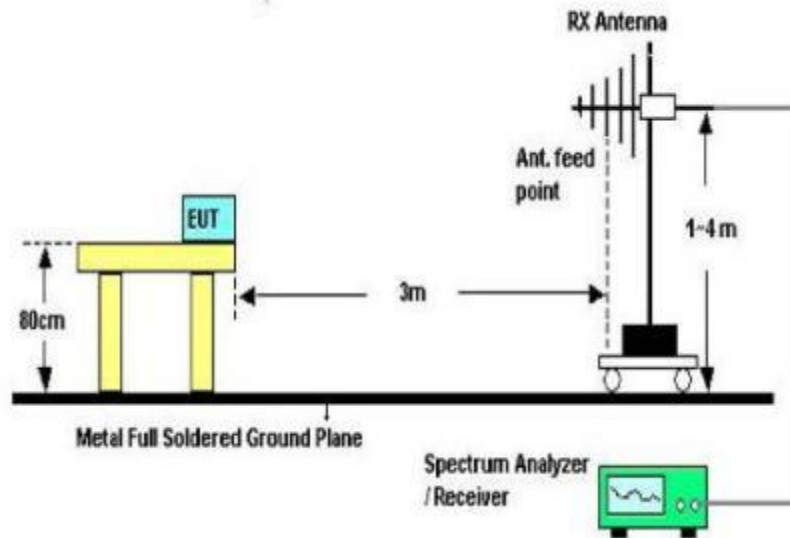

Above 30MHz Test Setup

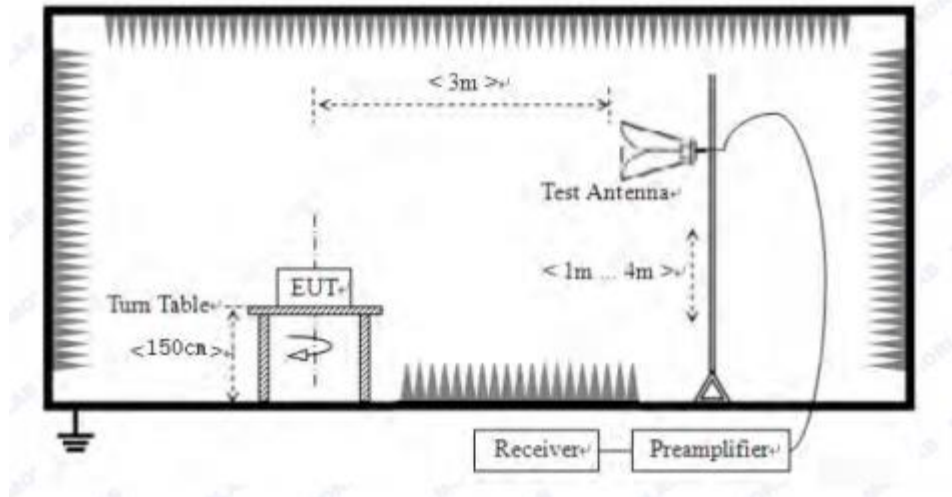

Above 1GHz Test Setup

3.4. Test Results

Test Condition

Continual Transmitting in maximum power.

9KHz~150KHz	RBW200Hz	VBW1KHz
150KHz~30MHz	RBW9KHz	VBW 30KHz
30MHz~1GHz	RBW120KHz	VBW 300KHz
Above1GHz	RBW1MHz	VBW 3MHz

We have scanned the EUT from 9kHz up to the 10th harmonic of the fundamental.

Detailed information please see the following page.


From 9KHz to 30MHz: Conclusion: PASS

Note: 1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

2. Only show the test data of the worst Channel in this report.


From 30MHz to 1000MHz: Conclusion: PASS

Vertical:

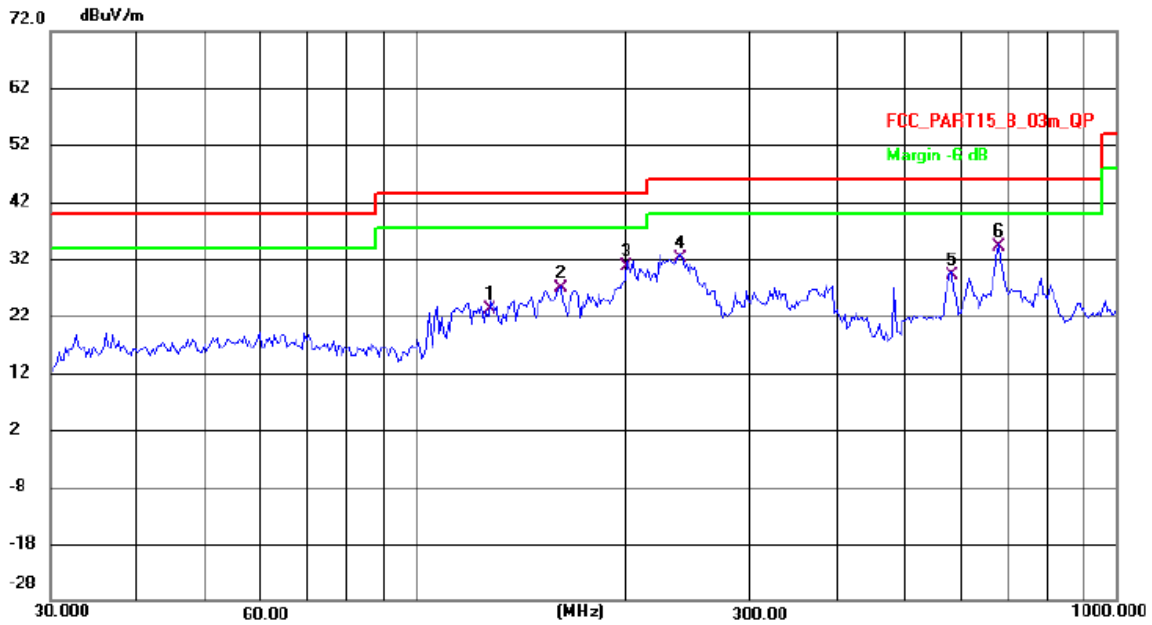

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	127.5862	44.75	-21.71	23.04	43.50	-20.46	QP
2	160.8850	47.78	-20.80	26.98	43.50	-16.52	QP
3	200.0431	55.49	-24.91	30.58	43.50	-12.92	QP
4	238.4626	56.40	-24.39	32.01	46.00	-13.99	QP
5	582.1121	43.95	-14.70	29.25	46.00	-16.75	QP
6 *	679.4343	46.84	-12.79	34.05	46.00	-11.95	QP

Horizontal:

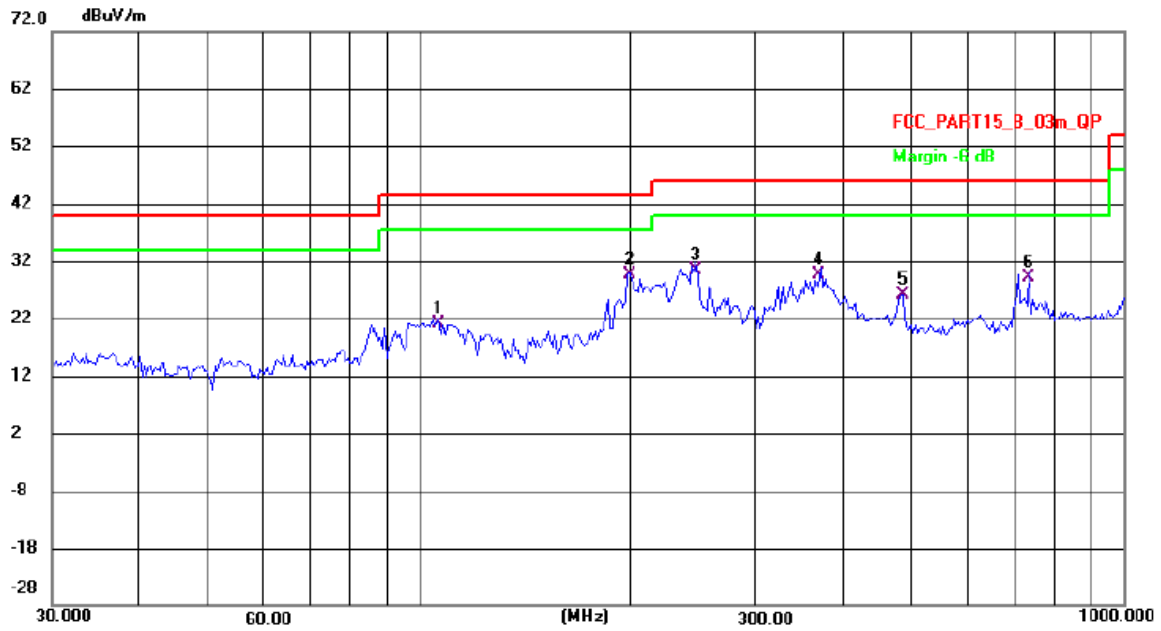

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	106.2810	44.37	-23.32	21.05	43.50	-22.45	QP
2 *	198.6423	54.38	-24.80	29.58	43.50	-13.92	QP
3	246.9901	54.23	-23.96	30.27	46.00	-15.73	QP
4	371.2679	49.91	-20.33	29.58	46.00	-16.42	QP
5	484.9067	43.49	-17.37	26.12	46.00	-19.88	QP
6	734.0371	40.49	-11.47	29.02	46.00	-16.98	QP

Remark: All modes have been tested, and only worst data of B mode, Channel 2412MHz was listed in this report.

From 1G-25GHz


Test Mode: IEEE 802.11b TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4824	44.59	V	33.95	10.18	34.26	58.34	74	-15.66	PK
4824	32.04	V	33.95	10.18	34.26	51.91	54	-2.09	AV
7236	/	/	/	/	/	/	/	/	/
9648	/	/	/	/	/	/	/	/	/
4824	45.21	H	33.95	10.18	34.26	55.08	74	-18.92	PK
4824	38.27	H	33.95	10.18	34.26	48.14	54	-5.86	AV
7236	/	/	/	/	/	/	/	/	/
9648	/	/	/	/	/	/	/	/	/
Test Mode: IEEE 802.11b TX Mid									
4874	45.68	V	33.93	10.2	34.29	55.52	74	-18.48	PK
4874	32.57	V	33.93	10.2	34.29	42.41	54	-11.59	AV
7311	/	/	/	/	/	/	/	/	/
9748	/	/	/	/	/	/	/	/	/
4874	46.27	H	33.93	10.2	34.29	56.11	74	-17.89	PK
4874	31.24	H	33.93	10.2	34.29	41.08	54	-12.92	AV
7311	/	/	/	/	/	/	/	/	/
9748	/	/	/	/	/	/	/	/	/
Test Mode: IEEE 802.11b TX High									
4924	46.51	V	33.98	10.22	34.25	56.46	74	-17.54	PK
4924	36.48	V	33.98	10.22	34.25	46.43	54	-7.57	AV
7386	/	/	/	/	/	/	/	/	/
9848	/	/	/	/	/	/	/	/	/
4924	47.08	H	33.98	10.22	34.25	57.03	74	-16.97	PK
4924	33.13	H	33.98	10.22	34.25	43.08	54	-10.92	AV
7386	/	/	/	/	/	/	/	/	/
9848	/	/	/	/	/	/	/	/	/




Note:




- 1, Result = Read level + Antenna factor + cable loss-Amp factor
- 2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.




Note: All modes and channels have been tested and only the IEEE 802.11b TX mode with the worst data is listed.




Conducted RF Spurious Emission



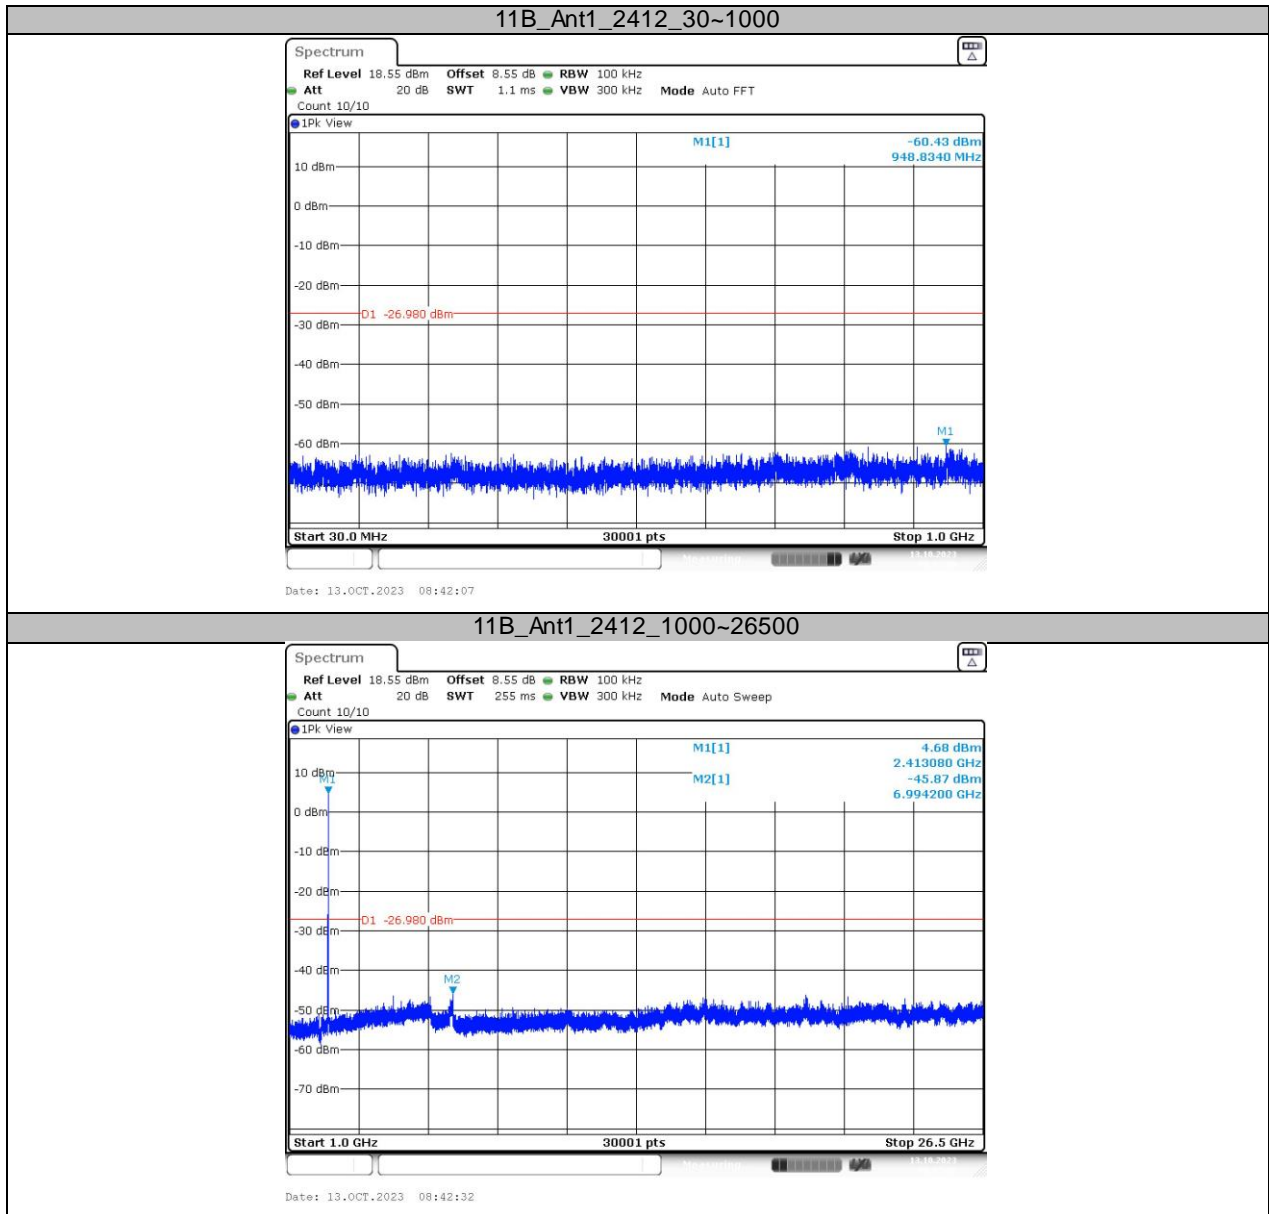


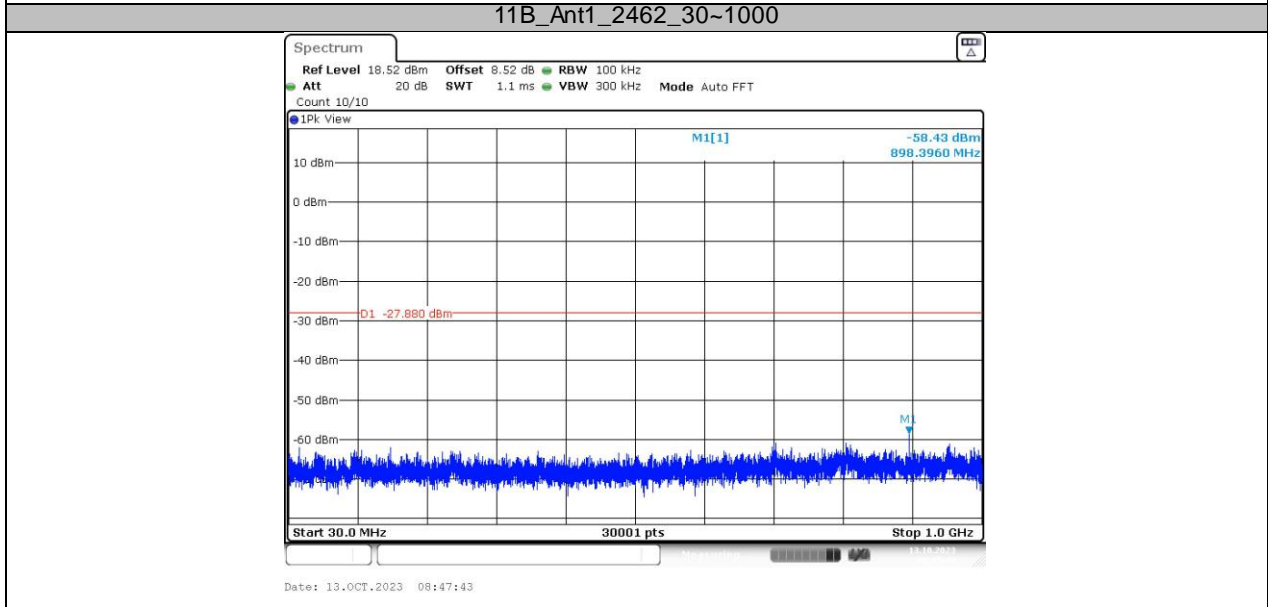
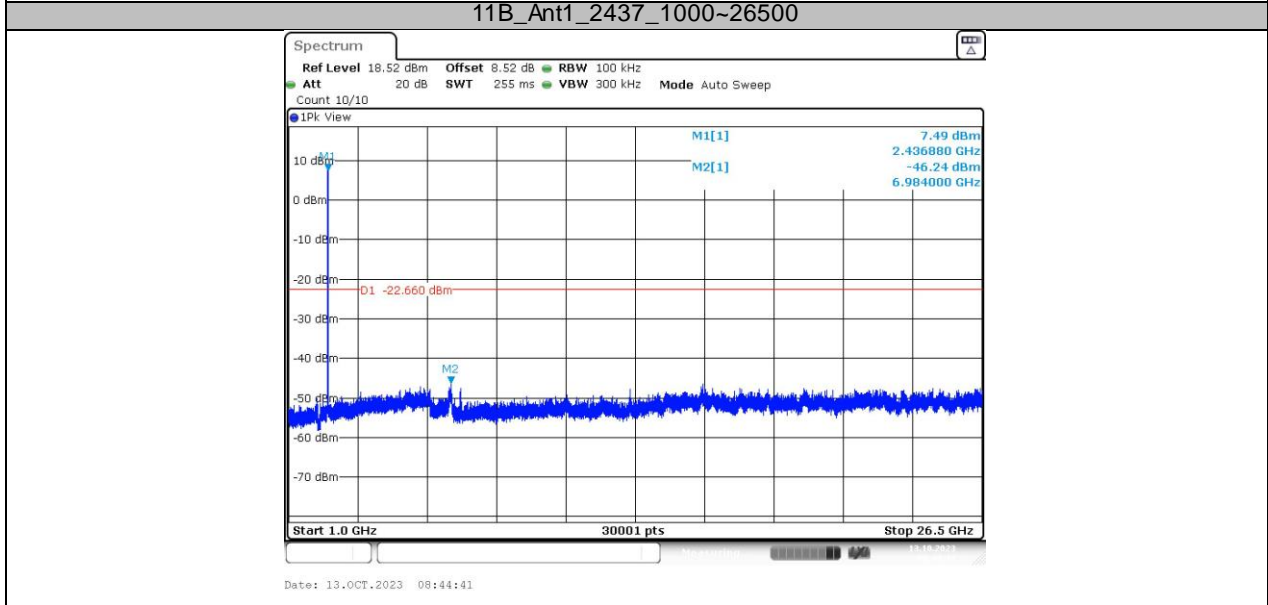
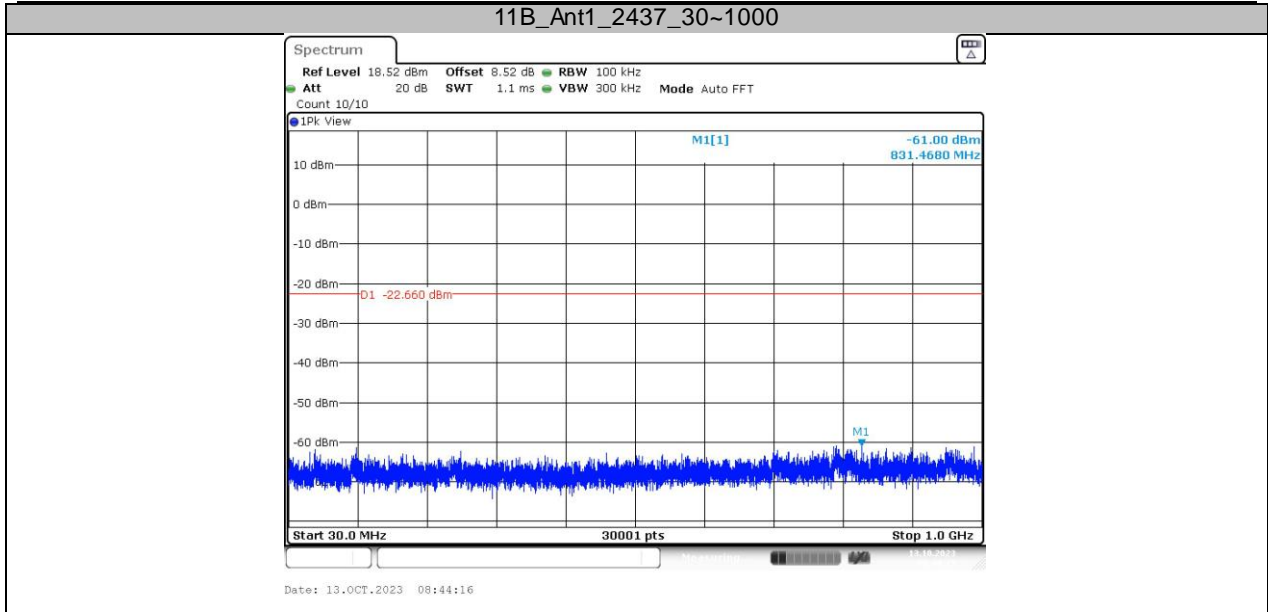


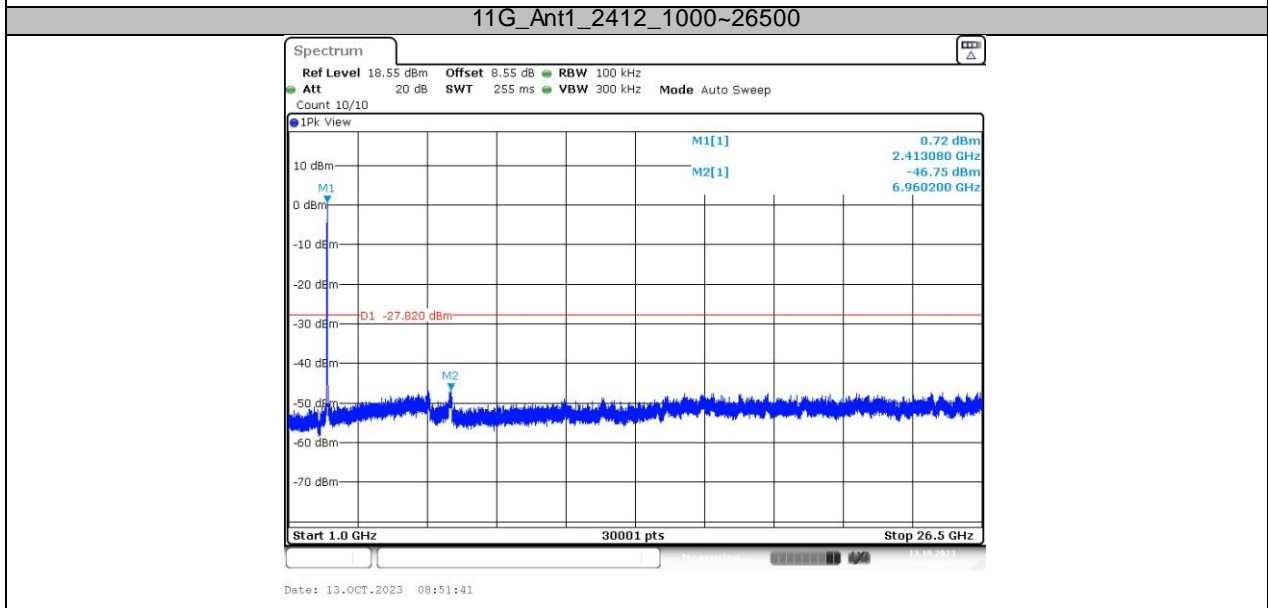
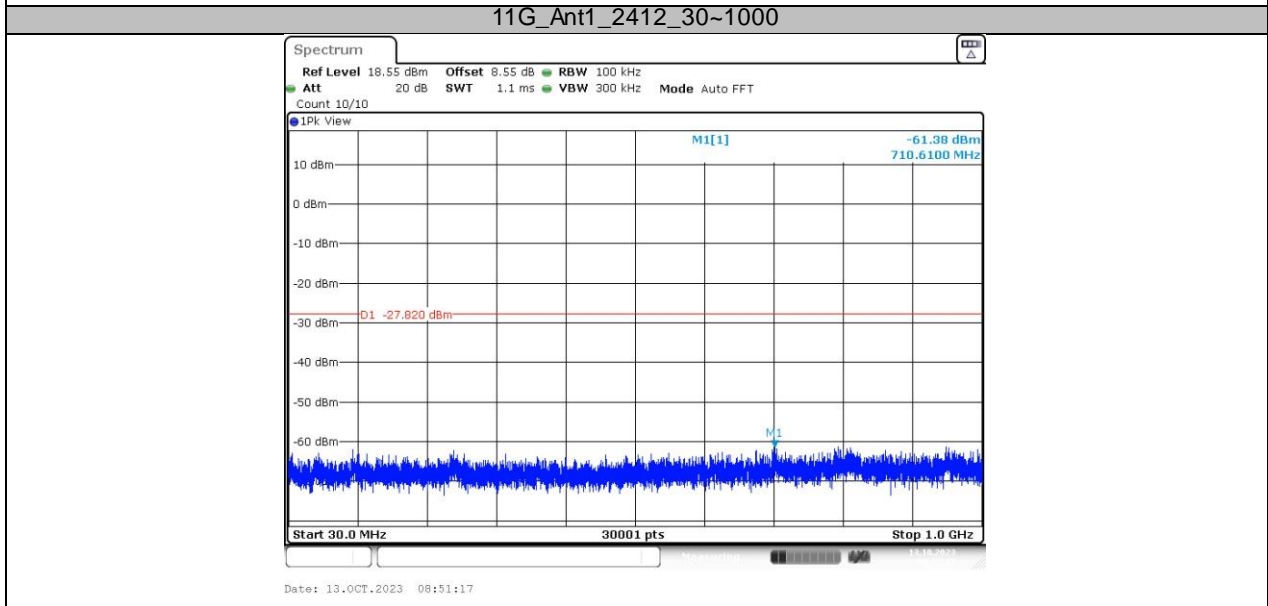
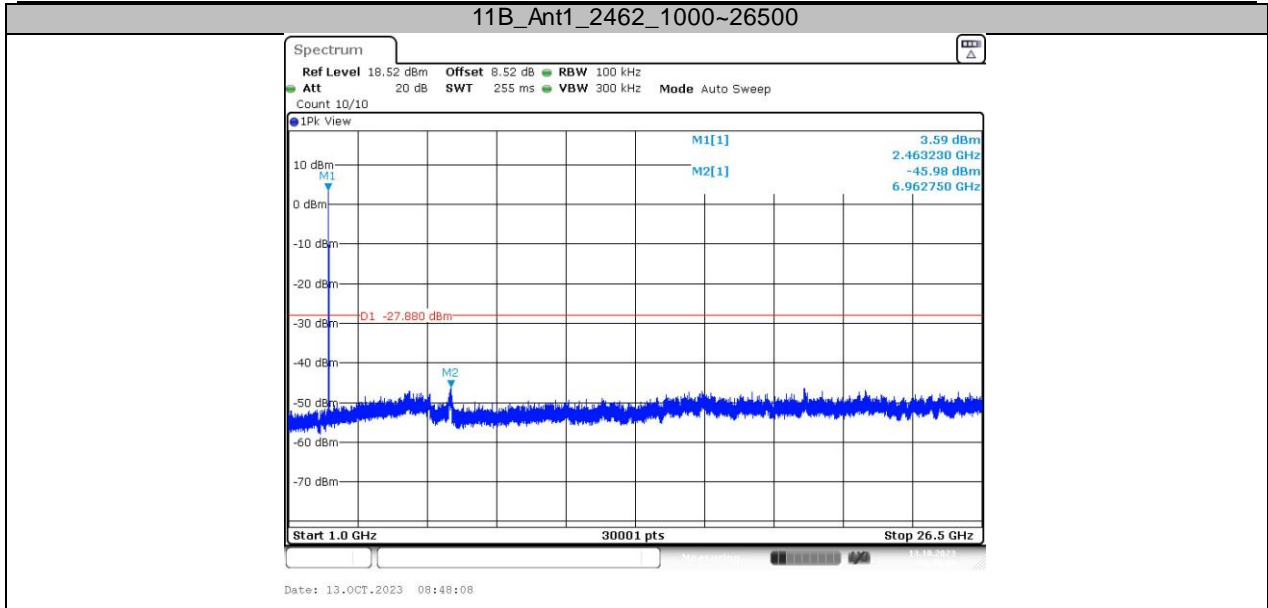


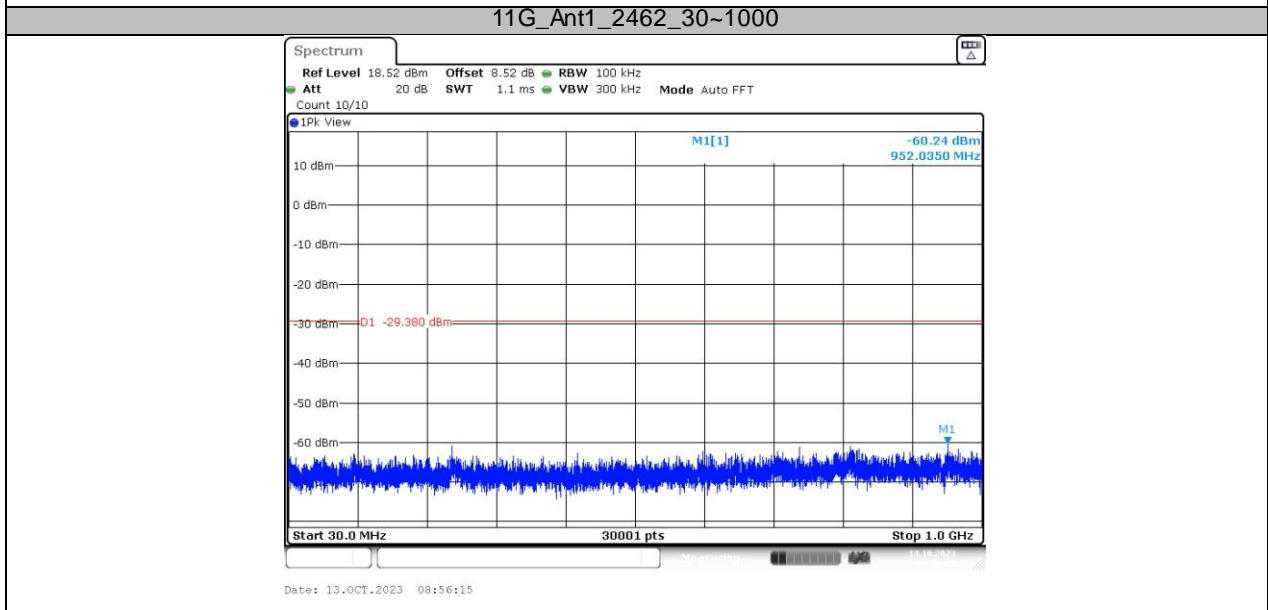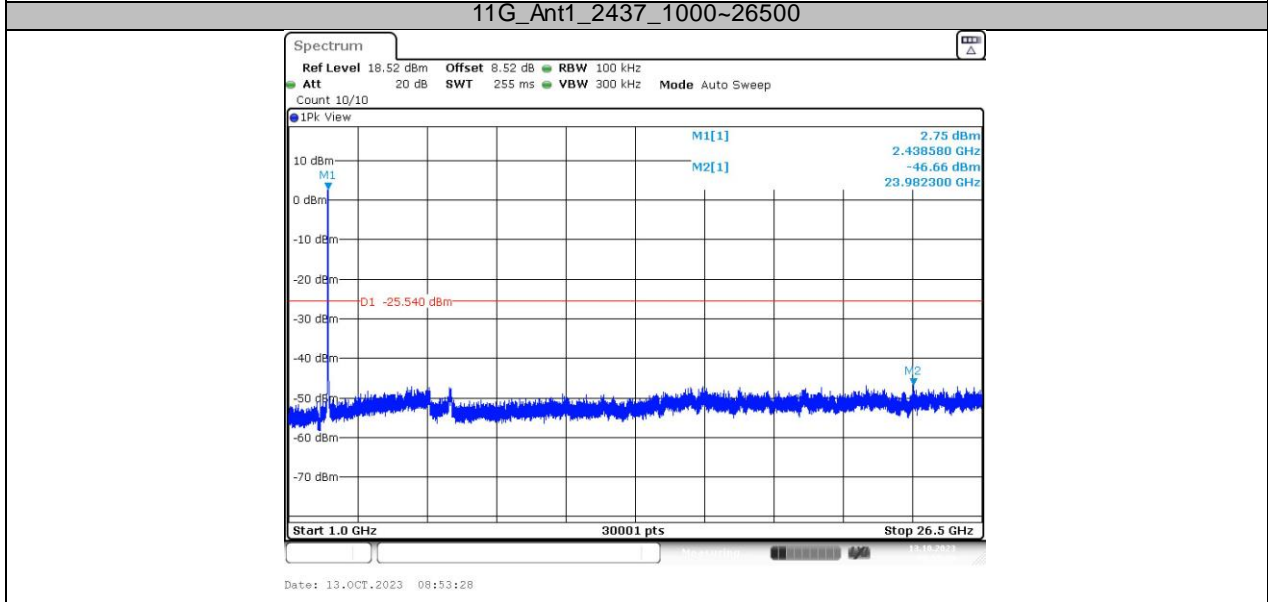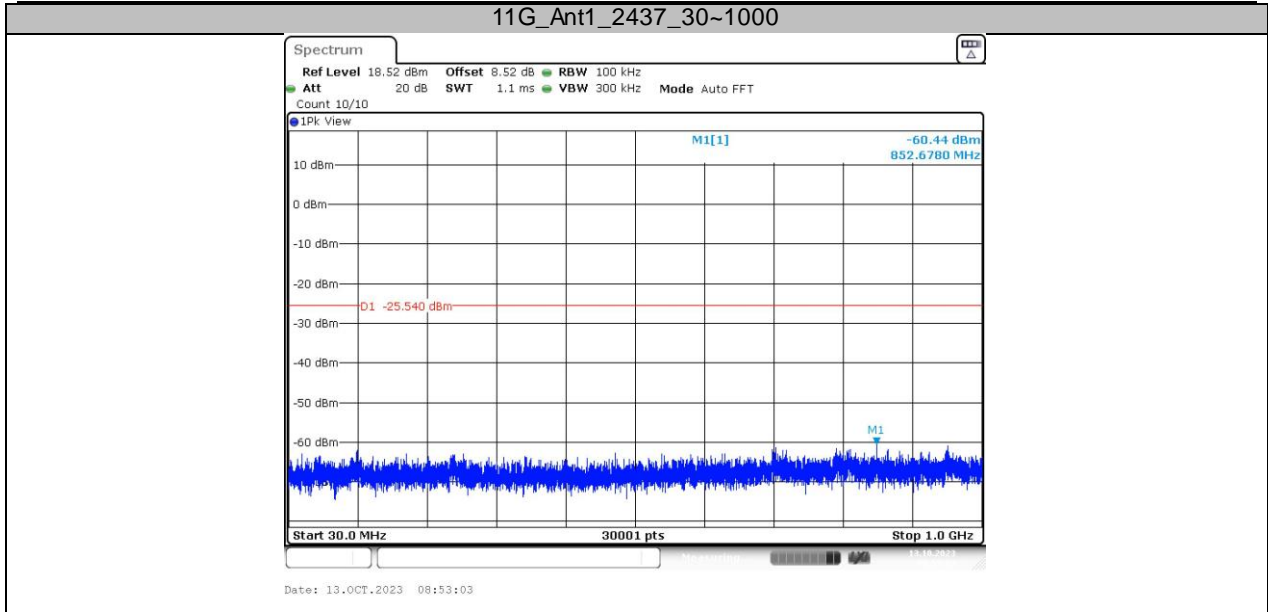


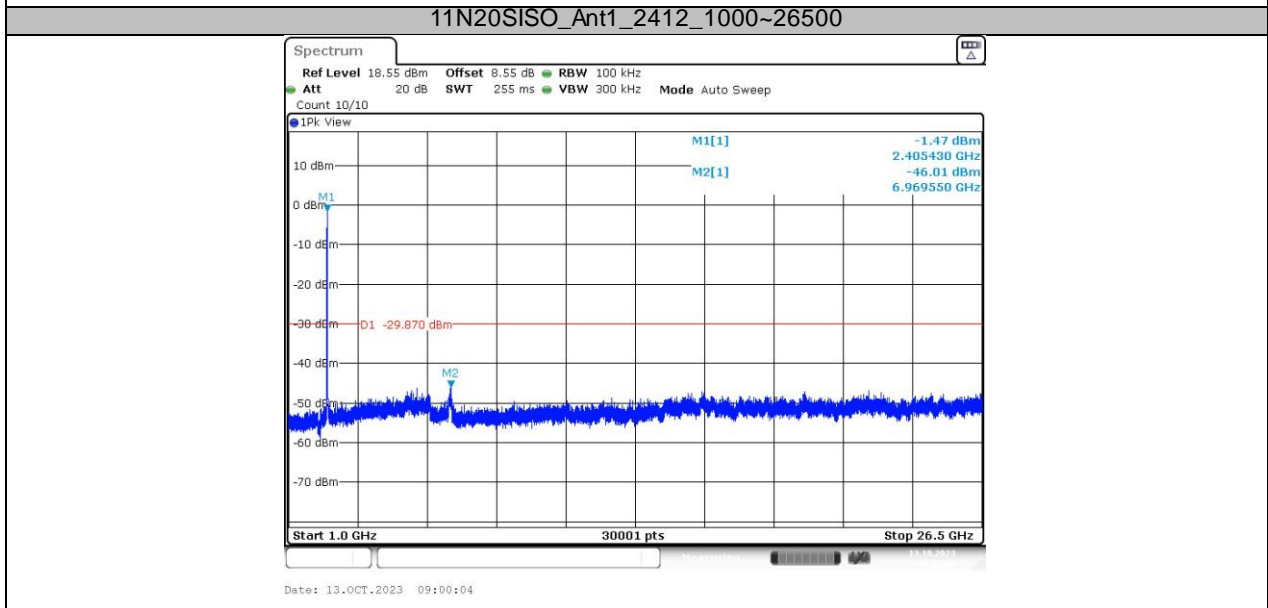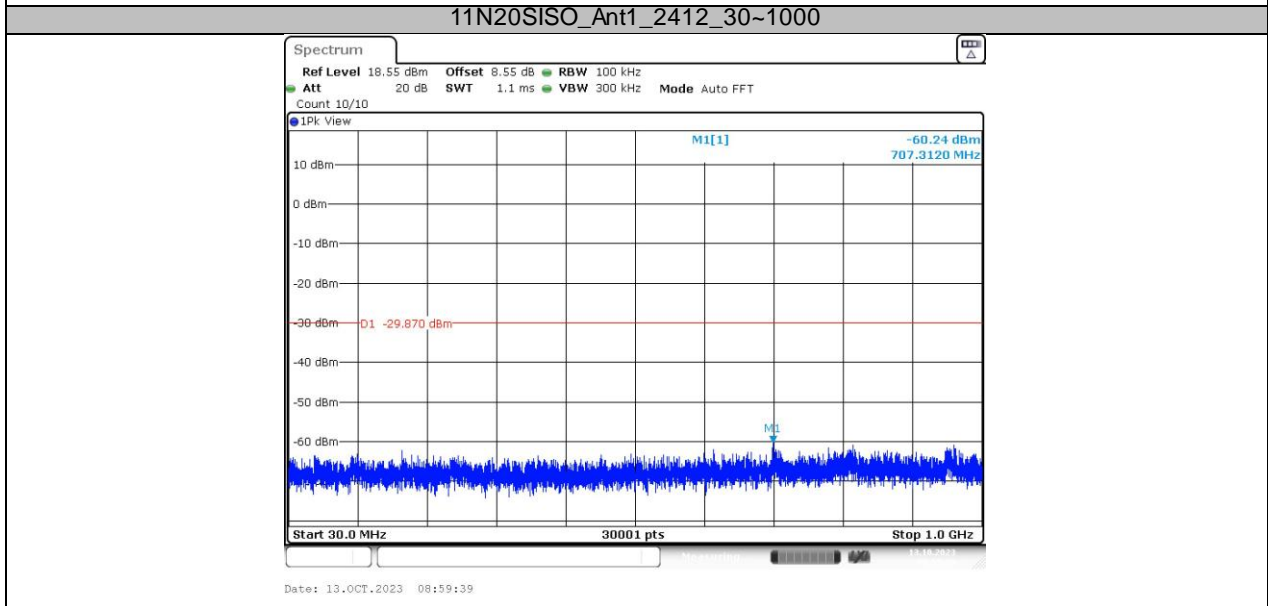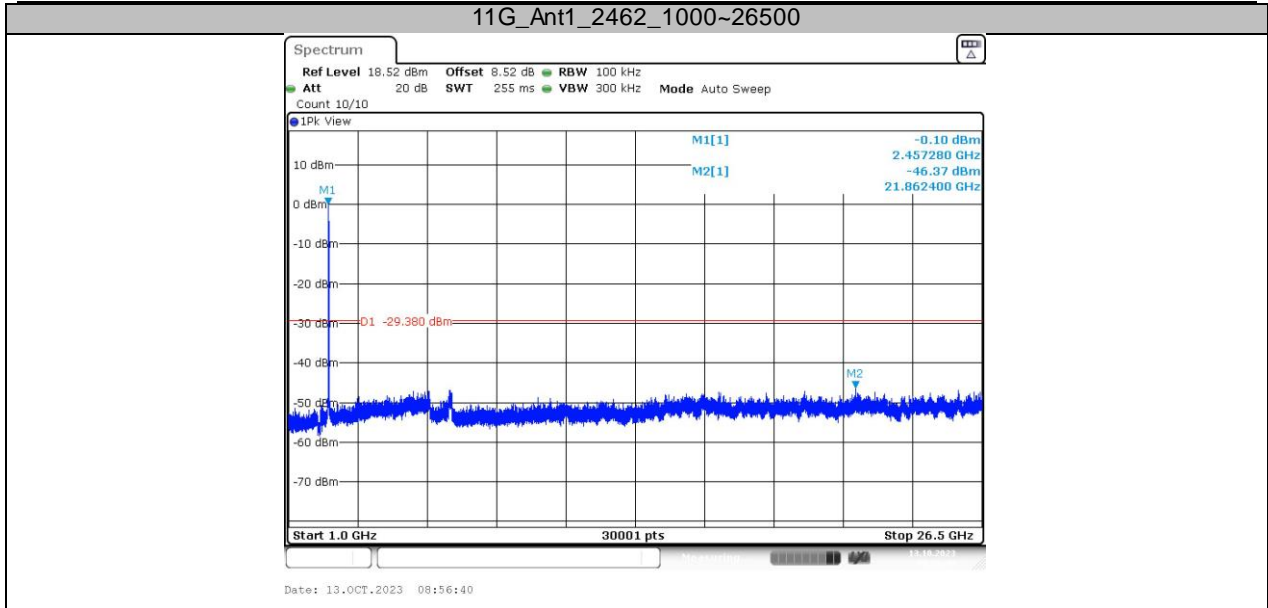

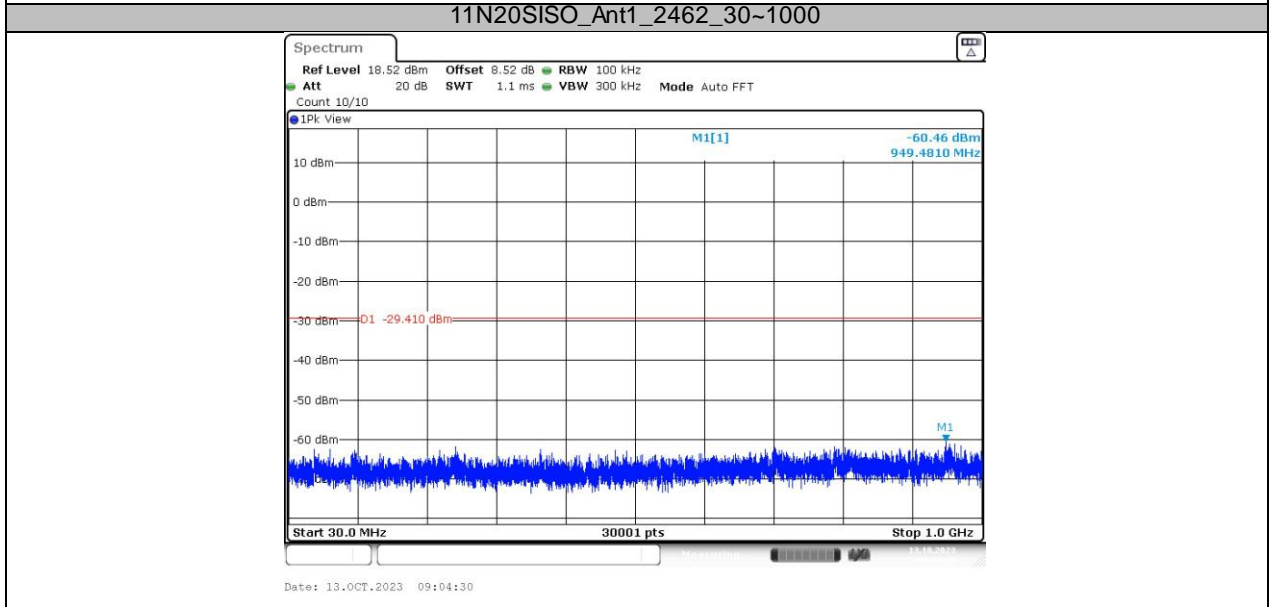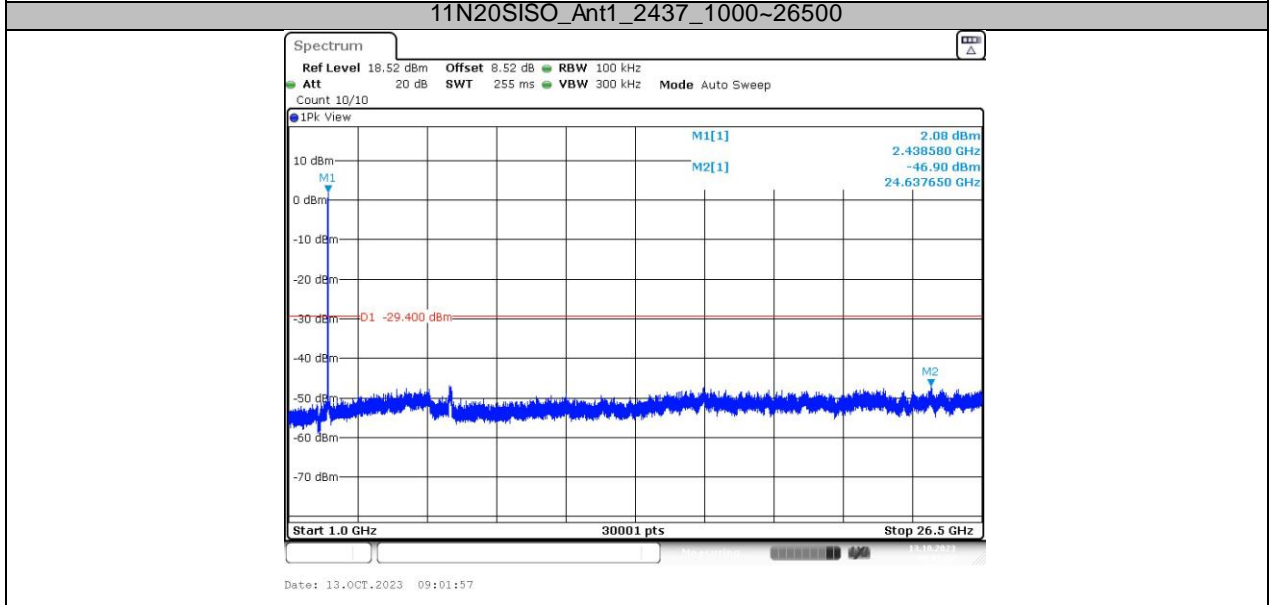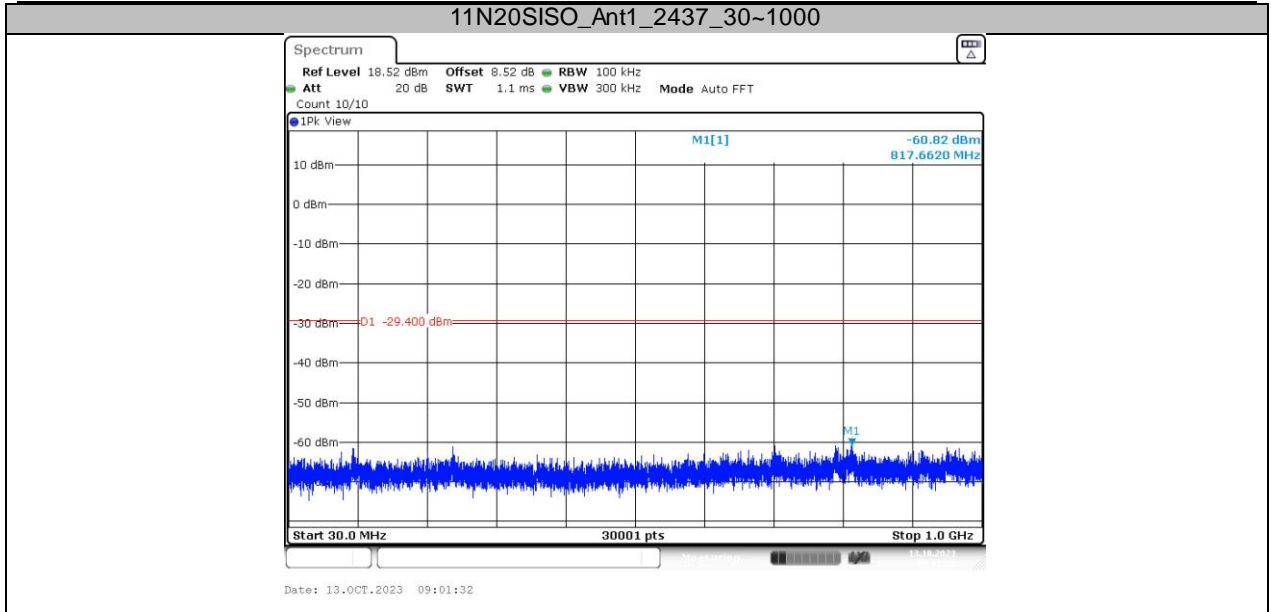

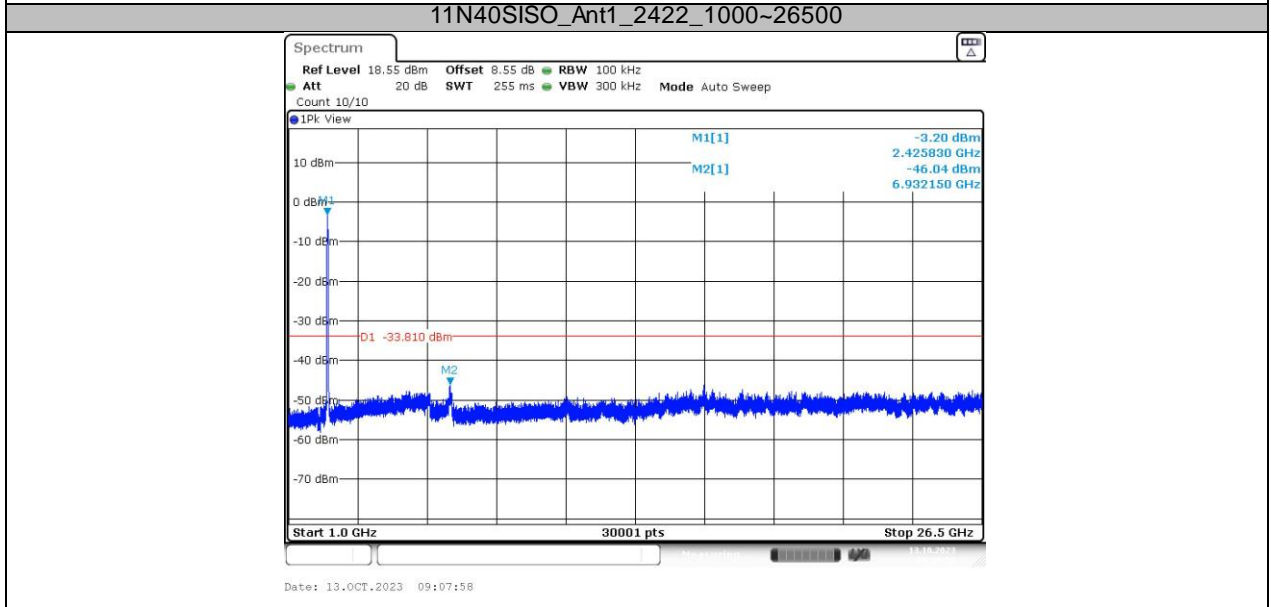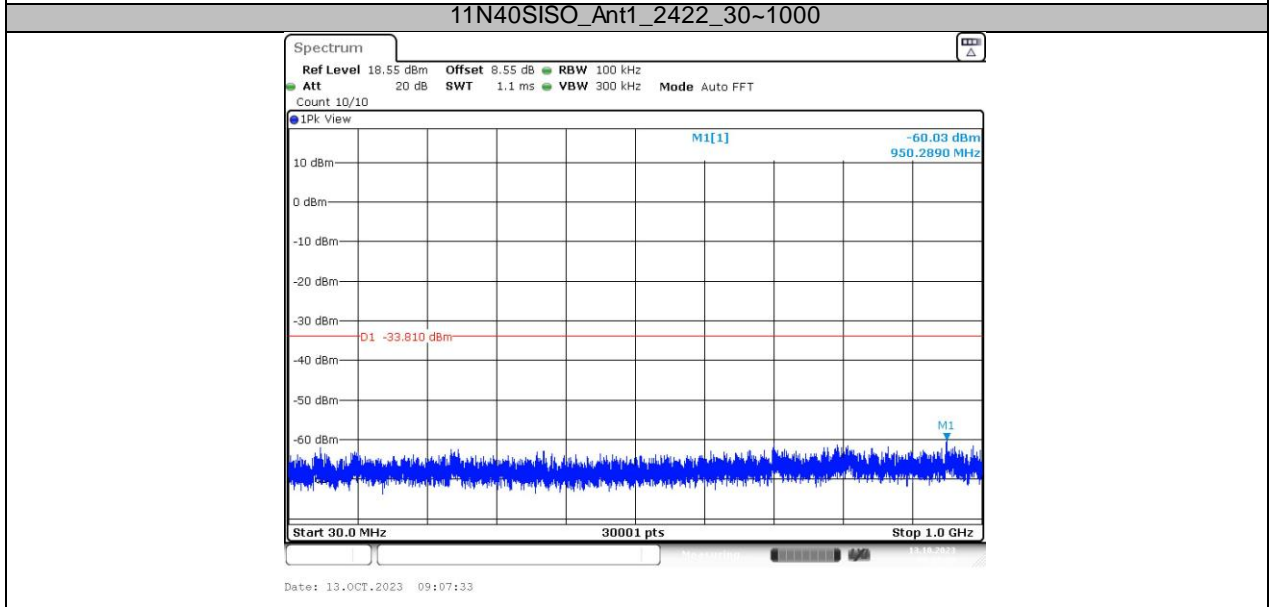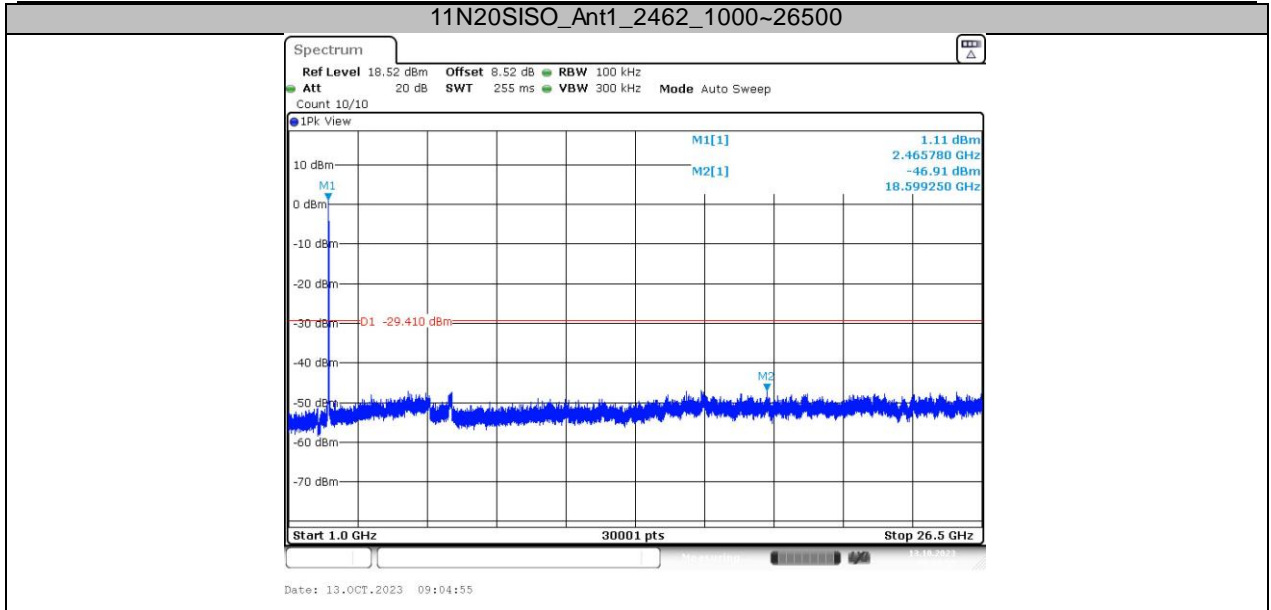

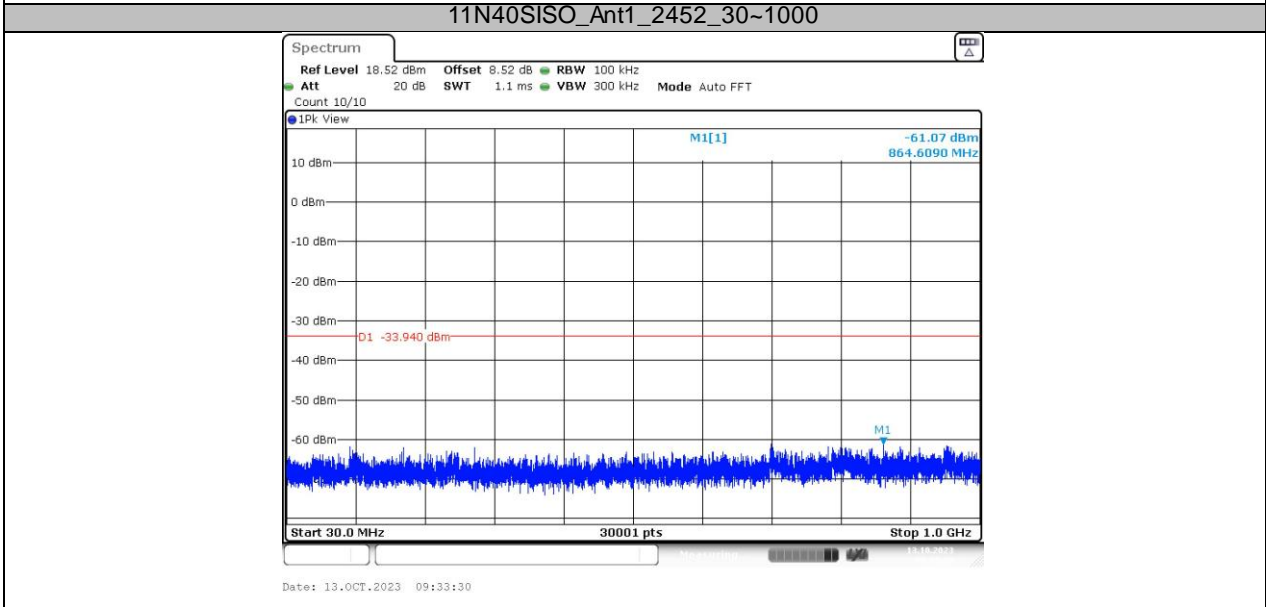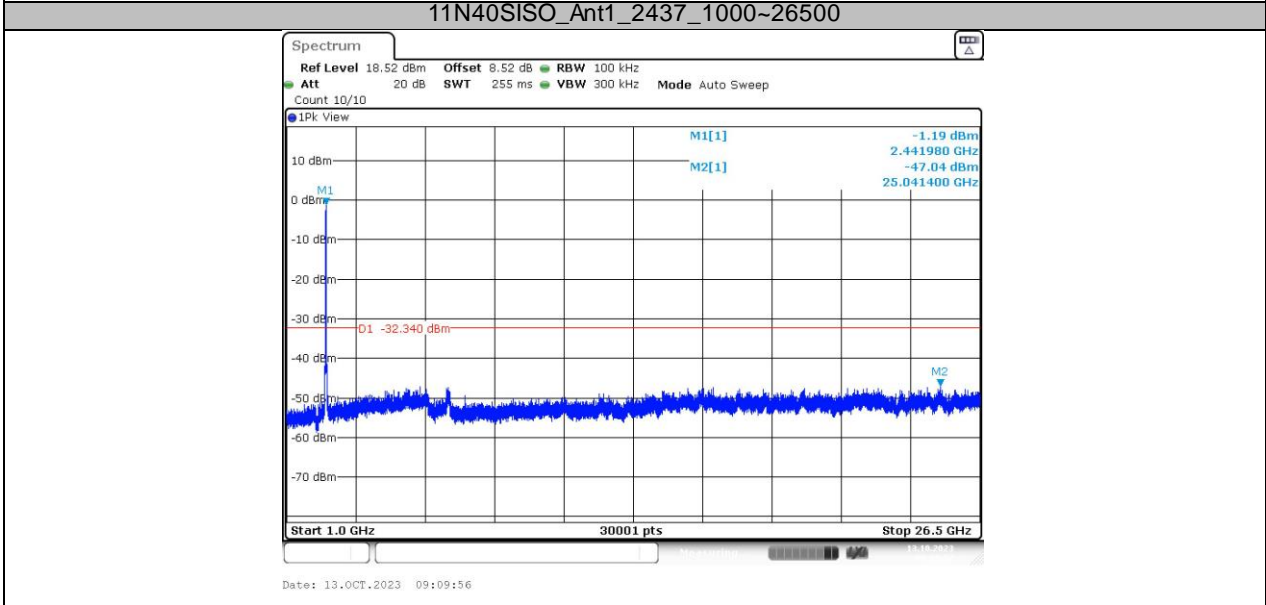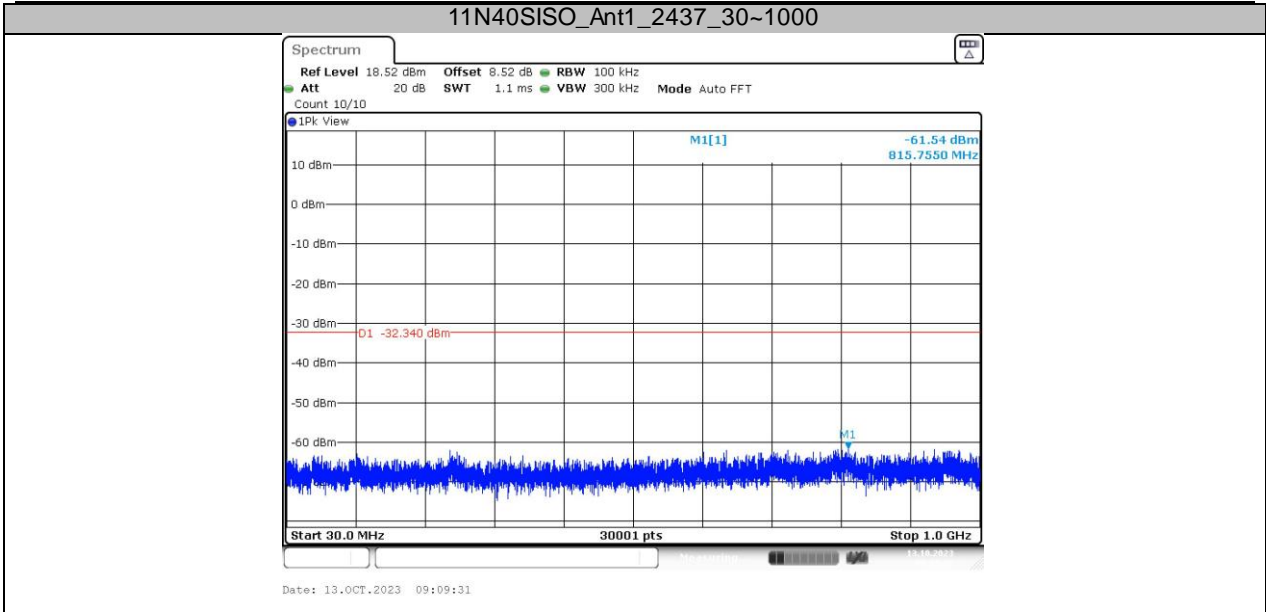

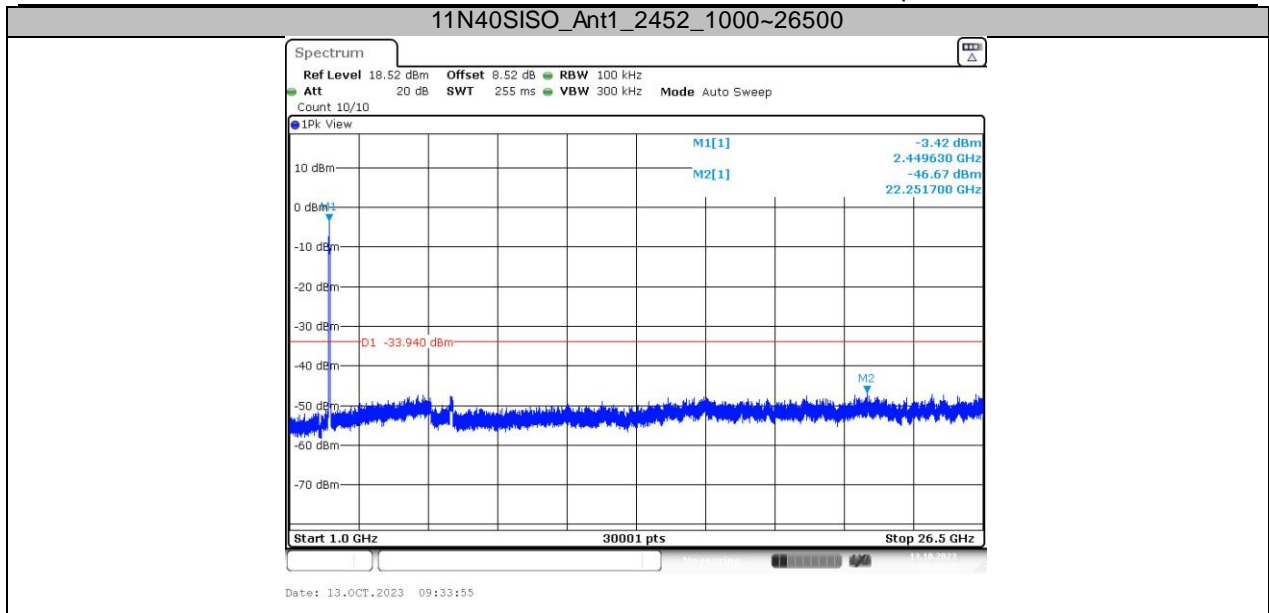

4. POWER LINE CONDUCTED EMISSION

4.1. Test Limits

Frequency MHz	Limits dB(μ V)	
	Quasi-peak Level	Average Level
0.15 -0.50	66 -56*	56 - 46*
0.50 -5.00	56	46
5.00 -30.00	60	50


- Notes: 1. *Decreasing linearly with logarithm of frequency.
 2. The lower limit shall apply at the transition frequencies.
 3. The limit decreases in line with the logarithm of the frequency in the rang of 0.15 to 0.50 MHz.

4.2. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10:2013 on Conducted Emission Measurement.

The bandwidth of test receiver is set at 9 kHz.

4.3. Test Setup

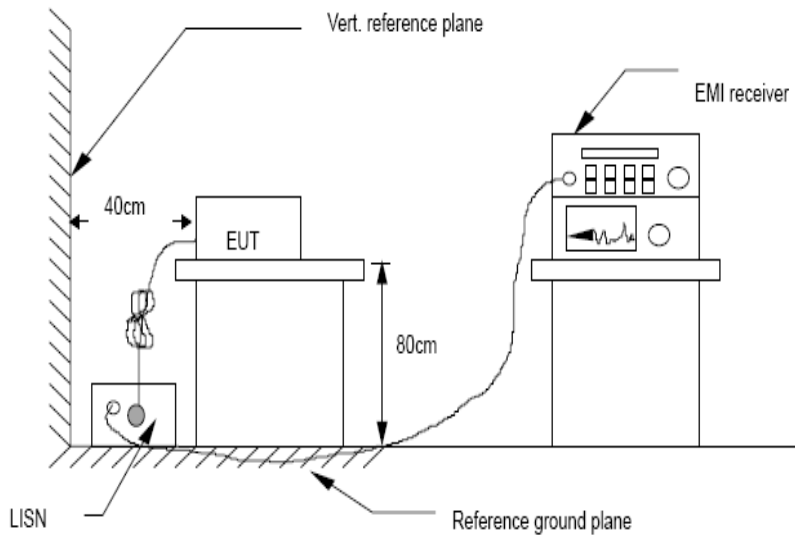


4.4. Test Results


PASS. (See below detailed test data)

Note: If peak Result comply with AV limit, QP and AV Result is deemed to comply with AV limit

Line:

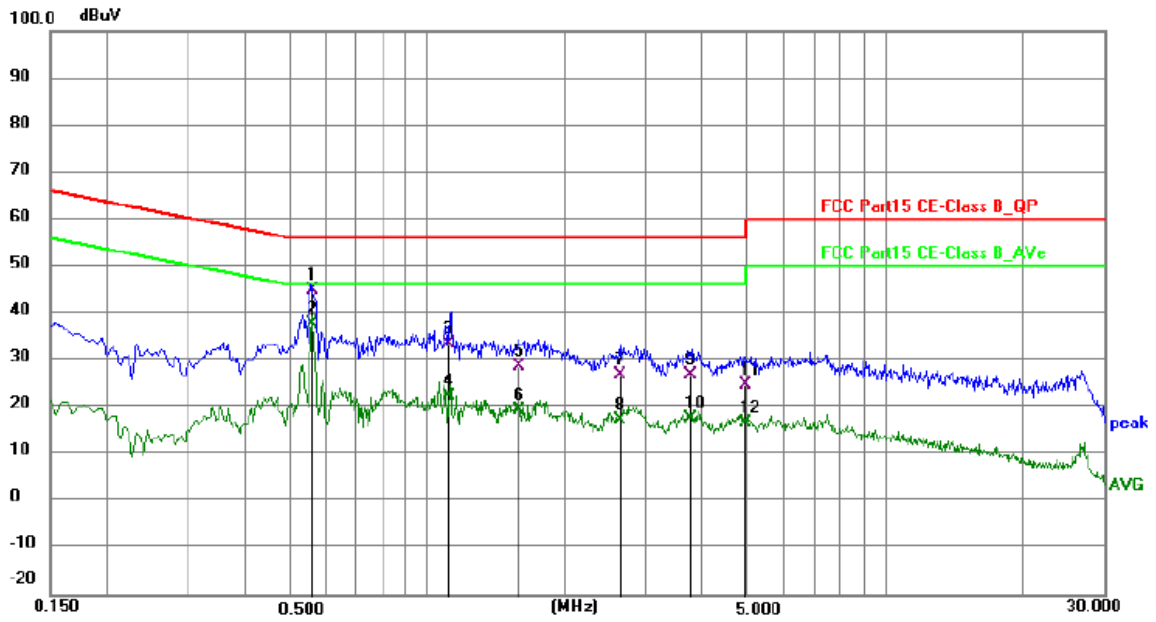

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.5596	35.32	9.62	44.94	56.00	-11.06	QP	P	
2 *	0.5596	28.22	9.62	37.84	46.00	-8.16	AVG	P	
3	1.1174	23.83	9.64	33.47	56.00	-22.53	QP	P	
4	1.1174	12.96	9.64	22.60	46.00	-23.40	AVG	P	
5	1.5849	19.06	9.65	28.71	56.00	-27.29	QP	P	
6	1.5849	9.91	9.65	19.56	46.00	-26.44	AVG	P	
7	2.6537	17.42	9.65	27.07	56.00	-28.93	QP	P	
8	2.6537	7.63	9.65	17.28	46.00	-28.72	AVG	P	
9	3.7501	17.18	9.67	26.85	56.00	-29.15	QP	P	
10	3.7501	7.94	9.67	17.61	46.00	-28.39	AVG	P	
11	4.9530	15.30	9.68	24.98	56.00	-31.02	QP	P	
12	4.9530	7.05	9.68	16.73	46.00	-29.27	AVG	P	

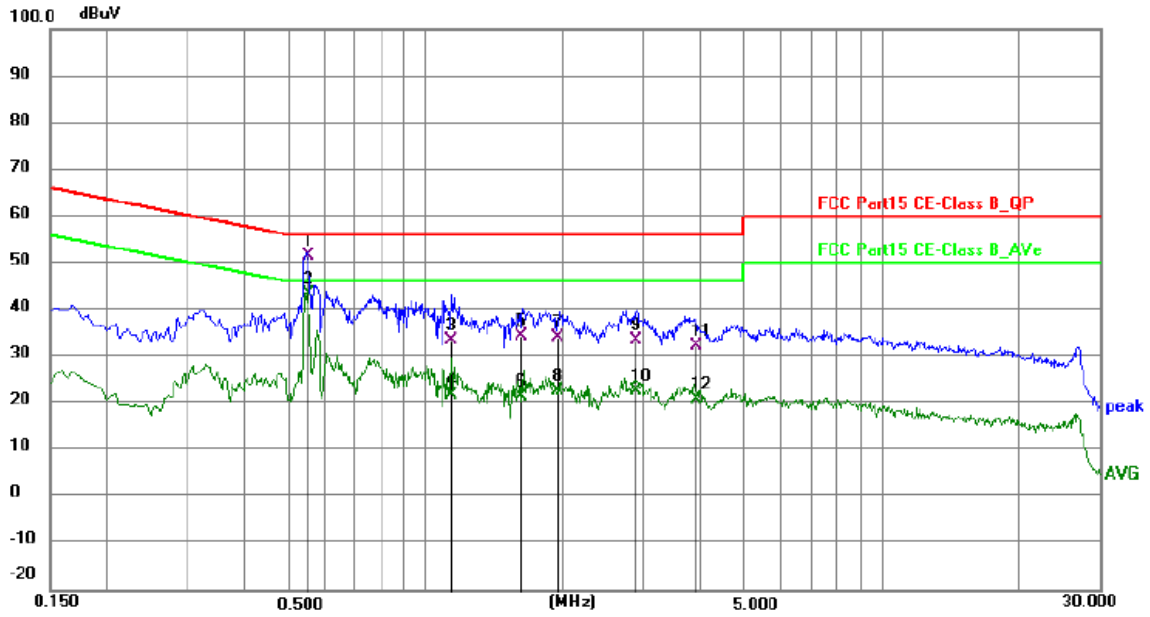Neutral:


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.5540	41.89	9.62	51.51	56.00	-4.49	QP	P	
2 *	0.5540	33.90	9.62	43.52	46.00	-2.48	AVG	P	
3	1.1424	23.98	9.64	33.62	56.00	-22.38	QP	P	
4	1.1424	12.19	9.64	21.83	46.00	-24.17	AVG	P	
5	1.6247	24.76	9.65	34.41	56.00	-21.59	QP	P	
6	1.6247	12.03	9.65	21.68	46.00	-24.32	AVG	P	
7	1.9506	24.55	9.65	34.20	56.00	-21.80	QP	P	
8	1.9506	13.03	9.65	22.68	46.00	-23.32	AVG	P	
9	2.8941	24.00	9.65	33.65	56.00	-22.35	QP	P	
10	2.8941	12.96	9.65	22.61	46.00	-23.39	AVG	P	
11	3.9207	22.63	9.67	32.30	56.00	-23.70	QP	P	
12	3.9207	11.31	9.67	20.98	46.00	-25.02	AVG	P	

Note: All modes and channels have been tested and only the B mode 2412MHz mode with the worst data is listed.

5. CONDUCTED MAXIMUM OUTPUT POWER

5.1. Test limits

Please refer RSS-247 & FCC PART 15: 15.247.

Regulation 15.247(b) The limit of Maximum Peak Output Power Measurement is 1 W(30dBm)

5.2. Test Procedure

Details see the KDB558074 D01 Meas Guidance v05r02


5.2.1 Place the EUT on the table and set it in transmitting mode.

5.2.2 Connected the EUT's antenna port to Spectrum Analyzer.

5.2.3 Measure out each mode and each bands peak output power of EUT.

Note: The cable loss was offset into measure device as amplitude offset.

5.3. Test Setup

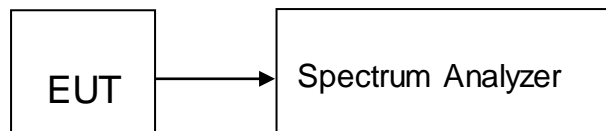

5.4. Test Results

PASS

Detailed information please see the following page.