

FCC CFR47 PART 22H, 24E, 27 CERTIFICATION TEST REPORT FCC ID: 2AXAX-EOSFLIP4G

Product: feature phone

Trade Mark: tianhoo

Model Number: EOS flip 4G

Family Model: N/A

Report No.: S20071404414005

Prepared for

LONGCONN ELECTRONICS (SHENZHEN) CO LTD

Floor 3,B1 Block ,Xu Jing Chang Industrial Park, NO.39 HaoyeRoad,FuhaiStreet,
Bao'an, Shenzhen, China

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street,
Bao'an District, Shenzhen 518126 P.R.China.

Tel.: 400-800-6106, 0755-3699 5508

Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name : LONGCONN ELECTRONICS (SHENZHEN) CO LTD
Address : Floor 3,B1 Block ,Xu Jing Chang Industrial Park, NO.39
HaoyeRoad,FuhaiStreet, Bao'an, Shenzhen, China
Manufacturer's Name : LONGCONN ELECTRONICS (SHENZHEN) CO LTD
Address : Floor 3,B1 Block ,Xu Jing Chang Industrial Park, NO.39
HaoyeRoad,FuhaiStreet, Bao'an, Shenzhen, China
Product name : feature phone
Model and/or type reference : EOS flip 4G
Family Model: N/A
Standards : FCC CFR 47 Part 22H, Part 24E, Part 27
Test procedure : ANSI C63.26:2015
ANSI/TIA-603-E-2016

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personal only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests..... 20 Jul. 2020 ~ 24 Aug, 2020

Date of Issue..... 25 Aug, 2020

Test Result..... Pass

Testing Engineer : [Signature]

(Cheng Jiawen)

Technical Manager : [Signature]

(Jason Chen)

Authorized Signatory : [Signature]

(Alex Li)

TABLE OF CONTENTS

1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION	5
1.2 RELATED SUBMITTAL(S) / GRANT (S)	6
1.3 TEST METHODOLOGY	6
1.4 TEST FACILITY	6
MEASUREMENT UNCERTAINTY	6
1.5 SPECIAL ACCESSORIES.....	6
1.6 WORST-CASE CONFIGURATION AND MODE.....	6
1.6 SUMMARY OF TEST RESULTS	7
2. SYSTEM TEST CONFIGURATION	9
2.1 EUT CONFIGURATION.....	9
2.2 EUT EXERCISE	9
2.3 CONFIGURATION OF EUT SYSTEM.....	9
2.4 TEST SETUP	10
3. TEST AND MEASUREMENT EQUIPMENT	11
4. OUTPUT POWER	13
4.1 OUTPUT POWER MEASUREMENT	13
6. BANDEDGE AND EMISSION MASK	16
7. OUT OF BAND EMISSIONS	17
7.1 MEASUREMENT METHOD	18
8. RADIATED MEASUREMENT	19
8.1. RADIATED POWER (ERP & EIRP).....	19
8.2 LTE BAND 2.....	20
8.3 LTE BAND 4.....	24
8.4 LTE BAND 5.....	28

8.5 LTE BAND 7	30
9. SPURIOUS RADIATION EMISSION	32
9.1 LTE BAND 2.....	34
9.2 LTE BAND 4.....	36
9.3 LTE BAND 5.....	38
9.4 LTE BAND 7.....	40
10. FREQUENCY STABILITY	42
10.1 LTE BAND 2	43
10.2 LTE BAND 4	45
10.3 LTE BAND 5	47
10.4 LTE BAND 7	49
11. PEAK-TO-AVERAGE RATIO	51
11.1 Description of the PAR Measurement.....	51
11.2 Measuring Instruments	51
11.3 Test Procedures.....	51
11.4 Test Setup.....	51

1. GENERAL INFORMATION

1.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Designation:	feature phone
Trade Mark	tianhoo
Model Name	EOS flip 4G
Family Model	N/A
Model Difference	N/A
FCC ID:	2AXAX-EOSFLIP4G
Frequency Bands:	U.S. Bands: <input checked="" type="checkbox"/> LTE FDD Band 2, 4, 5, 7
Frequency Range:	LTE FDD Band 2 Uplink: 1850MHz-1910MHz, Downlink: 1930MHz-1990MHz; LTE FDD Band 4 Uplink: 1710MHz-1755MHz, Downlink: 2110MHz-2155MHz; LTE FDD Band 5 Uplink: 824MHz-849MHz, Downlink: 869MHz-894MHz; LTE-FDD Band 7 Uplink: 2500MHz-2570MHz, Downlink: 2620MHz-2690MHz;
Type of Modulation:	QPSK/16QAM
SIM Card	SIM 1 and SIM 2 is a chipset unit and tested as a single chipset. The SIM 1 is chosen for test.
Antenna:	FPC Antenna
Antenna gain:	Band 2: 3.0dBi, Band 4: 0.6dBi, Band 5: -0.6dBi, Band 7: 1.3dBi,
Power Supply:	DC 3.8V/2000mAh from battery or DC 5V from Adapter.
Adapter:	Model: 618045 Input: 100-240V~50/60Hz 0.25A MAX Output: 5V---1000mA
Extreme Vol. Limits:	DC 3.4V to DC 4.2V (Nominal DC 3.8V) (Note 1)
HW Version	3568_MB_V1.1
SW Version	3568TH_V01_2020-07-18-09-00
** Note1: The High Voltage 4.2V and Low Voltage 3.4V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage.	

1.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2AXAX-EOSFLIP4G** filing to comply with the FCC Part 22H&24E &27.

1.3 TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI/TIA-603-E-2016, FCC CFR 47 Part 2, Part 22, Part 24, Part 27, ANSI C63.26:2015.

1.4 TEST FACILITY

The test site used to collect the radiated data is located at:

ShenZhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R.China.

The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.26:2015& ANSI C63.4: 2014.

FCC Registration No.:463705

IC Registration No.:9270A-1,

CNAS Registration No.:L5516

MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.5dB

1.5 SPECIAL ACCESSORIES

The battery and the charger, earphone supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

1.6 WORST-CASE CONFIGURATION AND MODE

The worst-case scenario for all measurements is based on the investigation results.

The device has LTE Bands of: Band 2, Band 4, Band 5, Band 7.

The RB Size was selected to measure for peak or average ERP and EIRP, which was based on the conducted power verification baseline data.

For the fundamental investigation of radiated emissions, the EUT is investigated for vertical and horizontal antenna orientations and X Y and Z orientations of the EUT alone. After the investigations the worst case was determined to be at X orientation for all LTE bands.

1.6 SUMMARY OF TEST RESULTS

FCC Part22, Subpart H/ FCC Part24, Subpart E, FCC Part27, Subpart L, KDB 971168 D01 Power Meas License Digital Systems v03			
FCC Rule	Test Item	Verdict	Remark
2.1046	Conducted Output Power	PASS	
22.913(d) 24.232(d) 27.50(d)(5) KDB 971168 D01 Clause 5.7	Peak-to-Average Ratio	PASS	
2.1049 22.917(b) 24.238(b) KDB 971168 D01 Clause 4.2	Occupied Bandwidth	PASS	
2.1051 22.917(a) 24.238(a) 27.53(c), (g), (h) KDB 971168 D01 Clause 6	Band Edge	PASS	
22.913(a)(2) 27.50(b)(10), (c)(10) KDB 971168 D01 Clause 5.6	Effective Radiated Power	PASS	
24.232(c) 27.50(h)(2), (d)(4) KDB 971168 D01 Clause 5.6	Equivalent Isotropic Radiated Power	PASS	
2.1053 22.917(a) 24.238(a) 27.53(c)(g)(h)(m) KDB 971168 D01 Clause 7	Field Strength of Spurious Radiation	PASS	
2.1055 22.355 24.235 27.54 KDB 971168 D01 Clause 9	Frequency Stability for Temperature & Voltage	PASS	

2.1051 22.917(a) 24.238(a) 27.53(c)(g)(h)(m) KDB 971168 D01 Clause 6	Conducted Emission	PASS	
--	--------------------	------	--

Remark:

1. "N/A" denotes test is not applicable in this Test Report.
2. All test items were verified and recorded according to the standards and without any deviation during the test.
3. No modifications are made to the EUT during all test items.

2. SYSTEM TEST CONFIGURATION

2.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

2.3 CONFIGURATION OF EUT SYSTEM


Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Note
1	feature phone	EOS flip 4G	FCC ID: 2AXAX-EOSFLIP4G	EUT


*Note: All the accessories have been used during the test.
the following "EUT" in setup diagram means EUT system.*

2.4 TEST SETUP


For Radiated Test Cases

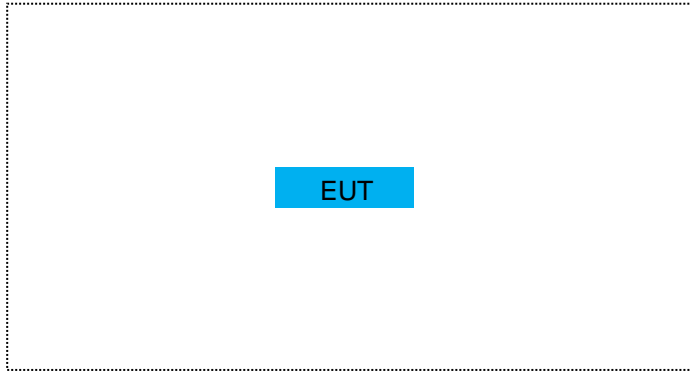


For Conducted Output Power

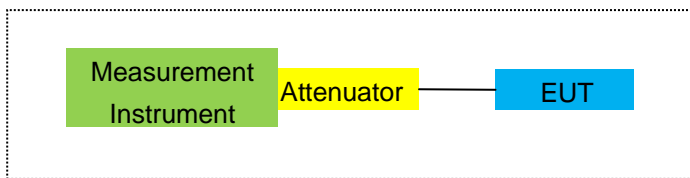

For Peak-to Average Ratio, Occupied Bandwidth, Conducted Band edge and Conducted Spurious Emission

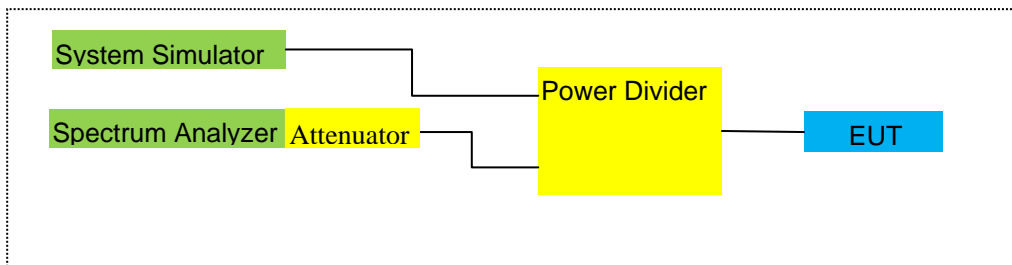

For Frequency Stability

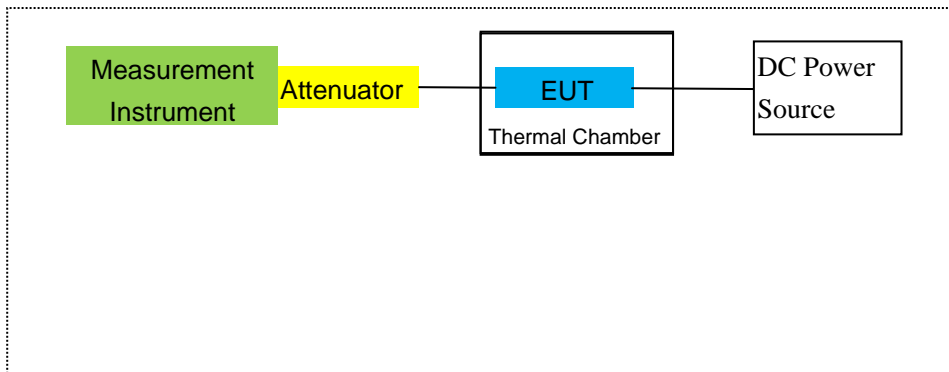

Note: EUT built-in battery-powered, the battery is fully-charged.

3. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	MXA Signal Analyzer	Agilent	N9020A	MY49100060	2019.08.28	2020.08.27	1 year
2	Test Receiver	R&S	ESPI	101318	2020.05.11	2021.05.10	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2020.04.11	2021.04.10	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2020.05.11	2023.05.10	3 year
5	Horn Antenna	EM	EM-AH-10180	2011071402	2020.04.11	2021.04.10	1 year
6	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2019.12.10	2020.12.09	1 year
7	Amplifier	EM	EM-30180	060538	2020.07.13	2021.07.12	1 year
8	Loop Antenna	ARA	PLA-1030/B	1029	2020.05.11	2021.05.10	1 year
9	Power Meter	R&S	NRVS	100696	2020.07.13	2021.07.12	1 year
10	Power Sensor	R&S	URV5-Z4	0395.1619.05	2020.05.11	2021.05.10	1 year
11	Test Cable	N/A	R-01	N/A	2019.08.06	2022.08.05	3 year
12	Test Cable	N/A	R-02	N/A	2020.07.13	2021.07.12	1 year
13	Test Cable	N/A	R-03	N/A	2019.06.28	2022.06.27	3 year
14	Test Receiver	R&S	ESCI	101160	2020.05.11	2021.05.10	1 year
15	LISN	R&S	ENV216	101313	2020.05.11	2021.05.10	1 year
16	LISN	EMCO	3816/2	00042990	2020.05.11	2021.05.10	1 year
17	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2020.05.11	2021.05.10	1 year
18	Passive Voltage Probe	R&S	ESH2-Z3	100196	2020.04.11	2021.04.10	1 year
19	Test Cable	N/A	C01	N/A	2020.05.11	2023.05.10	3 year
20	Test Cable	N/A	C02	N/A	2020.05.11	2023.05.10	3 year
21	Test Cable	N/A	C03	N/A	2020.05.11	2021.05.10	1 year
22	Attenuator	MCE	24-10-34	BN9258	2020.05.11	2021.05.10	1 year
23	Spectrum Analyzer	agilent	e4440a	us44300399	2020.05.11	2021.05.10	1 year
24	test receiver	R&S	ESCI	a0304218	2020.05.11	2021.05.10	1 year
25	Communication Tester	R&S	CMU200	A0304247	2020.07.13	2021.07.12	1 year
26	Thermal Chamber	Ten Billion	TTC-B3C	TBN-960502	2020.05.11	2021.05.10	1 year

27	DC Power Source	N/A	PS-6005D	2017040292 3	2020.07.13	2021.07.12	1 year
28	PSG Analog Signal Generator	Agilent	E8257D	MY51110112	2020.07.13	2021.07.12	1 year
29	Communication Tester	R&S	CMW500	148500	2020.05.11	2021.05.10	1 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable& DC Power Source which is scheduled for calibration every 3 years.

4. OUTPUT POWER

4.1 OUTPUT POWER MEASUREMENT

LTE Measurement Procedure:

All LTE bands conducted power peak and average are obtained from the CMW500 telecommunication test set. The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".3

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

Test data reference attachment.

5. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

MODES TESTED

- LTE Band 2
- LTE Band 4
- LTE Band 5
- LTE Band 7

RESULTS

PASS

Test data reference attachment.

6. BANDEDGE AND EMISSION MASK

RULE PART(S)

FCC: §2.1051, §22.917(a), §24.238(a), §27.53(c)(g)(h)(m)

FCC: §2.1046, §22.913, §24.232

LIMITS

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P[\text{Watts}])$, where P is the transmitter power in Watts.

The minimum permissible attenuation level for Band 7 is as following.

Per 27.53(g) for operations in the 698-746 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

Per 27.53(c.5) for operations in the 776-788 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

For all plots showing emissions in the 763 – 775MHz and 793 – 805MHz band, the FCC limit per 27.53(c.4) is $65 + 10\log_{10}(P) = -35\text{dBm}$ in a 6.25kHz bandwidth.

Per 27.53(m) for operations in the BRS/EBS bands, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth.

TEST PROCEDURE

The transmitter output was connected to a CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

For each band edge measurement:

Set the spectrum analyzer span to include the block edge frequency

Set a marker to point the corresponding band edge frequency in each test case.

Set display line

Set resolution bandwidth to at least 1% of emission bandwidth.

MODES TESTED

- LTE Band 2/4/5/7

RESULTS

Test data reference attachment.

Note: Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

7. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.917(a), §24.238(a), §27.53(c)(g)(h)(m)

LIMITS

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P[\text{Watts}])$, where P is the transmitter power in Watts.

The minimum permissible attenuation level for Band 7 is as following.

Per 27.53(g) for operations in the 698-746 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

Per 27.53(c.5) for operations in the 776-788 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

For all plots showing emissions in the 763 – 775MHz and 793 – 805MHz band, the FCC limit per 27.53(c.4) is $65 + 10\log_{10}(P) = -35\text{dBm}$ in a 6.25kHz bandwidth.

Per 27.53(m) for operations in the BRS/EBS bands, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth.

TEST PROCEDURE

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

For each out of band emissions measurement:

- Set display line
- Set RBW & VBW to 100 kHz for the measurement below 1 GHz, and 1 MHz for the measurement above 1 GHz.

MODES TESTED

- LTE Band2
- LTE Band 4
- LTE Band 5
- LTE Band 7

7.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

Test data reference attachment.

Note: Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

8. RADIATED MEASUREMENT

8.1. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §22.913(a)(2), §24.232(c) and §27.50 (h)(2), (b)(10), (c)(10), (d)(4)

LIMITS:

22.913(a) (2)- The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.
24.232 (c) Mobile and portable stations are limited to 2 watts EIRP.
27.50 (c) (10) the following power and antenna height requirements apply to stations transmitting in the 698–746 MHz band, the portable stations (hand-held devices) are limited to 3 watts ERP.
27.50 (b)(10) Portable stations (hand-held devices) transmitting in the 746–757 MHz, 758–763 MHz, 776–793 MHz, and 805–806 MHz bands are limited to 3 watts ERP.
27.50 (d)(4) The following power and antenna height requirements apply to stations transmitting in the 1710–1755 MHz and 2110–2155 MHz bands: Fixed, mobile, and portable (hand-held) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP.
27.50 (h)(2) Mobile and other user stations in the 2500–2570 MHz and 2620–2690 MHz bands. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

TEST PROCEDURE

ANSI/TIA-603-E Clause 2.2.17

KDB 971168 v02r01 RF power output using broadband peak and average power meter method.

KDB 971168 D01 Power Meas License Digital Systems v02r01, "Measurement Guidance for Certification of Licensed Digital Transmitters"

MODES TESTED

- LTE Band2
- LTE Band 4
- LTE Band 5
- LTE Band 7

RESULTS

Pass

8.2 LTE BAND 2

Radiated Power (EIRP) for Band 2										
Mode	RB/RB SIZE	Frequency	Result						Polarization Of Max. ERP	Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Factor Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)			
1.4MHz Band QPSK	1/#Mid	1850.7	0.48	3.76	28.24	24.96	313.329	Horizontal	Pass	
		1880	1.29	3.91	28.22	25.60	363.078	Horizontal	Pass	
		1909.3	0.23	3.93	28.20	24.50	281.838	Horizontal	Pass	
3.0MHz Band QPSK	1/#Mid	1851.5	1.23	3.77	28.23	25.69	370.681	Horizontal	Pass	
		1880	0.92	3.91	28.24	25.25	334.965	Horizontal	Pass	
		1908.5	0.94	3.94	28.25	25.25	334.965	Horizontal	Pass	
5.0MHz Band QPSK	1/#Mid	1852.5	0.59	3.77	28.31	25.13	325.837	Horizontal	Pass	
		1880	0.95	3.91	28.22	25.26	335.738	Horizontal	Pass	
		1907.5	1.45	3.94	28.20	25.71	372.392	Horizontal	Pass	
10.0MHz Band QPSK	1/#Mid	1855	0.77	3.79	28.33	25.31	339.625	Horizontal	Pass	
		1880	1.16	3.95	28.22	25.43	349.140	Horizontal	Pass	
		1905	1.32	3.97	28.19	25.54	358.096	Horizontal	Pass	
15.0MHz Band QPSK	1/#Mid	1857.5	0.35	3.79	28.34	24.90	309.030	Horizontal	Pass	
		1880	1.72	3.95	28.22	25.99	397.192	Horizontal	Pass	
		1902.5	1.86	3.97	28.18	26.07	404.576	Horizontal	Pass	
20.0MHz Band QPSK	1/#Mid	1860	1.26	3.81	28.35	25.80	380.189	Horizontal	Pass	
		1880	0.60	3.96	28.22	24.86	306.196	Horizontal	Pass	
		1900	1.72	4.00	28.16	25.88	387.258	Horizontal	Pass	
1.4MHz Band QPSK	1/#Mid	1850.7	1.36	3.76	28.24	25.84	383.707	Vertical	Pass	
		1880	1.45	3.91	28.22	25.76	376.704	Vertical	Pass	
		1909.3	0.61	3.93	28.20	24.88	307.610	Vertical	Pass	
3.0MHz Band QPSK	1/#Mid	1851.5	0.92	3.77	28.23	25.38	345.144	Vertical	Pass	
		1880	1.16	3.91	28.24	25.49	353.997	Vertical	Pass	
		1908.5	1.76	3.94	28.25	26.07	404.576	Vertical	Pass	
5.0MHz Band QPSK	1/#Mid	1852.5	1.53	3.77	28.31	26.07	404.576	Vertical	Pass	
		1880	1.61	3.91	28.22	25.92	390.841	Vertical	Pass	
		1907.5	1.52	3.94	28.20	25.78	378.443	Vertical	Pass	
10.0MHz Band QPSK	1/#Mid	1855	0.83	3.79	28.33	25.37	344.350	Vertical	Pass	
		1880	0.67	3.95	28.22	24.94	311.889	Vertical	Pass	
		1905	0.32	3.97	28.19	24.54	284.446	Vertical	Pass	

15.0MHz	1/#Mid	1857.5	0.18	3.79	28.34	24.73	297.167	Vertical	Pass
Band		1880	1.27	3.95	28.22	25.54	358.096	Vertical	Pass
QPSK		1902.5	0.40	3.97	28.18	24.61	289.068	Vertical	Pass
20.0MHz	1/#Mid	1860	0.82	3.81	28.35	25.36	343.558	Vertical	Pass
Band		1880	0.24	3.96	28.22	24.50	281.838	Vertical	Pass
QPSK		1900	2.39	4.00	28.16	26.55	451.856	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Factor Gain (dB)+ SG Level (dBm)- Cable Loss(dBm)

Factor Gain(dB)=Antenna Gain(dB) + Amplifier Factor (dB)

Radiated Power (EIRP) for Band 2									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Factor Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band 16 QAM	1/#Mid	1850.7	0.37	3.76	28.24	24.85	305.492	Horizontal	Pass
		1880	0.43	3.91	28.22	24.74	297.852	Horizontal	Pass
		1909.3	0.73	3.93	28.20	25.00	316.228	Horizontal	Pass
3.0MHz Band 16 QAM	1/#Mid	1851.5	0.16	3.77	28.23	24.62	289.734	Horizontal	Pass
		1880	1.37	3.91	28.24	25.70	371.535	Horizontal	Pass
		1908.5	0.43	3.94	28.25	24.74	297.852	Horizontal	Pass
5.0MHz Band 16 QAM	1/#Mid	1852.5	-0.01	3.77	28.31	24.53	283.792	Horizontal	Pass
		1880	1.34	3.91	28.22	25.65	367.282	Horizontal	Pass
		1907.5	0.28	3.94	28.20	24.54	284.446	Horizontal	Pass
10.0MHz Band 16 QAM	1/#Mid	1855	0.96	3.79	28.33	25.50	354.813	Horizontal	Pass
		1880	0.06	3.95	28.22	24.33	271.019	Horizontal	Pass
		1905	0.79	3.97	28.19	25.01	316.957	Horizontal	Pass
15.0MHz Band 16 QAM	1/#Mid	1857.5	0.89	3.79	28.34	25.44	349.945	Horizontal	Pass
		1880	1.44	3.95	28.22	25.71	372.392	Horizontal	Pass
		1902.5	0.87	3.97	28.18	25.08	322.107	Horizontal	Pass
20.0MHz Band 16 QAM	1/#Mid	1860	1.11	3.81	28.35	25.65	367.282	Horizontal	Pass
		1880	1.19	3.96	28.22	25.45	350.752	Horizontal	Pass
		1900	0.69	4.00	28.16	24.85	305.492	Horizontal	Pass
1.4MHz Band 16 QAM	1/#Mid	1850.7	0.80	3.76	28.24	25.28	337.287	Vertical	Pass
		1880	0.19	3.91	28.22	24.50	281.838	Vertical	Pass
		1909.3	0.74	3.93	28.20	25.01	316.957	Vertical	Pass
3.0MHz Band 16 QAM	1/#Mid	1851.5	1.04	3.77	28.23	25.50	354.813	Vertical	Pass
		1880	1.24	3.91	28.24	25.57	360.579	Vertical	Pass
		1908.5	0.89	3.94	28.25	25.20	331.131	Vertical	Pass
5.0MHz Band 16 QAM	1/#Mid	1852.5	0.65	3.77	28.31	25.19	330.370	Vertical	Pass
		1880	1.06	3.91	28.22	25.37	344.350	Vertical	Pass
		1907.5	0.44	3.94	28.20	24.70	295.121	Vertical	Pass
10.0MHz Band 16 QAM	1/#Mid	1855	0.74	3.79	28.33	25.28	337.287	Vertical	Pass
		1880	0.54	3.95	28.22	24.81	302.691	Vertical	Pass
		1905	0.41	3.97	28.19	24.63	290.402	Vertical	Pass
15.0MHz Band 16 QAM	1/#Mid	1857.5	0.57	3.79	28.34	25.12	325.087	Vertical	Pass
		1880	0.06	3.95	28.22	24.33	271.019	Vertical	Pass
		1902.5	0.57	3.97	28.18	24.78	300.608	Vertical	Pass

20.0MHz		1860	1.02	3.81	28.35	25.56	359.749	Vertical	Pass
Band 16	1/#Mid	1880	1.62	3.96	28.22	25.88	387.258	Vertical	Pass
QAM		1900	0.20	4.00	28.16	24.36	272.898	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Factor Gain (dB)+ SG Level (dBm)- Cable Loss(dBm)

Factor Gain(dB)=Antenna Gain(dB) + Amplifier Factor (dB)

8.3 LTE BAND 4

Radiated Power (EIRP) for Band 4									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Factor Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band QPSK	1/#Mid	1710.7	-1.53	3.12	27.58	22.93	196.336	Horizontal	Pass
		1732.5	-0.97	3.27	27.61	23.37	217.270	Horizontal	Pass
		1754.3	-1.76	3.29	27.63	22.58	181.134	Horizontal	Pass
3.0MHz Band QPSK	1/#Mid	1711.5	-2.85	3.13	27.61	21.63	145.546	Horizontal	Pass
		1732.5	-2.89	3.27	27.61	21.45	139.637	Horizontal	Pass
		1753.5	-2.74	3.30	27.62	21.58	143.880	Horizontal	Pass
5.0MHz Band QPSK	1/#Mid	1712.5	-2.61	3.13	27.63	21.89	154.525	Horizontal	Pass
		1732.5	-3.76	3.27	27.61	20.58	114.288	Horizontal	Pass
		1752.5	-1.04	3.30	27.60	23.26	211.836	Horizontal	Pass
10.0MHz Band QPSK	1/#Mid	1715	-1.97	3.15	27.64	22.52	178.649	Horizontal	Pass
		1732.5	-1.43	3.31	27.61	22.87	193.642	Horizontal	Pass
		1750	-1.20	3.33	27.59	23.06	202.302	Horizontal	Pass
15.0MHz Band QPSK	1/#Mid	1717.5	-2.06	3.15	27.65	22.44	175.388	Horizontal	Pass
		1732.5	-1.53	3.31	27.61	22.77	189.234	Horizontal	Pass
		1747.5	-1.59	3.33	27.57	22.65	184.077	Horizontal	Pass
20.0MHz Band QPSK	1/#Mid	1720	-2.55	3.17	27.66	21.94	156.315	Horizontal	Pass
		1732.5	-1.41	3.32	27.61	22.88	194.089	Horizontal	Pass
		1745	-1.37	3.36	27.56	22.83	191.867	Horizontal	Pass
1.4MHz Band QPSK	1/#Mid	1710.7	-1.47	3.12	27.58	22.99	199.067	Vertical	Pass
		1732.5	-2.18	3.27	27.61	22.16	164.437	Vertical	Pass
		1754.3	-2.38	3.29	27.63	21.96	157.036	Vertical	Pass
3.0MHz Band QPSK	1/#Mid	1711.5	-1.47	3.13	27.61	23.01	199.986	Vertical	Pass
		1732.5	-1.10	3.27	27.61	23.24	210.863	Vertical	Pass
		1753.5	-1.61	3.30	27.62	22.71	186.638	Vertical	Pass
5.0MHz Band QPSK	1/#Mid	1712.5	-3.10	3.13	27.63	21.40	138.038	Vertical	Pass
		1732.5	-2.27	3.27	27.61	22.07	161.065	Vertical	Pass
		1752.5	-2.63	3.30	27.60	21.67	146.893	Vertical	Pass
10.0MHz Band	1/#Mid	1715	-2.37	3.15	27.64	22.12	162.930	Vertical	Pass
		1732.5	-2.20	3.31	27.61	22.10	162.181	Vertical	Pass

QPSK		1750	-1.59	3.33	27.59	22.67	184.927	Vertical	Pass
15.0MH	1/#Mid	1717.5	-2.51	3.15	27.65	21.99	158.125	Vertical	Pass
z Band		1732.5	-1.69	3.31	27.61	22.61	182.390	Vertical	Pass
QPSK		1747.5	-2.44	3.33	27.57	21.80	151.356	Vertical	Pass
20.0MH	1/#Mid	1720	-1.56	3.17	27.66	22.93	196.336	Vertical	Pass
z Band		1732.5	-0.81	3.32	27.61	23.48	222.844	Vertical	Pass
QPSK		1745	-1.18	3.36	27.56	23.02	200.447	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Factor Gain (dB)+ SG Level (dBm)- Cable Loss(dBm)

Factor Gain(dB)=Antenna Gain(dB) + Amplifier Factor (dB)

Radiated Power (EIRP) for Band 4									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Factor Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band 16 QAM	1/#Mid	1710.7	-3.09	3.12	27.58	21.37	137.088	Horizontal	Pass
		1732.5	-1.81	3.27	27.61	22.53	179.061	Horizontal	Pass
		1754.3	-2.79	3.29	27.63	21.55	142.889	Horizontal	Pass
3.0MHz Band 16 QAM	1/#Mid	1711.5	-2.80	3.13	27.61	21.68	147.231	Horizontal	Pass
		1732.5	-3.85	3.27	27.61	20.49	111.944	Horizontal	Pass
		1753.5	-2.76	3.30	27.62	21.56	143.219	Horizontal	Pass
5.0MHz Band 16 QAM	1/#Mid	1712.5	-3.19	3.13	27.63	21.31	135.207	Horizontal	Pass
		1732.5	-3.23	3.27	27.61	21.11	129.122	Horizontal	Pass
		1752.5	-2.22	3.30	27.60	22.08	161.436	Horizontal	Pass
10.0MHz Band 16 QAM	1/#Mid	1715	-3.05	3.15	27.64	21.44	139.316	Horizontal	Pass
		1732.5	-2.86	3.31	27.61	21.44	139.316	Horizontal	Pass
		1750	-3.12	3.33	27.59	21.14	130.017	Horizontal	Pass
15.0MHz Band 16 QAM	1/#Mid	1717.5	-3.22	3.15	27.65	21.28	134.276	Horizontal	Pass
		1732.5	-1.60	3.31	27.61	22.70	186.209	Horizontal	Pass
		1747.5	-2.61	3.33	27.57	21.63	145.546	Horizontal	Pass
20.0MHz Band 16 QAM	1/#Mid	1720	-2.41	3.17	27.66	22.08	161.436	Horizontal	Pass
		1732.5	-2.02	3.32	27.61	22.27	168.655	Horizontal	Pass
		1745	-2.76	3.36	27.56	21.44	139.316	Horizontal	Pass
1.4MHz Band 16 QAM	1/#Mid	1710.7	-2.73	3.12	27.58	21.73	148.936	Vertical	Pass
		1732.5	-2.44	3.27	27.61	21.90	154.882	Vertical	Pass
		1754.3	-2.73	3.29	27.63	21.61	144.877	Vertical	Pass
3.0MHz Band 16 QAM	1/#Mid	1711.5	-2.70	3.13	27.61	21.78	150.661	Vertical	Pass
		1732.5	-3.76	3.27	27.61	20.58	114.288	Vertical	Pass
		1753.5	-3.59	3.30	27.62	20.73	118.304	Vertical	Pass
5.0MHz Band 16 QAM	1/#Mid	1712.5	-3.05	3.13	27.63	21.45	139.637	Vertical	Pass
		1732.5	-2.92	3.27	27.61	21.42	138.676	Vertical	Pass
		1752.5	-3.04	3.30	27.60	21.26	133.660	Vertical	Pass
10.0MHz Band 16 QAM	1/#Mid	1715	-2.34	3.15	27.64	22.15	164.059	Vertical	Pass
		1732.5	-2.83	3.31	27.61	21.47	140.281	Vertical	Pass
		1750	-2.02	3.33	27.59	22.24	167.494	Vertical	Pass
15.0MHz Band	1/#Mid	1717.5	-3.03	3.15	27.65	21.47	140.281	Vertical	Pass
		1732.5	-3.04	3.31	27.61	21.26	133.660	Vertical	Pass

16 QAM		1747.5	-2.18	3.33	27.57	22.06	160.694	Vertical	Pass
20.0MH	1/#Mid	1720	-1.78	3.17	27.66	22.71	186.638	Vertical	Pass
z Band		1732.5	-1.98	3.32	27.61	22.31	170.216	Vertical	Pass
16 QAM		1745	-1.54	3.36	27.56	22.66	184.502	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Factor Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

Factor Gain(dB)=Antenna Gain(dB) + Amplifier Factor (dB)

8.4 LTE BAND 5

Radiated Power (ERP) for Band 5										
Mode	RB/ RB SIZE	Freque ncy	Result							Conclu sion
			SG Level (dBm)	Cable Loss (dBm)	Facto r Gain (dB)	Corre ction (dB)	Max. ERP Averag e (dBm)	Max. ERP Averag e (mW)	Polarizati on Of Max. ERP	
1.4MHz Band QPSK	1/#M id	824.7	6.51	2.01	19.68	2.15	22.03	159.588	Horizontal	Pass
		836.5	6.78	2.01	19.77	2.15	22.39	173.380	Horizontal	Pass
		848.3	5.72	2.02	19.82	2.15	21.37	137.088	Horizontal	Pass
3.0MHz Band QPSK	1/#M id	825.5	7.03	2.01	19.70	2.15	22.57	180.717	Horizontal	Pass
		836.5	6.82	2.01	19.77	2.15	22.43	174.985	Horizontal	Pass
		847.5	7.34	2.02	19.81	2.15	22.98	198.609	Horizontal	Pass
5.0MHz Band QPSK	1/#M id	826.5	7.09	2.01	19.71	2.15	22.64	183.654	Horizontal	Pass
		836.5	6.82	2.01	19.77	2.15	22.43	174.985	Horizontal	Pass
		846.5	7.10	2.02	19.79	2.15	22.72	187.068	Horizontal	Pass
10.0MH z Band QPSK	1/#M id	829	6.58	2.01	19.73	2.15	22.15	164.059	Horizontal	Pass
		836.5	7.51	2.01	19.77	2.15	23.12	205.116	Horizontal	Pass
		844	5.78	2.02	19.78	2.15	21.39	137.721	Horizontal	Pass
1.4MHz Band QPSK	1/#M id	824.7	6.99	2.01	19.68	2.15	22.51	178.238	Vertical	Pass
		836.5	7.19	2.01	19.77	2.15	22.80	190.546	Vertical	Pass
		848.3	6.20	2.02	19.82	2.15	21.85	153.109	Vertical	Pass
3.0MHz Band QPSK	1/#M id	825.5	6.33	2.01	19.70	2.15	21.87	153.815	Vertical	Pass
		836.5	7.03	2.01	19.77	2.15	22.64	183.654	Vertical	Pass
		847.5	7.24	2.02	19.81	2.15	22.88	194.089	Vertical	Pass
5.0MHz Band QPSK	1/#M id	826.5	7.10	2.01	19.71	2.15	22.65	184.077	Vertical	Pass
		836.5	5.71	2.01	19.77	2.15	21.32	135.519	Vertical	Pass
		846.5	7.46	2.02	19.79	2.15	23.08	203.236	Vertical	Pass
10.0MH z Band QPSK	1/#M id	829	7.35	2.01	19.73	2.15	22.92	195.884	Vertical	Pass
		836.5	7.71	2.01	19.77	2.15	23.32	214.783	Vertical	Pass
		844	6.24	2.02	19.78	2.15	21.85	153.109	Vertical	Pass

Radiated Power (ERP) for Band 5											
Mode	RB/ RB SIZE	Freque ncy	Result							Polarizati on Of Max. ERP	Conclu sion
			SG Level (dBm)	Cable Loss (dBm)	Facto r Gain (dB)	Corre ction (dB)	Max. ERP Averag e (dBm)	Max. ERP Averag e (mW)			
1.4MHz Band 16 QAM	1/#M id	824.7	5.52	2.01	19.68	2.15	21.04	127.057	Horizontal	Pass	
		836.5	5.96	2.01	19.77	2.15	21.57	143.549	Horizontal	Pass	
		848.3	5.56	2.02	19.82	2.15	21.21	132.130	Horizontal	Pass	
3.0MHz Band 16 QAM	1/#M id	825.5	5.61	2.01	19.70	2.15	21.15	130.317	Horizontal	Pass	
		836.5	5.93	2.01	19.77	2.15	21.54	142.561	Horizontal	Pass	
		847.5	5.32	2.02	19.81	2.15	20.96	124.738	Horizontal	Pass	
5.0MHz Band 16 QAM	1/#M id	826.5	6.10	2.01	19.71	2.15	21.65	146.218	Horizontal	Pass	
		836.5	4.77	2.01	19.77	2.15	20.38	109.144	Horizontal	Pass	
		846.5	5.78	2.02	19.79	2.15	21.40	138.038	Horizontal	Pass	
10.0MH z Band 16 QAM	1/#M id	829	5.21	2.01	19.73	2.15	20.78	119.674	Horizontal	Pass	
		836.5	4.92	2.01	19.77	2.15	20.53	112.980	Horizontal	Pass	
		844	4.71	2.02	19.78	2.15	20.32	107.647	Horizontal	Pass	
1.4MHz Band 16 QAM	1/#M id	824.7	5.90	2.01	19.68	2.15	21.42	138.676	Vertical	Pass	
		836.5	5.10	2.01	19.77	2.15	20.71	117.761	Vertical	Pass	
		848.3	4.66	2.02	19.82	2.15	20.31	107.399	Vertical	Pass	
3.0MHz Band 16 QAM	1/#M id	825.5	5.43	2.01	19.70	2.15	20.97	125.026	Vertical	Pass	
		836.5	5.46	2.01	19.77	2.15	21.07	127.938	Vertical	Pass	
		847.5	5.03	2.02	19.81	2.15	20.67	116.681	Vertical	Pass	
5.0MHz Band 16 QAM	1/#M id	826.5	4.91	2.01	19.71	2.15	20.46	111.173	Vertical	Pass	
		836.5	5.95	2.01	19.77	2.15	21.56	143.219	Vertical	Pass	
		846.5	5.91	2.02	19.79	2.15	21.53	142.233	Vertical	Pass	
10.0MH z Band 16 QAM	1/#M id	829	5.77	2.01	19.73	2.15	21.34	136.144	Vertical	Pass	
		836.5	5.99	2.01	19.77	2.15	21.60	144.544	Vertical	Pass	
		844	6.06	2.02	19.78	2.15	21.67	146.893	Vertical	Pass	

Note:

ERP=EIRP-2.15

SG Level= Signal generator output

Max. EIRP Average (dBm)= Factor Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

Factor Gain(dB)=Antenna Gain(dB) + Amplifier Factor (dB)

8.5 LTE BAND 7

Radiated Power (EIRP) for Band 7									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Factor Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
5.0MHz Band QPSK	1/#Midd	2502.5	2.66	4.54	27.75	25.87	386.367	Horizontal	Pass
		2535	2.95	4.69	27.72	25.98	396.278	Horizontal	Pass
		2567.5	2.95	4.71	27.71	25.95	393.550	Horizontal	Pass
10.0MHz Band QPSK	1/#Midd	2505	2.31	4.55	27.76	25.52	356.451	Horizontal	Pass
		2535	1.88	4.69	27.72	24.91	309.742	Horizontal	Pass
		2565	2.21	4.72	27.70	25.19	330.370	Horizontal	Pass
15.0MHz Band QPSK	1/#Midd	2507.5	2.97	4.55	27.77	26.19	415.911	Horizontal	Pass
		2535	3.05	4.69	27.72	26.08	405.509	Horizontal	Pass
		2562.5	1.97	4.72	27.69	24.94	311.889	Horizontal	Pass
20.0MHz Band QPSK	1/#Midd	2510	2.17	4.57	27.78	25.38	345.144	Horizontal	Pass
		2535	1.96	4.73	27.72	24.95	312.608	Horizontal	Pass
		2560	3.21	4.75	27.68	26.14	411.150	Horizontal	Pass
5.0MHz Band QPSK	1/#Midd	2502.5	2.34	4.54	27.75	25.55	358.922	Vertical	Pass
		2535	2.39	4.69	27.72	25.42	348.337	Vertical	Pass
		2567.5	1.90	4.71	27.71	24.90	309.030	Vertical	Pass
10.0MHz Band QPSK	1/#Midd	2505	2.52	4.55	27.76	25.73	374.111	Vertical	Pass
		2535	2.48	4.69	27.72	25.51	355.631	Vertical	Pass
		2565	1.50	4.72	27.70	24.48	280.543	Vertical	Pass
15.0MHz Band QPSK	1/#Midd	2507.5	2.81	4.55	27.77	26.03	400.867	Vertical	Pass
		2535	2.39	4.69	27.72	25.42	348.337	Vertical	Pass
		2562.5	3.08	4.72	27.69	26.05	402.717	Vertical	Pass
20.0MHz Band QPSK	1/#Midd	2510	3.20	4.57	27.78	26.41	437.522	Vertical	Pass
		2535	2.99	4.73	27.72	25.98	396.278	Vertical	Pass
		2560	3.37	4.75	27.68	26.30	426.580	Vertical	Pass

Radiated Power (EIRP) for Band 7

Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Factor Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
5.0MHz Band 16 QAM	1/#Mid	2502.5	1.05	4.54	27.75	24.26	266.686	Horizontal	Pass
		2535	1.95	4.69	27.72	24.98	314.775	Horizontal	Pass
		2567.5	2.35	4.71	27.71	25.35	342.768	Horizontal	Pass
10.0MHz Band 16 QAM	1/#Mid	2505	2.41	4.55	27.76	25.62	364.754	Horizontal	Pass
		2535	2.07	4.69	27.72	25.10	323.594	Horizontal	Pass
		2565	1.78	4.72	27.70	24.76	299.226	Horizontal	Pass
15.0MHz Band 16 QAM	1/#Mid	2507.5	2.13	4.55	27.77	25.35	342.768	Horizontal	Pass
		2535	1.99	4.69	27.72	25.02	317.687	Horizontal	Pass
		2562.5	2.59	4.72	27.69	25.56	359.749	Horizontal	Pass
20.0MHz Band 16 QAM	1/#Mid	2510	2.23	4.57	27.78	25.44	349.945	Horizontal	Pass
		2535	2.48	4.73	27.72	25.47	352.371	Horizontal	Pass
		2560	1.70	4.75	27.68	24.63	290.402	Horizontal	Pass
5.0MHz Band 16 QAM	1/#Mid	2502.5	1.95	4.54	27.75	25.16	328.095	Vertical	Pass
		2535	1.87	4.69	27.72	24.90	309.030	Vertical	Pass
		2567.5	1.39	4.71	27.71	24.39	274.789	Vertical	Pass
10.0MHz Band 16 QAM	1/#Mid	2505	1.24	4.55	27.76	24.45	278.612	Vertical	Pass
		2535	1.64	4.69	27.72	24.67	293.089	Vertical	Pass
		2565	2.33	4.72	27.70	25.31	339.625	Vertical	Pass
15.0MHz Band 16 QAM	1/#Mid	2507.5	2.63	4.55	27.77	25.85	384.592	Vertical	Pass
		2535	2.23	4.69	27.72	25.26	335.738	Vertical	Pass
		2562.5	2.12	4.72	27.69	25.09	322.849	Vertical	Pass
20.0MHz Band 16 QAM	1/#Mid	2510	2.72	4.57	27.78	25.93	391.742	Vertical	Pass
		2535	2.78	4.73	27.72	25.77	377.572	Vertical	Pass
		2560	2.33	4.75	27.68	25.26	335.738	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Factor Gain (dB)+ SG Level (dBm)- Cable Loss(dBm)

Factor Gain(dB)=Antenna Gain(dB) + Amplifier Factor (dB)

9. SPURIOUS RADIATION EMISSION

RULE PART(S)

FCC: §2.1051, §22.917(a), §24.238(a), §27.53(c)(g)(h)(m)

LIMIT

For Band 7, the minimum permissible attenuation level of any spurious emission is $55 + \log_{10}(P)$ [Watts].

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P)$ [Watts], where P is the transmitter power in Watts.

TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

The unwanted emission power shall be measured with a resolution bandwidth of at least 1% of the occupied bandwidth in the 1 MHz band immediately outside and adjacent to the channel edge of the equipment. Beyond the 1 MHz band immediately outside the channel edge of the equipment, a resolution bandwidth of 1 MHz shall be employed. A narrower resolution bandwidth is allowed to be used provided that the measured power is integrated over the full required measurement bandwidth of 1 MHz or 1% of the occupied bandwidth as applicable.

The power of any unwanted emissions measured from the channel edge of the equipment shall be attenuated below the transmitter power, P (dBW), as follows:

- a. for base station and subscriber equipment, other than mobile subscriber equipment, the attenuation shall not be less than $43 + 10 \text{ Log}_{10} (p)$, dB; and
- b. for mobile subscriber equipment, the attenuation shall not be less than $43 + 10 \text{ Log}_{10} (p)$, dB at the channel edges and $55 + 10 \text{ Log}_{10} (p)$ at 5.5 MHz away and beyond the channel edges where p in (a) and (b) is the transmitter power measured in watts.

MODES TESTED

- LTE Band 2
LTE Band 4
- LTE Band 5
LTE Band 7

RESULTS

PASS

9.1 LTE BAND 2

QPSK EIRP POWER FOR LTE BAND 2 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 1710.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3701.4	-48.54	4.04	33.51	-19.07	-13	-6.07	Horizontal
3701.4	-48.82	4.04	33.51	-19.35	-13	-6.35	Vertical
5552.1	-48.03	5.24	35.84	-17.43	-13	-4.43	Vertical
5552.1	-51.66	5.24	35.84	-21.06	-13	-8.06	Horizontal
114.0	-45.24	1.69	17.41	-29.52	-13	-16.52	Vertical
135.9	-39.26	1.78	16.32	-24.72	-13	-11.72	Horizontal
Test Results for Mid Channel 1732.5MHz							
3760.0	-49.54	4.04	33.56	-20.02	-13	-7.02	Horizontal
3760.0	-52.18	4.04	33.56	-22.66	-13	-9.66	Vertical
5640.0	-52.13	5.24	35.91	-21.46	-13	-8.46	Vertical
5640.0	-57.42	5.24	35.91	-26.75	-13	-13.75	Horizontal
220.7	-42.84	1.56	15.12	-29.28	-13	-16.28	Vertical
199.5	-44.74	1.76	17.55	-28.95	-13	-15.95	Horizontal
Test Results for High Channel 1754.3MHz							
3818.6	-49.04	4.04	34.00	-19.08	-13	-6.08	Horizontal
3818.6	-49.55	4.04	34.00	-19.59	-13	-6.59	Vertical
5727.9	-52.43	5.24	36.04	-21.63	-13	-8.63	Vertical
5727.9	-56.12	5.24	36.04	-25.32	-13	-12.32	Horizontal
95.5	-46.54	1.53	17.99	-30.08	-13	-17.08	Vertical
205.3	-40.17	1.45	16.40	-25.22	-13	-12.22	Horizontal

QPSK EIRP POWER FOR LTE BAND 2 (20.0MHZ BANDWIDTH)

Test Results for Low Channel 1710.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3720.0	-49.58	4.07	33.54	-20.11	-13	-7.11	Horizontal
3720.0	-45.47	4.07	33.54	-16.00	-13	-3.00	Vertical
5580.0	-53.55	5.28	35.86	-22.97	-13	-9.97	Vertical
5580.0	-54.36	5.28	35.86	-23.78	-13	-10.78	Horizontal
206.3	-44.34	1.57	15.59	-30.32	-13	-17.32	Vertical
214.4	-39.53	1.53	16.52	-24.54	-13	-11.54	Horizontal
Test Results for Mid Channel 1732.5MHz							
3760.0	-53.79	4.04	33.56	-24.27	-13	-11.27	Horizontal
3760.0	-49.59	4.04	33.56	-20.07	-13	-7.07	Vertical
5640.0	-53.74	5.24	35.91	-23.07	-13	-10.07	Vertical
5640.0	-53.57	5.24	35.91	-22.90	-13	-9.90	Horizontal
218.5	-37.68	1.59	15.68	-23.59	-13	-10.59	Vertical
91.3	-41.74	1.57	15.26	-28.05	-13	-15.05	Horizontal
Test Results for High Channel 1754.3MHz							
3800.0	-47.91	4.04	34.00	-17.95	-13	-4.95	Horizontal
3800.0	-47.57	4.04	34.00	-17.61	-13	-4.61	Vertical
5700.0	-56.03	5.24	36.04	-25.23	-13	-12.23	Vertical
5700.0	-49.64	5.24	36.04	-18.84	-13	-5.84	Horizontal
265.8	-43.26	1.39	16.67	-27.98	-13	-14.98	Vertical
235.5	-48.33	1.60	17.19	-32.74	-13	-19.74	Horizontal

Note: P_{Mea}(dBm)= Power(dBm)+ ARpl (dBm)

. Over Limit= : P_{Mea}(dBm)-Limit(dBm)

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.2 LTE BAND 4

QPSK EIRP POWER FOR LTE BAND 4 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 1710.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3421.4	-45.13	4.02	29.80	-19.35	-13	-6.35	Horizontal
3421.4	-50.49	4.02	29.80	-24.71	-13	-11.71	Vertical
5132.1	-49.69	5.24	35.84	-19.09	-13	-6.09	Vertical
5132.1	-53.87	5.24	35.84	-23.27	-13	-10.27	Horizontal
183.2	-45.95	1.61	15.63	-31.93	-13	-18.93	Vertical
175.3	-40.80	1.74	17.69	-24.85	-13	-11.85	Horizontal
Test Results for Mid Channel 1732.5MHz							
3465.0	-45.86	4.03	30.00	-19.89	-13	-6.89	Horizontal
3465.0	-54.19	4.03	30.00	-28.22	-13	-15.22	Vertical
5197.5	-51.63	5.25	35.86	-21.02	-13	-8.02	Vertical
5197.5	-53.84	5.25	35.86	-23.23	-13	-10.23	Horizontal
128.4	-44.41	1.77	16.57	-29.61	-13	-16.61	Vertical
243.9	-46.62	1.35	16.29	-31.68	-13	-18.68	Horizontal
Test Results for High Channel 1754.3MHz							
3508.6	-55.07	4.05	30.01	-29.11	-13	-16.11	Horizontal
3508.6	-50.48	4.05	30.01	-24.52	-13	-11.52	Vertical
5262.9	-53.36	5.26	35.86	-22.76	-13	-9.76	Vertical
5262.9	-46.65	5.26	35.86	-16.05	-13	-3.05	Horizontal
191.5	-36.86	1.77	15.20	-23.43	-13	-10.43	Vertical
198.0	-46.46	1.74	17.98	-30.22	-13	-17.22	Horizontal

QPSK EIRP POWER FOR LTE BAND 4 (20.0MHZ BANDWIDTH)

Test Results for Low Channel 1720MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3440.0	-48.62	4.02	29.80	-22.84	-13	-9.84	Horizontal
3440.0	-52.65	4.02	29.80	-26.87	-13	-13.87	Vertical
5160.0	-54.78	5.24	35.84	-24.18	-13	-11.18	Vertical
5160.0	-53.83	5.24	35.84	-23.23	-13	-10.23	Horizontal
159.1	-48.94	1.74	17.91	-32.77	-13	-19.77	Vertical
274.4	-40.24	1.74	15.65	-26.33	-13	-13.33	Horizontal
Test Results for Mid Channel 1732.5MHz							
3465.0	-56.33	4.03	30.00	-30.36	-13	-17.36	Horizontal
3465.0	-48.75	4.03	30.00	-22.78	-13	-9.78	Vertical
5197.5	-49.65	5.25	35.86	-19.04	-13	-6.04	Vertical
5197.5	-58.10	5.25	35.86	-27.49	-13	-14.49	Horizontal
258.9	-44.19	1.46	15.23	-30.42	-13	-17.42	Vertical
155.1	-44.90	1.58	17.74	-28.74	-13	-15.74	Horizontal
Test Results for High Channel 1745MHz							
3490.0	-49.85	2.91	27.68	-25.08	-13	-12.08	Horizontal
3490.0	-57.25	2.91	27.68	-32.48	-13	-19.48	Vertical
5235.0	-50.24	5.26	35.86	-19.64	-13	-6.64	Vertical
5235.0	-50.28	5.26	35.86	-19.68	-13	-6.68	Horizontal
93.1	-41.14	1.33	17.71	-24.76	-13	-11.76	Vertical
251.5	-38.86	1.38	15.68	-24.56	-13	-11.56	Horizontal

Note: P_{Mea}(dBm)= Power(dBm)+ ARpl (dBm)

. Over Limit= : P_{Mea}(dBm)-Limit(dBm)

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.3 LTE BAND 5

QPSK EIRP POWER FOR LTE BAND 5 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 824.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1649.4	-54.01	2.78	27.50	-29.29	-13	-16.29	Horizontal
1649.4	-49.17	2.78	27.50	-24.45	-13	-11.45	Vertical
2474.1	-51.40	2.90	27.80	-26.50	-13	-13.50	Vertical
2474.1	-47.86	2.90	27.80	-22.96	-13	-9.96	Horizontal
232.9	-45.39	1.39	16.27	-30.51	-13	-17.51	Vertical
80.4	-44.62	1.38	15.97	-30.03	-13	-17.03	Horizontal
Test Results For Mid Channel 836.5MHz							
1673.0	-51.86	2.80	27.48	-27.18	-13	-14.18	Horizontal
1673.0	-55.35	2.80	27.48	-30.67	-13	-17.67	Vertical
2509.5	-57.03	2.91	27.70	-32.24	-13	-19.24	Vertical
2509.5	-50.98	2.91	27.70	-26.19	-13	-13.19	Horizontal
108.6	-44.68	1.52	15.25	-30.95	-13	-17.95	Vertical
140.2	-39.97	1.76	16.52	-25.21	-13	-12.21	Horizontal
Test Results for High Channel 848.3MHz							
1696.6	-55.73	2.82	27.43	-31.12	-13	-18.12	Horizontal
1696.6	-55.83	2.82	27.43	-31.22	-13	-18.22	Vertical
2544.9	-53.62	2.92	27.74	-28.80	-13	-15.80	Vertical
2544.9	-52.36	2.92	27.74	-27.54	-13	-14.54	Horizontal
217.0	-47.91	1.75	16.98	-32.68	-13	-19.68	Vertical
124.8	-37.15	1.41	15.16	-23.40	-13	-10.40	Horizontal

QPSK EIRP POWER FOR LTE BAND 5 (10MHZ BANDWIDTH)

Test Results for Low Channel 829MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1658.0	-57.27	2.78	27.50	-32.55	-13	-19.55	Horizontal
1658.0	-50.12	2.78	27.50	-25.40	-13	-12.40	Vertical
2487.0	-53.85	2.90	27.80	-28.95	-13	-15.95	Vertical
2487.0	-51.99	2.90	27.80	-27.09	-13	-14.09	Horizontal
100.6	-44.15	1.35	17.73	-27.77	-13	-14.77	Vertical
101.9	-48.52	1.53	17.86	-32.19	-13	-19.19	Horizontal
Test Results For Mid Channel 836.5MHz							
1673.0	-55.37	2.80	27.48	-30.69	-13	-17.69	Horizontal
1673.0	-55.37	2.80	27.48	-30.69	-13	-17.69	Vertical
2509.5	-59.09	2.91	27.70	-34.30	-13	-21.30	Vertical
2509.5	-57.80	2.91	27.70	-33.01	-13	-20.01	Horizontal
135.6	-40.25	1.49	15.38	-26.36	-13	-13.36	Vertical
174.8	-44.44	1.66	17.75	-28.35	-13	-15.35	Horizontal
Test Results for High Channel 844MHz							
1688.0	-51.61	2.82	27.43	-27.00	-13	-14.00	Horizontal
1688.0	-50.90	2.82	27.43	-26.29	-13	-13.29	Vertical
2532.0	-53.32	2.92	27.74	-28.50	-13	-15.50	Vertical
2532.0	-55.20	2.92	27.74	-30.38	-13	-17.38	Horizontal
241.9	-42.22	1.41	16.94	-26.69	-13	-13.69	Vertical
154.8	-47.69	1.39	16.51	-32.57	-13	-19.57	Horizontal

Note: P_{Mea}(dBm)= Power(dBm)+ ARpl (dBm)

. Over Limit= : P_{Mea}(dBm)-Limit(dBm)

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.4 LTE BAND 7

QPSK EIRP POWER FOR LTE BAND 7 (5.0MHZ BANDWIDTH)

Test Results for Low Channel 2502.5MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
5005.0	-68.35	5.23	35.81	-37.77	-25	-12.77	Horizontal
5005.0	-63.18	5.23	35.81	-32.60	-25	-7.60	Vertical
7507.5	-65.68	5.67	36.85	-34.50	-25	-9.50	Vertical
7507.5	-64.45	5.67	36.85	-33.27	-25	-8.27	Horizontal
129.4	-55.26	1.69	15.49	-41.46	-25	-16.46	Vertical
124.5	-53.52	1.32	15.50	-39.34	-25	-14.34	Horizontal
Test Results for Mid Channel 2535MHz							
5070.0	-64.40	5.23	35.82	-33.81	-25	-8.81	Horizontal
5070.0	-60.48	5.23	35.82	-29.89	-25	-4.89	Vertical
7605.0	-61.93	5.67	36.85	-30.75	-25	-5.75	Vertical
7605.0	-64.33	5.67	36.85	-33.15	-25	-8.15	Horizontal
264.9	-50.20	1.53	15.58	-36.15	-25	-11.15	Vertical
365.9	-50.15	1.38	16.16	-35.37	-25	-10.37	Horizontal
Test Results for High Channel 2567.5MHz							
5135.0	-66.01	5.24	35.83	-35.42	-25	-10.42	Horizontal
5135.0	-63.01	5.24	35.83	-32.42	-25	-7.42	Vertical
7702.5	-67.11	5.68	36.87	-35.92	-25	-10.92	Vertical
7702.5	-67.54	5.68	36.87	-36.35	-25	-11.35	Horizontal
425.5	-57.43	1.49	15.81	-43.11	-25	-18.11	Vertical
321.2	-58.31	1.71	16.02	-44.00	-25	-19.00	Horizontal

QPSK EIRP POWER FOR LTE BAND 7 (20.0MHZ BANDWIDTH)

Test Results for Low Channel 2510MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
5020.0	-68.28	5.23	35.82	-37.69	-25	-12.69	Horizontal
5020.0	-61.55	5.23	35.82	-30.96	-25	-5.96	Vertical
7530.0	-67.44	5.67	36.86	-36.25	-25	-11.25	Vertical
7530.0	-64.11	5.67	36.86	-32.92	-25	-7.92	Horizontal
404.7	-58.74	1.73	15.61	-44.86	-25	-19.86	Vertical
525.2	-53.20	1.80	17.78	-37.22	-25	-12.22	Horizontal
Test Results for Mid Channel 2535MHz							
5070.0	-63.16	5.23	35.82	-32.57	-25	-7.57	Horizontal
5070.0	-60.05	5.23	35.82	-29.46	-25	-4.46	Vertical
7605.0	-61.31	5.67	36.85	-30.13	-25	-5.13	Vertical
7605.0	-66.37	5.67	36.85	-35.19	-25	-10.19	Horizontal
308.5	-53.54	1.58	16.31	-38.81	-25	-13.81	Vertical
382.8	-58.94	1.40	15.92	-44.42	-25	-19.42	Horizontal
Test Results for High Channel 2560MHz							
5120.0	-66.62	5.24	35.83	-36.03	-25	-11.03	Horizontal
5120.0	-66.74	5.24	35.83	-36.15	-25	-11.15	Vertical
7680.0	-62.21	5.70	36.88	-31.03	-25	-6.03	Vertical
7680.0	-66.20	5.70	36.88	-35.02	-25	-10.02	Horizontal
533.9	-56.75	1.66	16.52	-41.89	-25	-16.89	Vertical
372.9	-52.87	1.69	17.59	-36.97	-25	-11.97	Horizontal

Note: P_{Mea}(dBm)= Power(dBm)+ ARpl (dBm)

. Over Limit= : P_{Mea}(dBm)-Limit(dBm)

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

10. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235, §27.54

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

TEST PROCEDURE

Use CMW 500 with Frequency Error measurement capability.

- Temp. = -30° to $+50^{\circ}\text{C}$
- Voltage = low voltage, DC 3.4V, Normal, DC 3.8V and High voltage, DC 4.2V.

Frequency Stability vs Temperature:

The EUT is placed inside a temperature chamber. The temperature is set to -30°C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until $+50^{\circ}\text{C}$ is reached.

Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case).

MODES TESTED

- LTE Band 2
LTE Band 4
- LTE Band 5
LTE Band 7

RESULTS

See the following pages.

10.1 LTE BAND 2

QPSK, (20MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 2 QPSK, (CH 18900 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
3.4	1880	7.29	0.003878	2.5
3.8	1880	-5.33	-0.002835	2.5
4.2	1880	13.16	0.007000	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 2 QPSK, (CH 18900 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
Normal (25C)	1880	-7.62	-0.004053	2.5
Extreme (50C)	1880	5.45	0.002899	2.5
Extreme (40C)	1880	-19.05	-0.010133	2.5
Extreme (30C)	1880	-0.23	-0.000122	2.5
Extreme (10C)	1880	4.59	0.002441	2.5
Extreme (0C)	1880	-3.47	-0.001846	2.5
Extreme (-10C)	1880	-14.84	-0.007894	2.5
Extreme (-20C)	1880	-19.87	-0.010569	2.5
Extreme (-30C)	1880	2.32	0.001234	2.5

16QAM, (20MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 2 16QAM, (CH 18900 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
3.4	1880	-4.73	-0.002516	2.5
3.8	1880	-10.11	-0.005378	2.5
4.2	1880	-7.15	-0.003803	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 2 16QAM, (CH 18900 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
Normal (25C)	1880	2.70	0.001436	2.5
Extreme (50C)	1880	16.63	0.008846	2.5
Extreme (40C)	1880	7.44	0.003957	2.5
Extreme (30C)	1880	1.93	0.001027	2.5
Extreme (10C)	1880	11.60	0.006170	2.5
Extreme (0C)	1880	-2.34	-0.001245	2.5
Extreme (-10C)	1880	-1.47	-0.000782	2.5
Extreme (-20C)	1880	19.57	0.010410	2.5
Extreme (-30C)	1880	-12.98	-0.006904	2.5

*Note: Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.2 LTE BAND 4

QPSK, (10MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 4 QPSK, (CH 20175 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
3.4	1732.5	-14.58	-0.008416	2.5
3.8	1732.5	-19.58	-0.011302	2.5
4.2	1732.5	-14.15	-0.008167	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 4 QPSK, (CH 20175 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
Normal (25C)	1732.5	13.38	0.007723	2.5
Extreme (50C)	1732.5	-17.08	-0.009859	2.5
Extreme (40C)	1732.5	13.83	0.007983	2.5
Extreme (30C)	1732.5	-16.20	-0.009351	2.5
Extreme (10C)	1732.5	-19.21	-0.011088	2.5
Extreme (0C)	1732.5	-12.48	-0.007203	2.5
Extreme (-10C)	1732.5	-12.26	-0.007076	2.5
Extreme (-20C)	1732.5	0.76	0.000439	2.5
Extreme (-30C)	1732.5	9.23	0.005328	2.5

16QAM, (20MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 4 16QAM, (CH 20175 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
3.4	1732.5	-5.03	-0.002903	2.5
3.8	1732.5	10.29	0.005939	2.5
4.2	1732.5	-18.91	-0.010915	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 4 16QAM, (CH 20175 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
Normal (25C)	1732.5	5.28	0.003048	2.5
Extreme (50C)	1732.5	-5.61	-0.003238	2.5
Extreme (40C)	1732.5	-3.43	-0.001980	2.5
Extreme (30C)	1732.5	16.61	0.009587	2.5
Extreme (10C)	1732.5	4.95	0.002857	2.5
Extreme (0C)	1732.5	-8.05	-0.004646	2.5
Extreme (-10C)	1732.5	13.13	0.007579	2.5
Extreme (-20C)	1732.5	4.47	0.002580	2.5
Extreme (-30C)	1732.5	15.31	0.008837	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.3 LTE BAND 5

QPSK, (10MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 5 QPSK, (CH 20525 RB size 50 RB Offset 0 10MHz BANDWIDTH)				
3.4	836.5	5.99	0.007161	2.5
3.8	836.5	-5.63	-0.006730	2.5
4.2	836.5	9.81	0.011727	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 5 QPSK, (CH 20525 RB size 50 RB Offset 0 10MHz BANDWIDTH)				
Normal (25C)	836.5	11.61	0.013879	2.5
Extreme (50C)	836.5	-3.90	-0.004662	2.5
Extreme (40C)	836.5	-3.19	-0.003814	2.5
Extreme (30C)	836.5	14.77	0.017657	2.5
Extreme (10C)	836.5	13.98	0.016712	2.5
Extreme (0C)	836.5	3.55	0.004244	2.5
Extreme (-10C)	836.5	-3.05	-0.003646	2.5
Extreme (-20C)	836.5	-3.31	-0.003957	2.5
Extreme (-30C)	836.5	19.96	0.023861	2.5

16QAM, (10MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 5 16QAM, (CH 20525 RB size 50 RB Offset 0 10MHz BANDWIDTH)				
3.4	836.5	-13.67	-0.016342	2.5
3.8	836.5	-18.55	-0.022176	2.5
4.2	836.5	10.04	0.012002	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 5 16QAM, (CH 20525 RB size 50 RB Offset 0 10MHz BANDWIDTH)				
Normal (25C)	836.5	-8.51	-0.010173	2.5
Extreme (50C)	836.5	6.71	0.008022	2.5
Extreme (40C)	836.5	-15.78	-0.018864	2.5
Extreme (30C)	836.5	8.63	0.010317	2.5
Extreme (10C)	836.5	16.24	0.019414	2.5
Extreme (0C)	836.5	-17.04	-0.020371	2.5
Extreme (-10C)	836.5	-6.05	-0.007233	2.5
Extreme (-20C)	836.5	0.43	0.000514	2.5
Extreme (-30C)	836.5	-13.40	-0.016019	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.4 LTE BAND 7

QPSK, (20MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 7 QPSK, (CH 21100 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
3.4	2535	18.81	0.007420	2.5
3.8	2535	13.02	0.005136	2.5
4.2	2535	16.55	0.006529	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 7 QPSK, (CH 21100 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
Normal (25C)	2535	-14.80	-0.005838	2.5
Extreme (50C)	2535	8.64	0.003408	2.5
Extreme (40C)	2535	-12.39	-0.004888	2.5
Extreme (30C)	2535	9.59	0.003783	2.5
Extreme (10C)	2535	-0.29	-0.000114	2.5
Extreme (0C)	2535	3.35	0.001321	2.5
Extreme (-10C)	2535	14.97	0.005905	2.5
Extreme (-20C)	2535	-6.70	-0.002643	2.5
Extreme (-30C)	2535	18.27	0.007207	2.5

16QAM, (20MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 7 16QAM, (CH 21100 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
3.4	2535	4.81	0.001897	2.5
3.8	2535	-10.36	-0.004087	2.5
4.2	2535	13.70	0.005404	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 7 16QAM, (CH 21100 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
Normal (25C)	2535	2.98	0.001176	2.5
Extreme (50C)	2535	-0.28	-0.000110	2.5
Extreme (40C)	2535	14.29	0.005637	2.5
Extreme (30C)	2535	17.56	0.006927	2.5
Extreme (10C)	2535	-18.39	-0.007254	2.5
Extreme (0C)	2535	11.46	0.004521	2.5
Extreme (-10C)	2535	-14.20	-0.005602	2.5
Extreme (-20C)	2535	4.36	0.001720	2.5
Extreme (-30C)	2535	15.95	0.006292	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

11. Peak-to-Average Ratio

11.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


11.2 Measuring Instruments

See list of measuring instruments of this test report.

11.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. For GSM/EGPRS operating modes:
 - a. Set the RBW = 1MHz, VBW = 1MHz, Peak detector in spectrum analyzer.
 - b. Set EUT in maximum power output, and triggered the burst signal.
 - c. Measured respectively the Peak level and Mean level, and the deviation was recorded as Peak to Average Ratio.
4. For UMTS operating modes:
 - a. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
 - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.

11.4 Test Setup

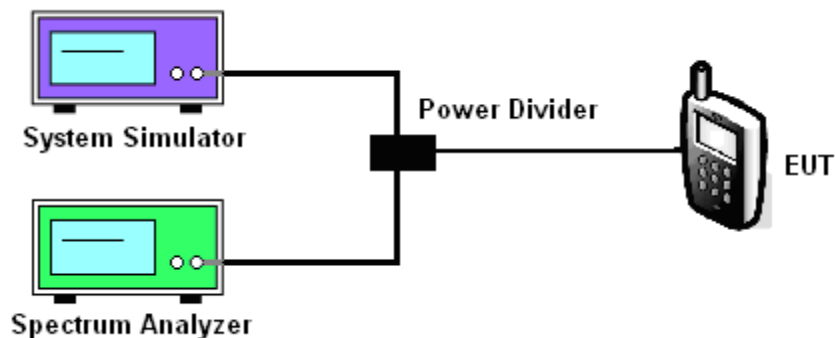

MODES TESTED

- LTE Band 2/4/5/7
-

Test data reference attachment.

----END OF REPORT----