



802.11ax-HE40 Power Spectral Density - Ant 1


Channel 38 (5190MHz)

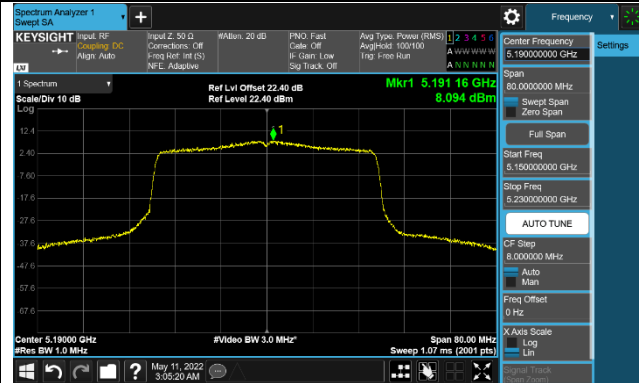


Channel 46 (5230MHz)

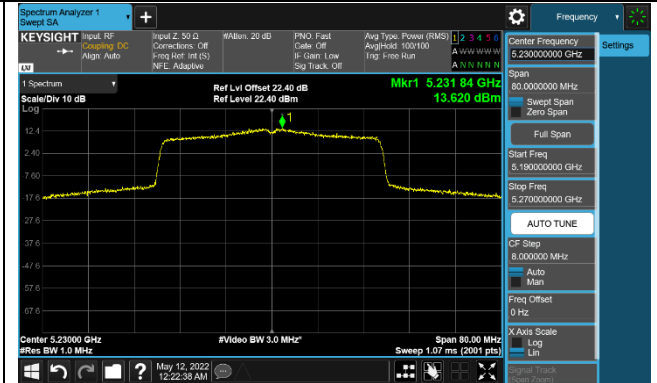

Channel 54 (5270MHz)

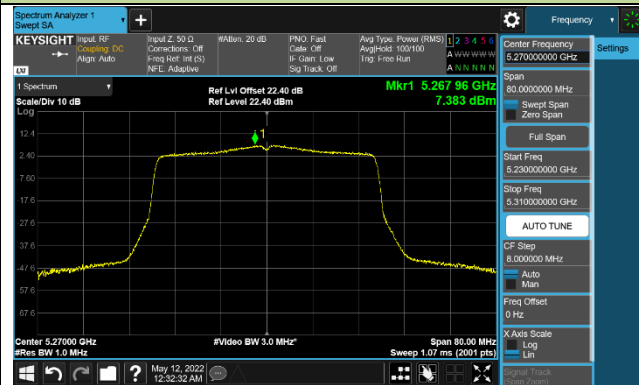


Channel 62 (5310MHz)

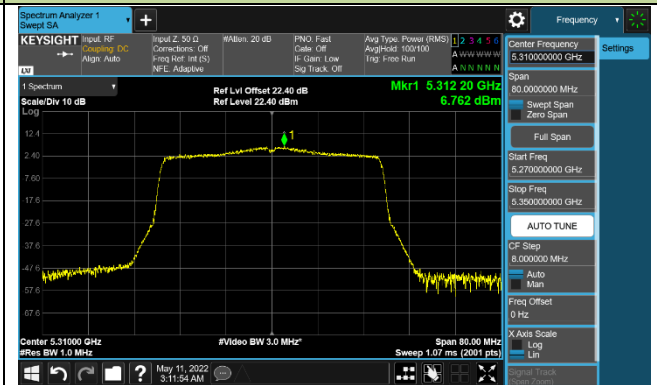


Channel 102 (5510MHz)




Channel 110 (5550MHz)

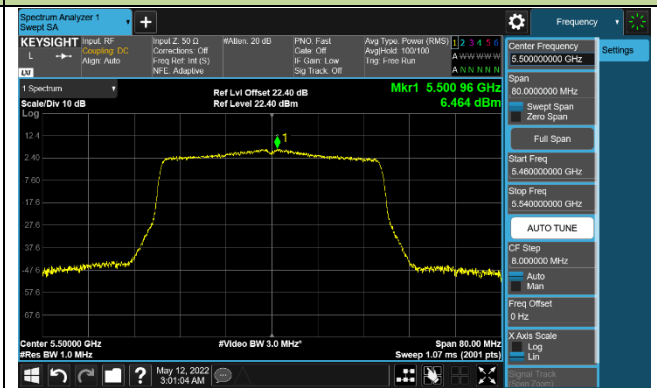


Channel 134 (5670MHz)

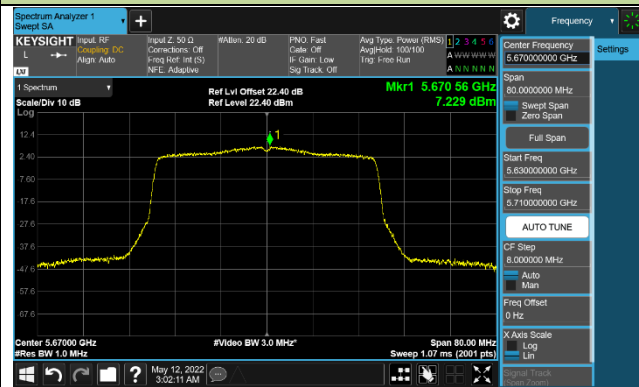


Channel 142 (5710MHz)

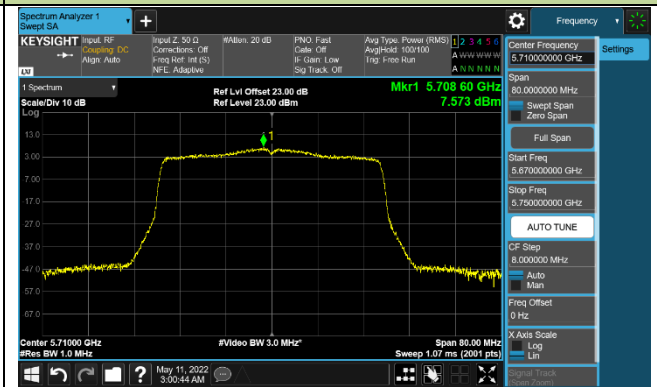

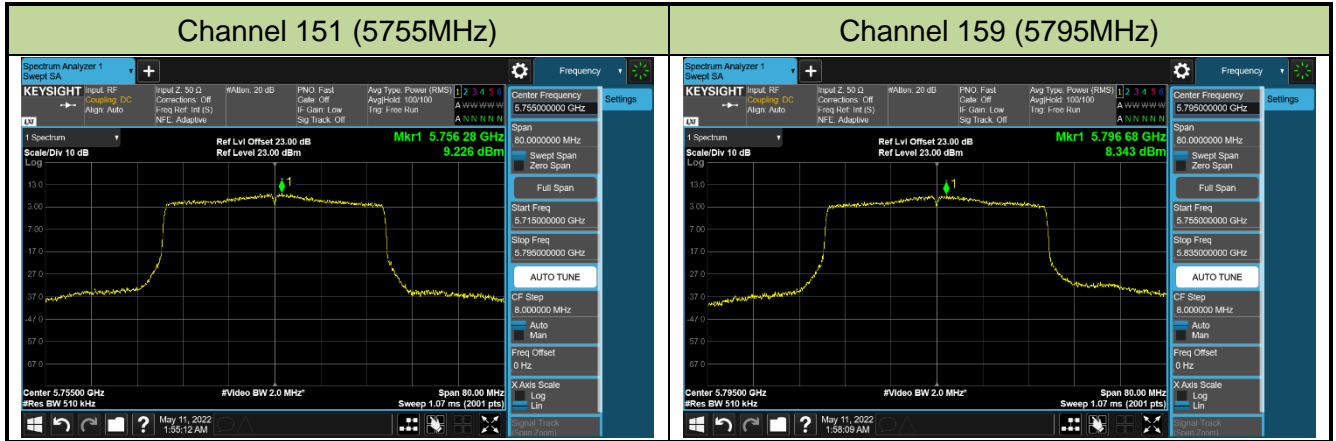


802.11ax-HE80 Power Spectral Density - Ant 1


Channel 42 (5210MHz)

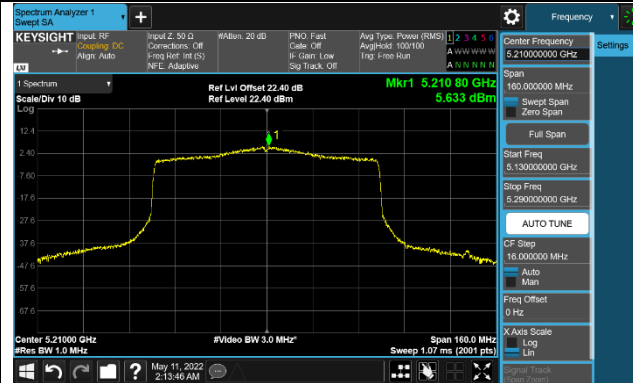

Channel 58 (5290MHz)

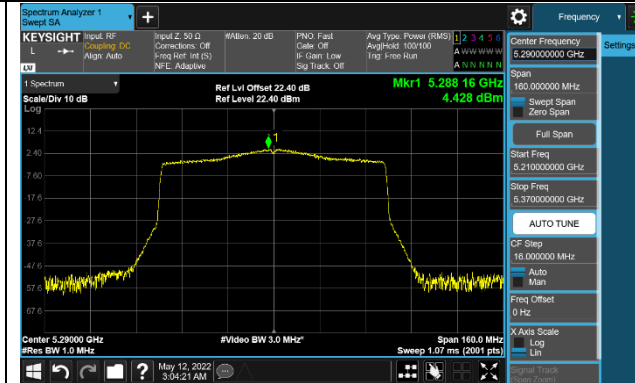


Channel 106 (5530MHz)

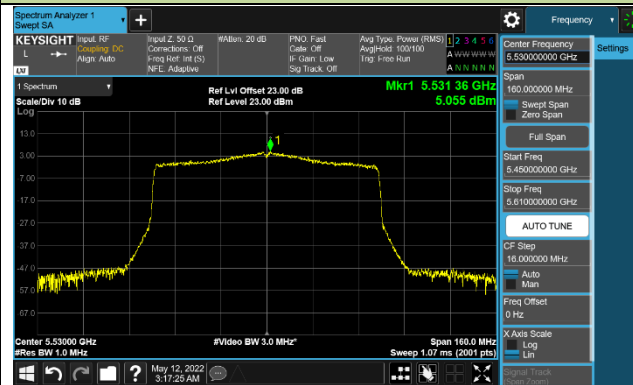

Channel 122 (5610MHz)



Channel 138 (5690MHz)

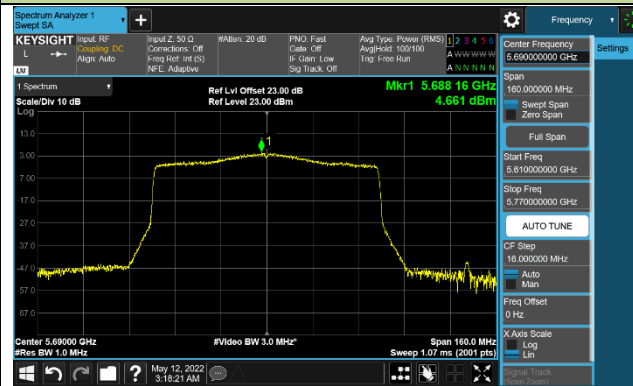

Channel 155 (5775MHz)



802.11ax-HE160 Power Spectral Density - Ant 1

Channel 50 (5250MHz)



Channel 114 (5570MHz)



7.7. Frequency Stability Measurement

7.7.1. Test Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5GHz band (IEEE 802.11 specification).

7.7.2. Test Limit

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

7.7.3. Test Setup

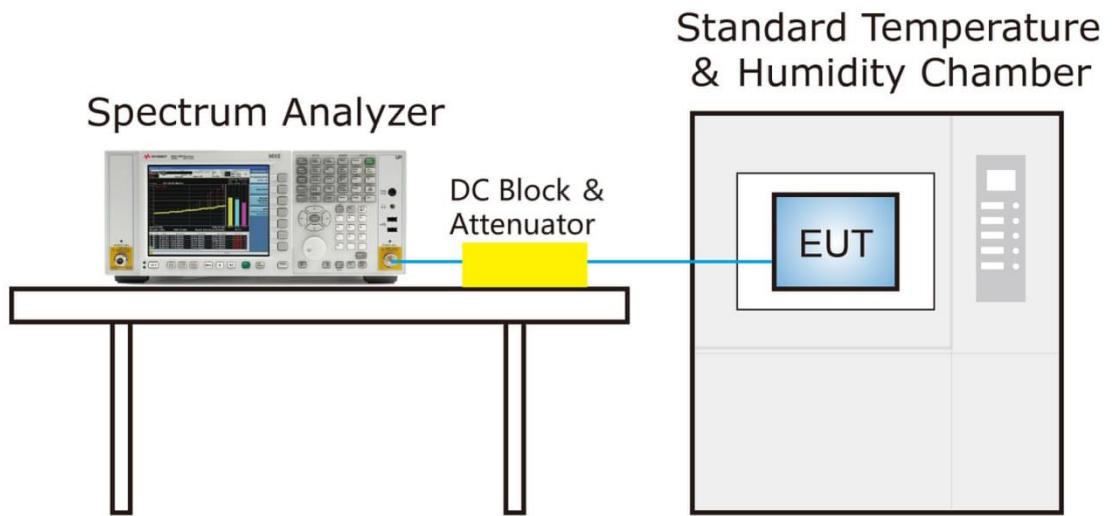

7.7.4. Test Result

Product	AX3000 Gigabit Wi-Fi 6 Router	Test Engineer	Owen
Test Site	SR3	Test Time	2022/5/12
Test Mode	5180MHz (Carrier Mode)		

Voltage (%)	Power (AC)	Temp (°C)	Frequency Tolerance (ppm)
100%	120V/60Hz	- 30	-0.68
		- 20	1.93
		- 10	2.43
		0	1.22
		+ 10	-1.95
		+ 20	-4.88
		+ 30	-7.16
		+ 40	-11.31
		+ 50	-12.95
115%	138V/60Hz	+ 20	-4.98
85%	102V/60Hz	+ 20	-5.04

Note: Frequency Tolerance (ppm) = $\frac{[\text{Measured Frequency (Hz)} - \text{Declared Frequency (Hz)}]}{\text{Declared Frequency (Hz)}} * 10^6$.

7.8. Radiated Spurious Emission Measurement

7.8.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.8.2. Test Procedure Used

KDB 789033 D02v02r01 - Section II) G

7.8.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
>1000 MHz	1 MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.8.4. Test Setup

Below 1GHz Test Setup:

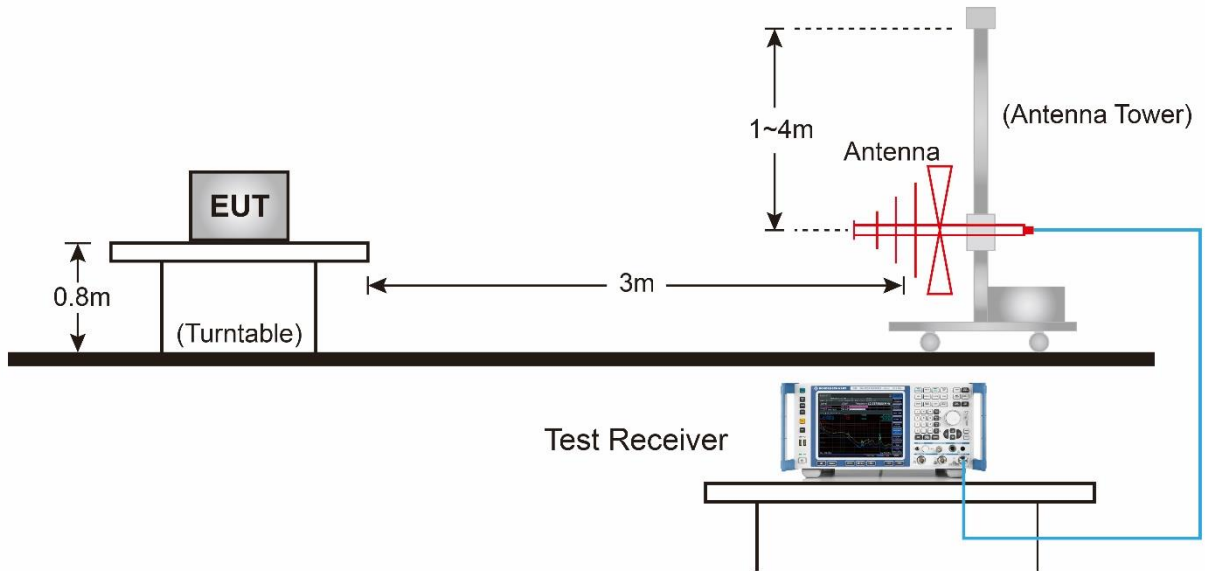


Above 1GHz Test Setup:

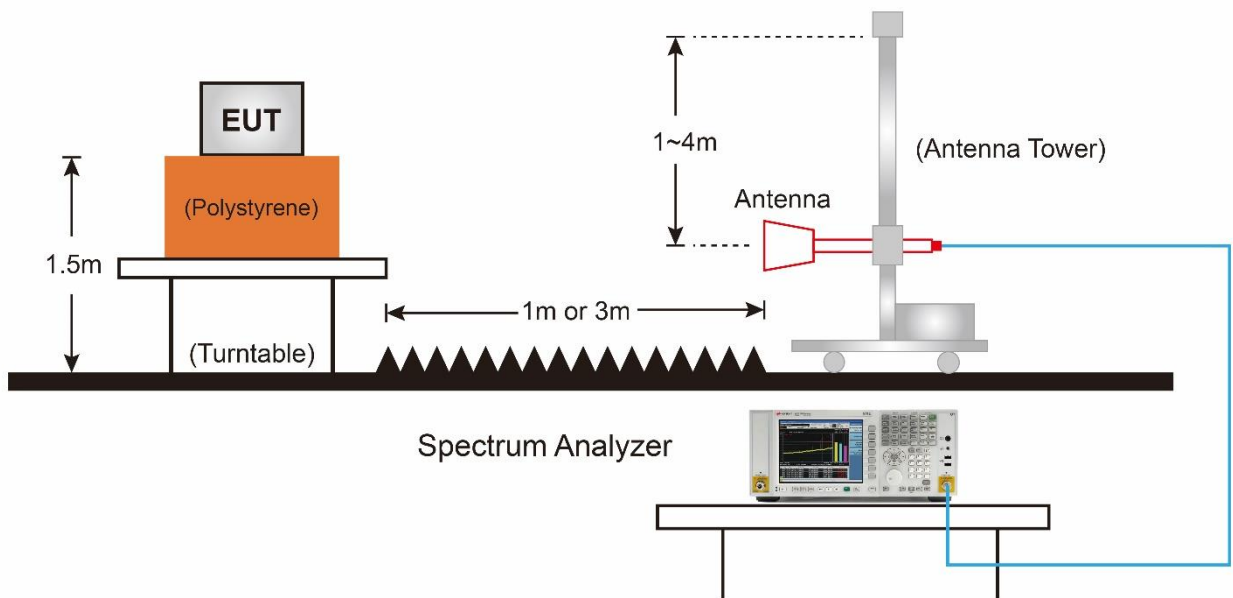

7.8.5. Test Result

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	VULB 9162	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 120V/60Hz

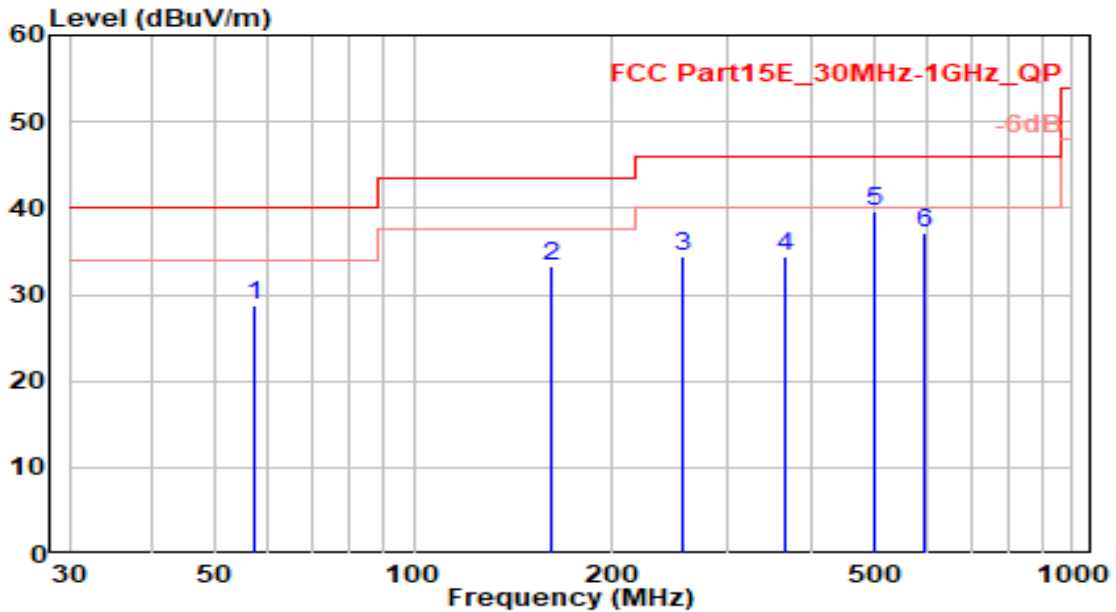


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	57.190	8.30	20.49	28.79	-11.21	40.00	150	30	QP
2	162.120	16.90	16.37	33.27	-10.23	43.50	150	100	QP
3	255.310	13.53	20.79	34.33	-11.67	46.00	100	280	QP
4	364.920	11.05	23.28	34.32	-11.68	46.00	110	360	QP
5 *	502.420	13.93	25.75	39.68	-6.32	46.00	150	50	QP
6	594.570	9.67	27.56	37.23	-8.77	46.00	140	350	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	VULB 9162	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 120V/60Hz

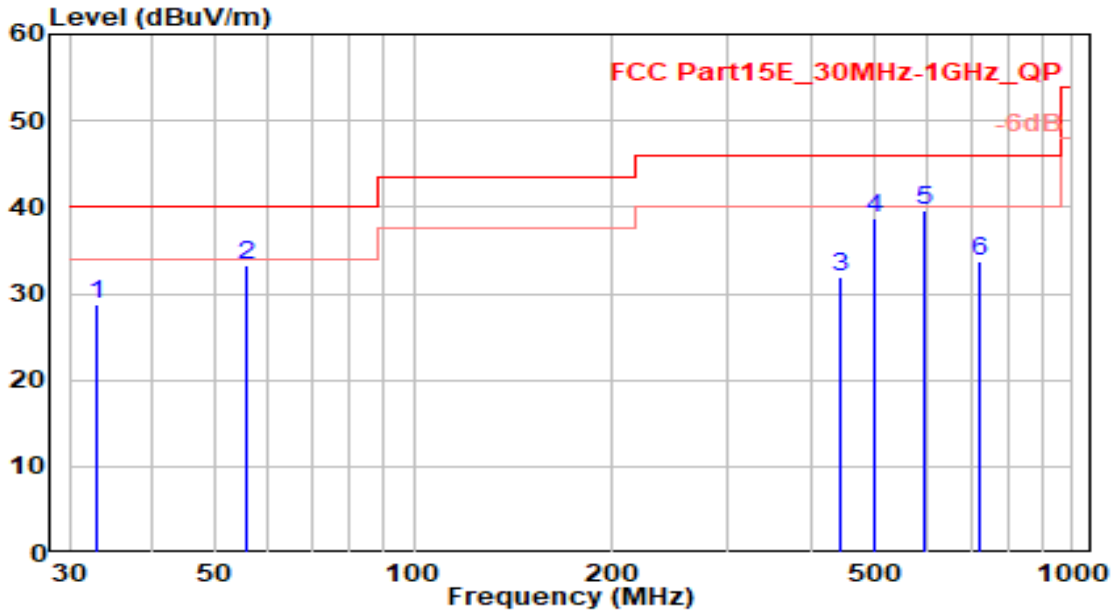


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	32.990	10.82	17.98	28.80	-11.20	40.00	100	170	QP
2	55.550	12.45	20.74	33.19	-6.81	40.00	100	100	QP
3	445.130	7.64	24.39	32.04	-13.96	46.00	200	0	QP
4	500.110	12.92	25.72	38.64	-7.36	46.00	120	360	QP
5 *	596.510	11.92	27.61	39.53	-6.47	46.00	150	320	QP
6	721.440	4.61	29.21	33.83	-12.17	46.00	100	110	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

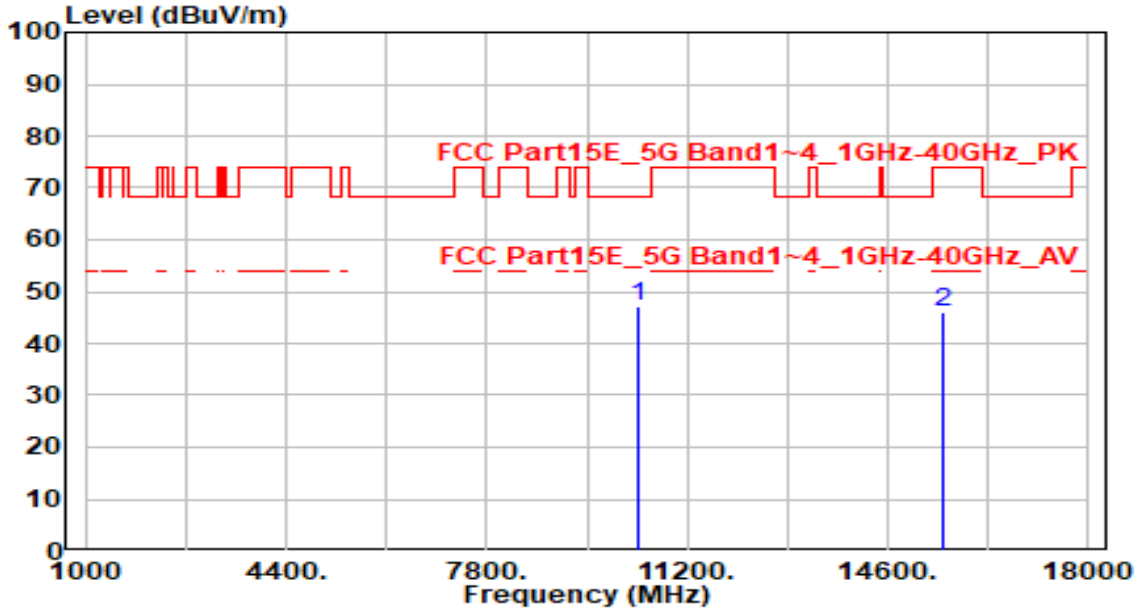


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10360.000	42.73	4.29	47.02	-21.18	68.20	300	10	Peak
2	15540.000	39.04	6.82	45.86	-28.14	74.00	100	260	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

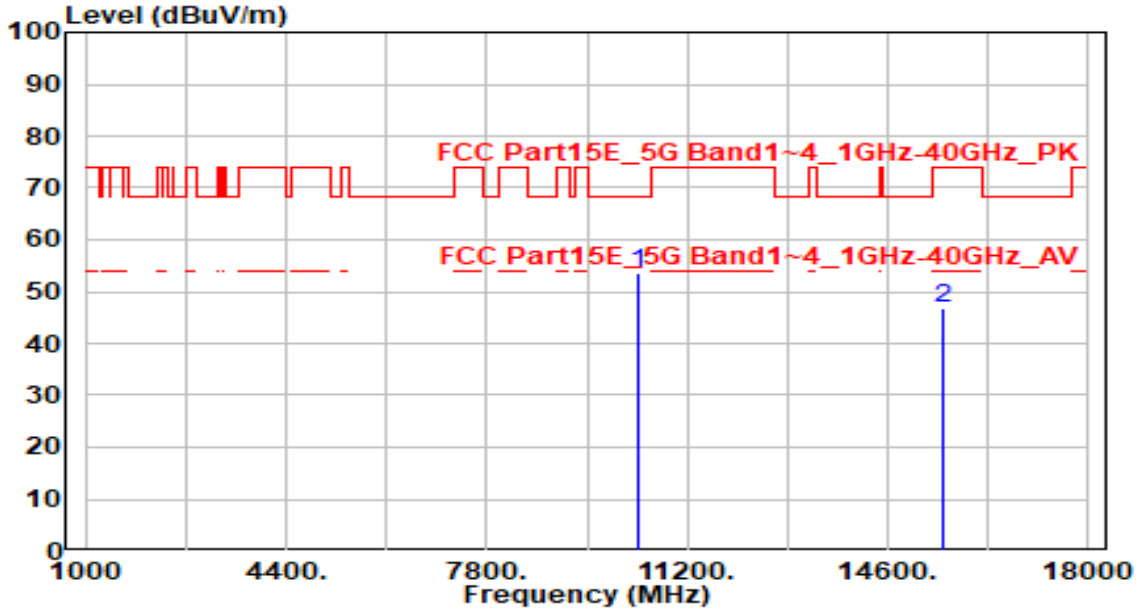


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10360.000	49.17	4.29	53.46	-14.74	68.20	300	225	Peak
2	15540.000	39.84	6.82	46.66	-27.34	74.00	300	100	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 120V/60Hz

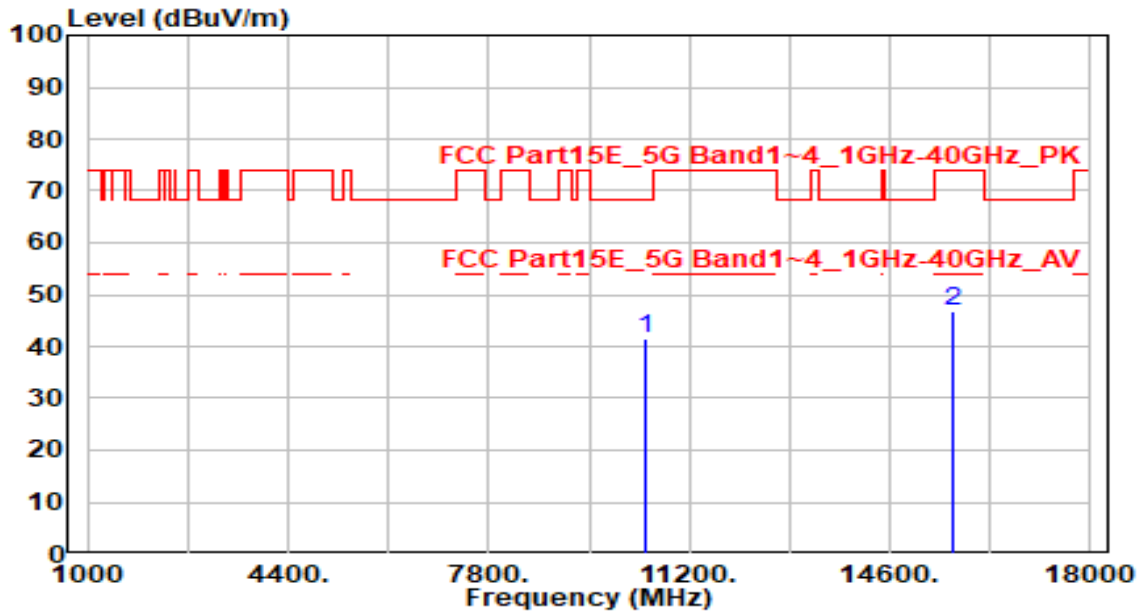


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10440.000	37.31	4.38	41.68	-26.52	68.20	300	0	Peak
2	15660.000	40.01	6.86	46.88	-27.12	74.00	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 120V/60Hz

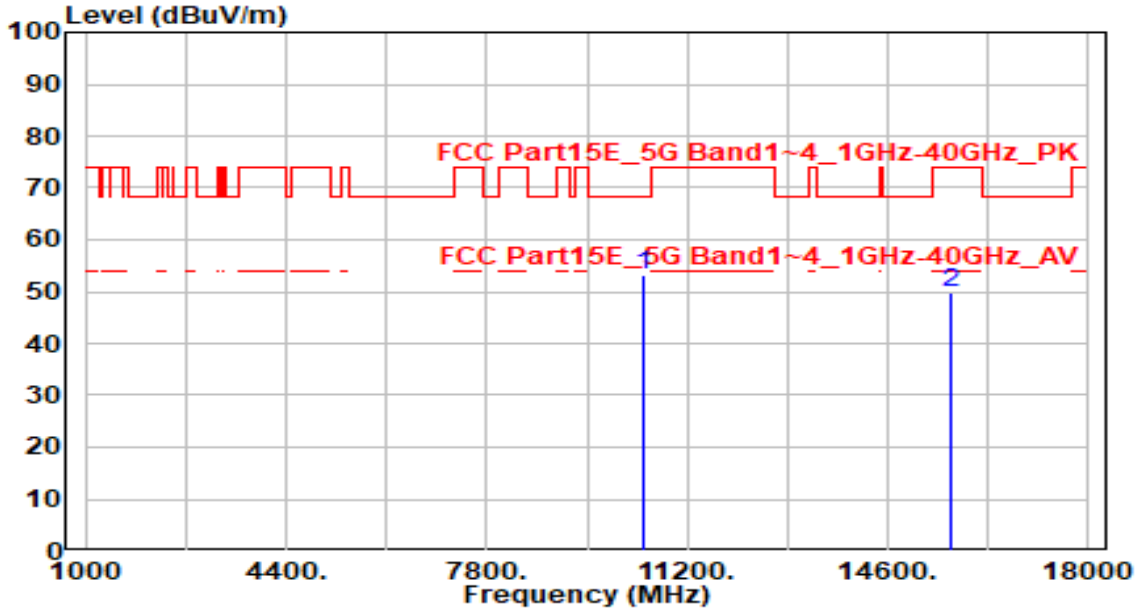


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10440.000	48.96	4.38	53.34	-14.86	68.20	300	230	Peak
2	15660.000	42.95	6.86	49.81	-24.19	74.00	300	240	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band1_CH 48_ANT 0+1	Test Voltage	AC 120V/60Hz

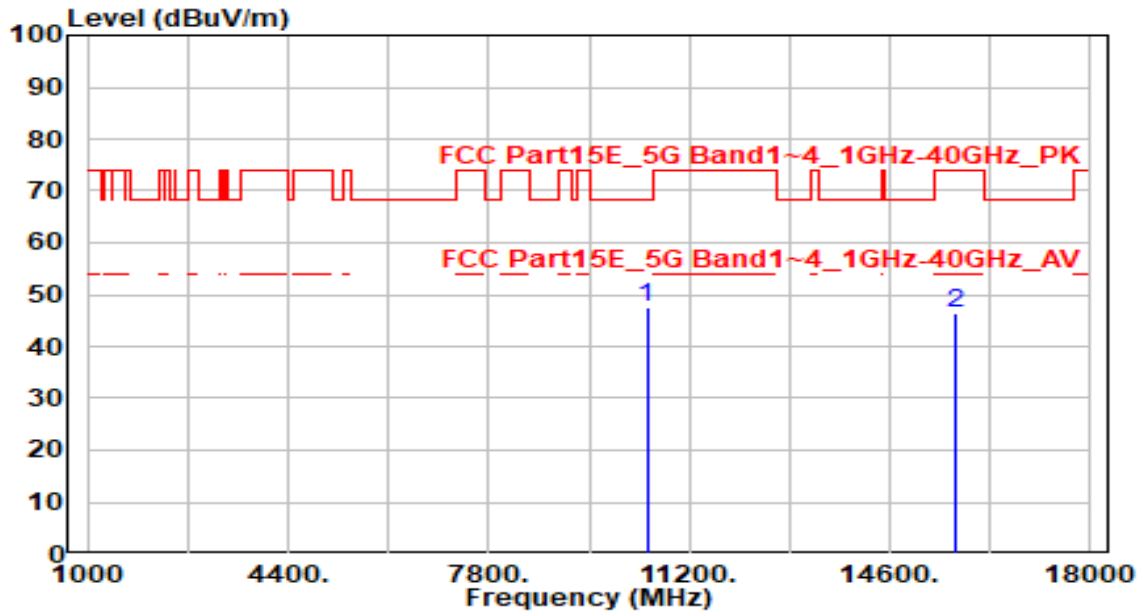


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10480.000	43.27	4.43	47.70	-20.50	68.20	300	135	Peak
2	15720.000	39.65	6.90	46.55	-27.45	74.00	300	70	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band1_CH 48_ANT 0+1	Test Voltage	AC 120V/60Hz

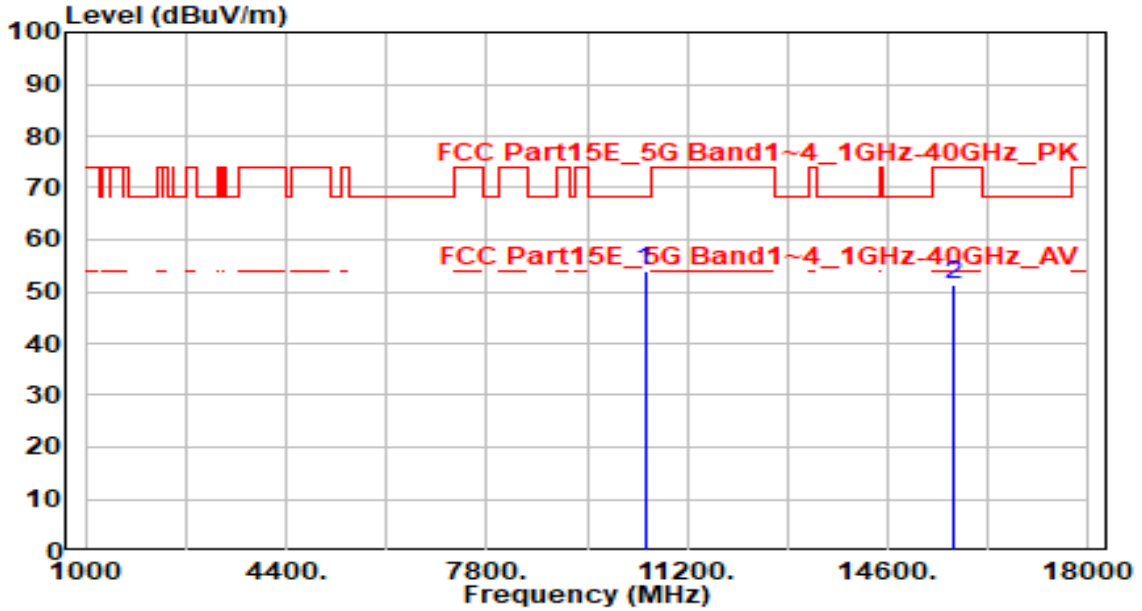


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10480.000	49.69	4.43	54.12	-14.08	68.20	300	0	Peak
2	15720.000	44.52	6.90	51.42	-22.58	74.00	300	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band2_CH 52_ANT 0+1	Test Voltage	AC 120V/60Hz

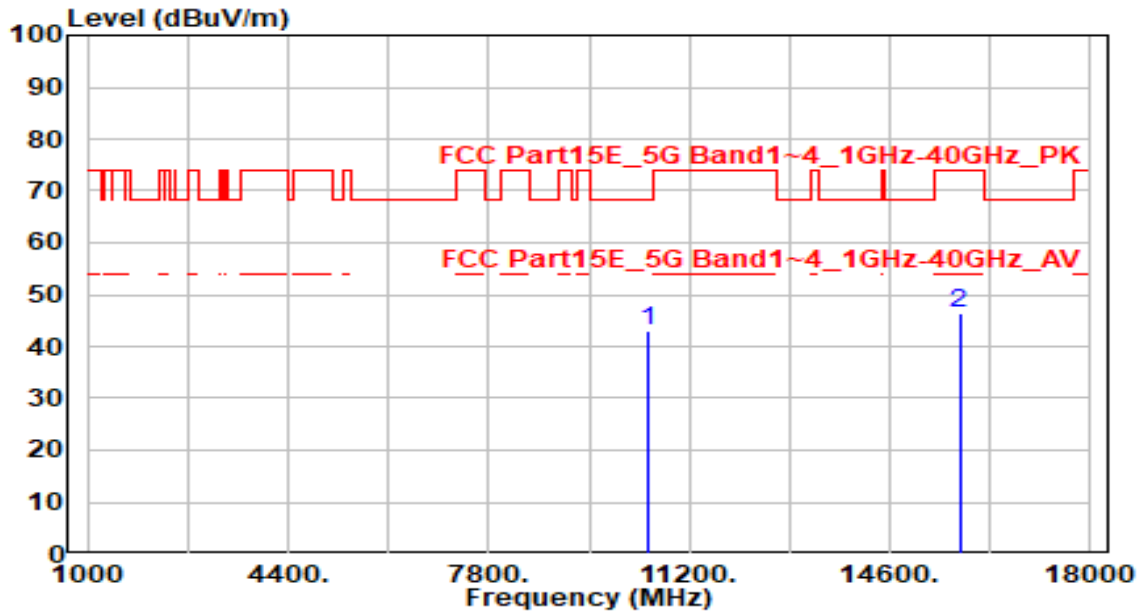


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10520.000	38.59	4.45	43.04	-25.16	68.20	300	360	Peak
2	15780.000	39.39	6.95	46.34	-27.66	74.00	300	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band2_CH 52_ANT 0+1	Test Voltage	AC 120V/60Hz

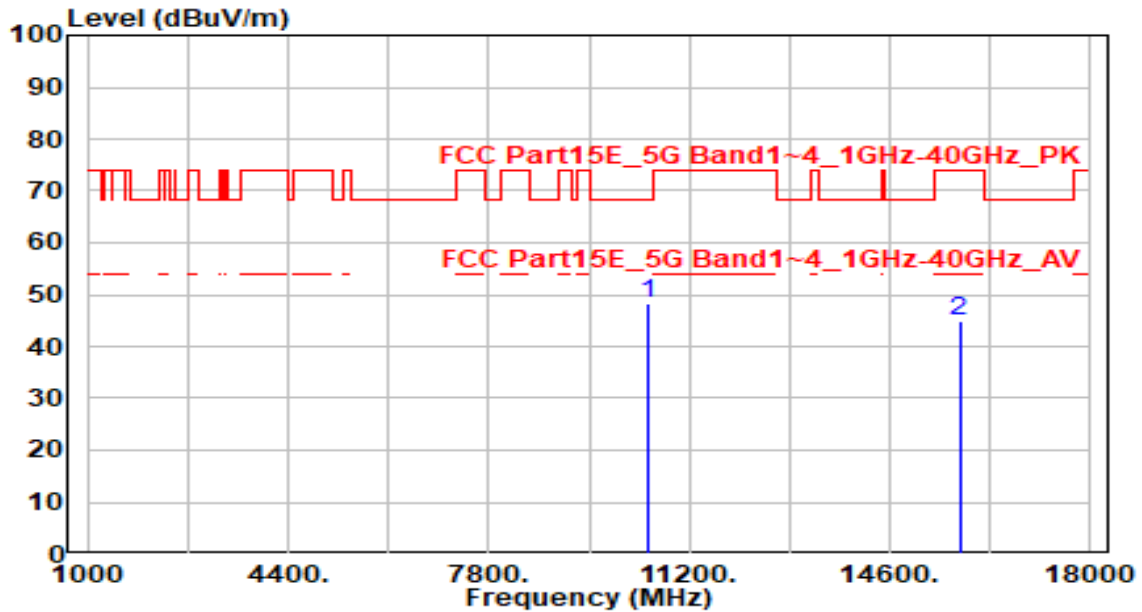


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10520.000	43.69	4.45	48.13	-20.07	68.20	300	0	Peak
2	15780.000	37.94	6.95	44.89	-29.11	74.00	300	140	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band2_CH 60_ANT 0+1	Test Voltage	AC 120V/60Hz

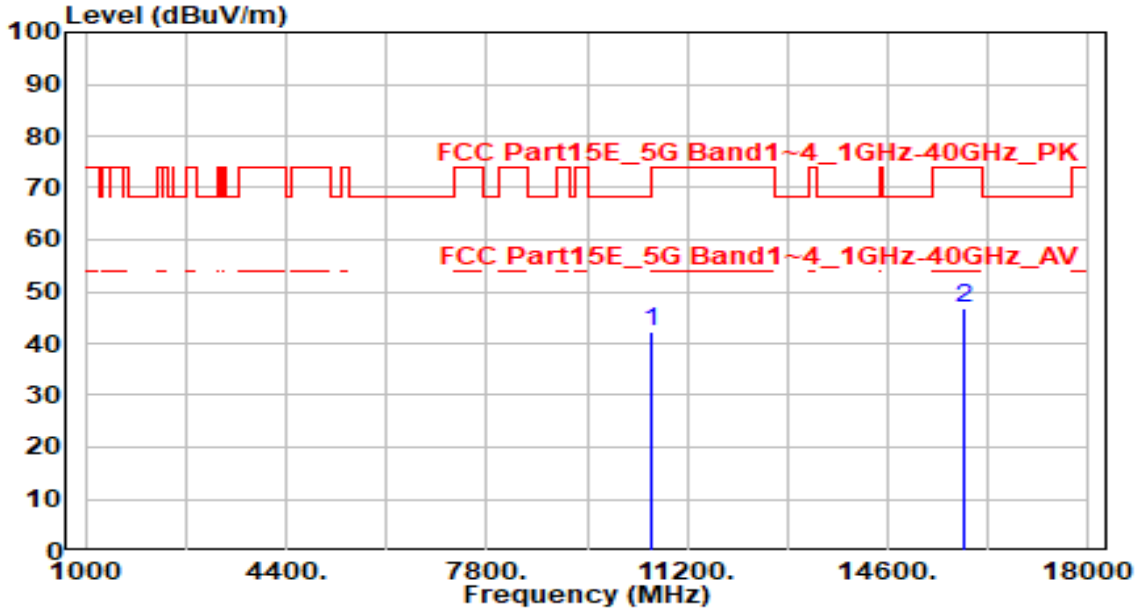


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10600.000	37.73	4.41	42.14	-26.06	68.20	300	150	Peak
2	15900.000	39.53	7.09	46.61	-27.39	74.00	300	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band2_CH 60_ANT 0+1	Test Voltage	AC 120V/60Hz

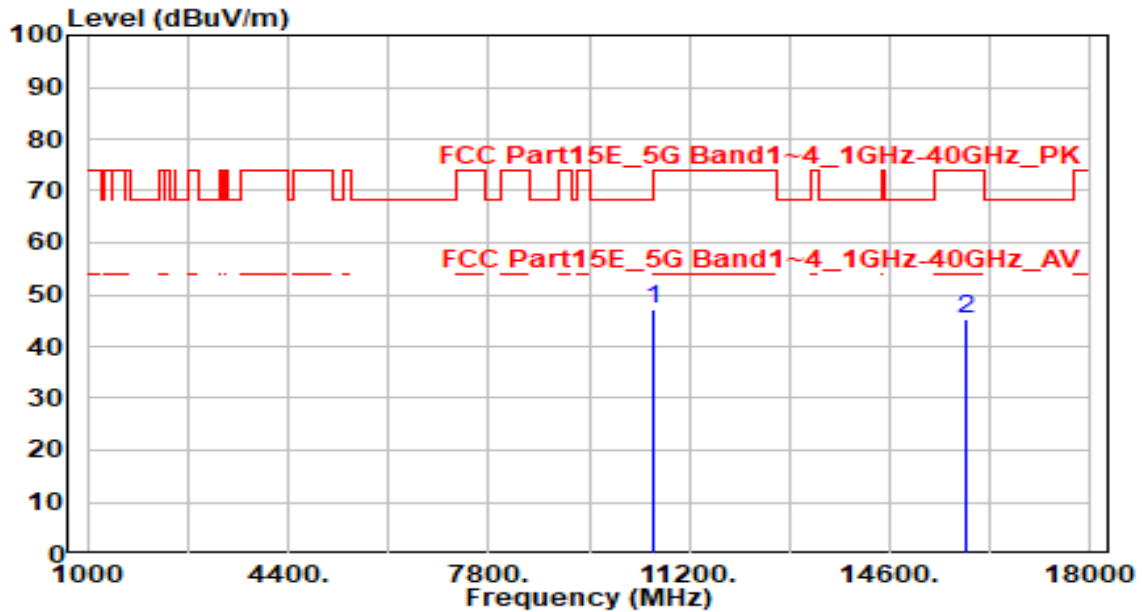


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10600.000	42.81	4.41	47.23	-20.97	68.20	300	5	Peak
2	15900.000	38.18	7.09	45.26	-28.74	74.00	300	320	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

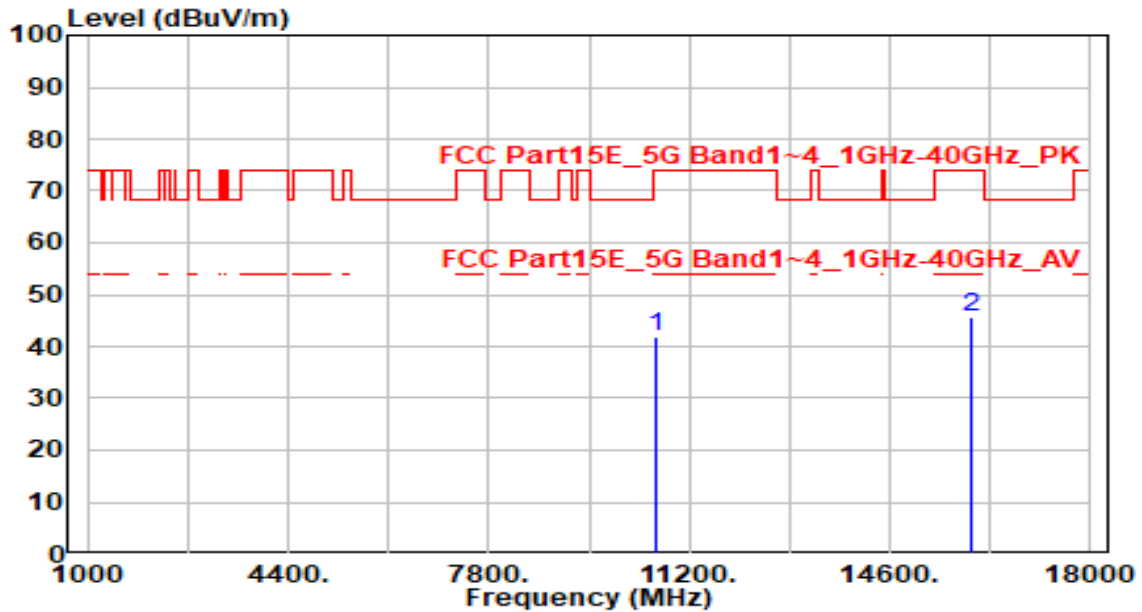


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	37.68	4.37	42.06	-31.94	74.00	300	75	Peak
2	* 15960.000	38.48	7.16	45.64	-28.36	74.00	300	55	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

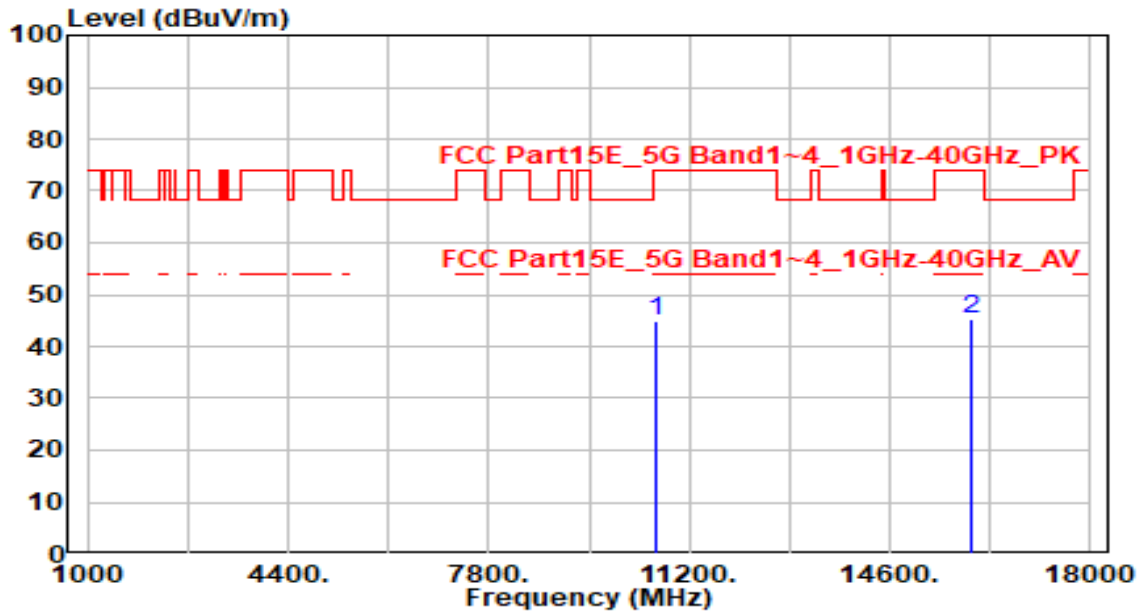


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	40.53	4.37	44.90	-29.10	74.00	300	0	Peak
2	* 15960.000	38.23	7.16	45.39	-28.61	74.00	300	230	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

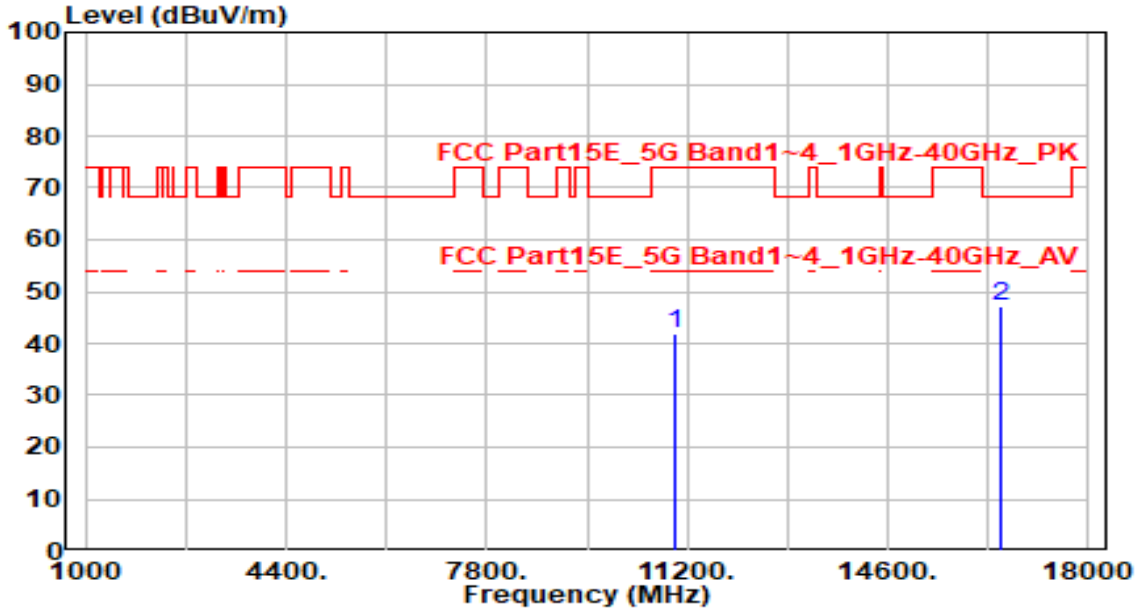


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	37.84	4.20	42.04	-31.96	74.00	300	215	Peak
2	* 16500.000	39.96	7.03	46.99	-21.21	68.20	300	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

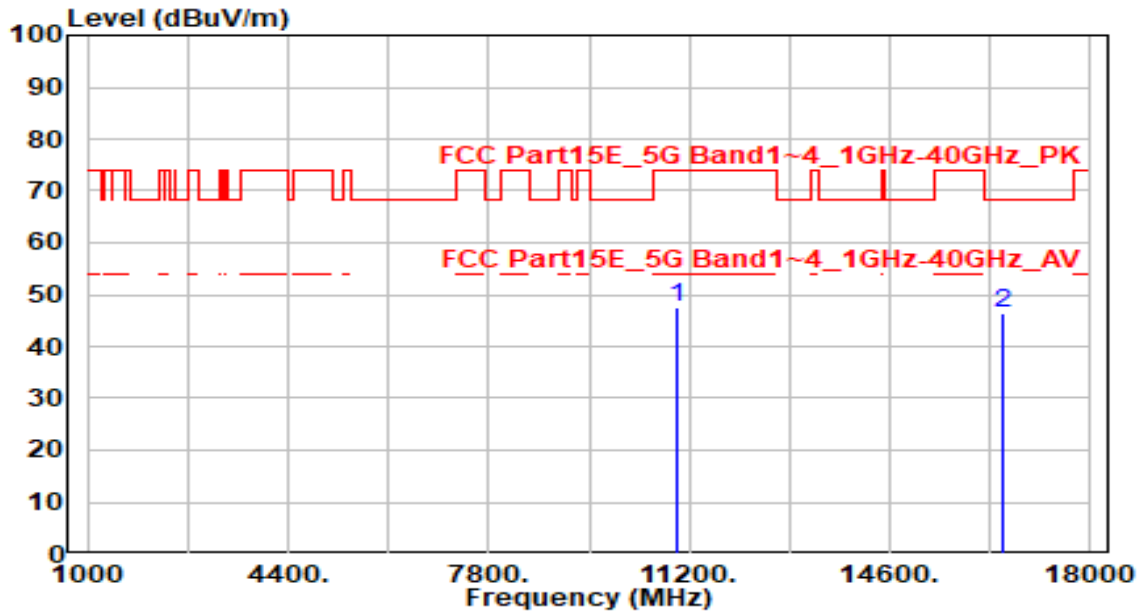


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	43.24	4.20	47.44	-26.56	74.00	300	10	Peak
2	* 16500.000	39.38	7.03	46.40	-21.80	68.20	300	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band3_CH 116_ANT 0+1	Test Voltage	AC 120V/60Hz

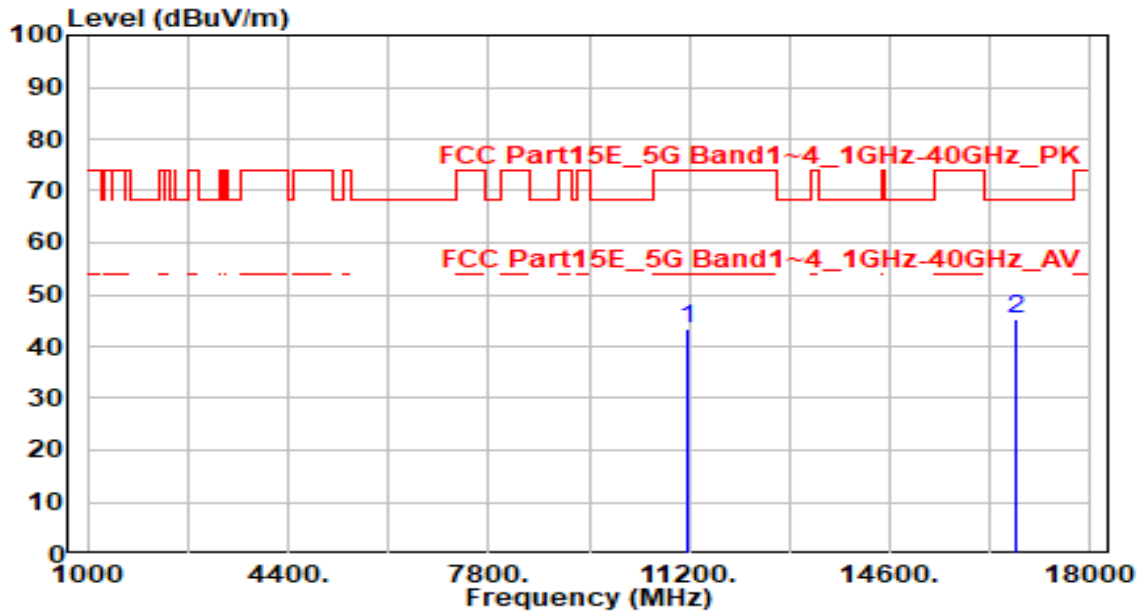


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	38.79	4.52	43.30	-30.70	74.00	300	130	Peak
2	* 16740.000	38.28	6.96	45.24	-22.96	68.20	300	135	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band3_CH 116_ANT 0+1	Test Voltage	AC 120V/60Hz

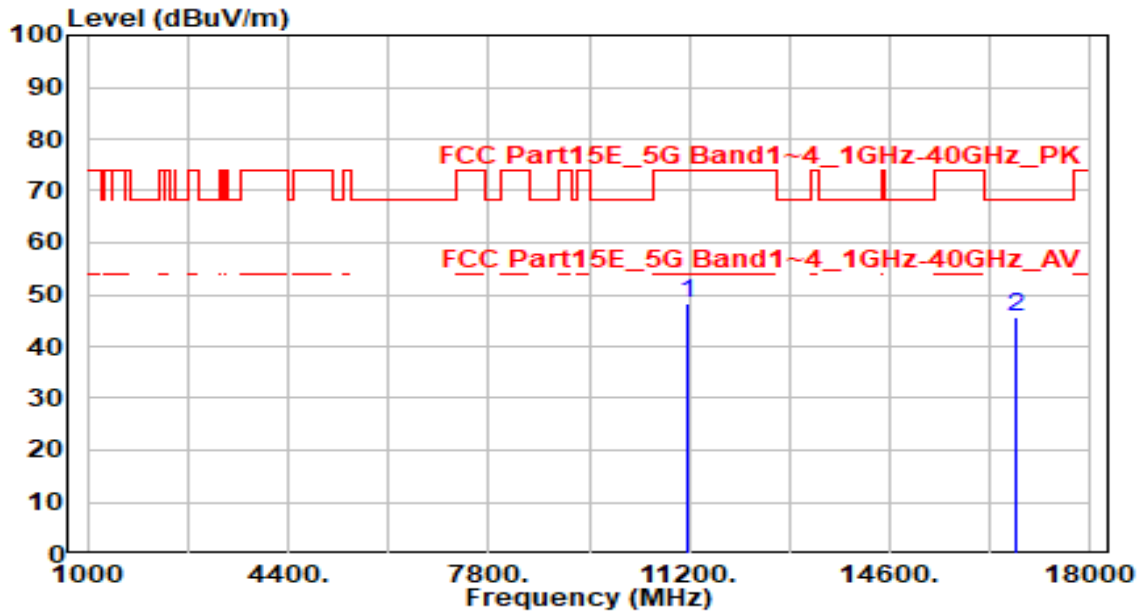


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	43.80	4.52	48.31	-25.69	74.00	300	270	Peak
2	* 16740.000	38.71	6.96	45.67	-22.53	68.20	300	105	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

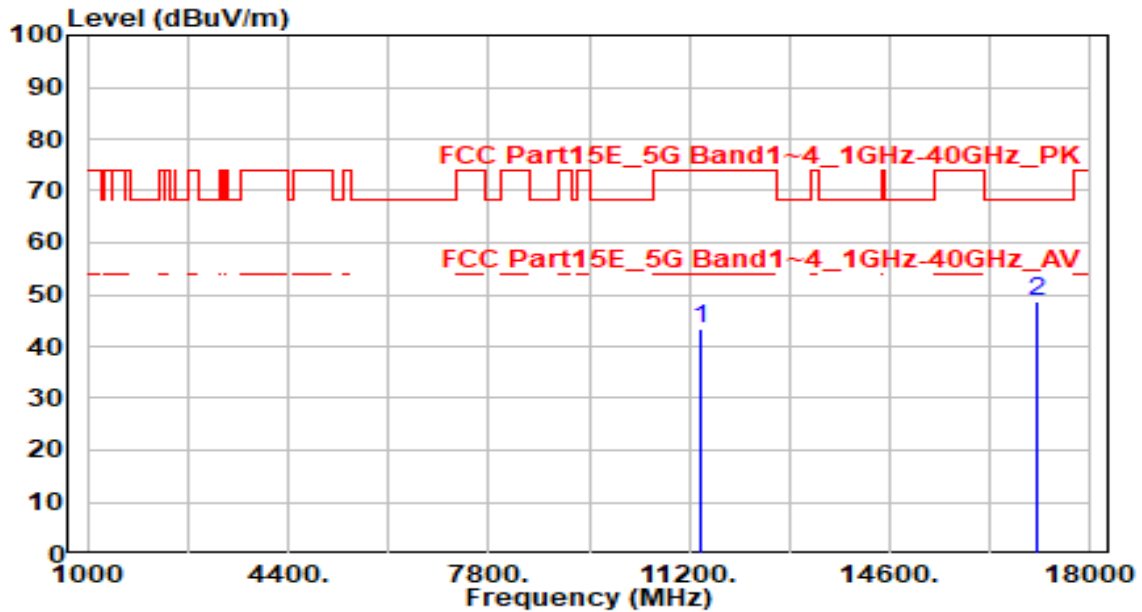


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	38.77	4.79	43.56	-30.44	74.00	300	140	Peak
2	* 17100.000	41.56	6.97	48.53	-19.67	68.20	300	65	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

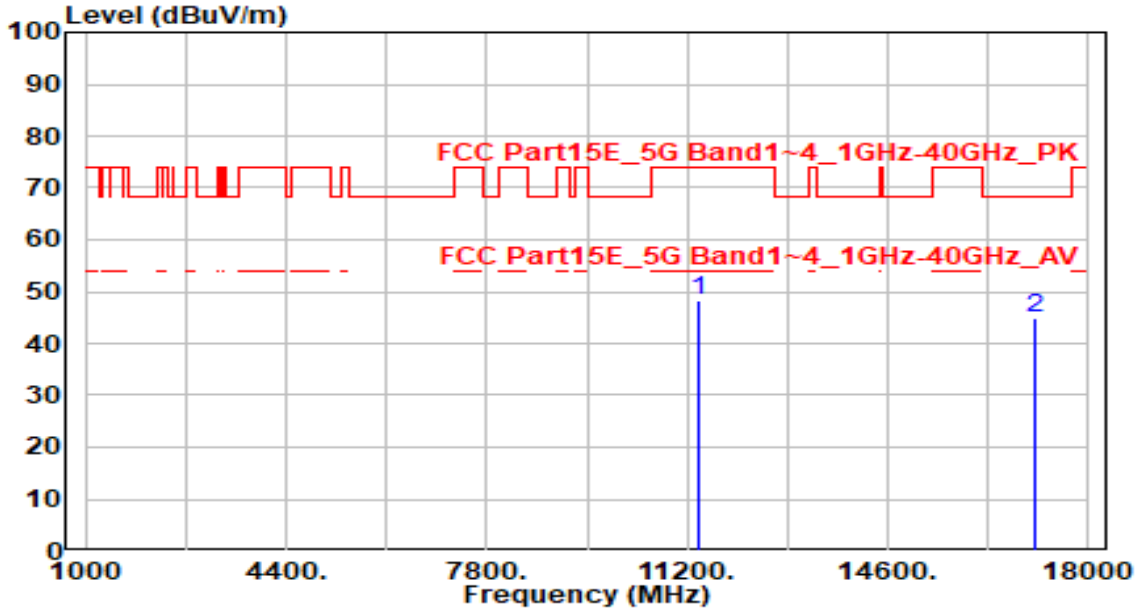


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	43.62	4.79	48.41	-25.59	74.00	300	360	Peak
2	* 17100.000	37.78	6.97	44.75	-23.45	68.20	300	340	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band3_CH 144_ANT 0+1	Test Voltage	AC 120V/60Hz

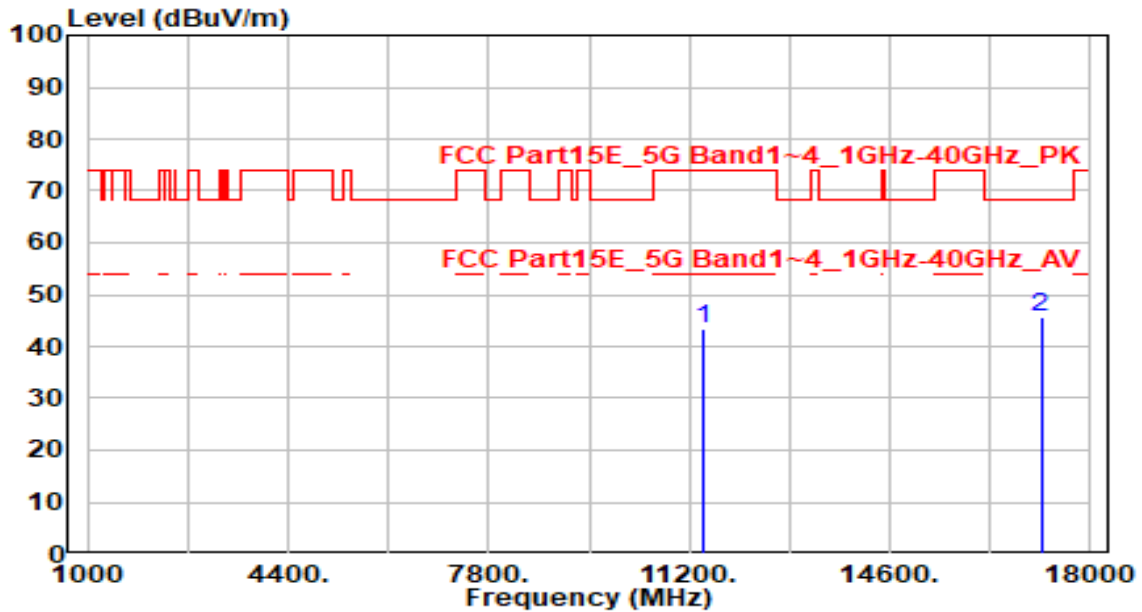


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	38.70	4.80	43.50	-30.50	74.00	300	315	Peak
2	* 17160.000	38.81	6.97	45.78	-22.42	68.20	300	290	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band3_CH 144_ANT 0+1	Test Voltage	AC 120V/60Hz

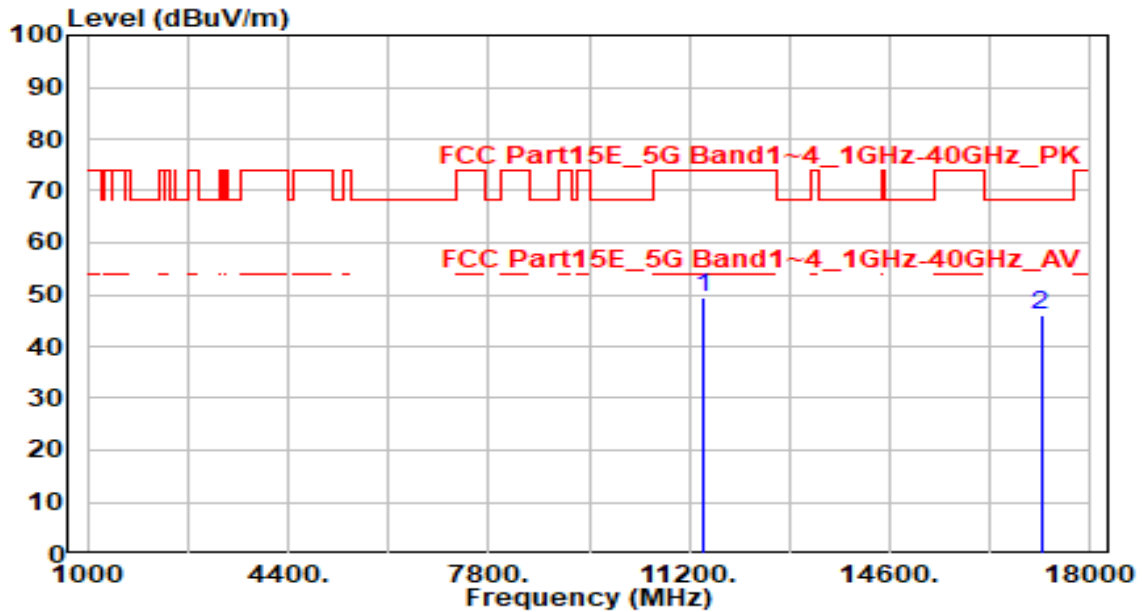


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	44.51	4.80	49.31	-24.69	74.00	300	355	Peak
2	* 17160.000	39.25	6.97	46.22	-21.98	68.20	300	265	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

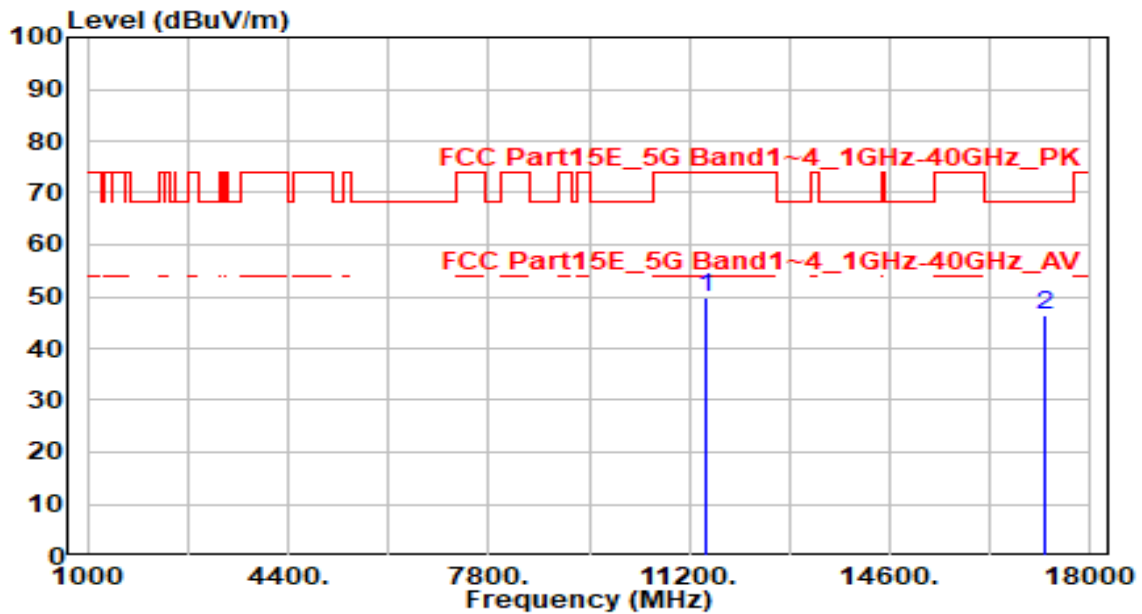


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	44.95	4.80	49.75	-24.25	74.00	300	40	Peak
2	* 17235.000	39.48	7.03	46.50	-21.70	68.20	300	20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

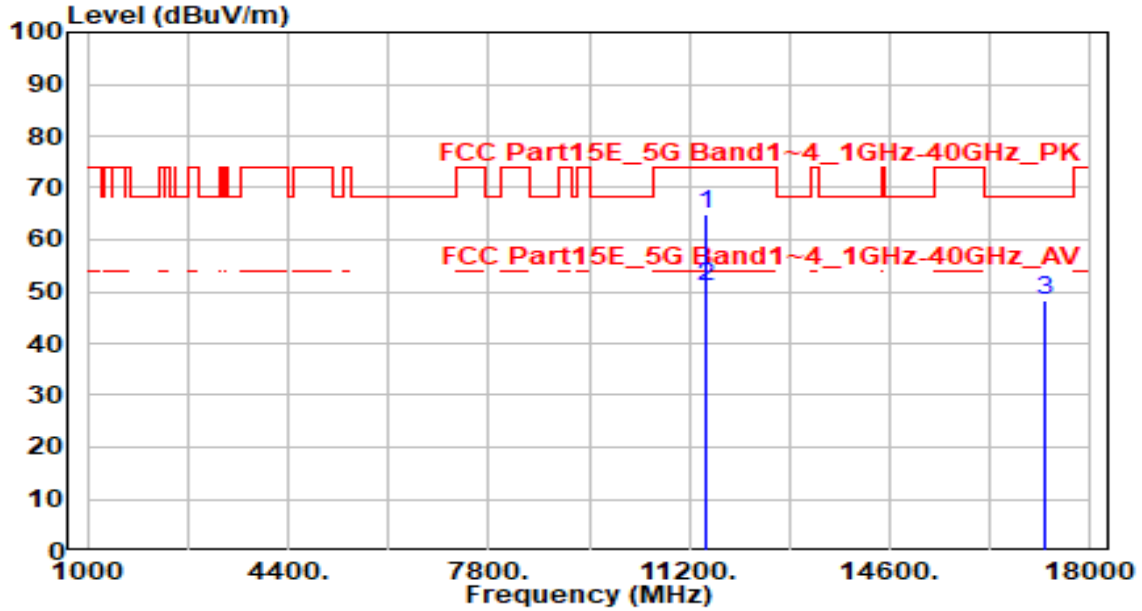


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 11490.000	60.22	4.80	65.02	-8.98	74.00	220	270	Peak
2	* 11490.000	46.04	4.80	50.84	-3.16	54.00	220	270	Average
3	17235.000	41.18	7.03	48.20	-20.00	68.20	300	285	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band4_CH 157_ANT 0+1	Test Voltage	AC 120V/60Hz

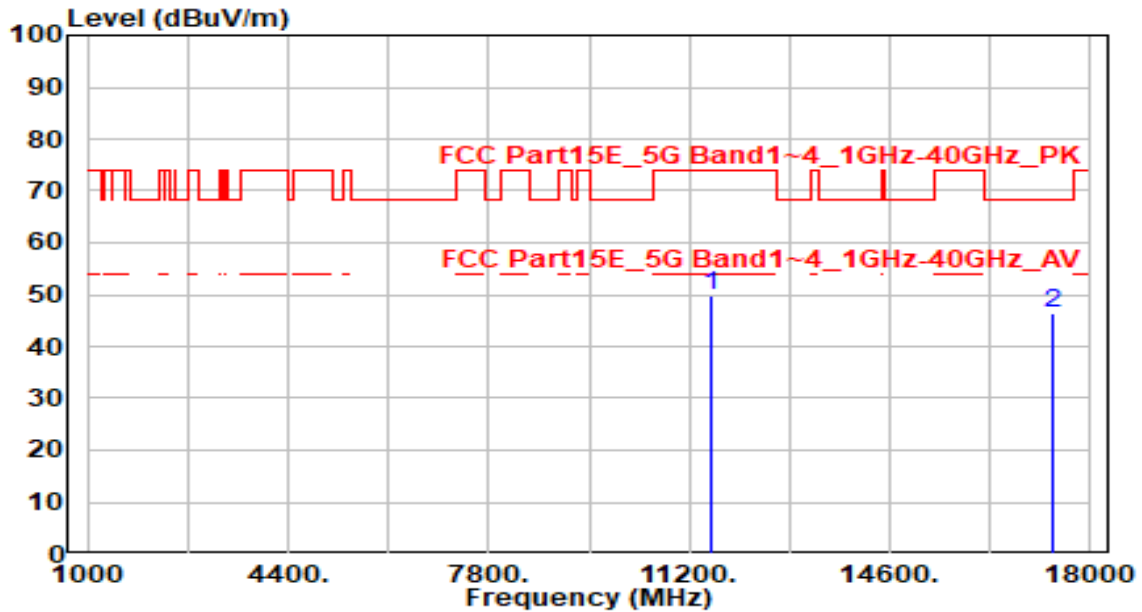


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	45.20	4.77	49.97	-24.03	74.00	200	20	Peak
2	* 17355.000	39.03	7.21	46.24	-21.96	68.20	200	50	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band4_CH 157_ANT 0+1	Test Voltage	AC 120V/60Hz

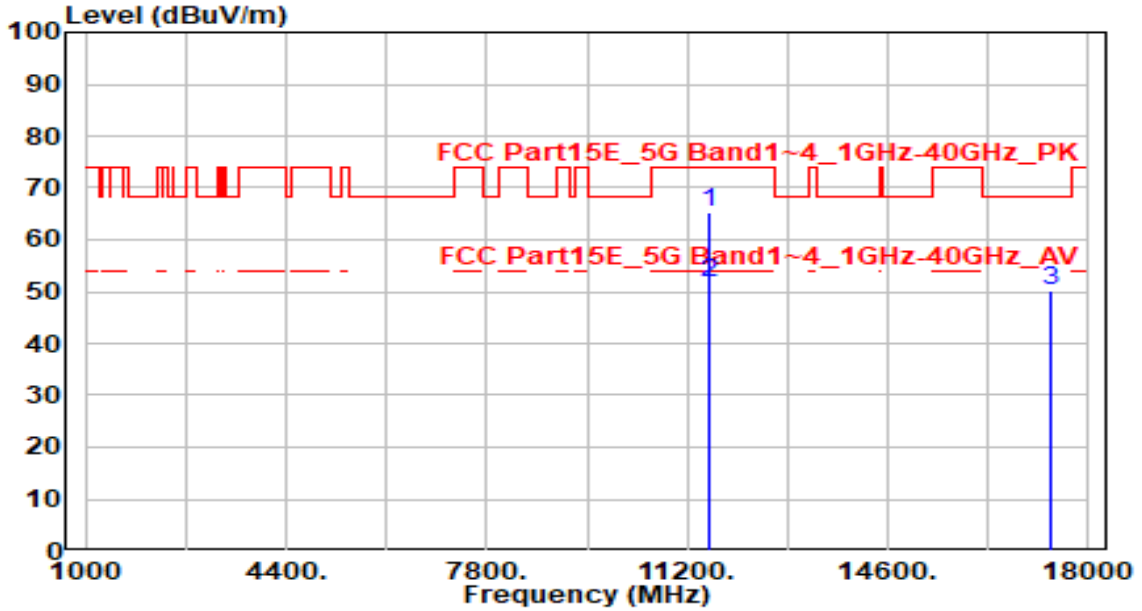


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 11570.000	60.59	4.77	65.36	-8.64	74.00	200	265	Peak
2	* 11570.000	47.04	4.77	51.81	-2.19	54.00	200	265	Average
3	17355.000	42.82	7.21	50.03	-18.17	68.20	200	270	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

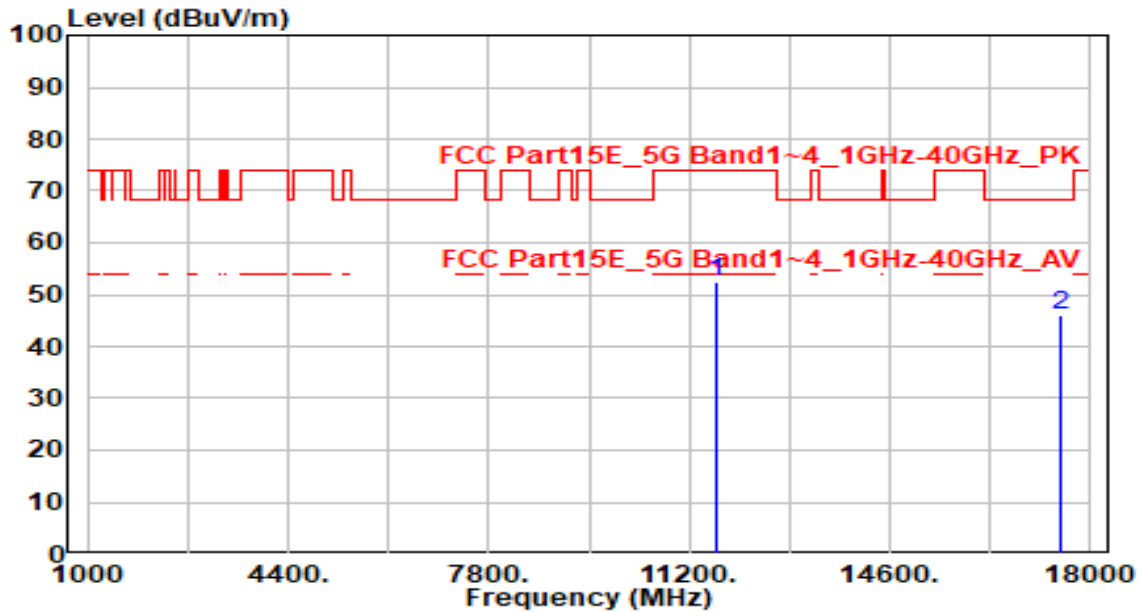


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 11650.000	47.66	4.73	52.40	-21.60	74.00	200	10	Peak
2	17475.000	38.55	7.48	46.03	-22.17	68.20	200	115	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

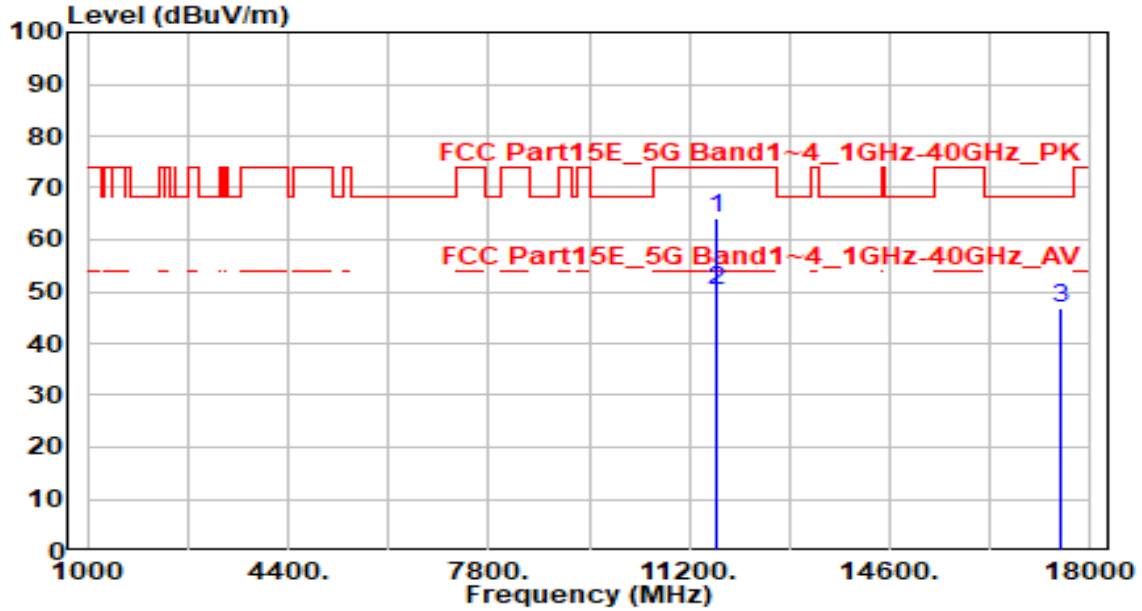


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 11650.000	59.47	4.73	64.20	-9.80	74.00	220	270	Peak
2	* 11650.000	45.29	4.73	50.02	-3.98	54.00	220	270	Average
3	17475.000	39.16	7.48	46.64	-21.56	68.20	200	130	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

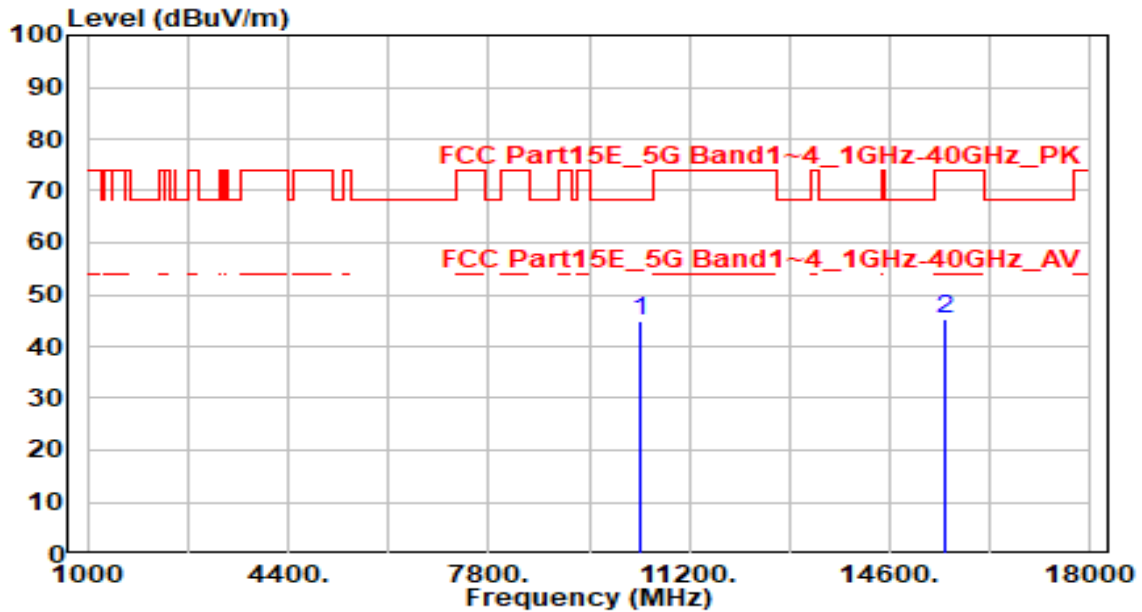


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10360.000	40.55	4.29	44.85	-23.35	68.20	200	320	Peak
2	15540.000	38.45	6.82	45.27	-28.73	74.00	200	60	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

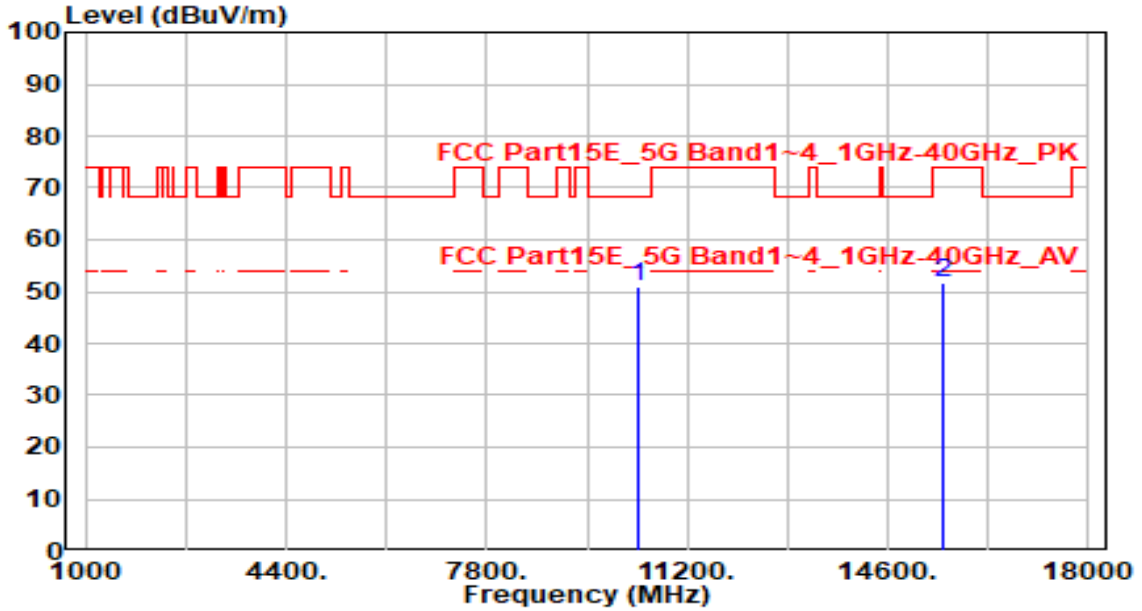


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10360.000	46.55	4.29	50.84	-17.36	68.20	200	250	Peak
2	15540.000	44.70	6.82	51.53	-22.47	74.00	200	185	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 120V/60Hz

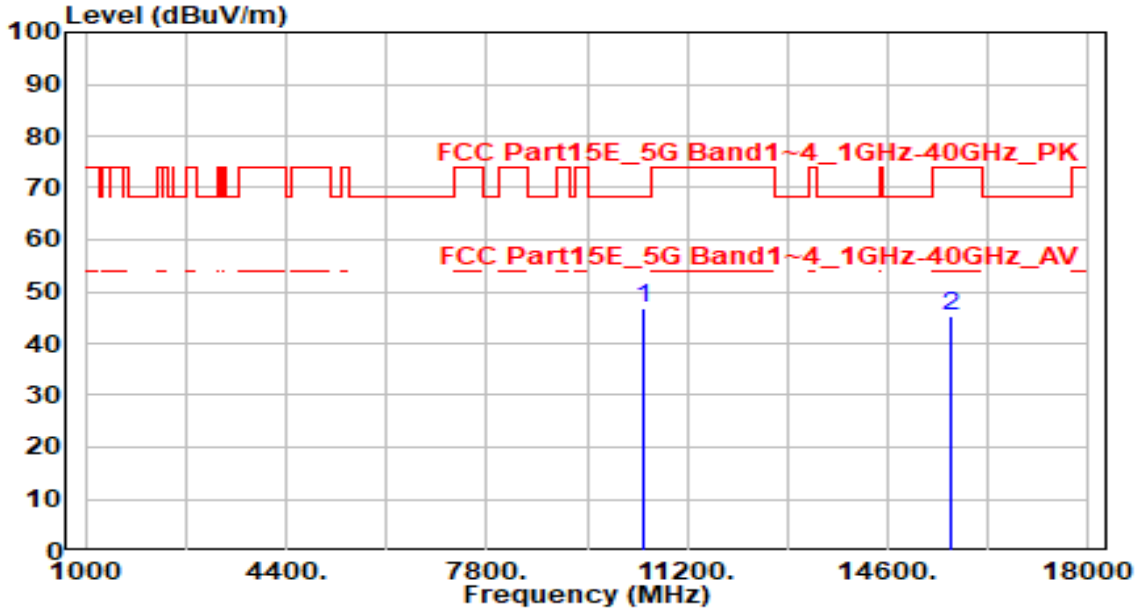


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10440.000	42.26	4.38	46.63	-21.57	68.20	200	310	Peak
2	15660.000	38.43	6.86	45.30	-28.70	74.00	200	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 120V/60Hz

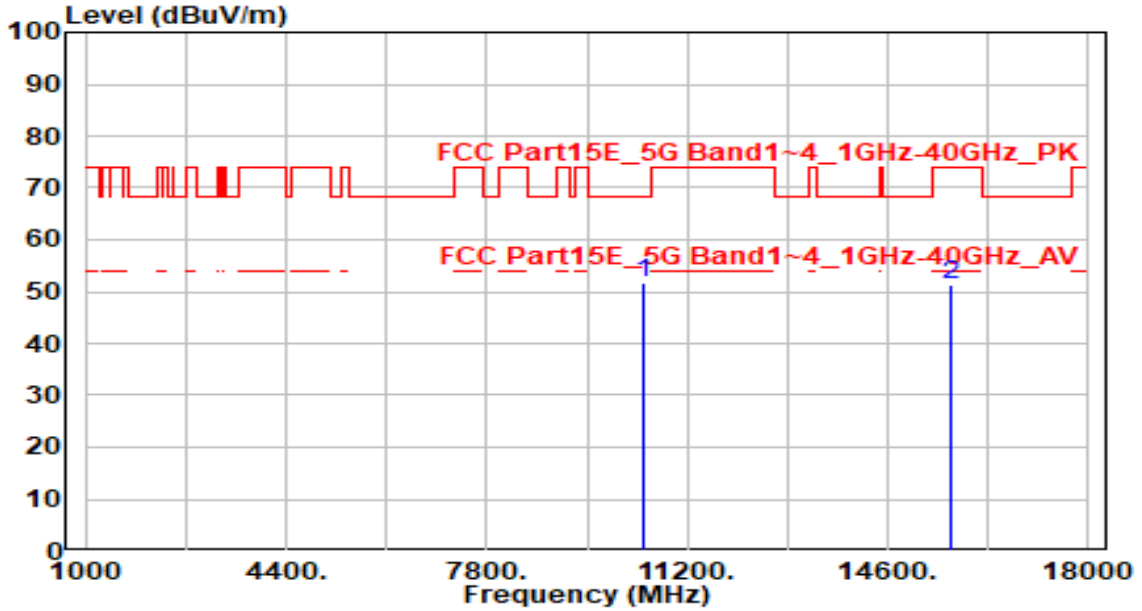


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10440.000	47.46	4.38	51.83	-16.37	68.20	200	250	Peak
2	15660.000	44.35	6.86	51.22	-22.78	74.00	200	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band1_CH 48_ANT 0+1	Test Voltage	AC 120V/60Hz

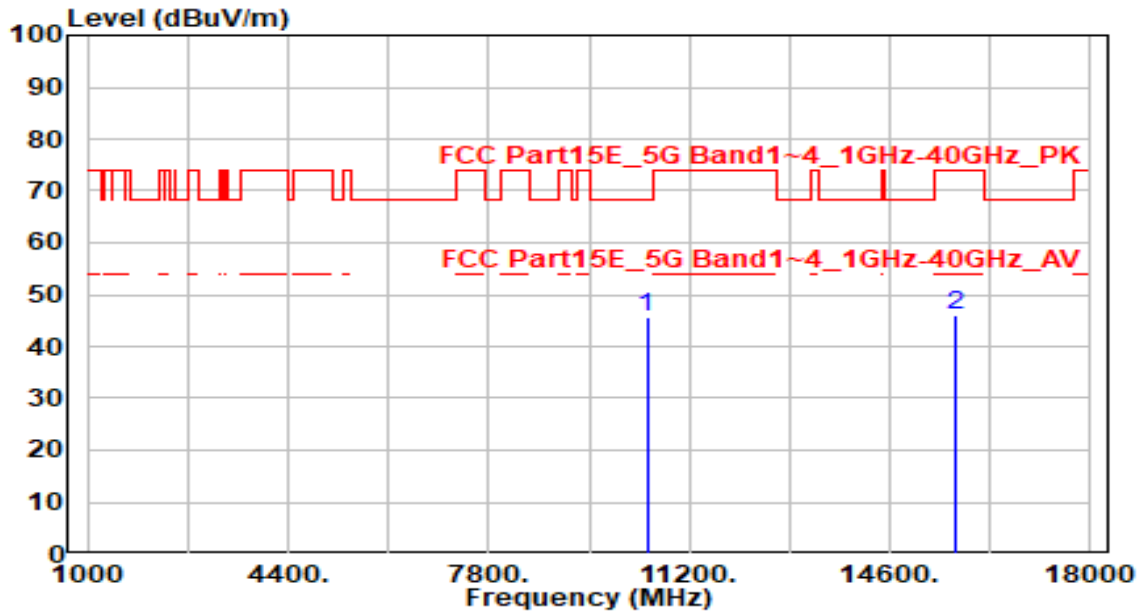


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10480.000	41.25	4.43	45.68	-22.52	68.20	200	300	Peak
2	15720.000	39.24	6.90	46.14	-27.86	74.00	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band1_CH 48_ANT 0+1	Test Voltage	AC 120V/60Hz

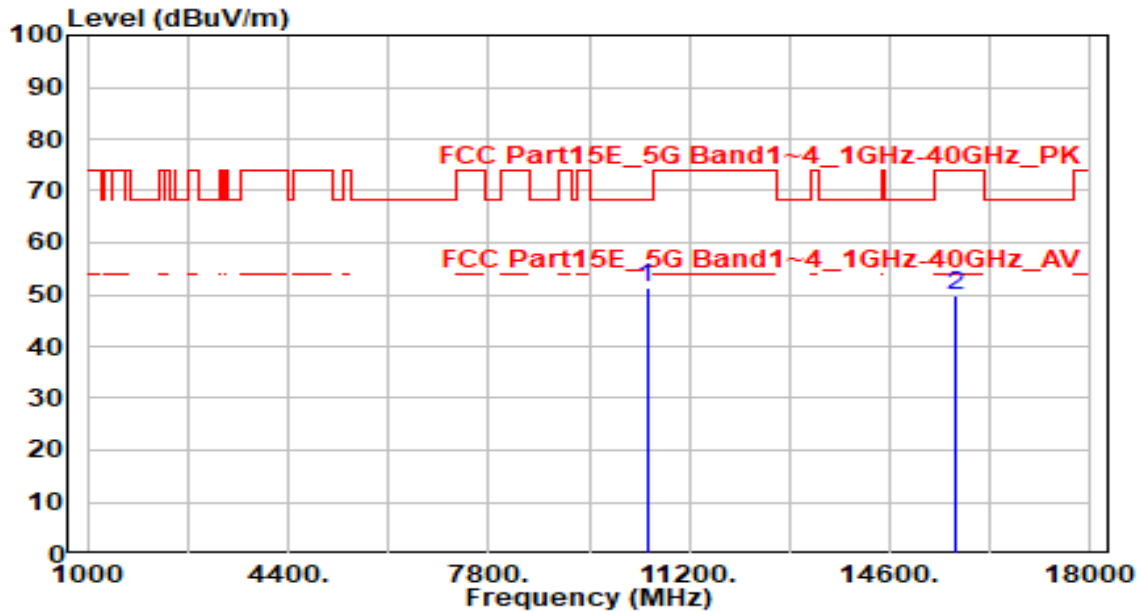


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10480.000	46.99	4.43	51.42	-16.78	68.20	200	310	Peak
2	15720.000	42.91	6.90	49.81	-24.19	74.00	200	310	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band2_CH 52_ANT 0+1	Test Voltage	AC 120V/60Hz

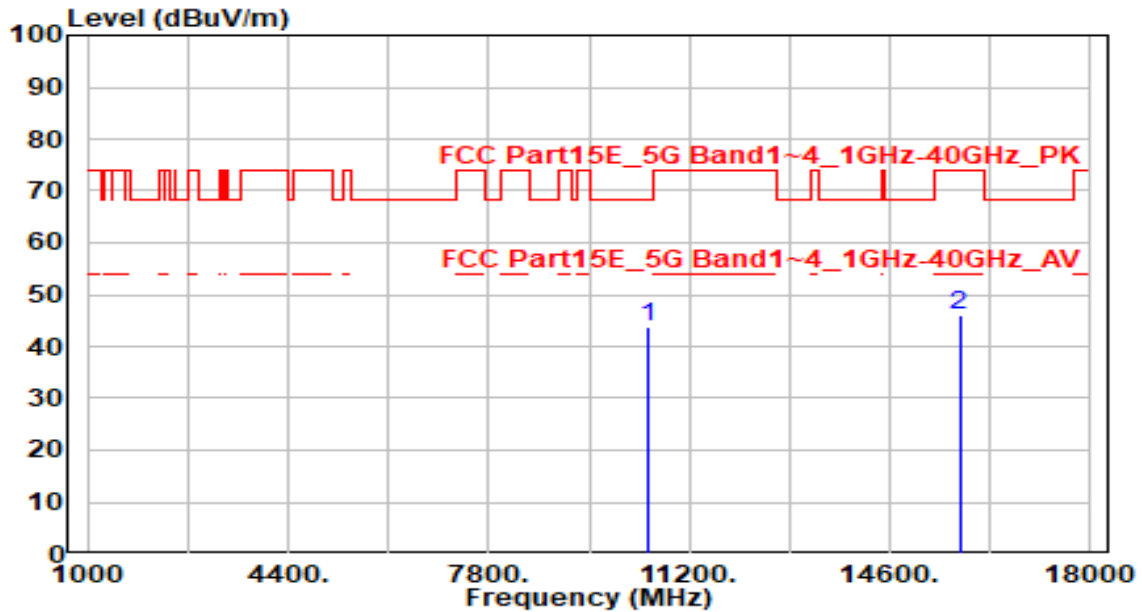


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10520.000	39.27	4.45	43.72	-24.48	68.20	200	90	Peak
2	15780.000	39.16	6.95	46.11	-27.89	74.00	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band2_CH 52_ANT 0+1	Test Voltage	AC 120V/60Hz

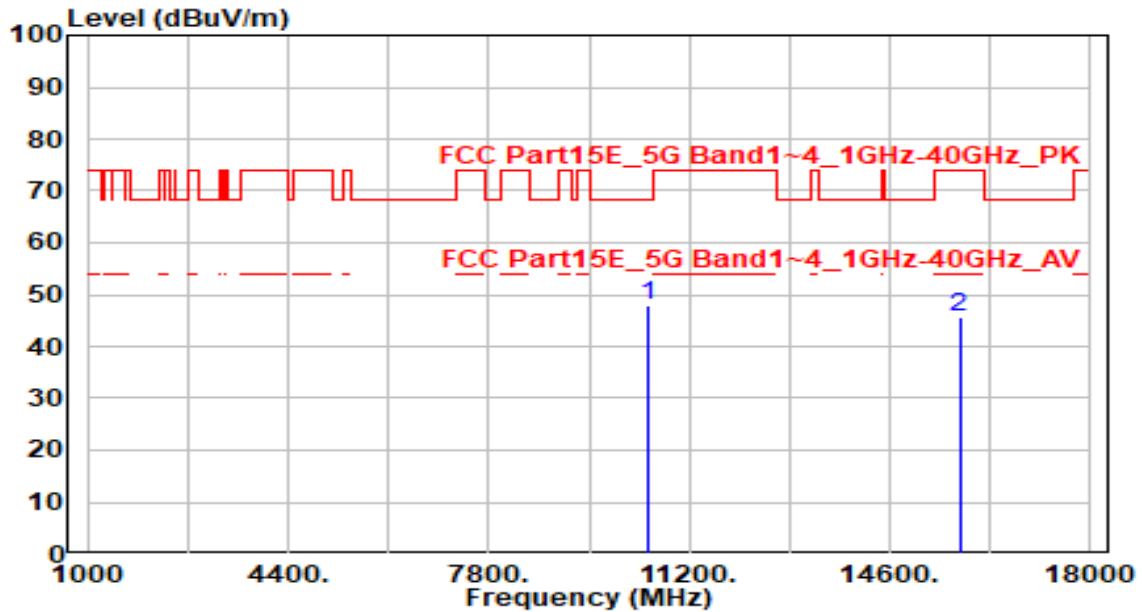


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10520.000	43.34	4.45	47.79	-20.41	68.20	200	10	Peak
2	15780.000	38.73	6.95	45.68	-28.32	74.00	200	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band2_CH 60_ANT 0+1	Test Voltage	AC 120V/60Hz

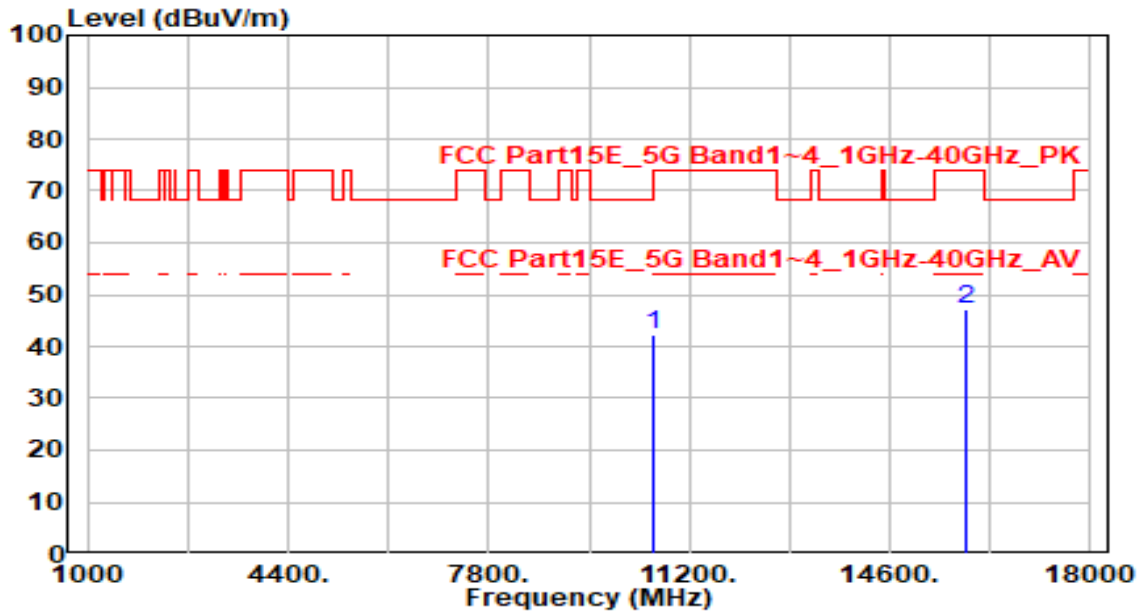


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10600.000	38.00	4.41	42.41	-25.79	68.20	200	130	Peak
2	15900.000	40.10	7.09	47.18	-26.82	74.00	200	120	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band2_CH 60_ANT 0+1	Test Voltage	AC 120V/60Hz

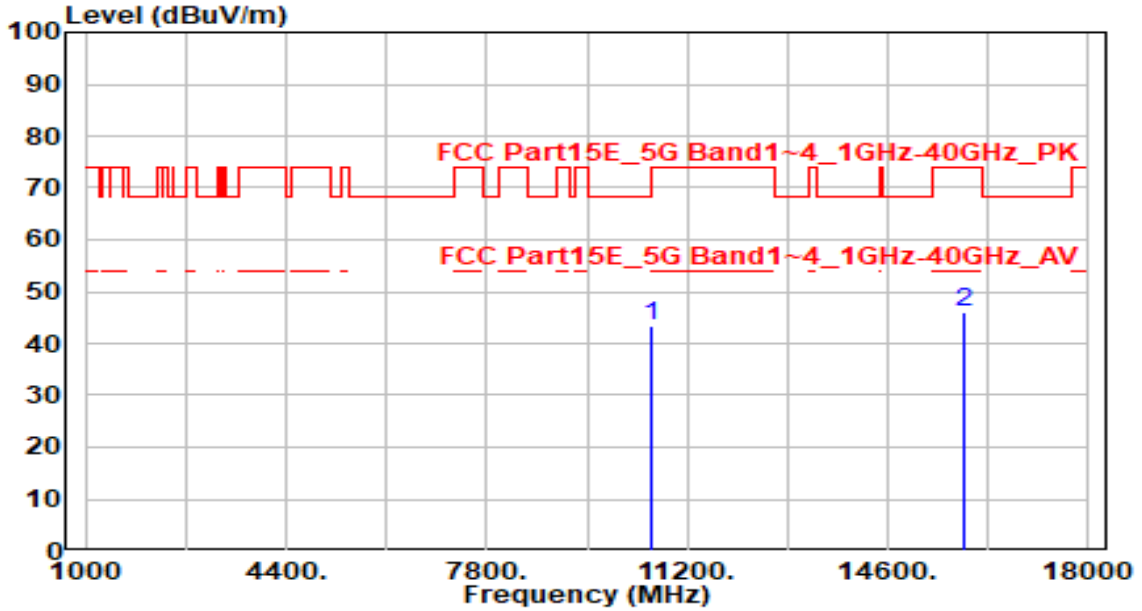


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10600.000	38.91	4.41	43.32	-24.88	68.20	200	290	Peak
2	15900.000	38.85	7.09	45.94	-28.06	74.00	200	100	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

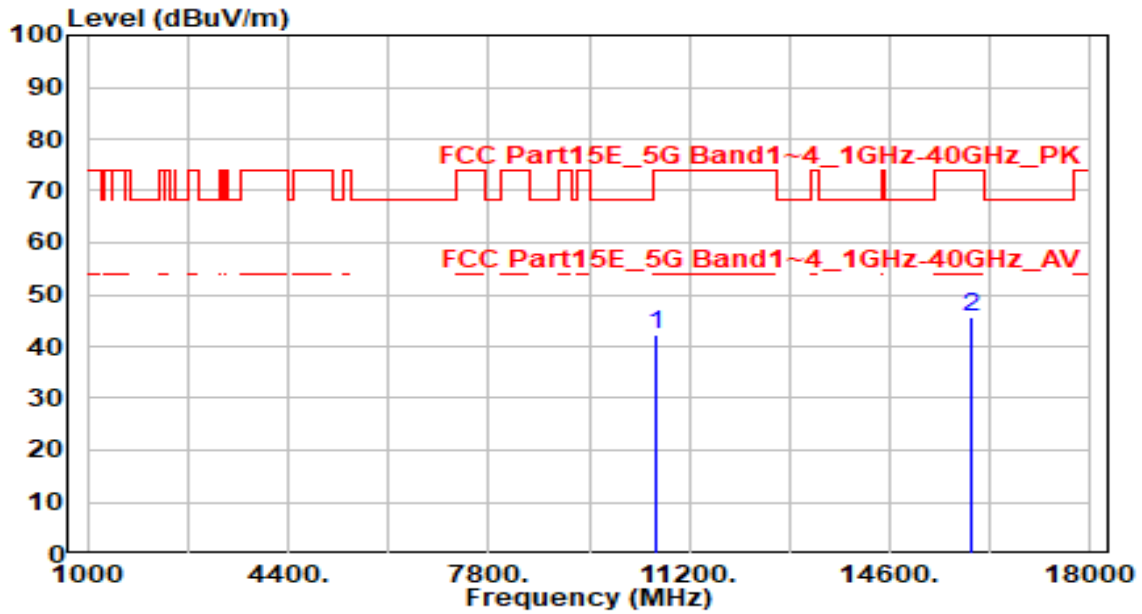


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	38.05	4.37	42.42	-31.58	74.00	200	150	Peak
2	* 15960.000	38.58	7.16	45.74	-28.26	74.00	200	70	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

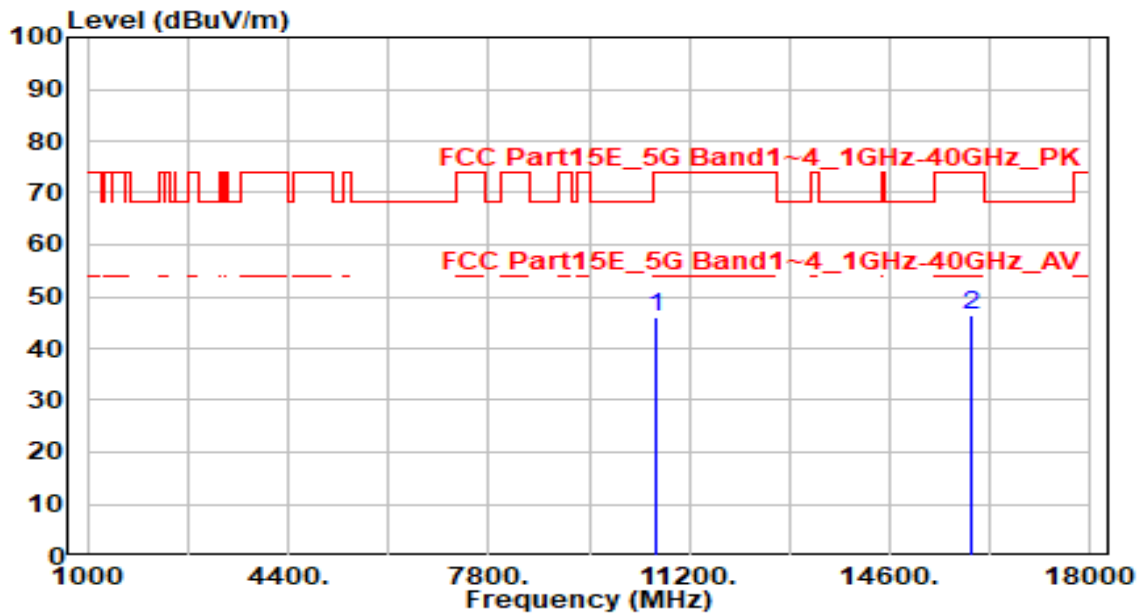


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	41.67	4.37	46.04	-27.96	74.00	200	300	Peak
2	* 15960.000	39.17	7.16	46.33	-27.67	74.00	200	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

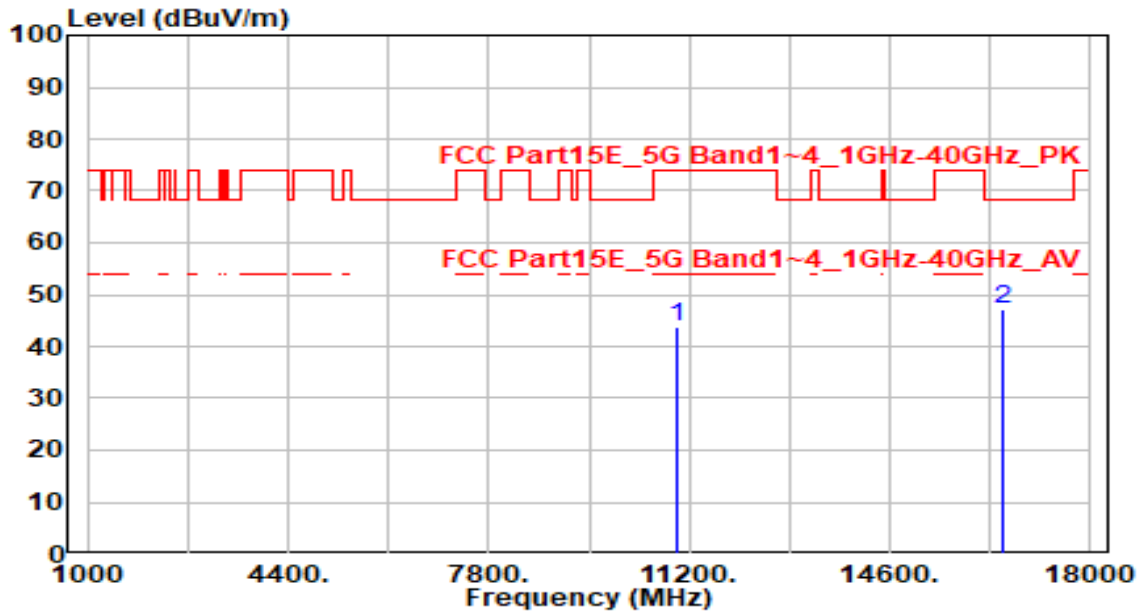


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	39.43	4.20	43.63	-30.37	74.00	200	50	Peak
2	* 16500.000	40.10	7.03	47.13	-21.07	68.20	200	100	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

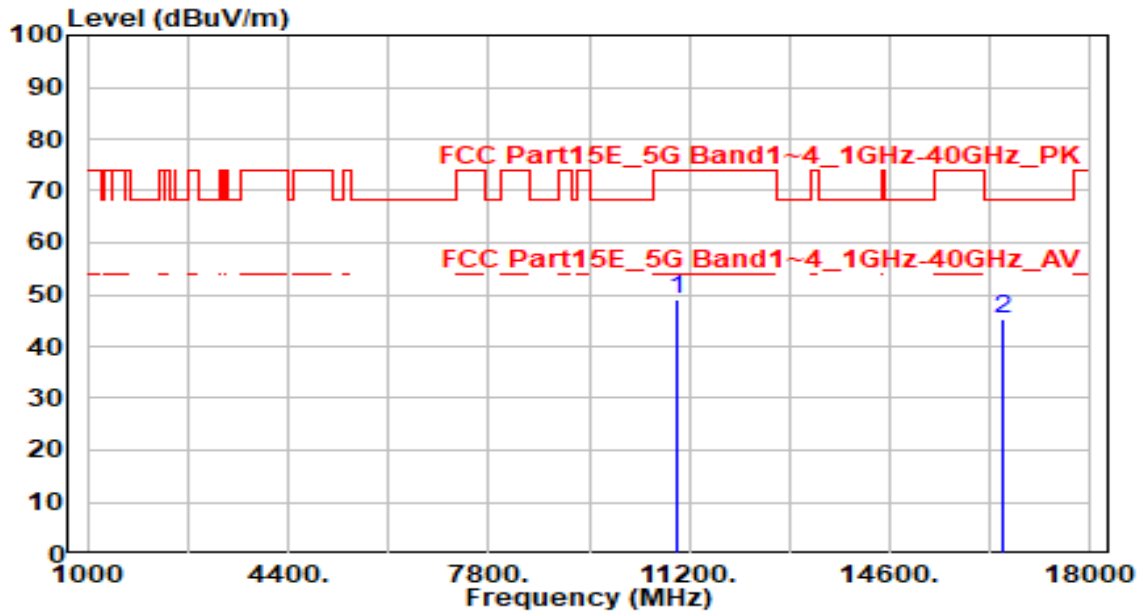


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	44.87	4.20	49.07	-24.93	74.00	200	270	Peak
2	* 16500.000	38.10	7.03	45.12	-23.08	68.20	200	130	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band3_CH 116_ANT 0+1	Test Voltage	AC 120V/60Hz

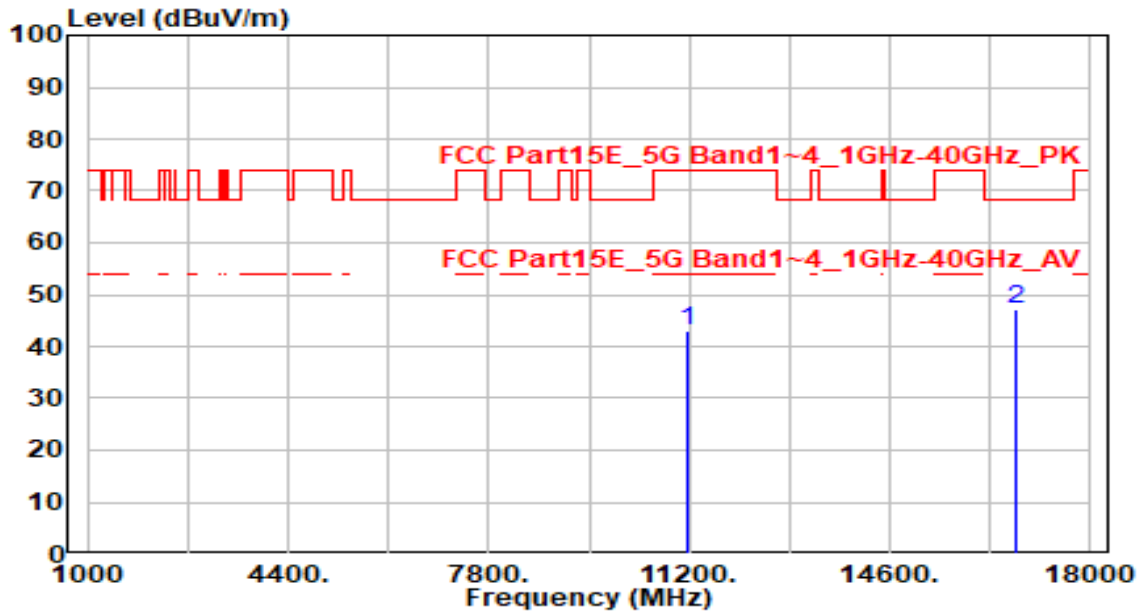


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	38.46	4.52	42.98	-31.02	74.00	200	320	Peak
2	* 16740.000	40.11	6.96	47.07	-21.13	68.20	200	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band3_CH 116_ANT 0+1	Test Voltage	AC 120V/60Hz

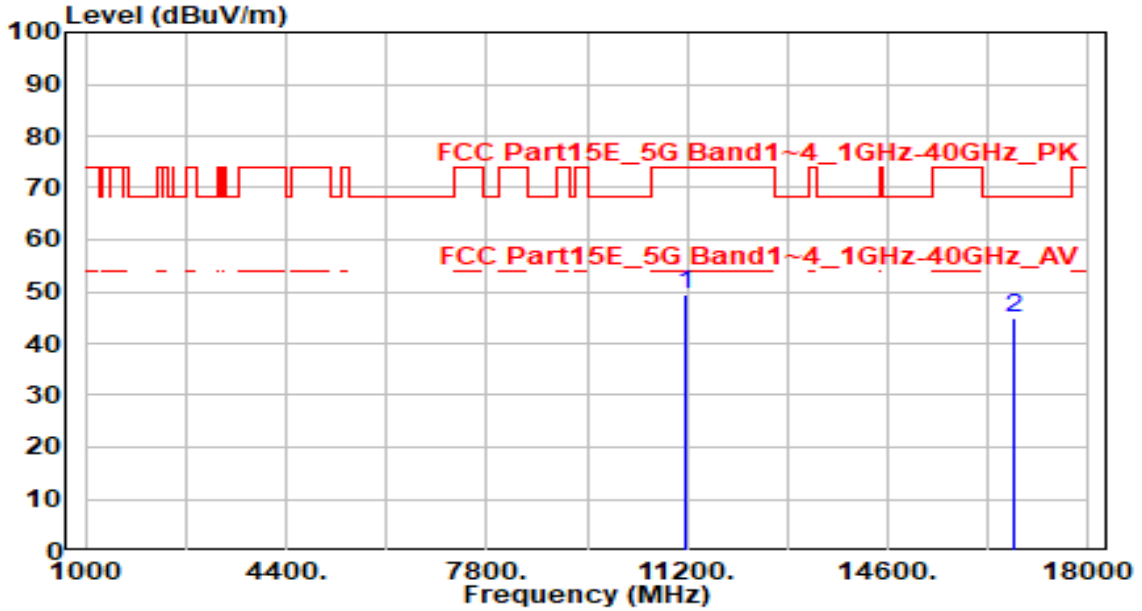


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	45.06	4.52	49.58	-24.42	74.00	200	250	Peak
2	* 16740.000	37.99	6.96	44.95	-23.25	68.20	200	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

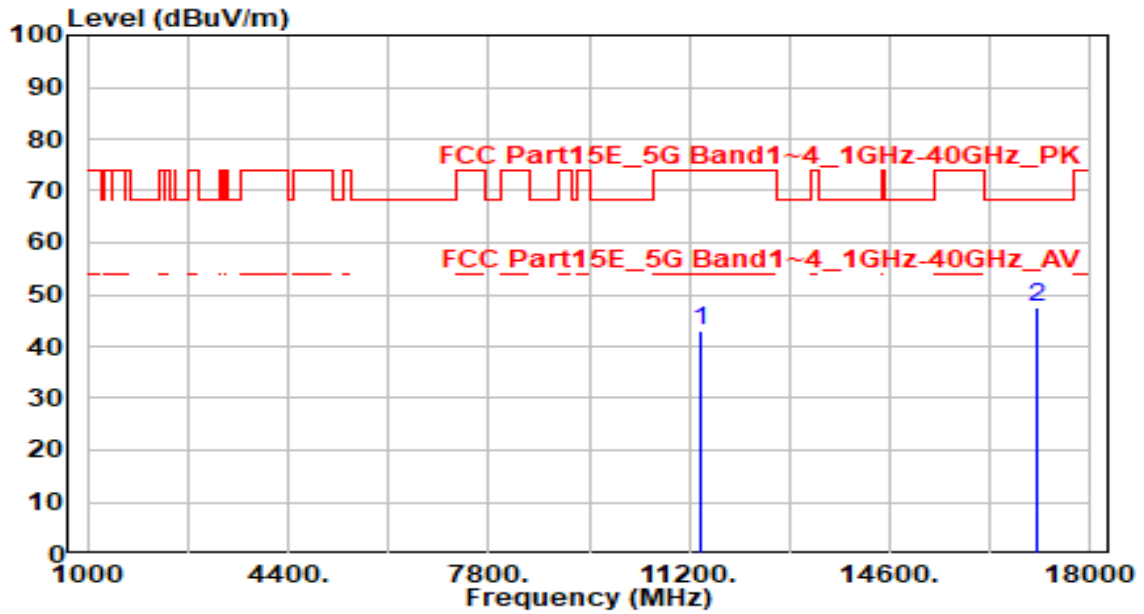


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	38.14	4.79	42.94	-31.06	74.00	200	250	Peak
2	* 17100.000	40.44	6.97	47.41	-20.79	68.20	200	100	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

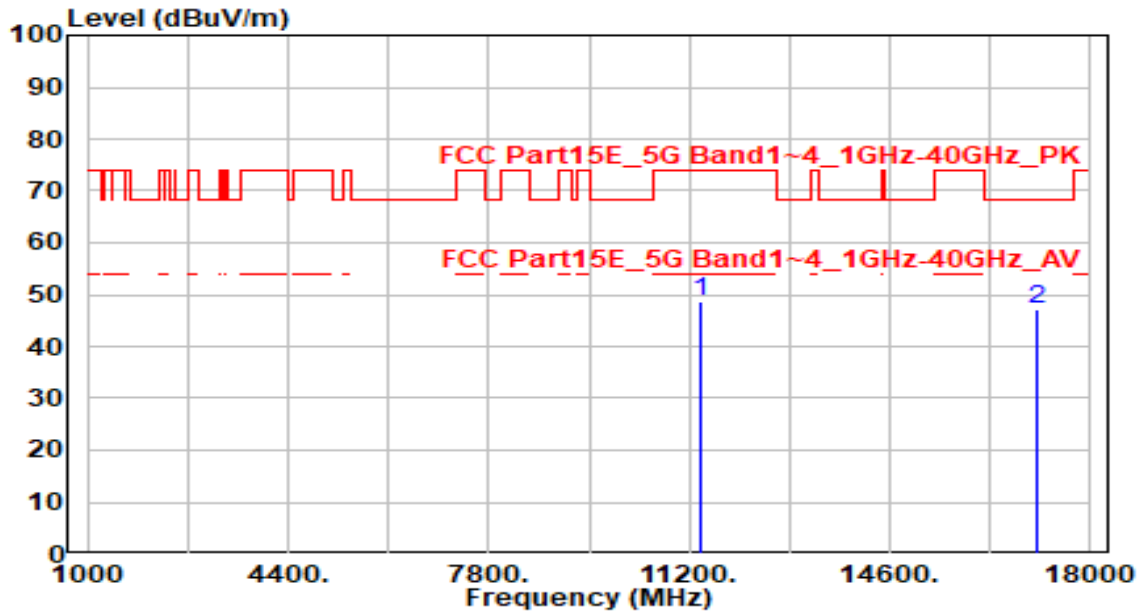


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	43.81	4.79	48.60	-25.40	74.00	200	20	Peak
2	* 17100.000	40.12	6.97	47.09	-21.11	68.20	200	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band3_CH 144_ANT 0+1	Test Voltage	AC 120V/60Hz

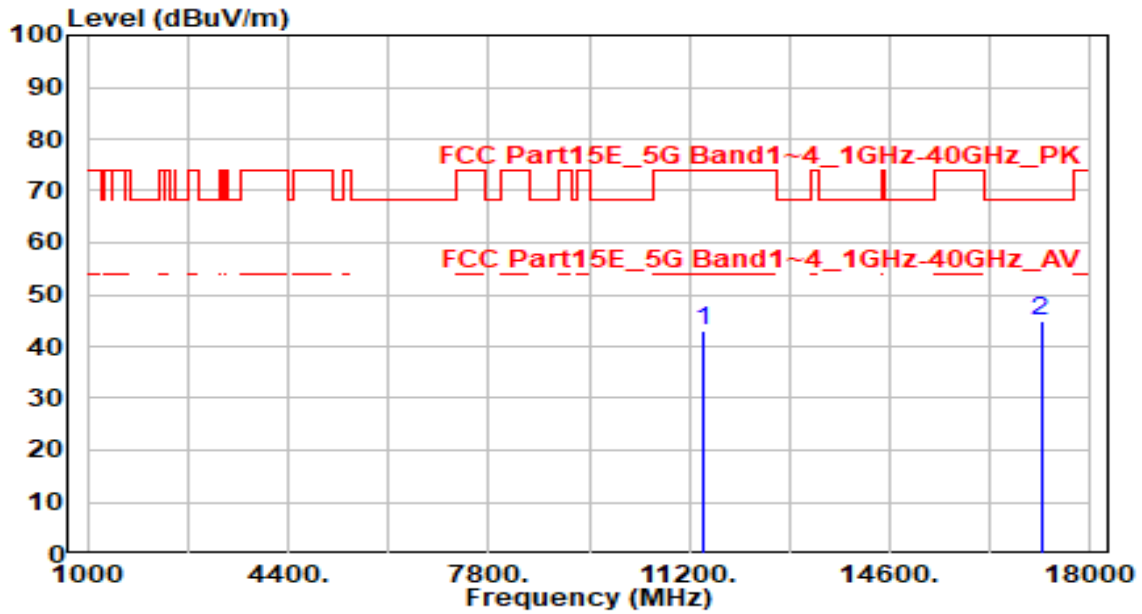


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	38.23	4.80	43.02	-30.98	74.00	200	150	Peak
2	* 17160.000	38.00	6.97	44.97	-23.23	68.20	200	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band3_CH 144_ANT 0+1	Test Voltage	AC 120V/60Hz

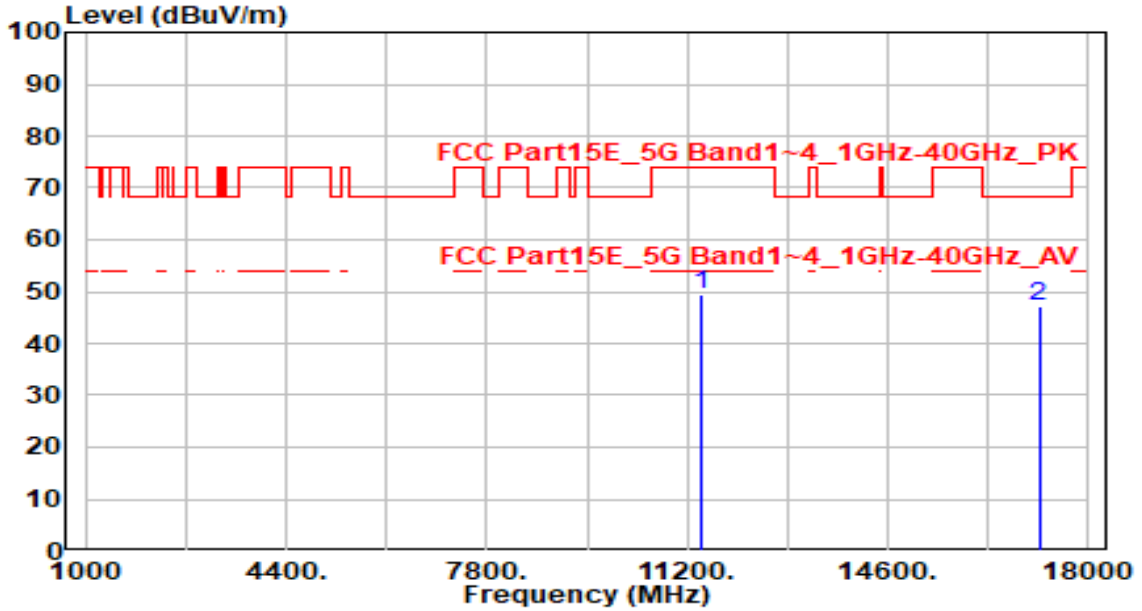


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	44.73	4.80	49.53	-24.47	74.00	200	260	Peak
2	* 17160.000	40.20	6.97	47.17	-21.03	68.20	200	280	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

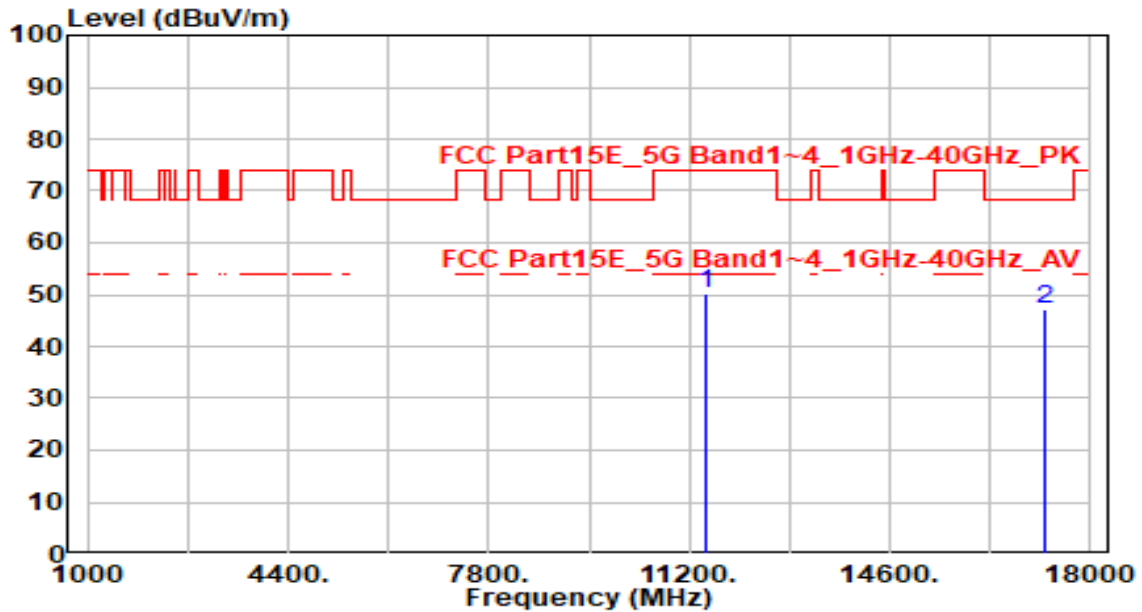


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	45.28	4.80	50.08	-23.92	74.00	200	280	Peak
2	* 17235.000	40.29	7.03	47.32	-20.88	68.20	200	300	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

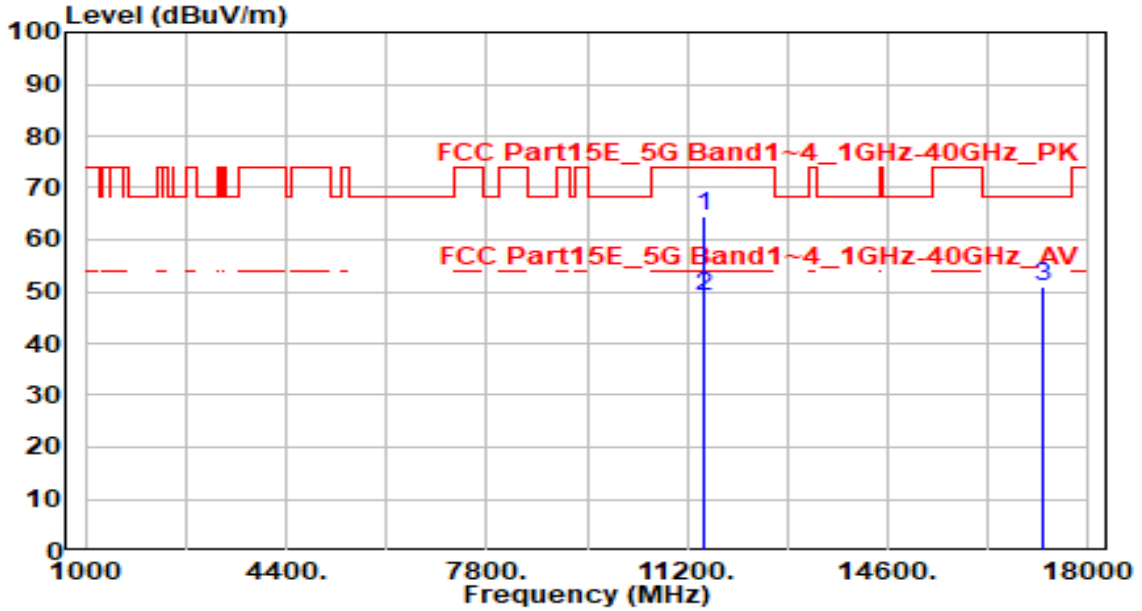


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 11490.000	59.69	4.80	64.49	-9.51	74.00	200	270	Peak
2	* 11490.000	44.27	4.80	49.07	-4.93	54.00	200	265	Average
3	17235.000	43.98	7.03	51.00	-17.20	68.20	200	245	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band4_CH 157_ANT 0+1	Test Voltage	AC 120V/60Hz

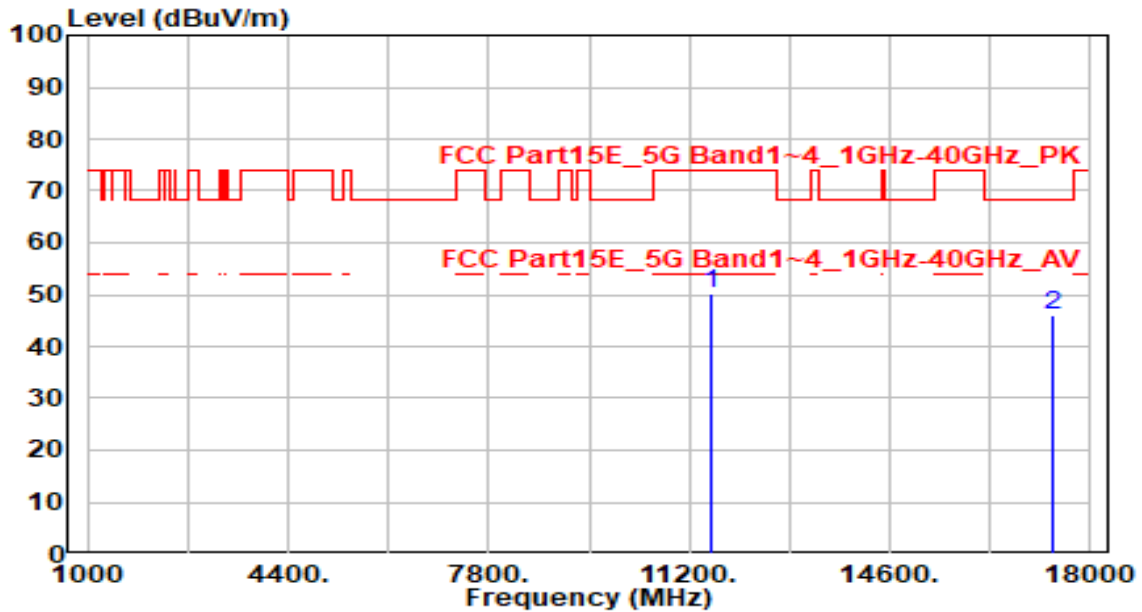


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	45.46	4.77	50.22	-23.78	74.00	200	35	Peak
2	* 17355.000	38.97	7.21	46.17	-22.03	68.20	200	115	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band4_CH 157_ANT 0+1	Test Voltage	AC 120V/60Hz

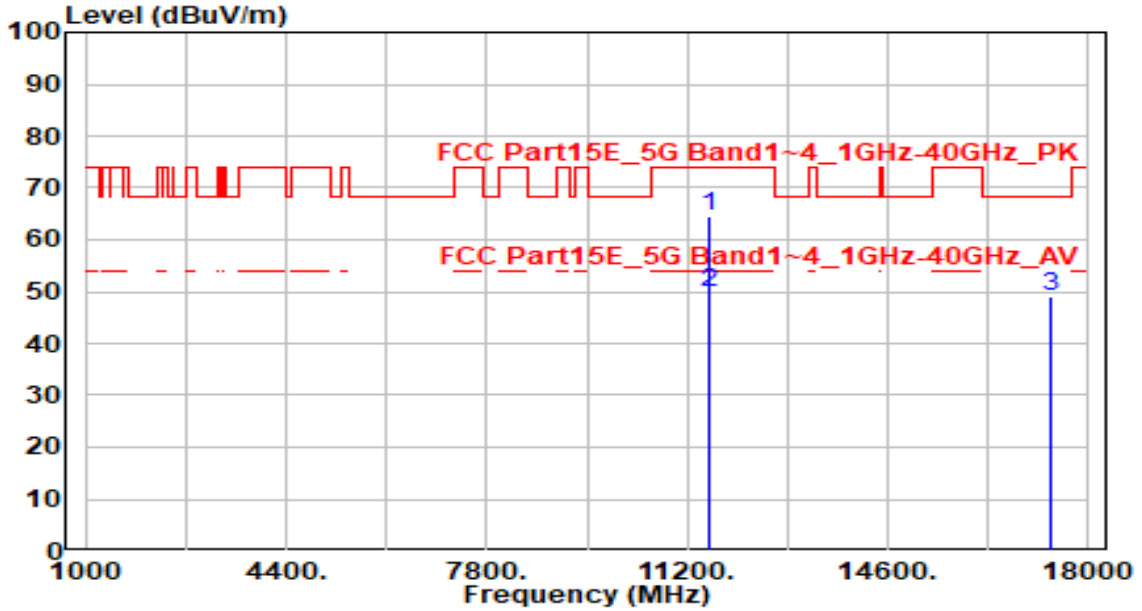


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 11570.000	59.95	4.77	64.72	-9.28	74.00	220	265	Peak
2	* 11570.000	45.22	4.77	49.99	-4.01	54.00	220	265	Average
3	17355.000	41.95	7.21	49.16	-19.04	68.20	200	250	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

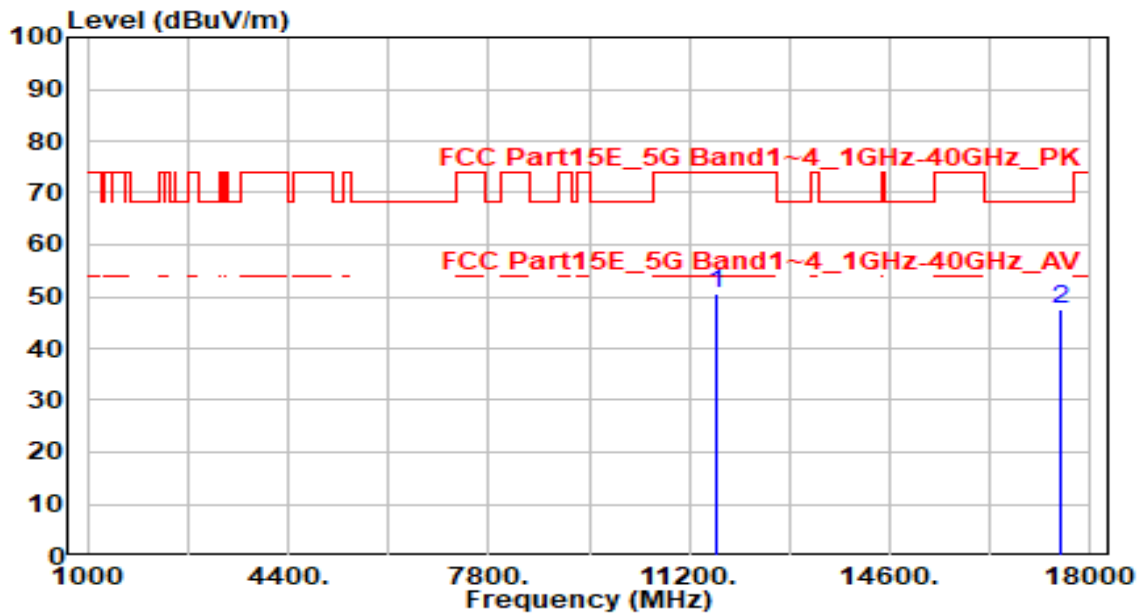


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	45.99	4.73	50.72	-23.28	74.00	200	25	Peak
2	* 17475.000	40.01	7.48	47.49	-20.71	68.20	200	280	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

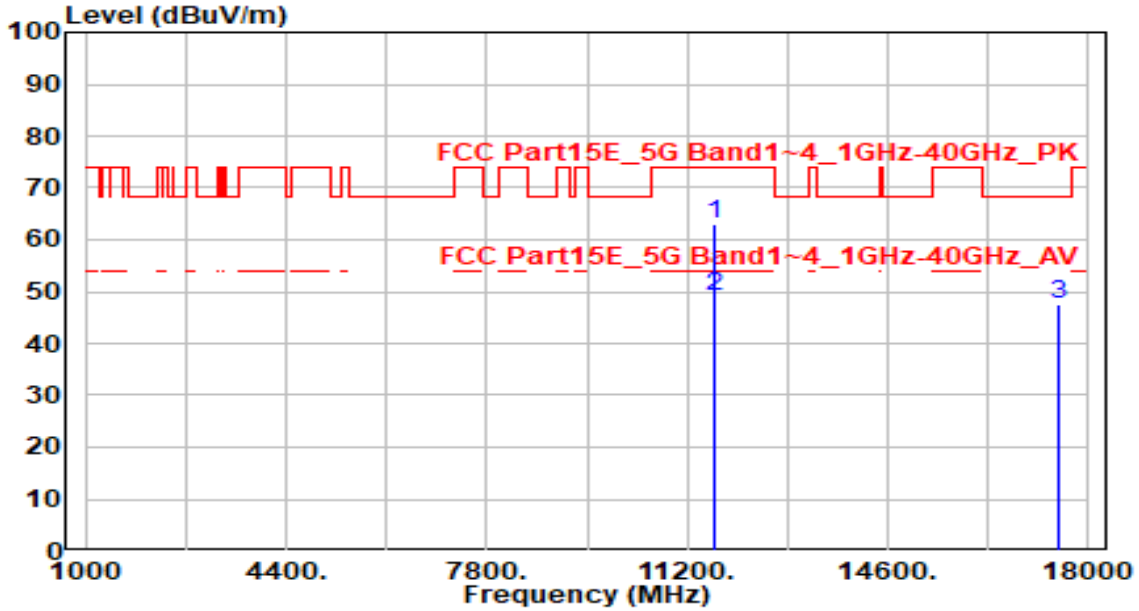


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 11650.000	58.21	4.73	62.94	-11.06	74.00	220	280	Peak
2	* 11650.000	44.19	4.73	48.92	-5.08	54.00	220	280	Average
3	17475.000	40.23	7.48	47.71	-20.49	68.20	200	220	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

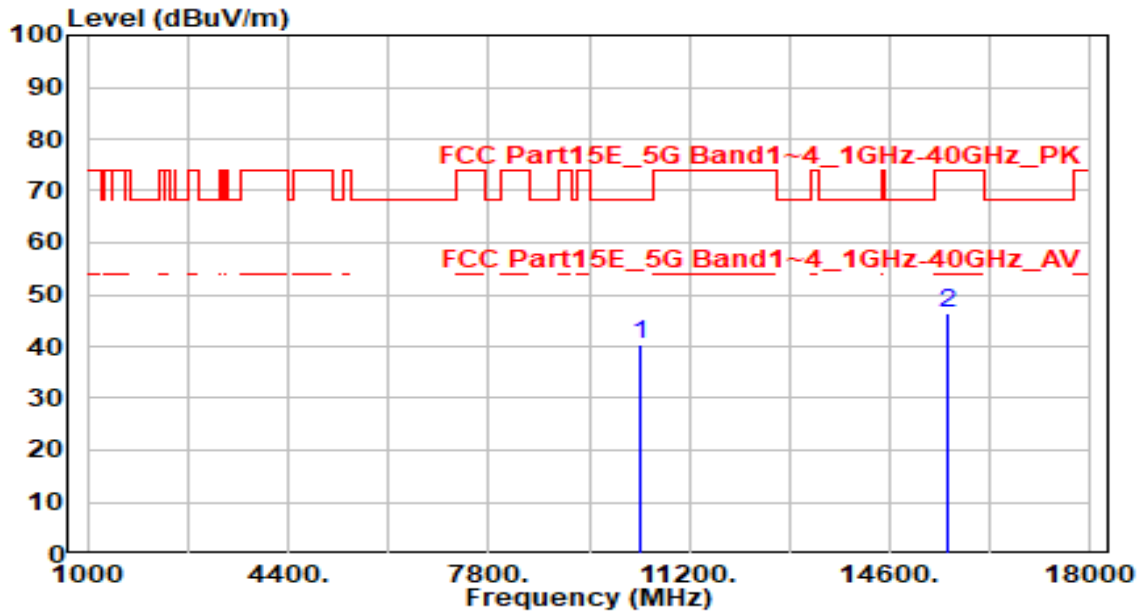


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10380.000	35.99	4.31	40.30	-27.90	68.20	200	285	Peak
2	* 15570.000	39.58	6.82	46.40	-27.60	74.00	200	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

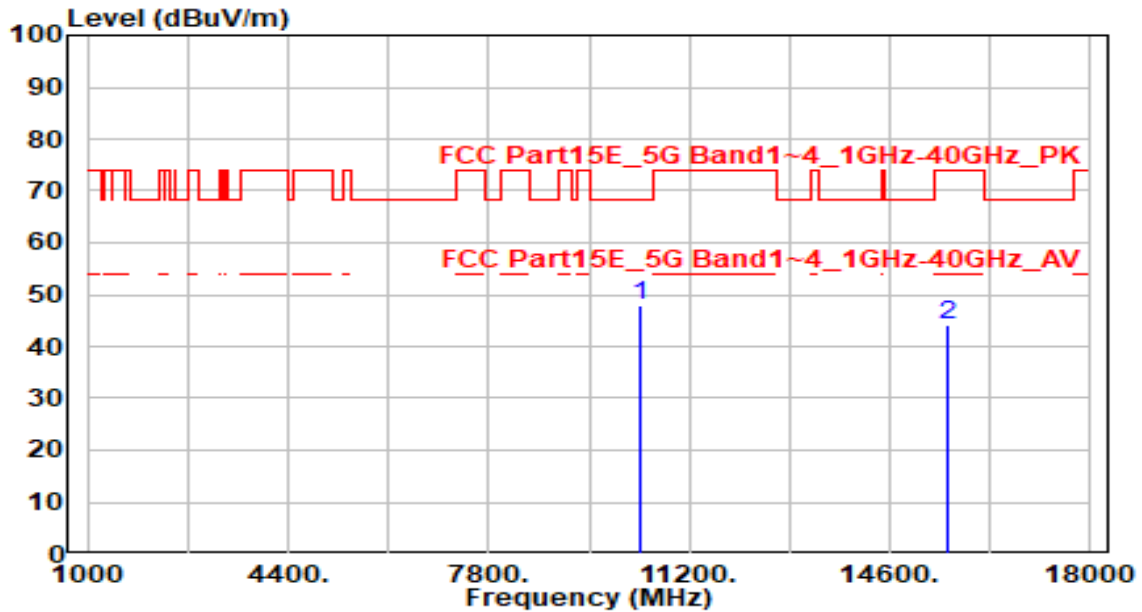


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10380.000	43.45	4.31	47.76	-20.44	68.20	200	320	Peak
2	15570.000	37.49	6.82	44.31	-29.69	74.00	200	270	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band1_CH 46_ANT 0+1	Test Voltage	AC 120V/60Hz

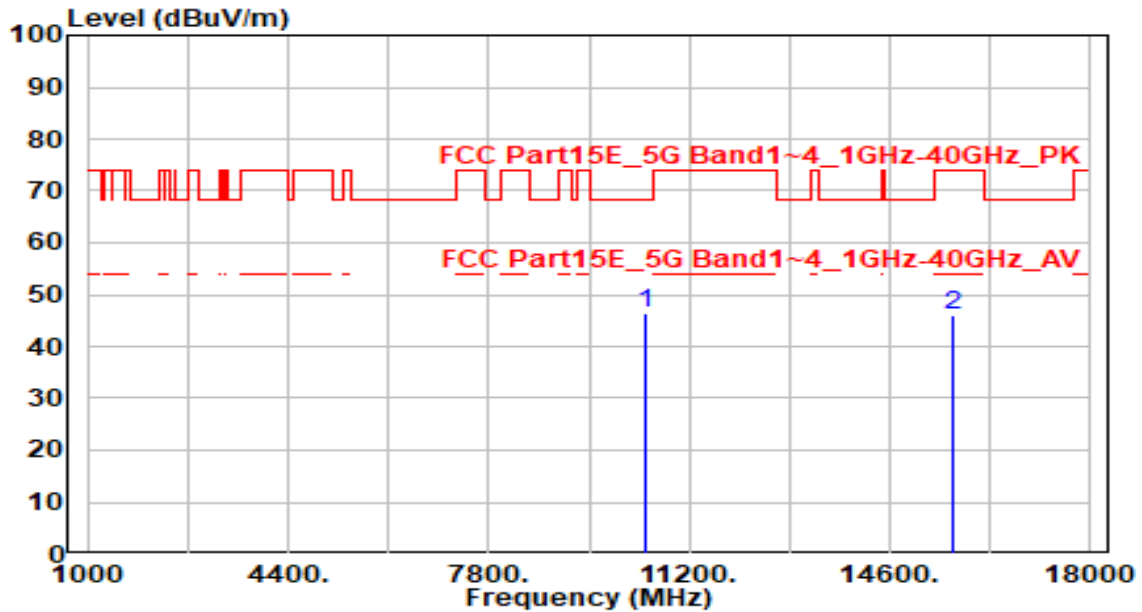


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10460.000	42.17	4.40	46.57	-21.63	68.20	200	235	Peak
2	15690.000	39.34	6.88	46.22	-27.78	74.00	200	345	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band1_CH 46_ANT 0+1	Test Voltage	AC 120V/60Hz

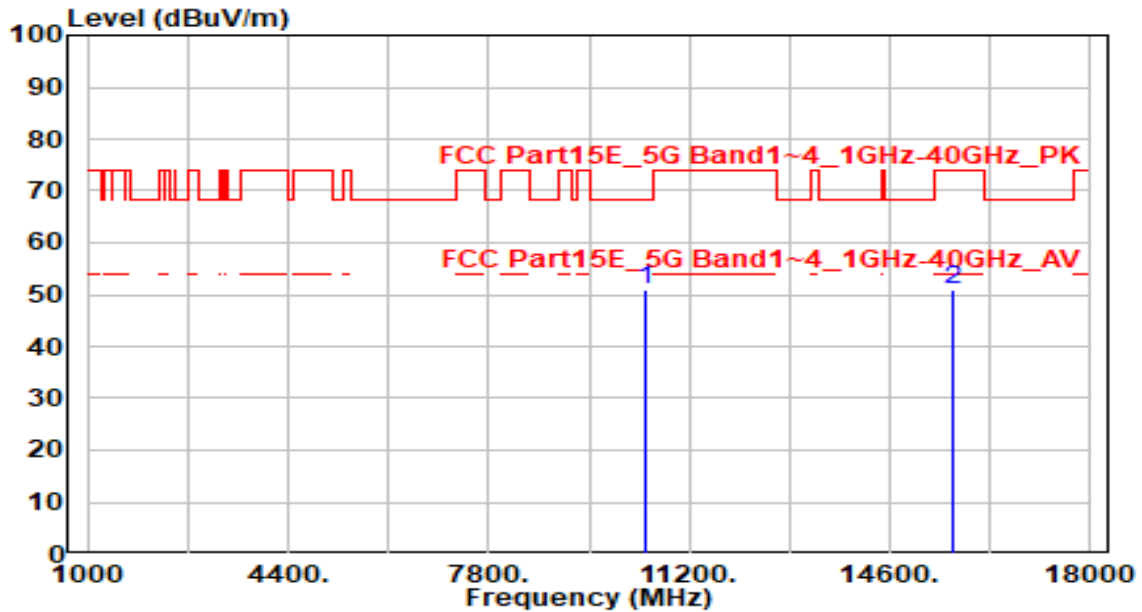


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	46.64	4.40	51.05	-17.15	68.20	200	245	Peak
2		44.00	6.88	50.89	-23.11	74.00	200	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band2_CH 54_ANT 0+1	Test Voltage	AC 120V/60Hz

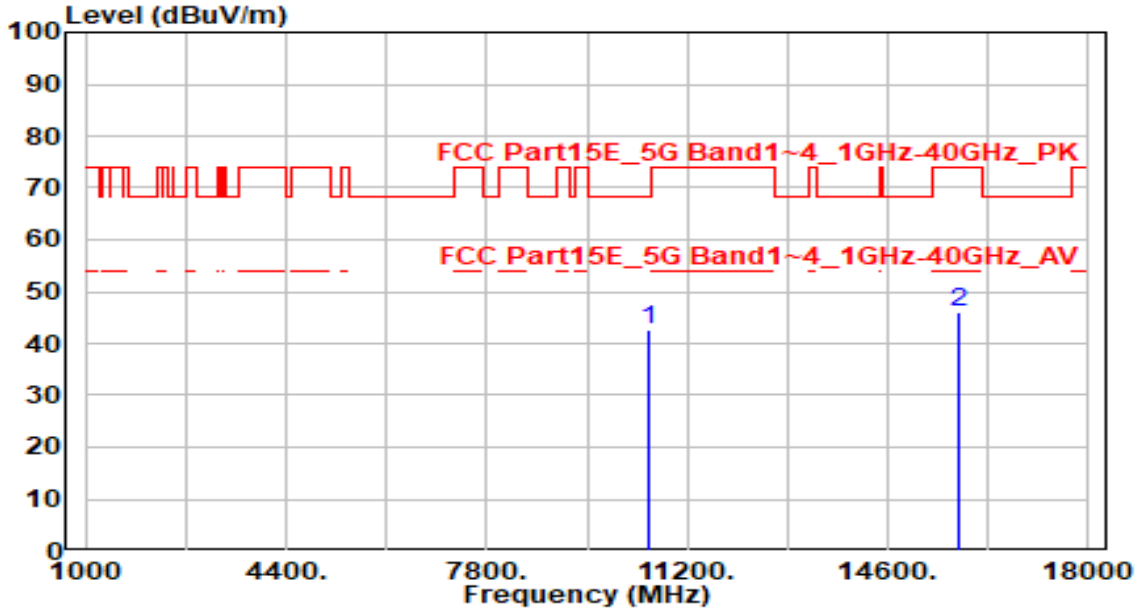


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10540.000	38.13	4.44	42.56	-25.64	68.20	200	175	Peak
2	15810.000	38.89	6.97	45.86	-28.14	74.00	200	240	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band2_CH 54_ANT 0+1	Test Voltage	AC 120V/60Hz

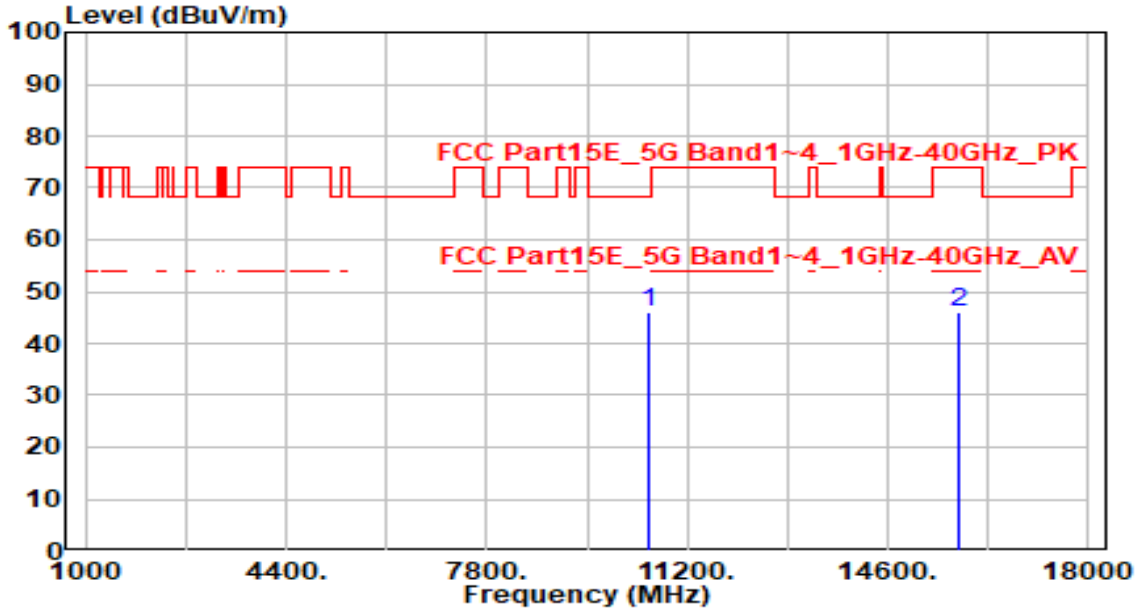


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10540.000	41.69	4.44	46.12	-22.08	68.20	200	10	Peak
2	15810.000	38.93	6.97	45.90	-28.10	74.00	200	205	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

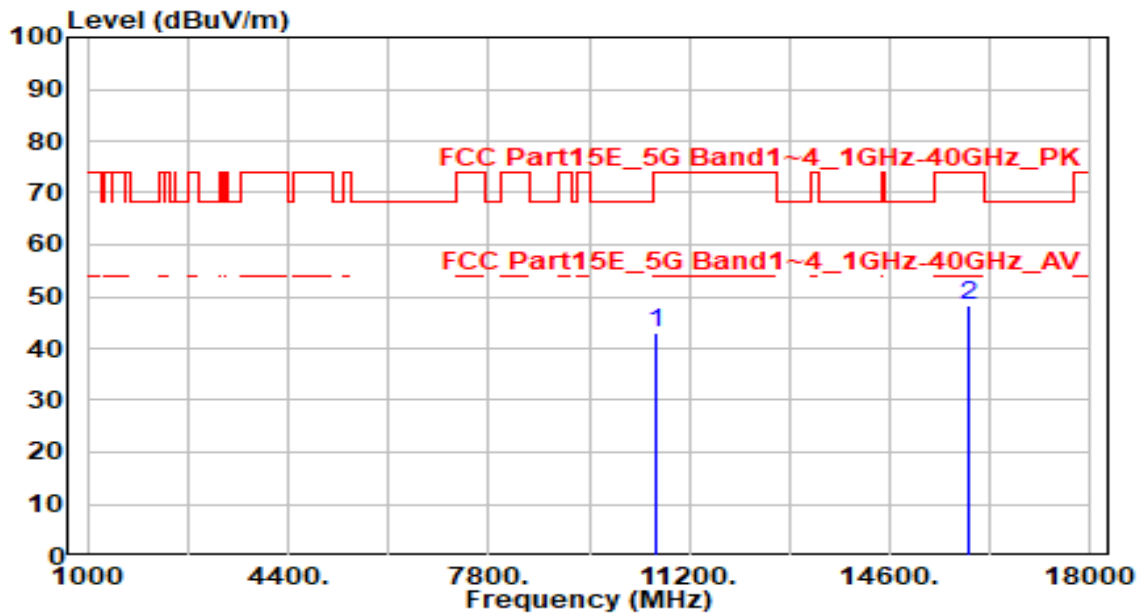


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10620.000	38.53	4.39	42.93	-31.07	74.00	200	165	Peak
2	* 15930.000	41.23	7.12	48.35	-25.65	74.00	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

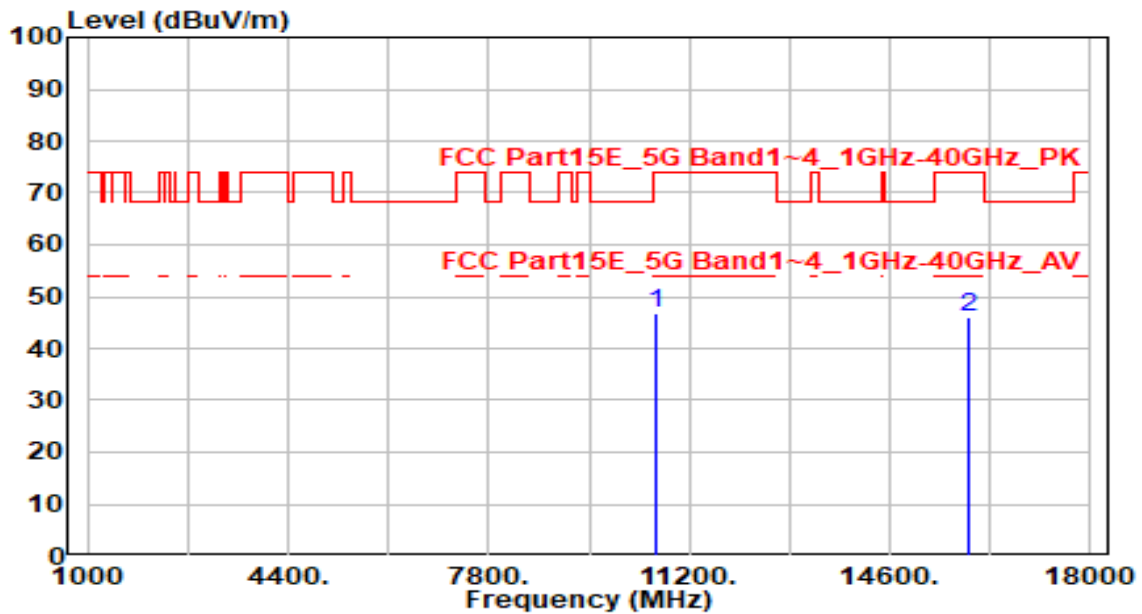


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	42.43	4.39	46.82	-27.18	74.00	200	10	Peak
2		38.98	7.12	46.10	-27.90	74.00	200	185	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

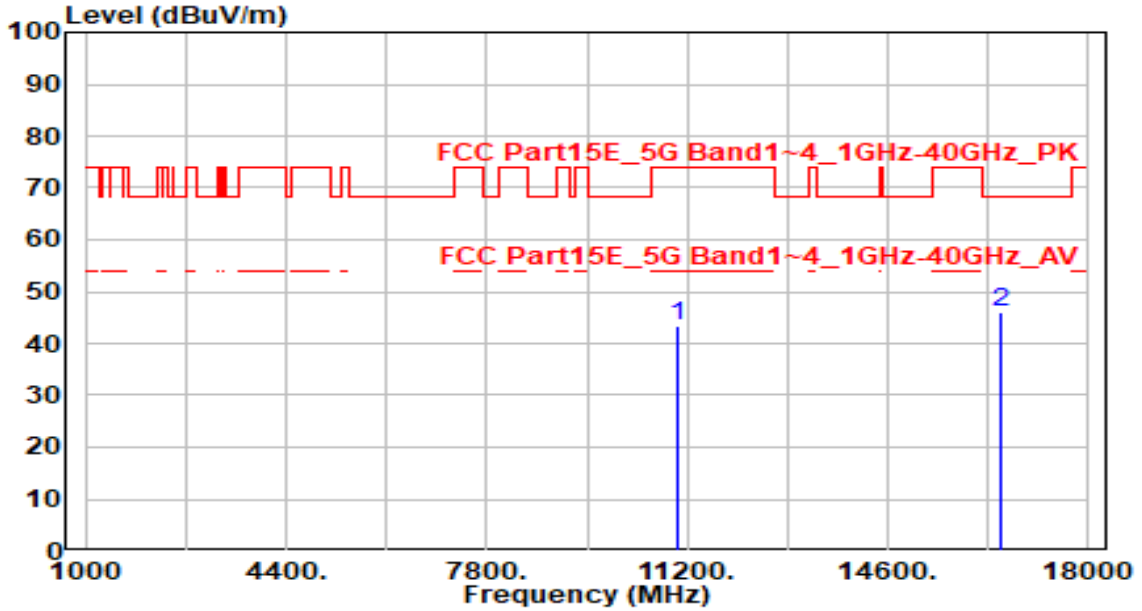


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11020.000	39.29	4.24	43.54	-30.46	74.00	100	270	Peak
2	* 16530.000	39.04	7.02	46.05	-22.15	68.20	100	45	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

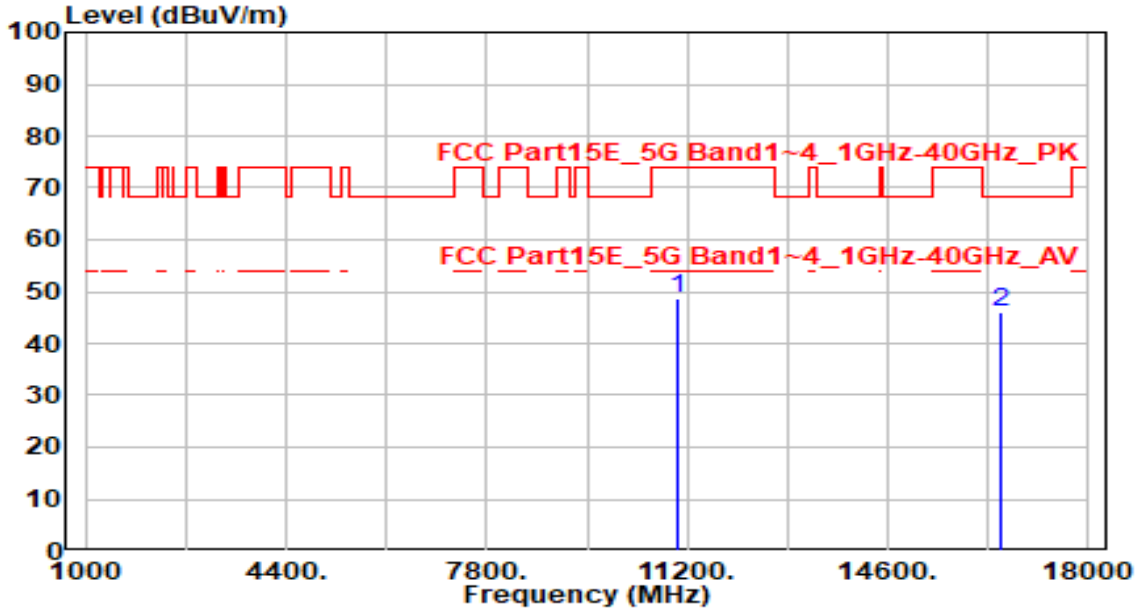


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11020.000	44.35	4.24	48.59	-25.41	74.00	300	200	Peak
2	* 16530.000	38.94	7.02	45.96	-22.24	68.20	300	310	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band3_CH 110_ANT 0+1	Test Voltage	AC 120V/60Hz

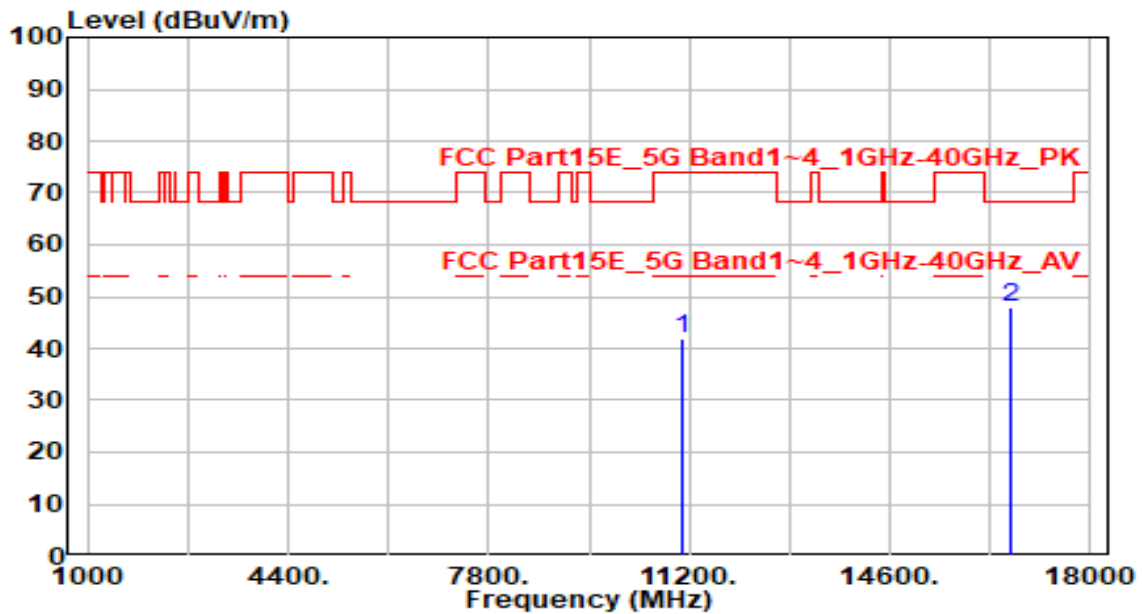


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11100.000	37.66	4.40	42.06	-31.94	74.00	200	290	Peak
2	* 16650.000	41.10	6.98	48.08	-20.12	68.20	200	55	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band3_CH 110_ANT 0+1	Test Voltage	AC 120V/60Hz

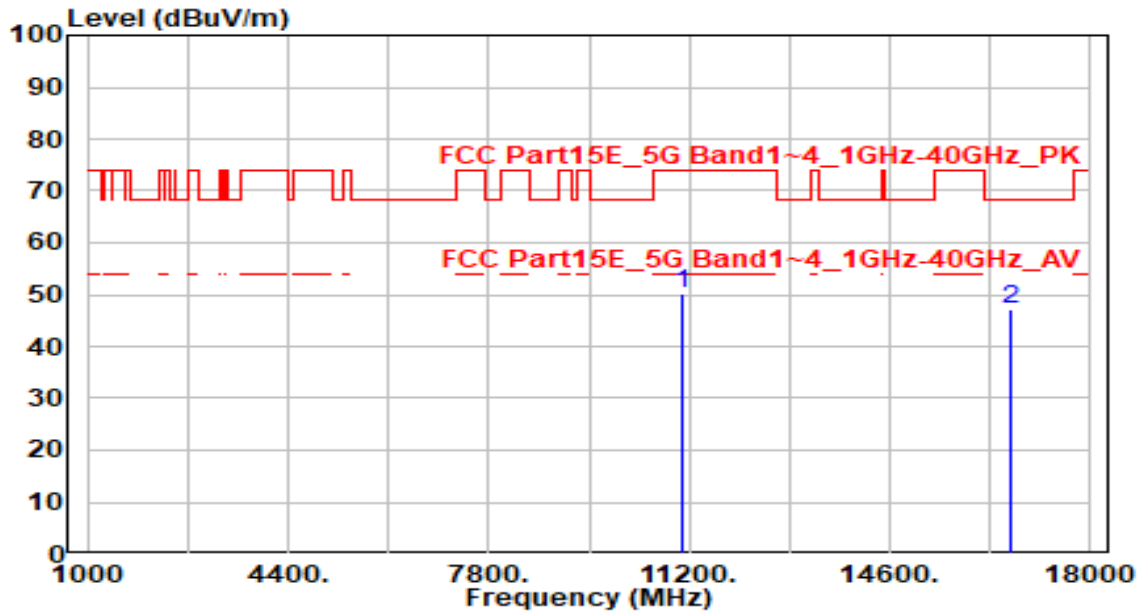


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11100.000	45.92	4.40	50.32	-23.68	74.00	200	250	Peak
2	* 16650.000	40.19	6.98	47.17	-21.03	68.20	200	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

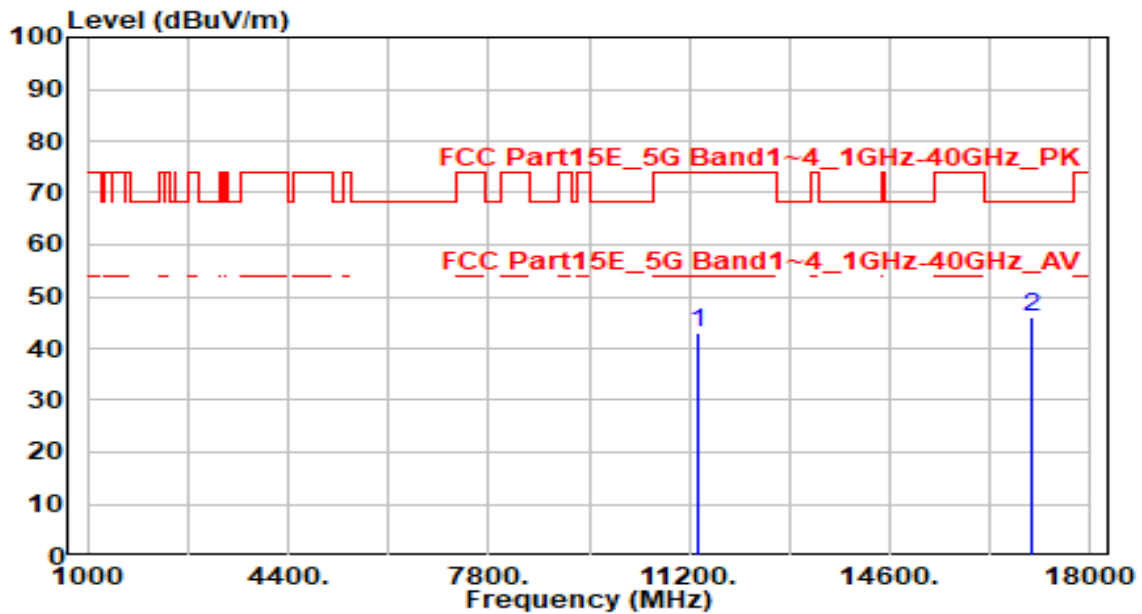


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11340.000	38.14	4.73	42.87	-31.13	74.00	200	280	Peak
2	* 17010.000	39.22	6.95	46.18	-22.02	68.20	200	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

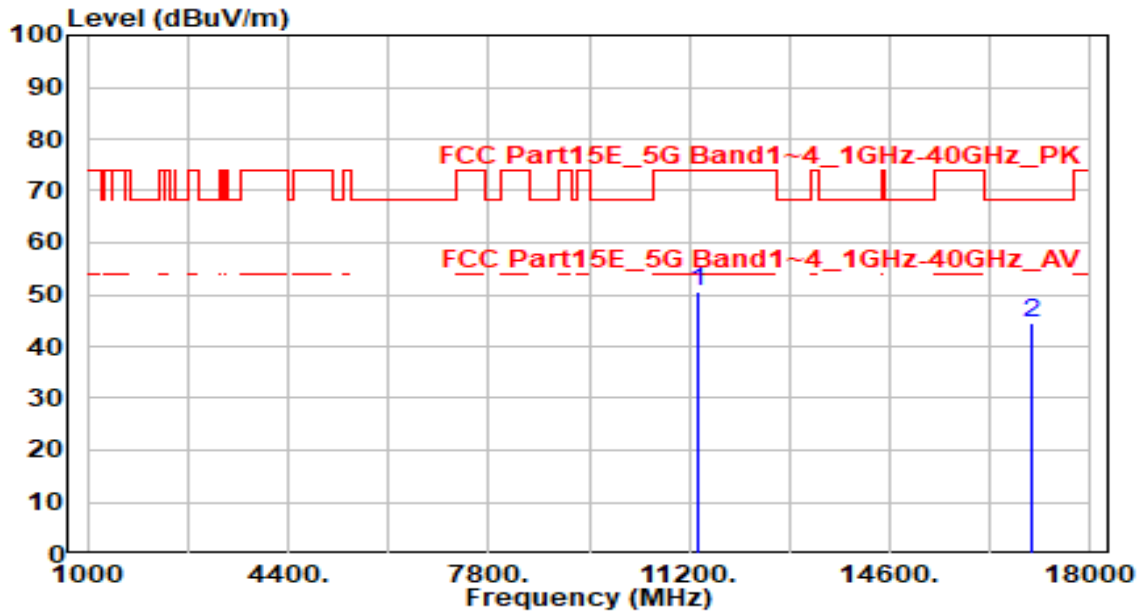


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 11340.000	45.81	4.73	50.55	-23.45	74.00	200	270	Peak
2	17010.000	37.74	6.95	44.69	-23.51	68.20	200	250	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band3_CH 142_ANT 0+1	Test Voltage	AC 120V/60Hz

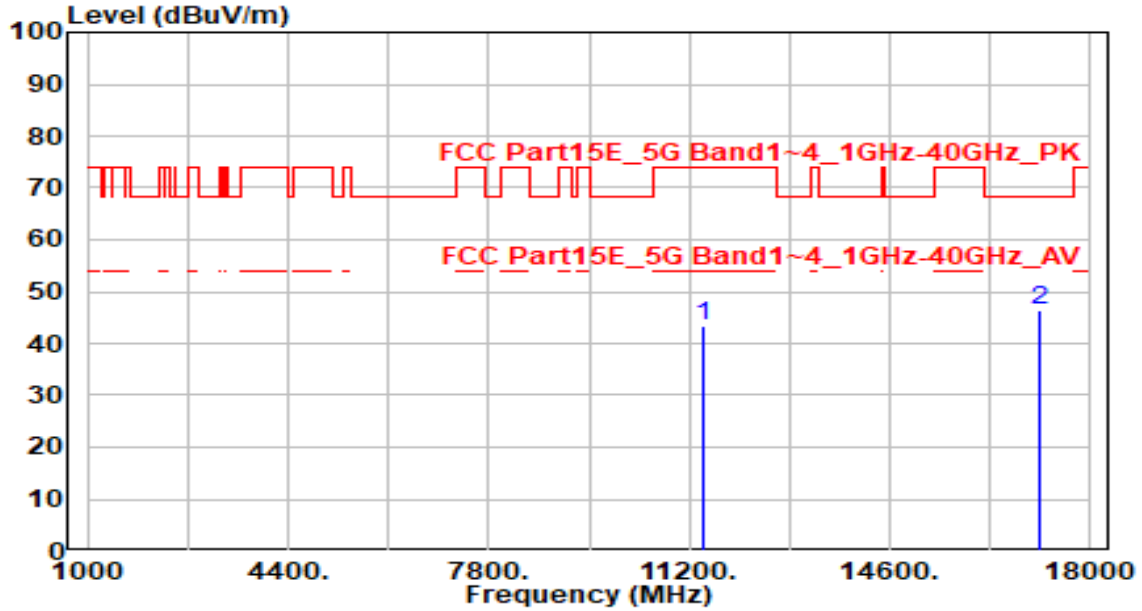


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11420.000	38.46	4.80	43.25	-30.75	74.00	200	280	Peak
2	* 17130.000	39.58	6.97	46.55	-21.65	68.20	200	140	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band3_CH 142_ANT 0+1	Test Voltage	AC 120V/60Hz

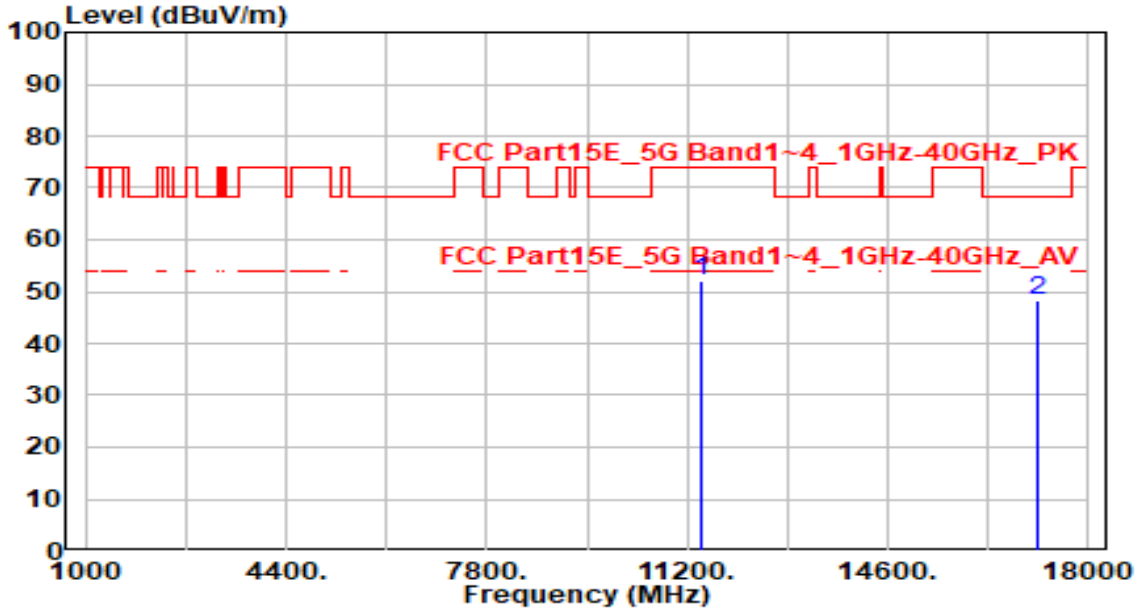


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11420.000	47.29	4.80	52.08	-21.92	74.00	200	275	Peak
2	* 17130.000	41.48	6.97	48.45	-19.75	68.20	200	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

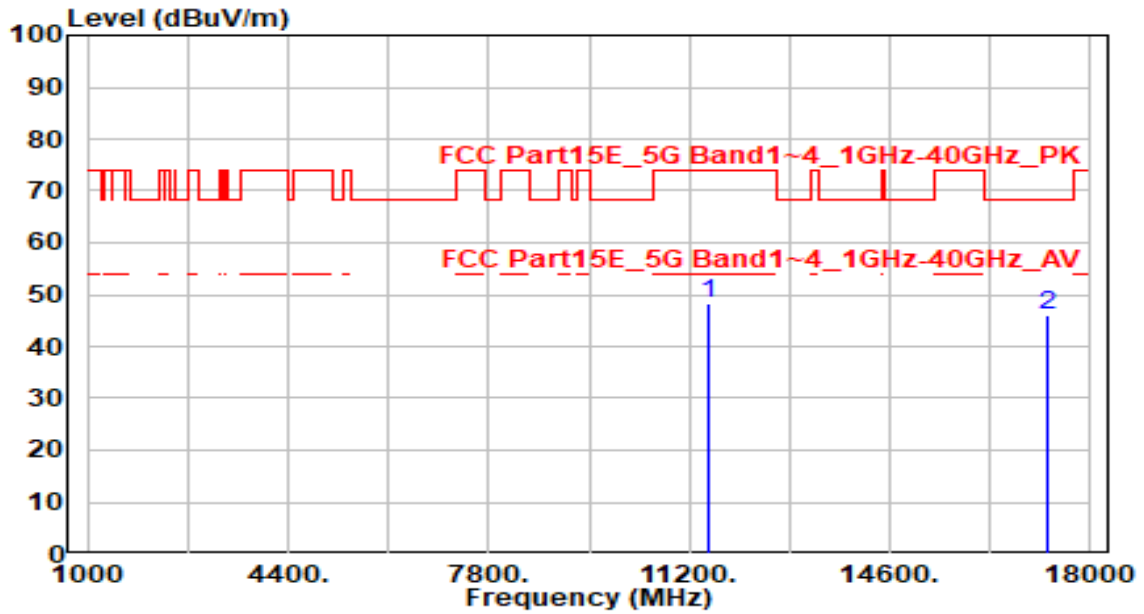


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11510.000	43.45	4.80	48.24	-25.76	74.00	200	260	Peak
2	* 17265.000	39.03	7.07	46.10	-22.10	68.20	200	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

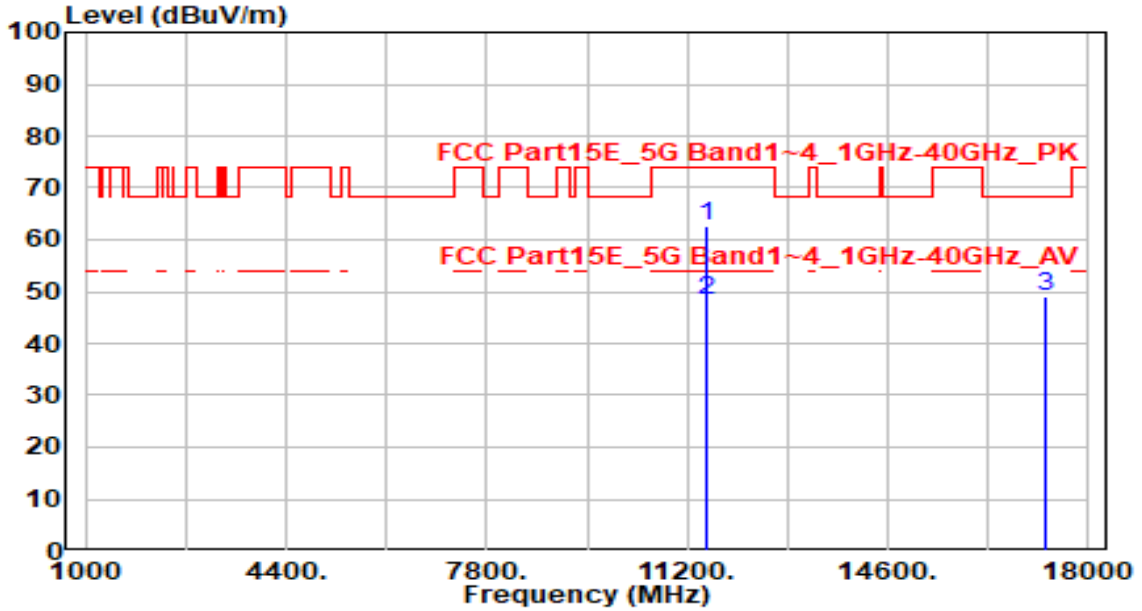


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 11510.000	57.93	4.80	62.73	-11.27	74.00	220	270	Peak
2	* 11510.000	43.61	4.80	48.41	-5.59	54.00	220	270	Average
3	17265.000	41.92	7.07	48.99	-19.21	68.20	200	265	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

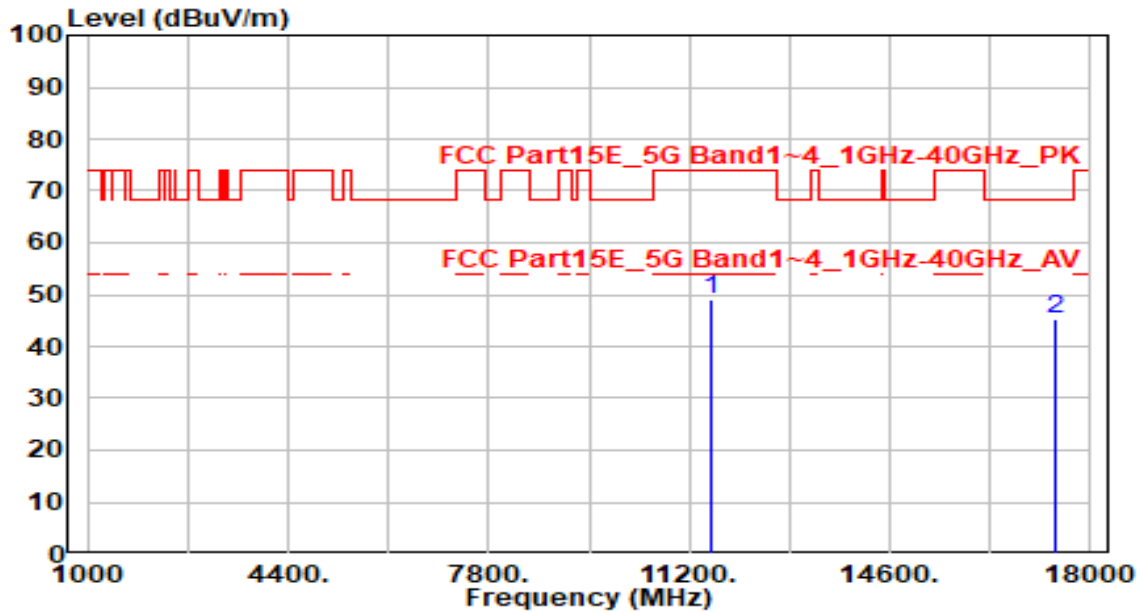


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11590.000	44.25	4.76	49.01	-24.99	74.00	200	25	Peak
2	* 17385.000	37.98	7.26	45.24	-22.96	68.20	200	190	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

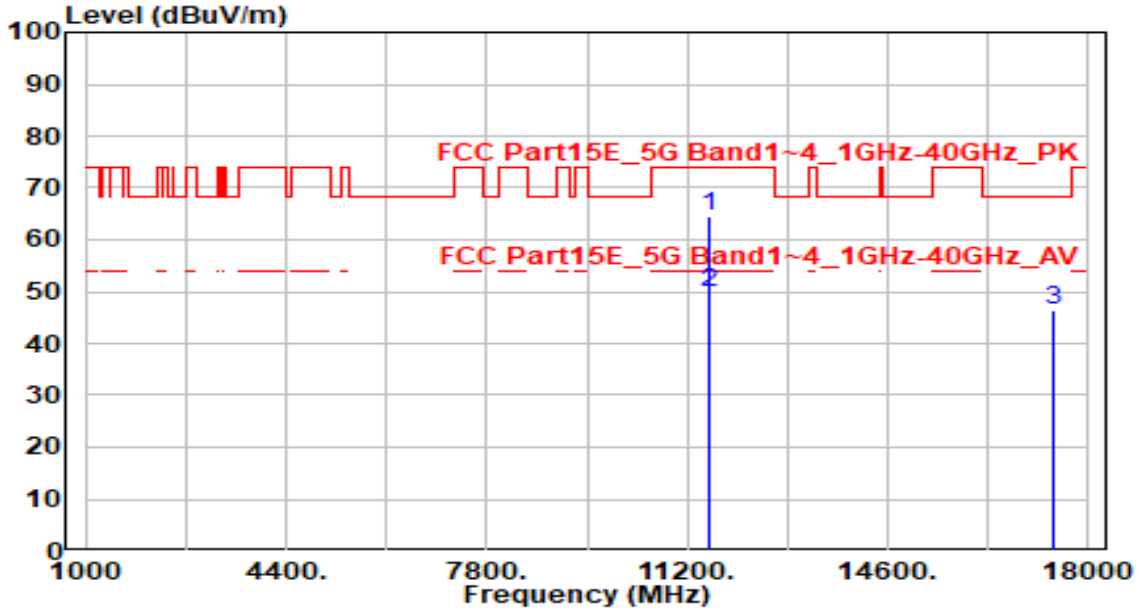


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 11590.000	59.66	4.76	64.42	-9.58	74.00	220	270	Peak
2	* 11590.000	45.16	4.76	49.92	-4.08	54.00	220	270	Average
3	17385.000	38.99	7.26	46.25	-21.95	68.20	200	275	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

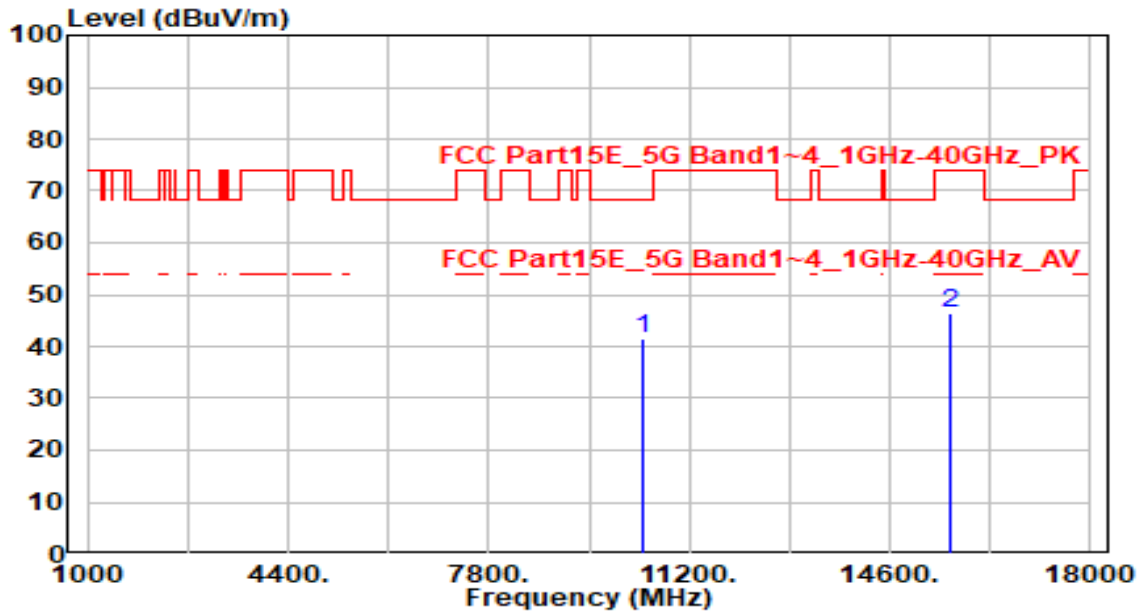


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	37.00	4.35	41.35	-26.85	68.20	200	75	Peak
2		39.61	6.84	46.46	-27.54	74.00	200	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

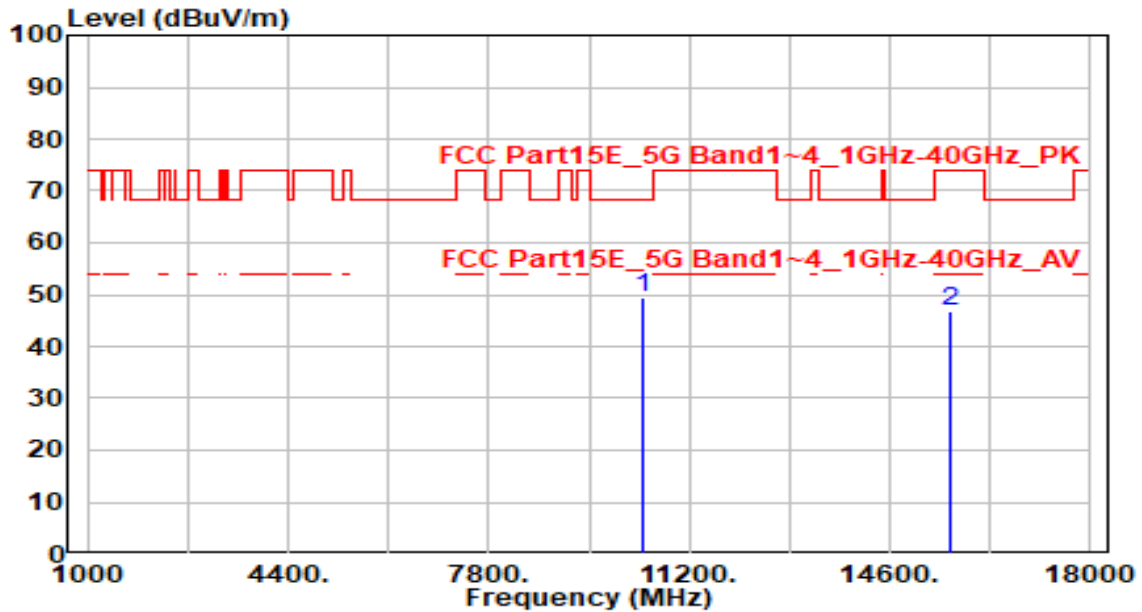


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10420.000	45.21	4.35	49.56	-18.64	68.20	200	250	Peak
2	15630.000	40.13	6.84	46.97	-27.03	74.00	200	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

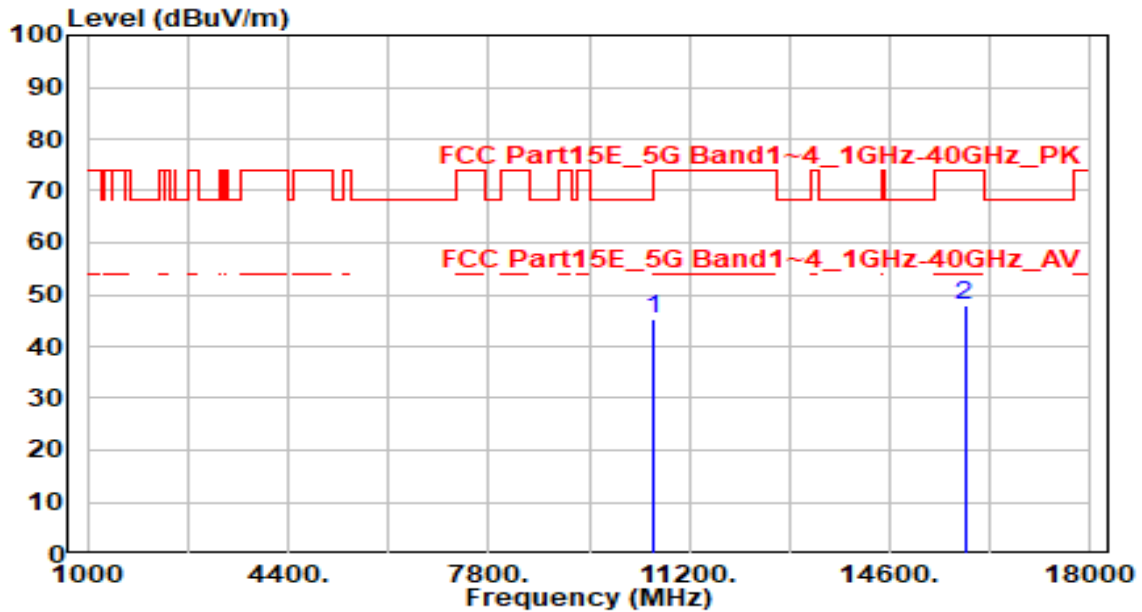


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10580.000	41.02	4.42	45.44	-22.76	68.20	200	30	Peak
2	15870.000	40.77	7.05	47.82	-26.18	74.00	200	345	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

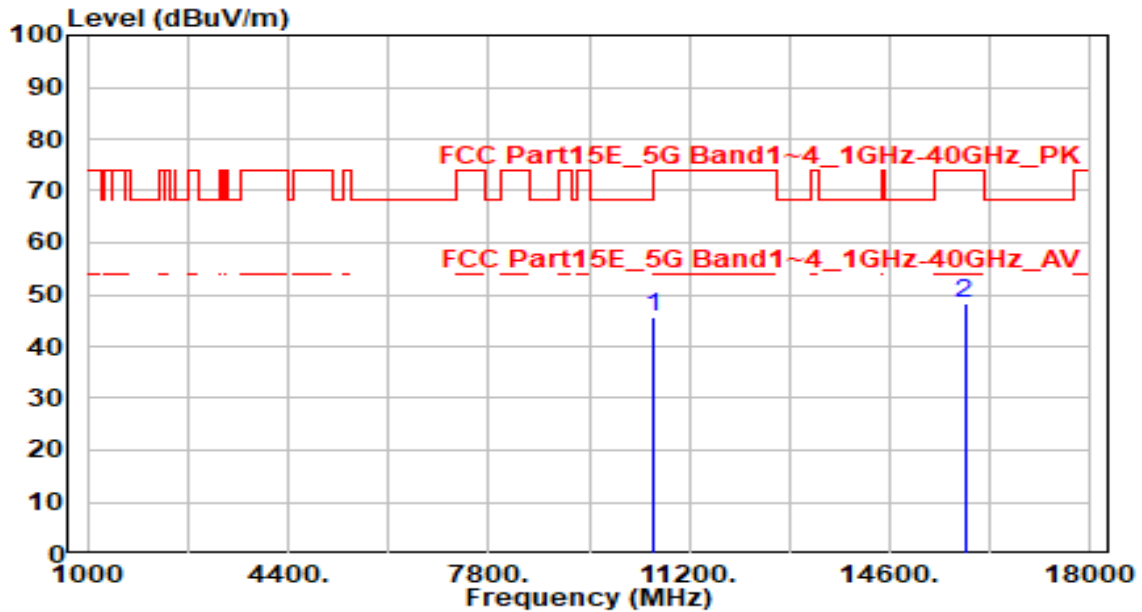


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10580.000	41.29	4.42	45.71	-22.49	68.20	200	10	Peak
2	15870.000	41.08	7.05	48.13	-25.87	74.00	200	270	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

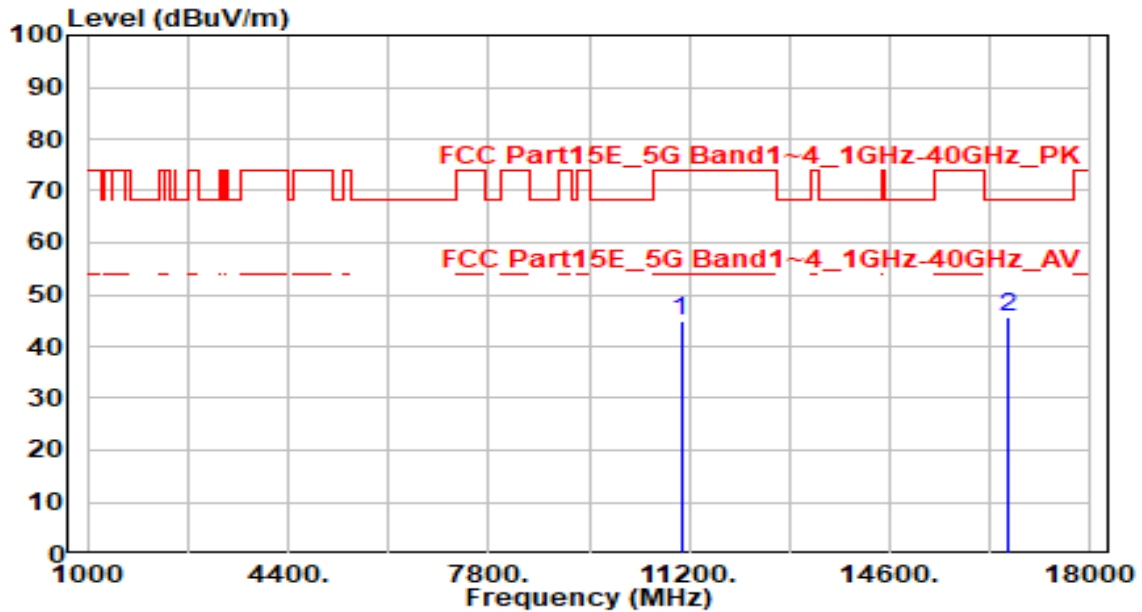


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	40.58	4.32	44.90	-29.10	74.00	200	255	Peak
2	* 16590.000	38.54	6.99	45.53	-22.67	68.20	200	280	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

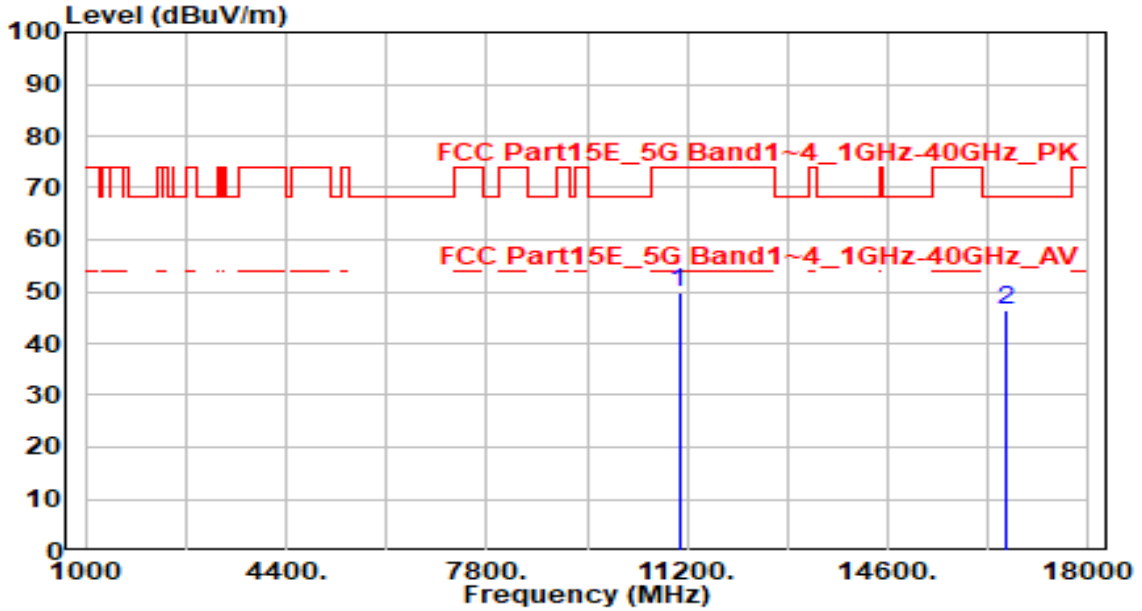


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	45.62	4.32	49.94	-24.06	74.00	200	250	Peak
2	* 16590.000	39.52	6.99	46.51	-21.69	68.20	200	5	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band3_CH 122_ANT 0+1	Test Voltage	AC 120V/60Hz

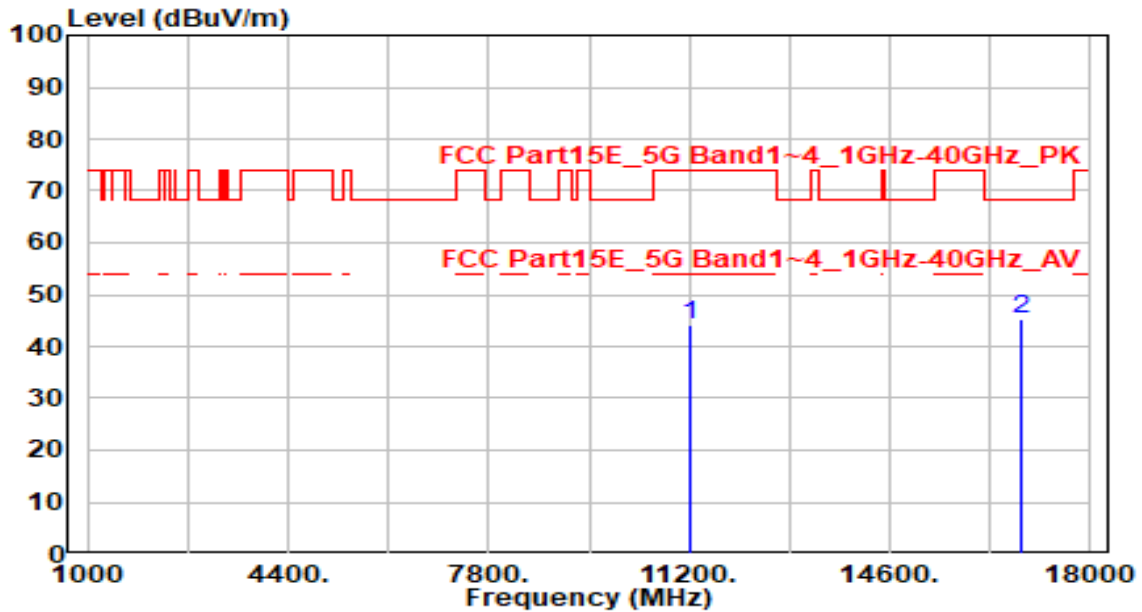


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	39.35	4.62	43.97	-30.03	74.00	200	255	Peak
2	* 16830.000	37.89	7.49	45.38	-22.82	68.20	200	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band3_CH 122_ANT 0+1	Test Voltage	AC 120V/60Hz

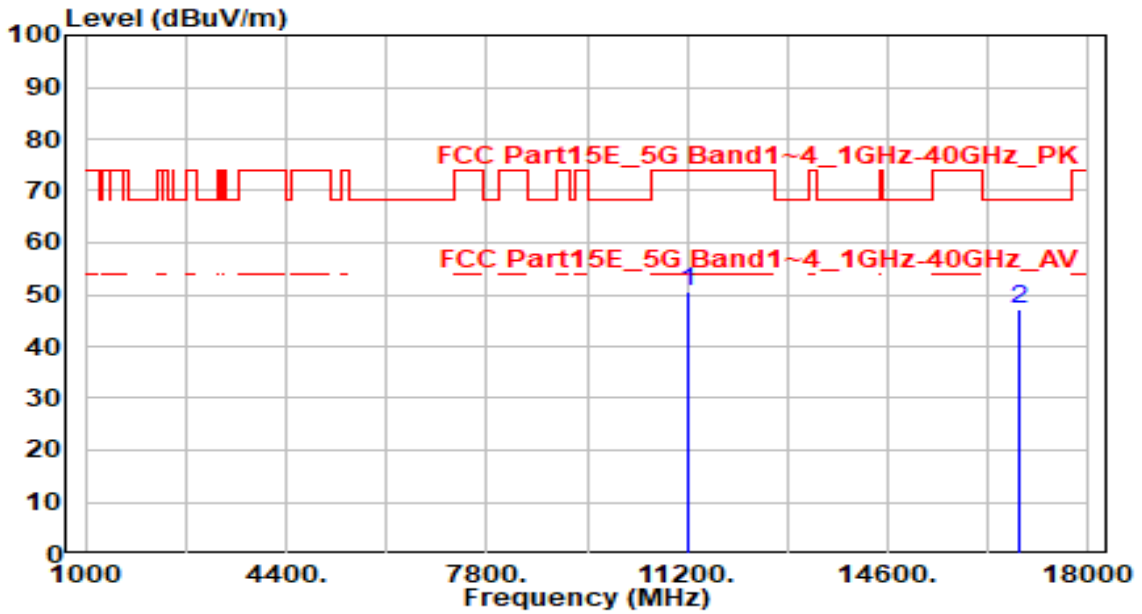


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	45.87	4.62	50.49	-23.51	74.00	200	270	Peak
2	* 16830.000	39.49	7.49	46.99	-21.21	68.20	200	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band3_CH 138_ANT 0+1	Test Voltage	AC 120V/60Hz

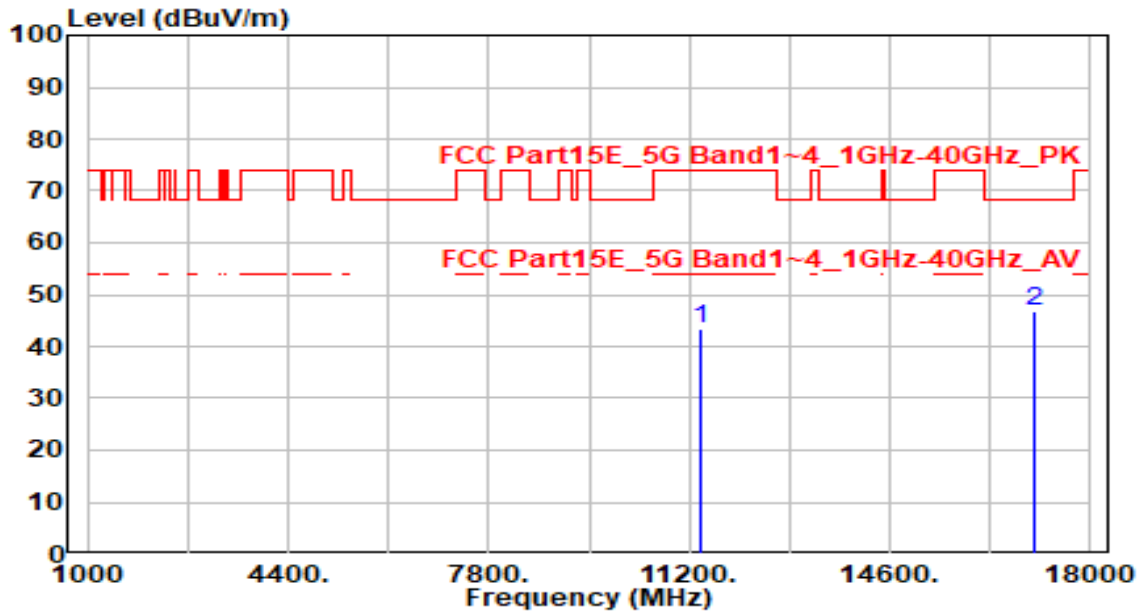


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	38.45	4.77	43.22	-30.78	74.00	200	280	Peak
2	* 17070.000	39.84	6.97	46.80	-21.40	68.20	200	60	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band3_CH 138_ANT 0+1	Test Voltage	AC 120V/60Hz

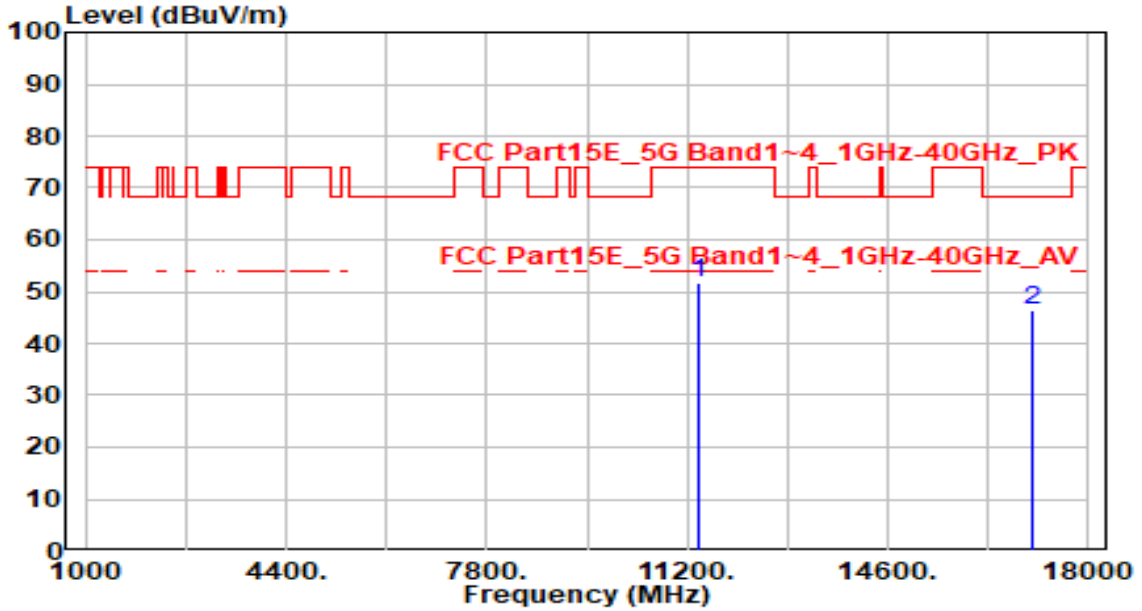


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	46.77	4.77	51.55	-22.45	74.00	200	250	Peak
2	* 17070.000	39.59	6.97	46.55	-21.65	68.20	200	30	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

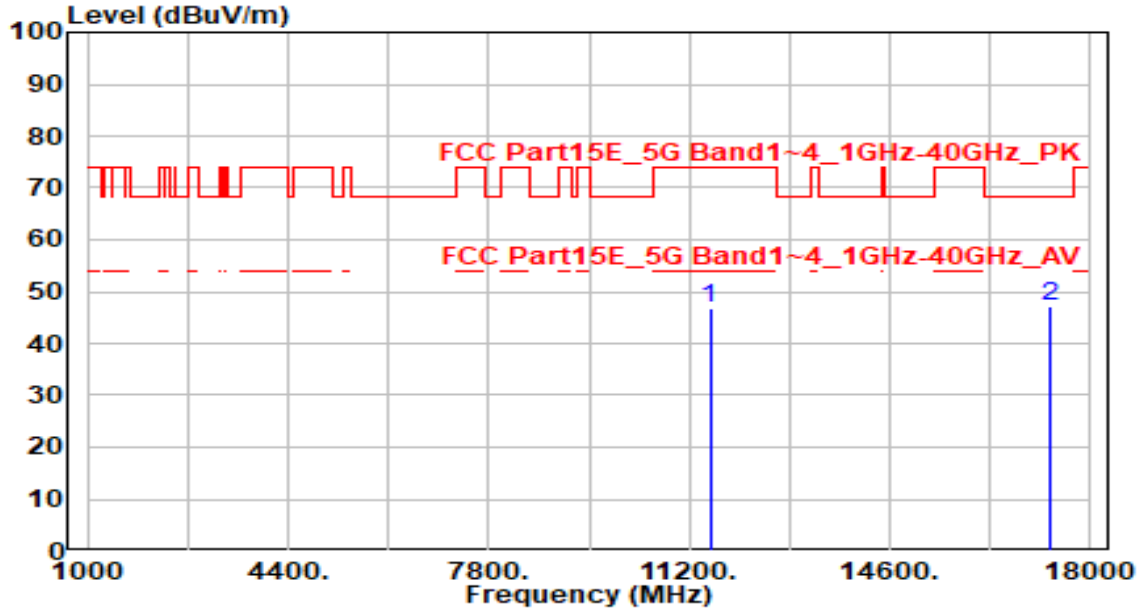


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11550.000	42.06	4.78	46.83	-27.17	74.00	200	270	Peak
2	* 17325.000	40.14	7.16	47.30	-20.90	68.20	200	290	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

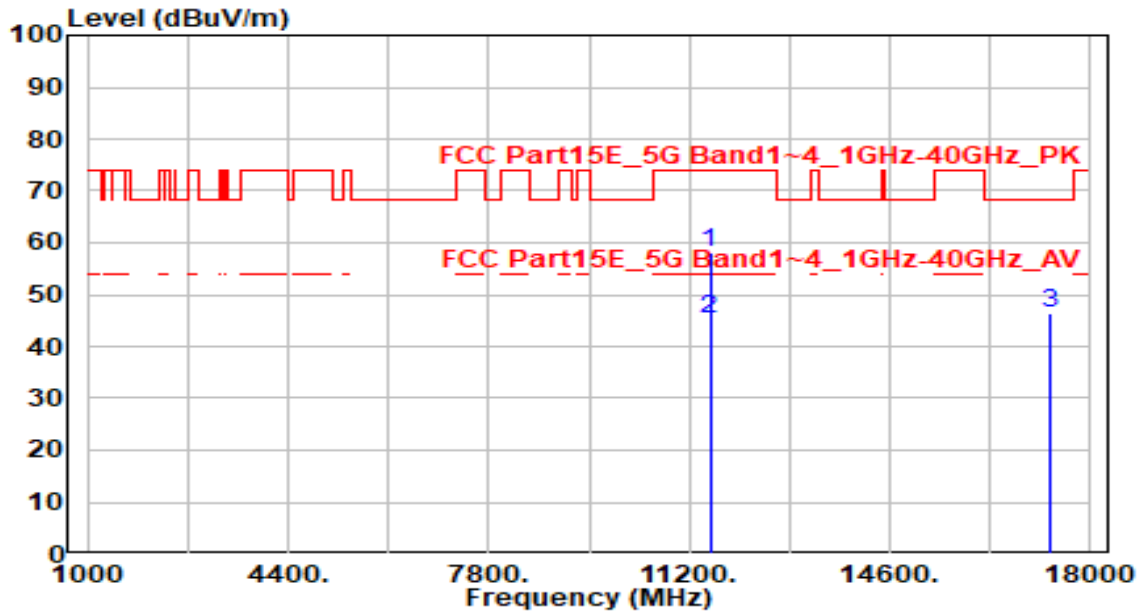


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 11550.000	53.21	4.78	57.99	-16.01	74.00	220	265	Peak
2	* 11550.000	40.41	4.78	45.19	-8.81	54.00	220	265	Average
3	17325.000	39.09	7.16	46.25	-21.95	68.20	200	270	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

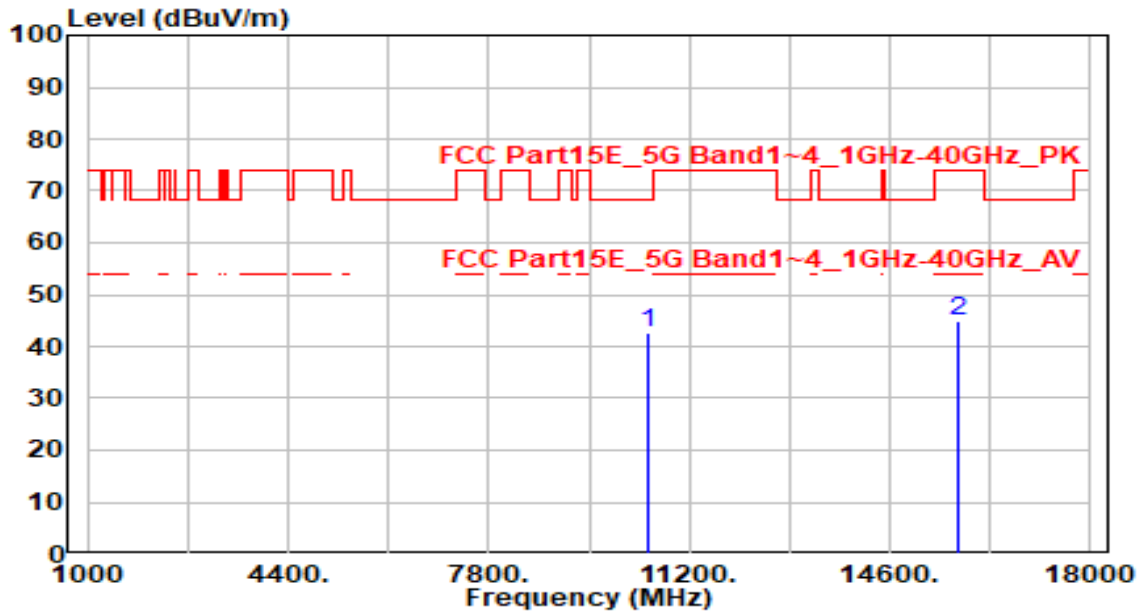


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10500.000	38.23	4.46	42.69	-25.51	68.20	200	25	Peak
2	15750.000	38.13	6.93	45.06	-28.94	74.00	200	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

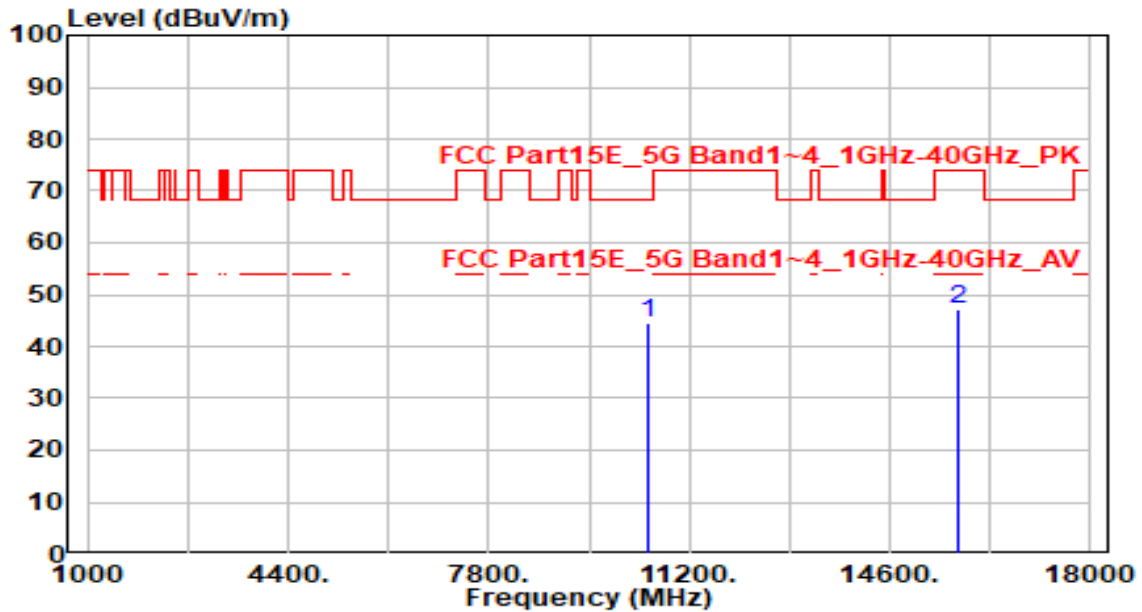


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10500.000	40.00	4.46	44.46	-23.74	68.20	200	105	Peak
2	15750.000	40.15	6.93	47.07	-26.93	74.00	200	55	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

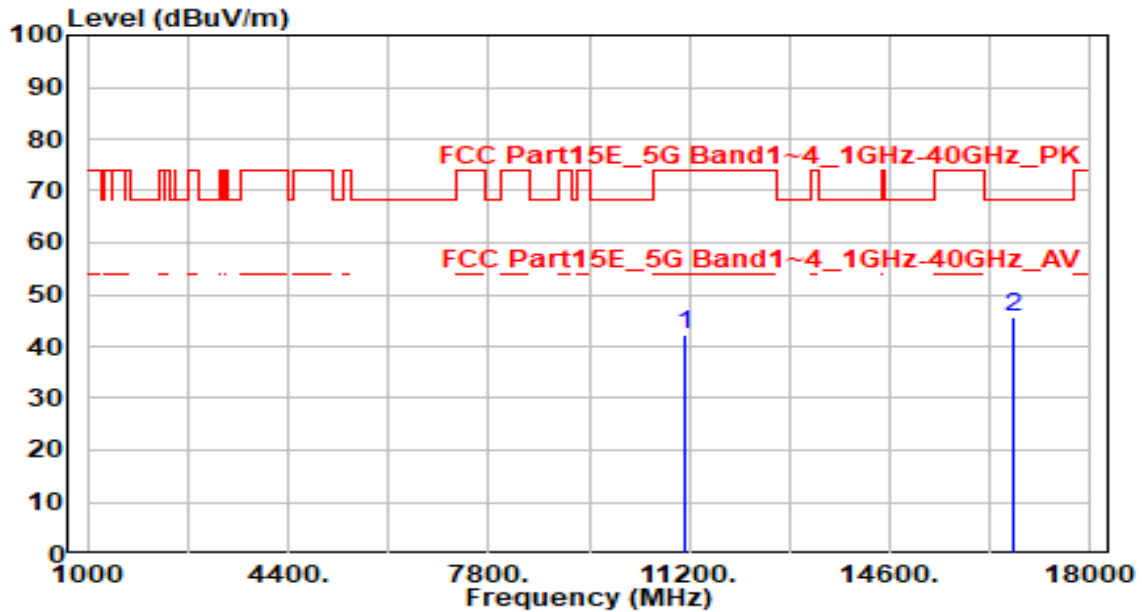


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11140.000	37.94	4.48	42.42	-31.58	74.00	200	60	Peak
2	* 16710.000	38.78	6.97	45.74	-22.46	68.20	200	340	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

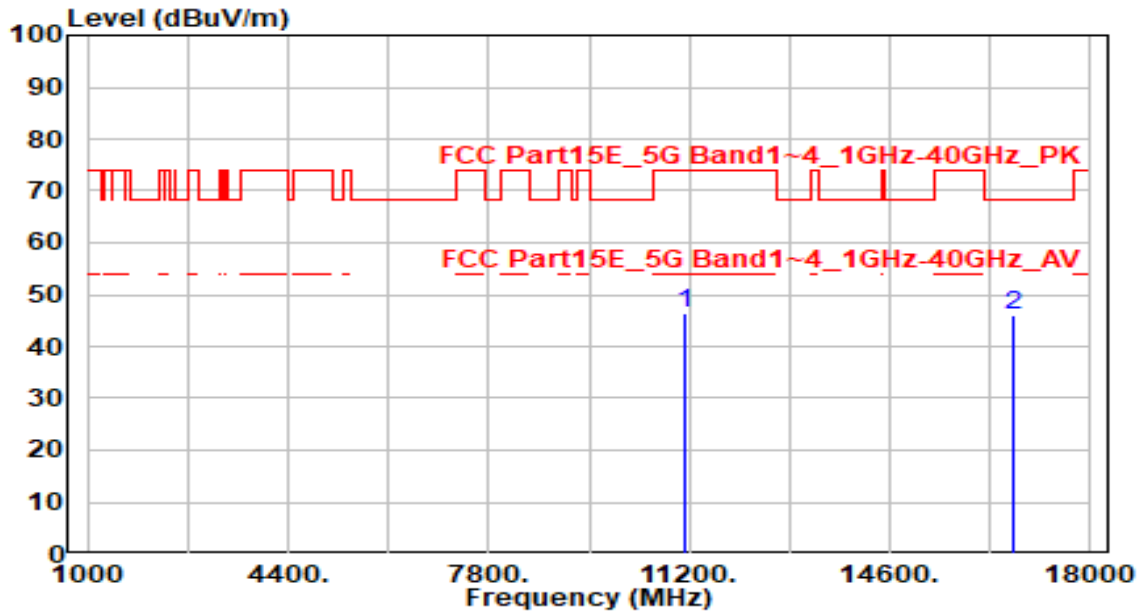


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11140.000	42.11	4.48	46.59	-27.41	74.00	200	250	Peak
2	* 16710.000	39.12	6.97	46.09	-22.11	68.20	200	245	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

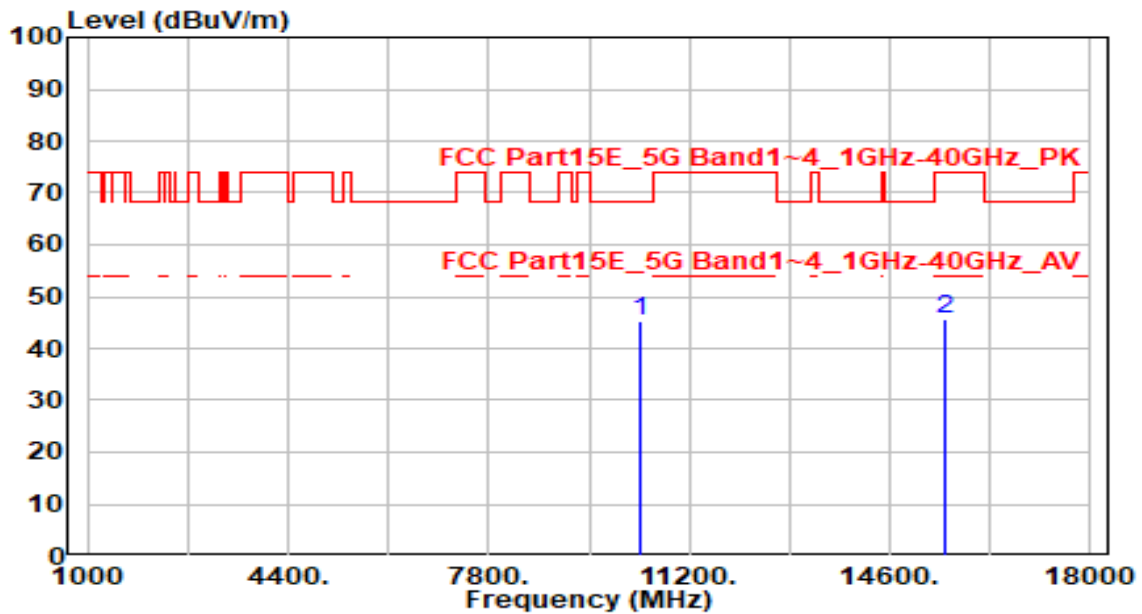


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10360.000	40.95	4.29	45.25	-22.95	68.20	200	330	Peak
2	15540.000	38.65	6.82	45.47	-28.53	74.00	200	50	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

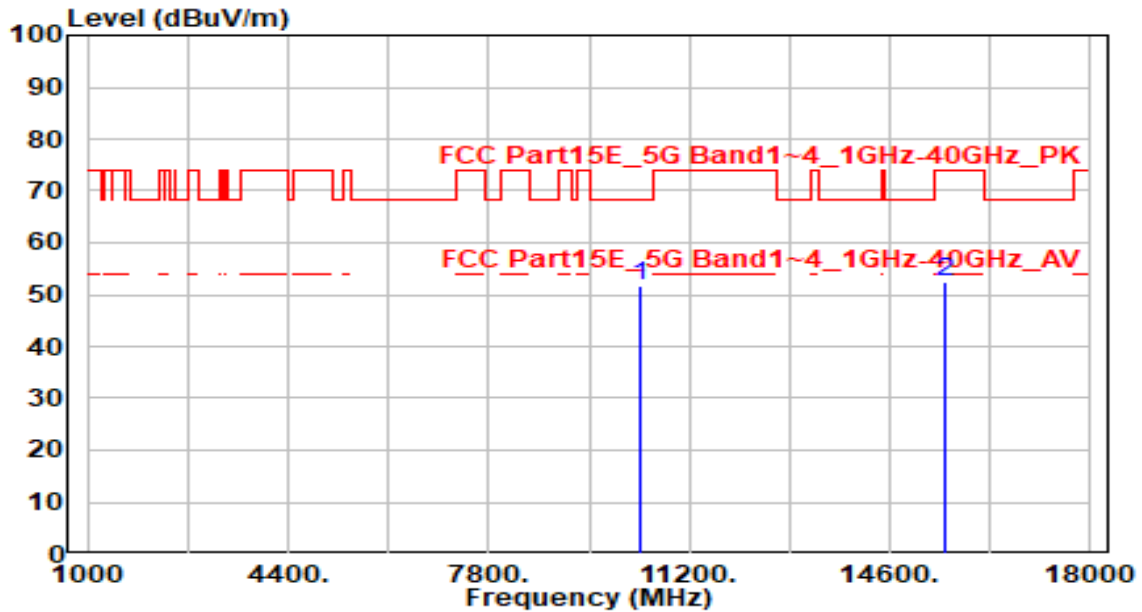


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	47.25	4.29	51.54	-16.66	68.20	200	245	Peak
2		45.60	6.82	52.43	-21.57	74.00	200	190	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 120V/60Hz

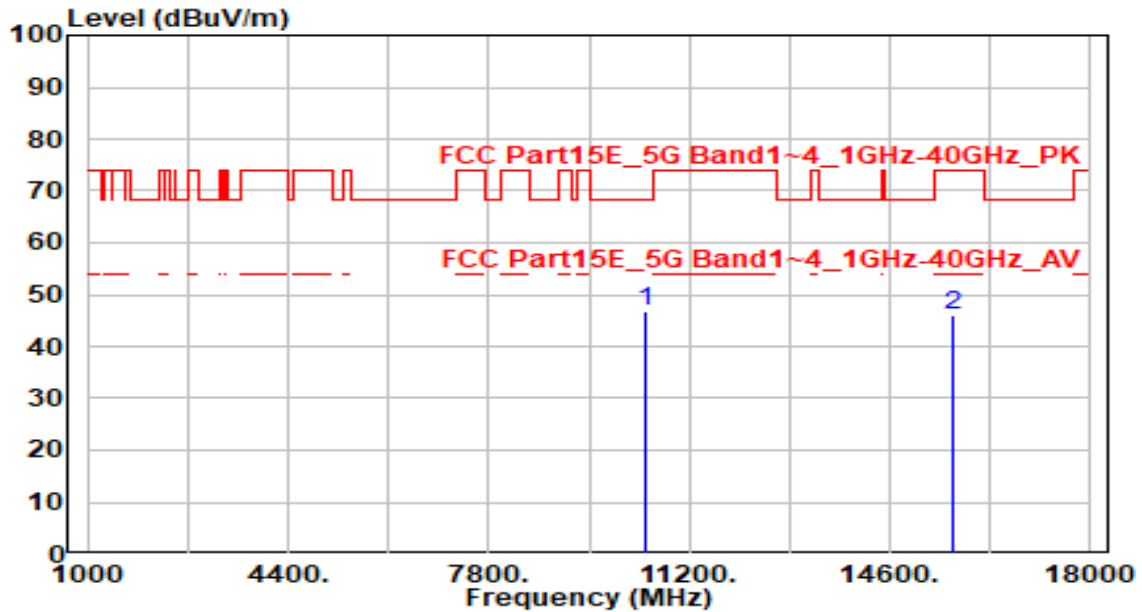


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10440.000	42.46	4.38	46.83	-21.37	68.20	200	350	Peak
2	15660.000	39.33	6.86	46.20	-27.80	74.00	200	20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 120V/60Hz

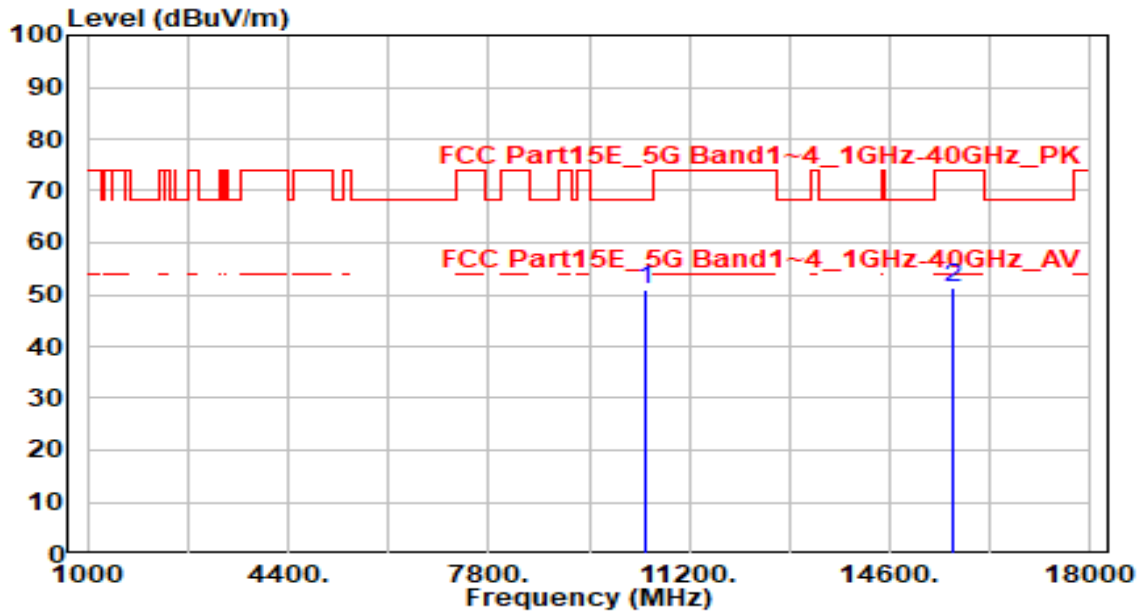


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10440.000	46.56	4.38	50.93	-17.27	68.20	200	245	Peak
2	15660.000	44.55	6.86	51.42	-22.58	74.00	200	185	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band1_CH 48_ANT 0+1	Test Voltage	AC 120V/60Hz

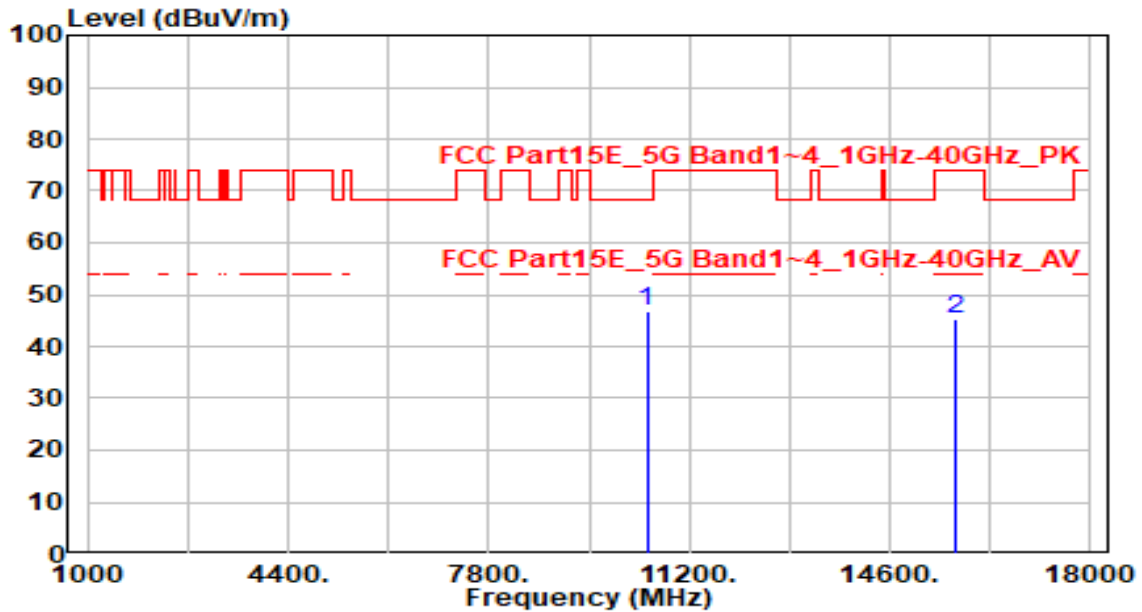


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10480.000	42.47	4.43	46.90	-21.30	68.20	200	290	Peak
2	15720.000	38.44	6.90	45.34	-28.66	74.00	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band1_CH 48_ANT 0+1	Test Voltage	AC 120V/60Hz

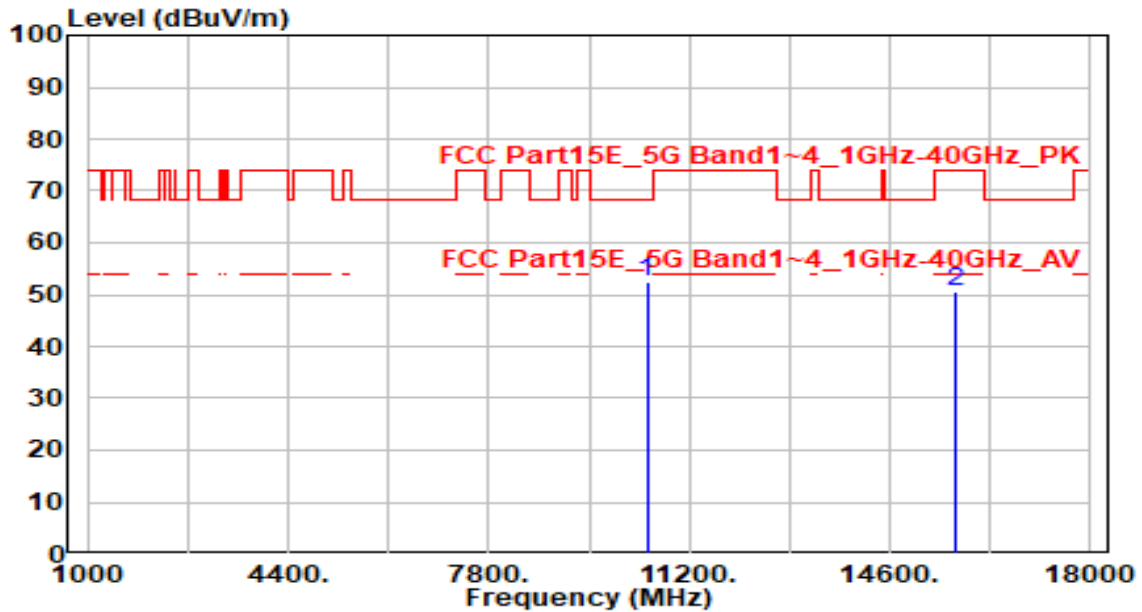


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10480.000	47.96	4.43	52.39	-15.81	68.20	200	325	Peak
2	15720.000	43.61	6.90	50.51	-23.49	74.00	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band2_CH 52_ANT 0+1	Test Voltage	AC 120V/60Hz

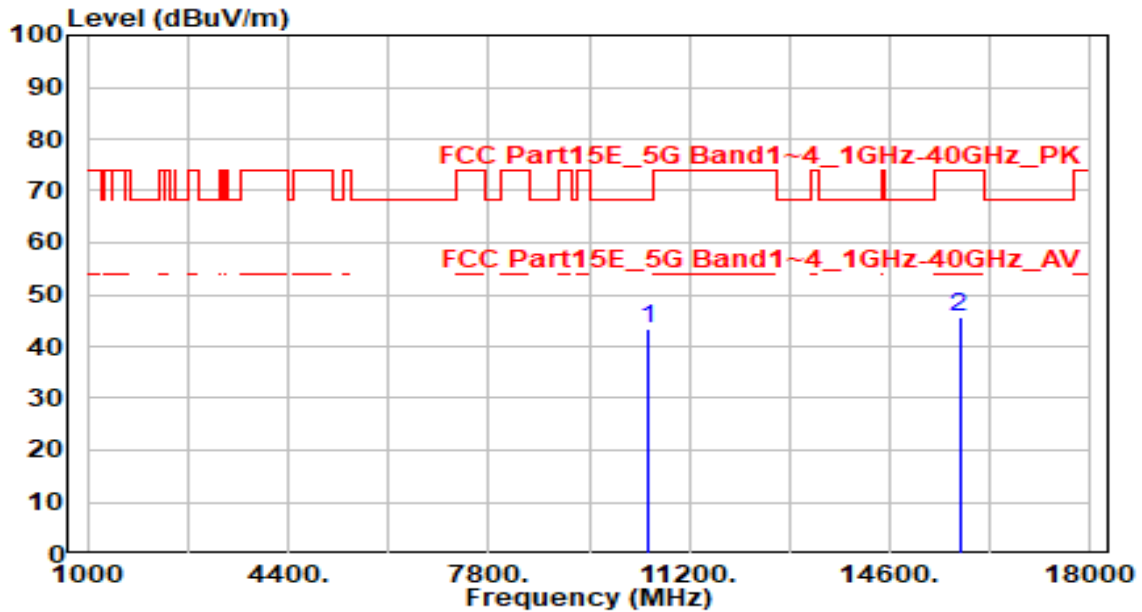


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10520.000	38.77	4.45	43.22	-24.98	68.20	200	60	Peak
2	15780.000	38.66	6.95	45.61	-28.39	74.00	200	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band2_CH 52_ANT 0+1	Test Voltage	AC 120V/60Hz

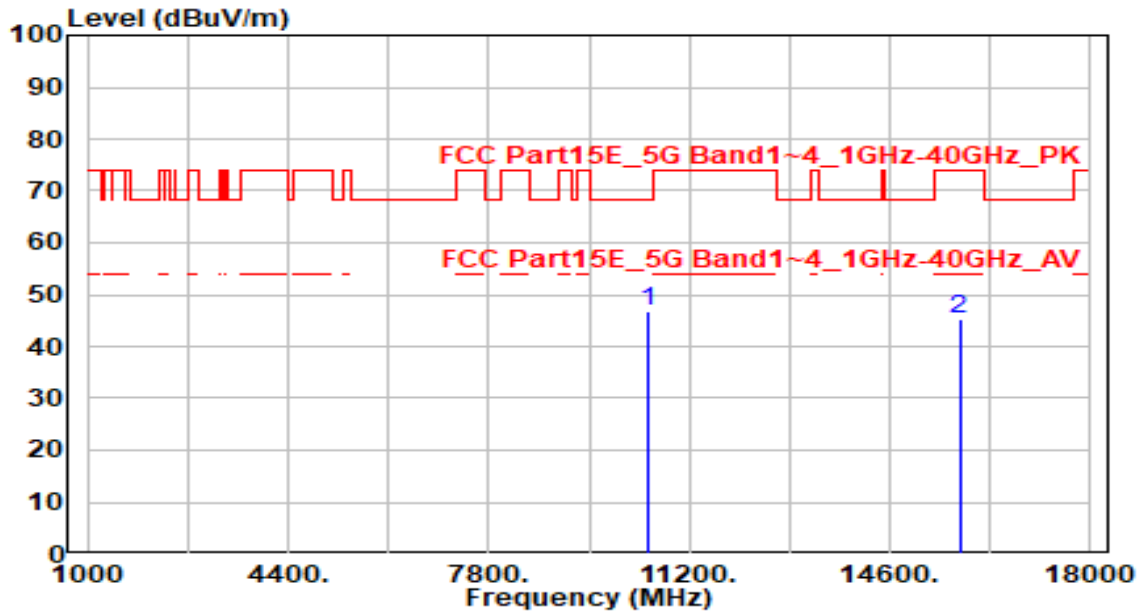


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10520.000	42.24	4.45	46.69	-21.51	68.20	200	5	Peak
2	15780.000	38.23	6.95	45.18	-28.82	74.00	200	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band2_CH 60_ANT 0+1	Test Voltage	AC 120V/60Hz

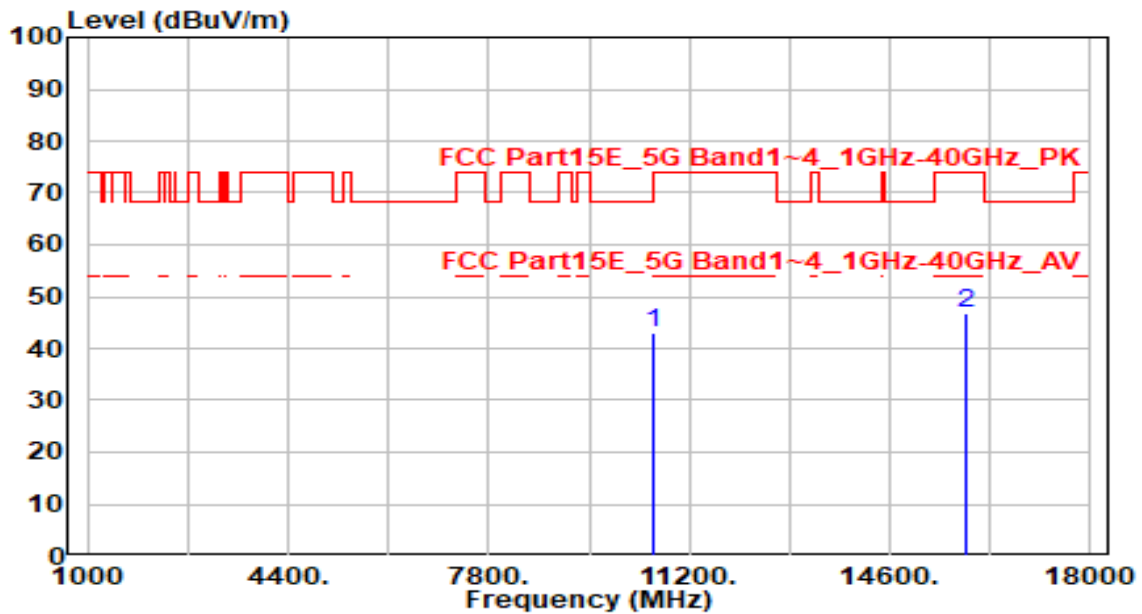


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10600.000	38.49	4.41	42.90	-25.30	68.20	200	125	Peak
2	15900.000	39.80	7.09	46.88	-27.12	74.00	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band2_CH 60_ANT 0+1	Test Voltage	AC 120V/60Hz

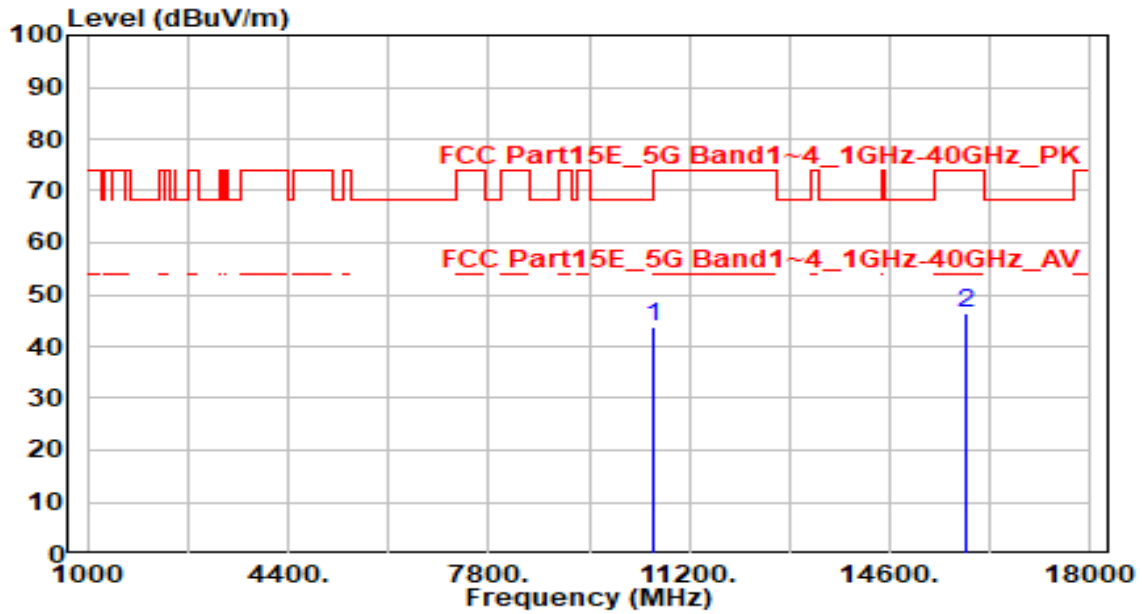


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10600.000	39.51	4.41	43.92	-24.28	68.20	200	285	Peak
2	15900.000	39.15	7.09	46.24	-27.76	74.00	200	260	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

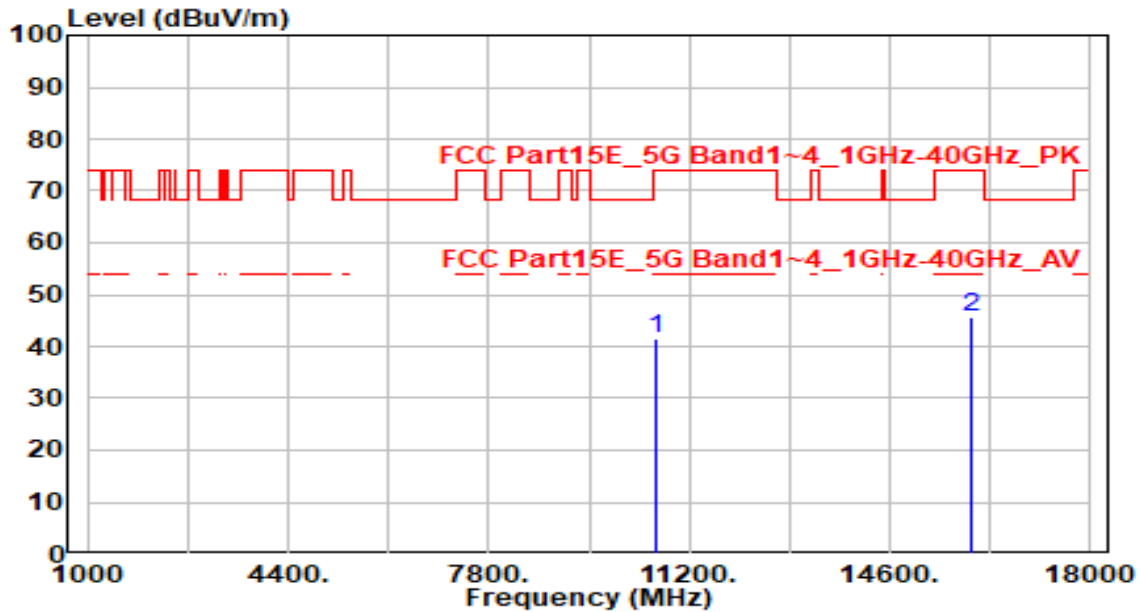


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	37.15	4.37	41.52	-32.48	74.00	200	185	Peak
2	* 15960.000	38.58	7.16	45.74	-28.26	74.00	200	75	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

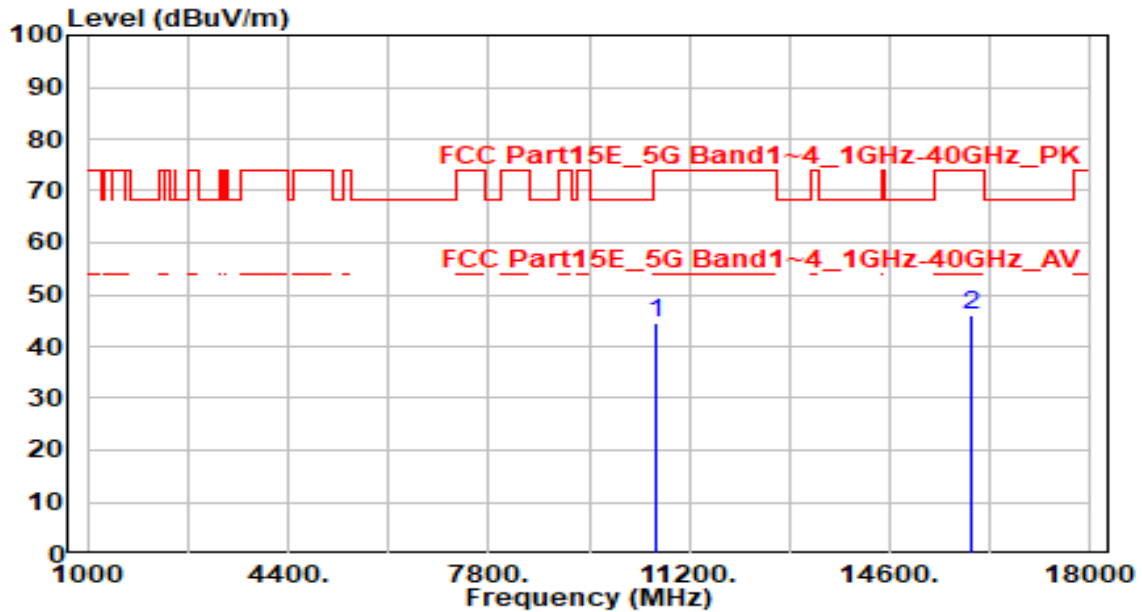


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	40.17	4.37	44.54	-29.46	74.00	200	325	Peak
2	* 15960.000	38.77	7.16	45.93	-28.07	74.00	200	230	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

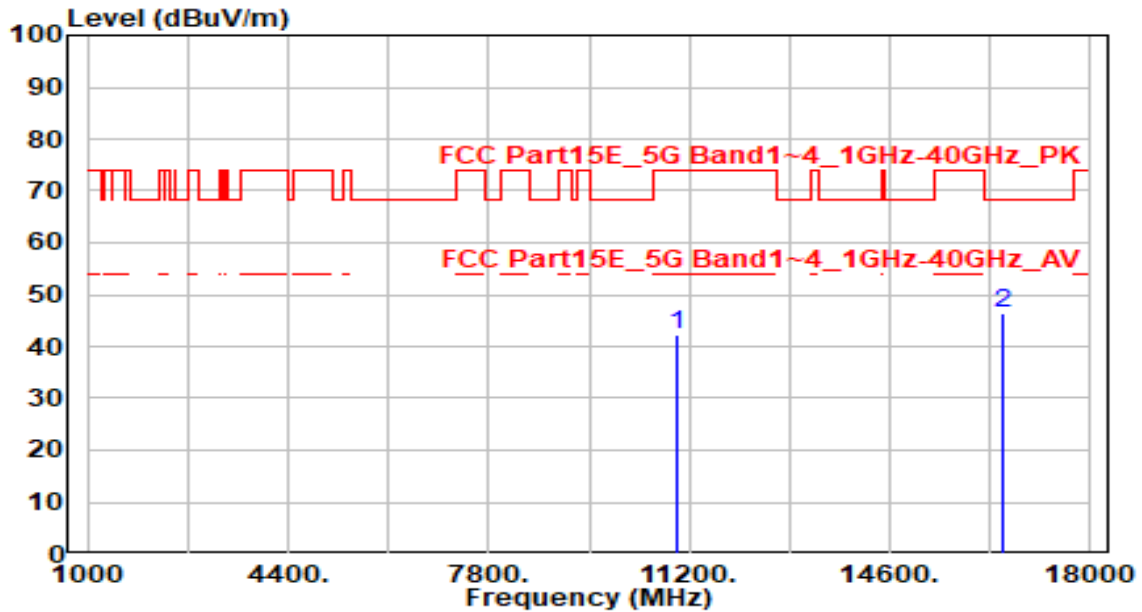


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	38.13	4.20	42.33	-31.67	74.00	200	40	Peak
2	* 16500.000	39.30	7.03	46.33	-21.87	68.20	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

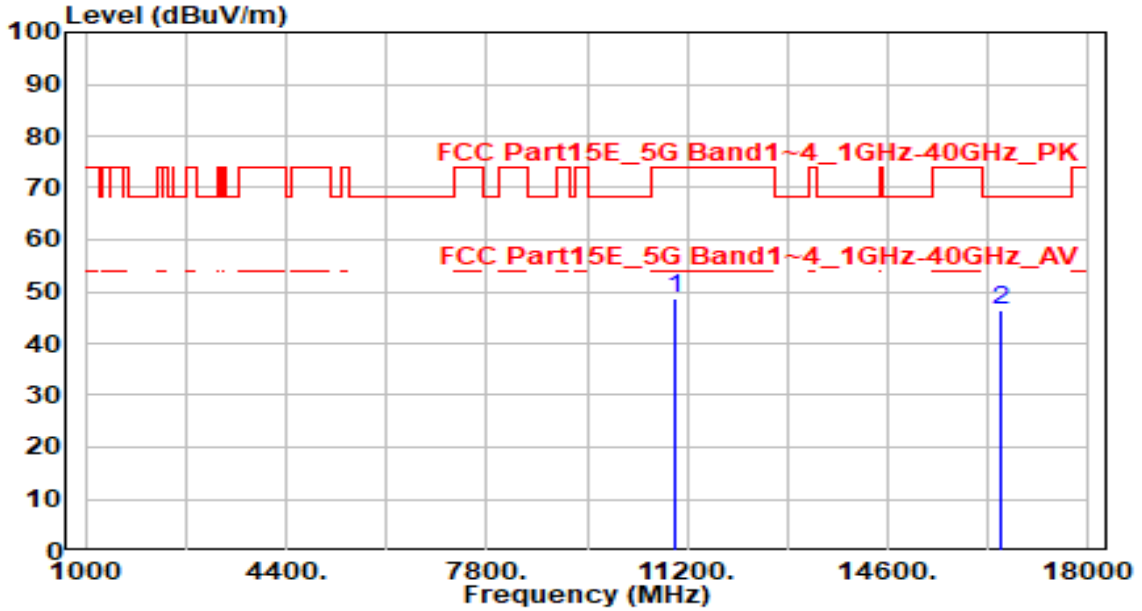


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	44.37	4.20	48.57	-25.43	74.00	200	260	Peak
2	* 16500.000	39.50	7.03	46.52	-21.68	68.20	200	330	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band3_CH 116_ANT 0+1	Test Voltage	AC 120V/60Hz

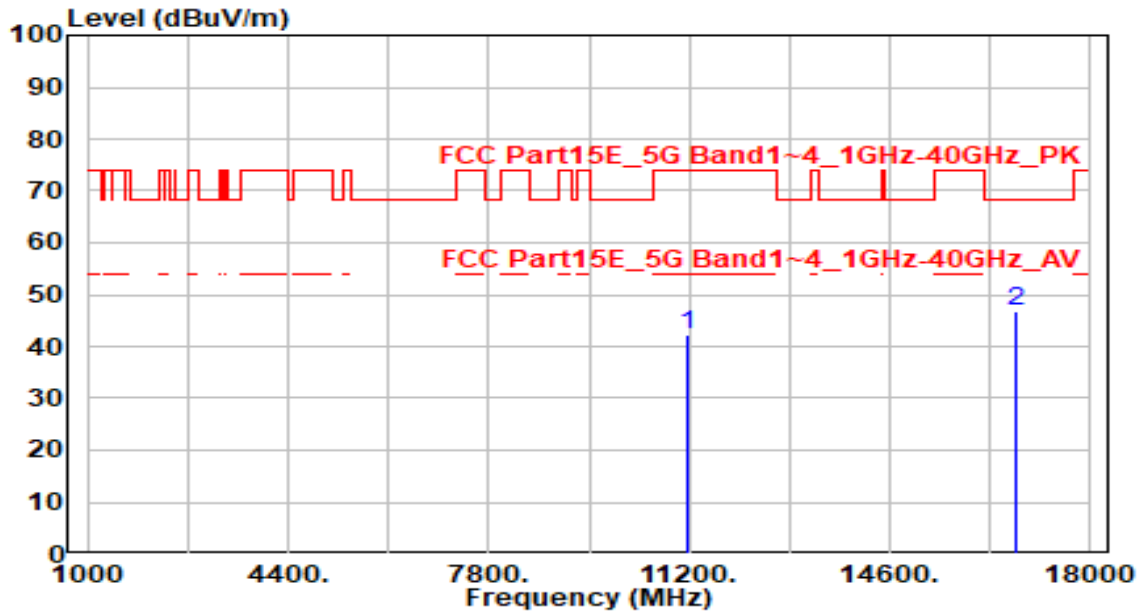


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	37.86	4.52	42.38	-31.62	74.00	200	360	Peak
2	* 16740.000	39.91	6.96	46.87	-21.33	68.20	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band3_CH 116_ANT 0+1	Test Voltage	AC 120V/60Hz

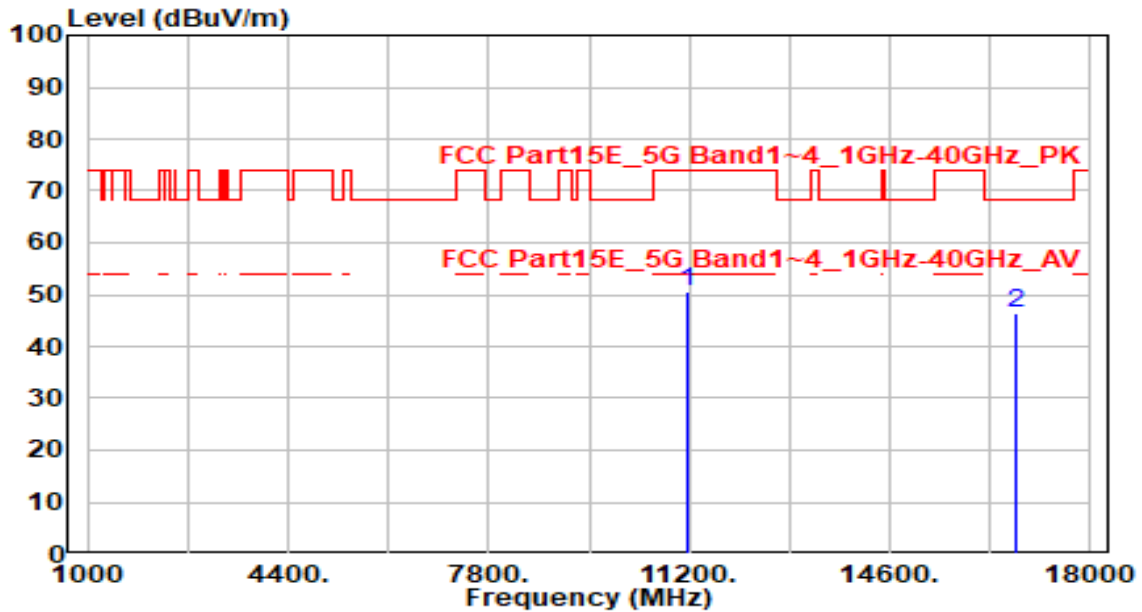


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	46.06	4.52	50.58	-23.42	74.00	200	260	Peak
2	* 16740.000	39.41	6.96	46.37	-21.83	68.20	200	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

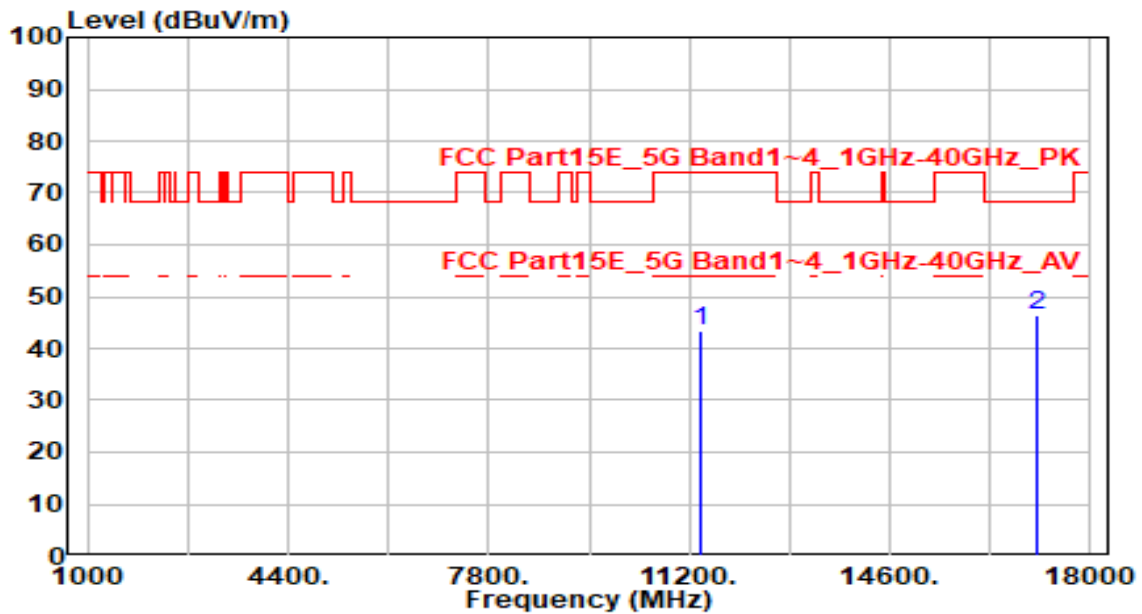


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	38.64	4.79	43.44	-30.56	74.00	200	280	Peak
2	* 17100.000	39.52	6.97	46.49	-21.71	68.20	200	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

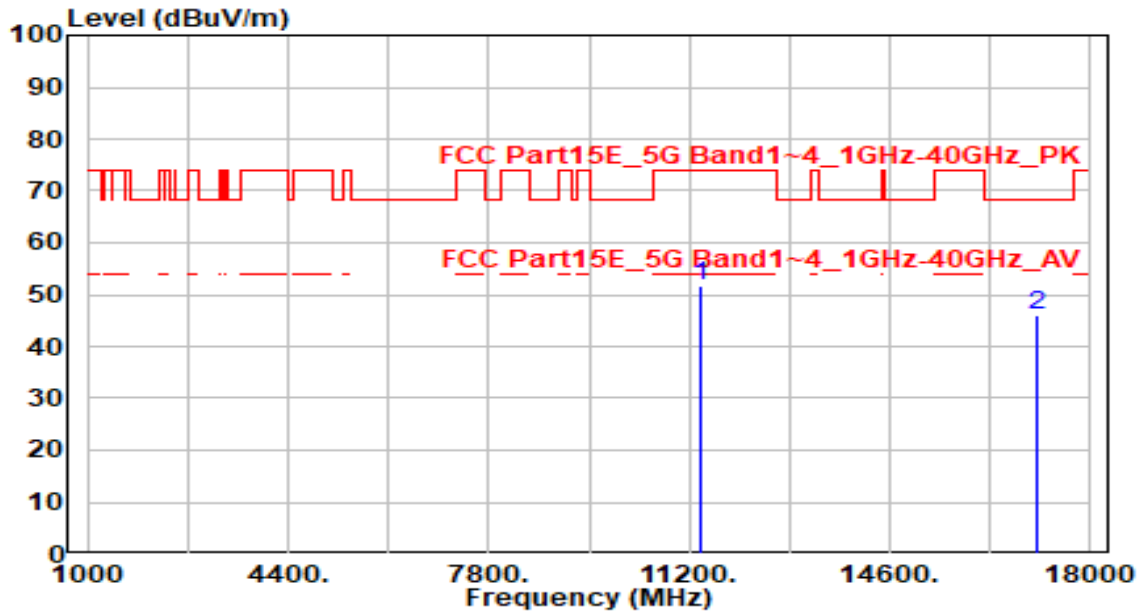


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	46.81	4.79	51.60	-22.40	74.00	200	270	Peak
2	* 17100.000	39.12	6.97	46.09	-22.11	68.20	200	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band3_CH 144_ANT 0+1	Test Voltage	AC 120V/60Hz

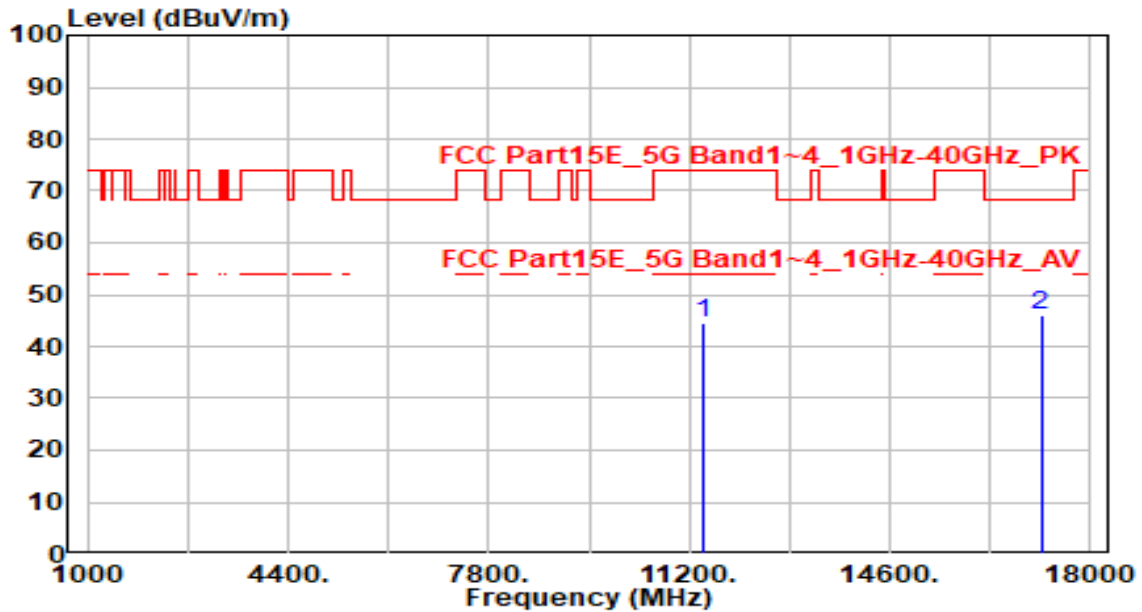


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	39.63	4.80	44.42	-29.58	74.00	200	160	Peak
2	* 17160.000	39.10	6.97	46.07	-22.13	68.20	200	320	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band3_CH 144_ANT 0+1	Test Voltage	AC 120V/60Hz

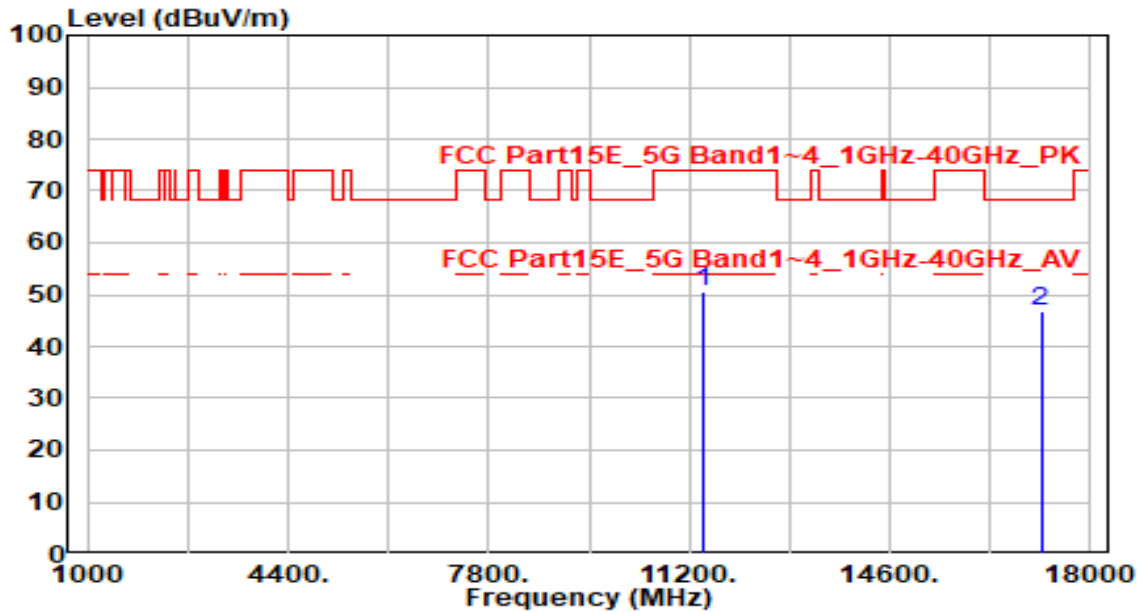


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	45.61	4.80	50.41	-23.59	74.00	200	255	Peak
2	* 17160.000	39.90	6.97	46.87	-21.33	68.20	200	70	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

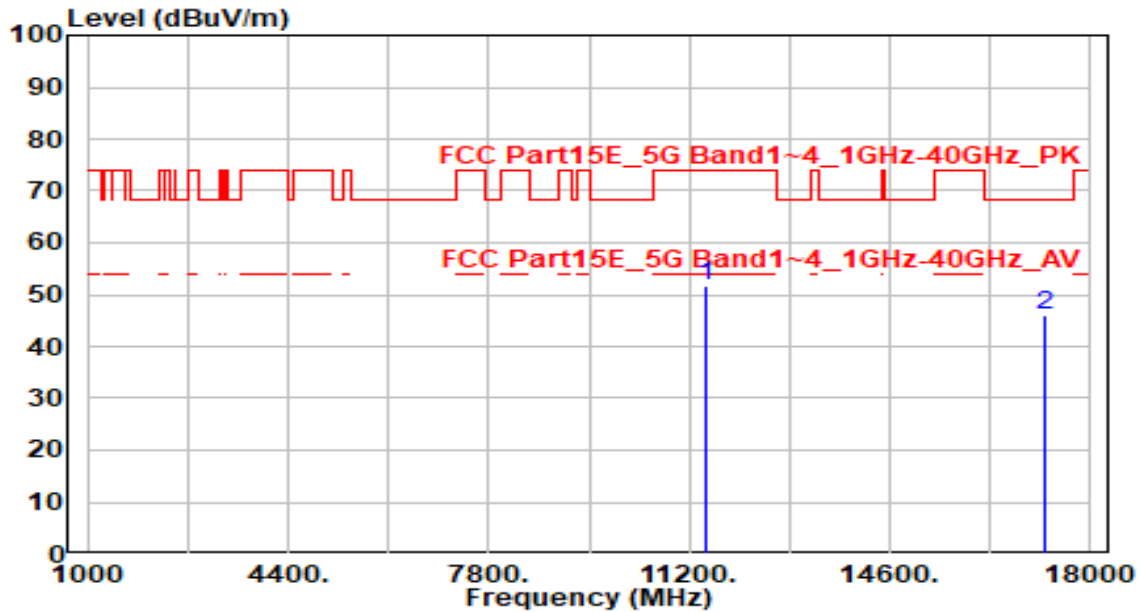


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	46.80	4.80	51.60	-22.40	74.00	200	275	Peak
2	* 17235.000	39.19	7.03	46.22	-21.98	68.20	200	310	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

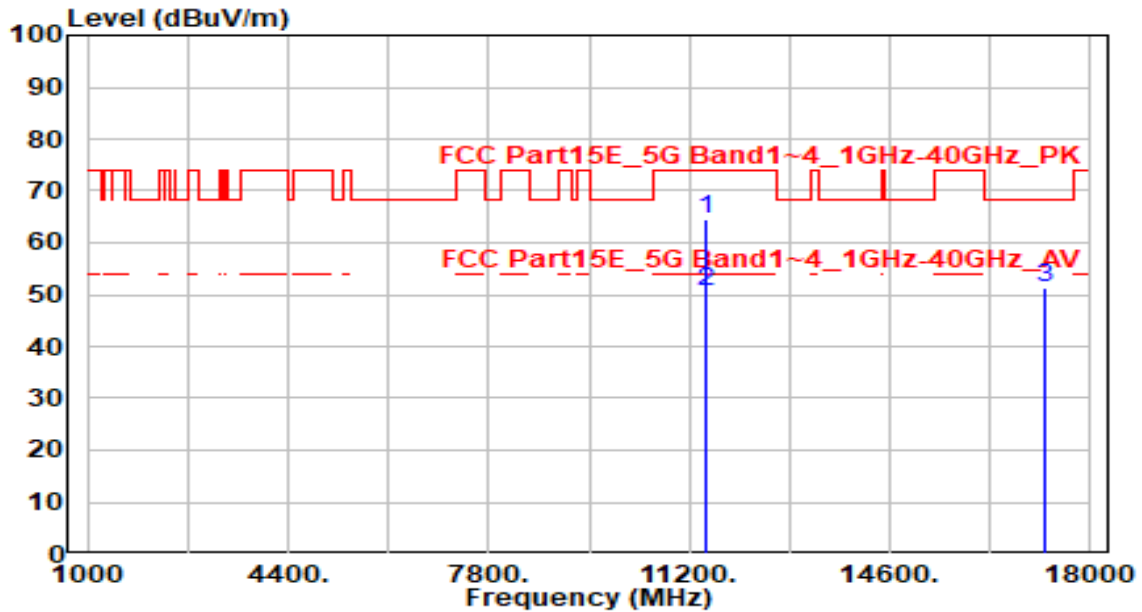


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 11490.000	59.69	4.80	64.49	-9.51	74.00	200	270	Peak
2	* 11490.000	45.67	4.80	50.47	-3.53	54.00	200	270	Average
3	17235.000	44.48	7.03	51.50	-16.70	68.20	200	255	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band4_CH 157_ANT 0+1	Test Voltage	AC 120V/60Hz

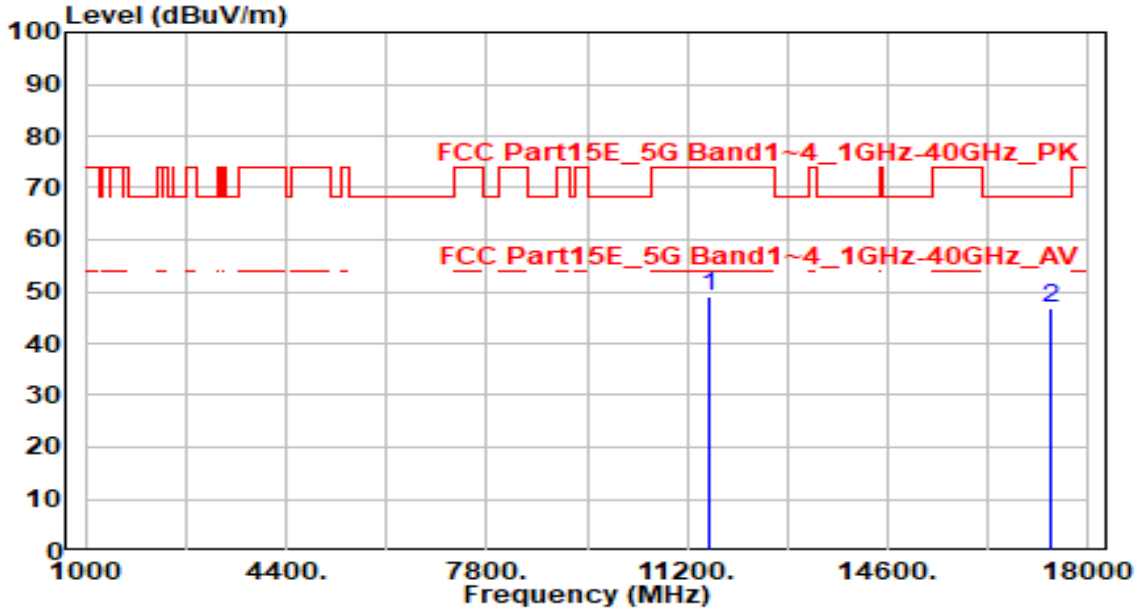


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	44.26	4.77	49.02	-24.98	74.00	200	25	Peak
2	* 17355.000	39.66	7.21	46.87	-21.33	68.20	200	225	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band4_CH 157_ANT 0+1	Test Voltage	AC 120V/60Hz

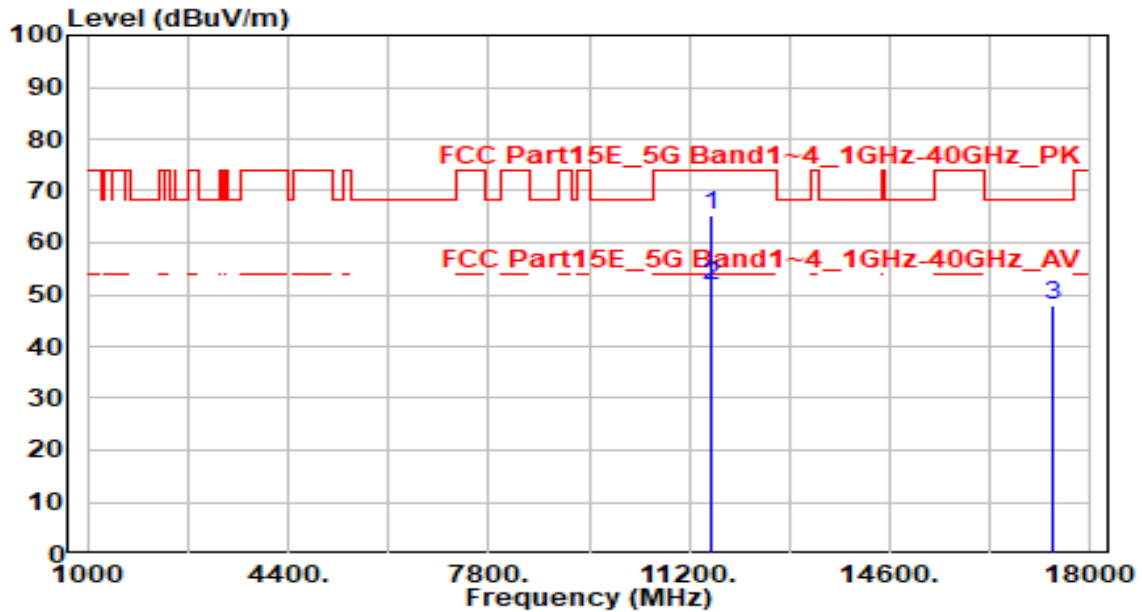


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 11570.000	60.59	4.77	65.36	-8.64	74.00	220	265	Peak
2	* 11570.000	46.92	4.77	51.69	-2.31	54.00	220	265	Average
3	17355.000	40.75	7.21	47.96	-20.24	68.20	200	270	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

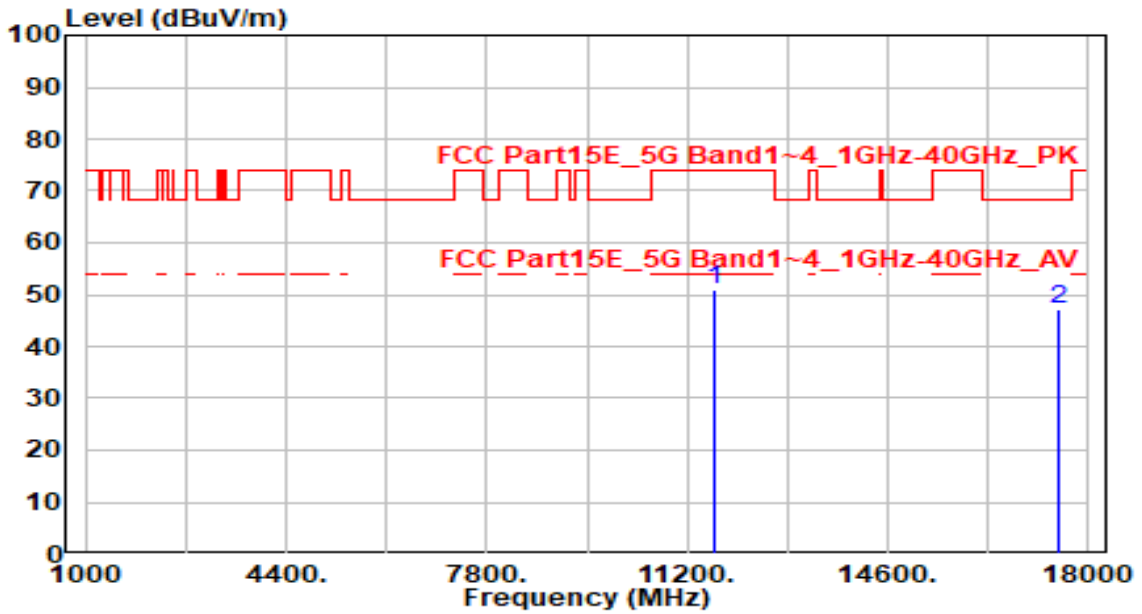


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	46.29	4.73	51.02	-22.98	74.00	200	15	Peak
2	* 17475.000	39.60	7.48	47.08	-21.12	68.20	200	290	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

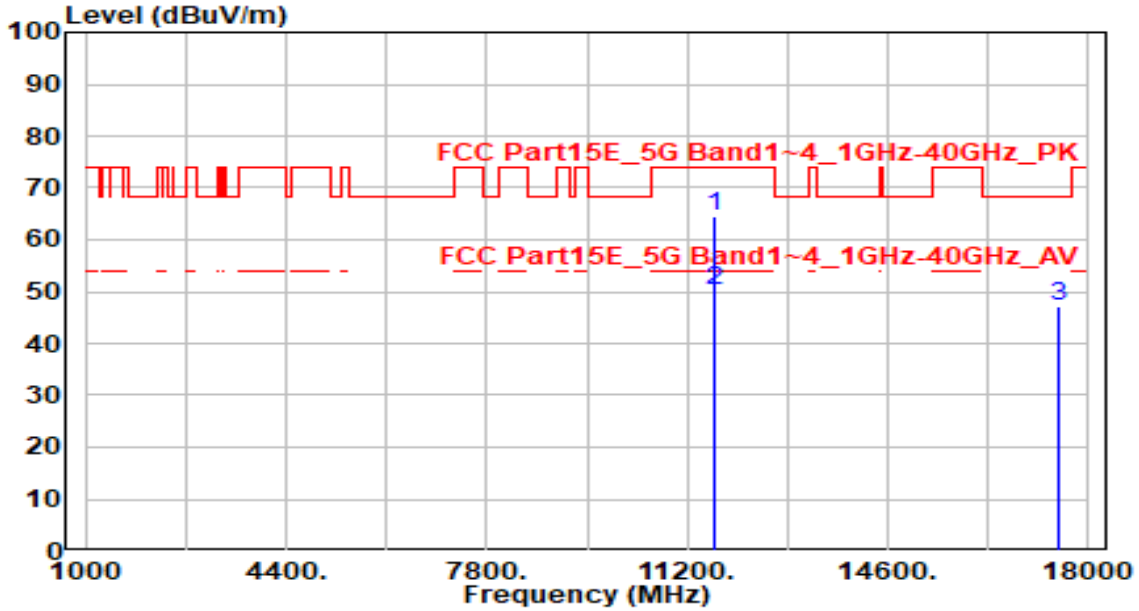


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 11650.000	59.61	4.73	64.34	-9.66	74.00	220	270	Peak
2	* 11650.000	45.51	4.73	50.24	-3.76	54.00	220	270	Average
3	17475.000	39.73	7.48	47.21	-20.99	68.20	200	230	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

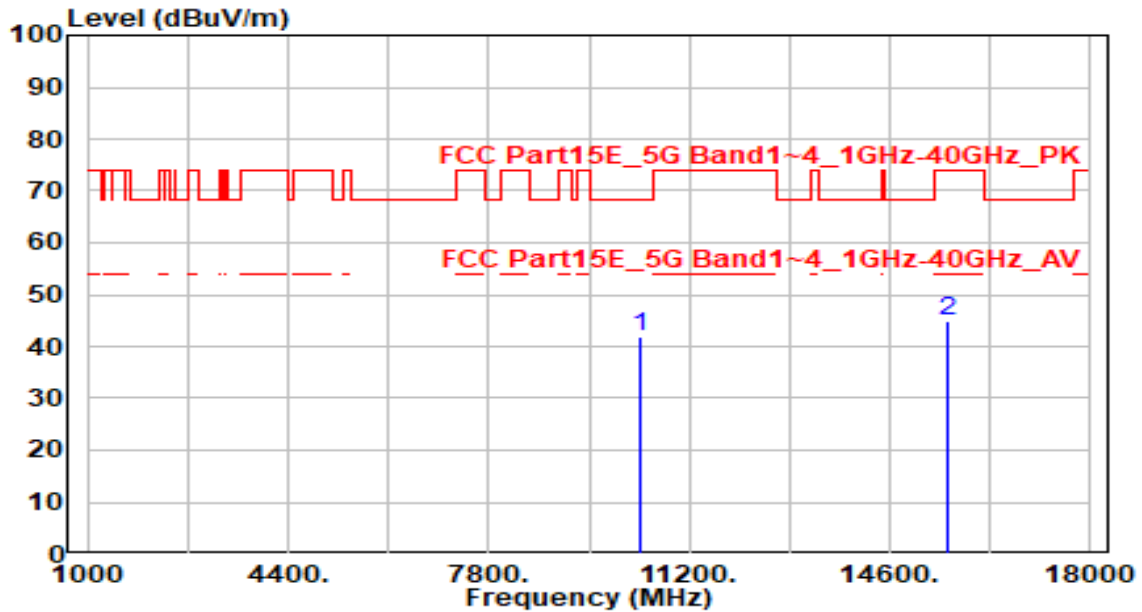


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10380.000	37.56	4.31	41.87	-26.33	68.20	200	290	Peak
2	15570.000	38.08	6.82	44.90	-29.10	74.00	200	185	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

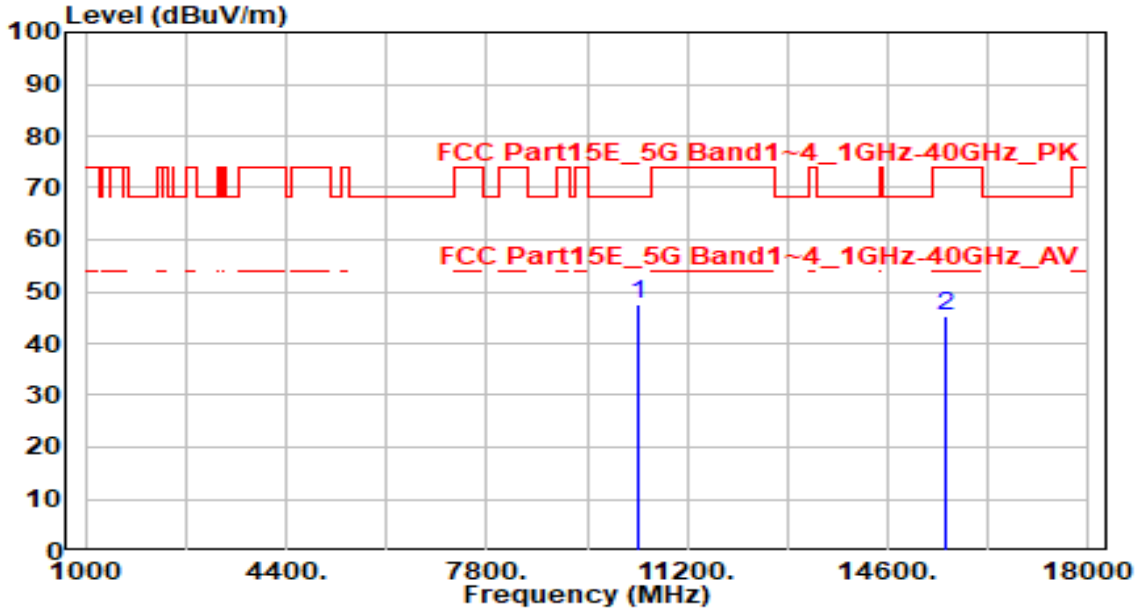


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10380.000	43.40	4.31	47.71	-20.49	68.20	200	315	Peak
2	15570.000	38.39	6.82	45.21	-28.79	74.00	200	265	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band1_CH 46_ANT 0+1	Test Voltage	AC 120V/60Hz

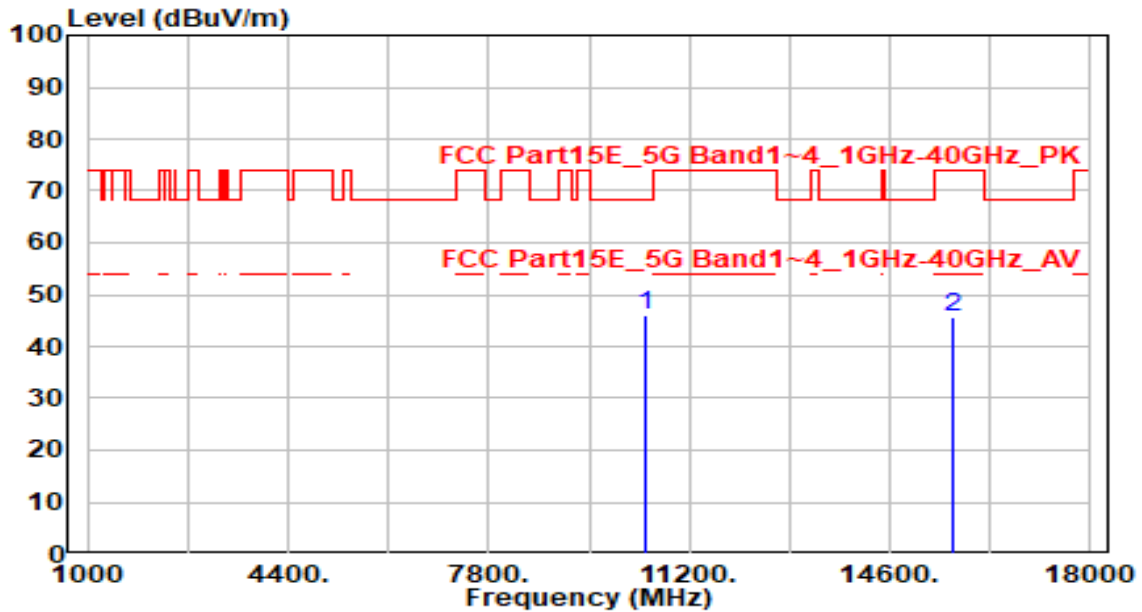


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10460.000	41.47	4.40	45.87	-22.33	68.20	200	240	Peak
2	15690.000	38.64	6.88	45.52	-28.48	74.00	200	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band1_CH 46_ANT 0+1	Test Voltage	AC 120V/60Hz

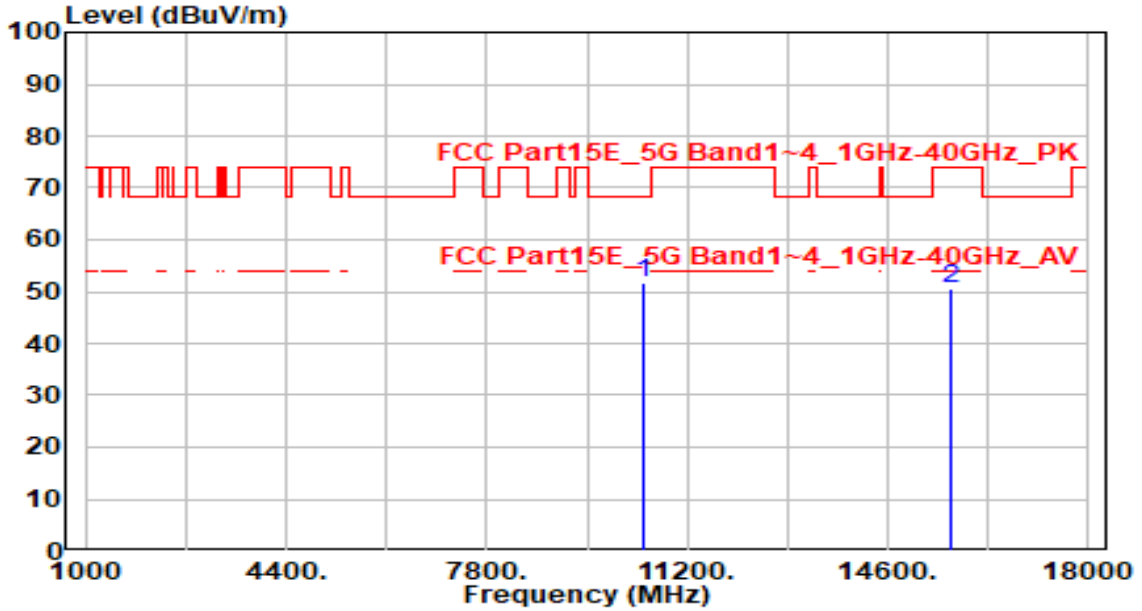


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10460.000	47.14	4.40	51.55	-16.65	68.20	200	245	Peak
2	15690.000	43.70	6.88	50.59	-23.41	74.00	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band2_CH 54_ANT 0+1	Test Voltage	AC 120V/60Hz

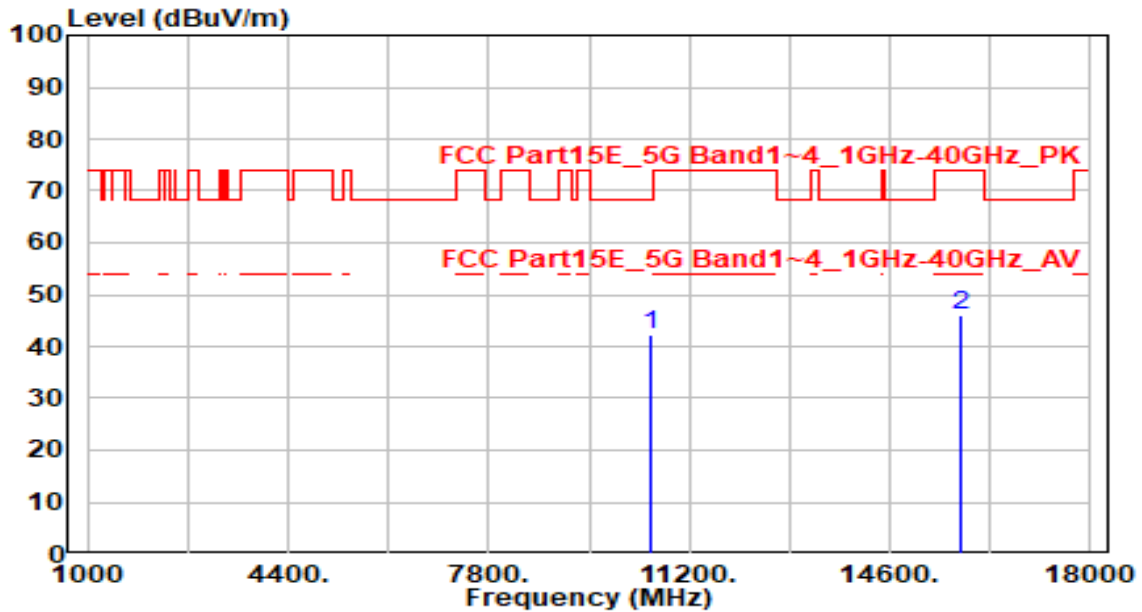


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10540.000	37.95	4.44	42.38	-25.82	68.20	200	170	Peak
2	15810.000	39.09	6.97	46.06	-27.94	74.00	200	250	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band2_CH 54_ANT 0+1	Test Voltage	AC 120V/60Hz

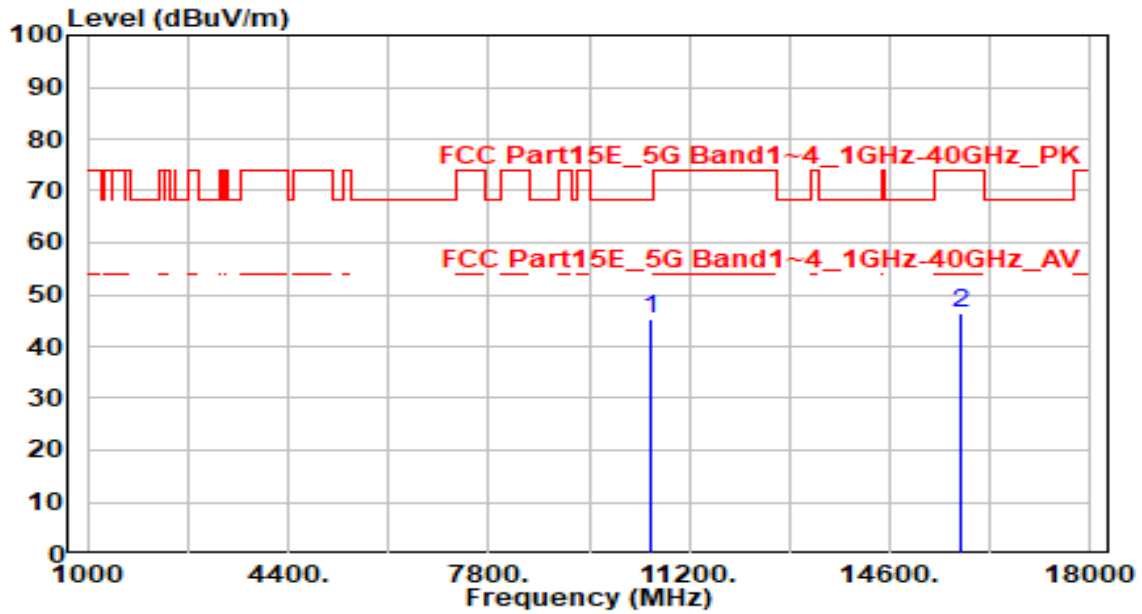


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10540.000	40.99	4.44	45.42	-22.78	68.20	200	5	Peak
2	15810.000	39.33	6.97	46.30	-27.70	74.00	200	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

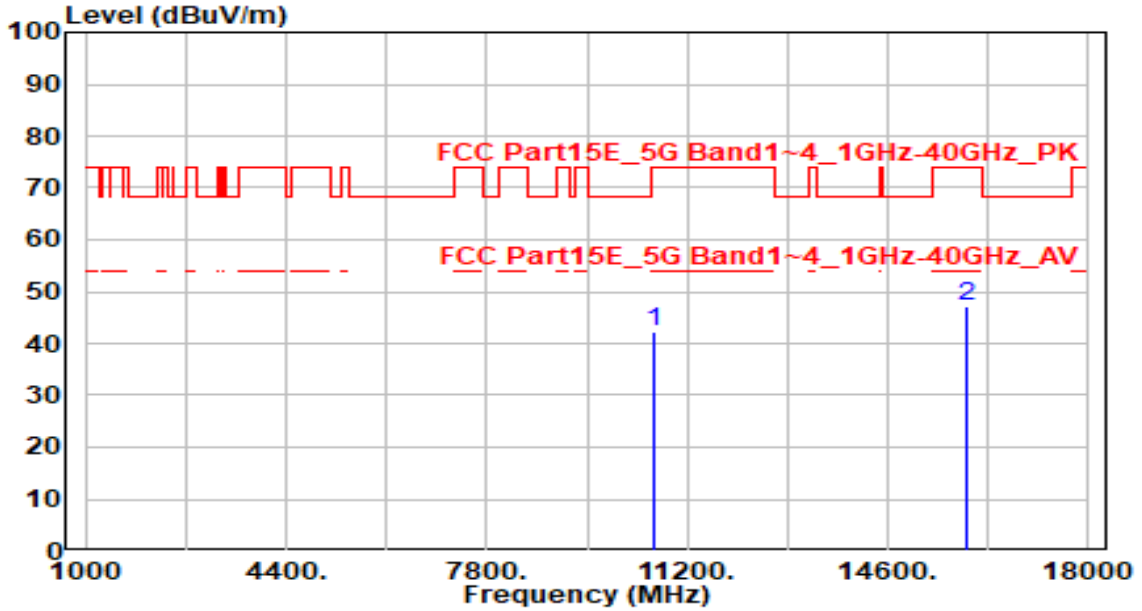


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10620.000	37.95	4.39	42.35	-31.65	74.00	200	160	Peak
2	* 15930.000	40.21	7.12	47.33	-26.67	74.00	200	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

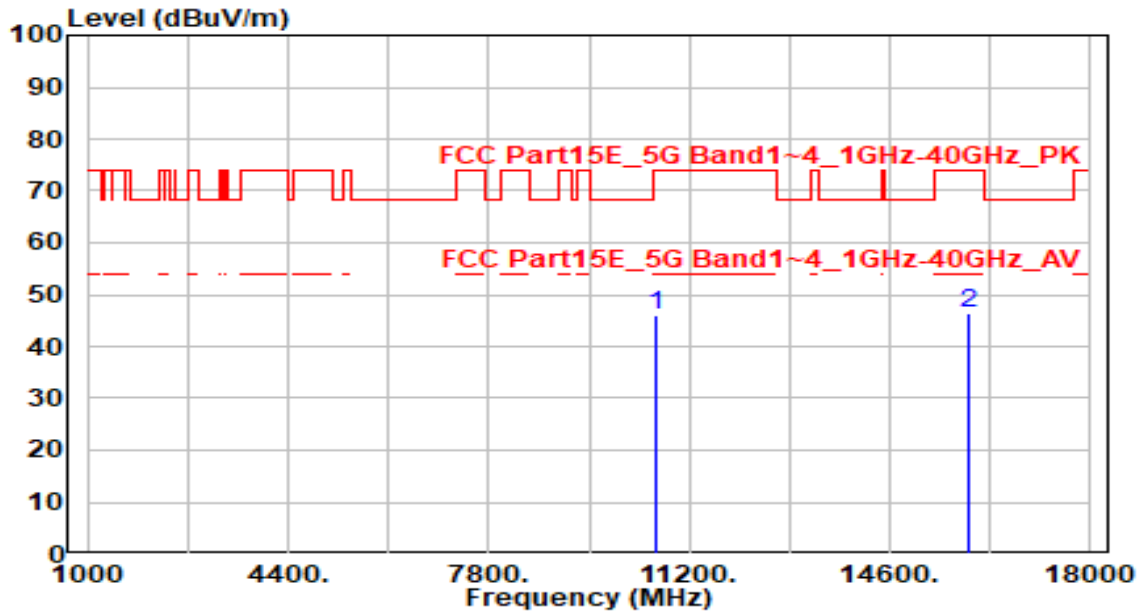


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10620.000	41.83	4.39	46.22	-27.78	74.00	200	5	Peak
2	* 15930.000	39.43	7.12	46.55	-27.45	74.00	200	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

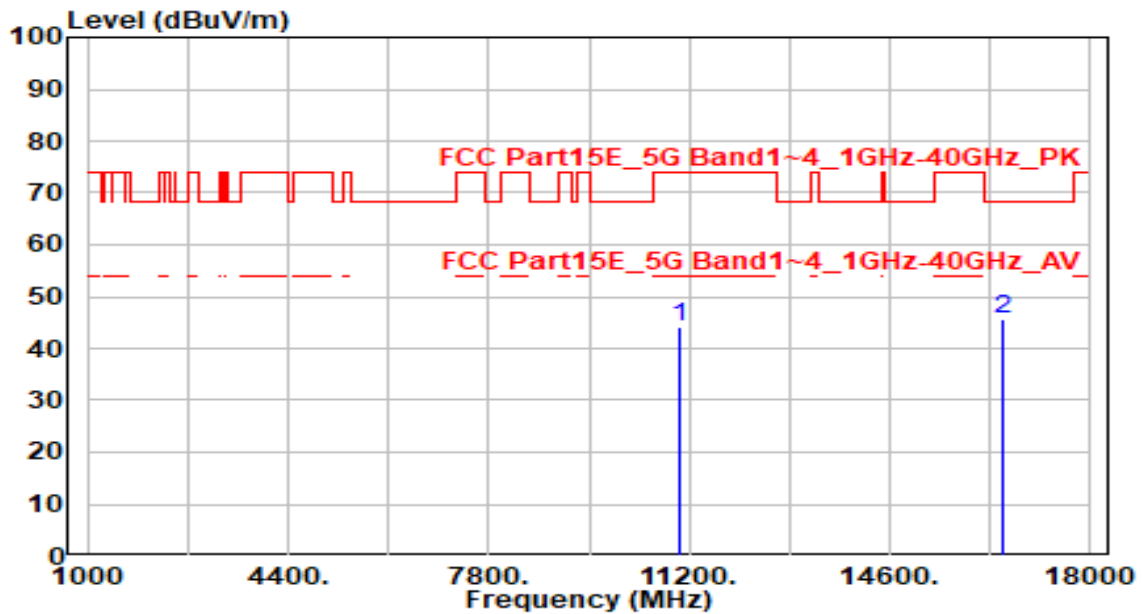


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11020.000	39.74	4.24	43.99	-30.01	74.00	100	265	Peak
2	* 16530.000	38.58	7.02	45.59	-22.61	68.20	100	40	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

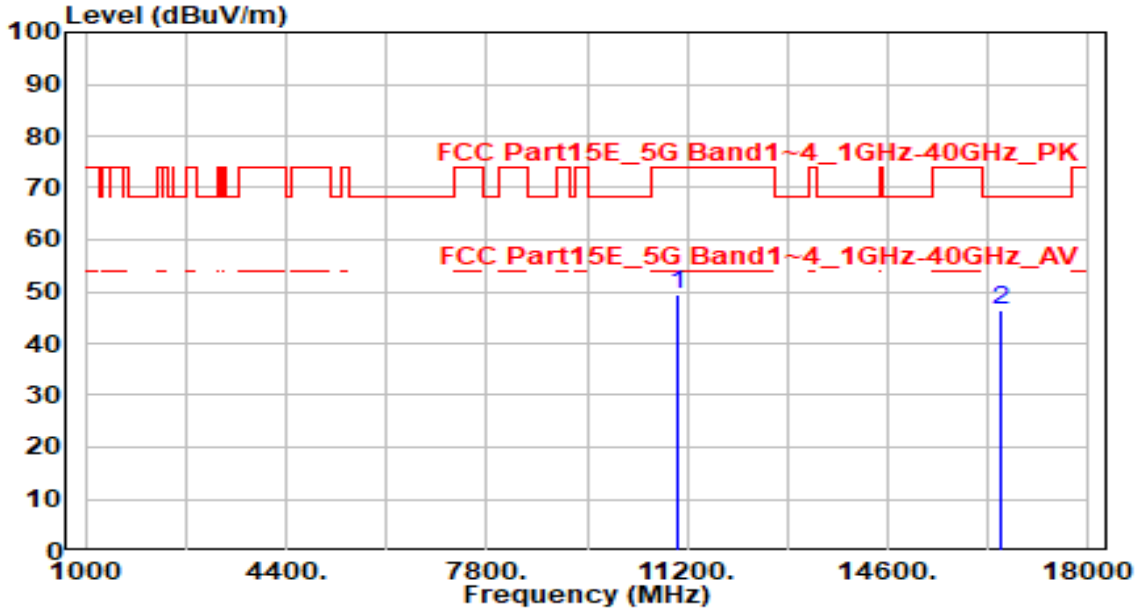


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11020.000	45.32	4.24	49.56	-24.44	74.00	300	175	Peak
2	* 16530.000	39.33	7.02	46.35	-21.85	68.20	300	320	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band3_CH 110_ANT 0+1	Test Voltage	AC 120V/60Hz

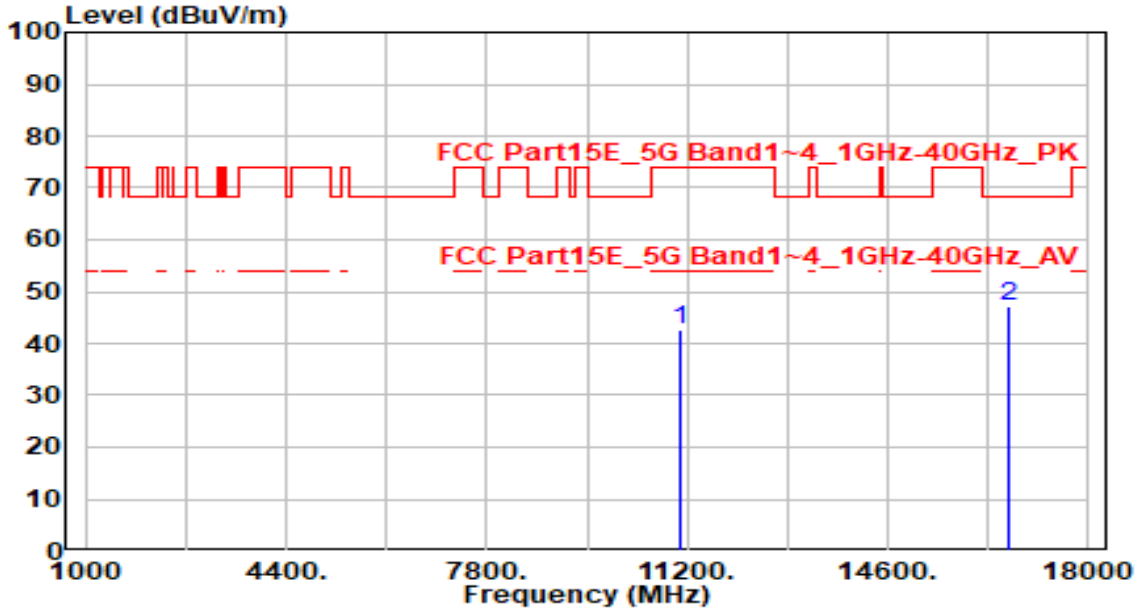


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11100.000	38.16	4.40	42.56	-31.44	74.00	200	285	Peak
2	* 16650.000	40.00	6.98	46.98	-21.22	68.20	200	50	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band3_CH 110_ANT 0+1	Test Voltage	AC 120V/60Hz

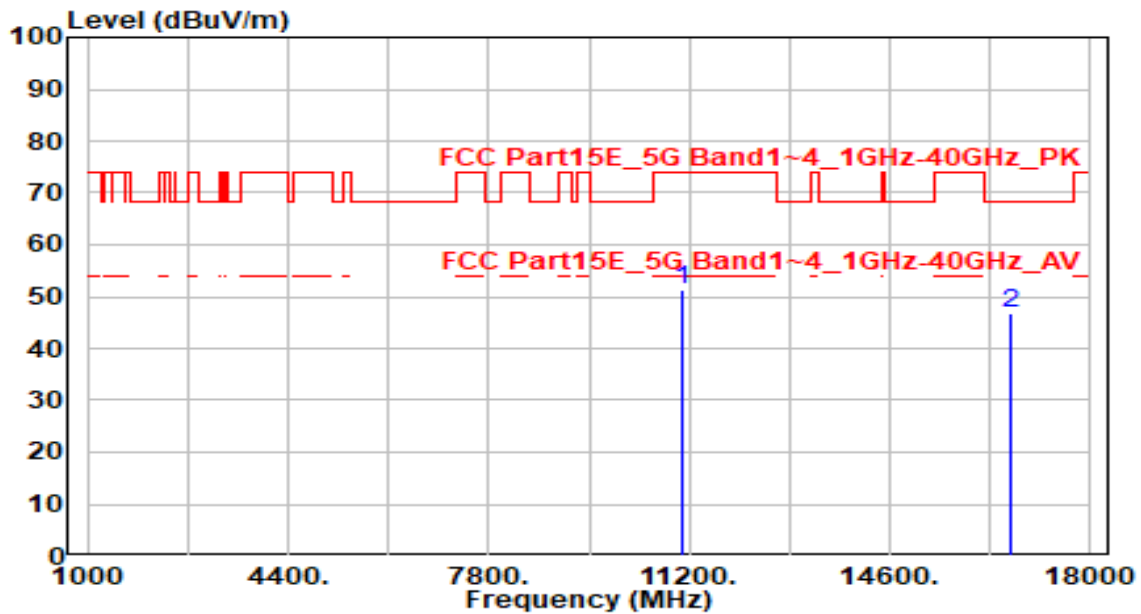


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11100.000	46.82	4.40	51.22	-22.78	74.00	200	265	Peak
2	* 16650.000	39.89	6.98	46.87	-21.33	68.20	200	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

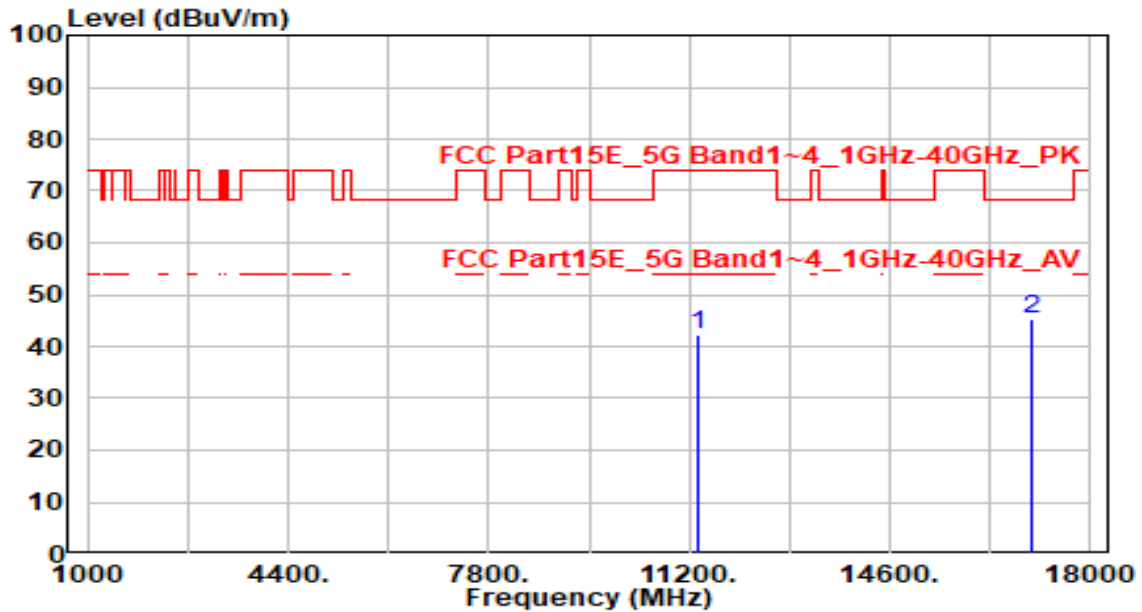


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11340.000	37.44	4.73	42.17	-31.83	74.00	200	275	Peak
2	* 17010.000	38.33	6.95	45.29	-22.91	68.20	200	145	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

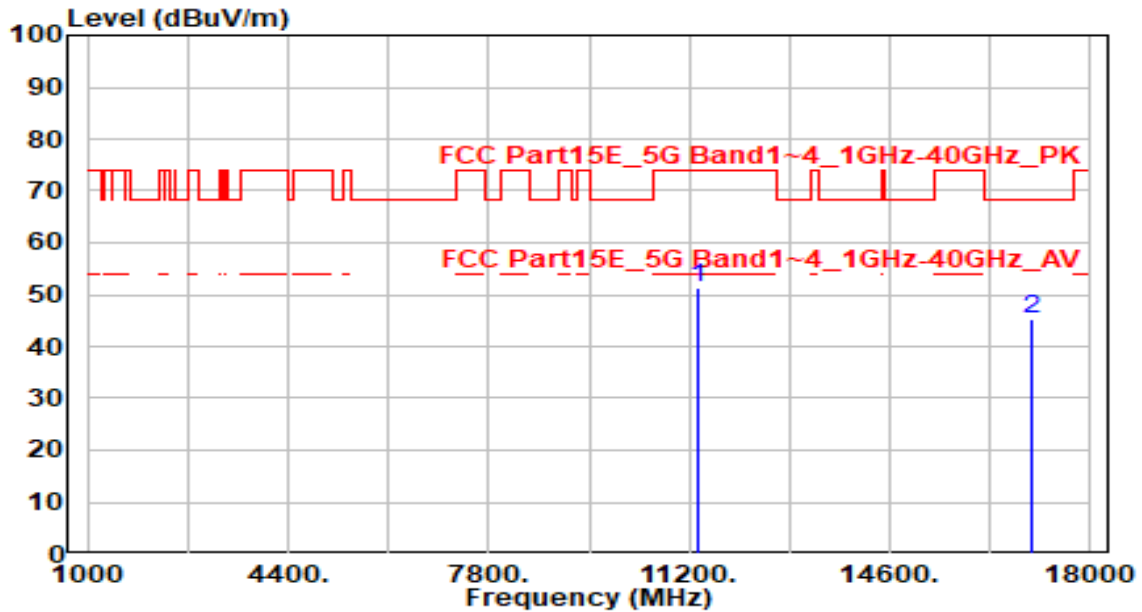


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 11340.000	46.63	4.73	51.37	-22.63	74.00	200	265	Peak
2	17010.000	38.32	6.95	45.27	-22.93	68.20	200	245	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band3_CH 142_ANT 0+1	Test Voltage	AC 120V/60Hz

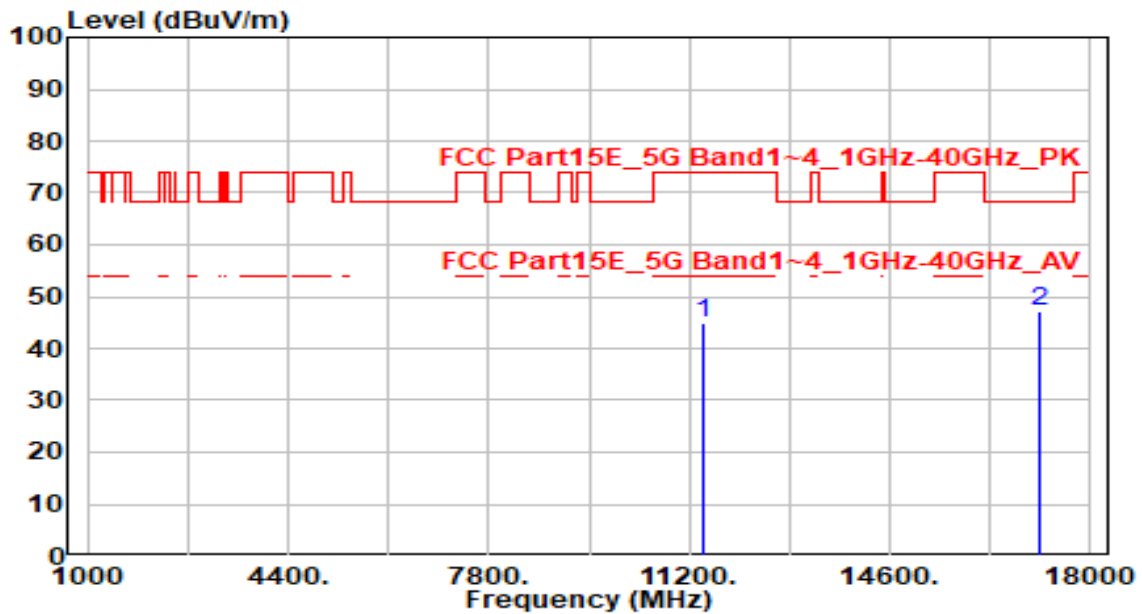


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11420.000	39.96	4.80	44.75	-29.25	74.00	200	285	Peak
2	* 17130.000	40.18	6.97	47.15	-21.05	68.20	200	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band3_CH 142_ANT 0+1	Test Voltage	AC 120V/60Hz

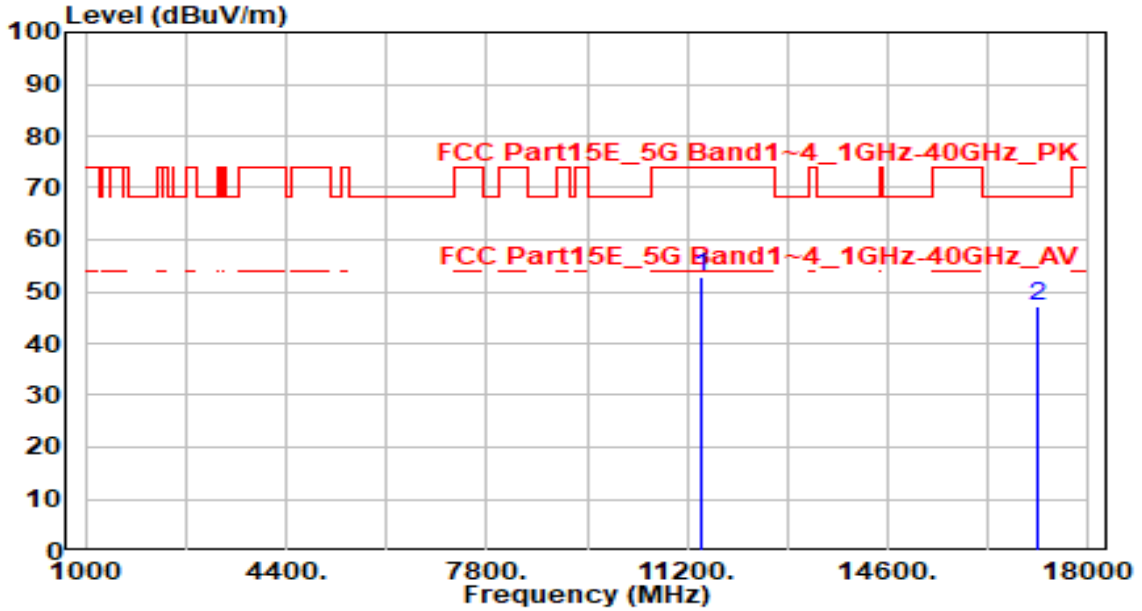


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11420.000	48.19	4.80	52.98	-21.02	74.00	200	270	Peak
2	* 17130.000	40.38	6.97	47.35	-20.85	68.20	200	310	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

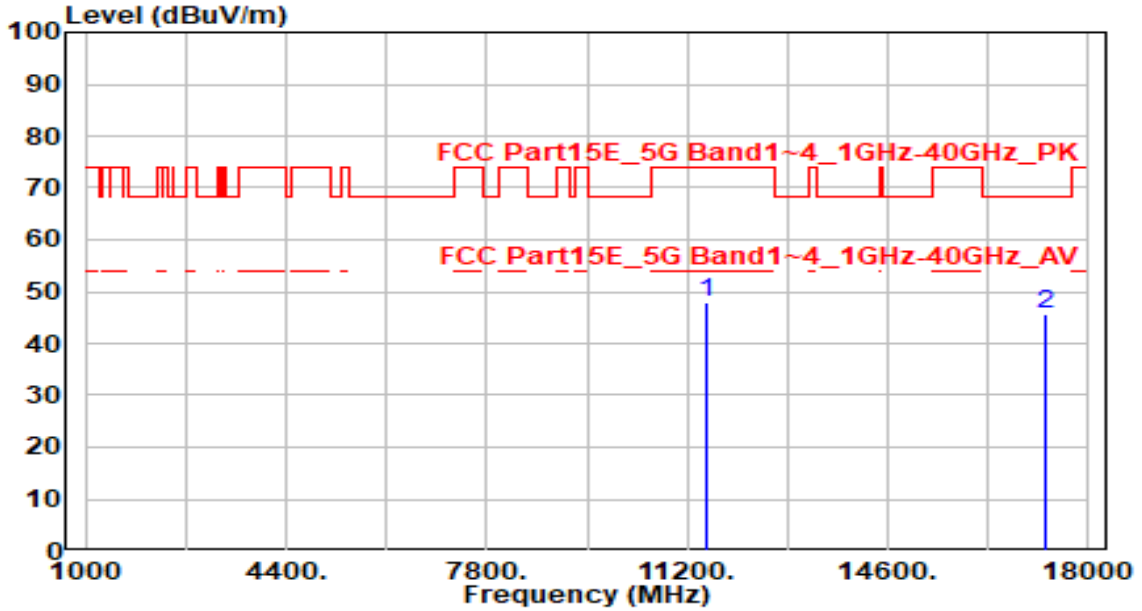


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11510.000	43.25	4.80	48.04	-25.96	74.00	200	275	Peak
2	* 17265.000	38.44	7.07	45.51	-22.69	68.20	200	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

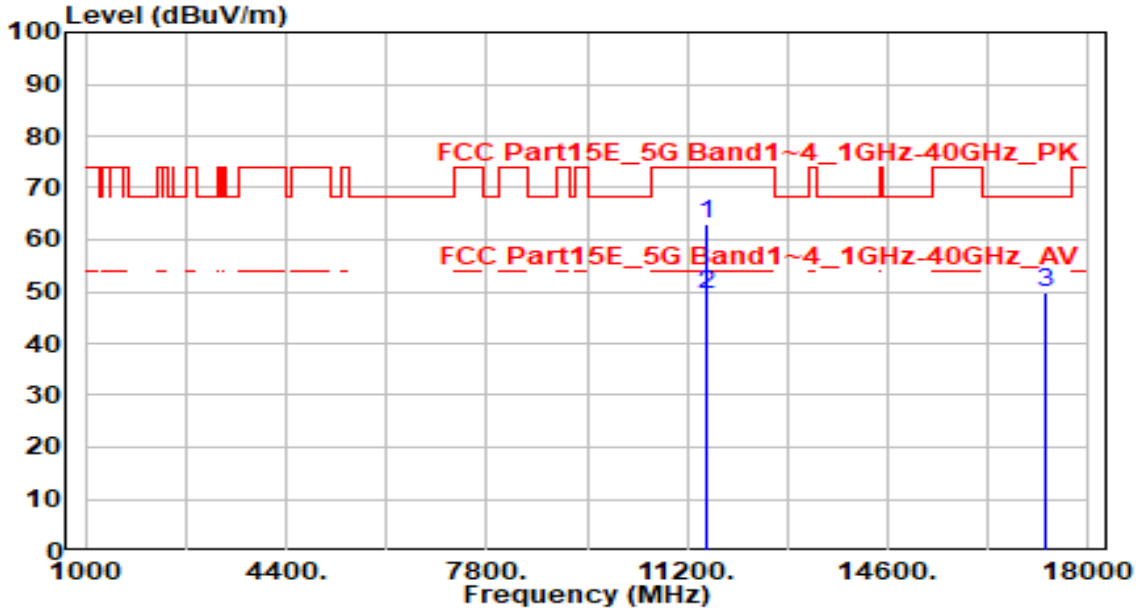


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 11510.000	58.26	4.80	63.06	-10.94	74.00	220	265	Peak
2	* 11510.000	44.60	4.80	49.40	-4.60	54.00	220	265	Average
3	17265.000	42.70	7.07	49.77	-18.43	68.20	200	270	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

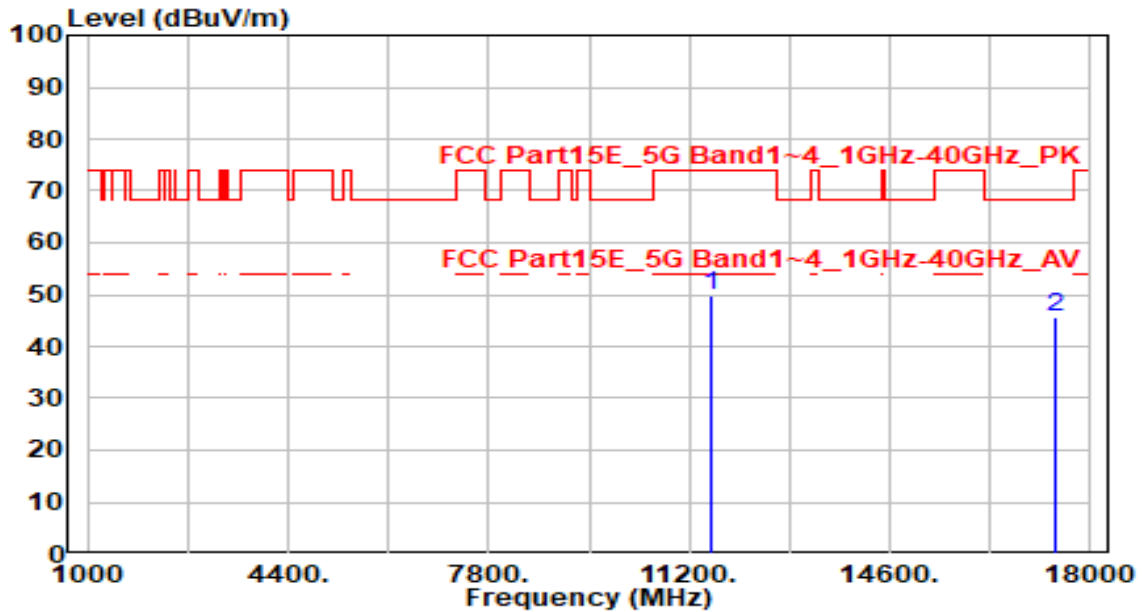


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11590.000	45.22	4.76	49.97	-24.03	74.00	200	10	Peak
2	* 17385.000	38.48	7.26	45.74	-22.46	68.20	200	185	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

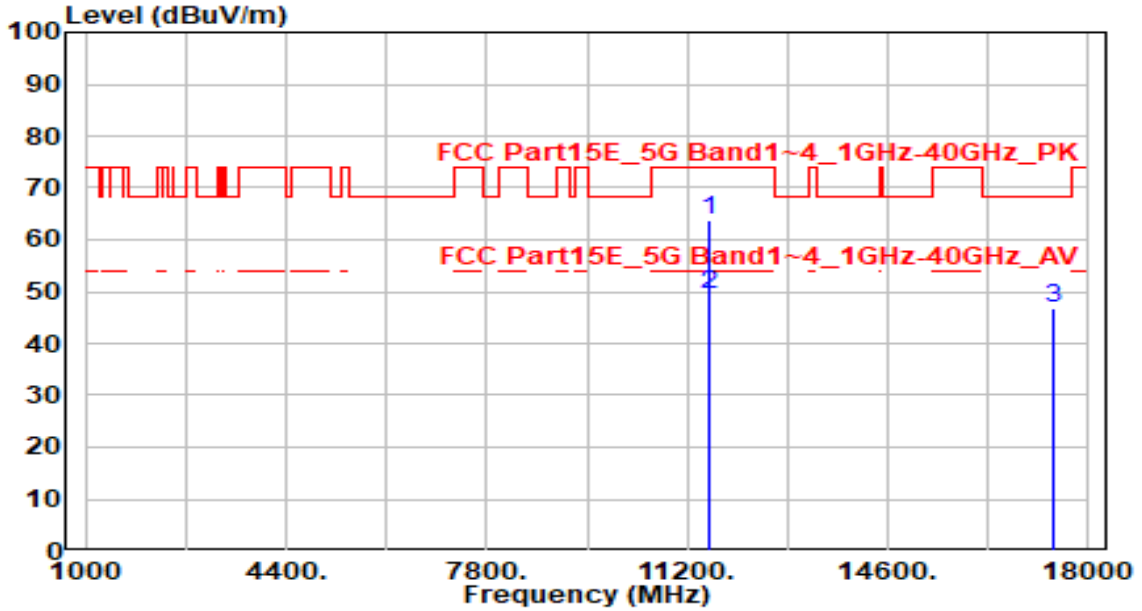


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 11590.000	59.06	4.76	63.82	-10.18	74.00	220	265	Peak
2	* 11590.000	44.66	4.76	49.42	-4.58	54.00	220	265	Average
3	17385.000	39.45	7.26	46.71	-21.49	68.20	200	280	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

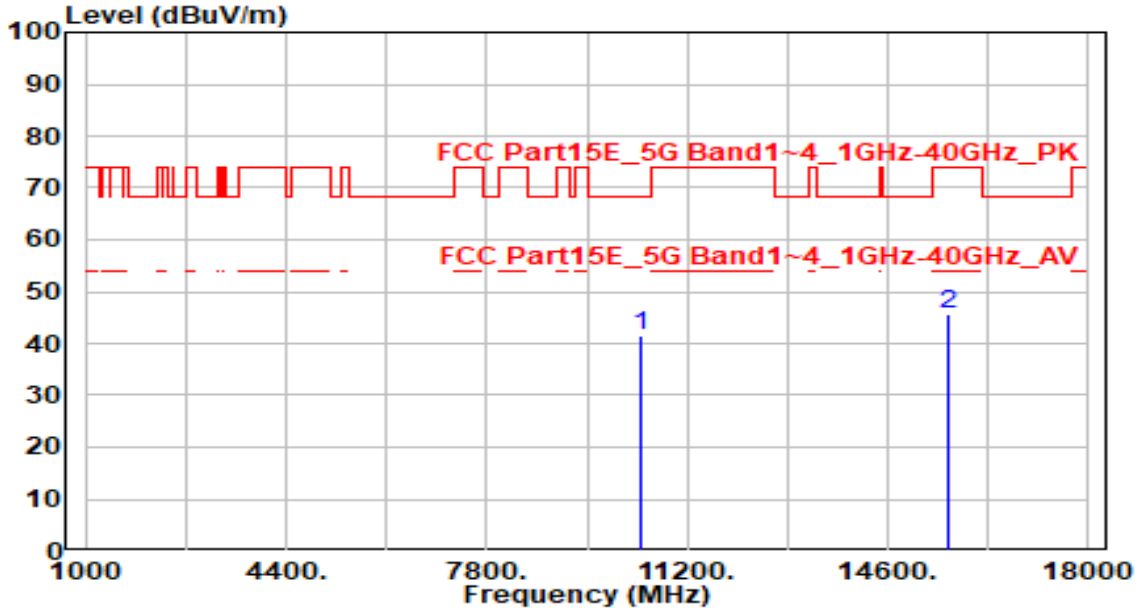


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10420.000	37.07	4.35	41.42	-26.78	68.20	200	70	Peak
2	15630.000	38.81	6.84	45.66	-28.34	74.00	200	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

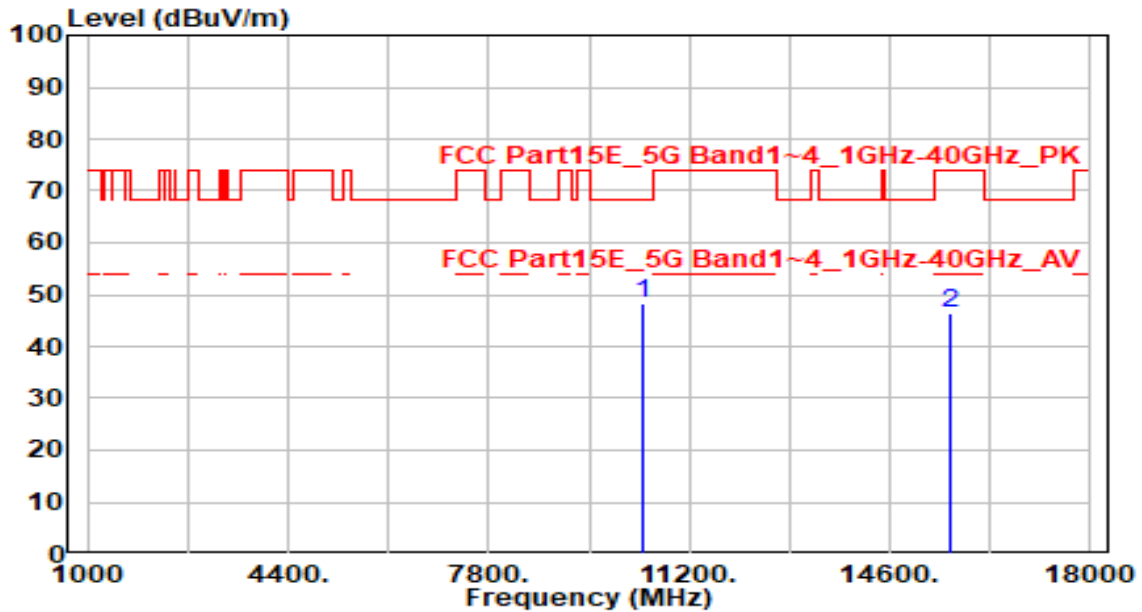


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10420.000	44.11	4.35	48.46	-19.74	68.20	200	245	Peak
2	15630.000	39.53	6.84	46.37	-27.63	74.00	200	165	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

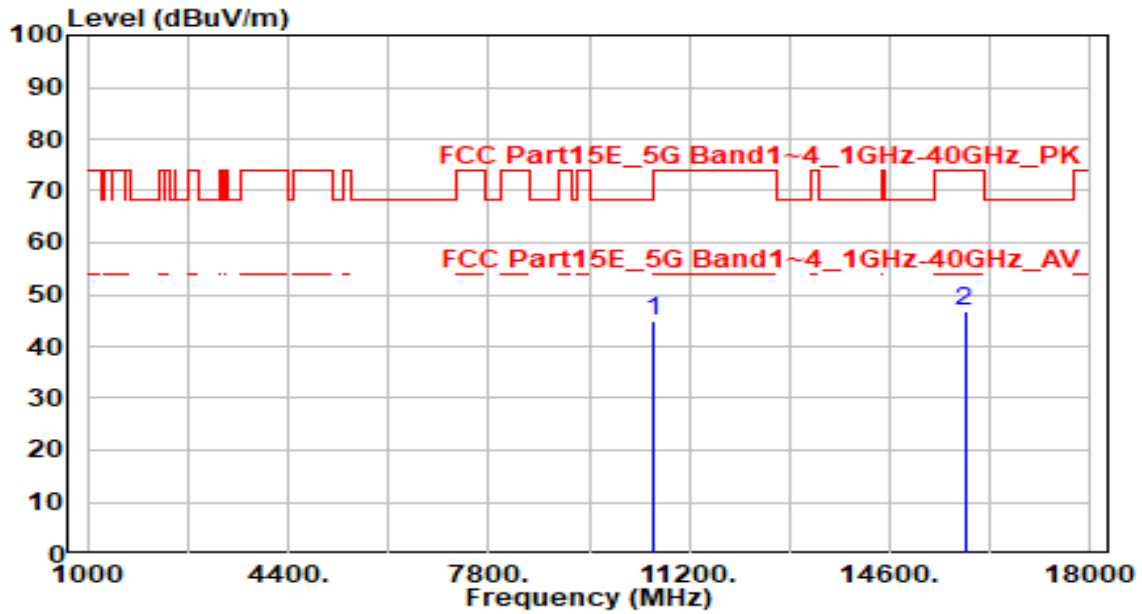


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10580.000	40.32	4.42	44.74	-23.46	68.20	200	25	Peak
2	15870.000	39.67	7.05	46.72	-27.28	74.00	200	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

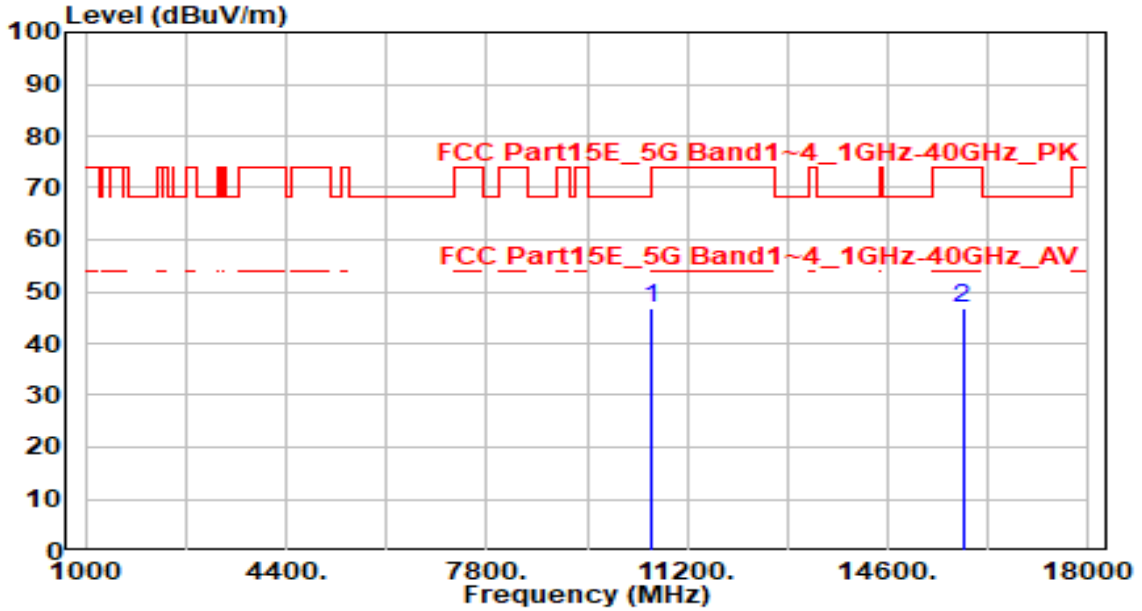


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10580.000	42.49	4.42	46.91	-21.29	68.20	200	0	Peak
2	15870.000	39.58	7.05	46.63	-27.37	74.00	200	280	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

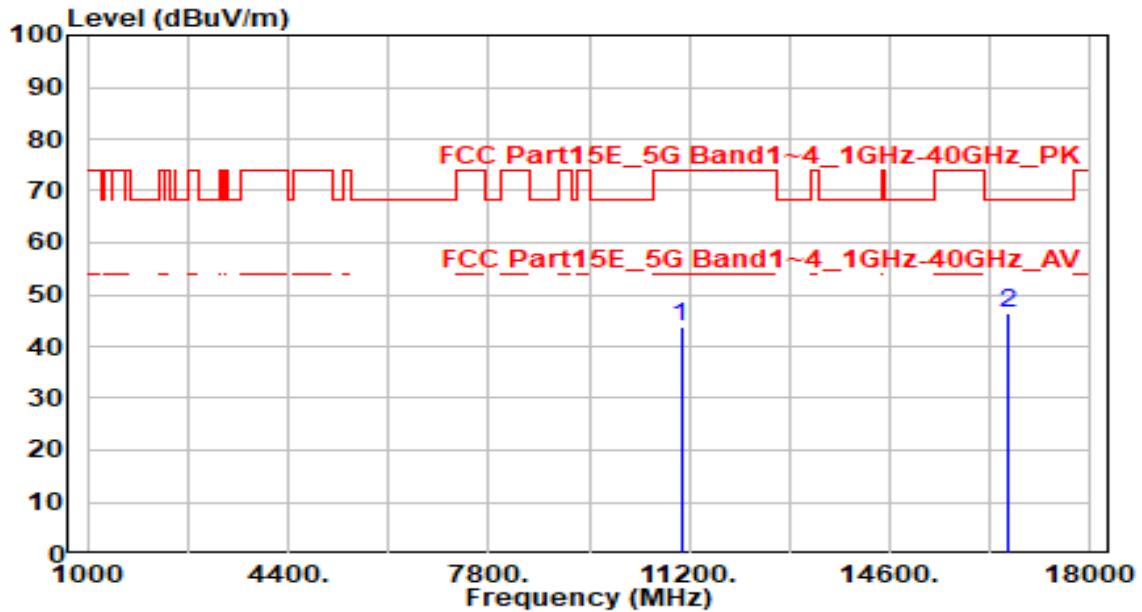


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	39.58	4.32	43.90	-30.10	74.00	200	255	Peak
2	* 16590.000	39.54	6.99	46.53	-21.67	68.20	200	295	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

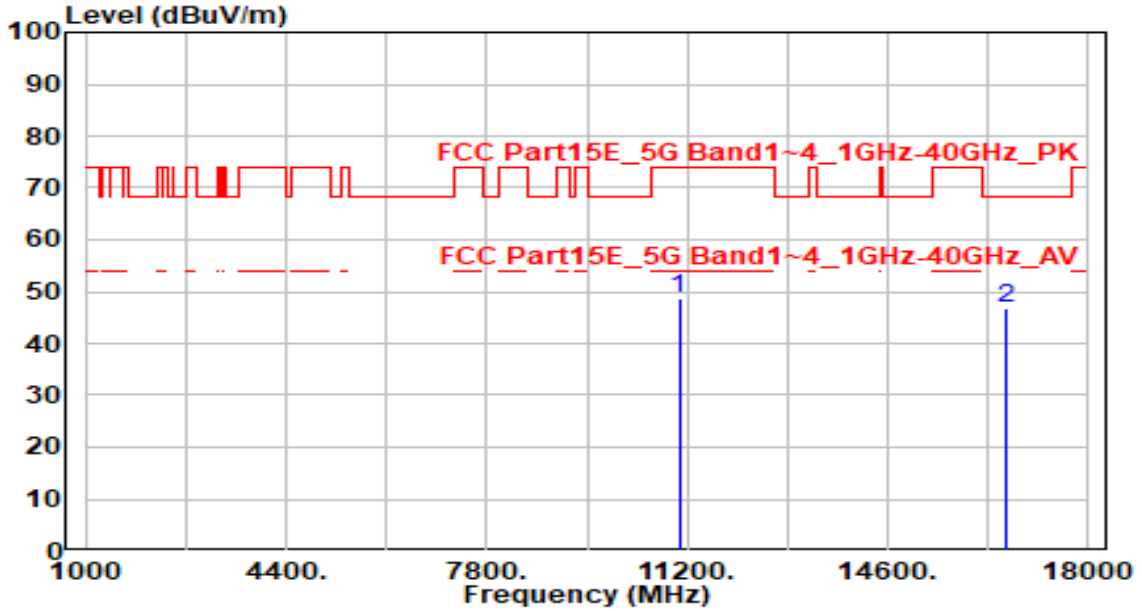


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	44.32	4.32	48.64	-25.36	74.00	200	265	Peak
2	* 16590.000	39.72	6.99	46.71	-21.49	68.20	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band3_CH 122_ANT 0+1	Test Voltage	AC 120V/60Hz

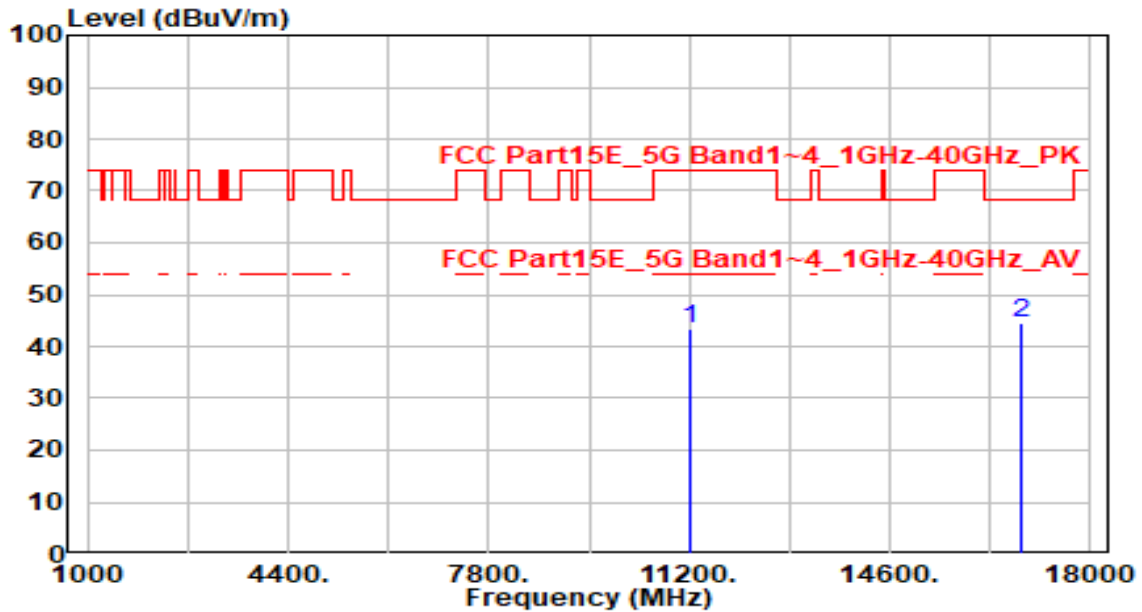


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	38.85	4.62	43.47	-30.53	74.00	200	265	Peak
2	* 16830.000	37.19	7.49	44.68	-23.52	68.20	200	5	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band3_CH 122_ANT 0+1	Test Voltage	AC 120V/60Hz

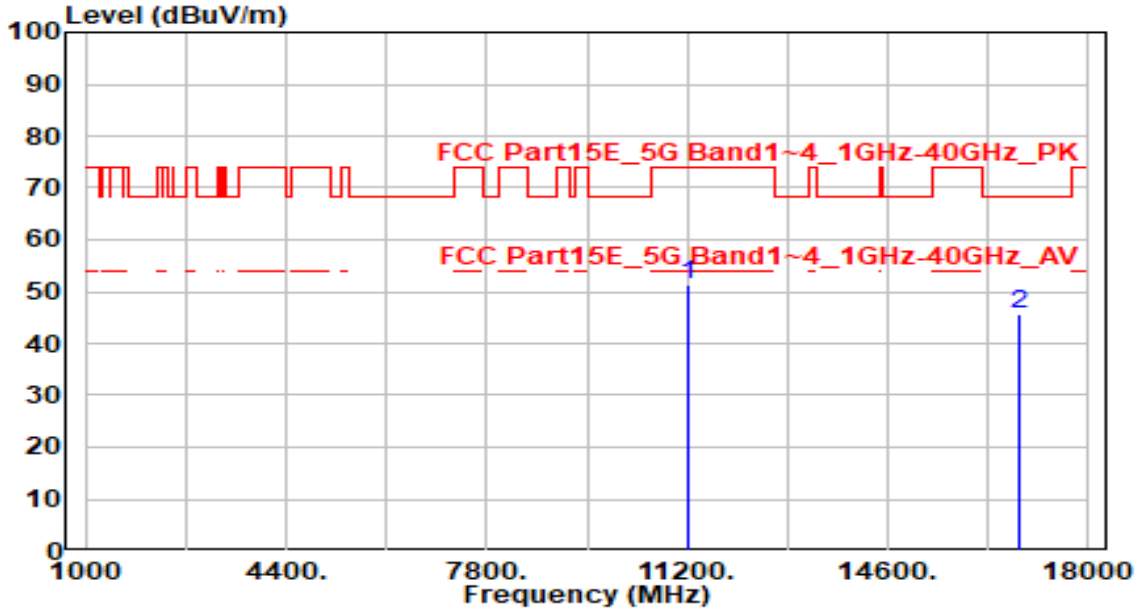


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	46.57	4.62	51.19	-22.81	74.00	200	265	Peak
2	* 16830.000	38.09	7.49	45.59	-22.61	68.20	200	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band3_CH 138_ANT 0+1	Test Voltage	AC 120V/60Hz

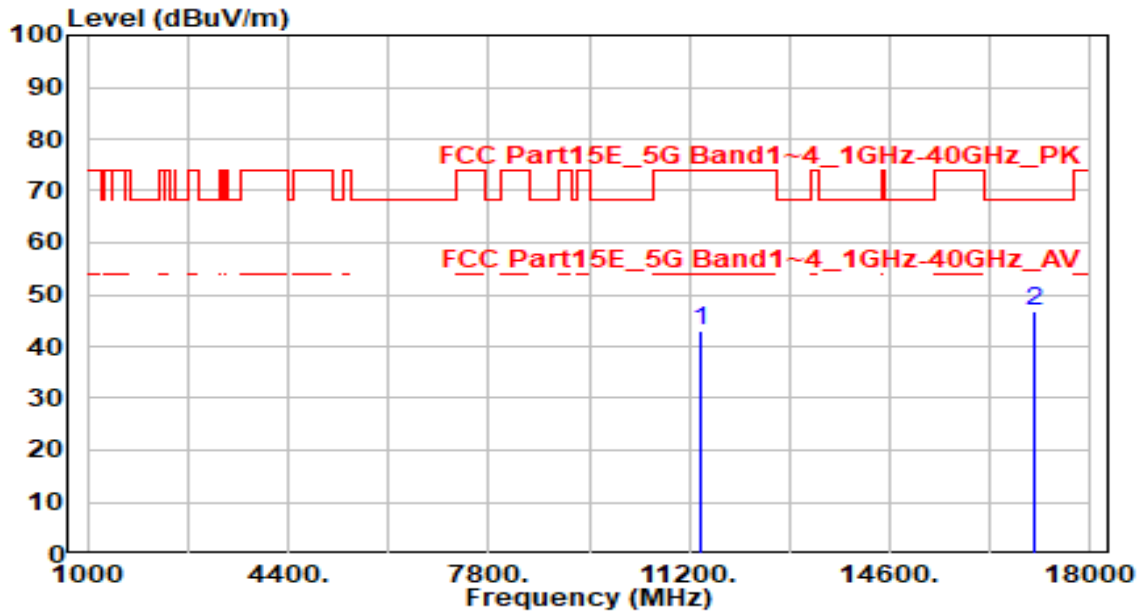


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	38.25	4.77	43.02	-30.98	74.00	200	275	Peak
2	* 17070.000	39.94	6.97	46.90	-21.30	68.20	200	50	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band3_CH 138_ANT 0+1	Test Voltage	AC 120V/60Hz

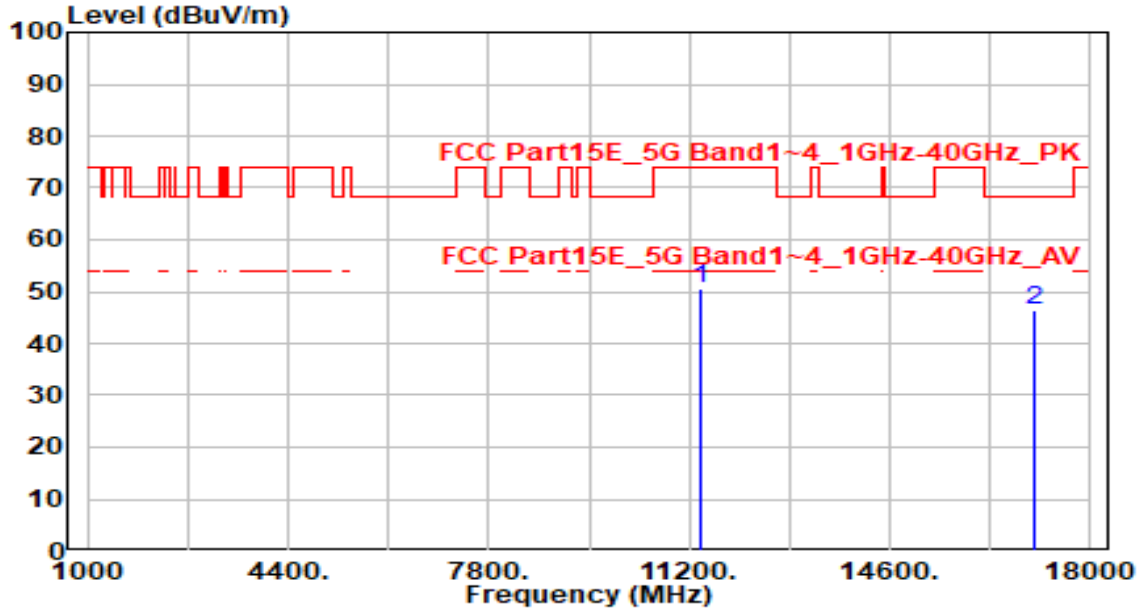


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	45.97	4.77	50.75	-23.25	74.00	200	260	Peak
2	* 17070.000	39.59	6.97	46.55	-21.65	68.20	200	30	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

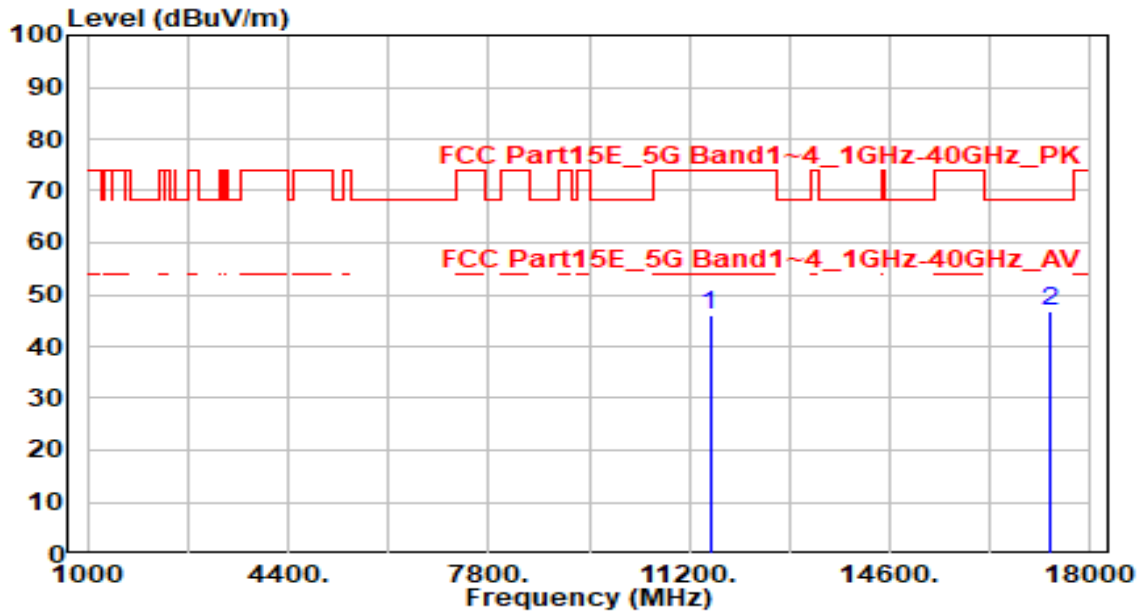


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11550.000	41.26	4.78	46.03	-27.97	74.00	200	265	Peak
2	* 17325.000	39.74	7.16	46.90	-21.30	68.20	200	285	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

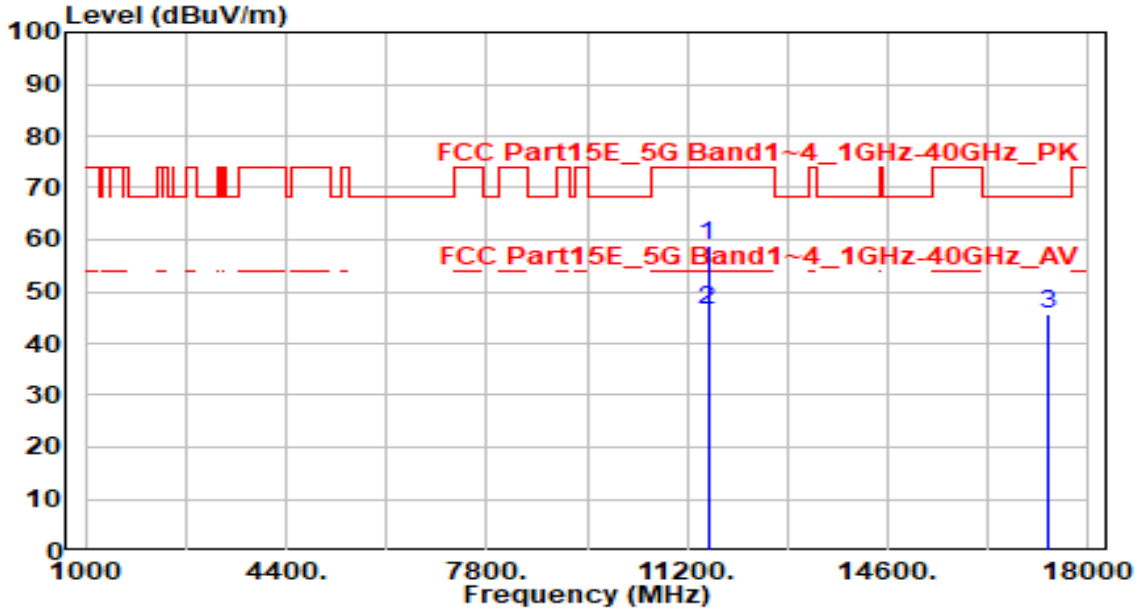


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 11550.000	54.20	4.78	58.98	-15.02	74.00	220	270	Peak
2	* 11550.000	41.51	4.78	46.29	-7.71	54.00	220	270	Average
3	17325.000	38.49	7.16	45.65	-22.55	68.20	200	265	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

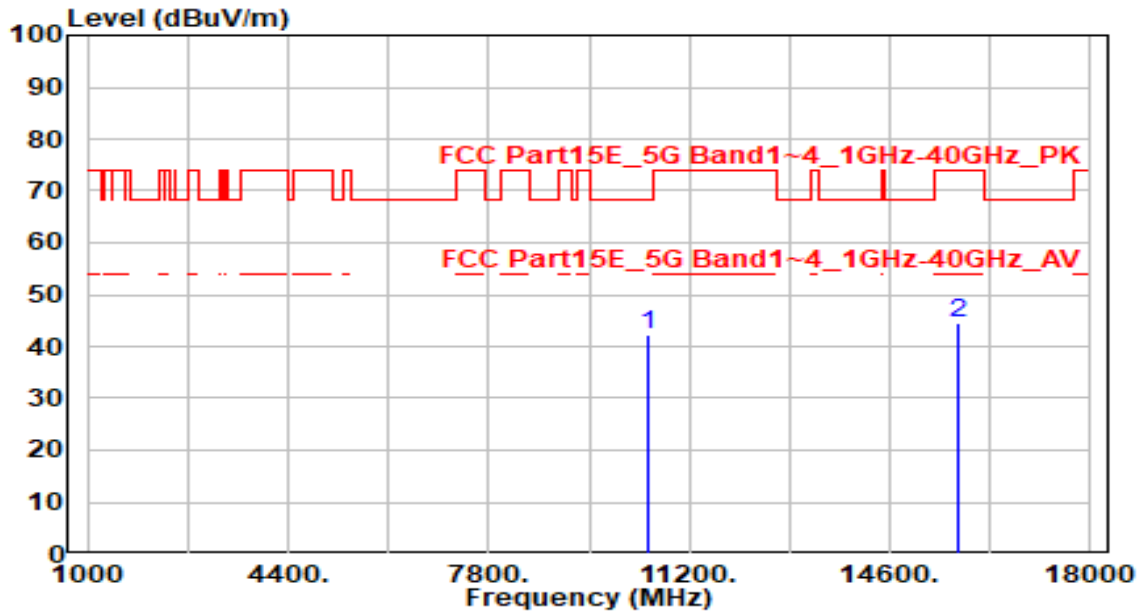


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10500.000	37.63	4.46	42.09	-26.11	68.20	200	20	Peak
2	15750.000	37.73	6.93	44.66	-29.34	74.00	200	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

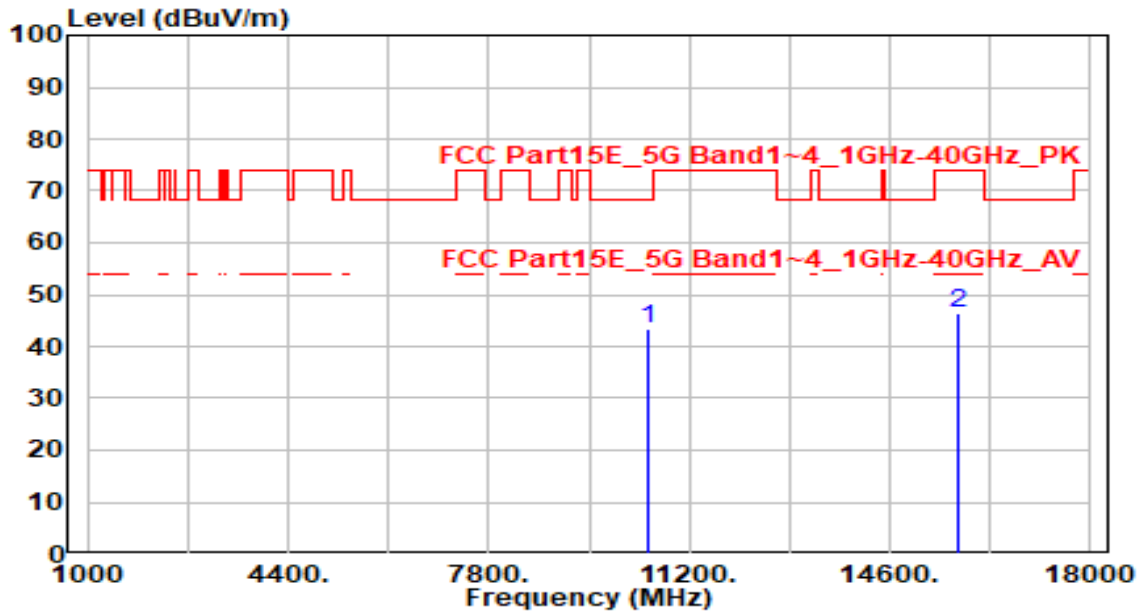


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10500.000	39.09	4.46	43.55	-24.65	68.20	200	100	Peak
2	15750.000	39.35	6.93	46.27	-27.73	74.00	200	45	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

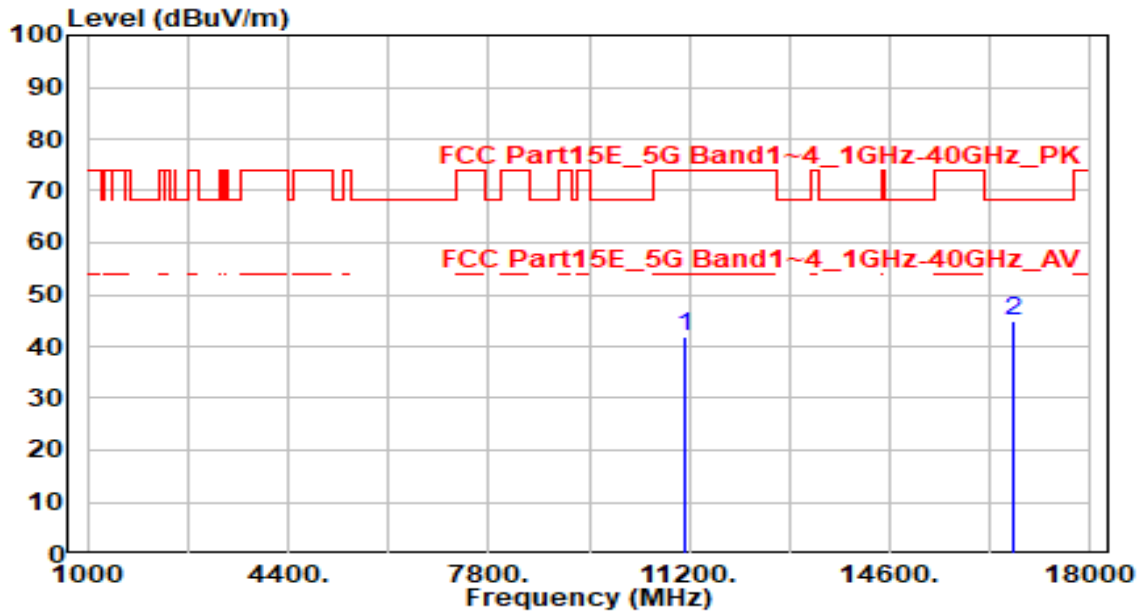


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11140.000	37.24	4.48	41.72	-32.28	74.00	200	55	Peak
2	* 16710.000	38.04	6.97	45.00	-23.20	68.20	200	335	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

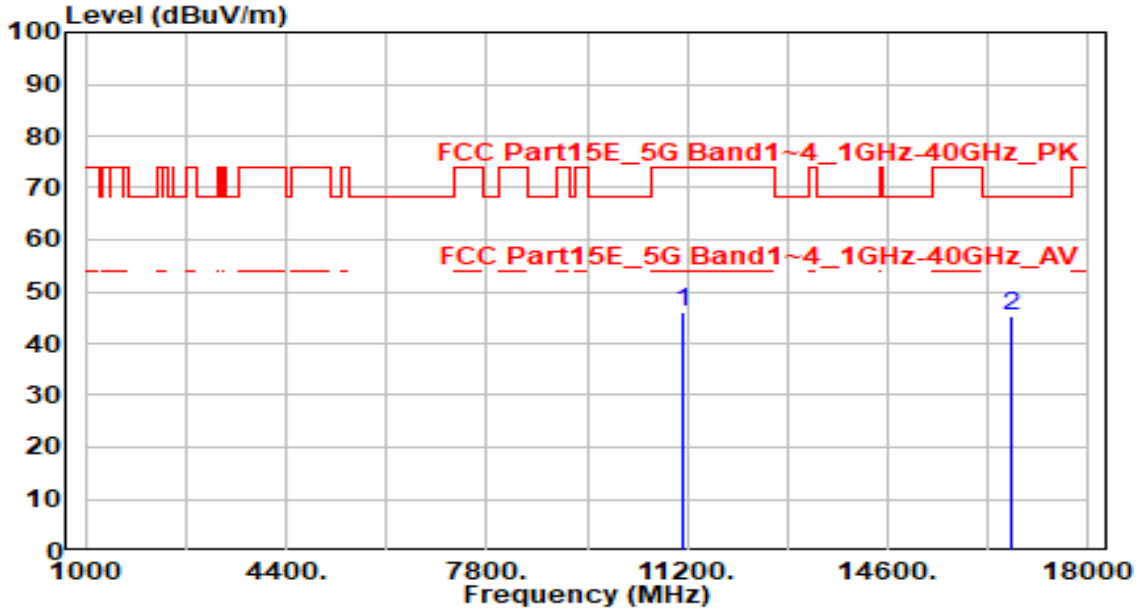

No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11140.000	41.74	4.48	46.22	-27.78	74.00	200	260	Peak
2	* 16710.000	38.44	6.97	45.41	-22.79	68.20	200	250	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.9. Radiated Restricted Band Edge Measurement

7.9.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42-16.423	399.9 - 410	4.5-5.15
¹ 0.495 - 0.505	16.69475-16.69525	608 - 614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960 - 1240	7.25-7.75
4.125-4.128	25.5 -25.67	1300 - 1427	8.025 - 8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660 - 1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123 - 138	2200 - 2300	14.47-14.5
8.291-8.294	149.9-150.05	2310 - 2390	15.35-16.2
8.362-8.366	156.52475-156.525	2483.5 - 2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690 - 2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260 - 3267	23.6-24.0
12.29-12.293	167.72-173.2	3332 - 3339	31.2-31.8
12.51975-12.52025	240 - 285	3345.8 - 3358	36.43-36.5
12.57675-12.57725	322-335.4	3600 - 4400	(²)
13.36-13.41	--	--	--

For 15.407(b) requirement:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge

increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Refer to KDB 789033 D02v02r01 G)2)c), as specified in § 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in § 15.407(b)(4)). However, an out-of-band emission that complies with both the peak and average limits of § 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz maximum emission limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.9.2. Test Procedure Used

KDB 789033 D02v02r01 - Section II) G

7.9.3. Test Setting


Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW If the EUT is configured to transmit with duty cycle $\geq 98\%$, set $VBW \leq RBW/100$ (i.e., 10 kHz) but not less than 10 Hz. If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$.
4. Detector = Peak
5. Sweep time = auto
6. Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98% duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle.

7.9.4. Test Setup

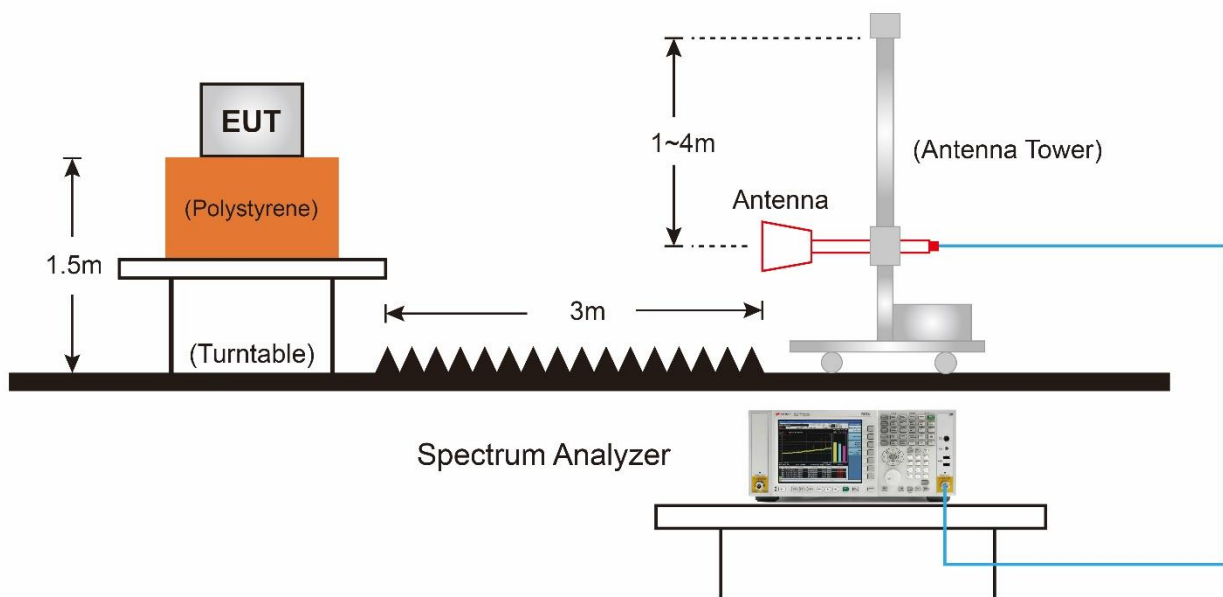

7.9.5. Test Result

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

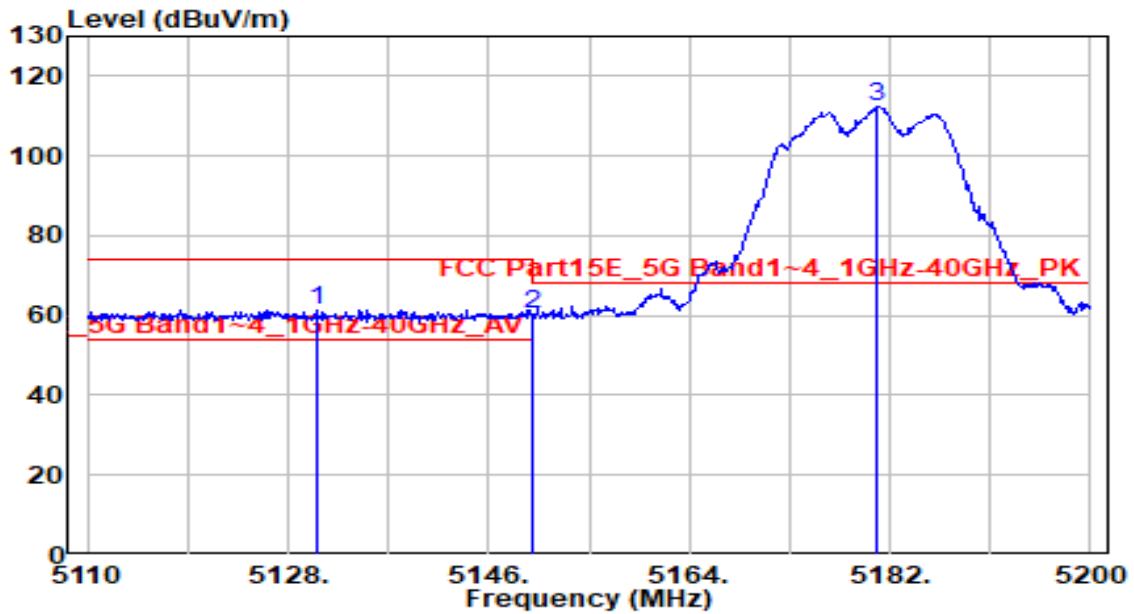


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5130.610	61.76	-0.34	61.42	-12.58	74.00	105	245	Peak
2	5150.000	60.64	-0.34	60.29	-13.71	74.00	105	245	Peak
3	5180.740	112.76	-0.35	112.41	N/A	N/A	105	245	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

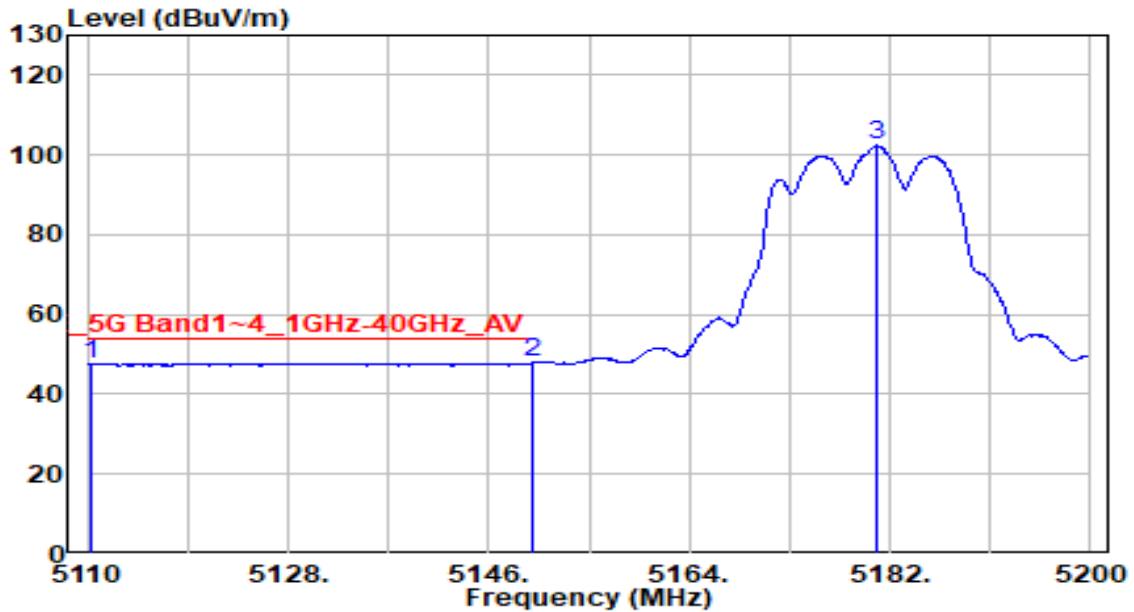


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5110.360	48.12	-0.34	47.78	-6.22	54.00	105	245	Average
2	* 5150.000	48.21	-0.34	47.87	-6.13	54.00	105	245	Average
3	5180.830	102.72	-0.35	102.37	N/A	N/A	105	245	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

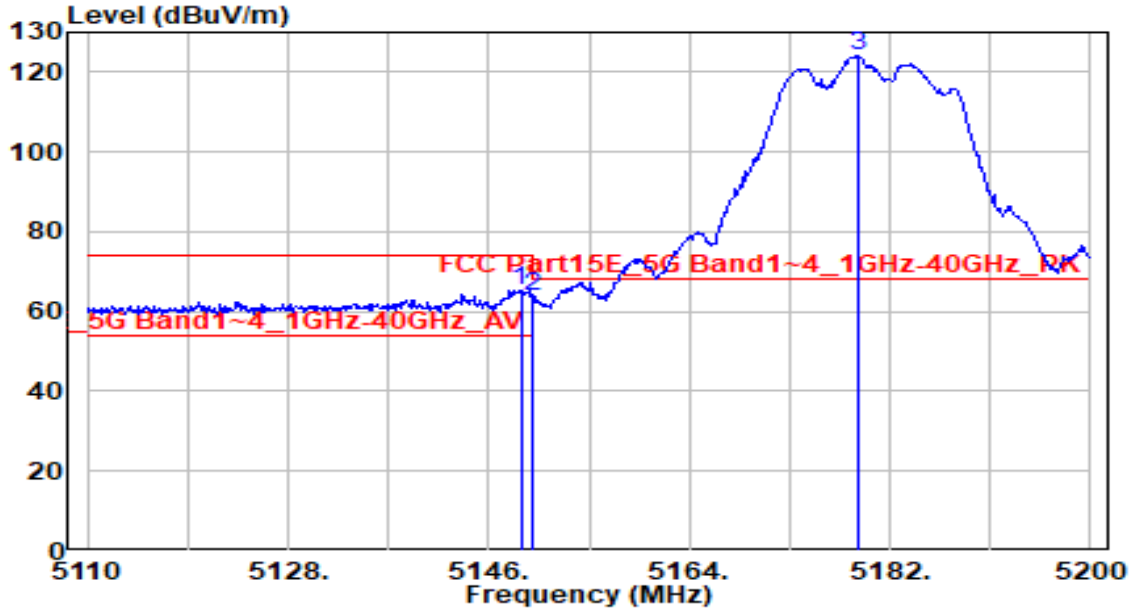


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5148.880	65.57	-0.34	65.22	-8.78	74.00	110	45	Peak
2	5150.000	64.24	-0.34	63.90	-10.10	74.00	110	45	Peak
3	5179.120	124.35	-0.35	124.01	N/A	N/A	110	45	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

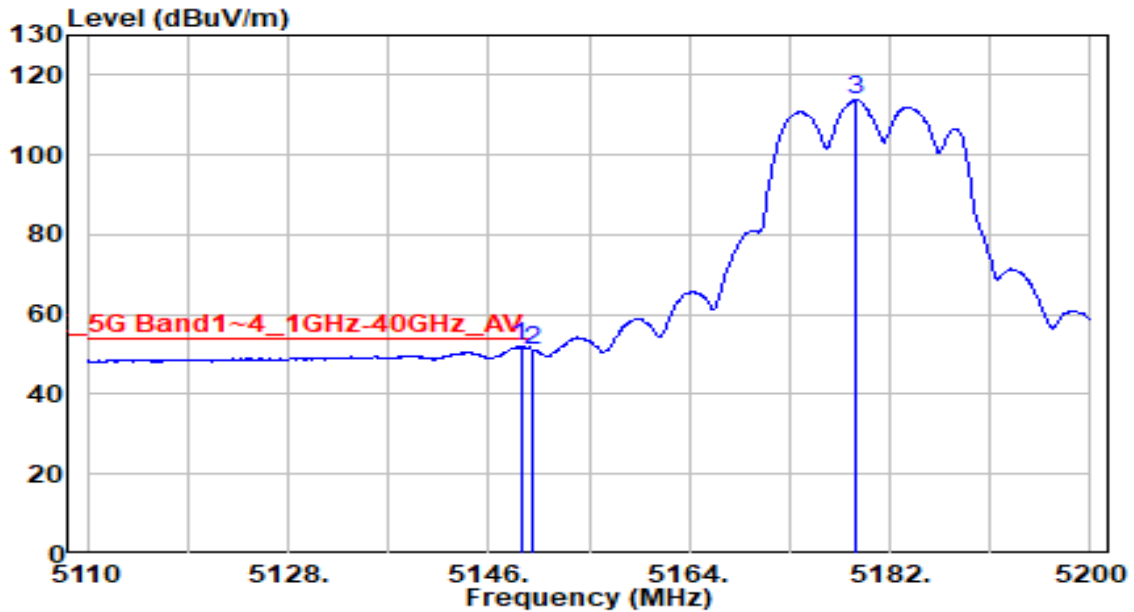


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5148.880	52.32	-0.34	51.97	-2.03	54.00	110	45	Average
2	5150.000	51.47	-0.34	51.12	-2.88	54.00	110	45	Average
3	5178.940	114.19	-0.35	113.85	N/A	N/A	110	45	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

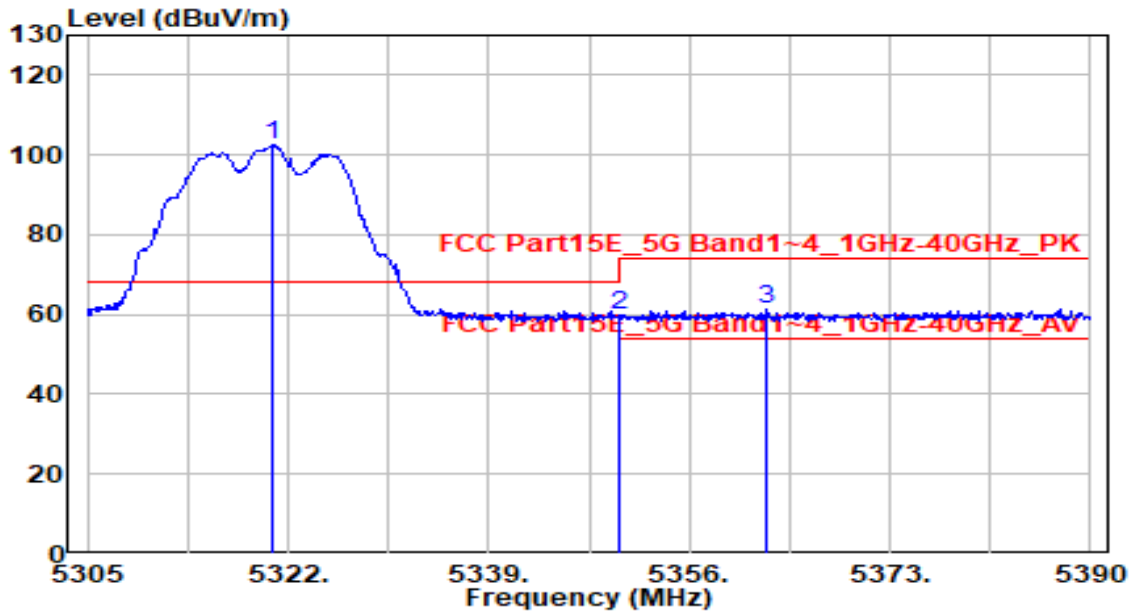


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5320.725	102.73	-0.34	102.40	N/A	N/A	160	245	Peak
2	5350.000	60.03	-0.33	59.69	-14.31	74.00	160	245	Peak
3	* 5362.630	61.51	-0.33	61.18	-12.82	74.00	160	245	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

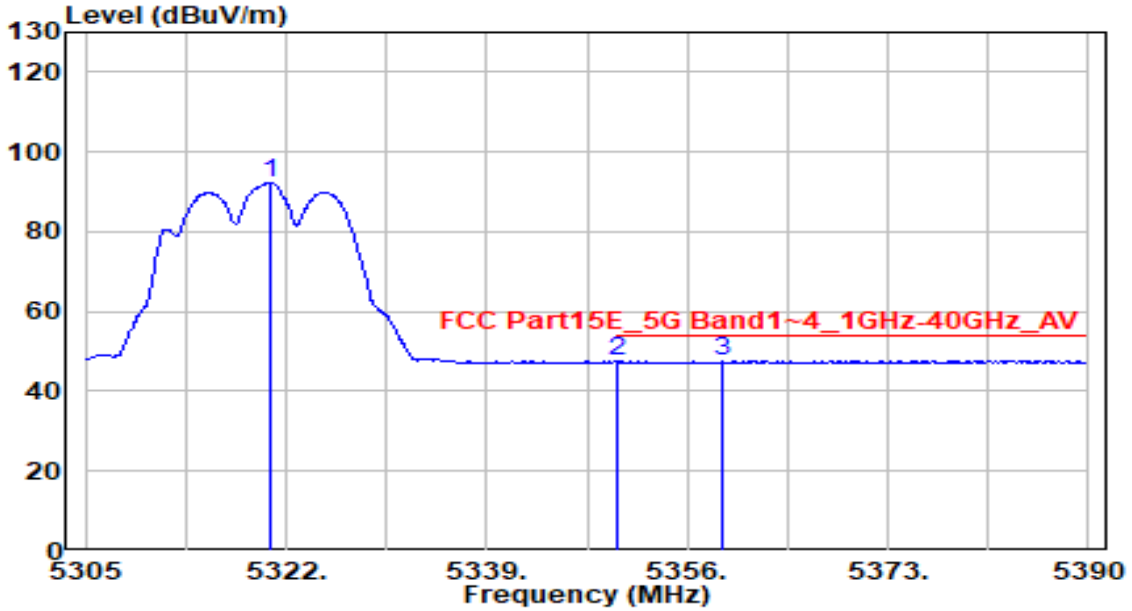


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5320.640	92.72	-0.34	92.38	N/A	N/A	160	245	Average
2	5350.000	47.79	-0.33	47.46	-6.54	54.00	160	245	Average
3	* 5359.060	48.02	-0.33	47.69	-6.31	54.00	160	245	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

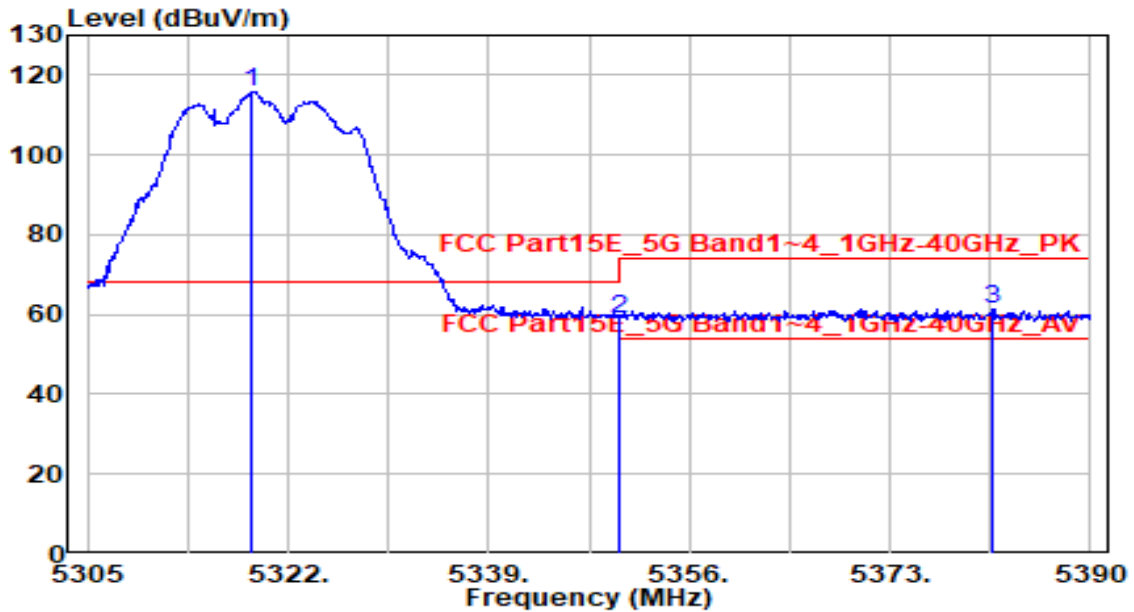


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.940	116.23	-0.34	115.90	N/A	N/A	120	50	Peak
2	5350.000	59.06	-0.33	58.73	-15.27	74.00	120	50	Peak
3	* 5381.755	61.66	-0.33	61.33	-12.67	74.00	120	50	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

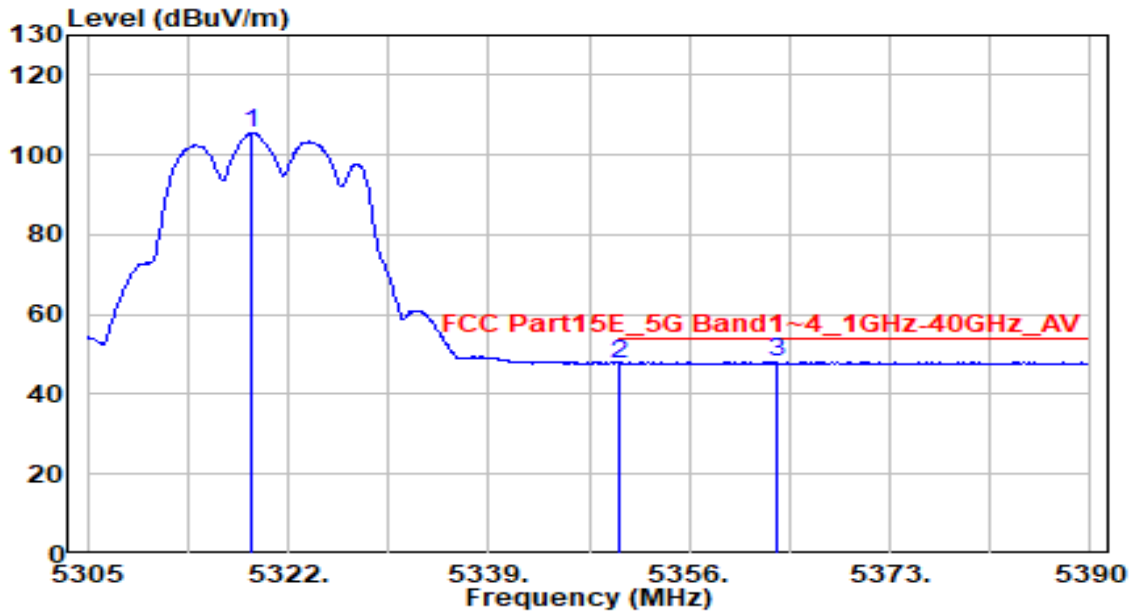


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.940	105.71	-0.34	105.37	N/A	N/A	120	50	Average
2	5350.000	48.11	-0.33	47.78	-6.22	54.00	120	50	Average
3	* 5363.480	48.46	-0.33	48.13	-5.87	54.00	120	50	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

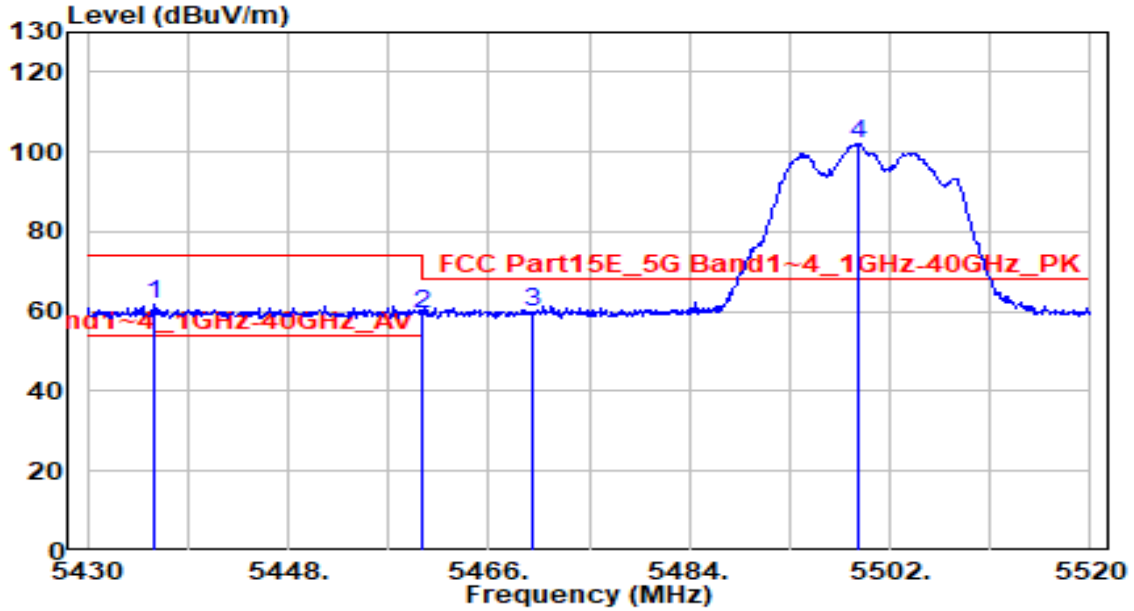


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5435.940	61.97	-0.19	61.78	-12.22	74.00	165	245	Peak
2	5460.000	59.38	-0.11	59.27	-14.73	74.00	165	245	Peak
3	* 5470.000	59.88	-0.07	59.81	-8.39	68.20	165	245	Peak
4	5499.120	101.96	0.04	102.00	N/A	N/A	165	245	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

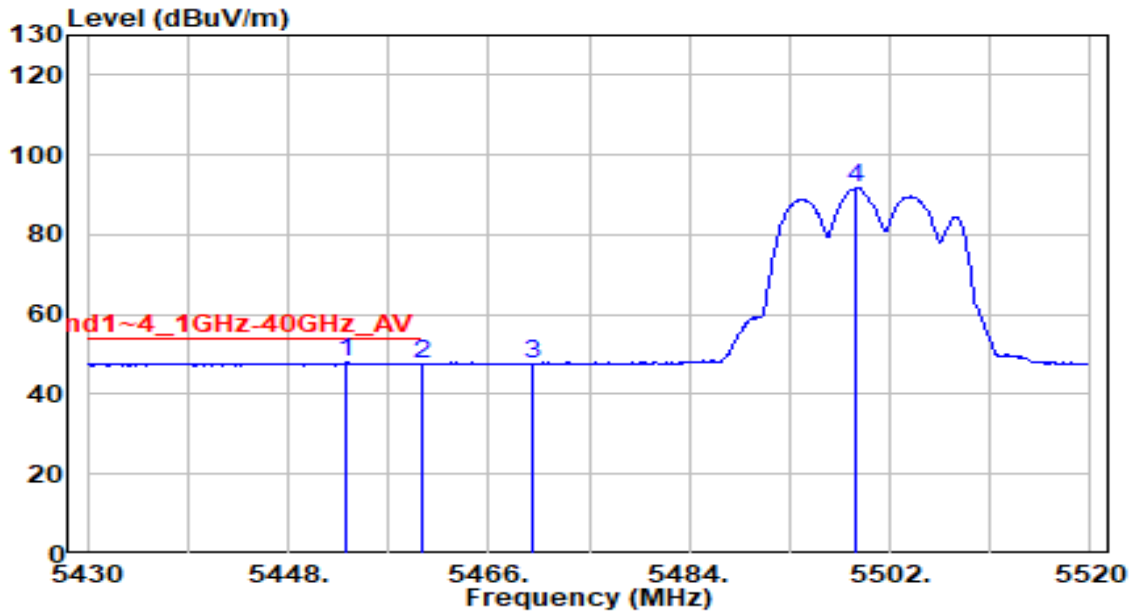


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5453.220	48.19	-0.13	48.05	-5.95	54.00	165	245	Average
2	5460.000	47.65	-0.11	47.55	-6.45	54.00	165	245	Average
3	5470.000	47.73	-0.07	47.66	N/A	N/A	165	245	Average
4	5499.030	91.62	0.04	91.65	N/A	N/A	165	245	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

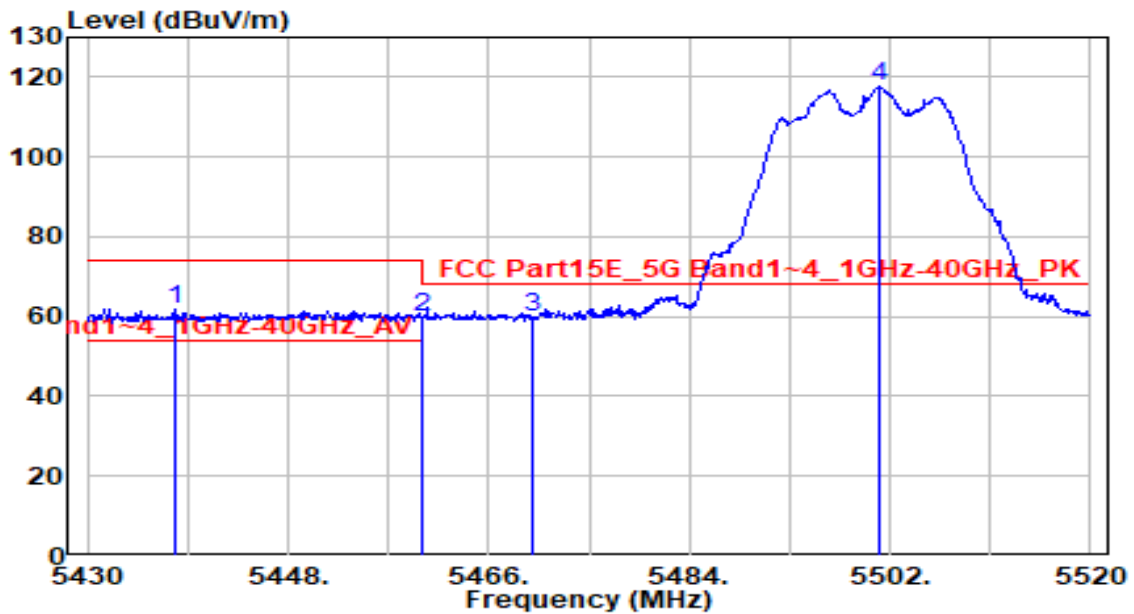


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5437.830	62.18	-0.19	62.00	-12.00	74.00	125	30	Peak
2	5460.000	60.08	-0.11	59.98	-14.02	74.00	125	30	Peak
3	* 5470.000	59.72	-0.07	59.65	-8.55	68.20	125	30	Peak
4	5501.010	117.70	0.04	117.75	N/A	N/A	125	30	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

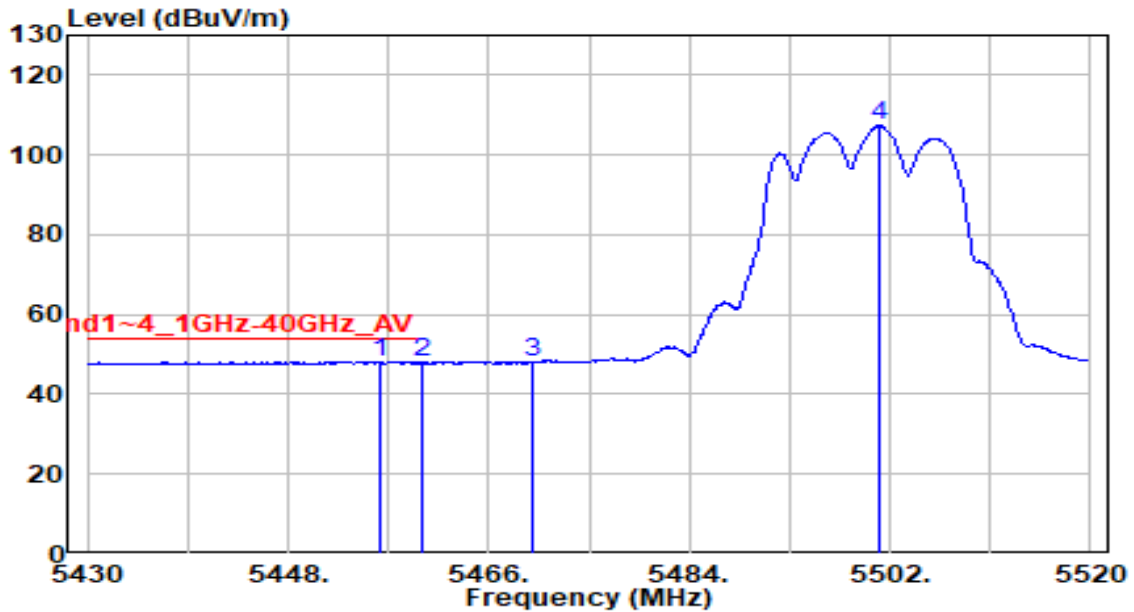


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5456.190	48.32	-0.12	48.20	-5.80	54.00	125	30	Average
2	5460.000	47.98	-0.11	47.87	-6.13	54.00	125	30	Average
3	5470.000	47.98	-0.07	47.91	N/A	N/A	125	30	Average
4	5501.100	107.30	0.05	107.35	N/A	N/A	125	30	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

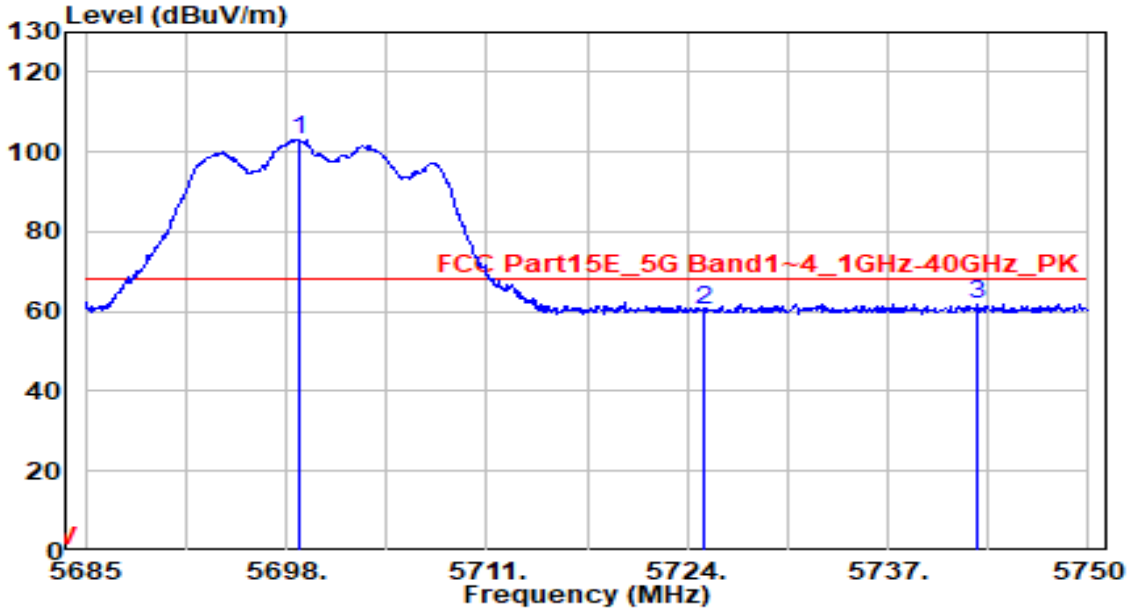


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5698.845	102.37	0.78	103.16	N/A	N/A	165	250	Peak
2	5725.000	59.23	0.89	60.12	-8.08	68.20	165	250	Peak
3	* 5742.850	61.07	0.96	62.03	-6.17	68.20	165	250	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

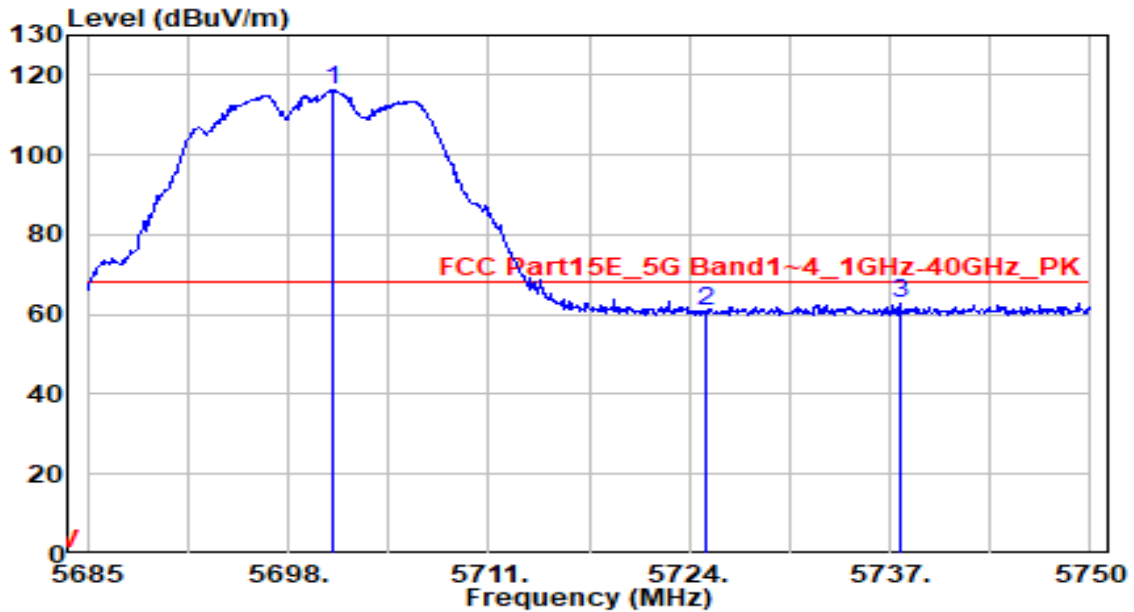


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5700.925	115.38	0.79	116.17	N/A	N/A	120	30	Peak
2	5725.000	59.71	0.89	60.60	-7.60	68.20	120	30	Peak
3	* 5737.650	61.96	0.94	62.90	-5.30	68.20	120	30	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

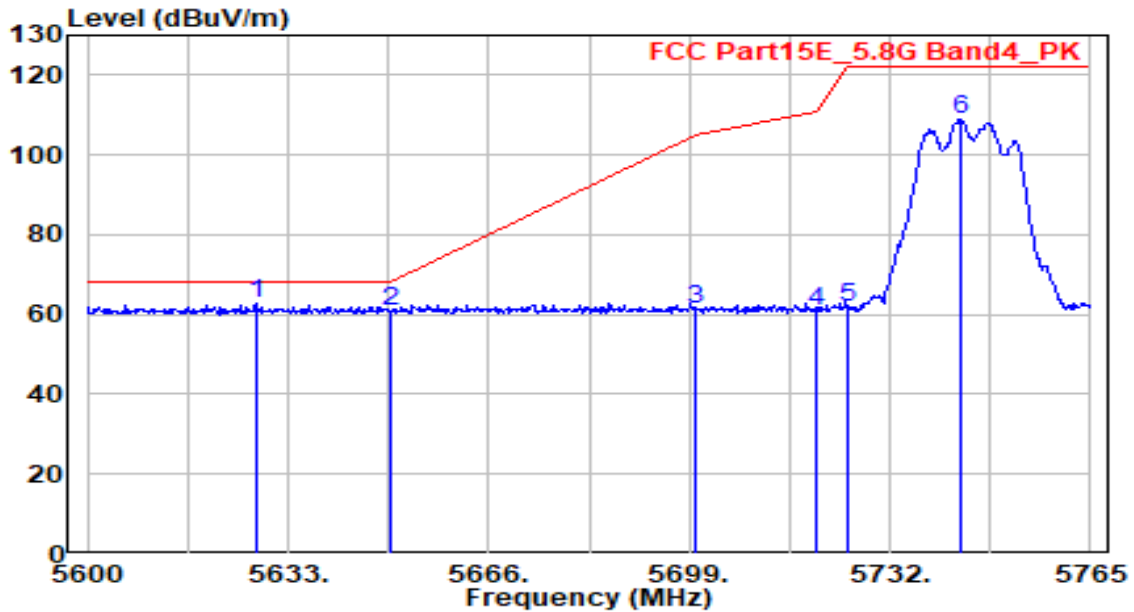


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5627.720	62.20	0.50	62.70	-5.50	68.20	170	250	Peak
2	5650.000	60.21	0.59	60.80	-7.40	68.20	170	250	Peak
3	5700.000	60.70	0.79	61.49	-43.71	105.20	170	250	Peak
4	5720.000	59.75	0.87	60.62	-50.18	110.80	170	250	Peak
5	5725.000	60.93	0.89	61.82	-60.38	122.20	170	250	Peak
6	5743.550	107.92	0.96	108.89	N/A	N/A	170	250	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

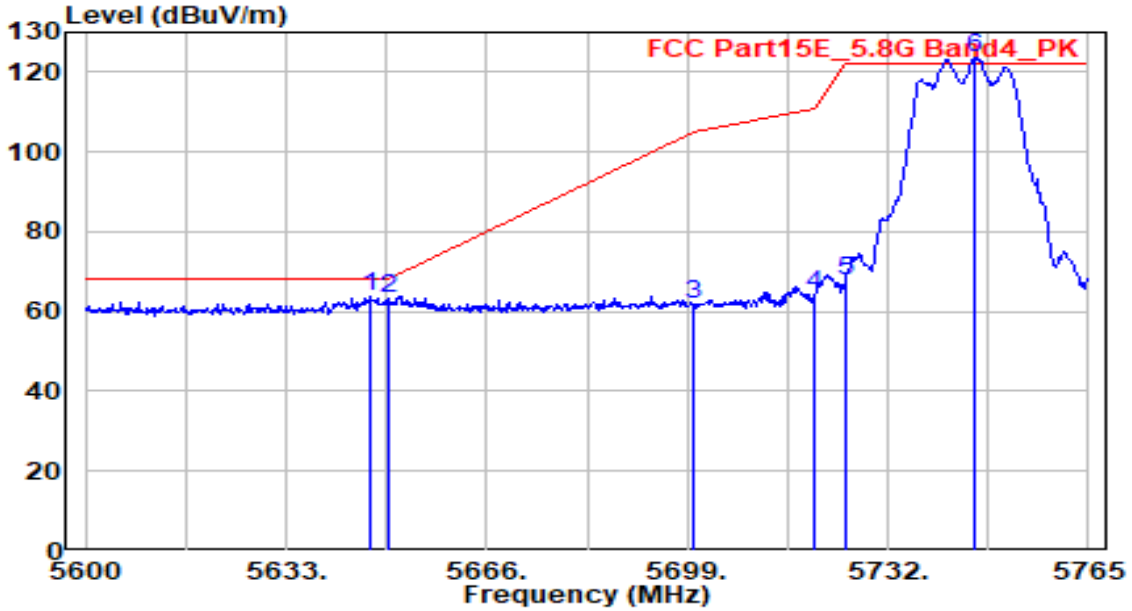


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5646.860	63.22	0.58	63.79	-4.41	68.20	155	35	Peak
2	5650.000	62.93	0.59	63.52	-4.68	68.20	155	35	Peak
3	5700.000	60.99	0.79	61.77	-43.43	105.20	155	35	Peak
4	5720.000	63.39	0.87	64.26	-46.54	110.80	155	35	Peak
5	5725.000	66.63	0.89	67.52	-54.68	122.20	155	35	Peak
6	5746.355	122.63	0.97	123.60	N/A	N/A	155	35	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

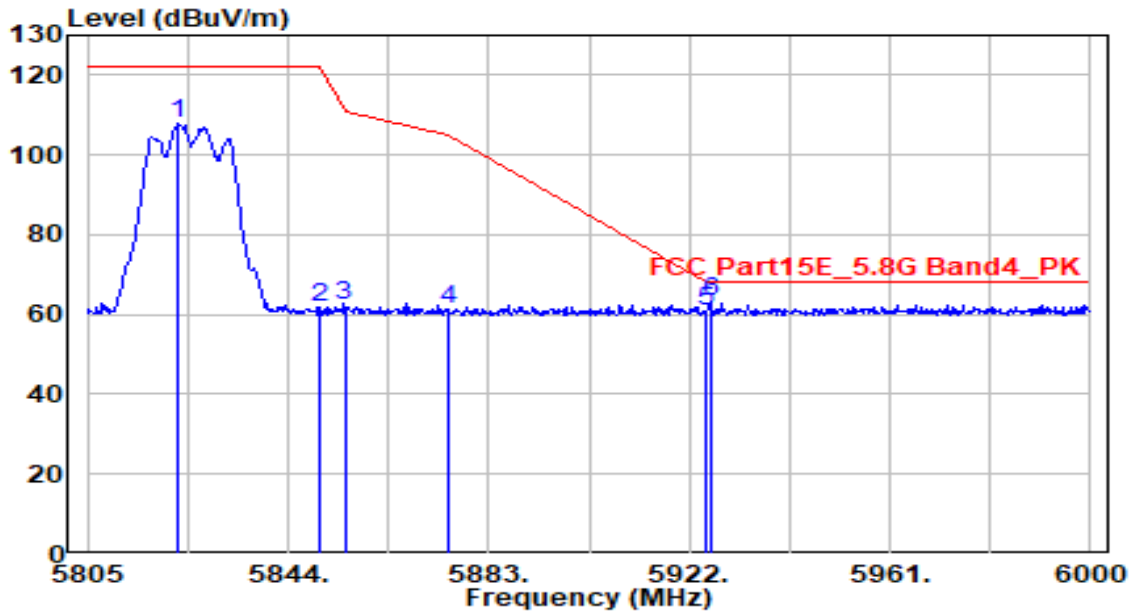


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5822.745	106.47	1.21	107.68	N/A	N/A	170	250	Peak
2	5850.000	60.55	1.23	61.78	-60.42	122.20	170	250	Peak
3	5855.000	61.14	1.24	62.38	-48.42	110.80	170	250	Peak
4	5875.000	59.91	1.26	61.17	-44.03	105.20	170	250	Peak
5	5925.000	59.35	1.30	60.66	-7.54	68.20	170	250	Peak
6	* 5926.290	61.87	1.30	63.17	-5.03	68.20	170	250	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-06
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

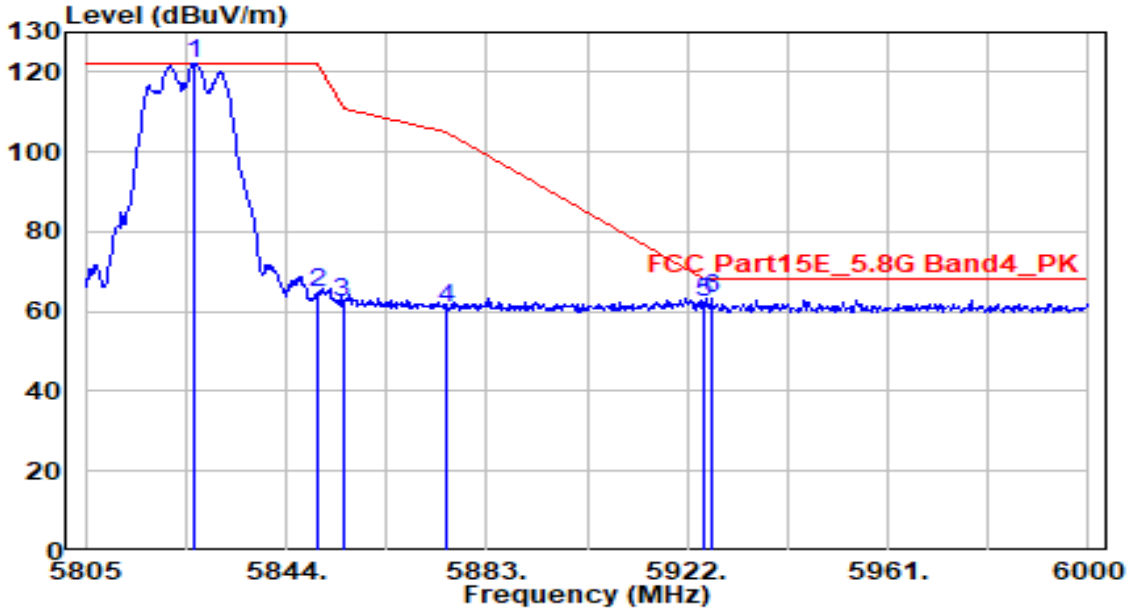


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5826.255	121.06	1.21	122.27	N/A	N/A	165	35	Peak
2	5850.000	63.33	1.23	64.56	-57.64	122.20	165	35	Peak
3	5855.000	61.27	1.24	62.51	-48.29	110.80	165	35	Peak
4	5875.000	59.77	1.26	61.03	-44.17	105.20	165	35	Peak
5	5925.000	60.82	1.30	62.12	-6.08	68.20	165	35	Peak
6	* 5926.680	61.77	1.31	63.08	-5.12	68.20	165	35	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

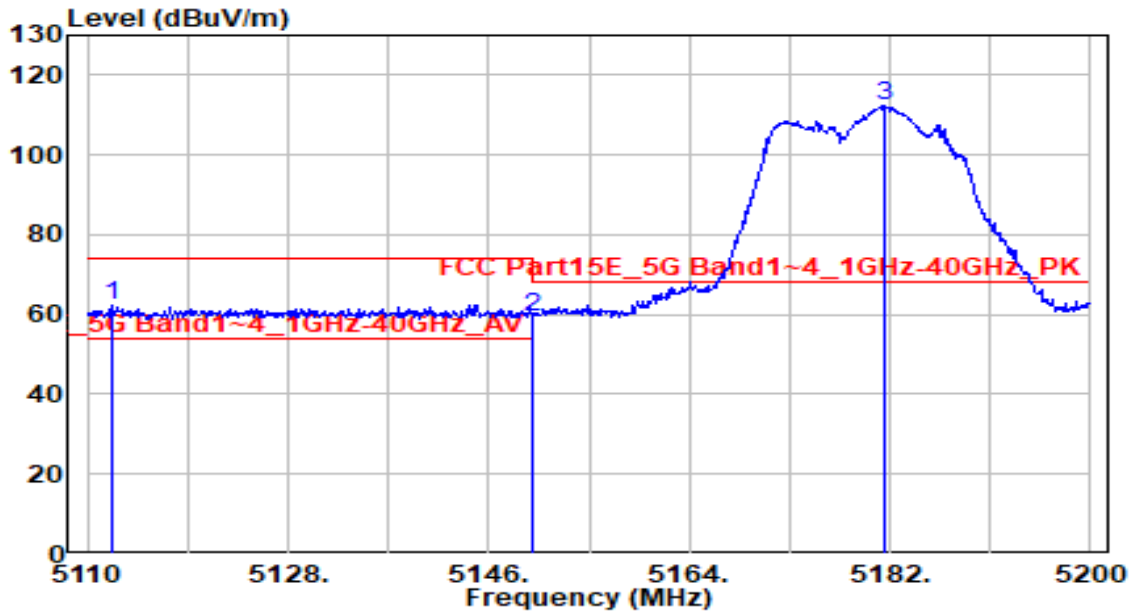


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5112.160	62.85	-0.34	62.51	-11.49	74.00	105	245	Peak
2	5150.000	59.75	-0.34	59.41	-14.59	74.00	105	245	Peak
3	5181.550	112.83	-0.35	112.49	N/A	N/A	105	245	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

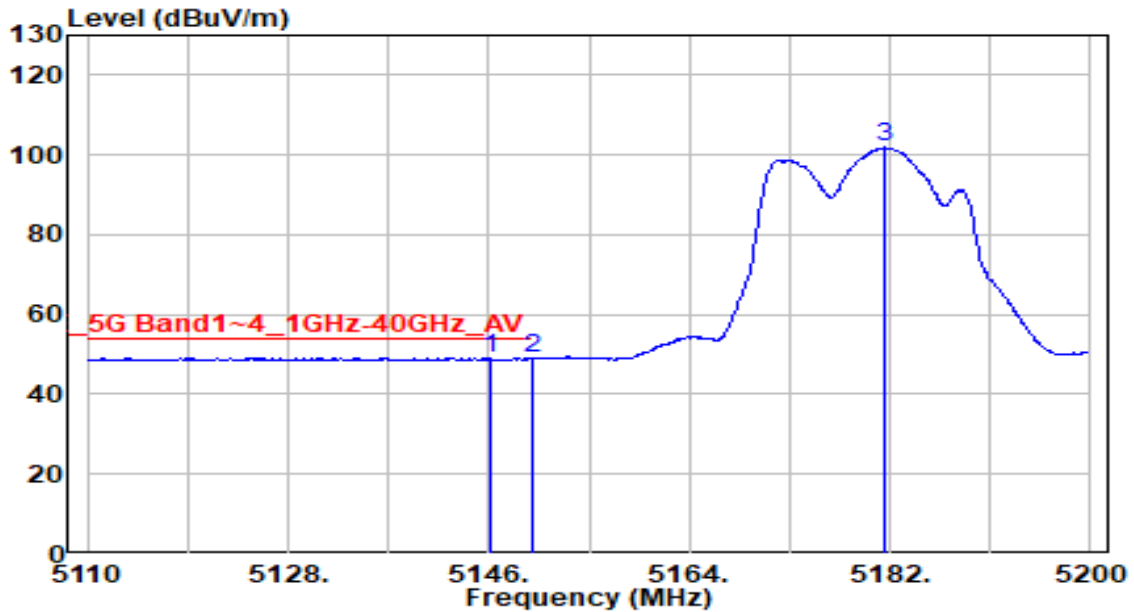


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5146.180	49.47	-0.34	49.13	-4.87	54.00	105	245	Average
2	5150.000	49.38	-0.34	49.03	-4.97	54.00	105	245	Average
3	5181.550	102.21	-0.35	101.86	N/A	N/A	105	245	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

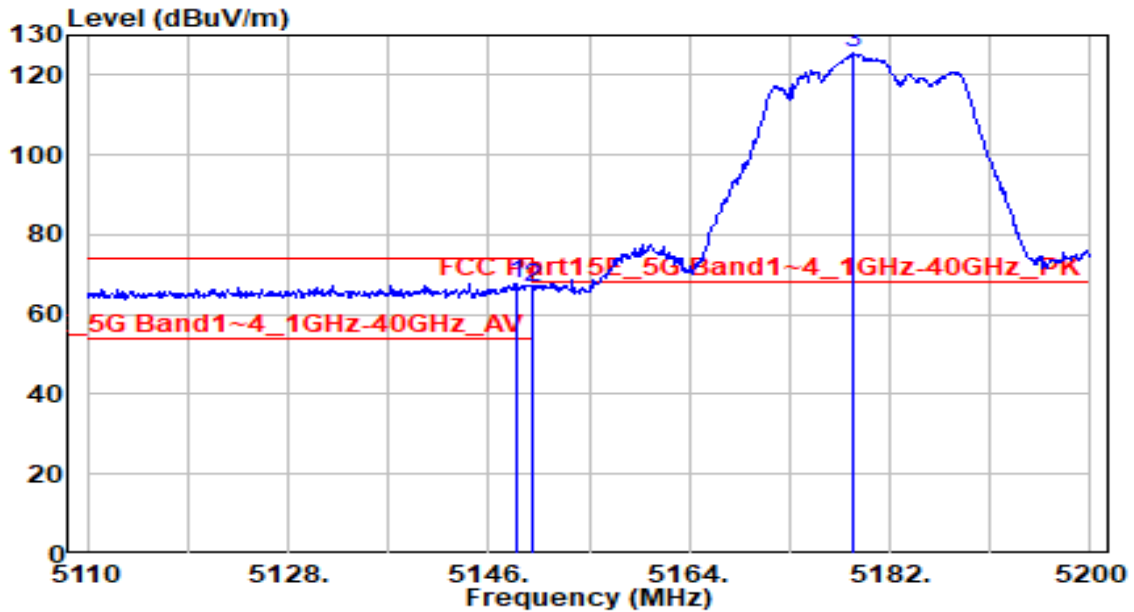


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5148.520	68.03	-0.34	67.68	-6.32	74.00	100	50	Peak
2	5150.000	67.21	-0.34	66.87	-7.13	74.00	100	50	Peak
3	5178.670	126.07	-0.35	125.72	N/A	N/A	100	50	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

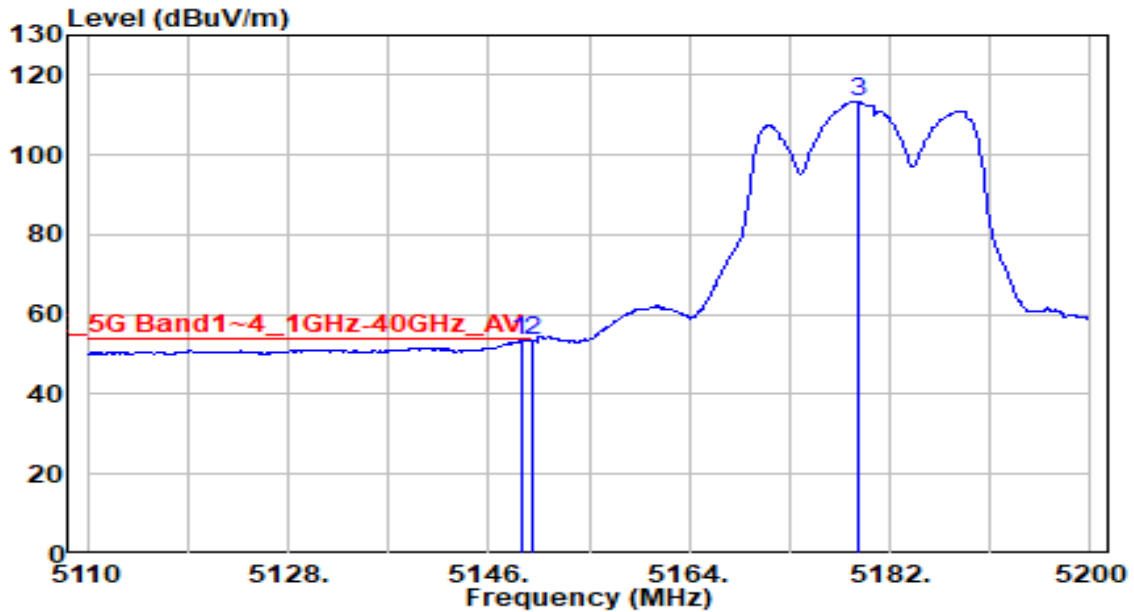


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5148.880	53.85	-0.34	53.50	-0.50	54.00	100	50	Average
2	* 5150.000	54.05	-0.34	53.71	-0.29	54.00	100	50	Average
3	5179.120	113.89	-0.35	113.55	N/A	N/A	100	50	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

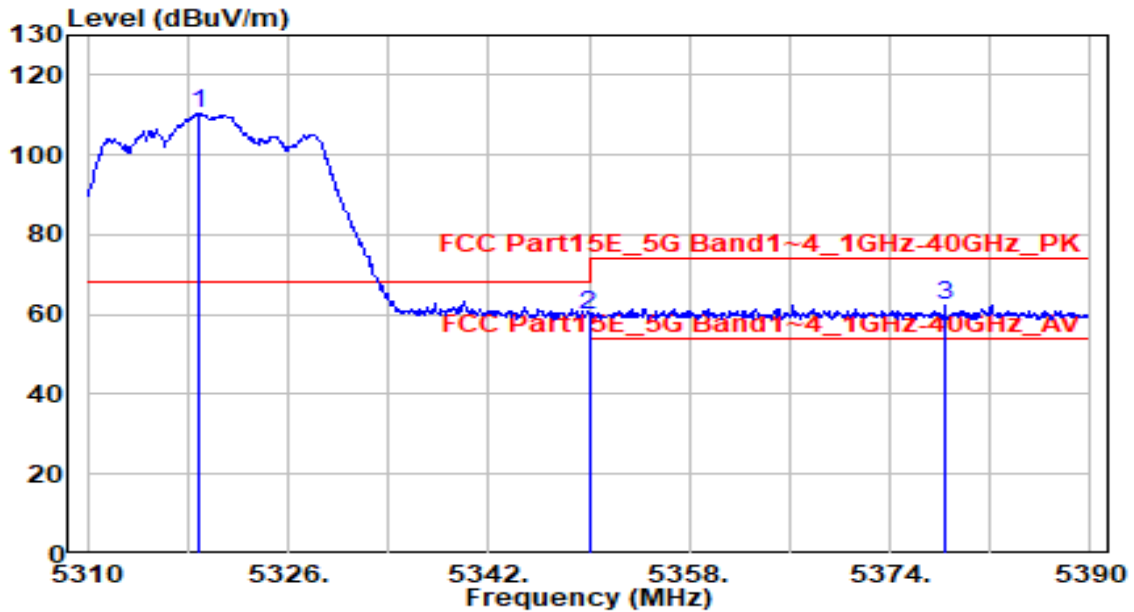


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.960	110.84	-0.34	110.50	N/A	N/A	165	245	Peak
2	5350.000	60.28	-0.33	59.95	-14.05	74.00	165	245	Peak
3	* 5378.400	62.75	-0.33	62.42	-11.58	74.00	165	245	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

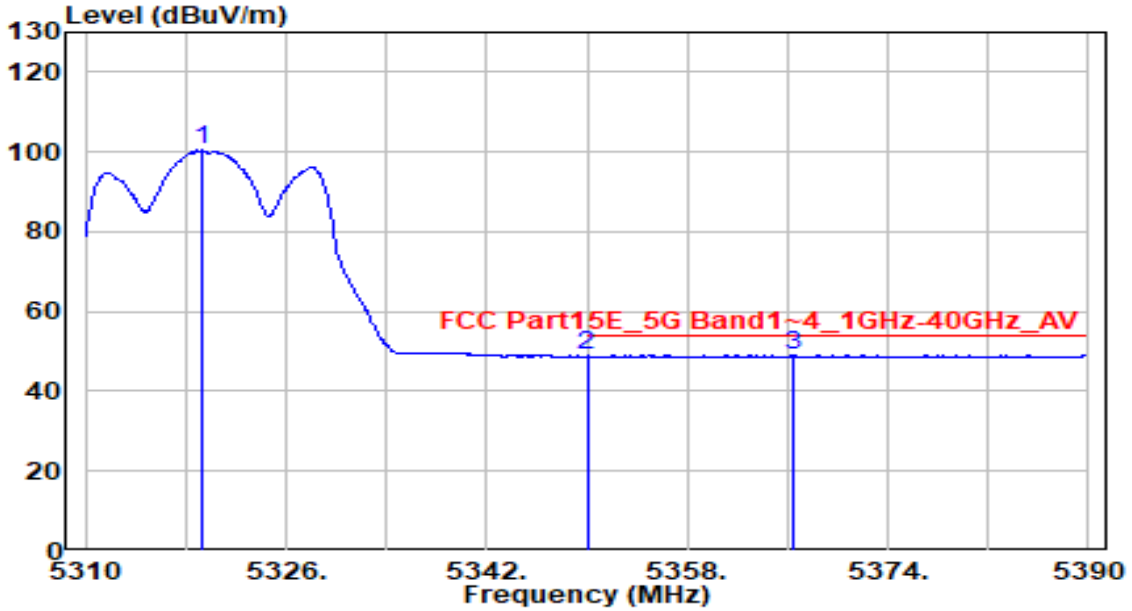


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5319.280	100.69	-0.34	100.36	N/A	N/A	165	245	Average
2	5350.000	49.17	-0.33	48.83	-5.17	54.00	165	245	Average
3	* 5366.480	49.39	-0.33	49.06	-4.94	54.00	165	245	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

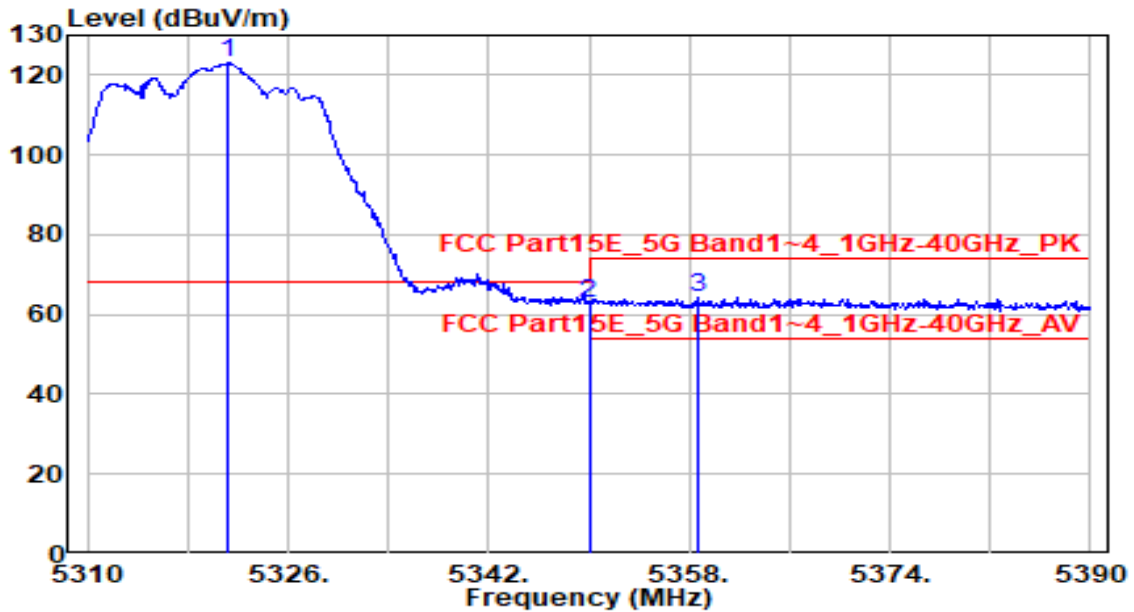


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5321.200	123.57	-0.34	123.23	N/A	N/A	125	55	Peak
2	5350.000	63.16	-0.33	62.83	-11.17	74.00	125	55	Peak
3	* 5358.640	64.48	-0.33	64.15	-9.85	74.00	125	55	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

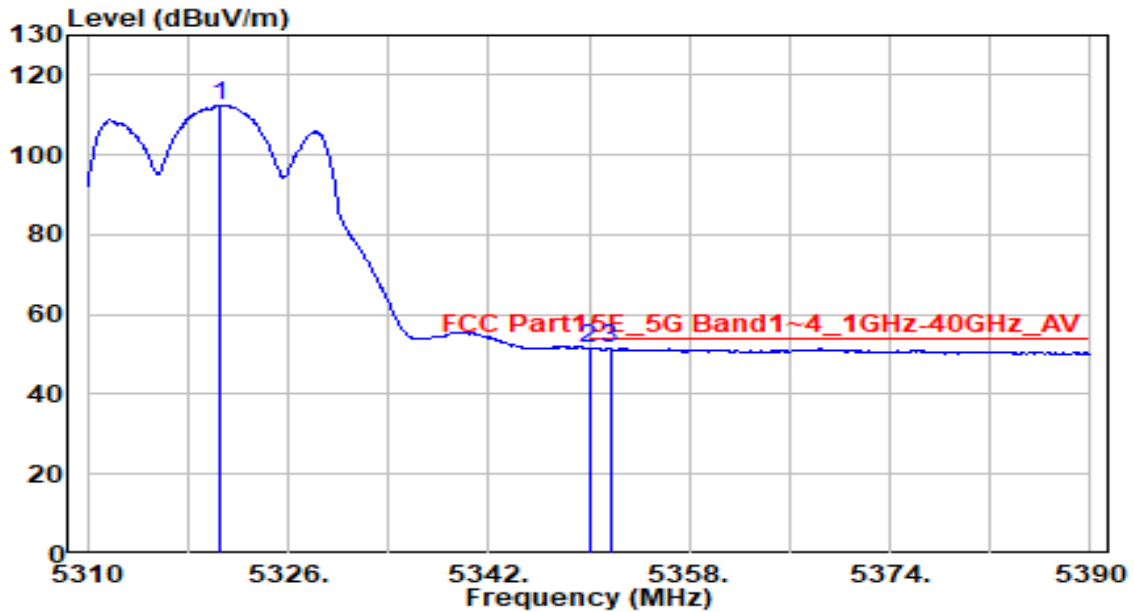


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5320.480	112.83	-0.34	112.49	N/A	N/A	125	55	Average
2	5350.000	51.80	-0.33	51.47	-2.53	54.00	125	55	Average
3	* 5351.680	52.01	-0.33	51.68	-2.32	54.00	125	55	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

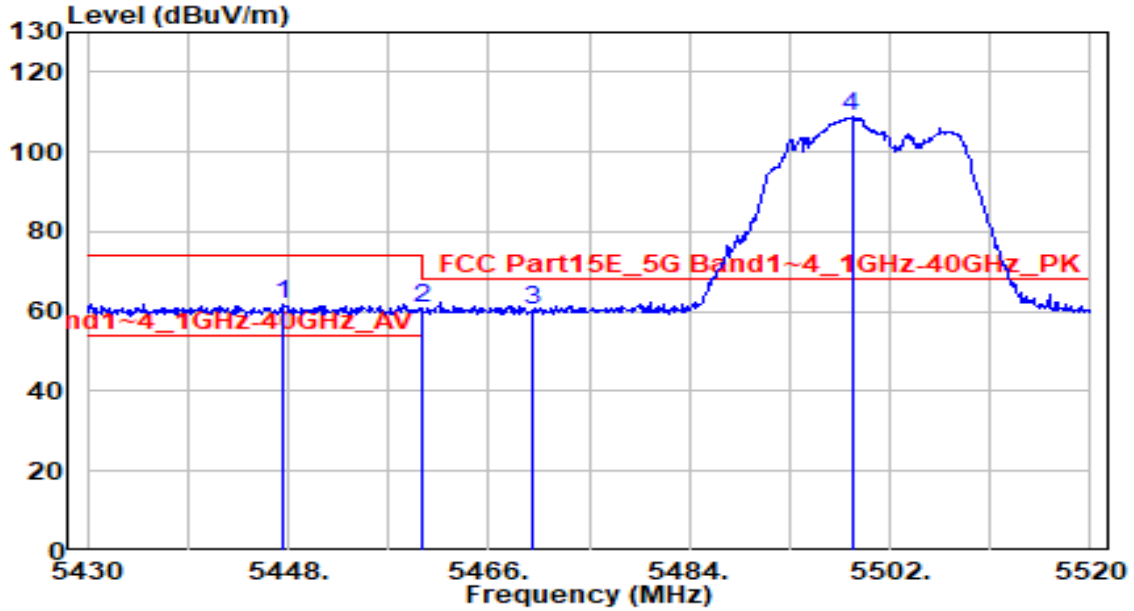


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5447.640	62.12	-0.15	61.97	-12.03	74.00	125	250	Peak
2	5460.000	60.72	-0.11	60.62	-13.38	74.00	125	250	Peak
3	* 5470.000	60.21	-0.07	60.14	-8.06	68.20	125	250	Peak
4	5498.580	109.02	0.04	109.06	N/A	N/A	125	250	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

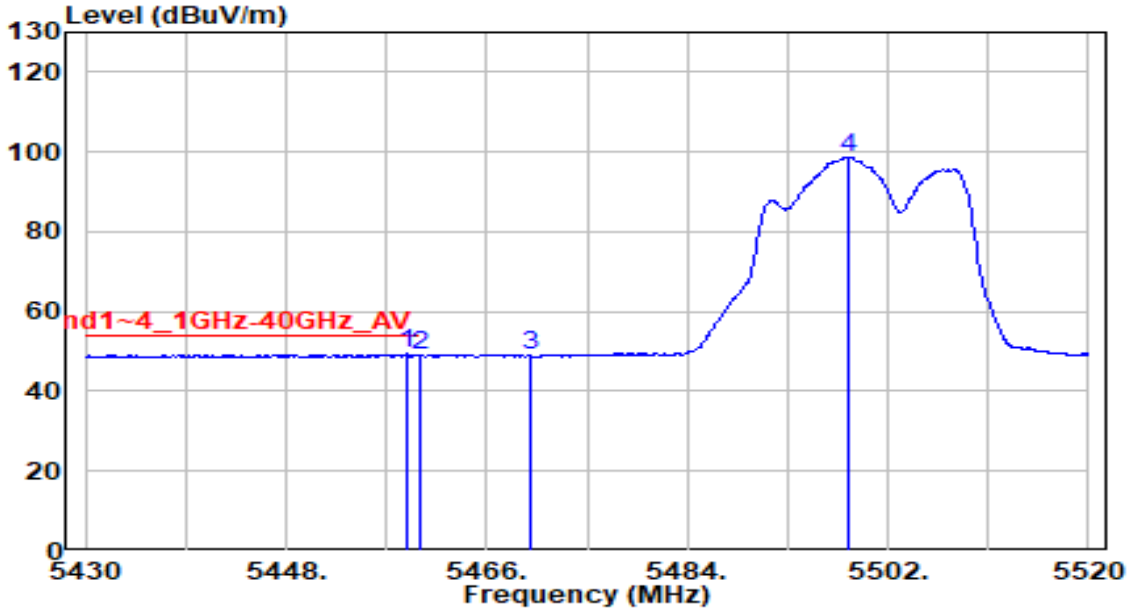


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5458.890	49.43	-0.11	49.32	-4.68	54.00	125	250	Average
2	5460.000	48.95	-0.11	48.84	-5.16	54.00	125	250	Average
3	5470.000	48.90	-0.07	48.83	N/A	N/A	125	250	Average
4	5498.490	98.69	0.04	98.73	N/A	N/A	125	250	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

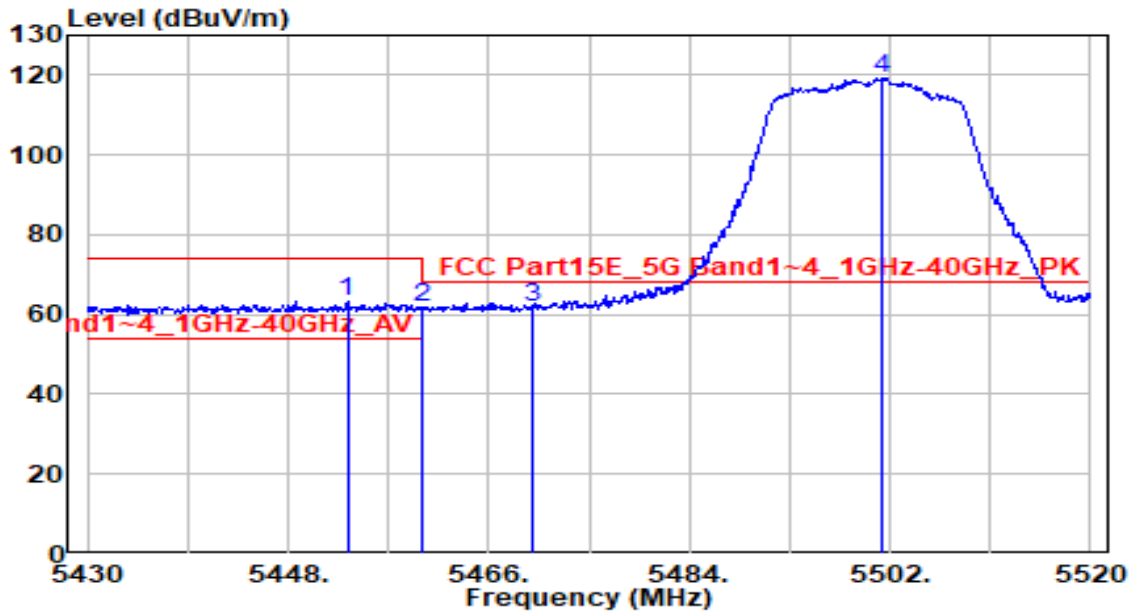


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5453.310	63.39	-0.13	63.26	-10.74	74.00	155	20	Peak
2	5460.000	62.03	-0.11	61.93	-12.07	74.00	155	20	Peak
3	* 5470.000	61.67	-0.07	61.60	-6.60	68.20	155	20	Peak
4	5501.190	119.28	0.05	119.33	N/A	N/A	155	20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

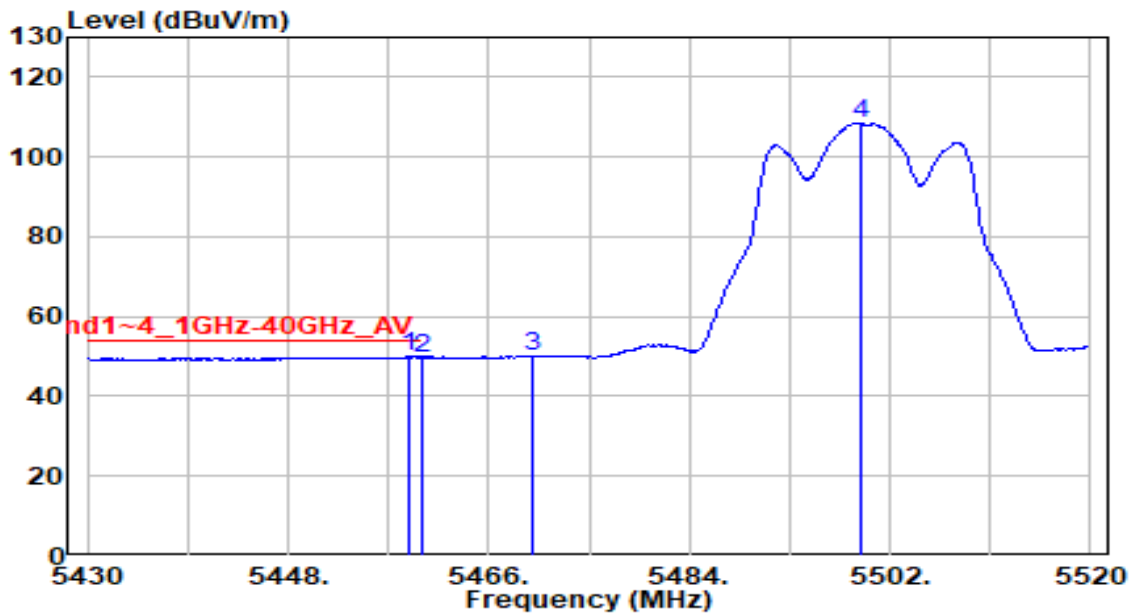


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5458.800	50.11	-0.11	50.00	-4.00	54.00	155	20	Average
2	5460.000	49.85	-0.11	49.74	-4.26	54.00	155	20	Average
3	5470.000	50.09	-0.07	50.02	N/A	N/A	155	20	Average
4	5499.390	108.50	0.04	108.54	N/A	N/A	155	20	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

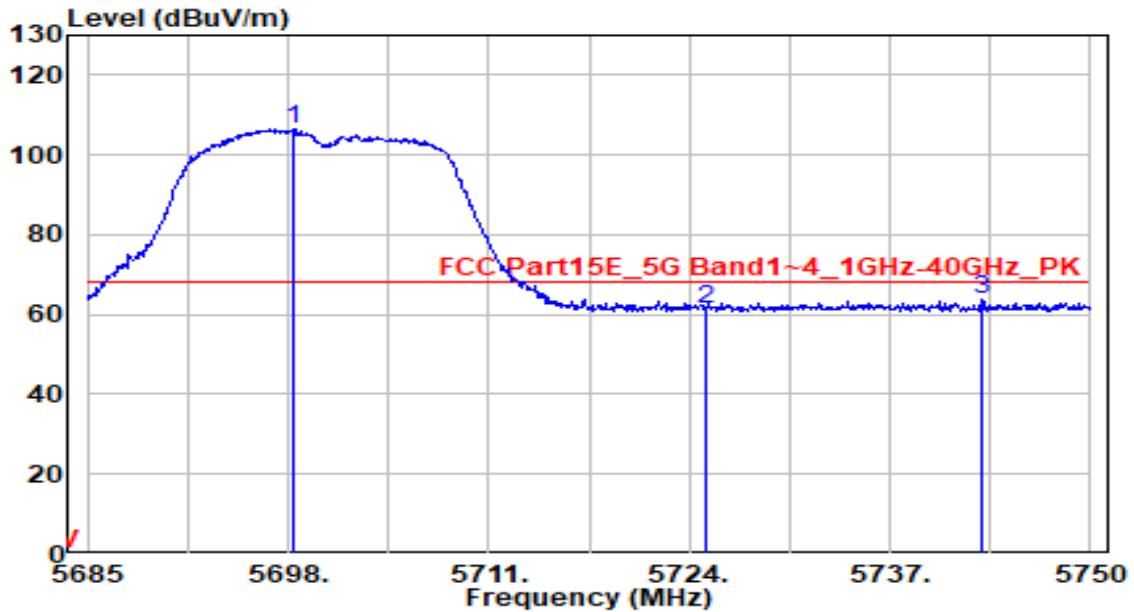


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5698.390	105.88	0.78	106.66	N/A	N/A	135	265	Peak
2	5725.000	60.35	0.89	61.24	-6.96	68.20	135	265	Peak
3	* 5742.915	62.59	0.96	63.55	-4.65	68.20	135	265	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

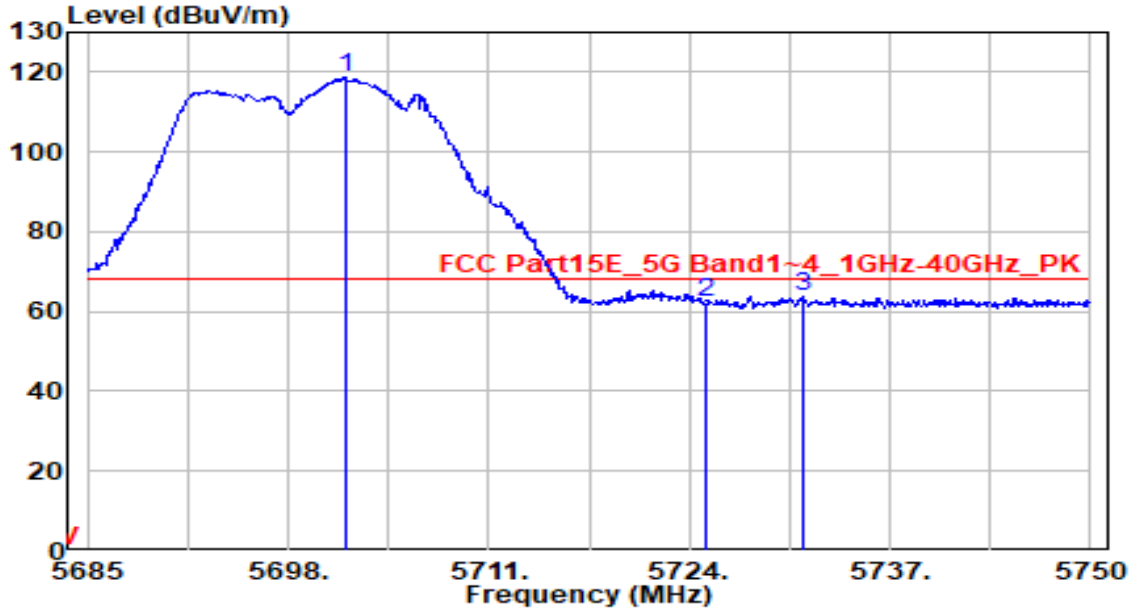


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5701.705	117.86	0.80	118.66	N/A	N/A	130	30	Peak
2	5725.000	61.31	0.89	62.20	-6.00	68.20	130	30	Peak
3	* 5731.345	62.76	0.91	63.68	-4.52	68.20	130	30	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

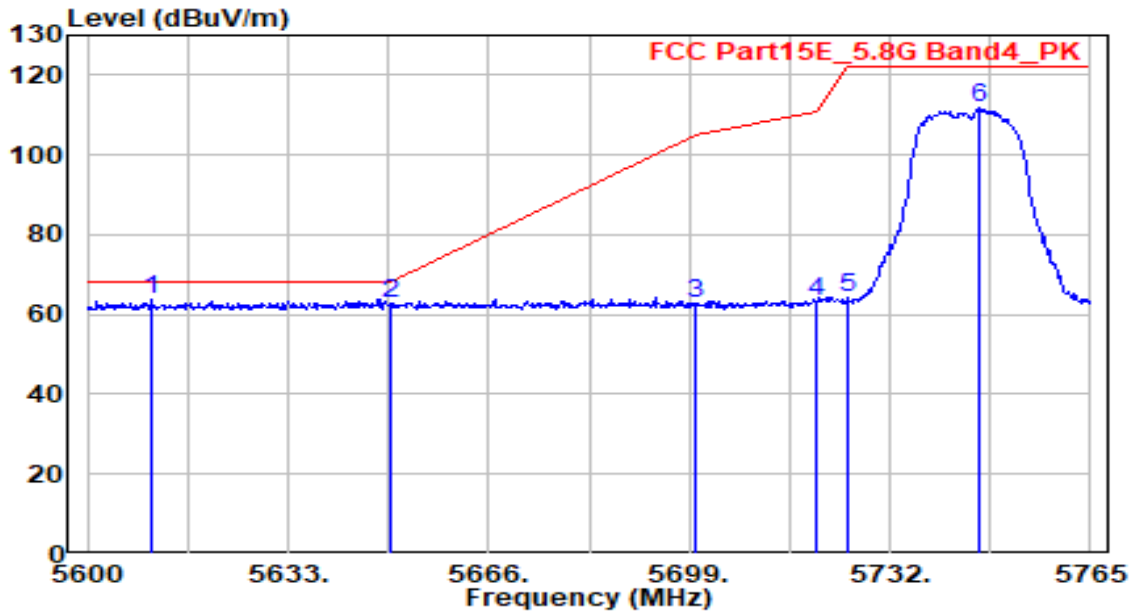


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5610.560	63.33	0.43	63.76	-4.44	68.20	190	265	Peak
2	5650.000	62.22	0.59	62.81	-5.39	68.20	190	265	Peak
3	5700.000	61.78	0.79	62.57	-42.63	105.20	190	265	Peak
4	5720.000	62.54	0.87	63.41	-47.40	110.80	190	265	Peak
5	5725.000	63.44	0.89	64.33	-57.87	122.20	190	265	Peak
6	5746.685	110.67	0.98	111.65	N/A	N/A	190	265	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

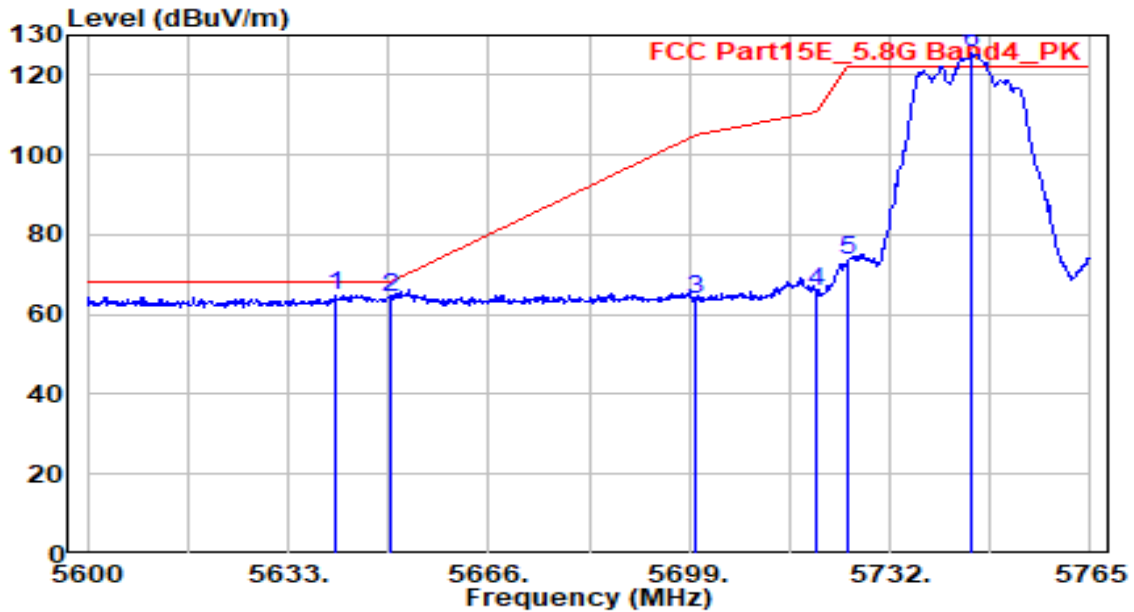


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5640.920	64.41	0.55	64.97	-3.23	68.20	165	0	Peak
2	5650.000	63.75	0.59	64.34	-3.86	68.20	165	0	Peak
3	5700.000	62.75	0.79	63.54	-41.66	105.20	165	0	Peak
4	5720.000	64.66	0.87	65.53	-45.27	110.80	165	0	Peak
5	5725.000	72.83	0.89	73.72	-48.48	122.20	165	0	Peak
6	5745.530	124.43	0.97	125.40	N/A	N/A	165	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

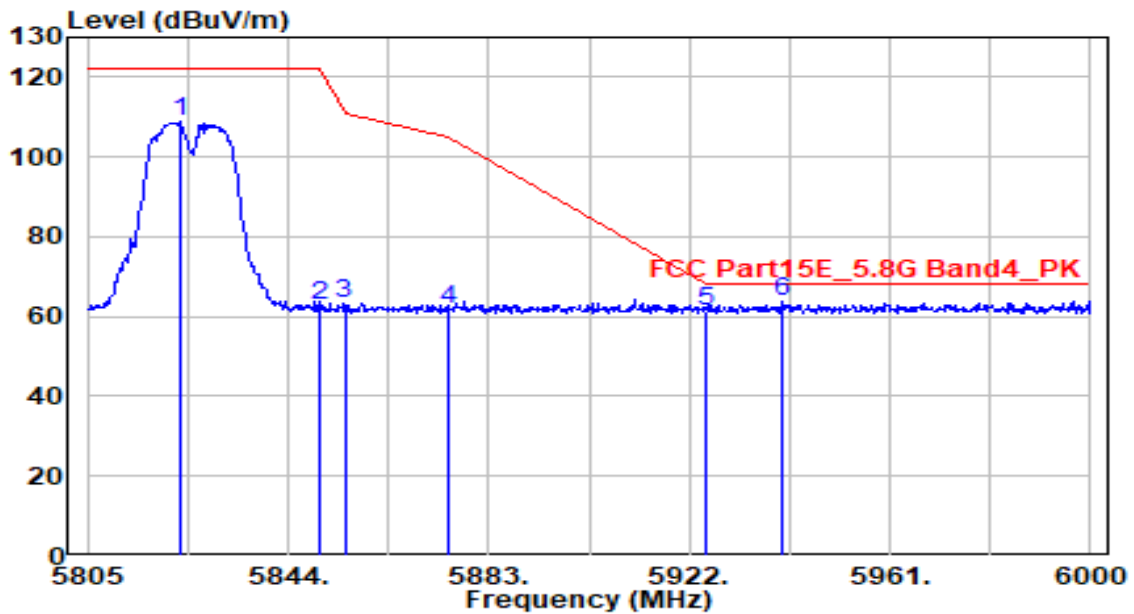


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5823.135	107.83	1.21	109.04	N/A	N/A	170	245	Peak
2	5850.000	61.72	1.23	62.95	-59.25	122.20	170	245	Peak
3	5855.000	61.87	1.24	63.11	-47.69	110.80	170	245	Peak
4	5875.000	60.56	1.26	61.82	-43.38	105.20	170	245	Peak
5	5925.000	59.86	1.30	61.16	-7.04	68.20	170	245	Peak
6	* 5939.940	62.37	1.32	63.68	-4.52	68.20	170	245	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

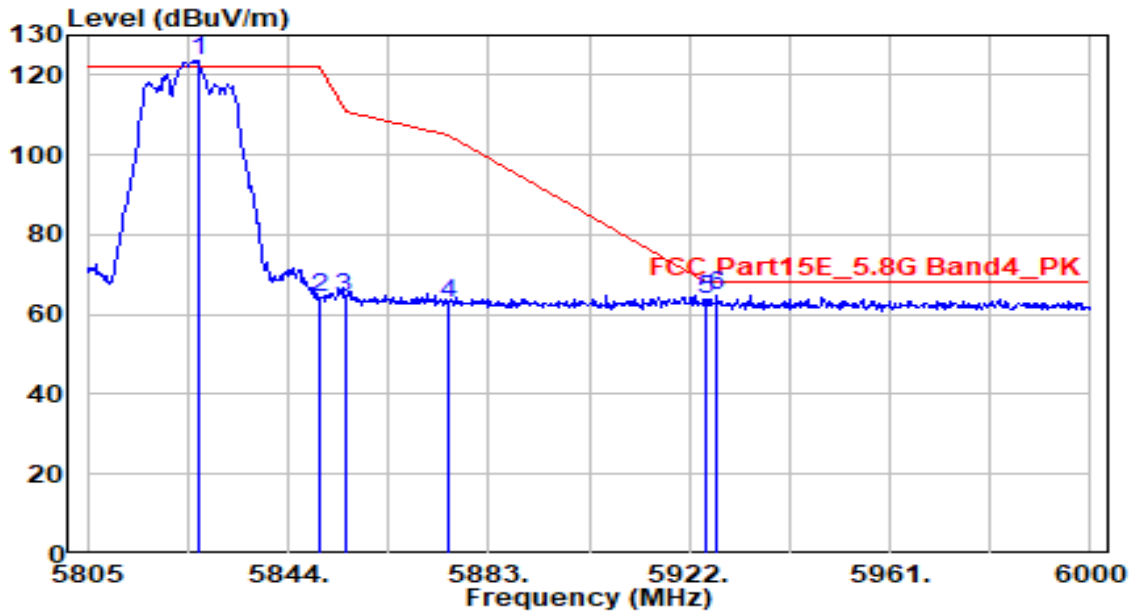


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5826.450	122.44	1.21	123.65	N/A	N/A	170	0	Peak
2	5850.000	62.86	1.23	64.09	-58.11	122.20	170	0	Peak
3	5855.000	63.15	1.24	64.39	-46.41	110.80	170	0	Peak
4	5875.000	61.43	1.26	62.69	-42.51	105.20	170	0	Peak
5	5925.000	62.25	1.30	63.56	-4.64	68.20	170	0	Peak
6	* 5927.460	63.49	1.31	64.80	-3.40	68.20	170	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

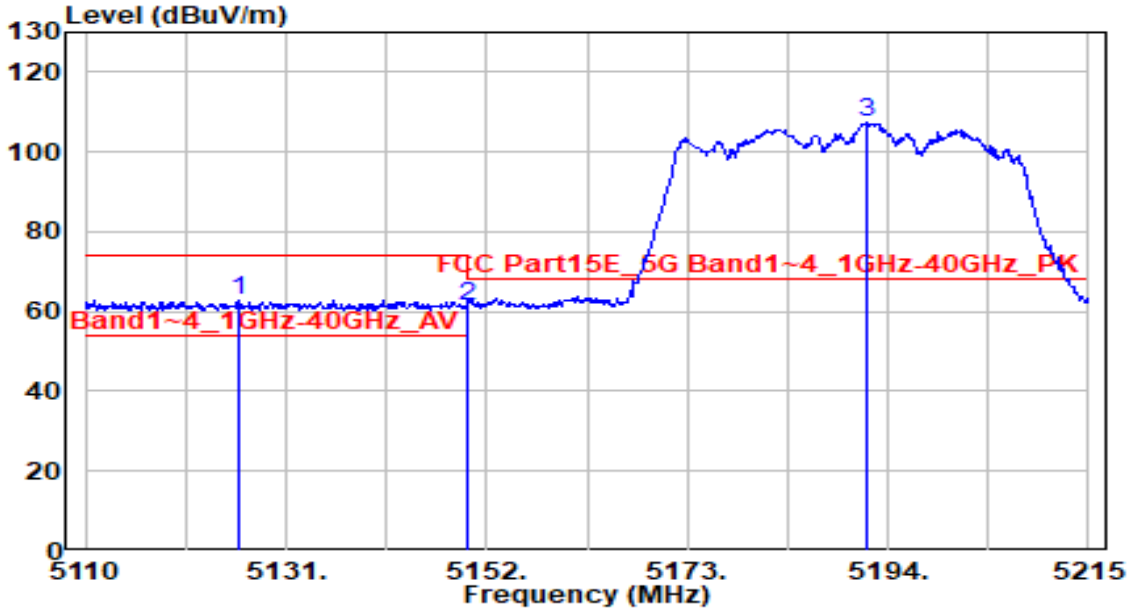


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5126.170	63.13	-0.34	62.78	-11.22	74.00	110	265	Peak
2	5150.000	61.73	-0.34	61.39	-12.61	74.00	110	265	Peak
3	5191.690	107.73	-0.35	107.39	N/A	N/A	110	265	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preampifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

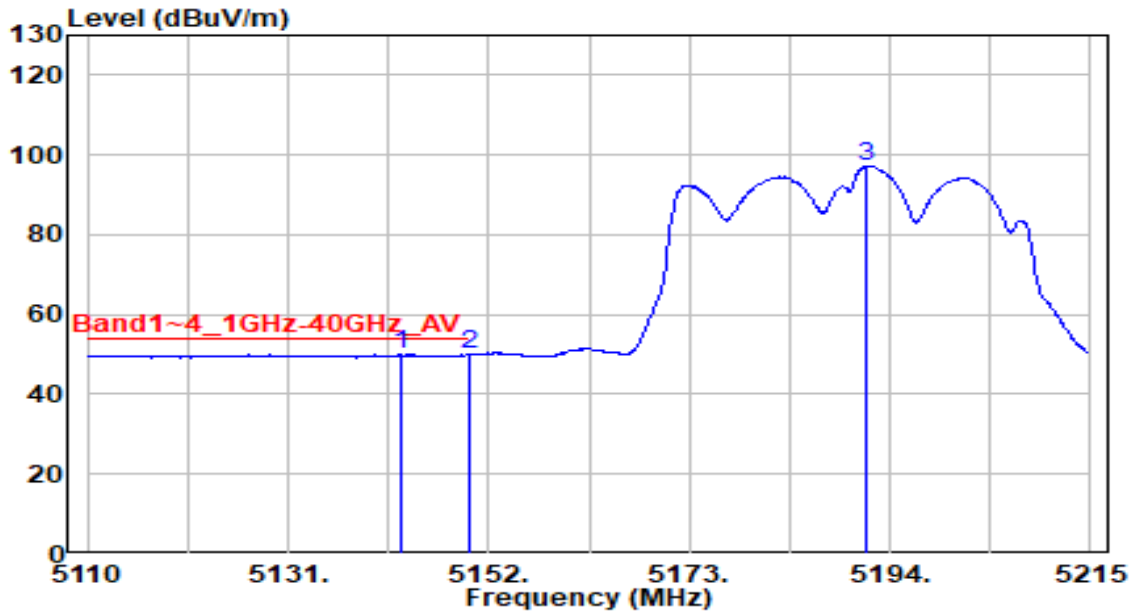


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5142.760	50.29	-0.34	49.95	-4.05	54.00	110	265	Average
2	5150.000	50.15	-0.34	49.81	-4.19	54.00	110	265	Average
3	5191.585	97.61	-0.35	97.27	N/A	N/A	110	265	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

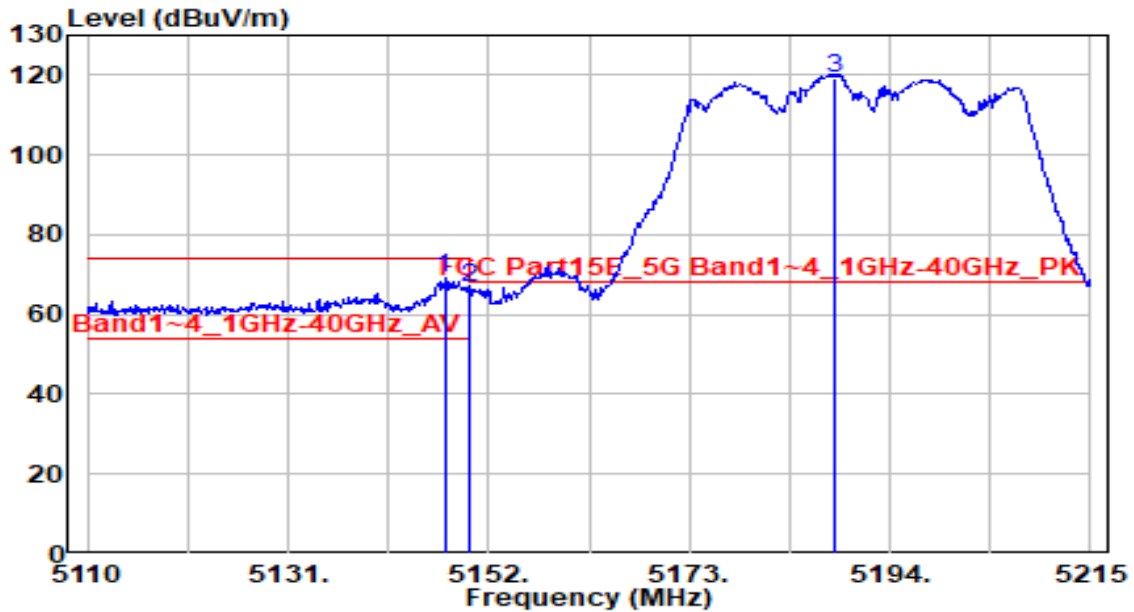


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5147.380	69.35	-0.34	69.01	-4.99	74.00	125	45	Peak
2	5150.000	67.16	-0.34	66.82	-7.18	74.00	125	45	Peak
3	5188.120	119.75	-0.35	119.40	N/A	N/A	125	45	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

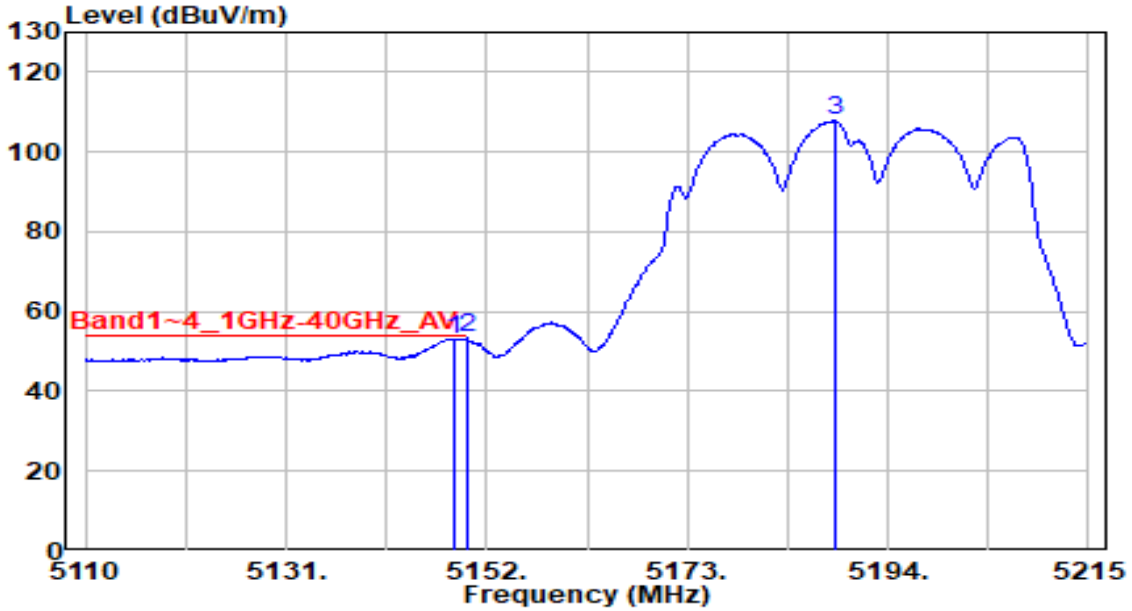


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5148.745	53.34	-0.34	52.99	-1.01	54.00	125	45	Average
2	* 5150.000	53.70	-0.34	53.36	-0.64	54.00	125	45	Average
3	5188.540	108.11	-0.35	107.76	N/A	N/A	125	45	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

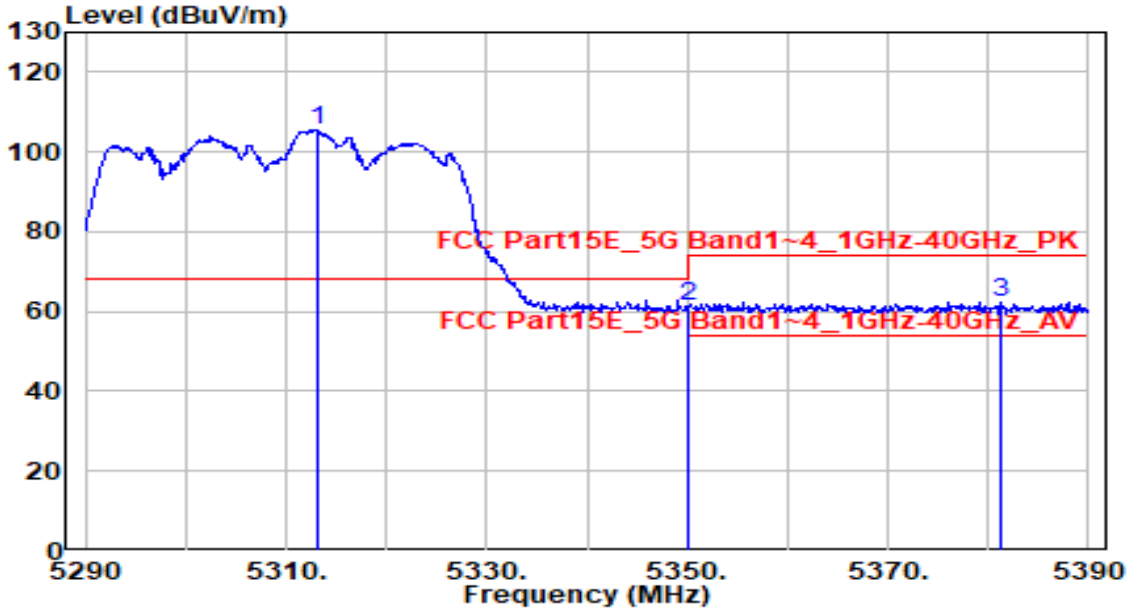


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5313.100	105.77	-0.34	105.43	N/A	N/A	165	235	Peak
2	5350.000	61.68	-0.33	61.34	-12.66	74.00	165	235	Peak
3	* 5381.200	62.82	-0.33	62.49	-11.51	74.00	165	235	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

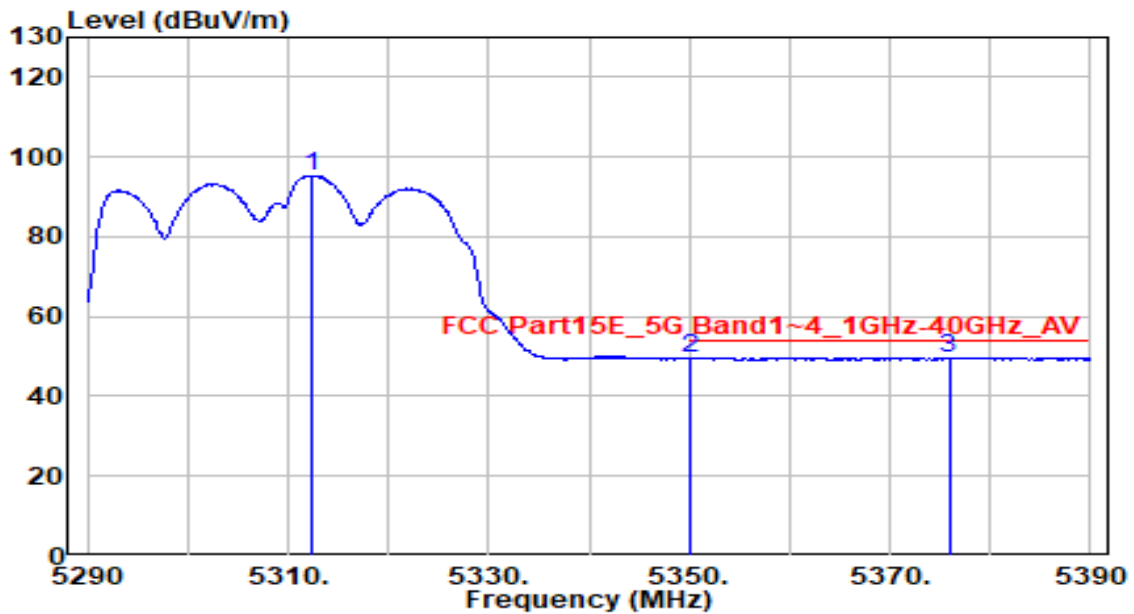


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5312.300	95.58	-0.34	95.24	N/A	N/A	165	235	Average
2	5350.000	49.83	-0.33	49.49	-4.51	54.00	165	235	Average
3	* 5375.900	50.08	-0.33	49.75	-4.25	54.00	165	235	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

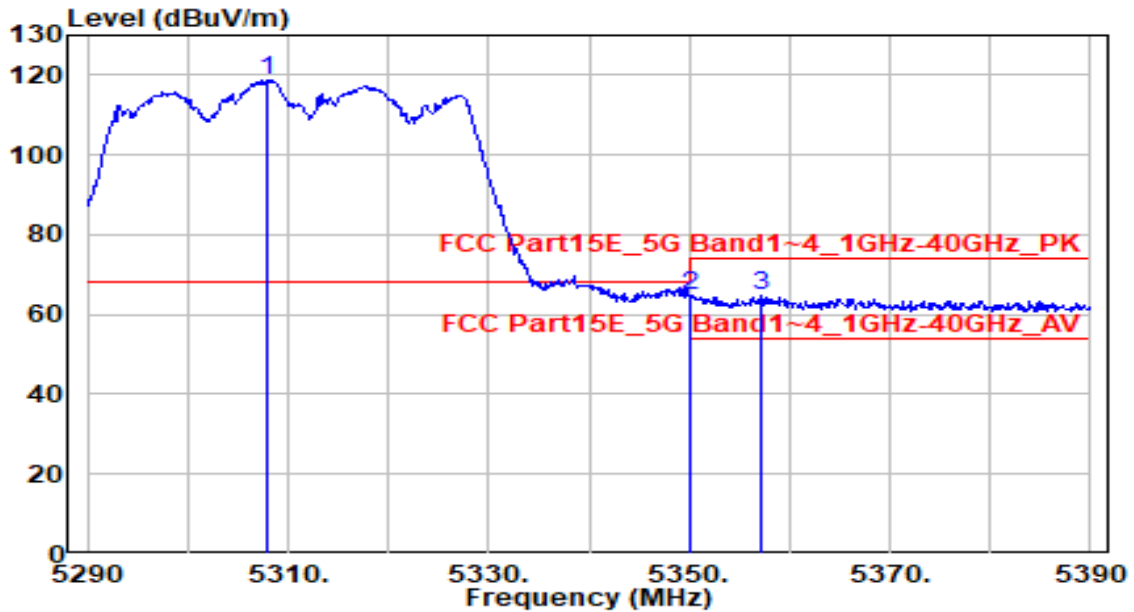


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5307.900	119.21	-0.34	118.87	N/A	N/A	120	45	Peak
2	5350.000	64.92	-0.33	64.58	-9.42	74.00	120	45	Peak
3	* 5357.100	65.18	-0.33	64.84	-9.16	74.00	120	45	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

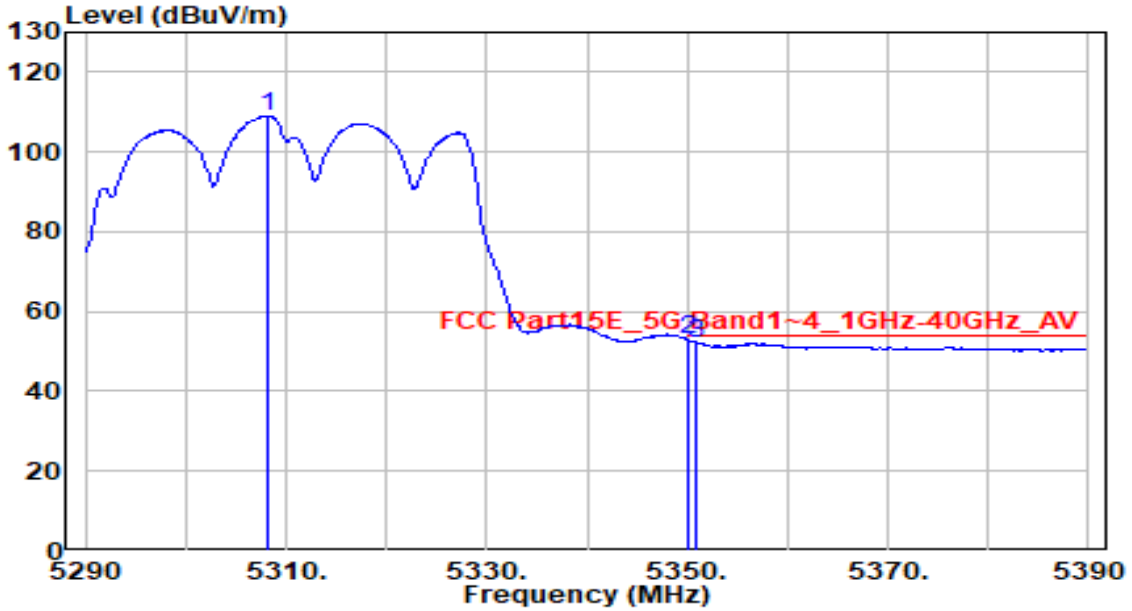


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5308.300	109.31	-0.34	108.98	N/A	N/A	120	45	Average
2	* 5350.000	53.30	-0.33	52.96	-1.04	54.00	120	45	Average
3	5351.000	52.45	-0.33	52.12	-1.88	54.00	120	45	Average

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB) + 20dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

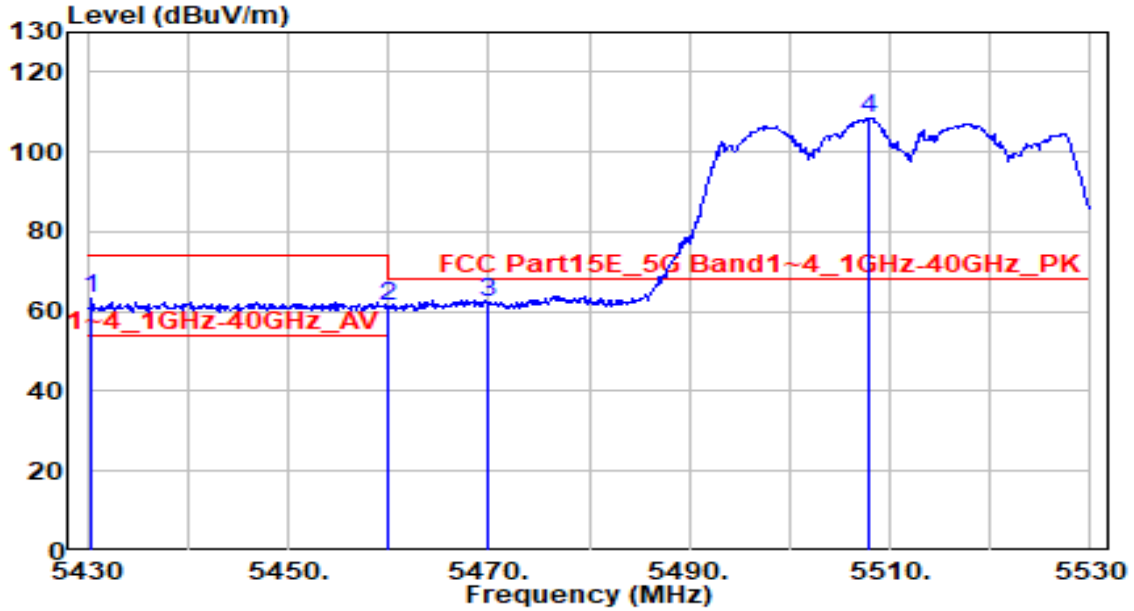


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5430.400	63.30	-0.21	63.09	-10.91	74.00	130	250	Peak
2	5460.000	61.22	-0.11	61.11	-12.89	74.00	130	250	Peak
3	* 5470.000	62.30	-0.07	62.23	-5.97	68.20	130	250	Peak
4	5508.000	108.29	0.07	108.35	N/A	N/A	130	250	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

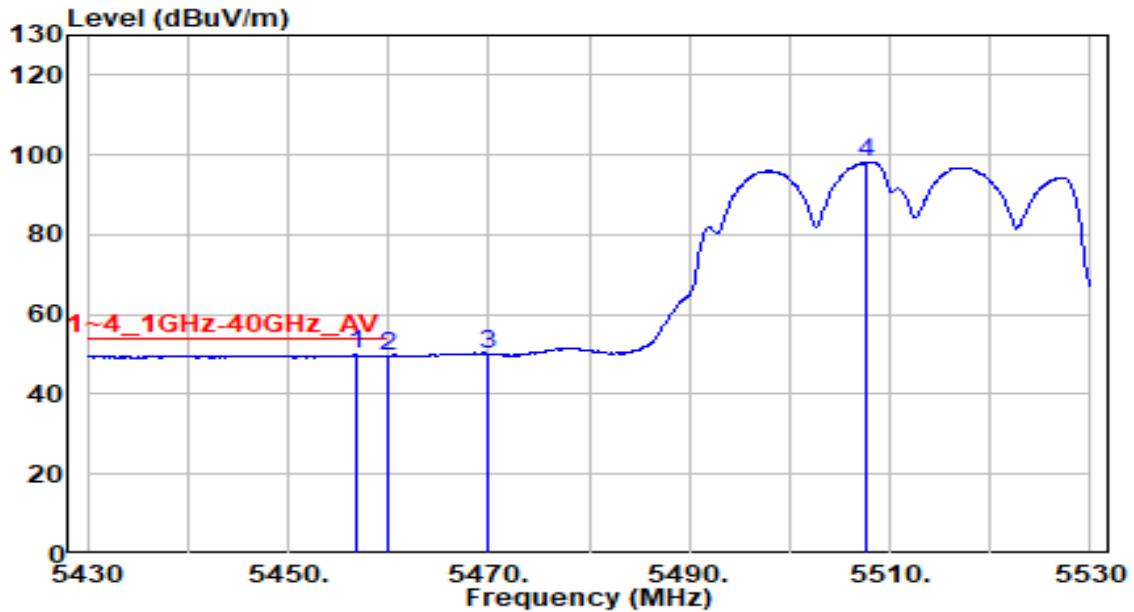


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5456.700	49.95	-0.12	49.84	-4.16	54.00	130	250	Average
2	5460.000	49.81	-0.11	49.71	-4.29	54.00	130	250	Average
3	5470.000	50.14	-0.07	50.07	N/A	N/A	130	250	Average
4	5507.600	98.14	0.07	98.21	N/A	N/A	130	250	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

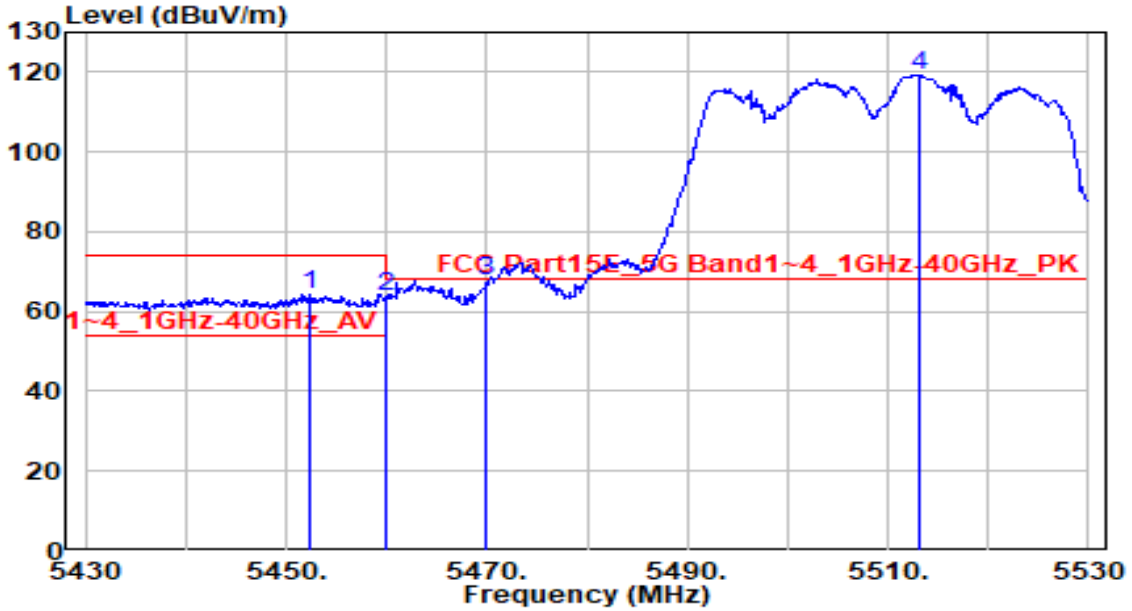


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5452.400	64.32	-0.13	64.18	-9.82	74.00	150	30	Peak
2	5460.000	63.77	-0.11	63.66	-10.34	74.00	150	30	Peak
3	* 5470.000	67.94	-0.07	67.87	-0.33	68.20	150	30	Peak
4	5513.200	119.30	0.09	119.38	N/A	N/A	150	30	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

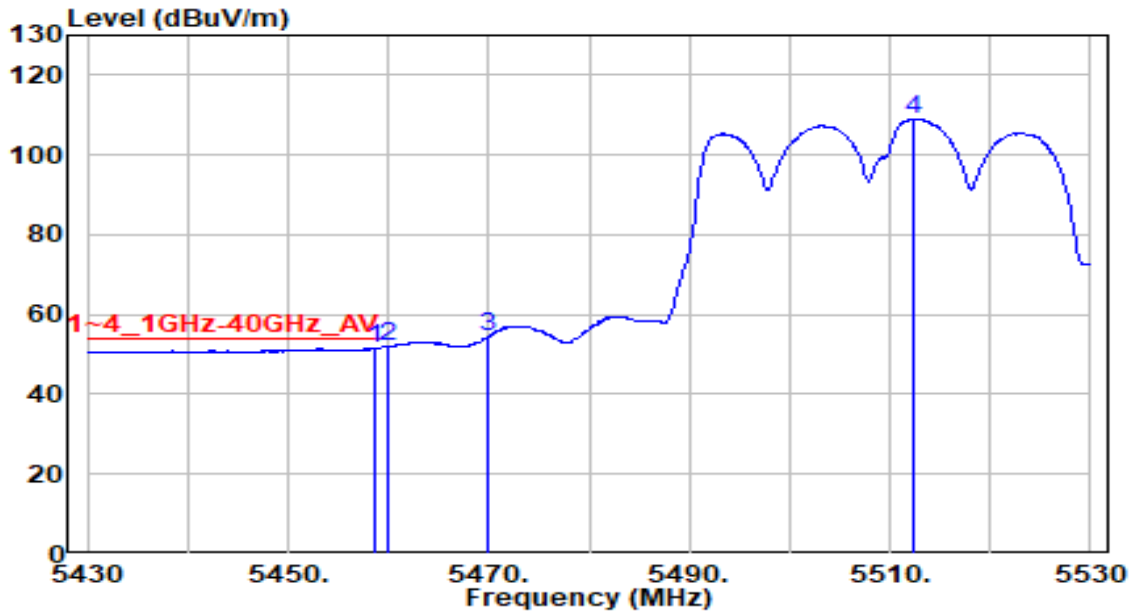


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.700	51.85	-0.11	51.74	-2.26	54.00	150	30	Average
2	* 5460.000	52.10	-0.11	51.99	-2.01	54.00	150	30	Average
3	5470.000	54.62	-0.07	54.55	N/A	N/A	150	30	Average
4	5512.300	109.00	0.08	109.08	N/A	N/A	150	30	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

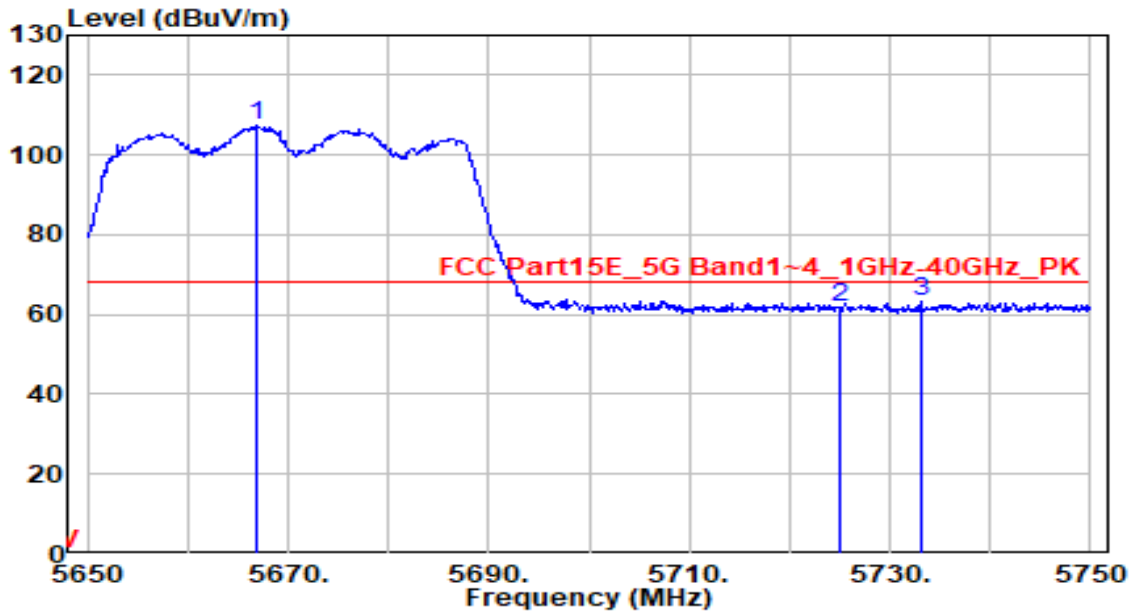


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5666.800	106.56	0.66	107.22	N/A	N/A	180	265	Peak
2	5725.000	60.91	0.89	61.80	-6.40	68.20	180	265	Peak
3	* 5733.100	62.33	0.92	63.25	-4.95	68.20	180	265	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

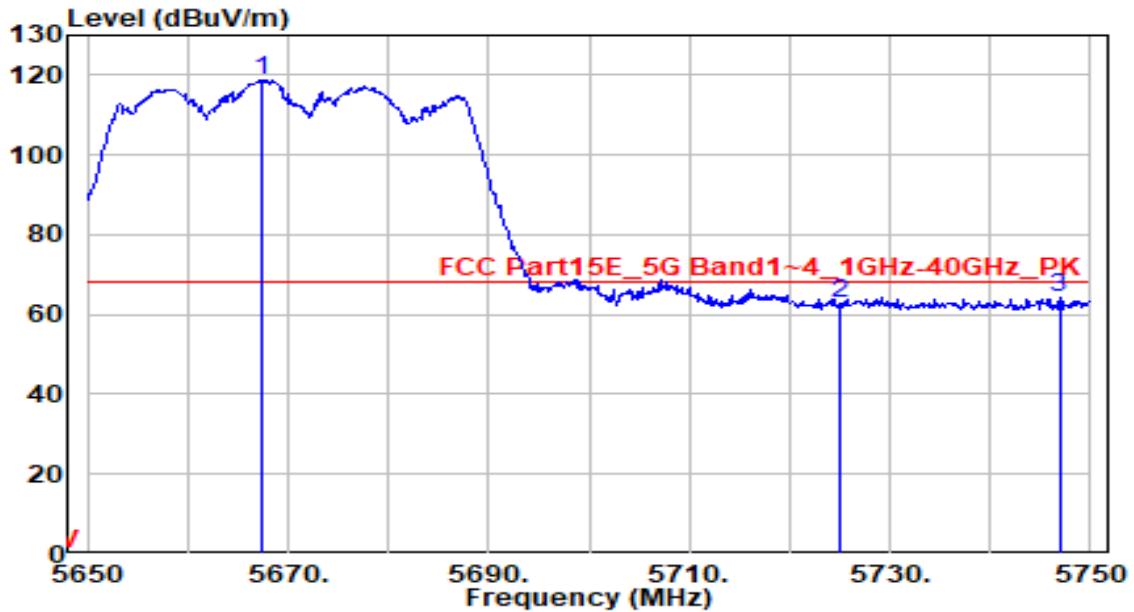


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5667.300	118.30	0.66	118.96	N/A	N/A	125	45	Peak
2	5725.000	61.77	0.89	62.66	-5.54	68.20	125	45	Peak
3	* 5746.900	63.39	0.98	64.36	-3.84	68.20	125	45	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

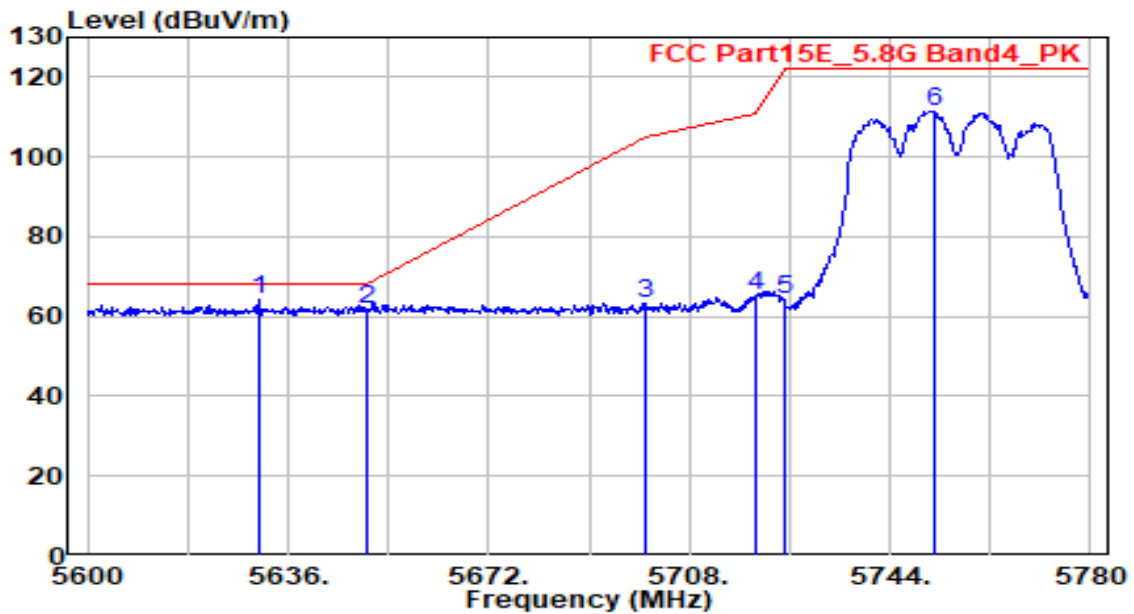


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5630.780	63.51	0.51	64.03	-4.17	68.20	125	250	Peak
2	5650.000	61.34	0.59	61.93	-6.27	68.20	125	250	Peak
3	5700.000	62.73	0.79	63.52	-41.68	105.20	125	250	Peak
4	5720.000	64.17	0.87	65.04	-45.76	110.80	125	250	Peak
5	5725.000	63.32	0.89	64.21	-57.99	122.20	125	250	Peak
6	5751.920	110.55	1.00	111.55	N/A	N/A	125	250	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

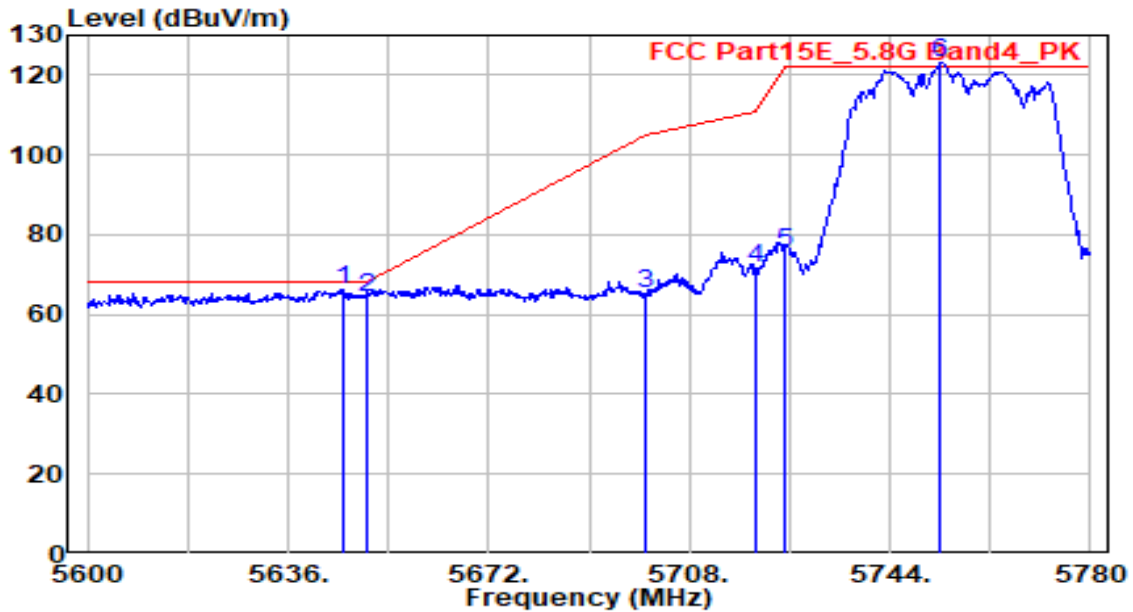


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5645.900	65.55	0.57	66.12	-2.08	68.20	155	330	Peak
2	5650.000	63.80	0.59	64.39	-3.81	68.20	155	330	Peak
3	5700.000	64.52	0.79	65.31	-39.89	105.20	155	330	Peak
4	5720.000	70.74	0.87	71.61	-39.19	110.80	155	330	Peak
5	5725.000	74.83	0.89	75.72	-46.48	122.20	155	330	Peak
6	5753.000	122.12	1.00	123.12	N/A	N/A	155	330	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

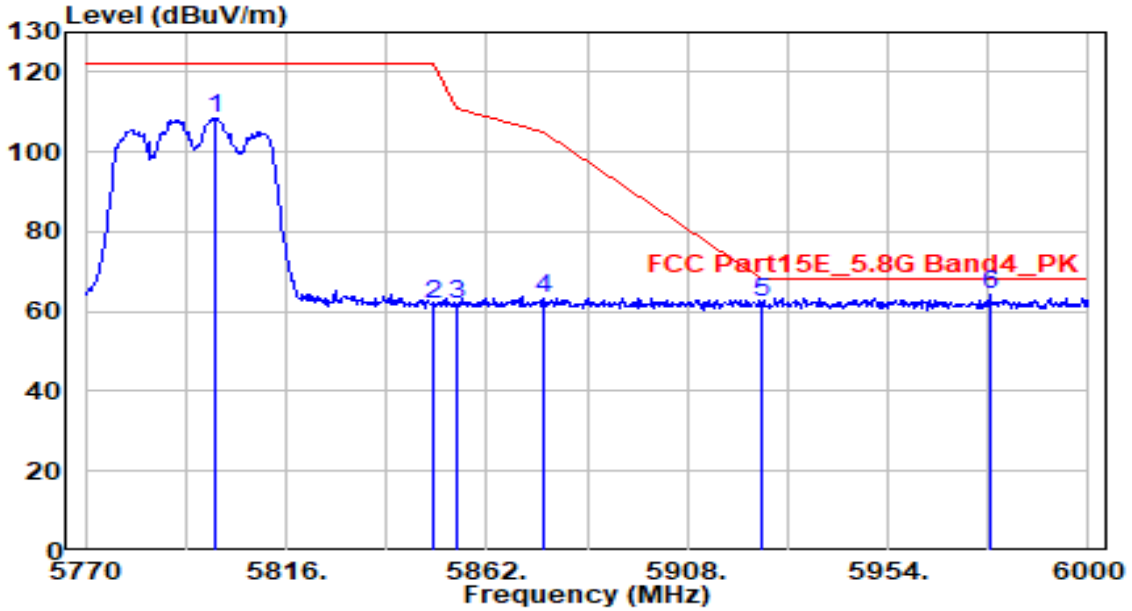


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5799.900	107.25	1.19	108.43	N/A	N/A	130	250	Peak
2	5850.000	60.43	1.23	61.66	-60.54	122.20	130	250	Peak
3	5855.000	60.74	1.24	61.98	-48.82	110.80	130	250	Peak
4	5875.000	61.98	1.26	63.24	-41.96	105.20	130	250	Peak
5	5925.000	61.04	1.30	62.34	-5.86	68.20	130	250	Peak
6	* 5977.230	62.67	1.35	64.02	-4.18	68.20	130	250	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

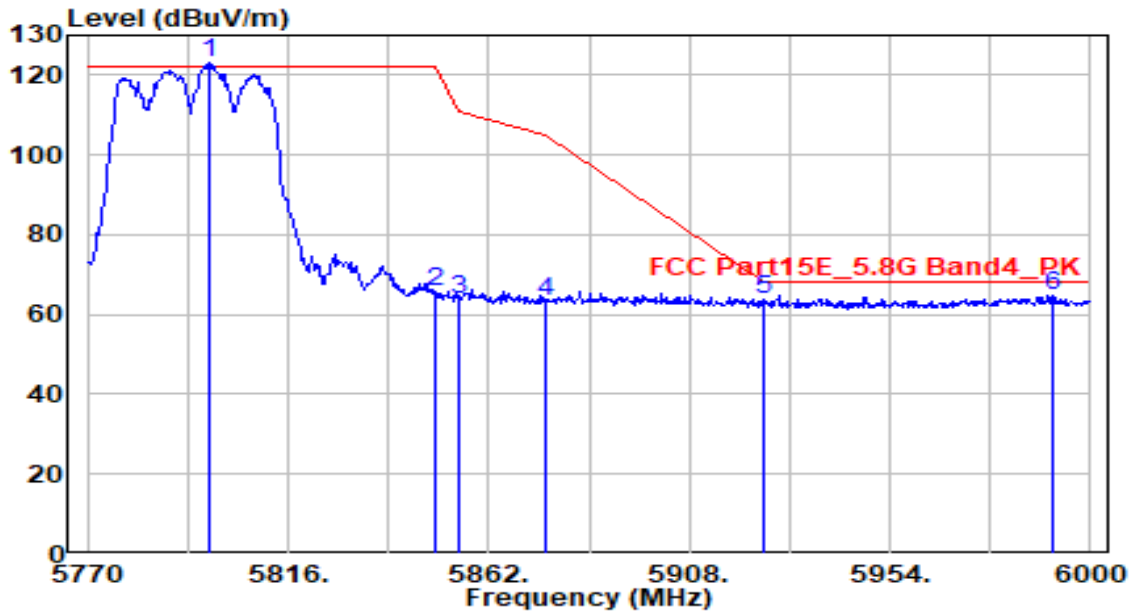


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5798.060	121.73	1.18	122.90	N/A	N/A	170	30	Peak
2	5850.000	64.26	1.23	65.50	-56.70	122.20	170	30	Peak
3	5855.000	62.63	1.24	63.87	-46.93	110.80	170	30	Peak
4	5875.000	62.13	1.26	63.39	-41.81	105.20	170	30	Peak
5	5925.000	62.40	1.30	63.70	-4.50	68.20	170	30	Peak
6	* 5991.260	63.22	1.36	64.58	-3.62	68.20	170	30	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

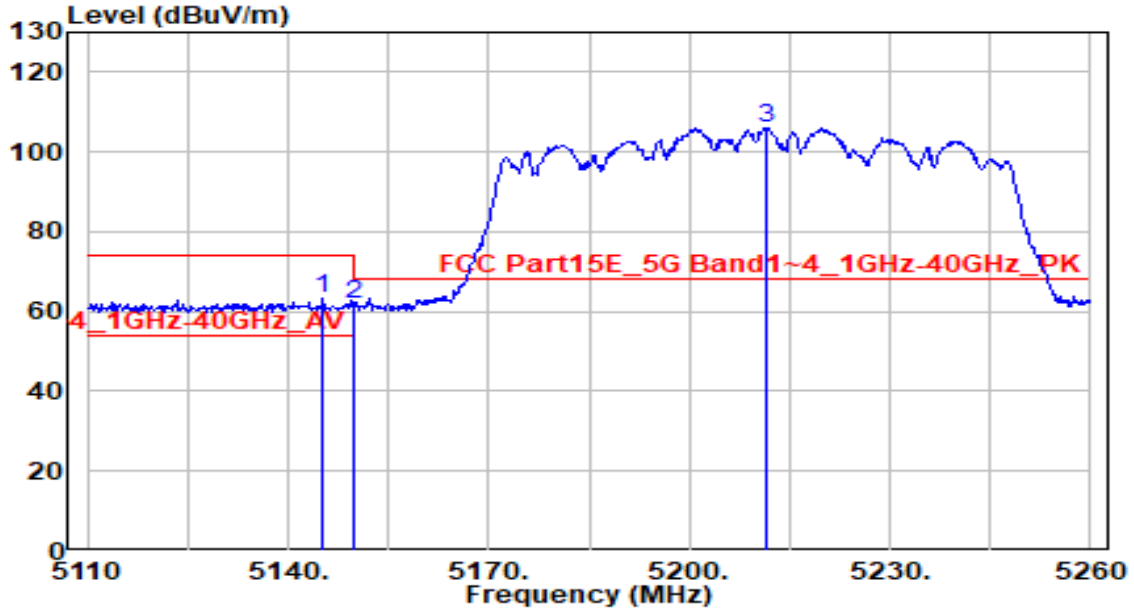


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5145.250	63.41	-0.34	63.07	-10.93	74.00	135	250	Peak
2	5150.000	61.93	-0.34	61.59	-12.41	74.00	135	250	Peak
3	5211.700	106.48	-0.34	106.14	N/A	N/A	135	250	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

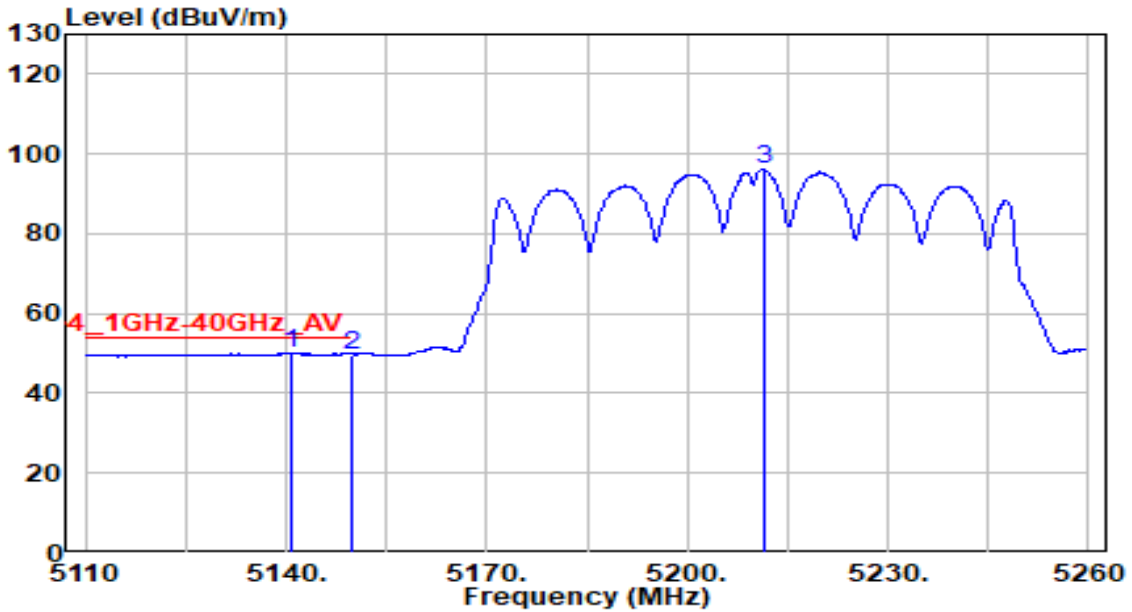


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5140.900	50.42	-0.34	50.08	-3.92	54.00	135	250	Average
2	5150.000	50.09	-0.34	49.75	-4.25	54.00	135	250	Average
3	5211.400	96.57	-0.34	49.75	N/A	N/A	135	250	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

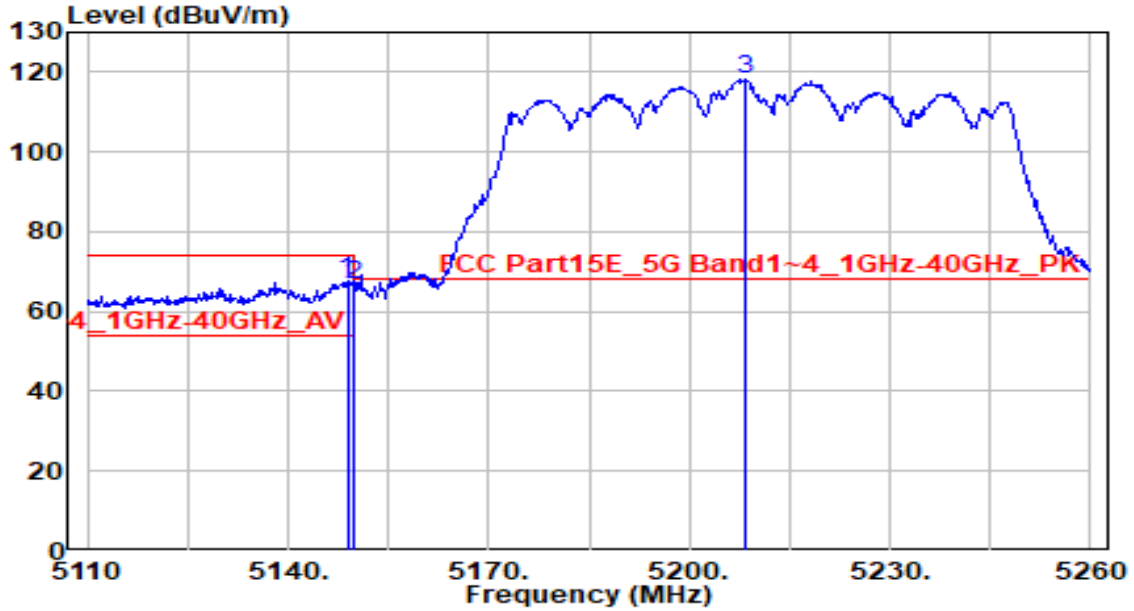


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5148.850	67.91	-0.34	67.57	-6.43	74.00	135	45	Peak
2	5150.000	67.02	-0.34	66.68	-7.32	74.00	135	45	Peak
3	5208.250	118.47	-0.34	118.12	N/A	N/A	135	45	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

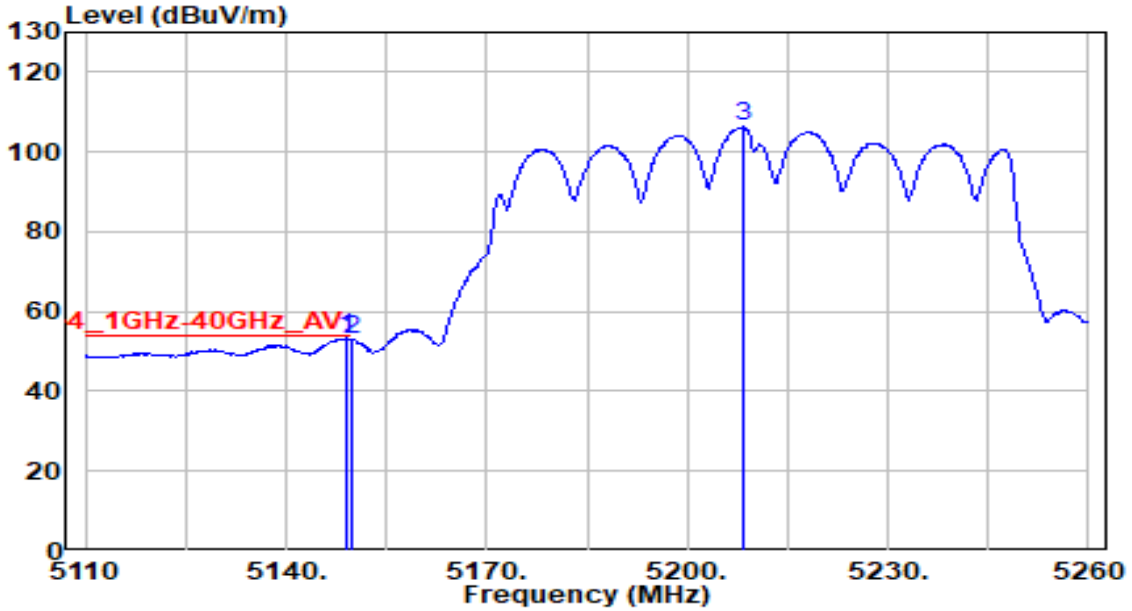


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5149.000	53.61	-0.34	53.27	-0.73	54.00	135	45	Average
2	5150.000	53.19	-0.34	52.85	-1.15	54.00	135	45	Average
3	5208.400	106.64	-0.34	106.30	N/A	N/A	135	45	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

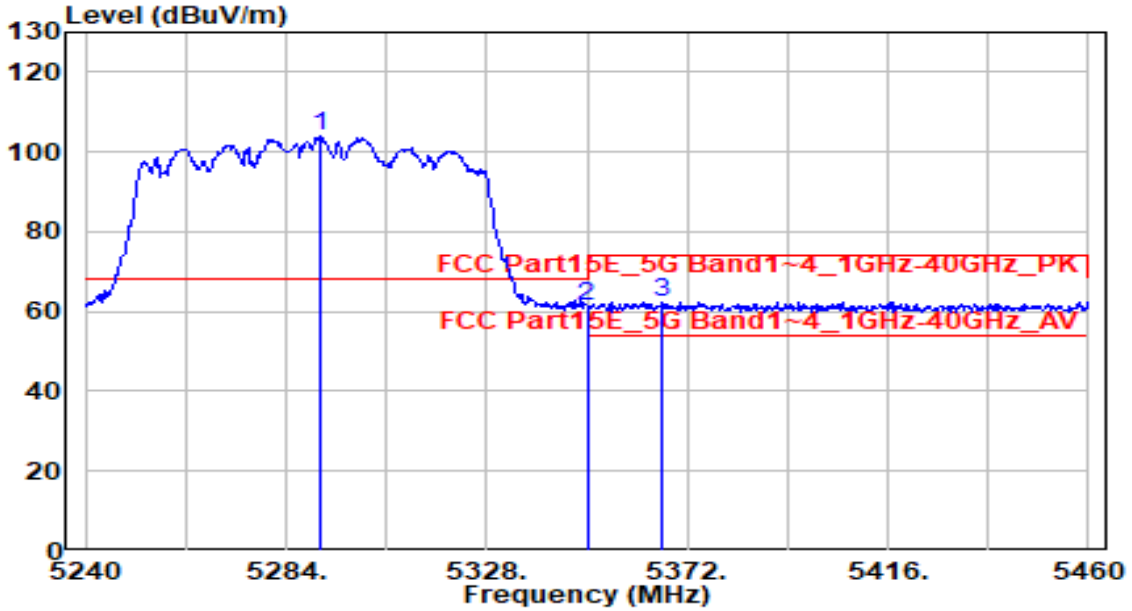


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5291.480	104.31	-0.34	103.97	N/A	N/A	100	245	Peak
2	5350.000	61.76	-0.33	61.42	-12.58	74.00	100	245	Peak
3	* 5366.500	62.82	-0.33	62.49	-11.51	74.00	100	245	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

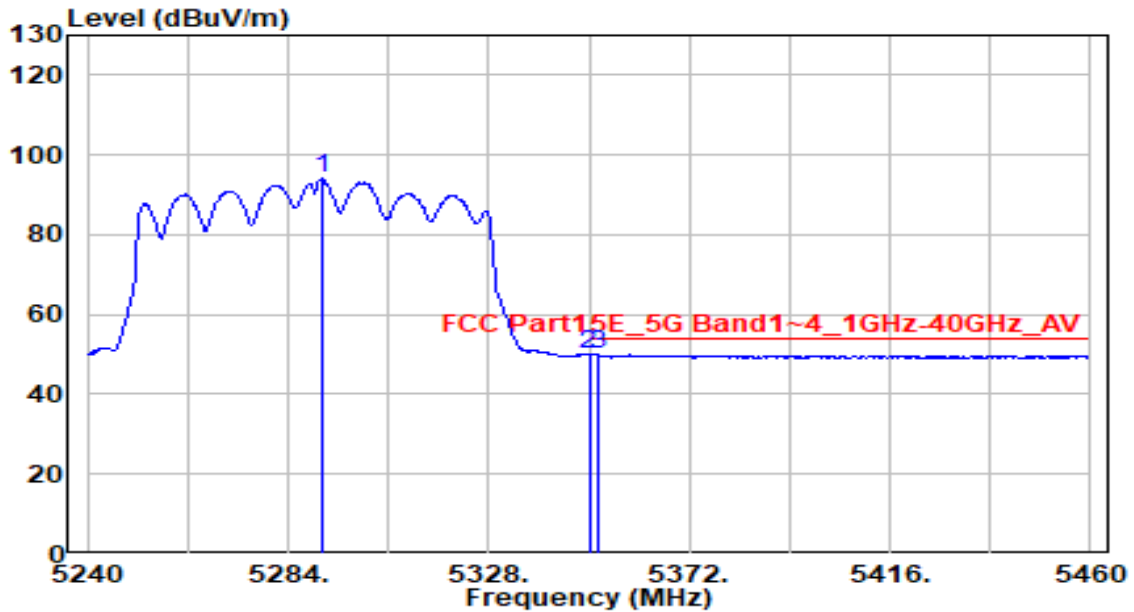


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5291.480	94.35	-0.34	94.01	N/A	N/A	100	245	Average
2	5350.000	50.28	-0.33	49.95	-4.05	54.00	100	245	Average
3	* 5351.760	50.42	-0.33	50.09	-3.91	54.00	100	245	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

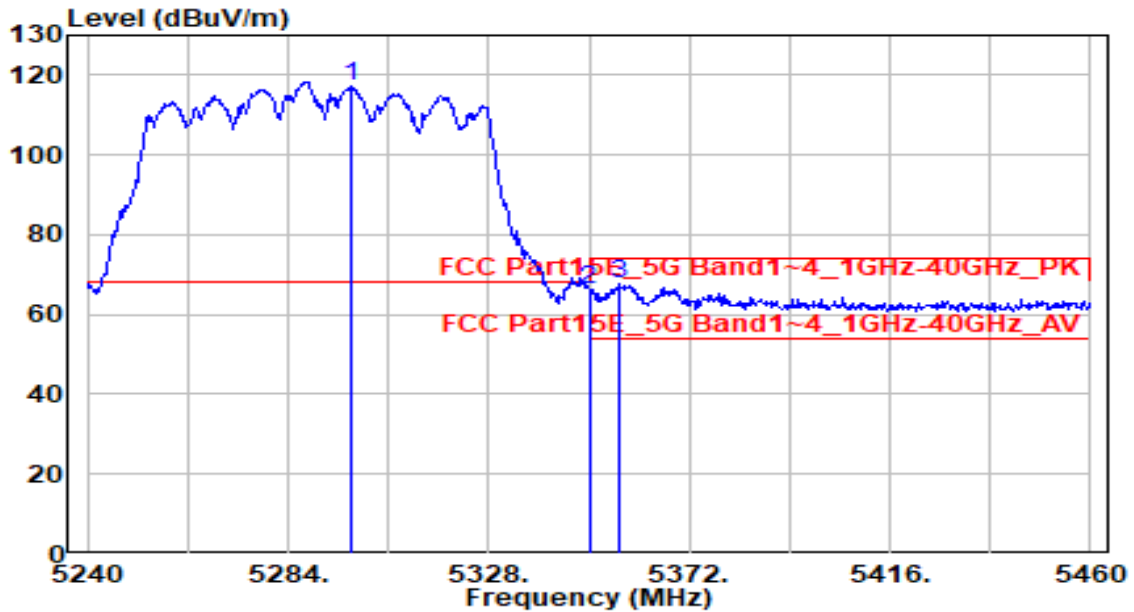


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5297.640	117.46	-0.34	117.12	N/A	N/A	130	45	Peak
2	5350.000	66.58	-0.33	66.25	-7.75	74.00	130	45	Peak
3	* 5356.600	67.90	-0.33	67.57	-6.43	74.00	130	45	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

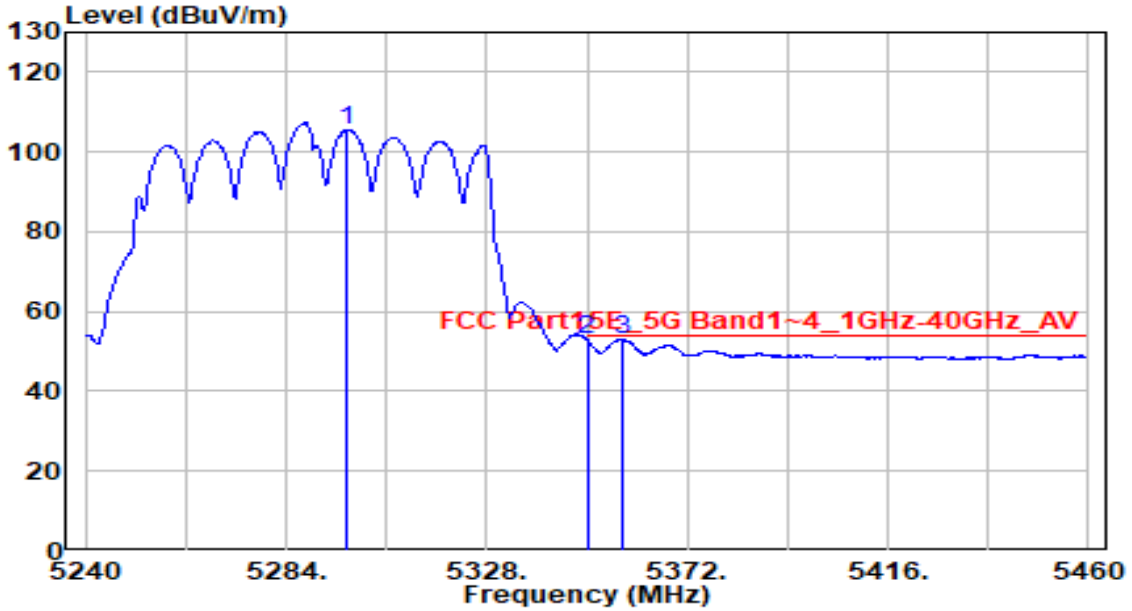


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5297.420	105.93	-0.34	105.59	N/A	N/A	130	45	Average
2	5350.000	53.12	-0.33	52.78	-1.22	54.00	130	45	Average
3	* 5357.700	53.43	-0.33	53.09	-0.91	54.00	130	45	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

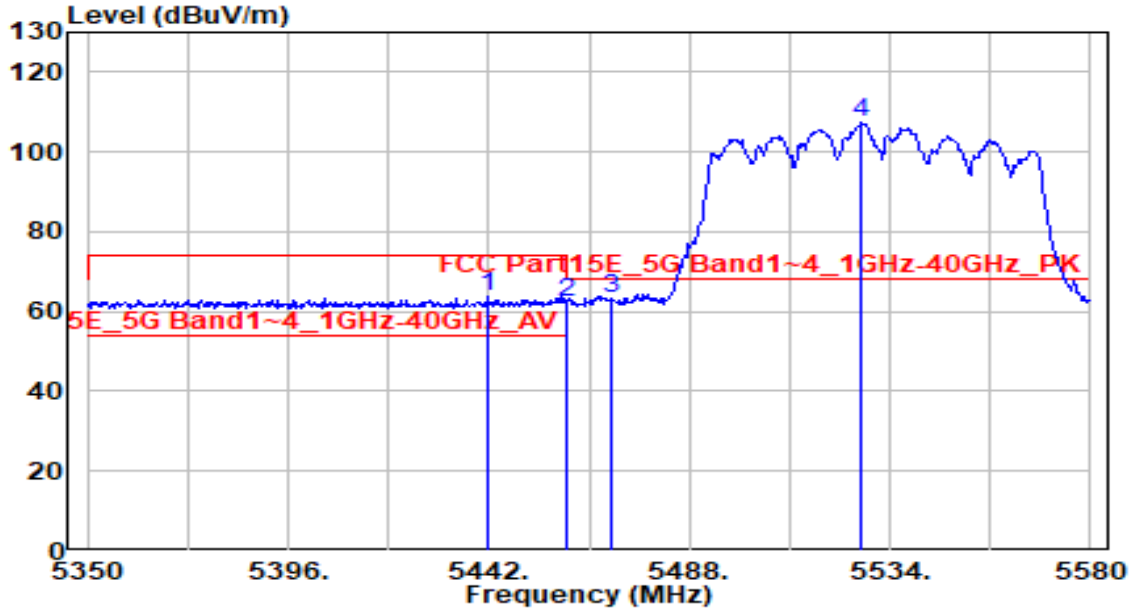


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5441.540	64.17	-0.17	63.99	-10.01	74.00	125	250	Peak
2	5460.000	62.35	-0.11	62.24	-11.76	74.00	125	250	Peak
3	* 5470.000	63.35	-0.07	63.28	-4.92	68.20	125	250	Peak
4	5527.330	107.16	0.14	107.30	N/A	N/A	125	250	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

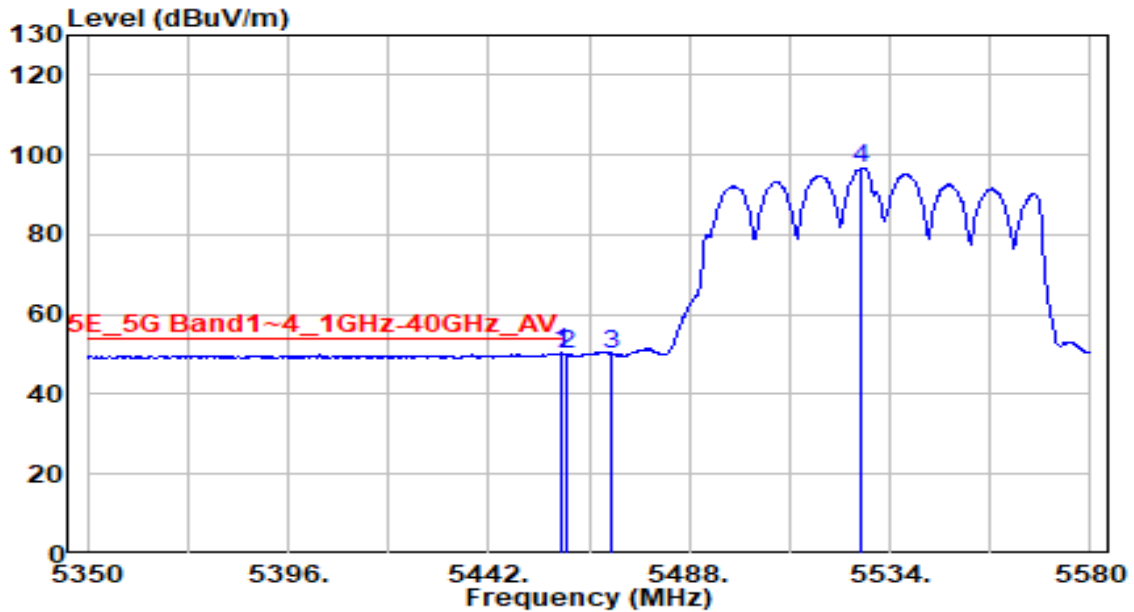


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	54.42	-0.11	54.31	-3.69	54.00	125	250	Average
2		50.04	-0.11	49.93	-4.07	54.00	125	250	Average
3		50.24	-0.07	50.17	N/A	N/A	125	250	Average
4		96.62	0.14	96.76	N/A	N/A	125	250	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

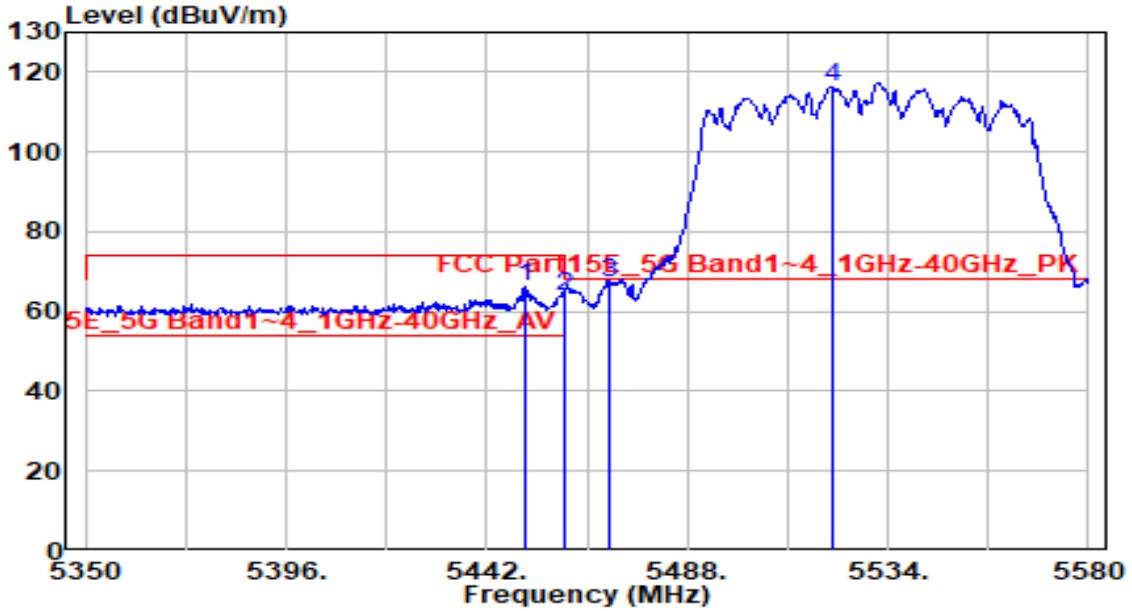


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5450.970	66.55	-0.14	66.41	-7.59	74.00	130	60	Peak
2	5460.000	64.10	-0.11	63.99	-10.01	74.00	130	60	Peak
3	* 5470.000	67.52	-0.07	67.45	-0.75	68.20	130	60	Peak
4	5521.120	116.23	0.11	116.35	N/A	N/A	130	60	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

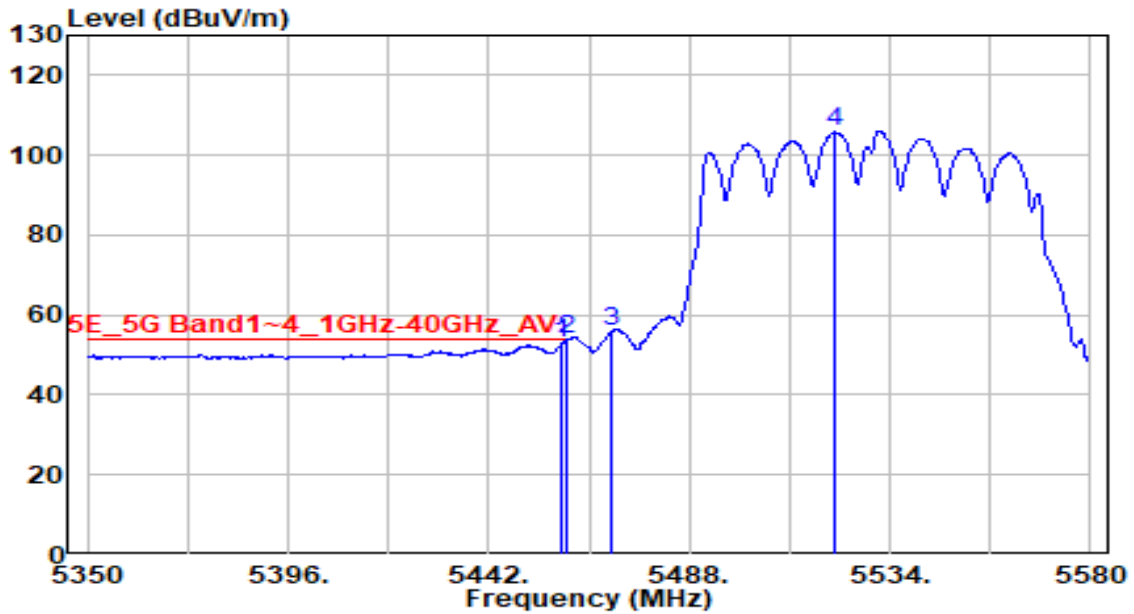


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.520	52.99	-0.11	52.88	-1.12	54.00	130	60	Average
2	* 5460.000	53.93	-0.11	53.82	-0.18	54.00	130	60	Average
3	5470.000	55.88	-0.07	55.81	N/A	N/A	130	60	Average
4	5521.120	105.74	0.11	105.86	N/A	N/A	130	60	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

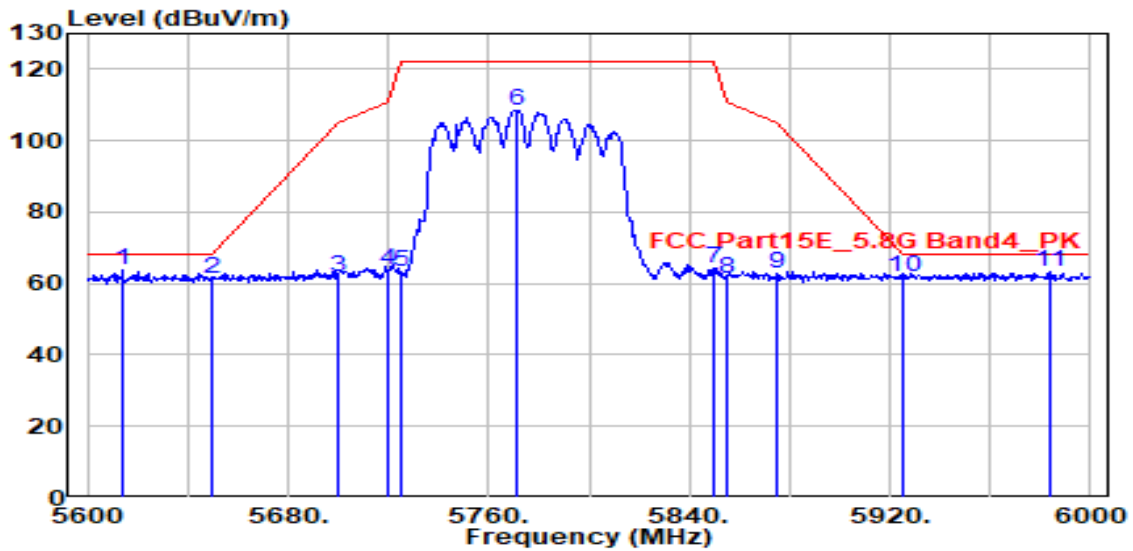


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5614.000	63.18	0.45	63.63	-4.57	68.20	130	250	Peak
2	5650.000	60.91	0.59	61.50	-6.70	68.20	130	250	Peak
3	5700.000	61.15	0.79	61.94	-43.26	105.20	130	250	Peak
4	5720.000	62.68	0.87	63.55	-47.25	110.80	130	250	Peak
5	5725.000	62.46	0.89	63.35	-58.85	122.20	130	250	Peak
6	5771.200	107.58	1.07	108.65	N/A	N/A	130	250	Peak
7	5850.000	62.98	1.23	64.21	-57.99	122.20	130	250	Peak
8	5855.000	60.29	1.24	61.53	-49.27	110.80	130	250	Peak
9	5875.000	61.58	1.26	62.84	-42.36	105.20	130	250	Peak
10	5925.000	60.61	1.30	61.91	-6.29	68.20	130	250	Peak
11	5984.000	61.85	1.36	63.21	-4.99	68.20	130	250	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

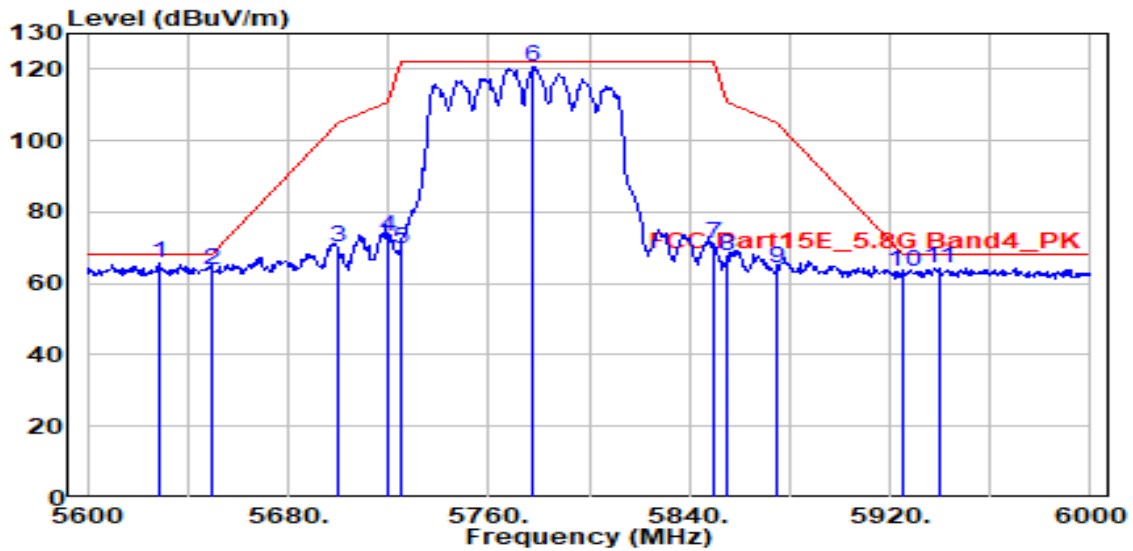


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5628.400	65.16	0.50	65.67	-2.53	68.20	150	30	Peak
2	5650.000	63.16	0.59	63.75	-4.45	68.20	150	30	Peak
3	5700.000	69.42	0.79	70.21	-34.99	105.20	150	30	Peak
4	5720.000	72.37	0.87	73.24	-37.56	110.80	150	30	Peak
5	5725.000	68.61	0.89	69.50	-52.70	122.20	150	30	Peak
6	5777.600	119.66	1.10	120.76	N/A	N/A	150	30	Peak
7	5850.000	70.11	1.23	71.35	-50.85	122.20	150	30	Peak
8	5855.000	66.48	1.24	67.72	-43.08	110.80	150	30	Peak
9	5875.000	63.22	1.26	64.48	-40.72	105.20	150	30	Peak
10	5925.000	61.73	1.30	63.04	-5.16	68.20	150	30	Peak
11	5939.600	63.03	1.32	64.34	-3.86	68.20	150	30	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

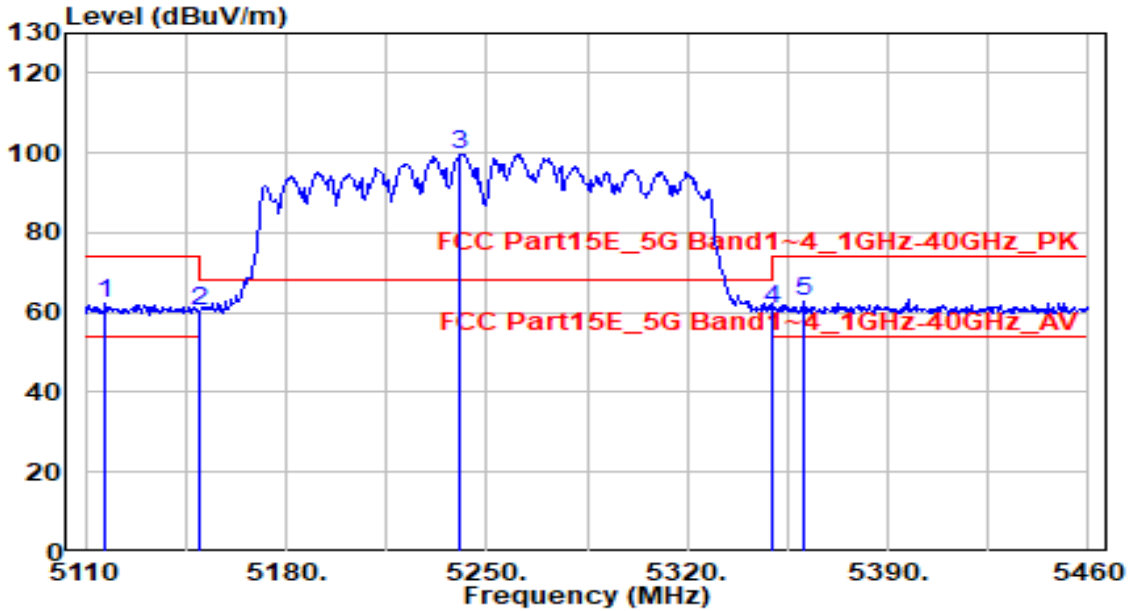


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5116.650	62.63	-0.34	62.29	-11.71	74.00	100	245	Peak
2	5150.000	60.77	-0.34	60.43	-13.57	74.00	100	245	Peak
3	5240.900	100.14	-0.34	99.79	N/A	N/A	100	245	Peak
4	5350.000	61.27	-0.33	60.93	-13.07	74.00	100	245	Peak
5	* 5360.250	62.89	-0.33	62.56	-11.44	74.00	100	245	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

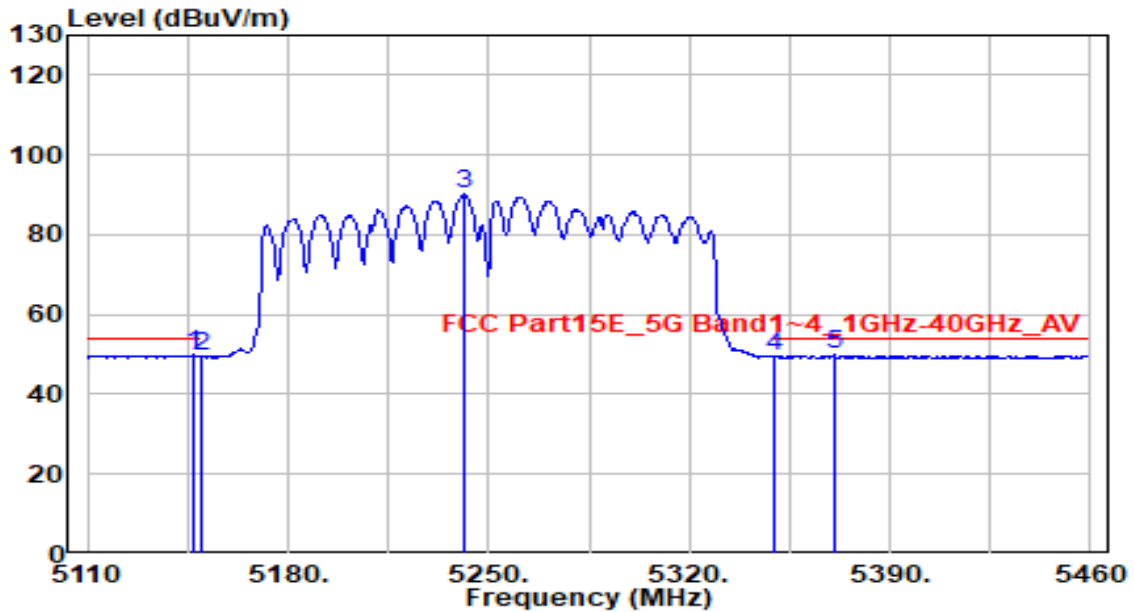


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5147.450	50.18	-0.34	49.84	-4.16	54.00	100	245	Average
2	5150.000	50.10	-0.34	49.75	-4.25	54.00	100	245	Average
3	5241.600	90.46	-0.34	90.12	N/A	N/A	100	245	Average
4	5350.000	49.84	-0.33	49.50	-4.50	54.00	100	245	Average
5	5370.400	50.14	-0.33	49.80	-4.20	54.00	100	245	Average

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

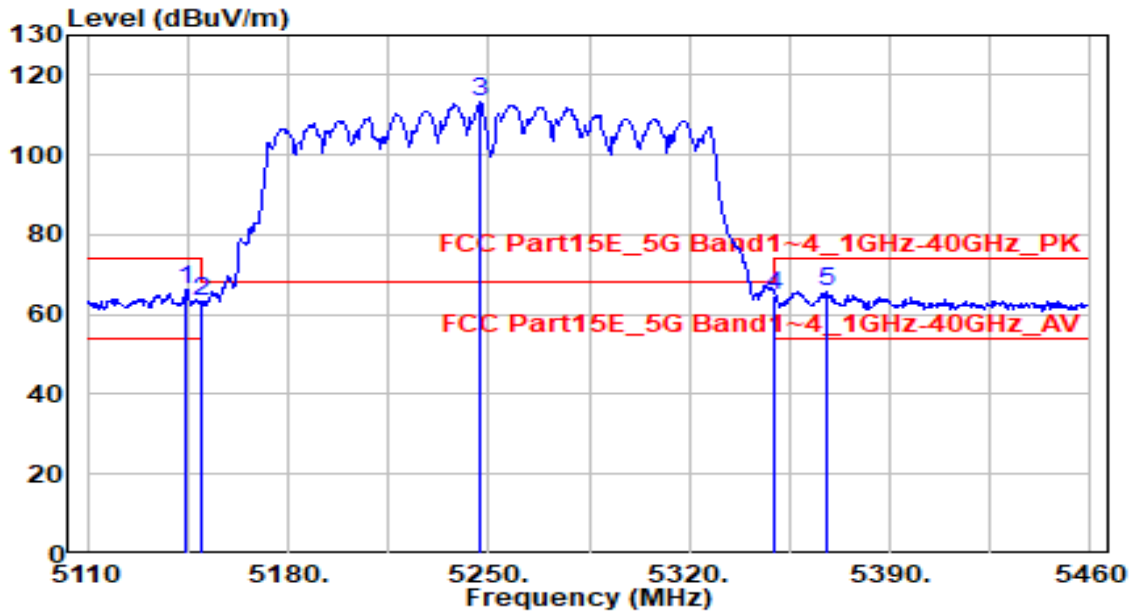


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5144.650	66.63	-0.34	66.29	-7.71	74.00	120	45	Peak
2	5150.000	63.67	-0.34	63.32	-10.68	74.00	120	45	Peak
3	5247.200	113.51	-0.34	113.17	N/A	N/A	120	45	Peak
4	5350.000	64.91	-0.33	64.58	-9.42	74.00	120	45	Peak
5	5367.600	66.19	-0.33	65.86	-8.14	74.00	120	45	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

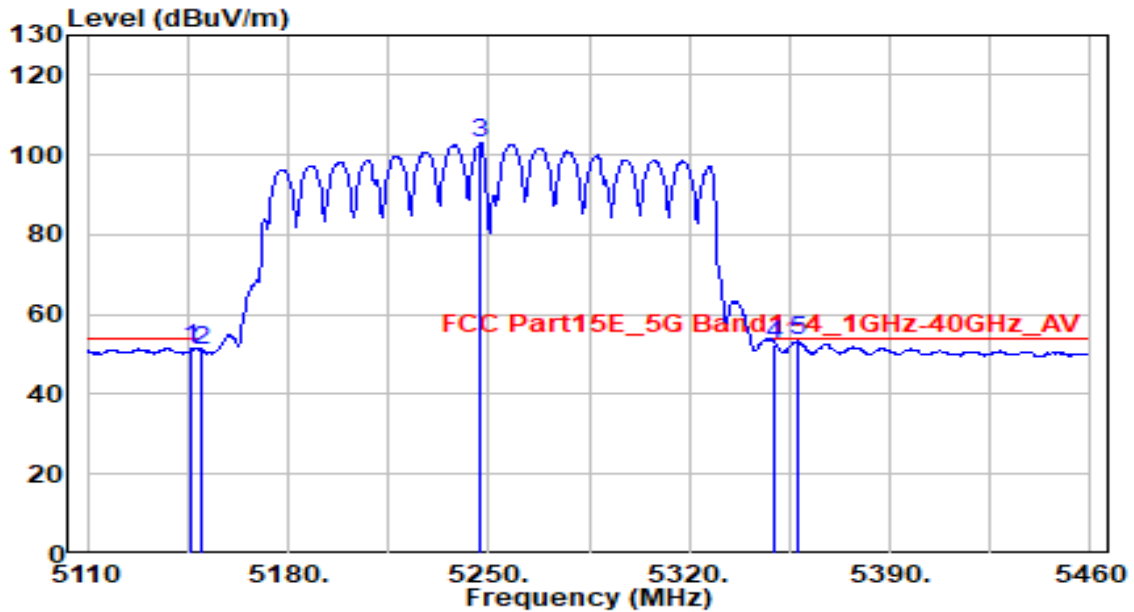


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5146.400	51.98	-0.34	51.64	-2.36	54.00	120	45	Average
2	5150.000	51.41	-0.34	51.07	-2.93	54.00	120	45	Average
3	5247.200	103.48	-0.34	103.13	N/A	N/A	120	45	Average
4	5350.000	52.80	-0.33	52.46	-1.54	54.00	120	45	Average
5	* 5357.800	53.64	-0.33	53.31	-0.69	54.00	120	45	Average

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2022-05-16
Factor	DRH18-E	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

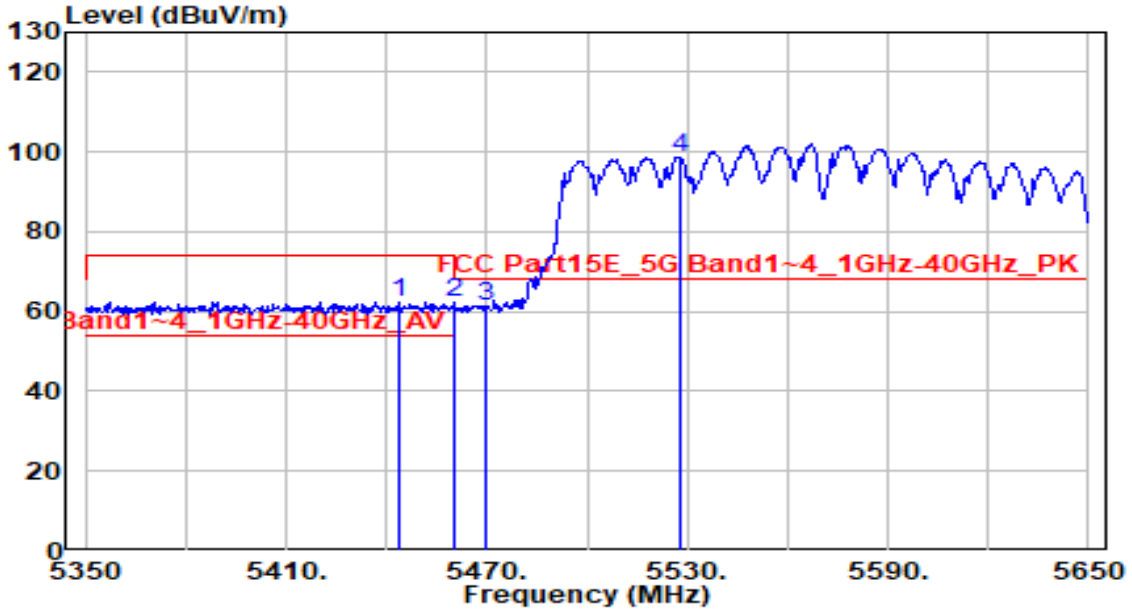

No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5444.200	62.69	-0.16	62.53	-11.47	74.00	130	250	Peak
2	5460.000	62.38	-0.11	62.27	-11.73	74.00	130	250	Peak
3	* 5470.000	61.55	-0.07	61.48	-6.72	68.20	130	250	Peak
4	5527.600	98.71	0.14	98.84	N/A	N/A	130	250	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.