



FCC Part 15, Subpart C Test Report

FCC ID: 2AXKN-RIFF

Applicant: Generation-S Private Limited

Address: 3 Ang Mo Kio ST 62 #06-08 Singapore 569139

Manufacturer: Generation-S Private Limited

Address: 3 Ang Mo Kio ST 62 #06-08 Singapore 569139

Product(s): Fender RIFF Bluetooth Speaker

Brand(s): Fender

Test Model(s): RIFF

Series Model(s): N/A

Test Date: Aug. 20, 2022~ Nov. 02, 2022

Issued Date: Nov. 18, 2022

Issued By: Hwa-Hsing (Dongguan) Testing Co., Ltd.

Address: No.101, Bld N1, Yuyuan 2Rd, Yuyuan Industrial Park, HuangJiang Town, Dongguan, China

Test Firm Registration No.: 915896

Designation No.: CN1255

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10:2013

The above equipment has been tested by **Hwa-Hsing (Dongguan) Testing Co., Ltd.**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :

Niny Zhang

Reviewed by :

Tank Tan

Approved by :

Scott He



"This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. Our report includes all the tests requested by you and the results thereof based upon the information that you provided to us. The report would be invalid without specific stamp of test institute and the signatures of tester and approver."



Table of Contents

Release Control Record	4
1 Summary of Test Results	5
1.1 Measurement Uncertainty	5
1.2 Modification Record	5
2 General Information	6
2.1 General Description of EUT	6
2.2 Description of Test Modes	7
2.3 Test Mode Applicability and Tested Channel Detail	8
2.4 Description of Support Units	10
2.4.1 Configuration of System under Test	10
3 Test Types and Results	11
3.1 Radiated Emission and Band-edge Measurement	11
3.1.1 Limits of Radiated Emission and Band-edge Measurement	11
3.1.2 Test Instruments	12
3.1.3 Test Procedures	13
3.1.4 Deviation from Test Standard	14
3.1.5 Test Setup	15
3.1.6 EUT Operating Conditions	16
3.1.7 Test Results	17
3.2 Conducted Emission Measurement	29
3.2.1 Limits of Conducted Emission Measurement	29
3.2.2 Test Instruments	29
3.2.3 Test Procedures	30
3.2.4 Test Setup	30
3.2.5 EUT Operating Condition	30
3.2.6 Deviation from Test Standard	30
3.2.7 Test Results	31
3.3 Number of Hopping Frequency Used	33
3.3.1 Limits of Hopping Frequency Used Measurement	33
3.3.2 Test Setup	33
3.3.3 Test Instruments	33
3.3.4 Test Procedure	33
3.3.5 Deviation from Test Standard	33
3.3.6 Test Results	34
3.4 Channel Bandwidth	35
3.4.1 Limits of Channel Bandwidth Measurement	35
3.4.2 Test Setup	35
3.4.3 Test Instruments	35
3.4.4 Test Procedure	35
3.4.5 Deviation from Test Standard	35
3.4.6 EUT Operating Condition	35
3.4.7 Test Results	36
3.5 Occupied Bandwidth Measurement	38
3.5.1 Test Setup	38
3.5.2 Test Instruments	38
3.5.3 Test Procedure	38
3.5.4 Deviation from Test Standard	38
3.5.5 EUT Operating Conditions	38
3.5.6 Test Results	39
3.6 Hopping Channel Separation	41



3.6.1	Limits of Hopping Channel Separation Measurement.....	41
3.6.2	Test Setup.....	41
3.6.3	Test Instruments	41
3.6.4	Test Procedure	41
3.6.5	Deviation from Test Standard	41
3.6.6	Test Results	42
3.7	Maximum Output Power	44
3.7.1	Limits of Maximum Output Power Measurement	44
3.7.2	Test Setup.....	44
3.7.3	Test Instruments	44
3.7.4	Test Procedure	44
3.7.5	Deviation from Test Standard	45
3.7.6	EUT Operating Condition	45
3.7.7	Test Results	46
3.8	Conducted Out of Band Emission Measurement	49
3.8.1	Limits of Conducted Out of Band Emission Measurement.....	49
3.8.2	Tets Setup.....	49
3.8.3	Test Instruments	49
3.8.4	Test Procedure	50
3.8.5	Deviation from Test Standard	50
3.8.6	EUT Operating Condition	50
3.8.7	Test Results	51
4	Pictures of Test Arrangements.....	56
5	Test Instruments.....	57
	Appendix – Information on the Testing Laboratories	58



Release Control Record

Issue No.	Description	Date Issued
220805EL02-RF-US-01	Original Release	Nov. 18, 2022



1 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247) KDB 558074 D01 15.247 Meas Guidance v05r02 ANSI C63.10:2013;			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit.
15.247(a)(1) (iii)	Number of Hopping Frequency Used	Pass	Meet the requirement of limit.
15.247(a)(1) (iii)	Dwell Time on Each Channel	Pass	Meet the requirement of limit.
15.247(a)(1)	1. Hopping Channel Separation 2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	Pass	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power	Pass	Meet the requirement of limit.
---	Occupied Bandwidth Measurement	Pass	Reference only
15.205 & 209	Radiated Emissions	Pass	Meet the requirement of limit.
15.247(d)	Band Edge Measurement	Pass	Meet the requirement of limit.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	No antenna connector is used.

Note1: If the Frequency Hopping System operating in 2400-2483.5MHz band and the output power less than 125mW. The hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of hopping channel whichever is greater.

Note2: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (sDoC). The test report has been issued separately.

1.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUTs specified in CISPR 16-4-2:

The listed uncertainties are the worst-case uncertainty for the entire range of measurement. Please note that the uncertainty values are provided for informational purposes only and are not used in determining the PASS/FAIL results.

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.66 dB
Radiated Emissions up to 1 GHz	9KHz ~ 30MHz	2.16 dB
	30MHz ~ 1000MHz	3.47 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	4.84 dB
	18GHz ~ 40GHz	4.67 dB

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k = 2.

1.2 Modification Record

There were no modifications required for compliance.



2 General Information

2.1 General Description of EUT

Product(s)	Fender RIFF Bluetooth Speaker
Test Model(s)	RIFF
Sample No.	HS220823-01-13
Series Model(s)	N/A
Status of EUT	Engineering Prototype
Power Supply Rating	DC 15V/20V, 3A from USB or DC 7.2V from battery
Modulation Type	GFSK, $\pi/4$ DQPSK, 8DPSK for FHSS
Transfer Rate	1Mbps, 2Mbps, 3Mbps
Operating Frequency	2402 ~ 2480MHz
Number of Channel	79
Output Power (Peak)	8.579dBm
Antenna Type	FPCB Antenna
Antenna Gain	2.95dBi
Antenna Connector	N/A
Accessory Device	N/A
Cable Supplied	Type-c Charging Cable: 120cm, Unshielded, Detachable, No Core

Note:

1. Please refer to the EUT photo document (Reference No.:220805EL02-01&02) for detailed product photo.
2. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



2.2 Description of Test Modes

79 channels are provided to this EUT:

Channel	Freq. (MHz)						
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	-	-



2.3 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable test items	X-Axis	Y-Axis	Z-Axis	Voltage Supply
Conducted	AC Power Conducted Emission	N/A	N/A	N/A	AC120V/60Hz Or AC230V/50Hz Or DC 7.2V from battery
Radiated	Radiated Emissions	√	√	√	
Antenna Port Conducted Measurement	Number of Hopping Frequency Used	N/A	N/A	N/A	
	Dwell Time on Each Channel	N/A	N/A	N/A	
	Band Edge Measurement	N/A	N/A	N/A	
	Antenna Port Emission	N/A	N/A	N/A	
	Conducted power	N/A	N/A	N/A	
	Hopping Channel Separation	N/A	N/A	N/A	
	Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	N/A	N/A	N/A	

1. *: The EUT had been pre-tested on the positioned of each 3 Axis. The worst case was found when positioned on **X-plane**.

2. "N/A" means no effect.

Evaluation of difference data rate:

Applicable test items	Modulation Type			The Worst-case modes recording in report
	GFSK	$\pi/4$ DQPSK	8DPSK	
Radiated Emissions	√	√	√	GFSK& 8DPSK
Antenna Port Conducted Measurement	√	√	√	GFSK& 8DPSK

Test Condition:

Applicable test items	Environmental Conditions	Test Date	Tested by
AC Power Conducted Emission	26.2deg. C, 55%RH	2022-10-08	Jim
Radiated Emissions	26.5deg. C, 50%RH	2022-08-24	King Ye
Antenna Port Conducted Measurement	26deg. C, 69%RH	2022-11-02	Dragon Long

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.



Radiated Emission Test (Above 1 GHz):

EUT Configure Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Packet Type
-	0 to 78	0, 39, 78	FHSS	GFSK	DH5
-	0 to 78	0, 39, 78	FHSS	8DPSK	3DH5

Radiated Emission Test (Below 1 GHz):

EUT Configure Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Packet Type
-	0 to 78	39	FHSS	GFSK	DH5
-	0 to 78	0, 39, 78	FHSS	8DPSK	3DH5

Power Line Conducted Emission Test:

EUT Configure Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Packet Type
-	0 to 78	39	FHSS	GFSK	DH5

Antenna Port Conducted Measurement:

This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Packet Type
-	0 to 78	0, 39, 78	FHSS	GFSK	DH5
-	0 to 78	0, 39, 78	FHSS	8DPSK	3DH5




2.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1.	Notebook	DELL	Latitude 5300	00426-OEM-8992662-00006	N/A
2.	Notebook	HUAWEI	NbD-WFH9	EUEPM21725002655	

No.	Signal Cable Description of The Above Support Units
1.	USB extension cord 1.0m

2.4.1 Configuration of System under Test

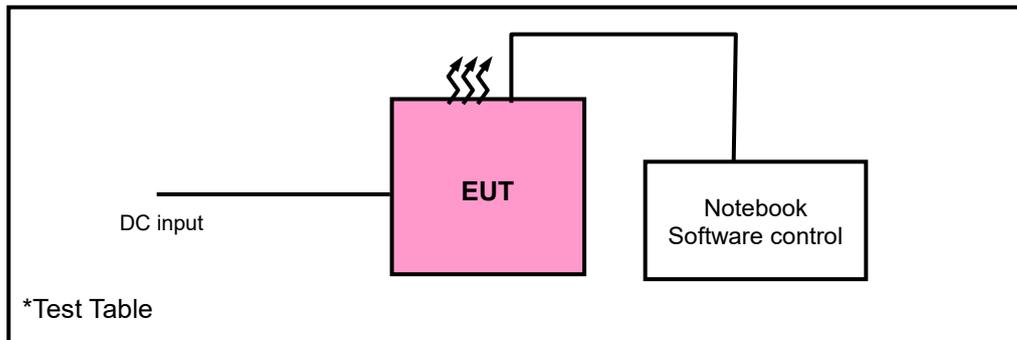



3 Test Types and Results

3.1 Radiated Emission and Band-edge Measurement

3.1.1 Limits of Radiated Emission and Band-edge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

* DTS emissions in non-restricted frequency bands Subclause 11.11 of ANSI C63.10 is applicable.

* DTS emissions in restricted frequency bands Subclause 11.12 of ANSI C63.10 is applicable

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.



3.1.2 Test Instruments

Radiated emission below 30MHz:

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	100962	2023-01-13
3m Semi-anechoic Chamber	MAORUI	9m*6m*6m	NSEMC003	2023-04-15*
Test software	FARAD	FARAD	EZ_EMCV1.1.4.2	N/A
Loop Antenna	EMCI	HLA 6121	56735	2023-04-15*
Preamplifier	EMCI	EMC001340	980201	2023-01-12
Antenna Tower	MF	MFA-440H	NA	NA
Turn Table	MF	MFT-201SS	NA	NA
Antenna Tower&Turn Table Controller	MF	MF-7802	NA	NA

Frequency Range below 1GHz:

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
3m Semi-anechoic Chamber	MAORUI	9m*6m*6m	NSEMC003	2023-01-13
EMI Test Receiver	Rohde&Schwarz	ESR7	100962	2023-09-12*
Broadband antenna	Schwarzbeck	VULB 9168	00937	2023-04-15*
Signal Amplifier	Com-power	PAM-103	18020051	2023-08-25
Attenuator	Rohde&Schwarz	TS2GA-6dB	18101101	N/A
Test software	FARAD	FARAD	EZ_EMCV1.1.4.2	N/A

Frequency Range 1-18GHz:

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
3m Semi-anechoic Chamber	MAORUI	9m*6m*6m	NSEMC003	2023-04-15*
Horn Antenna	Schwarzbeck	BBHA 9120D	01959	2024-05-04
Broadband Coaxial Preamplifier	Com-power	PAM-118A	1804003	2023-08-25
Spectrum	Keysight	N9020A	MY51240612	2023-08-25
Antenna Tower	MF	MFA-440H	NA	NA
Turn Table	MF	MFT-201SS	NA	NA
Antenna Tower&Turn Table Controller	MF	MF-7802	NA	NA

Frequency Range 18-40GHz:

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
3m Semi-anechoic Chamber	MAORUI	9m*6m*6m	NSEMC003	2023-04-15*
Spectrum Analyzer	Rohde&Schwarz	FSV-40N	101783	2023-01-13
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170242	2023-04-10*
Pre-Amplifier	EMCI	EMC 184045	980102	2023-01-12
Antenna Tower	MF	MFA-440H	NA	NA
Turn Table	MF	MFT-201SS	NA	NA
Antenna Tower&Turn Table Controller	MF	MF-7802	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months or 24 months (*).
2. The test was performed in 966



3.1.3 Test Procedures

a. **Peak emission levels are measured by setting the instrument as follow:**

1) RBW&VBWsetting as a function of frequency:

Frequency	RBW	VBW
9kHz~150kHz	200Hz	600Hz
0.15MHz~30MHz	9kHz	30kHz
30MHz~1000MHz	120kHz	300kHz
>1000MHz	1MHz	3MHz

- 2) Detector = peak.
- 3) Sweep time = auto.
- 4) Trace mode = max hold.
- 5) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

Note: If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement

b. **Average emission levels are measured by setting the instrument as follow:**

● **Trace averaging with continuous EUT transmission at full power**

If the EUT can be configured or modified to transmit continuously (D ≥ 98%), then the average emission levels shall be measured using the following method (with EUT transmitting continuously):

- 1) RBW=1 MHz (unless otherwise specified).
- 2) VBW ≥ 3 *RBW.
- 3) Detector =RMS
- 4) Sweep time = auto.
- 5) Perform a trace average of at least 100 traces.

● **Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction**

If continuous transmission of the EUT (D≥98%) cannot be achieved and the duty cycle is constant (duty cycle variations are less than ±2%). then the following procedure shall be used

- 1) The EUT shall be configured to operate at the maximum achievable duty cycle.
- 2) Measure the duty cycle D of the transmitter output signal as described in 11.6.
- 3) RBW=1 MHz (unless otherwise specified).
- 4) VBW ≥ 3 *RBW.
- 5) Detector =RMS
- 6) Sweep time = auto.
- 7) Perform a trace average of at least 100 traces.

A correction factor shall be added to the measurement results prior to comparing with the emission limit to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

*If power averaging (rms) mode was used in step 5). then the applicable correction factor is [10 10g (1/ D)], where D is the duty cycle.

**If linear voltage averaging mode was used in step f). then the applicable correction factor is [20 10g (1/D)], where D is the duty cycle.

***If a specific emission is demonstrated to be continuous (D > 98%) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that



● **Reduced VBW Averaging across ON and OFF times of the EUT transmissions with max hold**

If continuous transmission of the EUT ($D > 98\%$) cannot be achieved and the duty cycle is not constant (duty cycle variations exceed $\pm 2\%$), then the following procedure shall be used:

- 1) RBW = 1 MHz.
 - 2) $VBW \geq 1/T$.
 - 3) Detector = peak
 - 4) Sweep time = auto.
 - 5) Trace mode = max hold.
 - 6) Allow max hold to run for at least $[50 \times (1/D)]$ traces
- c. The EUT was placed on the top of a rotating table 0.8 meters (below 1GHz) / 1.5 meters (1-18GHz) / 1.5 meters (18-40GHz) above the reference ground. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The EUT was set 3 meters away from the interference-receiving antenna (Below 1GHz) & (Above 1-18GHz), which was mounted on the top of a variable-height antenna tower. The EUT was set 1 meters away from the interference-receiving antenna (18-40GHz).
- e. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- f. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- g. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

1. Test procedures for measuring FHSS device: The use of a duty cycle correction factor (DCCF) is permitted for calculating average radiated field strength emission levels for an FHSS device in 15.247. This DCCF can be applied when the unwanted emission limit is subject to an average field strength limit (e.g., within a Government Restricted band) and the conditions specified in Section 15.35(c) can be satisfied. The average radiated field strength is calculated by subtracting the DCCF from the maximum radiated field strength level as determined through measurement. The maximum radiated field strength level represents the worst-case (maximum amplitude) RMS measurement of the emission(s) during continuous transmission (i.e., not including any time intervals during which the transmitter is off or is transmitting at a reduced power level). It is also acceptable to apply the DCCF to a measurement performed with a peak detector instead of the specified RMS power averaging detector. Note that Section 15.35(c) specifies that the DCCF shall represent the worst-case (greatest duty cycle) over any 100 msec transmission period. Subclause 7.5 of ANSI C63.10 provides additional measurement guidance applicable to determination of the DCCF.
2. All modes of operation were investigated and the worst-case emissions are reported.


3.1.4 Deviation from Test Standard

No deviation.




3.1.5 Test Setup

Radiated emission below 30MHz:

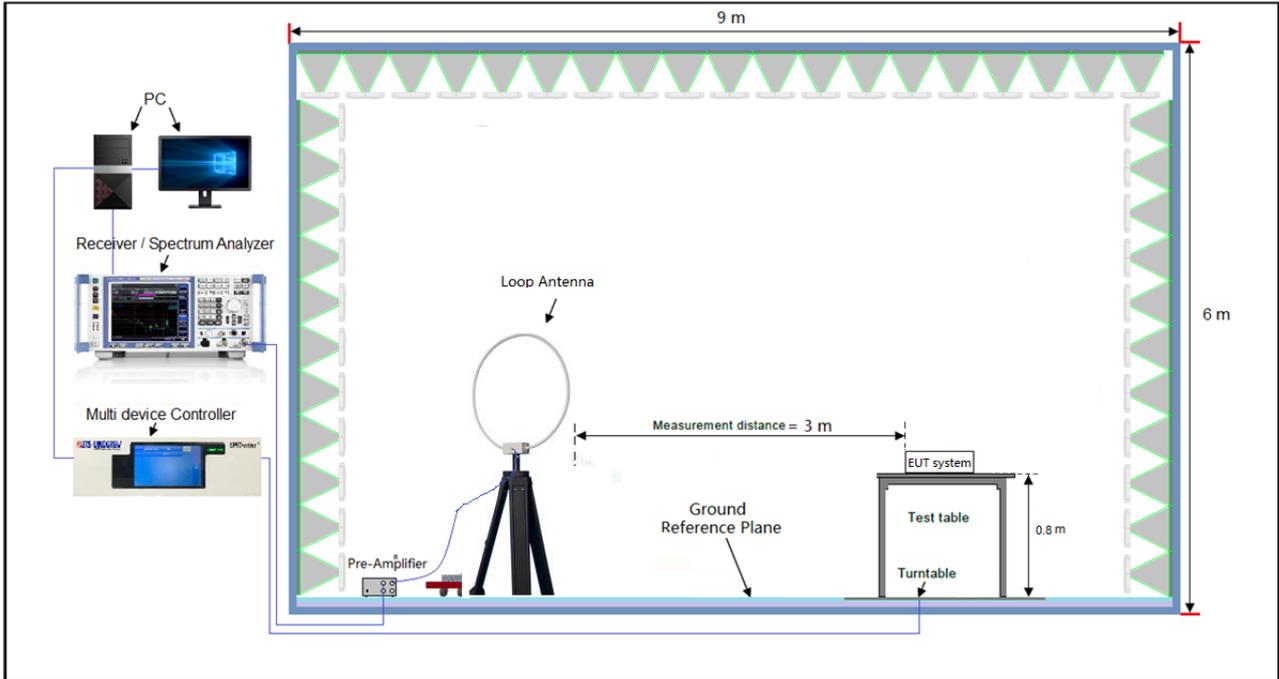


Frequency Range below 1GHz:

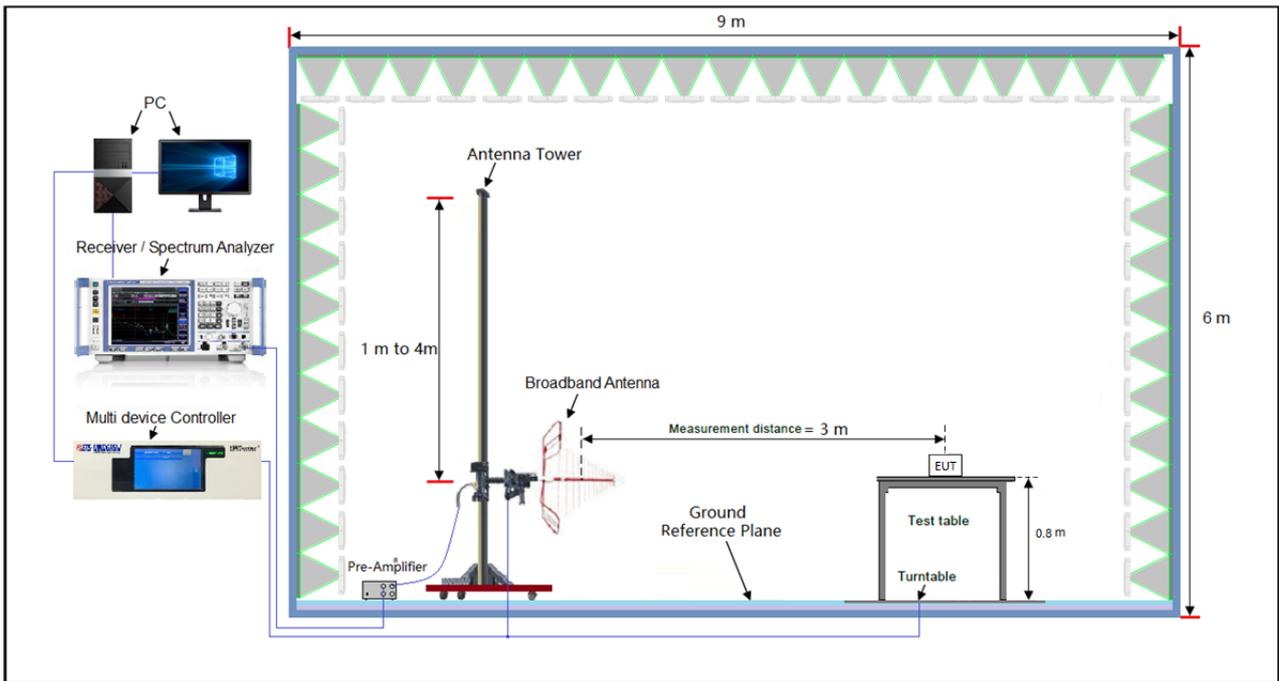




Frequency Range above 1GHz:

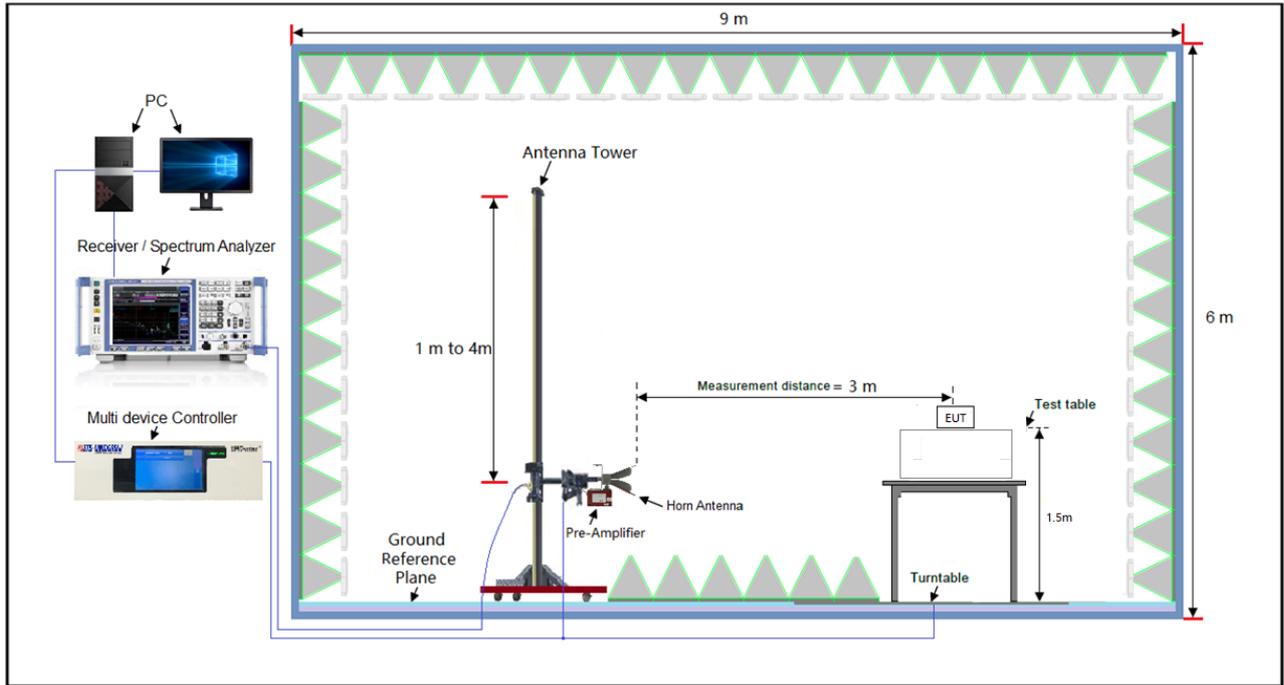

Frequency Range 18-40GHz:

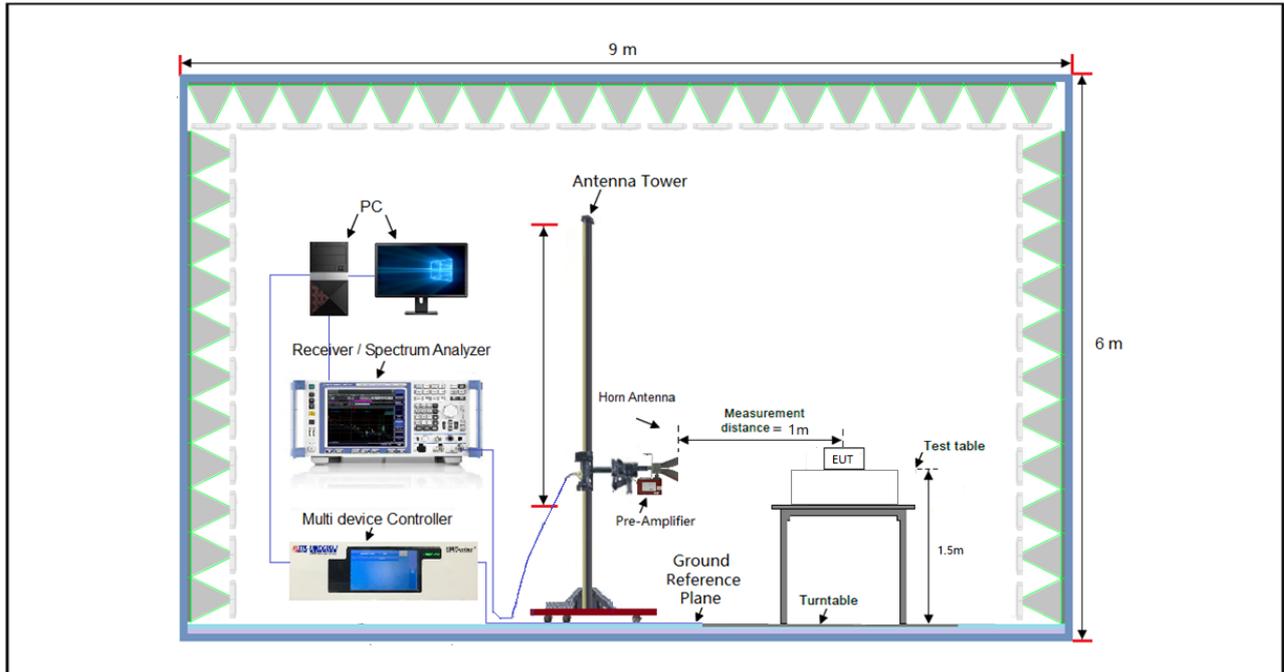

*For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.1.6 EUT Operating Conditions

Set the EUT under transmission condition continuously at specific channel frequency.




3.1.7 Test Results

9 kHz ~ 30 MHz Data:

The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

30 MHz ~ 1GHz Worst-Case Data:

Frequency Range	30MHz ~ 1GHz	Detector Function	Peak (PK) Quasi-peak (QP)
Test Channel	Channel 0		

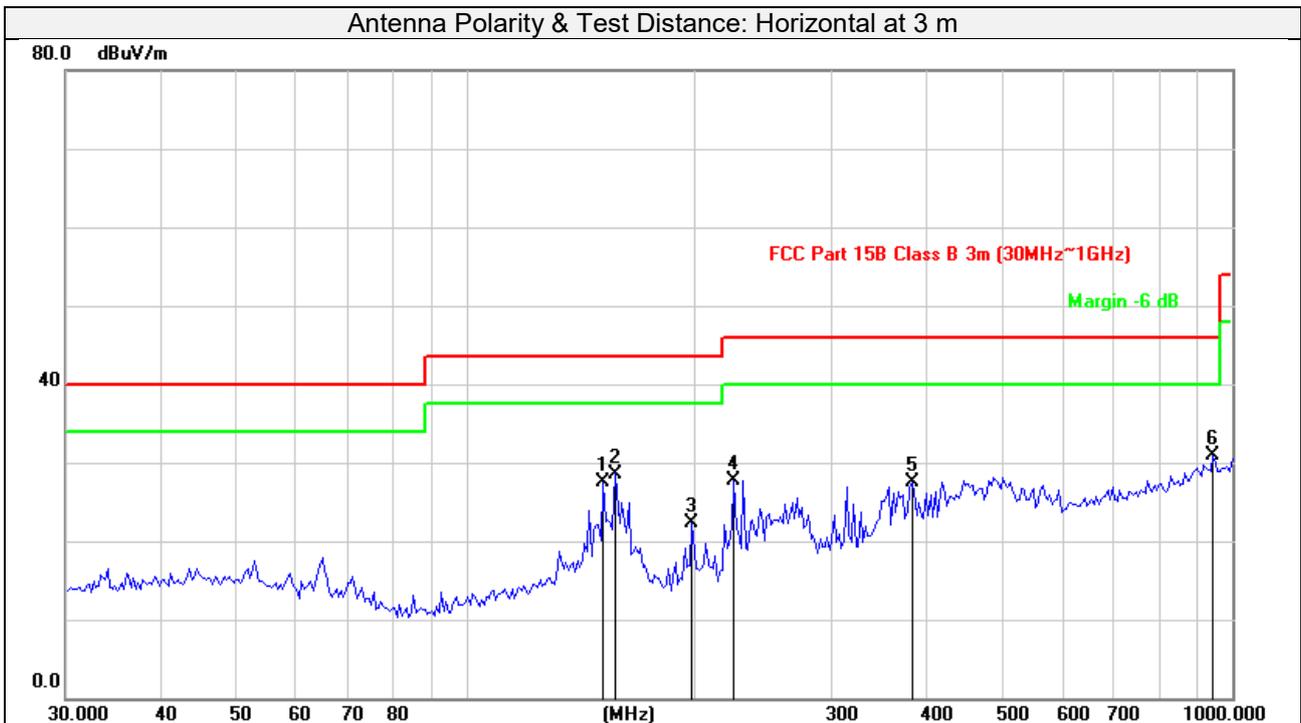


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1	151.0252	41.82	-14.39	27.43	43.50	-16.07	peak	300	58
2 *	156.4259	42.79	-14.19	28.60	43.50	-14.90	peak	200	86
3	197.2513	39.36	-17.00	22.36	43.50	-21.14	peak	100	112
4	223.8481	43.69	-15.96	27.73	46.00	-18.27	peak	200	255
5	381.8519	38.03	-10.54	27.49	46.00	-18.51	peak	100	325
6	945.3336	30.81	0.13	30.94	46.00	-15.06	peak	200	88

Remarks:

- 1.Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
- 2.Margin value = Emission level – Limit value



Frequency Range	30MHz ~ 1GHz	Detector Function	Peak (PK) Quasi-peak (QP)
Test Channel	Channel 39		

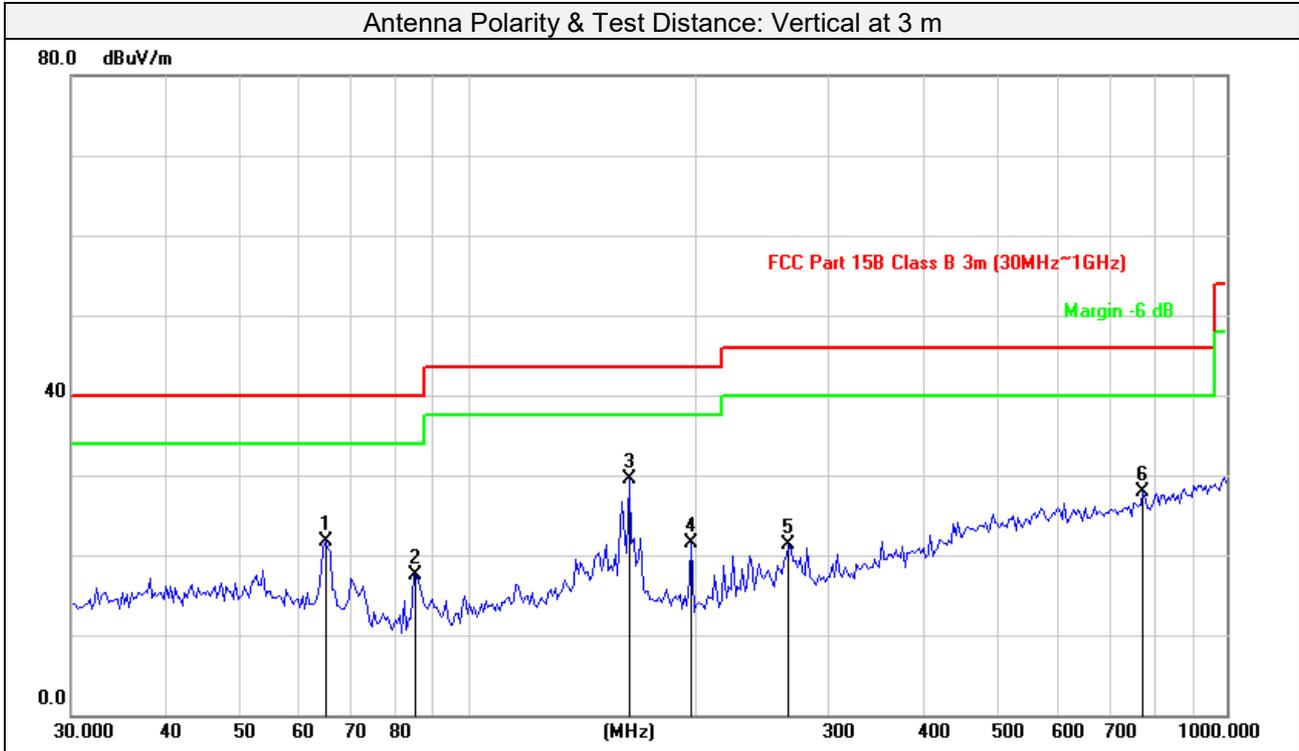

No.	Frequency (MHz)	Reading (dBUV)	Factor (dB)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1	64.9869	38.42	-16.70	21.72	40.00	-18.28	peak	100	325
2	85.4769	36.90	-19.31	17.59	40.00	-22.41	peak	100	247
3 *	163.1623	43.90	-14.36	29.54	43.50	-13.96	peak	200	169
4	197.2514	38.43	-17.00	21.43	43.50	-22.07	peak	300	125
5	264.9709	35.52	-14.23	21.29	46.00	-24.71	peak	100	31
6	776.4849	30.37	-2.48	27.89	46.00	-18.11	peak	200	58

Remarks:


1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value



Above 1GHz Data:

GFSK

Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AVG)
Test Channel	Channel 0		

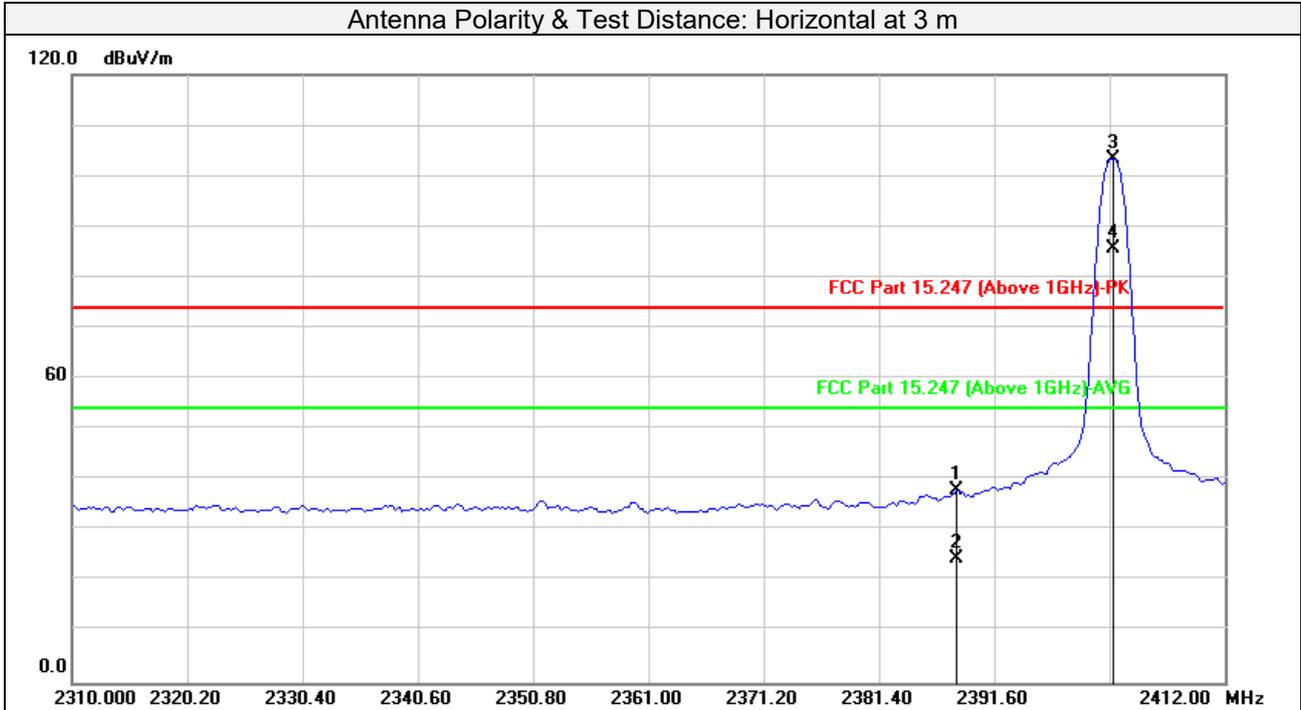


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1	2388.289	37.06	0.77	37.83	74.00	-36.17	peak	100	142
2	2388.289	23.70	0.77	24.47	54.00	-29.53	AVG	100	142
3#	2402.188	102.57	0.74	103.31			peak	100	142
4#	2402.188	84.95	0.74	85.69			AVG	100	142
5	4804.000	40.89	7.27	48.16	74.00	-25.84	peak	349	176
6	4804.000	31.87	7.27	39.14	54.00	-14.86	AVG	349	176
7	7206.000	34.42	10.75	45.17	74.00	-28.83	peak	126	183
8	7206.000	23.53	10.75	34.28	54.00	-19.72	AVG	126	183

Remarks:

- Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
Margin value = Emission level – Limit value
- #2402MHz: Fundamental frequency.
- The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.



Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AVG)
Test Channel	Channel 0		

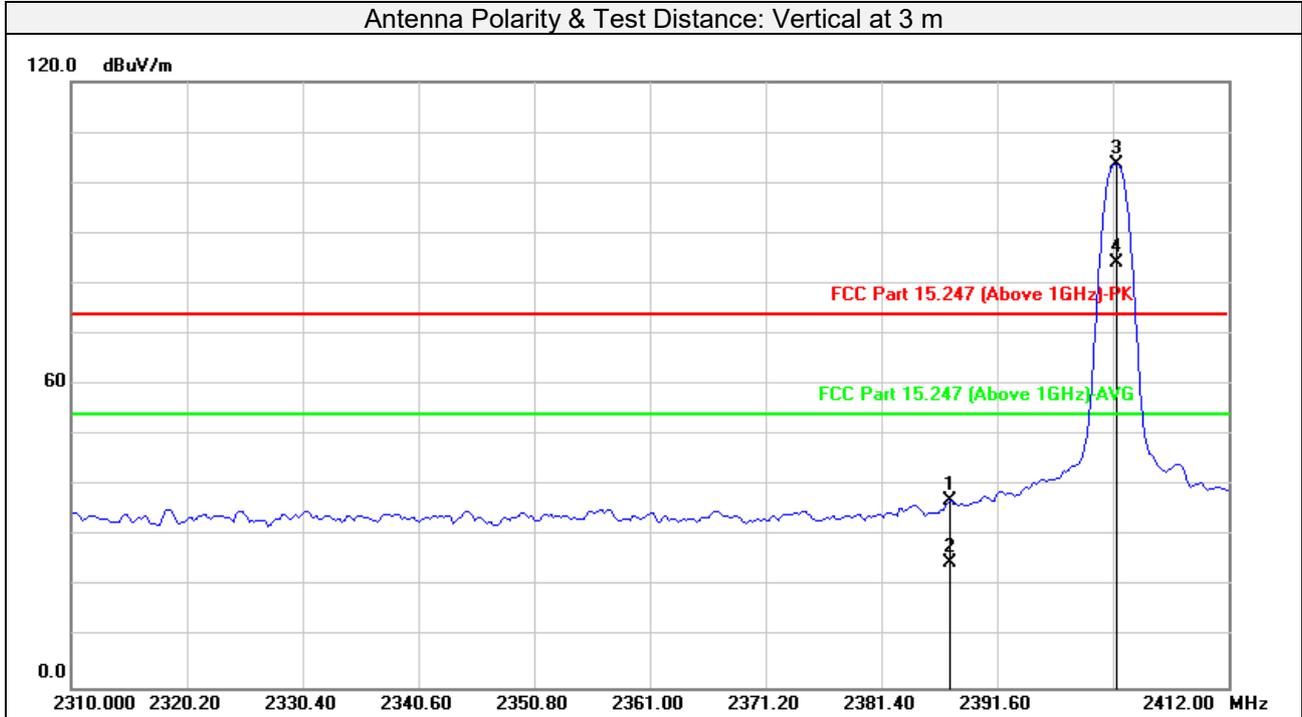

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1	2387.471	36.33	0.77	37.10	74.00	-36.90	peak	184	71
2	2387.471	24.07	0.77	24.84	54.00	-29.16	AVG	184	71
3#	2402.188	102.79	0.74	103.53			peak	184	71
4#	2402.188	83.44	0.74	84.18			AVG	184	71
5	4804.000	41.00	7.27	48.27	74.00	-25.73	peak	320	159
6	4804.000	31.19	7.27	38.46	54.00	-15.54	AVG	320	159
7	7206.000	36.06	10.75	46.81	74.00	-27.19	peak	100	136
8	7206.000	24.86	10.75	35.61	54.00	-18.39	AVG	100	136

Remarks:

- Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
Margin value = Emission level – Limit value
- #2402MHz: Fundamental frequency.
- The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.



Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AVG)
Test Channel	Channel 39		


Antenna Polarity & Test Distance: Horizontal at 3 m									
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1 #	2441.000	100.52	0.69	101.21			peak	262	174
2 #	2441.000	83.05	0.69	83.74			AVG	262	174
3	4882.000	41.06	7.61	48.67	74.00	-25.33	peak	316	165
4	4882.000	31.86	7.61	39.47	54.00	-14.53	AVG	316	165
5	7323.000	34.19	10.92	45.11	74.00	-28.89	peak	116	211
6	7323.000	24.47	10.92	35.39	54.00	-18.61	AVG	116	211
Antenna Polarity & Test Distance: Vertical at 3 m									
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1 #	2441.000	99.52	0.69	100.21			peak	316	221
2 #	2441.000	82.32	0.69	83.01			AVG	316	221
3	4882.000	40.60	7.61	48.21	74.00	-25.79	peak	321	159
4	4882.000	31.54	7.61	39.15	54.00	-14.85	AVG	321	159
5	7323.000	34.36	10.92	45.28	74.00	-28.72	peak	100	164
6	7323.000	23.25	10.92	34.17	54.00	-19.83	AVG	100	164

Remarks:

- Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
Margin value = Emission level – Limit value
- #2441MHz: Fundamental frequency.
- The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.



Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AVG)
Test Channel	Channel 78		

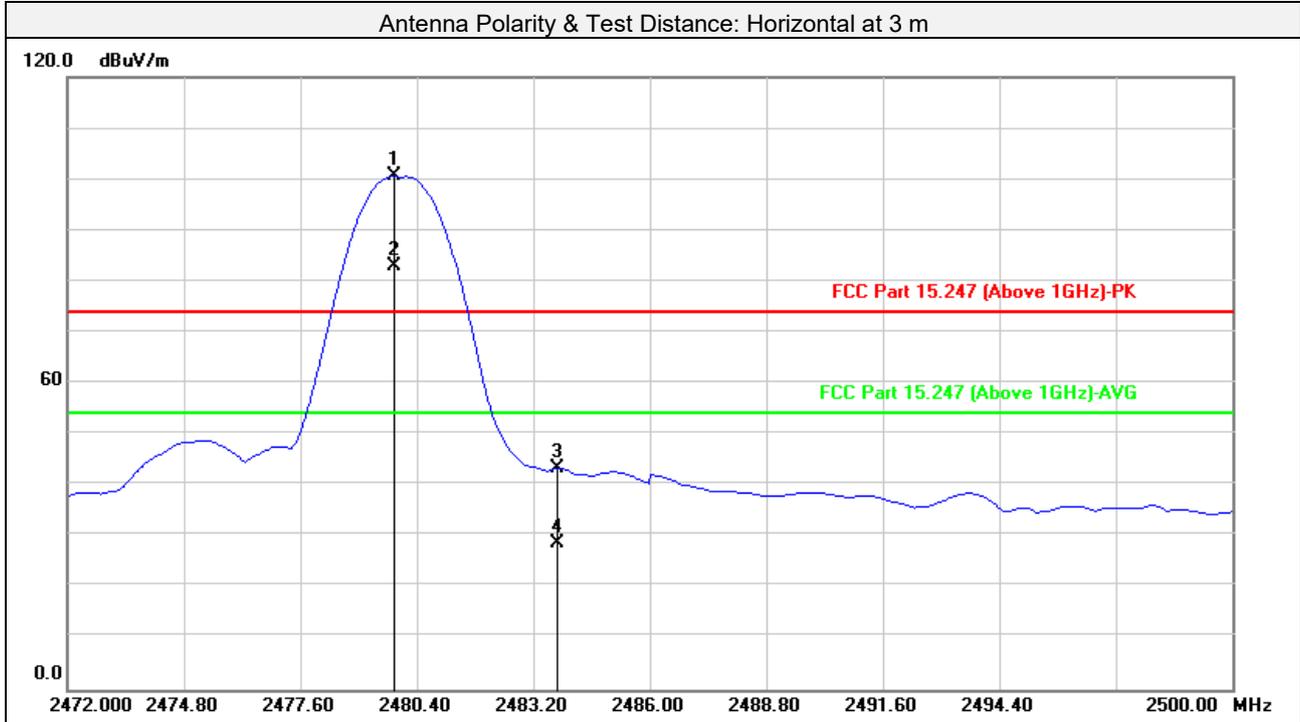

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1#	2479.856	99.87	0.64	100.51			peak	100	168
2#	2479.856	82.39	0.64	83.03			AVG	100	168
3	2483.784	42.69	0.63	43.32	74.00	-30.68	peak	100	168
4	2483.784	28.12	0.63	28.75	54.00	-25.25	AVG	100	168
5	4960.000	39.35	7.94	47.29	74.00	-26.71	peak	326	147
6	4960.000	30.73	7.94	38.67	54.00	-15.33	AVG	326	147
7	7440.000	34.17	11.09	45.26	74.00	-28.74	peak	100	124
8	7440.000	23.69	11.09	34.78	54.00	-19.22	AVG	100	124


Remarks:

- Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
Margin value = Emission level – Limit value
- #2480MHz: Fundamental frequency.
- The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.



Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AVG)
Test Channel	Channel 78		

Antenna Polarity & Test Distance: Vertical at 3 m

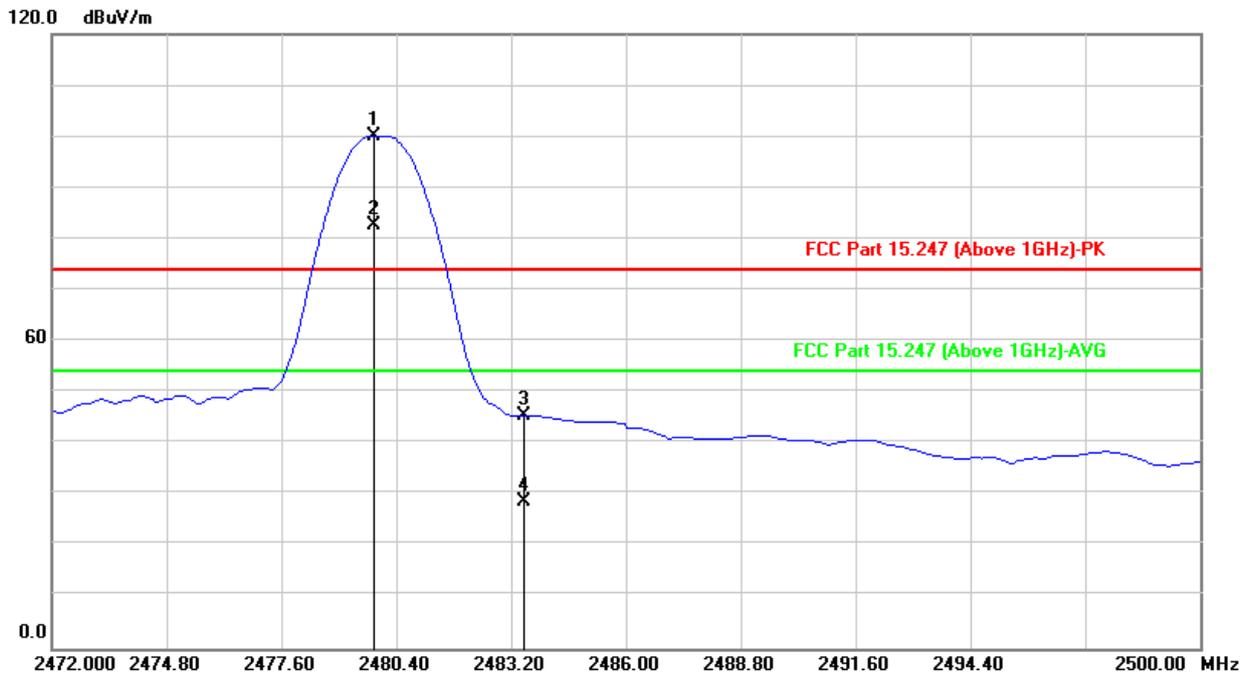

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1#	2479.856	99.50	0.64	100.14			peak	100	165
2#	2479.856	82.16	0.64	82.80			AVG	100	165
3	2483.500	44.82	0.63	45.45	74.00	-28.55	peak	100	165
4	2483.500	27.94	0.63	28.57	54.00	-25.43	AVG	100	165
5	4960.000	40.66	7.94	48.60	74.00	-25.40	peak	341	188
6	4960.000	31.98	7.94	39.92	54.00	-14.08	AVG	341	188
7	7440.000	34.33	11.09	45.42	74.00	-28.58	peak	109	138
8	7440.000	24.68	11.09	35.77	54.00	-18.23	AVG	109	138

Remarks:


- Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
Margin value = Emission level – Limit value
- #2480MHz: Fundamental frequency.
- The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.



8DPSK

Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AVG)
Test Channel	Channel 0		

Antenna Polarity & Test Distance: Horizontal at 3 m

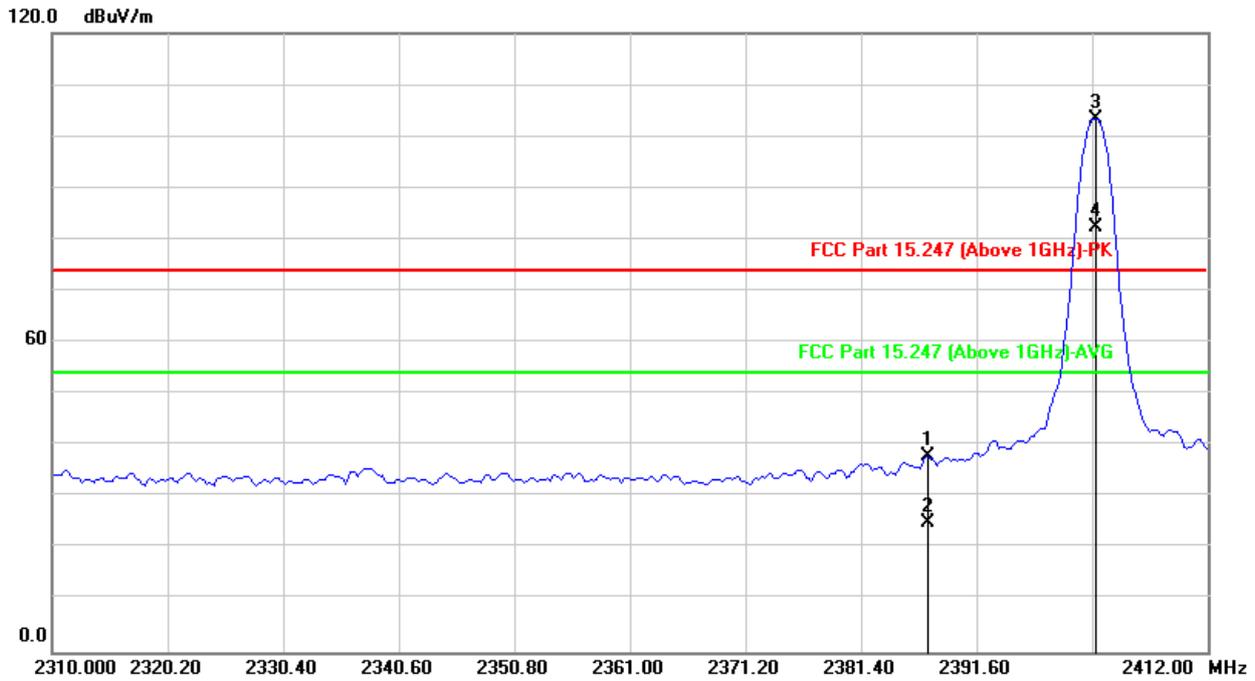

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1	2387.267	37.06	0.77	37.83	74.00	-36.17	peak	100	167
2	2387.267	24.23	0.77	25.00	54.00	-29.00	AVG	100	167
3#	2402.188	102.71	0.74	103.45			peak	100	167
4#	2402.188	81.72	0.74	82.46			AVG	100	167
5	4804.000	40.55	7.27	47.82	74.00	-26.18	peak	324	146
6	4804.000	29.01	7.27	36.28	54.00	-17.72	AVG	324	146
7	7206.000	32.44	10.75	43.19	74.00	-30.81	peak	100	102
8	7206.000	22.89	10.75	33.64	54.00	-20.36	AVG	100	102


Remarks:

- Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
Margin value = Emission level – Limit value
- #2402MHz: Fundamental frequency.
- The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.



Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AVG)
Test Channel	Channel 0		

Antenna Polarity & Test Distance: Vertical at 3 m

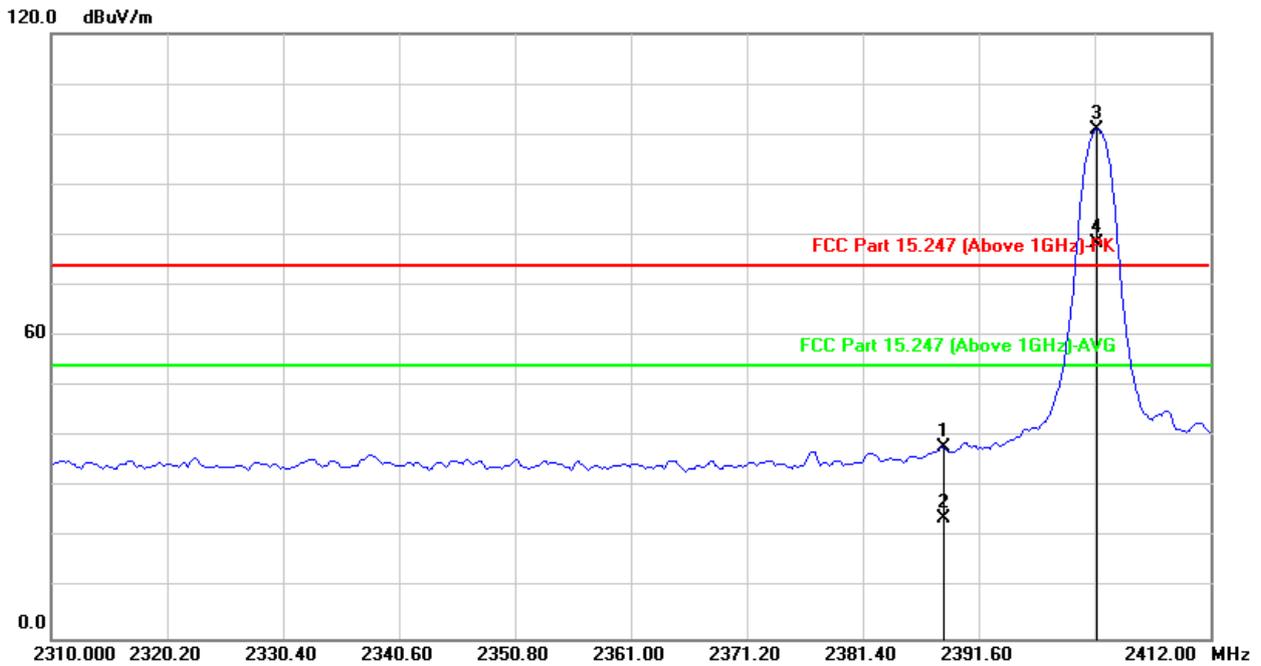

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1	2388.493	37.04	0.77	37.81	74.00	-36.19	peak	100	67
2	2388.493	23.14	0.77	23.91	54.00	-30.09	AVG	100	67
3#	2401.984	100.07	0.75	100.82			peak	100	67
4#	2401.984	77.64	0.75	78.39			AVG	100	67
5	4804.000	40.23	7.27	47.50	74.00	-26.50	peak	354	198
6	4804.000	29.27	7.27	36.54	54.00	-17.46	AVG	354	198
7	7206.000	31.97	10.75	42.72	74.00	-31.28	peak	100	102
8	7206.000	22.00	10.75	32.75	54.00	-21.25	AVG	100	102

Remarks:

- Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
Margin value = Emission level – Limit value
- #2402MHz: Fundamental frequency.
- The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.



Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AVG)
Test Channel	Channel 39		


Antenna Polarity & Test Distance: Horizontal at 3 m									
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1#	2441.000	100.17	0.69	100.86			peak	354	158
2#	2441.000	80.55	0.69	81.24			AVG	354	158
3	4882.000	40.78	7.61	48.39	74.00	-25.61	peak	204	211
4	4882.000	27.66	7.61	35.27	54.00	-18.73	AVG	204	211
5	7323.000	33.26	10.92	44.18	74.00	-29.82	peak	100	163
6	7323.000	23.68	10.92	34.60	54.00	-19.40	AVG	100	163
Antenna Polarity & Test Distance: Vertical at 3 m									
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1#	2441.000	99.69	0.69	100.38			peak	122	214
2#	2441.000	79.72	0.69	80.41			AVG	122	214
3	4882.000	39.67	7.61	47.28	74.00	-26.72	peak	123	184
4	4882.000	29.03	7.61	36.64	54.00	-17.36	AVG	123	184
5	7323.000	32.24	10.92	43.16	74.00	-30.84	peak	100	169
6	7323.000	23.32	10.92	34.24	54.00	-19.76	AVG	100	169

Remarks:

- Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
Margin value = Emission level – Limit value
- #2441MHz: Fundamental frequency.
- The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.



Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AVG)
Test Channel	Channel 78		

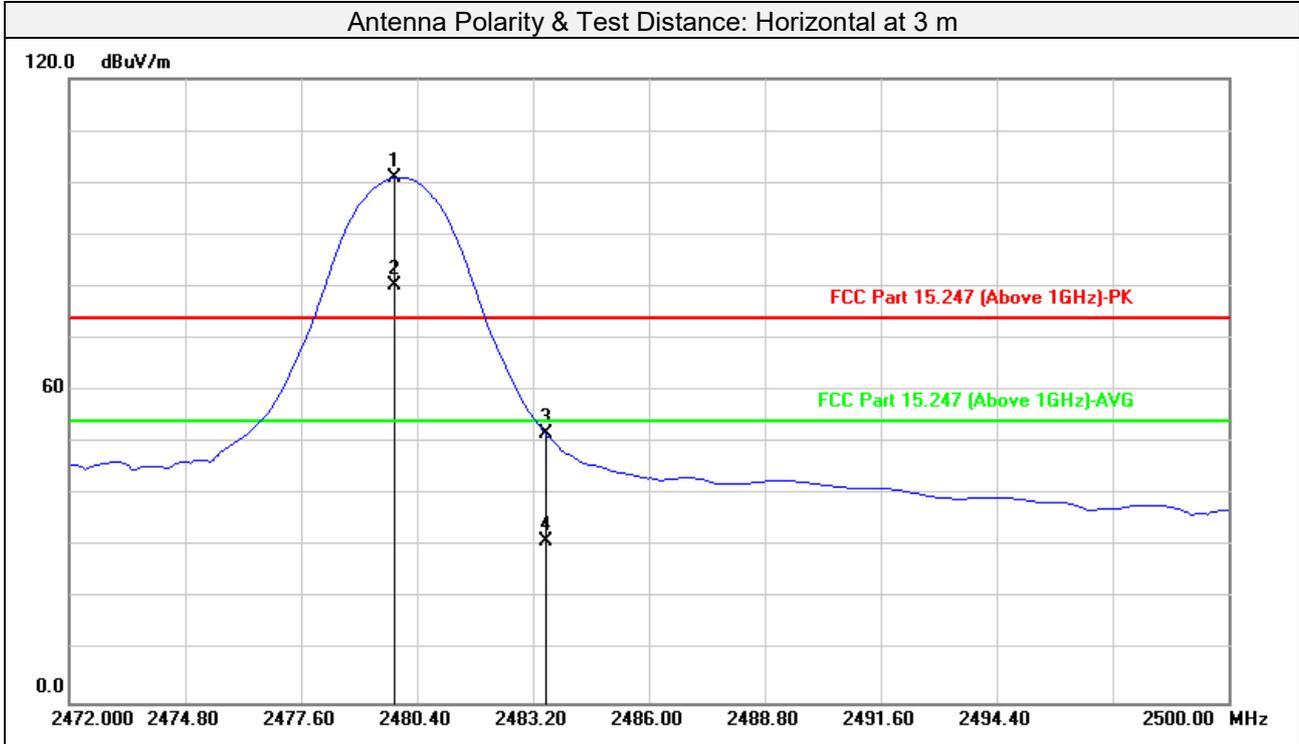


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1#	2479.856	100.22	0.64	100.86			peak	100	163
2#	2479.856	79.58	0.64	80.22			AVG	100	163
3	2483.500	51.08	0.63	51.71	74.00	-22.29	peak	100	163
4	2483.500	30.43	0.63	31.06	54.00	-22.94	AVG	100	163
5	4960.000	40.70	7.94	48.64	74.00	-25.36	peak	165	122
6	4960.000	28.23	7.94	36.17	54.00	-17.83	AVG	165	122
7	7440.000	32.49	11.09	43.58	74.00	-30.42	peak	225	211
8	7440.000	22.16	11.09	33.25	54.00	-20.75	AVG	225	211

Remarks:

- Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
Margin value = Emission level – Limit value
- #2480MHz: Fundamental frequency.
- The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.



Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AVG)
Test Channel	Channel 78		

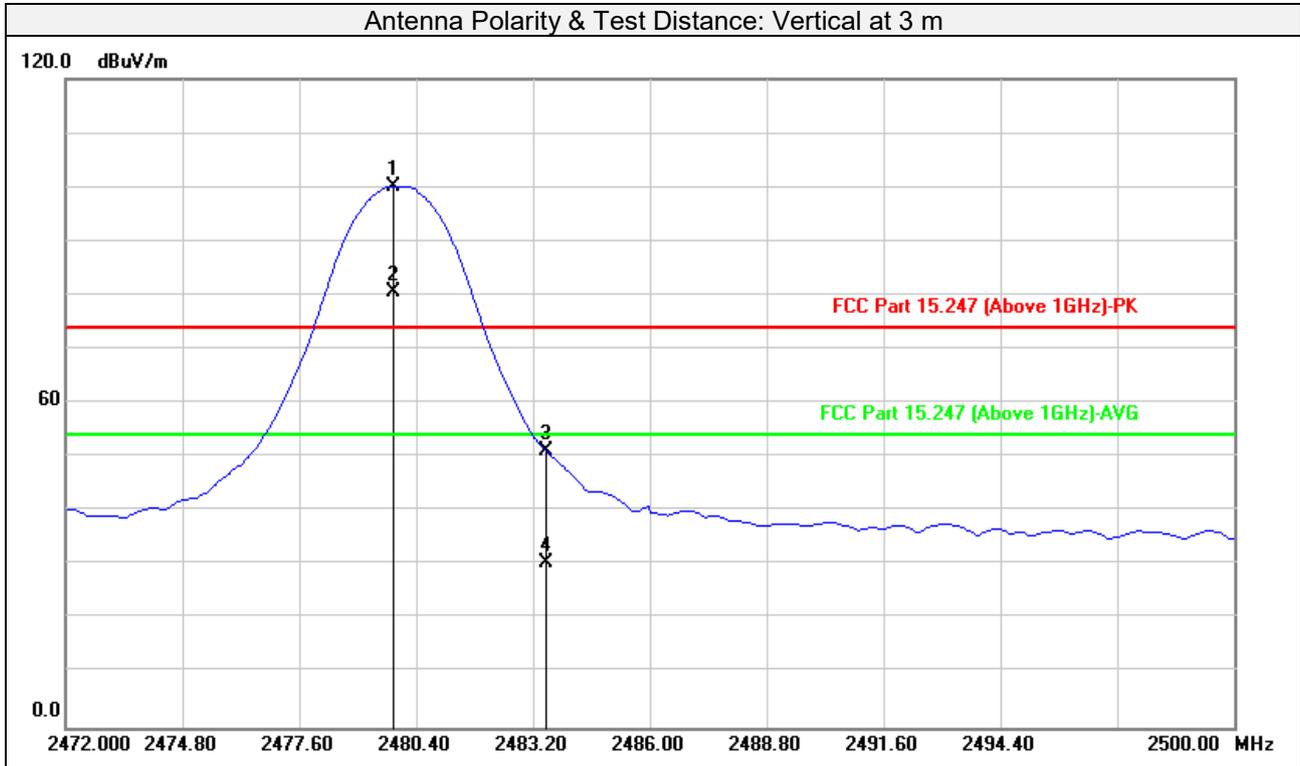

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1#	2479.856	99.52	0.64	100.16			peak	100	164
2#	2479.856	79.76	0.64	80.40			AVG	100	164
3	2483.500	50.62	0.63	51.25	74.00	-22.75	peak	100	164
4	2483.500	29.95	0.63	30.58	54.00	-23.42	AVG	100	164
5	4960.000	39.58	7.94	47.52	74.00	-26.48	peak	259	147
6	4960.000	28.17	7.94	36.11	54.00	-17.89	AVG	259	147
7	7440.000	31.83	11.09	42.92	74.00	-31.08	peak	100	164
8	7440.000	22.66	11.09	33.75	54.00	-20.25	AVG	100	164

Remarks:

- Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
Margin value = Emission level – Limit value
- #2480MHz: Fundamental frequency.
- The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.



3.2 Conducted Emission Measurement

3.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

- Note: 1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

3.2.2 Test Instruments


Description	Manufacturer	Model No.	Serial No.	Due Date of Calibration
EMI Test Receiver	Rohde&Schwarz	ESR 7	101961	2023-01-13
Artificial Mains Network	Rohde&Schwarz	ENV216	3560.6550.15	2023-01-12
Test software	FARAD	EZ_EMV V1.1.4.2	N/A	N/A

- Note: 1. The calibration interval of the above test instruments is 12 months.
2. The test was performed in Shielded Room 1.



3.2.7 Test Results

Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
-----------------	----------------	--	--------------------------------------

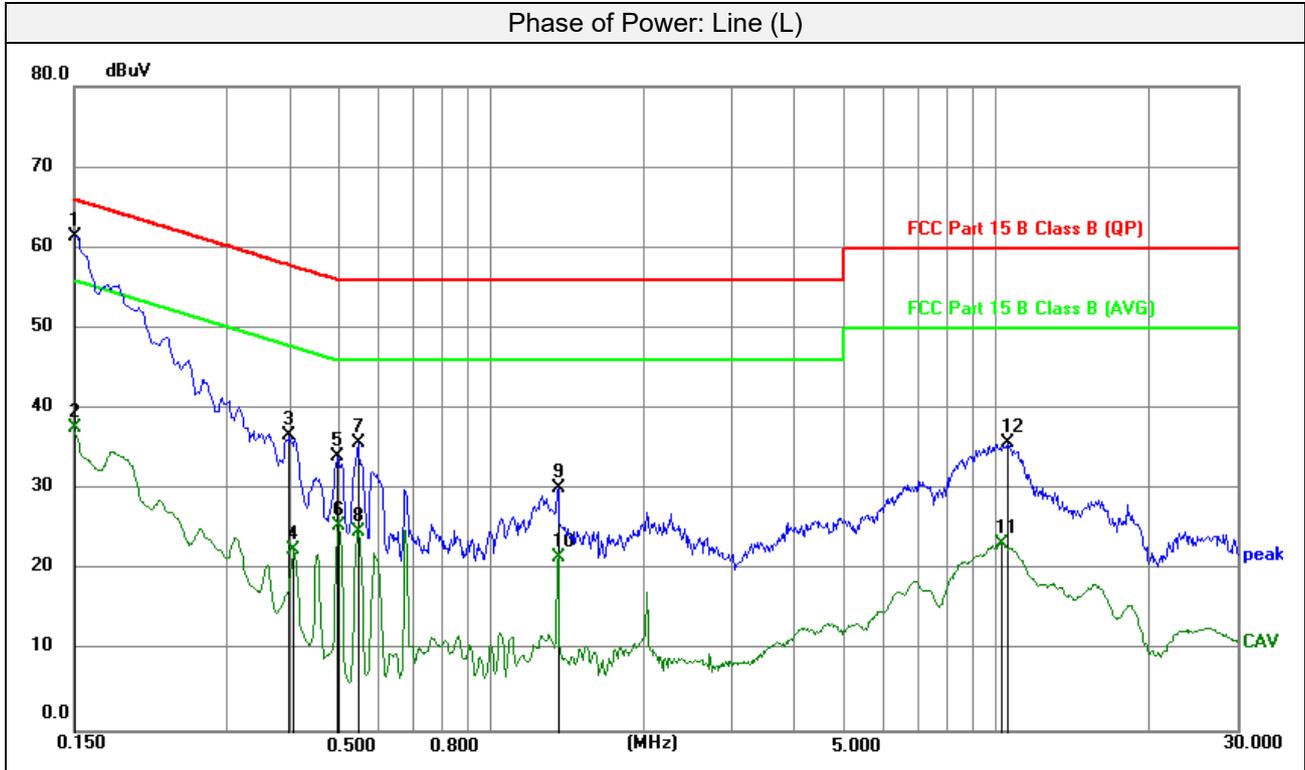


No.	Frequency (MHz)	Reading (dBuV)	Correction Factor (dB)	Emission Level (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1500	51.17	10.19	61.36	66.00	-4.64	peak
2	0.1500	27.40	10.19	37.59	56.00	-18.41	AVG
3	0.3997	26.70	10.11	36.81	57.86	-21.05	peak
4	0.4087	12.46	10.11	22.57	47.67	-25.10	AVG
5	0.4987	23.97	10.10	34.07	56.02	-21.95	peak
6	0.5032	15.50	10.10	25.60	46.00	-20.40	AVG
7	0.5482	25.72	10.10	35.82	56.00	-20.18	peak
8	0.5482	14.73	10.10	24.83	46.00	-21.17	AVG
9	1.3605	20.21	10.05	30.26	56.00	-25.74	peak
10	1.3605	11.45	10.05	21.50	46.00	-24.50	AVG
11	10.2705	13.15	10.11	23.26	50.00	-26.74	AVG
12	10.5090	25.69	10.12	35.81	60.00	-24.19	peak

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.



Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution andwidth	Quasi-Peak (QP) / Average (AV), 9kHz
-----------------	----------------	---	--------------------------------------

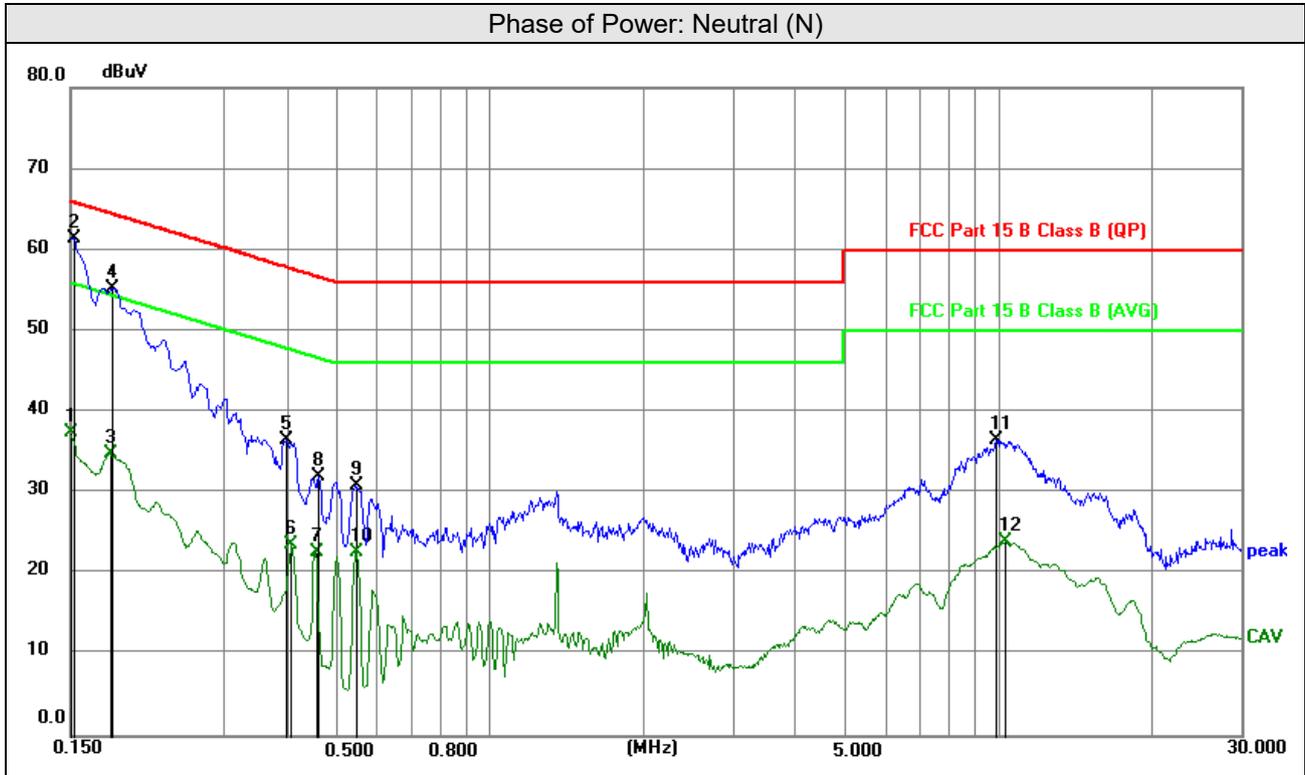

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1500	27.36	10.19	37.55	56.00	-18.45	AVG
2	0.1522	51.28	10.18	61.46	65.88	-4.42	peak
3	0.1793	24.66	10.16	34.82	54.52	-19.70	AVG
4	0.1815	45.14	10.15	55.29	64.42	-9.13	peak
5	0.3997	26.46	10.09	36.55	57.86	-21.31	peak
6	0.4087	13.52	10.09	23.61	47.67	-24.06	AVG
7	0.4560	12.57	10.11	22.68	46.77	-24.09	AVG
8	0.4627	21.89	10.11	32.00	56.64	-24.64	peak
9	0.5460	20.91	10.11	31.02	56.00	-24.98	peak
10	0.5482	12.68	10.11	22.79	46.00	-23.21	AVG
11	9.9442	26.45	10.11	36.56	60.00	-23.44	peak
12	10.3920	13.85	10.13	23.98	50.00	-26.02	AVG

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.




3.3 Number of Hopping Frequency Used

3.3.1 Limits of Hopping Frequency Used Measurement

At least 15 channels frequencies, and should be equally spaced.

3.3.2 Test Setup

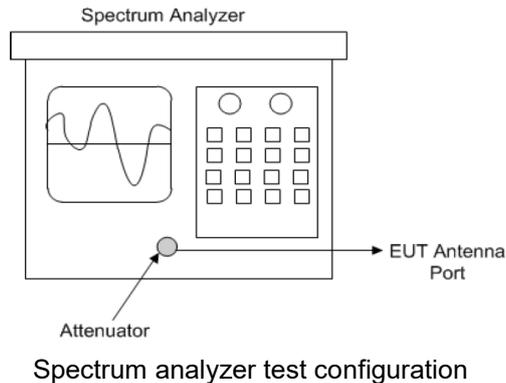

3.3.3 Test Instruments

Refer to section 5 to get information of above instrument.

3.3.4 Test Procedure

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- d. Set the SA on View mode and then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were complete.



3.3.5 Deviation from Test Standard

No deviation.



3.3.6 Test Results

There are 79 hopping frequencies in the hopping mode. Please refer to next page for the test result. On the plots, it shows that the hopping frequencies are equally spaced.

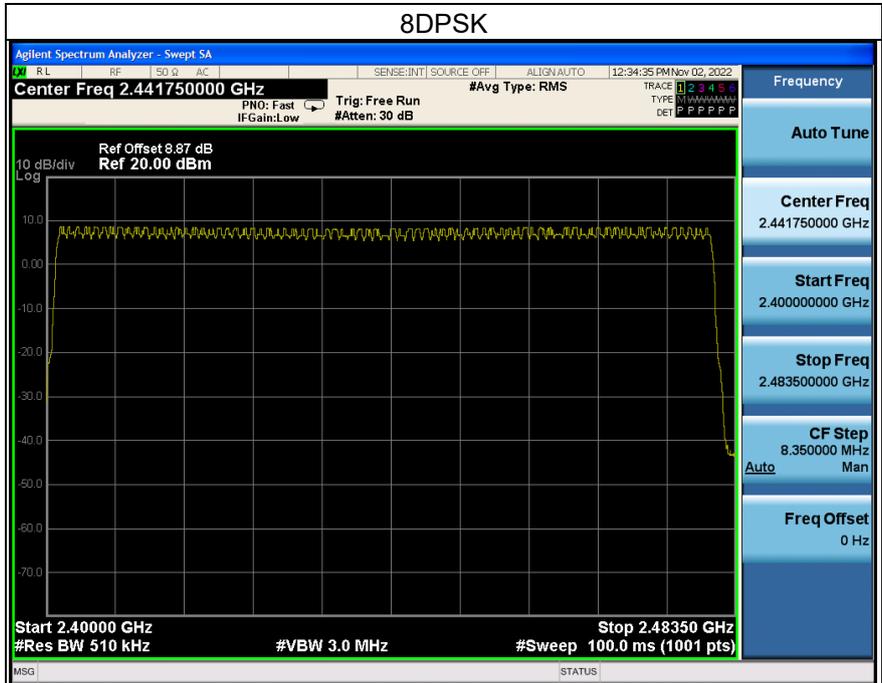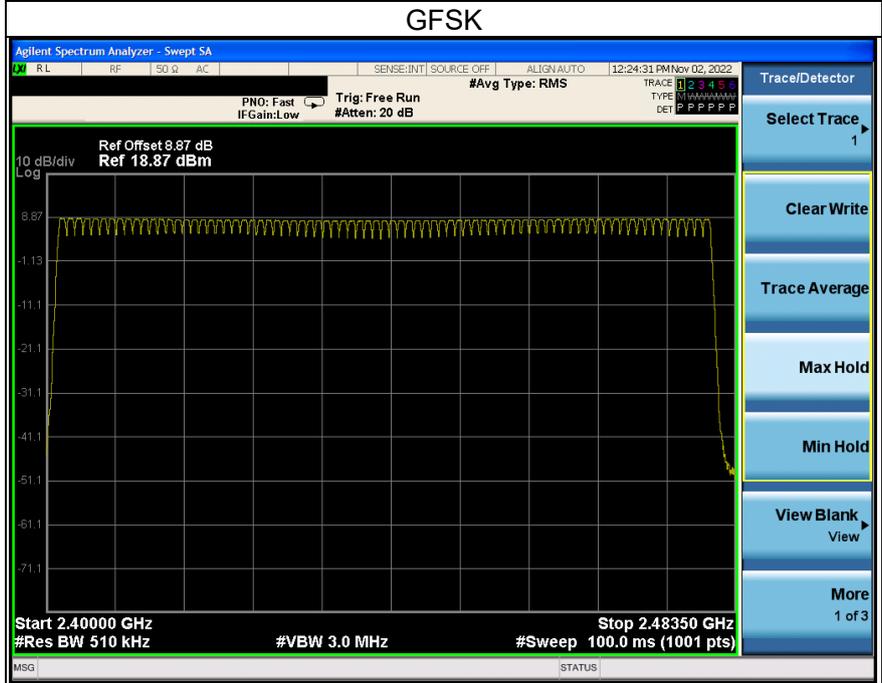




3.4 Channel Bandwidth

3.4.1 Limits of Channel Bandwidth Measurement

For frequency hopping system operating in the 2400-2483.5 MHz, if the 20 dB bandwidth of hopping channel is greater than 25 kHz, two-thirds 20 dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

3.4.2 Test Setup

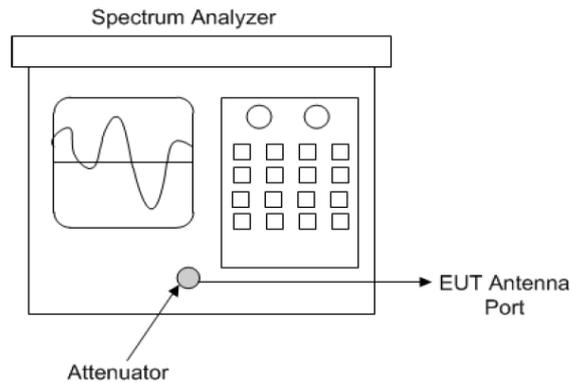

Spectrum analyzer test configuration

3.4.3 Test Instruments

Refer to section 5 to get information of above instrument.

3.4.4 Test Procedure

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the instrument equal to the highest peak value.
- Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
- Repeat above procedures until all frequencies measured were complete.

3.4.5 Deviation from Test Standard

No deviation.

3.4.6 EUT Operating Condition

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.



3.4.7 Test Results


Channel	Frequency (MHz)	20dB Bandwidth (MHz)	
		GFSK	8DPSK
0	2402	0.969	1.278
39	2441	0.960	1.290
78	2480	1.032	1.296





3.5 Occupied Bandwidth Measurement

3.5.1 Test Setup

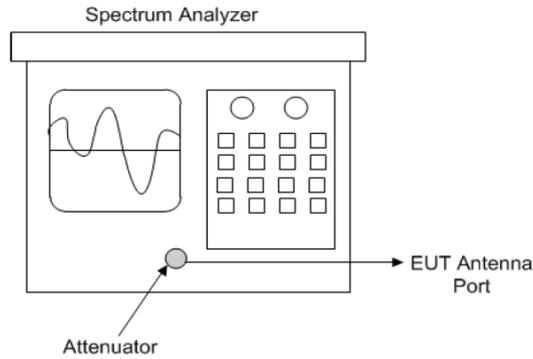

Spectrum analyzer test configuration

3.5.2 Test Instruments

Refer to section 5 to get information of above instrument

3.5.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to PEAK. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean power of a given emission.

3.5.4 Deviation from Test Standard

No deviation.

3.5.5 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



3.5.6 Test Results

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		GFSK	8DPSK
0	2402	0.883	1.201
39	2441	0.882	1.199
78	2480	0.906	1.173



Lab: [Hwa-Hsing \(Dongguan\) Testing Co., Ltd.](#)
 Address: [No.101, Bld N1, Yuyuan 2Rd, Yuyuan Industrial Park, HuangJiang Town, Dongguan, China](#)

Tel: [0769-83078199](tel:0769-83078199)
 Web.: www.hwa-hsing.com
 E-Mail: customerservice.dg@hwa-hsing.com

Release
 Ver. 1.5




3.6 Hopping Channel Separation

3.6.1 Limits of Hopping Channel Separation Measurement

At least 25 kHz or two-third of 20 dB hopping channel bandwidth (whichever is greater).

3.6.2 Test Setup

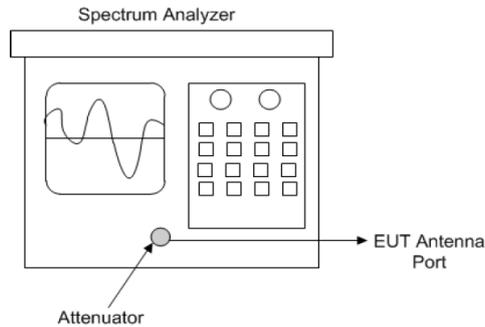

3.6.3 Test Instruments

Refer to section 5 to get information of above instrument.

3.6.4 Test Procedure

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
- By using the MaxHold function record the separation of two adjacent channels.
- Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
- Repeat above procedures until all frequencies measured were complete.

3.6.5 Deviation from Test Standard


No deviation.



3.6.6 Test Results

Channel No.	Frequency (MHz)	Adjacent Channel Separation (MHz)		Minimum Limit (MHz)		Pass / Fail
		GFSK	8DPSK	GFSK	8DPSK	
0	2402	0.999	0.996	0.646	0.852	Pass
39	2441	0.993	0.996	0.640	0.860	Pass
78	2480	0.999	0.996	0.688	0.864	Pass

Note: The minimum limit is two-third 20 dB bandwidth.

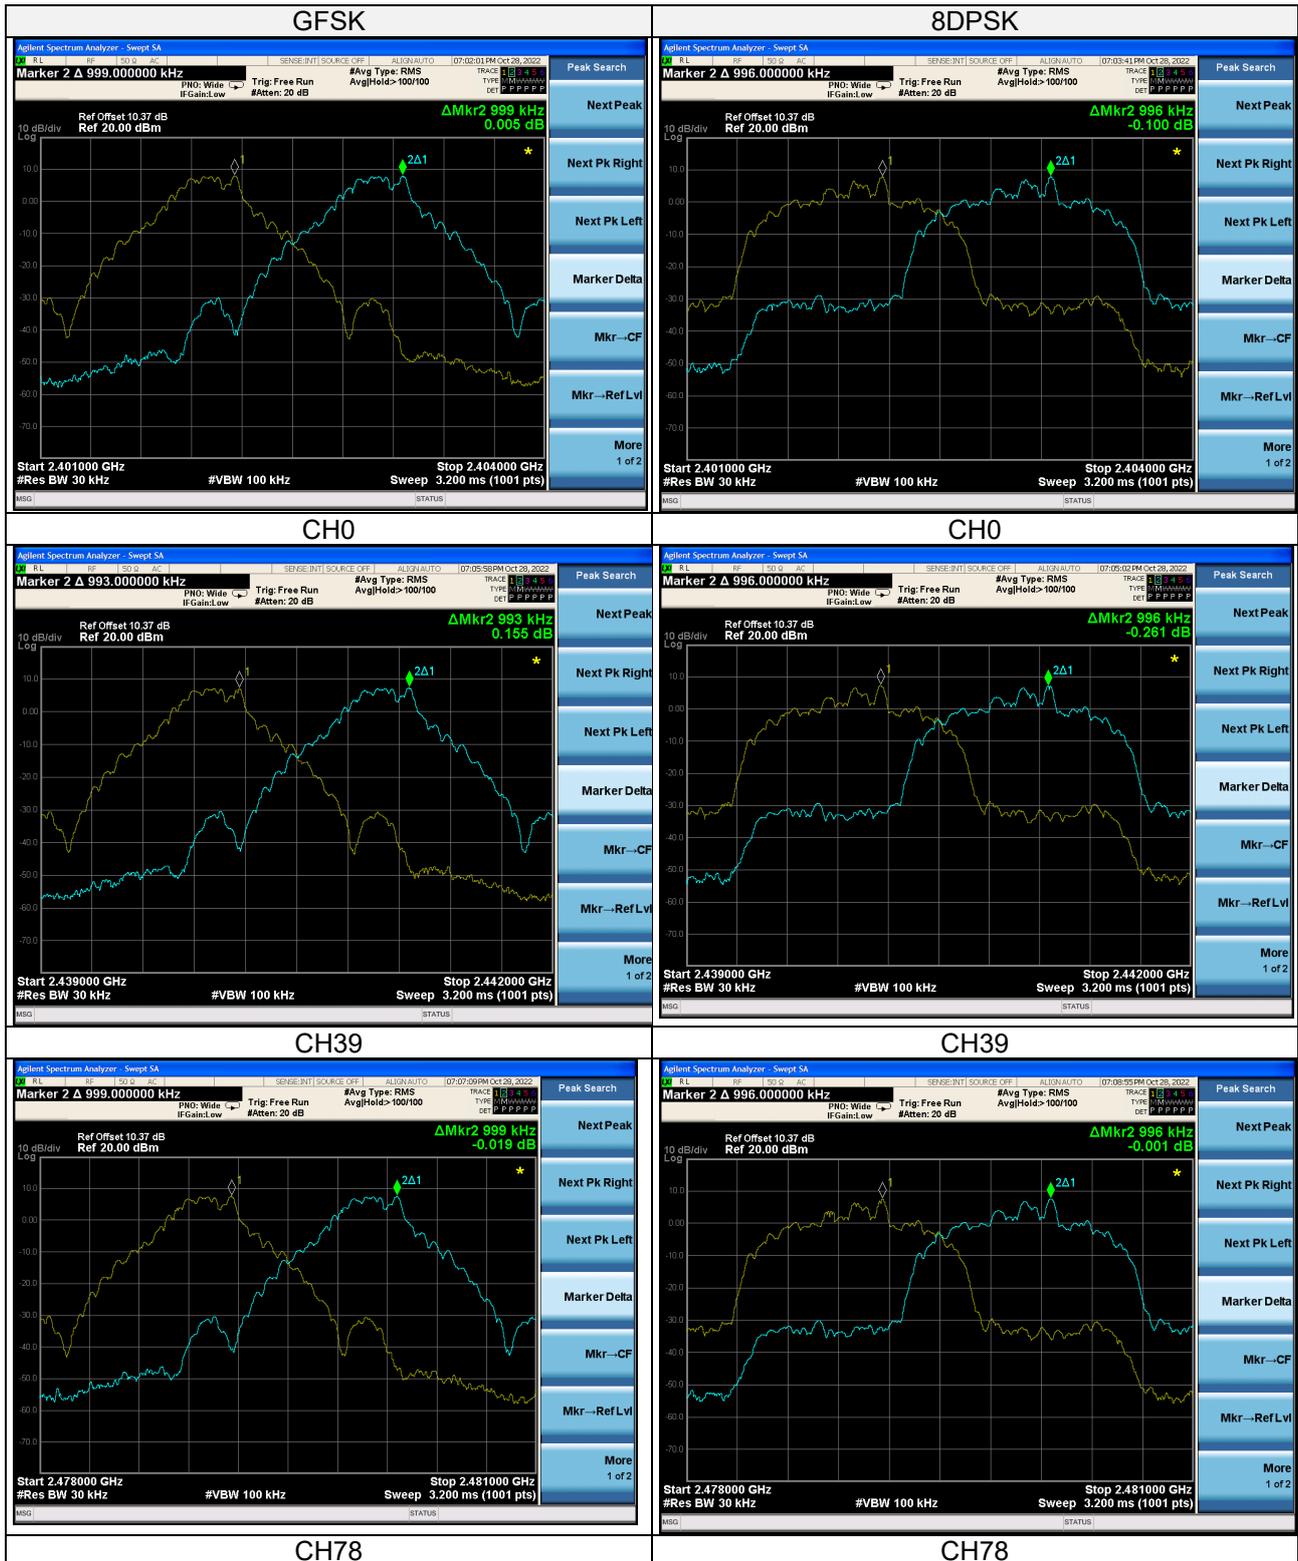




3.7 Maximum Output Power

3.7.1 Limits of Maximum Output Power Measurement

The Maximum Output Power Measurement is 125mW.

3.7.2 Test Setup

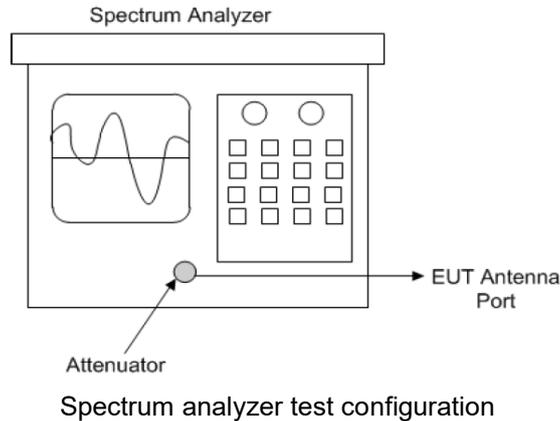

3.7.3 Test Instruments

Refer to section 5 to get information of above instrument.

3.7.4 Test Procedure

Measurement using a spectrum analyzer (SA), Selection of test method:

Maximum peak conducted output power

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

- a) Set the RBW > DTS bandwidth.
- b) Set VBW > [3 x RBW]
- c) Set span > [3 x RBW]
- d) Sweep time = auto couple.
- e) Detector = peak
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.



Maximum conducted (average) output power

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c) SA Setting:
 - 1)* Set span to at least 1.5 times the OBW
 - 2)* Set sweep trigger to "free run."
 - 3)* Set RBW= 1% to 5% of the OBW. not to exceed 1MHz.
 - 4)* Set VBW $\geq 3 \times$ RBW
 - 5)* Number of points in sweep $\geq 2 \times$ span /RBW. (This gives bin-to-bin spacing \leq RBW / 2. so that narrowband signals are not lost between frequency bins).
 - 6)* Sweep time \leq (number of points in sweep) x T. where T is defined in 11.6. If this gives a sweep time less than the auto sweep time of the instrument. then method AVGSA-3 shall not be used (use AVGSA-3A). The purpose of this step is so that the averaging time in each bin is less than or equal to the minimum time of a transmission.
 - 7)* Detector =RMS (power averaging).
 - 8)* Trace mode =Max hold.
 - 9)* Allow max hold to run for at least 60 s or longer as needed to allow the trace to stabilize.
 - 10)* Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function. then sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW.
- d. Measure the captured power within the band and recording the plot.
- e. Repeat above procedures until all frequencies required were complete.

3.7.5 Deviation from Test Standard

No deviation.

3.7.6 EUT Operating Condition

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.



3.7.7 Test Results

Peak power


Channel No.	Freq. (MHz)	Output Power (dBm)		Output Power (mW)		Power Limit (mW)	Pass / Fail
		GFSK	8DPSK	GFSK	8DPSK		
0	2402	8.556	8.579	7.171	7.209	125	Pass
39	2441	7.894	7.934	6.157	6.214	125	Pass
78	2480	8.146	8.263	6.525	6.703	125	Pass

Average power

Channel No.	Freq. (MHz)	Output Power (dBm)		Output Power (mW)		Power Limit (mW)	Pass / Fail
		GFSK	8DPSK	GFSK	8DPSK		
0	2402	6.150	4.410	4.121	2.761	125	Pass
39	2441	5.790	4.110	3.793	2.576	125	Pass
78	2480	5.990	4.270	3.972	2.673	125	Pass




Peak Power Spectrum Plot

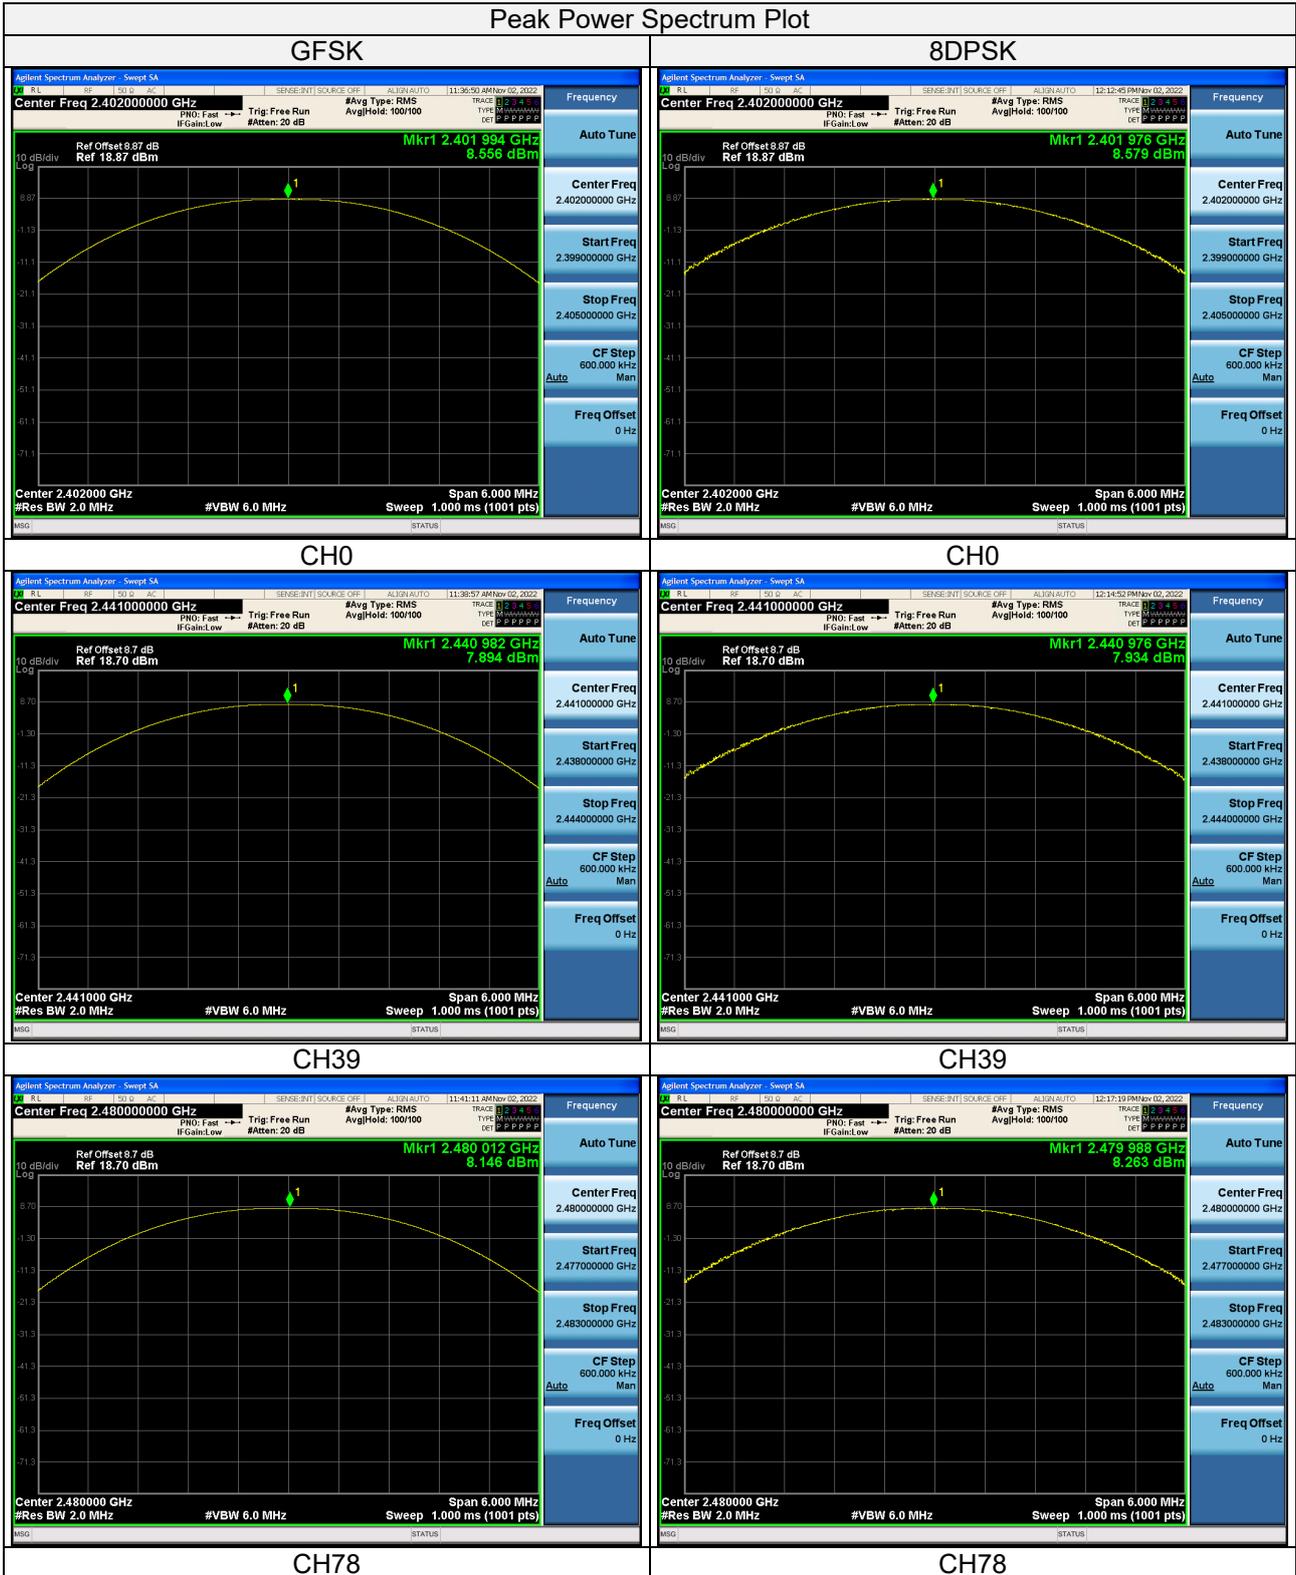



Average Power Spectrum Plot

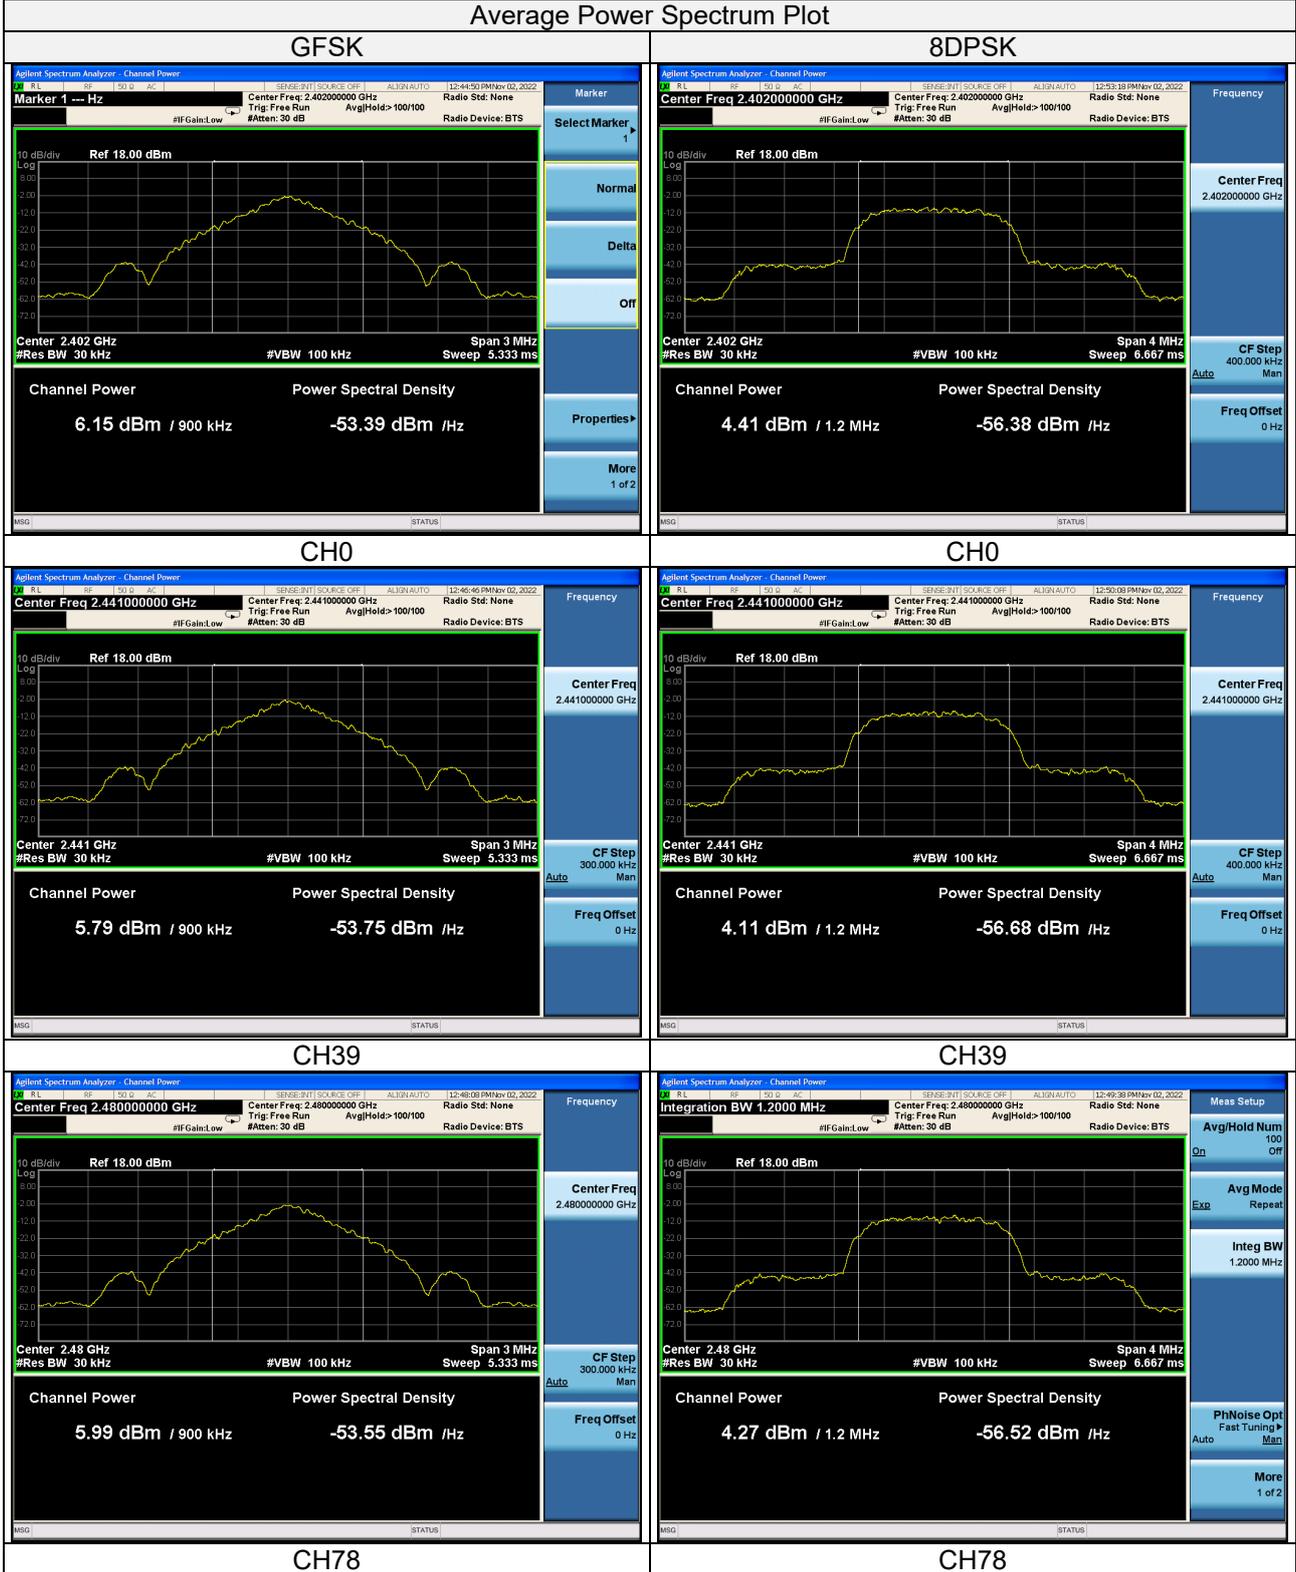




3.8 Conducted Out of Band Emission Measurement

3.8.1 Limits of Conducted Out of Band Emission Measurement

- a. **If the maximum peak conducted output power procedure was used to determine compliance as described in 11.9.1**, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).
- b. **If maximum conducted (average) output power was used to determine compliance as described in 11.9.2**, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc)

3.8.2 Tets Setup

- DTS emissions in non-restricted frequency bands Subclause 11.11 of ANSI C63.10 is applicable.
- DTS emissions in restricted frequency bands Subclause 11.12 of ANSI C63.10 is applicable

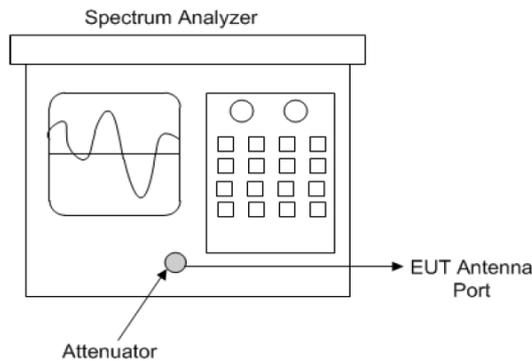

Spectrum analyzer test configuration

3.8.3 Test Instruments

Refer to section 5 to get information of above instrument.



3.8.4 Test Procedure

- a. Establish a reference level by using the following procedure:
- 1) Set instrument center frequency to DTS channel center frequency.
 - 2) Set the span to 21.5 times the DTS bandwidth)
 - 3) Set the RBW= 100 kHz)
 - 4) Set the VBW $\geq 3 \times$ RBW
 - 5) Detector = peak
 - 6) Sweep time = auto coupling
 - 7) Trace mode =max hold
 - 8) Allow trace to fully stabilize
 - 9) Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

- b. Establish an emission level by using the following procedure:
- 1) Set the center frequency and span to encompass frequency range to be measured.
 - 2) Set the RBW = 100 kHz
 - 3) Set the VBW ≥ 300 kHz.
 - 4) Detector = peak.
 - 5) Sweep time = auto couple.
 - 6) Trace mode = max hold.
 - 7) Allow trace to fully stabilize.
 - 8) Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

3.8.5 Deviation from Test Standard

No deviation.


3.8.6 EUT Operating Condition

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.



3.8.7 Test Results


The spectrum plots are attached on the following images. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

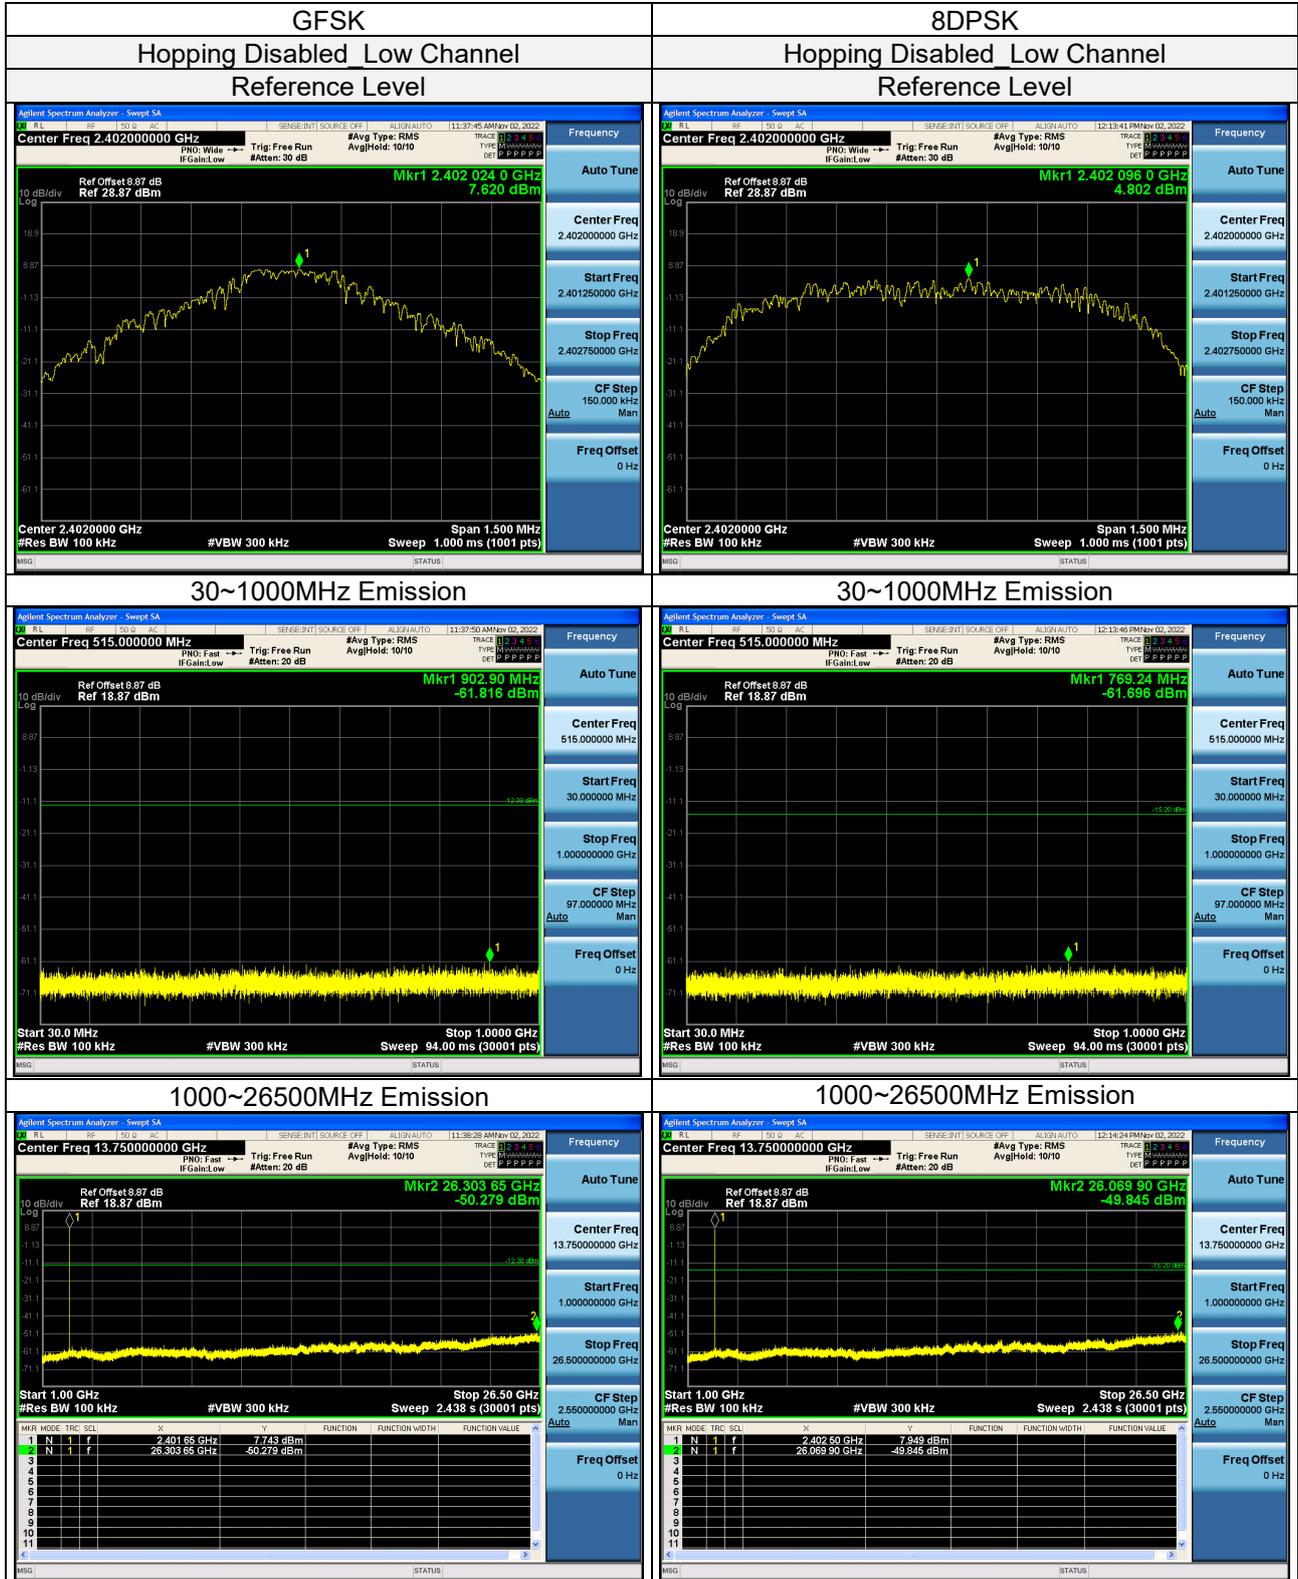

Lab: [Hwa-Hsing \(Dongguan\) Testing Co., Ltd.](#)
 Address: [No.101, Bld N1, Yuyuan 2Rd, Yuyuan Industrial Park, HuangJiang Town, Dongguan, China](#)

Tel: [0769-83078199](tel:0769-83078199)
 Web.: www.hwa-hsing.com
 E-Mail: customerservice.dg@hwa-hsing.com


Release
 Ver. 1.5

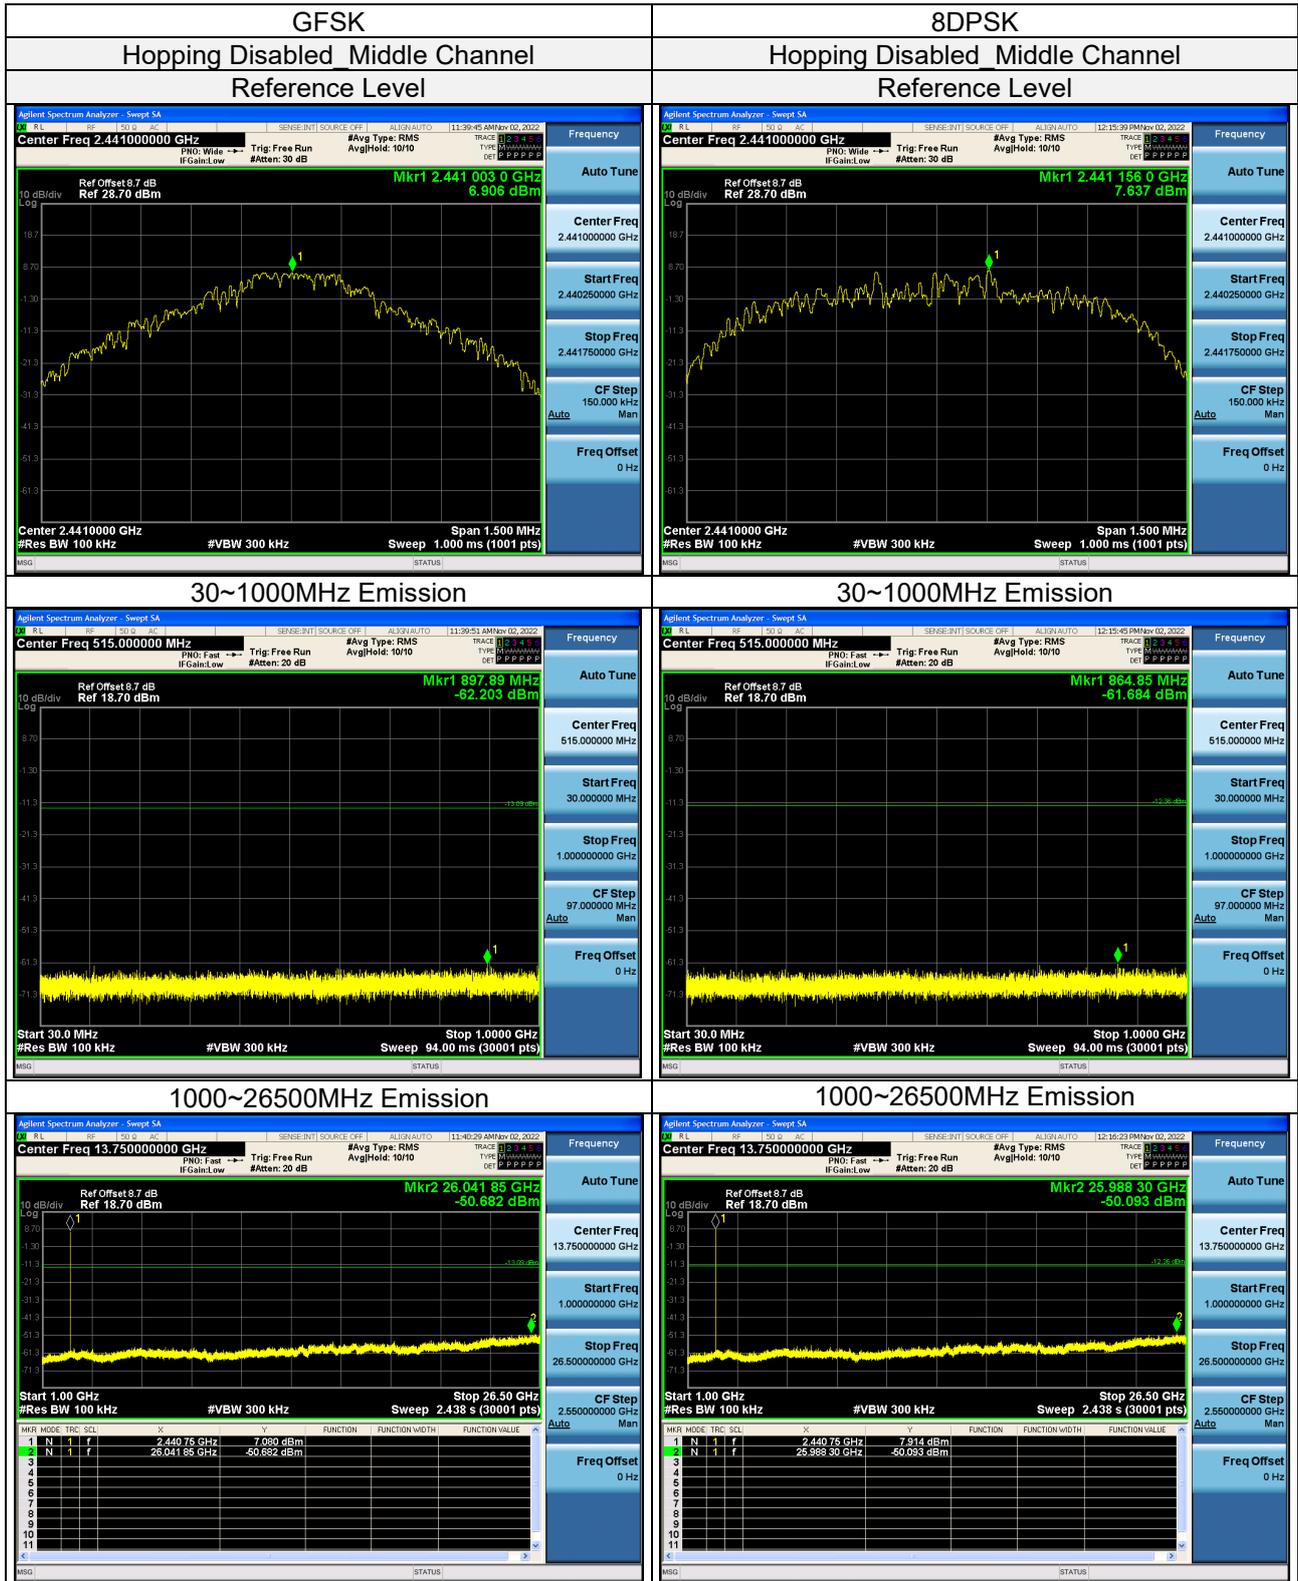

Lab: [Hwa-Hsing \(Dongguan\) Testing Co., Ltd.](#)
Address: [No.101, Bld N1, Yuyuan 2Rd, Yuyuan Industrial Park, HuangJiang Town, Dongguan, China](#)

Tel: [0769-83078199](tel:0769-83078199)
Web: www.hwa-hsing.com
E-Mail: customerservice.dg@hwa-hsing.com


Release [Ver. 1.5](#)

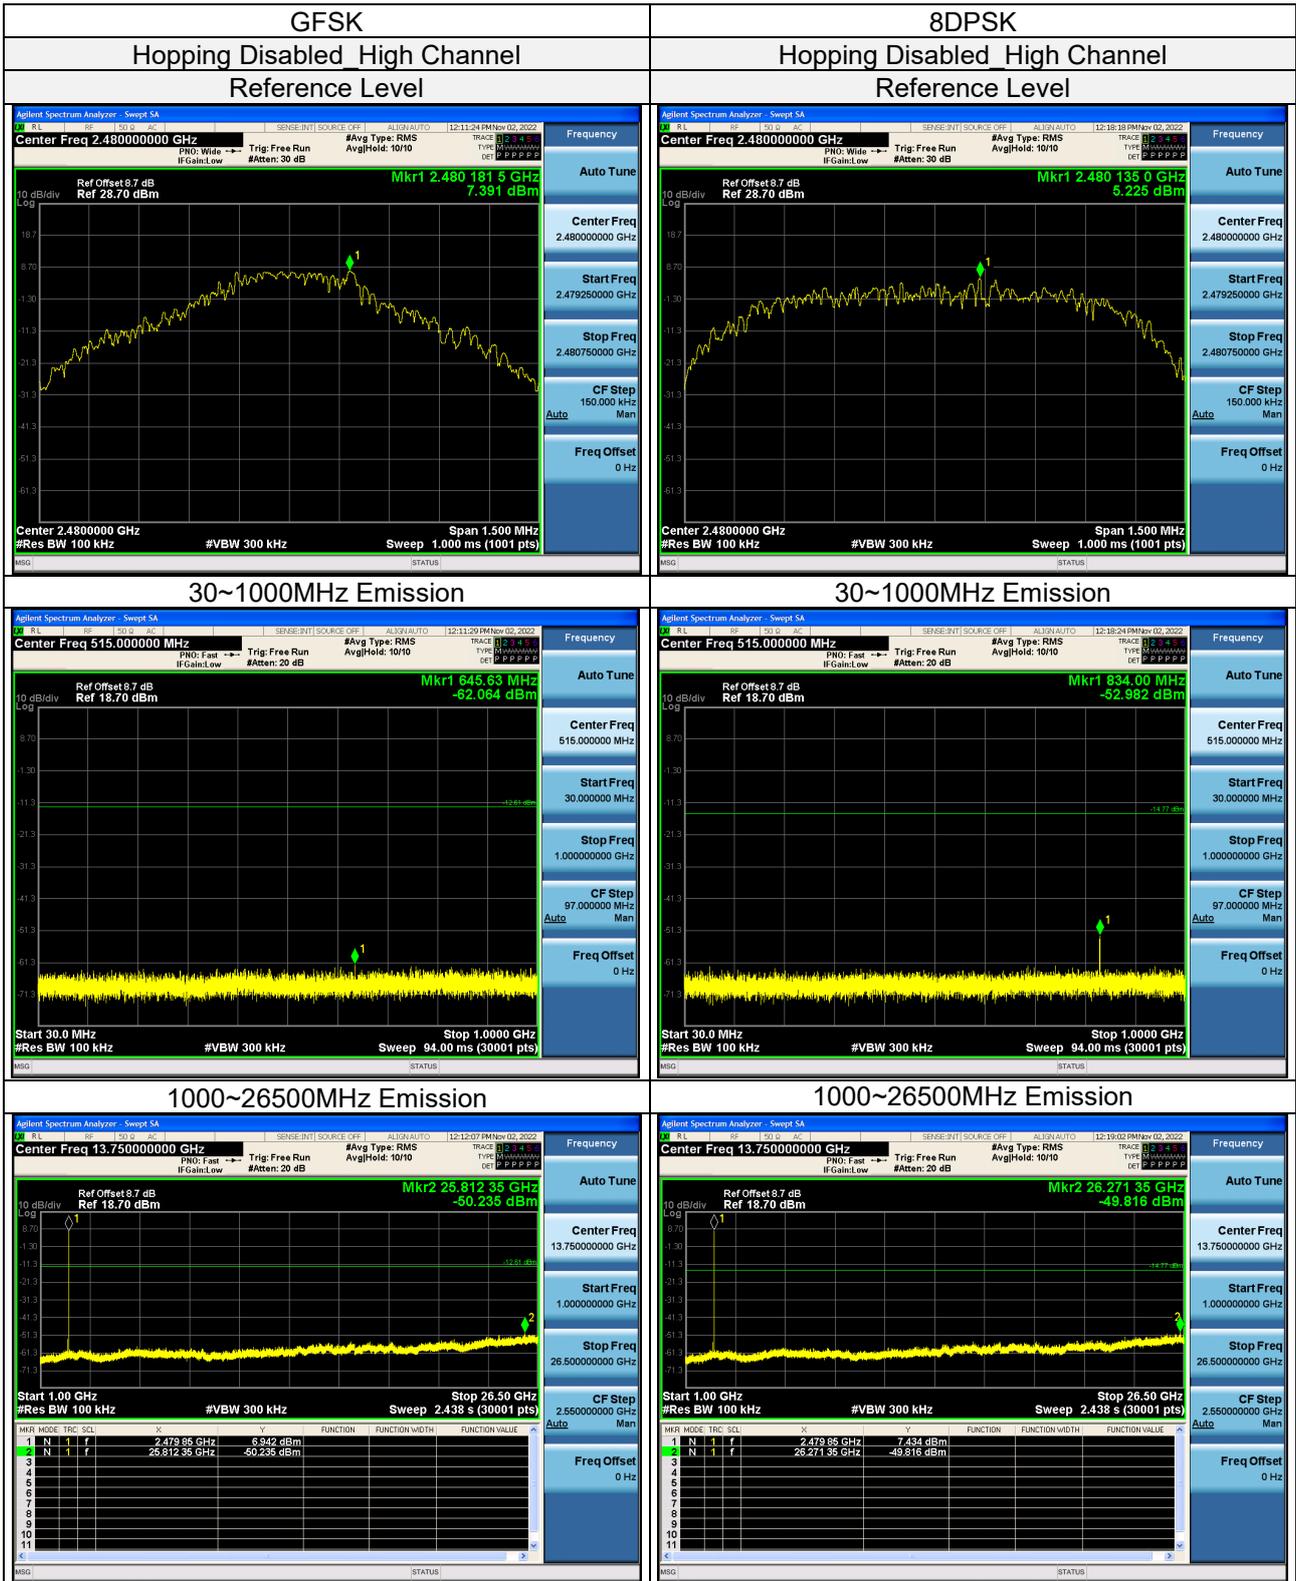

Lab: [Hwa-Hsing \(Dongguan\) Testing Co., Ltd.](#)
Address: [No.101, Bld N1, Yuyuan 2Rd, Yuyuan Industrial Park, HuangJiang Town, Dongguan, China](#)

Tel: [0769-83078199](tel:0769-83078199)
Web: www.hwa-hsing.com
E-Mail: customerservice.dg@hwa-hsing.com


Release
[Ver. 1.5](#)

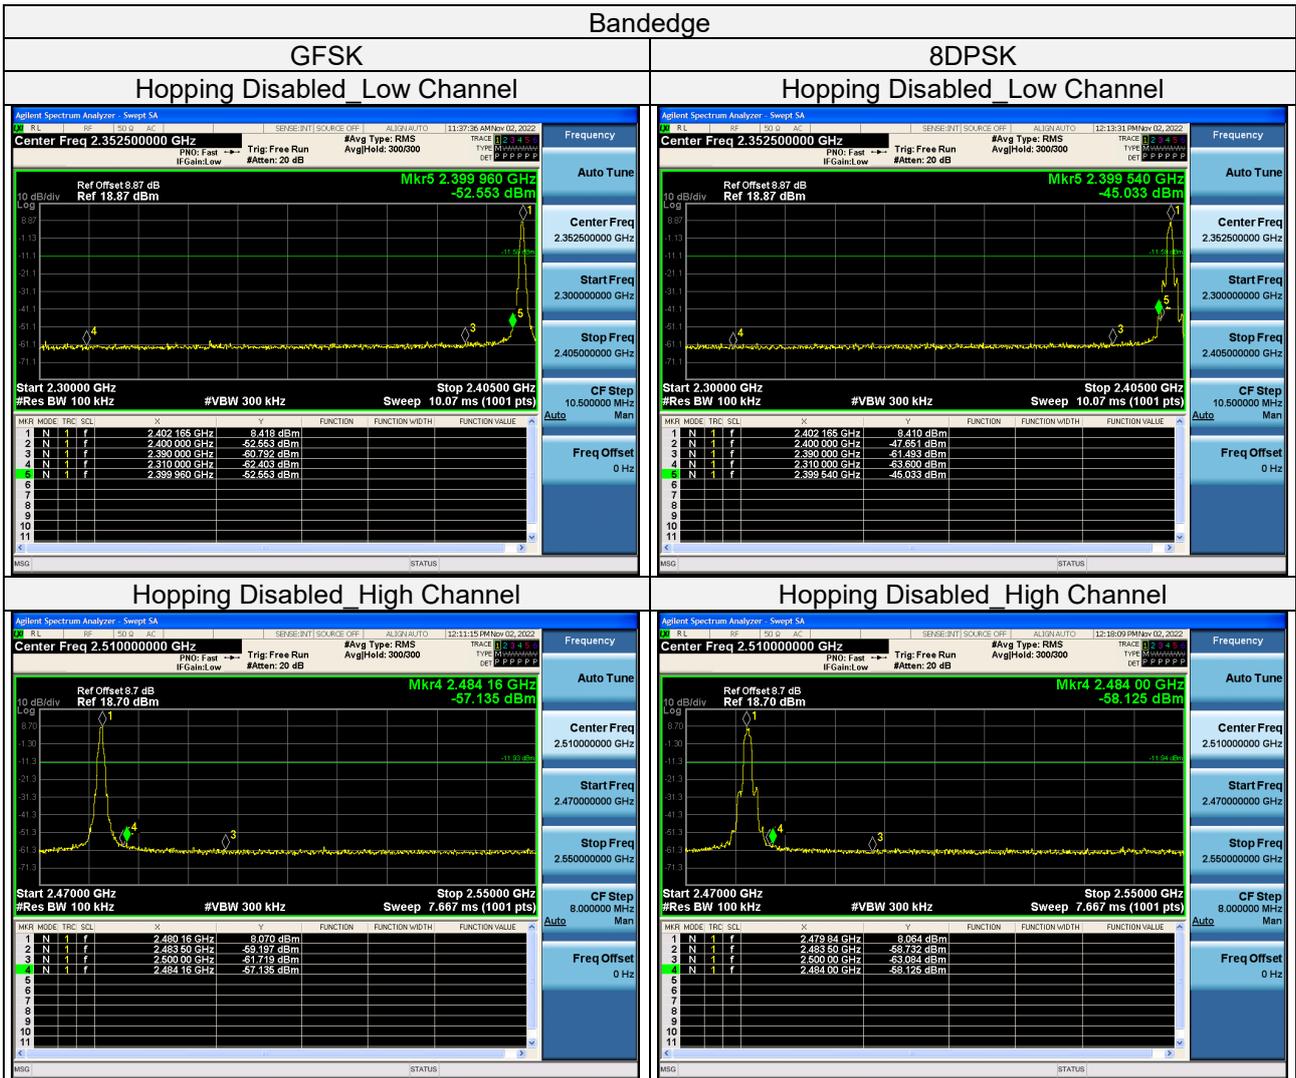

Lab: Hwa-Hsing (Dongguan) Testing Co., Ltd.
Address: No.101, Bld N1, Yuyuan 2Rd, Yuyuan Industrial Park, HuangJiang Town, Dongguan, China

Tel: 0769-83078199
Web: www.hwa-hsing.com
E-Mail: customerservice.dg@hwa-hsing.com

Release Ver. 1.5

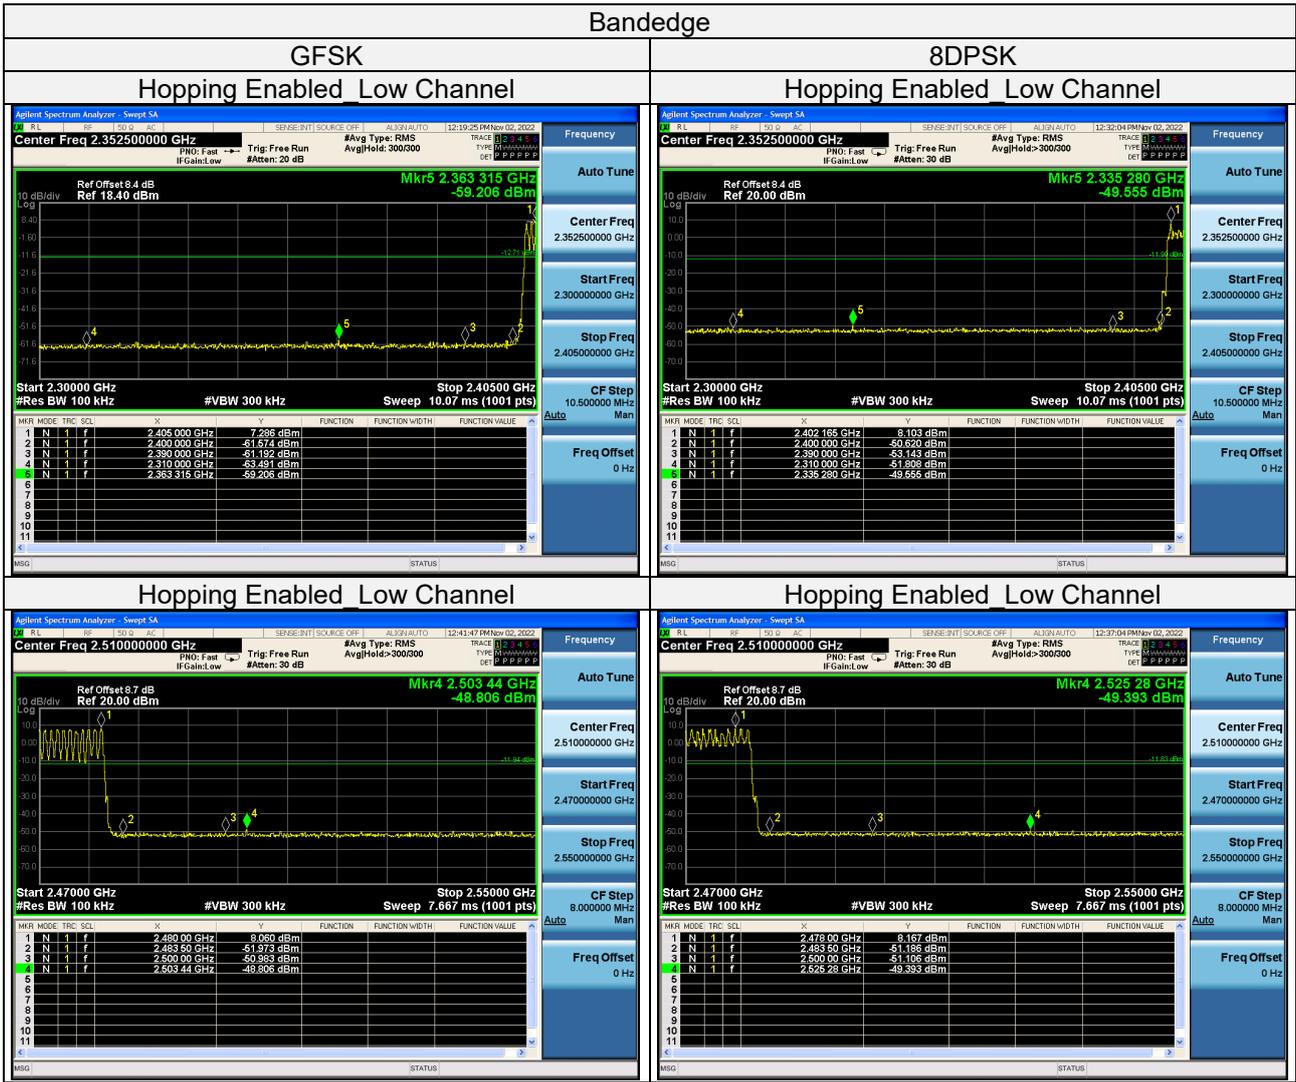



HWA-HSING Test Report No.: 220805EL02-RF-US-01

4 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).



5 Test Instruments

Description	Manufacturer	Model No.	Serial No.	Due Date of Calibration
Spectrum	Keysight	N9020A	MY51240612	2023-08-25
Spectrum Analyzer	Rohde&Schwarz	FSV-40N	101783	2023-01-12
Power Meter 10Hz~18GHz	Tonscend	JS0806-2	188060126	2023-08-25
Signal generator	Keysight	E4421B	GB40051020	2023-08-25
Signal generator	Keysight	N5182A	MY47420944	2023-08-25
Test Software	Tonscend	JS0806-2	NA	NA
Hygrothermograph	Yuhuaze	HTC-1	NA	2023-08-25

Note: 1. The calibration interval of the above test instruments is 12 months.
2. The test was performed in Chamber.



HWA-HSING Test Report No.: 220805EL02-RF-US-01

Appendix – Information on the Testing Laboratories

We, [Hwa-Hsing \(Dongguan\) Co., Ltd.](#), A global provider of TESTING and CERTIFICATION services for consumer products, electronic products and wireless information technology products. Adhering to the core values “HONEST and TRUSTWORTHY, OBJECTIVE and IMPARTIALITY, RIGOROUS and AFFICIENT”, commitment to provide professional, perfect and efficient comprehensive ONE-STOP solution of TESTING and CERTIFICATION services for Manufacturers, Buyers, Traders, Brands, Retailers. Assist client to better manage risk, protect their brands, reduce costs and cut time to over 150 markets in global. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lab Address: [No.101, Bld N1, Yuyuan 2Rd, Yuyuan Industrial Park, HuangJiang Town, Dongguan, China](#)

Contact Tel: [0769-83078199](tel:0769-83078199)

Email: Customerservice.dg@hwa-hsing.com

Web Site: www.hwa-hsing.com

The address and road map of all our labs can be found in our web site also.

--- END ---