

# WinCheck™ S2

Service Manual  
90-230071-01  
Baseline

WinCheck™ S2  
July 2023

Technology Training and Support Services  
10 Memorial Boulevard, Providence, RI 02903 USA



---

## WinCheck™ S2 - Service Manual

### Warranty

Information in this document is subject to change without notice and does not represent a commitment on the part of IGT, a wholly owned subsidiary of IGT. No part of this manual may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, for any purpose other than the purchaser's personal use without written permission of IGT.

Nothing contained in this document shall be construed as a warranty. The warranty, if any, for a product shall be contained in the contract with IGT for the purchase, lease or license of the product. ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT, ARE HEREBY DISCLAIMED. IN NO EVENT SHALL IGT BE LIABLE FOR DIRECT, INDIRECT, INCIDENTAL, PUNITIVE OR CONSEQUENTIAL DAMAGES, INCLUDING BUT NOT LIMITED TO LOSS OF USE, REVENUE OR PROFITS.

### Hardware Warning!

The following servicing instructions and/or information is for use by **QUALIFIED PERSONNEL ONLY**.

### Third-Party Trademarks

All other trademarks and registered trademarks are the property of their respective owners, without intent to infringe.

### Hardware Trademark and Copyright Information

© 2023 IGT. All rights reserved.

Certain trademarks and/or service marks used herein are the property of their respective third party owners. The use of such marks herein is for identification purposes only, and does not imply an endorsement by IGT of the mark owner, or vice-versa, or that such mark owner has authorized IGT to promote its products and/or services.

### Contact Information

IGT  
10 Memorial Boulevard  
Providence, Rhode Island 02903  
1-401-392-1000

IGT Support  
1-866-777-8448



### We Appreciate Your Ideas!

Help the IGT team hit the jackpot. Please send your feedback to [Support@igt.com](mailto:Support@igt.com) Give it to us straight – We appreciate your input.

---

# Table of Contents

<b>Chapter 1 Introduction</b>	<b>5</b>
Overview	5
Product Notes for Field Services	6
Controller Board	6
3.5" LCD/Capacitive Touchscreen	6
Audio Indicator	6
2D Barcode Scanner	6
Environmental Specification	7
Electrical Specification	8
Communications Specification	8
Mechanical Specification	8
External Ports	9
<b>Chapter 2 Installation</b>	<b>11</b>
Counter-Mount Installation	11
Wall-Mount Installation	14
<b>Chapter 3 Diagnostics</b>	<b>17</b>
Required Equipment for the USB Method	17
Diagnostics Tests	17
Device Information	19
Peripheral Test	19
Configuration	20
Firmware update from USB	21
*** Reboot ***	22
<b>Chapter 4 Download</b>	<b>23</b>
Downloading WinCheck S2 Firmware Using Terminal Diagnostics	23
Downloading WinCheck S2 Firmware Using WinCheck S2 Standalone Diagnostics	23
<b>Chapter 5 Configuration</b>	<b>25</b>
Wired Configuration	26
Wireless Configuration	26
Multiple Counter-Top Terminals in Same Location - Wireless Configuration	27
<b>Chapter 6 Operation</b>	<b>31</b>
<b>Chapter 7 Hardware</b>	<b>33</b>
Required Tools	34
Removing the Main Controller Board	34
Removing the Barcode Scanner Engine	36
Removing the LCD Assembly	37
<b>Chapter 8 Troubleshooting</b>	<b>39</b>
Troubleshooting Techniques—The Seven-Step Troubleshooting Method	39
Step One: Identify the Problem	39
Step Two: Determine Related Symptoms	40
Step Three: Analyze the Symptoms	40
Step Four: Isolate the Problem	41
Step Five: Correct the Problem	42
Step Six: Verify the Correction	42

---

Step Seven: Document the Process .....	42
Troubleshooting Worksheet .....	43
General Troubleshooting .....	45
<b>Chapter 9 Preventive Maintenance .....</b>	<b>49</b>
Cleaning Materials .....	49
External Cleaning .....	49
When You Are Finished .....	49
<b>Chapter 10 Handling Precautions .....</b>	<b>51</b>
What is ESD? .....	51
Becoming "Static Safe" .....	51
ESD-Induced Failure Modes .....	52
Radiated Electromagnetic Fields .....	52
Conducted Charges .....	52
Typical Symptoms of ESD Damage .....	52
Common False Assumptions Concerning ESD .....	52
ESD Precautions Checklist .....	53
Recommended Devices .....	53
Precautionary Practices .....	53
Recommended Handling - Example .....	54
Proper Grounding Technique .....	54
IGT Manufacturing Specification .....	55
Packaging .....	55
General Packaging Procedures .....	55
<b>Chapter 11 Diagrams .....</b>	<b>57</b>
<b>Chapter 12 Spare Parts and Tools .....</b>	<b>59</b>
<b>Chapter 13 Product Safety &amp; Approvals .....</b>	<b>61</b>
Safety Instructions .....	61
Model Rating Label .....	62
FCC .....	62
FCC Radiation Exposure Statement .....	62
Industry Canada .....	63
European Union .....	63
Wireless Device Option .....	63



# Chapter 1 Introduction

## Overview

The WinCheck™ S2 is IGT's next generation customer ticket checker and optionally as a digital play device ([[Undefined variable Ticket\_Scan\_Plus.CC Product]]). The device consists of an integrated barcode scanner and LCD touchscreen player display.

- As a customer ticket checker, players may check their printed ticket for a winning status by placing the ticket in view of the barcode scanner to scan the barcode.
- As a digital play device, players additionally may check their printed tickets as described above.

The WinCheck S2 connects to a retailer terminal, either wired via a Netgear router or wireless via Wi-Fi card mounted on the counter-top terminal's motherboard, which in turn communicates with the host system. Status messages are communicated from the host through the retailer terminal and to the WinCheck S2 to be displayed to the player. Up to three (3) devices can be connected to each retailer counter-top terminal.



**Figure 1-1 WinCheck S2 with Optional Counter Mount**

The WinCheck S2 includes the following components:

- 2D Barcode Scanner (Zebra SE4107)
- 3.5" LCD Capacitive Touchscreen Display
- Controller Board
- Audio Indicator
- Wired Communications

Options include:

- WiFi Communications

## Product Notes for Field Services

The WinCheck S2 serial number prefix indicates the mechanical configuration of the devices and what they are used for.

The WinCheck S2 has serial number prefixes of:

- WB meaning you can only connect using a Wired/Ethernet cable.
- WW meaning you can connect either by Wired/Ethernet or a Wi-Fi connection.

## Controller Board

The 51-XXXX-01E is the controller board for the WinCheck S2. The main chip is a Cortex-A7 @900 MHz RAM1Gb DDR3L.

## 3.5" LCD/Capacitive Touchscreen

The WinCheck S2 utilizes a 5" backlit LCD/capacitive touchscreen. The display brightness is adjusted automatically depending on the environment.

## Audio Indicator

The audio output in this device is generated by an audio transducer with a rated frequency of 2,000 Hz. The sound produced is a series of beeps and clicks which are controlled through software. The sound output is as follows:

Beep Setting	Sound Output (dB) @ 1 ft. distance	Sound Output (dB) @ 2 ft. distance
High	66	48
Low	59	42

## 2D Barcode Scanner

The WinCheck S2 utilizes the Zebra SE4107 scan engine. This device is capable of scanning barcodes on tickets and smartphones including 1D, 2D, PDF, and QR codes. The scanner is motion activated and utilizes warm white LCD illumination and a green LED aimer.

# Environmental Specification

The WinCheck S2 adheres to the following environmental requirements:

<b>Storage Environment</b>	Temperature	-20°C to 60°C (-4°F to 140°F)
	Humidity	10% to 95%, non-condensing
<b>Operating Environment</b>	Temperature	0°C to 45°C (32°F to 113°F)
	Humidity	10% to 90%, non-condensing

## Electrical Specification

The power adapter used to power the WinCheck S2 is a Universal switchable pack adapter (5V 2A DC Jack) with power cable. An adapter for international use (EU/AU/UK) is available.



US Power



International Power Adapter


## Communications Specification

The WinCheck S2 communicates with the host via the retailer terminal either wired to the ETH1 port on the terminal (directly or through an Ethernet switch), or wirelessly via a wireless module (WiFi 2.4G / 5G /BLE 5.0).

## Mechanical Specification

The approximate weight of the WinCheck S2 is X.X lbs.

The following dimensions are for the WinCheck S2 in a Counter Mount Base.

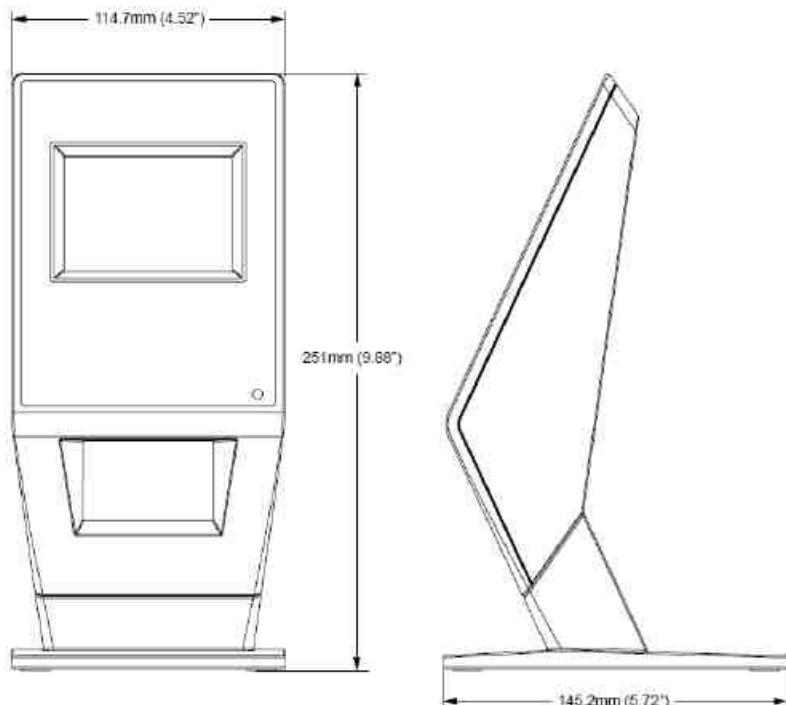

Height	9.88" (251mm)
Width	4.52" (114.7mm)
Depth	5.72" (145.2mm)

## External Ports

The external ports are physical connections on the back of the WinCheck S2..



1—Ethernet (RJ45)

2—USB-B

3—Power

*This page is intentionally left blank.*



## Chapter 2 Installation

This chapter details the procedure for installing a WinCheck S2 device into a retailer location with wired or wireless (WIFI) communications and counter-mounted or wall-mounted.

The configuration of the WinCheck S2 needs to be performed prior to the physical installation on wall mount or counter-top base.

For wired configurations:

- If there is only one (1) WinCheck S2 being connected to one (1) retailer counter-top terminal, no configuration on either product needs to be configured.
- If there are more than one retailer counter-top terminal in one location using a wireless configuration, the counter-top terminal as well as the WinCheck S2 need to be configured.

Refer to *Configuration* on page 25 for more information.

Before beginning the installation process for the WinCheck S2, verify that there is a fully functioning clerk-operated lottery terminal already operating at the site.



*Please check with your site for the preferred and allowable installation options.*

### Counter-Mount Installation

1	Plug in the cables.
2	Route the Ethernet cable along the channel, if applicable.
3	Route the power cable along the channel.
4	Hook the lip on the top of the mount into top rear of the WinCheck S2.
5	Secure with two (2) screws.

The power cord and Ethernet cable (if applicable) for wired communications must be properly routed on the back of the device prior to attaching to the counter-top base or wall mount.




*Due to the length of the power cord, the WinCheck S2 must be installed within a distance of 7' 11" to a power outlet.*

1. If using a counter-top base, insert the power and Ethernet (if applicable) cables through the base first.
2. Plug the power cord into the power port.
3. Plug the Ethernet cable into RJ45 port (if applicable).



4. Route and secure the cables down the cable retention guides on the back of the device as shown. Allow some slack for the cord to best be able to secure it into the guides.

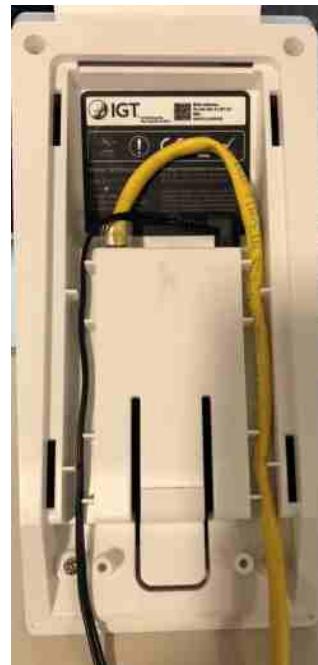



5. Place the device onto the base by inserting the tab on the base into the slot opening on the top rear of the device.
6. Install the device onto the base by inserting the back of the bezel onto the tab on the base and gently sliding down.




7. Secure the WinCheck S2 to the cover on the base with the two (2) screws provided.
8. Install the Ethernet cable to the ETH port 1 of the retailer terminal in the retailer location or Ethernet switch depending on the configuration. (TBD-Subject to change)
9. Continue to *Configuration* on page 25, if necessary.

Once installed the WinCheck S2 may be powered on.



*It takes +/- 10 seconds from power up for the blue display screen to appear. The blue screen remains static for 3 seconds and then the IGT splash screen is displayed.*

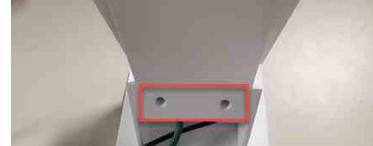

## Wall-Mount Installation

Following your local site specific procedures to secure the wall mount to the wall using four (4) screws. The power cord and ethernet cable for wired communications must be properly routed on the back of the device prior to attaching the wall mount.



*Due to the length of the power cord, the WinCheck S2 must be installed within a distance of 7' 11" feet to a power outlet.*

*The WinCheck S2 cannot be placed higher than 6.56 feet (2 meters) with a wall mount bracket. The wall mount needs to be less than 6.56 feet (2 meters), measured from the floor to the bottom of the WinCheck S2. For ADA compliance, a maximum height is 48" from floor.*



1. Attach Wall Mount Plate to wall with 4 screws.



*The hole pattern is not the same as original WinCheck device.*

2. Connect the cable(s).



3. Route the cable(s) along this channel.

4. Place the WinCheck S2 onto the two (2) tabs then push in the bottom to lock in place.
5. Continue to *Configuration* on page 25, if necessary.

Once installed the WinCheck S2 may be powered on.



*It takes +/- 10 seconds from power up for the blue display screen to appear. The blue screen remains static for 3 seconds and then the IGT splash screen is displayed.*

*This page is intentionally left blank.*



## Chapter 3 Diagnostics

### Required Equipment for the USB Method

In order to perform the internal diagnostic test for the WinCheck S2, the following equipment is required:

- Fat-32 Formatted USB-named DEBUGPLUG (for dowloading firmware manually)
- Pre-printed Barcoded Ticket (for testing barcode scanner)
- USB Type B Male to Type A Female Adapter Data Extension Cable (required when using DEBUGPLUG)

### Diagnostics Tests

There are two ways to enter the WinCheck™S2 Standalone Diagnostics:

- **Option 1:** While the WinCheck S2 is powering up and displaying the IGT logo splash screen (shown in the following image), touch the display panel at least once per second (for approximately 30 seconds).




- **Option 2:** Using an USB device.



*This same USB Storage device may also be used to load the WinCheck S2 with new firmware.*

1. Insert the FAT32-formatted USB storage device labeled DEBUGPLUG into an extension cable and connect it to the WinCheck S2, as shown in the image that follows.

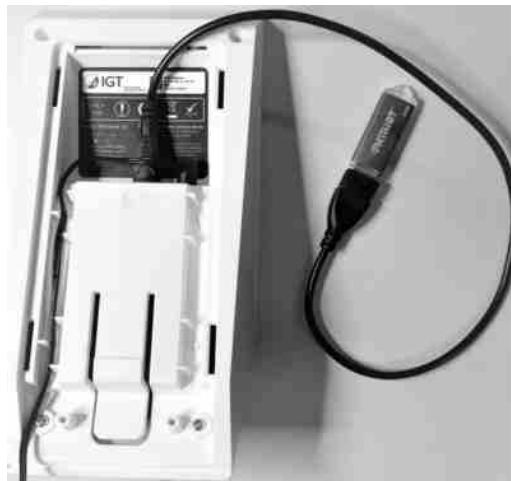

2. Power up the WinCheck S2. The *Password* screen appears.



3. Enter the password 2022101010 and touch **OK**.



4. The password is verified and the *Main Menu* appears.

The diagnostics tool *Main Menu* displays once in standalone diagnostics mode.



Menu options include:

- *Device Information* on page 19
- *Peripheral Test* on page 19
- *Configuration* on page 20
- *Firmware update from USB* on page 21
- *\*\*\* Reboot \*\*\** on page 22


## Device Information

Touch **Device information** to view the device's firmware version, and eth0/wlan0 IP addresses. Touch <BACK to return to the *Main Menu*.



## Peripheral Test

Touch **Peripheral test** to test device components. Touch <BACK to return to the *Main Menu*.

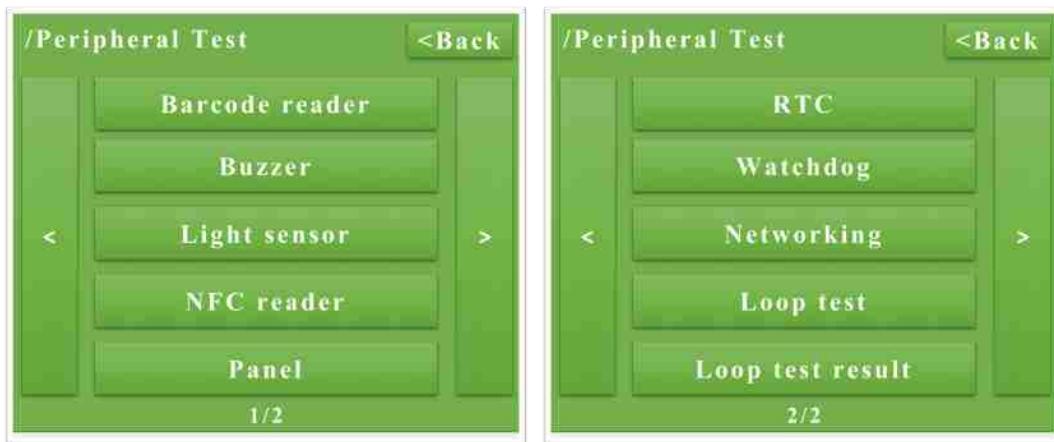

Tests include:

- *Barcode Reader*—Get barcode.
- *Buzzer*—Confirm the device plays the buzzer audio. This is not used to change volume.
- *Light sensor*—Toggle between 8, 9 and 10 to test the light sensor.
- *NFC reader*—Not used with WinCheck S2.
- *Panel*—Confirm the panel and displays multi-colored screens. This is also used to change the panel brightness.
- *RTC*—Real Time Clock.
- *Watchdog*—Watchdog.
- *Networking*—Networking settings.
- *Loop test*—Performs a loop test.
- *Loop test results*—Displays loop test results.

## Configuration

Touch **Configuration** to configure the device at installation/as needed. Touch **<BACK** to return to the *Main Menu*. Refer to *Configuration* on page 25 for more information.



## Firmware update from USB




*The USB device named DEPLUGPLUG with the Firmware file on it, must be inserted into the WinCheck S2.*

1. Touch **Firmware update from USB** to update the firmware loaded on the device.



- If the file is found, the screen below appears. Continue to step 2.

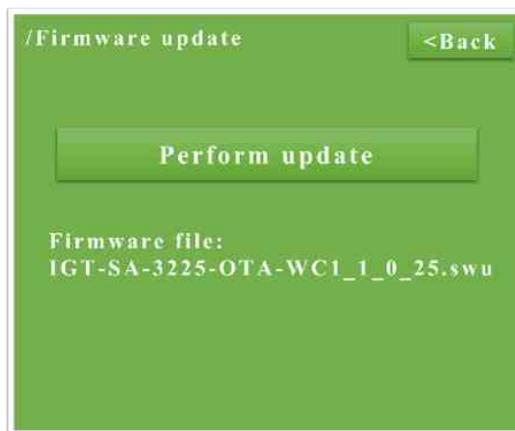

- If the file is not found, the screen below appears. Ensure that the USB device named DEPLUGPLUG has the updated firmware file on it, and that it is properly inserted into the WinCheck S2.



2. To perform the update, touch **Perform update**. The screen displays [OTA is running ...please wait], note this process takes approximately two minutes.



3. When complete, the screen displays [OTA is SUCCESS...reboot] and the WinCheck S2 automatically reboots.



4. The WinCheck S2 screen displays black, then blue, then black, then a tone of green, and the *Password Entry* screen appears.
5. If configuration is complete, remove the DEBUGPLUG and reboot the WinCheck S2.

### \*\*\* Reboot \*\*\*

Touch **\*\*\*Reboot\*\*\*** to perform a device reboot.



## Chapter 4 Download

The WinCheck S2 downloads can be performed over the network, through the terminal or in standalone diagnostics.

### Downloading WinCheck S2 Firmware Using Terminal Diagnostics



*Current document procedure to be tested.*

1. Boot the counter-top terminal into diagnostics using a USB stick labeled DEBUGPLUG.
2. From the diagnostics **Main Menu**, select **Peripherals Menu > WINCHECKS2\_1**
3. Menu **UP** to page 2 and select **ACTIVATE WATCHDOG**.
4. Wait for *De-activate "Complete"* to display at the bottom of the screen.



*Deactivating the Watchdog results in a WinCheck S2 reboot.*

5. Menu **DOWN** to select **WINCHECK FIRMWARE DOWNLOAD**. The download begins immediately upon selecting this option. This process takes 3-4 minutes to complete.
6. The screen displays a message such as *"File transfer in progress (IGT-SA-nnnn-OTA-WC\_1\_o\_nn.swu.tgz)..."*, followed by *Downloading IGT-SA-nnnn-OTA-WC\_1\_o\_nn.swu.tgz*.
7. The WinCheck S2 reboots automatically again.
8. After the device reboots completely, select **DEACTIVATE WATCHDOG** from the **WINCHECKS2\_1 Menu** page 1.

### Downloading WinCheck S2 Firmware Using WinCheck S2 Standalone Diagnostics

1. Copy the firmware file, provided to you by your site, to the FAT32 formatted USB device labeled DEBUGPLUG.
2. Boot the WinCheck S2 into diagnostics using the USB stick labeled DEBUGPLUG with the firmware files on it.

3. From the diagnostics *Main Menu*, select **Firmware upgrade from USB**.
4. On the next screen select **Perform update**. The screen indicates the update is processing and the firmware file name.
5. When complete, the screen indicates *Success* and the WinCheck S2 reboots automatically and the password screen appears.



---

## Chapter 5 Configuration

After the WinCheck S2 hardware has been installed per *Installation* on page 11, it must be configured. The WinCheck S2 configuration procedure assigns a unique polling address to each device connected to the lottery terminal. The polling addresses allow the host lottery terminal to share data with the WinCheck S2.


Multiple WinCheck S2 devices connected to the same host lottery terminal must have different polling addresses. These addresses allow the lottery terminal to distinguish one WinCheck S2 device from another. As many as three (3) devices may be connected in parallel to a single host lottery terminal.

Depending on the type of communications, continue to:

- *Wired Configuration* on page 26
- *Wireless Configuration* on page 26

## Wired Configuration

- From the standalone diagnostics main page (Diagnostic tool) select **Configuration**.
- On the *Configuration page 1* the first selection identifies the WinCheck S2.
  - To install only one WinCheck S2, the first selection remains as the default of **wincheck\_id: 1** and no other configuration is needed.
  - To install the second WinCheck S2, select the box and select **wincheck\_id: 2**. After the selection the screen returns to page 1 configuration.

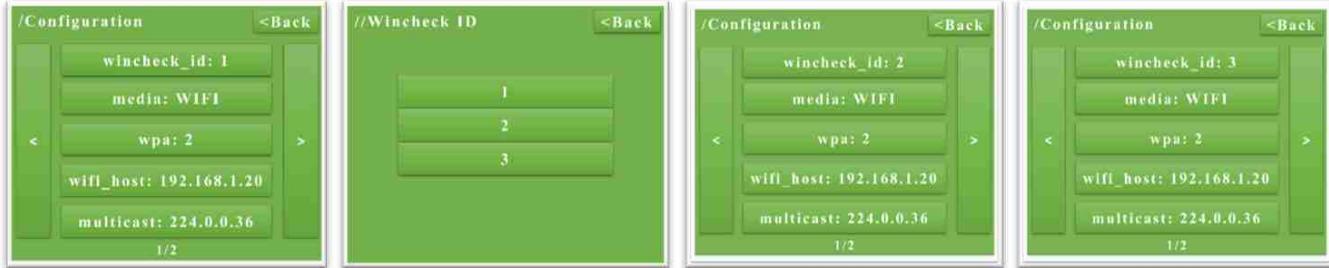

- To install the third WinCheck S2, select the box and select **wincheck\_id: 3**. After the selection the screen returns to page 1 configuration.



*A maximum of three WinCheck S2s can be connected to one terminal.*


- On the *Configuration page 1* select **media: WIFI** (default).
- On the next page select **ETHERNET**. After the selection the screen returns to page 1 configuration.



- Physically, the Ethernet cable needs to be connected to the WinCheck S2 and the terminal at ETH Port 1. For multiple WinCheck S2s a switch will be necessary.

## Wireless Configuration

- From the main page (Diagnostic tool) select Configuration
- On *Configuration page 1* the first selection identifies the WinCheck S2.
  - To install only one WinCheck S2, the first selection remains as the default of **wincheck\_id: 1** and no other configuration is needed.
  - To install the second WinCheck S2, select the box and select **wincheck\_id: 2**. After the selection the screen returns to page 1 configuration.

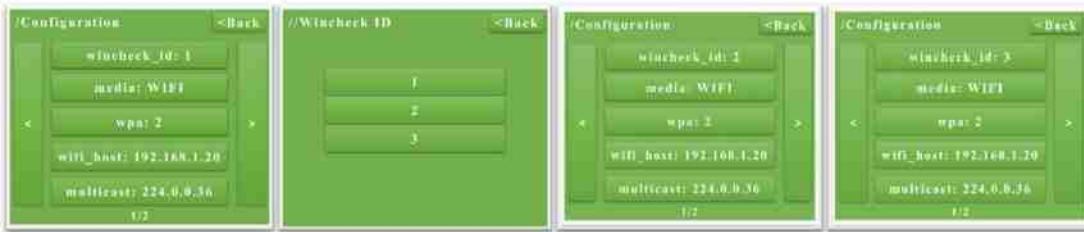


- To install the third WinCheck S2, select the box and select **wincheck\_id: 3**. After the selection the screen returns to page 1 configuration.



*A maximum of three WinCheck S2s can be connected to one terminal.*

3. From the standalone diagnostics main page (Diagnostic tool) select **Configuration**.
4. On *Configuration page 1*, the second selection identifies the media, which defaults to **WIFI**, should this need to be changed, select the media box.

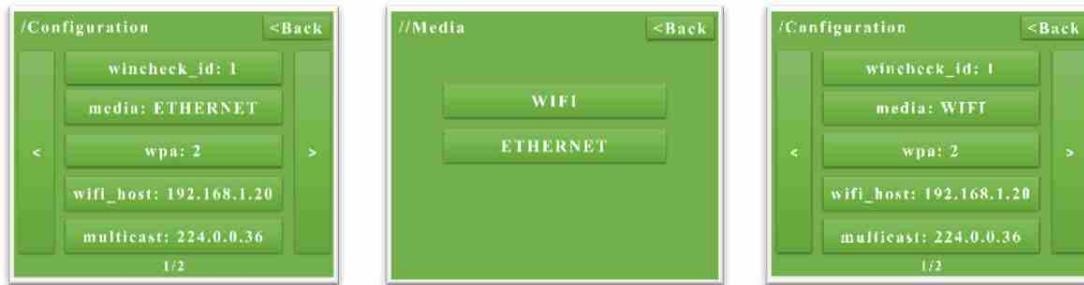

5. On the next page select **WIFI**. After the selection the screen returns to page 1 configuration.
6. Select the right arrow to go to page 2. The default settings are shown in the following image.




## Multiple Counter-Top Terminals in Same Location - Wireless Configuration

Follow the steps in the previous section to identify the WinCheck S2 ID.


Then, follow the steps in this section to configure and identify an additional terminal(s) to communicate with.

1. From the standalone diagnostics main page (Diagnostic tool) select **Configuration**.
2. Select the **right arrow** to go to page 2.


3. Select *WiFi\_ssid\_suffix*: **11111111**.
4. Enter **22222222** (eight in total) then touch **OK**.

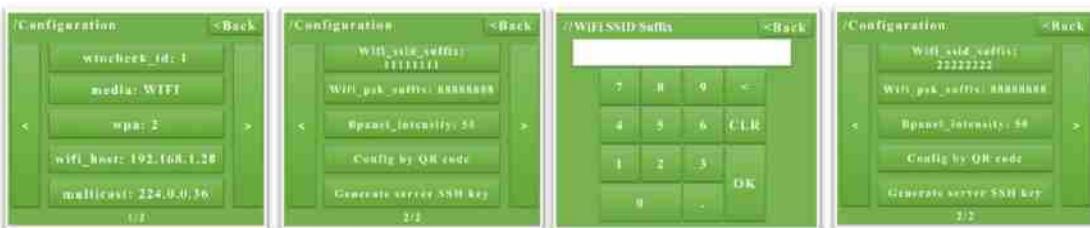


5. On the counter-top terminal enter terminal diagnostics.

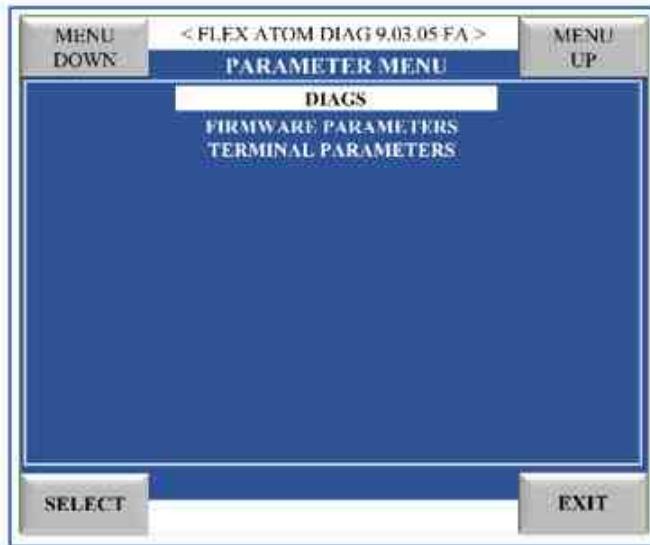


6. From the Main Menu go to **UTILITIES > SET PARAMETERS > DIAGS**.
7. **MENU DOWN** to page 2 and touch to highlight the *WiFi SSID* field and touch **SELECT**.
8. Touch the **backspace key** to delete the suffix (last 8 digits) of the SSID.

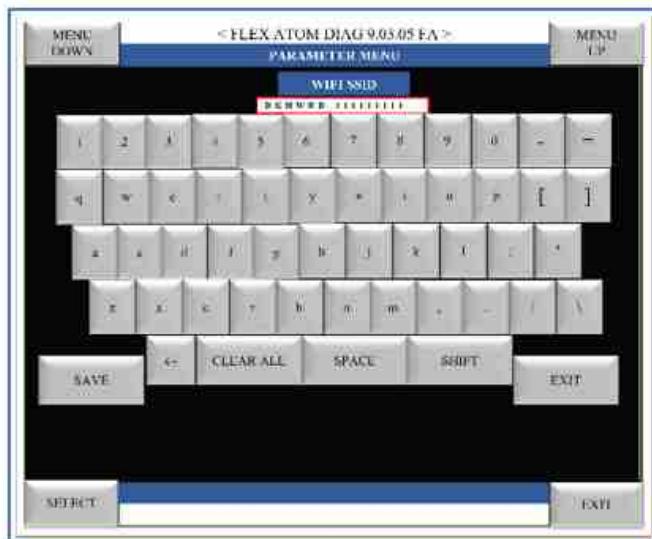

9. Input the same SSID suffix setting that was entered on the WinCheck S2. In this instance, it was **22222222**. Touch **SAVE**.

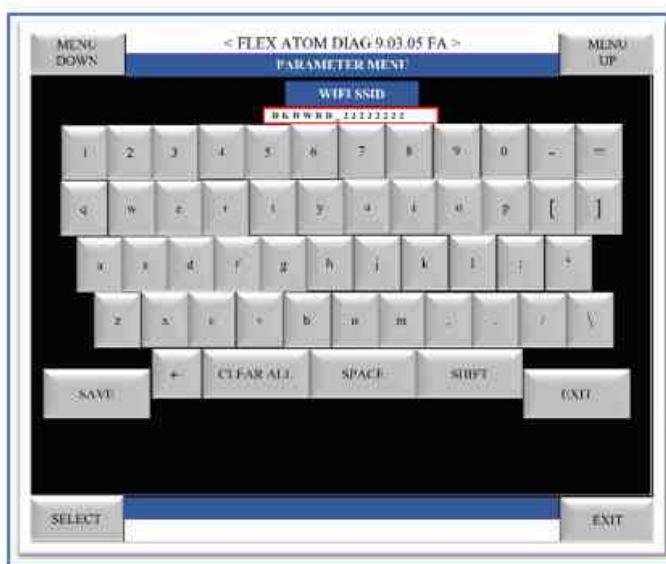

10. Touch **MENU DOWN** to verify the parameter **HIDE SSID** equals **Yes**. If it does not then highlight the box and touch **SELECT** to toggle to **Yes**.
11. To save these changes touch **EXIT**, then touch **SAVE**.

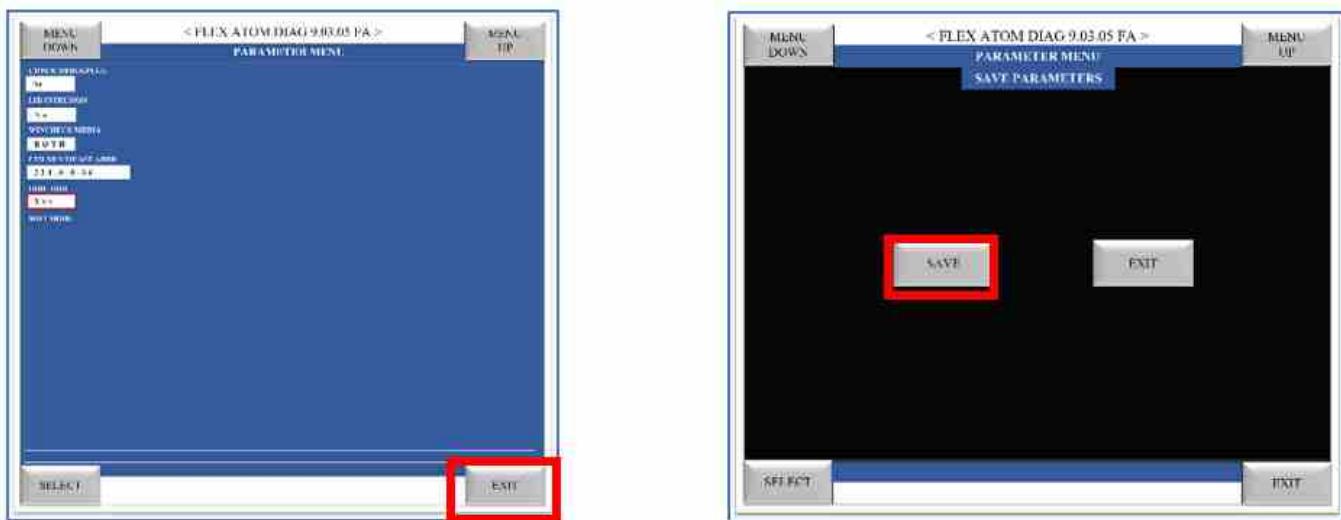

*This page is intentionally left blank.*



## Chapter 6 Operation

The WinCheck S2 does not have any direct communication with the host system, and because of this must send barcode and number data from the lottery tickets to a lottery terminal to the host. The associated online terminal validates whether the ticket is a winner, not a winner, or is invalid, and sends a text message to the WinCheck S2, which displays the appropriate message on the WinCheck S2 LCD.

As a Customer Ticket Checker, the WinCheck S2 is an IGT peripheral that allows players to check the winning status of draw game and instant tickets by scanning the ticket barcode.

*This page is intentionally left blank.*



## Chapter 7 Hardware

This chapter covers the disassembly of WinCheck S2 to remove the main board.

Topics in this section include:

- *Required Tools* on page 34
- *Removing the Main Controller Board* on page 34
- *Removing the Barcode Scanner Engine* on page 36
- *Removing the LCD Assembly* on page 37

## Required Tools

- #1 Phillips-head Screwdriver
- #0 Phillips-head Screwdriver




*The screws into the plastic housing are self-tapping. Use caution when replacing.*

*TIP: Insert the screw using the correct angle and turn the screw to the left first to verify thread alignment.*

## Removing the Main Controller Board


The following instructions are to remove the main board from the WinCheck S2.

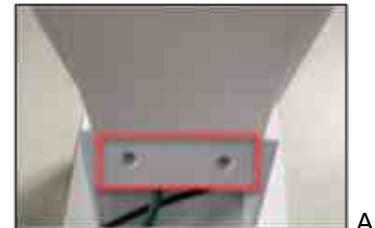

A

1. If counter-mounted, remove the two (2) screws on the back of the base and lift the unit off of the counter-top base and disconnect.(image A)

If wall-mounted, press in the tab to disengage from wall mount.(image B)

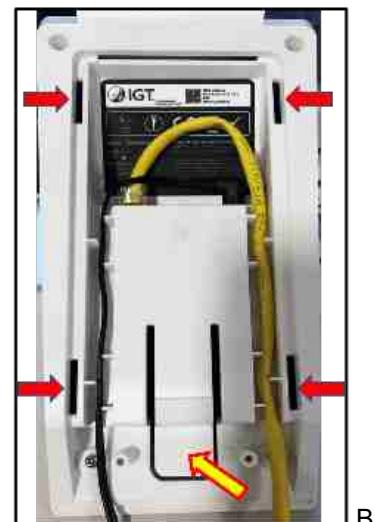

B

2. Remove the four (4) screws from the back of the WinCheck S2.




3. Remove the four (4) screws that secure the black bracket to the front and separate as shown.



4. Carefully lift the black release tab from barcode scanner connector (J14) and remove.
5. Remove the two (2) screws that secure the black metal scanner housing bracket.
6. Remove the bracket from controller board



7. Turn the unit over and disconnect the two (2) ribbon cables by carefully lifting the black connection locks .

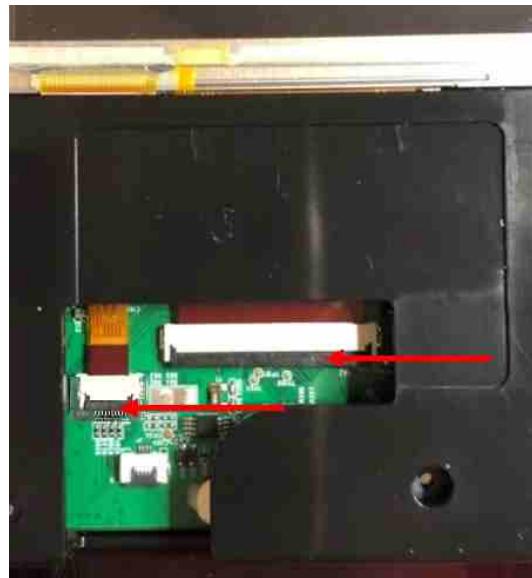

8. Turn the unit back over and remove the four (4) screws that secure the board to the device.

**⚠** *Take note and use caution that the LCD is only pressed into the cavity where it resides.*



**i** *If difficulty occurs when connecting the ribbon cables through the small opening in the front during re-assembly, remove the LCD screen. Refer to Removing the LCD Assembly on page 37 for more information. Connect the LCD ribbon cables first then insert the LCD screen through the opening and then secure the controller board and barcode scanner enclosure.*

## Removing the Barcode Scanner Engine

1. Remove the main controller board. Refer to *Removing the Main Controller Board* on page 34 for more information.

2. Using a #0 Phillips-head Screwdriver to remove the two (2) screws that secure the scanner engine to the housing.



3. Guide the engine and cable out of the housing and be sure to make note of the cable direction for re-assembly.



## Removing the LCD Assembly

1. Remove the main controller board. Refer to *Removing the Main Controller Board* on page 34 for more information.
2. Turn the unit over to disconnect the LCD assembly ribbon cables. Disconnect the two (2) ribbon cables by carefully lifting the black connection locks.
3. Locate the opening in the back of the device above the controller board and carefully push from behind and guide the LCD screen out of its cavity.
4. Replace with new assembly. When reconnecting the LCD ribbon connection, verify they are inserted straight and completely and press down on the locking tabs.

 *If difficulty occurs when connecting the ribbons cables through the small opening in the front, connect the LCD ribbon cables first then insert the LCD screen through the opening and then secure the main controller board and barcode scanner enclosure.*

*This page is intentionally left blank.*



## Chapter 8 Troubleshooting

### Troubleshooting Techniques—The Seven-Step Troubleshooting Method

The seven-step troubleshooting method is a constructive development tool for FSTs. The following procedures may assist in determining problems and finding solutions for issues with IGT machines. The seven steps include:

1. Verify the problem
2. Determine related symptoms
3. Analyze the symptoms
4. Isolate the problem
5. Correct the problem
6. Verify the correction
7. Document the process

#### Step One: Identify the Problem

When an issue is dispatched for an IGT machine, you should identify the problem, determine if a problem actually exists, and note if the existing problem is intermittent or continuous.

#### Identifying the Problem

The average retailer is likely not going to be technically oriented; therefore, it may often be difficult to understand their description of the problem on the dispatch request. Your knowledge of the machine functionality is important when comprehending the initial request. If you are not familiar with the equipment, do the proper research and review reference material can significantly assist with the troubleshooting process.

#### Determining a Problem Exists

Sometimes what seems to be a problem may actually be a normal function of the machine. For example, the machine sound is not working. Before you look at the affected hardware components, it is good practice to check if the sound level may have been lowered on the previous shift in the management application.

There also could be instances where the customer notices a characteristic that differs between machines. These are not necessarily problems and the best way to address this type of issue is to make a comparison with a known good machine and note the differences, such as sounds, lights, and items initiating in the proper sequence.

## Determining if a Problem is Intermittent or Continuous

Continuous problems are normally obvious when they occur; whereas, intermittent problems can be difficult to find and are often frustrating. When a problem is intermittent, you will need as much information as possible about the conditions that were present when the problem occurred.

For example:

- What was the customer/retailer doing at the time of the instance?
- What error message(s) appeared?

If the conditions are repeated and the problem does not re-occur, a thorough inspection of the connectors, and components may be required. Look for pinching, pulling, or other damage on the cables that could be causing the problem.



*Never assume a problem fixed itself or mysteriously went away. More than likely, the problem will return in the future. If the problem occurs again, ask the retailer to place an “out of service” plaque on the machine and to leave it in the current state until a FST can return.*

## Step Two: Determine Related Symptoms

Once the problem has been identified, you should investigate the symptoms more thoroughly and perform machine diagnostics to determine if the problem is affecting any other peripherals.

Performing diagnostics and an overall inspection may save time by finding additional problems that may hinder the repair.

The items to consider are:

- What other areas are impacted?
  - Verify proper voltages (AC and DC)?
    - A completely dead circuit may indicate a short, ground, bad fuse, or power supply.
  - Verify peripheral communications in diagnostics?
  - Shared switches or sensors?
- Can you identify additional problems by operating peripherals related or connected to the problem area.
- Could software or firmware be the source of the problem?

## Step Three: Analyze the Symptoms

Analyzing the problem provides better understanding as to the nature of the information provided on the service call. Determining related symptoms may indicate that other areas may or may not be affected. At this point in the process, stop and combine / document the following information:


- The specific components and areas affected in the machine
  - Both the customer complaint and related symptoms
- What kind of problem exists?

- Voltage deficiencies, grounds, software, firmware, etc.
- When does the problem occur?
- Is there a history of problems?
  - Cadence notes
  - Previous dispatch requests
  - Service Card

After combining the above information, create a checklist of the known good components and areas. Keeping track of all the affected areas of the machine that do not have to be checked will save time by reducing the amount of repetitive diagnostic tests.

## Utilizing Available Resources

A number of resources are available for solving complex problems. For example, wiring diagrams can be used to trace out the affected board or take note of common connectors and components. Research FSBs and other specific information about the machine on GNIEDirect.

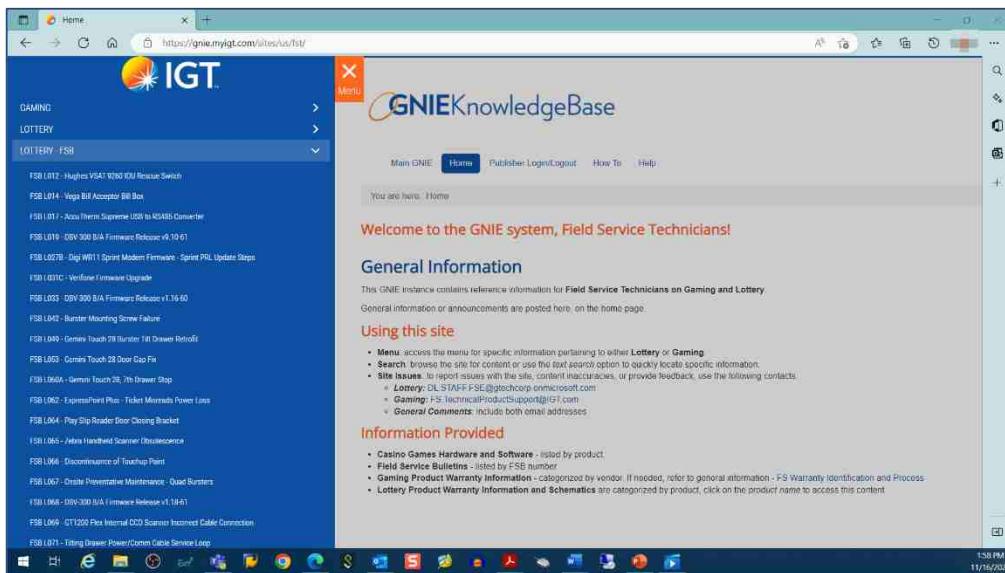

Depending on the nature of the problem, someone else may have also have expertise that may assist in the troubleshooting process.

## Step Four: Isolate the Problem

To isolate the problem, find the possible problem area(s), determine where to make the initial checks, and perform inspections. Look for simple or obvious items before disassembling the machine; i.e. connector disconnected or a failed component.

By looking at the symptoms, you should make a plan for making the first two initial checks. If the first two initial checks do not find the faulty component or cause of the problem, they should at least lead you to making additional checks based on their findings.



*Remember, the location of the problem will be in one of the areas ruled to be a problem board or component as determined from the previous steps. Looking or performing checks on known good circuits may cause frustration and delay the repair.*

## 50/50 Isolation

The 50/50 rule may be highly effective in locating a problem component(s). For example, using the Combo Board, as the central point of distribution and isolating the suspected problem component(s) one at a time, will provide indicators of the problem area. If other components work in parallel or use the same power source on the affected component, the machine will partially recover the non-problem component(s) or the symptoms may change. This process of elimination will further provide clues to the problem.



*Never remove or attach a module or connector with machine power on. Remove power from the terminal first.*

## Software and Firmware

If the software or firmware is suspected of causing the problem, ensure you have the latest and greatest software for the hardware.

## Swaptronics

Swaptronics is the act of taking a known good part and testing it in a machine to verify it is operating correctly. This may quickly find a solution to a problem; however, this may also cause unwanted damage to an additional machine or a good part. Use caution.



*Never hot swap any peripheral*

## Step Five: Correct the Problem

Correcting the trouble is a direct step in the overall process. Performing the repair will usually involve:

- Replacing a component
- Replacing a cable
- Servicing a connector
  - Repair and re-pin if possible
- Installing programs

## Step Six: Verify the Correction

After making the repair, you must always verify that the problem was corrected. Operate and test the machine in the same fashion as the first three steps in the troubleshooting process. Performing these checks will not only inspect for additional damage that may have occurred during the repair, it will also help to ensure customer satisfaction.

## Step Seven: Document the Process

Documenting and archiving the troubleshooting steps taken to resolve a problem is essential. Making the information available to co-workers could save time if the same problem occurs in the same or similar machine. Creating an archive of problems and their resolutions will assist all service technicians.

## Troubleshooting Worksheet

Use the Troubleshooting Worksheet on the following page to make use of the Seven-Step Troubleshooting Method.

1. Verify the problem.
2. Determine related symptoms.
3. Analyze the symptoms.
4. Isolate the problem.
5. Correct the problem.
6. Verify the correction.
7. Document the process.

## Troubleshooting Worksheet

### Step 1: Verify the Problem

Identify the Initial Problem by listing the complaint, error messages, LEDs , or any other faulty symptoms.

--

Is the Problem: Intermittent Continuous?

### Step 2: Determine Related Symptoms

Perform an inspection / diagnostics and list all components that are affected.

--

### Step 3: Analyze the Symptoms

What type of problem exists?	
When does the problem occur?	
Is there a history of the problem?	
What areas are unaffected?	

### Step 4: Isolate the Problem

List the initial two checks performed and use the space below to list the subsequent checks based on the findings:

1	
2	

### Step 5: Correct the Problem

What was done to correct the problem?

--

### Step 6: Verify the Correction

Were diagnostics and tests completed following the repair?

--

### Step 7: Document and Archive

Print Name:	Date:
-------------	-------

## General Troubleshooting

When failed WinCheck S2 units and power supplies are removed from the field, they are returned to a screening facility for a diagnostic test and evaluation.

When a failure occurs between the host lottery terminal and the WinCheck S2 the most likely causes are:

- No power getting to the WinCheck S2.
- No communications occurring between the host lottery terminal and the WinCheck S2.

Both of these problems are addressed on the following pages. If the WinCheck S2 cannot be fixed in the field, return the unit to a IGT repair depot.

Of course, the failure may not be between the lottery terminal and the WinCheck S2 at all. The lottery terminal may be the cause of the failure (bad RS-485 drivers, for instance), or communications may have failed between the lottery terminal and Central.

If the troubleshooting methods in this chapter fail to solve the problem and if a known, good WinCheck S2 does not work when you swap it for a different unit, the problem lies elsewhere. The troubleshooting procedures in this section are a general guide on how to isolate possible faults in the WinCheck S2 at the screening facility.

Prior to performing the troubleshooting steps in this chapter, perform the following steps:

- Inspect the WinCheck S2 for any physical damage, debris or disconnected/loose cables.
- Perform a Power Reset of the WinCheck S2 by removing power, waiting 5 seconds and then reapplying power.



*It takes 10 seconds from power up for the blue display screen to appear. The blue screen remains static for 3 seconds and then the IGT splash screen is displayed.*

- Use the WinCheck S2 standalone diagnostics for the component you are troubleshooting to further diagnose the problem; this chapter assumes that diagnostic testing has been performed prior to performing the steps that follow.

After each step, check the WinCheck S2 to determine if the fault has cleared. Once the source of the problem is identified repair or replace per warranty.



*A WinCheck S2 with communication-related symptoms is a special case. If the Comm Diagnostics do not reveal any problems, the screening facility may have the ability to duplicate the site's communication environment in an effort to replicate the symptom. If the symptom cannot be replicated, label the WinCheck S2 appropriately and return it to field.*

### Troubleshooting Guide—WinCheck S2

Module	Problem	Possible Causes
Display	Black Screen/White Screen Vertical Lines	<ul style="list-style-type: none"> <li>• Faulty Power Supply</li> <li>• Faulty Ribbon cable connection</li> <li>• Faulty LCD Assembly</li> <li>• Faulty WinCheck S2 Main Controller Board</li> </ul>

Module	Problem	Possible Causes
Resistive Touchscreen	Unresponsive to touch	<ul style="list-style-type: none"> <li>• Dirty Touchscreen</li> <li>• Faulty Ribbon cable connection</li> <li>• Faulty LCD Assembly</li> <li>• Faulty WinCheck S2 Main Controller Board</li> </ul>
Power		
 <i>It takes 10 seconds from power up for the blue display screen to appear. The blue screen remains static for 3 seconds and then the IGT splash screen appears.</i>	No Power	<ul style="list-style-type: none"> <li>• Faulty Power Supply</li> <li>• Faulty WinCheck S2 Main Controller Board</li> </ul>
Terminal Load/Boot	Terminal Reset	Faulty WinCheck S2 Controller Board
Sound	None	<ul style="list-style-type: none"> <li>• Wrong settings</li> <li>• Faulty WinCheck S2 Main Controller Board</li> </ul>
Reader	Intermittent Reads/Not reading	<ul style="list-style-type: none"> <li>• Scratched or dirty window</li> <li>• Faulty Ribbon cable connections</li> <li>• Faulty Barcode Scanner Engine</li> <li>• Faulty WinCheck S2 Main Controller Board</li> </ul>
Scanner	No green light	<ul style="list-style-type: none"> <li>• Faulty Power Supply</li> <li>• Faulty Ribbon cable connections</li> <li>• Faulty Barcode Scanner Engine</li> <li>• Faulty WinCheck S2 Main Controller Board</li> </ul>
Communication - Wired	Will not communicate	<ul style="list-style-type: none"> <li>• Incorrect settings</li> <li>• Faulty Ethernet switch</li> <li>• Faulty WinCheck S2 Main Controller Board</li> </ul>
Communication - Wireless	Will not communicate	<ul style="list-style-type: none"> <li>• Incorrect settings</li> <li>• Faulty WinCheck S2 Main Controller Board</li> </ul>
Display	Green screen with no prompt for password when attempting to use standalone diagnostics	<ul style="list-style-type: none"> <li>• A failed Barcode Scanner</li> <li>• A disconnected or faulty Barcode Scanner.</li> <li>• Faulty WinCheck S2 Main Controller Board</li> </ul>

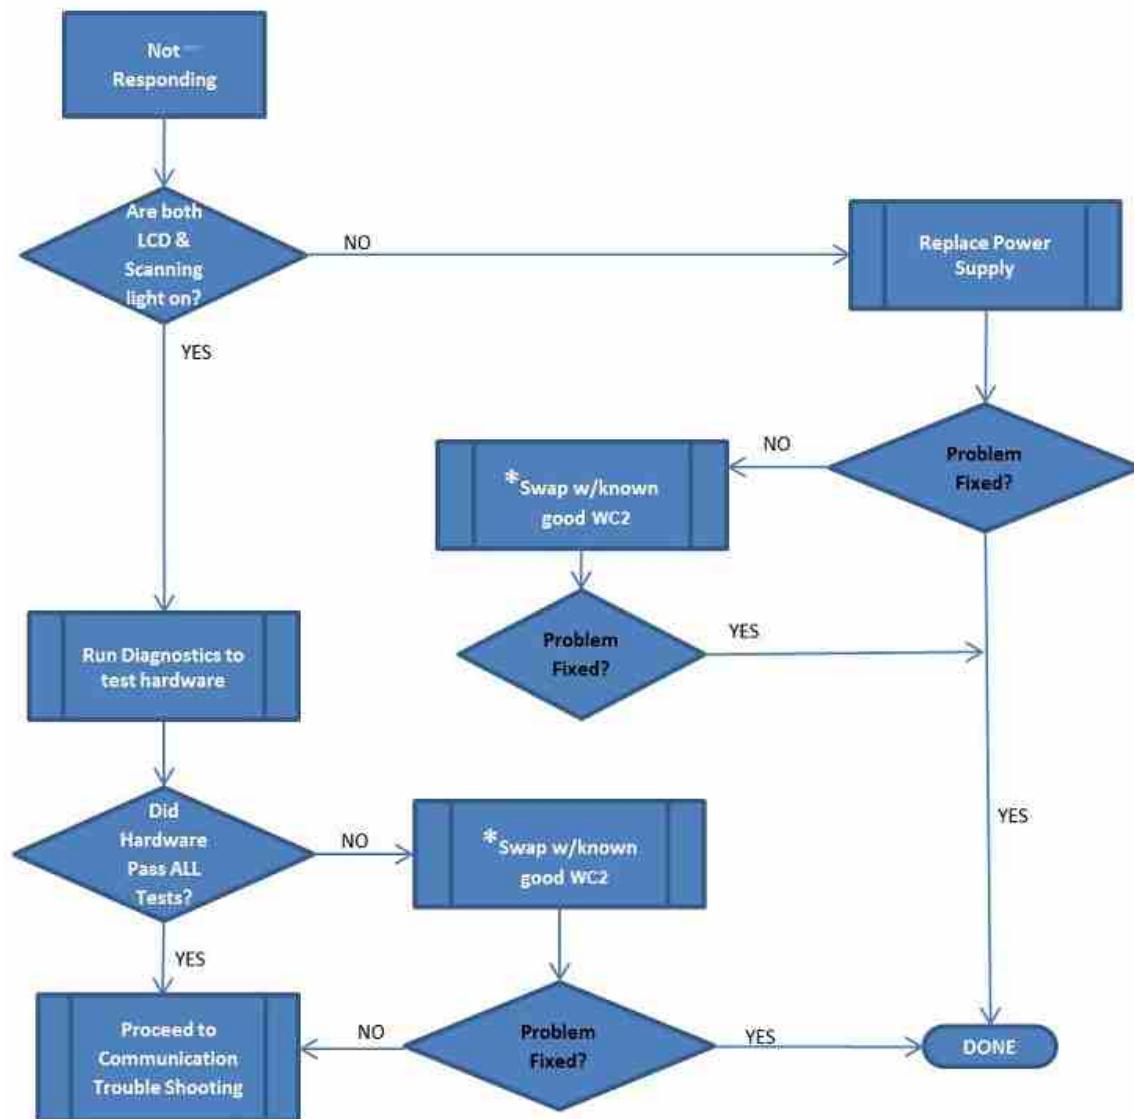


Figure 8-1 WinCheck S2 Troubleshooting Flow Chart - Initial Steps

*This page is intentionally left blank.*



## Chapter 9 Preventive Maintenance

The recommended frequency for the preventive maintenance procedures for the WinCheck S2 is upon each visit to a retailer location unless otherwise stated in a jurisdiction-specific contract. FSTs should perform preventive maintenance during routine service calls that do not require a terminal swap.

### Cleaning Materials

- All purpose cleaner (ammonia and vinegar free)
- Glass Cleaner (ammonia and vinegar free)
- Clean, lint-free cloth

The PM steps below are NOT in the order that the steps need to be performed. There is no specific recommended order. Power down the equipment before conducting any maintenance on the terminal and/or peripherals.

To maintain the WinCheck S2, check that all connections are properly seated and that the scanner area is clear of dust and debris. Take care not to scratch the protective film that covers the LCD.

### External Cleaning



*Do not, under any circumstances, spray cleaners directly onto the terminal or peripherals.*

- *Terminal Exterior*—Wipe the case with a cloth dampened with all-purpose cleaner.
- *LCD*—Wipe with a non-ammonia, non-vinegar based cleaner, sprayed onto a clean, soft, lint-free cloth. NEVER spray cleaner directly onto the LCD.
- *Scanner Window*—Wipe with a non-ammonia, non-vinegar based cleaner, sprayed onto a clean, soft, lint-free cloth. NEVER spray cleaner directly onto the scanner window.

### When You Are Finished

Power up the WinCheck S2 *BEFORE* the powering up the retailer lottery terminal. Verify that the terminal and all peripherals are functioning properly.

*This page is intentionally left blank.*



## Chapter 10 Handling Precautions

This chapter explains the proper handling of Electrostatic Discharge (ESD) sensitive modules and devices, the proper transport of terminals and other parts, how terminals and devices should be packaged for returns to depots or retailers, and the proper storage of extra or backup devices and parts.

All Printed Circuit Boards (PCBs) are static-sensitive. In order to prevent damage to electronic components through ESD, please take the precautions presented in this chapter whenever:

- Performing any work on a PCBs and equipment containing PCBs
- Removing subassemblies or components

### What is ESD?

Static is the electrical charge created by the friction of two dissimilar materials moving against each other. Electro Static Discharge, or ESD, is the unintended dissipation of that charge, typically by short circuiting the charge to another device or to ground.

Our bodies can create as much as 25,000 volts of static electricity across our 100 to 250 picofarads of capacitance to ground. In the worst case work environment, voltages on some objects could exceed 50,000 volts. This more than exceeds the static-tolerance threshold of most transistors, resistors, op-amps, and digital computer chips. Some MOS families, for instance, can be damaged by a charge as low as 150 volts.

Usually the damage is such that it goes undetected for some time but eventually creates either an intermittent or hard failure in the field. Insulators, or non-conductors of electricity, pose the greatest static discharge threat to electronic devices because of their inability to bleed their static charges.

### Becoming “Static Safe”

Equipment or component failures that result from ESD can be difficult to identify but can be avoided at minimal cost with proper handling techniques.

A static electricity-safe workplace is an environment in which anything that can generate static charges is eliminated or is drained of its charge. Such a workplace employs conductive and static dissipative materials for its table tops, floor surfaces, clothing, and material handling bins, boxes and bags. Machines, tools and test fixtures should be properly grounded. Technicians or anyone handling electronic components should wear wrist straps and even ankle straps at all times when working on or near ESD sensitive electronic modules, PCBs and devices.

This chapter has been created to help you identify ESD failures and to implement correct handling procedures. Please read the following sections carefully.

## ESD-Induced Failure Modes

### Radiated Electromagnetic Fields

Radiated electromagnetic fields induce low-level voltages in unshielded signal conductors. These can cause intermittent unit halts from which the operator may recover. Older products are more sensitive to these fields. Products manufactured today are designed with covers and shielded external cables to protect them from most induced voltages.

### Conducted Charges

Conducted charges (usually at points where the operator touches the unit) may transfer directly to components and result in either intermittent or permanent failures.

### Typical Symptoms of ESD Damage

Hard failures such as blown semiconductor junctions, cracked oxide layers, fused metallization or bond wires can result from ESD, however, intermittent failures are the most common result of ESD. The device becomes temperature sensitive, input thresholds shift, output levels and drive ability degrade, etc.

Increased failure rates are also typical. Normal stresses such as temperature swings, power surges, or another “zap” could permanently disable a device previously exposed to ESD, even if no symptoms existed from the first exposure!

### Common False Assumptions Concerning ESD

**MYTH:** Only MOS devices are ESD sensitive.

**FACT:** All semiconductor materials are sensitive to ESD. Some devices are just more sensitive than others.

**MYTH:** A component cannot be damaged once it is installed in a board.

**FACT:** It may be even more susceptible to induced fields due to the antenna effect of the etch or wire connected to it.

**MYTH:** If the device works after I replaced it, I got lucky and did not damage it.

**FACT:** Most failures are not catastrophic and only reveal themselves as intermittent or latent failures.

**MYTH:** A grounded metal table top is a good anti-static work surface.

**FACT:** A much better way to dissipate electrostatic fields is to use an anti-static mat and a 1-Megohm discharge current limiting resistor connected to earth ground so that the charge is drained in a controlled manner.

**MYTH:** Wrist straps present a personal shock hazard when working on live circuits because they ground your body.

**FACT:** As long as the 1-Megohm resistor is connected between the strap and the ground connection the wrist strap does not increase your risk of suffering a shock hazard. The 1-Megohm resistor limits the current to a safe value for low-voltage circuits.

**MYTH:** We don't take precautions and we don't have ESD problems at our depot.

**FACT:** You may not realize the damage that you are causing, but it is there. IGT Engineering can determine if hard and intermittent failures are due to ESD damage by examining individual components, but such damage is not something that a technician can readily identify.

**MYTH:** The terminal is not susceptible to static damage.

**FACT:** Our terminals can be damaged or destroyed by static discharge just like any other electronic device.

## ESD Precautions Checklist

### Recommended Devices

- Wrist straps at the bench
- Wrist strap tester
- Only tools or parts made out of conducting materials (i.e., no plastic solder vacuums, tweezers, etc.).
- 3M® anti-static vacuum cleaners
- Static-dissipative mats connected to earth ground for bench tops and flooring
- Static-dissipative bags, boxes, bins and/or totes for handling PCBs (bags and totes must remain closed during transport - no part of the item can "stick out" of the bag or the bag is ineffective)
- Static-free floor mats, static-dissipative shelving, and 3M black conductive PCB storage bags used at all times (stockroom)

### Precautionary Practices

- Minimize handling of components.
- Keep parts in static-dissipative packaging until ready for use.
- Use ESD-protective containers for handling and transporting small components.
- Handle IC's by the body, not the leads.
- Do not slide static sensitive devices over any surface.
- Eliminate static generators from your work area, for example plastic, vinyl, styrofoam, etc.
- Use a static-free workstation whenever handling parts in the office, in the field or anywhere.

## Recommended Handling - Example

A typical scenario for a technician at a bench to properly retrieve parts from a stock area is as follows:

- You, the technician, are seated at a bench, connected to electrical ground via a wrist strap.
- The bench surface has a clean, grounded, static-dissipative bench mat connected to earth ground. All tools are conductive.
- When rising from the bench to retrieve a PCB (for example), disconnect the wrist strap.
- Proceed to the storage location and back to the bench, keeping the board in the existing closed static-dissipative packaging.
- Re-attach the wrist strap, remove the board from the bag, and install it in the terminal, which is sitting on the static-dissipative mat.



*After leaving and returning to the static-dissipative area, always reconnect to a static wrist strap connected to electrical ground before touching any static sensitive parts.*

## Proper Grounding Technique

RLTs and FSTs must follow proper ESD precautions. This includes the items mentioned throughout this section: wrist straps, anti-static mats, anti-static vacuum cleaners, and antistatic bags.

- FSTs in the field must be grounded by a wrist strap connected to the terminal which in turn is connected to earth ground when servicing that terminal and all boards being transported must be stored enclosed within static-dissipative packaging.
- RLTs must work in a static-safe environment. The workbenches must have anti-static mats which are connected to earth ground and the RLT must observe proper ESD precautions, utilizing static wrists straps and proper anti-static packaging.




*Vacuum cleaners are generators of static electricity. When purchasing a vacuum cleaner, choose one with an antistatic nozzle (such as the one recommended in the Spare Parts and Tools Chapter). If unable to purchase antistatic vacuum cleaners, the nozzle of the hose must be wrapped with antistatic (conductive) tape from the nozzle to the handle.*

The picture below shows a properly grounded technician. Notice that the technician is grounded to the anti-static mat and the mat is grounded to earth ground at the AC outlet.



When servicing the terminal in the field, FSTs first must ground themselves to the terminal chassis which is powered off and connected to earth ground, as shown in the picture below.

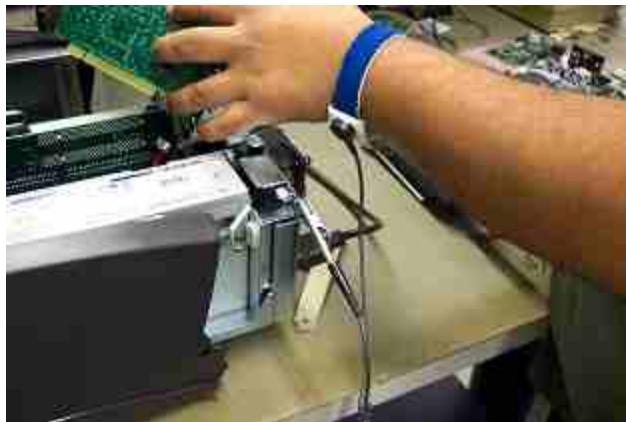

## IGT Manufacturing Specification

IGT (prior GTECH) assemblies comply with IEC 61000-4-2 recommendations for severity typically in excess of level three. IEC stands for International Electrotechnical Commission. The specification is for Electromagnetic Compatibility for Industrial Process Measurement and Control Equipment.

Part two specifies electrostatic discharge requirements and states that our equipment must withstand 15KV air discharges and 8KV contact discharges. Both positive and negative polarity discharges must comply.

## Packaging

### General Packaging Procedures

Package and ship all modules or devices in the packaging in which they were received from the manufacturer, whenever possible. Make sure that the packaging is in good condition and not damaged from previous shipping or handling.

- Circuit boards offer special problems and should be inspected for delicate components and sharp objects. Contact Manufacturing Engineering for assistance, if needed.
- All precautions must be made to insure that product that is shipped is not deformed or altered due to packaging used. Consideration must be given to the fragileness of the product that is shipped for total coverage of protective materials.
- Appropriate sized labels, elastic bands, or ESD tape must be used for securing ESD bags. Staples cannot be used.
- Multiple Circuit Card Assemblies' must be placed in a single static shielding bag only if they are mechanically separated with conductive or anti-static foam. No movement between assemblies can occur.
- As a priority, Circuit Card Assemblies' must be transported in slotted, conductive totes, with dividers spaced for tight capture. If boards are very short, anti-static bubble wrap or anti-static foam is used to prevent movement from slotting during handling. When conductive totes/dividers are not available, static shielding bags protect Circuit Card Assemblies'. Separation of Circuit Card Assemblies' by means of anti-static bubble or thin

Polyethylene foam sheeting is required. Fragile parts must be cushioned from one board to another and no 'puncturing' of ESD protection is allowed.

- All IC's must be placed in anti-static tube holders that are cut to size; then, placed in static shielding bags for transit in kit or sales orders. Shielding bags must be fully closed and sealed. Static shielding bags may be replaced by conductive DIP tube shippers or bin boxes.
- IC's that will not fit an IC tube must be placed in conductive foam. All IC legs are inserted in foam without deforming; then, placed in static shielding bags for transport in kit or sales orders. Shielding bags must be carefully closed and sealed properly.
- IC's must not be placed loose in bags.
- Parts which mark or scratch easily must use supplier packaging or must be separated by thin foam, polybag material or corrugated in a similar fashion to the original supplier packaging.



## Chapter 11 Diagrams

The following page includes the block diagram for the WinCheck S2. Please contact FSE Engineering, should you need additional information.

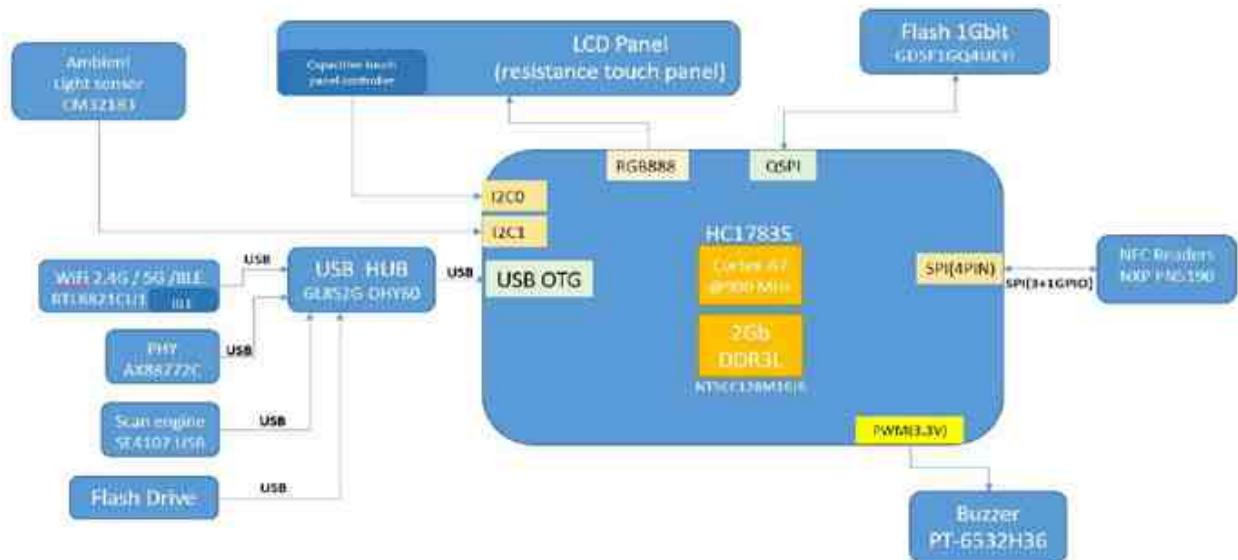


Figure 11-1 WinCheck S2 Block Diagram



## Chapter 12 Spare Parts and Tools

Contact [#FSE@IGT.com](mailto:#FSE@IGT.com) to get correct Spare Parts Lists for specific components.

You may refer to the latest warranty information in the FSE Warranty Information folder in the Field Service Engineering folder in SharePoint. For information on locating this information please refer to:

- To access by phone outside the IGT network: [Outside IGT Network](#)
- To access on the IGT Network: [Inside IGT Network](#)

*This page is intentionally left blank.*



# Chapter 13 Product Safety & Approvals

## Safety Instructions

- The terminal may only be installed by qualified, trained personnel.
- Field Service Manuals and Retailer Reference Guides for the terminal are provided at the time of training.
- If the terminal was stored in a cold environment, condensation can occur. In order to prevent condensation, wait for the terminal to acclimate to the temperature for 3 to 4 hours before opening the package.
- Verify that the terminal nominal voltage matches the voltage of the local line to which it is being installed.
- This terminal is equipped with a safety-tested power cable and may only be connected to a grounded power outlet.
- Ensure that the power outlet to which the terminal is being connected is freely accessible.
- Always grip the cable plugs to remove them from outlet, never pull the power or data cables from the sockets by the cables.
- Lay leads and cables so that no one can stand on or trip over them.
- Data transmission lines must not be connected or disconnected during a thunderstorm.
- Ensure that no objects (e.g. jewelry, paper clips, etc.) are allowed to drop inside the terminal.
- In the case of an emergency (e.g. damaged housing, operating elements or power cable, entry of moisture or objects), switch off the terminal, pull out the power cable and contact the responsible customer support department.
- Repairs or modifications to the terminal may only be carried out by qualified, trained personnel.
- Unauthorized opening of the terminal and repairs may result in considerable danger, as well as jeopardize the warranty coverage.

## Model Rating Label



## FCC

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- \* Reorient or relocate the receiving antenna.
- \* Increase the separation between the equipment and receiver.
- \* Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- \* Consult the dealer or an experienced radio/TV technician for help.



*FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.*

## FCC Radiation Exposure Statement

for mobile devices without co-location condition ( the transmitting antenna is installed or located more than 20cm away from the body of user and near by person )

FCC RF Radiation Exposure Statement: 1. This Transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. 2. This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

## Industry Canada

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

1. This device may not cause interference.
2. This device must accept any interference, including interference that may cause undesired operation of the device.

This device and its antenna(s) must not be co-located or operating in conjunction with any other antenna or transmitter.

This product complies with ISED radiation exposure limits set forth for an uncontrolled environment. This product should be installed and operated with minimum distance 20 cm between the radiator and your body.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

1. L'appareil ne doit pas produire de brouillage;
2. L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Cet appareil et son antenne (s) ne doit pas être co-localisés ou fonctionnement en association avec une autre antenne ou transmetteur.

Ce produit sont conformes aux limites ISED d'exposition aux rayonnements définies pour un environnement non contrôlé. Ce produit doivent être installés et utilisés avec distance minimum de 20 cm entre le radiateur et votre corps.

## European Union

*This is a class B product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.*



## Wireless Device Option

The wireless option for the WinCheck S2 uses and approved Azurewave Technologies mini-PCIe module (Model# AW-NE762H; FCC ID: VQF-RT3090-1T1R) operating in the 2.4GHz frequency range and is in compliance with the 802.11 b/g/n communication protocol standards. For a complete list of approved companies, refer to GTECH part number 55-0115-01E.

---

## Document Modification History

Date	Version	Description of Change
February 2023	00	Initial Release
July 2023	01	Trainer updates