


Mode: 802.11ac_HT40
 Band: UNII-2C
 Distance of measurement: 3 meter
 Channel: 142

- Spurious


Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 001.25	52.91	Peak	V	-9.44	-	43.47	74.00	30.53
1 019.25	48.64	Peak	H	-9.43	-	39.21	74.00	34.79
1 080.24	52.67	Peak	H	-9.37	-	43.30	74.00	30.70
1 186.23	49.76	Peak	H	-9.25	-	40.51	74.00	33.49
1 159.23	51.68	Peak	V	-9.28	-	42.40	74.00	31.60
1 283.72	51.26	Peak	V	-9.13	-	42.13	74.00	31.87
1 421.71	51.81	Peak	V	-8.96	-	42.85	74.00	31.15

- Band edge

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
5 799.58	40.72	Peak	H	9.96	-	50.68	74.00	23.32
5 812.03	43.92	Peak	V	10.08	-	54.00	74.00	20.00

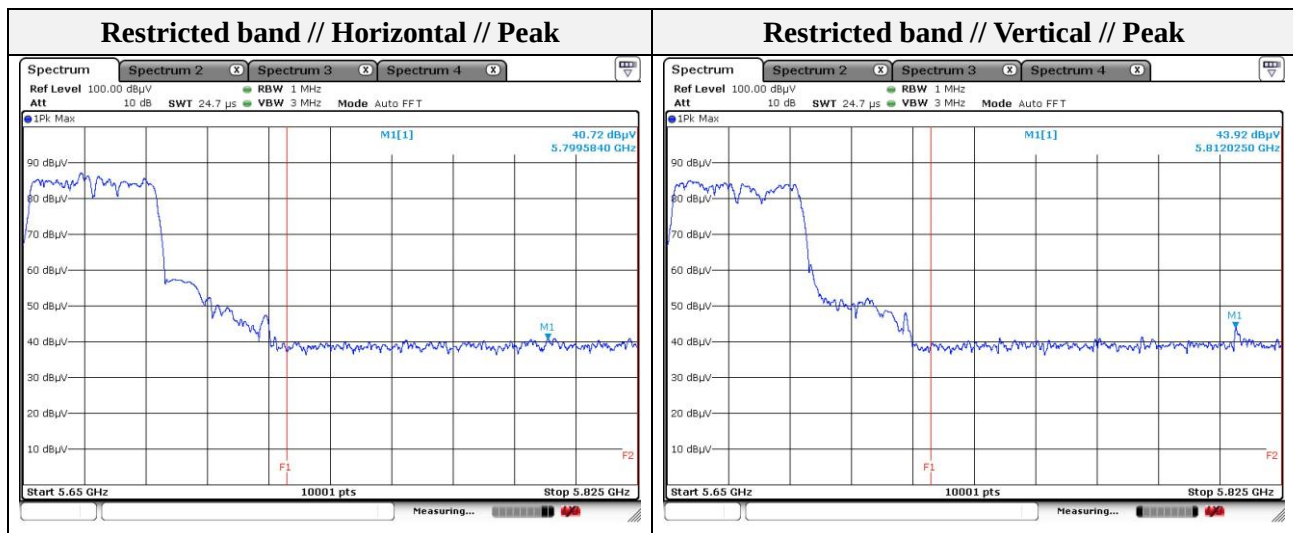

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

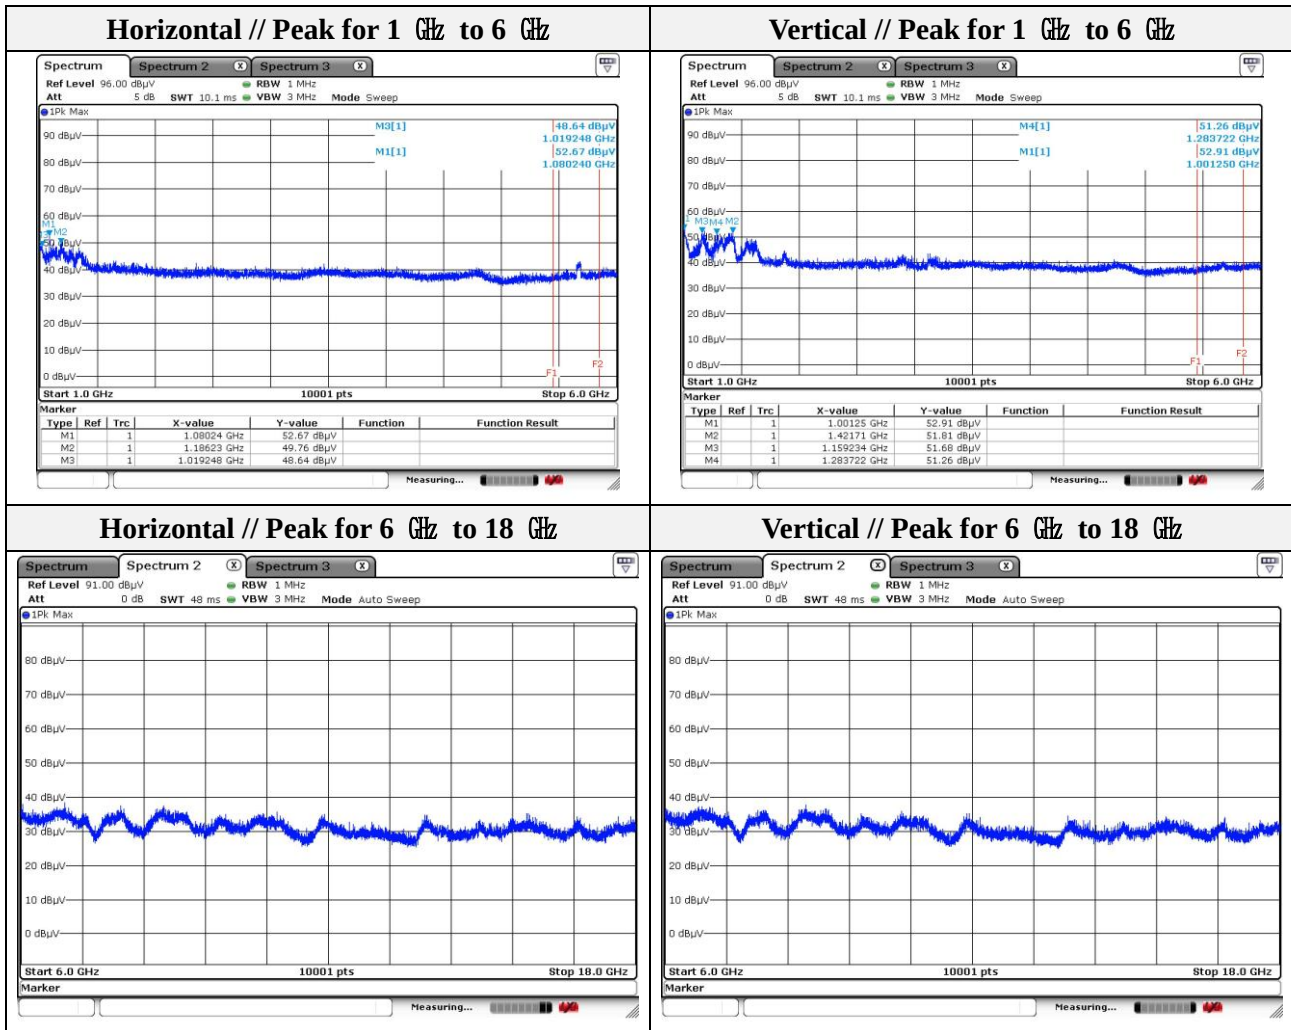

Note.

1. No spurious emission were detected above 6 GHz.
2. Average test would be performed if the peak result were greater than the average limit.


Mode: 802.11ac_HT80
Band: UNII-2C
Distance of measurement: 3 meter
Channel: 106

- Spurious


Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 000.75	49.58	Peak	H	-9.44	-	40.14	74.00	33.86
1 003.75	53.46	Peak	V	-9.44	-	44.02	74.00	29.98
1 080.74	52.37	Peak	H	-9.36	-	43.01	74.00	30.99
1 158.23	52.26	Peak	V	-9.28	-	42.98	74.00	31.02
1 188.73	49.53	Peak	H	-9.25	-	40.28	74.00	33.72
1 288.72	52.98	Peak	V	-9.11	-	43.87	74.00	30.13
1 397.21	51.03	Peak	V	-8.97	-	42.06	74.00	31.94

- Band edge

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
5455.09	36.73	Peak	H	7.16	-	43.89	74.00	30.11
5458.24	37.71	Peak	V	7.16	-	44.87	74.00	29.13

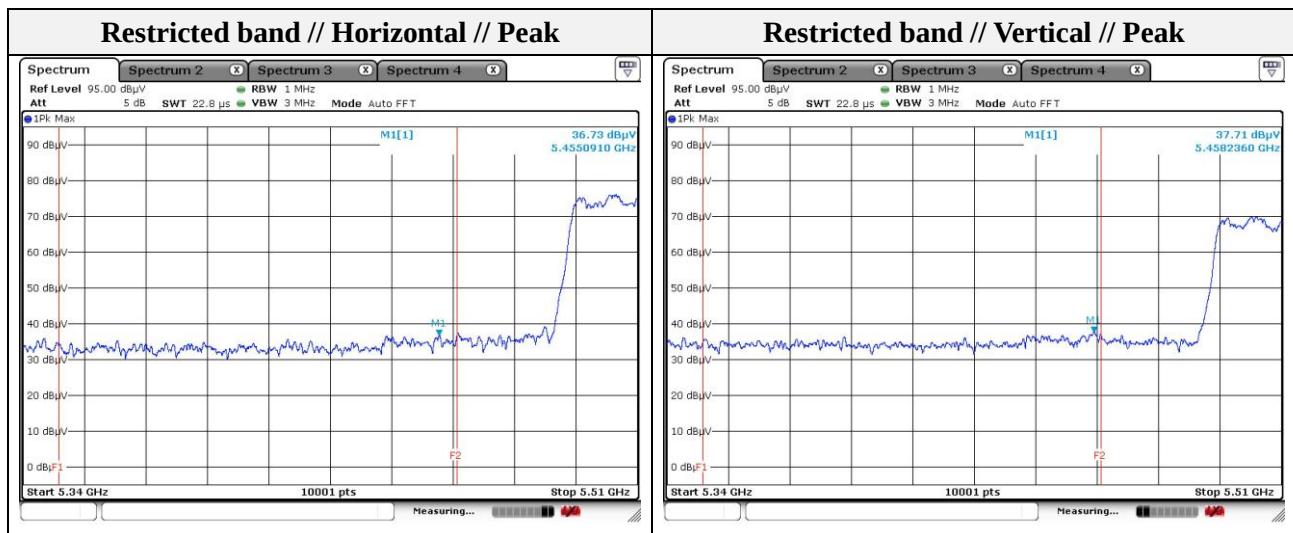

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

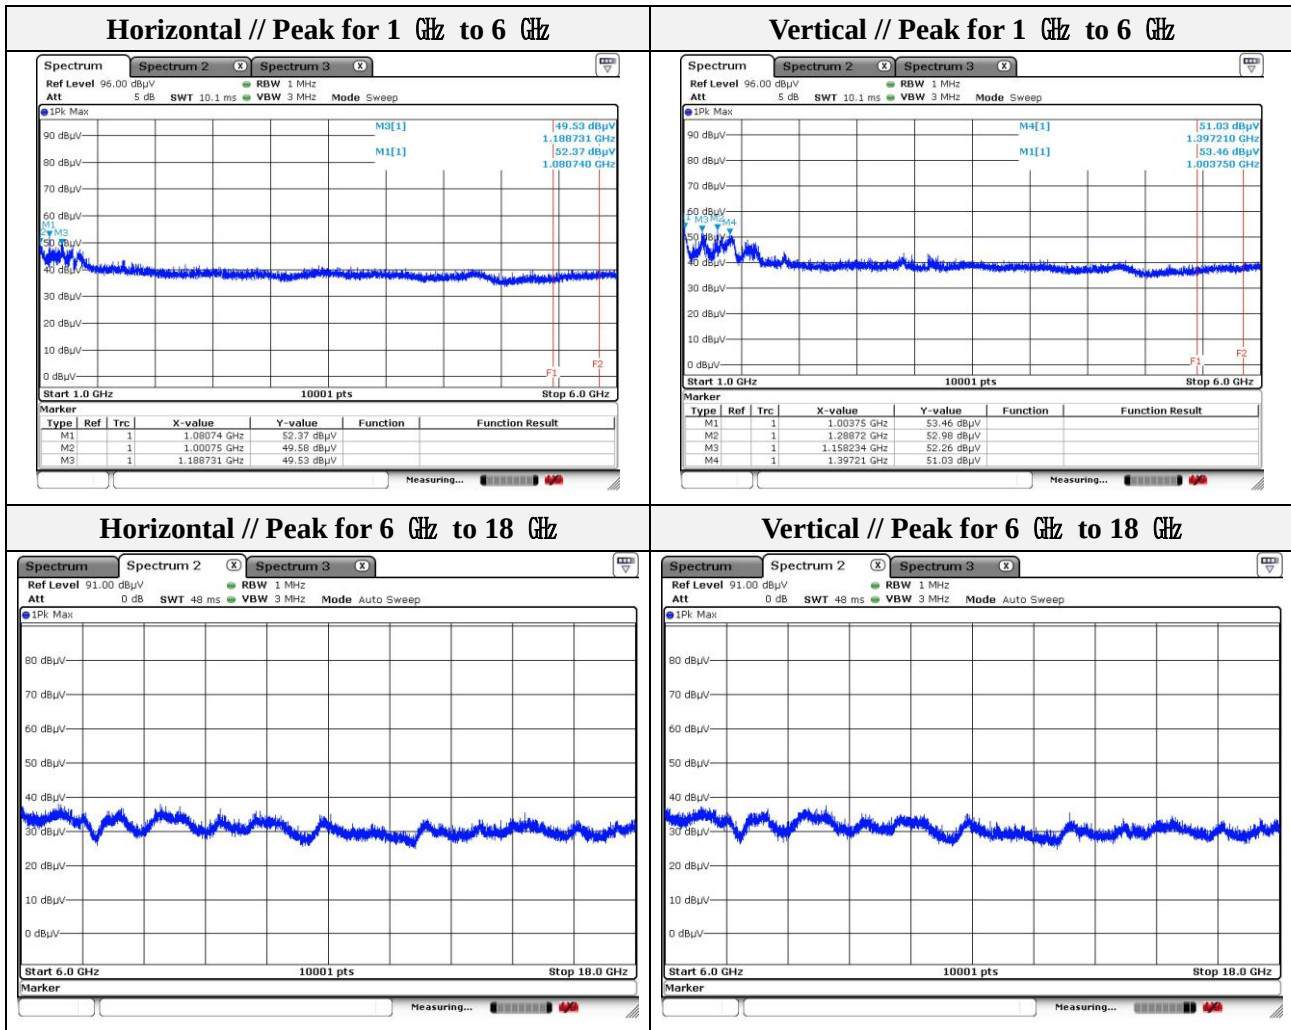

Note.

1. No spurious emission were detected above 6 GHz.
2. Average test would be performed if the peak result were greater than the average limit.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-RF1-22T0071


Page (179) of (214)

Mode: 802.11ac_HT80
Band: UNII-2C
Distance of measurement: 3 meter
Channel: 122

- Spurious

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 000.25	54.58	Peak	V	-9.44	-	45.14	74.00	28.86
1 080.24	51.44	Peak	H	-9.37	-	42.07	74.00	31.93
1 173.23	51.71	Peak	V	-9.26	-	42.45	74.00	31.55
1 193.73	50.60	Peak	H	-9.25	-	41.35	74.00	32.65
1 279.72	49.67	Peak	H	-9.13	-	40.54	74.00	33.46
1 289.22	52.41	Peak	V	-9.12	-	43.29	74.00	30.71
1 398.71	50.84	Peak	V	-8.96	-	41.88	74.00	32.12

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

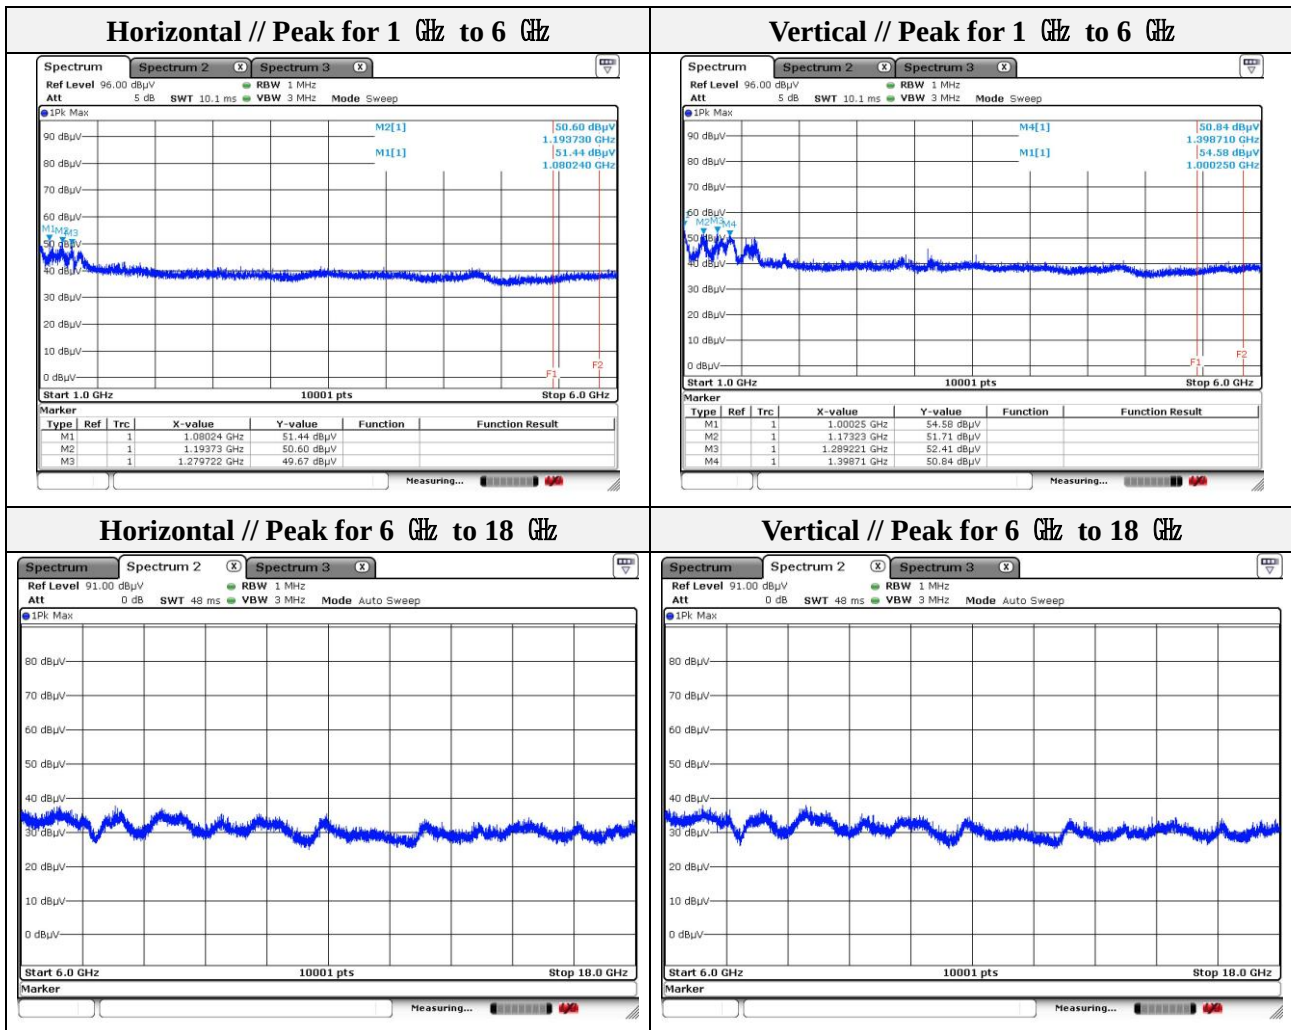

Note.

1. No spurious emission were detected above 6 GHz.
2. Average test would be performed if the peak result were greater than the average limit.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-RF1-22T0071


Page (181) of (214)

Mode: 802.11ac_HT80
Band: UNII-2C
Distance of measurement: 3 meter
Channel: 138

- Spurious

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 000.75	53.33	Peak	V	-9.44	-	43.89	74.00	30.11
1 004.75	50.47	Peak	H	-9.44	-	41.03	74.00	32.97
1 080.24	51.84	Peak	H	-9.37	-	42.47	74.00	31.53
1 158.73	50.59	Peak	V	-9.29	-	41.30	74.00	32.70
1 185.73	50.37	Peak	H	-9.25	-	41.12	74.00	32.88
1 410.71	50.97	Peak	V	-8.96	-	42.01	74.00	31.99
1 606.19	50.36	Peak	V	-4.85	-	45.51	74.00	28.49

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

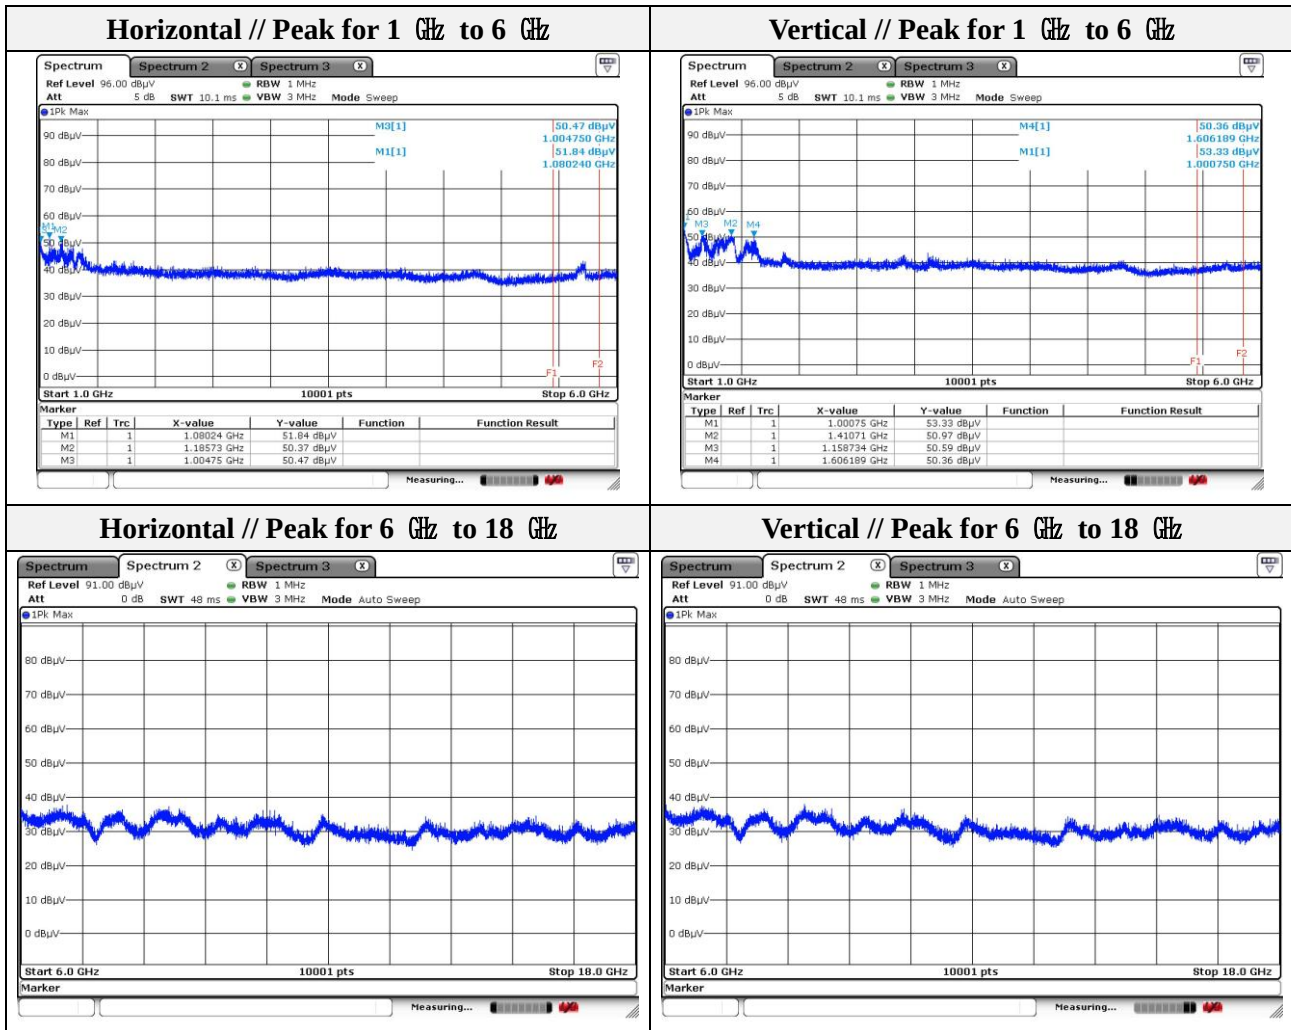

Note.

1. No spurious emission were detected above 6 GHz.
2. Average test would be performed if the peak result were greater than the average limit.


Mode: 802.11a
 Band: UNII-3
 Distance of measurement: 3 meter
 Channel: 149

- Spurious


Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 002.25	53.23	Peak	V	-9.44	-	43.79	74.00	30.21
1 080.74	51.90	Peak	H	-9.36	-	42.54	74.00	31.46
1 188.23	51.43	Peak	V	-9.25	-	42.18	74.00	31.82
1 189.23	49.73	Peak	H	-9.25	-	40.48	74.00	33.52
1 239.23	49.12	Peak	H	-9.18	-	39.94	74.00	34.06
1 287.22	50.57	Peak	V	-9.12	-	41.45	74.00	32.55
1 409.21	51.22	Peak	V	-8.96	-	42.26	74.00	31.74

- Band edge

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
5 721.80	40.44	Peak	V	9.67	-	50.11	74.00	23.89
5 724.84	40.85	Peak	H	9.68	-	50.53	74.00	23.47

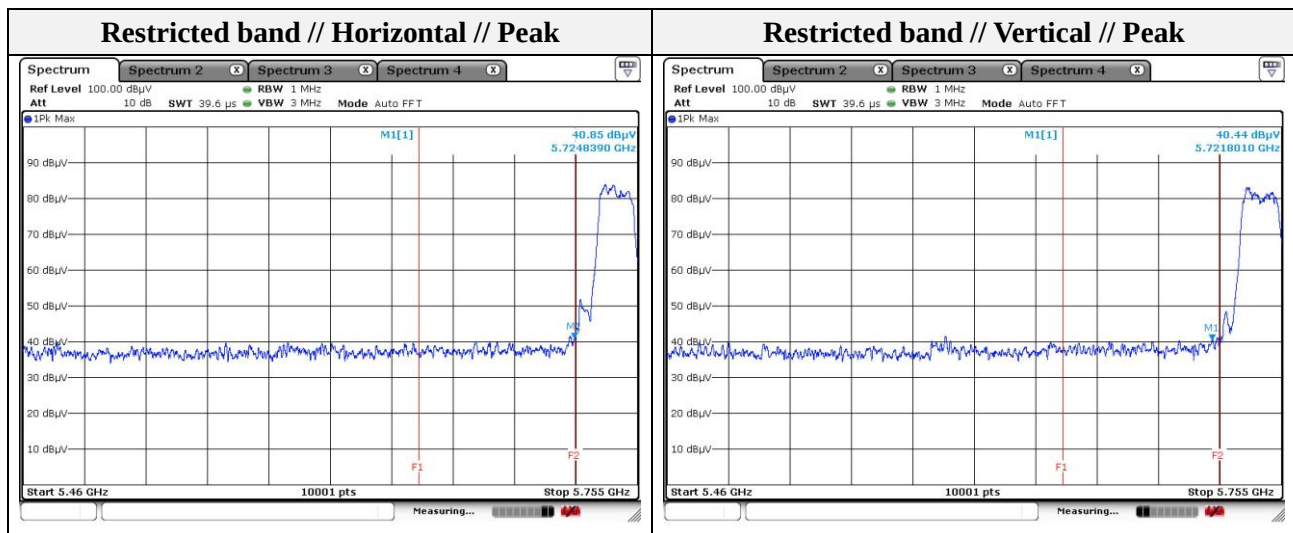

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

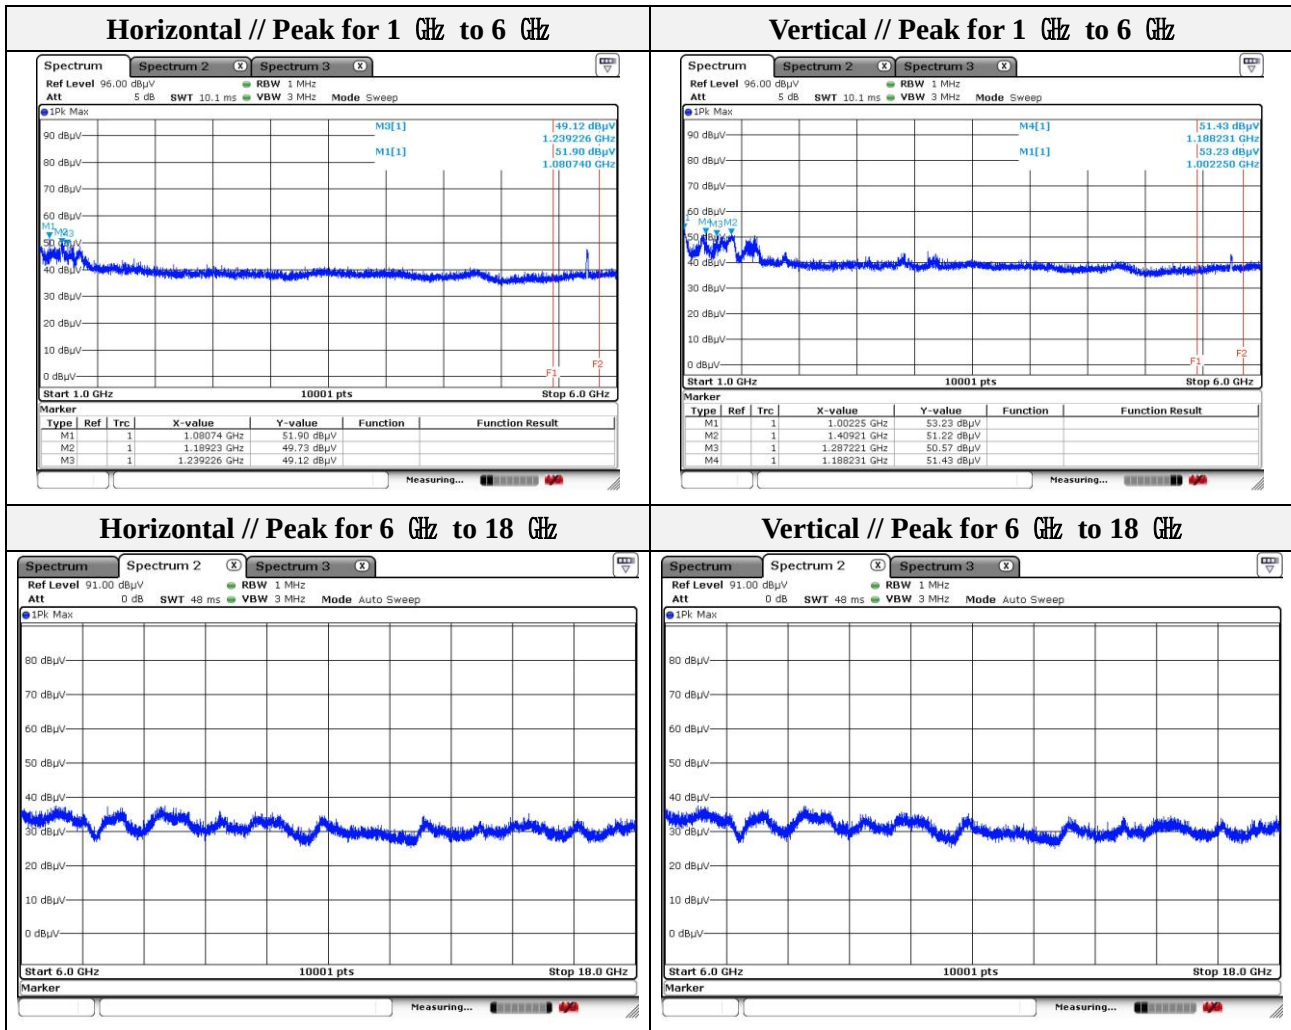

Note.


1. No spurious emission were detected above 6 GHz.
2. Average test would be performed if the peak result were greater than the average limit.

Mode: 802.11a
 Band: UNII-3
 Distance of measurement: 3 meter
 Channel: 157

- **Spurious**

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 006.25	49.56	Peak	H	-9.43	-	40.13	74.00	33.87
1 000.75	54.10	Peak	V	-9.44	-	44.66	74.00	29.34
1 080.24	52.52	Peak	H	-9.37	-	43.15	74.00	30.85
1 157.73	51.80	Peak	V	-9.28	-	42.52	74.00	31.48
1 188.23	50.59	Peak	H	-9.25	-	41.34	74.00	32.66
1 410.71	51.83	Peak	V	-8.96	-	42.87	74.00	31.13

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

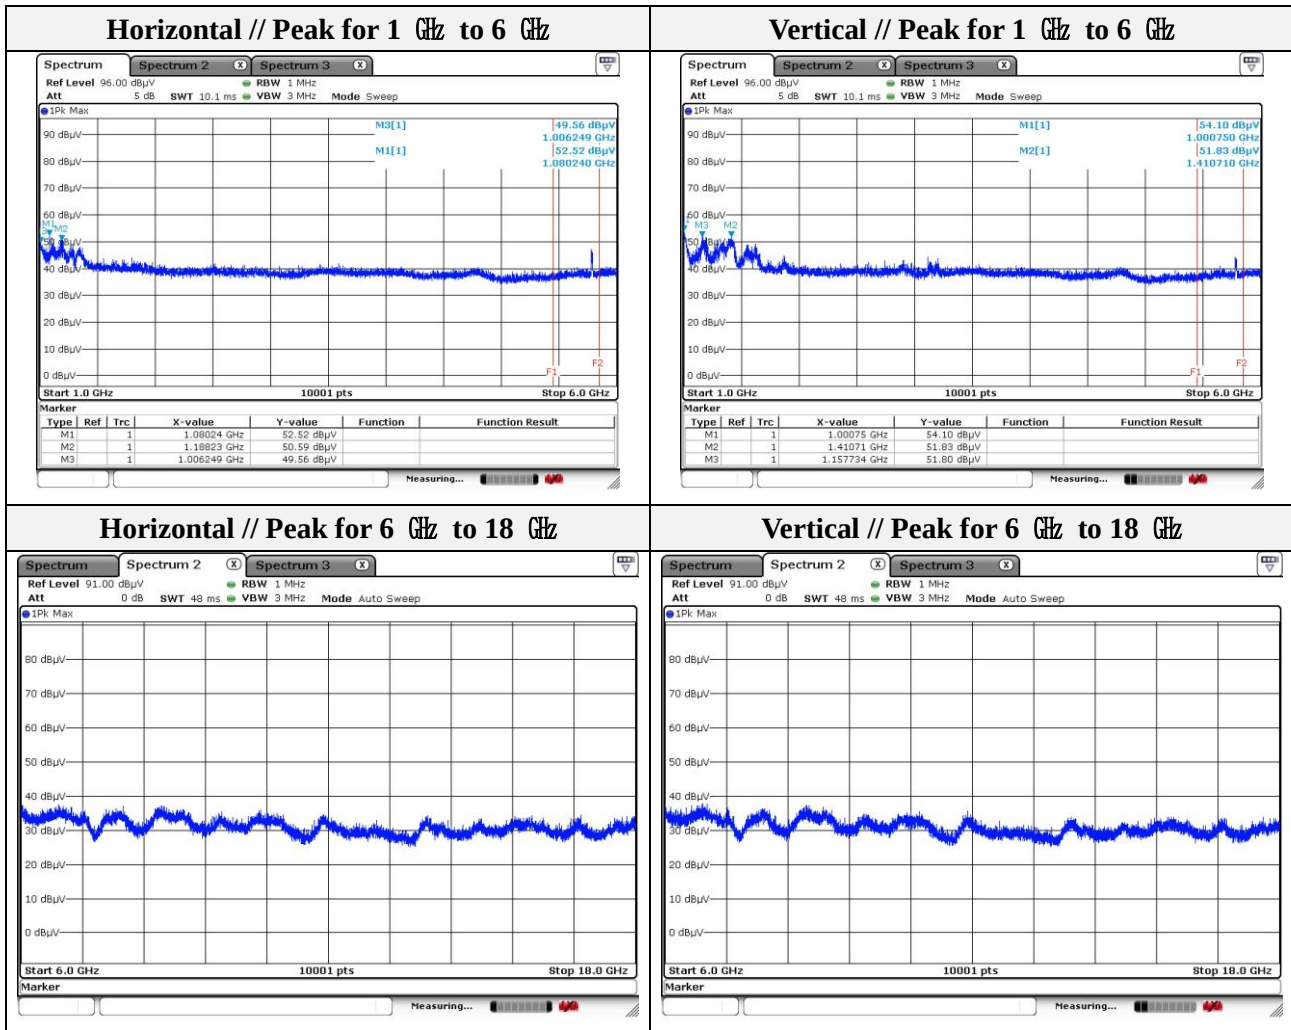

Note.

1. No spurious emission were detected above 6 GHz.
2. Average test would be performed if the peak result were greater than the average limit.


Mode: 802.11a
Band: UNII-3
Distance of measurement: 3 meter
Channel: 165

- Spurious


Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 002.75	53.75	Peak	V	-9.44	-	44.31	74.00	29.69
1 080.24	52.24	Peak	H	-9.37	-	42.87	74.00	31.13
1 107.24	49.72	Peak	H	-9.33	-	40.39	74.00	33.61
1 157.73	52.45	Peak	V	-9.28	-	43.17	74.00	30.83
1 188.23	49.53	Peak	H	-9.25	-	40.28	74.00	33.72
1 289.22	52.71	Peak	V	-9.12	-	43.59	74.00	30.41
1 394.21	51.84	Peak	V	-8.97	-	42.87	74.00	31.13

- Band edge

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
5 864.77	42.76	Peak	V	10.57	-	53.33	74.00	20.67
5 865.15	42.13	Peak	H	10.57	-	52.70	74.00	21.30

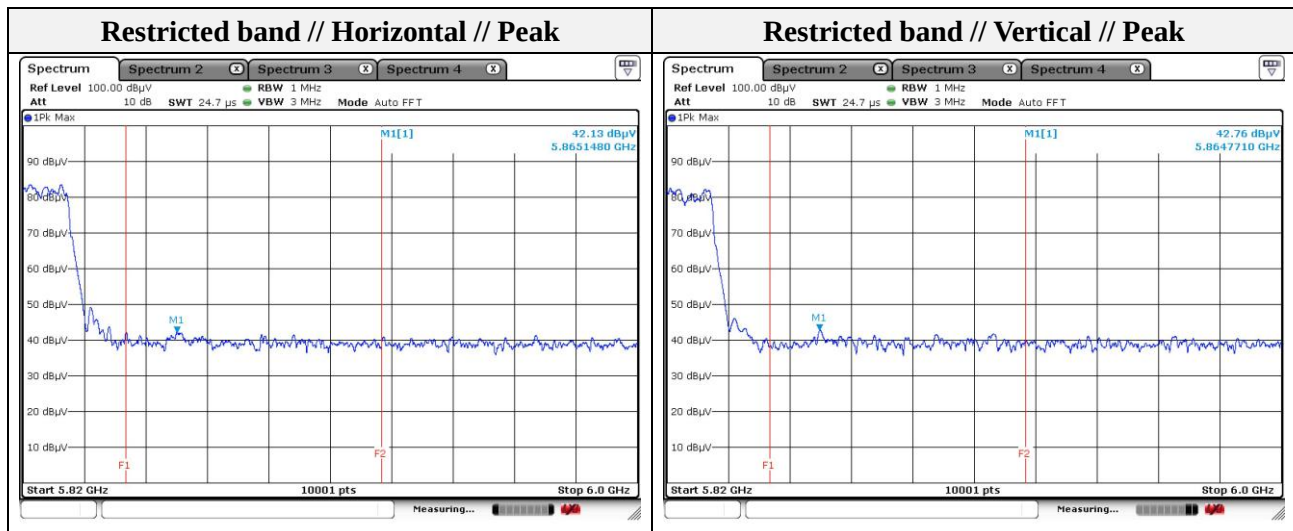

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

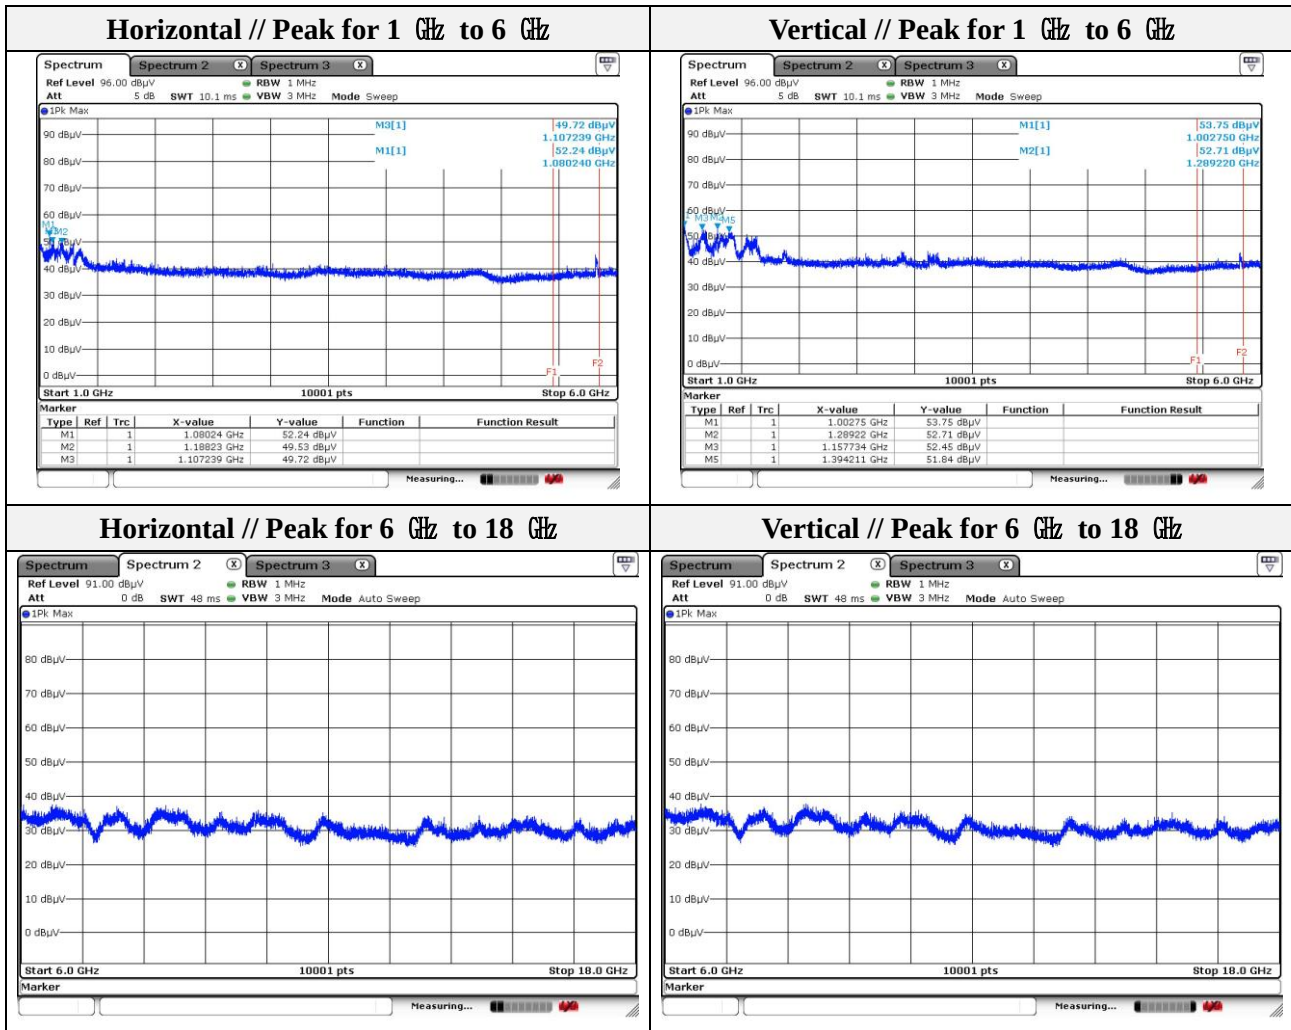

Note.

1. No spurious emission were detected above 6 GHz.
2. Average test would be performed if the peak result were greater than the average limit.


Mode: 802.11an_HT20
Band: UNII-3
Distance of measurement: 3 meter
Channel: 149

- Spurious


Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 000.75	50.02	Peak	H	-9.44	-	40.58	74.00	33.42
1 006.25	52.74	Peak	V	-9.43	-	43.31	74.00	30.69
1 080.74	52.45	Peak	H	-9.36	-	43.09	74.00	30.91
1 175.23	50.59	Peak	V	-9.26	-	41.33	74.00	32.67
1 200.23	50.89	Peak	H	-9.24	-	41.65	74.00	32.35
1 398.21	50.67	Peak	V	-8.97	-	41.70	74.00	32.30
1 618.19	51.47	Peak	V	-4.64	-	46.83	74.00	27.17

- Band edge

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
5 721.80	40.44	Peak	V	9.67	-	50.11	74.00	23.89
5 724.40	42.87	Peak	H	9.68	-	52.55	74.00	21.45

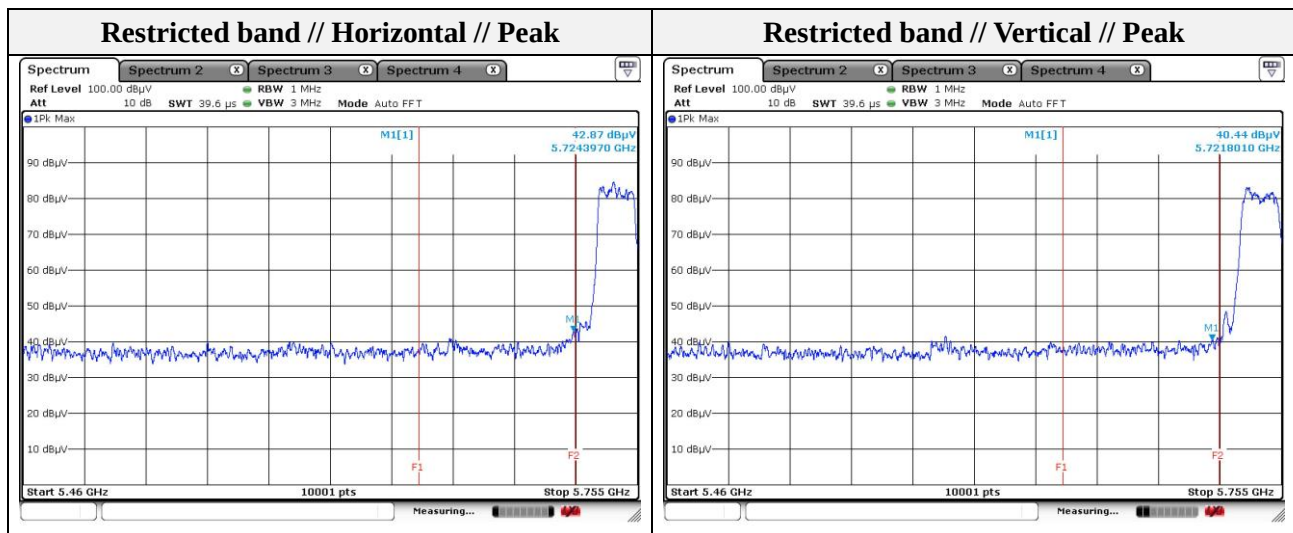

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

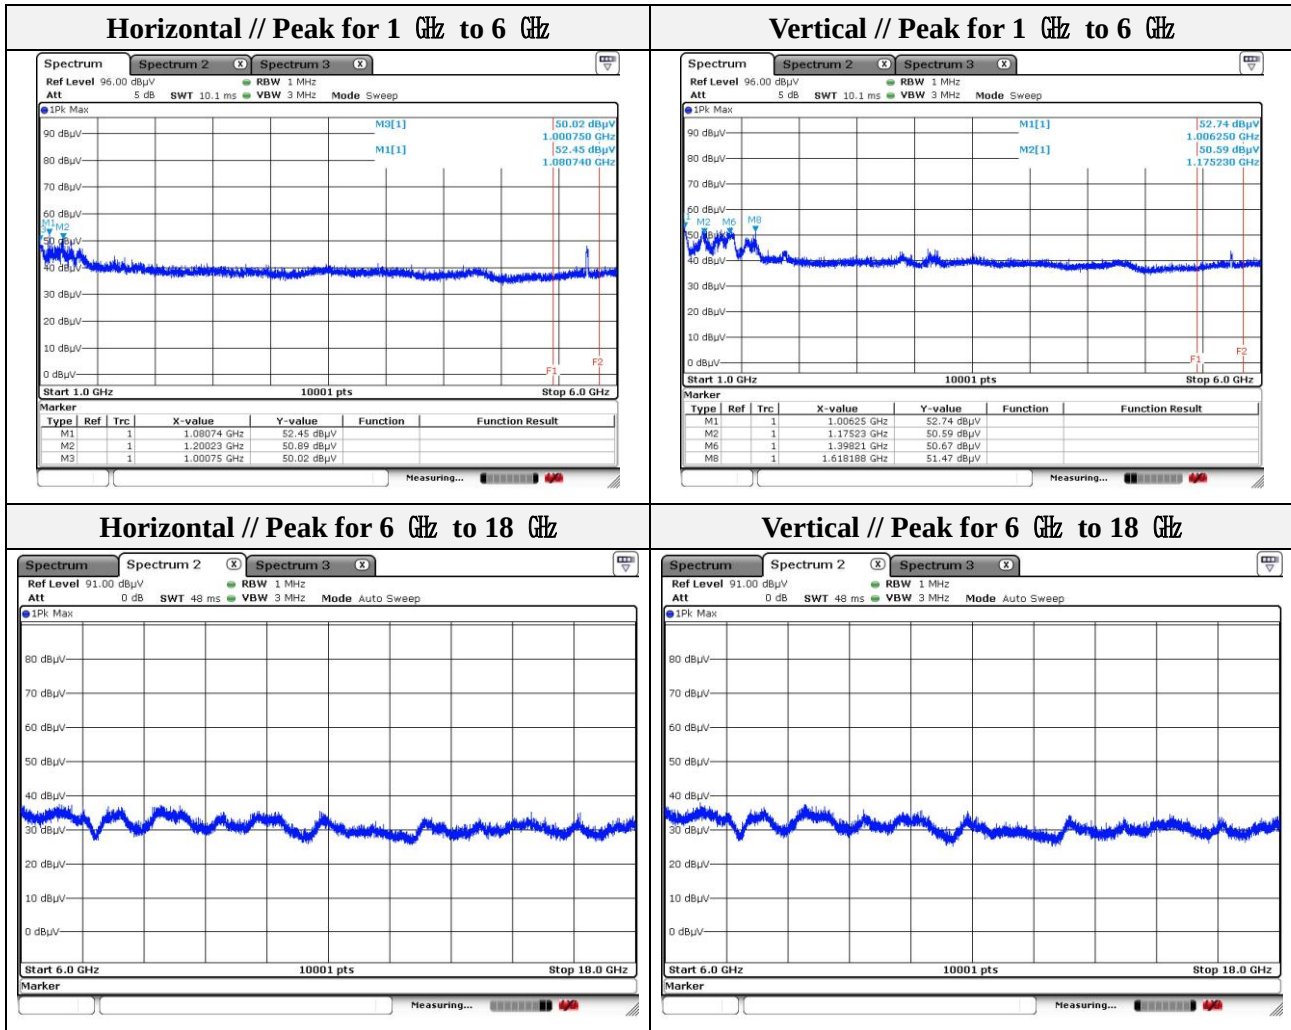

Note.


1. No spurious emission were detected above 6 GHz.
2. Average test would be performed if the peak result were greater than the average limit.

Mode: 802.11an_HT20
 Band: UNII-3
 Distance of measurement: 3 meter
 Channel: 157

- **Spurious**

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 000.75	51.08	Peak	H	-9.44	-	41.64	74.00	32.36
1 001.25	52.50	Peak	V	-9.44	-	43.06	74.00	30.94
1 080.74	51.90	Peak	H	-9.36	-	42.54	74.00	31.46
1 157.73	51.92	Peak	V	-9.28	-	42.64	74.00	31.36
1 179.73	50.64	Peak	H	-9.26	-	41.38	74.00	32.62
1 391.71	51.49	Peak	V	-8.97	-	42.52	74.00	31.48
1 618.69	51.44	Peak	V	-4.63	-	46.81	74.00	27.19

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

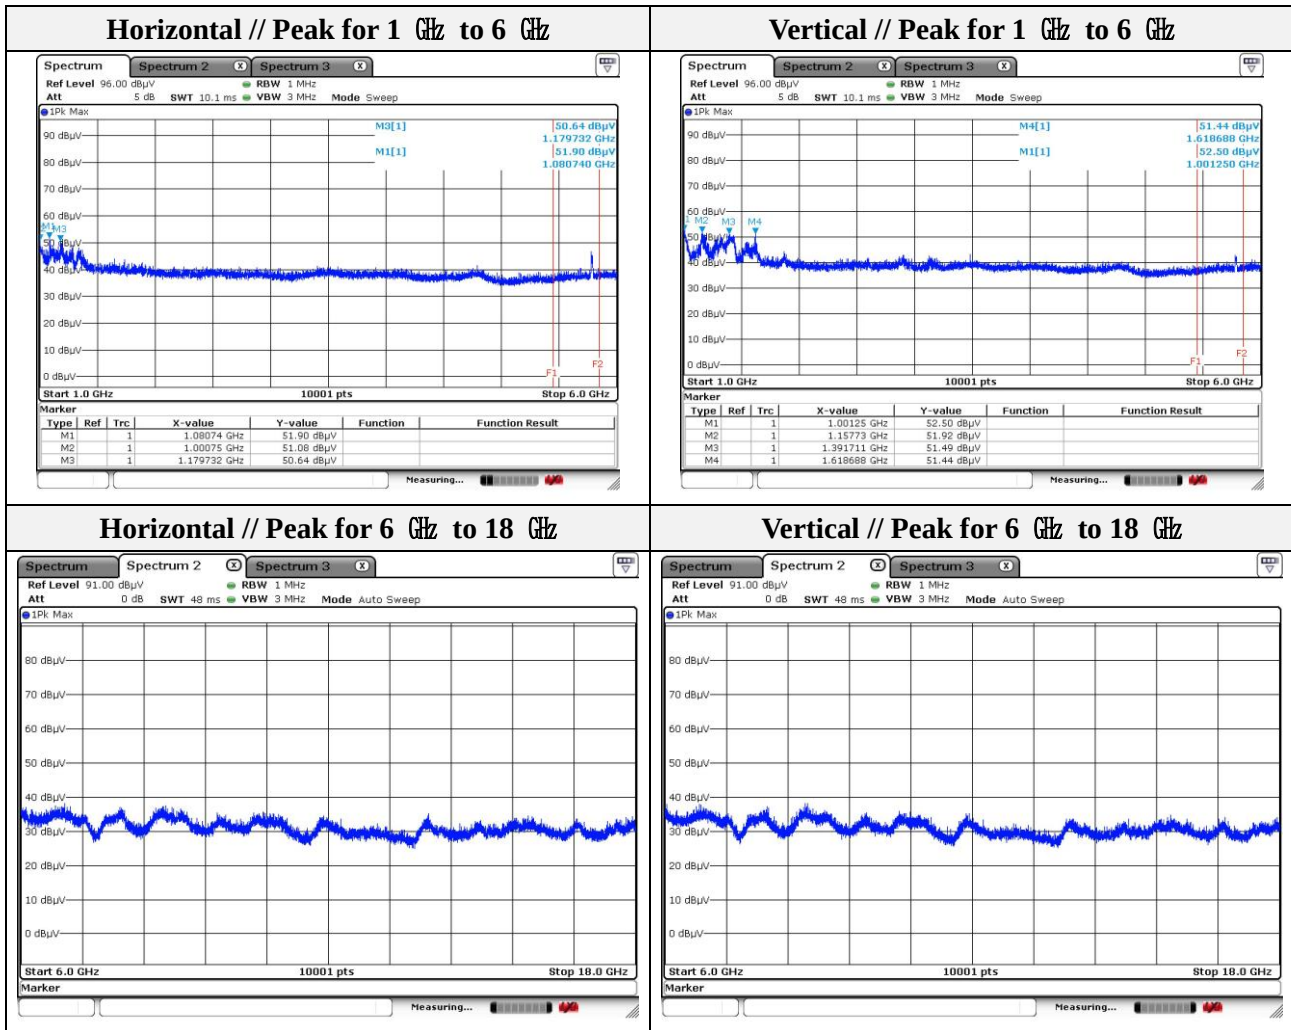

Note.

1. No spurious emission were detected above 6 GHz.
2. Average test would be performed if the peak result were greater than the average limit.


Mode: 802.11an_HT20
Band: UNII-3
Distance of measurement: 3 meter
Channel: 165

- Spurious


Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 000.25	50.03	Peak	H	-9.44	-	40.59	74.00	33.41
1 004.75	52.18	Peak	V	-9.44	-	42.74	74.00	31.26
1 080.24	51.24	Peak	H	-9.37	-	41.87	74.00	32.13
1 170.23	52.39	Peak	V	-9.27	-	43.12	74.00	30.88
1 191.23	49.27	Peak	H	-9.24	-	40.03	74.00	33.97
1 387.71	50.98	Peak	V	-8.98	-	42.00	74.00	32.00
1 589.19	49.04	Peak	V	-5.13	-	43.91	74.00	30.09

- Band edge

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
5865.11	42.72	Peak	H	10.57	-	53.29	74.00	20.71
5870.80	41.87	Peak	V	10.62	-	52.49	74.00	21.51

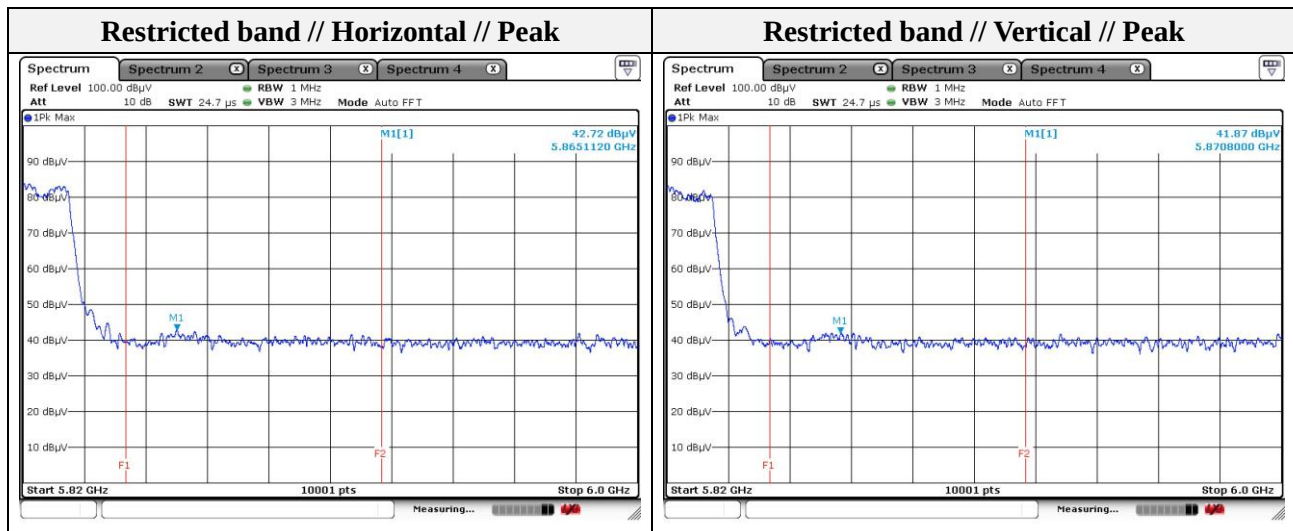

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

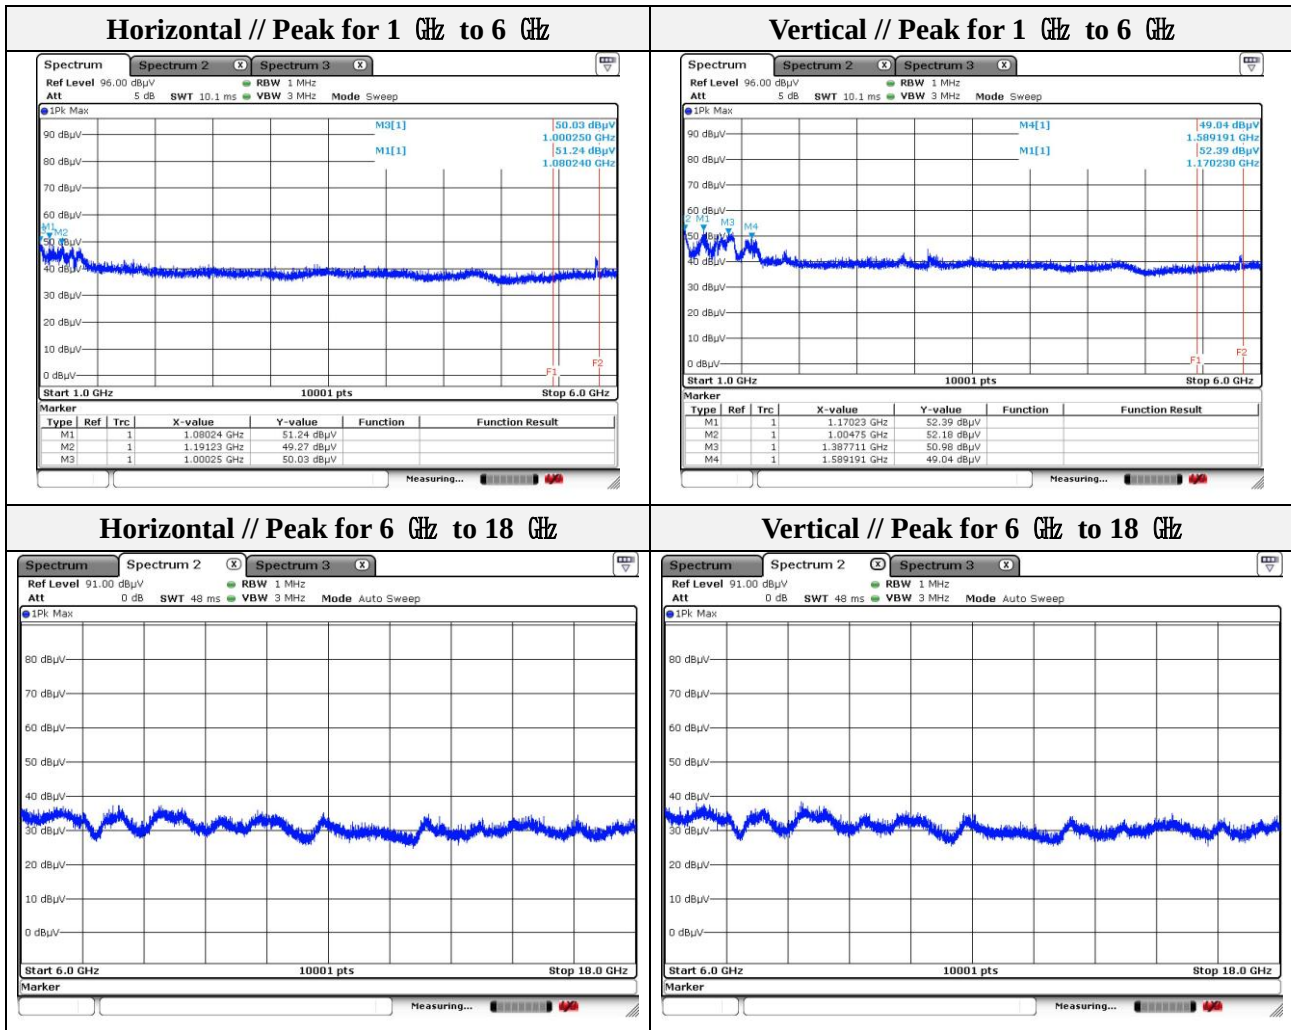

Note.

1. No spurious emission were detected above 6 GHz.
2. Average test would be performed if the peak result were greater than the average limit.


Mode: 802.11ac_HT20
Band: UNII-3
Distance of measurement: 3 meter
Channel: 149

- Spurious


Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 000.25	49.25	Peak	H	-9.44	-	39.81	74.00	34.19
1 003.25	52.27	Peak	V	-9.44	-	42.83	74.00	31.17
1 080.24	52.00	Peak	H	-9.37	-	42.63	74.00	31.37
1 172.23	50.62	Peak	V	-9.27	-	41.35	74.00	32.65
1 196.23	49.36	Peak	H	-9.24	-	40.12	74.00	33.88
1 288.22	51.15	Peak	V	-9.11	-	42.04	74.00	31.96
1 429.71	51.24	Peak	V	-8.97	-	42.27	74.00	31.73

- Band edge

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
5 721.18	40.34	Peak	H	9.67	-	50.01	74.00	23.99
5 723.98	41.68	Peak	V	9.68	-	51.36	74.00	22.64

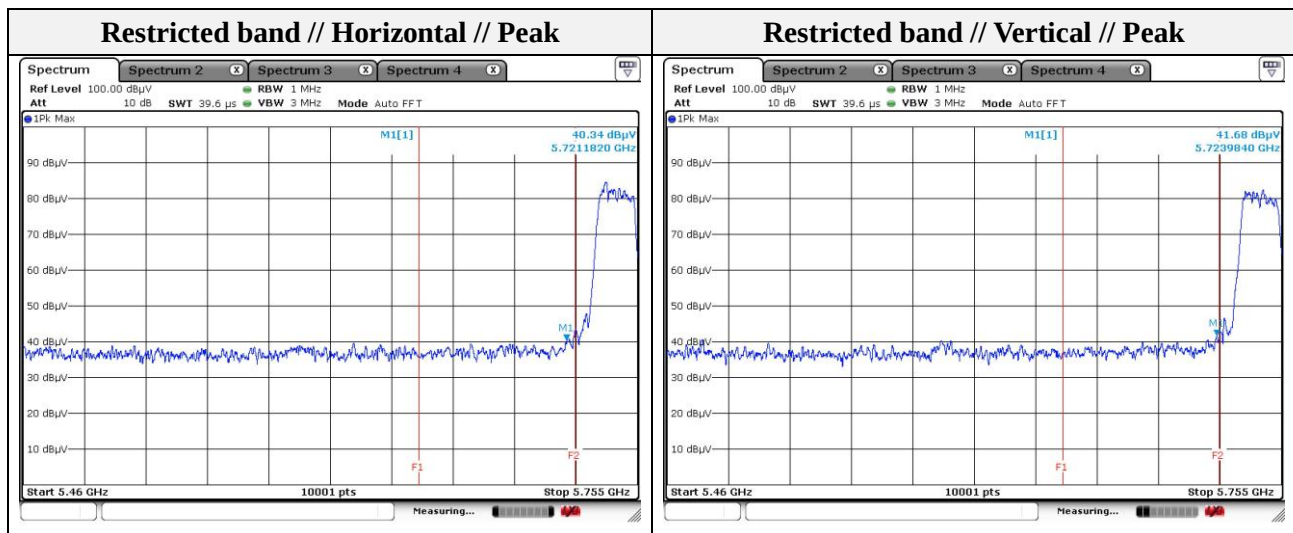

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

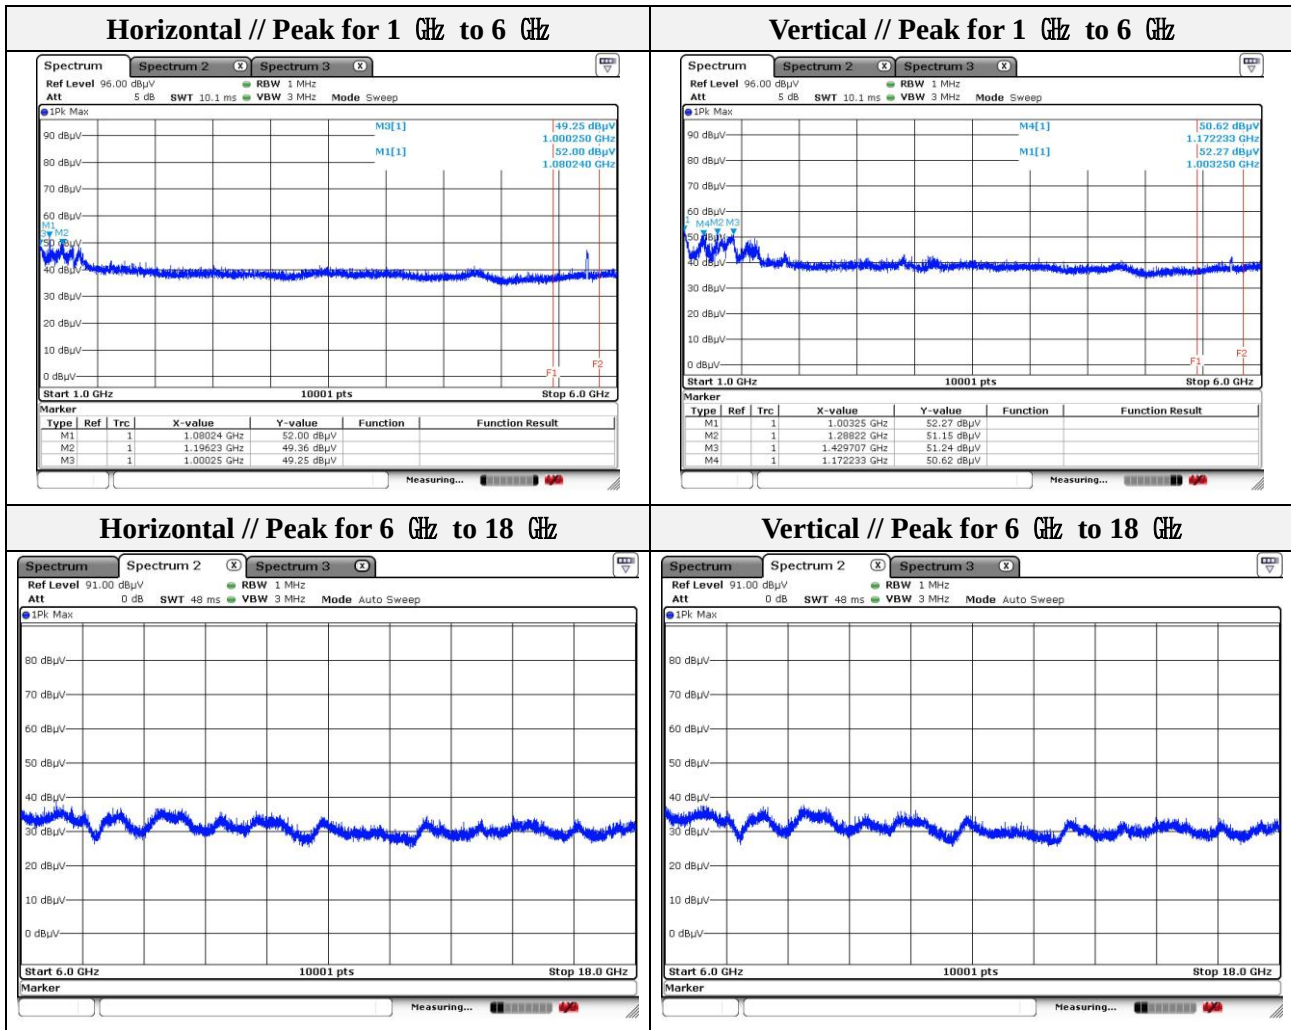

Note.

1. No spurious emission were detected above 6 GHz.
2. Average test would be performed if the peak result were greater than the average limit.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-RF1-22T0071


Page (197) of (214)

Mode: 802.11ac_HT20
Band: UNII-3
Distance of measurement: 3 meter
Channel: 157

- Spurious

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1000.75	49.82	Peak	H	-9.44	-	40.38	74.00	33.62
1004.75	52.97	Peak	V	-9.44	-	43.53	74.00	30.47
1080.74	51.64	Peak	H	-9.36	-	42.28	74.00	31.72
1174.73	51.02	Peak	V	-9.26	-	41.76	74.00	32.24
1187.73	49.41	Peak	H	-9.25	-	40.16	74.00	33.84
1412.21	51.62	Peak	V	-8.97	-	42.65	74.00	31.35
1615.19	50.08	Peak	V	-4.69	-	45.39	74.00	28.61

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

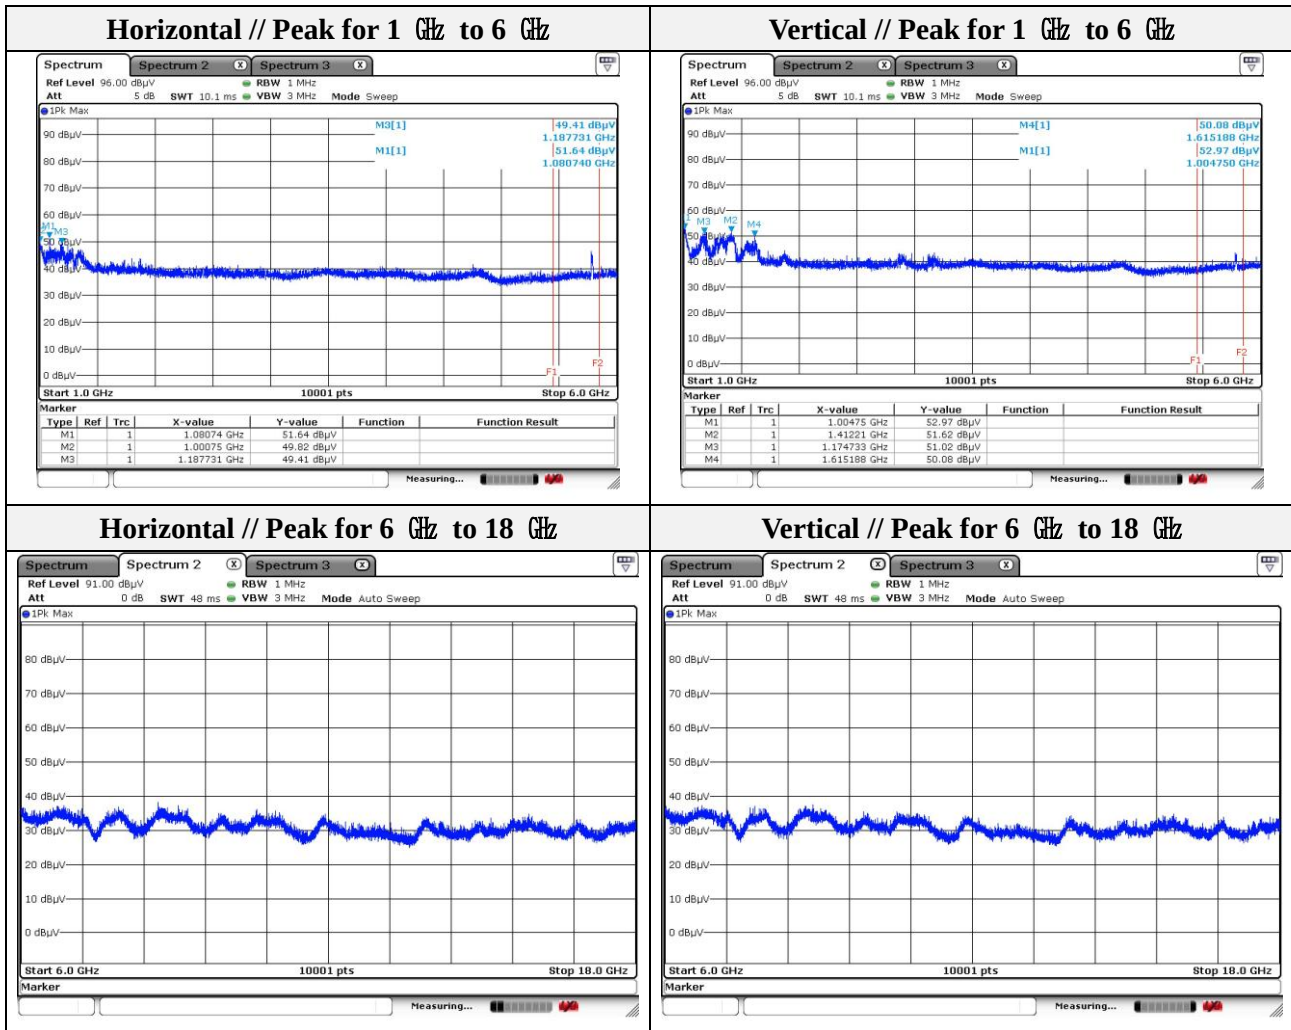

Note.

1. No spurious emission were detected above 6 GHz.
2. Average test would be performed if the peak result were greater than the average limit.


Mode: 802.11ac_HT20
Band: UNII-3
Distance of measurement: 3 meter
Channel: 165

- Spurious


Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 000.25	50.65	Peak	H	-9.44	-	41.21	74.00	32.79
1 000.75	54.51	Peak	V	-9.44	-	45.07	74.00	28.93
1 080.74	51.73	Peak	H	-9.36	-	42.37	74.00	31.63
1 165.23	51.16	Peak	V	-9.28	-	41.88	74.00	32.12
1 201.73	49.70	Peak	H	-9.24	-	40.46	74.00	33.54
1 321.12	51.73	Peak	V	-9.07	-	42.66	74.00	31.34
1 413.21	50.97	Peak	V	-8.96	-	42.01	74.00	31.99

- Band edge

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
5 864.09	42.39	Peak	V	10.55	-	52.94	74.00	21.06
5 868.19	42.08	Peak	H	10.59	-	52.67	74.00	21.33

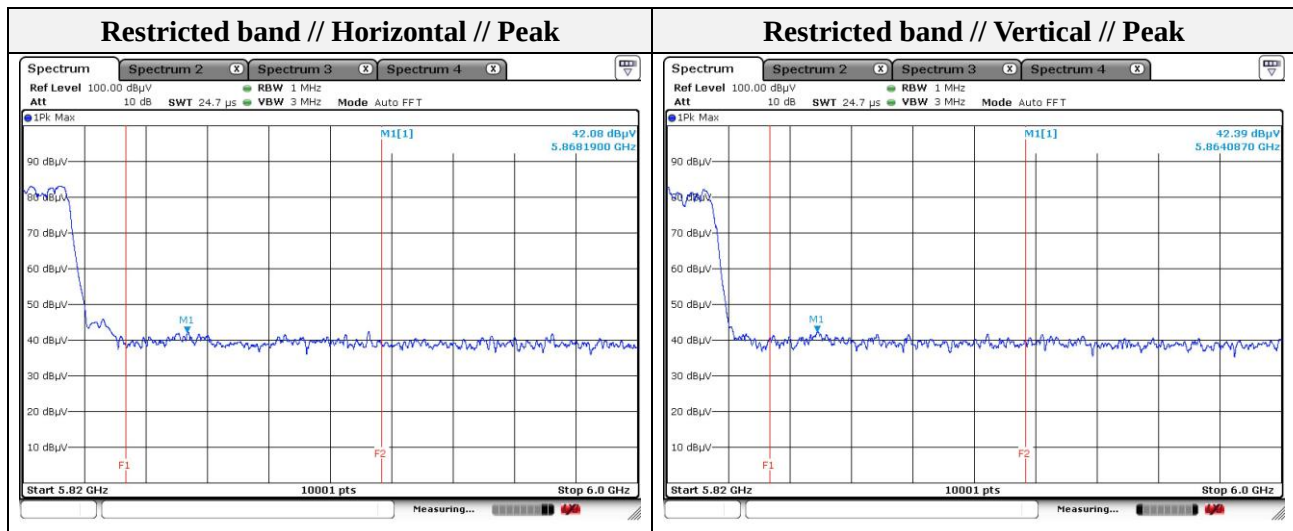

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

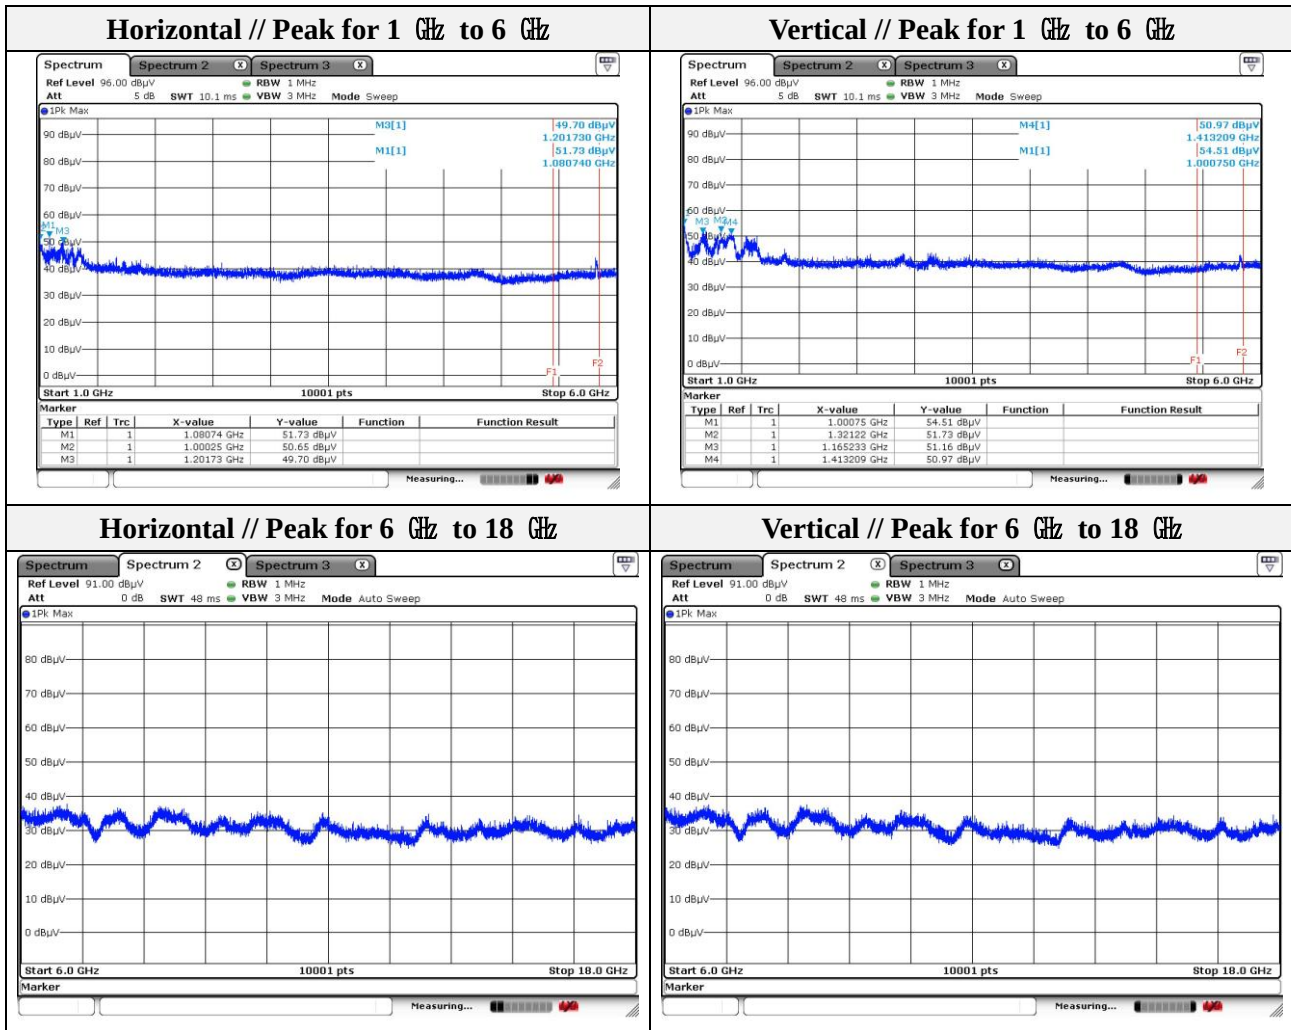

Note.

1. No spurious emission were detected above 6 GHz.
2. Average test would be performed if the peak result were greater than the average limit.


Mode: 802.11an_HT40
 Band: UNII-3
 Distance of measurement: 3 meter
 Channel: 151

- Spurious




Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 000.25	50.30	Peak	H	-9.44	-	40.86	74.00	33.14
1 000.75	53.34	Peak	V	-9.44	-	43.90	74.00	30.10
1 080.74	52.06	Peak	H	-9.36	-	42.70	74.00	31.30
1 160.73	51.16	Peak	V	-9.28	-	41.88	74.00	32.12
1 179.73	50.26	Peak	H	-9.26	-	41.00	74.00	33.00
1 288.72	51.93	Peak	V	-9.11	-	42.82	74.00	31.18
1 604.69	50.23	Peak	V	-4.87	-	45.36	74.00	28.64

- Band edge

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
5722.76	44.13	Peak	H	9.67	-	53.80	74.00	20.20
5722.76	43.98	Peak	V	9.67	-	53.65	74.00	20.35

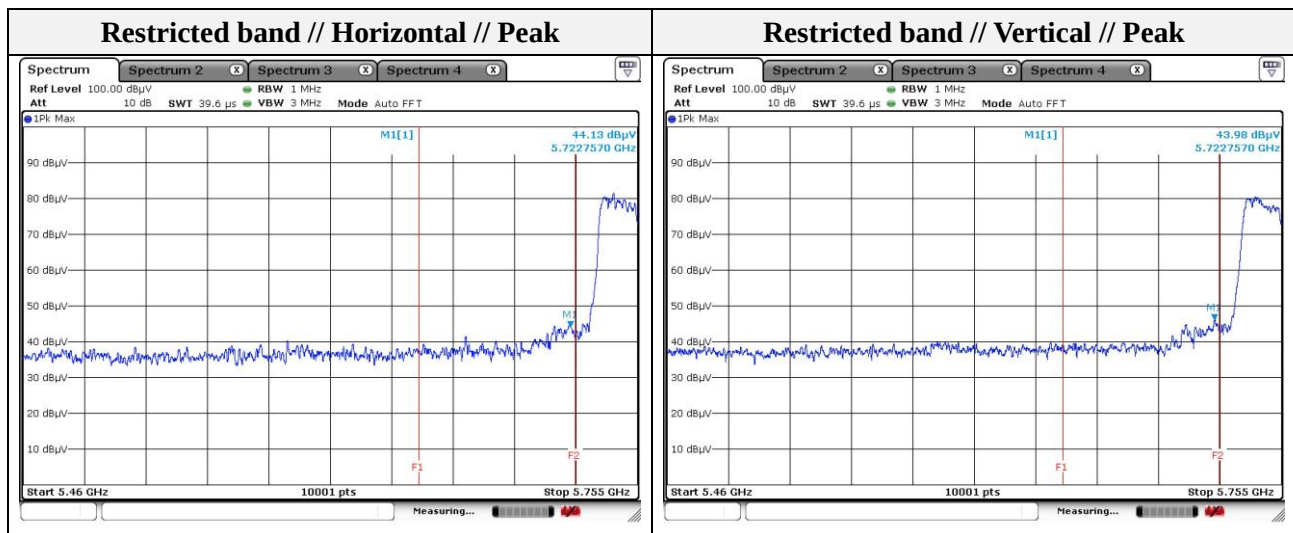

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

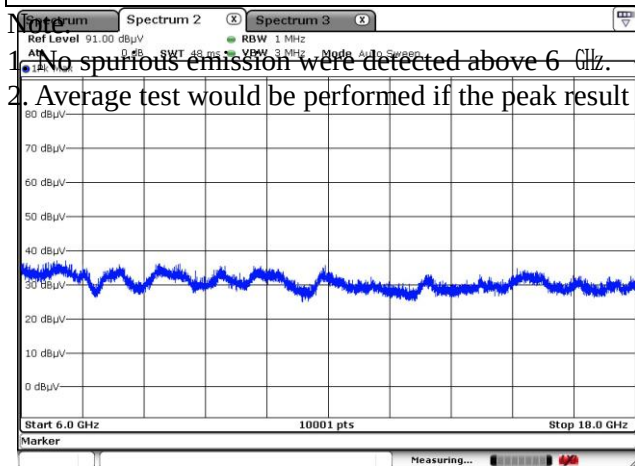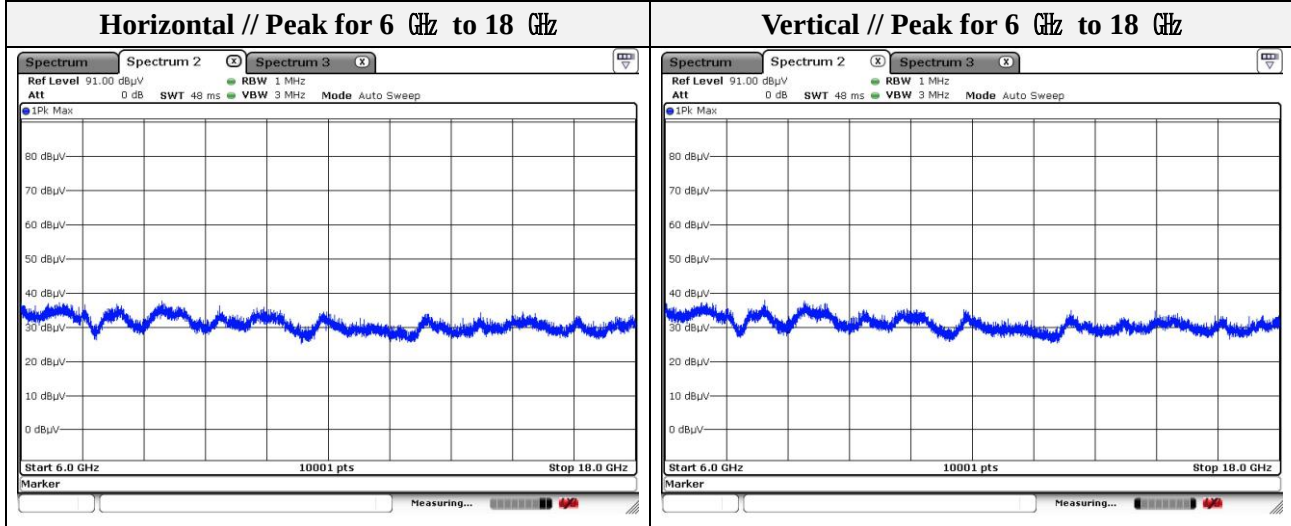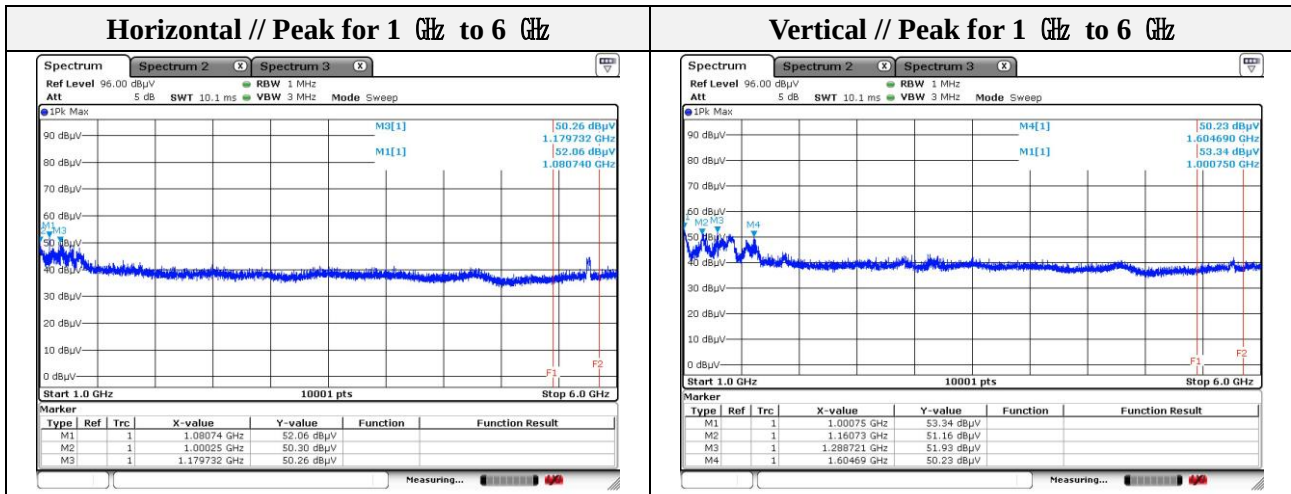


Mode: 802.11an_HT40
 Band: UNII-3
 Distance of measurement: 3 meter
 Channel: 159

- Spurious


Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 000.25	49.86	Peak	H	-9.44	-	40.42	74.00	33.58
1 000.25	53.76	Peak	V	-9.44	-	44.32	74.00	29.68
1 080.24	52.07	Peak	H	-9.37	-	42.70	74.00	31.30
1 157.23	52.10	Peak	V	-9.28	-	42.82	74.00	31.18
1 189.23	50.14	Peak	H	-9.25	-	40.89	74.00	33.11
1 288.72	51.78	Peak	V	-9.11	-	42.67	74.00	31.33
1 620.19	49.89	Peak	V	-4.60	-	45.29	74.00	28.71

- Band edge

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
5 871.26	41.71	Peak	V	10.62	-	52.33	74.00	21.67
5 871.91	42.41	Peak	H	10.63	-	53.04	74.00	20.96

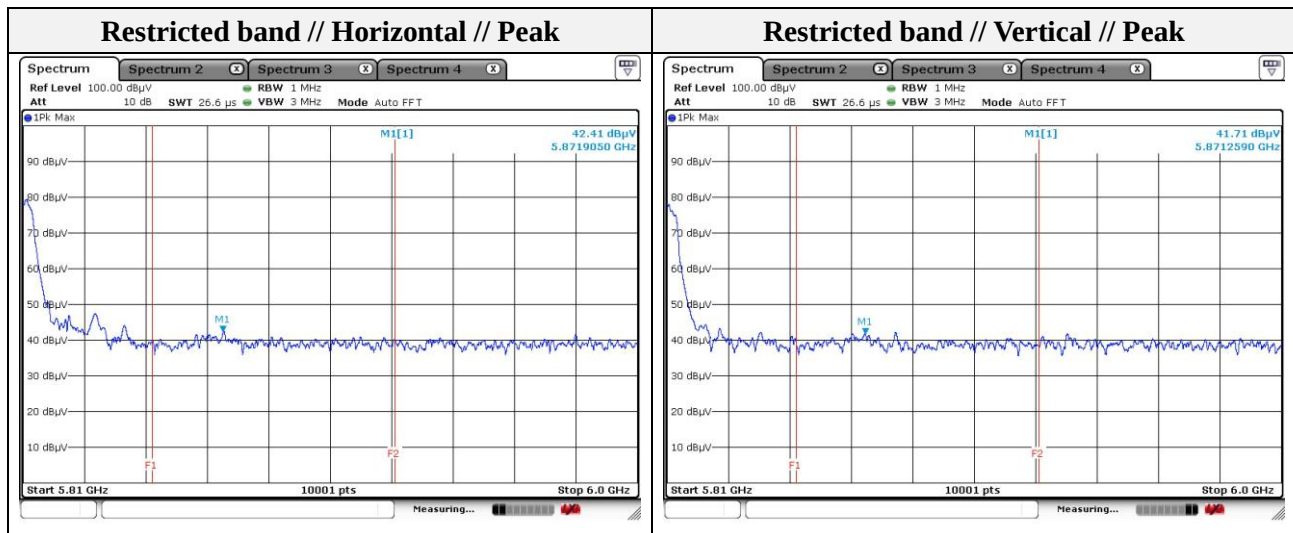

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

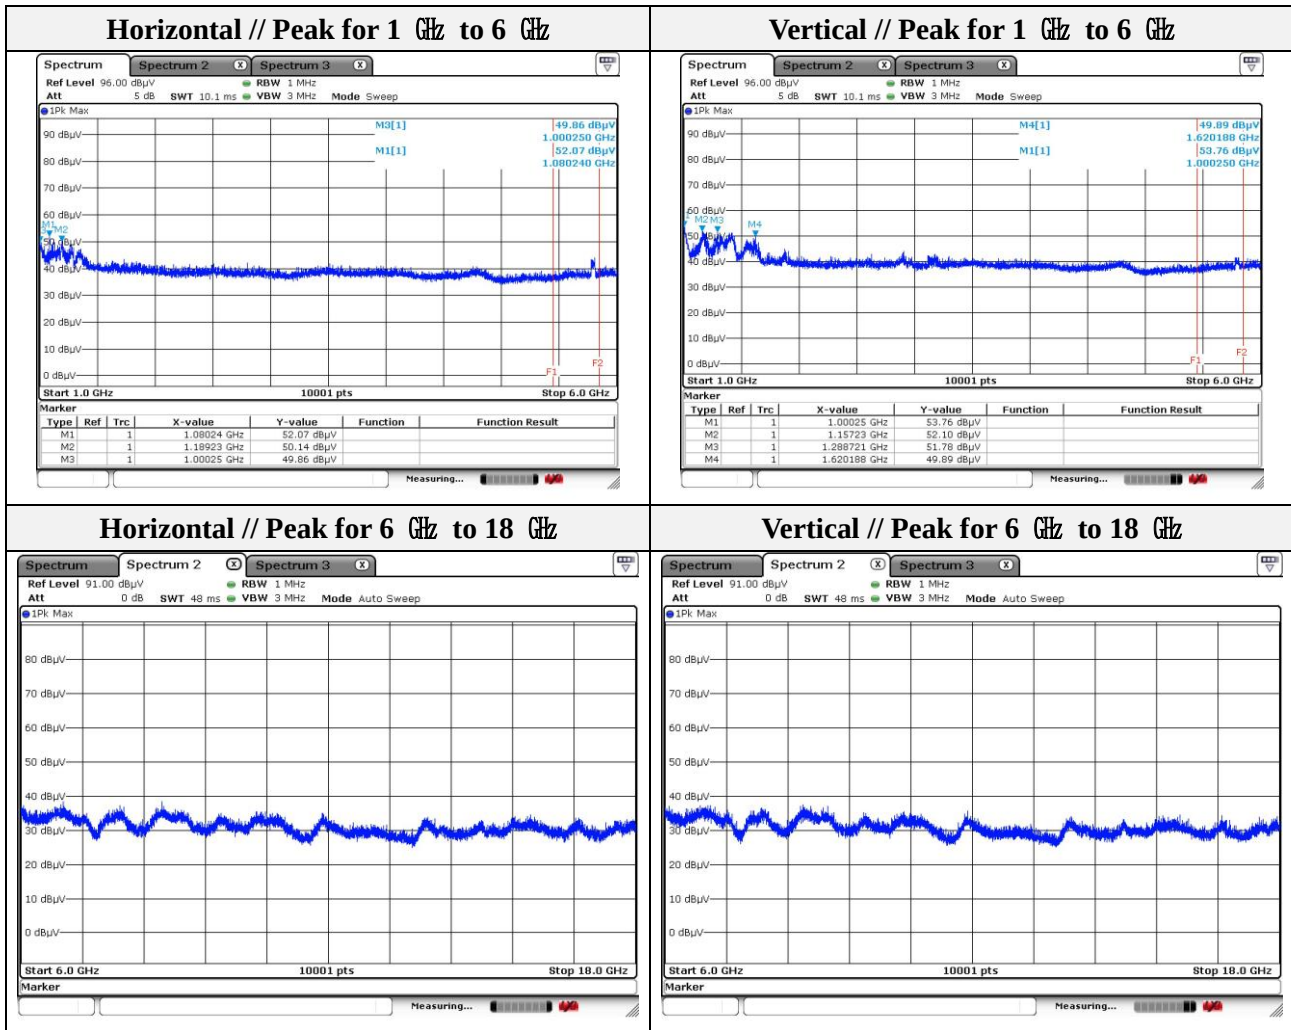

Note.

1. No spurious emission were detected above 6 GHz.
2. Average test would be performed if the peak result were greater than the average limit.


Mode: 802.11ac_HT40
Band: UNII-3
Distance of measurement: 3 meter
Channel: 151

- Spurious


Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 000.25	49.32	Peak	H	-9.44	-	39.88	74.00	34.12
1 001.25	52.89	Peak	V	-9.44	-	43.45	74.00	30.55
1 080.24	51.72	Peak	H	-9.37	-	42.35	74.00	31.65
1 155.23	52.42	Peak	V	-9.29	-	43.13	74.00	30.87
1 198.23	48.90	Peak	H	-9.24	-	39.66	74.00	34.34
1 288.22	51.54	Peak	V	-9.11	-	42.43	74.00	31.57
1 412.21	51.37	Peak	V	-8.97	-	42.40	74.00	31.60

- Band edge

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
5 722.55	43.01	Peak	H	9.67	-	52.68	74.00	21.32
5 724.29	43.29	Peak	V	9.68	-	52.97	74.00	21.03

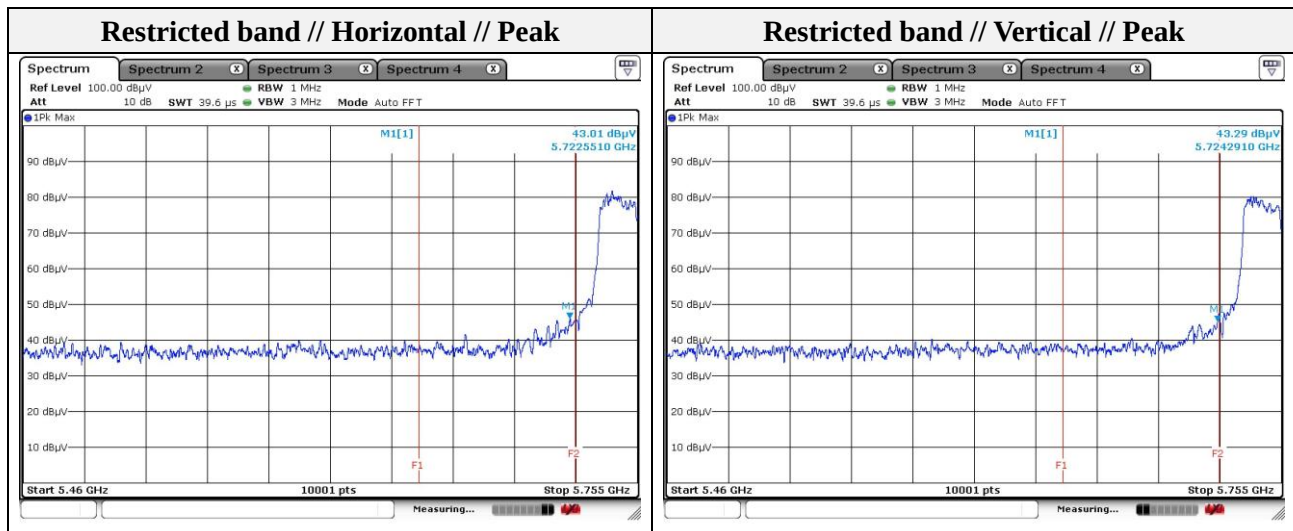

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

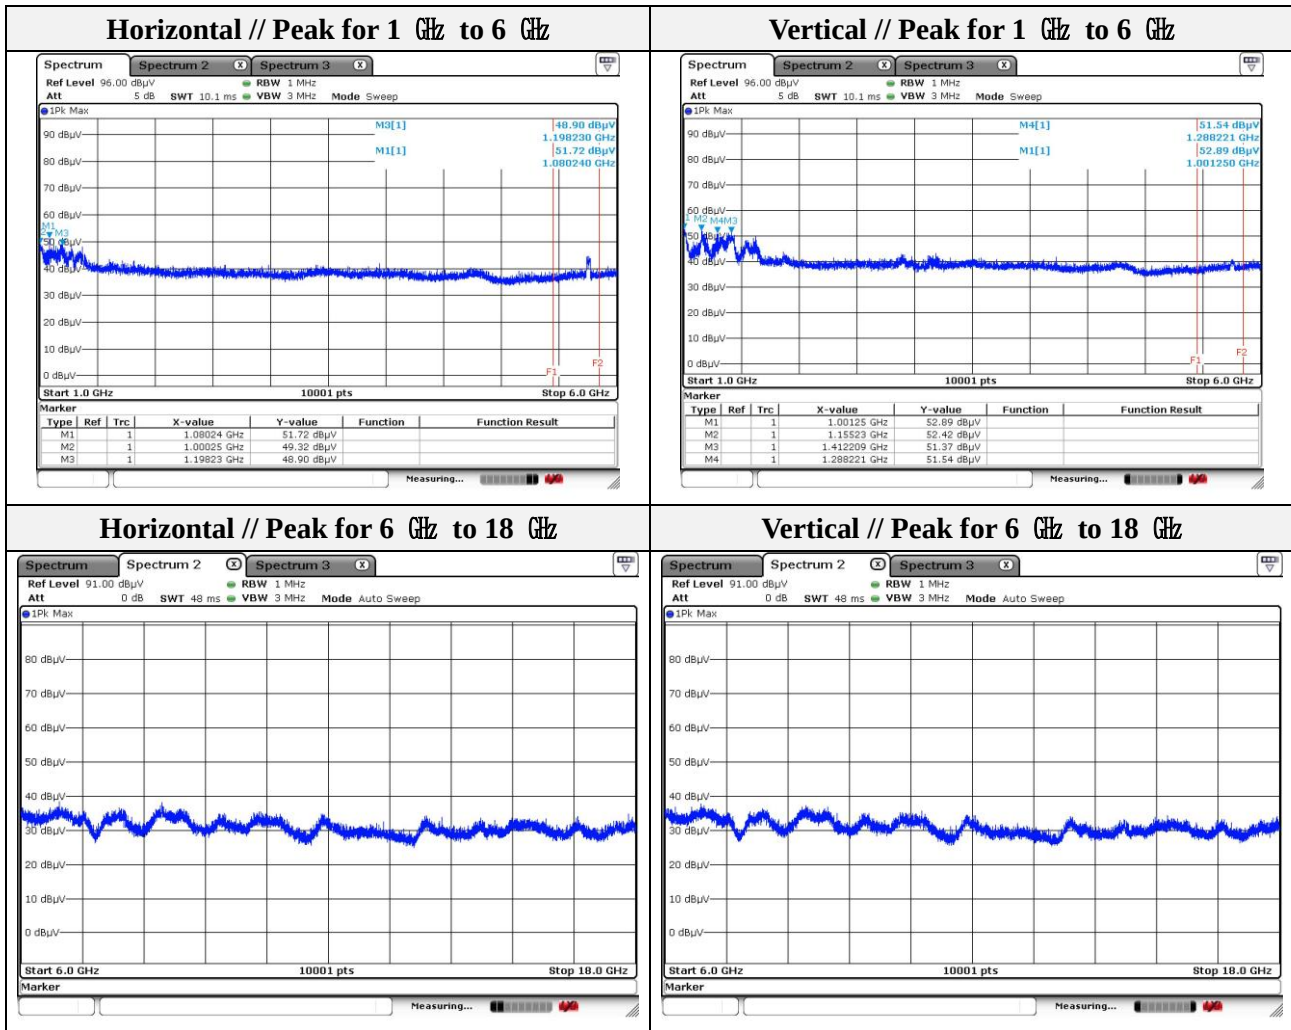

Note.

1. No spurious emission were detected above 6 GHz.
2. Average test would be performed if the peak result were greater than the average limit.


Mode: 802.11ac_HT40
Band: UNII-3
Distance of measurement: 3 meter
Channel: 159

- Spurious


Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 000.25	50.64	Peak	H	-9.44	-	41.20	74.00	32.80
1 003.25	53.40	Peak	V	-9.44	-	43.96	74.00	30.04
1 080.74	51.64	Peak	H	-9.36	-	42.28	74.00	31.72
1 162.73	51.74	Peak	V	-9.27	-	42.47	74.00	31.53
1 179.73	51.02	Peak	H	-9.26	-	41.76	74.00	32.24
1 338.22	51.49	Peak	V	-9.05	-	42.44	74.00	31.56
1 600.19	50.35	Peak	V	-4.96	-	45.39	74.00	28.61

- Band edge

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
5 867.56	42.63	Peak	H	10.59	-	53.22	74.00	20.78
5 908.34	42.18	Peak	V	10.97	-	53.15	74.00	20.85

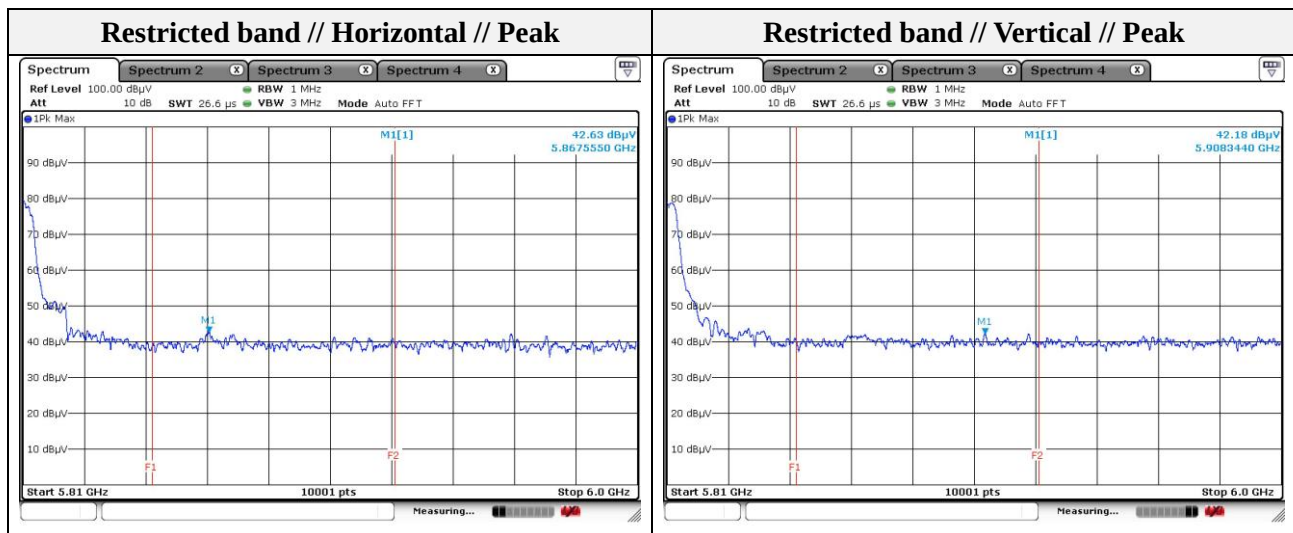

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

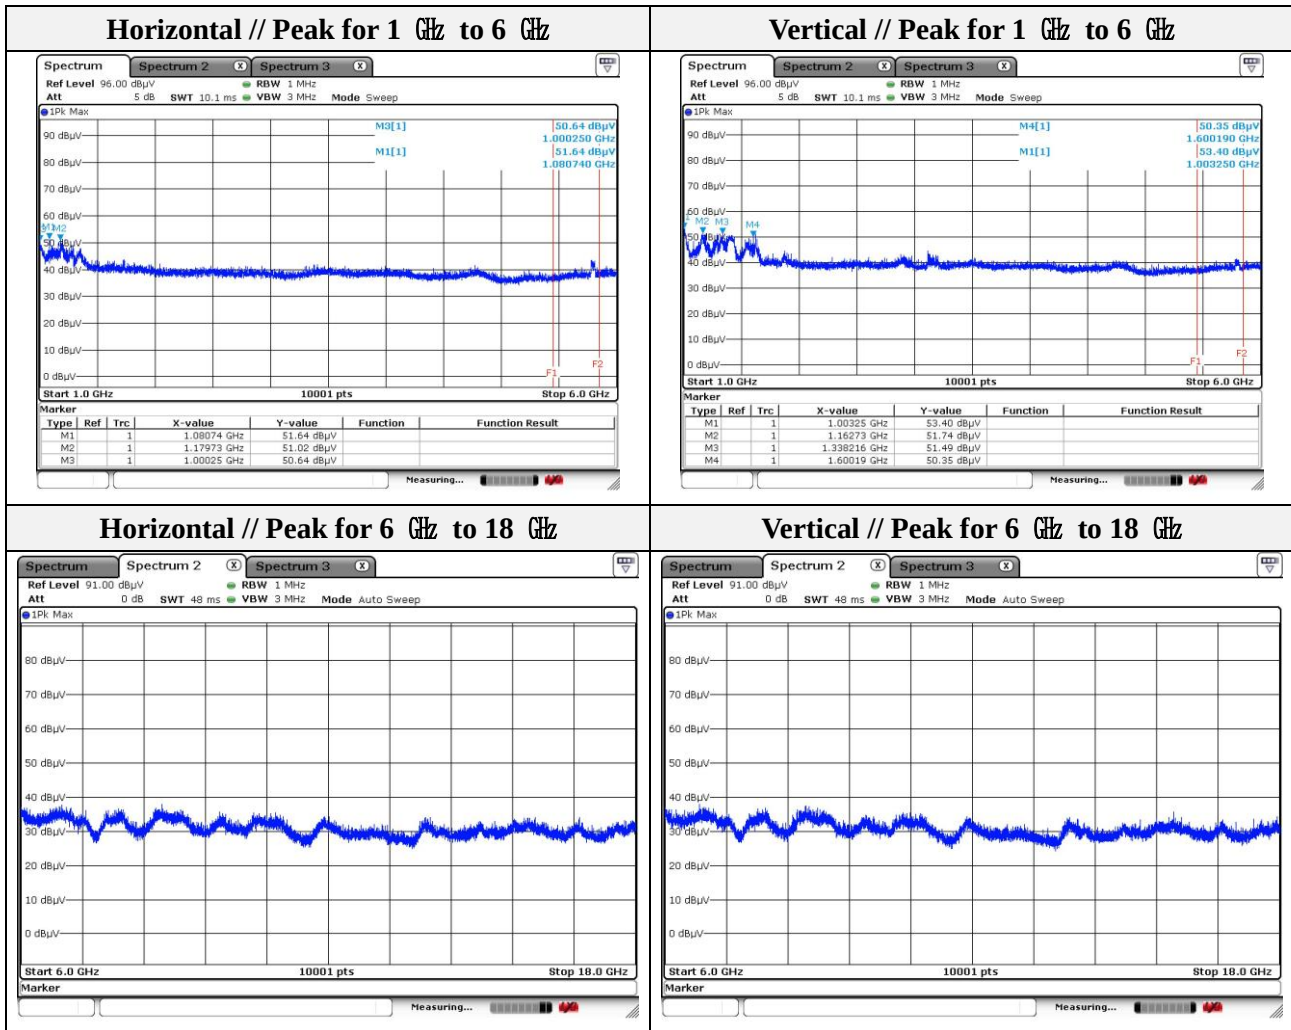

Note.

1. No spurious emission were detected above 6 GHz.
2. Average test would be performed if the peak result were greater than the average limit.

Mode: 802.11ac_HT80
Band: UNII-3
Distance of measurement: 3 meter
Channel: 5775

- Spurious

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 001.75	53.35	Peak	V	-9.45	-	43.90	74.00	30.10
1 006.75	50.53	Peak	H	-9.43	-	41.10	74.00	32.90
1 080.24	52.04	Peak	H	-9.37	-	42.67	74.00	31.33
1 160.23	51.52	Peak	V	-9.28	-	42.24	74.00	31.76
1 199.23	49.07	Peak	H	-9.24	-	39.83	74.00	34.17
1 289.22	52.41	Peak	V	-9.12	-	43.29	74.00	30.71
1 415.71	51.64	Peak	V	-8.97	-	42.67	74.00	31.33


- Band edge

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
5720.68	38.51	Peak	H	9.66	-	48.17	74.00	25.83
5874.01	39.36	Peak	V	10.65	-	50.01	74.00	23.99


- Band edge

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
5699.47	37.37	Peak	V	9.59	-	46.96	74.00	27.04
5859.12	39.05	Peak	H	10.51	-	49.56	74.00	24.44

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

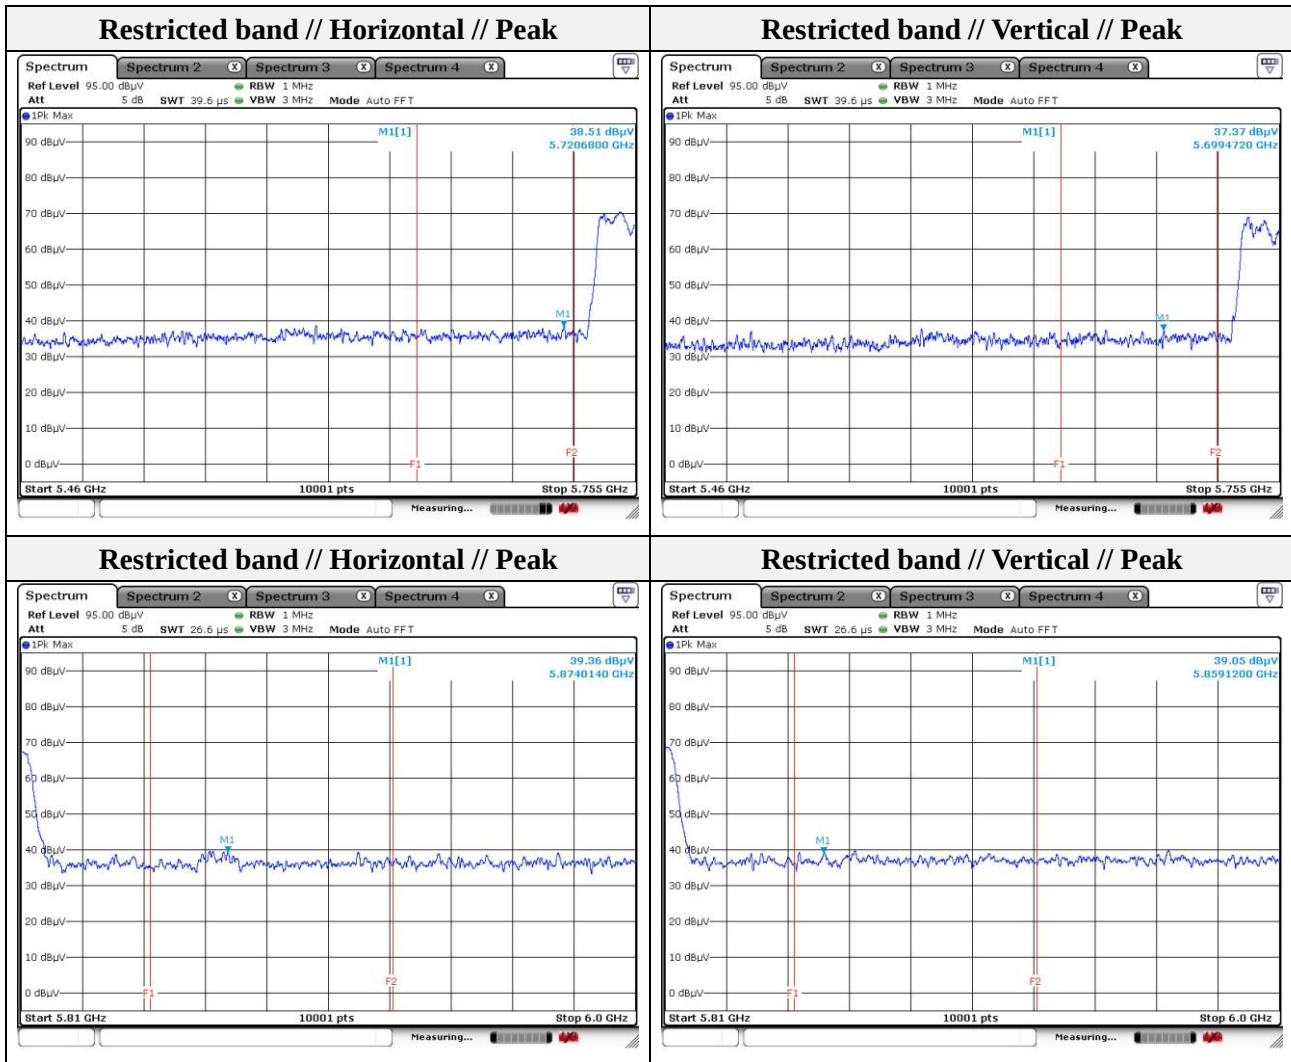

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

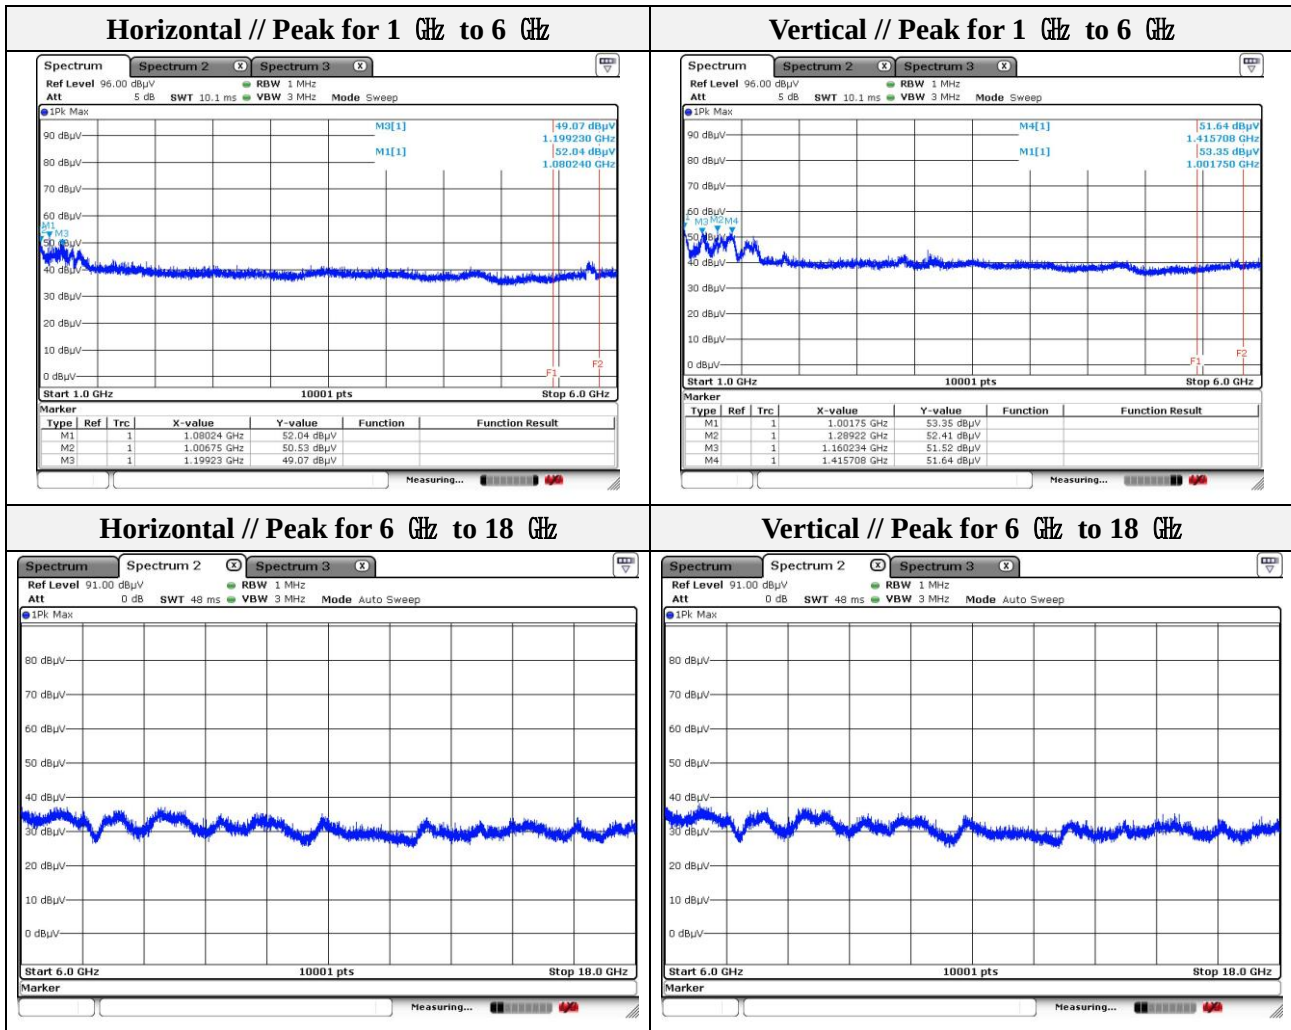


Note.

1. No spurious emission were detected above 6 GHz.
2. Average test would be performed if the peak result were greater than the average limit.

Test results (18 GHz to 40 GHz)

Mode: 802.11a
 Band: UNII-1
 Channel: 36 (Worst Case)
 Distance of measurement: 3 meter

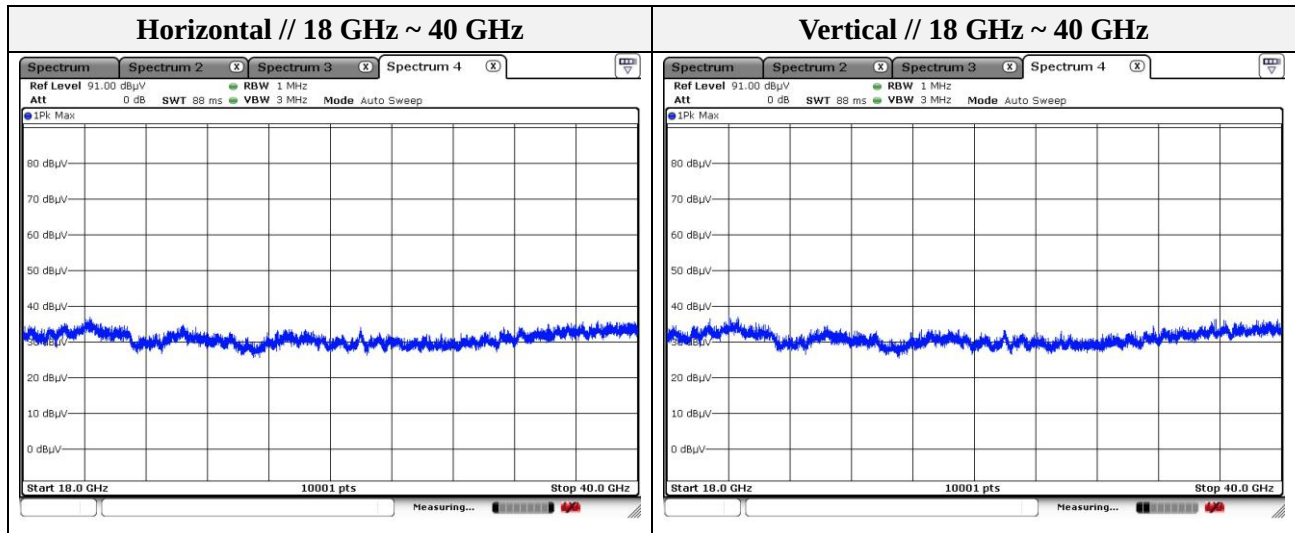

Note.

1. No spurious emission were detected above 18 GHz.

Appendix A. Measurement equipment

Equipment	Manufacturer	Model	Serial No.	Calibration interval	Calibration due.
Spectrum analyzer	R&S	FSV3044	101272	1 year	2023.03.14
SIGNAL GENERATOR	KEYSIGHT	N5182B	MY59100115	1 year	2023.04.27
SIGNAL GENERATOR	Anritsu	68369B	002118	1 year	2023.05.13
Power Meter	Anritsu	ML2495A	2010001	1 year	2023.04.27
Pulse Power Sensor	Anritsu	MA2411B	1911111	1 year	2023.04.27
Attenuator	Mini-Circuits	BW-S10-2W263+	3	1 year	2023.01.17
Loop Antenna	Schwarzbeck	FMZB1513	225	2 years	2023.01.18
BILOG ANTENNA	Schwarzbeck	VULB 9168	9168-461	2 years	2022.12.22
Horn Antenna	A.H	SAS-571	414	1 year	2023.01.18
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA 9170550	1 year	2023.01.18
Amplifier	SONOMA INSTRUMENT	310N	401123	1 year	2023.06.02
PREAMPLIFIER	HP	8449B	3008A00538	1 year	2023.06.02
BROADBAND AMPLIFIER	SCHWARZBECK	BBV9721	PS9721-003	1 year	2023.01.17
Attenuator	HUBER+SHHNER	6806.17.A	NONE	1 year	2023.04.01
DC Power supply	Agilent	6632B	MY43004090	1 year	2022.06.21
EMI Test Receiver	R&S	ESU26	100552	1 year	2023.03.31

Peripheral devices

Device	Manufacturer	Model No.	Serial No.
Notebook computer	LG Electronics Inc.,	LGS53	306QCZP560949

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr