

TEST REPORT

Applicant: Blustream PTY LTD

Address of Applicant: 26 Lionel Rd, Mount Waverley, Melbourne, Victoria, 3149, Australia

Manufacturer/Factory: Shen Zhen Proitav Technology Co.,Ltd

Address of Manufacturer/Factory: Floor 3-4, Building 16, Hejing Industrial Zone, Fuyong Town, Baoan District, Shenzhen, China

Equipment Under Test (EUT)

Product Name: 4K60 BYOD Presentation Switcher

Model No.: AMF41W

Trade Mark: Blustream

FCC ID: 2AY2P-AMF41W

IC: 27021-AMF41W

Applicable standards: FCC CFR Title 47 Part 15 Subpart E Section 15.407
RSS-Gen Issue 5
RSS-247 Issue 2

Date of sample receipt: February 01, 2021

Date of Test: February 02, 2021-May 13, 2021

Date of report issue: May 14, 2021

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:


Robinson Luo
Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	May 14, 2021	Original

Prepared By:



Date:

May 14, 2021

Project Engineer

Check By:



Reviewer

Date:

May 14, 2021

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
4.1 MEASUREMENT UNCERTAINTY	4
5 GENERAL INFORMATION	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	6
5.3 TEST FACILITY.....	6
5.4 TEST LOCATION.....	6
5.5 DESCRIPTION OF SUPPORT UNITS.....	6
5.6 DEVIATION FROM STANDARDS.....	6
6 TEST INSTRUMENTS LIST	7
7 TEST RESULTS AND MEASUREMENT DATA	9
7.1 ANTENNA REQUIREMENT:.....	9
7.2 CONDUCTED EMISSIONS	10
7.3 EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH	13
7.4 PEAK TRANSMIT POWER.....	14
7.5 POWER SPECTRAL DENSITY	16
7.6 BAND EDGE.....	18
7.7 RADIATED EMISSION.....	24
7.8 FREQUENCY STABILITY	44
8 TEST SETUP PHOTO	45
9 EUT CONSTRUCTIONAL DETAILS.....	45

4 Test Summary

Test Item	Section	Result
Antenna requirement	FCC part 15.203 & RSS-Gen 6.8	PASS
AC Power Line Conducted Emission	FCC part 15.207& RSS-Gen 8.8	PASS
Peak Transmit Power	FCC part 15.407(a)(1) RSS-247 6.2	PASS
Channel Bandwidth	FCC part 15.247 (a)(2) RSS-247 Section 5.2(a) & RSS-Gen 6.7	Pass
Power Spectral Density	FCC part 15.407(a)(1) RSS-247 6.2	PASS
Undesirable Emission	FCC part 15.407(b)(6), 15.205/15.209 RSS-247 6.2	PASS
Radiated Emission	FCC part 15.205/15.209 RSS-Gen 8.9 & 8.10	PASS
Band Edge	FCC part 15.407(b)(1) RSS-247 6.2	PASS
Frequency Stability	FCC part 15.407(g) RSS-Gen 8.11	PASS

Remark:

Pass: The EUT complies with the essential requirements in the standard.

4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	30MHz-200MHz	3.8039dB	(1)
Radiated Emission	200MHz-1GHz	3.9679dB	(1)
Radiated Emission	1GHz-18GHz	4.29dB	(1)
Radiated Emission	18GHz-40GHz	3.30dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	3.44dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

Remark: Test according to ANSI C63.10:2013 and ANSI C63.4:2014

5 General Information

5.1 General Description of EUT

Product Name:	4K60 BYOD Presentation Switcher			
Model No.:	AMF41W			
Serial No.:	BA020210719XXXX			
Hardware Version:	V0.3			
Software Version:	v2.4.7			
Test sample(s) ID:	GTS202102000020-1			
Sample(s) Status:	Engineer sample			
Operation Frequency:	Band	Mode	Frequency Range(MHz)	Number of channels
	U-NII Band I	IEEE 802.11n/ac 20MHz	5180-5240	4
		IEEE 802.11ac 80MHz	5210	1
Modulation technology:	OFDM			
Antenna Type:	Integral Antenna			
Antenna gain:	ANT 1: 2dBi ANT 2: 2dBi			
Power supply:	Adapter : Model: NBS24J120200D5 Input: AC 100-240V, 50/60Hz, 0.6A Output: DC 12.0V, 2.0A, 24.0W			

Channel list for 802.11n/ac(HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180MHz	40	5200MHz	44	5220MHz	48	5240MHz

Channel list for 802.11ac(HT80)	
Channel	Frequency
42	5210MHz

5.2 Test mode

Transmitting mode	Keep the EUT in transmitting with modulation..
-------------------	--

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

Mode	Data rate
802.11n/ac(HT20)	6/6.5 Mbps
802.11ac(HT80)	29.3 Mbps

5.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 381383**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383.

- **IC —Registration No.: 9079A**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A.

- **NVLAP (LAB CODE:600179-0)**

Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP). LAB CODE:600179-0

5.4 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, sBaoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480

Fax: 0755-27798960

5.5 Description of Support Units

Manufacturer	Description	Model	Serial Number
Lenovo	Notebook PC	E40-80	N/A

5.6 Deviation from Standards

None.

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 02 2020	July. 01 2025
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 25 2020	June. 24 2021
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 25 2020	June. 24 2021
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 25 2020	June. 24 2021
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 25 2020	June. 24 2021
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June. 25 2020	June. 24 2021
9	Coaxial Cable	GTS	N/A	GTS211	June. 25 2020	June. 24 2021
10	Coaxial cable	GTS	N/A	GTS210	June. 25 2020	June. 24 2021
11	Coaxial Cable	GTS	N/A	GTS212	June. 25 2020	June. 24 2021
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 25 2020	June. 24 2021
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 25 2020	June. 24 2021
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 25 2020	June. 24 2021
15	Band filter	Amindeon	82346	GTS219	June. 25 2020	June. 24 2021
16	Power Meter	Anritsu	ML2495A	GTS540	June. 25 2020	June. 24 2021
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 25 2020	June. 24 2021
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 25 2020	June. 24 2021
19	Splitter	Agilent	11636B	GTS237	June. 25 2020	June. 24 2021
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 25 2020	June. 24 2021
21	Breitband hornantenne	SCHWARZBECK	BBHA 9170	GTS579	Oct. 18 2020	Oct. 17 2021
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 18 2020	Oct. 17 2021
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 18 2020	Oct. 17 2021
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June. 25 2020	June. 24 2021

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.15 2019	May.14 2022
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 25 2020	June. 24 2021
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June. 25 2020	June. 24 2021
4	ENV216 2-L-V-NETZNACHB.DE	ROHDE&SCHWARZ	ENV216	GTS226	June. 25 2020	June. 24 2021
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June. 25 2020	June. 24 2021
8	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	June. 25 2020	June. 24 2021
9	ISN	SCHWARZBECK	NTFM 8158	GTS565	June. 25 2020	June. 24 2021

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	June. 25 2020	June. 24 2021
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 25 2020	June. 24 2021
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June. 25 2020	June. 24 2021
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	June. 25 2020	June. 24 2021
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	June. 25 2020	June. 24 2021
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	June. 25 2020	June. 24 2021
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	June. 25 2020	June. 24 2021
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	June. 25 2020	June. 24 2021

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	June. 25 2020	June. 24 2021
2	Barometer	ChangChun	DYM3	GTS255	June. 25 2020	June. 24 2021

7 Test results and Measurement Data

7.1 Antenna requirement:

Standard requirement:	FCC Part15 C Section 15.203
<p><i>15.203 requirement:</i></p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p>	
Standard requirement:	RSS-Gen 6.8
<p>A transmitter can only be sold or operated with antennas with which it was approved.</p> <p>When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer. For transmitters of RF output power of 10 milliwatts or less, only the portion of the antenna gain that is in excess of 6 dBi (6 dB above isotropic gain) shall be added to the measured RF output power to demonstrate compliance with the radiated power limits specified in the applicable standard. For transmitters of output power greater than 10 milliwatts, the total antenna gain shall be added to the measured RF output power to demonstrate compliance to the specified radiated power</p>	
E.U.T Antenna:	
<p><i>The antenna is Integral antenna, the best case gain of the antenna is 2dBi, reference to the appendix II for details</i></p>	


7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207 RSS-Gen Section 8.8					
Test Method:	ANSI C63.10:2013 & RSS-Gen					
Test Frequency Range:	150KHz to 30MHz					
Class / Severity:	Class B					
Receiver setup:	RBW=9KHz, VBW=30KHz					
Limit:	Frequency range (MHz)	Limit (dBuV)				
		Quasi-peak	Average			
	0.15-0.5	66 to 56*	56 to 46*			
	0.5-5	56	46			
	5-30	60	50			
* Decreases with the logarithm of the frequency.						
Test procedure	<p>The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.</p>					
Test setup:	<p><i>Remark:</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>					
Test Instruments:	Refer to section 5.10 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	AC 120V, 60Hz					
Test results:	Pass					

Remark: Both high and low voltages have been tested to show only the worst low voltage test data.


Measurement data:

Line:

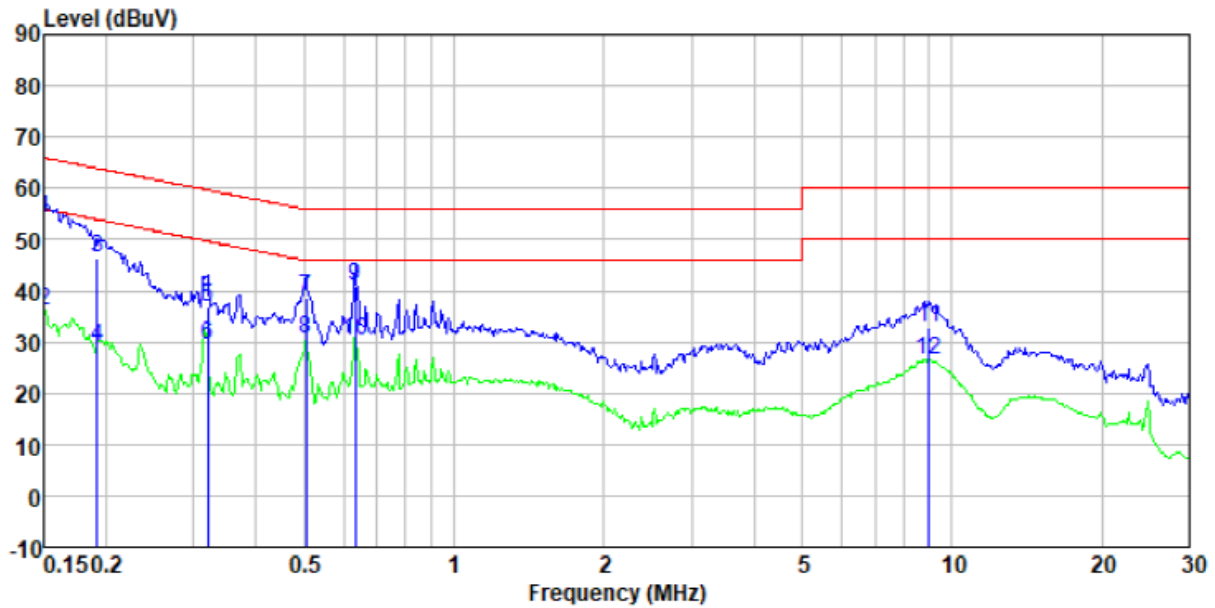

Freq MHz	Reading level dBuV	LISN/ISN factor dB/m	Cable loss dB	Level dBuV	Limit level dBuV	Over limit dB	Remark
0.15	33.79	20.40	0.07	54.26	66.00	-11.74	QP
0.15	15.65	20.40	0.07	36.12	56.00	-19.88	Average
0.19	25.78	20.40	0.11	46.29	63.93	-17.64	QP
0.19	8.60	20.40	0.11	29.11	53.93	-24.82	Average
0.32	16.49	20.39	0.10	36.98	59.71	-22.73	QP
0.32	8.90	20.39	0.10	29.39	49.71	-20.32	Average
0.50	18.30	20.31	0.11	38.72	56.00	-17.28	QP
0.50	10.25	20.31	0.11	30.67	46.00	-15.33	Average
0.63	20.35	20.28	0.12	40.75	56.00	-15.25	QP
0.63	9.93	20.28	0.12	30.33	46.00	-15.67	Average
9.01	12.41	20.20	0.20	32.81	60.00	-27.19	QP
9.01	6.18	20.20	0.20	26.58	50.00	-23.42	Average


Neutral:

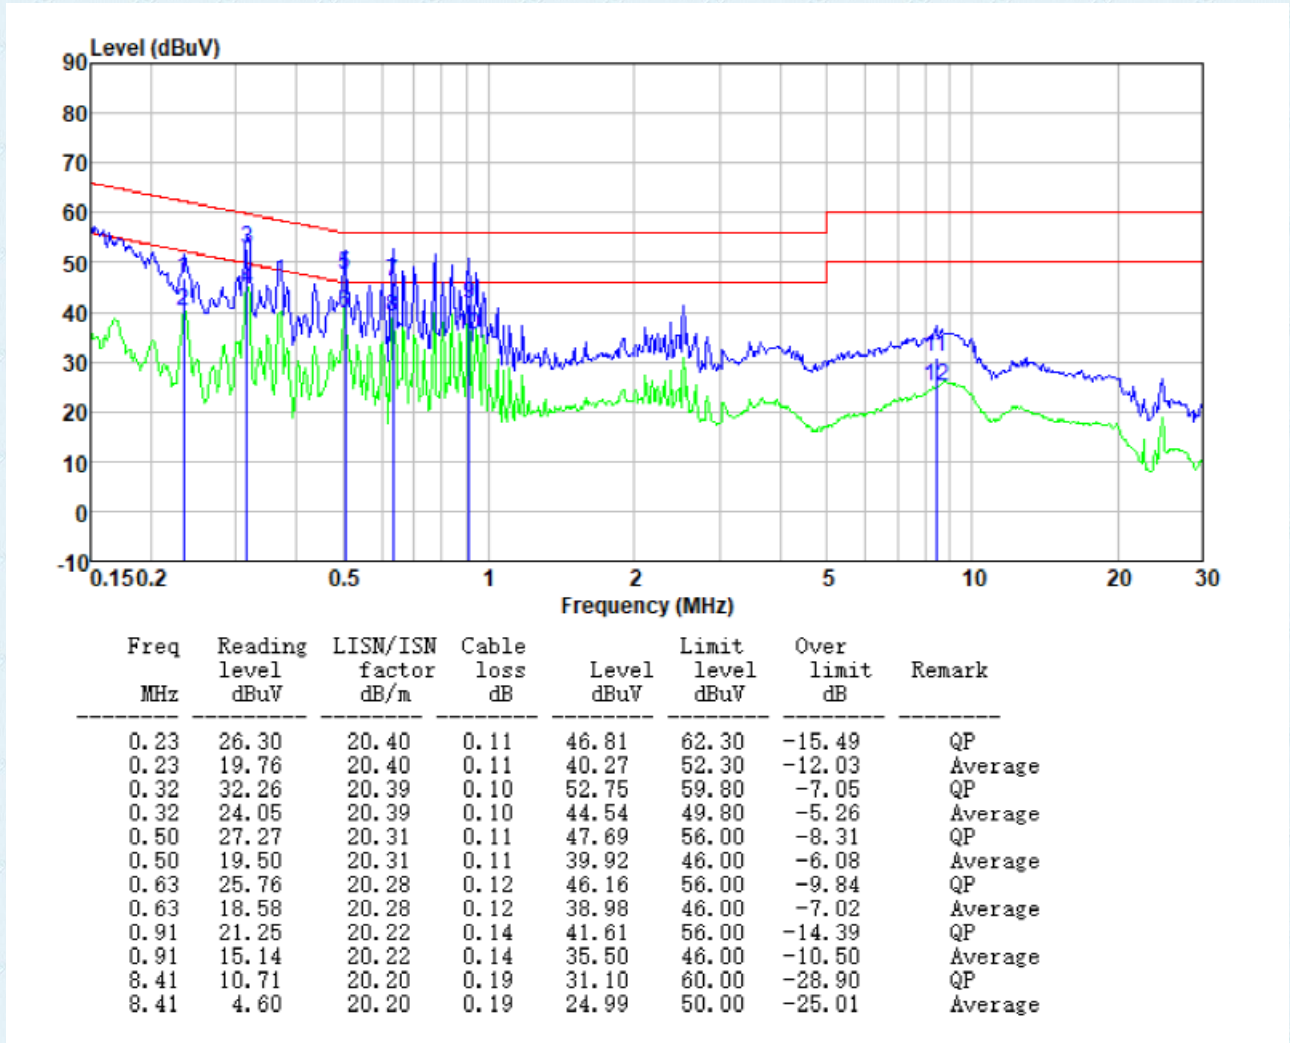

Notes:


1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss

7.3 Emission Bandwidth and 99% Occupied Bandwidth

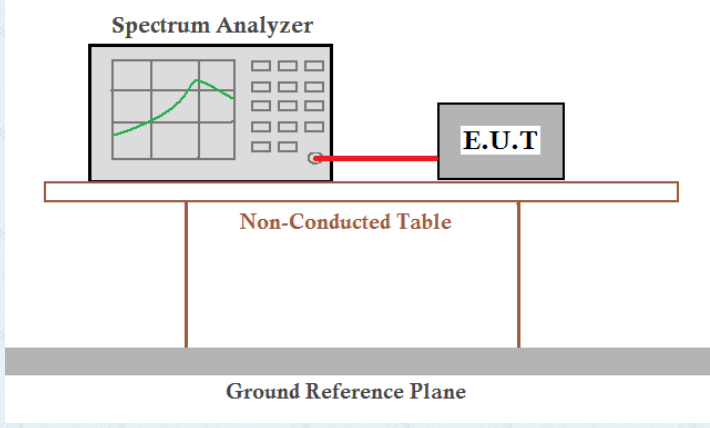Test Requirement :	FCC Part15 E Section 15.407 RSS-247 5.2 & RSS-Gen 6.7
Test Method :	ANSI C63.10:2013 and RSS-Gen & KDB 789033 D02 v02r01
Limit:	N/A
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which sits on a Ground Reference Plane.</p>
Test procedure:	According to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01.
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data: The detailed test data see Appendix for WIFI 5G


7.4 Peak Transmit Power

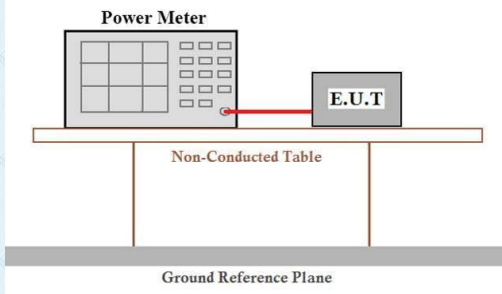Test Requirement	FCC Part15 E Section 15.407 RSS-247 6.2.1.1&6.2.2.1&6.2.3.1	
Test Method :	ANSI C63.10:2013 and RSS-Gen & KDB 789033 D02 v02r01	
FCC Limit:	Frequency band (MHz)	Limit
	5150-5250	$\leq 1W(30dBm)$ for master device
		$\leq 250Mw(23.98dBm)$ for client device
	5250-5350	$\leq 250Mw(23.98dBm)$ for client device or $11dBm+10\log B^*$
	5470-5725	$\leq 250Mw(23.98dBm)$ for client device or $11dBm+10\log B^*$
Remark: *Where B is the 26Db emission bandwidth in MHz. The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.		
IC Limit:	Operation Frequency Band	Limit
	5150~5250 MHz	EIRP shall not exceed 200 mW or $10 + 10 \log B$, dBm
	5250~5350 MHz	Conducted output power shall not exceed 250 mW or $11 + 10 \log B$ EIRP shall not exceed 1.0 W or $17 + 10 \log B$, dBm
	5470~5600 MHz and 5650~5725 MHz	Conducted output power shall not exceed 250 mW or $11 + 10 \log B$ EIRP shall not exceed 1.0 W or $17 + 10 \log B$, dBm
	5725~5850 MHz	The maximum conducted output power over the frequency band of operation shall not exceed 1 W.
Test setup:		
Test procedure:	<p>Measurement using an RF average power meter</p> <p>(i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied</p> <ol style="list-style-type: none"> The EUT is configured to transmit continuously or to transmit with a constant duty cycle. At all times when the EUT is transmitting, it must be transmitting at its maximum power control level. The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five. <p>(ii) If the transmitter does not transmit continuously, measure the duty cycle, x, of the transmitter output signal as described in section B).</p>	

	(iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
	(iv) Adjust the measurement in dBm by adding $10 \log(1/x)$ where x is the duty cycle (e.g., $10 \log(1/0.25)$ if the duty cycle is 25 percent).
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data: The detailed test data see Appendix for WIFI 5G

7.5 Power Spectral Density

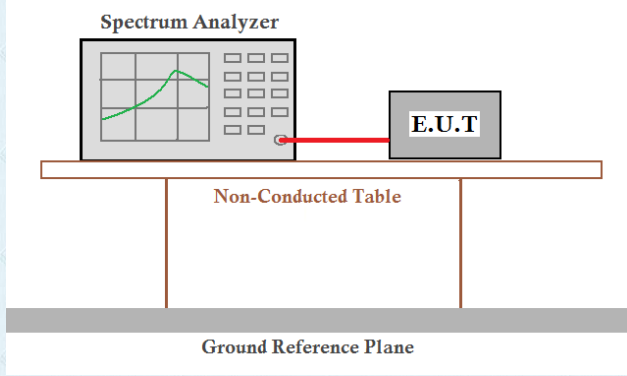
Test Requirement:	FCC Part15 E Section 15.407 RSS-247 6.2.1.1&6.2.2.1&6.2.3.1	
Test Method :	ANSI C63.10:2013 and RSS-Gen & KDB 789033 D02 v02r01	
FCC Limit:	Frequency band (MHz)	Limit
	5150-5250	≤17dBm in 1MHz for master device
		≤11dBm in 1MHz for client device
	5250-5350	≤11dBm in 1MHz for client device
	5470-5725	≤11dBm in 1MHz for client device
	Remark: The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test.	
	Frequency Band	Limit
	5150~5250 MHz	EIRP spectral density 10 dBm / MHz
	5250~5350 MHz	11dBm / MHz
	5470~5600 MHz and 5650~5725 MHz	11dBm / MHz
	5725~5850 MHz	30 dBm/500kHz
Test setup:		
Test procedure:	<ol style="list-style-type: none"> 1) Create an average power spectrum for the EUT operating mode being tested by following the instructions in section E)2) for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, "Compute power...". 2) Use the peak search function on the instrument to find the peak of the spectrum. 3) Make the following adjustments to the peak value of the spectrum, if applicable: <ol style="list-style-type: none"> a) If Method SA-2 or SA-2 Alternative was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum. b) If Method SA-3 Alternative was used and the linear mode was used in step E)2)g)(viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging. 4) The result is the PSD. 	
Test Instruments:	Refer to section 5.10 for details	

Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data: The detailed test data see Appendix for WIFI 5G

7.6 Band Edge

Test Requirement:	FCC Part15 E Section 15.407 and 5.205 RSS-Gen 8.10																							
Test Method:	ANSI C63.10:2013 & RSS-Gen																							
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)																							
Receiver setup:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Detector</th> <th>RBW</th> <th>VBW</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-1GHz</td> <td>Quasi-peak</td> <td>120KHz</td> <td>300KHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td rowspan="2">Above 1GHz</td> <td>Peak</td> <td>1MHz</td> <td>3MHz</td> <td>Peak Value</td> </tr> <tr> <td>AV</td> <td>1MHz</td> <td>3MHz</td> <td>Average Value</td> </tr> </tbody> </table>				Frequency	Detector	RBW	VBW	Remark	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value	Above 1GHz	Peak	1MHz	3MHz	Peak Value	AV	1MHz	3MHz	Average Value	
Frequency	Detector	RBW	VBW	Remark																				
30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value																				
Above 1GHz	Peak	1MHz	3MHz	Peak Value																				
	AV	1MHz	3MHz	Average Value																				
Limit:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Limit (dBuV/m @3m)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-88MHz</td> <td>40.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td>88MHz-216MHz</td> <td>43.5</td> <td>Quasi-peak Value</td> </tr> <tr> <td>216MHz-960MHz</td> <td>46.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td>960MHz-1GHz</td> <td>54.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td rowspan="2">Above 1GHz</td> <td>54.0</td> <td>Average Value</td> </tr> <tr> <td>68.2</td> <td>Peak Value</td> </tr> </tbody> </table> <p>Undesirable emission limits:</p> <ol style="list-style-type: none"> (1) For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. (2) For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5.25-5.35 GHz band that generate emissions in the 5.15-5.25 GHz band must meet all applicable technical requirements for operation in the 5.15-5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5.15-5.25 GHz band. (3) For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz. 				Frequency	Limit (dBuV/m @3m)	Remark	30MHz-88MHz	40.0	Quasi-peak Value	88MHz-216MHz	43.5	Quasi-peak Value	216MHz-960MHz	46.0	Quasi-peak Value	960MHz-1GHz	54.0	Quasi-peak Value	Above 1GHz	54.0	Average Value	68.2	Peak Value
Frequency	Limit (dBuV/m @3m)	Remark																						
30MHz-88MHz	40.0	Quasi-peak Value																						
88MHz-216MHz	43.5	Quasi-peak Value																						
216MHz-960MHz	46.0	Quasi-peak Value																						
960MHz-1GHz	54.0	Quasi-peak Value																						
Above 1GHz	54.0	Average Value																						
	68.2	Peak Value																						
Test Procedure:	<ol style="list-style-type: none"> a. The EUT was placed on the top of a rotating table 1.5 m above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not 																							

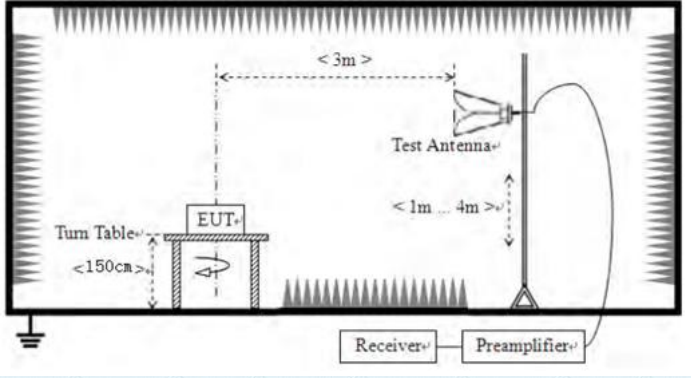	have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test setup:	<p>For radiated emissions above 1GHz</p> 
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Remarks:

1. Only the worst case Main Antenna test data.
2. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.
5. According to KDB 789033 D02 v02r01 section G) 1) (d), for For measurements above 1000 MHz @ 3m distance, the limit of field strength is computed as follows:
 $E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2;$
 For example, if $\text{EIRP} = -27\text{dBm}$
 $E[\text{dBuV/m}] = -27 + 95.2 = 68.2\text{dBuV/m}.$

Measurement Data:

ANT 1:

802.11n(HT20)					PK			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
5150.00	44.36	32.07	8.99	37.49	47.93	68.20	-20.27	Horizontal
5350.00	45.86	31.75	9.29	37.20	49.70	68.20	-18.50	Horizontal
5150.00	42.98	32.07	8.99	37.49	46.55	68.20	-21.65	Vertical
5350.00	42.68	31.75	9.29	37.20	46.52	68.20	-21.68	Vertical

802.11n(HT20)					AV			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
5150.00	35.98	32.07	8.99	37.49	39.55	54.00	-14.45	Horizontal
5350.00	30.58	31.75	9.29	37.20	34.42	54.00	-19.58	Horizontal
5150.00	31.68	32.07	8.99	37.49	35.25	54.00	-18.75	Vertical
5350.00	34.29	31.75	9.29	37.20	38.13	54.00	-15.87	Vertical

802.11ac(HT20)					PK			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
5150.00	43.59	32.07	8.99	37.49	47.16	68.20	-21.04	Horizontal
5350.00	45.95	31.75	9.29	37.20	49.79	68.20	-18.41	Horizontal
5150.00	42.67	32.07	8.99	37.49	46.24	68.20	-21.96	Vertical
5350.00	42.01	31.75	9.29	37.20	45.85	68.20	-22.35	Vertical

802.11ac(HT20)					AV			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
5150.00	34.95	32.07	8.99	37.49	38.52	54.00	-15.48	Horizontal
5350.00	31.56	31.75	9.29	37.20	35.40	54.00	-18.60	Horizontal
5150.00	31.58	32.07	8.99	37.49	35.15	54.00	-18.85	Vertical
5350.00	34.57	31.75	9.29	37.20	38.41	54.00	-15.59	Vertical

802.11ac(HT80)					PK			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
5150.00	43.59	32.07	8.99	37.49	47.16	68.20	-21.04	Horizontal
5350.00	41.68	31.75	9.29	37.20	45.52	68.20	-22.68	Horizontal
5150.00	43.28	32.07	8.99	37.49	46.85	68.20	-21.35	Vertical
5350.00	43.59	31.75	9.29	37.20	47.43	68.20	-20.77	Vertical

802.11ac(HT80)					AV			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
5150.00	36.98	32.07	8.99	37.49	40.55	54.00	-13.45	Horizontal
5350.00	34.85	31.75	9.29	37.20	38.69	54.00	-15.31	Horizontal
5150.00	32.69	32.07	8.99	37.49	36.26	54.00	-17.74	Vertical
5350.00	36.89	31.75	9.29	37.20	40.73	54.00	-13.27	Vertical

ANT 2:

802.11n(HT20)					PK			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
5150.00	43.21	32.07	8.99	37.49	46.78	68.20	-21.42	Horizontal
5350.00	42.10	31.75	9.29	37.20	45.94	68.20	-22.26	Horizontal
5150.00	40.35	32.07	8.99	37.49	43.92	68.20	-24.28	Vertical
5350.00	41.07	31.75	9.29	37.20	44.91	68.20	-23.29	Vertical

802.11n(HT20)					AV			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
5150.00	35.32	32.07	8.99	37.49	38.89	54.00	-15.11	Horizontal
5350.00	29.85	31.75	9.29	37.20	33.69	54.00	-20.31	Horizontal
5150.00	30.67	32.07	8.99	37.49	34.24	54.00	-19.76	Vertical
5350.00	35.85	31.75	9.29	37.20	39.69	54.00	-14.31	Vertical

802.11ac(HT20)					PK			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
5150.00	43.06	32.07	8.99	37.49	46.63	68.20	-21.57	Horizontal
5350.00	45.62	31.75	9.29	37.20	49.46	68.20	-18.74	Horizontal
5150.00	42.01	32.07	8.99	37.49	45.58	68.20	-22.62	Vertical
5350.00	41.63	31.75	9.29	37.20	45.47	68.20	-22.73	Vertical

802.11ac(HT20)					AV			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
5150.00	34.32	32.07	8.99	37.49	37.89	54.00	-16.11	Horizontal
5350.00	30.98	31.75	9.29	37.20	34.82	54.00	-19.18	Horizontal
5150.00	30.67	32.07	8.99	37.49	34.24	54.00	-19.76	Vertical
5350.00	33.59	31.75	9.29	37.20	37.43	54.00	-16.57	Vertical




802.11ac(HT80)					PK			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
5150.00	43.65	32.07	8.99	37.49	47.22	68.20	-20.98	Horizontal
5350.00	40.98	31.75	9.29	37.20	44.82	68.20	-23.38	Horizontal
5150.00	43.98	32.07	8.99	37.49	47.55	68.20	-20.65	Vertical
5350.00	43.57	31.75	9.29	37.20	47.41	68.20	-20.79	Vertical

802.11ac(HT80)					AV			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
5150.00	36.56	32.07	8.99	37.49	40.13	54.00	-13.87	Horizontal
5350.00	33.98	31.75	9.29	37.20	37.82	54.00	-16.18	Horizontal
5150.00	31.59	32.07	8.99	37.49	35.16	54.00	-18.84	Vertical
5350.00	36.85	31.75	9.29	37.20	40.69	54.00	-13.31	Vertical

7.7 Radiated Emission

Test Requirement :	FCC Part15 C Section 15.209 and 15.205 RSS-Gen 8.9 & 8.10																													
Test Method :	ANSI C63.10: 2013 & RSS-Gen																													
Test Frequency Range:	9kHz to 40GHz																													
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)																													
Receiver setup:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Detector</th> <th>RBW</th> <th>VBW</th> <th>Value</th> </tr> </thead> <tbody> <tr> <td>9kHz-150KHz</td> <td>Quasi-peak</td> <td>200Hz</td> <td>1kHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td>150kHz-30MHz</td> <td>Quasi-peak</td> <td>9kHz</td> <td>30kHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td>30MHz-1GHz</td> <td>Quasi-peak</td> <td>120KHz</td> <td>300KHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td rowspan="2">Above 1GHz</td> <td>Peak</td> <td>1MHz</td> <td>3MHz</td> <td>Peak Value</td> </tr> <tr> <td>AV</td> <td>1MHz</td> <td>3MHz</td> <td>Average Value</td> </tr> </tbody> </table>	Frequency	Detector	RBW	VBW	Value	9kHz-150KHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value	150kHz-30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value	Above 1GHz	Peak	1MHz	3MHz	Peak Value	AV	1MHz	3MHz	Average Value
Frequency	Detector	RBW	VBW	Value																										
9kHz-150KHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value																										
150kHz-30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value																										
30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value																										
Above 1GHz	Peak	1MHz	3MHz	Peak Value																										
	AV	1MHz	3MHz	Average Value																										
FCC Limit:	<table border="1"> <thead> <tr> <th>Frequency (MHz)</th> <th>Field strength (microvolts/meter)</th> <th>Measurement distance (meters)</th> </tr> </thead> <tbody> <tr> <td>0.009-0.490</td> <td>2400/F(kHz)</td> <td>300</td> </tr> <tr> <td>0.490-1.705</td> <td>24000/F(kHz)</td> <td>30</td> </tr> <tr> <td>1.705-30.0</td> <td>30</td> <td>30</td> </tr> <tr> <td>30-88</td> <td>100**</td> <td>3</td> </tr> <tr> <td>88-216</td> <td>150**</td> <td>3</td> </tr> <tr> <td>216-960</td> <td>200**</td> <td>3</td> </tr> <tr> <td>Above 960</td> <td>500</td> <td>3</td> </tr> </tbody> </table> <p>The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.</p>	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	0.009-0.490	2400/F(kHz)	300	0.490-1.705	24000/F(kHz)	30	1.705-30.0	30	30	30-88	100**	3	88-216	150**	3	216-960	200**	3	Above 960	500	3					
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)																												
0.009-0.490	2400/F(kHz)	300																												
0.490-1.705	24000/F(kHz)	30																												
1.705-30.0	30	30																												
30-88	100**	3																												
88-216	150**	3																												
216-960	200**	3																												
Above 960	500	3																												
IC Limit:	<p>Table 5 – General field strength limits at frequencies above 30 MHz</p> <table border="1"> <thead> <tr> <th>Frequency (MHz)</th> <th>Field strength (µV/m at 3 m)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 – 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table> <p>Table 6 – General field strength limits at frequencies below 30 MHz</p> <table border="1"> <thead> <tr> <th>Frequency</th> <th>Magnetic field strength (H-Field) (µA/m)</th> <th>Measurement distance (m)</th> </tr> </thead> <tbody> <tr> <td>9 - 490 kHz¹</td> <td>6.37/F (F in kHz)</td> <td>300</td> </tr> <tr> <td>490 - 1705 kHz</td> <td>63.7/F (F in kHz)</td> <td>30</td> </tr> <tr> <td>1.705 - 30 MHz</td> <td>0.08</td> <td>30</td> </tr> </tbody> </table> <p>Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.</p>	Frequency (MHz)	Field strength (µV/m at 3 m)	30 – 88	100	88 – 216	150	216 – 960	200	Above 960	500	Frequency	Magnetic field strength (H-Field) (µA/m)	Measurement distance (m)	9 - 490 kHz ¹	6.37/F (F in kHz)	300	490 - 1705 kHz	63.7/F (F in kHz)	30	1.705 - 30 MHz	0.08	30							
Frequency (MHz)	Field strength (µV/m at 3 m)																													
30 – 88	100																													
88 – 216	150																													
216 – 960	200																													
Above 960	500																													
Frequency	Magnetic field strength (H-Field) (µA/m)	Measurement distance (m)																												
9 - 490 kHz ¹	6.37/F (F in kHz)	300																												
490 - 1705 kHz	63.7/F (F in kHz)	30																												
1.705 - 30 MHz	0.08	30																												
Test Procedure:	<p>Substitution method was performed to determine the actual ERP emission levels of the EUT.</p> <p>The following test procedure as below:</p> <p>1>.Below 1GHz test procedure:</p> <ol style="list-style-type: none"> The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter 																													

	<p>camber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <ol style="list-style-type: none"> 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. <p>2>.Above 1GHz test procedure:</p> <ol style="list-style-type: none"> 1. On the test site as test setup graph above, the EUT shall be placed at the 0.8m support on the turntable and in the position closest to normal use as declared by the provider. 2. The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter. The output of the test antenna shall be connected to the measuring receiver. 3. The transmitter shall be switched on, if possible, without modulation and the measuring receiver shall be tuned to the frequency of the transmitter under test. 4. The test antenna shall be raised and lowered from 1m to 4m until a maximum signal level is detected by the measuring receiver. Then the turntable should be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver. 5. Repeat step 4 for test frequency with the test antenna polarized horizontally. 6. Remove the transmitter and replace it with a substitution antenna 7. Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a nonradiating cable. With the antennas at both ends vertically polarized, and with the signal generator tuned to a particular test frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output. 8. Repeat step 7 with both antennas horizontally polarized for each test frequency. 9. Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps 7 and 8 by the power loss in the cable between the generator and the antenna, and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna by the following formula: $\text{EIRP(dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBi)}$ where:
--	--
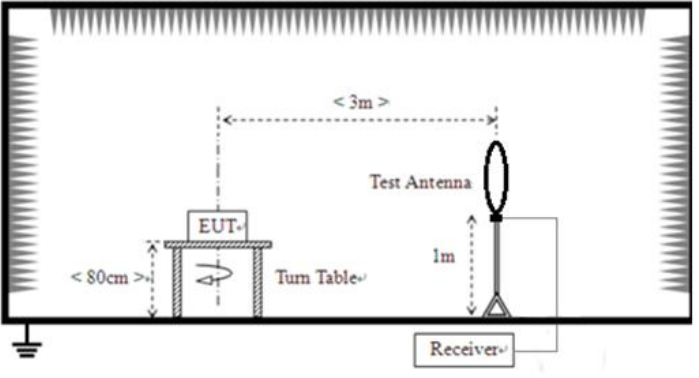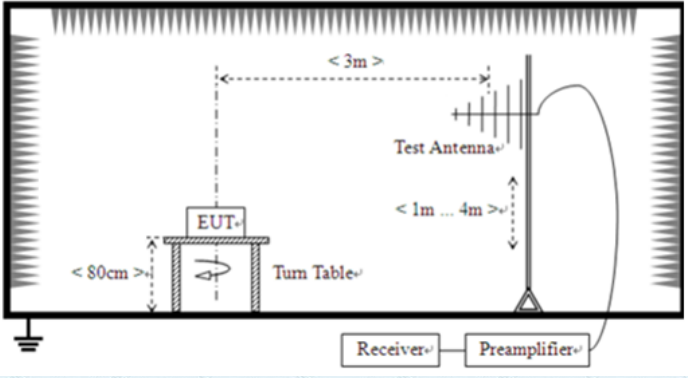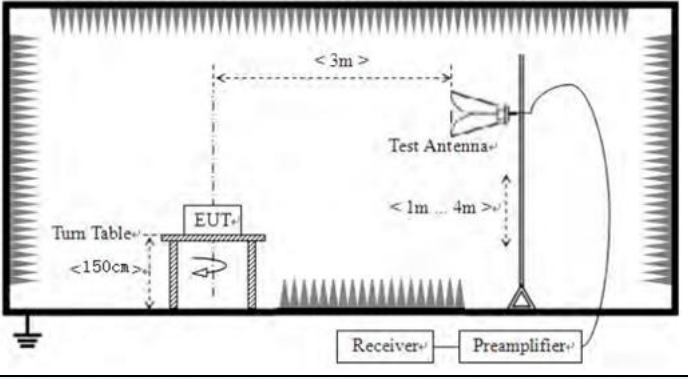
<p>Test setup:</p>	<p>Pg is the generator output power into the substitution antenna.</p> <p>For radiated emissions from 9kHz to 30MHz</p>  <p>For radiated emissions from 30MHz to 1GHz</p>  <p>For radiated emissions above 1GHz</p> 						
<p>Test Instruments:</p>	<p>Refer to section 5.10 for details</p>						
<p>Test mode:</p>	<p>Refer to section 5.2 for details</p>						
<p>Test environment:</p>	<table border="1"> <tr> <td>Temp.:</td> <td>25 °C</td> <td>Humid.:</td> <td>52%</td> <td>Press.:</td> <td>1012mbar</td> </tr> </table>	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar		
<p>Test voltage:</p>	<p>AC 120V, 60Hz</p>						
<p>Test results:</p>	<p>Pass</p>						

Remarks:

1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

Measurement Data:


9 kHz ~ 30 MHz

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

All antennas have test, only the worst case ANT 1 report.


30MHz~ 1GHz

Test mode:	802.11n(HT20)	Test channel:	Lowest	Polarization:	Horizontal
------------	---------------	---------------	--------	---------------	------------

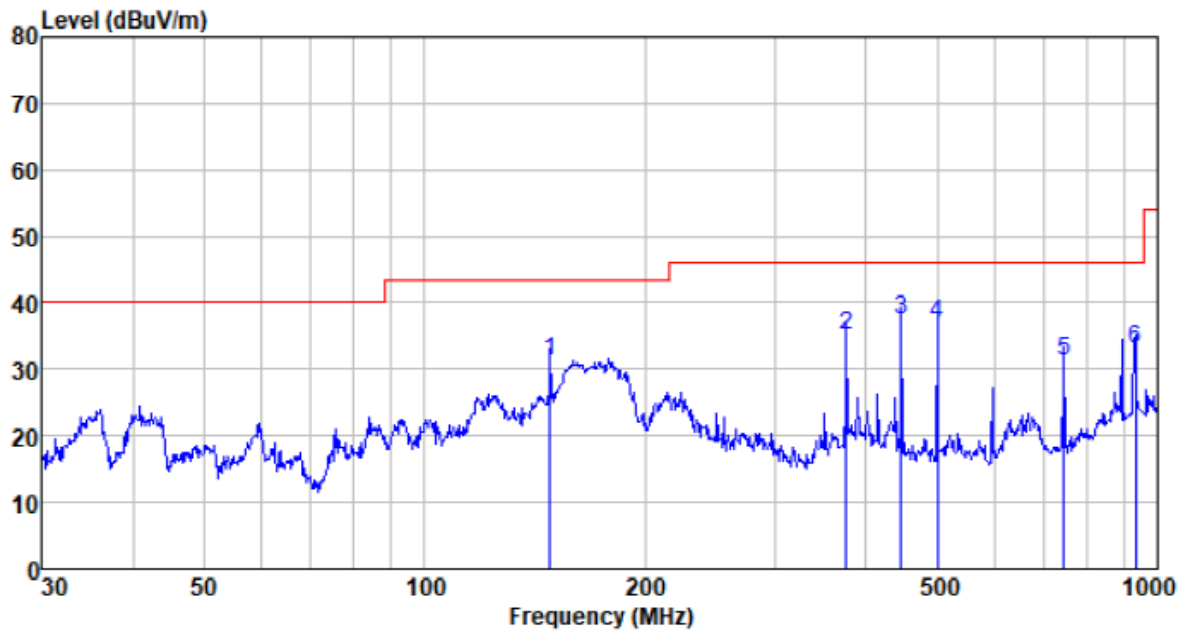


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
148.441	59.11	7.57	1.56	37.07	31.17	43.50	-12.33	QP
375.939	55.02	14.94	2.75	37.50	35.21	46.00	-10.79	QP
446.414	55.57	16.28	3.07	37.52	37.40	46.00	-8.60	QP
501.179	53.66	17.30	3.31	37.51	36.76	46.00	-9.24	QP
744.866	44.34	20.41	4.26	37.63	31.38	46.00	-14.62	QP
932.272	43.16	22.43	4.98	37.57	33.00	46.00	-13.00	QP

Test mode:	802.11n(HT20)	Test channel:	Lowest	Polarization:	Vertical
------------	---------------	---------------	--------	---------------	----------

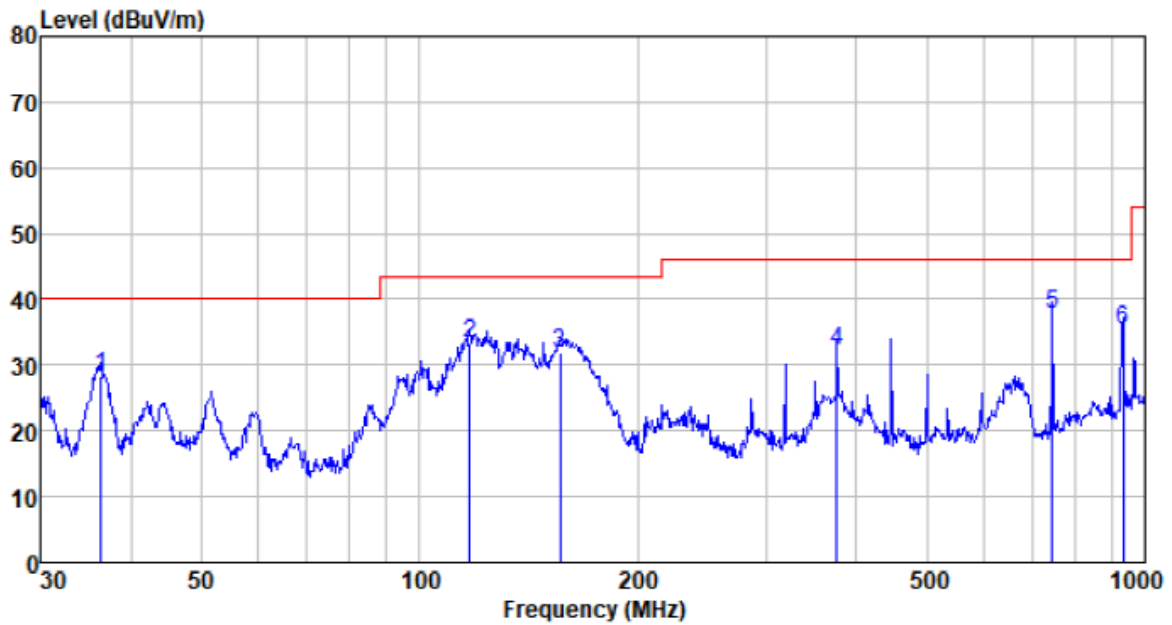


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
36.381	51.55	11.58	0.62	35.45	28.30	40.00	-11.70	QP
117.360	59.02	9.92	1.34	36.86	33.42	43.50	-10.08	QP
156.458	59.40	8.10	1.61	37.11	32.00	43.50	-11.50	QP
375.939	51.89	14.94	2.75	37.50	32.08	46.00	-13.92	QP
744.866	50.64	20.41	4.26	37.63	37.68	46.00	-8.32	QP
932.272	45.49	22.43	4.98	37.57	35.33	46.00	-10.67	QP

Test mode:	802.11n(HT20)	Test channel:	Middle	Polarization:	Horizontal
------------	---------------	---------------	--------	---------------	------------

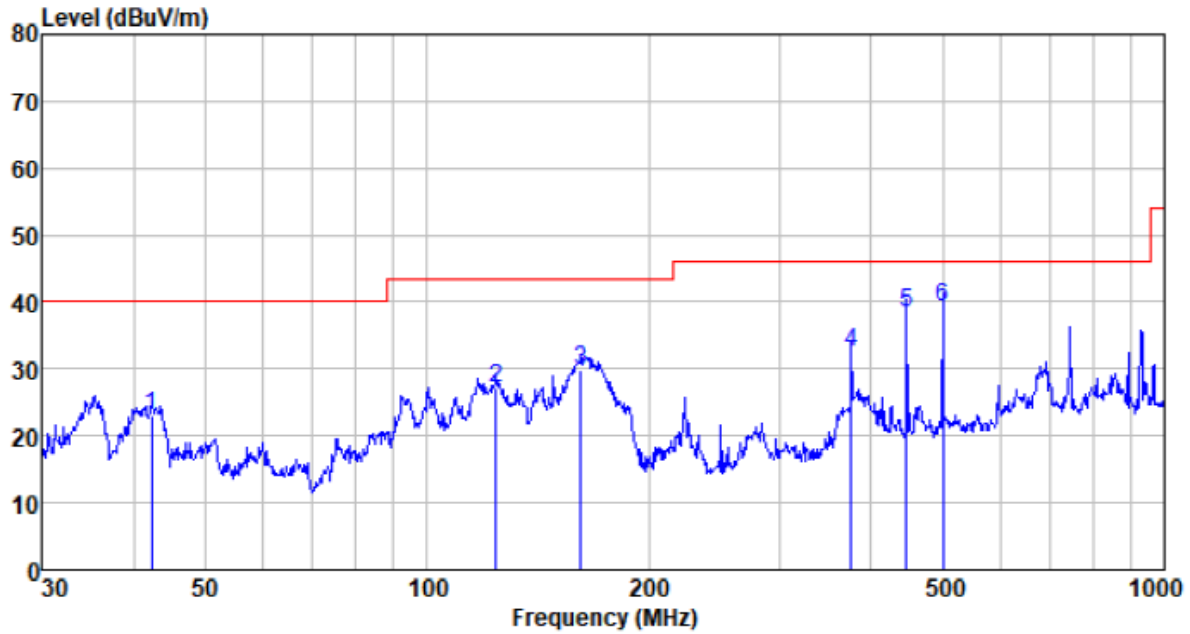


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
42.302	45.87	12.23	0.69	35.79	23.00	40.00	-17.00	QP
124.133	53.69	8.96	1.39	36.91	27.13	43.50	-16.37	QP
161.474	57.03	8.33	1.64	37.14	29.86	43.50	-13.64	QP
375.939	52.20	14.94	2.75	37.50	32.39	46.00	-13.61	QP
446.414	56.49	16.28	3.07	37.52	38.32	46.00	-7.68	QP
501.179	56.21	17.30	3.31	37.51	39.31	46.00	-6.69	QP

Test mode:	802.11n(HT20)	Test channel:	Middle	Polarization:	Vertical
------------	---------------	---------------	--------	---------------	----------

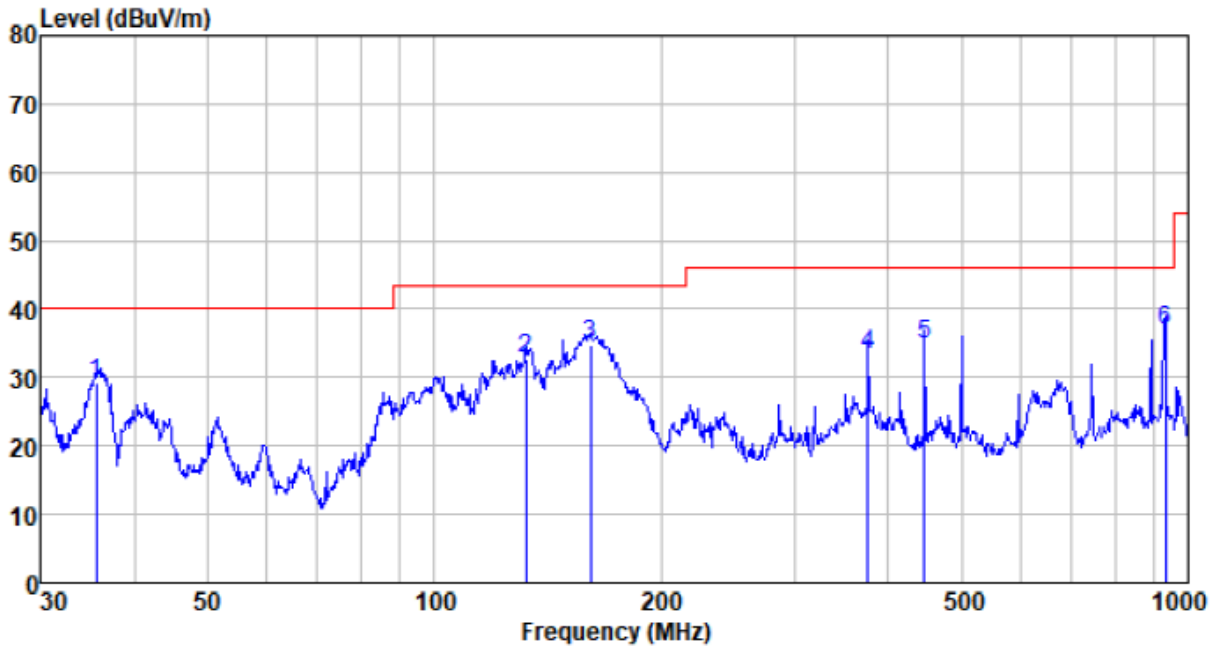


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
35.624	52.66	11.42	0.62	35.40	29.30	40.00	-10.70	QP
132.221	60.19	8.01	1.45	36.97	32.68	43.50	-10.82	QP
160.909	61.91	8.33	1.63	37.14	34.73	43.50	-8.77	QP
375.939	53.09	14.94	2.75	37.50	33.28	46.00	-12.72	QP
446.414	53.01	16.28	3.07	37.52	34.84	46.00	-11.16	QP
932.272	47.09	22.43	4.98	37.57	36.93	46.00	-9.07	QP

Test mode:	802.11n(HT20)	Test channel:	Highest	Polarization:	Horizontal
------------	---------------	---------------	---------	---------------	------------

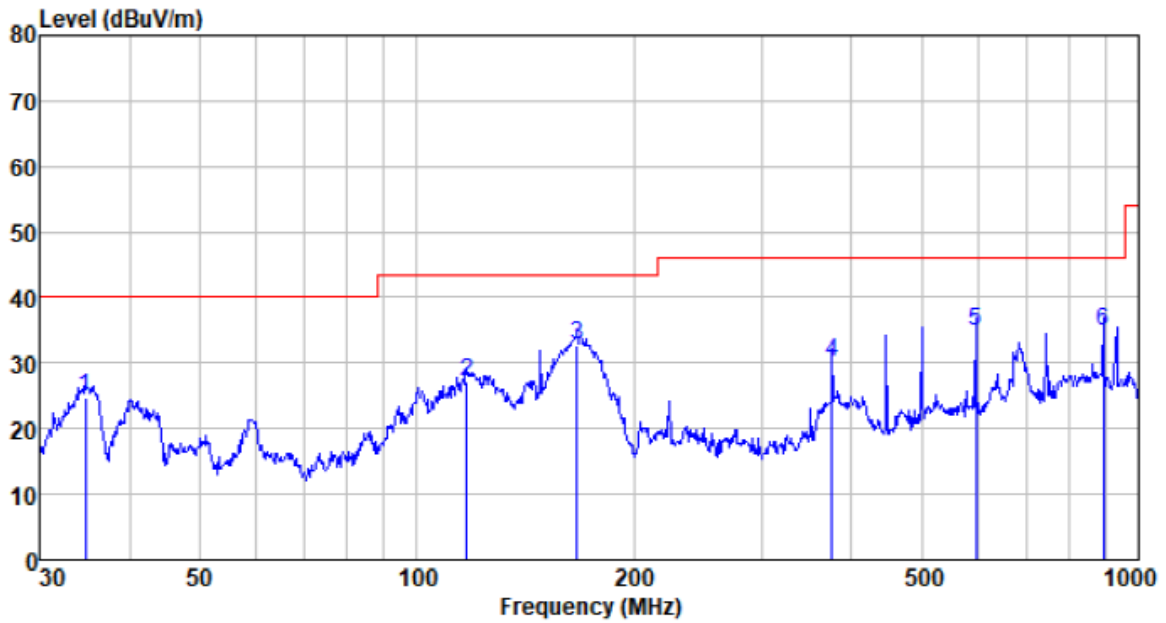


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
34.760	48.15	11.30	0.61	35.34	24.72	40.00	-15.28	QP
117.360	52.81	9.92	1.34	36.86	27.21	43.50	-16.29	QP
166.651	59.83	8.43	1.67	37.17	32.76	43.50	-10.74	QP
375.939	49.95	14.94	2.75	37.50	30.14	46.00	-15.86	QP
595.133	49.29	19.39	3.70	37.54	34.84	46.00	-11.16	QP
893.857	45.32	22.23	4.83	37.60	34.78	46.00	-11.22	QP

Test mode:	802.11n(HT20)	Test channel:	Highest	Polarization:	Vertical
------------	---------------	---------------	---------	---------------	----------

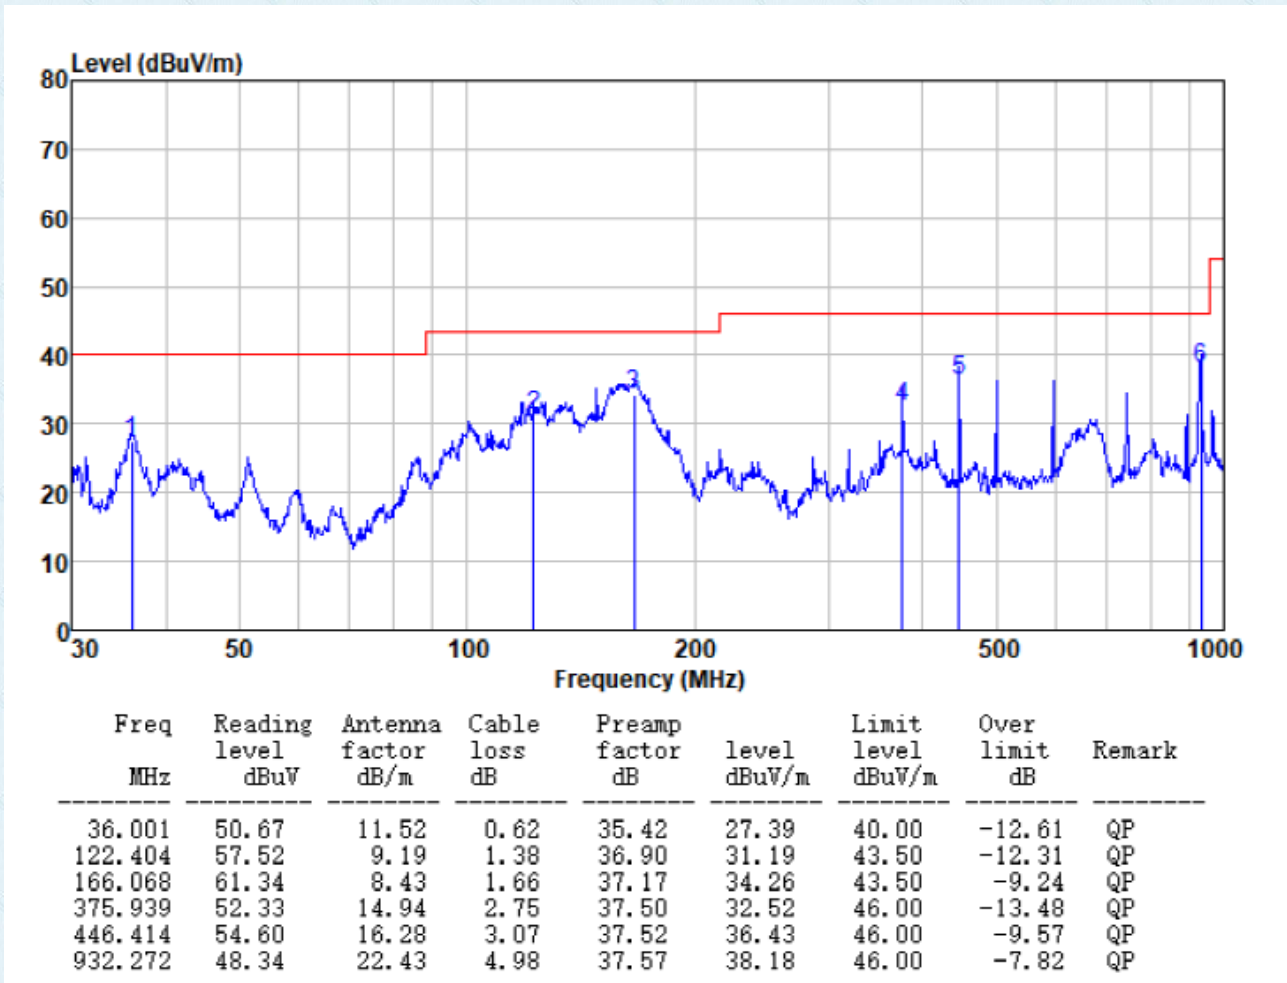


Test mode:	802.11ac(HT20)	Test channel:	Lowest	Polarization:	Horizontal
------------	----------------	---------------	--------	---------------	------------

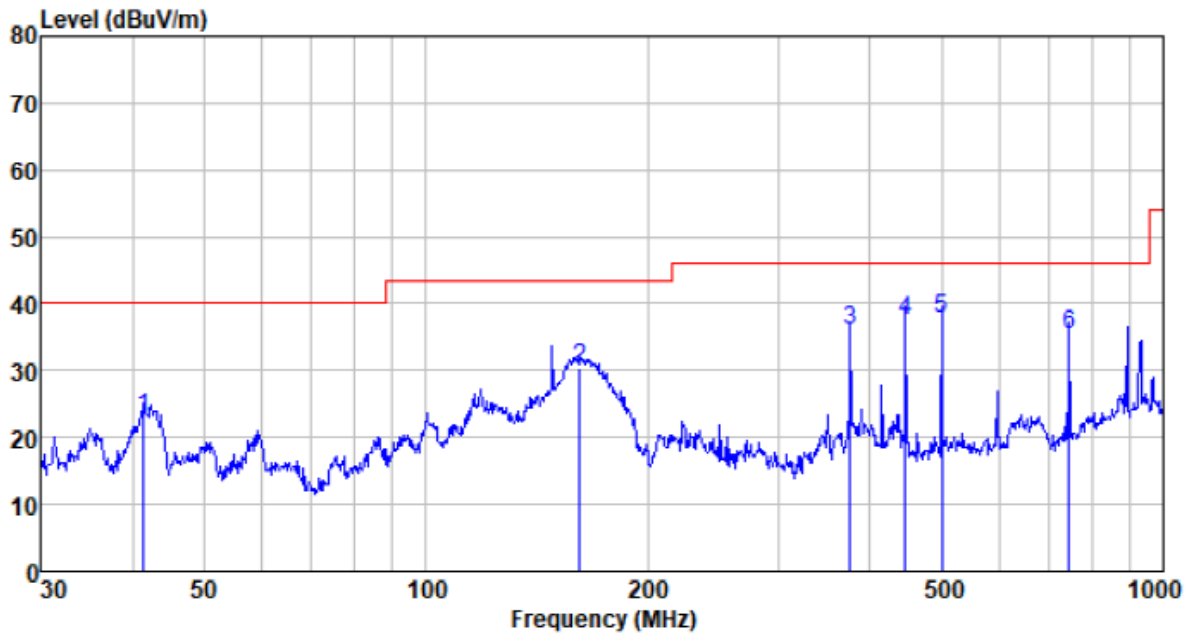


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
41.422	45.81	12.22	0.68	35.75	22.96	40.00	-17.04	QP
161.474	57.48	8.33	1.64	37.14	30.31	43.50	-13.19	QP
375.939	55.93	14.94	2.75	37.50	36.12	46.00	-9.88	QP
446.414	55.78	16.28	3.07	37.52	37.61	46.00	-8.39	QP
501.179	54.59	17.30	3.31	37.51	37.69	46.00	-8.31	QP
744.866	48.25	20.41	4.26	37.63	35.29	46.00	-10.71	QP

Test mode:	802.11ac(HT20)	Test channel:	Lowest	Polarization:	Vertical
------------	----------------	---------------	--------	---------------	----------

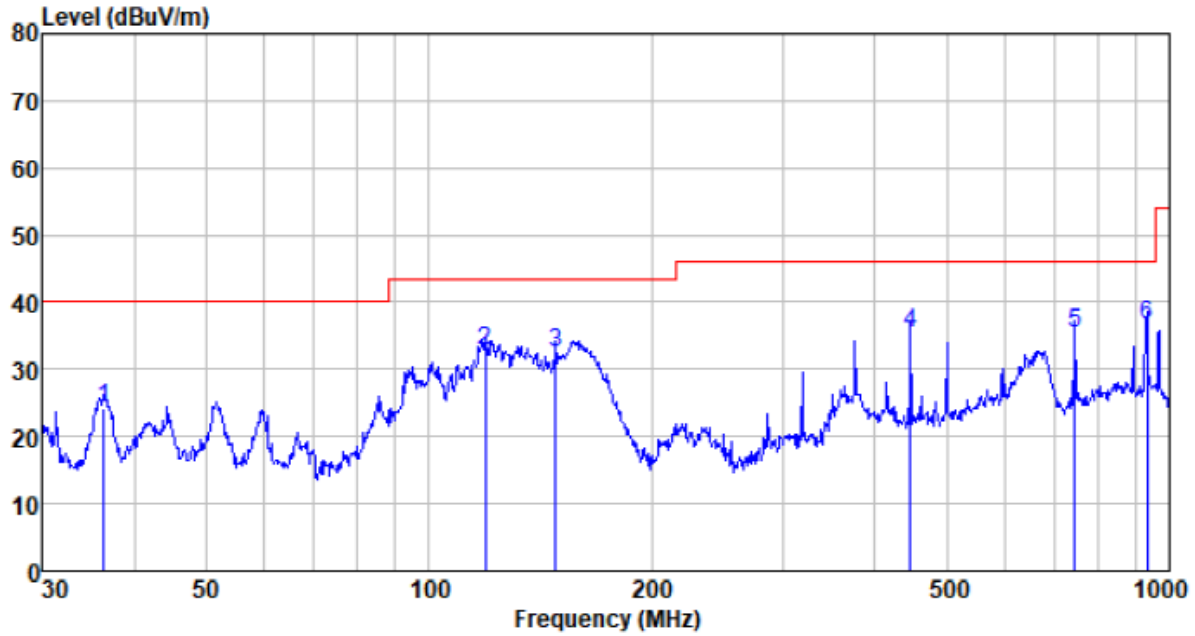


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
36.381	47.41	11.58	0.62	35.45	24.16	40.00	-15.84	QP
119.018	58.76	9.67	1.35	36.87	32.91	43.50	-10.59	QP
148.441	60.31	7.57	1.56	37.07	32.37	43.50	-11.13	QP
446.414	53.51	16.28	3.07	37.52	35.34	46.00	-10.66	QP
744.866	48.28	20.41	4.26	37.63	35.32	46.00	-10.68	QP
932.272	46.69	22.43	4.98	37.57	36.53	46.00	-9.47	QP

Test mode:	802.11ac(HT20)	Test channel:	Middle	Polarization:	Horizontal
------------	----------------	---------------	--------	---------------	------------

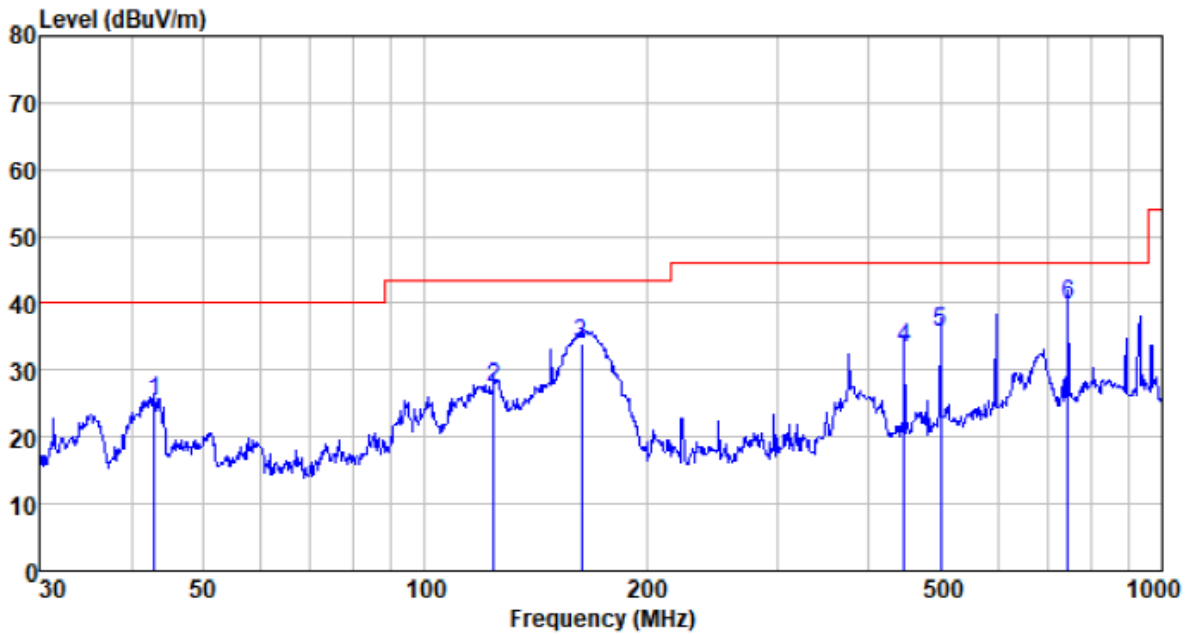


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
42.900	48.34	12.23	0.69	35.83	25.43	40.00	-14.57	QP
124.133	54.03	8.96	1.39	36.91	27.47	43.50	-16.03	QP
163.182	61.13	8.37	1.65	37.15	34.00	43.50	-9.50	QP
446.414	51.44	16.28	3.07	37.52	33.27	46.00	-12.73	QP
501.179	52.73	17.30	3.31	37.51	35.83	46.00	-10.17	QP
744.866	52.87	20.41	4.26	37.63	39.91	46.00	-6.09	QP

Test mode:	802.11ac(HT20)	Test channel:	Middle	Polarization:	Vertical
------------	----------------	---------------	--------	---------------	----------

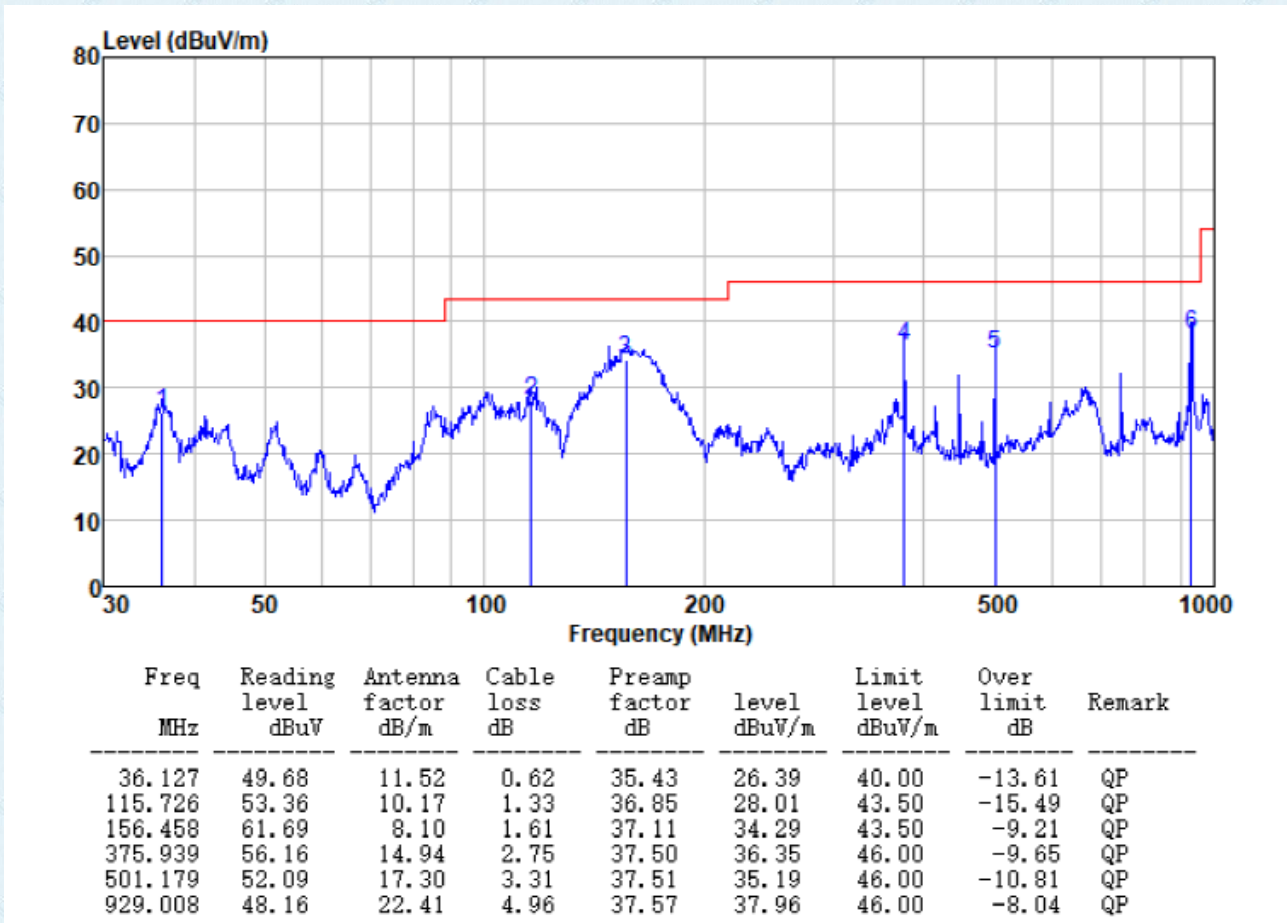


Test mode:	802.11ac(HT20)	Test channel:	Highest	Polarization:	Horizontal
------------	----------------	---------------	---------	---------------	------------

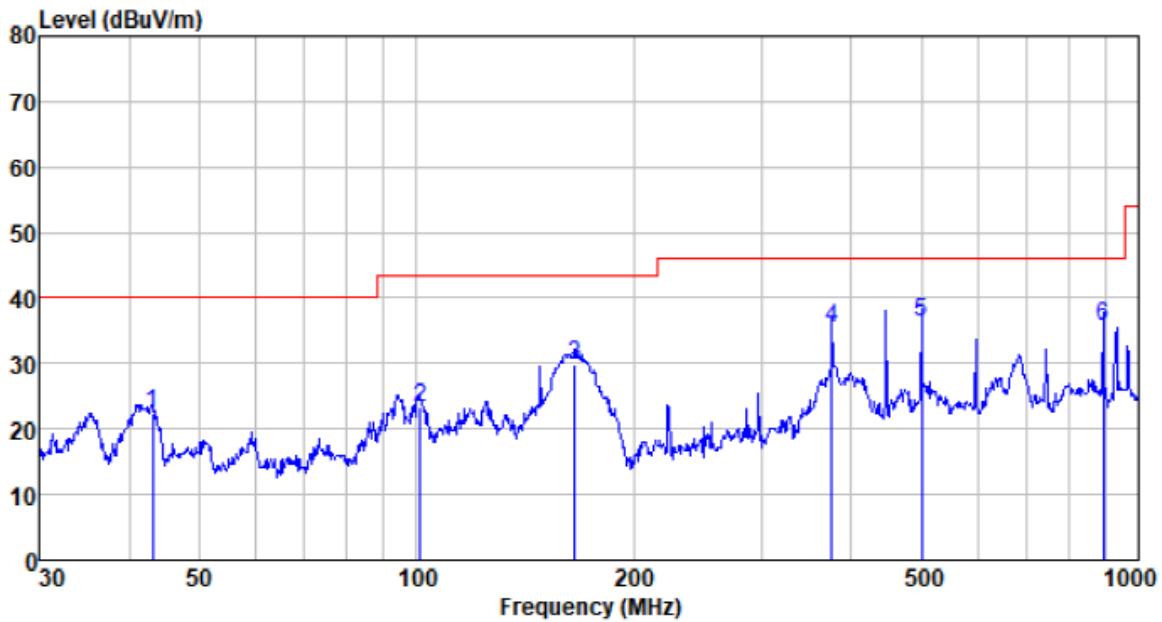


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
43.050	45.20	12.23	0.70	35.83	22.30	40.00	-17.70	QP
101.289	46.80	12.04	1.20	36.73	23.31	43.50	-20.19	QP
165.487	56.99	8.41	1.66	37.16	29.90	43.50	-13.60	QP
375.939	55.11	14.94	2.75	37.50	35.30	46.00	-10.70	QP
501.179	53.24	17.30	3.31	37.51	36.34	46.00	-9.66	QP
893.857	46.23	22.23	4.83	37.60	35.69	46.00	-10.31	QP

Test mode:	802.11ac(HT20)	Test channel:	Highest	Polarization:	Vertical
------------	----------------	---------------	---------	---------------	----------

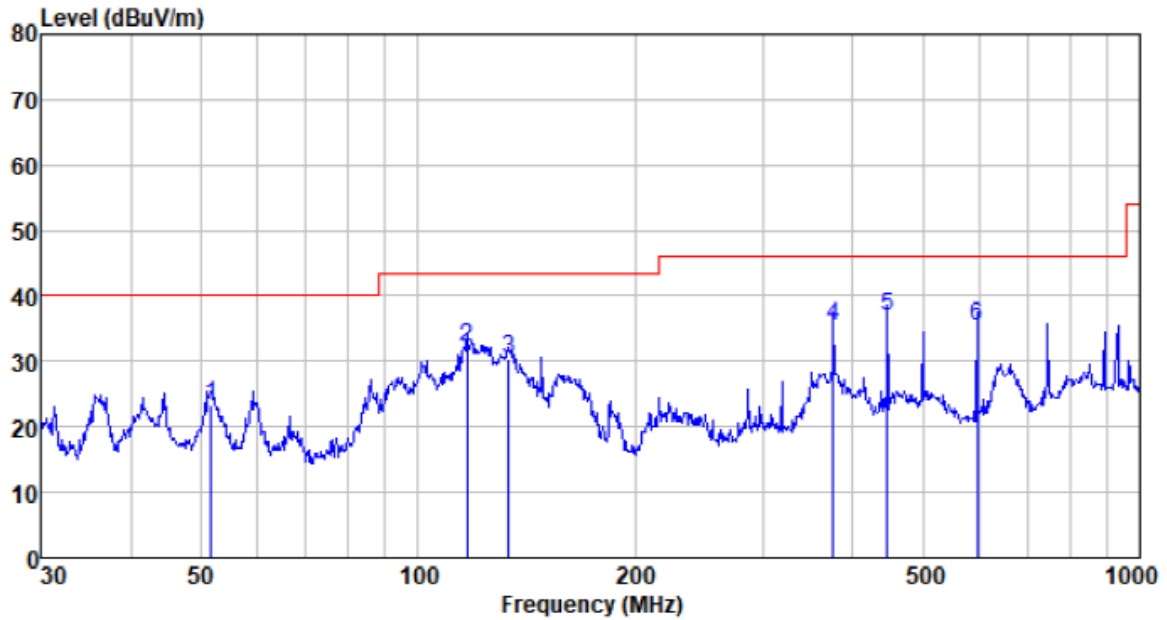


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
51.662	46.71	12.12	0.79	36.21	23.41	40.00	-16.59	QP
116.950	57.81	10.01	1.34	36.86	32.30	43.50	-11.20	QP
133.619	57.90	7.92	1.46	36.98	30.30	43.50	-13.20	QP
375.939	55.22	14.94	2.75	37.50	35.41	46.00	-10.59	QP
446.414	54.99	16.28	3.07	37.52	36.82	46.00	-9.18	QP
595.133	49.87	19.39	3.70	37.54	35.42	46.00	-10.58	QP

Test mode:	802.11ac(HT80)	Test channel:	5210MHz	Polarization:	Horizontal
------------	----------------	---------------	---------	---------------	------------

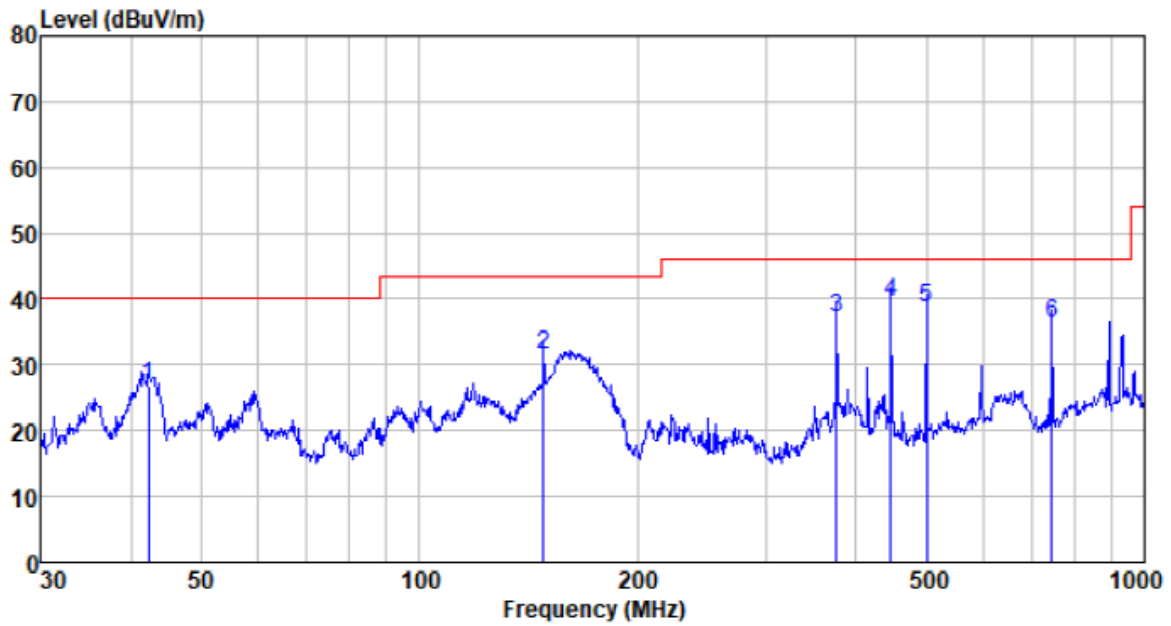

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
42.302	49.77	12.23	0.69	35.79	26.90	40.00	-13.10	QP
148.441	59.57	7.57	1.56	37.07	31.63	43.50	-11.87	QP
375.939	56.93	14.94	2.75	37.50	37.12	46.00	-8.88	QP
446.414	57.78	16.28	3.07	37.52	39.61	46.00	-6.39	QP
501.179	55.59	17.30	3.31	37.51	38.69	46.00	-7.31	QP
744.866	49.25	20.41	4.26	37.63	36.29	46.00	-9.71	QP

Test mode:	802.11ac(HT80)	Test channel:	5210MHz	Polarization:	Vertical
------------	----------------	---------------	---------	---------------	----------

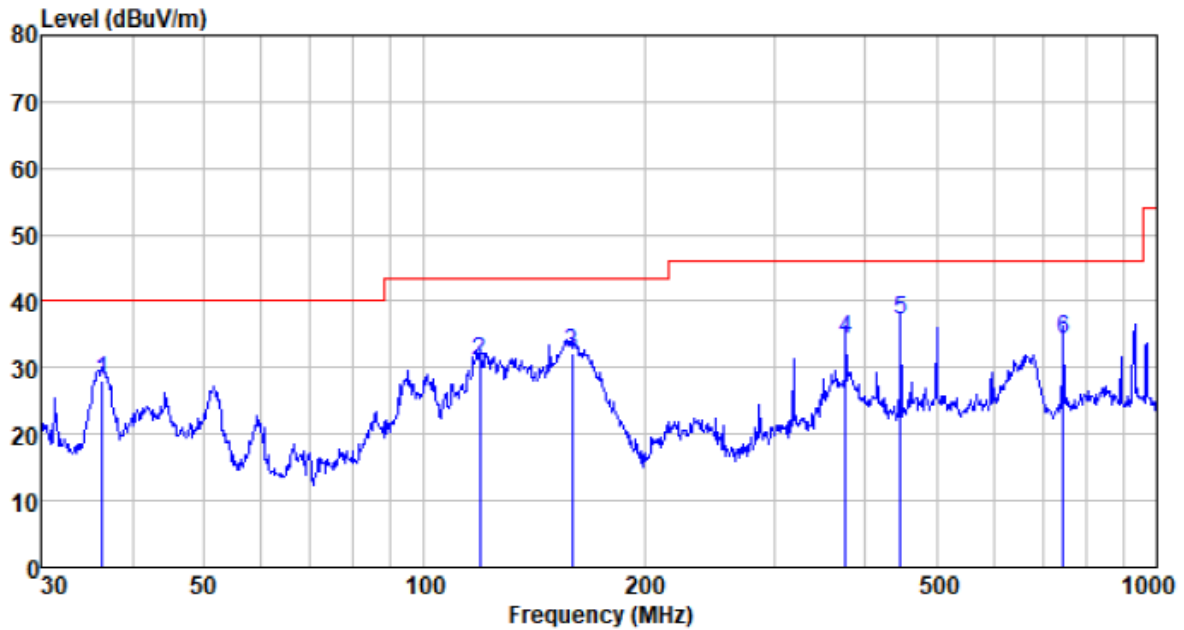

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
36.381	51.41	11.58	0.62	35.45	28.16	40.00	-11.84	QP
119.018	56.76	9.67	1.35	36.87	30.91	43.50	-12.59	QP
159.225	59.46	8.25	1.62	37.13	32.20	43.50	-11.30	QP
375.939	54.04	14.94	2.75	37.50	34.23	46.00	-11.77	QP
446.414	55.51	16.28	3.07	37.52	37.34	46.00	-8.66	QP
744.866	47.28	20.41	4.26	37.63	34.32	46.00	-11.68	QP

Above 1GHz

802.11n(HT20) 5180MHz					PK			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.00	31.25	39.67	14.62	32.65	52.89	68.20	-15.31	Vertical
15540.00	31.65	38.60	17.66	34.46	53.45	68.20	-14.75	Vertical
10360.00	33.58	39.67	14.62	32.65	55.22	68.20	-12.98	Horizontal
15540.00	33.98	38.60	17.66	34.46	55.78	68.20	-12.42	Horizontal
802.11n(HT20) 5180MHz					AV			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.00	20.38	39.67	14.62	32.65	42.02	54.00	-11.98	Vertical
15540.00	21.68	38.60	17.66	34.46	43.48	54.00	-10.52	Vertical
10360.00	19.69	39.67	14.62	32.65	41.33	54.00	-12.67	Horizontal
15540.00	21.59	38.60	17.66	34.46	43.39	54.00	-10.61	Horizontal
802.11n(HT20) 5200MHz					PK			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.00	34.68	39.75	14.63	32.71	56.35	68.20	-11.85	Vertical
15600.00	28.98	38.33	17.67	34.17	50.81	68.20	-17.39	Vertical
10400.00	30.21	39.75	14.63	32.71	51.88	68.20	-16.32	Horizontal
15600.00	30.24	38.33	17.67	34.17	52.07	68.20	-16.13	Horizontal
802.11n(HT20) 5200MHz					AV			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.00	19.98	39.75	14.63	32.71	41.65	54.00	-12.35	Vertical
15600.00	20.31	38.33	17.67	34.17	42.14	54.00	-11.86	Vertical
10400.00	20.98	39.75	14.63	32.71	42.65	54.00	-11.35	Horizontal
15600.00	20.09	38.33	17.67	34.17	41.92	54.00	-12.08	Horizontal
802.11n(HT20) 5240MHz					PK			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.00	29.35	39.82	14.68	32.86	50.99	68.20	-17.21	Vertical
15720.00	33.10	38.09	17.73	33.66	55.26	68.20	-12.94	Vertical
10480.00	29.38	39.82	14.68	32.86	51.02	68.20	-17.18	Horizontal
15720.00	32.16	38.09	17.73	33.66	54.32	68.20	-13.88	Horizontal
802.11n(HT20) 5240MHz					AV			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.00	22.06	39.82	14.68	32.86	43.70	54.00	-10.3	Vertical
15720.00	23.14	38.09	17.73	33.66	45.30	54.00	-8.7	Vertical
10480.00	20.39	39.82	14.68	32.86	42.03	54.00	-11.97	Horizontal
15720.00	20.58	38.09	17.73	33.66	42.74	54.00	-11.26	Horizontal


802.11ac(HT20) 5180MHz					PK			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.00	30.16	39.67	14.62	32.65	51.80	68.20	-16.4	Vertical
15540.00	31.68	38.60	17.66	34.46	53.48	68.20	-14.72	Vertical
10360.00	33.98	39.67	14.62	32.65	55.62	68.20	-12.58	Horizontal
15540.00	34.58	38.60	17.66	34.46	56.38	68.20	-11.82	Horizontal
802.11ac(HT20) 5180MHz					AV			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.00	19.68	39.67	14.62	32.65	41.32	54.00	-12.68	Vertical
15540.00	21.39	38.60	17.66	34.46	43.19	54.00	-10.81	Vertical
10360.00	20.32	39.67	14.62	32.65	41.96	54.00	-12.04	Horizontal
15540.00	21.54	38.60	17.66	34.46	43.34	54.00	-10.66	Horizontal
802.11ac(HT20) 5200MHz					PK			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.00	34.58	39.75	14.63	32.71	56.25	68.20	-11.95	Vertical
15600.00	29.68	38.33	17.67	34.17	51.51	68.20	-16.69	Vertical
10400.00	29.48	39.75	14.63	32.71	51.15	68.20	-17.05	Horizontal
15600.00	30.65	38.33	17.67	34.17	52.48	68.20	-15.72	Horizontal
802.11ac(HT20) 5200MHz					AV			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.00	20.38	39.75	14.63	32.71	42.05	54.00	-11.95	Vertical
15600.00	20.14	38.33	17.67	34.17	41.97	54.00	-12.03	Vertical
10400.00	20.98	39.75	14.63	32.71	42.65	54.00	-11.35	Horizontal
15600.00	20.30	38.33	17.67	34.17	42.13	54.00	-11.87	Horizontal
802.11ac(HT20) 5240MHz					PK			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.00	29.21	39.82	14.68	32.86	50.85	68.20	-17.35	Vertical
15720.00	33.65	38.09	17.73	33.66	55.81	68.20	-12.39	Vertical
10480.00	30.05	39.82	14.68	32.86	51.69	68.20	-16.51	Horizontal
15720.00	32.19	38.09	17.73	33.66	54.35	68.20	-13.85	Horizontal
802.11ac(HT20) 5240MHz					AV			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.00	22.56	39.82	14.68	32.86	44.20	54.00	-9.8	Vertical
15720.00	23.54	38.09	17.73	33.66	45.70	54.00	-8.3	Vertical
10480.00	20.34	39.82	14.68	32.86	41.98	54.00	-12.02	Horizontal
15720.00	20.58	38.09	17.73	33.66	42.74	54.00	-11.26	Horizontal

802.11ac(HT80) 5210MHz					PK			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10420.00	32.68	39.82	14.66	32.80	54.36	68.20	-13.84	Vertical
15630.00	34.15	38.09	17.71	33.81	56.14	68.20	-12.06	Vertical
10420.00	33.02	39.82	14.66	32.80	54.70	68.20	-13.5	Horizontal
15630.00	30.19	38.09	17.71	33.81	52.18	68.20	-16.02	Horizontal
802.11ac(HT80) 5210MHz					AV			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10420.00	24.03	39.82	14.66	32.80	45.71	54.00	-8.29	Vertical
15630.00	20.69	38.09	17.71	33.81	42.68	54.00	-11.32	Vertical
10420.00	22.16	39.82	14.66	32.80	43.84	54.00	-10.16	Horizontal
15630.00	22.30	38.09	17.71	33.81	44.29	54.00	-9.71	Horizontal

Notes:

1. Level = Read Level + Antenna Factor+ Cable loss- Preamp Factor.
2. The test trace is same as the ambient noise (the test frequency range: 18GHz~40GHz), therefore no data appear in the report.
3. Test result margin more than 20dB under PK limit, then average measurement needn't be performed.

7.8 Frequency stability

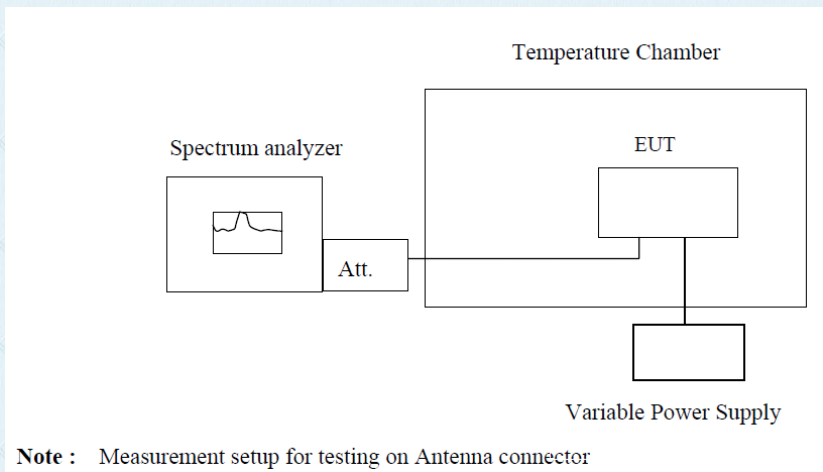Test Requirement:	FCC Part15 C Section 15.407(g) RSS-Gen 8.11
Test Method:	ANSI C63.10:2013, FCC Part 2.1055, RSS-Gen
Limit:	Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified
Test Procedure:	The EUT was setup to ANSI C63.4, 2003; tested to 2.1055 for compliance to FCC Part 15.407(g) requirements.
Test setup:	 <p>Note : Measurement setup for testing on Antenna connector</p>
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data: The detailed test data see Appendix for WIFI 5G

8 Test Setup Photo

Reference to the **appendix I** for details.

9 EUT Constructional Details

Reference to the **appendix II** for details.

---END---