



5.6. Conducted Spurious Emissions and Band Edges Test

5.6.1. Standard Applicable

According to §15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

5.6.2. Measuring Instruments and Setting

Please refer to section 6 of equipment list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Detector	Peak
Attenuation	Auto
RB / VB (Emission in restricted band)	100KHz/300KHz
RB / VB (Emission in non-restricted band)	100KHz/300KHz

5.6.3. Test Procedures

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz

The spectrum from 9 KHz to 26.5GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

5.6.4. Test Setup Layout

This test setup layout is the same as that shown in section 5.4.4.

5.6.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.6.6. Test Results of Conducted Spurious Emissions


Temperature	22.5°C	Humidity	56%
Test Engineer	Anna Hu	Configurations	IEEE 802.11b/g/n




Test Mode	Channel	Frequency (MHz)	Measured Frequency Range	Spurious RF Conducted Emission (dBc)			Limits (dBc)	Verdict
				Antenna 0	Antenna 1	Antenna 2		
IEEE 802.11b	1	2412	9 KHz – 26.5 GHz	<-20	<-20	<-20	-20	PASS
	6	2437	9 KHz – 26.5 GHz	<-20	<-20	<-20		
	11	2462	9 KHz – 26.5 GHz	<-20	<-20	<-20		
IEEE 802.11g	1	2412	9 KHz – 26.5 GHz	<-20	<-20	<-20	-20	PASS
	6	2437	9 KHz – 26.5 GHz	<-20	<-20	<-20		
	11	2462	9 KHz – 26.5 GHz	<-20	<-20	<-20		
IEEE 802.11n HT20	1	2412	9 KHz – 26.5 GHz	<-20	<-20	<-20	-20	PASS
	6	2437	9 KHz – 26.5 GHz	<-20	<-20	<-20		
	11	2462	9 KHz – 26.5 GHz	<-20	<-20	<-20		
IEEE 802.11n HT40	3	2422	9 KHz – 26.5 GHz	<-20	<-20	<-20	-20	PASS
	6	2437	9 KHz – 26.5 GHz	<-20	<-20	<-20		
	9	2452	9 KHz – 26.5 GHz	<-20	<-20	<-20		


Remark:

1. Measured RF conducted spurious emission at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20; 13.5Mbps at IEEE 802.11n HT40;
4. “---“means that the fundamental frequency not for 15.209 limits requirement.
5. Not recorded emission values from 9 KHz to 30 MHz as emission level at least 20 dBc lower than limit;
6. Please refer to following plots;

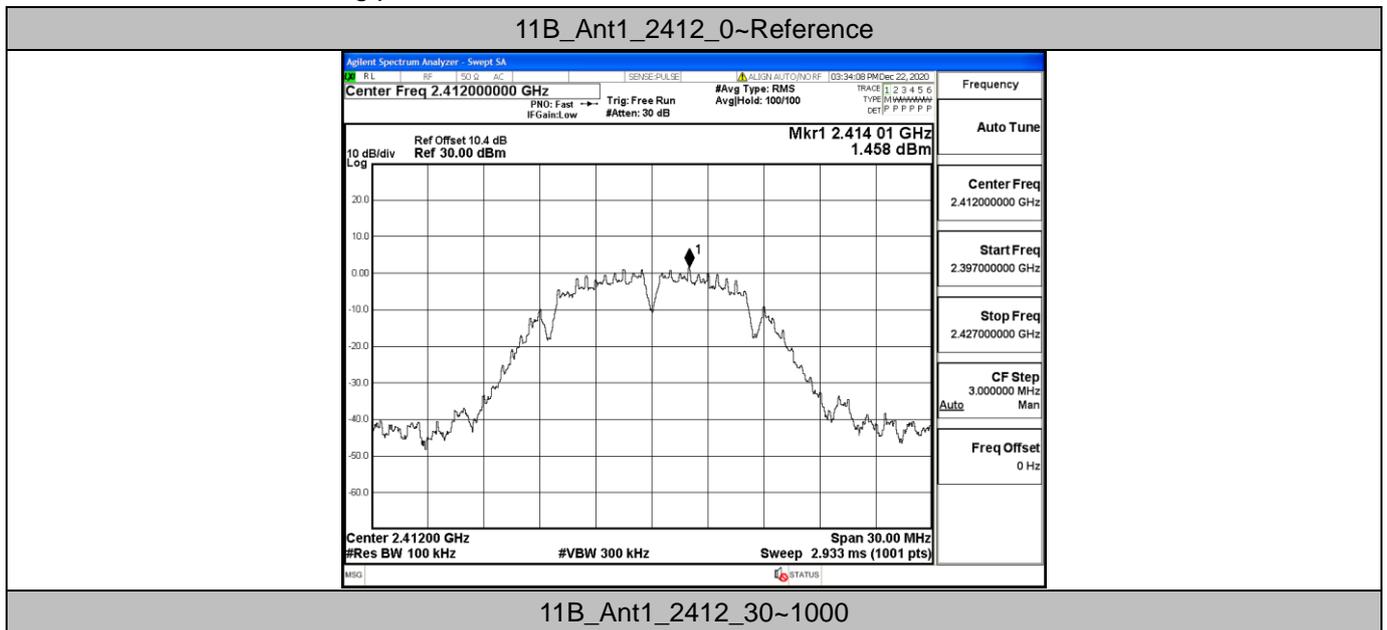


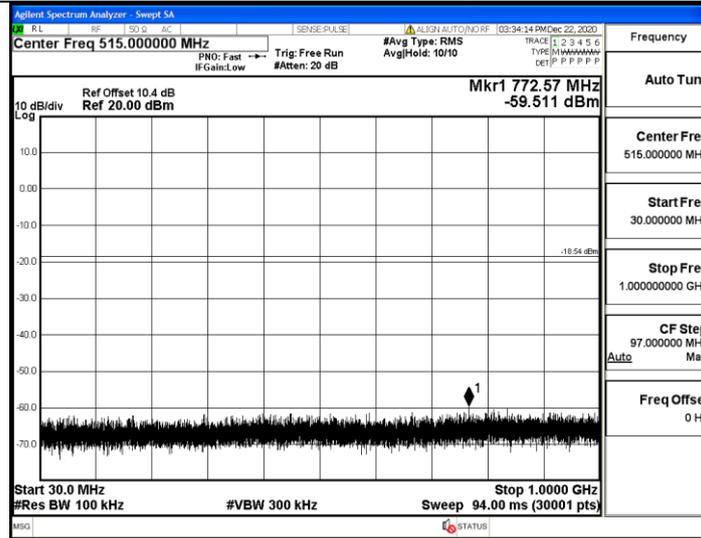


11B_Ant1_2412_1000~26500

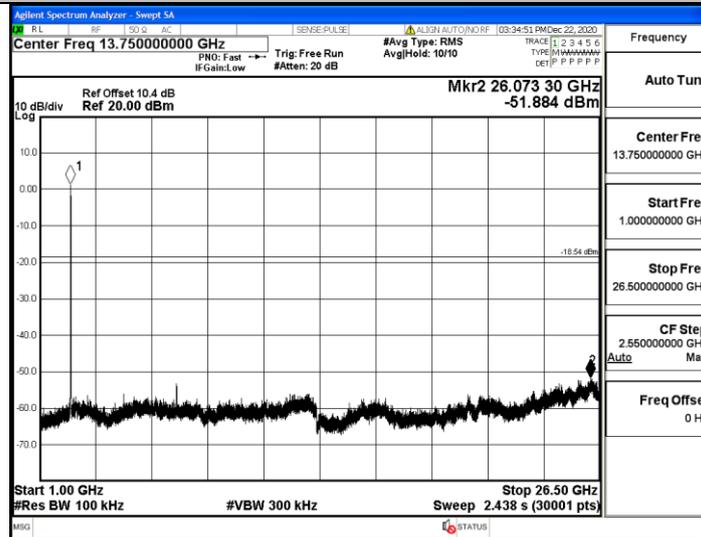


11B_Ant1_2437_0~Reference

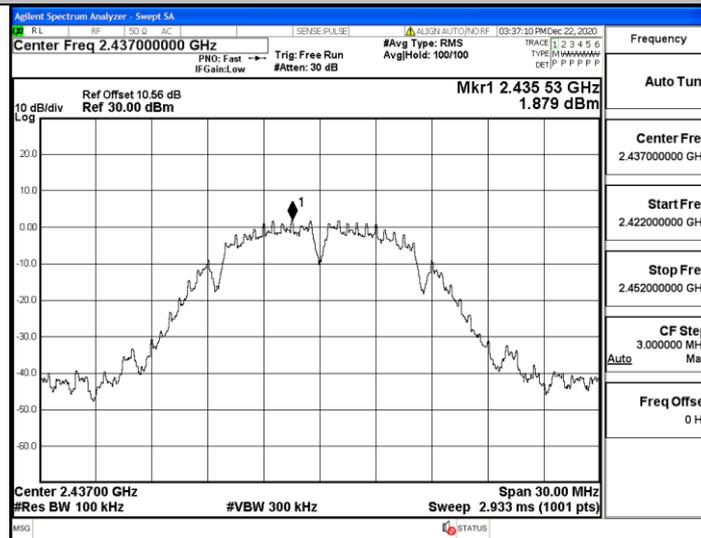


11B_Ant1_2437_30~1000

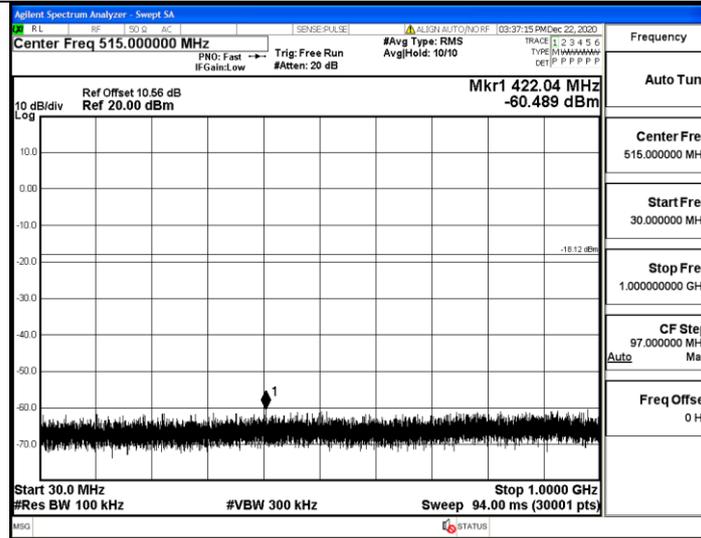


11B_Ant1_2437_1000~26500

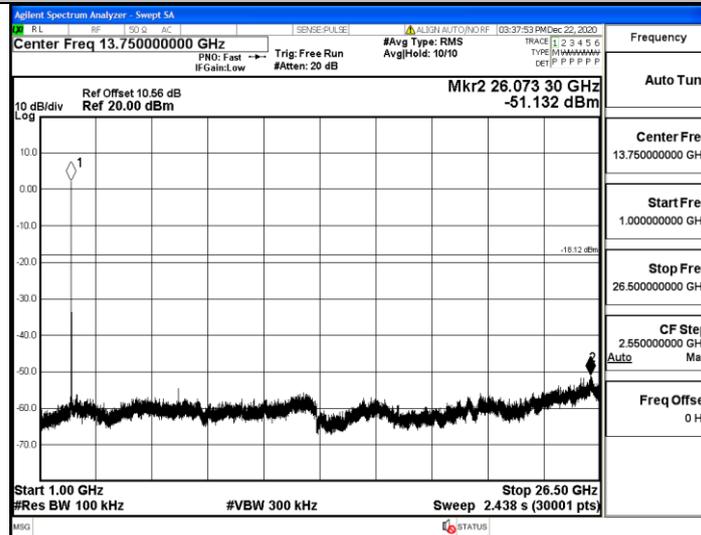


11B_Ant1_2462_0~Reference

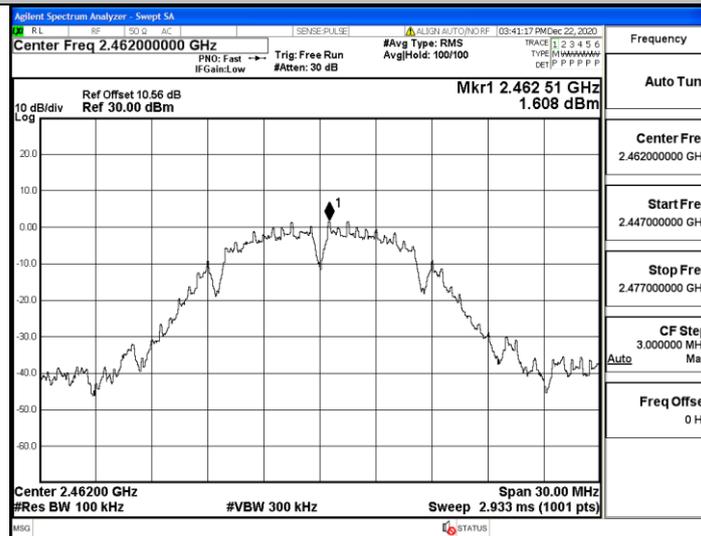


11B_Ant1_2462_30~1000

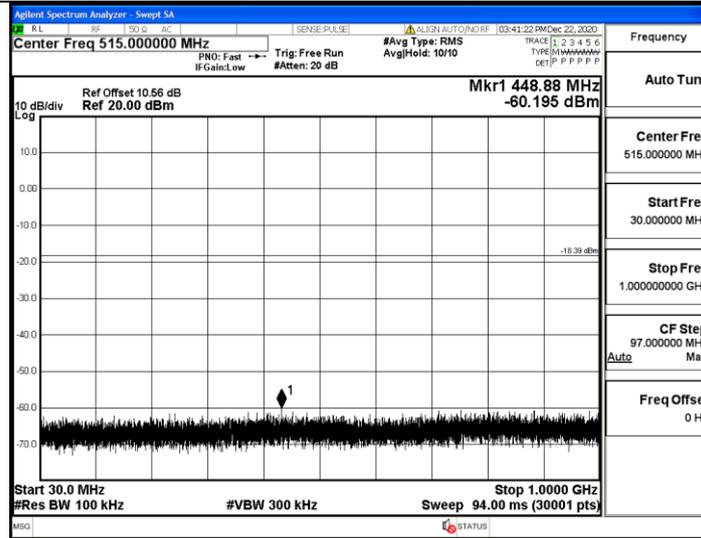


11B_Ant1_2462_1000~26500

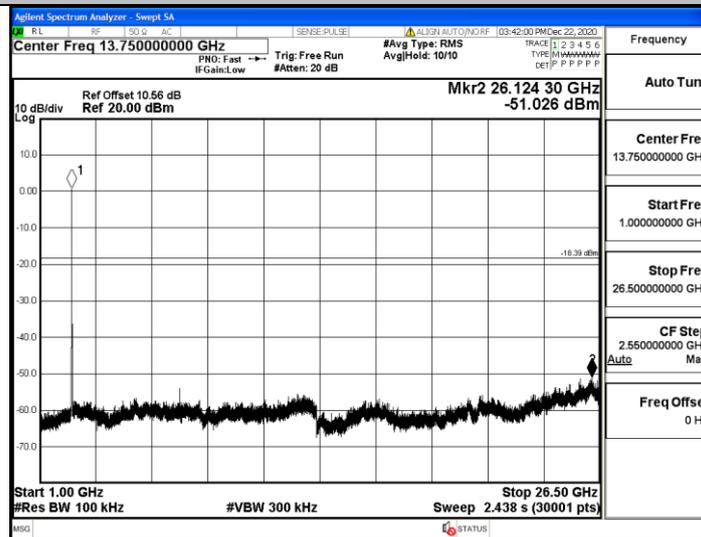


11G_Ant1_2412_0~Reference

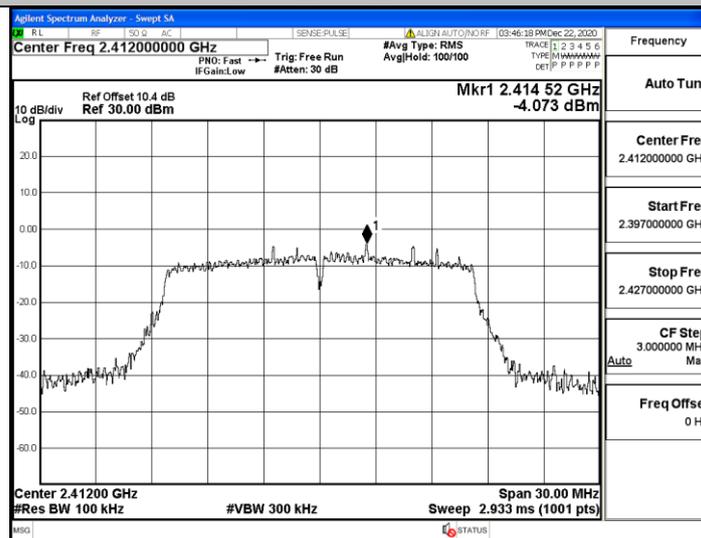


11G_Ant1_2412_30~1000

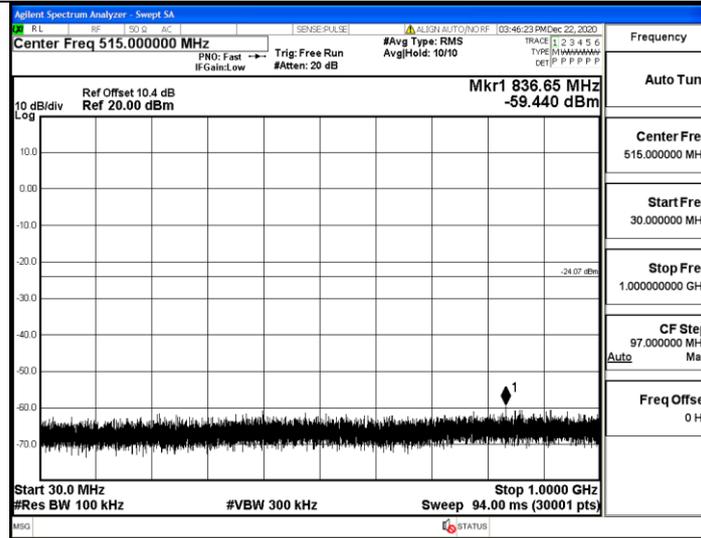


11G_Ant1_2412_1000~26500

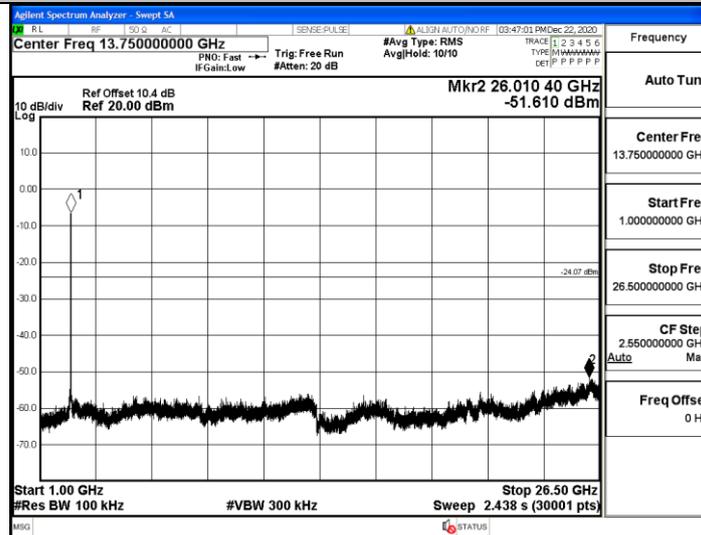


11G_Ant1_2437_0~Reference

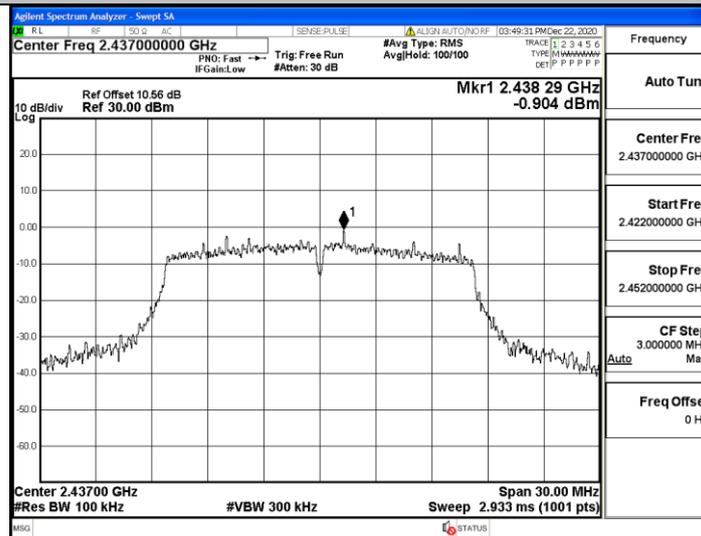


11G_Ant1_2437_30~1000

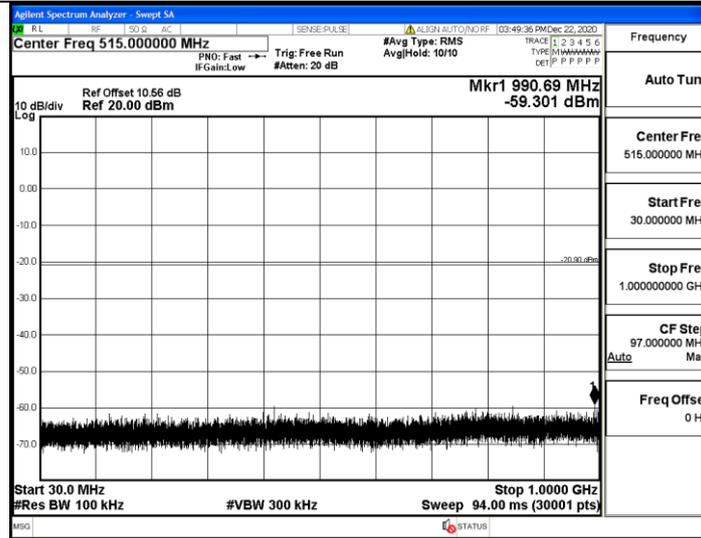


11G_Ant1_2437_1000~26500

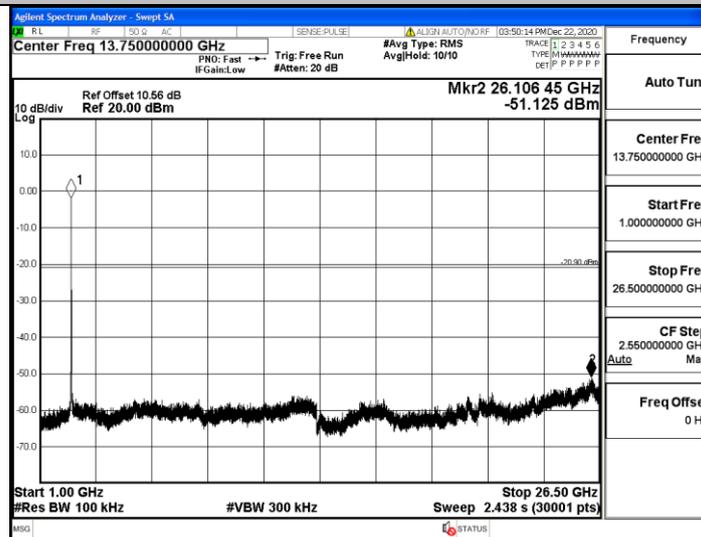


11G_Ant1_2462_0~Reference

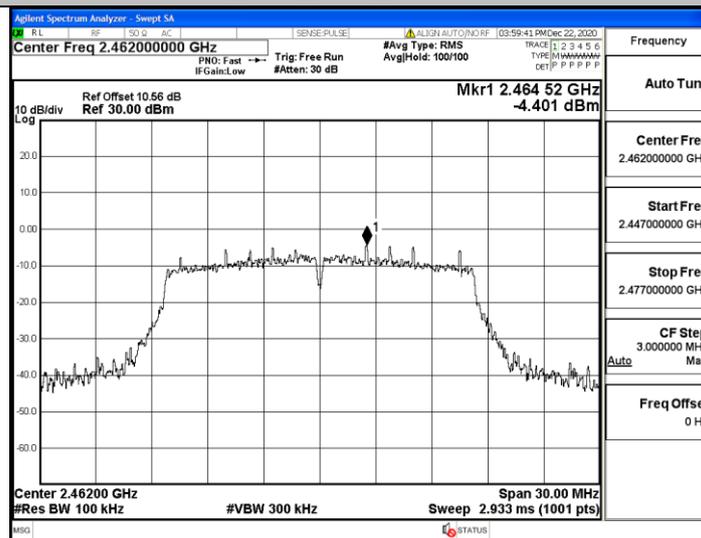


11G_Ant1_2462_30~1000

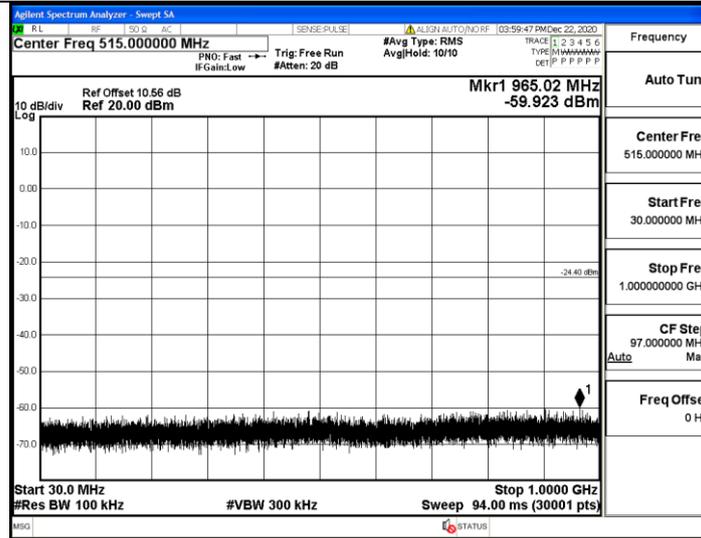


11G_Ant1_2462_1000~26500

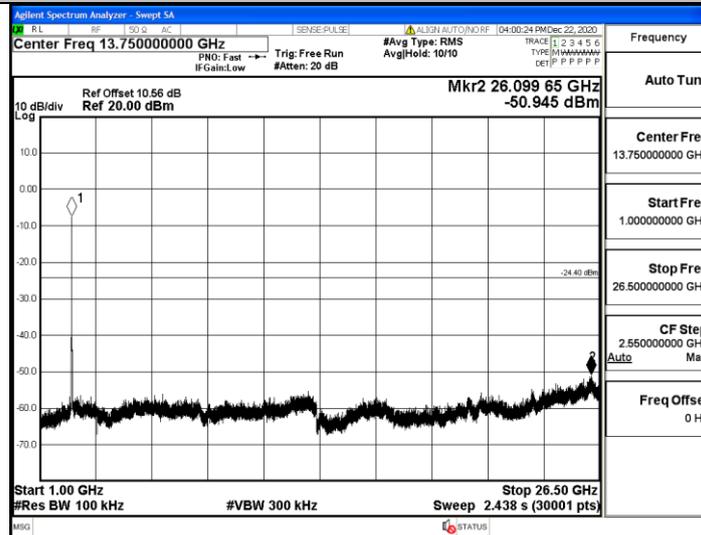


11N20SISO_Ant1_2412_0~Reference

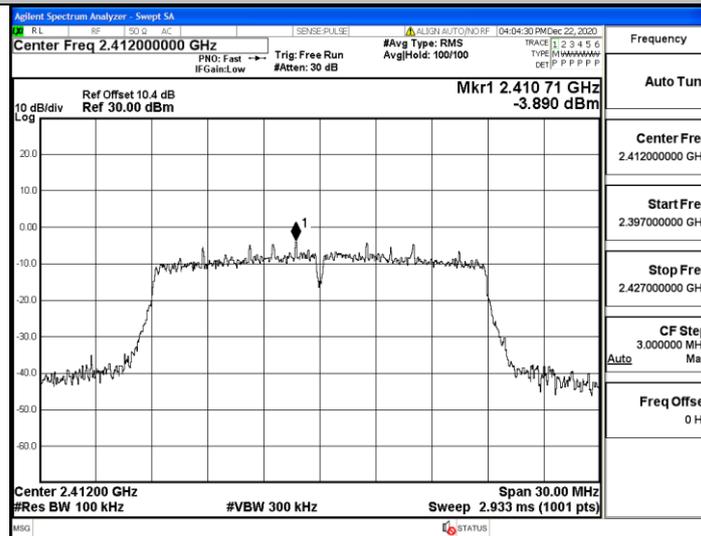


11N20SISO_Ant1_2412_30~1000

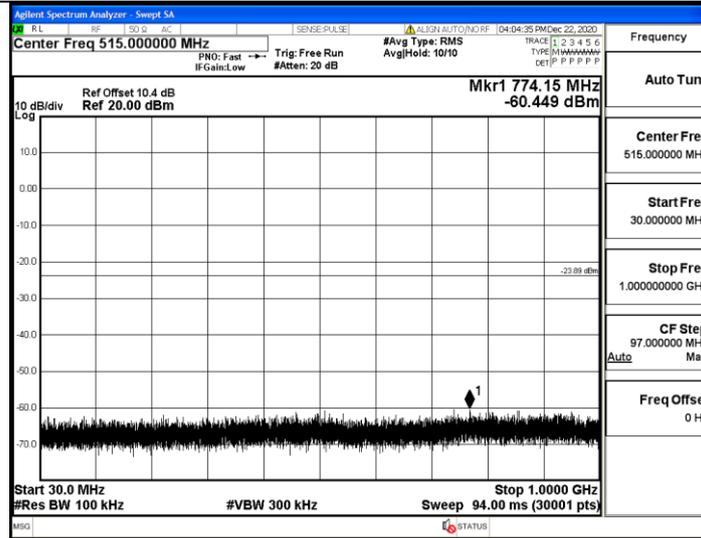


11N20SISO_Ant1_2412_1000~26500

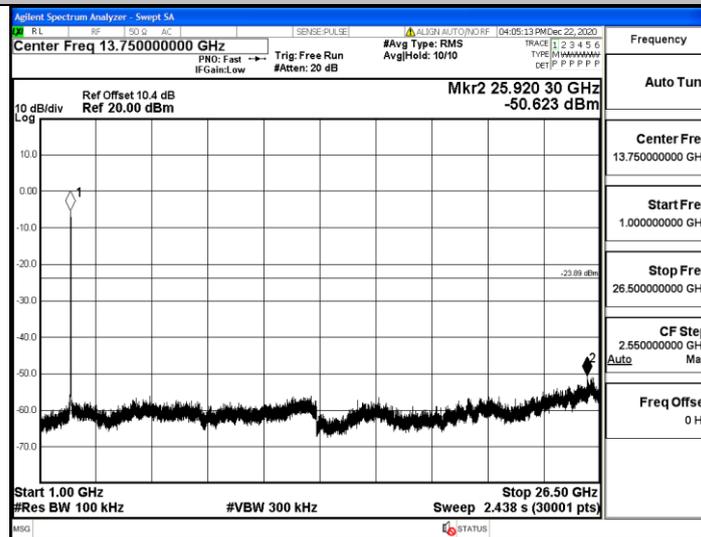


11N20SISO_Ant1_2437_0~Reference

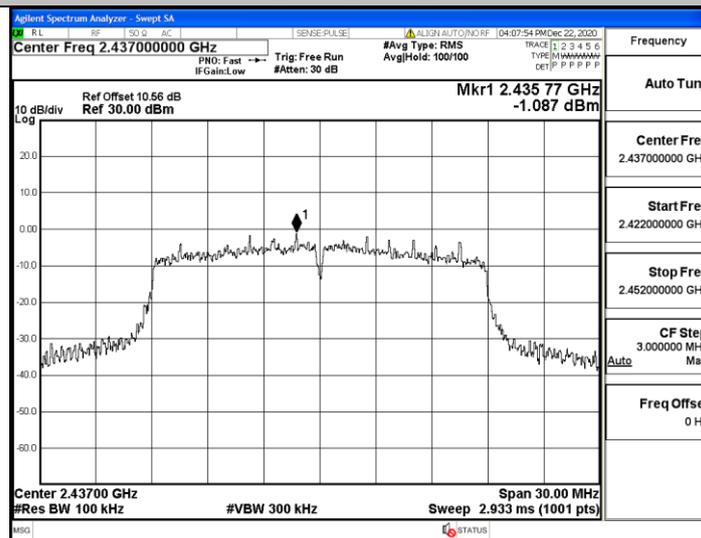


11N20SISO_Ant1_2437_30~1000

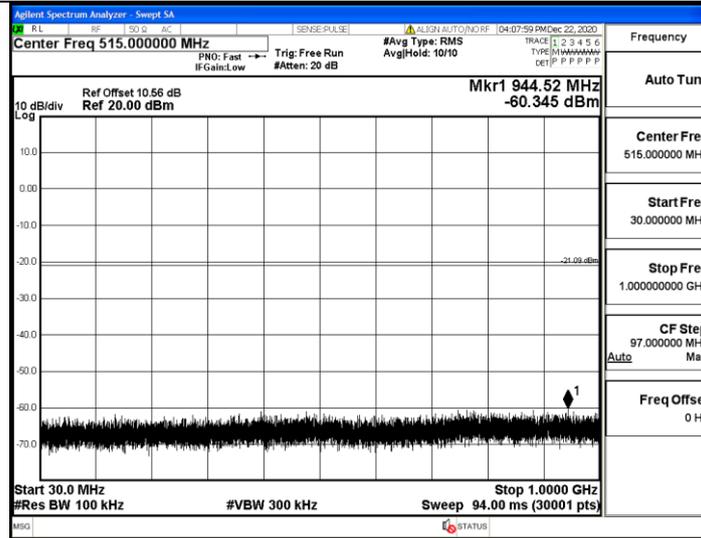


11N20SISO_Ant1_2437_1000~26500

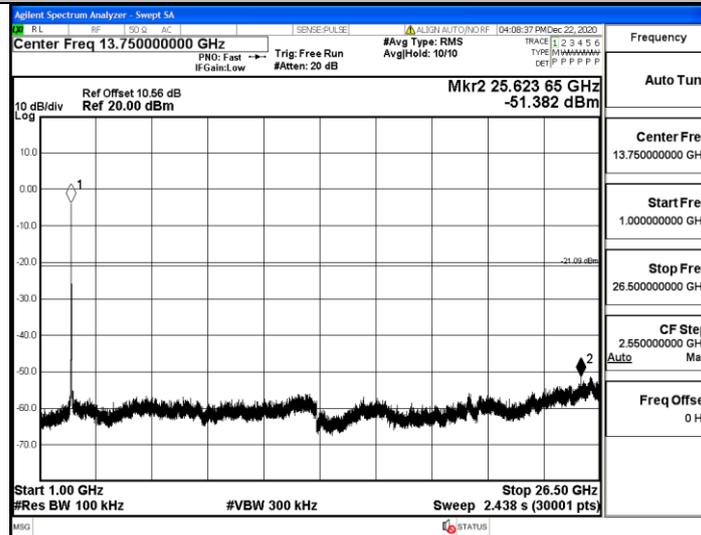


11N20SISO_Ant1_2462_0~Reference

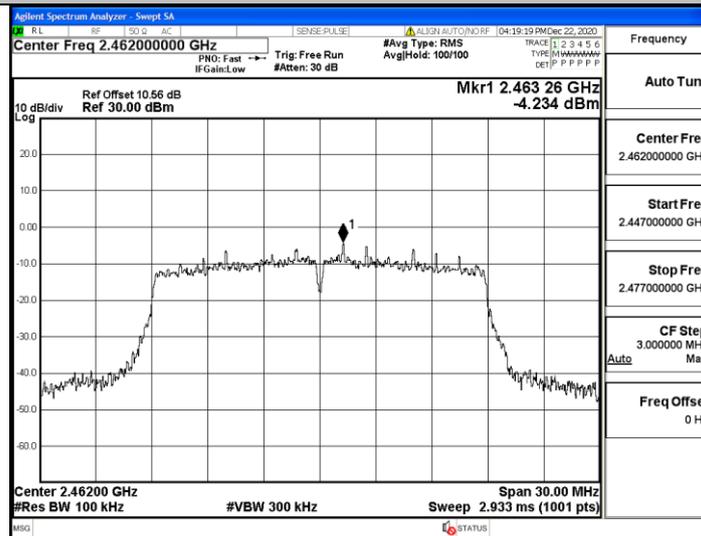


11N20SISO_Ant1_2462_30~1000

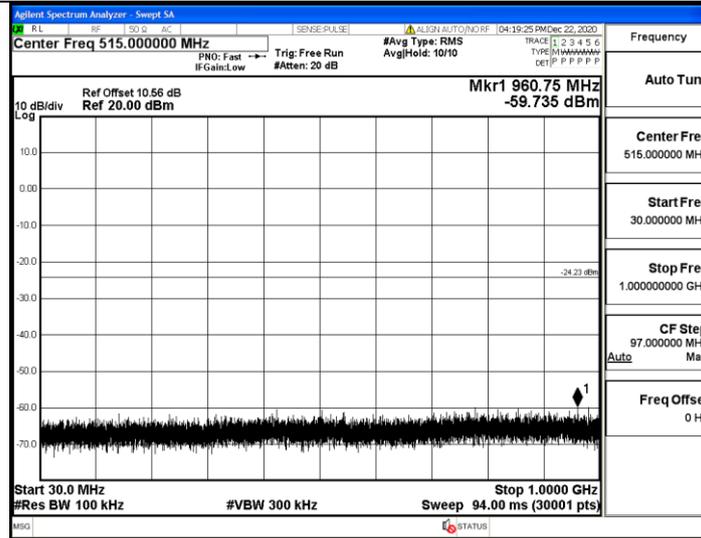


11N20SISO_Ant1_2462_1000~26500

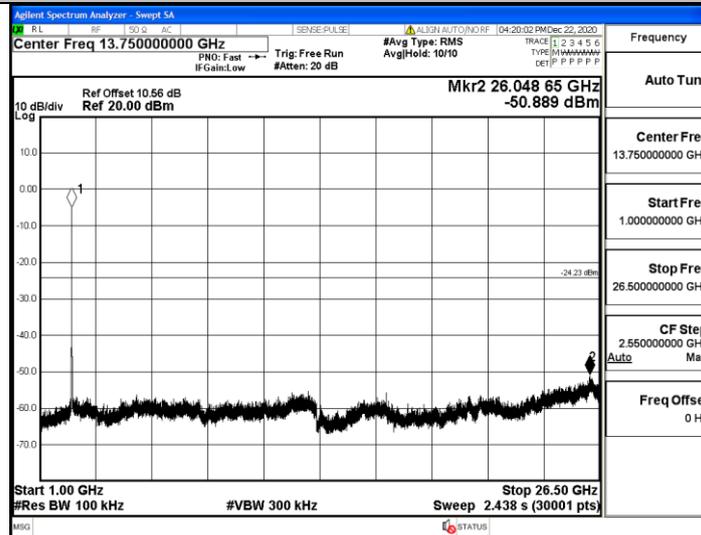


11N40SISO_Ant1_2422_0~Reference

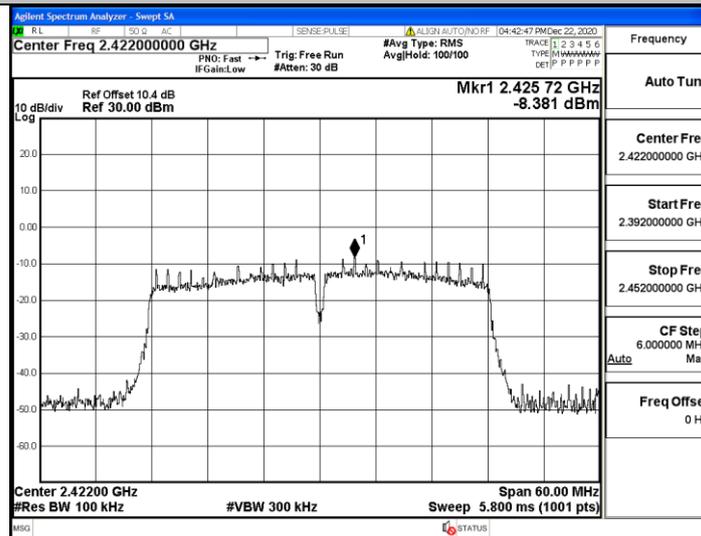


11N40SISO_Ant1_2422_30~1000

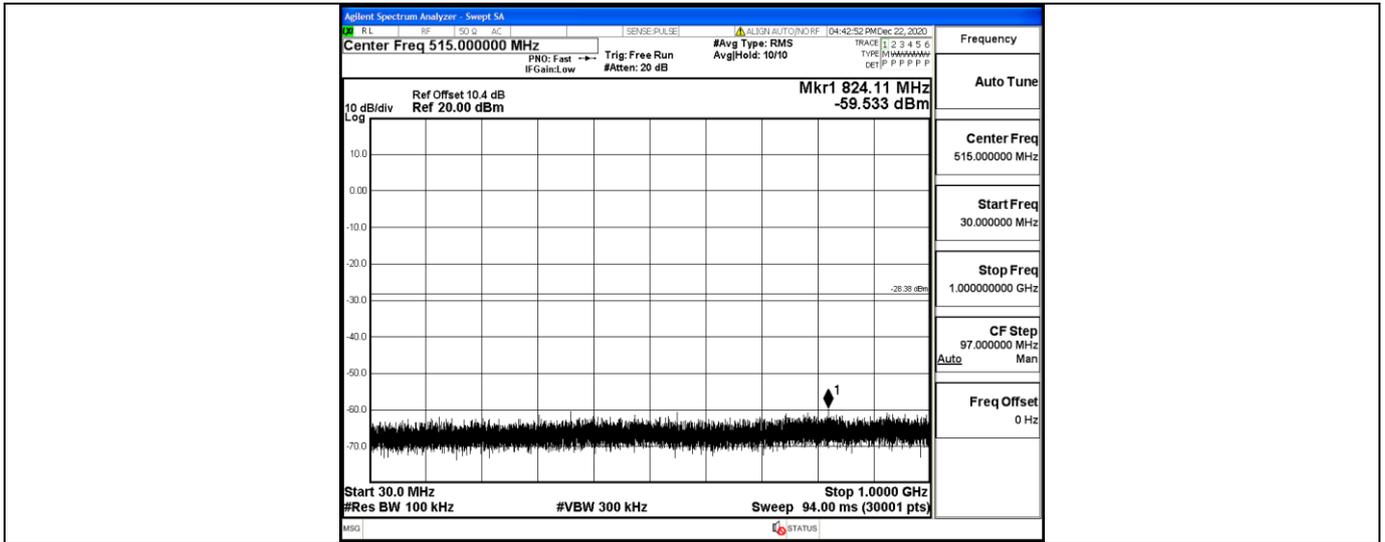


11N40SISO_Ant1_2422_1000~26500

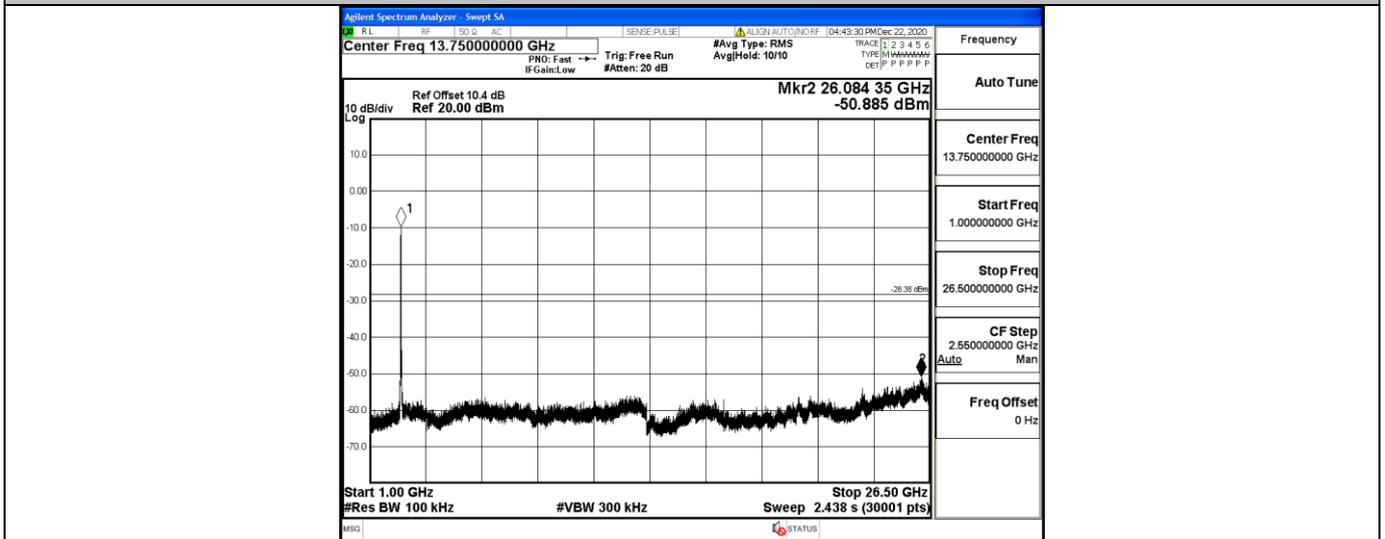


11N40SISO_Ant1_2437_0~Reference

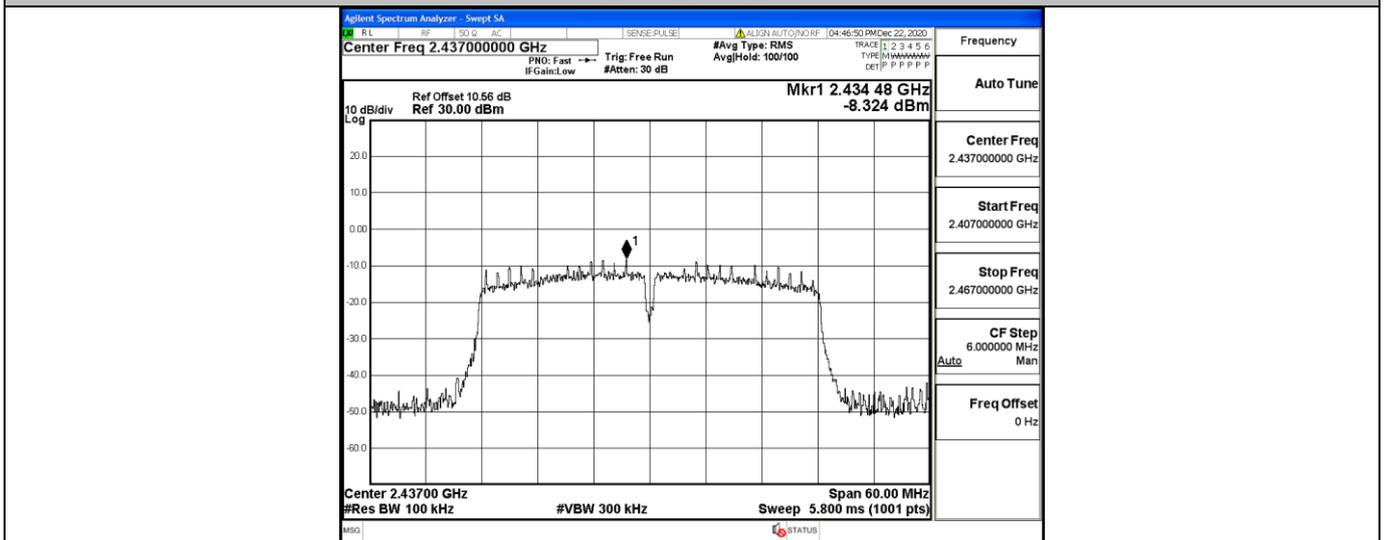


11N40SISO_Ant1_2437_30~1000

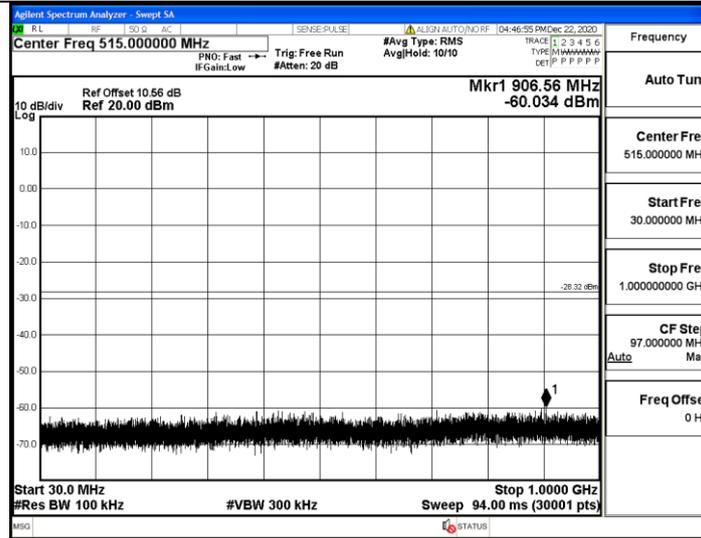


11N40SISO_Ant1_2437_1000~26500

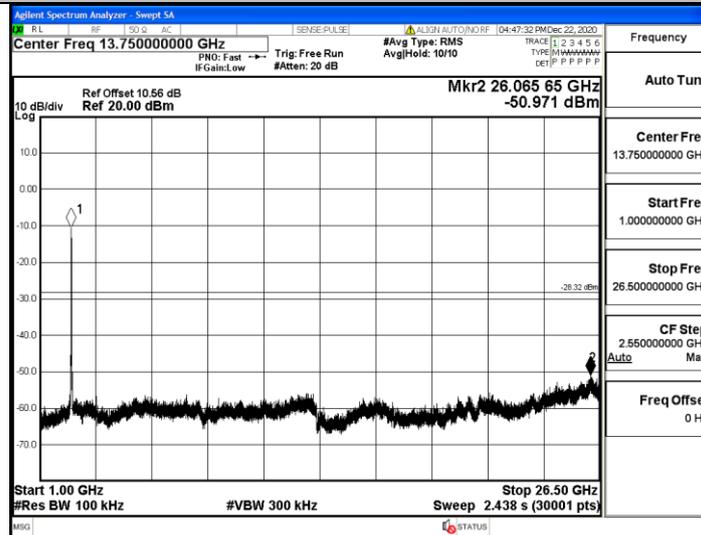


11N40SISO_Ant1_2452_0~Reference

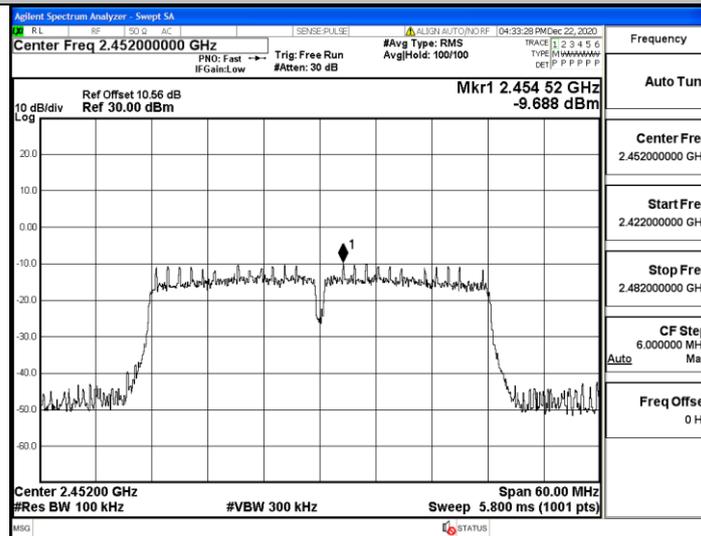

11N40SISO_Ant1_2452_30~1000

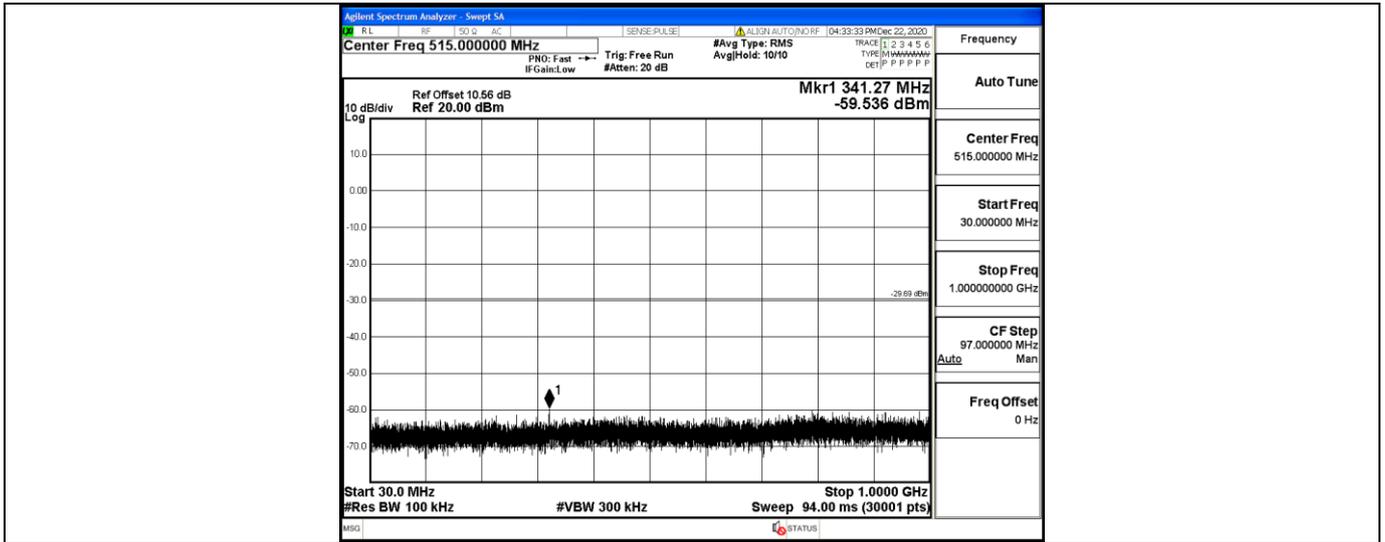


11N40SISO_Ant1_2452_1000~26500

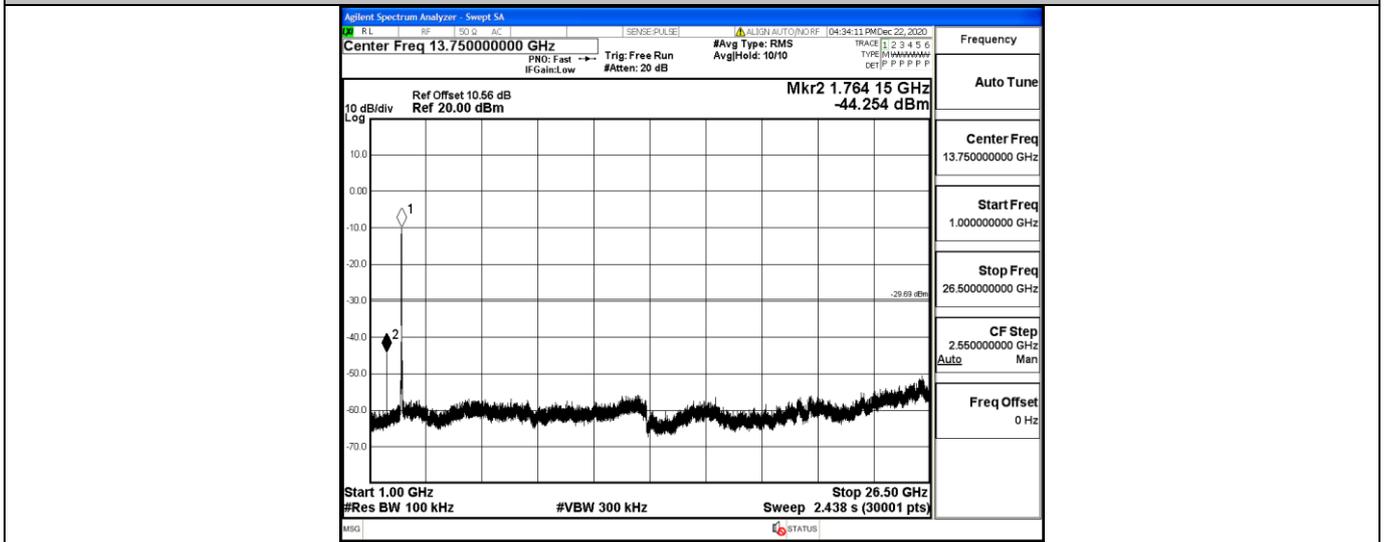





11B_Ant1_Low_2412

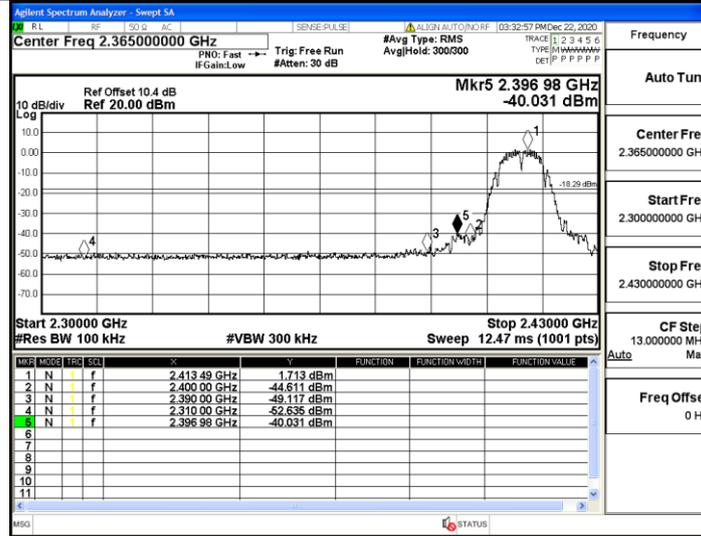


11B_Ant1_High_2462

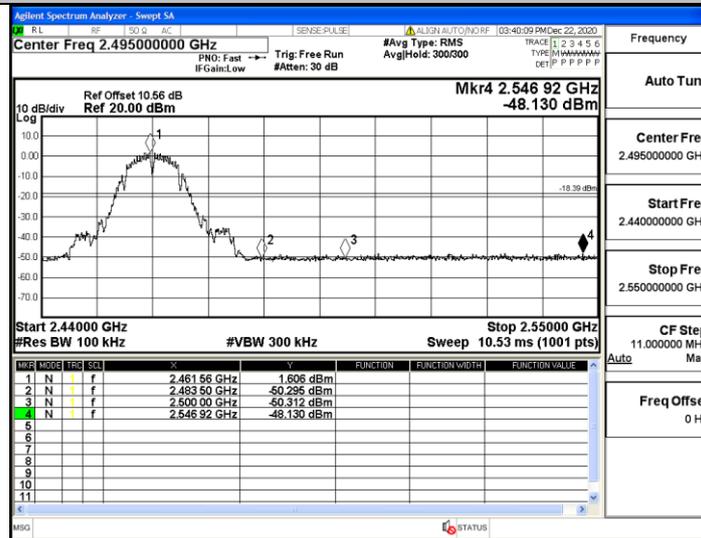


11G_Ant1_Low_2412

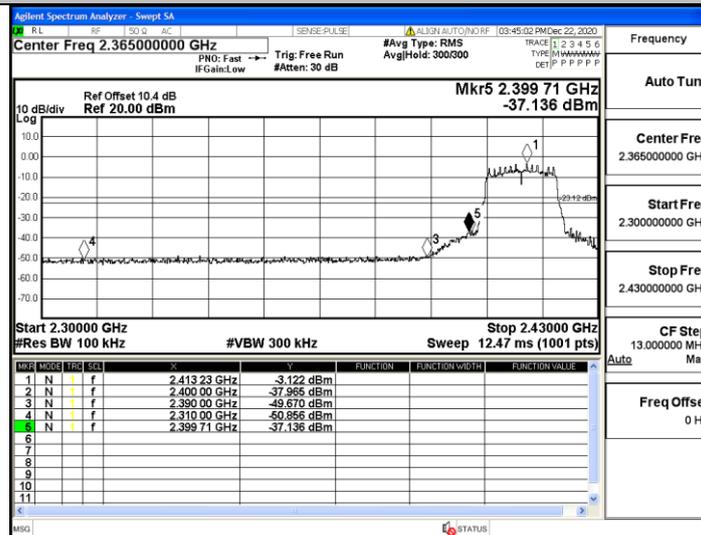


11G_Ant1_High_2462

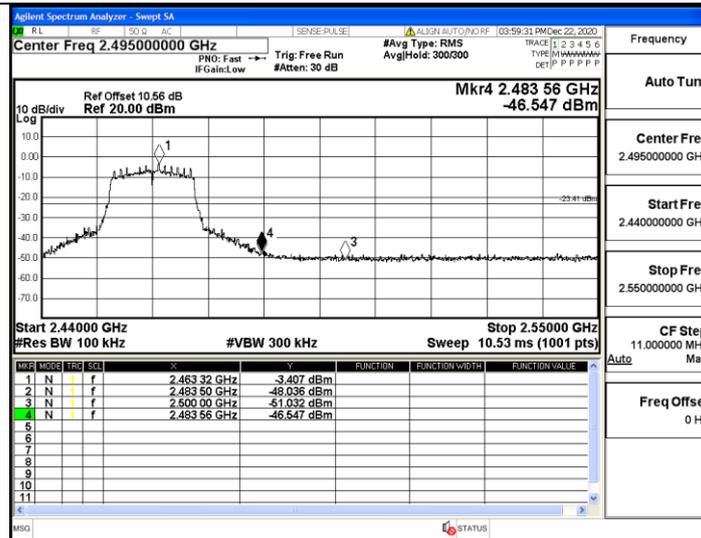


11N20SISO_Ant1_Low_2412

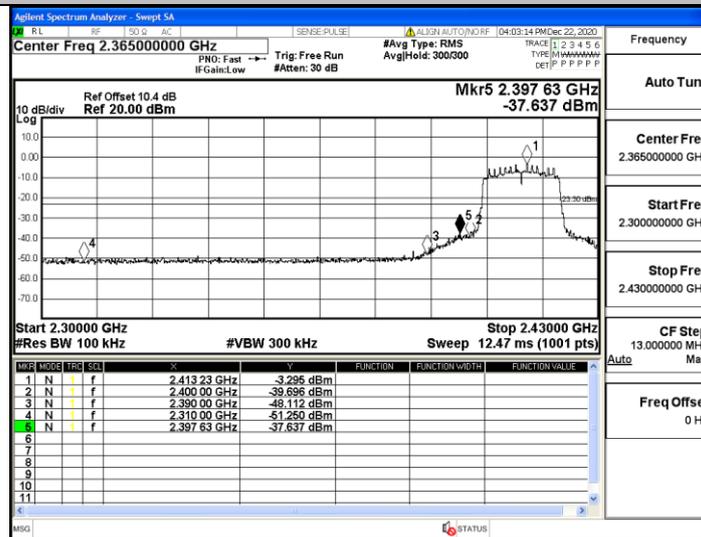


11N20SISO_Ant1_High_2462

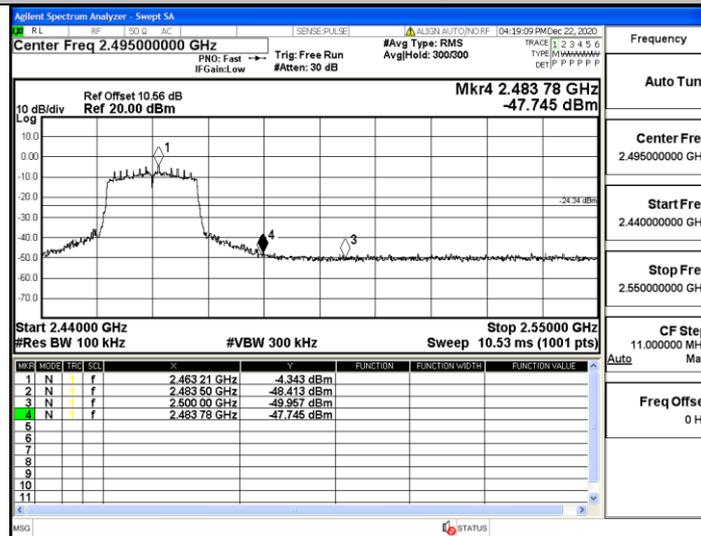

11N40SISO_Ant1_Low_2422

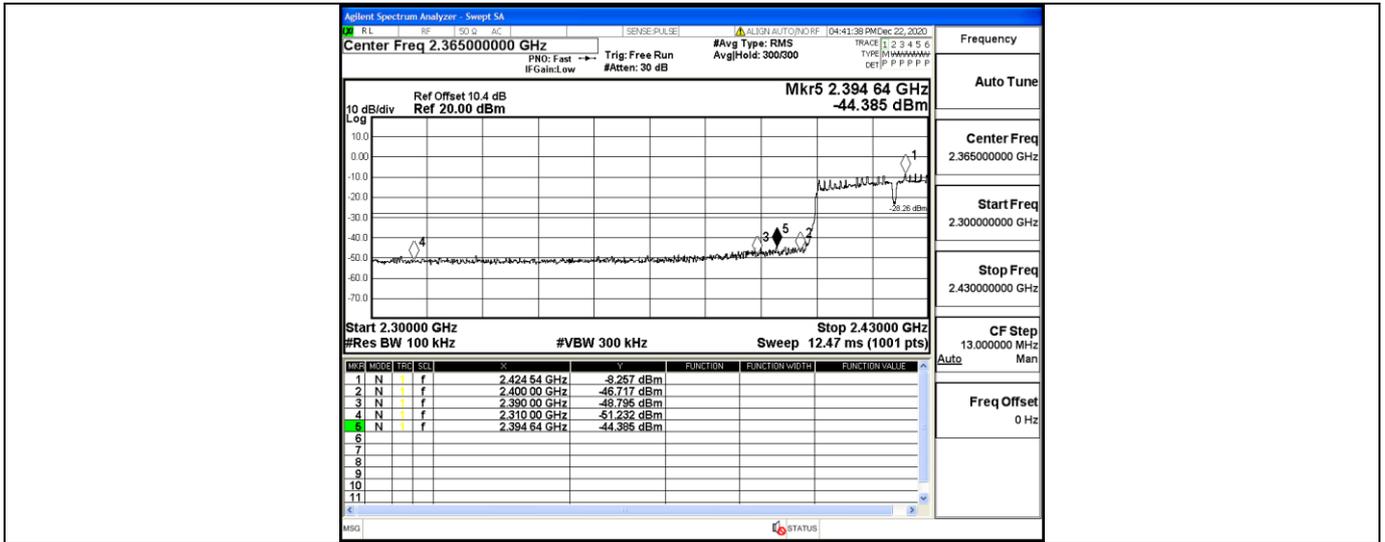

11N40SISO_Ant1_High_2452

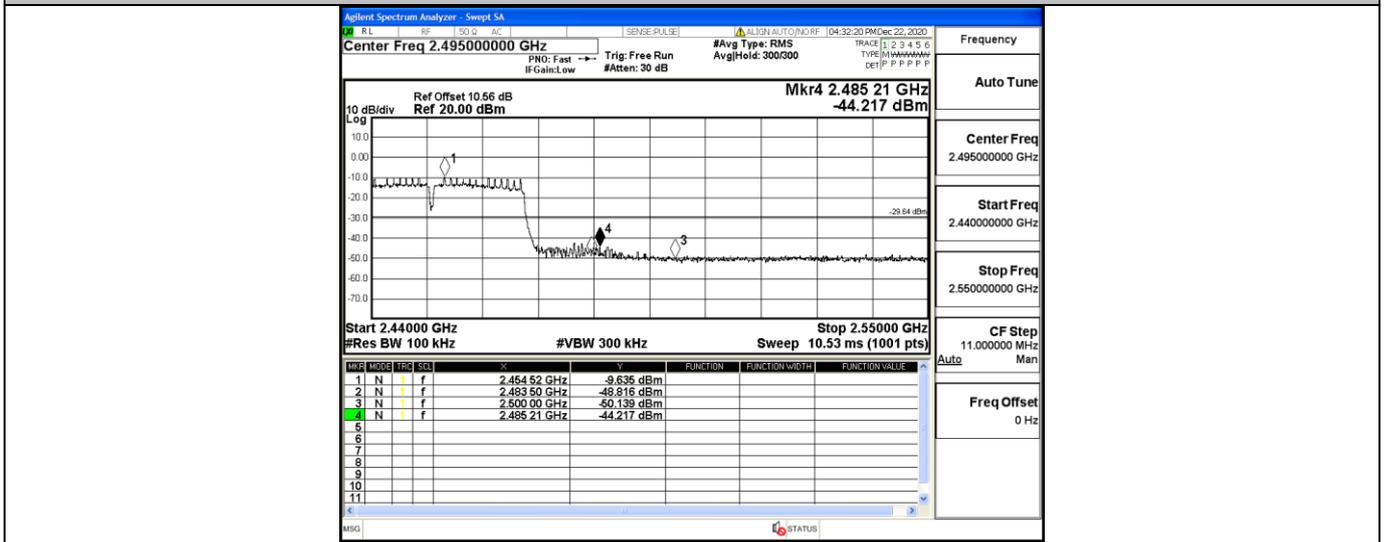

5.7. Power line conducted emissions


5.7.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range are listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

* Decreasing linearly with the logarithm of the frequency

5.7.2 Block Diagram of Test Setup

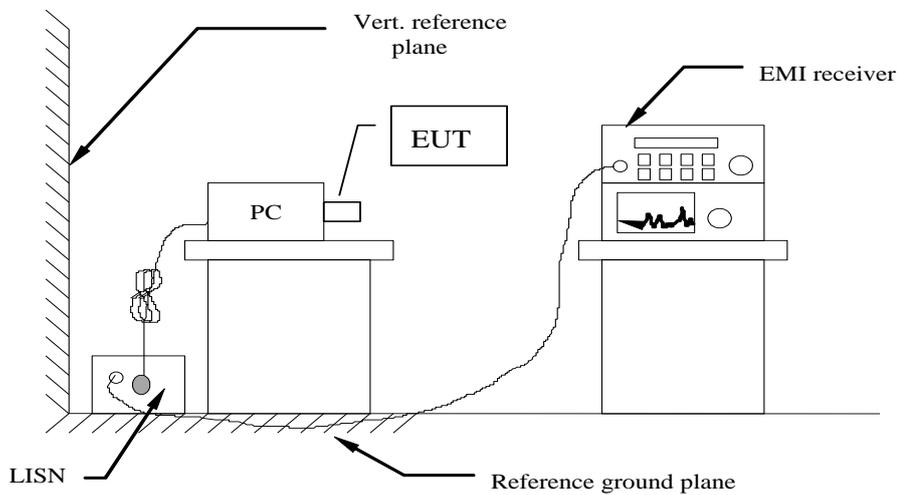

5.7.3 Test Results


Temperature	22.5°C	Humidity	56.2%
Test Engineer	Anna Hu	Configurations	802.11b (Low Channel)



The Worst Test result for 802.11b (Low Channel)

AC Conducted Emission of power adapter @ AC 120V/60Hz @ IEEE 802.11b Low Channel (worst case)

Line

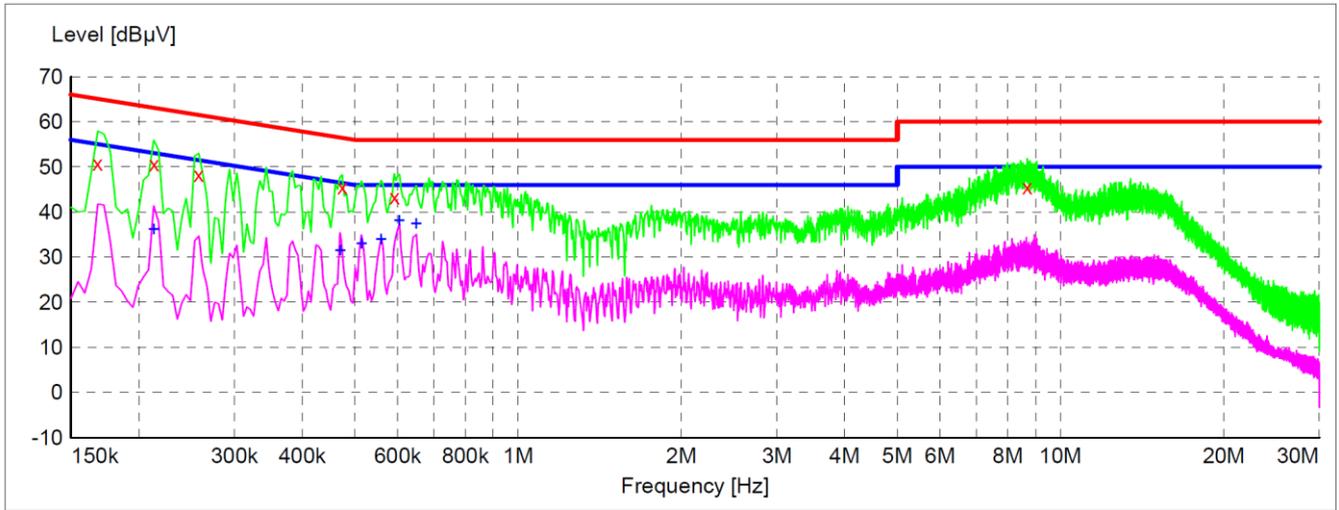


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.168000	50.80	10.1	65	14.3	QP	L1	GND
0.213000	50.60	10.6	63	12.5	QP	L1	GND
0.258000	48.30	10.4	62	13.2	QP	L1	GND
0.474000	45.50	10.0	56	10.9	QP	L1	GND
0.591000	43.30	9.9	56	12.7	QP	L1	GND
8.686500	45.50	9.8	60	14.5	QP	L1	GND

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.213000	36.10	10.6	53	17.0	AV	L1	GND
0.469500	31.40	10.0	47	15.1	AV	L1	GND
0.514500	32.90	9.9	46	13.1	AV	L1	GND
0.559500	33.90	9.9	46	12.1	AV	L1	GND
0.604500	38.00	9.9	46	8.0	AV	L1	GND
0.649500	37.30	9.9	46	8.7	AV	L1	GND



Neutral

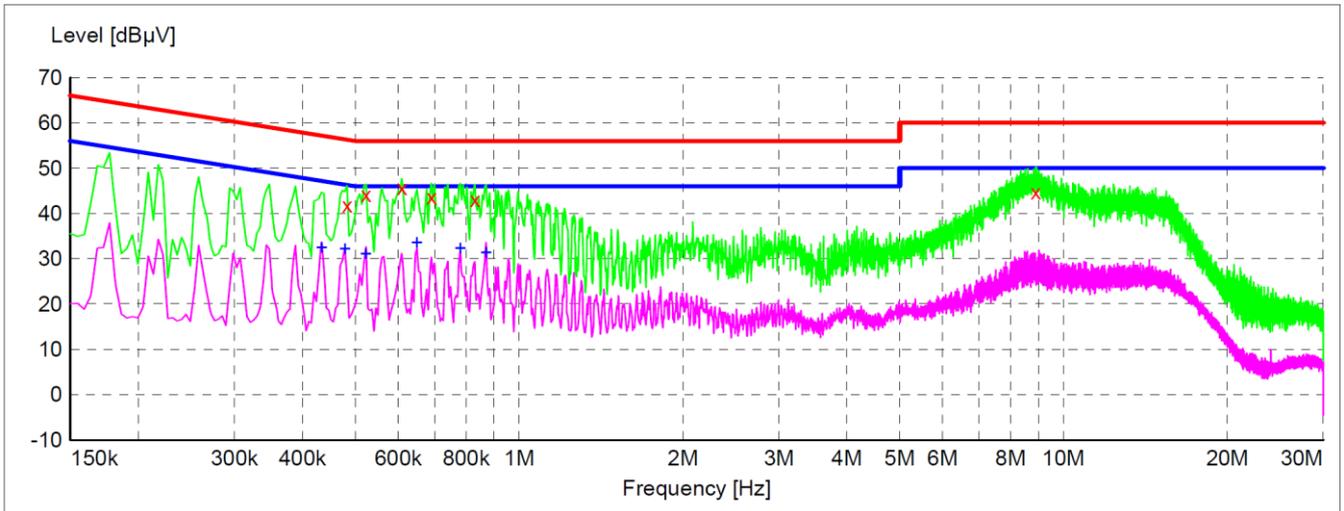

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.483000	41.80	10.0	56	14.5	QP	N	GND
0.523500	44.20	9.9	56	11.8	QP	N	GND
0.609000	45.70	9.9	56	10.3	QP	N	GND
0.690000	43.60	9.9	56	12.4	QP	N	GND
0.829500	43.00	9.8	56	13.0	QP	N	GND
8.898000	44.70	9.8	60	15.3	QP	N	GND

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.433500	32.40	10.0	47	14.8	AV	N	GND
0.478500	32.10	10.0	46	14.3	AV	N	GND
0.523500	31.00	9.9	46	15.0	AV	N	GND
0.649500	33.50	9.9	46	12.5	AV	N	GND
0.780000	32.30	9.8	46	13.7	AV	N	GND
0.870000	31.30	9.8	46	14.7	AV	N	GND

***Note: Pre-scan all modes and recorded the worst case results in this report (IEEE 802.11b Low Channel).


5.8. Band-edge measurements for radiated emissions

5.8.1 Standard Applicable


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

5.8.2 Test Setup Layout

For Radiated

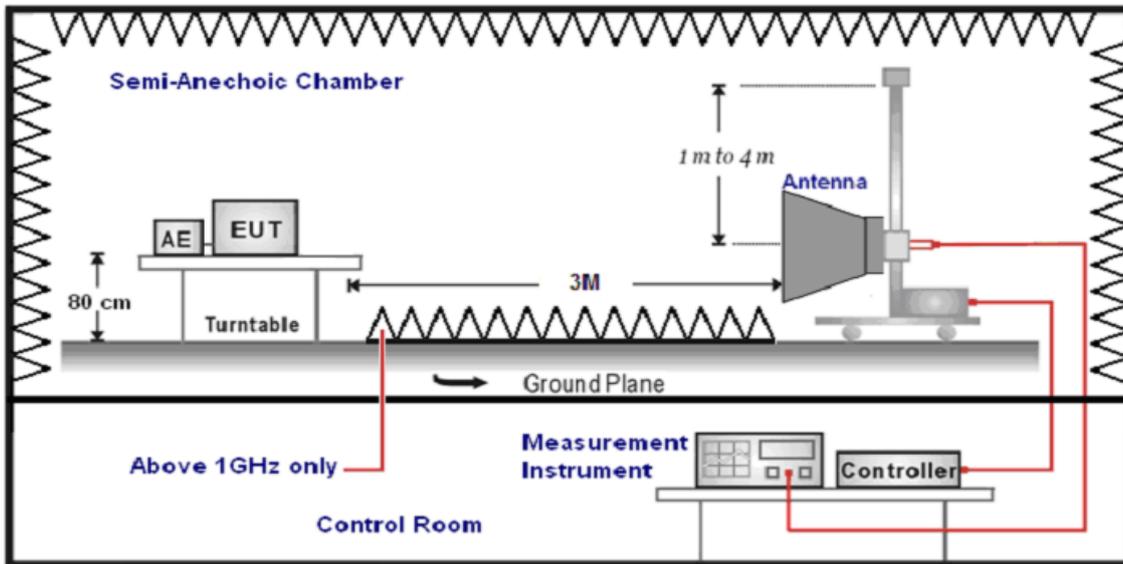

For Conducted

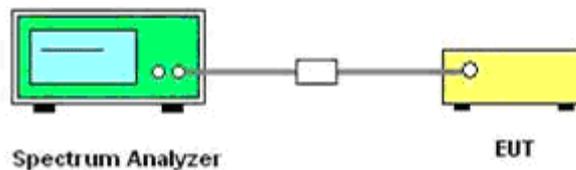

5.8.3. Measuring Instruments and Setting

Please refer to equipment list in this report. The following table is the setting of Spectrum Analyzer.

5.8.4. Test Procedures

Radiated Method:

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.



3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed..
5. The distance between test antenna and EUT was 3 meter:
6. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

Conducted Method:

According to KDB 558074 D01 for Antenna-port conducted measurement. Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to an EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1MHz, VBW=3MHz for peak detector and RBW=1MHz, VBW=1/B for AV detector.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.
6. Measure the conducted output power (in dBm) using the detector specified by the appropriate regulatory agency (see 12.2.2, 12.2.3, and 12.2.4 for guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
7. Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see 12.2.5 for guidance on determining the applicable antenna gain)
8. Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).
9. For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
10. Convert the result ant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20\log D + 104.77 = \text{EIRP} + 95.23$$

Where:

E = electric field strength in dBμV/m,
 EIRP = equivalent isotropic radiated power in dBm
 D = specified measurement distance in meters.

11. Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.
12. Per KDB662911 D01 section b) In cases where a combination of conducted measurements and cabinet radiated measurements are permitted to demonstrate compliance with absolute radiated out-of-band and spurious limits (e.g., KDB Publications 558074 for DTS and 789033 for U-NII), the conducted measurements must be combined with directional gain to compute the radiated levels of the out-of-band and spurious emissions as described in this section.
13. Compare the resultant electric field strength level to the applicable regulatory limit.
14. Perform radiated spurious emission test duress until all measured frequencies were complete.



5.8.5 Test Results

Temperature	23.8°C	Humidity	51%
Test Engineer	Anna Hu	Configurations	IEEE 802.11b/g/n

IEEE 802.11b										
Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2390.00	56.90	29.99	30.21	8.35	65.03	74	-8.97	Peak	Horizontal
1	2390.00	38.00	29.99	30.21	8.35	46.13	54	-7.87	AV ^[1]	Horizontal
2	2390.00	55.31	29.99	30.21	8.35	63.44	74	-10.56	Peak	Vertical
2	2390.00	39.75	29.99	30.21	8.35	47.88	54	-6.12	AV ^[1]	Vertical
3	2483.50	53.14	30.25	30.25	8.5	61.64	74	-12.36	Peak	Horizontal
3	2483.50	24.87	30.25	30.25	8.5	33.37	54	-20.63	AV ^[1]	Horizontal
4	2483.50	50.90	30.25	30.25	8.5	59.40	74	-14.60	Peak	Vertical
4	2483.50	27.62	30.25	30.25	8.5	36.12	54	-17.88	AV ^[1]	Vertical
5	2487.09	55.13	30.25	30.25	8.5	63.63	74	-10.37	Peak	Horizontal
5	2483.97	38.11	30.25	30.25	8.5	46.61	54	-7.39	AV ^[1]	Horizontal
6	2499.29	50.58	30.25	30.25	8.5	59.08	74	-14.92	Peak	Vertical
6	2495.36	34.93	30.25	30.25	8.5	43.43	54	-10.57	AV ^[1]	Vertical

IEEE 802.11g										
Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2390.00	57.19	29.99	30.21	8.35	65.32	74	-8.68	Peak	Horizontal
1	2390.00	40.12	29.99	30.21	8.35	48.25	54	-5.75	AV ^[1]	Horizontal
2	2390.00	57.40	29.99	30.21	8.35	65.53	74	-8.47	Peak	Vertical
2	2390.00	37.32	29.99	30.21	8.35	45.45	54	-8.55	AV ^[1]	Vertical
3	2483.50	54.00	30.25	30.25	8.5	62.50	74	-11.50	Peak	Horizontal
3	2483.50	26.65	30.25	30.25	8.5	35.15	54	-18.85	AV ^[1]	Horizontal
4	2483.50	50.71	30.25	30.25	8.5	59.21	74	-14.79	Peak	Vertical
4	2483.50	24.11	30.25	30.25	8.5	32.61	54	-21.39	AV ^[1]	Vertical
5	2489.86	56.25	30.25	30.25	8.5	64.75	74	-9.25	Peak	Horizontal
5	2494.63	37.74	30.25	30.25	8.5	46.24	54	-7.76	AV ^[1]	Horizontal
6	2499.79	50.40	30.25	30.25	8.5	58.90	74	-15.10	Peak	Vertical
6	2497.44	36.83	30.25	30.25	8.5	45.33	54	-8.67	AV ^[1]	Vertical



IEEE 802.11n HT20										
Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2390.00	54.93	29.99	30.21	8.35	63.06	74	-10.94	Peak	Horizontal
1	2390.00	36.17	29.99	30.21	8.35	44.30	54	-9.70	AV ^[1]	Horizontal
2	2390.00	56.84	29.99	30.21	8.35	64.97	74	-9.03	Peak	Vertical
2	2390.00	37.53	29.99	30.21	8.35	45.66	54	-8.34	AV ^[1]	Vertical
3	2483.50	56.14	30.25	30.25	8.5	64.64	74	-9.36	Peak	Horizontal
3	2483.50	27.57	30.25	30.25	8.5	36.07	54	-17.93	AV ^[1]	Horizontal
4	2483.50	51.41	30.25	30.25	8.5	59.91	74	-14.09	Peak	Vertical
4	2483.50	24.82	30.25	30.25	8.5	33.32	54	-20.68	AV ^[1]	Vertical
5	2485.03	55.41	30.25	30.25	8.5	63.91	74	-10.09	Peak	Horizontal
5	2485.70	38.34	30.25	30.25	8.5	46.84	54	-7.16	AV ^[1]	Horizontal
6	2499.73	50.41	30.25	30.25	8.5	58.91	74	-15.09	Peak	Vertical
6	2496.56	37.73	30.25	30.25	8.5	46.23	54	-7.77	AV ^[1]	Vertical

IEEE 802.11n HT40										
Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2390.00	57.82	29.99	30.21	8.35	65.95	74	-8.05	Peak	Horizontal
1	2390.00	39.76	29.99	30.21	8.35	47.89	54	-6.11	AV ^[1]	Horizontal
2	2390.00	58.27	29.99	30.21	8.35	66.40	74	-7.60	Peak	Vertical
2	2390.00	39.63	29.99	30.21	8.35	47.76	54	-6.24	AV ^[1]	Vertical
3	2483.50	54.46	30.25	30.25	8.5	62.96	74	-11.04	Peak	Horizontal
3	2483.50	26.15	30.25	30.25	8.5	34.65	54	-19.35	AV ^[1]	Horizontal
4	2483.50	53.10	30.25	30.25	8.5	61.60	74	-12.40	Peak	Vertical
4	2483.50	28.06	30.25	30.25	8.5	36.56	54	-17.44	AV ^[1]	Vertical
5	2486.78	58.17	30.25	30.25	8.5	66.67	74	-7.33	Peak	Horizontal
5	2486.04	34.70	30.25	30.25	8.5	43.20	54	-10.80	AV ^[1]	Horizontal
6	2499.46	47.96	30.25	30.25	8.5	56.46	74	-17.54	Peak	Vertical
6	2499.31	39.20	30.25	30.25	8.5	47.70	54	-6.30	AV ^[1]	Vertical

1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. The other emission levels were very low against the limit.
3. Over Limit=Emission Level - Limit.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. Detector AV is setting spectrum/receiver. RBW=1MHz/VBW=IIF(DC>98%,10Hz,1/B)/Sweep time=Auto/Detector=Peak;



5.9. Antenna Requirements

5.9.1. Standard Applicable

According to antenna requirement of §15.203.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

5.9.2. Antenna Connected Construction

5.9.2.1. Standard Applicable

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

5.9.2.2. Antenna Connector Construction

The directional gains of antenna refer to section 1.1, and the antenna is a Internal antenna connect to PCB board and no consideration of replacement. Please see EUT photo for details.

5.9.2.3. Results: Compliance.

**6. LIST OF MEASURING EQUIPMENTS**

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
1	MXA Signal Analyzer	Keysight	N9020A	MY52091623	2020/1/2	2021/1/1
2	Power Sensor	Agilent	U2021XA	MY5365004	2020/1/2	2021/1/1
3	Power Meter	Agilent	U2531A	TW53323507	2020/1/2	2021/1/1
4	Wideband Antenna	schwarzbeck	VULB 9163	958	2019/11/16	2022/11/15
5	Horn Antenna	schwarzbeck	9120D-1141	1574	2019/11/16	2022/11/15
6	EMI Test Receiver	R&S	ESCI	100849/003	2020/1/2	2021/1/1
7	Controller	MF	MF7802	N/A	N/A	N/A
8	Amplifier	schwarzbeck	BBV 9743	209	2020/1/2	2021/1/1
9	Amplifier	Tonscend	TSAMP-051 8SE	--	2020/1/2	2021/1/1
10	RF Cable(below 1GHz)	HUBER+SUHNE R	RG214	N/A	2020/1/2	2021/1/1
11	RF Cable(above 1GHz)	HUBER+SUHNE R	RG214	N/A	2020/1/2	2021/1/1
12	Artificial Mains	ROHDE & SCHWARZ	ENV 216	101333-IP	2020/1/2	2021/1/1
12	EMI Test Software	ROHDE & SCHWARZ	ESK1	V1.71	N/A	N/A
14	RE test software	Tonscend	JS32-RE	V2.0.2.0	N/A	N/A
15	Test Software	Tonscend	JS1120-3	V2.5.77.0418	N/A	N/A
16	Horn Antenna	A-INFO	LB-180400-K F	J211020657	2019/11/16	2022/11/15
17	Pre-amplifier	CDSI	PAP-1840	17021	2020/03/24	2021/03/23



7. TEST SETUP PHOTOGRAPHS OF EUT

Please refer to separated files for Test Setup Photos of the EUT.

8. EXTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for External Photos of the EUT.

9. INTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for Internal Photos of the EUT.

-----THE END OF REPORT-----