



Test Report No.:  
FCC2025-0016-RF2

## TEST REPORT

**FCC ID** : 2AYXT61100004  
**Applicant** : Eight Sleep Inc  
**Product Name** : Pod Hub  
**Model No.** : 11504

**CVC Testing Technology Co., Ltd.**

<b>Product Name</b>	Pod Hub	<b>Trade Mark</b>	Eight Sleep
<b>Type/Model</b>	11504	<b>Sample Status</b>	/
<b>Applicant</b>	Eight Sleep Inc		
<b>Applicant Address</b>	915 Broadway STE 1301 New York, New York 10010		
<b>Manufacturer</b>	BoShiJie Technology Co., Ltd		
<b>Manufacturer Address</b>	Boshijie Industrial Park, No. 1 Huifeng West Third Road, Zhongkai High-tech Zone, Huizhou City, Guangdong, China. 516006		
<b>Factory</b>	BoShiJie Technology Co., Ltd		
<b>Factory Address</b>	Boshijie Industrial Park, No. 1 Huifeng West Third Road, Zhongkai High-tech Zone, Huizhou City, Guangdong, China. 516006		
<b>Sample Identification</b>	1-1	<b>Test Item</b>	See page 8
<b>Tested According To</b>	FCC CFR47 Part 15C Radio Frequency Devices ANSI C63.10-2020/Cor1-2023 KDB 558074 D01 15.247 Meas Guidance v05r02		
<b>Receiving Date</b>	March.19,2025	<b>Completing Date</b>	March.28,2025~April.30,2025
<b>Test conclusion</b>	<p>The equipment under test was found to comply with the requirements of the standards applied.</p> <p>Final Verdict: Pass.</p> <p style="text-align: right;">Seal of CVC</p> <p style="text-align: right;">Date of issue: <b>June.25,2025</b></p>		
Abbreviations: / Pass= passed Fail = failed N/A= not applicable			
This test report relates only to the EUT, and shall not be reproduced except in full, without written approval of CVC.			

Approved by:

**Chen Huawen**




Reviewed by:

**Xu Zhenfei**



Tested by:

**Li Yueao**



# TABLE OF CONTENTS

**RELEASE CONTROL RECORD ..... 4**

**1. GENERAL PRODUCT INFORMATION ..... 5**

    1.1 GENERAL INFORMATION ..... 5

**2. TEST SITES ..... 6**

    2.1 TEST FACILITIES ..... 6

    2.2 DESCRIPTION OF NON-STANDARD METHOD AND DEVIATIONS ..... 6

    2.3 LIST OF TEST AND MEASUREMENT INSTRUMENTS ..... 6

**3. TEST CONFIGURATION ..... 7**

    3.1 TEST MODE ..... 7

    3.2 DUTY CYCLE ..... 8

**4. SUMMARY OF MEASUREMENT RESULTS ..... 9**

**5. MEASUREMENT PROCEDURE ..... 10**

    5.1 CONDUCTED EMISSION ..... 10

    5.2 RADIATED EMISSION ..... 14

    5.3 PEAK POWER OUTPUT -CONDUCTED ..... 25

    5.4 20dB EMISSION BANDWIDTH ..... 26

    5.5 OCCUPIED CHANNEL BANDWIDTH ..... 27

    5.6 FREQUENCY SEPARATION ..... 28

    5.7 TIME OF OCCUPANCY (DWELL TIME) ..... 29

    5.8 BAND EDGE MEASUREMENT ..... 30

    5.9 NUMBER OF HOPPING FREQUENCY ..... 31

    5.10 SPURIOUS RF CONDUCTED EMISSIONS ..... 32

**6. APPENDIX X ..... 33**

### RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
FCC2025-0016-RF2	Original release	June.25,2025

# 1. General Product Information

## 1.1 General information

Product Name	Pod Hub
Model No.	11504
Additional model	/
Power Supply	110-240V AC 50-60Hz
Serial Number(SN)	B110C3C6
specific power settings	DH5: 6 2DH5: 6 3DH5: 6
Antenna Type	FPC antenna
Antenna Gain	5.54 dBi (provided by client)
Beamforming gain	Unsupported (provided by client)
Frequency Range	2402MHz~2480MHz
Bluetooth Version:	5.1
Channel Number	79
Type of Modulation	GFSK, π/4DQPSK, 8DPSK
Hopping Channel Type:	Adaptive Frequency Hopping systems
Max. Conducted Power	0.98dBm
Operate Temp.Range	-10°C~+70°C

**Note:**

1. The information of the EUT is declared by the manufacturer.
2. The laboratory is not responsible for the product technical specification provided by the client.
3. The product models of this application are: 11504. All the tests carried out on model 11504.
4. EUT photo refer to report (Report NO.:FCC2025-0016-EUT).
5. There are two power supplies, from different manufacturers.

Power supply information		
No.	Manufacturer	MODEL
1	Meanwell	LOP-400-12
2	Megmeet	MAP400-12

6. This time, the main engine+bedspread was used for testing, and the test results covered other combinations.
7. There are four ways to sell this product in combination: 1)Host+Bed cover, 2)Host+Pillow, 3)Host+Bed cover+Pillow, 4)Host+Bed cover+blanket.

## 2. Test Sites

### 2.1 Test Facilities

The tests and measurements refer to this report were performed by RF testing Lab. of CVC Testing Technology Co., Ltd.

Add.: No.3, Tiantaiyi Road, Kaitai Avenue, Science City, Guangzhou,Guangdong,510663, People's Republic of China

Telephone : +86-20-32293888

Fax : +86-20-32293889

FCC(Test firm designation number: CN1282)

IC(Test firm CAB identifier number: CN0103)

CNAS(Test firm designation number: L0095)

### 2.2 Description of Non-standard Method and Deviations

The testing and measurement methods used in this report are applied by all standard methods. Not any non-standard method or deviation from the used standards was used.

### 2.3 List of Test and Measurement Instruments

Refer to **Appendix X**.

### 3. Test Configuration

#### 3.1 Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Test Mode	Antenna Delivery	Test Channel
DH1/DH3/DH5 2DH1/2DH3/2DH5 3DH1/3DH3/3DH5	1TX / 1RX	0,39,78,hop

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate and different channels. Preliminary tests have been done on all the configuration for confirming worst case.

Data rate and channel below means worst-case rate of each test item.

Worst-case data rates and channels are shown as following table.

Test Items	Test Modes	Test Channels
Conducted Emissions	3DH5	0
Radiated Emissions	3DH5	0
Peak Power Output -Conducted	DH5/2DH5/3DH5	0,39,78
20dB Emission Bandwidth	DH5/2DH5/3DH5	0,39,78
Occupied Channel Bandwidth	DH5/2DH5/3DH5	0,39,78
Frequency Separation	DH5/2DH5/3DH5	hop
Time of Occupancy (Dwell Time)	DH1/DH3/DH5/ 2DH1/2DH3/2DH5/ 3DH1/3DH3/3DH5	hop
Band Edge Compliance	DH5/2DH5/3DH5	0,78
Number of Hopping Frequency	DH5/2DH5/3DH5	hop
Spurious RF Conducted Emissions	DH5/2DH5/3DH5	0,39,78

## 3.2 Duty cycle

Appendix I of BT\_ diagram

## 4. Summary of measurement results

Summary of measurements of results	Clause in FCC rules	Verdict	Note
Conducted Emissions	15.207	PASS	/
Radiated Emissions	15.247(d),15.205,15.209	PASS	/
Peak Power Output -Conducted	15.247(b)(1)	PASS	Appendix C of BT_ diagram
20dB Emission Bandwidth	15.247(a)(1)	PASS	Appendix A of BT_ diagram
Occupied Channel Bandwidth	15.247(a)(1)	PASS	Appendix B of BT_ diagram
Frequency Separation	15.247(a)(1)	PASS	Appendix D of BT_ diagram
Time of Occupancy (Dwell Time)	15.247(a)(1)(iii)	PASS	Appendix E of BT_ diagram
Band Edge Compliance	15.247(d)	PASS	Appendix G of BT_ diagram
Number of Hopping Frequency	15.247(a)(1)(iii)	PASS	Appendix F of BT_ diagram
Spurious RF Conducted Emissions	15.247(d)	PASS	Appendix H of BT_ diagram
Antenna Requirement	15.203	PASS	See note 1

Note 1: According to 15.203, it is considered sufficient to comply with the provisions of this section.

## 5. Measurement procedure

### 5.1 Conducted Emission

Ambient condition:

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.2kPa

#### Method of Measurement:

The EUT was setup according to ANSI C63.10-2020/Cor1-2023 for compliance to FCC 47CFR 15.207 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.


#### Limits:

Frequency (MHz)	Conducted Limits(dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46*
0.5 - 5	56	46
5 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

## Test Setup:

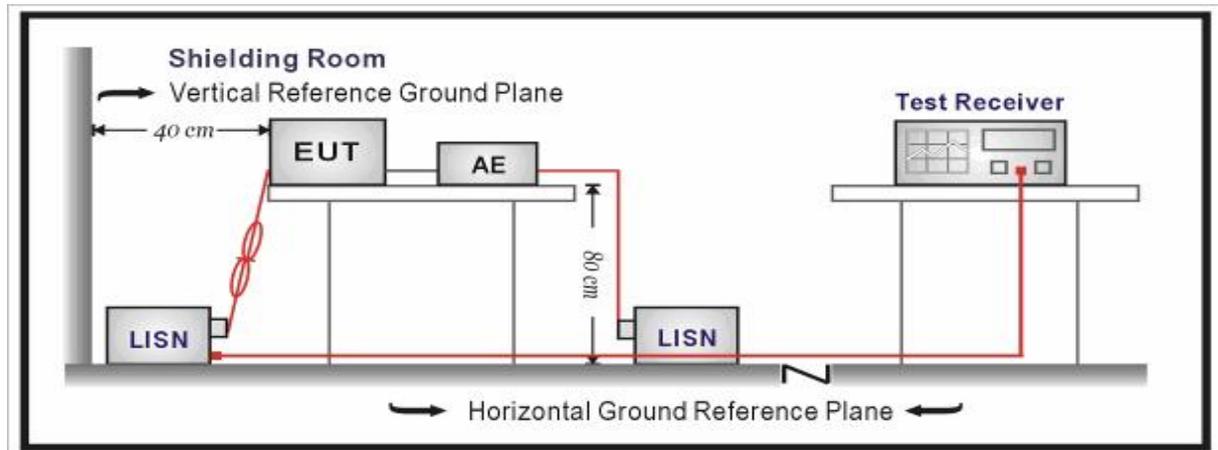

## Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

*Notes:*

- 1. The following Quasi-Peak and Average measurements were performed on the EUT:*
- 2. Final Level = Reading + Factor.*


## Measurement Uncertainty:

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .  $U = 3.12$  dB.


Test Results:

During the test, the Conducted Emission from 150kHz to 30MHz was performed in all modes with all channels, and all antennas. BT 8DPSK Channel 0, antenna 1 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

Radiates Emission	150k~30MHz							
Power Line	L							
Test channel	Worst-Case							
Suspected List								
Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV]	Limit [dBμV]	Margin [dB]	Detector	Type	Pass/Fail
0.1523	10.20	45.82	56.02	65.88	9.86	QP	L	PASS
0.2018	10.20	43.06	53.26	63.54	10.28	QP	L	PASS
10.1558	10.81	37.61	48.42	60.00	11.58	QP	L	PASS
11.0828	11.00	21.90	32.90	50.00	17.10	AV	L	PASS
10.1603	10.81	31.94	42.75	50.00	7.25	AV	L	PASS
0.2018	10.20	37.88	48.08	53.54	5.46	AV	L	PASS

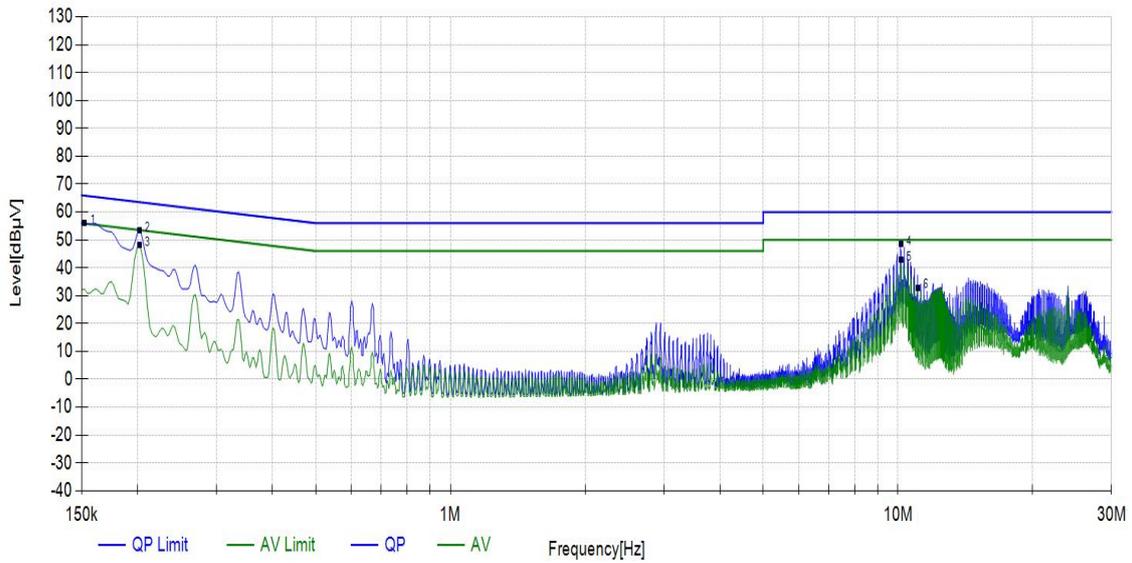

Radiates Emission	150k~30MHz							
Power Line	N							
Test channel	Worst-Case							
Suspected List								
Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV]	Limit [dBμV]	Margin [dB]	Detector	Type	Pass/Fail
0.1613	10.19	43.60	53.79	65.40	11.61	QP	N	PASS
0.2018	10.19	44.33	54.52	63.54	9.02	QP	N	PASS
10.1535	10.77	36.99	47.76	60.00	12.24	QP	N	PASS
12.3518	11.23	23.83	35.06	50.00	14.94	AV	N	PASS
10.1603	10.77	31.13	41.90	50.00	8.10	AV	N	PASS
0.2018	10.19	38.58	48.77	53.54	4.77	AV	N	PASS

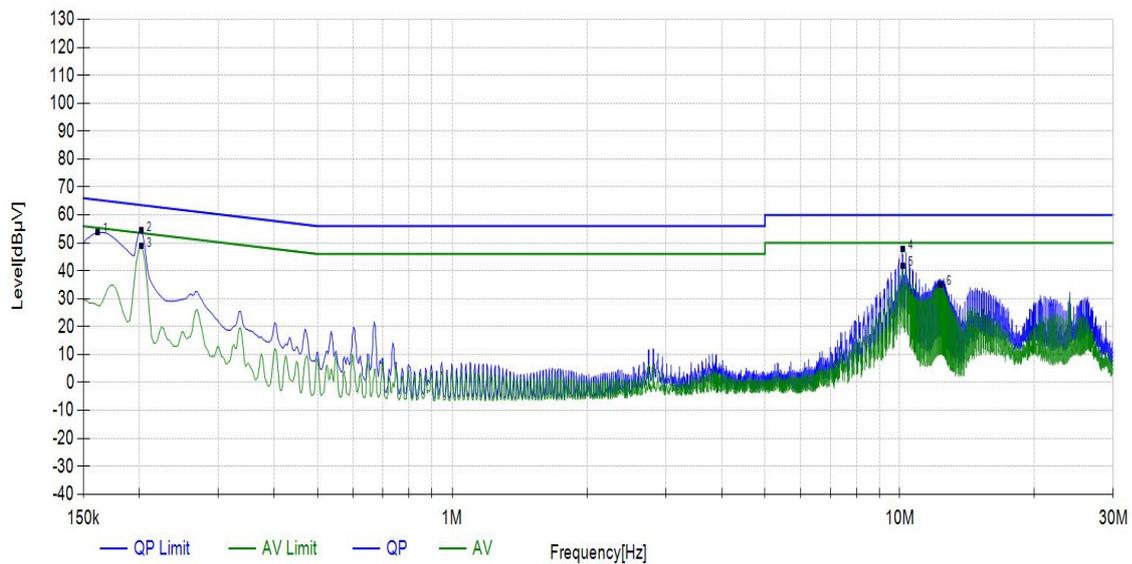

## 5.2 Radiated Emission

Ambient condition:

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.2kPa

### Method of Measurement:

The EUT was setup and tested according to ANSI C63.10-2020/Cor1-2023.

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from Antenna to the EUT was 3 meters.

The Antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the Antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2020/Cor1-2023 on radiated measurement.

The resolution bandwidth below 1GHz setting on the field strength meter is 120 kHz and above 1GHz is 1MHz.

The frequency range from 30MHz to 10th harmonic is checked.

Note: When doing emission measurement above 1GHz, the horn Antenna will be bended down a little (as horn

Antenna has the narrow beamwidth) in order to keeping the Antenna in the “cone of radiation” of EUT. The 3dB beamwidth is 10~60 degrees for H-plane and 10~90 degrees for E-plane.

### Limits:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Frequency	Limit ( $\mu\text{V}/\text{m}$ )	Limit ( $\text{dB}\mu\text{V}/\text{m}$ @3m)	Remark
0.009MHz-0.490MHz	2400/F(kHz)@300m	20lg(24000000/F(kHz))	Quasi-peak Level
0.490MHz~1.705MHz	24000/F(kHz)@30m	20lg(2400000/F(kHz))	Quasi-peak Level
1.705MHz~30.0MHz	30@30m	69.54	Quasi-peak Level
30MHz-88MHz	100@3m	40.0	Quasi-peak Level
88MHz-216MHz	150@3m	43.5	Quasi-peak Level
216MHz-960MHz	200@3m	46.0	Quasi-peak Level
960MHz-1GHz	500@3m	54.0	Quasi-peak Level


Above 1GHz	500@3m	54.0	Average Level
	5000@3m	74.0	Peak Level

Spurious Radiated Emissions are permitted in any of the frequency bands listed below:


MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.
12.57675-12.57725	322-335.4	3600-4400	/
13.36-13.41	/	/	/

### Test Setup:


Below 30MHz Test Setup:

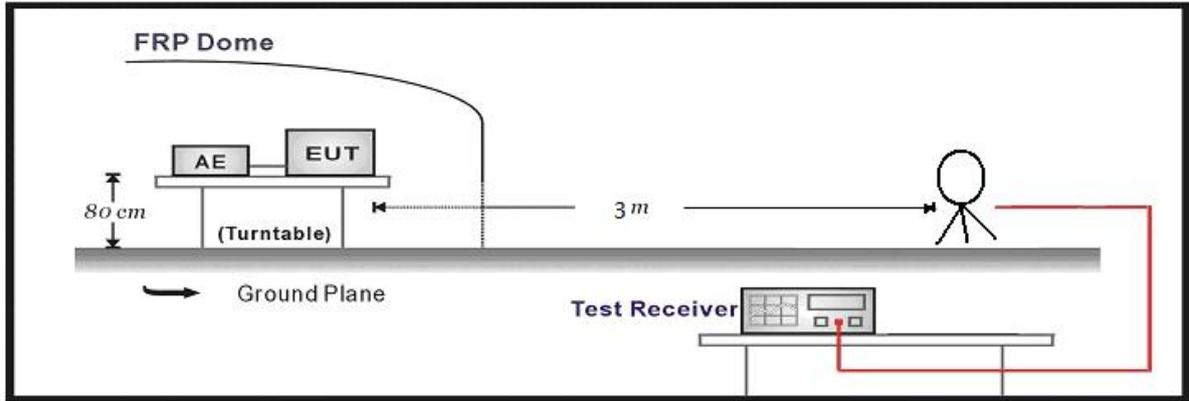

Below 1GHz Test Setup:

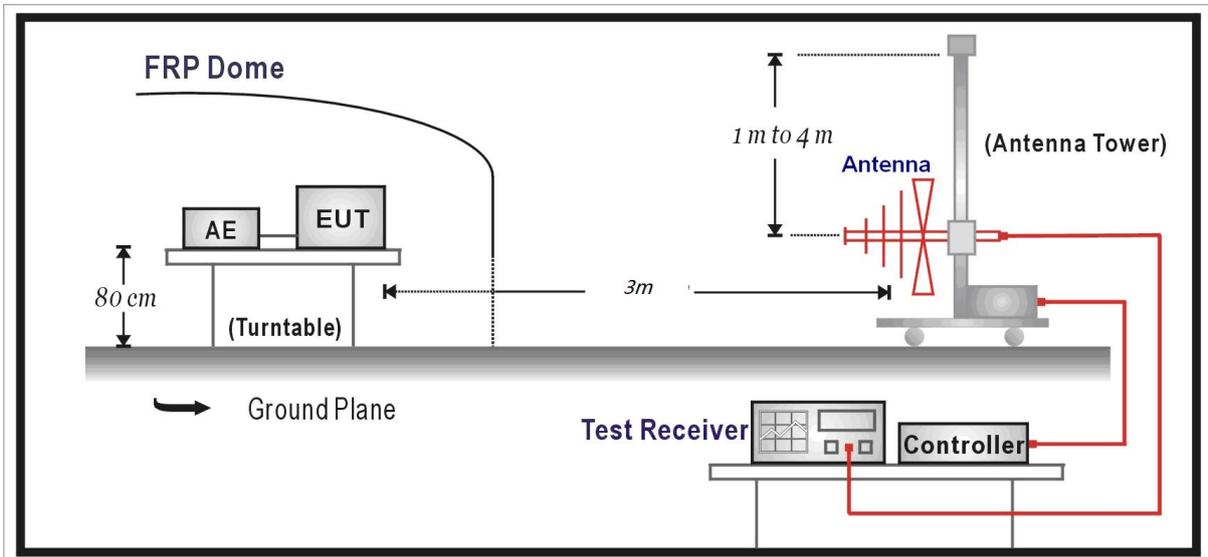

Above 1GHz Test Setup:

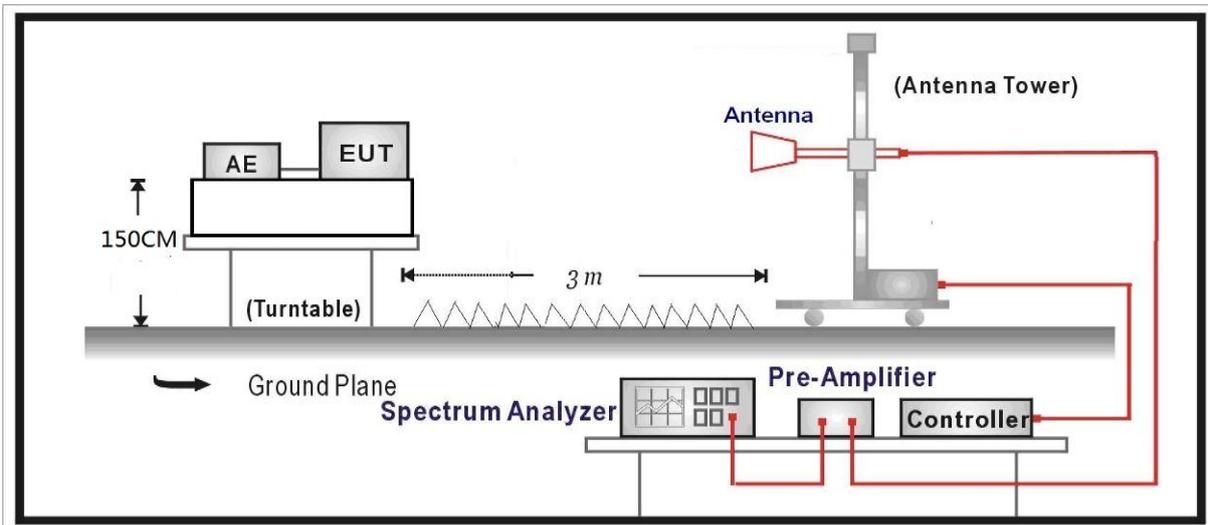

### Measurement Data:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Level = Reading - Factor

Factor = Preamplifier Factor – Antenna Factor–Cable Loss

### Measurement Uncertainty:

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor k = 1.96.

Frequency	Uncertainty
9KHz-30MHz	3.55 dB
30MHz-200MHz	4.19 dB
200MHz-1GHz	3.63 dB
Above 1GHz	3.68 dB


**Test Results:**

During the test, the Radiates Emission from 9kHz to 1GHz was performed in all modes with all channels and all antennas. BT 8DPSK Channel 0, antenna 1 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

Radiates Emission	9k~1G								
Test channel	Worst-Case								
Polarity	Horizontal								
Suspected List									
Frequency [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detect or	Height [cm]	Angle deg	Pass/Fail
79.669	8.76	16.08	24.84	40.00	15.16	PK	100	345	PASS
161.3511	10.13	15.34	25.47	43.50	18.03	PK	100	234	PASS
201.7072	12.93	20.49	33.42	43.50	10.08	PK	100	207	PASS
584.9925	21.76	19.40	41.16	46.00	4.84	PK	100	88	PASS
975.0685	26.57	12.92	39.49	54.00	14.51	PK	100	16	PASS

Note: 9kHz~30MHz have been test and test data more than 20dB margin.


Final Data List							
Frequency [MHz]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Pass/Fail
79.669	8.76	21.00	40.00	19.00	370	358	PASS
161.3511	10.13	21.63	43.50	21.87	330	299	PASS
201.7072	12.93	29.17	43.50	14.33	220	204	PASS
584.9925	21.76	37.81	46.00	8.19	189	156	PASS
975.0685	26.57	36.14	54.00	17.86	258	219	PASS

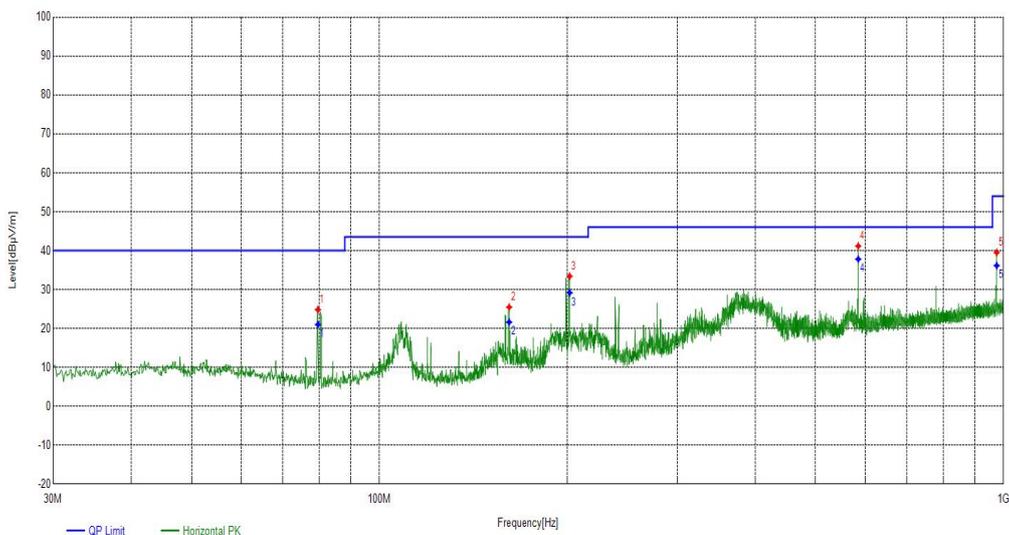

Radiates Emission	9k~1G								
Test channel	Worst-Case								
Polarity	Vertical								
Suspected List									
Frequency [MHz]	Factor [dB]	Reading [dB $\mu$ V/m]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Detect or	Height [cm]	Angle deg	Pass/Fail
159.4109	9.99	19.55	29.54	43.50	13.96	PK	100	95	PASS
201.7072	12.93	17.24	30.17	43.50	13.33	PK	100	135	PASS
345.4755	16.59	18.67	35.26	46.00	10.74	PK	100	109	PASS
584.9925	21.76	19.47	41.23	46.00	4.77	PK	100	0	PASS
975.0685	26.57	11.60	38.17	54.00	15.83	PK	100	5	PASS

Note: 9kHz~30MHz have been test and test data more than 20dB margin.

Final Data List							
Frequency [MHz]	Factor [dB]	QP Value [dB $\mu$ V/m]	QP Limit [dB $\mu$ V/m]	QP Margin [dB]	Height [cm]	Angle [°]	Pass/Fail
159.4109	9.99	24.71	43.50	18.79	300	163	PASS
201.7072	12.93	26.24	43.50	17.26	340	245	PASS
345.4755	16.59	31.33	46.00	14.67	150	187	PASS
584.9925	21.76	38.20	46.00	7.80	217	98	PASS
975.0685	26.57	34.73	54.00	19.27	86	318	PASS

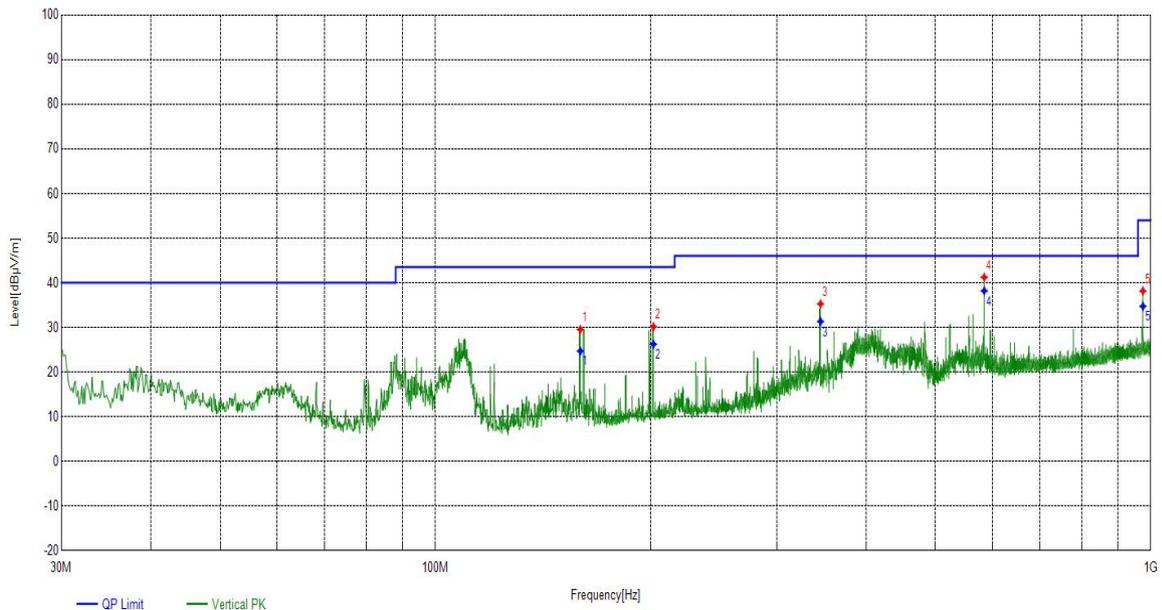

During the test, the Radiates Emission from 1GHz to 40GHz was performed in all modes with all channels and all antennas. BT 8DPSK, Highest, medium, lowest channels, antenna 1 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

Radiates Emission		Above 1G						
Test channel		Lowest						
polarization		Horizontal						
Suspected List								
Frequency [MHz]	Factor [dB]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detect or	Height [cm]	Pass/Fail
3868.586859	-0.40	38.66	38.26	74.00	35.74	PK	150	PASS
7048.90489	8.02	35.47	43.49	74.00	30.51	PK	150	PASS
12717.97179	12.53	34.06	46.59	74.00	27.41	PK	150	PASS
3868.586859	-0.40	28.06	27.66	54.00	26.34	AV	150	PASS
7048.90489	8.02	24.26	32.28	54.00	21.72	AV	150	PASS
12717.97179	12.53	20.99	33.52	54.00	20.48	AV	150	PASS

Note: The emission levels of other frequencies were greater than 20dB margin.

Radiates Emission		Above 1G						
Test channel		Lowest						
polarization		Vertical						
Suspected List								
Frequency [MHz]	Factor [dB]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detect or	Height [cm]	Pass/Fail
3778.5778	-0.58	38.84	38.26	74.00	35.74	PK	150	PASS
7645.9645	8.37	35.73	44.10	74.00	29.90	PK	150	PASS
13637.5637	13.81	32.16	45.97	74.00	28.03	PK	150	PASS
3778.5778	-0.58	27.20	26.62	54.00	27.38	AV	150	PASS
7645.9645	8.37	24.52	32.89	54.00	21.11	AV	150	PASS
13637.5637	13.81	19.43	33.24	54.00	20.76	AV	150	PASS

Note: The emission levels of other frequencies were greater than 20dB margin.

Radiates Emission		Above 1G						
Test channel		Medium						
polarization		Horizontal						
Suspected List								
Frequency [MHz]	Factor [dB]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detect or	Height [cm]	Pass/Fail
4126.6126	-0.27	39.09	38.82	74.00	35.18	PK	150	PASS
6985.8985	7.94	35.98	43.92	74.00	30.08	PK	150	PASS
12717.9717	12.53	33.42	45.95	74.00	28.05	PK	150	PASS
4126.61266	-0.27	27.03	26.76	54.00	27.24	AV	150	PASS
6985.8985	7.94	24.52	32.46	54.00	21.54	AV	150	PASS
12717.9717	12.53	21.34	33.87	54.00	20.13	AV	150	PASS

Note: The emission levels of other frequencies were greater than 20dB margin.

Radiates Emission		Above 1G						
Test channel		Medium						
polarization		Vertical						
Suspected List								
Frequency [MHz]	Factor [dB]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detect or	Height [cm]	Pass/Fail
3666.0666	-0.74	39.91	39.17	74.00	34.83	PK	150	PASS
7900.9900	8.45	35.98	44.43	74.00	29.57	PK	150	PASS
14500.1500	17.40	29.31	46.71	74.00	27.29	PK	150	PASS
3666.0666	-0.74	27.07	26.33	54.00	27.67	AV	150	PASS
7900.9900	8.45	23.75	32.20	54.00	21.80	AV	150	PASS
14500.1500	17.40	17.83	35.23	54.00	18.77	AV	150	PASS

Note: The emission levels of other frequencies were greater than 20dB margin.

Radiates Emission		Above 1G						
Test channel		Highest						
polarization		Horizontal						
Suspected List								
Frequency [MHz]	Factor [dB]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detect or	Height [cm]	Pass/Fail
3879.0879	-0.38	39.05	38.67	74.00	35.33	PK	150	PASS
6981.3981	7.91	36.44	44.35	74.00	29.65	PK	150	PASS
13505.5505	13.50	32.48	45.98	74.00	28.02	PK	150	PASS
3840.0840	-0.46	29.01	28.55	54.00	25.45	AV	150	PASS
7165.9165	8.06	25.29	33.35	54.00	20.65	AV	150	PASS
13628.5626	13.78	22.88	36.66	54.00	17.34	AV	150	PASS

Note: The emission levels of other frequencies were greater than 20dB margin.

Radiates Emission		Above 1G						
Test channel		Highest						
polarization		Vertical						
Suspected List								
Frequency [MHz]	Factor [dB]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detect or	Height [cm]	Pass/Fail
3714.0714	-0.67	40.23	39.56	74.00	34.44	PK	150	PASS
7050.4050	8.02	36.51	44.53	74.00	29.47	PK	150	PASS
14530.1530	17.32	28.78	46.10	74.00	27.90	PK	150	PASS
3822.0822	-0.50	29.00	28.50	54.00	25.50	AV	150	PASS
7072.9072	8.03	25.70	33.73	54.00	20.27	AV	150	PASS
14467.1467	17.25	19.41	36.66	54.00	17.34	AV	150	PASS

Note: The emission levels of other frequencies were greater than 20dB margin.

Band Edge:

During the test, the Band Edge was performed in BT all modes with all channels and all antennas. BT 8DPSK, Highest and lowest channels, antenna 1 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

Test mode		8DPSK							
Test channel		Lowest							
polarization		Horizontal							
Suspected List									
Frequency [MHz]	Factor [dB]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detect or	Height [cm]	Angle deg	Pass/Fail
2323.3323	-5.25	42.36	37.11	74.00	36.89	PK	150	259	PASS
2373.7373	-5.09	43.82	38.73	74.00	35.27	PK	150	253	PASS
2390.1390	-5.04	40.62	35.58	74.00	38.42	PK	150	311	PASS
2323.3323	-5.25	28.51	23.26	54.00	30.74	AV	150	279	PASS
2373.7373	-5.09	28.45	23.36	54.00	30.64	AV	150	298	PASS
2390.1390	-5.04	28.10	23.06	54.00	30.94	AV	150	266	PASS
Test mode		8DPSK							
Test channel		Lowest							
polarization		Vertical							
Suspected List									
Frequency [MHz]	Factor [dB]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detect or	Height [cm]	Angle deg	Pass/Fail
2320.1320	-5.26	42.13	36.87	74.00	37.13	PK	150	165	PASS
2358.3358	-5.14	41.65	36.51	74.00	37.49	PK	150	165	PASS
2390.1390	-5.04	38.69	33.65	74.00	40.35	PK	150	24	PASS
2320.1320	-5.26	29.37	24.11	54.00	29.89	AV	150	315	PASS
2358.3358	-5.14	28.56	23.42	54.00	30.58	AV	150	185	PASS
2390.1390	-5.04	27.98	22.94	54.00	31.06	AV	150	354	PASS

Test mode		8DPSK							
Test channel		Highest							
polarization		Horizontal							
Suspected List									
Frequency [MHz]	Factor [dB]	Reading [dB $\mu$ V/m]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Detect or	Height [cm]	Angle deg	Pass/Fail
2483.5483	-4.79	46.95	42.16	74.00	31.84	PK	150	169	PASS
2489.5489	-4.77	50.08	45.31	74.00	28.69	PK	150	289	PASS
2493.9493	-4.75	48.02	43.27	74.00	30.73	PK	150	16	PASS
2483.5483	-4.79	31.92	27.13	54.00	26.87	AV	150	39	PASS
2489.5489	-4.77	29.02	24.25	54.00	29.75	AV	150	83	PASS
2493.9493	-4.75	29.05	24.30	54.00	29.70	AV	150	129	PASS
Test mode		8DPSK							
Test channel		Highest							
polarization		Vertical							
Suspected List									
Frequency [MHz]	Factor [dB]	Reading [dB $\mu$ V/m]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Detect or	Height [cm]	Angle deg	Pass/Fail
2483.5483	-4.79	40.80	36.01	74.00	37.99	PK	150	360	PASS
2487.5487	-4.77	44.73	39.96	74.00	34.04	PK	150	240	PASS
2532.1532	-4.61	41.67	37.06	74.00	36.94	PK	150	96	PASS
2483.5483	-4.79	30.31	25.52	54.00	28.48	AV	150	228	PASS
2487.5487	-4.77	28.42	23.65	54.00	30.35	AV	150	276	PASS
2532.1532	-4.61	27.56	22.95	54.00	31.05	AV	150	43	PASS

### 5.3 Peak Power Output -Conducted

Ambient condition:

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.2kPa


#### Method of Measurement:

During the process of the testing, The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss. The EUT is controlled by the Bluetooth test set to ensure max power transmission with proper modulation. The peak detector is used.

#### Limits:

Rule Part 15.247 (b) (1) specifies that " For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts."

#### Test Setup:

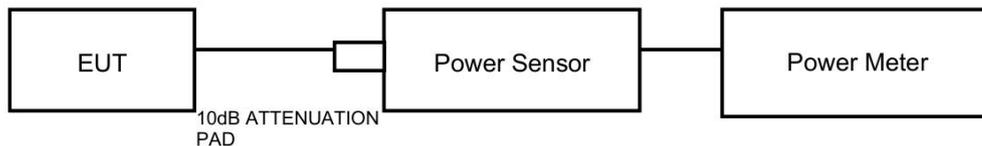

#### Measurement Uncertainty:

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.44$  dB.

### 5.4 20dB Emission Bandwidth

Ambient condition:

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.2kPa

#### Method of Measurement:

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable. RBW is set to 20 kHz; VBW is set to 100 kHz on spectrum analyzer.

Detector=Peak, Trace mode=Max hold.

#### Limits:

No specific occupied bandwidth requirements in part 15.247(a) (1).

#### Test Setup:



#### Measurement Uncertainty:

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 936$  Hz.

## 5.5 Occupied Channel Bandwidth

Ambient condition:

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.2kPa

### Method of Measurement:

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable. RBW is set to 20 kHz; VBW is set to 100 kHz on spectrum analyzer.

Detector=Peak, Trace mode=Max hold.

### Limits:

No specific occupied bandwidth requirements in part 15.247(a) (1).

### Test Setup:



### Measurement Uncertainty:

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 936$  Hz.

## 5.6 Frequency Separation

Ambient condition:

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.2kPa

### Method of Measurement:

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable the band edge of the lowest and highest channels were measured. The peak detector is used and RBW is set to 100 kHz and VBW is set to 300 kHz on spectrum analyzer.

### Limits:

Rule Part 15.247(a)(1) specifies that “Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. ”

Note: The value of two-thirds of 20 dB bandwidth is always greater than 25 kHz.

### Test Setup:



### Measurement Uncertainty:

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U=936$  Hz

### 5.7 Time of Occupancy (Dwell Time)

Ambient condition:

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.2kPa

#### Method of Measurement:

The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss. RBW is set to 1MHz and VBW is set to 3MHz on spectrum analyzer. The dwell time is calculated by:

Dwell time = time slot length \* hop rate \* 0.4s with:

The selected EUT Packet type uses a slot type of 5-Tx&1-Rx and a hopping rate of 1600(ch\*hop/s) for all channels. So the final hopping rate for all channel is  $1600/6=266.67(ch*hop/s)$

#### Limits:

Rule Part15.247(a) specifies that " Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed."

Dwell time	$\leq 400ms$
------------	--------------

#### Test Setup:



#### Measurement Uncertainty:

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ .

Requirements	Uncertainty					
Dwell Time	DH5	U=0.70ms	2DH5	U=0.70ms	3DH5	U=0.70ms

## 5.8 Band Edge Measurement

Ambient condition:

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.2kPa

Method of Measurement:

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable the band edge of the lowest and highest channels were measured. The peak detector is used and RBW is set to 100 kHz and VBW is set to 300 kHz on spectrum analyzer.

Limits:

Rule Part 15.247(d) specifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Test Setup:



Measurement Uncertainty:

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ ,  $U = 936 \text{ Hz}$ ,  $2 \text{ GHz} - 3 \text{ GHz} = 1.407 \text{ dB}$ .

### 5.9 Number of hopping Frequency

Ambient condition:

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.2kPa

Method of Measurement:

The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss. RBW is set to 100KHz and VBW is set to 300KHz on spectrum analyzer. Set EUT on Hopping on mode.

Limits:

Rule Part 15.247(a) (1) (iii) specifies that” Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.”

Limits	$\geq 15$ channels

Test Setup:



Measurement Uncertainty:

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.75\text{dB}$ .

### 5.10 Spurious RF Conducted Emissions

Ambient condition:

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.2kPa

#### Method of Measurement:

The EUT was connected to the spectrum analyzer with a known loss. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. Set RBW to 100kHz and VBW to 300 kHz, Sweep is set to AUTO. The test is in transmitting mode.

#### Limits:

Rule Part 15.247(d) specifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

#### Test Setup:



#### Measurement Uncertainty:

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .

Frequency	Uncertainty
100kHz-2GHz	0.684 dB
2GHz-26GHz	1.407 dB

## 6. Appendix X

Test Equipment	Type/Mode	SERIAL NO.	Equipment No.	Manufacturer	Cal. Due
Communication Shielded Room 2	4m*3m*3m	CRTDSWKS R4 4301	/	CRT	2027/04/22
Spectrum Analyzer	FSV40	101580	DZ-000238-3	R&S	2026/03/27
RF Radio Frequency Switch	JS0806-2	19H9080187	DZ-000241	Tonscend	2026/03/27
Programmable DC Power Supply	E3644A	MY58036222	DZ-000178	KEYSIGHT	2026/04/10
5m Semi-Anechoic Chamber	SAC-5	SAC-5-2.0	EM-000557	COMTEST	2027/02/01
Spectrum Analyzer	N9010B	MY57470323	DZ-000174	KEYSIGHT	2026/01/01
EMI Test Receiver	N9038A-508	MY532290079	EM-000397	Agilent	2025/12/26
EMI Test Receiver	ESR7	102235	EM-000574	R&S	2026/01/05
loop antenna	HLA 6121	540046	EM-000546	TESEQ	2026/06/02
Broadband Antenna	VULB 9163	9163-530	EM-000342	SCHWAR ZBECK	2026/06/02
Waveguide Horn Antenna	HF906	360306/008	EM-000093	R&S	2025/12/26
Waveguide Horn Antenna	BBHA9170	00949	DZ-000209-2	SCHWAR ZBECK	2025/08/03
Preamplifier	BBV 9721	9721-050	DZ-000209-1	SCHWAR ZBECK	2026/06/02
Bandstop Filters	SW-BSF-2400-100-7-A1	/	EM-000495	/	2025/08/29
5G Bandstop Filters	WRCJV12-4900-5100-5900-6100-50EE	1	DZ-000186	WI	2025/12/02
Temperature and humidity meter	MHO-C201	/	DZ-000249-2	Seconds test	2025/07/28
Temperature and humidity meter	MHO-C201	/	DZ-000249-5	Seconds test	2025/07/28

Dynacomm	Software Release	Software Developer
TS1120-3 Test System(Conduction test)	3.3.38	Tonscend
TS+ (5m,Radiation test)	JS32-RE 5.0.0	Tonscend

————— No Body Text Below —————

## Important

1. The test report is invalid without the official stamp of CVC;
2. Any part photocopies of the test report are forbidden without the written permission from CVC;
3. The test report is invalid without the signatures of Author and Reviewer;
4. The test report is invalid if altered;
5. Objections to the test report must be submitted to CVC within 15 days;
6. Generally, commission test is responsible for the tested samples only;
7. As for the test result, “—” or “N/A” means “not applicable”, “ / ” means “not testing”, “P” means “pass” and “F” means “fail”.

Address: No.3,Tiantaiyi Road, Kaitai Avenue, Science City, Guangzhou, China (Test location)

Post Code: 510663      Tel: 020-32293888

FAX: 020 32293889      E-mail: [office@cvc.org.cn](mailto:office@cvc.org.cn)