

TEST REPORT

FCC ID.	2AZ4C2021M	
Test Report No.	TCT210519E045	
Date of issue	Jun. 16, 2021	
Testing laboratory	SHENZHEN TONGCE TESTING LAB	
Testing location/ address:	TCT Testing Industrial Park Fuqiao 5th Industrial Zone, Fuhai Street, Bao'an District Shenzhen, Guangdong, 518103, People's Republic of China	
Applicant's name	Shenzhen Hui Bao Xiang Technology Co., Ltd	
Address	5001, West Block, Veteran Building, 3012 Xingye Road, Xixiang Street, Baoan District, Shenzhen, China	
Manufacturer's name	Shenzhen Hui Bao Xiang Technology Co., Ltd	
Address	5001, West Block, Veteran Building, 3012 Xingye Road, Xixiang Street, Baoan District, Shenzhen, China	
Standard(s)	FCC CFR Title 47 Part 15 Subpart C Section 15.247 FCC KDB 558074 D01 15.247 Meas Guidance v05r02 ANSI C63.10:2013	
Test item description	Laptop	
Trade Mark	VGKE	
Model/Type reference	Refer to model list of page 4	
Rating(s)	Adapter Information: Model: IRON008A INPUT: AC 95-265V, 50-60Hz, 0.8A OUTPUT: DC 12V, 2A Rechargeable Li-ion Battery DC 7.6V	
Date of receipt of test item	May 19, 2021	
Date (s) of performance of test	See dates for each test case	
Tested by (+signature)	Brave Zeng	
Check by (+signature)	Beryl Zhao	
Approved by (+signature) :	Tomsin	
General disclaimer:		
This report shall not be reproduced except in full, without the written approval of SHENZHEN TONGCE TESTING LAB. This document may be altered or revised by SHENZHEN TONGCE TESTING LAB personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.		

Table of Contents

1. General Product Information	3
1.1. EUT description	3
1.2. Model(s) list.....	4
1.3. Operation Frequency	5
2. Test Result Summary	6
3. General Information.....	7
3.1. Test environment and mode.....	7
3.2. Description of Support Units.....	8
4. Facilities and Accreditations	9
4.1. Facilities	9
4.2. Location	9
4.3. Measurement Uncertainty.....	9
5. Test Results and Measurement Data	10
5.1. Antenna requirement	10
5.2. Conducted Emission.....	11
5.3. Maximum Conducted (Average) Output Power	15
5.4. Emission Bandwidth	16
5.5. Power Spectral Density.....	17
5.6. Conducted Band Edge and Spurious Emission Measurement	18
5.7. Radiated Spurious Emission Measurement	20

Appendix A: Test Result of Conducted Test

Appendix B: Photographs of Test Setup

Appendix C: Photographs of EUT

1. General Product Information

1.1. EUT description

Test item description	Laptop
Model/Type reference	B14
Sample Number	TCT210519E012-0101
Operation Frequency	2412MHz~2462MHz (802.11b/802.11g/802.11n(HT20)) 2422MHz~2452MHz (802.11n(HT40))
Channel Separation	5MHz
Number of Channel	11 for 802.11b/802.11g/802.11n(HT20) 7 for 802.11n(HT40)
Modulation Technology	802.11b: Direct Sequence Spread Spectrum (DSSS) 802.11g/802.11n: Orthogonal Frequency Division Multiplexing(OFDM)
Data speed	802.11b: 1Mbps, 2Mbps, 5.5Mbps, 11Mbps 802.11g: 6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps 802.11n: Up to 150Mbps
Antenna Type	FPC Antenna
Antenna Gain	2.5dBi
Rating(s)	Adapter Information: Model: IRON008A INPUT: AC 95-265V, 50-60Hz, 0.8A OUTPUT: DC 12V, 2A Rechargeable Li-ion Battery DC 7.6V
Remark	/

Note: The antenna gain listed in this report is provided by applicant, and the test laboratory is not responsible for this parameter.

1.2. Model(s) list

No.	Model No.	Tested with
1	B14	<input checked="" type="checkbox"/>
Other models	B10, B10 S, B10 Plus, B10 Pro, B10 Air, B11, B11 S, B11 Plus, B11 Pro, B11 Air, B12, B12 S, B12 Plus, B12 Pro, B12 Air, B13, B13 S, B13 Plus, B13 Pro, B13 Air, B14 S, B14 Plus, B14 Pro, B14 Air, B15, B15 S, B15 Plus, B15 Pro, B15 Air, B10 E, B11 E, B12 E, B13 E, B14 E, B15 E, M13, M13 S, M13 E, M13 Plus, M13 Pro, M13 Air, A13, A13 S, A13 E, A13 Plus, A13 Pro, A13 Air, C13, C13 S, C13 E, C13 Plus, C13 Pro, C13 Air, D13, D13 S, D13 E, D13 Plus, D13 Pro, D13 Air, E13, E13 S, E13 E, E13 Plus, E13 Pro, E13 Air, F13, F13 S, F13 E, F13 Plus, F13 Pro, F13 Air, M14, M14 S, M14 E, M14 Plus, M14 Pro, M14 Air, A14, A14 S, A14 E, A14 Plus, A14 Pro, A14 Air, C14, C14 S, C14 E, C14 Plus, C14 Pro, C14 Air, D14, D14 S, D14 E, D14 Plus, D14 Pro, D14 Air, E14, E14 S, E14 E, E14 Plus, E14 Pro, E14 Air, F14, F14 S, F14 E, F14 Plus, F14 Pro, F14 Air, A15, A15 S, A15 E, A15 Plus, A15 Pro, A15 Air, M15, M15 S, M15 E, M15 Plus, M15 Pro, M15 Air, A15, M15 S, M15 E, M15 Plus, M15 Pro, M15 Air, C15, M15 S, M15 E, M15 Plus, M15 Pro, M15 Air, D15, M15 S, M15 E, M15 Plus, M15 Pro, M15 Air, E15, M15 S, M15 E, M15 Plus, M15 Pro, M15 Air, F15, M15 S, M15 E, M15 Plus, M15 Pro, M15 Air	<input type="checkbox"/>

Note: B14 is tested model, other models are derivative models. The models are identical in circuit and PCB layout, only different on the model names. So the test data of B14 can represent the remaining models.

1.3. Operation Frequency

For 802.11b/g/n(HT20)

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz	--	--

For 802.11n (HT40)

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
--	--	4	2427MHz	7	2442MHz	--	--
--	--	5	2432MHz	8	2447MHz	--	--
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

802.11b/802.11g/802.11n (HT20)

Channel	Frequency
The lowest channel	2412MHz
The middle channel	2437MHz
The Highest channel	2462MHz

802.11n (HT40)

Channel	Frequency
The lowest channel	2422MHz
The middle channel	2437MHz
The Highest channel	2452MHz

2. Test Result Summary

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203/§15.247 (c)	PASS
AC Power Line Conducted Emission	§15.207	PASS
Conducted Peak Output Power	§15.247 (b)(3)	PASS
6dB Emission Bandwidth	§15.247 (a)(2)	PASS
Power Spectral Density	§15.247 (e)	PASS
Band Edge	§15.247(d)	PASS
Spurious Emission	§15.205/§15.209	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

3. General Information

3.1. Test environment and mode

Operating Environment:		
Condition	Conducted Emission	Radiated Emission
Temperature:	25.0 °C	25.0 °C
Humidity:	55 % RH	55 % RH
Atmospheric Pressure:	1010 mbar	1010 mbar
Test Software:		
Software Information:	EALTEK 11n 8723	
Power Level:	58	
Test Mode:		
Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations	
<p>The sample was placed 0.8m & 1.5m for the measurement below & above 1GHz above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case(Z axis) are shown in Test Results of the following pages.</p>		

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

Mode	Data rate
802.11b	1Mbps
802.11g	6Mbps
802.11n(H20)	6.5Mbps
802.11n(H40)	13.5Mbps

3.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
/	/	/	/	/

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. For conducted measurements (Output Power, 6dB Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.

4. Facilities and Accreditations

4.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 645098
SHENZHEN TONGCE TESTING LAB
Designation Number: CN1205

The testing lab has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- IC - Registration No.: 10668A-1
SHENZHEN TONGCE TESTING LAB
CAB identifier: CN0031

The testing lab has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing.

4.2. Location

SHENZHEN TONGCE TESTING LAB.

Address: TCT Testing Industrial Park Fuqiao 5th Industrial Zone, Fuhai Street, Bao'an District Shenzhen, Guangdong, 518103, People's Republic of China

TEL: +86-755-27673339


4.3. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	± 3.10 dB
2	RF power, conducted	± 0.12 dB
3	Spurious emissions, conducted	± 0.11 dB
4	All emissions, radiated(<1 GHz)	± 4.56 dB
5	All emissions, radiated(1 GHz - 18 GHz)	± 4.22 dB
6	All emissions, radiated(18 GHz- 40 GHz)	± 4.36 dB

5. Test Results and Measurement Data

5.1. Antenna requirement

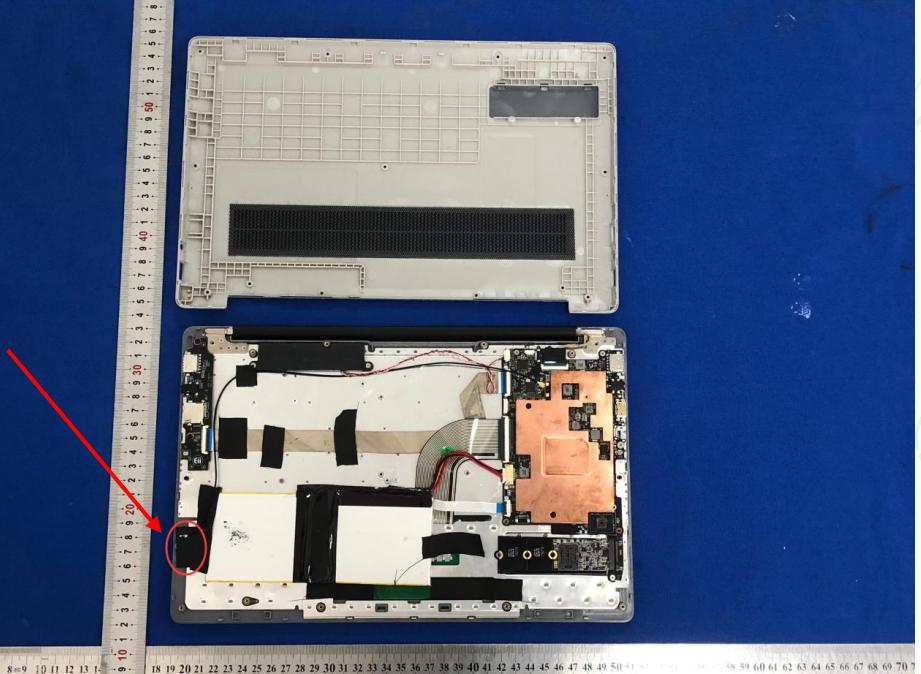Standard requirement:	FCC Part15 C Section 15.203 /247(c)
<p>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p>	
<p>15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</p>	
E.U.T Antenna:	
<p>The WIFI antenna is FPC antenna which permanently attached, and the best case gain of the antenna is 2.5dBi.</p>	
 Antenna	

5.2. Conducted Emission

5.2.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2013														
Frequency Range:	150 kHz to 30 MHz														
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
Limits:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test Setup:	<p>Reference Plane</p> <p>Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>														
Test Mode:	Charging + transmitting with modulation														
Test Procedure:	<ol style="list-style-type: none"> 1. The E.U.T is connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement. 														
Test Result:	PASS														


5.2.2. Test Instruments

Conducted Emission Shielding Room Test Site (843)				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Test Receiver	R&S	ESCI3	100898	Jul. 27, 2021
LISN-2	Schwarzbeck	NSLK 8126	8126453	Sep. 11, 2021
Line-5	TCT	CE-05	N/A	Sep. 02, 2021
EMI Test Software	Shurples Technology	EZ-EMC	N/A	N/A

5.2.3. Test data

Please refer to following diagram for individual

Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

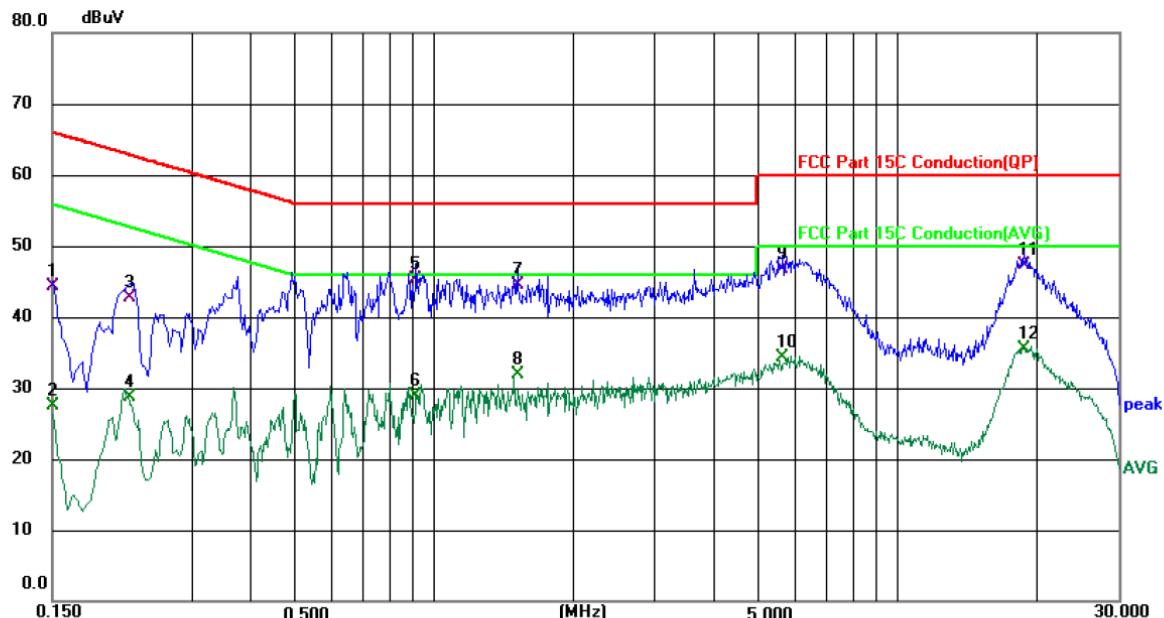

Site				Phase: L1			Temperature: 25 (°C)	
Limit: FCC Part 15C Conduction(QP)				Power: AC 120 V/60 Hz			Humidity: 55 %	
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Comment
		MHz	dB μ V	dB	dB μ V	dB	Detector	
1		0.1500	34.75	9.60	44.35	66.00	-21.65	QP
2		0.1500	17.94	9.60	27.54	56.00	-28.46	AVG
3		0.2220	33.30	9.39	42.69	62.74	-20.05	QP
4		0.2220	19.37	9.39	28.76	52.74	-23.98	AVG
5	*	0.9180	36.00	9.36	45.36	56.00	-10.64	QP
6		0.9180	19.52	9.36	28.88	46.00	-17.12	AVG
7		1.5180	35.00	9.46	44.46	56.00	-11.54	QP
8		1.5180	22.47	9.46	31.93	46.00	-14.07	AVG
9		5.6779	37.00	9.64	46.64	60.00	-13.36	QP
10		5.6779	24.60	9.64	34.24	50.00	-15.76	AVG
11		18.8100	37.20	10.03	47.23	60.00	-12.77	QP
12		18.8100	25.48	10.03	35.51	50.00	-14.49	AVG

Note:

Freq. = Emission frequency in MHz

Reading level (dB μ V) = Receiver reading

Corr. Factor (dB) = LISN factor + Cable loss

Measurement (dB μ V) = Reading level (dB μ V) + Corr. Factor (dB)

Limit (dB μ V) = Limit stated in standard


Margin (dB) = Measurement (dB μ V) – Limits (dB μ V)

QP. =Quasi-Peak

AVG =average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz

Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

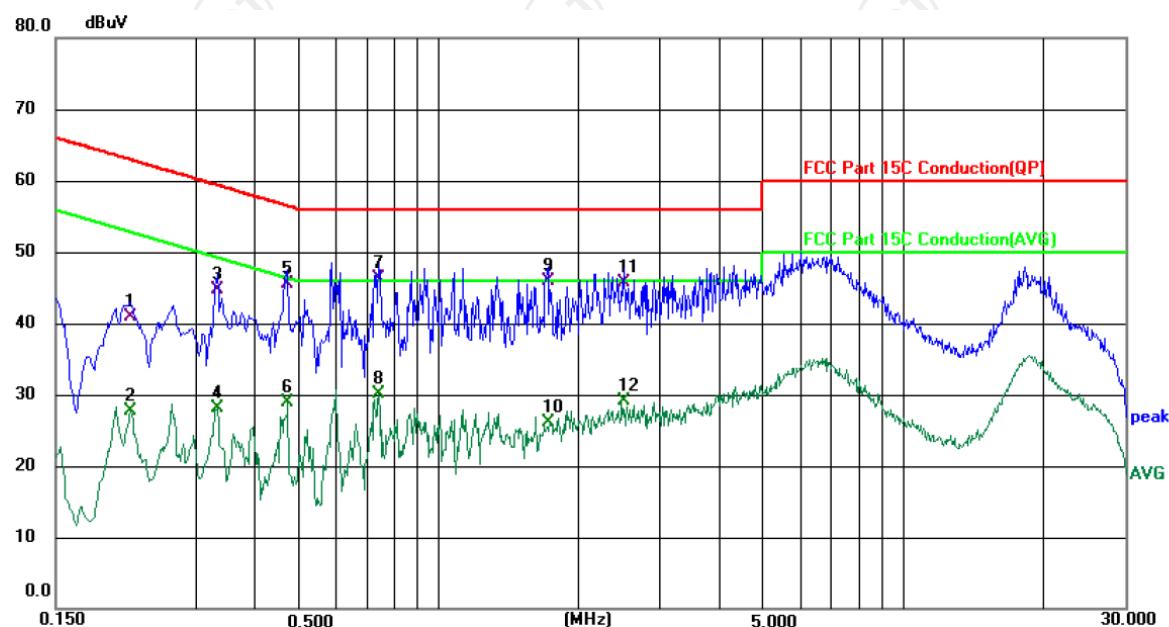

Site	Phase: N	Temperature: 25 (°C)
Limit: FCC Part 15C Conduction(QP)		Humidity: 55 %
Power: AC 120 V/60 Hz		

No. Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Over	Detector	Comment
		dBuV	dB	dBuV	dB			
1	0.2179	31.60	9.33	40.93	62.90	-21.97	QP	
2	0.2179	18.31	9.33	27.64	52.90	-25.26	AVG	
3	0.3339	35.40	9.35	44.75	59.35	-14.60	QP	
4	0.3339	18.73	9.35	28.08	49.35	-21.27	AVG	
5	0.4711	36.20	9.28	45.48	56.49	-11.01	QP	
6	0.4711	19.58	9.28	28.86	46.49	-17.63	AVG	
7 *	0.7459	37.10	9.29	46.39	56.00	-9.61	QP	
8	0.7459	20.79	9.29	30.08	46.00	-15.92	AVG	
9	1.7178	36.40	9.43	45.83	56.00	-10.17	QP	
10	1.7178	16.59	9.43	26.02	46.00	-19.98	AVG	
11	2.5059	36.20	9.47	45.67	56.00	-10.33	QP	
12	2.5059	19.60	9.47	29.07	46.00	-16.93	AVG	

Note1:

Freq. = Emission frequency in MHz

Reading level (dB μ V) = Receiver reading

Corr. Factor (dB) = LISN factor + Cable loss

Measurement (dB μ V) = Reading level (dB μ V) + Corr. Factor (dB)

Limit (dB μ V) = Limit stated in standard

Margin (dB) = Measurement (dB μ V) – Limits (dB μ V)

Q.P. =Quasi-Peak

AVG =average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

5.3. Maximum Conducted (Average) Output Power


5.3.1. Test Specification

5.3.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100619	Sep. 11, 2021
RF Cable (9KHz-26.5GHz)	TCT	RE-06	N/A	Sep. 11, 2021
Antenna Connector	TCT	RFC-01	N/A	Sep. 11, 2021

5.4. Emission Bandwidth

5.4.1. Test Specification

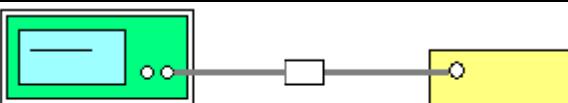Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	KDB 558074 D01 v05r02
Limit:	>500kHz
Test Setup:	 <p>The diagram illustrates the test setup. A green box labeled "Spectrum Analyzer" is connected to a yellow box labeled "EUT" (Equipment Under Test) via a cable with a connector. The connection is made at the top of the EUT box.</p>
Test Mode:	Transmitting mode with modulation
Test Procedure:	<ol style="list-style-type: none">1. Set to the maximum power setting and enable the EUT transmit continuously.2. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.3. Measure and record the results in the test report.
Test Result:	PASS

5.4.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100619	Sep. 11, 2021
RF Cable (9KHz-26.5GHz)	TCT	RE-06	N/A	Sep. 11, 2021
Antenna Connector	TCT	RFC-01	N/A	Sep. 11, 2021

5.5. Power Spectral Density

5.5.1. Test Specification


Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	KDB 558074
Limit:	The average power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.
Test Setup:	 <p style="text-align: center;">Spectrum Analyzer EUT</p>
Test Mode:	Transmitting mode with modulation
Test Procedure:	<ol style="list-style-type: none"> 1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW): $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$. Video bandwidth $\text{VBW} \geq 3 \times \text{RBW}$. Set the span to at least 1.5 times the OBW. 4. Detector = RMS, Sweep time = auto couple. 5. Employ trace averaging (RMS) mode over a minimum of 100 traces. Use the peak marker function to determine the maximum power level. 6. Measure and record the results in the test report.
Test Result:	PASS

5.5.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100619	Sep. 11, 2021
RF Cable (9KHz-26.5GHz)	TCT	RE-06	N/A	Sep. 11, 2021
Antenna Connector	TCT	RFC-01	N/A	Sep. 11, 2021

5.6. Conducted Band Edge and Spurious Emission Measurement

5.6.1. Test Specification

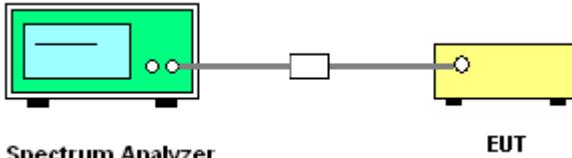Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074
Limit:	In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).
Test Setup:	 <p>Spectrum Analyzer EUT</p>
Test Mode:	Transmitting mode with modulation
Test Procedure:	<ol style="list-style-type: none"> 1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d). 4. Measure and record the results in the test report. 5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
Test Result:	PASS



5.6.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100619	Sep. 11, 2021
RF Cable (9KHz-26.5GHz)	TCT	RE-06	N/A	Sep. 11, 2021
Antenna Connector	TCT	RFC-01	N/A	Sep. 11, 2021

5.7. Radiated Spurious Emission Measurement

5.7.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.209																																							
Test Method:	ANSI C63.10: 2013																																							
Frequency Range:	9 kHz to 25 GHz																																							
Measurement Distance:	3 m																																							
Antenna Polarization:	Horizontal & Vertical																																							
Operation mode:	Transmitting mode with modulation																																							
Receiver Setup:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Detector</th> <th>RBW</th> <th>VBW</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>9kHz- 150kHz</td> <td>Quasi-peak</td> <td>200Hz</td> <td>1kHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td>150kHz- 30MHz</td> <td>Quasi-peak</td> <td>9kHz</td> <td>30kHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td>30MHz-1GHz</td> <td>Quasi-peak</td> <td>120KHz</td> <td>300KHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td rowspan="2">Above 1GHz</td><td>Peak</td> <td>1MHz</td> <td>3MHz</td> <td>Peak Value</td> </tr> <tr> <td>Peak</td> <td>1MHz</td> <td>10Hz</td> <td>Average Value</td> </tr> </tbody> </table>					Frequency	Detector	RBW	VBW	Remark	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value	Above 1GHz	Peak	1MHz	3MHz	Peak Value	Peak	1MHz	10Hz	Average Value						
Frequency	Detector	RBW	VBW	Remark																																				
9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value																																				
150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value																																				
30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value																																				
Above 1GHz	Peak	1MHz	3MHz	Peak Value																																				
	Peak	1MHz	10Hz	Average Value																																				
Limit:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Field Strength (microvolts/meter)</th> <th>Measurement Distance (meters)</th> </tr> </thead> <tbody> <tr> <td>0.009-0.490</td> <td>2400/F(KHz)</td> <td>300</td> </tr> <tr> <td>0.490-1.705</td> <td>24000/F(KHz)</td> <td>30</td> </tr> <tr> <td>1.705-30</td> <td>30</td> <td>30</td> </tr> <tr> <td>30-88</td> <td>100</td> <td>3</td> </tr> <tr> <td>88-216</td> <td>150</td> <td>3</td> </tr> <tr> <td>216-960</td> <td>200</td> <td>3</td> </tr> <tr> <td>Above 960</td> <td>500</td> <td>3</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Frequency</th> <th>Field Strength (microvolts/meter)</th> <th>Measurement Distance (meters)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Above 1GHz</td><td>500</td> <td>3</td> <td>Average</td> </tr> <tr> <td>5000</td> <td>3</td> <td>Peak</td> </tr> </tbody> </table>					Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	0.009-0.490	2400/F(KHz)	300	0.490-1.705	24000/F(KHz)	30	1.705-30	30	30	30-88	100	3	88-216	150	3	216-960	200	3	Above 960	500	3	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	Detector	Above 1GHz	500	3	Average	5000	3	Peak
Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)																																						
0.009-0.490	2400/F(KHz)	300																																						
0.490-1.705	24000/F(KHz)	30																																						
1.705-30	30	30																																						
30-88	100	3																																						
88-216	150	3																																						
216-960	200	3																																						
Above 960	500	3																																						
Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	Detector																																					
Above 1GHz	500	3	Average																																					
	5000	3	Peak																																					
Test setup:	<p>For radiated emissions below 30MHz</p> <p>Distance = 3m</p> <p>0.8m</p> <p>Turn table</p> <p>1m</p> <p>Ground Plane</p> <p>30MHz to 1GHz</p>																																							

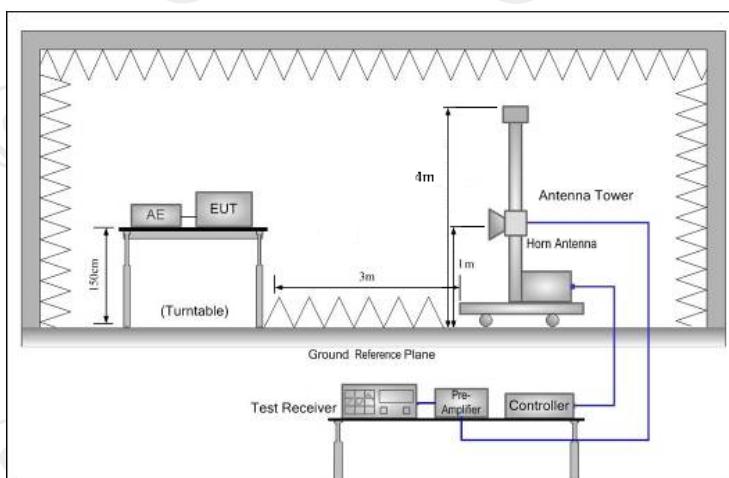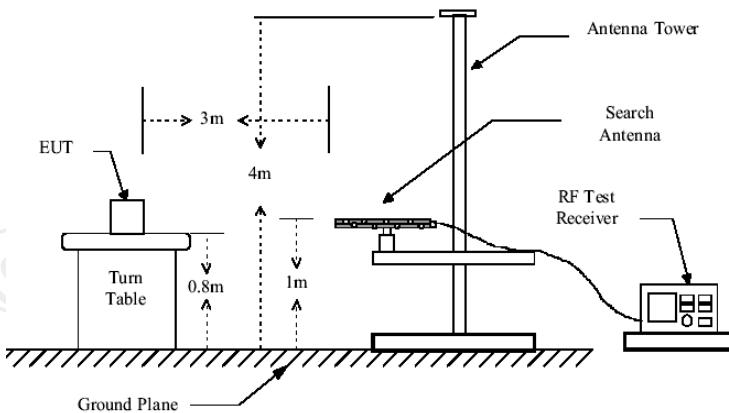

1. For the radiated emission test below 1GHz:
 The EUT was placed on a turntable with 0.8 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level.

For the radiated emission test above 1GHz:
 Place the measurement antenna on a turntable with 1.5 meter above ground, which is away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which

Test Procedure:

	<p>maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.</p> <p>3. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level</p> <p>4. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.</p> <p>5. Use the following spectrum analyzer settings:</p> <ul style="list-style-type: none">(1) Span shall wide enough to fully capture the emission being measured;(2) Set RBW=120 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;(3) Set RBW = 1 MHz, VBW= 3MHz for $f > 1$ GHz for peak measurement. <p>For average measurement: VBW = 10 Hz, when duty cycle is no less than 98 percent. $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.</p>
Test results:	PASS


5.7.2. Test Instruments

Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Test Receiver	ROHDE&SCHW ARZ	ESIB7	100197	Jul. 27, 2021
Spectrum Analyzer	ROHDE&SCHW ARZ	FSQ40	200061	Sep. 11, 2021
Pre-amplifier	EM Electronics Corporation CO.,LTD	EM30265	07032613	Sep. 02, 2021
Pre-amplifier	HP	8447D	2727A05017	Sep. 02, 2021
Loop antenna	ZHINAN	ZN30900A	12024	Sep. 05, 2022
Broadband Antenna	Schwarzbeck	VULB9163	340	Sep. 04, 2022
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Sep. 04, 2022
Horn Antenna	A-INFO	LB-180400-KF	J211020657	Sep. 04, 2022
Antenna Mast	Keleto	RE-AM	N/A	N/A
Line-4	TCT	RE-high-04	N/A	Sep. 02, 2021
Line-8	TCT	RE-01	N/A	Jul. 27, 2021
EMI Test Software	Shurples Technology	EZ-EMC	N/A	N/A

5.7.3. Test Data

Please refer to following diagram for individual
Below 1GHz

Horizontal:

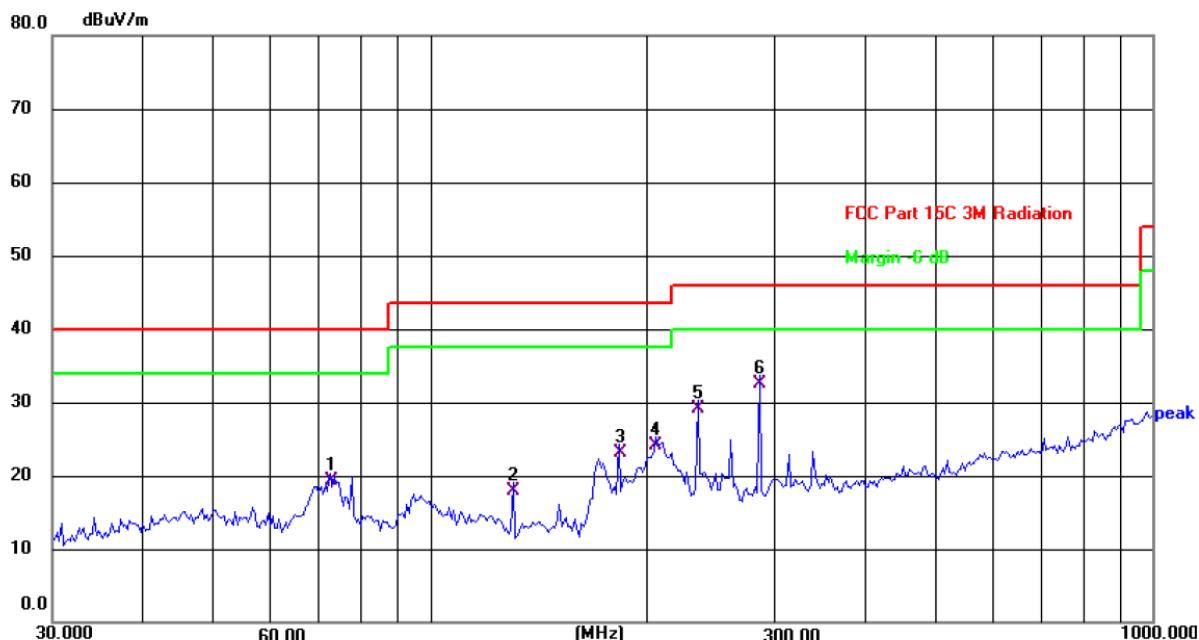

Site

Polarization: **Horizontal**

Temperature: 25(°C)


Limit: FCC Part 15C 3M Radiation

Power: AC 120 V/60 Hz

Humidity: 55 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	72.7203	35.12	-15.73	19.39	40.00	-20.61	QP
2	130.3048	35.12	-17.16	17.96	43.50	-25.54	QP
3	182.5785	37.22	-14.18	23.04	43.50	-20.46	QP
4	205.7458	37.52	-13.33	24.19	43.50	-19.31	QP
5	235.1346	41.66	-12.63	29.03	46.00	-16.97	QP
6 *	286.2653	43.33	-10.77	32.56	46.00	-13.44	QP

Vertical:

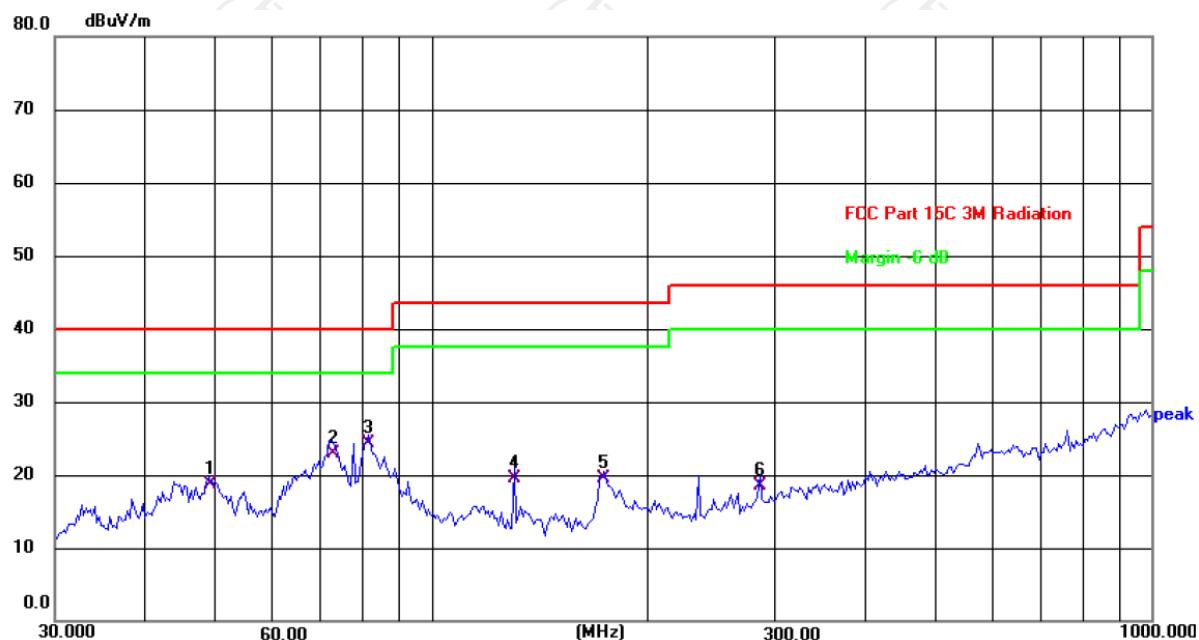

Site

Polarization: **Vertical**

Temperature: 25(°C)

Limit: FCC Part 15C 3M Radiation

Power: AC 120 V/60 Hz

Humidity: 55 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	49.0627	30.65	-11.99	18.66	40.00	-21.34	QP
2	72.7203	38.66	-15.73	22.93	40.00	-17.07	QP
3 *	81.9477	40.22	-15.87	24.35	40.00	-15.65	QP
4	130.3048	36.66	-17.16	19.50	43.50	-24.00	QP
5	173.8146	34.11	-14.58	19.53	43.50	-23.97	QP
6	286.2653	29.22	-10.77	18.45	46.00	-27.55	QP

Note: 1. The low frequency, which started from 9KHz-30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported

2. Measurements were conducted in all three channels (high, middle, low) and all modulation(802.11b, 802.11g, 802.11n(HT20), 802.11n(HT40)), and the worst case Mode (Middle channel and 802.11b) was submitted only.

3. Freq. = Emission frequency in MHz

Measurement (dB μ V/m) = Reading level (dB μ V) + Corr. Factor (dB)

Correction Factor= Antenna Factor + Cable loss – Pre-amplifier

Limit (dB μ V/m) = Limit stated in standard


Margin (dB) = Measurement (dB μ V/m) – Limits (dB μ V/m)

* is meaning the worst frequency has been tested in the test frequency range

Test Result of Radiated Spurious at Band edges

Lowest channel 2412:


Horizontal:

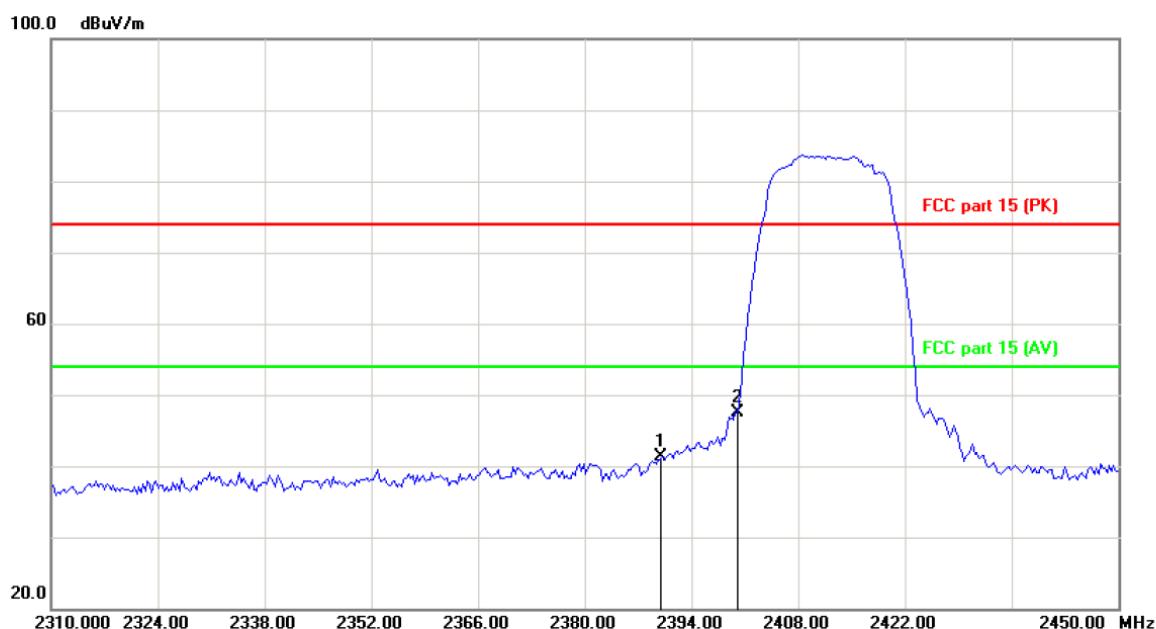

Site: Polarization: **Horizontal** Temperature: 25
Limit: FCC part 15 (PK) Power: Humidity: 55 %

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		2390.000	54.54	-13.15	41.39	74.00	-32.61	peak
2	*	2400.000	60.72	-13.12	47.60	74.00	-26.40	peak

Vertical:

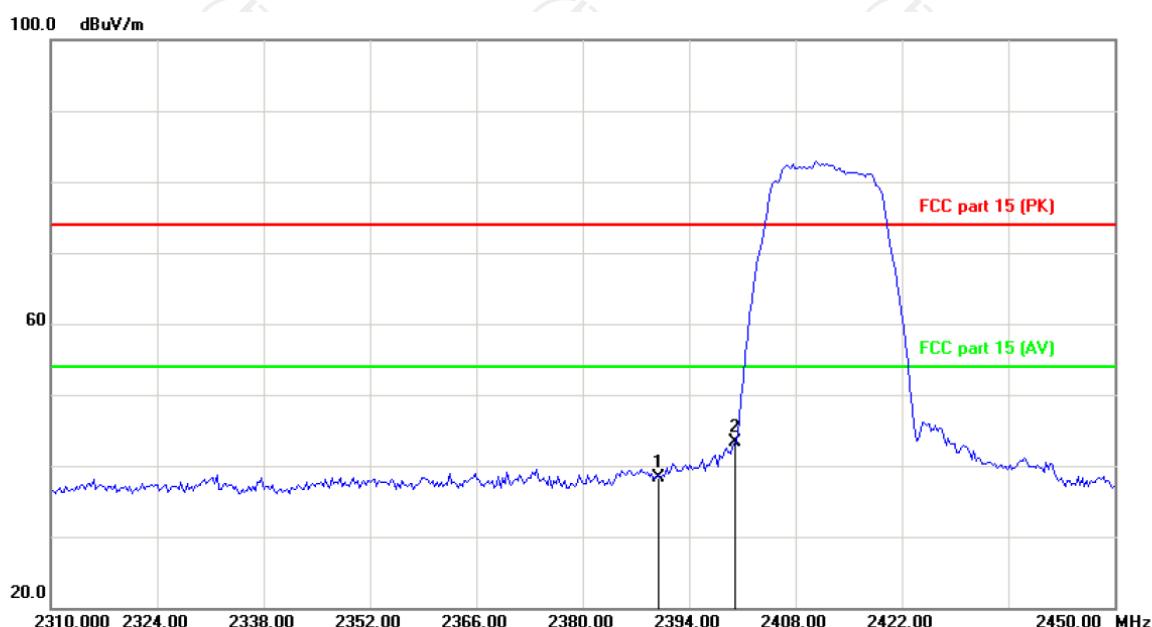


Site: Polarization: **Vertical** Temperature: 25
Limit: FCC part 15 (PK) Power: Humidity: 55 %

No.	Mk.	Freq. MHz	Reading	Correct	Measure-	Limit	Over
			Level dBuV	Factor dB	ment dBuV/m		
1		2390.000	51.53	-13.15	38.38	74.00	-35.62 peak
2	*	2400.000	56.46	-13.12	43.34	74.00	-30.66 peak

Highest channel 2462:


Horizontal:

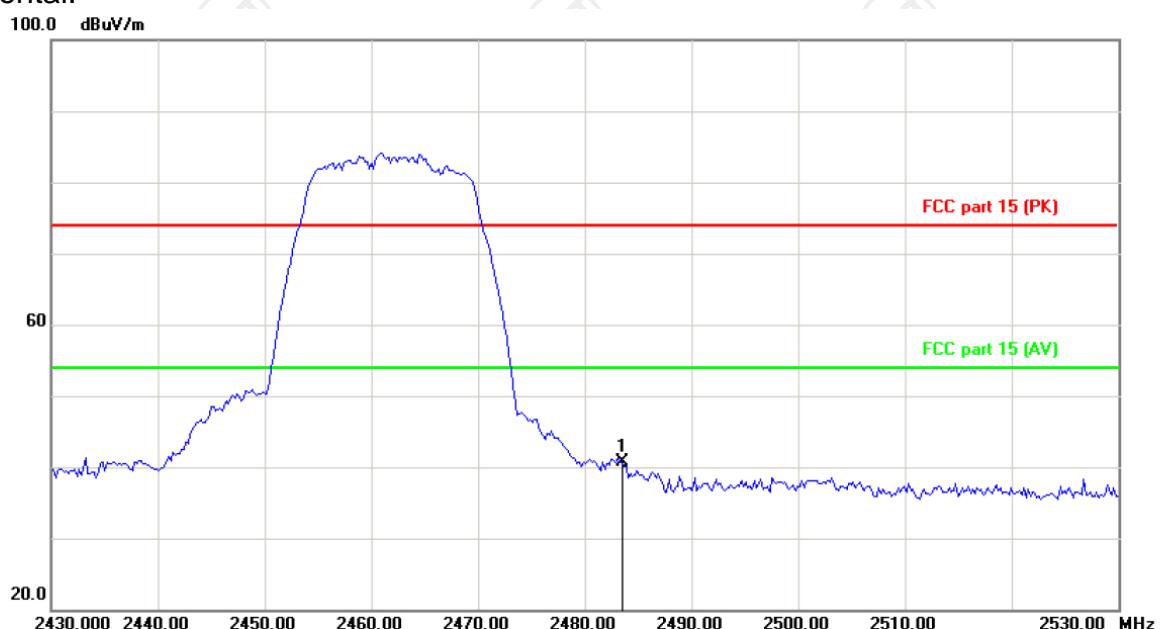

Site: Polarization: **Horizontal** Temperature: 25
Limit: FCC part 15 (PK) Power: Humidity: 55 %

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	*	2483.500	53.44	-12.74	40.70	74.00	-33.30	peak

Vertical:

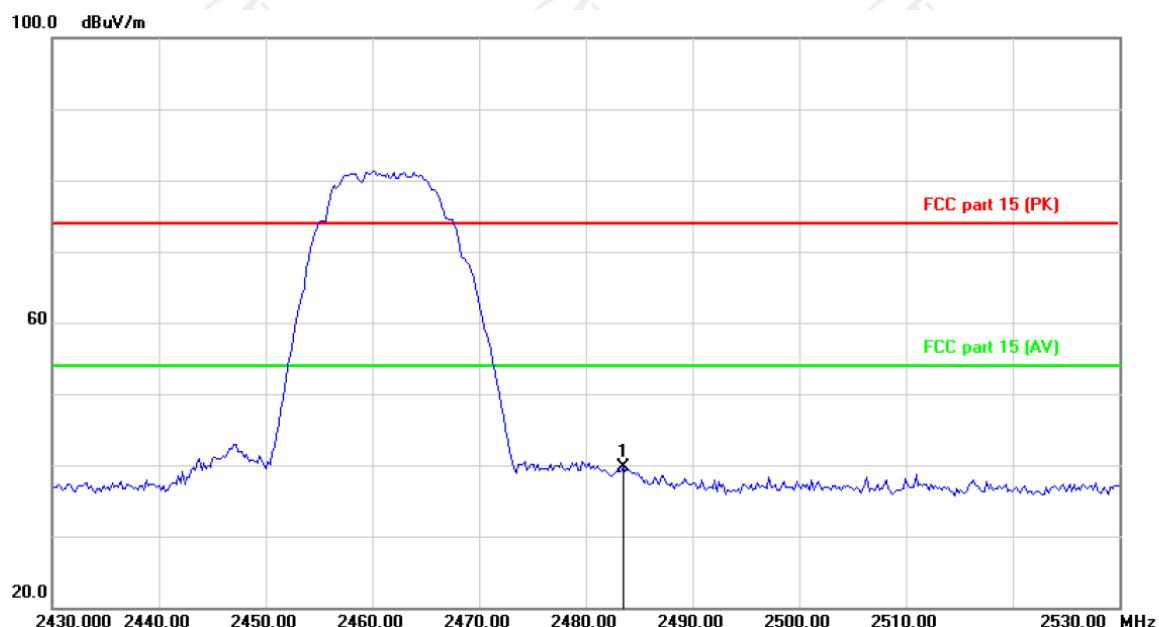

Site Polarization: **Vertical** Temperature: 25
Limit: FCC part 15 (PK) Power: Humidity: 55 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over
		MHz	dBuV	dB	dBuV/m	dB/m	dB
1	*	2483.500	52.37	-12.74	39.63	74.00	-34.37 peak

Note:

1. Peak Final Emission Level=Peak Reading + Correction Factor;
2. Correction Factor= Antenna Factor + Cable loss – Pre-amplifier
3. Measurements were conducted in all modulation(802.11b, 802.11g, 802.11n(HT20), 802.11n(HT40)), and the worst case Mode 802.11b) was submitted only.

Above 1GHz

Modulation Type: 802.11b

Low channel: 2412 MHz

Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
4824	H	48.85	---	0.75	49.60	---	74	54	-4.40
7236	H	40.36	---	9.87	50.23	---	74	54	-3.77
---	H	---	---	---	---	---	---	---	---
4824	V	47.88	---	0.75	48.63	---	74	54	-5.37
7236	V	40.47	---	9.87	50.34	---	74	54	-3.66
---	V	---	---	---	---	---	---	---	---

Middle channel: 2437MHz

Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
4874	H	45.15	---	0.97	46.12	---	74	54	-7.88
7311	H	36.33	---	9.83	46.16	---	74	54	-7.84
---	H	---	---	---	---	---	---	---	---
4874	V	45.72	---	0.97	46.69	---	74	54	-7.31
7311	V	36.44	---	9.83	46.27	---	74	54	-7.73
---	V	---	---	---	---	---	---	---	---

High channel: 2462 MHz

Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
4924	H	49.44	---	1.18	50.62	---	74	54	-3.38
7386	H	38.63	---	10.07	48.70	---	74	54	-5.30
---	H	---	---	---	---	---	---	---	---
4924	V	48.58	---	1.18	49.76	---	74	54	-4.24
7386	V	40.45	---	10.07	50.52	---	74	54	-3.48
---	V	---	---	---	---	---	---	---	---

Note:

1. Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier
2. Margin (dB) = Emission Level (Peak) (dB μ V/m)-Average limit (dB μ V/m)
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency. The highest test frequency is 25GHz.
5. Data of measurement shown “---”in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.
6. All the restriction bands are compliance with the limit of 15.209.

Modulation Type: 802.11g

Low channel: 2412 MHz

Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
4824	H	45.97	---	0.75	46.72	---	74	54	-7.28
7236	H	35.55	---	9.87	45.42	---	74	54	-8.58
---	H	---	---	---	---	---	---	---	---
4824	V	47.56	---	0.75	48.31	---	74	54	-5.69
7236	V	40.25	---	9.87	50.12	---	74	54	-3.88
---	V	---	---	---	---	---	---	---	---

Middle channel: 2437MHz

Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
4874	H	48.63	---	0.97	49.60	---	74	54	-4.40
7311	H	40.45	---	9.83	50.28	---	74	54	-3.72
---	H	---	---	---	---	---	---	---	---
4874	V	47.87	---	0.97	48.84	---	74	54	-5.16
7311	V	40.92	---	9.83	50.75	---	74	54	-3.25
---	V	---	---	---	---	---	---	---	---

High channel: 2462 MHz

Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
4924	H	47.96	---	1.18	49.14	---	74	54	-4.86
7386	H	39.47	---	10.07	49.54	---	74	54	-4.46
---	H	---	---	---	---	---	---	---	---
4924	V	46.07	---	1.18	47.25	---	74	54	-6.75
7386	V	33.85	---	10.07	43.92	---	74	54	-10.08
---	V	---	---	---	---	---	---	---	---

Note:

1. Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier
2. Margin (dB) = Emission Level (Peak) (dB μ V/m)-Average limit (dB μ V/m)
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency. The highest test frequency is 25GHz.
5. Data of measurement shown “---”in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.
6. All the restriction bands are compliance with the limit of 15.209.

Modulation Type: 802.11n (HT20)

Low channel: 2412 MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
4824	H	49.73	---	0.75	50.48	---	74	54	-3.52
7236	H	40.64	---	9.87	50.51	---	74	54	-3.49
---	H	---	---	---	---	---	---	---	---
4824	V	46.45	---	0.75	47.20	---	74	54	-6.80
7236	V	35.66	---	9.87	45.53	---	74	54	-8.47
---	V	---	---	---	---	---	---	---	---

Middle channel: 2437MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
4874	H	46.93	---	0.97	47.90	---	74	54	-6.10
7311	H	36.54	---	9.83	46.37	---	74	54	-7.63
---	H	---	---	---	---	---	---	---	---
4874	V	47.52	---	0.97	48.49	---	74	54	-5.51
7311	V	40.14	---	9.83	49.97	---	74	54	-4.03
---	V	---	---	---	---	---	---	---	---

High channel: 2462 MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
4924	H	45.11	---	1.18	46.29	---	74	54	-7.71
7386	H	36.67	---	10.07	46.74	---	74	54	-7.26
---	H	---	---	---	---	---	---	---	---
4924	V	47.95	---	1.18	49.13	---	74	54	-4.87
7386	V	40.77	---	10.07	50.84	---	74	54	-3.16
---	V	---	---	---	---	---	---	---	---

Note:

1. Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier
2. Margin (dB) = Emission Level (Peak) (dB μ V/m)-Average limit (dB μ V/m)
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency. The highest test frequency is 25GHz.
5. Data of measurement shown “---” in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.
6. All the restriction bands are compliance with the limit of 15.209.

Modulation Type: 802.11n (HT40)

Low channel: 2422 MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
4844	H	43.56	---	0.75	44.31	---	74	54	-9.69
7266	H	34.91	---	9.87	44.78	---	74	54	-9.22
---	H	---	---	---	---	---	---	---	---
4824	V	45.49	---	0.75	46.24	---	74	54	-7.76
7236	V	38.88	---	9.87	48.75	---	74	54	-5.25
---	V	---	---	---	---	---	---	---	---

Middle channel: 2437MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
4874	H	42.82	---	0.97	43.79	---	74	54	-10.21
7311	H	34.41	---	9.83	44.24	---	74	54	-9.76
---	H	---	---	---	---	---	---	---	---
4874	V	47.31	---	0.97	48.28	---	74	54	-5.72
7311	V	36.09	---	9.83	45.92	---	74	54	-8.08
---	V	---	---	---	---	---	---	---	---

High channel: 2452 MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
4904	H	45.32	---	1.18	46.50	---	74	54	-7.50
7356	H	36.45	---	10.07	46.52	---	74	54	-7.48
---	H	---	---	---	---	---	---	---	---
4904	V	43.78	---	1.18	44.96	---	74	54	-9.04
7356	V	36.54	---	10.07	46.61	---	74	54	-7.39
---	V	---	---	---	---	---	---	---	---

Note:

1. Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier
2. Margin (dB) = Emission Level (Peak) (dB μ V/m)-Average limit (dB μ V/m)
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency. The highest test frequency is 25GHz.
5. Data of measurement shown “---” in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.
6. All the restriction bands are compliance with the limit of 15.209.

Test Result of Conducted Test**DTS Bandwidth****Test Result**

TestMode	Antenna	Channel	DTS BW [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
11B	Ant1	2412	10.120	2406.960	2417.080	0.5	PASS
		2437	10.160	2431.920	2442.080	0.5	PASS
		2462	10.120	2456.920	2467.040	0.5	PASS
11G	Ant1	2412	16.640	2403.680	2420.320	0.5	PASS
		2437	16.640	2428.680	2445.320	0.5	PASS
		2462	16.600	2453.720	2470.320	0.5	PASS
11N20SISO	Ant1	2412	17.880	2403.080	2420.960	0.5	PASS
		2437	17.880	2428.040	2445.920	0.5	PASS
		2462	17.920	2453.040	2470.960	0.5	PASS
11N40SISO	Ant1	2422	36.480	2403.760	2440.240	0.5	PASS
		2437	36.480	2418.760	2455.240	0.5	PASS
		2452	36.560	2433.680	2470.240	0.5	PASS

Test Graphs

11B_Ant1_2412



Frequency

Auto Tune

Center Freq

2.41200000 GHz

Start Freq

2.39200000 GHz

Stop Freq

2.43200000 GHz

CF Step

4.000000 MHz

Auto

Freq Offset

0 Hz

11B_Ant1_2437



Frequency

Auto Tune

Center Freq

2.43700000 GHz

Start Freq

2.41700000 GHz

Stop Freq

2.45700000 GHz

CF Step

4.000000 MHz

Auto

Freq Offset

0 Hz

11B_Ant1_2462



Frequency

Auto Tune

Center Freq

2.46200000 GHz

Start Freq

2.44200000 GHz

Stop Freq

2.48200000 GHz

CF Step

4.000000 MHz

Auto

Freq Offset

0 Hz

11G_Ant1_2412




11G_Ant1_2437




11G_Ant1_2462



11N20SISO_Ant1_2412

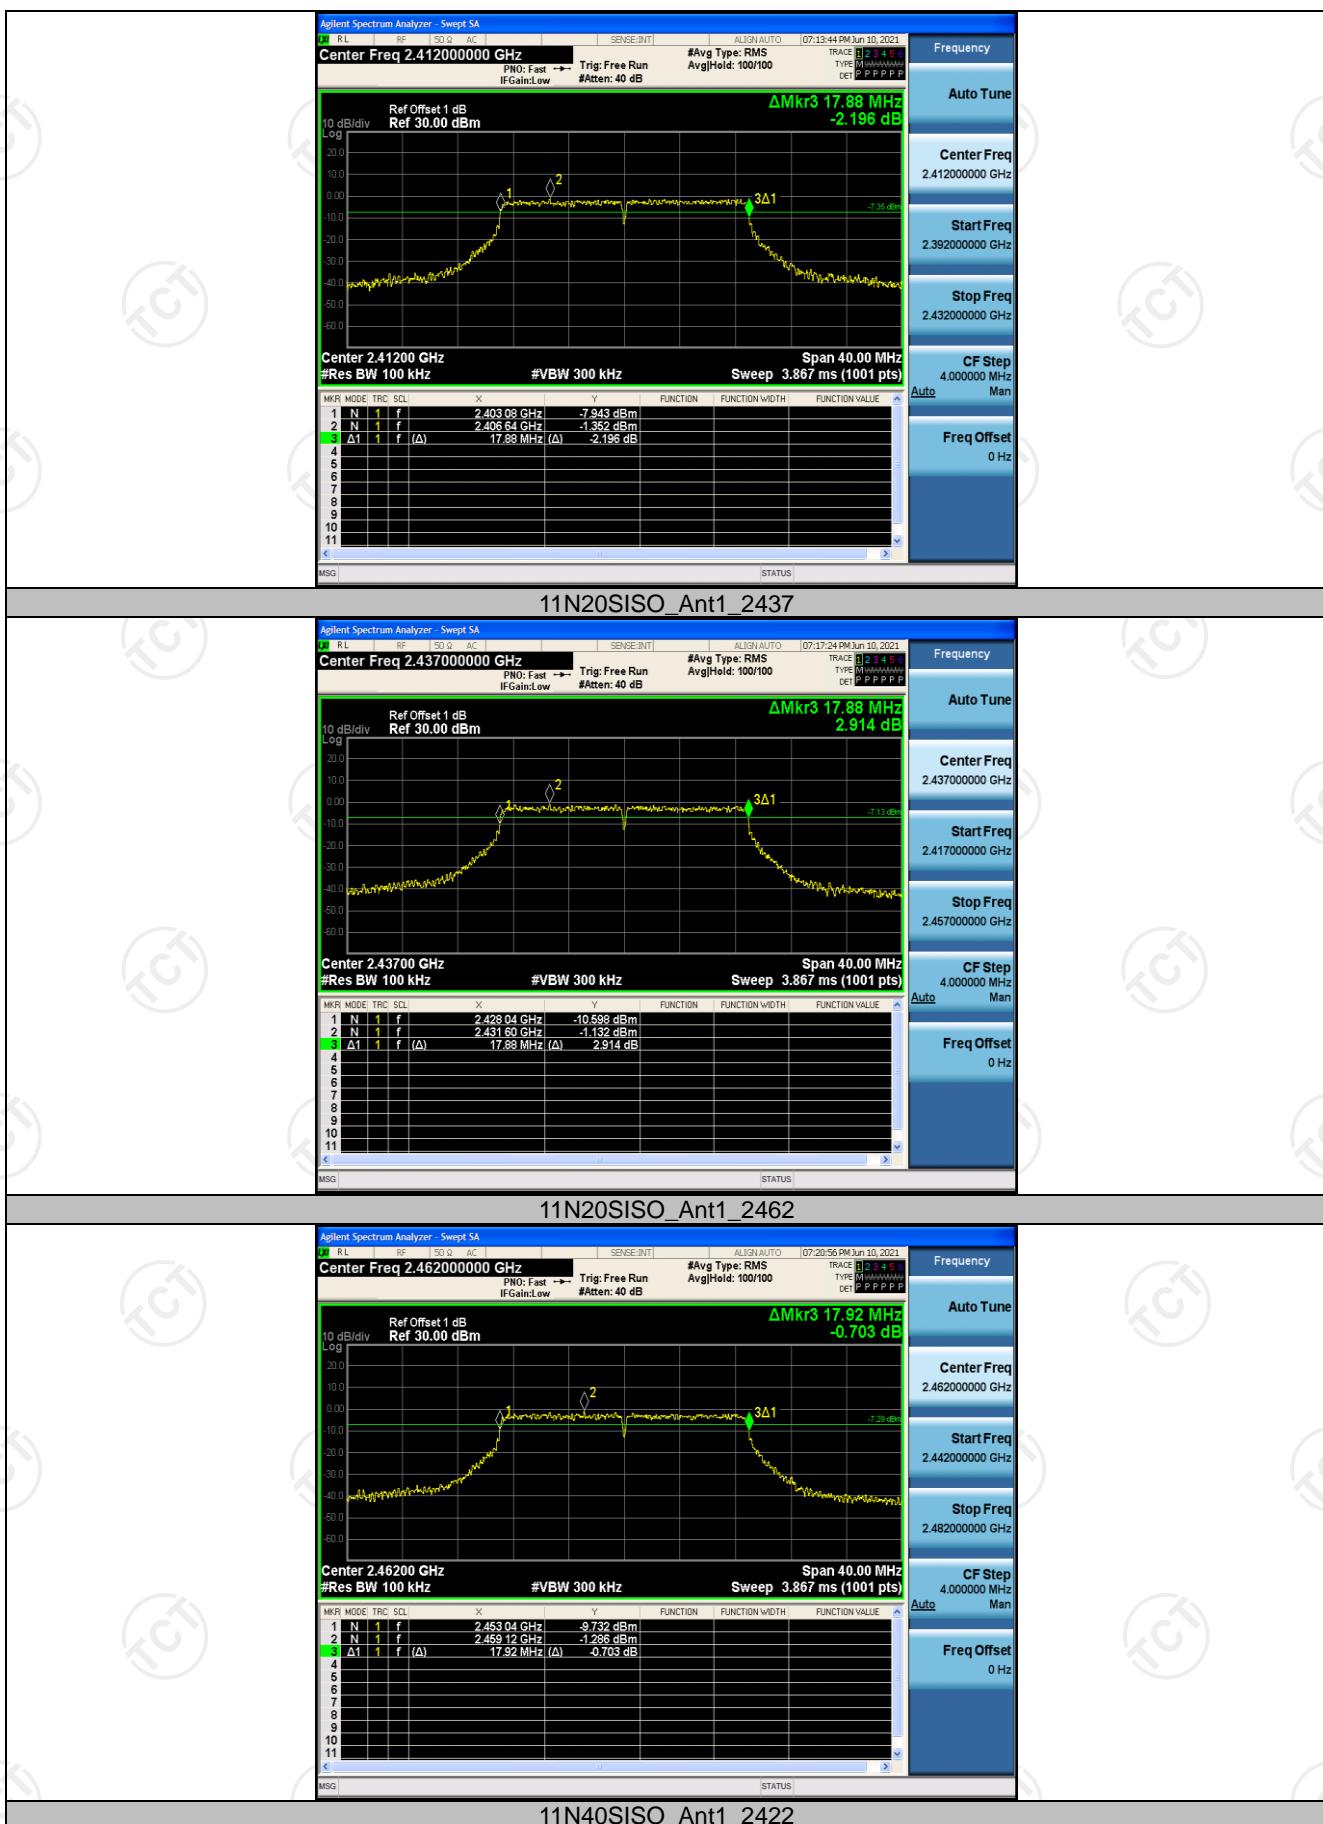


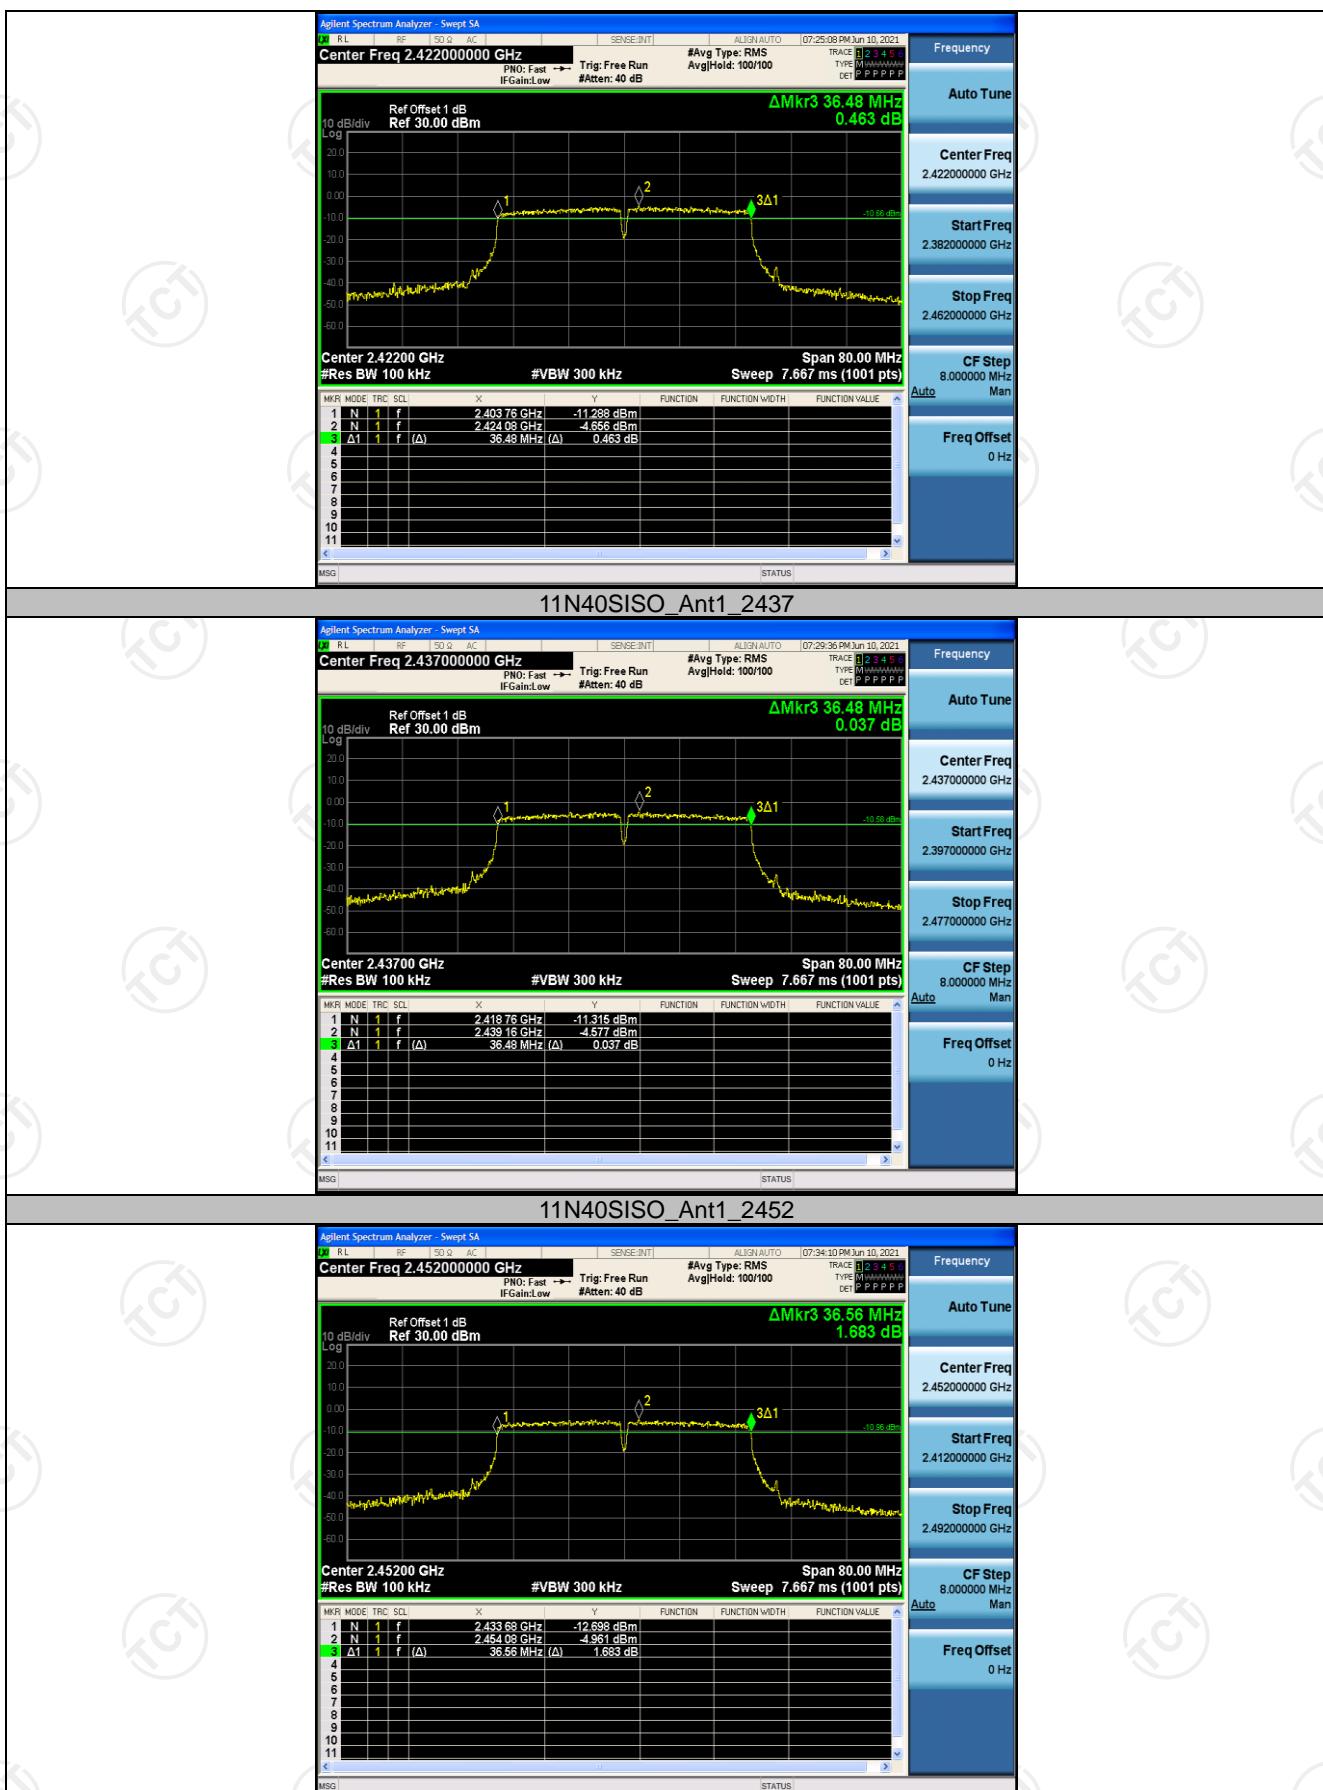

Occupied Channel Bandwidth**Test Result**

TestMode	Antenna	Channel	OCB [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
11B	Ant1	2412	15.317	2404.403	2419.720	---	PASS
		2437	15.309	2429.329	2444.638	---	PASS
		2462	15.357	2454.330	2469.687	---	PASS
11G	Ant1	2412	17.159	2403.386	2420.545	---	PASS
		2437	17.221	2428.276	2445.497	---	PASS
		2462	17.161	2453.351	2470.512	---	PASS
11N20SISO	Ant1	2412	18.260	2402.885	2421.145	---	PASS
		2437	18.212	2427.889	2446.101	---	PASS
		2462	18.255	2452.867	2471.122	---	PASS
11N40SISO	Ant1	2422	36.347	2403.938	2440.285	---	PASS
		2437	36.354	2418.862	2455.216	---	PASS
		2452	36.447	2433.850	2470.297	---	PASS

Test Graphs

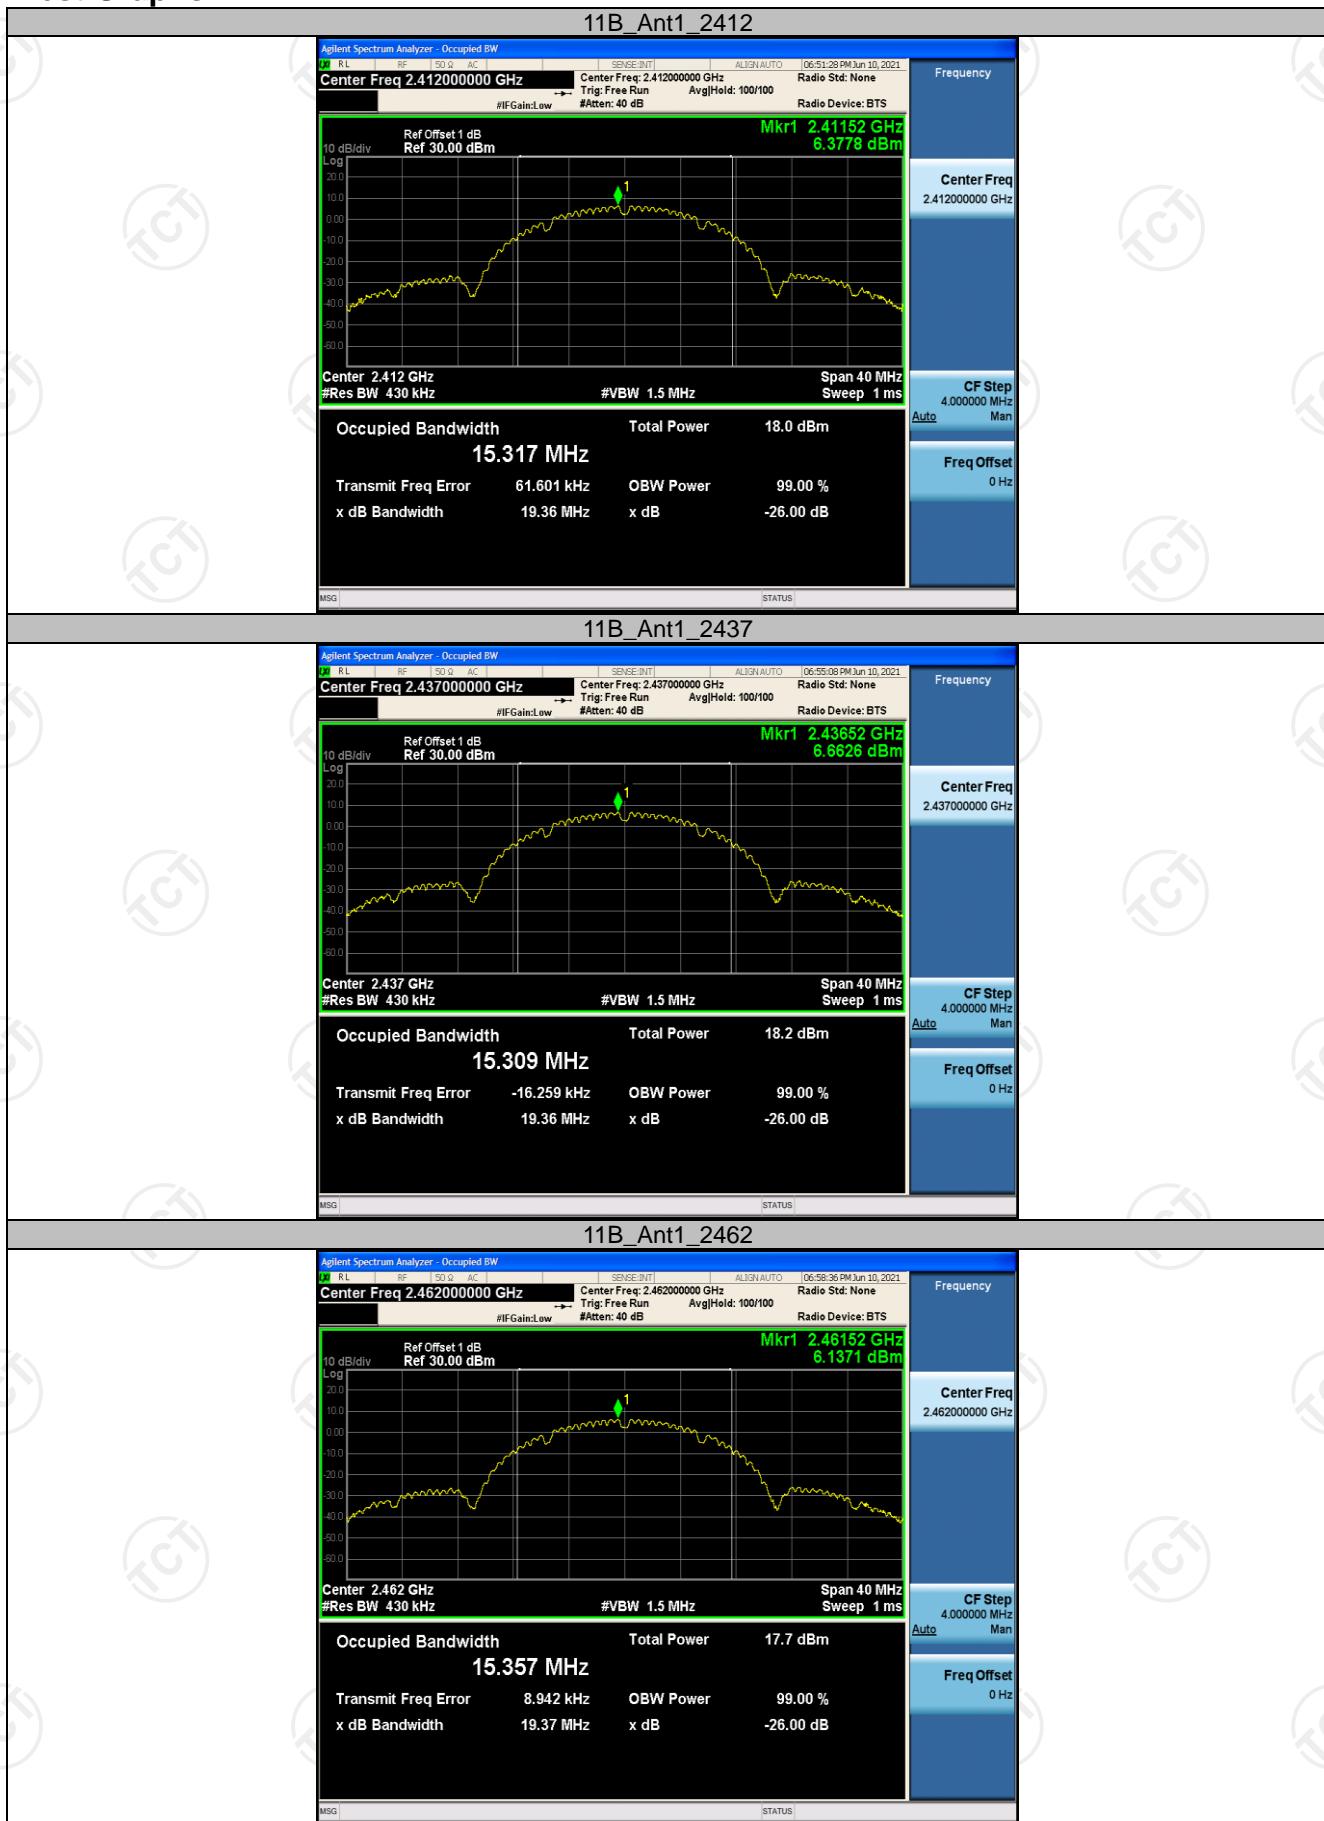

11G_Ant1_2412



11G_Ant1_2437



11G_Ant1_2462




11N20SISO_Ant1_2412



11N20SISO_Ant1_2437




11N20SISO_Ant1_2462

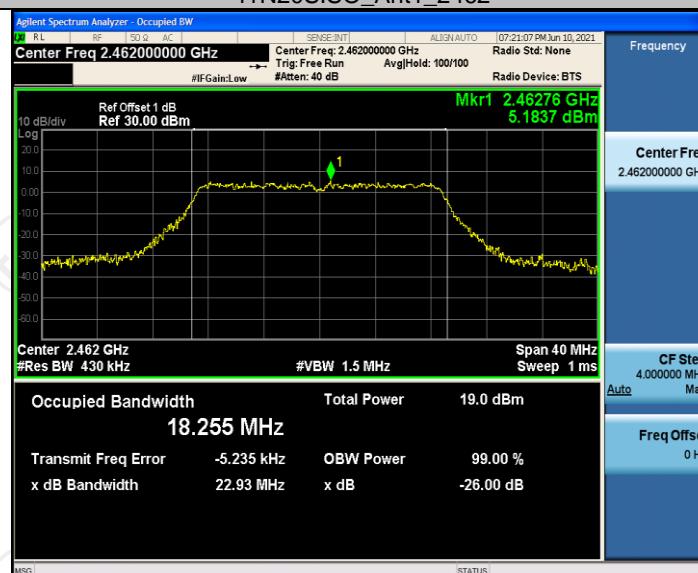

11N40SISO_Ant1_2422



11N40SISO_Ant1_2437

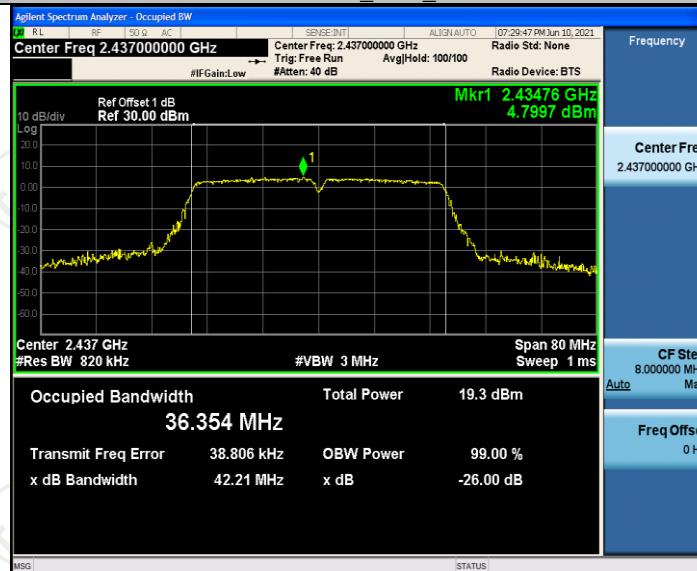

11N40SISO_Ant1_2452



Maximum conducted output power**Test Result**

TestMode	Antenna	Channel	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	14.98	<=30	PASS
		2437	15.21	<=30	PASS
		2462	14.80	<=30	PASS
11G	Ant1	2412	13.08	<=30	PASS
		2437	13.42	<=30	PASS
		2462	12.95	<=30	PASS
11N20SISO	Ant1	2412	13.36	<=30	PASS
		2437	13.25	<=30	PASS
		2462	12.91	<=30	PASS
11N40SISO	Ant1	2422	12.33	<=30	PASS
		2437	12.48	<=30	PASS
		2452	12.27	<=30	PASS

Test Graphs


11B_Ant1_2412




11B_Ant1_2437




11B_Ant1_2462

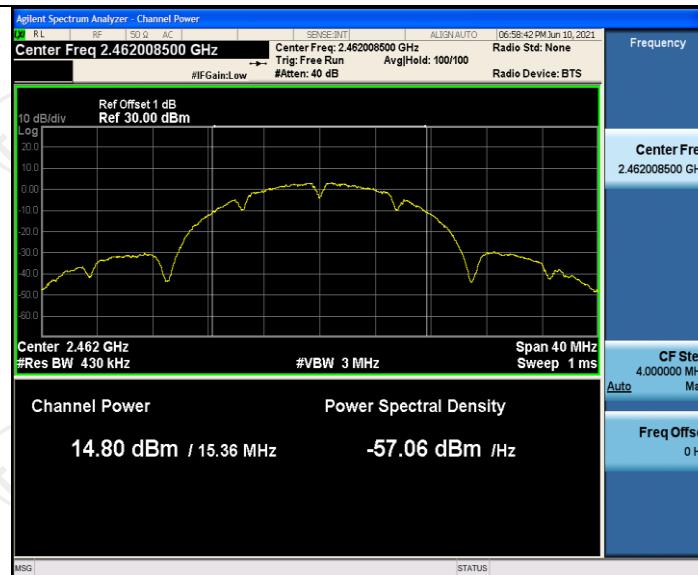


11G_Ant1_2412

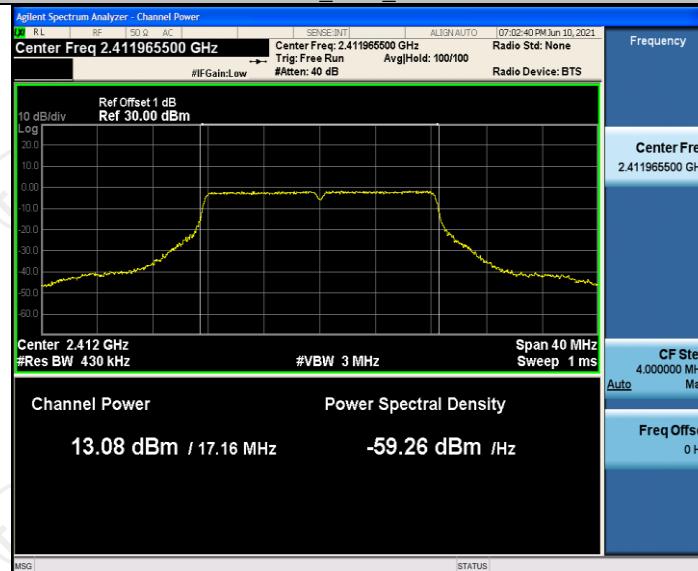


11G_Ant1_2437

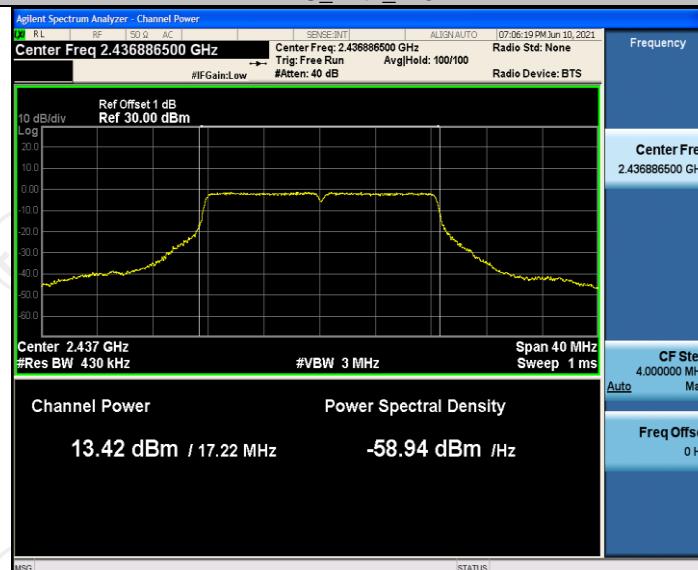


11G_Ant1_2462

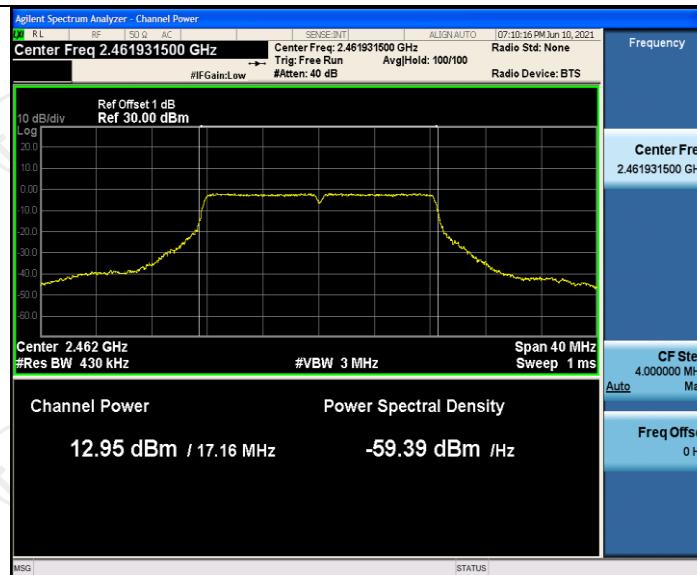


11N20SISO_Ant1_2412

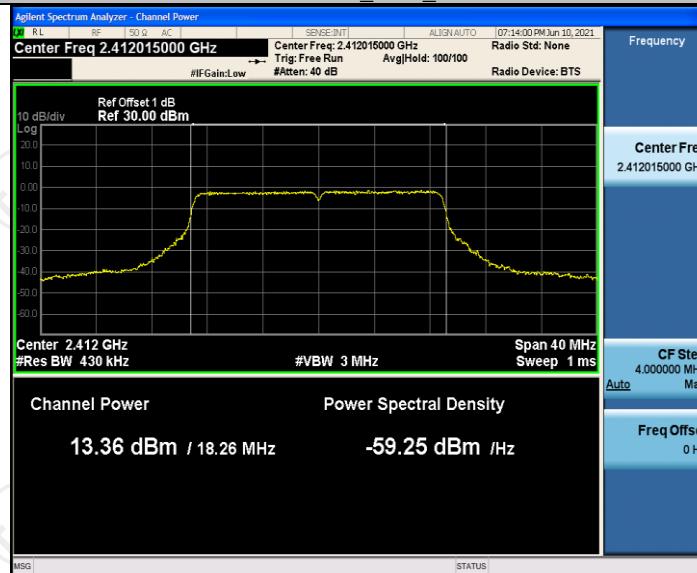


11N20SISO_Ant1_2437

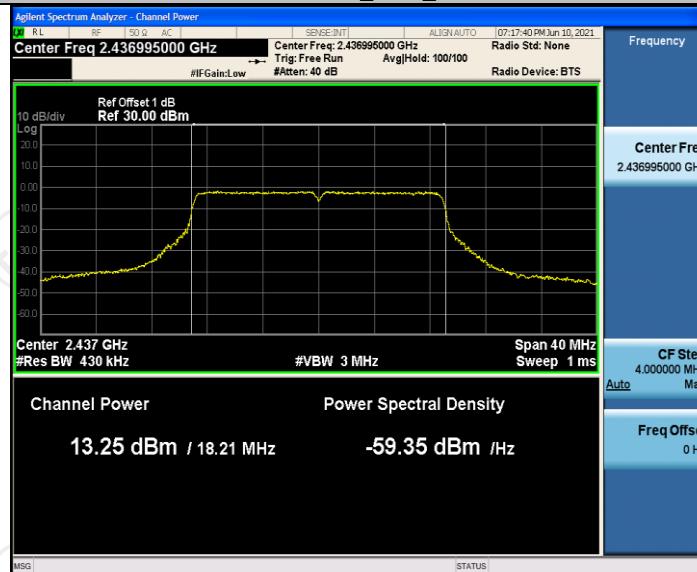

11N20SISO_Ant1_2462

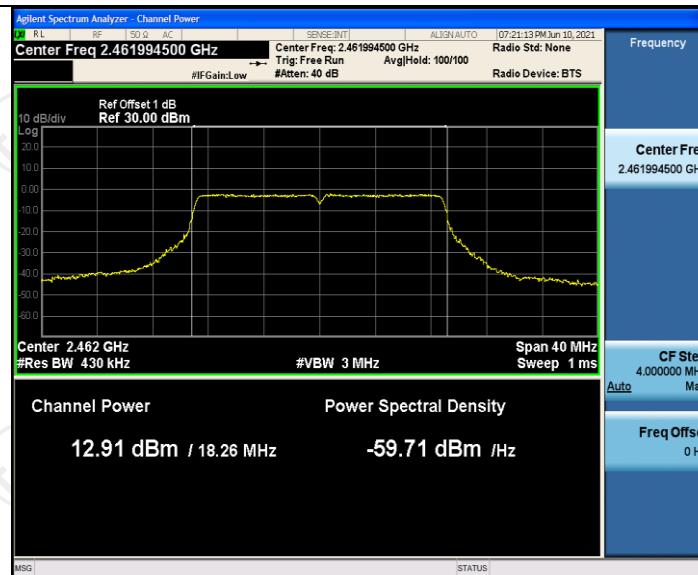

11N40SISO_Ant1_2422

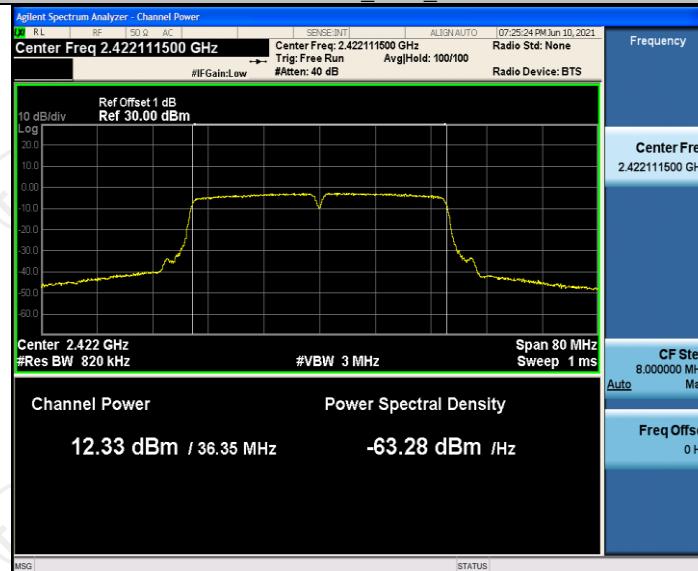

11N40SISO_Ant1_2437



11N40SISO_Ant1_2452