



FCC TEST REPORT

Report No.: STS2105168W01

Issued for

ShenZhen MaiZhan Technology Co.,Ltd

Area A2, 8 / F, Building H, ChuangXinYunGu, No.48 PaoTai Road, Guangming District, Shenzhen, China.

Product Name:	Magnetic car fast wireless charger
Brand Name:	N/A
Model Name:	MZEP08
Series Model:	MZEP08A, MZEP08B, MZEP08C, MZEP08D, MZEP08E, MZEP08F
FCC ID:	2AZ92-MZEP08F22
Test Standard:	FCC Part 15 Subpart C

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, all test data presented in this report is only applicable to presented test sample.

Shenzhen STS Test Services Co., Ltd.
 A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ,
 Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China
 TEL: +86-755 3688 6288 FAX: +86-755 3688 6277 E-mail:sts@stsapp.com





TEST RESULT CERTIFICATION

Applicant's Name: ShenZhen MaiZhan Technology Co.,Ltd
 Address.....: Area A2, 8 / F, Building H, ChuangXinYunGu, No.48 PaoTai Road, Guangming District, Shenzhen, China.
 Manufacturer's Name: ShenZhen MaiZhan Technology Co.,Ltd
 Address.....: Area A2, 8 / F, Building H, ChuangXinYunGu, No.48 PaoTai Road, Guangming District, Shenzhen, China.

Product Description

Product Name: Magnetic car fast wireless charger
 Brand Name: N/A
 Model Name.....: MZEP08
 Series Model: MZEP08A, MZEP08B, MZEP08C, MZEP08D, MZEP08E, MZEP08F

Test Standards.....: FCC Part 15 Subpart C

Test Procedure.....: ANSI C63.10-2013

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.
 This report shall not be reproduced except in full, without the written approval of STS, this document only be altered or revised by STS, personal only, and shall be noted in the revision of the document.

Date of Test.....:

Date of receipt of test item: 01 June 2021
 Date (s) of performance of tests : 01 June 2021 ~ 09 June 2021
 Date of Issue: 09 June 2021

Test Result: **Pass**

Testing Engineer : 

 (Chris Chen)

Technical Manager : 

 (Sean She)

Authorized Signatory : 

 (Vita Li)





Table of Contents	Page
1. SUMMARY OF TEST RESULTS	5
1.1 TEST FACTORY	5
1.2 MEASUREMENT UNCERTAINTY	5
2. GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF THE EUT	6
2.2 DESCRIPTION OF THE TEST MODES	7
2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	7
2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	8
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	9
3. CONDUCTED EMISSION TEST RESULT (SECTION 15.207)	10
3.1 POWER LINE CONDUCTED EMISSION LIMITS	10
3.2 TEST PROCEDURE	11
3.3 TEST SETUP	11
3.4 EUT OPERATING CONDITIONS	11
3.5 TEST RESULTS	12
4. RADIATED& FIELD EMISSION TEST RESULT (SECTIOU 15.209)	14
4.1 LIMIT	14
4.2 TEST PROCEDURE	14
4.3 TEST SETUP	15
4.4 TEST RESULTS	16
5. 20 DB BANDWIDTH TEST	20
5.1 LIMIT	20
5.2 TEST SETUP	20
5.3 TEST RESULTS	20
APPENDIX-PHOTOS OF TEST SETUP	21



Revision History

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	09 June 2021	STS2105168W01	ALL	Initial Issue



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.209(a)	Radiated emission, Spurious Emission	PASS	
2.1049	20 dB Bandwidth	PASS	

1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ, Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainly
1	RF output power, conducted	$\pm 0.68\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.988\text{dB}$
3	All emissions, radiated 9K-30MHz	$\pm 2.84\text{dB}$
4	All emissions, radiated 30M-1GHz	$\pm 4.39\text{dB}$
5	All emissions, radiated 1G-6GHz	$\pm 5.10\text{dB}$
6	All emissions, radiated >6G	$\pm 5.48\text{dB}$
7	Conducted Emission (9KHz-150KHz)	$\pm 2.79\text{dB}$
8	Conducted Emission (150KHz-30MHz)	$\pm 2.80\text{dB}$

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	Magnetic car fast wireless charger
Trade Name	N/A
Model Name	MZEP08
Series Model	MZEP08A, MZEP08B, MZEP08C, MZEP08D, MZEP08E, MZEP08F
Model Difference	Only different in appearance color
Channel List	Please refer to the Note 2.
Antenna Type	Please refer to the Note 3.
Equipemnt Category	Non-ISM frequency
Operating frequency	110.5-205KHz
Modulation Type	ASK, FSK
Power Rating:	Input: DC 9V 3A/9V 2A/5V 3A Output: 15W/10W/7.5W/5W
Hardware version number	MZEP08-001X-V1.0
Software version number	MZEP08-001E84FE
Connecting I/O Port(s)	Please refer to the Note 1.

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.
- 2.

Channel List					
Channel	Frequency (KHz)	Channel	Frequency (KHz)	Channel	Frequency (KHz)
00	128				

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	NOTE
1	N/A	MZEP08	Coil	N/A	Antenna

2.2 DESCRIPTION OF THE TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.


Test Mode	Description
Mode 1	TX Mode

Note: We tested for voltage DC 9V 3A, 9V 2A and 5V 3A, the worst case is 9V 3A, this report only show the worst case.


2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

Radiated Emission Test

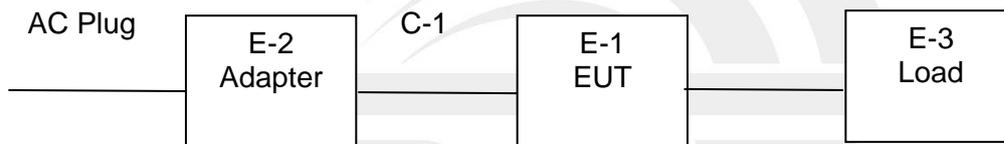

Conducted Emission Test

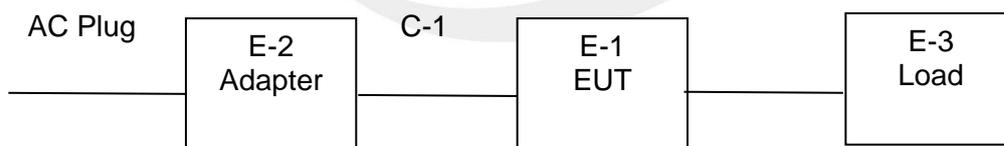

2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
C-1	DC Cable	N/A	N/A	100cm	NO

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
E-2	Adapter	N/A	LQ-017A-20C	N/A	N/A
E-3	Load	N/A	N/A	N/A	N/A

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (2) “YES” is means “with core”; “NO” is means “without core”.



2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2020.10.12	2021.10.11
Signal Analyzer	R&S	FSV 40-N	101823	2020.10.10	2021.10.09
Active loop Antenna	ZHINAN	ZN30900C	16035	2019.07.11	2021.07.10
Bilog Antenna	TESEQ	CBL6111D	34678	2020.10.12	2022.10.11
Pre-Amplifier (0.1M-3GHz)	EM	EM330	060665	2020.10.12	2021.10.11
Temperature & Humidity	HH660	Mieo	N/A	2020.10.13	2021.10.12
Test SW	BALUN	BL410-E/18.905			

Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2020.10.12	2021.10.11
LISN	R&S	ENV216	101242	2020.10.12	2021.10.11
LISN	EMCO	3810/2NM	23625	2020.10.12	2021.10.11
Temperature & Humidity	HH660	Mieo	N/A	2020.10.13	2021.10.12
Test SW	FARAD	EZ-EMC(Ver.STSLAB-03A1 CE)			

3. CONDUCTED EMISSION TEST RESULT (SECTION 15.207)

3.1 POWER LINE CONDUCTED EMISSION LIMITS

The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table.

FREQUENCY (MHz)	Class B (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of "*" marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.2 TEST PROCEDURE

- a. The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN is at least 80 cm from the nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.3 TEST SETUP

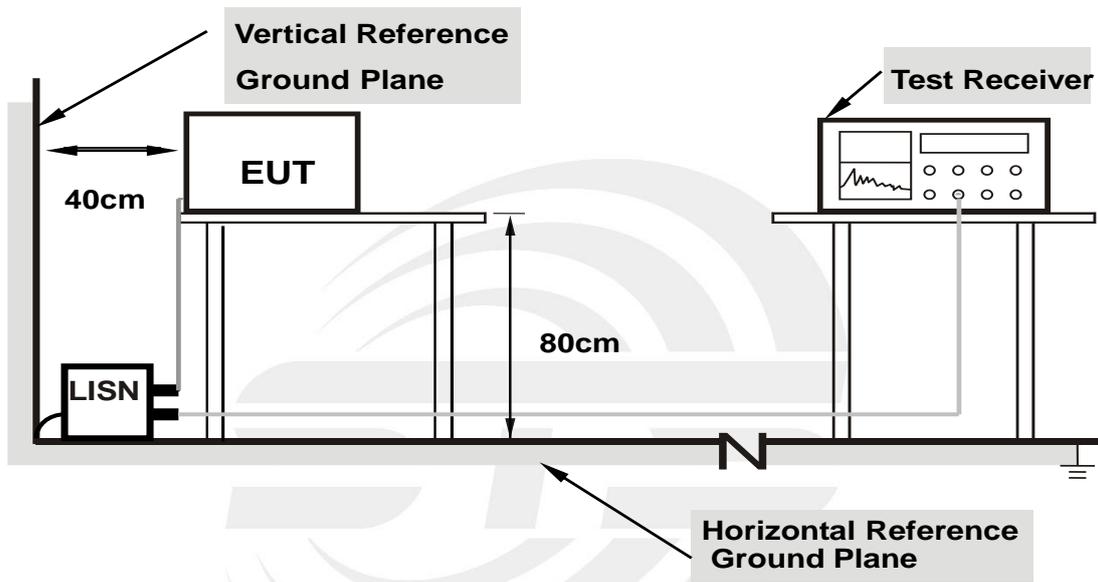

- Note: 1. Support units were connected to second LISN.**
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.

3.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


3.5 TEST RESULTS

Temperature:	23.5 °C	Relative Humidity:	59%
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode:	Mode 1		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.5620	27.53	20.38	47.91	56.00	-8.09	QP
2	0.5620	11.05	20.38	31.43	46.00	-14.57	AVG
3	1.2340	25.53	20.16	45.69	56.00	-10.31	QP
4	1.2340	17.45	20.16	37.61	46.00	-8.39	AVG
5	2.4660	28.38	20.11	48.49	56.00	-7.51	QP
6	2.4660	18.49	20.11	38.60	46.00	-7.40	AVG
7	5.4740	30.46	19.98	50.44	60.00	-9.56	QP
8	5.4740	21.15	19.98	41.13	50.00	-8.87	AVG
9	19.8740	34.97	19.95	54.92	60.00	-5.08	QP
10	19.8740	20.64	19.95	40.59	50.00	-9.41	AVG
11	29.1900	34.11	19.60	53.71	60.00	-6.29	QP
12	29.1900	9.81	19.60	29.41	50.00	-20.59	AVG

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) – Limit
3. Factor=LISN factor+Cable loss+Limiter (10dB)

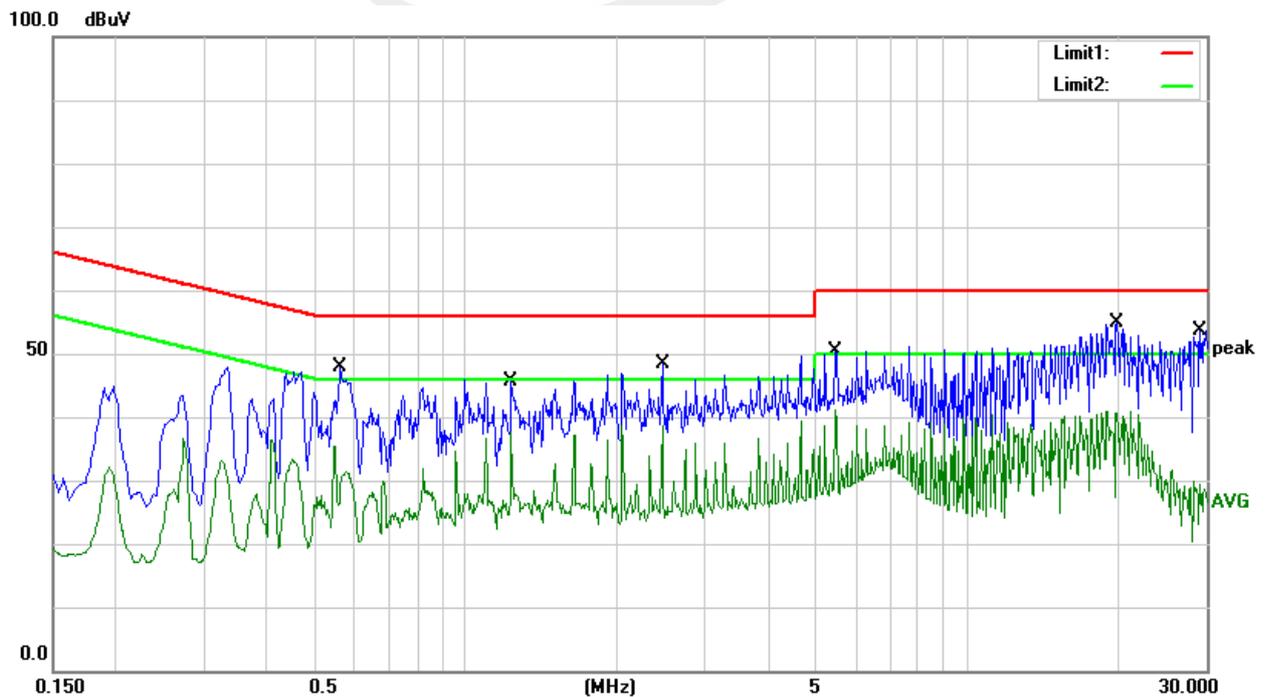




Temperature:	23.5 °C	Relative Humidity:	59%
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode:	Mode 1		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.5620	26.71	20.38	47.09	56.00	-8.91	QP
2	0.5620	13.98	20.38	34.36	46.00	-11.64	AVG
3	1.2340	22.52	20.16	42.68	56.00	-13.32	QP
4	1.2340	15.71	20.16	35.87	46.00	-10.13	AVG
5	2.8780	23.29	20.09	43.38	56.00	-12.62	QP
6	2.8780	14.23	20.09	34.32	46.00	-11.68	AVG
7	6.0220	27.13	19.93	47.06	60.00	-12.94	QP
8	6.0220	17.94	19.93	37.87	50.00	-12.13	AVG
9	19.8380	34.55	19.95	54.50	60.00	-5.50	QP
10	19.8380	20.06	19.95	40.01	50.00	-9.99	AVG
11	29.1180	34.97	19.60	54.57	60.00	-5.43	QP
12	29.1180	11.19	19.60	30.79	50.00	-19.21	AVG

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) - Limit
3. Factor = LISN factor + Cable loss + Limiter (10dB)

100.0 dBuV

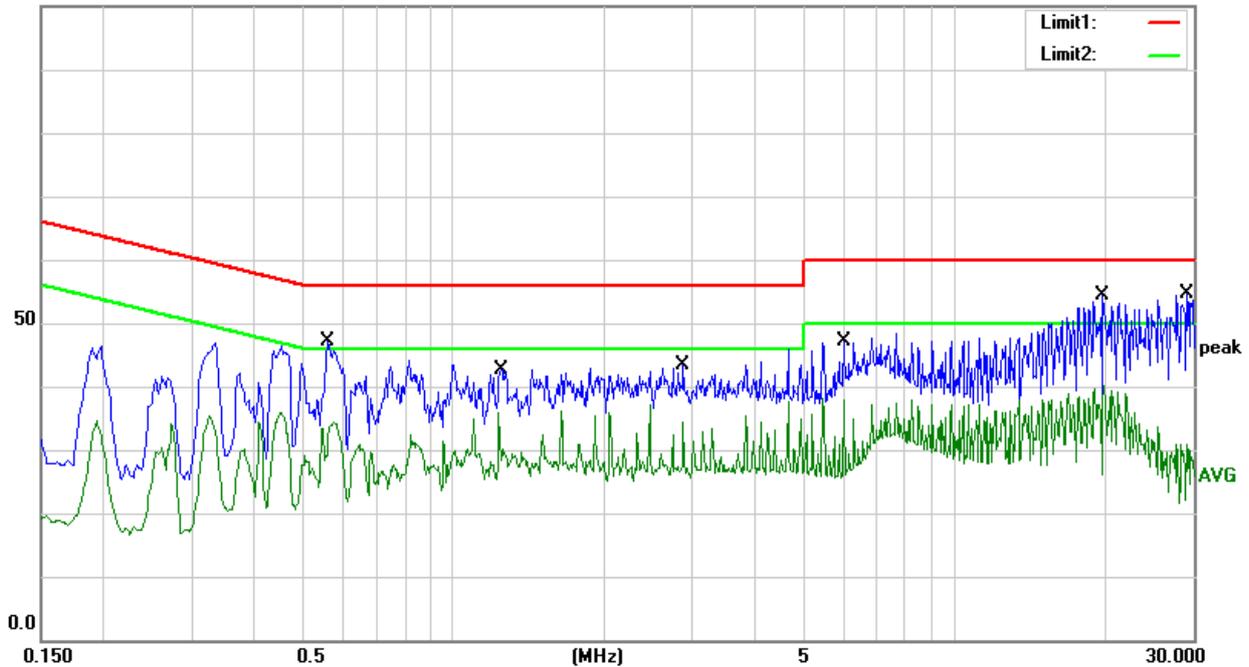

4. RADIATED& FIELD EMISSION TEST RESULT (SECTION 15.209)

4.1 LIMIT

Frequency [MHz]	Field Strength [uV/m]	Measurement Distance [Meters]
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

§ 15.209(d)The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

4.2 TEST PROCEDURE


- a. The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz.
- b. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- d. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

4.3 TEST SETUP

(A) Radiated Emission Test-Up Frequency Below 30MHz

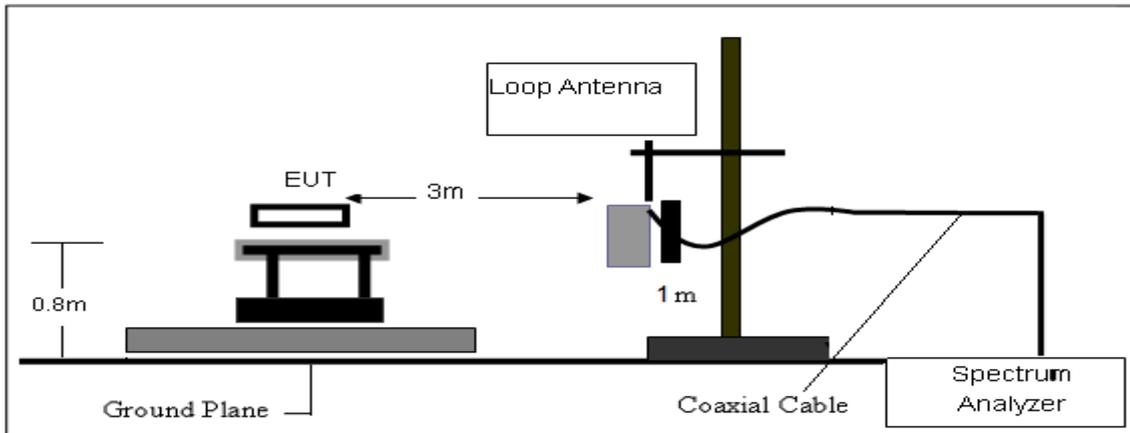


(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

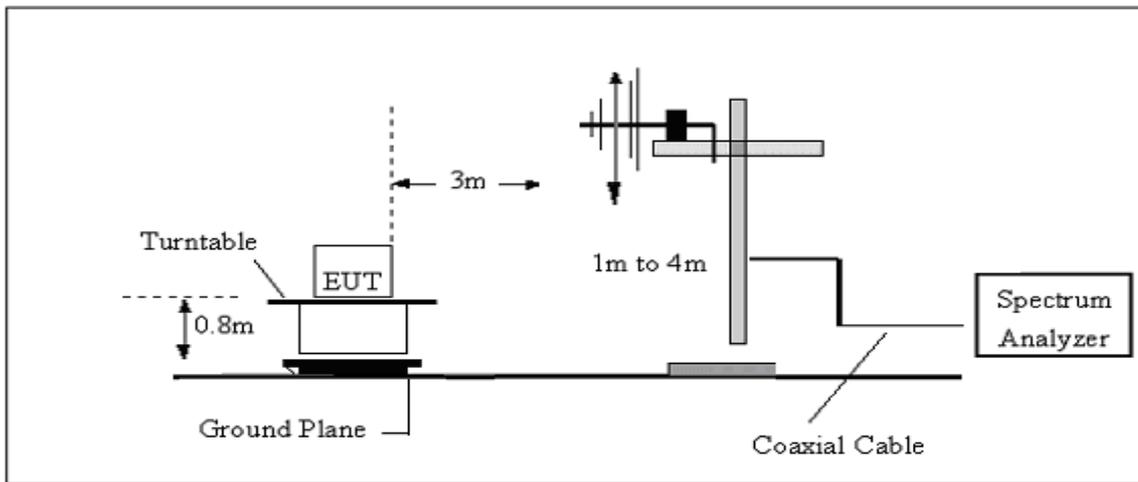

4.4 TEST RESULTS

Temperature :	23.1°C	Relative Humidity :	60%
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 1


4.4.1 Spurious Radiated Emission Below 30 MHz
9KHz-150KHz

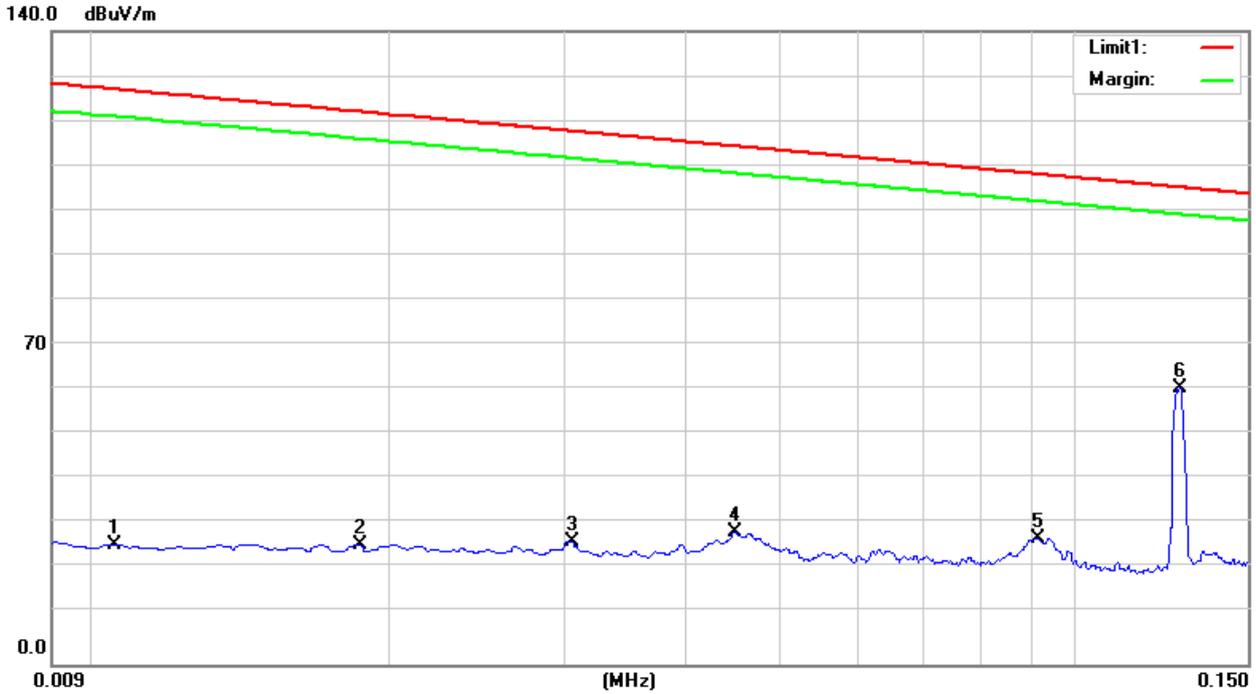

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0104	7.09	19.40	26.49	127.26	-100.77	AVG
2	0.0184	6.50	19.98	26.48	122.31	-95.83	AVG
3	0.0304	7.14	19.89	27.03	117.95	-90.92	AVG
4	0.0450	9.53	19.60	29.13	114.54	-85.41	AVG
5	0.0915	9.97	18.01	27.98	108.38	-80.40	QP
6	0.1280	43.65	17.54	61.19	105.46	-44.27	peak



150KHz-30MHz

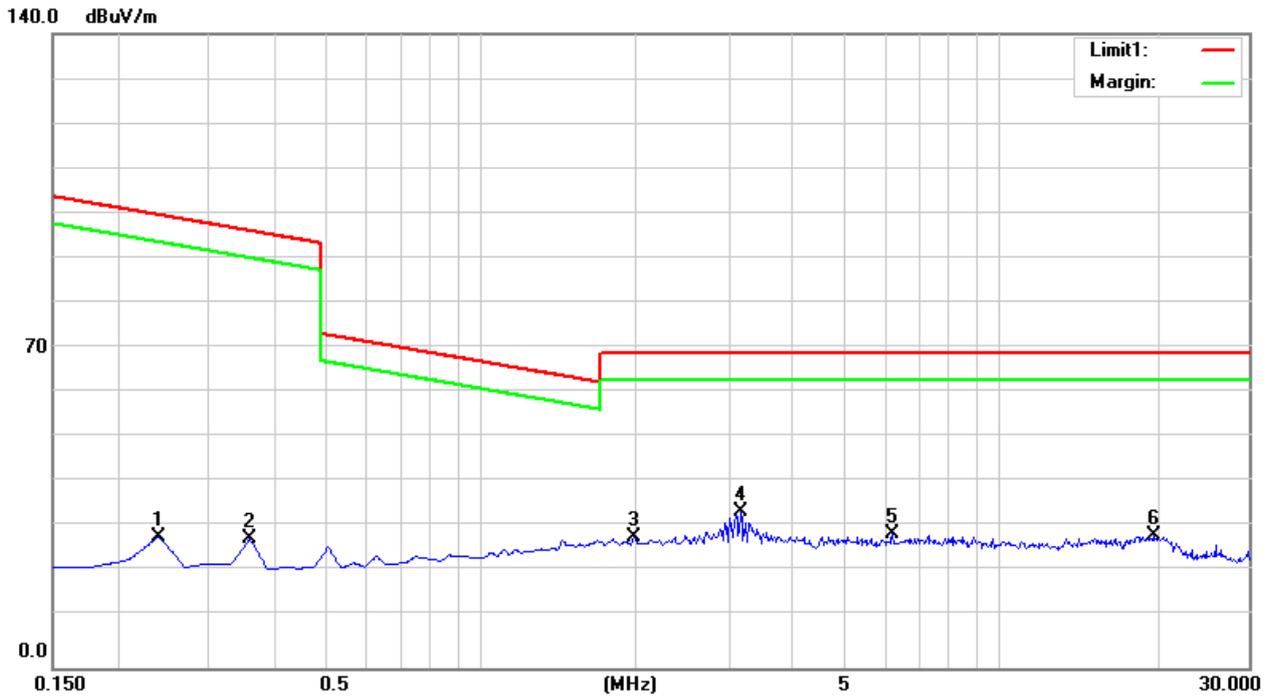

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.2396	9.21	19.83	29.04	100.01	-70.97	AVG
2	0.3590	8.45	20.14	28.59	96.50	-67.91	AVG
3	1.9708	8.50	20.39	28.89	69.50	-40.61	QP
4	3.1648	14.41	20.15	34.56	69.50	-34.94	QP
5	6.2096	9.31	20.43	29.74	69.50	-39.76	QP
6	19.6421	6.68	22.41	29.09	69.50	-40.41	QP

4.4.2 Spurious Radiated Emission below 1 GHz


Temperature :	23.1 °C	Relative Humidity :	60%
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 1

The following table shows the highest levels of radiated emissions on polarizations of vertical

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
104.6900	55.84	-19.63	36.21	43.50	-7.29	QP
201.6900	50.89	-21.00	29.89	43.50	-13.61	QP
561.5600	28.70	-5.51	23.19	46.00	-22.81	QP
783.6900	28.15	-2.12	26.03	46.00	-19.97	QP
869.0500	35.01	-0.52	34.49	46.00	-11.51	QP
977.6900	27.39	2.52	29.91	54.00	-24.09	QP

Remark:

1. Margin = Result (Result =Reading + Factor)–Limit
2. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain

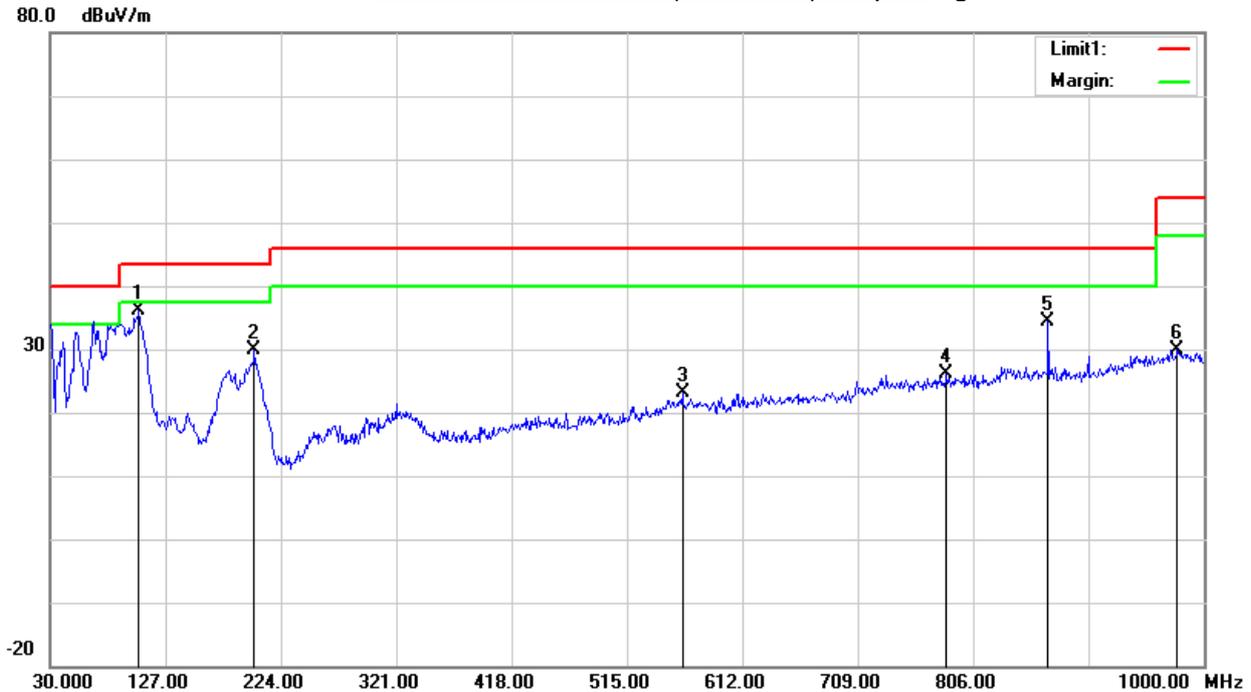




Temperature :	23.1 °C	Relative Humidity :	60%
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 1

The following table shows the highest levels of radiated emissions on polarizations of horizontal

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
105.6600	57.80	-19.53	38.27	43.50	-5.23	QP
203.6300	52.18	-20.86	31.32	43.50	-12.18	QP
567.3800	29.80	-5.57	24.23	46.00	-21.77	QP
716.7600	29.74	-3.44	26.30	46.00	-19.70	QP
857.4100	27.90	-0.50	27.40	46.00	-18.60	QP
999.0300	27.84	2.04	29.88	54.00	-24.12	QP

Remark:

1. Margin = Result (Result =Reading + Factor) –Limit
2. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain

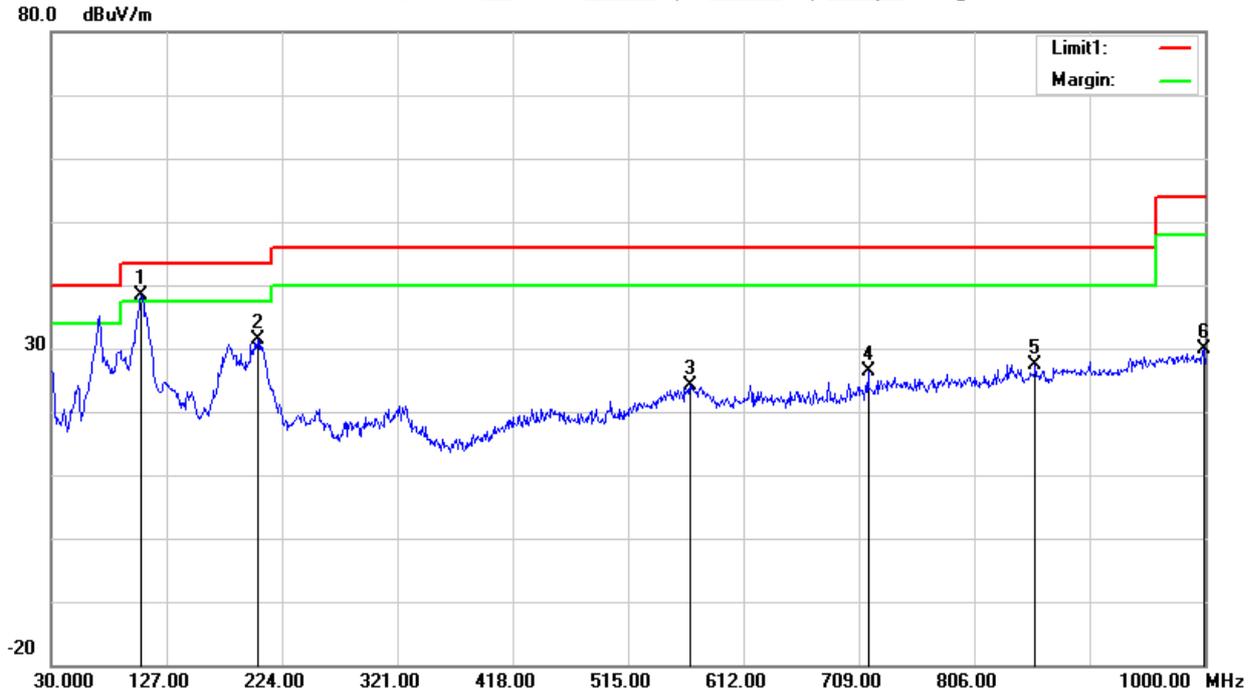



5. 20 DB BANDWIDTH TEST

5.1 Limit

FCC Part 2.1049, Only applicable to report.

5.2 TEST SETUP

Spectrum Parameter	Setting
Span Frequency	approximately 2 to 3 times the 20 dB bandwidth
RB	greater than 1 % or 5% of the 20 dB bandwidth,
VB	≥3RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

The test program and configuration, Refer to 4.2 and 4.3

5.3 TEST RESULTS

Operating Frequency (kHz)	20 dB Bandwidth(Hz)
128	565

CH00





APPENDIX-PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

※※※※END OF THE REPORT※※※※※

