



# FCC RF Test Report

**APPLICANT** : NOTHING TECHNOLOGY LIMITED  
**EQUIPMENT** : Smart Phone  
**BRAND NAME** : NOTHING  
**MODEL NAME** : A059P  
**FCC ID** : 2AZEQ-24111  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : (DTS) Digital Transmission System  
**TEST DATE(S)** : Nov. 27, 2024 ~ Nov. 30, 2024

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

**Sportun International Inc. (ShenZhen)**

**1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055  
People's Republic of China**



## TABLE OF CONTENTS

<b>REVISION HISTORY.....</b>	<b>3</b>
<b>SUMMARY OF TEST RESULT .....</b>	<b>4</b>
<b>1 GENERAL DESCRIPTION.....</b>	<b>5</b>
1.1 Applicant .....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT .....	5
1.6 Testing Location .....	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	6
<b>2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....</b>	<b>7</b>
2.1 Carrier Frequency and Channel .....	7
2.2 Test Mode.....	7
2.3 Connection Diagram of Test System.....	8
2.4 Support Unit used in test configuration and system .....	9
2.5 EUT Operation Test Setup .....	9
<b>3 TEST RESULT.....</b>	<b>10</b>
3.1 Radiated Band Edges and Spurious Emission Measurement .....	10
3.2 AC Conducted Emission Measurement.....	14
3.3 Antenna Requirements .....	16
<b>4 LIST OF MEASURING EQUIPMENT.....</b>	<b>17</b>
<b>5 MEASUREMENT UNCERTAINTY .....</b>	<b>18</b>
<b>APPENDIX A. AC CONDUCTED EMISSION TEST RESULT</b>	
<b>APPENDIX B. RADIATED SPURIOUS EMISSION</b>	
<b>APPENDIX C. DUTY CYCLE PLOTS</b>	
<b>APPENDIX D. SETUP PHOTOGRAPHS</b>	



# REVISION HISTORY



## SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.33 dB at 2389.95 MHz
3.2	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 9.29 dB at 0.25 MHz
3.3	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

**Remark:** This is a variant report for A059P, the change note could be referred to the Product Equality Declaration which is exhibit separately. According to the change, only the related test cases were verified from original report FR490417C.

Conformity Assessment Condition:
1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account. 2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"
Disclaimer:
The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



## 1 General Description

### 1.1 Applicant

**NOTHING TECHNOLOGY LIMITED**

Bedford House, 21A John Street, London, United Kingdom WC1N 2BF

### 1.2 Manufacturer

**NOTHING TECHNOLOGY LIMITED**

Bedford House, 21A John Street, London, United Kingdom WC1N 2BF

### 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Smart Phone
Brand Name	NOTHING
Model Name	A059P
FCC ID	2AIZEQ-24111
IMEI Code	Conduction: 353458700043030/353458700043022 Radiation: 353458700016747/353458700016754
HW Version	24111 Pro
SW Version	Nothing OS 3.1
EUT Stage	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

### 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Antenna Type / Gain	<Ant. 6> Metal frame Antenna with gain -0.58 dBi <Ant. 7> Metal frame Antenna with gain -1.48 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) 802.11ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)

### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.



## 1.6 Testing Location

Sportun International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

<b>Test Firm</b>	Sportun International Inc. (ShenZhen)		
<b>Test Site Location</b>	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
<b>Test Site No.</b>	<b>Sportun Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO02-SZ ; 03CH01-SZ	CN1256	421272

## 1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24
2.	CO02-SZ	AUDIX	E3	6.120613b

## 1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ANSI C63.10-2013

### Remark:

- All test items were verified and recorded according to the standards and without any deviation during the test.
- This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-

### 2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.


#### MIMO Antenna

Modulation	Data Rate
802.11g	6 Mbps


Test Cases	
AC Conducted Emission	Mode 1 :GSM850 Idle + WLAN Link(2.4G) + NFC TX + Adapter + USB Cable + Battery
Remark: For Radiated Test Cases, the tests were performance with Adapter and USB Cable.	

## 2.3 Connection Diagram of Test System

AC Conducted Emission:

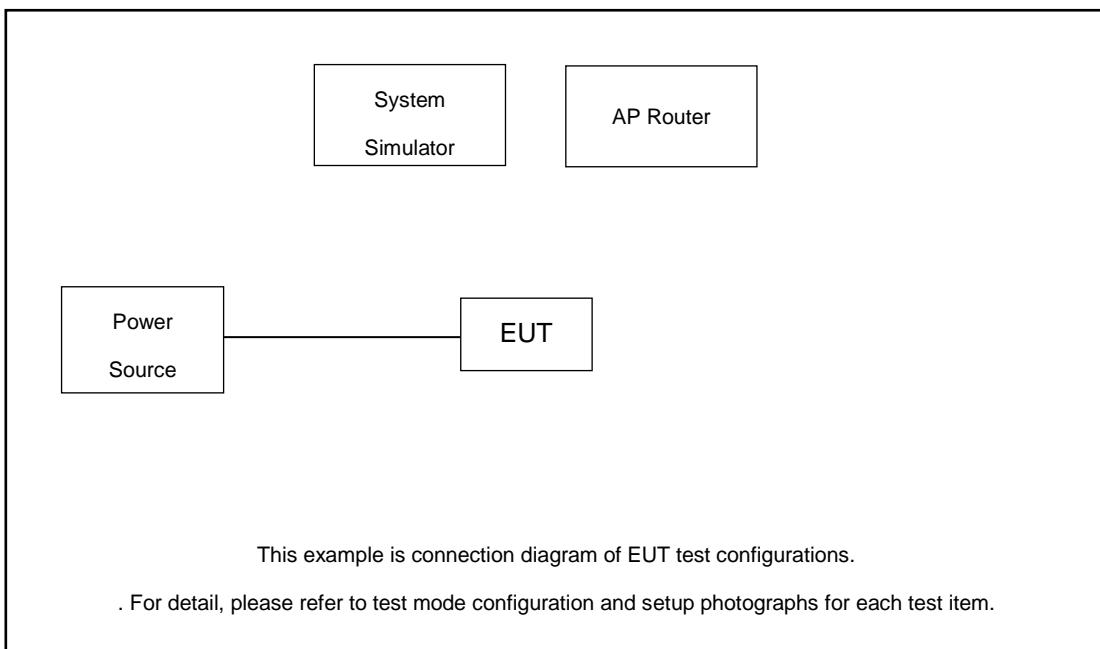

Radiated Emission:

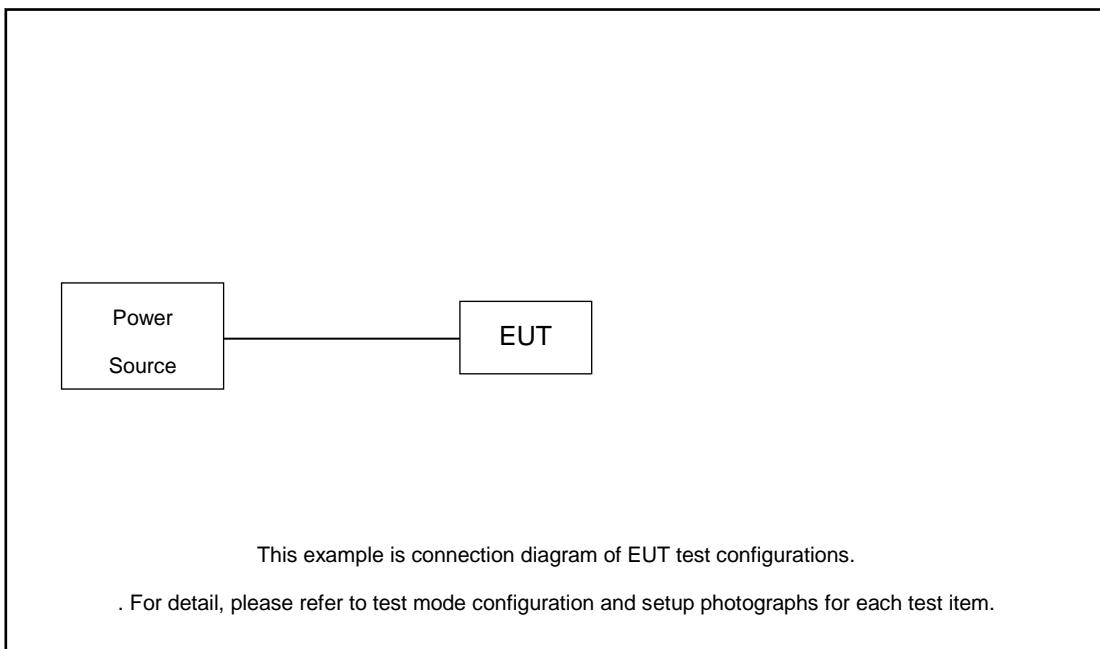



## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station(LTE)	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m

## 2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.



### 3 Test Result

#### 3.1 Radiated Band Edges and Spurious Emission Measurement

##### 3.1.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



### 3.1.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.

For average measurement:


  - VBW = 10 Hz, when duty cycle is no less than 98 percent.
  - VBW  $\geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

### 3.1.4 Test Setup


For radiated emissions below 30MHz

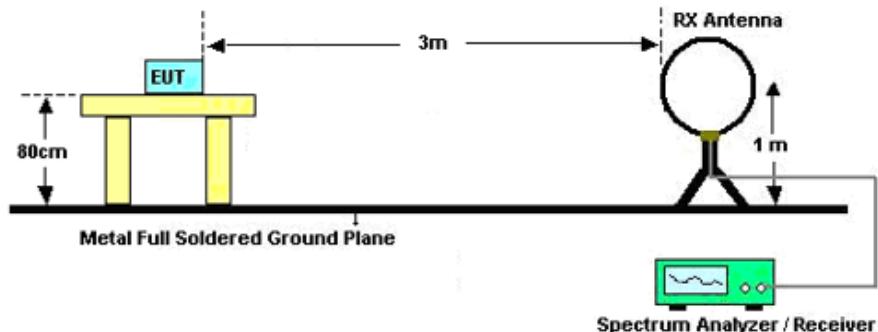

For radiated emissions from 30MHz to 1GHz

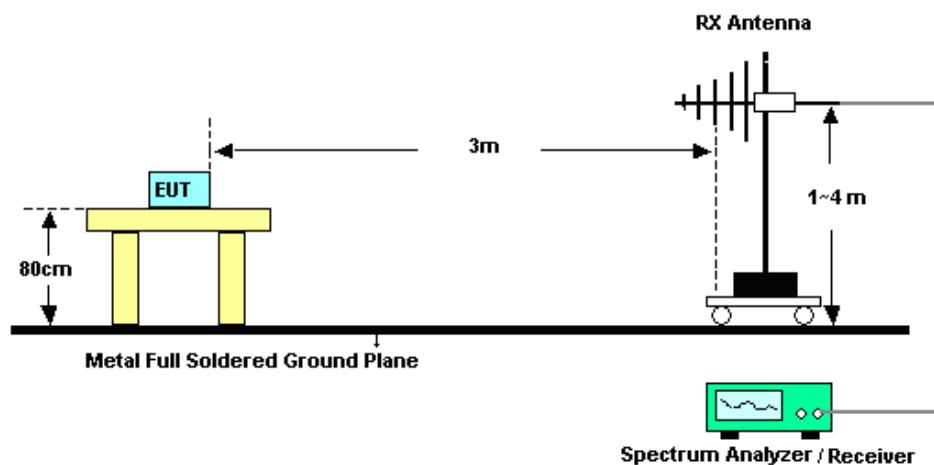

For radiated emissions above 1GHz

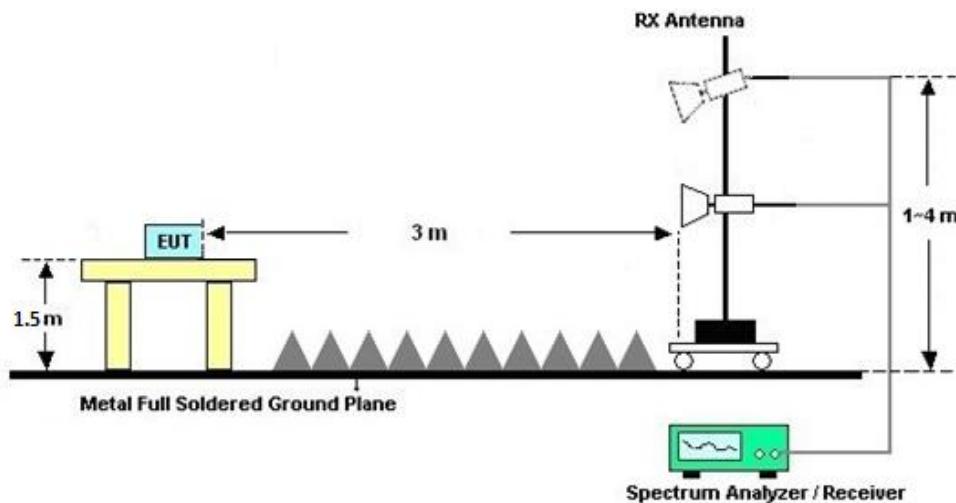



### 3.1.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### 3.1.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

### 3.1.7 Duty Cycle

Please refer to Appendix C.

### 3.1.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix B.



## 3.2 AC Conducted Emission Measurement

### 3.2.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

### 3.2.4 Test Setup

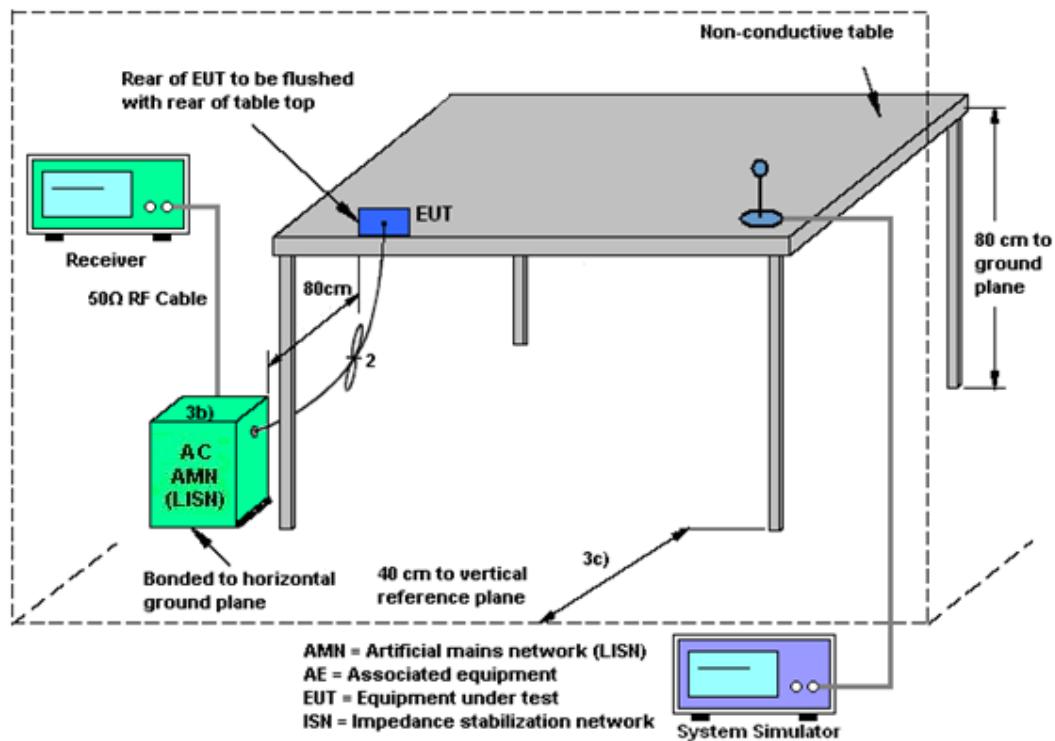

### 3.2.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



### 3.3 Antenna Requirements

#### 3.3.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

#### 3.3.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

#### 3.3.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain =  $G_{ANT}$  + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain =  $10 \log(N_{ANT}/N_{SS}=1)$  dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ .

Directional gain may be calculated by using the formulas applicable to equal gain antennas with  $G_{ANT}$  set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain  $G_{ANT}$  is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain “DG” is calculated as following table.

<CDD Modes>						
			DG for Power	DG for PSD	Power Limit Reduction	PSD Limit Reduction
	Ant. 6 (dBi)	Ant. 7 (dBi)	(dBi)	(dBi)	(dB)	(dB)
<b>2.4 GHz</b>	-0.58	-1.48	-0.58	1.99	0.00	0.00

$Power\ Limit\ Reduction = DG(Power) - 6dBi, ( min = 0 )$

$PSD\ Limit\ Reduction = DG(PSD) - 6dBi, ( min = 0 )$



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver&SA	Agilent	N9038A	MY522601 85	20Hz~26.5GHz	Dec. 27, 2023	Nov. 27, 2024	Dec. 26, 2024	Radiation (03CH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY551502 13	10Hz~44GHz	Jul. 03, 2024	Nov. 27, 2024	Jul. 02, 2025	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 29, 2023	Nov. 27, 2024	Dec. 28, 2024	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz-2GHz	Oct. 24, 2023	Nov. 27, 2024	Oct. 23, 2025	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 04, 2024	Nov. 27, 2024	Jul. 03, 2025	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Apr. 09,2024	Nov. 27, 2024	Apr. 08,2025	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 09, 2024	Nov. 27, 2024	Apr. 08,2025	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P-R	1943528	1GHz~18GHz	Oct. 14,2024	Nov. 27, 2024	Oct. 13,2025	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY532701 05	0.5GHz~26.5Ghz	Oct. 14,2024	Nov. 27, 2024	Oct. 13,2025	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 03, 2024	Nov. 27, 2024	Jul. 02, 2025	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001 985	N/A	Oct. 14,2024	Nov. 27, 2024	Oct. 13,2025	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Nov. 27, 2024	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Nov. 27, 2024	NCR	Radiation (03CH01-SZ)
EMI Receiver	R&S	ESR7	102297	9kHz~7GHz;	Jul. 03, 2024	Nov. 30, 2024	Jul. 02, 2025	Conduction (CO02-SZ)
AC LISN	R&S	ENV216	101499	9kHz~30MHz	Jul. 03, 2024	Nov. 30, 2024	Jul. 02, 2025	Conduction (CO02-SZ)
AC Power Source	CHROMA	61601	616010002 470	100Vac~250Vac	Dec.25, 2022	Nov. 30, 2024	Dec. 24, 2024	Conduction (CO02-SZ)

NCR: No Calibration Required



## 5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2U <sub>c</sub> (y))	2.5 dB
--	--------

### Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2U <sub>c</sub> (y))	2.8 dB
--	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2U <sub>c</sub> (y))	4.2 dB
--	--------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2U <sub>c</sub> (y))	5.0 dB
--	--------


### Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2U <sub>c</sub> (y))	4.3 dB
--	--------

----- THE END -----



## Appendix A. AC Conducted Emission Test Results

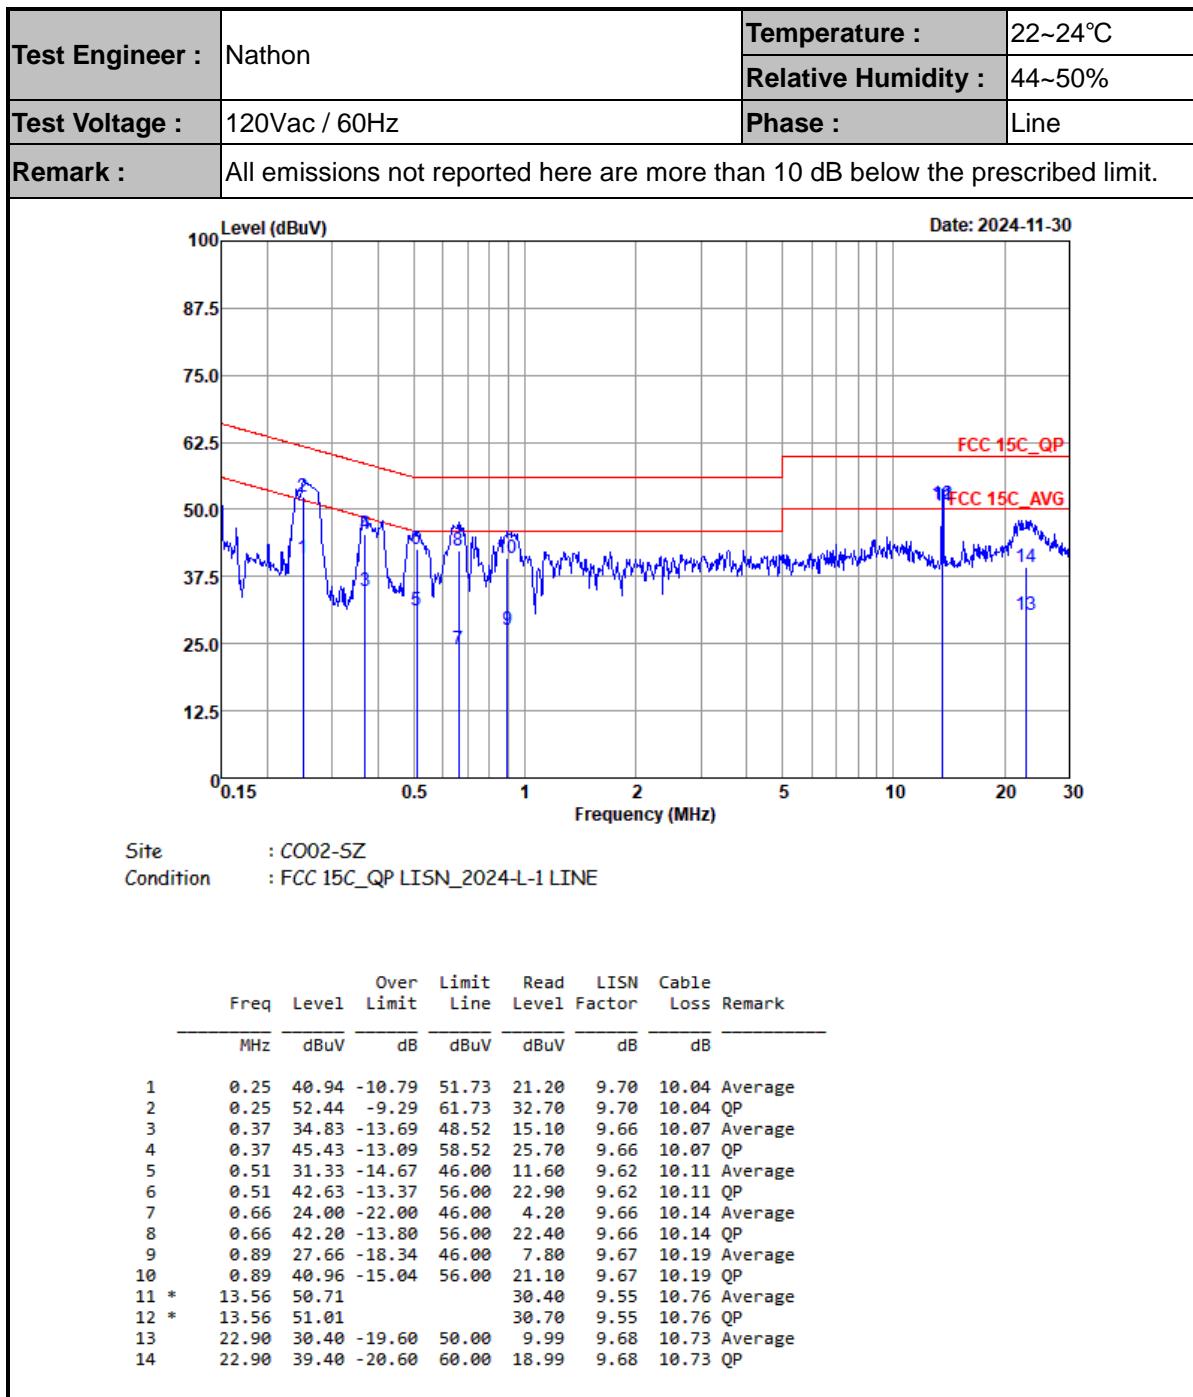


(1) with antenna

Remark: 13.560MHz is the NFC RF fundamental signal.



<b>Test Engineer :</b>	Nathon	<b>Temperature :</b>	22~24°C
		<b>Relative Humidity :</b>	44~50%
<b>Test Voltage :</b>	120Vac / 60Hz	<b>Phase :</b>	Neutral
<b>Remark :</b>	All emissions not reported here are more than 10 dB below the prescribed limit.		

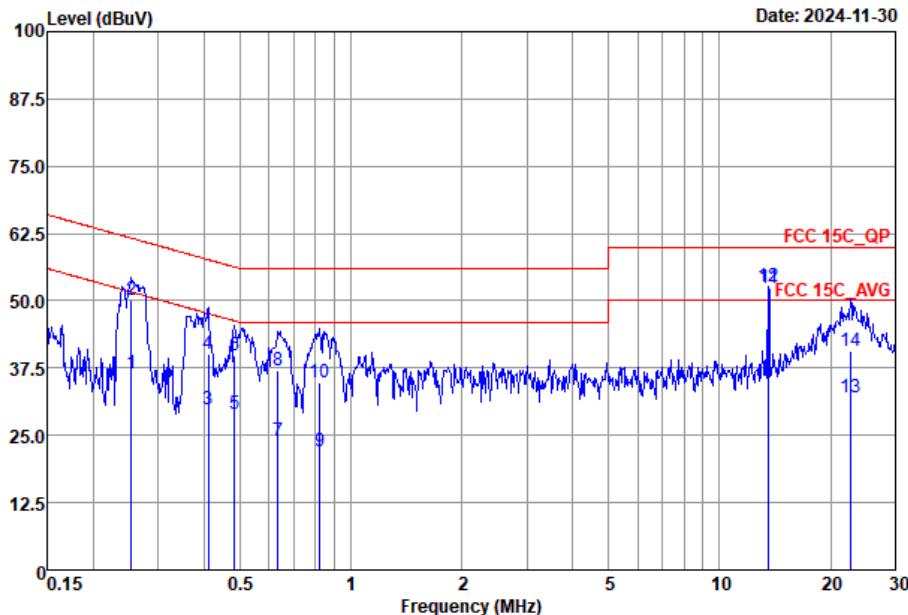


Site : CO02-SZ  
Condition : FCC 15C\_QP LISN\_2024-N-1 NEUTRAL

Freq	Level	Over Limit	Limit Line	Read		LISN Factor	Cable Loss	Remark
				dBuV	dB			
1	0.25	36.51	-15.13	51.64	16.79	9.68	10.04	Average
2	0.25	50.21	-11.43	61.64	30.49	9.68	10.04	QP
3	0.41	29.78	-17.86	47.64	10.00	9.70	10.08	Average
4	0.41	40.08	-17.56	57.64	20.30	9.70	10.08	QP
5	0.48	29.10	-17.17	46.27	9.30	9.69	10.11	Average
6	0.48	39.80	-16.47	56.27	20.00	9.69	10.11	QP
7	0.63	23.93	-22.07	46.00	4.10	9.69	10.14	Average
8	0.63	37.03	-18.97	56.00	17.20	9.69	10.14	QP
9	0.82	22.06	-23.94	46.00	2.21	9.68	10.17	Average
10	0.82	34.86	-21.14	56.00	15.01	9.68	10.17	QP
11 *	13.56	52.45		32.10	9.59	10.76	10.76	Average
12 *	13.56	52.65		32.30	9.59	10.76	10.76	QP
13	22.66	31.99	-18.01	50.00	11.59	9.67	10.73	Average
14	22.66	40.79	-19.21	60.00	20.39	9.67	10.73	QP


(1) with antenna

Remark: 13.560MHz is the NFC RF fundamental signal.

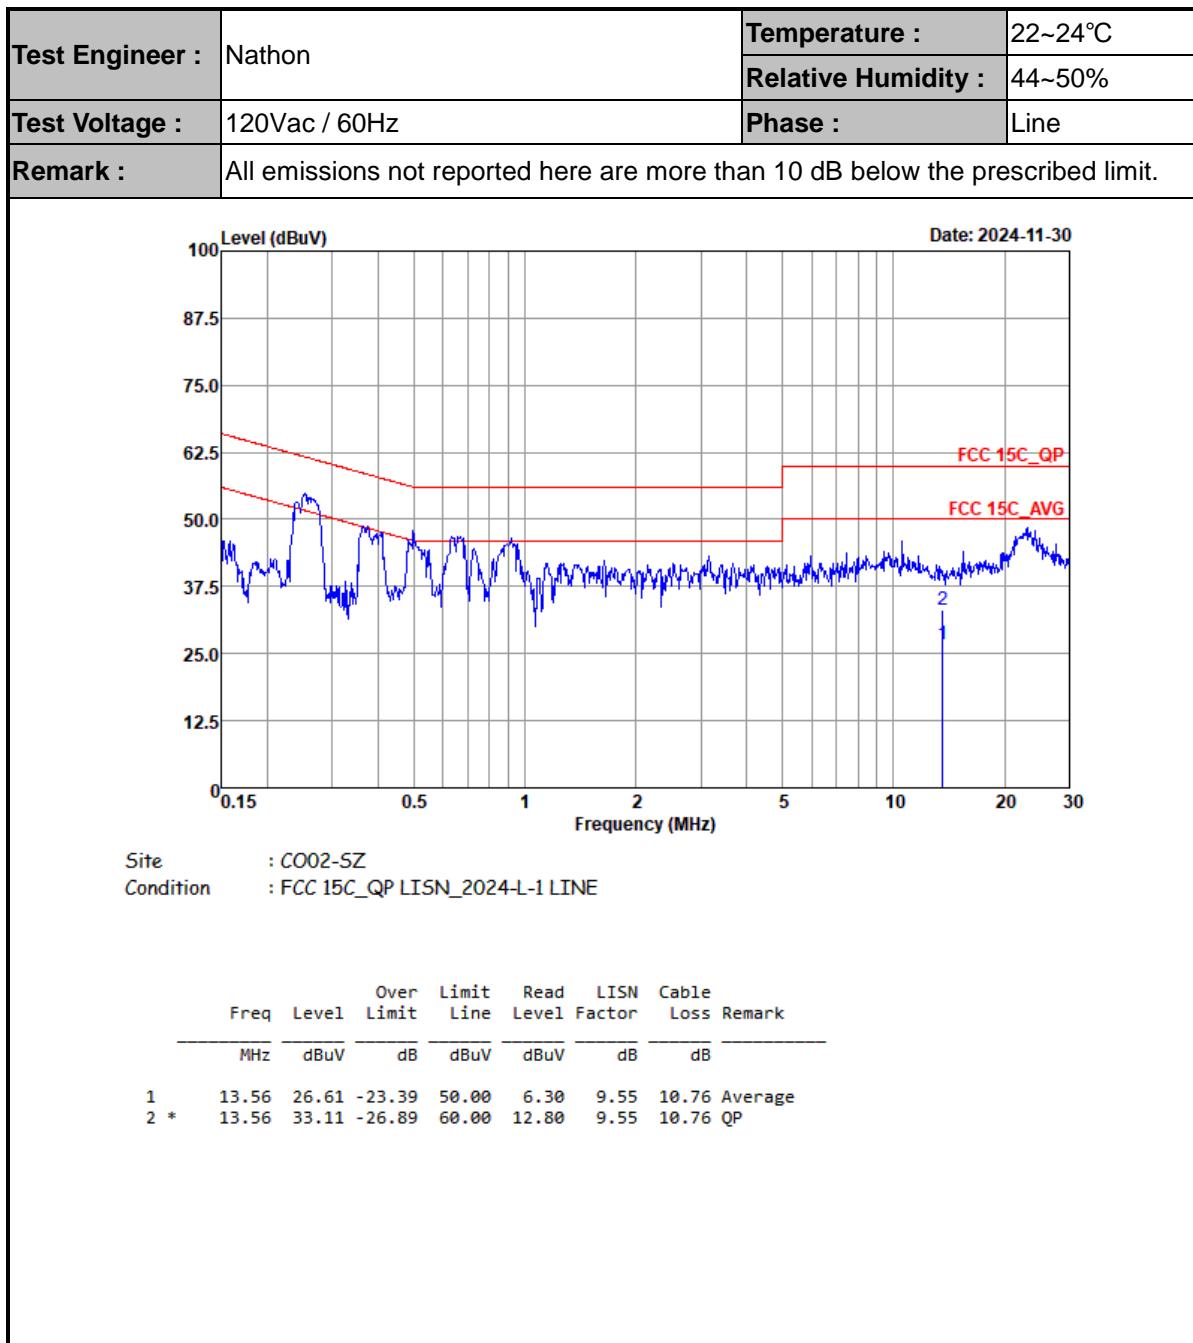

(2) With dummy load

Remark: Only the fundamental NFC signal needs to be retested per KDB 174176.

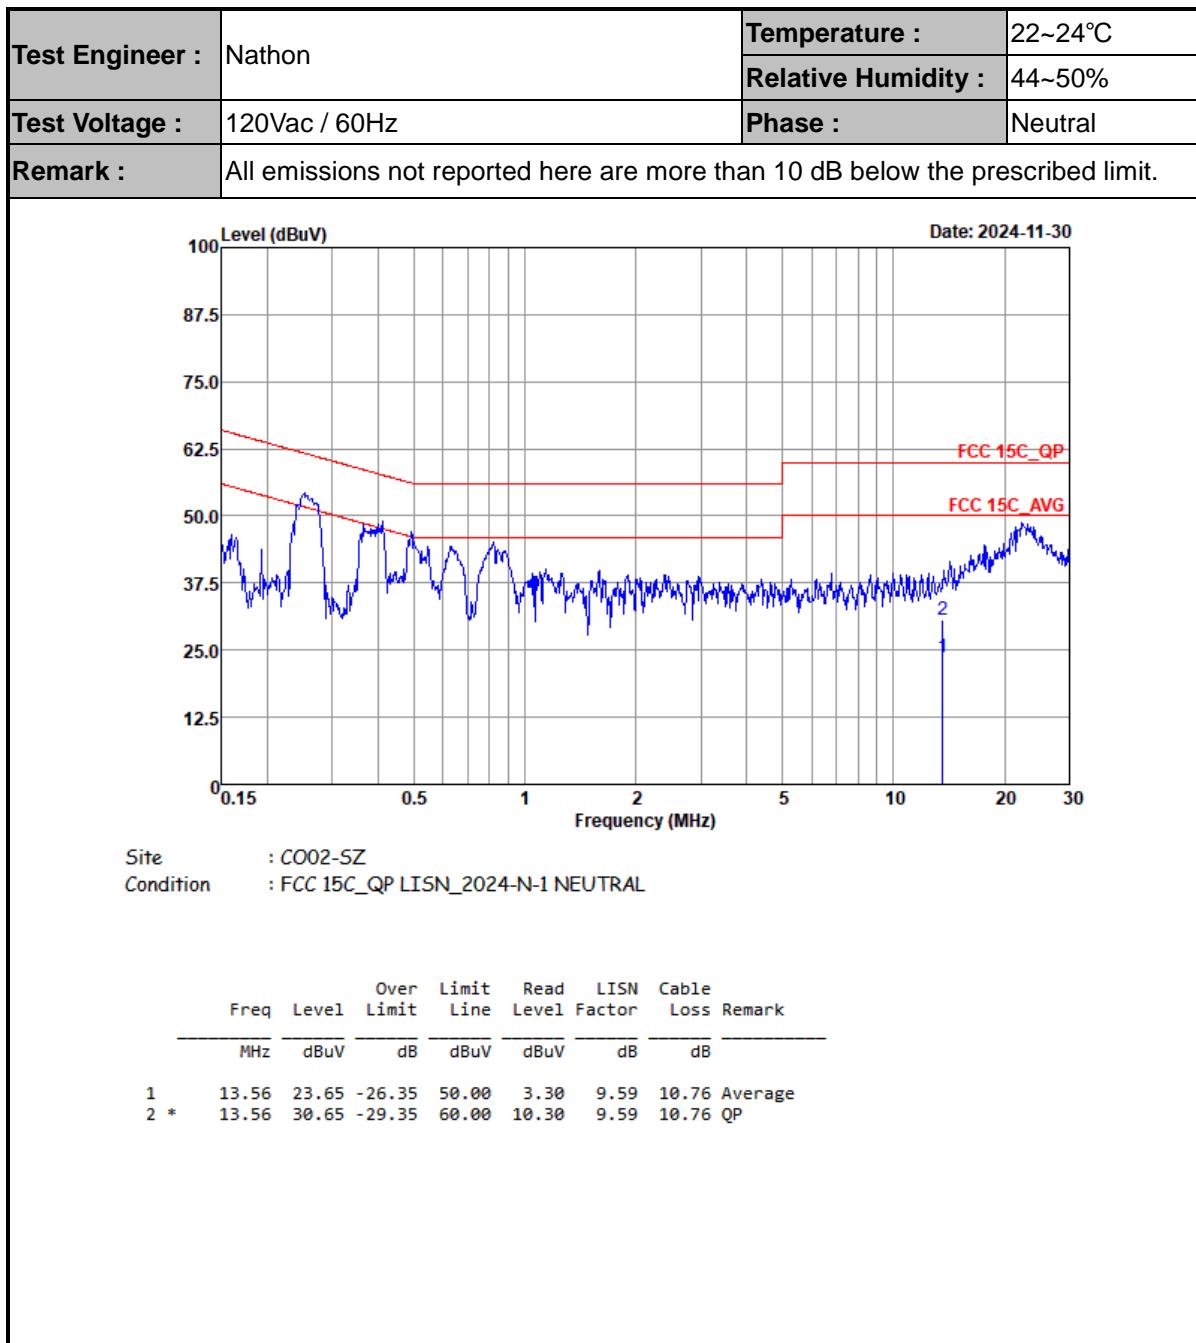

(2) With dummy load

Remark: Only the fundamental NFC signal needs to be retested per KDB 174176.

Note:

1. Level(dB $\mu$ V) = Read Level(dB $\mu$ V) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dB $\mu$ V) – Limit Line(dB $\mu$ V)



## Appendix B Radiated Spurious Emission Test Data

Test Engineer :	Jia Kuang	Relative Humidity :		48~49%
		Temperature :		24-25°C





### Radiated Spurious Emission Test Modes







Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	CDD 6+7	802.11g	01	2412	6Mbps	-	-
Mode 2	2400-2483.5	CDD 6+7	802.11g-LF	01	2412	6Mbps	-	-

### Summary of each worse mode



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11g	01	2389.95	50.67	54.00	-3.33	V	AVERAGE	Pass	Band Edge
	802.11g	01	4824.00	45.42	74.00	-28.58	V	Peak	Pass	Harmonic
2	802.11g-LF	01	36.79	33.15	40.00	-6.85	V	QP	Pass	LF

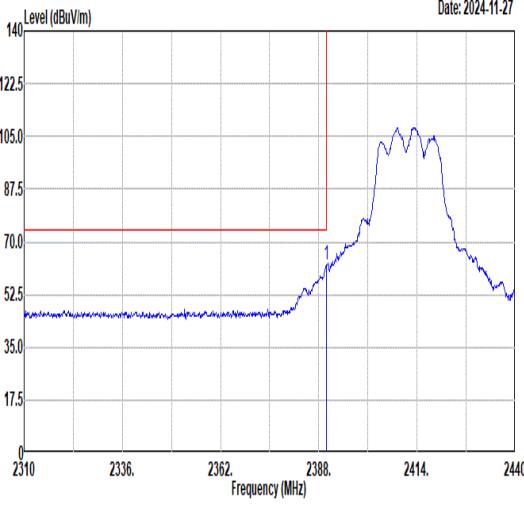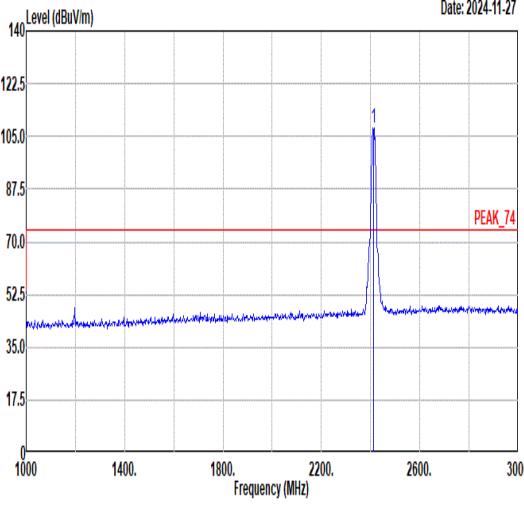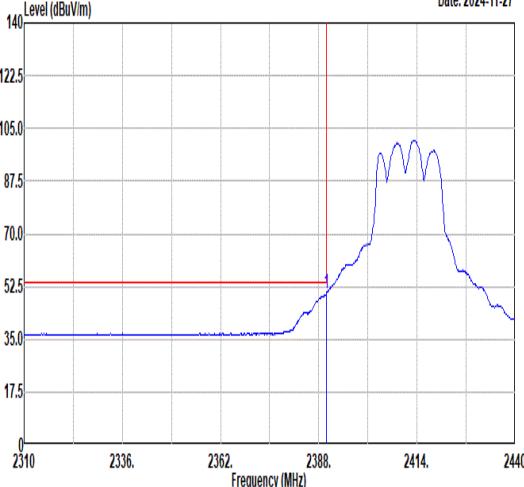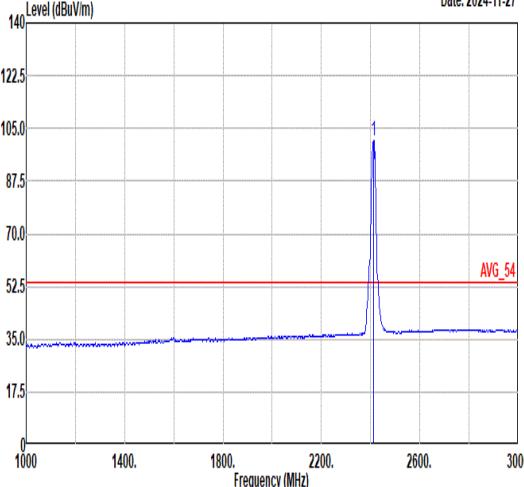





Mode	1																																																							
	Band Edge																																																							
	2400-2483.5_802.11g_CH01_2412MHz																																																							
ANT	CDD 6+7																																																							
Pol.	Horizontal	Fundamental																																																						
Peak	 <p>Level (dBuV/m)</p> <p>Date: 2024-11-27</p> <p>Frequency (MHz)</p> <table border="1"><thead><tr><th>Freq</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>2389.95</td><td>62.11</td><td>74.00</td><td>-11.89</td><td>56.39</td><td>30.60</td><td>7.76</td><td>32.64</td><td>400 31 PEAK</td></tr></tbody></table>	Freq	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	cm	deg		2389.95	62.11	74.00	-11.89	56.39	30.60	7.76	32.64	400 31 PEAK	 <p>Level (dBuV/m)</p> <p>Date: 2024-11-27</p> <p>Frequency (MHz)</p> <table border="1"><thead><tr><th>Freq</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>2412.00</td><td>108.02</td><td>-----</td><td>-----</td><td>102.21</td><td>30.63</td><td>7.81</td><td>32.63</td><td>400 31 PEAK</td></tr></tbody></table>	Freq	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	cm	deg		2412.00	108.02	-----	-----	102.21	30.63	7.81	32.63	400 31 PEAK
Freq	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	cm	deg																																																	
2389.95	62.11	74.00	-11.89	56.39	30.60	7.76	32.64	400 31 PEAK																																																
Freq	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	cm	deg																																																	
2412.00	108.02	-----	-----	102.21	30.63	7.81	32.63	400 31 PEAK																																																
 <p>Level (dBuV/m)</p> <p>Date: 2024-11-27</p> <p>Frequency (MHz)</p> <table border="1"><thead><tr><th>Freq</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>2389.95</td><td>50.34</td><td>54.00</td><td>-3.66</td><td>44.62</td><td>30.60</td><td>7.76</td><td>32.64</td><td>400 31 AVERAGE</td></tr></tbody></table>	Freq	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	cm	deg		2389.95	50.34	54.00	-3.66	44.62	30.60	7.76	32.64	400 31 AVERAGE	 <p>Level (dBuV/m)</p> <p>Date: 2024-11-27</p> <p>Frequency (MHz)</p> <table border="1"><thead><tr><th>Freq</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>2412.00</td><td>101.03</td><td>-----</td><td>-----</td><td>95.22</td><td>30.63</td><td>7.81</td><td>32.63</td><td>400 31 AVERAGE</td></tr></tbody></table>	Freq	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	cm	deg		2412.00	101.03	-----	-----	95.22	30.63	7.81	32.63	400 31 AVERAGE	
Freq	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	cm	deg																																																	
2389.95	50.34	54.00	-3.66	44.62	30.60	7.76	32.64	400 31 AVERAGE																																																
Freq	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	cm	deg																																																	
2412.00	101.03	-----	-----	95.22	30.63	7.81	32.63	400 31 AVERAGE																																																
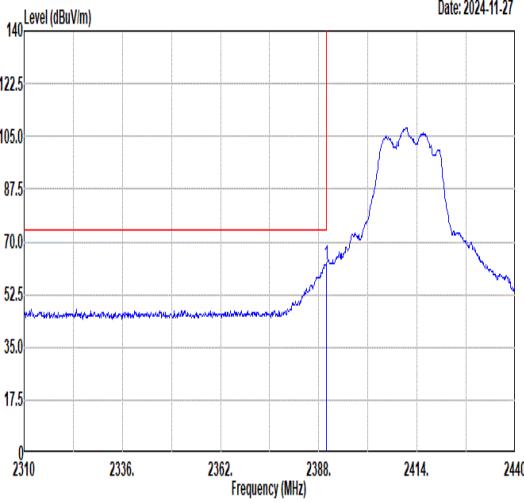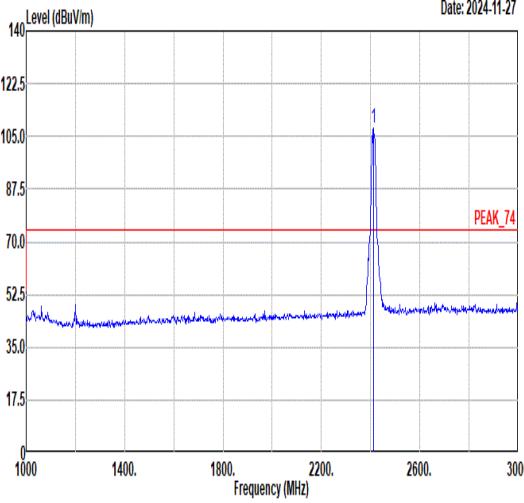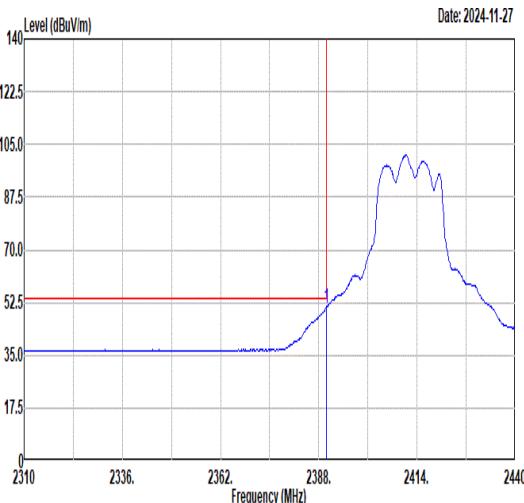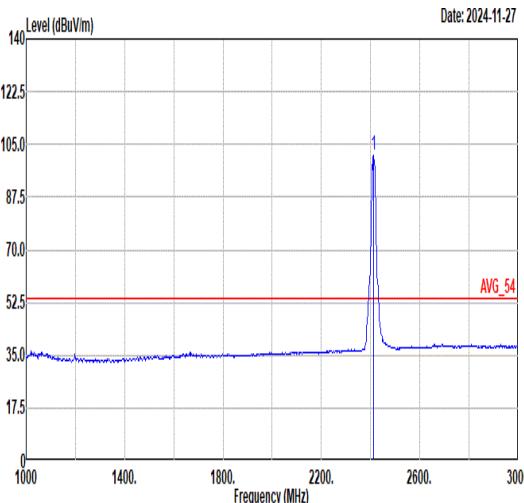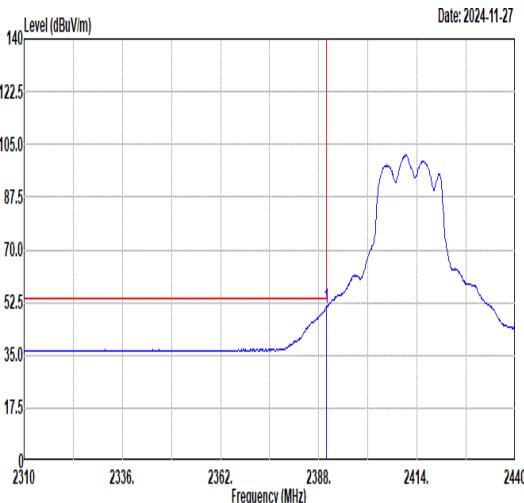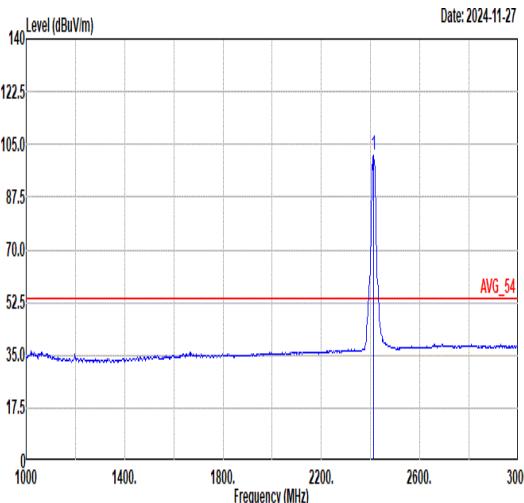
<b>Mode</b>	1																																																																																																													
	<b>Band Edge</b>																																																																																																													
	<b>2400-2483.5_802.11g_CH01_2412MHz</b>																																																																																																													
<b>ANT</b>	<b>CDD 6+7</b>																																																																																																													
<b>Pol.</b>	<b>Vertical</b>	<b>Fundamental</b>																																																																																																												
<b>Peak</b>	 <p>Date: 2024-11-27</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> </thead> <tbody> <tr> <td>MHz</td> <td>dBuV/m</td> <td>dBuV/m</td> <td></td> <td>dBuV</td> <td>dB/m</td> <td>dB</td> <td>cm</td> <td>deg</td> </tr> <tr> <td>1</td> <td>2389.95</td> <td>62.60</td> <td>74.00</td> <td>-11.40</td> <td>56.88</td> <td>30.60</td> <td>7.76</td> <td>32.64</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>238</td> <td>254</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>PEAK</td> </tr> </tbody> </table>	Freq	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	cm	deg	1	2389.95	62.60	74.00	-11.40	56.88	30.60	7.76	32.64								238	254									PEAK	 <p>Date: 2024-11-27</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> </thead> <tbody> <tr> <td>MHz</td> <td>dBuV/m</td> <td>dBuV/m</td> <td></td> <td>dBuV</td> <td>dB/m</td> <td>dB</td> <td>cm</td> <td>deg</td> </tr> <tr> <td>1</td> <td>2412.00</td> <td>107.78</td> <td>-----</td> <td>101.99</td> <td>30.62</td> <td>7.81</td> <td>32.64</td> <td>238</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>254</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>PEAK</td> </tr> </tbody> </table>	Freq	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	cm	deg	1	2412.00	107.78	-----	101.99	30.62	7.81	32.64	238									254									PEAK
Freq	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	cm	deg																																																																																																						
1	2389.95	62.60	74.00	-11.40	56.88	30.60	7.76	32.64																																																																																																						
							238	254																																																																																																						
								PEAK																																																																																																						
Freq	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	cm	deg																																																																																																						
1	2412.00	107.78	-----	101.99	30.62	7.81	32.64	238																																																																																																						
								254																																																																																																						
								PEAK																																																																																																						
 <p>Date: 2024-11-27</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> </thead> <tbody> <tr> <td>MHz</td> <td>dBuV/m</td> <td>dBuV/m</td> <td></td> <td>dBuV</td> <td>dB/m</td> <td>dB</td> <td>cm</td> <td>deg</td> </tr> <tr> <td>1</td> <td>2389.95</td> <td>50.67</td> <td>54.00</td> <td>-3.33</td> <td>44.95</td> <td>30.60</td> <td>7.76</td> <td>32.64</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>238</td> <td>254</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>AVERAGE</td> </tr> </tbody> </table>	Freq	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	cm	deg	1	2389.95	50.67	54.00	-3.33	44.95	30.60	7.76	32.64								238	254									AVERAGE	 <p>Date: 2024-11-27</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> </thead> <tbody> <tr> <td>MHz</td> <td>dBuV/m</td> <td>dBuV/m</td> <td></td> <td>dBuV</td> <td>dB/m</td> <td>dB</td> <td>cm</td> <td>deg</td> </tr> <tr> <td>1</td> <td>2412.00</td> <td>101.22</td> <td>-----</td> <td>95.43</td> <td>30.62</td> <td>7.81</td> <td>32.64</td> <td>238</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>254</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>AVERAGE</td> </tr> </tbody> </table>	Freq	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	cm	deg	1	2412.00	101.22	-----	95.43	30.62	7.81	32.64	238									254									AVERAGE	
Freq	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	cm	deg																																																																																																						
1	2389.95	50.67	54.00	-3.33	44.95	30.60	7.76	32.64																																																																																																						
							238	254																																																																																																						
								AVERAGE																																																																																																						
Freq	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	cm	deg																																																																																																						
1	2412.00	101.22	-----	95.43	30.62	7.81	32.64	238																																																																																																						
								254																																																																																																						
								AVERAGE																																																																																																						
<b>Avg</b>	 <p>Date: 2024-11-27</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> </thead> <tbody> <tr> <td>MHz</td> <td>dBuV/m</td> <td>dBuV/m</td> <td></td> <td>dBuV</td> <td>dB/m</td> <td>dB</td> <td>cm</td> <td>deg</td> </tr> <tr> <td>1</td> <td>2389.95</td> <td>50.67</td> <td>54.00</td> <td>-3.33</td> <td>44.95</td> <td>30.60</td> <td>7.76</td> <td>32.64</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>238</td> <td>254</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>AVERAGE</td> </tr> </tbody> </table>		Freq	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	cm	deg	1	2389.95	50.67	54.00	-3.33	44.95	30.60	7.76	32.64								238	254									AVERAGE																																																						
Freq	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	cm	deg																																																																																																						
1	2389.95	50.67	54.00	-3.33	44.95	30.60	7.76	32.64																																																																																																						
							238	254																																																																																																						
								AVERAGE																																																																																																						
 <p>Date: 2024-11-27</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> </thead> <tbody> <tr> <td>MHz</td> <td>dBuV/m</td> <td>dBuV/m</td> <td></td> <td>dBuV</td> <td>dB/m</td> <td>dB</td> <td>cm</td> <td>deg</td> </tr> <tr> <td>1</td> <td>2412.00</td> <td>101.22</td> <td>-----</td> <td>95.43</td> <td>30.62</td> <td>7.81</td> <td>32.64</td> <td>238</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>254</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>AVERAGE</td> </tr> </tbody> </table>		Freq	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	cm	deg	1	2412.00	101.22	-----	95.43	30.62	7.81	32.64	238									254									AVERAGE																																																							
Freq	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	cm	deg																																																																																																						
1	2412.00	101.22	-----	95.43	30.62	7.81	32.64	238																																																																																																						
								254																																																																																																						
								AVERAGE																																																																																																						

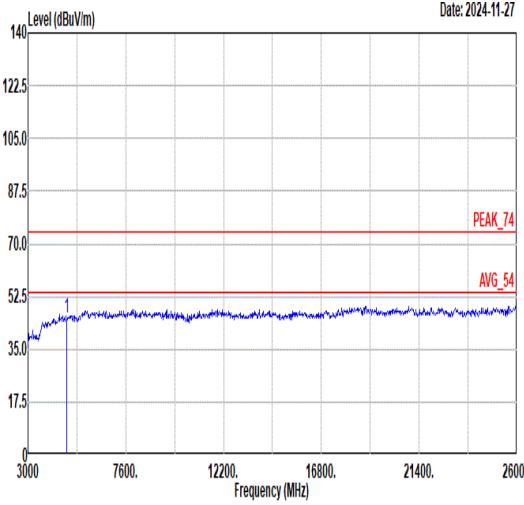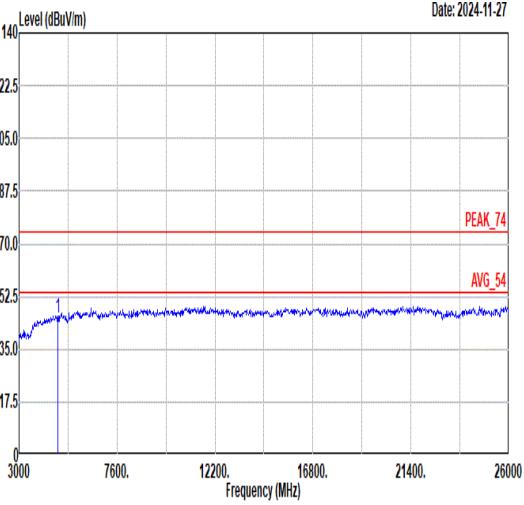

Mode	1																																																						
	Harmonic																																																						
	2400-2483.5_802.11g_CH01_2412MHz																																																						
ANT	CDD 6+7																																																						
Pol.	Horizontal																																																						
Peak																																																							
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>45.23</td><td>74.00</td><td>-28.77</td><td>51.44</td><td>35.30</td><td>11.08</td><td>52.59 --- --- Peak</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor					1	4824.00	45.23	74.00	-28.77	51.44	35.30	11.08	52.59 --- --- Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>45.42</td><td>74.00</td><td>-28.58</td><td>51.63</td><td>35.30</td><td>11.08</td><td>52.59 --- --- Peak</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor					1	4824.00	45.42	74.00	-28.58	51.63	35.30	11.08
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																															
Freq	Level	Line Margin	Level Factor	Loss Factor																																																			
1	4824.00	45.23	74.00	-28.77	51.44	35.30	11.08	52.59 --- --- Peak																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																															
Freq	Level	Line Margin	Level Factor	Loss Factor																																																			
1	4824.00	45.42	74.00	-28.58	51.63	35.30	11.08	52.59 --- --- Peak																																															

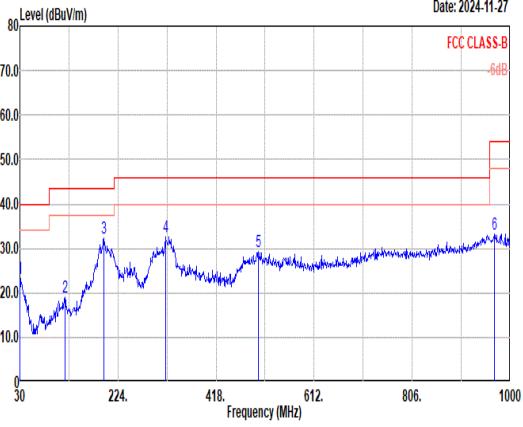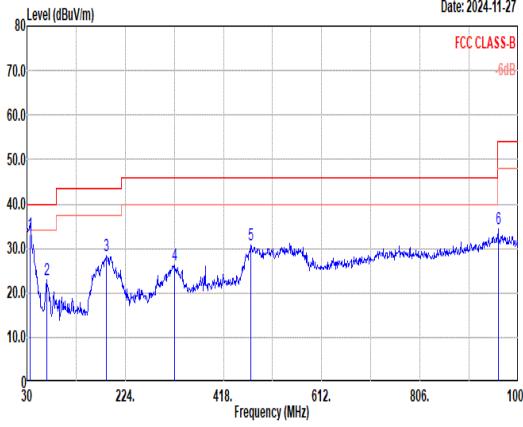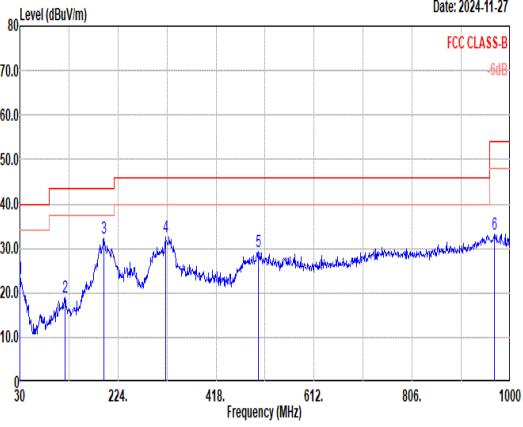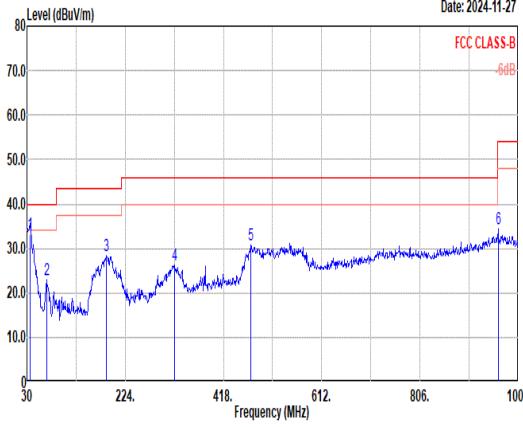

Mode	2																																																																																																																																																																																							
	LF																																																																																																																																																																																							
	802.11g-LF																																																																																																																																																																																							
ANT	CDD 6+7																																																																																																																																																																																							
Pol.	<b>Horizontal</b> 																																																																																																																																																																																							
QP/ Peak																																																																																																																																																																																								
	<table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th colspan="2">Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>30.00</td> <td>23.27</td> <td>40.00</td> <td>-16.73</td> <td>28.26</td> <td>25.20</td> <td>1.01</td> <td>31.20</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>119.24</td> <td>19.14</td> <td>43.50</td> <td>-24.36</td> <td>30.16</td> <td>18.16</td> <td>1.98</td> <td>31.16</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>196.84</td> <td>32.28</td> <td>43.50</td> <td>-11.22</td> <td>45.23</td> <td>15.41</td> <td>2.55</td> <td>30.91</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>318.09</td> <td>32.75</td> <td>46.00</td> <td>-13.25</td> <td>40.60</td> <td>19.80</td> <td>3.21</td> <td>30.86</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>5</td> <td>501.42</td> <td>29.39</td> <td>46.00</td> <td>-16.61</td> <td>32.34</td> <td>23.73</td> <td>4.03</td> <td>30.71</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>6</td> <td>967.99</td> <td>33.35</td> <td>54.00</td> <td>-20.65</td> <td>31.46</td> <td>27.28</td> <td>5.61</td> <td>31.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th colspan="2">Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>36.79</td> <td>33.15</td> <td>40.00</td> <td>-6.85</td> <td>42.17</td> <td>21.06</td> <td>1.12</td> <td>31.20</td> <td>100</td> <td>251</td> <td>QP</td> </tr> <tr> <td>2</td> <td>68.80</td> <td>22.92</td> <td>40.00</td> <td>-17.08</td> <td>40.23</td> <td>12.50</td> <td>1.52</td> <td>31.33</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>187.14</td> <td>28.33</td> <td>43.50</td> <td>-15.17</td> <td>41.56</td> <td>15.23</td> <td>2.49</td> <td>30.95</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>321.00</td> <td>26.39</td> <td>46.00</td> <td>-19.61</td> <td>34.15</td> <td>19.87</td> <td>3.23</td> <td>30.86</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>5</td> <td>471.35</td> <td>30.84</td> <td>46.00</td> <td>-15.16</td> <td>34.33</td> <td>23.30</td> <td>3.91</td> <td>30.70</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>6</td> <td>960.23</td> <td>34.35</td> <td>54.00</td> <td>-19.65</td> <td>32.55</td> <td>27.21</td> <td>5.59</td> <td>31.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Freq	Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	cm	deg	1	30.00	23.27	40.00	-16.73	28.26	25.20	1.01	31.20	---	---	Peak	2	119.24	19.14	43.50	-24.36	30.16	18.16	1.98	31.16	---	---	Peak	3	196.84	32.28	43.50	-11.22	45.23	15.41	2.55	30.91	---	---	Peak	4	318.09	32.75	46.00	-13.25	40.60	19.80	3.21	30.86	---	---	Peak	5	501.42	29.39	46.00	-16.61	32.34	23.73	4.03	30.71	---	---	Peak	6	967.99	33.35	54.00	-20.65	31.46	27.28	5.61	31.00	---	---	Peak	Freq	Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	cm	deg	1	36.79	33.15	40.00	-6.85	42.17	21.06	1.12	31.20	100	251	QP	2	68.80	22.92	40.00	-17.08	40.23	12.50	1.52	31.33	---	---	Peak	3	187.14	28.33	43.50	-15.17	41.56	15.23	2.49	30.95	---	---	Peak	4	321.00	26.39	46.00	-19.61	34.15	19.87	3.23	30.86	---	---	Peak	5	471.35	30.84	46.00	-15.16	34.33	23.30	3.91	30.70	---	---	Peak	6	960.23	34.35	54.00	-19.65	32.55	27.21	5.59	31.00	---	---	Peak
Freq	Limit			Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	cm	deg																																																																																																																																																																															
1	30.00	23.27	40.00	-16.73	28.26	25.20	1.01	31.20	---	---	Peak																																																																																																																																																																													
2	119.24	19.14	43.50	-24.36	30.16	18.16	1.98	31.16	---	---	Peak																																																																																																																																																																													
3	196.84	32.28	43.50	-11.22	45.23	15.41	2.55	30.91	---	---	Peak																																																																																																																																																																													
4	318.09	32.75	46.00	-13.25	40.60	19.80	3.21	30.86	---	---	Peak																																																																																																																																																																													
5	501.42	29.39	46.00	-16.61	32.34	23.73	4.03	30.71	---	---	Peak																																																																																																																																																																													
6	967.99	33.35	54.00	-20.65	31.46	27.28	5.61	31.00	---	---	Peak																																																																																																																																																																													
Freq	Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	cm		deg																																																																																																																																																																														
1	36.79	33.15	40.00	-6.85	42.17	21.06	1.12	31.20	100	251	QP																																																																																																																																																																													
2	68.80	22.92	40.00	-17.08	40.23	12.50	1.52	31.33	---	---	Peak																																																																																																																																																																													
3	187.14	28.33	43.50	-15.17	41.56	15.23	2.49	30.95	---	---	Peak																																																																																																																																																																													
4	321.00	26.39	46.00	-19.61	34.15	19.87	3.23	30.86	---	---	Peak																																																																																																																																																																													
5	471.35	30.84	46.00	-15.16	34.33	23.30	3.91	30.70	---	---	Peak																																																																																																																																																																													
6	960.23	34.35	54.00	-19.65	32.55	27.21	5.59	31.00	---	---	Peak																																																																																																																																																																													
Mode	2																																																																																																																																																																																							
	LF																																																																																																																																																																																							
	802.11g-LF																																																																																																																																																																																							
ANT	CDD 6+7																																																																																																																																																																																							
Pol.	<b>Horizontal</b> 																																																																																																																																																																																							
QP/ Peak																																																																																																																																																																																								

## Appendix C. Duty Cycle Plots

MIMO Ant.6+7:

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11g	99.64	-	-	10Hz

### 802.11g

