

# TEST REPORT


**Applicant:** AMANTII IMPORTS CORP  
**Address of Applicant:** 502-1027 Davie Street, Vancouver, BC V6E4L2, Canada  
**Manufacturer:** Ningbo Globaltec Science & Technology Co., Ltd  
**Address of Manufacturer:** No.99 East Tanjialing Road, Yuyao, Zhejiang, China  
**Factory:** SHENZHEN VORX TECHNOLOGY CO.,LTD  
**Address of Factory:** 102 BUILDING D, STUDENT INDUSTRIAL PARK,  
HONGQIAOTOU COMMUNITY, YANLUO STREET ,  
BAO'AN DISTRICT, SHENZHEN CHINA

## Equipment Under Test (EUT)

**Product Name:** Electric Fireplace  
**Model No.:** See section 5.1  
**FCC ID:** 2AZKE-SYMSLIM  
**Applicable standards:** FCC CFR Title 47 Part 15 Subpart C Section 15.247  
**Date of sample receipt:** May 19, 2021  
**Date of Test:** May 20-26, 2021  
**Date of report issued:** May 27, 2021  
**Test Result :** PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



**Robinson Luo**


**Laboratory Manager**

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

## 2 Version

| Version No. | Date         | Description |
|-------------|--------------|-------------|
| 00          | May 27, 2021 | Original    |
|             |              |             |
|             |              |             |
|             |              |             |
|             |              |             |

Prepared By:




Project Engineer

Date:

May 27, 2021

Check By:



Reviewer

Date:

May 27, 2021

## 3 Contents

|                                                                  | Page |
|------------------------------------------------------------------|------|
| 1 COVER PAGE .....                                               | 1    |
| 2 VERSION .....                                                  | 2    |
| 3 CONTENTS .....                                                 | 3    |
| 4 TEST SUMMARY .....                                             | 4    |
| 5 GENERAL INFORMATION .....                                      | 5    |
| 5.1 GENERAL DESCRIPTION OF EUT .....                             | 5    |
| 5.2 TEST MODE .....                                              | 9    |
| 5.3 DESCRIPTION OF SUPPORT UNITS .....                           | 9    |
| 5.4 DEVIATION FROM STANDARDS .....                               | 9    |
| 5.5 ABNORMALITIES FROM STANDARD CONDITIONS .....                 | 9    |
| 5.6 TEST FACILITY .....                                          | 9    |
| 5.7 TEST LOCATION .....                                          | 9    |
| 5.8 ADDITIONAL INSTRUCTIONS .....                                | 9    |
| 6 TEST INSTRUMENTS LIST .....                                    | 10   |
| 7 TEST RESULTS AND MEASUREMENT DATA .....                        | 12   |
| 7.1 ANTENNA REQUIREMENT .....                                    | 12   |
| 7.2 CONDUCTED EMISSIONS .....                                    | 13   |
| 7.3 CONDUCTED PEAK OUTPUT POWER .....                            | 16   |
| 7.4 CHANNEL BANDWIDTH .....                                      | 17   |
| 7.5 POWER SPECTRAL DENSITY .....                                 | 18   |
| 7.6 SPURIOUS EMISSION IN NON-RESTRICTED & RESTRICTED BANDS ..... | 19   |
| 7.6.1 Conducted Emission Method .....                            | 19   |
| 7.6.2 Radiated Emission Method .....                             | 20   |
| 8 TEST SETUP PHOTO .....                                         | 41   |
| 9 EUT CONSTRUCTIONAL DETAILS .....                               | 41   |

## 4 Test Summary

| Test Item                        | Section                    | Result |
|----------------------------------|----------------------------|--------|
| Antenna requirement              | FCC part 15.203/15.247 (c) | Pass   |
| AC Power Line Conducted Emission | FCC part 15.207            | Pass   |
| Conducted Peak Output Power      | FCC part 15.247 (b)(3)     | Pass   |
| Channel Bandwidth & 99% OCB      | FCC part 15.247 (a)(2)     | Pass   |
| Power Spectral Density           | FCC part 15.247 (e)        | Pass   |
| Band Edge                        | FCC part 15.247(d)         | Pass   |
| Spurious Emission                | FCC part 15.205/15.209     | Pass   |

*Remark: Test according to ANSI C63.10:2013 and RSS-Gen*

*Pass: The EUT complies with the essential requirements in the standard.*

### Measurement Uncertainty

| Test Item                        | Frequency Range | Measurement Uncertainty | Notes |
|----------------------------------|-----------------|-------------------------|-------|
| Radiated Emission                | 30MHz-200MHz    | 3.8039dB                | (1)   |
| Radiated Emission                | 200MHz-1GHz     | 3.9679dB                | (1)   |
| Radiated Emission                | 1GHz-18GHz      | 4.29dB                  | (1)   |
| Radiated Emission                | 18GHz-40GHz     | 3.30dB                  | (1)   |
| AC Power Line Conducted Emission | 0.15MHz ~ 30MHz | 3.44dB                  | (1)   |

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

## 5 General Information

### 5.1 General Description of EUT

|               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Name: | Electric Fireplace                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Model No.:    | <p>TD-1900XX-XX,<br/>XX denotes 26,30,33,38,44,48; suffix XX denotes 1-9,</p> <p>TD-X1900XX-XX,<br/>XX denotes 26,30,33,38,44,48; suffix XX denotes 1-9,</p> <p>SM-1900XXX-XX,<br/>XXX denotes 34,42,45,50,60,,74,88,100; suffix XX denotes 1-9,</p> <p>SM-X1900XXX-XX,<br/>XXX denotes 34,42,45,50,55,60,65,74,88,100; suffix XX denotes 1-9,</p> <p>SM-T1900XXX-XX,<br/>XXX denotes 34,42,45,50,60,74,88,100; suffix XX denotes 1-9,</p> <p>BI-X1900XX-XX,<br/>XX denotes 30,35,40,45,50,55,60,65; suffix XX denotes 1-9,</p> <p>BI-S1900XX-XX,<br/>XX denotes 40,50,60,72,88; suffix XX denotes 1-9,</p> <p>DE-T1900XX-XX,<br/>XX denotes 40,45,50,55,60,65,72,88; suffix XX denotes 1-9,</p> <p>DE-1900XX-XX,<br/>XX denotes 40,45,50,55,60,65,72,88; suffix XX denotes 1-9,</p> <p>CUBE-2025WM,<br/>TV-S1900XX-XX,<br/>XX denotes 30, 40,50,60,,72; suffix XX denotes 1-9,</p> <p>TV-1900XX-XX,<br/>XX denotes 40,50,60,,72; suffix XX denotes 1-9,</p> <p>TV-T1900XX-XX,<br/>XX denotes 40,50,60,,72; suffix XX denotes 1-9,</p> |

|                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                 | <p>INS-1900XX-XX,<br/>XX denotes 30,34; suffix XX denotes 1-9,</p> <p>FS26922-XX,<br/>suffix XX denotes 1-9,</p> <p>WM-G1900XX-XX,<br/>XX denotes 26,34,48,50,72,88; suffix XX denotes 1-9,</p> <p>WM-S1900XX-XX,<br/>XX denotes 26,34,48,60,72,88,; suffix XX denotes 1-9,</p> <p>WM-F1900XX-XX,<br/>XX denotes 40, 48, 62, 85 ; suffix XX denotes 1-9,</p> <p>ZECL-31-3228-XX,<br/>suffix XX denotes 1-9,</p> <p>TV2939-XX,<br/>suffix XX denotes 1-9,</p> <p>VLR190XXXX-XX,<br/>suffix XX denotes 1-9,</p> <p>IR1900XX-XX,<br/>suffix XX denotes 1-9,</p> <p>BS2100XXX-XX,<br/>XXX 40、50、60、72、88,100 suffix XX denotes 1-9,</p> <p>BS1900XXX-XX,<br/>XXX denotes 34,42,50,60,74,88,100; suffix XX denotes 1-9,</p> <p>BS1910XXX-XX,<br/>XXX denotes 34,42,50,60,74,88,100; suffix XX denotes 1-9,</p> <p>BS2000XX-XX,<br/>XX denotes 26,30,33,38,44,48; suffix XX denotes 1-9.</p> |
| Test Model No.: | SM-190042-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

|                                                                                                                                                                                          |                                                                                                                                               |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| Remark:All above models are identical in the same PCB layout, interior structure and electrical circuits.<br>The differences are appearance color and model name for commercial purpose. |                                                                                                                                               |
| Serial No.:                                                                                                                                                                              | N/A                                                                                                                                           |
| Operation Frequency:                                                                                                                                                                     | 802.11b/802.11g/802.11n(HT20): 2412MHz~2462MHz<br>802.11n(HT40): 2422MHz~2452MHz                                                              |
| Test sample(s) ID:                                                                                                                                                                       | GTSL202104000263-1                                                                                                                            |
| Sample(s) Status                                                                                                                                                                         | Engineer sample                                                                                                                               |
| Channel numbers:                                                                                                                                                                         | 802.11b/802.11g /802.11n(HT20): 11<br>802.11n(HT40): 7                                                                                        |
| Channel separation:                                                                                                                                                                      | 5MHz                                                                                                                                          |
| Modulation technology:                                                                                                                                                                   | 802.11b: Direct Sequence Spread Spectrum (DSSS)<br>802.11g/802.11n(HT20) /802.11n(HT40):<br>Orthogonal Frequency Division Multiplexing (OFDM) |
| Antenna Type:                                                                                                                                                                            | PCB Antenna                                                                                                                                   |
| Antenna gain:                                                                                                                                                                            | 3dBi(Declare by applicant)                                                                                                                    |
| Power supply:                                                                                                                                                                            | CLASS 2 POWER UNIT<br>Model No.: XY60S-1205000Q-UF<br>Input: AC 100-240V, 50/60Hz, 1.5A Max<br>Output: DC 12V, 5.0A                           |

| Operation Frequency each of channel |           |         |           |         |           |         |           |
|-------------------------------------|-----------|---------|-----------|---------|-----------|---------|-----------|
| Channel                             | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 1                                   | 2412MHz   | 4       | 2427MHz   | 7       | 2442MHz   | 10      | 2457MHz   |
| 2                                   | 2417MHz   | 5       | 2432MHz   | 8       | 2447MHz   | 11      | 2462MHz   |
| 3                                   | 2422MHz   | 6       | 2437MHz   | 9       | 2452MHz   |         |           |

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

| Test channel    | Frequency (MHz)               | Frequency (MHz) |
|-----------------|-------------------------------|-----------------|
|                 | 802.11b/802.11g/802.11n(HT20) | 802.11n(HT40)   |
| Lowest channel  | 2412MHz                       | 2422MHz         |
| Middle channel  | 2437MHz                       | 2437MHz         |
| Highest channel | 2462MHz                       | 2452MHz         |

## 5.2 Test mode

|                   |                                                |
|-------------------|------------------------------------------------|
| Transmitting mode | Keep the EUT in continuously transmitting mode |
|-------------------|------------------------------------------------|

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

| Mode      | 802.11b | 802.11g | 802.11n(HT20) | 802.11n(HT40) |
|-----------|---------|---------|---------------|---------------|
| Data rate | 1Mbps   | 6Mbps   | 6.5Mbps       | 13Mbps        |

## 5.3 Description of Support Units

None.

## 5.4 Deviation from Standards

None.

## 5.5 Abnormalities from Standard Conditions

None.

## 5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 381383**

Global United Technology SerSvices Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383.

- **IC —Registration No.: 9079A**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A

- **NVLAP (LAB CODE:600179-0)**

Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP). LAB CODE:600179-0

## 5.7 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480

Fax: 0755-27798960

## 5.8 Additional Instructions

|                   |                                               |
|-------------------|-----------------------------------------------|
| Test Software     | Special test command provided by manufacturer |
| Power level setup | Default                                       |

## 6 Test Instruments list

| Radiated Emission: |                                     |                                |                             |               |                     |                         |
|--------------------|-------------------------------------|--------------------------------|-----------------------------|---------------|---------------------|-------------------------|
| Item               | Test Equipment                      | Manufacturer                   | Model No.                   | Inventory No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1                  | 3m Semi- Anechoic Chamber           | ZhongYu Electron               | 9.2(L)*6.2(W)* 6.4(H)       | GTS250        | July. 02 2020       | July. 01 2025           |
| 2                  | Control Room                        | ZhongYu Electron               | 6.2(L)*2.5(W)* 2.4(H)       | GTS251        | N/A                 | N/A                     |
| 3                  | EMI Test Receiver                   | Rohde & Schwarz                | ESU26                       | GTS203        | June. 25 2020       | June. 24 2021           |
| 4                  | BiConiLog Antenna                   | SCHWARZBECK<br>MESS-ELEKTRONIK | VULB9163                    | GTS214        | June. 25 2020       | June. 24 2021           |
| 5                  | Double -ridged waveguide horn       | SCHWARZBECK<br>MESS-ELEKTRONIK | BBHA 9120 D                 | GTS208        | June. 25 2020       | June. 24 2021           |
| 6                  | Horn Antenna                        | ETS-LINDGREN                   | 3160                        | GTS217        | June. 25 2020       | June. 24 2021           |
| 7                  | EMI Test Software                   | AUDIX                          | E3                          | N/A           | N/A                 | N/A                     |
| 8                  | Coaxial Cable                       | GTS                            | N/A                         | GTS213        | June. 25 2020       | June. 24 2021           |
| 9                  | Coaxial Cable                       | GTS                            | N/A                         | GTS211        | June. 25 2020       | June. 24 2021           |
| 10                 | Coaxial cable                       | GTS                            | N/A                         | GTS210        | June. 25 2020       | June. 24 2021           |
| 11                 | Coaxial Cable                       | GTS                            | N/A                         | GTS212        | June. 25 2020       | June. 24 2021           |
| 12                 | Amplifier(100kHz-3GHz)              | HP                             | 8347A                       | GTS204        | June. 25 2020       | June. 24 2021           |
| 13                 | Amplifier(2GHz-20GHz)               | HP                             | 84722A                      | GTS206        | June. 25 2020       | June. 24 2021           |
| 14                 | Amplifier (18-26GHz)                | Rohde & Schwarz                | AFS33-18002<br>650-30-8P-44 | GTS218        | June. 25 2020       | June. 24 2021           |
| 15                 | Band filter                         | Amindeon                       | 82346                       | GTS219        | June. 25 2020       | June. 24 2021           |
| 16                 | Power Meter                         | Anritsu                        | ML2495A                     | GTS540        | June. 25 2020       | June. 24 2021           |
| 17                 | Power Sensor                        | Anritsu                        | MA2411B                     | GTS541        | June. 25 2020       | June. 24 2021           |
| 18                 | Wideband Radio Communication Tester | Rohde & Schwarz                | CMW500                      | GTS575        | June. 25 2020       | June. 24 2021           |
| 19                 | Splitter                            | Agilent                        | 11636B                      | GTS237        | June. 25 2020       | June. 24 2021           |
| 20                 | Loop Antenna                        | ZHINAN                         | ZN30900A                    | GTS534        | June. 25 2020       | June. 24 2021           |
| 21                 | Breitband hornantenne               | SCHWARZBECK                    | BBHA 9170                   | GTS579        | Oct. 18 2020        | Oct. 17 2021            |
| 22                 | Amplifier                           | TDK                            | PA-02-02                    | GTS574        | Oct. 18 2020        | Oct. 17 2021            |
| 23                 | Amplifier                           | TDK                            | PA-02-03                    | GTS576        | Oct. 18 2020        | Oct. 17 2021            |
| 24                 | PSA Series Spectrum Analyzer        | Rohde & Schwarz                | FSP                         | GTS578        | June. 25 2020       | June. 24 2021           |

| Conducted Emission |                           |                         |                      |               |                     |                         |
|--------------------|---------------------------|-------------------------|----------------------|---------------|---------------------|-------------------------|
| Item               | Test Equipment            | Manufacturer            | Model No.            | Inventory No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1                  | Shielding Room            | ZhongYu Electron        | 7.3(L)x3.1(W)x2.9(H) | GTS252        | May.15 2019         | May.14 2022             |
| 2                  | EMI Test Receiver         | R&S                     | ESCI 7               | GTS552        | June. 25 2020       | June. 24 2021           |
| 3                  | Coaxial Switch            | ANRITSU CORP            | MP59B                | GTS225        | June. 25 2020       | June. 24 2021           |
| 4                  | ENV216 2-L-V-NETZNACHB.DE | ROHDE&SCHWARZ           | ENV216               | GTS226        | June. 25 2020       | June. 24 2021           |
| 5                  | Coaxial Cable             | GTS                     | N/A                  | GTS227        | N/A                 | N/A                     |
| 6                  | EMI Test Software         | AUDIX                   | E3                   | N/A           | N/A                 | N/A                     |
| 7                  | Thermo meter              | KTJ                     | TA328                | GTS233        | June. 25 2020       | June. 24 2021           |
| 8                  | Absorbing clamp           | Elektronik-Feinmechanik | MDS21                | GTS229        | June. 25 2020       | June. 24 2021           |
| 9                  | ISN                       | SCHWARZBECK             | NTFM 8158            | GTS565        | June. 25 2020       | June. 24 2021           |
| 10                 | High voltage probe        | SCHWARZBECK             | TK9420               | GTS537        | July. 10 2020       | July. 09 2021           |

| RF Conducted Test: |                                                |              |                  |            |                     |                         |
|--------------------|------------------------------------------------|--------------|------------------|------------|---------------------|-------------------------|
| Item               | Test Equipment                                 | Manufacturer | Model No.        | Serial No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1                  | MXA Signal Analyzer                            | Agilent      | N9020A           | GTS566     | June. 25 2020       | June. 24 2021           |
| 2                  | EMI Test Receiver                              | R&S          | ESCI 7           | GTS552     | June. 25 2020       | June. 24 2021           |
| 3                  | Spectrum Analyzer                              | Agilent      | E4440A           | GTS533     | June. 25 2020       | June. 24 2021           |
| 4                  | MXG vector Signal Generator                    | Agilent      | N5182A           | GTS567     | June. 25 2020       | June. 24 2021           |
| 5                  | ESG Analog Signal Generator                    | Agilent      | E4428C           | GTS568     | June. 25 2020       | June. 24 2021           |
| 6                  | USB RF Power Sensor                            | DARE         | RPR3006W         | GTS569     | June. 25 2020       | June. 24 2021           |
| 7                  | RF Switch Box                                  | Shongyi      | RFSW3003328      | GTS571     | June. 25 2020       | June. 24 2021           |
| 8                  | Programmable Constant Temp & Humi Test Chamber | WEWON        | WHTH-150L-40-880 | GTS572     | June. 25 2020       | June. 24 2021           |

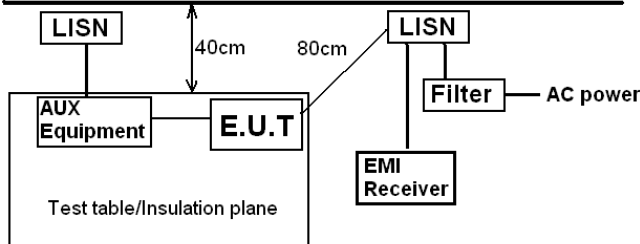
| General used equipment: |                                 |              |           |               |                     |                         |
|-------------------------|---------------------------------|--------------|-----------|---------------|---------------------|-------------------------|
| Item                    | Test Equipment                  | Manufacturer | Model No. | Inventory No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1                       | Humidity/ Temperature Indicator | KTJ          | TA328     | GTS243        | June. 25 2020       | June. 24 2021           |
| 2                       | Barometer                       | ChangChun    | DYM3      | GTS255        | June. 25 2020       | June. 24 2021           |

## 7 Test results and Measurement Data

### 7.1 Antenna requirement

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                     |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| <b>Standard requirement:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                     | FCC Part15 C Section 15.203 /247(c) |
| <b>15.203 requirement:</b><br>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. |                                     |
| <b>15.247(c) (1)(i) requirement:</b><br>(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.                                                                                |                                     |
| <b>EUT Antenna:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                     |
| <i>The antenna is PCB antenna, the best case gain of the antennas are 3dBi, reference to the appendix II for details</i>                                                                                                                                                                                                                                                                                                                                                         |                                     |

## 7.2 Conducted Emissions

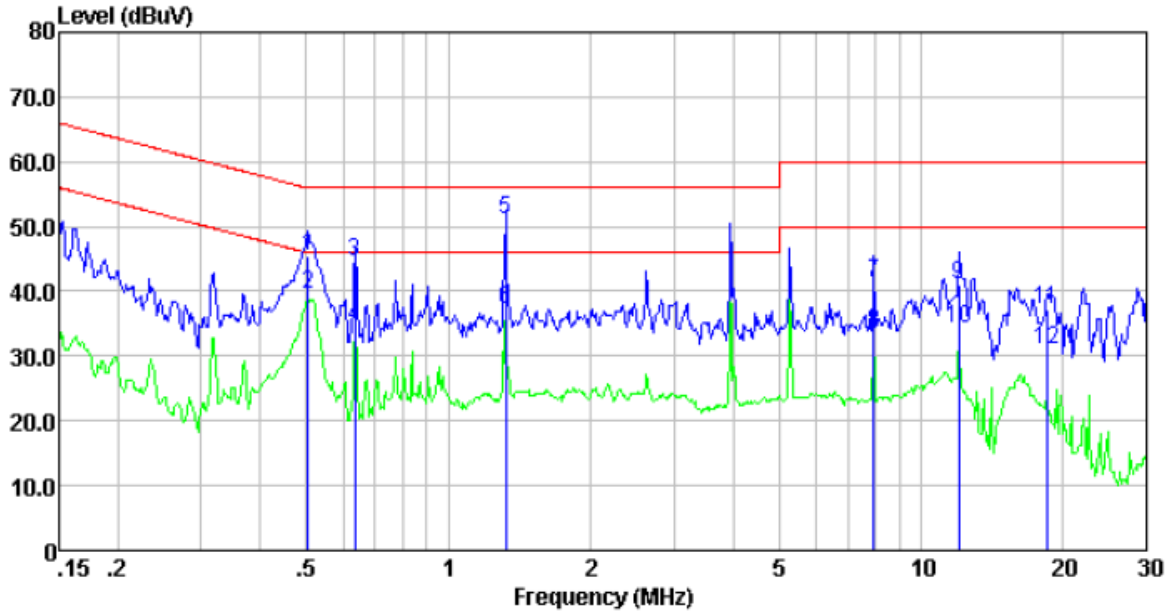
|                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |       |              |     |           |          |  |
|--------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|--------------|-----|-----------|----------|--|
| Test Requirement:                                | FCC Part15 C Section 15.207                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |       |              |     |           |          |  |
| Test Method:                                     | ANSI C63.10:2013                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |       |              |     |           |          |  |
| Test Frequency Range:                            | 150KHz to 30MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |       |              |     |           |          |  |
| Receiver setup:                                  | RBW=9KHz, VBW=30KHz, Sweep time=auto                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |       |              |     |           |          |  |
| Limit:                                           | Frequency range (MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |       | Limit (dBuV) |     |           |          |  |
|                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |       | Quasi-peak   |     | Average   |          |  |
|                                                  | 0.15-0.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |       | 66 to 56*    |     | 56 to 46* |          |  |
|                                                  | 0.5-5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |       | 56           |     | 46        |          |  |
|                                                  | 5-30                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |       | 60           |     | 50        |          |  |
| * Decreases with the logarithm of the frequency. |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |       |              |     |           |          |  |
| Test setup:                                      | <div><p style="text-align: center;"><b>Reference Plane</b></p><p>Remark<br/>E.U.T: Equipment Under Test<br/>LISN: Line Impedance Stabilization Network<br/>Test table height=0.8m</p></div>                                                                                                                                                                                                                                                                                                                                                                                                                                                       |       |              |     |           |          |  |
| Test procedure:                                  | <div><div>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</div><div>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</div><div>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.</div></div> |       |              |     |           |          |  |
| Test Instruments:                                | Refer to section 6.0 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |       |              |     |           |          |  |
| Test mode:                                       | Refer to section 5.2 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |       |              |     |           |          |  |
| Test environment:                                | Temp.:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 25 °C | Humid.:      | 52% | Press.:   | 1012mbar |  |
| Test voltage:                                    | AC 120V, 60Hz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |       |              |     |           |          |  |
| Test results:                                    | Pass                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |       |              |     |           |          |  |

Remark: Both high and low voltages have been tested to show only the worst low voltage test data.

## Measurement data

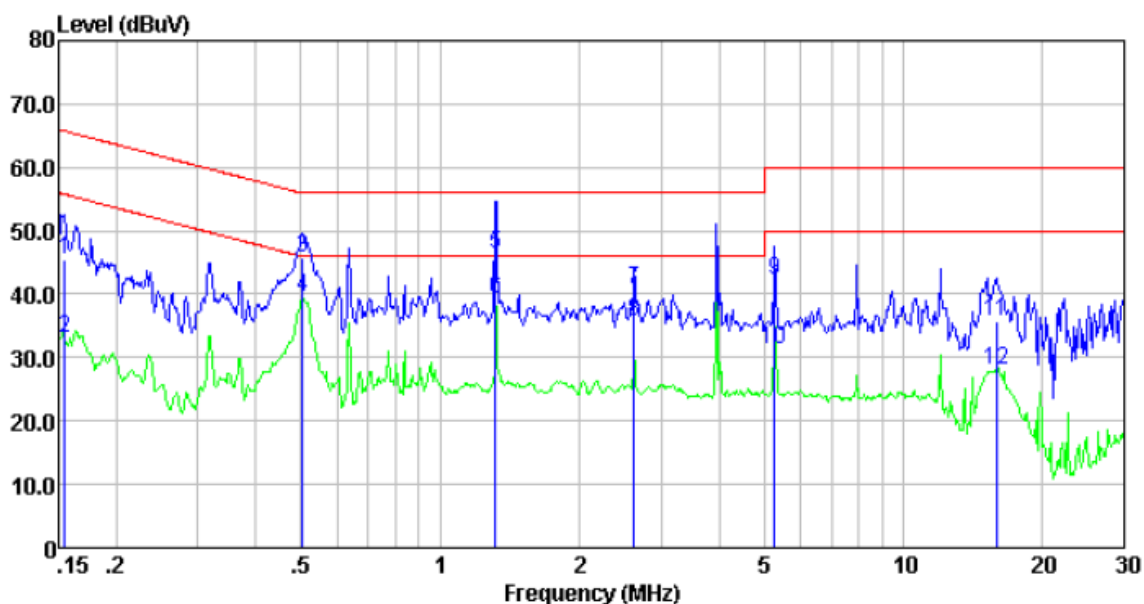
Pre-scan all test modes, found worst case at 802.11b 2462MHz, and so only show the test result of 802.11b 2462MHz

Line:



| Freq<br>MHz | Reading<br>level<br>dBuV | LISN/ISN<br>factor<br>dB/m | Cable<br>loss<br>dB | Level<br>dBuV | Limit<br>level<br>dBuV | Over<br>limit<br>dB | Remark  |
|-------------|--------------------------|----------------------------|---------------------|---------------|------------------------|---------------------|---------|
| 0.50        | 25.23                    | 20.31                      | 0.01                | 45.55         | 56.00                  | -10.45              | QP      |
| 0.50        | 19.15                    | 20.31                      | 0.01                | 39.47         | 46.00                  | -6.53               | Average |
| 0.63        | 24.21                    | 20.28                      | 0.02                | 44.51         | 56.00                  | -11.49              | QP      |
| 0.63        | 14.24                    | 20.28                      | 0.02                | 34.54         | 46.00                  | -11.46              | Average |
| 1.32        | 30.69                    | 20.20                      | 0.04                | 50.93         | 56.00                  | -5.07               | QP      |
| 1.32        | 16.82                    | 20.20                      | 0.04                | 37.06         | 46.00                  | -8.94               | Average |
| 7.94        | 20.93                    | 20.20                      | 0.09                | 41.22         | 60.00                  | -18.78              | QP      |
| 7.94        | 13.49                    | 20.20                      | 0.09                | 33.78         | 50.00                  | -16.22              | Average |
| 12.00       | 20.60                    | 20.20                      | 0.13                | 40.93         | 60.00                  | -19.07              | QP      |
| 12.00       | 14.01                    | 20.20                      | 0.13                | 34.34         | 50.00                  | -15.66              | Average |
| 18.43       | 16.76                    | 20.27                      | 0.18                | 37.21         | 60.00                  | -22.79              | QP      |
| 18.43       | 10.53                    | 20.27                      | 0.18                | 30.98         | 50.00                  | -19.02              | Average |

Neutral:

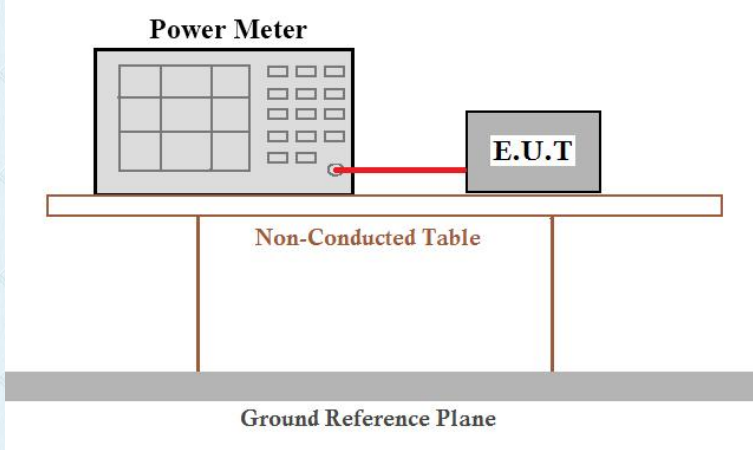


| Freq<br>MHz | Reading<br>level<br>dBuV | LISN/ISN<br>factor<br>dB/m | Cable<br>loss<br>dB | Level<br>dBuV | Limit<br>level<br>dBuV | Over<br>limit<br>dB | Remark  |
|-------------|--------------------------|----------------------------|---------------------|---------------|------------------------|---------------------|---------|
| 0.15        | 25.02                    | 20.40                      | 0.01                | 45.43         | 65.74                  | -20.31              | QP      |
| 0.15        | 12.62                    | 20.40                      | 0.01                | 33.03         | 55.74                  | -22.71              | Average |
| 0.50        | 25.37                    | 20.31                      | 0.01                | 45.69         | 56.00                  | -10.31              | QP      |
| 0.50        | 19.11                    | 20.31                      | 0.01                | 39.43         | 46.00                  | -6.57               | Average |
| 1.32        | 26.20                    | 20.20                      | 0.04                | 46.44         | 56.00                  | -9.56               | QP      |
| 1.32        | 19.05                    | 20.20                      | 0.04                | 39.29         | 46.00                  | -6.71               | Average |
| 2.62        | 20.50                    | 20.20                      | 0.05                | 40.75         | 56.00                  | -15.25              | QP      |
| 2.62        | 15.39                    | 20.20                      | 0.05                | 35.64         | 46.00                  | -10.36              | Average |
| 5.28        | 21.80                    | 20.20                      | 0.07                | 42.07         | 60.00                  | -17.93              | QP      |
| 5.28        | 10.91                    | 20.20                      | 0.07                | 31.18         | 50.00                  | -18.82              | Average |
| 15.89       | 15.33                    | 20.22                      | 0.17                | 35.72         | 60.00                  | -24.28              | QP      |
| 15.89       | 7.54                     | 20.22                      | 0.17                | 27.93         | 50.00                  | -22.07              | Average |

Notes:

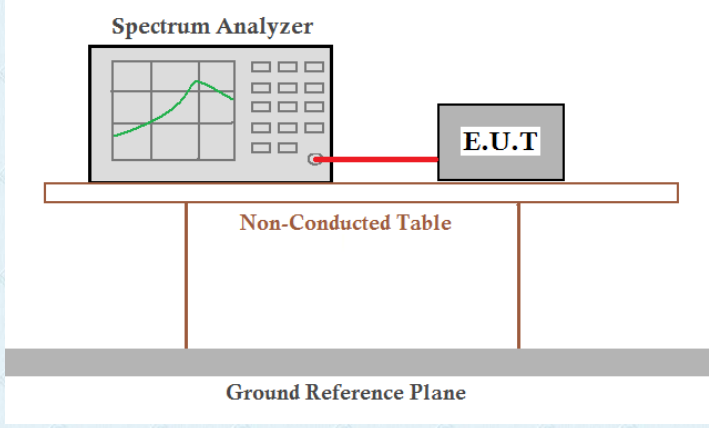
1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

## 7.3 Conducted Peak Output Power

|                    |                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement : | FCC Part15 C Section 15.247 (b)(3)                                                                                                                                                                                                                                                                                                                                                                                                            |
| Test Method :      | KDB558074 D01 15.247 Meas Guidance v05r02                                                                                                                                                                                                                                                                                                                                                                                                     |
| Limit:             | 30dBm                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Test setup:        |  <p>The diagram illustrates the test setup. A Power Meter, represented by a box with a grid and buttons, is connected to an E.U.T (Equipment Under Test), represented by a smaller box. A red cable connects the two. They are both placed on a table labeled 'Non-Conducted Table'. Below the table is a shaded area labeled 'Ground Reference Plane'.</p> |
| Test Instruments:  | Refer to section 6.0 for details                                                                                                                                                                                                                                                                                                                                                                                                              |
| Test mode:         | Refer to section 5.2 for details                                                                                                                                                                                                                                                                                                                                                                                                              |
| Test results:      | Pass                                                                                                                                                                                                                                                                                                                                                                                                                                          |

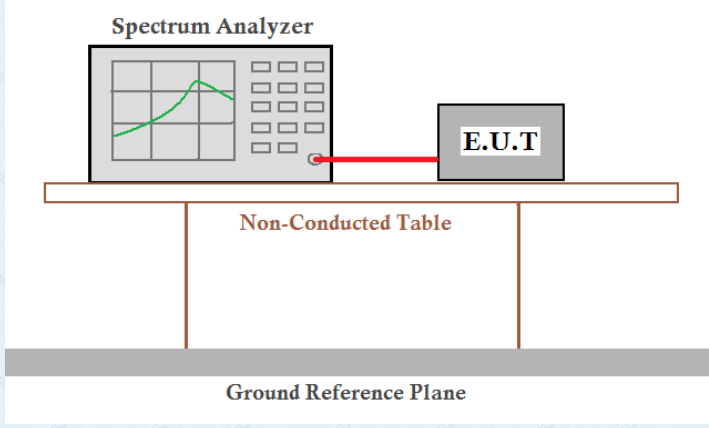
**Measurement Data:** The detailed test data see Appendix for WIFI 2.4G

## 7.4 Channel Bandwidth

|                    |                                                                                                                                                                                                                                                                                                                                                          |
|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement : | FCC Part15 C Section 15.247 (a)(2)                                                                                                                                                                                                                                                                                                                       |
| Test Method :      | KDB558074 D01 15.247 Meas Guidance v05r02                                                                                                                                                                                                                                                                                                                |
| Limit:             | >500KHz                                                                                                                                                                                                                                                                                                                                                  |
| Test setup:        |  <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.</p> |
| Test Instruments:  | Refer to section 6.0 for details                                                                                                                                                                                                                                                                                                                         |
| Test mode:         | Refer to section 5.2 for details                                                                                                                                                                                                                                                                                                                         |
| Test results:      | Pass                                                                                                                                                                                                                                                                                                                                                     |

**Measurement Data:** The detailed test data see Appendix for WIFI 2.4G

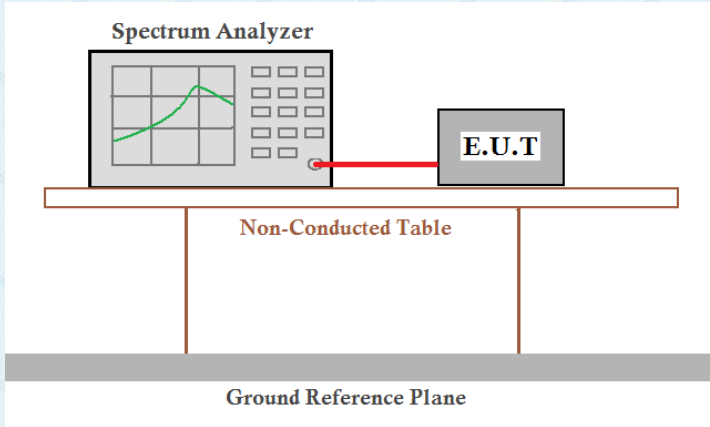
## 7.5 Power Spectral Density

|                   |                                                                                                                                                                                                                                                                                                                                                          |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247 (e)                                                                                                                                                                                                                                                                                                                          |
| Test Method:      | KDB558074 D01 15.247 Meas Guidance v05r02                                                                                                                                                                                                                                                                                                                |
| Limit:            | 8dBm/3kHz                                                                                                                                                                                                                                                                                                                                                |
| Test setup:       |  <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.</p> |
| Test Instruments: | Refer to section 6.0 for details                                                                                                                                                                                                                                                                                                                         |
| Test mode:        | Refer to section 5.2 for details                                                                                                                                                                                                                                                                                                                         |
| Test results:     | Pass                                                                                                                                                                                                                                                                                                                                                     |

**Measurement Data:** The detailed test data see Appendix for WIFI 2.4G

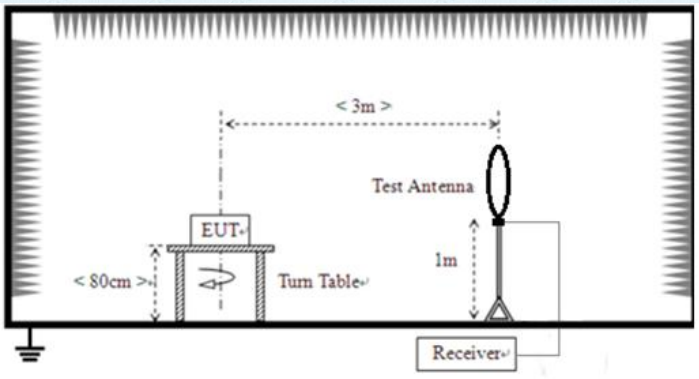
## 7.6 Spurious Emission in Non-restricted & restricted Bands

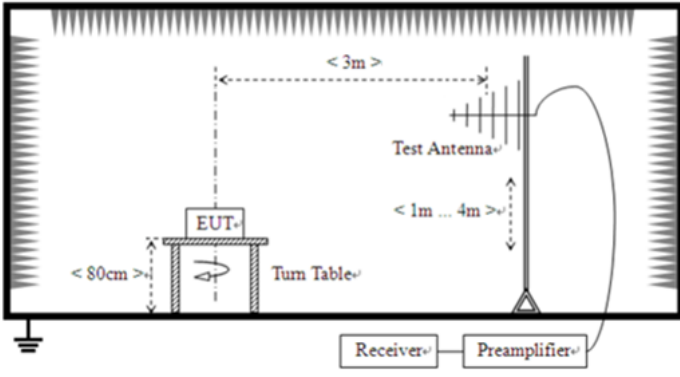
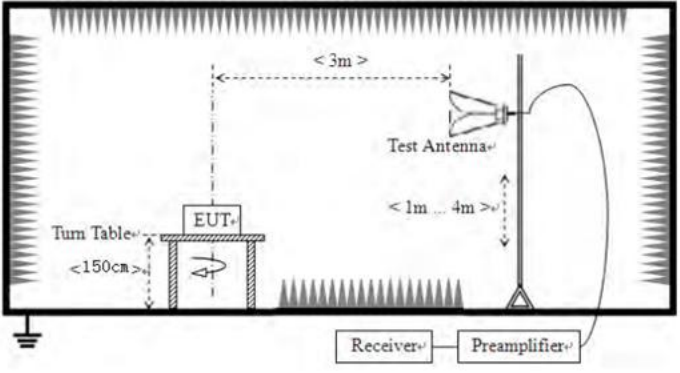
### 7.6.1 Conducted Emission Method

|                   |                                                                                                                                                                                                                                                                                                                                                                                         |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247 (d)                                                                                                                                                                                                                                                                                                                                                         |
| Test Method:      | ANSI C63.10:2013 and KDB558074 D01 15.247 Meas Guidance v05r02                                                                                                                                                                                                                                                                                                                          |
| Limit:            | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. |
| Test setup:       |  <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. The table is supported by two vertical legs and sits on a Ground Reference Plane.</p> |
| Test Instruments: | Refer to section 6.0 for details                                                                                                                                                                                                                                                                                                                                                        |
| Test mode:        | Refer to section 5.2 for details                                                                                                                                                                                                                                                                                                                                                        |
| Test results:     | Pass                                                                                                                                                                                                                                                                                                                                                                                    |

**Measurement Data:** The detailed test data see Appendix for WIFI 2.4G

## 7.6.2 Radiated Emission Method

| Test Requirement:     | FCC Part15 C Section 15.209 and 15.205                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                   |                               |         |            |                 |                                   |                               |             |             |     |             |              |    |            |    |    |       |       |   |        |       |   |         |       |   |           |     |   |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|-------------------------------|---------|------------|-----------------|-----------------------------------|-------------------------------|-------------|-------------|-----|-------------|--------------|----|------------|----|----|-------|-------|---|--------|-------|---|---------|-------|---|-----------|-----|---|
| Test Method:          | ANSI C63.10:2013                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                   |                               |         |            |                 |                                   |                               |             |             |     |             |              |    |            |    |    |       |       |   |        |       |   |         |       |   |           |     |   |
| Test Frequency Range: | 9kHz to 25GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                   |                               |         |            |                 |                                   |                               |             |             |     |             |              |    |            |    |    |       |       |   |        |       |   |         |       |   |           |     |   |
| Test site:            | Measurement Distance: 3m                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                   |                               |         |            |                 |                                   |                               |             |             |     |             |              |    |            |    |    |       |       |   |        |       |   |         |       |   |           |     |   |
| Receiver setup:       | Frequency                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Detector                          | RBW                           | VBW     | Value      |                 |                                   |                               |             |             |     |             |              |    |            |    |    |       |       |   |        |       |   |         |       |   |           |     |   |
|                       | 9KHz-150KHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Quasi-peak                        | 200Hz                         | 600Hz   | Quasi-peak |                 |                                   |                               |             |             |     |             |              |    |            |    |    |       |       |   |        |       |   |         |       |   |           |     |   |
|                       | 150KHz-30MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Quasi-peak                        | 9KHz                          | 30KHz   | Quasi-peak |                 |                                   |                               |             |             |     |             |              |    |            |    |    |       |       |   |        |       |   |         |       |   |           |     |   |
|                       | 30MHz-1GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Quasi-peak                        | 120KHz                        | 300KHz  | Quasi-peak |                 |                                   |                               |             |             |     |             |              |    |            |    |    |       |       |   |        |       |   |         |       |   |           |     |   |
|                       | Above 1GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Peak                              | 1MHz                          | 3MHz    | Peak       |                 |                                   |                               |             |             |     |             |              |    |            |    |    |       |       |   |        |       |   |         |       |   |           |     |   |
| RMS                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 1MHz                              | 3MHz                          | Average |            |                 |                                   |                               |             |             |     |             |              |    |            |    |    |       |       |   |        |       |   |         |       |   |           |     |   |
| Limit:                | <table><tr><th>Frequency (MHz)</th><th>Field strength (microvolts/meter)</th><th>Measurement distance (meters)</th></tr><tr><td>0.009-0.490</td><td>2400/F(kHz)</td><td>300</td></tr><tr><td>0.490-1.705</td><td>24000/F(kHz)</td><td>30</td></tr><tr><td>1.705-30.0</td><td>30</td><td>30</td></tr><tr><td>30-88</td><td>100**</td><td>3</td></tr><tr><td>88-216</td><td>150**</td><td>3</td></tr><tr><td>216-960</td><td>200**</td><td>3</td></tr><tr><td>Above 960</td><td>500</td><td>3</td></tr></table> |                                   |                               |         |            | Frequency (MHz) | Field strength (microvolts/meter) | Measurement distance (meters) | 0.009-0.490 | 2400/F(kHz) | 300 | 0.490-1.705 | 24000/F(kHz) | 30 | 1.705-30.0 | 30 | 30 | 30-88 | 100** | 3 | 88-216 | 150** | 3 | 216-960 | 200** | 3 | Above 960 | 500 | 3 |
|                       | Frequency (MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Field strength (microvolts/meter) | Measurement distance (meters) |         |            |                 |                                   |                               |             |             |     |             |              |    |            |    |    |       |       |   |        |       |   |         |       |   |           |     |   |
|                       | 0.009-0.490                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 2400/F(kHz)                       | 300                           |         |            |                 |                                   |                               |             |             |     |             |              |    |            |    |    |       |       |   |        |       |   |         |       |   |           |     |   |
|                       | 0.490-1.705                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 24000/F(kHz)                      | 30                            |         |            |                 |                                   |                               |             |             |     |             |              |    |            |    |    |       |       |   |        |       |   |         |       |   |           |     |   |
|                       | 1.705-30.0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 30                                | 30                            |         |            |                 |                                   |                               |             |             |     |             |              |    |            |    |    |       |       |   |        |       |   |         |       |   |           |     |   |
|                       | 30-88                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 100**                             | 3                             |         |            |                 |                                   |                               |             |             |     |             |              |    |            |    |    |       |       |   |        |       |   |         |       |   |           |     |   |
|                       | 88-216                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 150**                             | 3                             |         |            |                 |                                   |                               |             |             |     |             |              |    |            |    |    |       |       |   |        |       |   |         |       |   |           |     |   |
|                       | 216-960                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 200**                             | 3                             |         |            |                 |                                   |                               |             |             |     |             |              |    |            |    |    |       |       |   |        |       |   |         |       |   |           |     |   |
|                       | Above 960                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 500                               | 3                             |         |            |                 |                                   |                               |             |             |     |             |              |    |            |    |    |       |       |   |        |       |   |         |       |   |           |     |   |
|                       | The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.                                                                                                                                                                                                                  |                                   |                               |         |            |                 |                                   |                               |             |             |     |             |              |    |            |    |    |       |       |   |        |       |   |         |       |   |           |     |   |
| Test setup:           | For radiated emissions from 9kHz to 30MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                   |                               |         |            |                 |                                   |                               |             |             |     |             |              |    |            |    |    |       |       |   |        |       |   |         |       |   |           |     |   |
|                       |                                                                                                                                                                                                                                                                                                                                                                                                                           |                                   |                               |         |            |                 |                                   |                               |             |             |     |             |              |    |            |    |    |       |       |   |        |       |   |         |       |   |           |     |   |

|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                        | <p>For radiated emissions from 30MHz to 1GHz</p>  <p>For radiated emissions above 1GHz</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <p>Test Procedure:</p> | <ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol> |

|                   |                                  |       |         |     |         |          |
|-------------------|----------------------------------|-------|---------|-----|---------|----------|
| Test Instruments: | Refer to section 6.0 for details |       |         |     |         |          |
| Test mode:        | Refer to section 5.2 for details |       |         |     |         |          |
| Test environment: | Temp.:                           | 25 °C | Humid.: | 52% | Press.: | 1012mbar |
| Test voltage:     | AC120V 60Hz                      |       |         |     |         |          |
| Test results:     | Pass                             |       |         |     |         |          |

## Measurement data:

### Remark:

Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.  
Only shown the worst case test data.

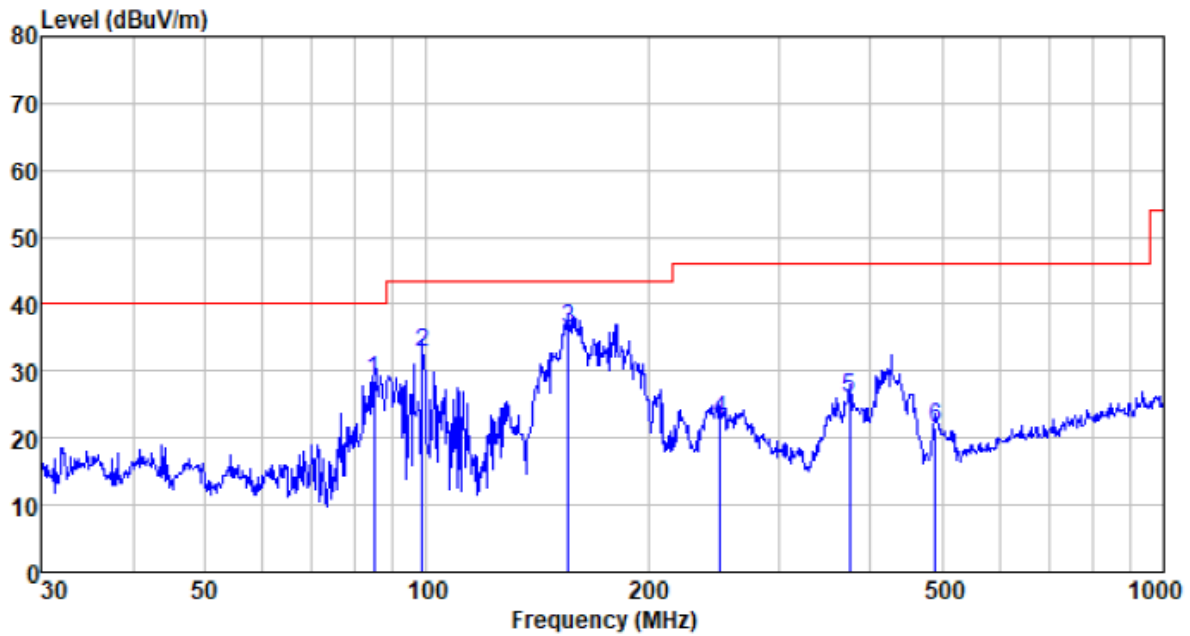
### ■ 9kHz~30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.

## ■ Below 1GHz

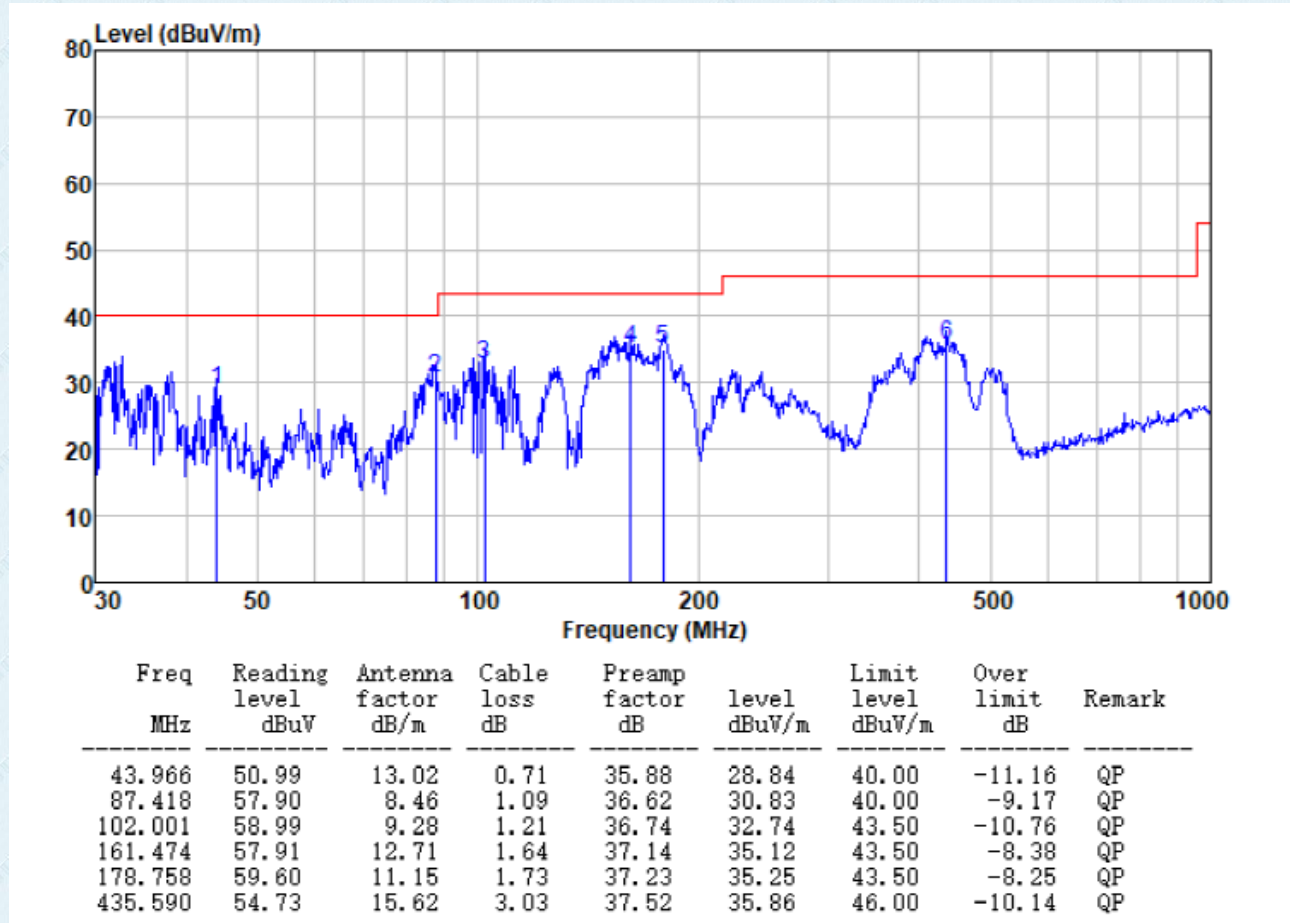
Pre-scan all test modes, found worst case at 802.11n(HT20) 2437MHz, and so only show the test result of 802.11n(HT20) 2437MHz

### Horizontal:



| Freq<br>MHz | Reading<br>level<br>dBuV | Antenna<br>factor<br>dB/m | Cable<br>loss<br>dB | Preamp<br>factor<br>dB | level<br>dBuV/m | Limit<br>level<br>dBuV/m | Over<br>limit<br>dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 84.999      | 55.73                    | 8.49                      | 1.07                | 36.59                  | 28.70           | 40.00                    | -11.30              | QP     |
| 98.833      | 59.31                    | 9.03                      | 1.18                | 36.71                  | 32.81           | 43.50                    | -10.69              | QP     |
| 155.910     | 58.99                    | 12.78                     | 1.60                | 37.11                  | 36.26           | 43.50                    | -7.24               | QP     |
| 250.301     | 47.20                    | 10.74                     | 2.12                | 37.38                  | 22.68           | 46.00                    | -23.32              | QP     |
| 374.623     | 46.70                    | 14.18                     | 2.74                | 37.50                  | 26.12           | 46.00                    | -19.88              | QP     |
| 490.745     | 39.25                    | 16.51                     | 3.26                | 37.51                  | 21.51           | 46.00                    | -24.49              | QP     |

Vertical:



## ■ Above 1GHz

## ■ Unwanted Emissions in non-restricted Frequency Bands

|            |         |               |        |
|------------|---------|---------------|--------|
| Test mode: | 802.11b | Test channel: | Lowest |
|------------|---------|---------------|--------|

### Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4824.00         | 37.56             | 31.79                 | 8.62            | 32.10              | 45.87          | 74.00               | -28.13          | Vertical     |
| 7236.00         | 32.49             | 36.19                 | 11.68           | 31.97              | 48.39          | 74.00               | -25.61          | Vertical     |
| 9648.00         | 31.48             | 38.07                 | 14.16           | 31.56              | 52.15          | 74.00               | -21.85          | Vertical     |
| 12060.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 14472.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 16884.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 4824.00         | 36.66             | 31.79                 | 8.62            | 32.10              | 44.97          | 74.00               | -29.03          | Horizontal   |
| 7236.00         | 32.46             | 36.19                 | 11.68           | 31.97              | 48.36          | 74.00               | -25.64          | Horizontal   |
| 9648.00         | 31.15             | 38.07                 | 14.16           | 31.56              | 51.82          | 74.00               | -22.18          | Horizontal   |
| 12060.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |
| 14472.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |
| 16884.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |

### Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4824.00         | 26.86             | 31.79                 | 8.62            | 32.10              | 35.17          | 54.00               | -18.83          | Vertical     |
| 7236.00         | 21.42             | 36.19                 | 11.68           | 31.97              | 37.32          | 54.00               | -16.68          | Vertical     |
| 9648.00         | 21.88             | 38.07                 | 14.16           | 31.56              | 42.55          | 54.00               | -11.45          | Vertical     |
| 12060.00        | *                 |                       |                 |                    |                | 54.00               |                 | Vertical     |
| 14472.00        | *                 |                       |                 |                    |                | 54.00               |                 | Vertical     |
| 16884.00        | *                 |                       |                 |                    |                | 54.00               |                 | Vertical     |
| 4824.00         | 26.34             | 31.79                 | 8.62            | 32.10              | 34.65          | 54.00               | -19.35          | Horizontal   |
| 7236.00         | 21.09             | 36.19                 | 11.68           | 31.97              | 36.99          | 54.00               | -17.01          | Horizontal   |
| 9648.00         | 20.94             | 38.07                 | 14.16           | 31.56              | 41.61          | 54.00               | -12.39          | Horizontal   |
| 12060.00        | *                 |                       |                 |                    |                | 54.00               |                 | Horizontal   |
| 14472.00        | *                 |                       |                 |                    |                | 54.00               |                 | Horizontal   |
| 16884.00        | *                 |                       |                 |                    |                | 54.00               |                 | Horizontal   |

|            |         |               |        |
|------------|---------|---------------|--------|
| Test mode: | 802.11b | Test channel: | Middle |
|------------|---------|---------------|--------|

## Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4874.00         | 37.09             | 31.85                 | 8.66            | 32.12              | 45.48          | 74.00               | -28.52          | Vertical     |
| 7311.00         | 32.86             | 36.37                 | 11.71           | 31.91              | 49.03          | 74.00               | -24.97          | Vertical     |
| 9748.00         | 32.71             | 38.27                 | 14.25           | 31.56              | 53.67          | 74.00               | -20.33          | Vertical     |
| 12185.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 14622.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 17059.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 4874.00         | 37.92             | 31.85                 | 8.66            | 32.12              | 46.31          | 74.00               | -27.69          | Horizontal   |
| 7311.00         | 31.68             | 36.37                 | 11.71           | 31.91              | 47.85          | 74.00               | -26.15          | Horizontal   |
| 9748.00         | 32.68             | 38.27                 | 14.25           | 31.56              | 53.64          | 74.00               | -20.36          | Horizontal   |
| 12185.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |
| 14622.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |
| 17059.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |

## Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4874.00         | 28.12             | 31.85                 | 8.66            | 32.12              | 36.51          | 54.00               | -17.49          | Vertical     |
| 7311.00         | 21.23             | 36.37                 | 11.71           | 31.91              | 37.40          | 54.00               | -16.60          | Vertical     |
| 9748.00         | 22.01             | 38.27                 | 14.25           | 31.56              | 42.97          | 54.00               | -11.03          | Vertical     |
| 12185.00        | *                 |                       |                 |                    |                | 54.00               |                 | Vertical     |
| 14622.00        | *                 |                       |                 |                    |                | 54.00               |                 | Vertical     |
| 17059.00        | *                 |                       |                 |                    |                | 54.00               |                 | Vertical     |
| 4874.00         | 28.15             | 31.85                 | 8.66            | 32.12              | 36.54          | 54.00               | -17.46          | Horizontal   |
| 7311.00         | 20.81             | 36.37                 | 11.71           | 31.91              | 36.98          | 54.00               | -17.02          | Horizontal   |
| 9748.00         | 22.43             | 38.27                 | 14.25           | 31.56              | 43.39          | 54.00               | -10.61          | Horizontal   |
| 12185.00        | *                 |                       |                 |                    |                | 54.00               |                 | Horizontal   |
| 14622.00        | *                 |                       |                 |                    |                | 54.00               |                 | Horizontal   |
| 17059.00        | *                 |                       |                 |                    |                | 54.00               |                 | Horizontal   |

|            |         |               |         |
|------------|---------|---------------|---------|
| Test mode: | 802.11b | Test channel: | Highest |
|------------|---------|---------------|---------|

## Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4924.00         | 40.99             | 31.90                 | 8.70            | 32.15              | 49.44          | 74.00               | -24.56          | Vertical     |
| 7386.00         | 32.50             | 36.49                 | 11.76           | 31.83              | 48.92          | 74.00               | -25.08          | Vertical     |
| 9848.00         | 35.27             | 38.62                 | 14.31           | 31.77              | 56.43          | 74.00               | -17.57          | Vertical     |
| 12310.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 14772.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 17234.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 4924.00         | 40.90             | 31.90                 | 8.70            | 32.15              | 49.35          | 74.00               | -24.65          | Horizontal   |
| 7386.00         | 31.71             | 36.49                 | 11.76           | 31.83              | 48.13          | 74.00               | -25.87          | Horizontal   |
| 9848.00         | 31.58             | 38.62                 | 14.31           | 31.77              | 52.74          | 74.00               | -21.26          | Horizontal   |
| 12310.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |
| 14772.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |
| 17234.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |

## Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4924.00         | 32.21             | 31.90                 | 8.70            | 32.15              | 40.66          | 54.00               | -13.34          | Vertical     |
| 7386.00         | 22.51             | 36.49                 | 11.76           | 31.83              | 38.93          | 54.00               | -15.07          | Vertical     |
| 9848.00         | 23.84             | 38.62                 | 14.31           | 31.77              | 45.00          | 54.00               | -9.00           | Vertical     |
| 12310.00        | *                 |                       |                 |                    |                | 54.00               |                 | Vertical     |
| 14772.00        | *                 |                       |                 |                    |                | 54.00               |                 | Vertical     |
| 17234.00        | *                 |                       |                 |                    |                | 54.00               |                 | Vertical     |
| 4924.00         | 31.47             | 31.90                 | 8.70            | 32.15              | 39.92          | 54.00               | -14.08          | Horizontal   |
| 7386.00         | 21.17             | 36.49                 | 11.76           | 31.83              | 37.59          | 54.00               | -16.41          | Horizontal   |
| 9848.00         | 20.90             | 38.62                 | 14.31           | 31.77              | 42.06          | 54.00               | -11.94          | Horizontal   |
| 12310.00        | *                 |                       |                 |                    |                | 54.00               |                 | Horizontal   |
| 14772.00        | *                 |                       |                 |                    |                | 54.00               |                 | Horizontal   |
| 17234.00        | *                 |                       |                 |                    |                | 54.00               |                 | Horizontal   |

|            |         |               |        |
|------------|---------|---------------|--------|
| Test mode: | 802.11g | Test channel: | lowest |
|------------|---------|---------------|--------|

**Peak value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4824.00         | 37.91             | 31.79                 | 8.62            | 32.10              | 46.22          | 74.00               | -27.78          | Vertical     |
| 7236.00         | 32.71             | 36.19                 | 11.68           | 31.97              | 48.61          | 74.00               | -25.39          | Vertical     |
| 9648.00         | 31.64             | 38.07                 | 14.16           | 31.56              | 52.31          | 74.00               | -21.69          | Vertical     |
| 12060.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 14472.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 16884.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 4824.00         | 36.95             | 31.79                 | 8.62            | 32.10              | 45.26          | 74.00               | -28.74          | Horizontal   |
| 7236.00         | 32.65             | 36.19                 | 11.68           | 31.97              | 48.55          | 74.00               | -25.45          | Horizontal   |
| 9648.00         | 31.30             | 38.07                 | 14.16           | 31.56              | 51.97          | 74.00               | -22.03          | Horizontal   |
| 12060.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |
| 14472.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |
| 16884.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |

|            |         |               |        |
|------------|---------|---------------|--------|
| Test mode: | 802.11g | Test channel: | Middle |
|------------|---------|---------------|--------|

**Peak value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4874.00         | 37.38             | 31.85                 | 8.66            | 32.12              | 45.77          | 74.00               | -28.23          | Vertical     |
| 7311.00         | 33.04             | 36.37                 | 11.71           | 31.91              | 49.21          | 74.00               | -24.79          | Vertical     |
| 9748.00         | 32.84             | 38.27                 | 14.25           | 31.56              | 53.80          | 74.00               | -20.20          | Vertical     |
| 12185.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 14622.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 17059.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 4874.00         | 38.16             | 31.85                 | 8.66            | 32.12              | 46.55          | 74.00               | -27.45          | Horizontal   |
| 7311.00         | 31.84             | 36.37                 | 11.71           | 31.91              | 48.01          | 74.00               | -25.99          | Horizontal   |
| 9748.00         | 32.80             | 38.27                 | 14.25           | 31.56              | 53.76          | 74.00               | -20.24          | Horizontal   |
| 12185.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |
| 14622.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |
| 17059.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |

|            |         |               |         |
|------------|---------|---------------|---------|
| Test mode: | 802.11g | Test channel: | Highest |
|------------|---------|---------------|---------|

## Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4924.00         | 41.48             | 31.90                 | 8.70            | 32.15              | 49.93          | 74.00               | -24.07          | Vertical     |
| 7386.00         | 32.81             | 36.49                 | 11.76           | 31.83              | 49.23          | 74.00               | -24.77          | Vertical     |
| 9848.00         | 35.49             | 38.62                 | 14.31           | 31.77              | 56.65          | 74.00               | -17.35          | Vertical     |
| 12310.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 14772.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 17234.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 4924.00         | 41.31             | 31.90                 | 8.70            | 32.15              | 49.76          | 74.00               | -24.24          | Horizontal   |
| 7386.00         | 31.99             | 36.49                 | 11.76           | 31.83              | 48.41          | 74.00               | -25.59          | Horizontal   |
| 9848.00         | 31.78             | 38.62                 | 14.31           | 31.77              | 52.94          | 74.00               | -21.06          | Horizontal   |
| 12310.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |
| 14772.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |
| 17234.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |

## Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 9848.00         | 24.06             | 38.62                 | 14.31           | 31.77              | 45.22          | 54.00               | -8.78           | Vertical     |

Note : Final AV value=AV+ducycycle correction factor=45.22+0.11=45.33dBuV/m@3m

|            |               |               |        |
|------------|---------------|---------------|--------|
| Test mode: | 802.11n(HT20) | Test channel: | Lowest |
|------------|---------------|---------------|--------|

**Peak value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4824.00         | 38.13             | 31.79                 | 8.62            | 32.10              | 46.44          | 74.00               | -27.56          | Vertical     |
| 7236.00         | 32.85             | 36.19                 | 11.68           | 31.97              | 48.75          | 74.00               | -25.25          | Vertical     |
| 9648.00         | 31.74             | 38.07                 | 14.16           | 31.56              | 52.41          | 74.00               | -21.59          | Vertical     |
| 12060.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 14472.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 16884.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 4824.00         | 37.13             | 31.79                 | 8.62            | 32.10              | 45.44          | 74.00               | -28.56          | Horizontal   |
| 7236.00         | 32.77             | 36.19                 | 11.68           | 31.97              | 48.67          | 74.00               | -25.33          | Horizontal   |
| 9648.00         | 31.39             | 38.07                 | 14.16           | 31.56              | 52.06          | 74.00               | -21.94          | Horizontal   |
| 12060.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |
| 14472.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |
| 16884.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |

|            |               |               |        |
|------------|---------------|---------------|--------|
| Test mode: | 802.11n(HT20) | Test channel: | Middle |
|------------|---------------|---------------|--------|

**Peak value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4874.00         | 37.56             | 31.85                 | 8.66            | 32.12              | 45.95          | 74.00               | -28.05          | Vertical     |
| 7311.00         | 33.16             | 36.37                 | 11.71           | 31.91              | 49.33          | 74.00               | -24.67          | Vertical     |
| 9748.00         | 32.92             | 38.27                 | 14.25           | 31.56              | 53.88          | 74.00               | -20.12          | Vertical     |
| 12185.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 14622.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 17059.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 4874.00         | 38.32             | 31.85                 | 8.66            | 32.12              | 46.71          | 74.00               | -27.29          | Horizontal   |
| 7311.00         | 31.94             | 36.37                 | 11.71           | 31.91              | 48.11          | 74.00               | -25.89          | Horizontal   |
| 9748.00         | 32.87             | 38.27                 | 14.25           | 31.56              | 53.83          | 74.00               | -20.17          | Horizontal   |
| 12185.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |
| 14622.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |
| 17059.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |

|            |               |               |         |
|------------|---------------|---------------|---------|
| Test mode: | 802.11n(HT20) | Test channel: | Highest |
|------------|---------------|---------------|---------|

## Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4924.00         | 41.79             | 31.90                 | 8.70            | 32.15              | 50.24          | 74.00               | -23.76          | Vertical     |
| 7386.00         | 33.01             | 36.49                 | 11.76           | 31.83              | 49.43          | 74.00               | -24.57          | Vertical     |
| 9848.00         | 35.63             | 38.62                 | 14.31           | 31.77              | 56.79          | 74.00               | -17.21          | Vertical     |
| 12310.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 14772.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 17234.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 4924.00         | 41.58             | 31.90                 | 8.70            | 32.15              | 50.03          | 74.00               | -23.97          | Horizontal   |
| 7386.00         | 32.16             | 36.49                 | 11.76           | 31.83              | 48.58          | 74.00               | -25.42          | Horizontal   |
| 9848.00         | 31.91             | 38.62                 | 14.31           | 31.77              | 53.07          | 74.00               | -20.93          | Horizontal   |
| 12310.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |
| 14772.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |
| 17234.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |

## Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 9848.00         | 24.19             | 38.62                 | 14.31           | 31.77              | 45.35          | 54.00               | -8.65           | Vertical     |

Note : Final AV value=AV+ducycycle correction factor=45.35+0.12=45.47dBuV/m@3m

|            |               |               |        |
|------------|---------------|---------------|--------|
| Test mode: | 802.11n(HT40) | Test channel: | Lowest |
|------------|---------------|---------------|--------|

**Peak value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4844.00         | 37.91             | 31.81                 | 8.63            | 32.11              | 46.24          | 74.00               | -27.76          | Vertical     |
| 7266.00         | 32.71             | 36.28                 | 11.69           | 31.94              | 48.74          | 74.00               | -25.26          | Vertical     |
| 9688.00         | 31.64             | 38.13                 | 14.21           | 31.52              | 52.46          | 74.00               | -21.54          | Vertical     |
| 12060.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 14472.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 16884.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 4844.00         | 36.95             | 31.81                 | 8.63            | 32.11              | 45.28          | 74.00               | -28.72          | Horizontal   |
| 7266.00         | 32.65             | 36.28                 | 11.69           | 31.94              | 48.68          | 74.00               | -25.32          | Horizontal   |
| 9688.00         | 31.30             | 38.13                 | 14.21           | 31.52              | 52.12          | 74.00               | -21.88          | Horizontal   |
| 12060.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |
| 14472.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |
| 16884.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |

|            |               |               |        |
|------------|---------------|---------------|--------|
| Test mode: | 802.11n(HT40) | Test channel: | Middle |
|------------|---------------|---------------|--------|

**Peak value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4874.00         | 37.38             | 31.85                 | 8.66            | 32.12              | 45.77          | 74.00               | -28.23          | Vertical     |
| 7311.00         | 33.04             | 36.37                 | 11.71           | 31.91              | 49.21          | 74.00               | -24.79          | Vertical     |
| 9748.00         | 32.84             | 38.27                 | 14.25           | 31.56              | 53.80          | 74.00               | -20.20          | Vertical     |
| 12185.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 14622.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 17059.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 4874.00         | 38.16             | 31.85                 | 8.66            | 32.12              | 46.55          | 74.00               | -27.45          | Horizontal   |
| 7311.00         | 31.84             | 36.37                 | 11.71           | 31.91              | 48.01          | 74.00               | -25.99          | Horizontal   |
| 9748.00         | 32.80             | 38.27                 | 14.25           | 31.56              | 53.76          | 74.00               | -20.24          | Horizontal   |
| 12185.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |
| 14622.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |
| 17059.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |

|            |               |               |         |
|------------|---------------|---------------|---------|
| Test mode: | 802.11n(HT40) | Test channel: | Highest |
|------------|---------------|---------------|---------|

## Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4904.00         | 41.48             | 31.88                 | 8.68            | 32.13              | 49.91          | 74.00               | -24.09          | Vertical     |
| 7356.00         | 32.81             | 36.45                 | 11.75           | 31.86              | 49.15          | 74.00               | -24.85          | Vertical     |
| 9808.00         | 35.49             | 38.43                 | 14.29           | 31.68              | 56.53          | 74.00               | -17.47          | Vertical     |
| 12310.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 14772.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 17234.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 4904.00         | 41.31             | 31.88                 | 8.68            | 32.13              | 49.74          | 74.00               | -24.26          | Horizontal   |
| 7356.00         | 31.99             | 36.45                 | 11.75           | 31.86              | 48.33          | 74.00               | -25.67          | Horizontal   |
| 9808.00         | 31.78             | 38.43                 | 14.29           | 31.68              | 52.82          | 74.00               | -21.18          | Horizontal   |
| 12310.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |
| 14772.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |
| 17234.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |

## Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 9808.00         | 24.06             | 38.43                 | 14.29           | 31.68              | 45.10          | 54.00               | -8.90           | Vertical     |

Note : Final AV value=AV+ducycle correction factor=45.10+0.23=45.33dBuV/m@3m

## Notes:

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

## ■ Unwanted Emissions in restricted Frequency Bands

|            |         |               |        |
|------------|---------|---------------|--------|
| Test mode: | 802.11b | Test channel: | Lowest |
|------------|---------|---------------|--------|

### Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 2310.00         | 39.57             | 27.14                 | 6.19            | 42.04                    | 30.86          | 74.00               | -43.14          | Horizontal   |
| 2390.00         | 47.88             | 27.37                 | 6.31            | 42.11                    | 39.45          | 74.00               | -34.55          | Horizontal   |
| 2310.00         | 38.10             | 27.14                 | 6.19            | 42.04                    | 29.39          | 74.00               | -44.61          | Vertical     |
| 2390.00         | 49.12             | 27.37                 | 6.31            | 42.11                    | 40.69          | 74.00               | -33.31          | Vertical     |

### Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 2310.00         | 29.93             | 27.14                 | 6.19            | 42.04                    | 21.22          | 54.00               | -32.78          | Horizontal   |
| 2390.00         | 37.00             | 27.37                 | 6.31            | 42.11                    | 28.57          | 54.00               | -25.43          | Horizontal   |
| 2310.00         | 28.58             | 27.14                 | 6.19            | 42.04                    | 19.87          | 54.00               | -34.13          | Vertical     |
| 2390.00         | 38.96             | 27.37                 | 6.31            | 42.11                    | 30.53          | 54.00               | -23.47          | Vertical     |

|            |         |               |         |
|------------|---------|---------------|---------|
| Test mode: | 802.11b | Test channel: | Highest |
|------------|---------|---------------|---------|

### Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 2483.50         | 48.33             | 27.66                 | 6.45            | 42.01                    | 40.43          | 74.00               | -33.57          | Horizontal   |
| 2500.00         | 40.82             | 27.70                 | 6.47            | 42.00                    | 32.99          | 74.00               | -41.01          | Horizontal   |
| 2483.50         | 48.16             | 27.66                 | 6.45            | 42.01                    | 40.26          | 74.00               | -33.74          | Vertical     |
| 2500.00         | 41.97             | 27.70                 | 6.47            | 42.00                    | 34.14          | 74.00               | -39.86          | Vertical     |

### Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 2483.50         | 36.98             | 27.66                 | 6.45            | 42.01                    | 29.08          | 54.00               | -24.92          | Horizontal   |
| 2500.00         | 33.48             | 27.70                 | 6.47            | 42.00                    | 25.65          | 54.00               | -28.35          | Horizontal   |
| 2483.50         | 37.74             | 27.66                 | 6.45            | 42.01                    | 29.84          | 54.00               | -24.16          | Vertical     |
| 2500.00         | 32.28             | 27.70                 | 6.47            | 42.00                    | 24.45          | 54.00               | -29.55          | Vertical     |

|            |         |               |        |
|------------|---------|---------------|--------|
| Test mode: | 802.11g | Test channel: | Lowest |
|------------|---------|---------------|--------|

**Peak value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 2310.00         | 39.61             | 27.14                 | 6.19            | 42.04                    | 30.90          | 74.00               | -43.10          | Horizontal   |
| 2390.00         | 47.94             | 27.37                 | 6.31            | 42.11                    | 39.51          | 74.00               | -34.49          | Horizontal   |
| 2310.00         | 38.15             | 27.14                 | 6.19            | 42.04                    | 29.44          | 74.00               | -44.56          | Vertical     |
| 2390.00         | 49.19             | 27.37                 | 6.31            | 42.11                    | 40.76          | 74.00               | -33.24          | Vertical     |

|            |         |               |         |
|------------|---------|---------------|---------|
| Test mode: | 802.11g | Test channel: | Highest |
|------------|---------|---------------|---------|

**Peak value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 2483.50         | 48.39             | 27.66                 | 6.45            | 42.01                    | 40.49          | 74.00               | -33.51          | Horizontal   |
| 2500.00         | 40.87             | 27.70                 | 6.47            | 42.00                    | 33.04          | 74.00               | -40.96          | Horizontal   |
| 2483.50         | 48.23             | 27.66                 | 6.45            | 42.01                    | 40.33          | 74.00               | -33.67          | Vertical     |
| 2500.00         | 42.03             | 27.70                 | 6.47            | 42.00                    | 34.20          | 74.00               | -39.80          | Vertical     |

|            |               |               |        |
|------------|---------------|---------------|--------|
| Test mode: | 802.11n(HT20) | Test channel: | Lowest |
|------------|---------------|---------------|--------|

**Peak value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 2310.00         | 39.94             | 27.14                 | 6.19            | 42.04              | 31.23          | 74.00               | -42.77          | Horizontal   |
| 2390.00         | 48.38             | 27.37                 | 6.31            | 42.11              | 39.95          | 74.00               | -34.05          | Horizontal   |
| 2310.00         | 38.50             | 27.14                 | 6.19            | 42.04              | 29.79          | 74.00               | -44.21          | Vertical     |
| 2390.00         | 49.71             | 27.37                 | 6.31            | 42.11              | 41.28          | 74.00               | -32.72          | Vertical     |

|            |               |               |         |
|------------|---------------|---------------|---------|
| Test mode: | 802.11n(HT20) | Test channel: | Highest |
|------------|---------------|---------------|---------|

**Peak value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 2483.50         | 48.86             | 27.66                 | 6.45            | 42.01              | 40.96          | 74.00               | -33.04          | Horizontal   |
| 2500.00         | 41.24             | 27.70                 | 6.47            | 42.00              | 33.41          | 74.00               | -40.59          | Horizontal   |
| 2483.50         | 48.77             | 27.66                 | 6.45            | 42.01              | 40.87          | 74.00               | -33.13          | Vertical     |
| 2500.00         | 42.45             | 27.70                 | 6.47            | 42.00              | 34.62          | 74.00               | -39.38          | Vertical     |

|            |               |               |        |
|------------|---------------|---------------|--------|
| Test mode: | 802.11n(HT40) | Test channel: | Lowest |
|------------|---------------|---------------|--------|

**Peak value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 2310.00         | 39.63             | 27.14                 | 6.19            | 42.04                    | 30.92          | 74.00               | -43.08          | Horizontal   |
| 2390.00         | 47.97             | 27.37                 | 6.31            | 42.11                    | 39.54          | 74.00               | -34.46          | Horizontal   |
| 2310.00         | 38.17             | 27.14                 | 6.19            | 42.04                    | 29.46          | 74.00               | -44.54          | Vertical     |
| 2390.00         | 49.22             | 27.37                 | 6.31            | 42.11                    | 40.79          | 74.00               | -33.21          | Vertical     |

|            |               |               |         |
|------------|---------------|---------------|---------|
| Test mode: | 802.11n(HT40) | Test channel: | Highest |
|------------|---------------|---------------|---------|

**Peak value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 2483.50         | 48.42             | 27.66                 | 6.45            | 42.01                    | 40.52          | 74.00               | -33.48          | Horizontal   |
| 2500.00         | 40.89             | 27.70                 | 6.47            | 42.00                    | 33.06          | 74.00               | -40.94          | Horizontal   |
| 2483.50         | 48.27             | 27.66                 | 6.45            | 42.01                    | 40.37          | 74.00               | -33.63          | Vertical     |
| 2500.00         | 42.05             | 27.70                 | 6.47            | 42.00                    | 34.22          | 74.00               | -39.78          | Vertical     |

**Remarks:**

1. The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.
2. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

## 8 Test Setup Photo

Reference to the **appendix I** for details.

## 9 EUT Constructional Details

Reference to the **appendix II** for details.

-----End-----