



TEST REPORT NUMBER: (8523)083-0588

TEST REPORT

Applicant:	Shantou Create Toys Industrial Co.,Ltd	Fax:	---
		E-mail:	---
Address :	East side of 1st Fengxin Road, Fengxiang Street, Chenghai District, Shantou City, Guangdong Province, China		
Test Date :	2023-4-13 to 2023-4-17		

Manufacturer or Supplier :	Shantou Create Toys Industrial Co.,Ltd
Address :	East side of 1st Fengxin Road, Fengxiang Street, Chenghai District, Shantou City, Guangdong Province, China
Sample Description:	Magic Steer Wrist Cars
Model number:	17002
Additional Model :	8022, 839779
Rated Voltage:	DC3V (AAA*2)
FCC ID :	2AZNN-8022

The submitted sample of the above equipment has been tested according to following standard(s)

47 CFR Part 15, Subpart C 249

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Assistant Manager

Name: Nick Lung

Date: APR 19,2023



TEST REPORT NUMBER: (8523)083-0588

1 Test Summary

Test Item	IC Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10-2013	N/A
Field Strength of the Fundamental Signal	47 CFR Part 15, Subpart C Section 15.249 (a)	RSS-Gen section 6.12 & ANSI C63.10-2013	PASS
Spurious Emissions	47 CFR Part 15, Subpart C Section 15.249 (a)/15.209	RSS-Gen section 6.13 & ANSI C63.10-2013	PASS
Restricted bands around fundamental frequency	47 CFR Part 15, Subpart C Section 15.249(a)/15.205	RSS-Gen section 6.13 & ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.215 (c)	RSS-Gen section 6.7 & ANSI C63.10-2013	PASS



TEST REPORT NUMBER: (8523)083-0588

2 Contents

	Page
TEST REPORT	1
1 TEST SUMMARY	2
2 CONTENTS	3
3 GENERAL INFORMATION	4
3.1 CLIENT INFORMATION	4
3.2 GENERAL DESCRIPTION OF EUT	4
3.3 TEST ENVIRONMENT AND MODE	6
3.4 DESCRIPTION OF SUPPORT UNITS	6
3.5 STATEMENT OF THE MEASUREMENT UNCERTAINTY	7
3.6 TEST LOCATION	8
3.7 TEST FACILITY	8
3.8 DEVIATION FROM STANDARDS	8
3.9 ABNORMALITIES FROM STANDARD CONDITIONS	8
3.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER	8
3.11 EQUIPMENT LIST	9
4 TEST RESULTS AND MEASUREMENT DATA	10
4.1 ANTENNA REQUIREMENT	10
4.2 RADIATED EMISSION	11
4.3 20DB BANDWIDTH	19
5 PHOTOGRAPHS	22
5.1 RADIATED EMISSION TEST SETUP	22
5.2 EUT CONSTRUCTIONAL DETAILS	22



TEST REPORT NUMBER: (8523)083-0588

3 General Information

3.1 Client Information

Applicant:	Shantou Create Toys Industrial Co.,Ltd
Address of Applicant:	East side of 1st Fengxin Road, Fengxiang Street, Chenghai District, Shantou City, Guangdong Province, China
Manufacturer:	Shantou Create Toys Industrial Co.,Ltd
Address of Manufacturer:	East side of 1st Fengxin Road, Fengxiang Street, Chenghai District, Shantou City, Guangdong Province, China

3.2 General Description of EUT

Name:	Magic Steer Wrist Cars
Test Model No.:	17002
Model No.:	17002, 8022, 839779
Trade Mark :	N/A
Serial No.:	---
Software Version:	CX8022TX—RED
Hardware Version:	WD-CX8022TX-02
Frequency Range:	2405-2475MHz
Modulation Type:	GFSK
Number of Channels:	71
Sample Type:	Portable product
Antenna Type:	WHIP antenna
Antenna Gain:	0.17dBi
Power Supply:	DC3V (AAA*2)



TEST REPORT NUMBER: (8523)083-0588

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2405MHz	20	2425MHz	40	2445MHz	60	2465MHz
1	2406MHz	21	2426MHz	41	2446MHz	61	2466MHz
2	2407MHz	22	2427MHz	42	2447MHz	62	2467MHz
3	2408MHz	23	2428MHz	43	2448MHz	63	2468MHz
4	2409MHz	24	2429MHz	44	2449MHz	64	2469MHz
5	2410MHz	25	2430MHz	45	2450MHz	65	2470MHz
6	2411MHz	26	2431MHz	46	2451MHz	66	2471MHz
7	2412MHz	27	2432MHz	47	2452MHz	67	2472MHz
8	2413MHz	28	2433MHz	48	2453MHz	68	2473MHz
9	2414MHz	29	2434MHz	49	2454MHz	69	2474MHz
10	2415MHz	30	2435MHz	50	2455MHz	70	2475MHz
11	2416MHz	31	2436MHz	51	2456MHz		
12	2417MHz	32	2437MHz	52	2457MHz		
13	2418MHz	33	2438MHz	53	2458MHz		
14	2419MHz	34	2439MHz	54	2459MHz		
15	2420MHz	35	2440MHz	55	2460MHz		
16	2421MHz	36	2441MHz	56	2461MHz		
17	2422MHz	37	2442MHz	57	2462MHz		
18	2423MHz	38	2443MHz	58	2463MHz		
19	2424MHz	39	2444MHz	59	2464MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2405MHz
The Middle channel	2445MHz
The Highest channel	2475MHz



TEST REPORT NUMBER: (8523)083-0588

3.3 Test Environment and Mode

Operating Environment:	
Temperature:	29 °C
Humidity:	59 % RH
Atmospheric Pressure:	1001mbar
Test mode:	
Test Mode:	Use test software (RF test) to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.

3.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.	Remark	FCC certification
/	/	/	/	CQA



TEST REPORT NUMBER: (8523)083-0588

3.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for **CQA** laboratory is reported:

No.	Item	Uncertainty
1	Radiated Emission (Below 1GHz)	5.12dB
2	Radiated Emission (Above 1GHz)	4.60dB
3	Conducted Disturbance (0.15~30MHz)	3.34dB
4	Radio Frequency	3×10^{-8}
5	Duty cycle	0.6 %
6	Occupied Bandwidth	1.1%
7	RF conducted power	0.86dB
8	RF power density	0.74
9	Conducted Spurious emissions	0.86dB
10	Temperature test	0.8℃
11	Humidity test	2.0%
12	Supply voltages	0.5 %
13	time	0.6 %.
14	Frequency Error	5.5 Hz



TEST REPORT NUMBER: (8523)083-0588

3.6 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

3.7 Test Facility

• **ISED No.: 22984**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements

• **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

• **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

3.8 Deviation from Standards

None.

3.9 Abnormalities from Standard Conditions

None.

3.10 Other Information Requested by the Customer

None.



TEST REPORT NUMBER: (8523)083-0588

3.11 Equipment List

Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2022/9/9	2023/9/8
Spectrum analyzer	R&S	FSU26	CQA-038	2022/9/9	2023/9/8
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2022/9/9	2023/9/8
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2022/9/9	2023/9/8
Loop antenna	Schwarzbeck	FMZB1516	CQA-060	2021/9/16	2024/9/15
Bilog Antenna	R&S	HL562	CQA-011	2021/9/16	2024/9/15
Horn Antenna	R&S	HF906	CQA-012	2021/9/16	2024/9/15
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2021/9/16	2024/9/15
Coaxial Cable (Above 1GHz)	CQA	N/A	C019	2022/9/9	2023/9/8
Coaxial Cable (Below 1GHz)	CQA	N/A	C020	2022/9/9	2023/9/8
Antenna Connector	CQA	RFC-01	CQA-080	2022/9/9	2023/9/8
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2022/9/9	2023/9/8
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2022/9/9	2023/9/8

Note:

The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.



TEST REPORT NUMBER: (8523)083-0588

4 Test results and Measurement Data

4.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203
EUT Antenna:	Refer to (8523)083-05889(C)
The antenna is soldered on the PCB, no need to consider replacement. best case gain Antenna is 0.17dBi.	



TEST REPORT NUMBER: (8523)083-0588




4.2 Radiated Emission

Test Requirement:	47 CFR Part 15, Subpart C Section 15.205/15.209				
Test Method:	ANSI C63.10 & RSS-Gen section 6.12/6.13				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Note: For fundamental frequency, RBW=5MHz, VBW=5MHz, Peak detector is for PK value, RMS detector is for Average value.					
Limit: (Spurious Emissions and band edge)	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
Note: 1) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device. 2) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.					
Limit: (Field strength of the	Frequency	Limit (dBuV/m @3m)		Remark	
	2400MHz-2483.5MHz	94.0		Average Value	



BUREAU
VERITAS

TEST REPORT NUMBER: (8523)083-0588

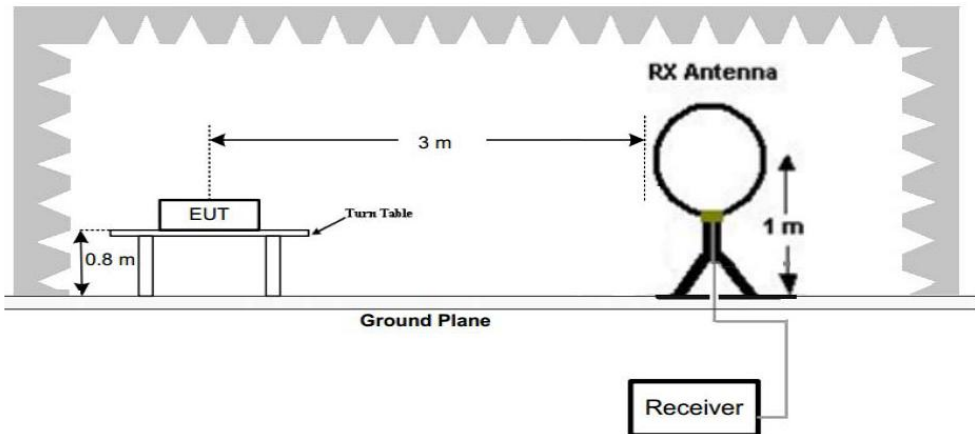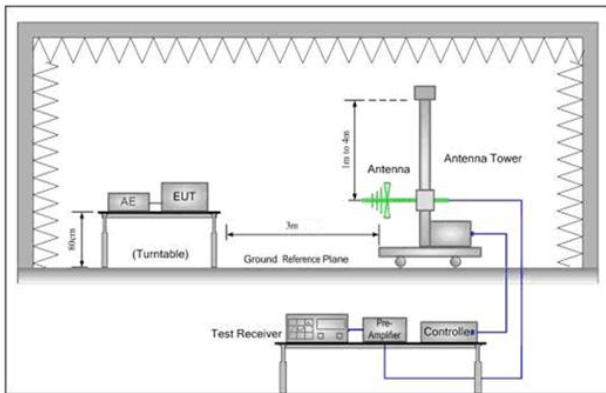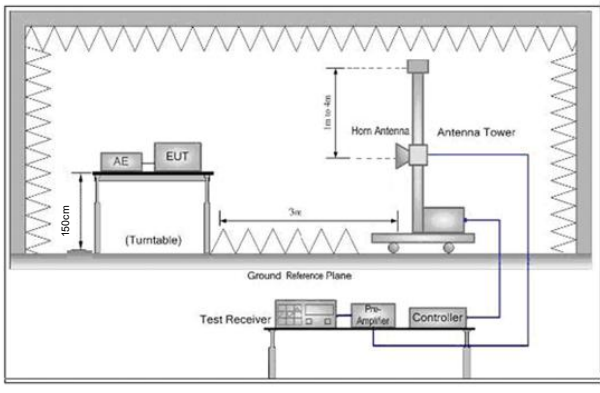fundamental signal)		114.0	Peak Value
Test Setup:			
			
Figure 1. Below 30MHz			
			
Figure 2. 30MHz to 1GHz		Figure 3. Above 1 GHz	
Test Procedure:	a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. Note: For the radiated emission test above 1GHz: Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.		



TEST REPORT NUMBER: (8523)083-0588

	c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel,the middle channel,the Highest channel h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode,And found the X axis positioning which it is worse case. i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with GFSK at lowest, middle and highest channel.
Final Test Mode:	Pretest the EUT at Transmitting mode, For below 1GHz part, through pre-scan, the worst case is the lowest channel. Only the worst case is recorded in the report.
Test Voltage:	DC3V (AAA*2)
Test Results:	Pass




BUREAU
VERITAS

TEST REPORT NUMBER: (8523)083-0588

Measurement Data

30MHz~1GHz (the worst case)

Test mode: Transmitting (Lowest channel) Vertical

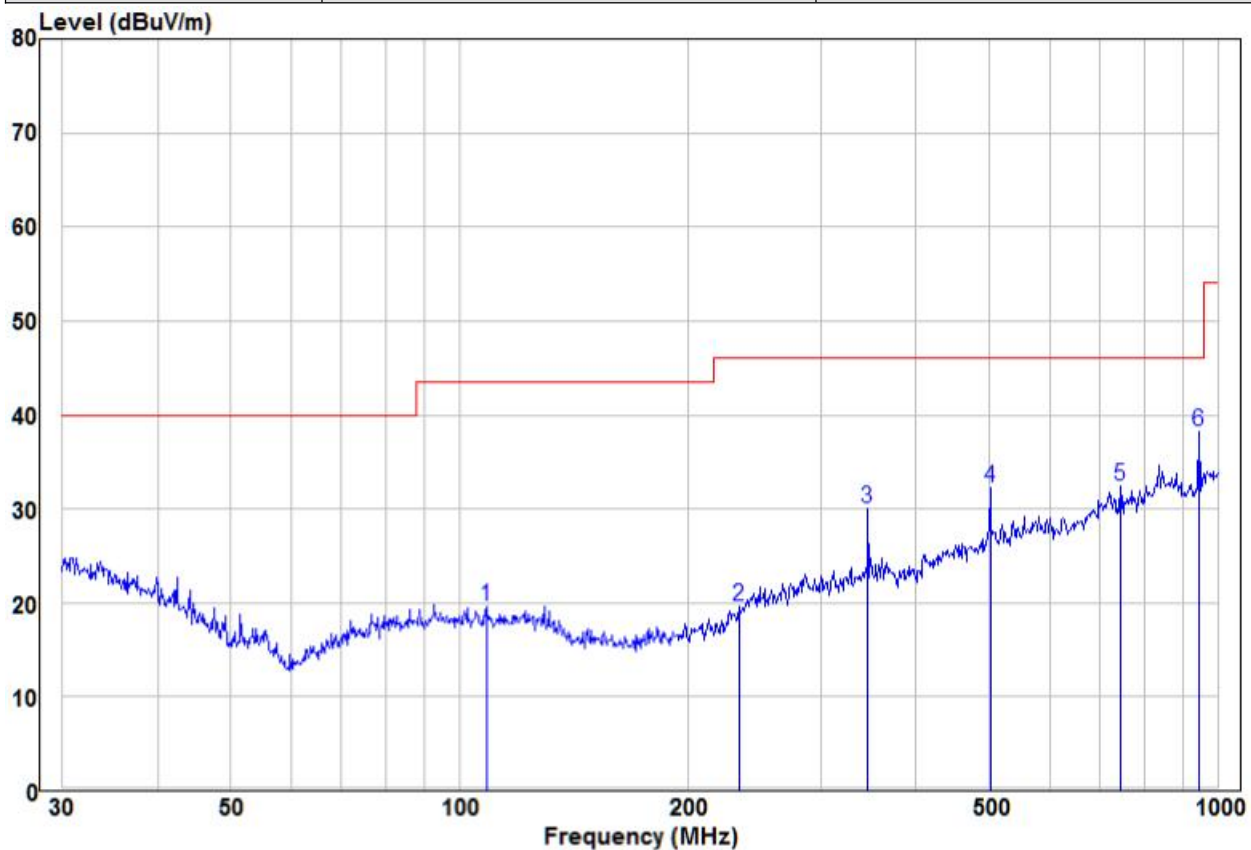

	Freq	Read		Limit	Over		
		Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Pol/Phase
1	108.65	9.38	10.24	19.62	43.50	-23.88	Peak
2	234.17	8.78	10.91	19.69	46.00	-26.31	Peak
3	345.60	15.11	14.84	29.95	46.00	-16.05	Peak
4	501.18	13.91	18.29	32.20	46.00	-13.80	Peak
5	744.87	10.57	21.88	32.45	46.00	-13.55	Peak
6 pp	945.44	14.58	23.62	38.20	46.00	-7.80	Peak
							VERTICAL
							VERTICAL
							VERTICAL
							VERTICAL
							VERTICAL
							VERTICAL

Bureau Veritas Shenzhen Co., Ltd

1st Floor, Block A, Minlida Industrial Building, 4th
Zone of Honghualing Industrial Park, Shenzhen,
Guangdong Province, China

Tel: 0755-86135643

Email: <http://www.bureauveritas.com>




BUREAU
VERITAS

TEST REPORT NUMBER: (8523)083-0588

30MHz~1GHz (the worst case)

Test mode: Transmitting (Lowest channel) Horizontal

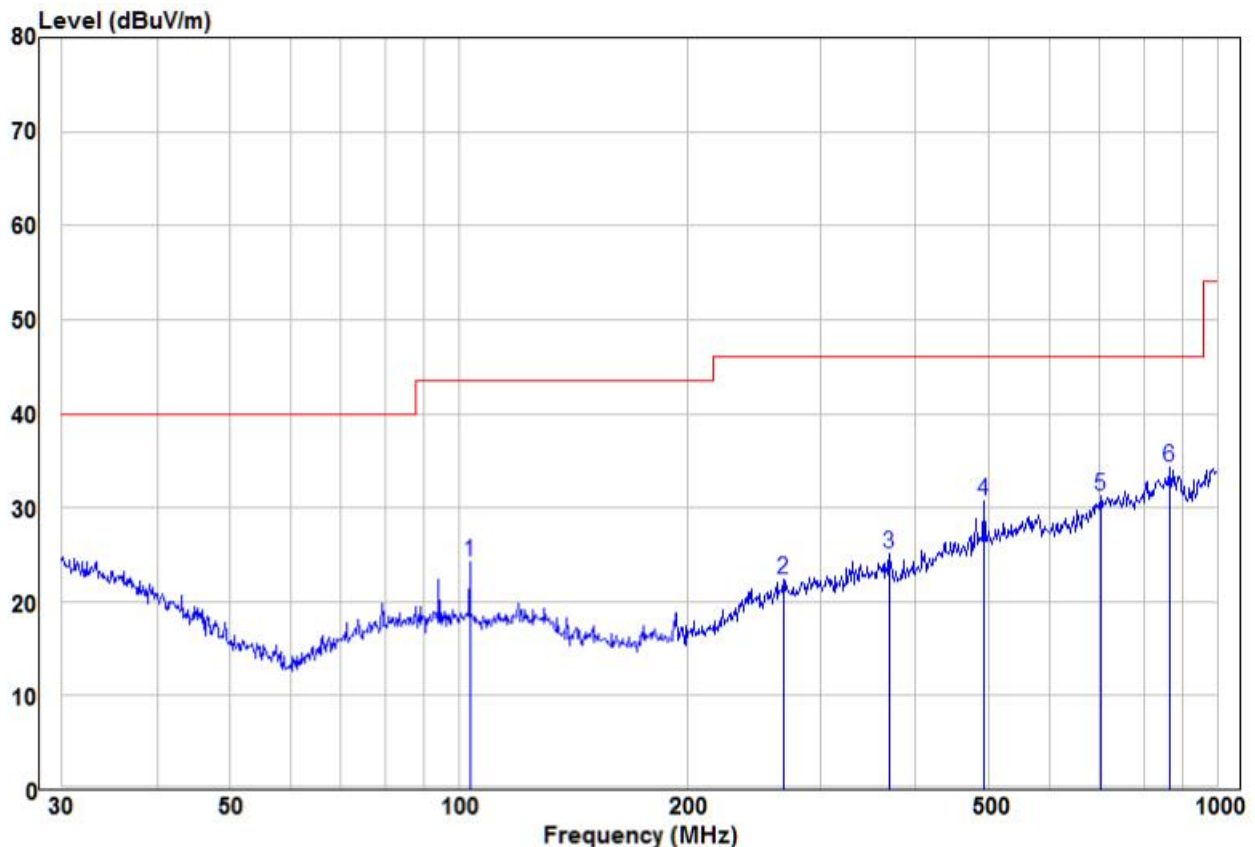

	Read			Limit	Over		
Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	103.44	13.81	10.49	24.30	43.50	-19.20 Peak	HORIZONTAL
2	267.55	9.65	12.66	22.31	46.00	-23.69 Peak	HORIZONTAL
3	369.40	9.64	15.42	25.06	46.00	-20.94 Peak	HORIZONTAL
4	492.47	12.70	18.04	30.74	46.00	-15.26 Peak	HORIZONTAL
5	701.76	10.10	21.10	31.20	46.00	-14.80 Peak	HORIZONTAL
6 pp	866.09	10.38	23.98	34.36	46.00	-11.64 Peak	HORIZONTAL



TEST REPORT NUMBER: (8523)083-0588

Above 1GHz							
Test mode:		Transmitting		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2390	54.88	-4.28	50.60	74	-23.40	Peak	H
2390	40.78	-4.28	36.50	54	-17.50	AVG	H
2400	51.12	1.13	52.25	74	-21.75	Peak	H
2400	38.14	1.13	39.27	54	-14.73	AVG	H
2405	96.49	-9.33	87.16	114	-26.84	peak	H
2405	92.16	-9.34	82.82	94	-11.18	AVG	H
4810	54.79	-4.28	50.51	74	-23.49	peak	H
4810	43.09	-4.28	38.81	54	-15.19	AVG	H
7215	53.32	1.13	54.45	74	-19.55	peak	H
7215	36.21	1.13	37.34	54	-16.66	AVG	H
2390	60.63	-9.2	51.43	74	-22.57	peak	V
2390	44.95	-9.2	35.75	54	-18.25	AVG	V
2400	62.55	-9.2	53.35	74	-20.65	peak	V
2400	45.09	-9.2	35.89	54	-18.11	AVG	V
2405	100.80	-9.33	91.47	114	-22.53	peak	V
2405	96.65	-9.33	87.32	94	-6.68	AVG	V
4810	56.71	-4.28	52.43	74	-21.57	peak	V
4810	40.78	-4.28	36.50	54	-17.50	AVG	V
7215	51.32	1.13	52.45	74	-21.55	peak	V
7215	37.14	1.13	38.27	54	-15.73	AVG	V



TEST REPORT NUMBER: (8523)083-0588

Test mode:		Transmitting		Test channel:		Middle	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2445	96.50	-9.36	87.14	114	-26.86	peak	H
2445	93.02	-9.36	83.66	94	-10.34	AVG	H
4890	55.36	-4.14	51.22	74	-22.78	peak	H
4890	42.08	-4.14	37.94	54	-16.06	AVG	H
7335	51.18	0.56	51.74	74	-22.26	peak	H
7335	37.97	0.56	38.53	54	-15.47	AVG	H
2445	98.66	-9.37	89.29	114	-24.71	peak	V
2445	97.93	-9.37	88.56	94	-5.44	AVG	V
4890	57.52	-4.14	53.38	74	-20.62	peak	V
4890	43.16	-4.14	39.02	54	-14.98	AVG	V
7335	52.75	0.56	53.31	74	-20.69	peak	V
7335	37.68	0.56	38.24	54	-15.76	AVG	V



TEST REPORT NUMBER: (8523)083-0588


Test mode:		Transmitting		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2475	100.07	-9.23	90.84	114	-23.16	peak	H
2475	98.48	-9.23	89.25	94	-4.75	AVG	H
2483.5	59.88	-9.29	50.59	74	-23.41	Peak	H
2483.5	44.89	-9.29	35.60	54	-18.40	AVG	H
4950	54.72	-4.03	50.69	74	-23.31	peak	H
4950	43.59	-4.03	39.56	54	-14.44	AVG	H
7425	51.66	1.68	53.34	74	-20.66	peak	H
7425	35.98	1.68	37.66	54	-16.34	AVG	H
2475	96.52	-9.23	87.29	114	-26.71	peak	V
2475	95.05	-9.23	85.82	94	-8.18	AVG	V
2483.5	60.57	-9.29	51.28	74	-22.72	peak	V
2483.5	44.96	-9.29	35.67	54	-18.33	AVG	V
4950	56.18	-4.03	52.15	74	-21.85	peak	V
4950	41.68	-4.03	37.65	54	-16.35	AVG	V
7425	52.57	1.68	54.25	74	-19.75	peak	V
7425	36.05	1.68	37.73	54	-16.27	AVG	V

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 2) Scan from 9kHz to 25GHz,The disturbance above 8GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported .

TEST REPORT NUMBER: (8523)083-0588

4.3 20dB Bandwidth

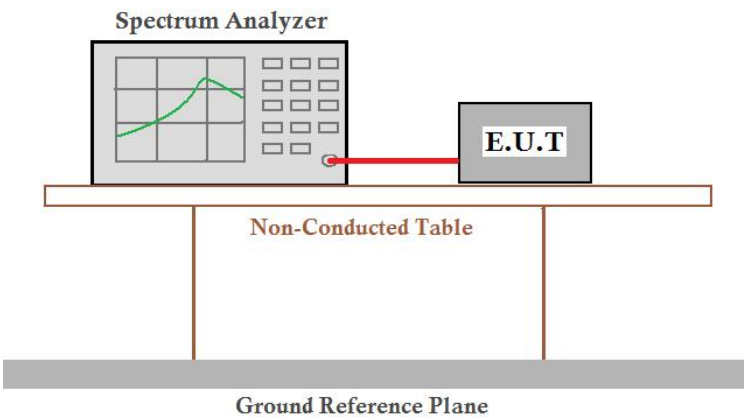Test Requirement:	47 CFR Part 15C Section 15.215
Test Method:	ANSI C63.10:2013 & RSS-Gen Section 6.7
Test Setup:	
Test Mode:	Transmitting with GFSK at lowest, middle and highest channel.
Limit:	N/A
Test Results:	Pass

Measurement Data

Test channel	20dB bandwidth (MHz)	Results
Lowest	1.199	Pass
Middle	1.205	Pass
Highest	1.205	Pass




BUREAU
VERITAS

TEST REPORT NUMBER: (8523)083-0588

Test plot as follows:

Test channel:	Lowest
---------------	--------

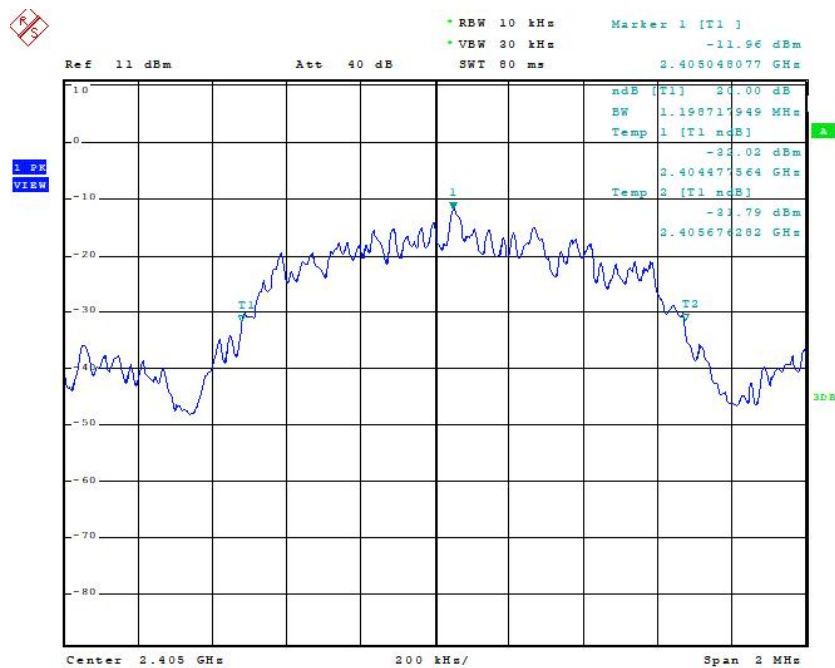





BUREAU
VERITAS

TEST REPORT NUMBER: (8523)083-0588

Test channel: Middle

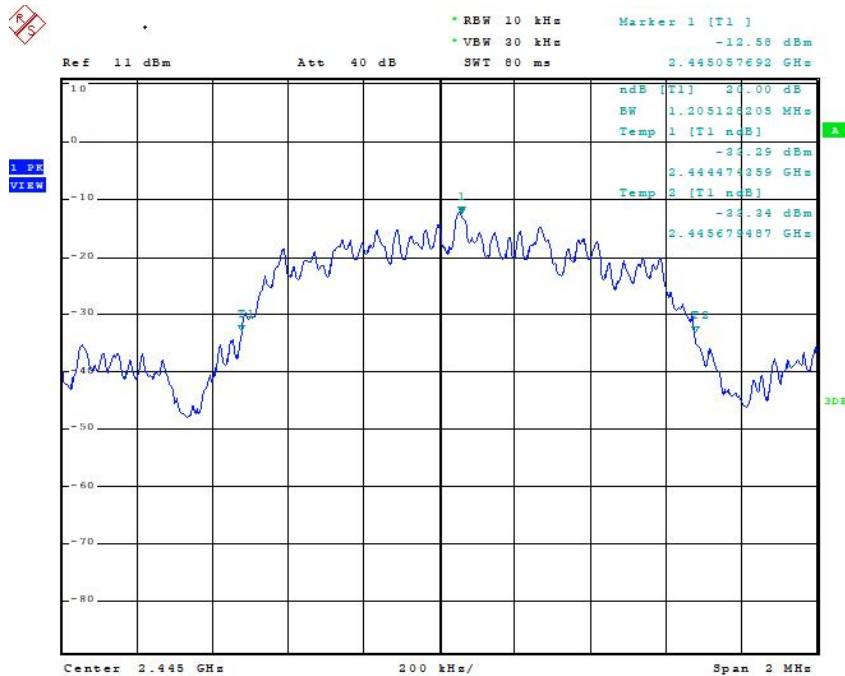

Test channel: Highest

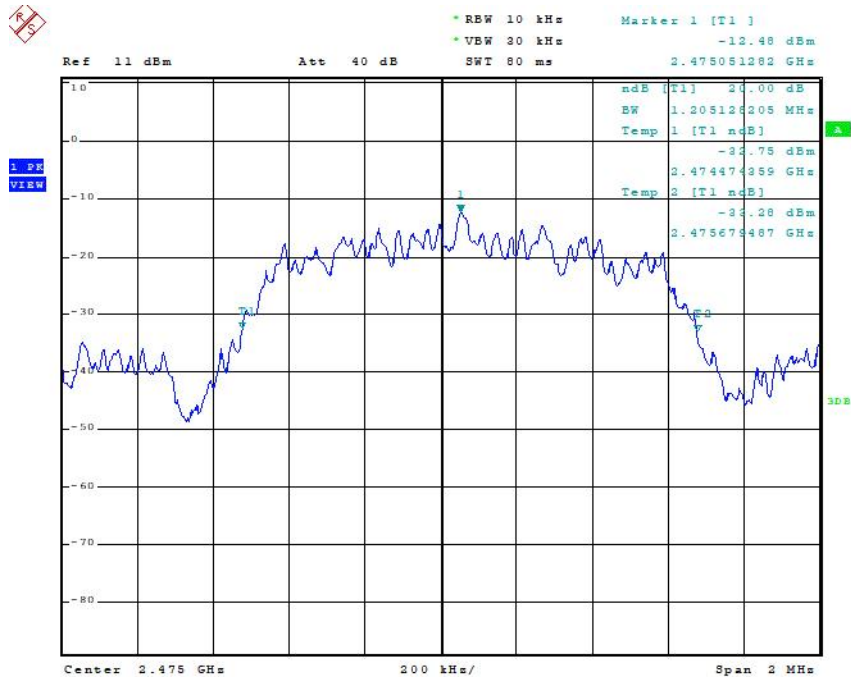

Bureau Veritas Shenzhen Co., Ltd

1st Floor, Block A, Minlida Industrial Building, 4th
Zone of Honghualing Industrial Park, Shenzhen,
Guangdong Province, China

Tel: 0755-86135643

Email: <http://www.bureauveritas.com>



TEST REPORT NUMBER: (8523)083-0588

5 Photographs

5.1 Radiated Emission Test Setup

Refer to (8523)083-0588(B)

5.2 EUT Constructional Details

Refer to (8523)083-0588(C)

***** END OF REPORT *****