

FCC TEST REPORT

Client Name : Dongguan Chuanggu Electronic Commerce Co., Ltd
Address : Rm.2005, F20,16 bldg,Yuegang Financial Services
Center, NO.7, Keji 10 Rd., Songshanhu High-tech
Zone,Dongguan,Guangdong China
Product Name : Baby Monitor
Date : Jul. 01, 2021

Shenzhen Anbotech Compliance Laboratory Limited



Contents

1. General Information.....	5
1.1. Client Information.....	5
1.2. Description of Device (EUT).....	5
1.3. Auxiliary Equipment Used During Test.....	6
1.4. Description of Test Modes.....	6
1.5. List of channels.....	6
1.6. Description Of Test Setup.....	7
1.7. Test Equipment List.....	7
1.8. Measurement Uncertainty.....	9
1.9. Description of Test Facility.....	9
2. Summary of Test Results.....	10
3. Conducted Emission Test.....	11
3.1. Test Standard and Limit.....	11
3.2. Test Setup.....	11
3.3. Test Procedure.....	11
3.4. Test Data.....	11
4. Radiation Spurious Emission and Band Edge.....	16
4.1. Test Standard and Limit.....	16
4.2. Test Setup.....	16
4.3. Test Procedure.....	17
4.4. Test Data.....	18
5. Maximum Peak Output Power Test.....	26
5.1. Test Standard and Limit.....	26
5.2. Test Setup.....	26
5.3. Test Procedure.....	26
5.4. Test Data.....	26
6. 20DB Occupy Bandwidth Test.....	29
6.1. Test Standard.....	29
6.2. Test Setup.....	29
6.3. Test Procedure.....	29
6.4. Test Data.....	29
7. Carrier Frequency Separation Test.....	32
7.1. Test Standard and Limit.....	32
7.2. Test Setup.....	32
7.3. Test Procedure.....	32
7.4. Test Data.....	32
8. Number of Hopping Channel Test.....	35
8.1. Test Standard and Limit.....	35



8.2. Test Setup.....	35
8.3. Test Procedure.....	35
8.4. Test Data.....	35
9. Dwell Time Test.....	37
9.1. Test Standard and Limit.....	37
9.2. Test Setup.....	37
9.3. Test Procedure.....	37
9.4. Test Data.....	37
10. 100kHz Bandwidth of Frequency Band Edge Requirement.....	39
10.1. Test Standard and Limit.....	39
10.2. Test Setup.....	39
10.3. Test Procedure.....	39
10.4. Test Data.....	39
11. Antenna Requirement.....	43
11.1. Test Standard and Requirement.....	43
11.2. Antenna Connected Construction.....	43
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	44
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	46
APPENDIX III -- INTERNAL PHOTOGRAPH.....	50



TEST REPORT

Applicant : Dongguan Chuanggu Electronic Commerce Co., Ltd
Manufacturer : HONG KONG TORSTEN E-COMMERCE CO., LIMITED
Product Name : Baby Monitor
Model No. : GB5200-M
Trade Mark : RIENOK
Rating(s) : Input: DC 5V, 1A (with DC 3.7V, 4000 mAh battery inside)

Test Standard(s) : FCC Part15 Subpart C, Section 15.247

Test Method(s) : ANSI C63.10: 2020

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of receipt

Apr. 08, 2021

Date of Test

Apr. 08~30, 2021

Prepared by

Ella Liang

(Engineer /Ella Liang)

Approved & Authorized Signer

Kingkong Jin

(Manager / Kingkong Jin)

1. General Information

1.1. Client Information

Applicant	:	Dongguan Chuanggu Electronic Commerce Co., Ltd
Address	:	Rm.2005, F20,16 bldg,Yuegang Financial Services Center, NO.7, Keji 10 Rd., Songshanhu High-tech Zone,Dongguan,Guangdong China
Manufacturer	:	HONG KONG TORSTEN E-COMMERCE CO., LIMITED
Address	:	FLAT/RM 616 6/F KAM TEEM INDUSTRIAL BLDG 135 CONNAUGHT ROAD WEST SHEUNG WAN HK
Factory	:	HONG KONG TORSTEN E-COMMERCE CO., LIMITED
Address	:	FLAT/RM 616 6/F KAM TEEM INDUSTRIAL BLDG 135 CONNAUGHT ROAD WEST SHEUNG WAN HK

1.2. Description of Device (EUT)

Product Name	:	Baby Monitor	
Model No.	:	GB5200-M	
Trade Mark	:	RIENOK	
Test Power Supply	:	AC 120V, 60Hz for adapter/ AC 240V, 60Hz for adapter/ DC 3.7V battery inside	
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)	
Product Description	:	Operation Frequency:	2410~2477 MHz
		Number of Channel:	20 Channels
		Modulation Type:	FHSS (GFSK)
		Antenna Type:	Monopole antenna
		Antenna Gain(Peak):	2dBi
Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.			

1.3. Auxiliary Equipment Used During Test

Adapter	:	M/N: TEKA-UCA20EU Input: 100-240V~50/60Hz 0.35A Output: DC 5V, 2A, 10W
---------	---	--

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

TEST MODE:

Mode 1	GFSK	CH01	TX+Charging/ TX Only
Mode 2		CH10	
Mode 3		CH20	



Note: (1) The measurements are performed at the highest, middle, lowest available channels.

1.5. List of channels

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
01	2410	05	2424	09	2438	13	2452	17	2466
02	2413.5	06	2427.5	10	2441.5	14	2455.5	18	2469.5
03	2417	07	2431	11	2445	15	2459	19	2473
04	2420.5	08	2434.5	12	2448.5	16	2462.5	20	2477

Note:

1. The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.
2. EUT built-in battery-powered, fully-charged battery use of the test battery.

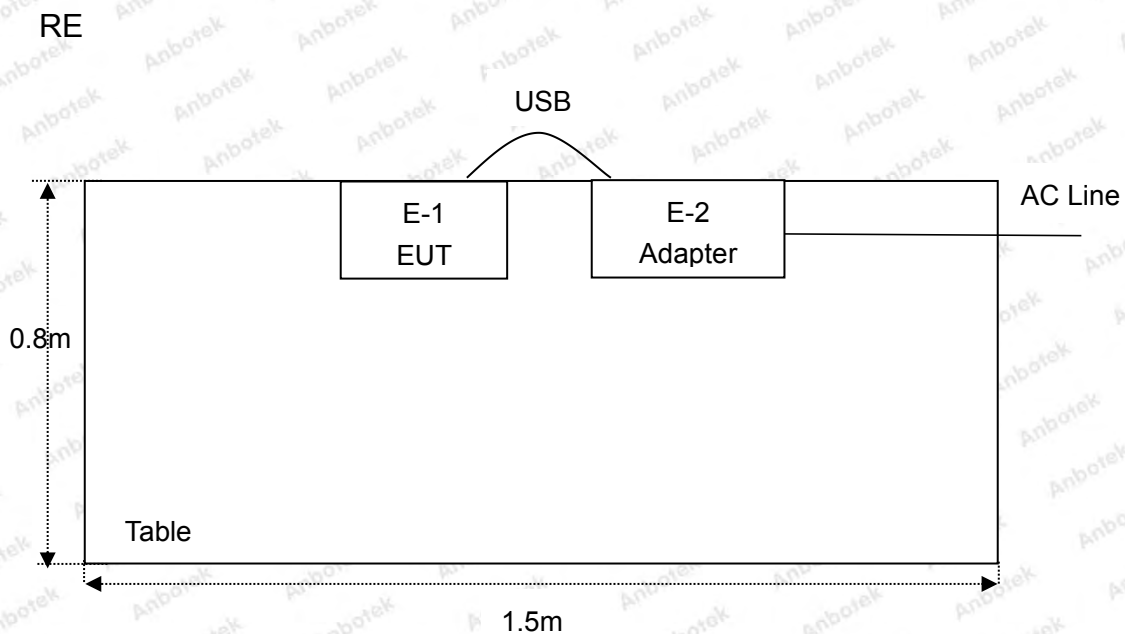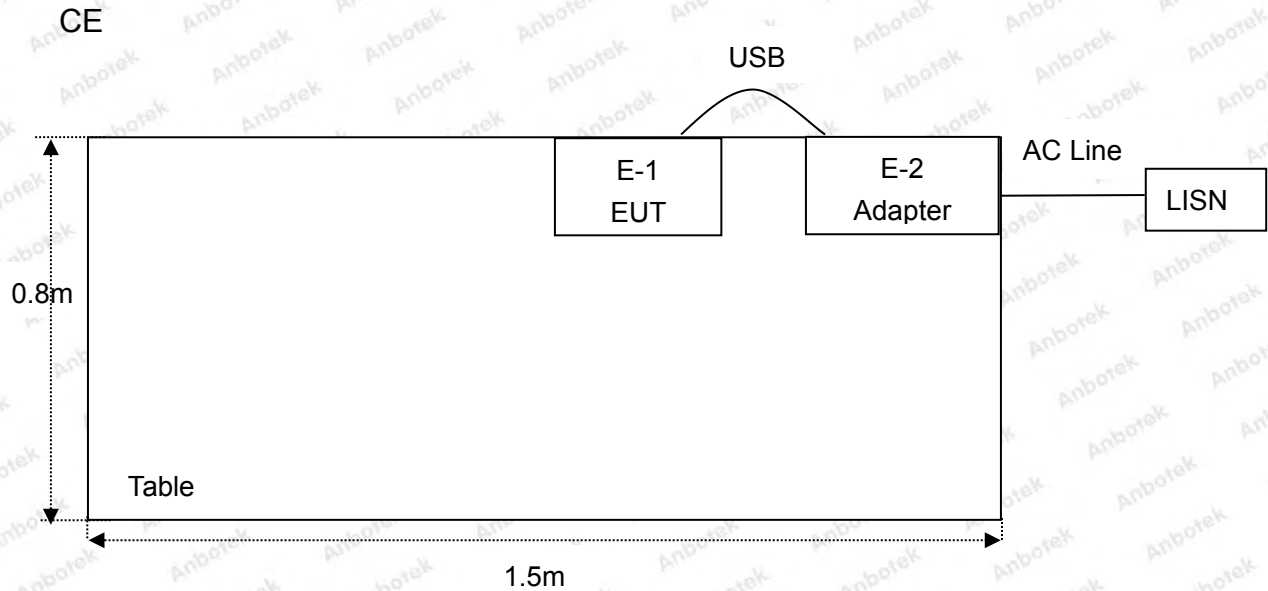1.6. Description Of Test Setup

1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Oct. 26, 2020	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 26, 2020	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Oct. 26, 2020	1 Year
4.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Oct. 26, 2020	1 Year
5.	MAX Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 26, 2020	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30 D	KD17503	Oct. 26, 2020	1 Year
7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 02, 2020	2 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Nov. 02, 2020	2 Year
9.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Nov. 02, 2020	2 Year
10.	Horn Antenna	A-INFO	LB-180400- KF	J211060628	Nov. 02, 2020	2 Year
11.	Pre-amplifier	SONOMA	310N	186860	Oct. 26, 2020	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
13.	RF Test Control System	YIHENG	YH3000	2017430	Oct. 26, 2020	1 Year
14.	Power Sensor	DAER	RPR3006W	15100041SN045	Oct. 26, 2020	1 Year
15.	Power Sensor	DAER	RPR3006W	15100041SN046	Oct. 26, 2020	1 Year
16.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 26, 2020	1 Year
17.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Oct. 26, 2020	1 Year
18.	Signal Generator	Agilent	E4421B	MY41000743	Oct. 26, 2020	1 Year
19.	DC Power Supply	IVYTECH	IV3605	1804D360510	Oct. 26, 2020	1 Year
20.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80 B	N/A	Oct. 26, 2020	1 Year

1.8. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
		Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

1.9. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, September 30, 2020.

ISED-Registration No.: 8058A

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A, September 30, 2020.

Test Location

Shenzhen Anbotech Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102



2. Summary of Test Results


Standard Section	Test Item	Result
15.203/15.247(c)	Antenna Requirement	PASS
15.207	Conducted Emission	PASS
15.205/15.209	Spurious Emission	PASS
15.247(b)(1)	Conducted Peak Output Power	PASS
15.247(a)(1)	20dB Occupied Bandwidth	PASS
15.247(a)(1)	Carrier Frequencies Separation	PASS
15.247(a)(1)	Hopping Channel Number	PASS
15.247(a)(1)	Dwell Time	PASS
15.247(d)	Band Edge	PASS
Remark: "N/A" is an abbreviation for Not Applicable.		

3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50
Remark: (1) *Decreasing linearly with logarithm of the frequency. (2) The lower limit shall apply at the transition frequency.			

3.2. Test Setup

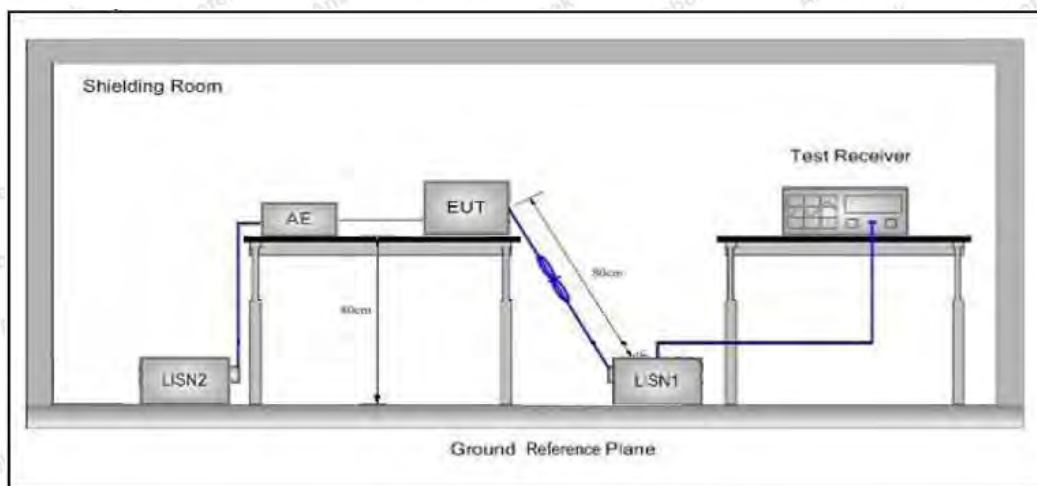

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2020 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

During the test, pre-scan all modes, and found the CH01 which is the worst case, only the worst case is recorded in the report.

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: CH01
Test Specification: AC 240V, 60Hz for adapter
Comment: Live Line
Tem.: 24.5°C Hum.: 49%

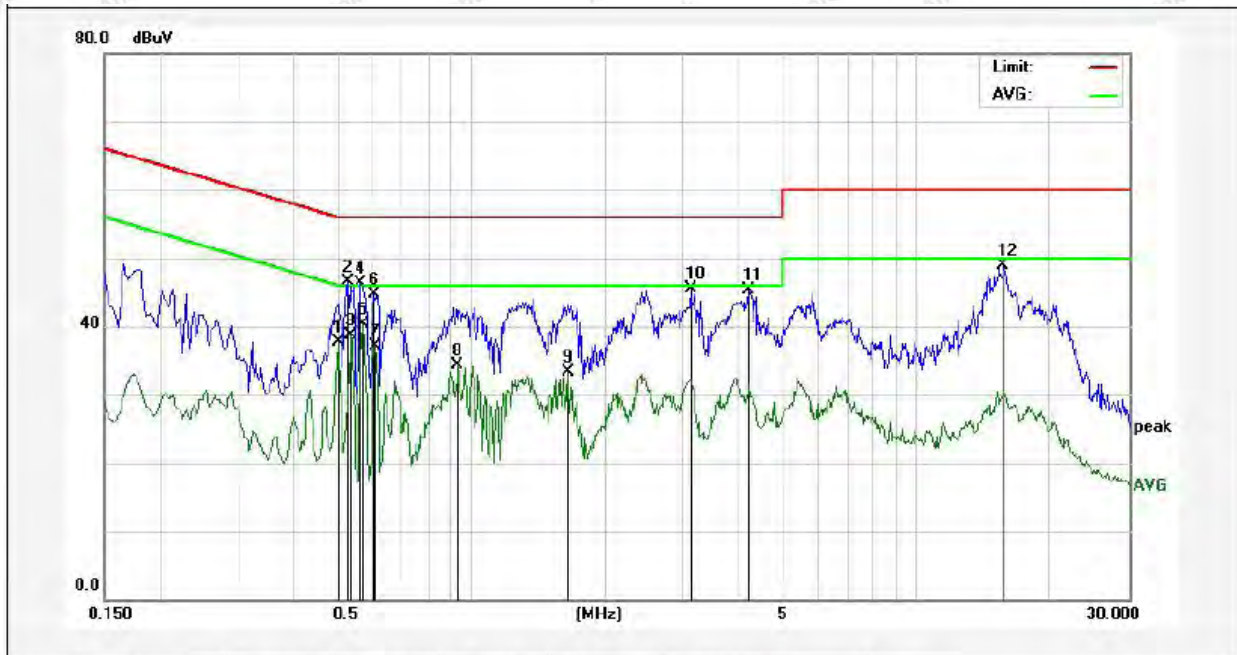

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.5020	17.74	19.98	37.72	46.00	-8.28	AVG	
2	0.5299	26.53	19.99	46.52	56.00	-9.48	QP	
3	0.5380	18.76	19.99	38.75	46.00	-7.25	AVG	
4	0.5660	26.32	20.00	46.32	56.00	-9.68	QP	
5	0.5740	20.27	20.00	40.27	46.00	-5.73	AVG	
6	0.6060	24.73	20.01	44.74	56.00	-11.26	QP	
7	0.6100	17.16	20.01	37.17	46.00	-8.83	AVG	
8	0.9380	14.29	20.10	34.39	46.00	-11.61	AVG	
9	1.6460	13.13	20.13	33.26	46.00	-12.74	AVG	
10	3.1220	25.36	20.16	45.52	56.00	-10.48	QP	
11	4.1979	25.09	20.19	45.28	56.00	-10.72	QP	
12	15.6539	28.58	20.27	48.85	60.00	-11.15	QP	

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: CH01
Test Specification: AC 240V, 60Hz for adapter
Comment: Neutral Line
Tem.: 24.5°C Hum.: 49%

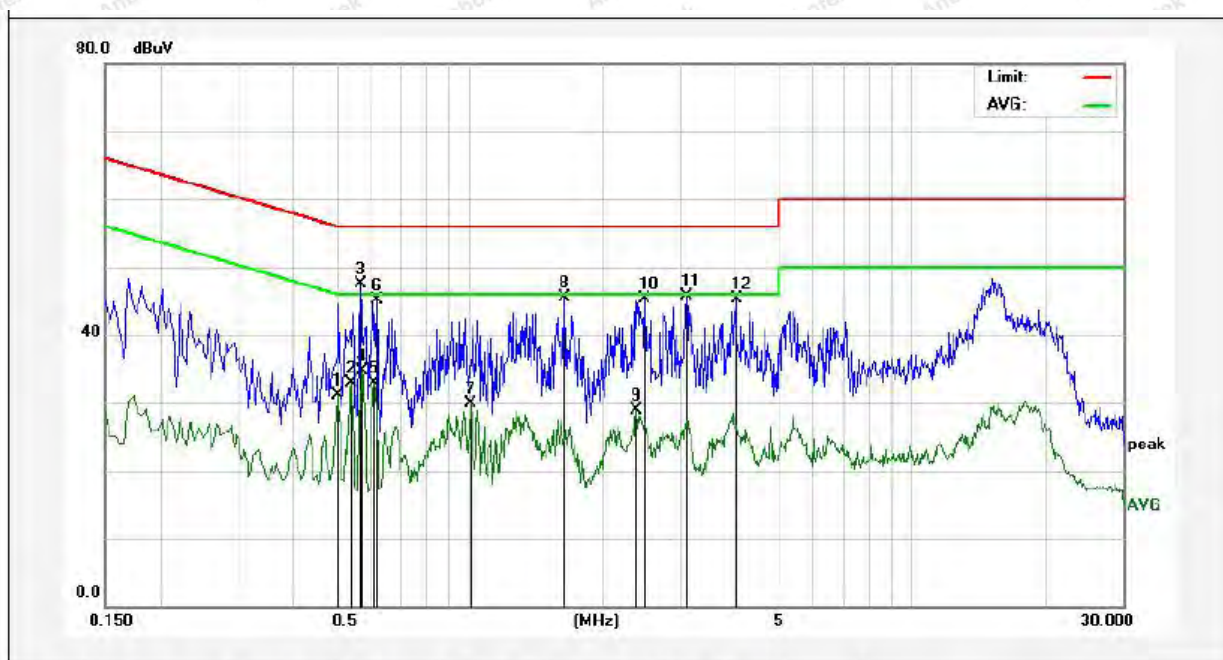

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.5020	11.17	19.98	31.15	46.00	-14.85	AVG	
2	0.5420	12.93	19.99	32.92	46.00	-13.08	AVG	
3	0.5700	27.46	20.00	47.46	56.00	-8.54	QP	
4	0.5740	14.64	20.00	34.64	46.00	-11.36	AVG	
5	0.6100	12.89	20.01	32.90	46.00	-13.10	AVG	
6	0.6180	24.99	20.02	45.01	56.00	-10.99	QP	
7	1.0100	9.69	20.12	29.81	46.00	-16.19	AVG	
8	1.6420	25.35	20.13	45.48	56.00	-10.52	QP	
9	2.3900	8.66	20.15	28.81	46.00	-17.19	AVG	
10	2.4940	25.13	20.15	45.28	56.00	-10.72	QP	
11	3.1020	25.56	20.16	45.72	56.00	-10.28	QP	
12	4.0100	25.16	20.18	45.34	56.00	-10.66	QP	

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: CH01
Test Specification: AC 120V, 60Hz for adapter
Comment: Live Line
Tem.: 24.5°C Hum.: 49%

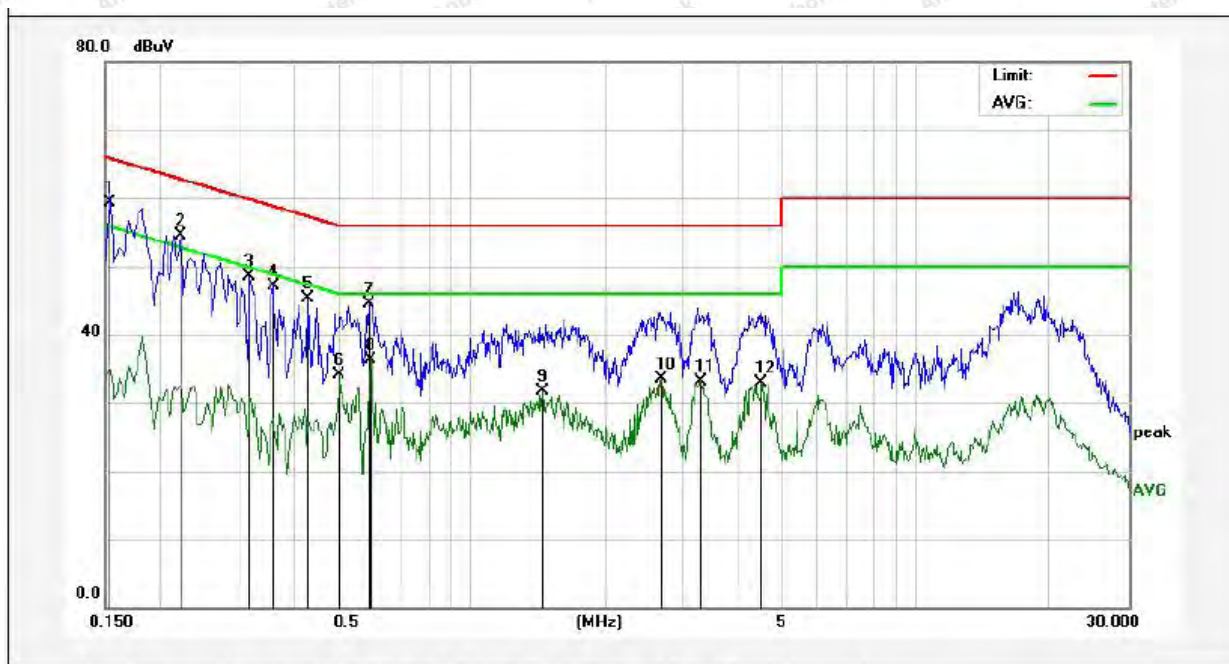

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1539	39.33	19.90	59.23	65.78	-6.55	QP	
2	0.2220	34.59	19.90	54.49	62.74	-8.25	QP	
3	0.3180	28.52	19.90	48.42	59.76	-11.34	QP	
4	0.3580	27.28	19.92	47.20	58.77	-11.57	QP	
5	0.4300	25.32	19.95	45.27	57.25	-11.98	QP	
6	0.5060	14.09	19.98	34.07	46.00	-11.93	AVG	
7	0.5899	24.42	20.01	44.43	56.00	-11.57	QP	
8	0.5940	16.29	20.01	36.30	46.00	-9.70	AVG	
9	1.4420	11.56	20.13	31.69	46.00	-14.31	AVG	
10	2.6700	13.36	20.15	33.51	46.00	-12.49	AVG	
11	3.2820	13.03	20.17	33.20	46.00	-12.80	AVG	
12	4.4860	12.69	20.19	32.88	46.00	-13.12	AVG	

Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: CH01
Test Specification: AC 120V, 60Hz for adapter
Comment: Neutral Line
Tem.: 24.5°C Hum.: 49%

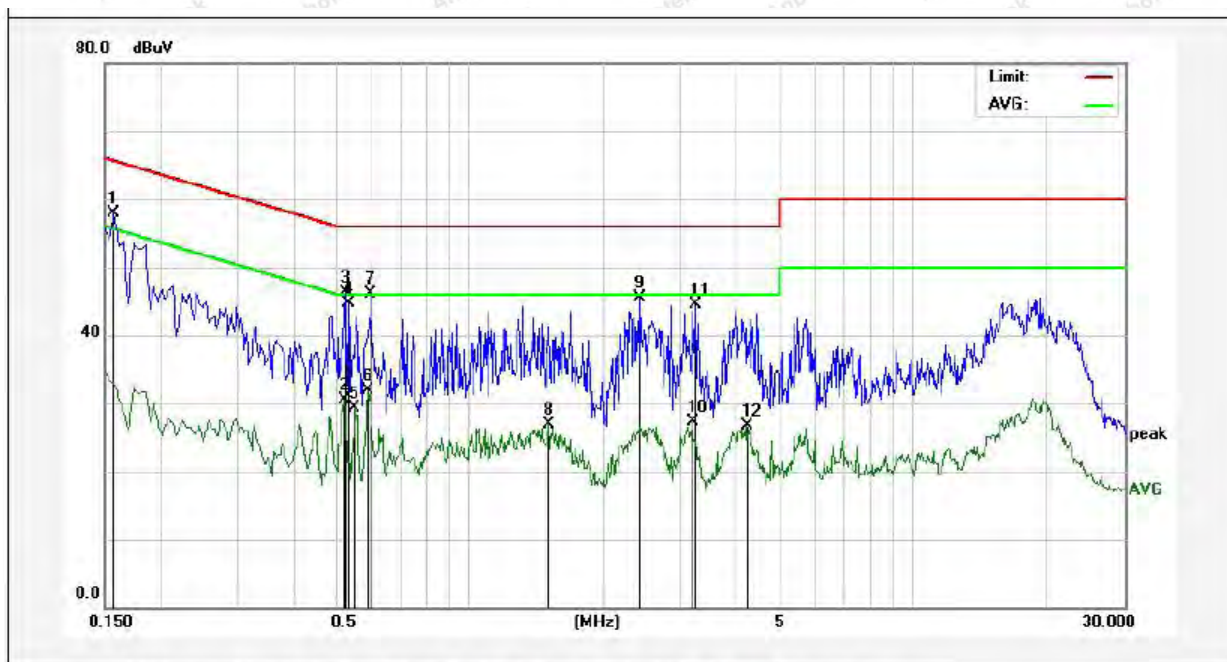

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1580	38.03	19.90	57.93	65.56	-7.63	QP	
2	0.5220	10.60	19.99	30.59	46.00	-15.41	AVG	
3	0.5260	26.29	19.99	46.28	56.00	-9.72	QP	
4	0.5340	24.68	19.99	44.67	56.00	-11.33	QP	
5	0.5500	9.24	19.99	29.23	46.00	-16.77	AVG	
6	0.5899	11.99	20.01	32.00	46.00	-14.00	AVG	
7	0.5980	26.09	20.01	46.10	56.00	-9.90	QP	
8	1.5060	6.72	20.13	26.85	46.00	-19.15	AVG	
9	2.4340	25.34	20.15	45.49	56.00	-10.51	QP	
10	3.1860	7.24	20.16	27.40	46.00	-18.60	AVG	
11	3.2340	24.32	20.16	44.48	56.00	-11.52	QP	
12	4.2100	6.60	20.19	26.79	46.00	-19.21	AVG	

4. Radiation Spurious Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

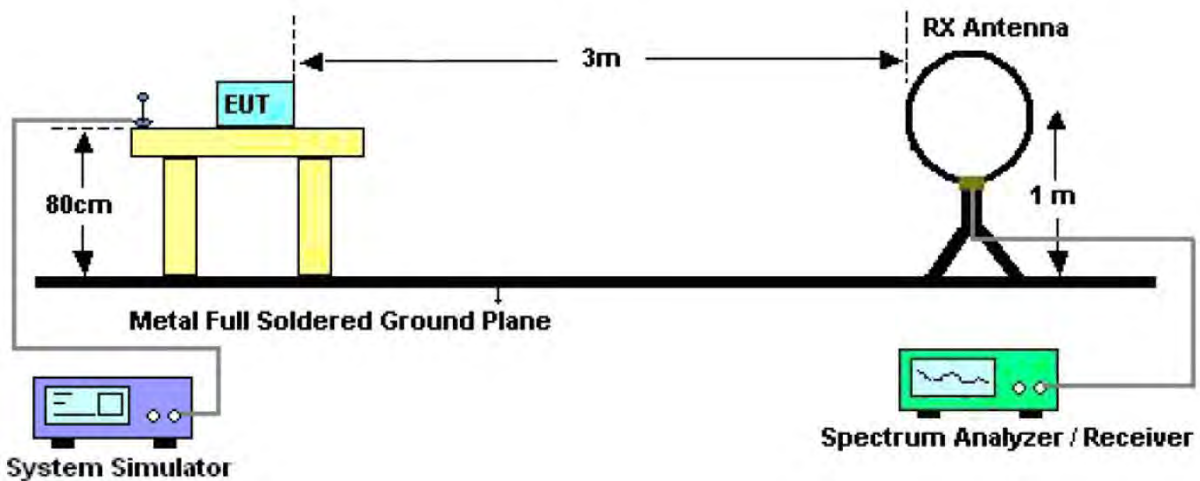


Figure 1. Below 30MHz

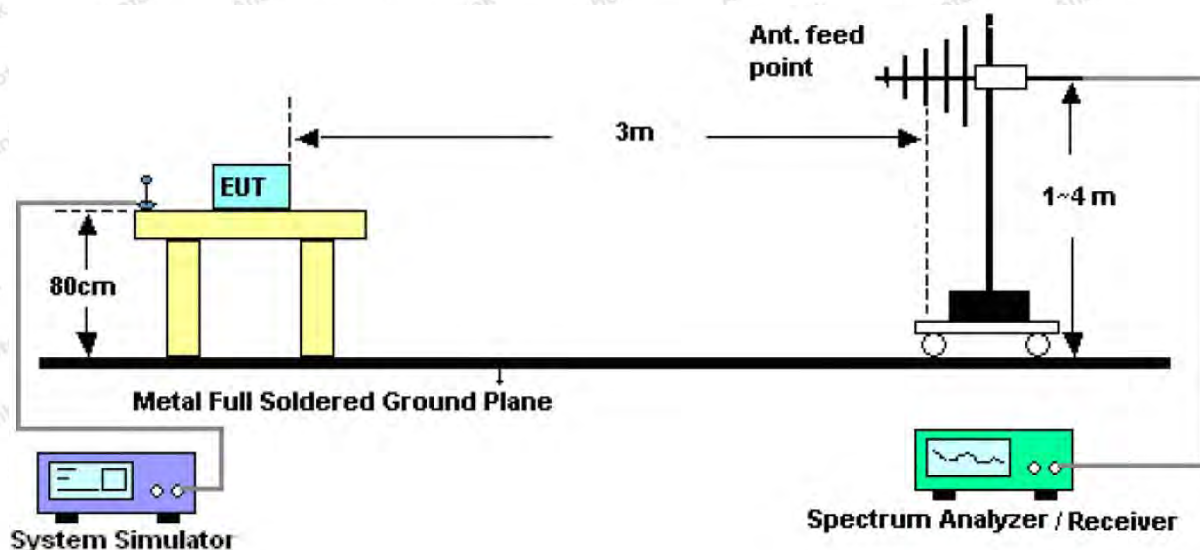


Figure 2. 30MHz to 1GHz

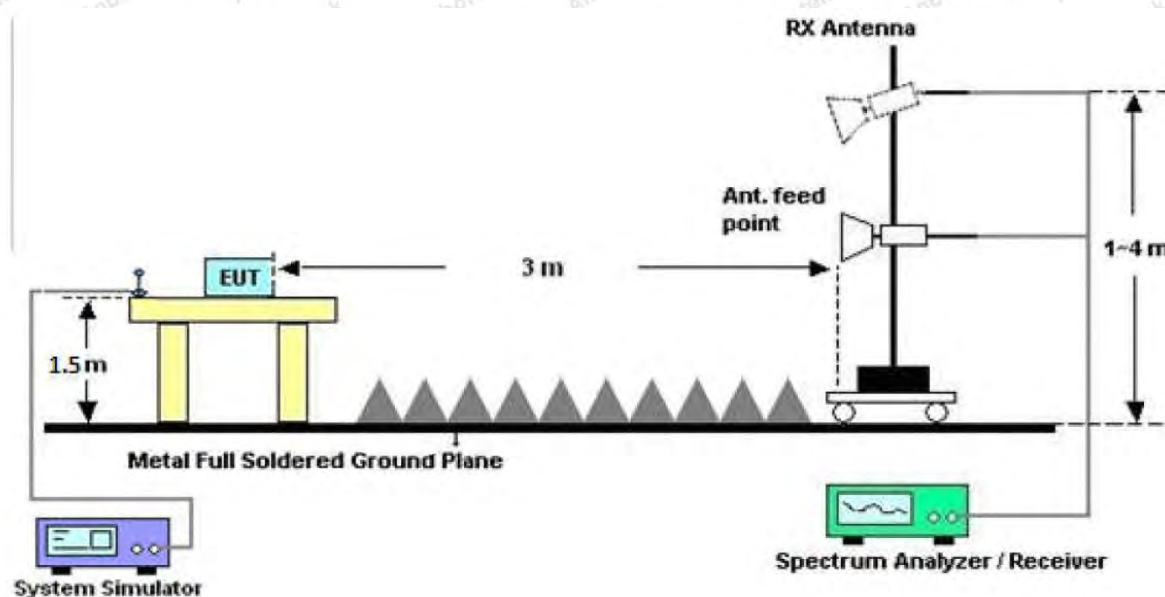


Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For the radiated emission test above 1GHz:

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com

Code:AB-RF-05-a

Hotline
400-003-0500
www.anbotek.com

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW = 1MHz, VBW = 1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

RBW = 1MHz, VBW = 10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

4.4. Test Data

PASS

During the test, pre-scan all the Modes, and found CH01 (TX+Charging) which is the worst case, only the worst case is recorded in the report.

The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.



Test Results (30~1000MHz)

Test Mode: Mode 1
Power Source: AC 120V, 60Hz for adapter
Polarization: Vertical
Temp.(°C)/Hum.(%RH): 24.9°C/45%RH



No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	30.2111	45.13	-17.16	27.97	40.00	-12.03	QP	100	0	
2	35.8746	43.03	-15.80	27.23	40.00	-12.77	QP	100	360	
3	223.7334	46.05	-16.28	29.77	46.00	-16.23	QP	100	0	
4	793.3960	35.54	-4.30	31.24	46.00	-14.76	QP	100	360	
5	962.1623	42.70	-0.56	42.14	54.00	-11.86	QP	100	0	
6	989.5355	32.18	0.08	32.26	54.00	-21.74	QP	100	360	

Test Results (30~1000MHz)

Test Mode: Mode 1
Power Source: AC 120V, 60Hz for adapter
Polarization: Horizontal
Temp.(°C)/Hum.(%RH): 24.9°C/45%RH



No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	178.1327	48.41	-20.92	27.49	43.50	-16.01	QP	100	360	
2	197.8928	48.91	-19.97	28.94	43.50	-14.56	QP	100	0	
3	223.7334	51.93	-19.38	32.55	46.00	-13.45	QP	100	360	
4	235.8164	53.29	-19.13	34.16	46.00	-11.84	QP	100	0	
5	912.8620	41.48	-1.48	40.00	46.00	-6.00	QP	100	360	
6	962.1623	40.20	-0.56	39.64	54.00	-14.36	QP	100	0	

Test Results (1GHz-25GHz)

Test Mode: CH01					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4820.00	40.63	34.04	6.58	34.09	47.16	74.00	-26.84	V
7230.00	34.04	37.11	7.73	34.50	44.38	74.00	-29.62	V
9640.00	33.43	39.31	9.23	34.79	47.18	74.00	-26.82	V
12050.00	*					74.00		V
14460.00	*					74.00		V
4820.00	45.60	34.04	6.58	34.09	52.13	74.00	-21.87	H
7230.00	36.09	37.11	7.73	34.50	46.43	74.00	-27.57	H
9640.00	33.17	39.31	9.23	34.79	46.92	74.00	-27.08	H
12050.00	*					74.00		H
14460.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4820.00	28.82	34.04	6.58	34.09	35.35	54.00	-18.65	V
7230.00	22.35	37.11	7.73	34.50	32.69	54.00	-21.31	V
9640.00	21.22	39.31	9.23	34.79	34.97	54.00	-19.03	V
12050.00	*					54.00		V
14460.00	*					54.00		V
4820.00	33.41	34.04	6.58	34.09	39.94	54.00	-14.06	H
7230.00	24.74	37.11	7.73	34.50	35.08	54.00	-18.92	H
9640.00	21.22	39.31	9.23	34.79	34.97	54.00	-19.03	H
12050.00	*					54.00		H
14460.00	*					54.00		H



Test Results (1GHz-25GHz)

Test Mode: CH10					Test channel: Middle			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4883.00	40.71	34.38	6.69	34.09	47.69	74.00	-26.31	V
7324.50	34.09	37.22	7.78	34.53	44.56	74.00	-29.44	V
9766.00	33.48	39.46	9.35	34.80	47.49	74.00	-26.51	V
12207.50	*					74.00		V
14649.00	*					74.00		V
4883.00	45.69	34.38	6.69	34.09	52.67	74.00	-21.33	H
7324.50	36.14	37.22	7.78	34.53	46.61	74.00	-27.39	H
9766.00	33.22	39.46	9.35	34.80	47.23	74.00	-26.77	H
12207.50	*					74.00		H
14649.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4883.00	28.91	34.38	6.69	34.09	35.89	54.00	-18.11	V
7324.50	22.41	37.22	7.78	34.53	32.88	54.00	-21.12	V
9766.00	21.27	39.46	9.35	34.80	35.28	54.00	-18.72	V
12207.50	*					54.00		V
14649.00	*					54.00		V
4883.00	33.52	34.38	6.69	34.09	40.50	54.00	-13.50	H
7324.50	24.81	37.22	7.78	34.53	35.28	54.00	-18.72	H
9766.00	21.29	39.46	9.35	34.80	35.30	54.00	-18.70	H
12207.50	*					54.00		H
14649.00	*					54.00		H



Test Results (1GHz-25GHz)

Test Mode: CH20					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4954.00	40.22	34.72	6.79	34.09	47.64	74.00	-26.36	V
7431.00	33.76	37.34	7.82	34.57	44.35	74.00	-29.65	V
9908.00	33.19	39.62	9.46	34.81	47.46	74.00	-26.54	V
12385.00	*					74.00		V
14862.00	*					74.00		V
4954.00	45.10	34.72	6.79	34.09	52.52	74.00	-21.48	H
7431.00	35.77	37.34	7.82	34.57	46.36	74.00	-27.64	H
9908.00	32.89	39.62	9.46	34.81	47.16	74.00	-26.84	H
12385.00	*					74.00		H
14862.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4954.00	28.66	34.72	6.79	34.09	36.08	54.00	-17.92	V
7431.00	22.24	37.34	7.82	34.57	32.83	54.00	-21.17	V
9908.00	21.12	39.62	9.46	34.81	35.39	54.00	-18.61	V
12385.00	*					54.00		V
14862.00	*					54.00		V
4954.00	33.24	34.72	6.79	34.09	40.66	54.00	-13.34	H
7431.00	24.62	37.34	7.82	34.57	35.21	54.00	-18.79	H
9908.00	21.11	39.62	9.46	34.81	35.38	54.00	-18.62	H
12385.00	*					54.00		H
14862.00	*					54.00		H

Remark:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. "*" means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.



Radiated Band Edge:





Remark:


1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

5. Maximum Peak Output Power Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	125mW

5.2. Test Setup



5.3. Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above,
2. Spectrum Setting:
 - RBW > the 20 dB bandwidth of the emission being measured
 - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
 - VBW $\geq$ RBW
 - Sweep = auto
 - Detector function = peak
 - Trace = max hold

5.4. Test Data

Test Item : Max. peak output power
Test Voltage : DC 3.7V battery inside
Test Result : PASS

Test Mode : CH Low ~ CH High
Temperature : 23.2℃
Humidity : 55%RH

Channel Frequency (MHz)	Peak Power output (dBm)	Limit (dBm)	Results	Modulation
2410	7.618	20.96	PASS	GFSK
2441.5	7.346	20.96	PASS	GFSK
2477	8.039	20.96	PASS	GFSK



Test Mode: Low



Test Mode: Middle




Test Mode: High

6. 20DB Occupy Bandwidth Test

6.1. Test Standard

Test Standard	FCC Part15 C Section 15.247 (a)(1)
---------------	------------------------------------

6.2. Test Setup



6.3. Test Procedure

Using the following spectrum analyzer settings:

1. Span= approximately 2 to 3 times the 20dB bandwidth, centered on a hopping channel.
2. Set the RBW = 30 kHz.
3. Set the VBW = 100 kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

6.4. Test Data

Test Item	: 20dB BW
Test Voltage	: DC 3.7V battery inside
Test Result	: PASS

Test Mode	: CH Low ~ CH High
Temperature	: 23.2℃
Humidity	: 55%RH

Channel	Frequency(MHz)	20dB Down BW(MHz)	Modulation Mode
Low	2410	3.522	GFSK
Middle	2441.5	3.556	GFSK
High	2477	4.044	GFSK



Test Mode: Low



Test Mode: Middle



Test Mode: High




7. Carrier Frequency Separation Test

7.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	>25KHz or >two-thirds of the 20 dB bandwidth

7.2. Test Setup



7.3. Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer settings:

1. Span= Wide enough to capture the peaks of two adjacent channels
2. Set the RBW = 100 kHz.
3. Set the VBW = 300 kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

7.4. Test Data

Test Item : Frequency Separation
 Test Voltage : DC 3.7V battery inside
 Test Result : PASS

Test Mode : CH Low ~ CH High
 Temperature : 23.2℃
 Humidity : 55%RH

Channel	Frequency (MHz)	Separation Read Value (MHz)	Limit (kHz)
Low	2410	3.5	2348.00
Middle	2441.5	3.5	2370.67
High	2477	4.0	2696.00
Remark:The limit is 2/3 of 20dB BW.			



Test Mode: Low



Test Mode: Middle




Test Mode: High

8. Number of Hopping Channel Test

8.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	>15 channels

8.2. Test Setup



8.3. Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer setting:


1. Span= the frequency band of operation
2. Set the RBW = 100kHz.
3. Set the VBW = 300kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

8.4. Test Data

Test Item	: Number of Hopping Frequency
Test Voltage	: DC 3.7V battery inside
Test Result	: PASS

Test Mode	: CH Low ~ CH High
Temperature	: 23.2℃
Humidity	: 55%RH

Hopping Channel Frequency Range	Quantity of Hopping Channel	Quantity of Hopping Channel
2410-2477MHz	20	>15

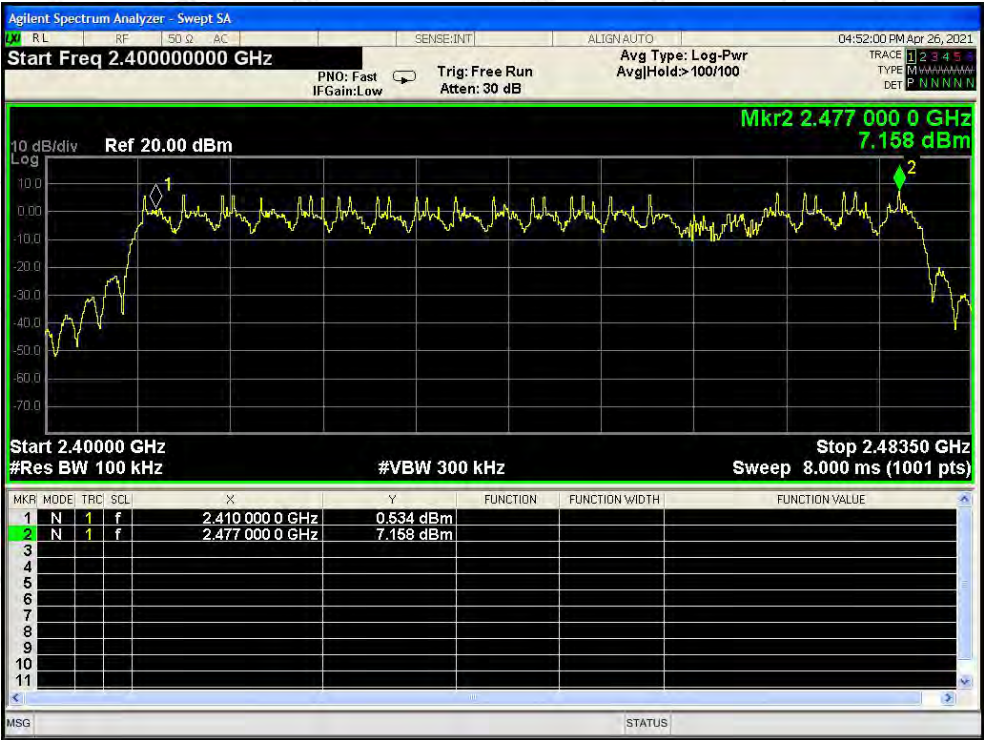


9. Dwell Time Test

9.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	0.4 sec

9.2. Test Setup



9.3. Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

1. Span= zero span, centered on a hopping channel
2. Set the RBW = 1 MHz.
3. Set the VBW = 1 MHz.
4. Sweep time = as necessary to capture the entire dwell time per hopping channel.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

9.4. Test Data

Test Item : Time of Occupancy
Test Voltage : DC 3.7V battery inside
Test Result : PASS

Test Mode : CH Low ~ CH High
Temperature : 23.2℃
Humidity : 55%RH



Channel	Burst width (ms)	Total hopping number in 8s	Total dwell time (s)	Limit (s)	Rusult
Hopping	0.4	64	0.0256	≤0.4	Pass

Note:

(1) Total dwell time=Burst width*Total hopping number

(2)There are total 18 channels were active at any time. So the test period is 0.4s*20=8s.

Test Mode: Hopping

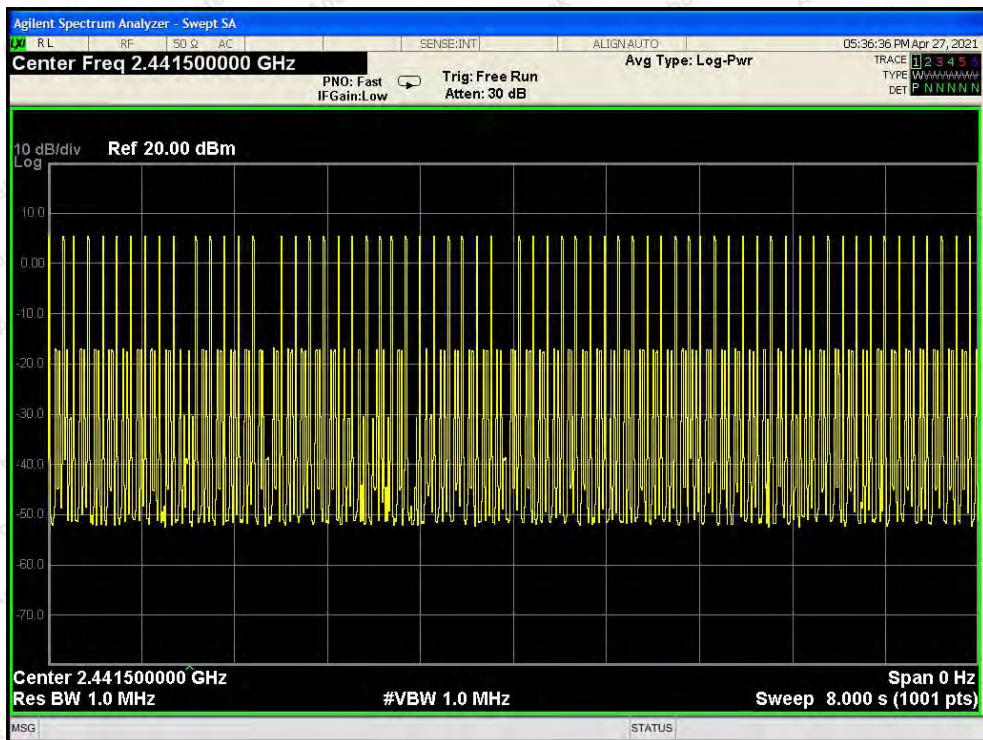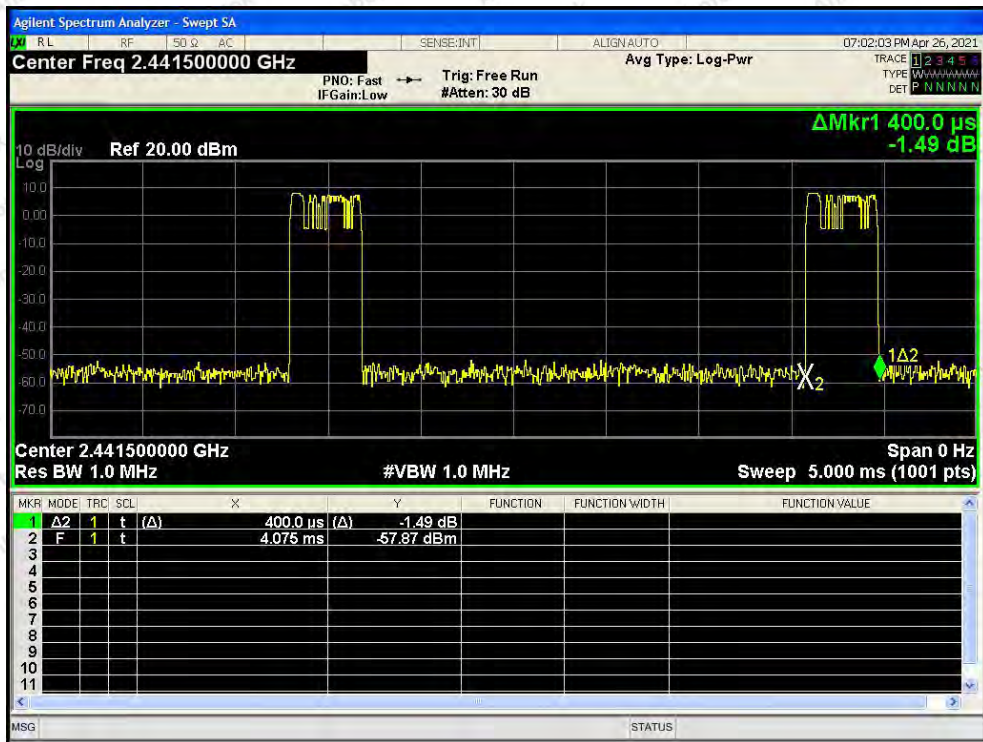


10. 100kHz Bandwidth of Frequency Band Edge Requirement

10.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (d)
Test Limit	in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

10.2. Test Setup



10.3. Test Procedure

The EUT must have its hopping/Non-hopping function enabled. Using the following spectrum analyzer setting:


1. Set the RBW = 100kHz.
2. Set the VBW = 300kHz.
3. Sweep time = auto couple.
4. Detector function = peak.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.

10.4. Test Data

Test Item	:	Band edge
Test Voltage	:	DC 3.7V battery inside
Test Result	:	PASS

Test Mode	:	CH Low ~ CH High
Temperature	:	23.2℃
Humidity	:	55%RH

For Hopping Mode

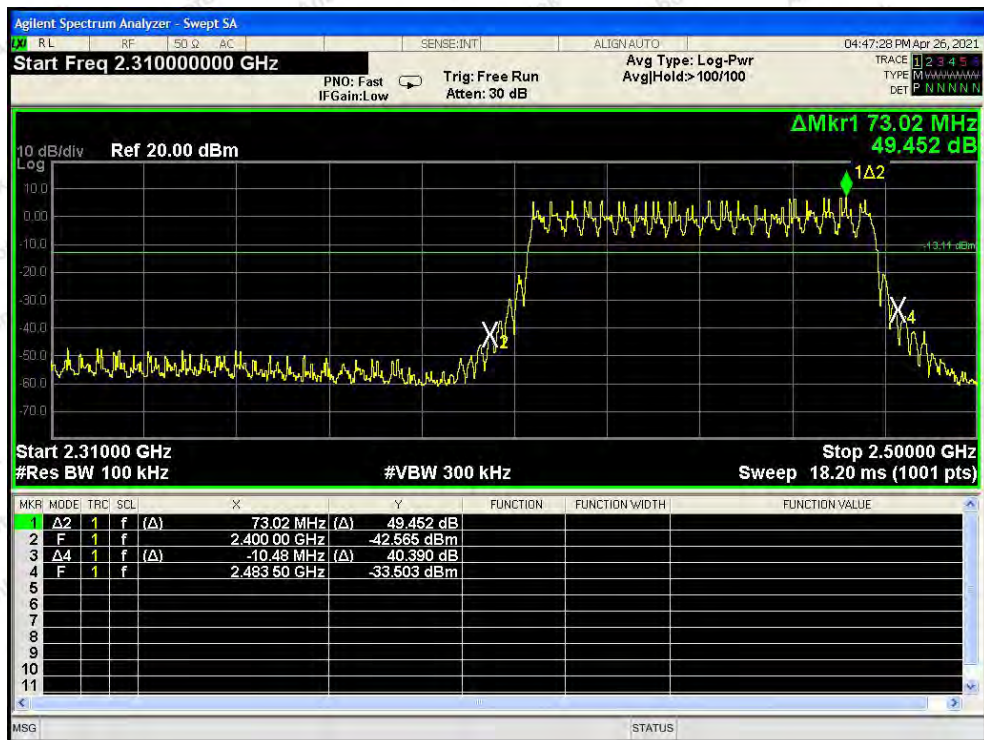

For Non-Hopping Mode




Lowest




Highest




Conducted Emission Method

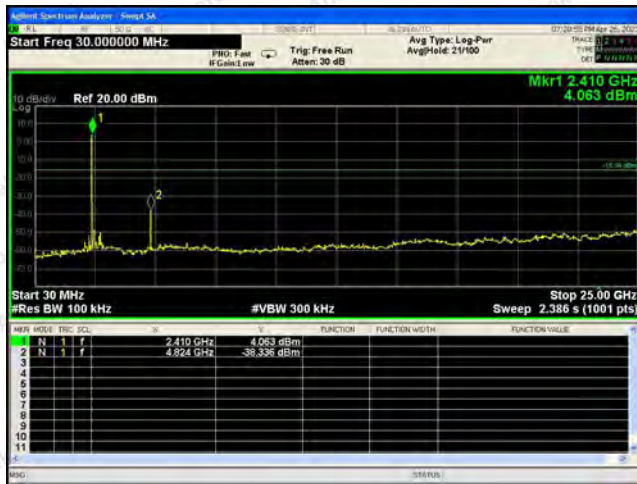

Test Mode: Low

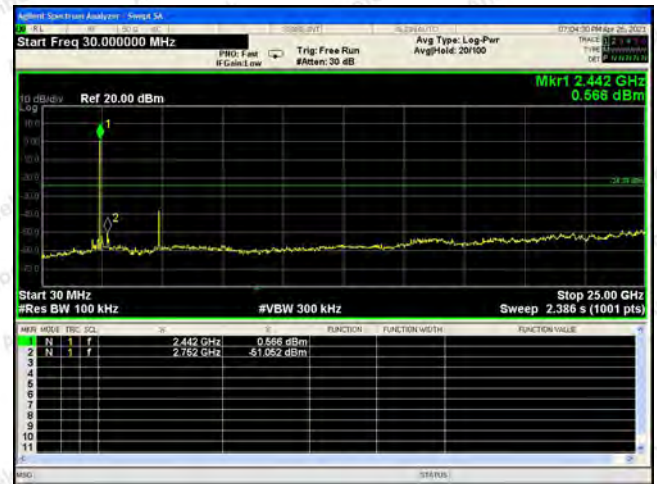

Test Mode: Mid

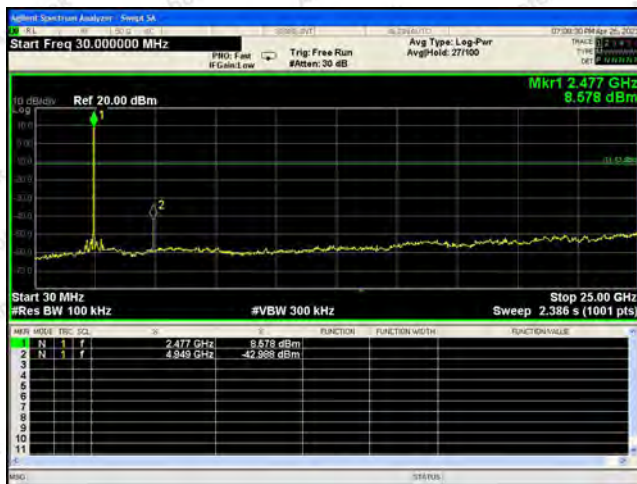

Test Mode: High

11. Antenna Requirement

11.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /247(c)
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 2) 15.247(c) (1)(i) requirement: Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

11.2. Antenna Connected Construction

The antenna is Monopole antenna which permanently attached, and the best case gain of the antenna is 2 dBi. It complies with the standard requirement.

APPENDIX I -- TEST SETUP PHOTOGRAPH

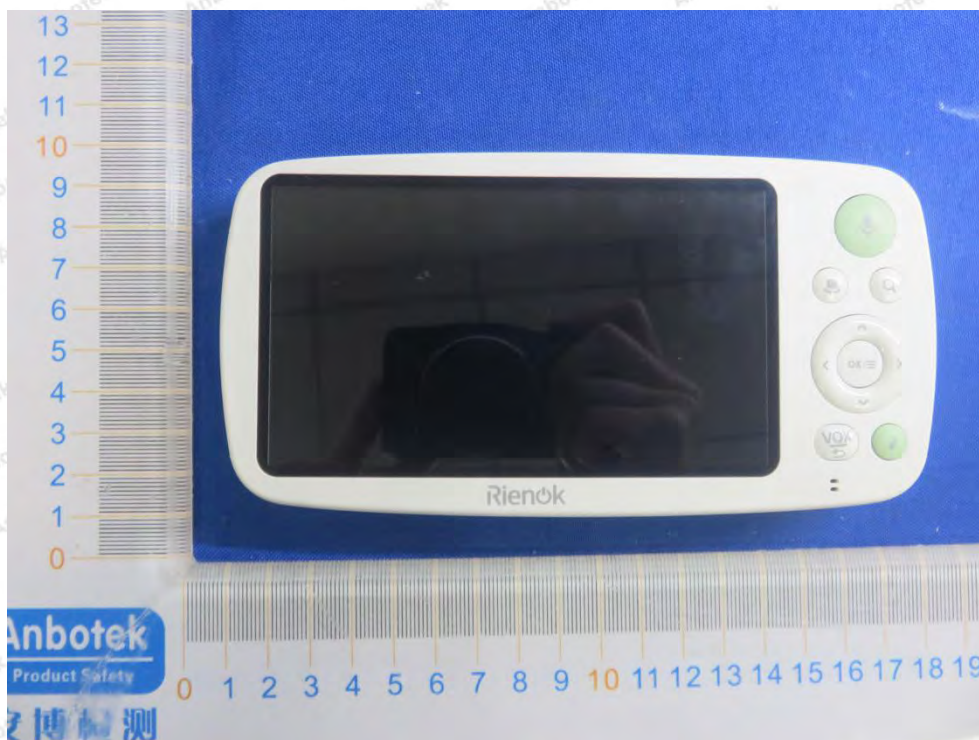
Photo of Conducted Emission Test



Photo of Radiation Emission Test






APPENDIX II -- EXTERNAL PHOTOGRAPH










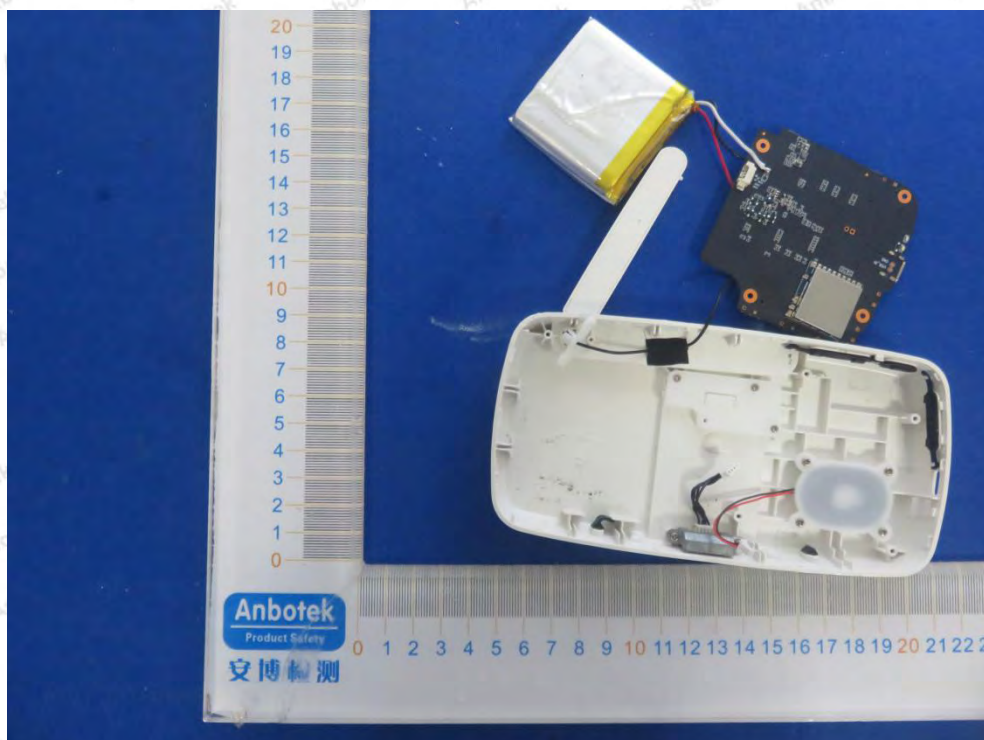


APPENDIX III -- INTERNAL PHOTOGRAPH

ANT

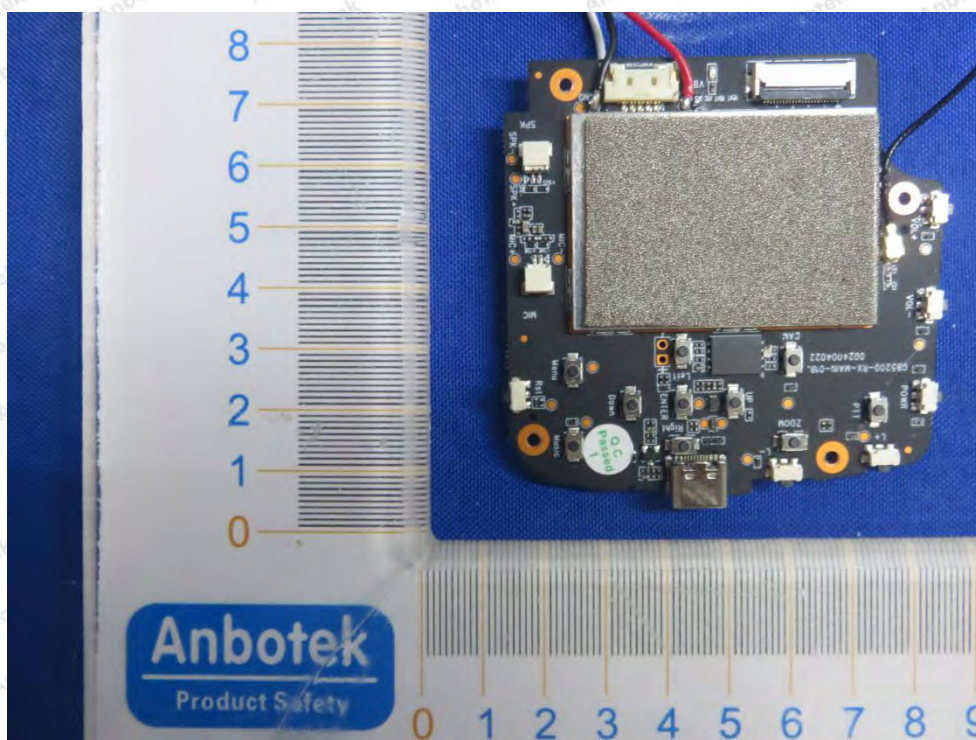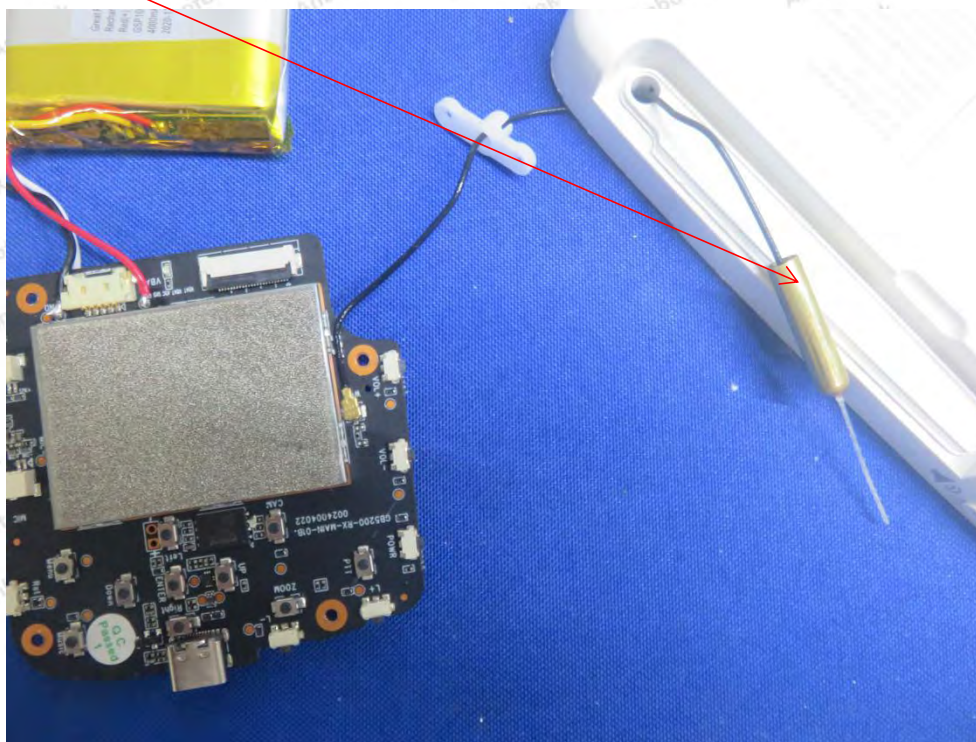

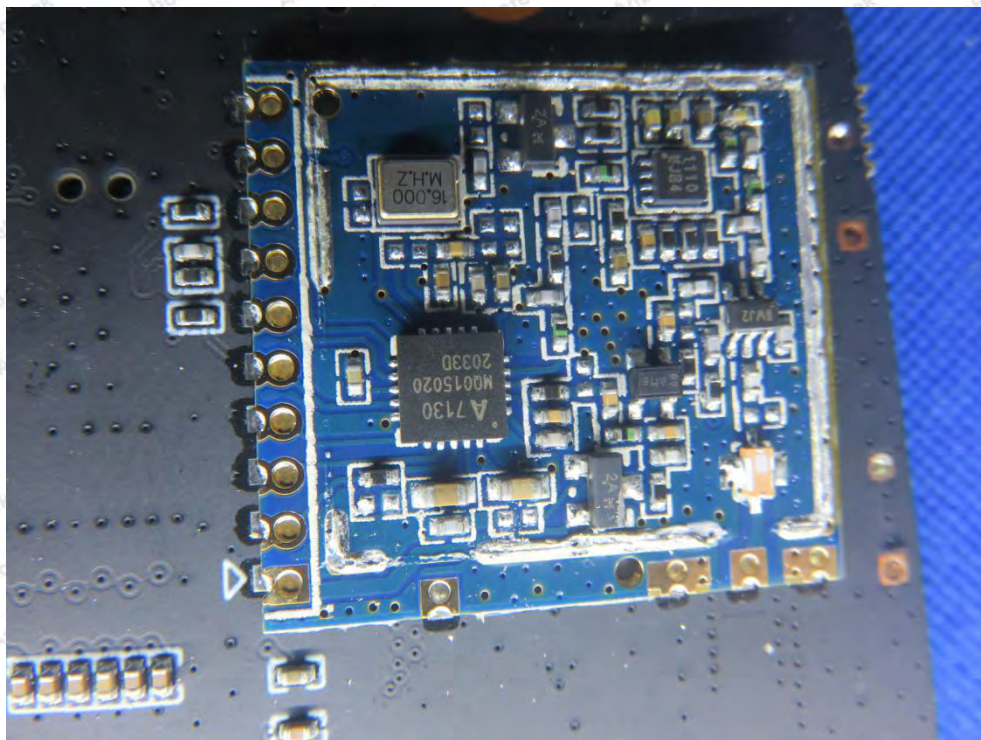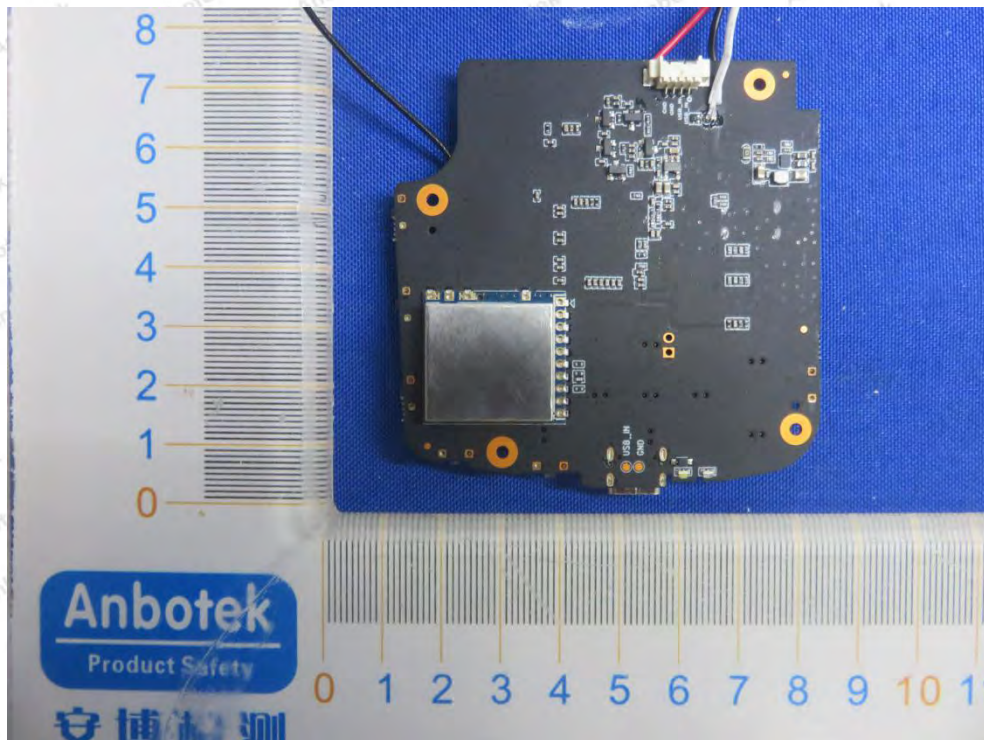

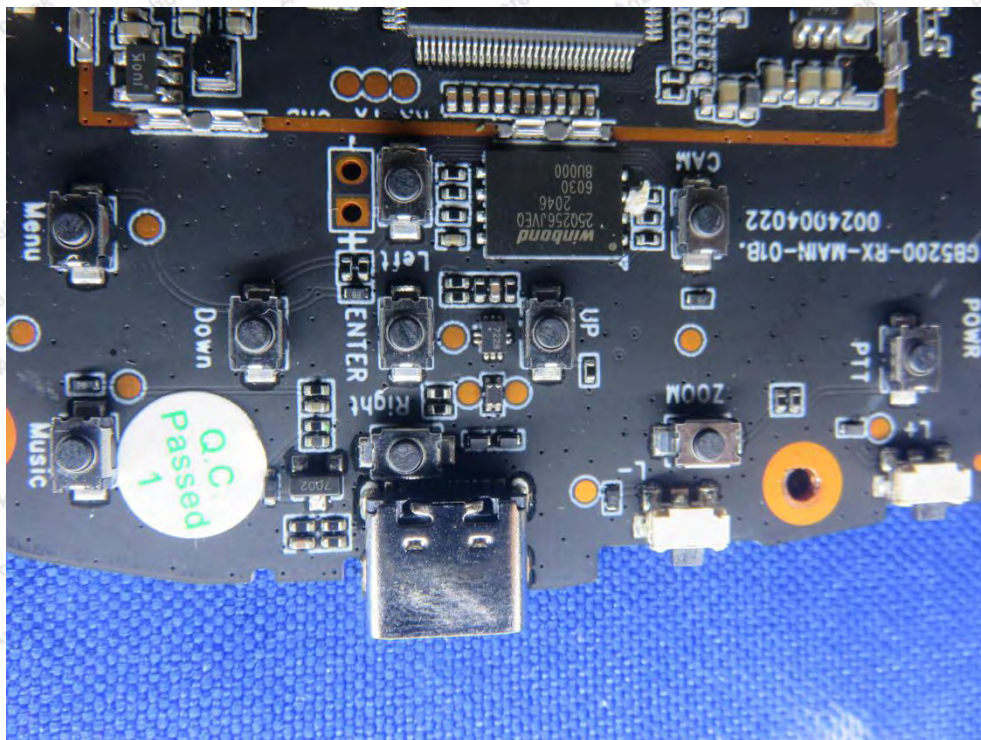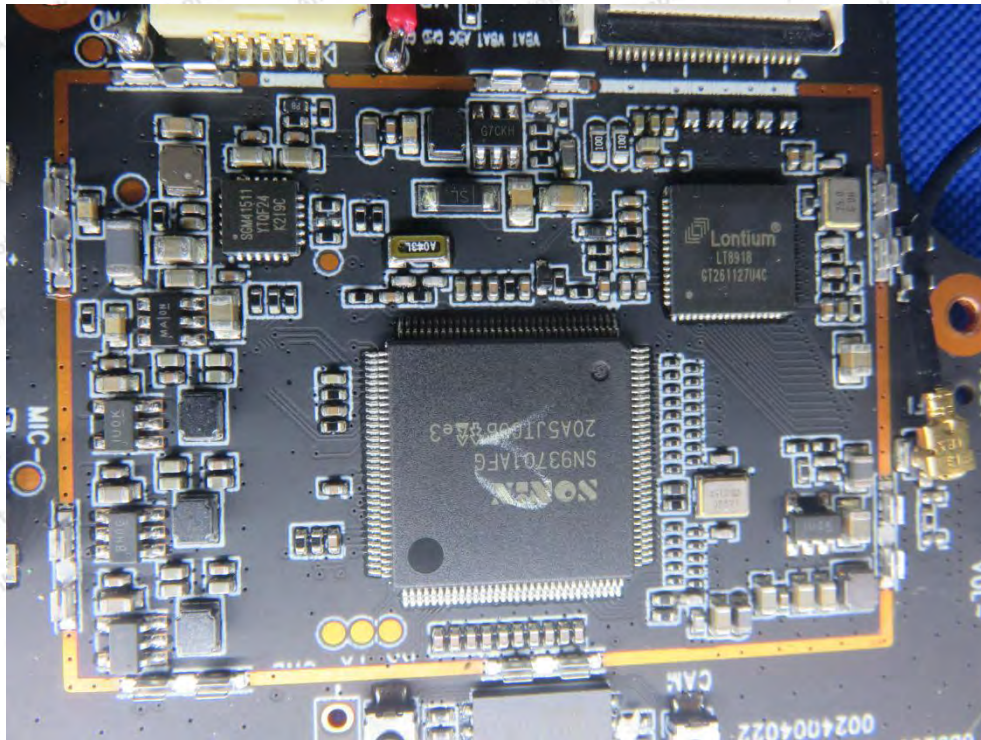



----- End of Report -----

