

## TEST REPORT

**Report Number: 21020815HKG-002**

Application for Original Grant of 47 CFR Part 15 Certification

Single New of RSS-247 Issue 2 Equipment

**FCC ID: 2AZUDESC21T03**

**IC: 27292-DESK21T03**

**Prepared and Checked by:**

**Approved by:**

Signed On File  
Wong Cheuk Ho, Herbert  
Lead Engineer

---

Wong Kwok Yeung, Kenneth  
Senior Lead Engineer  
Date: May 27, 2021

---

Intertek's standard Terms and Conditions can be obtained at our website <http://www.intertek.com/terms/>.

The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

© 2017 Intertek

## TEST REPORT

### GENERAL INFORMATION

<b>Applicant Name:</b>	actiMirror Corporation Ltd.
<b>Applicant Address:</b>	Unit 6-8, Hilder Centre, 2 Sung Ping Street, Hung Hom, Kowloon, Hong Kong.
<b>FCC Specification Standard:</b>	FCC Part 15, October 1, 2019 Edition
<b>FCC ID:</b>	2AZUDDSK21T03
<b>FCC Model(s):</b>	Desk21T-03
<b>IC Specification Standard:</b>	RSS-247 Issue 2, February 2017 RSS-Gen Issue 5, April 2018
<b>IC:</b>	27292-DESK21T03
<b>PMN:</b>	Desk21T-03
<b>HVIN:</b>	Desk21T-03
<b>Type of EUT:</b>	Spread Spectrum Transmitter
<b>Description of EUT:</b>	Smart Mirror with Display
<b>Serial Number:</b>	N/A
<b>Sample Receipt Date:</b>	February 18, 2021
<b>Date of Test:</b>	February 18, 2021 to May 24, 2021
<b>Report Date:</b>	May 27, 2021
<b>Environmental Conditions:</b>	Temperature: +10 to 40°C Humidity: 10 to 90%
<b>Conclusion:</b>	Test was conducted by client submitted sample. The submitted sample as received complied with the 47 CFR Part 15 / RSS-247 Issue 2 Certification.

**TEST REPORT**

**TABLE OF CONTENTS**

**1.0 TEST RESULTS SUMMARY & STATEMENT OF COMPLIANCE ..... 4**

    1.1 Summary of Test Results.....4

    1.2 Statement of Compliance.....4

**2.0 GENERAL DESCRIPTION..... 5**

    2.1 Product Description .....5

    2.2 Test Methodology .....6

    2.3 Test Facility .....6

    2.4 Related Submittal(s) Grants .....6

**3.0 SYSTEM TEST CONFIGURATION..... 7**

    3.1 Justification .....7

    3.2 EUT Exercising Software.....8

    3.3 Details of EUT and Description of Accessories.....9

    3.4 Measurement Uncertainty.....9

**4.0 TEST RESULTS ..... 10**

    4.1 Maximum Conducted Output Power at Antenna Terminals .....10

    4.2 Minimum 6dB RF Bandwidth.....12

    4.3 Maximum Power Spectral Density .....21

    4.4 Out of Band Conducted Emissions .....30

    4.5 Field Strength Calculation.....51

    4.6 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions.....52

        4.6.1 Radiated Emission Configuration Photograph .....52

        4.6.2 Radiated Emission Data .....52

        4.6.3 Radiated Emission Test Setup.....66

        4.6.4 Transmitter Duty Cycle Calculation .....67

    4.7 AC Power Line Conducted Emission .....68

        4.7.1 AC Power Line Conducted Emission Configuration Photograph .....68

        4.7.2 AC Power Line Conducted Emission Data .....68

        4.7.3 Conducted Emission Test Setup .....71

**5.0 EQUIPMENT LIST ..... 72**

## TEST REPORT

### 1.0 TEST RESULTS SUMMARY & STATEMENT OF COMPLIANCE

#### 1.1 Summary of Test Results

Test Items	FCC Part 15 Section	RSS-247/ RSS-Gen# Section	Results	Details See Section
Antenna Requirement	15.203	7.1.2#	Pass	2.1
Max. Conducted Output Power (Peak)	15.247(b)(3)&(4)	5.4(4)	Pass	4.1
Min. 6dB RF Bandwidth	15.247(a)(2)	5.2(1)	Pass	4.2
Max. Power Density (average)	15.247(e)	5.2(2)	Pass	4.3
Out of Band Antenna Conducted Emission	15.247(d)	5.5	Pass	4.4
Radiated Emission in Restricted Bands and Spurious Emissions	15.247(d), 15.209 & 15.109	5.5	Pass	4.6
AC Power Line Conducted Emission	15.207 & 15.107	7.2.4#	Pass	4.7

Note: Pursuant to FCC Part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered.

#### 1.2 Statement of Compliance

The equipment under test is found to be complying with the following standard:

FCC Part 15, October 1, 2019 Edition  
RSS-247 Issue 2, February 2017  
RSS-Gen Issue 5 Amendment 1, March 2019

## TEST REPORT

### 2.0 GENERAL DESCRIPTION

#### 2.1 Product Description

The Equipment Under Test (EUT) Model/HVIN: Desk21T-03 is a Smart Mirror with Display with Android system running with corresponding APP. It consists of display monitor, touch panel, LED light bars, small speakers, MIC, camera and connectivity of Bluetooth 3.0/BLE, 2.4G/5G Wi-Fi, 2 USB ports and one LAN Port. The EUT is operated on DC12V (AC/DC adaptor).

For 802.11b mode, it operates at frequency range of 2412.000MHz to 2462.000MHz with 11 channels. It transmits via Direct-sequence spread spectrum (DSSS) modulation. Maximum bit rate can be up to 11Mbps.

For 802.11g mode, it operates at frequency range of 2412.000MHz to 2462.000MHz with 11 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can be up to 54Mbps.

For 802.11n (with 20MHz bandwidth) mode, it operates at frequency range of 2412.000MHz to 2462.000MHz with 11 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can support up to 65Mbps.

The antenna(s) used in the EUT is integral, and the test sample is a prototype.

The circuit description is saved with filename: descri.pdf.

## TEST REPORT

### 2.2 Test Methodology

Both AC power line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Preliminary radiated scans and all radiated measurements were performed in radiated emission test sites. All Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application. Antenna port conducted measurements were performed according to ANSI C63.10 (2013) and KDB Publication No.558074 D01 v05r01 (11-February-2019). All other measurements were made in accordance with the procedures in 47 CFR Part 2 and RSS-Gen Issue 5 (2018).

### 2.3 Test Facility

The radiated emission test site and antenna port conducted measurement facility used to collect the radiated data and conductive data are at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong SAR, China. This test facility and site measurement data have been fully placed on file with the FCC and Industry Canada No.: 2042H.

### 2.4 Related Submittal(s) Grants

This is a single application for certification of a transceiver (WiFi portion)

## TEST REPORT

### 3.0 SYSTEM TEST CONFIGURATION

#### 3.1 Justification

For radiated emissions testing, the equipment under test (EUT) was setup to transmit / receive continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables (if any) were manipulated to produce worst case emissions.

The EUT was powered by a 120VAC (AC/DC adaptor).

For the measurements, the EUT was attached to a plastic stand if necessary and placed on the wooden turntable. If the base unit attached to peripherals, they were connected and operational (as typical as possible).

The signal was maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization were varied during the search for maximum signal level. The antenna height was varied from 1 to 4 meters. Radiated emissions were taken at three meters unless the signal level was too low for measurement at that distance. If necessary, a pre-amplifier was used and/or the test was conducted at a closer distance.

For any intentional radiator powered by AC power line, measurements of the radiated signal level of the fundamental frequency component of the emission was performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

Radiated emission measurement for transmitter were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

Emission that are directly caused by digital circuits in the transmit path and transmitter portion were measured, and the limit are according to FCC Part 15 Section 15.209 / RSS-247 2.5. Digital circuitries used to control additional functions other than the operation of the transmitter are subject to FCC Part 15 Section 15.109 / RSS-247 Section 5.5 Limits.

## TEST REPORT

### 3.1 Justification – Cont'd

Detector function for radiated emissions was in peak mode. Average readings, when required, were taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in section 4.8.3.

Determination of pulse desensitization was made according to *Hewlett Packard Application Note 150-2, Spectrum Analysis... Pulsed RF*. The effective period ( $T_{eff}$ ) was referred to Exhibit 4.8.3. With the resolution bandwidth 1MHz and spectrum analyzer IF bandwidth 3dB, the pulse desensitization factor was 0dB.

For AC line conducted emission test, the EUT along with its peripherals were placed on a 1.0m(W)x1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50ohm coupling impedance for measuring instrument. The LISN housing, measuring instrument case, reference ground plane, and vertical ground plane were bounded together. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were manipulated to find the maximum emission.

All relevant operation modes and data rates have been tested, and the worst-case data is included in this report.

For simultaneous transmission, both WiFi and Bluetooth portions are also switched on when taking radiated emission for determining worst-case spurious emission

### 3.2 EUT Exercising Software

The EUT exercise program (if any) used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use.

## TEST REPORT

### 3.3 Details of EUT and Description of Accessories

#### Details of EUT:

An AC adaptor (provided with the unit) was used to power the device. Their description are listed below.

- (1) An AC adaptor (Model: FJ-SW20171204000)  
Input: 100-240VAC 1.5A 50/60Hz  
Output: 12VDC 4A  
(Provided by Applicant)

#### Description of Accessories:

1. USB Flash 4GB
2. LAN cable of 2m long  
(Provided by Intertek)

### 3.4 Measurement Uncertainty

Decision Rule for compliance: For FCC/IC standard, the measured value must be within the limits of applicable standard without accounting for the measurement uncertainty. For EN/IEC/HKTA/HKTC standard, conformity rules will be used as per standard directly excepted EN/IEC 61000-3-2, EN/IEC 61000-3-3, HKTA1004, HKCA1008, HKTA1019, HKTA1020, HKTA1041 and HKTA1044. For these excepted or not mentioned standards, Cl 4.2.2 of ILAC-G8:09/2019 decision rules will be reference and guard band will be equal to our measurement uncertainty with 95% confidence level (k=2). In case, the measured value is within guard band region, undetermined decision will be used. The values of the Measurement uncertainty for radiated emission test and RF conducted measurement test are  $\pm 5.3\text{dB}$  and  $\pm 0.99\text{dB}$  respectively. The value of the Measurement uncertainty for conducted emission test is  $\pm 4.2\text{dB}$ .

Uncertainty and Compliance - Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.


## TEST REPORT

### 4.0 TEST RESULTS

#### 4.1 Maximum Conducted (peak) Output Power at Antenna Terminals

##### RF Conduct Measurement Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

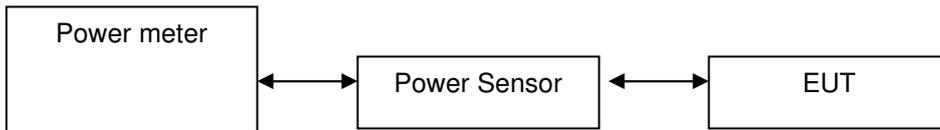

The antenna port of the EUT was connected to the input of a spectrum analyzer.

- The antenna power of the EUT was connected to the input of a power meter. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals. The measurement procedure 9.1.2 was used.
- The EUT should be configured to transmit continuously (at a minimum duty cycle of 98%) at full power over the measurement duration. The measurement procedure AVG1 was used.

##### IEEE 802.11b (DSSS, 1 Mbps) Antenna Gain = 2 dBi

Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2412	23.4	218.8
Middle Channel: 2437	23.5	223.9
High Channel: 2462	23.8	239.9

##### IEEE 802.11g (OFDM, 6 Mbps) Antenna Gain = 2 dBi

Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2412	21.8	151.4
Middle Channel: 2437	22.2	166.0
High Channel: 2462	22.6	182.0

##### IEEE 802.11n (20MHz) (OFDM, MCS0) Antenna Gain = 2 dBi

Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2412	20.5	112.2
Middle Channel: 2437	20.6	114.8
High Channel: 2462	21.4	138.0

**TEST REPORT**

4.1 Maximum Conducted Output Power at Antenna Terminals – Cont’d

Bluetooth 4.0 Antenna Gain = 2 dBi

Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2402	-0.6	0.9
Middle Channel: 2440	-0.5	0.9
High Channel: 2480	-0.1	1.0

Cable loss : 0.5 dB External Attenuation : 0 dB

Cable loss, external attenuation:  included in OFFSET function  
 added to SA raw reading

IEEE 802.11b (DSSS, 1 Mbps)  
max. conducted (peak) output level = 23.8 dBm

IEEE 802.11g (OFDM, 9 Mbps)  
max. conducted (peak) output level = 22.6 dBm

IEEE 802.11n (20MHz) (OFDM, MCS0)  
max. conducted (peak) output level = 21.4 dBm

Bluetooth 4.0  
max. conducted (peak) output level = -0.1 dBm

Limits:  
 1W (30dBm) for antennas with gains of 6dBi or less

\_\_\_W (\_\_\_dBm) for antennas with gains more than 6dBi

## TEST REPORT

### 4.2 Minimum 6dB RF Bandwidth

The antenna port of the EUT was connected to the input of a spectrum analyzer. The EBW measurement procedure was used. A PEAK output reading was taken, a DISPLAY line was drawn 6dB lower than PEAK level. The 6dB bandwidth was determined from where the channel output spectrum intersected the display line.

#### IEEE 802.11b (DSSS, 1 Mbps)

Frequency (MHz)	6dB Bandwidth (MHz)	
Low Channel:	2412	9.2
Middle Channel:	2437	9.2
High Channel:	2462	9.2

#### IEEE 802.11g (OFDM, 6 Mbps)

Frequency (MHz)	6dB Bandwidth (MHz)	
Low Channel:	2412	16.48
Middle Channel:	2437	16.44
High Channel:	2462	16.48

#### IEEE 802.11n (20MHz) (OFDM, MCS0)

Frequency (MHz)	6dB Bandwidth (MHz)	
Low Channel:	2412	17.76
Middle Channel:	2437	17.76
High Channel:	2462	16.84

#### IEEE Bluetooth 4.0 (OFDM, MCS0)

Frequency (MHz)	6dB Bandwidth (MHz)	
Low Channel:	2402	0.726
Middle Channel:	2440	0.726
High Channel:	2480	0.726

#### Limits


6 dB bandwidth shall be at least 500kHz

The plots of 6dB RF bandwidth are saved as below.


**TEST REPORT**

**PLOTS OF 6dB RF BANDWIDTH**

**802.11b, Lowest Channel**

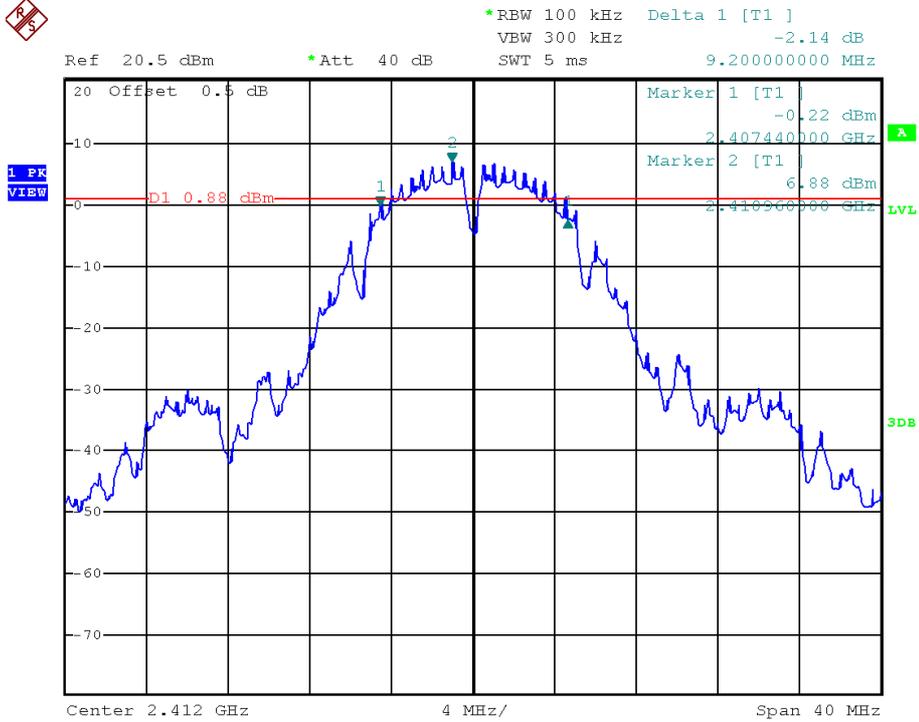


**802.11b, Middle Channel**

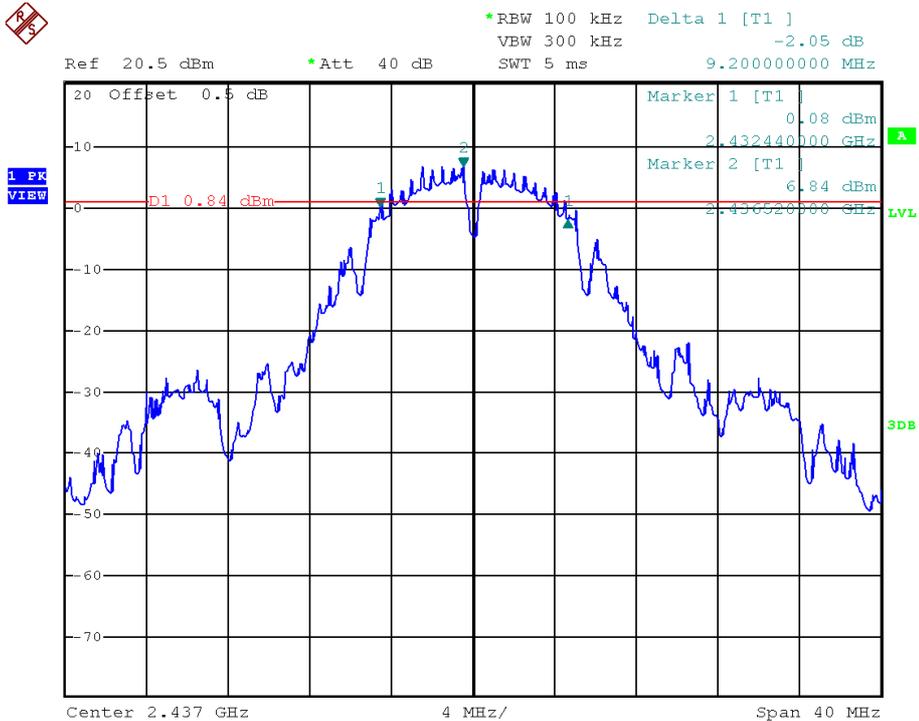

**TEST REPORT**

**PLOTS OF 6dB RF BANDWIDTH**


802.11b, Highest Channel

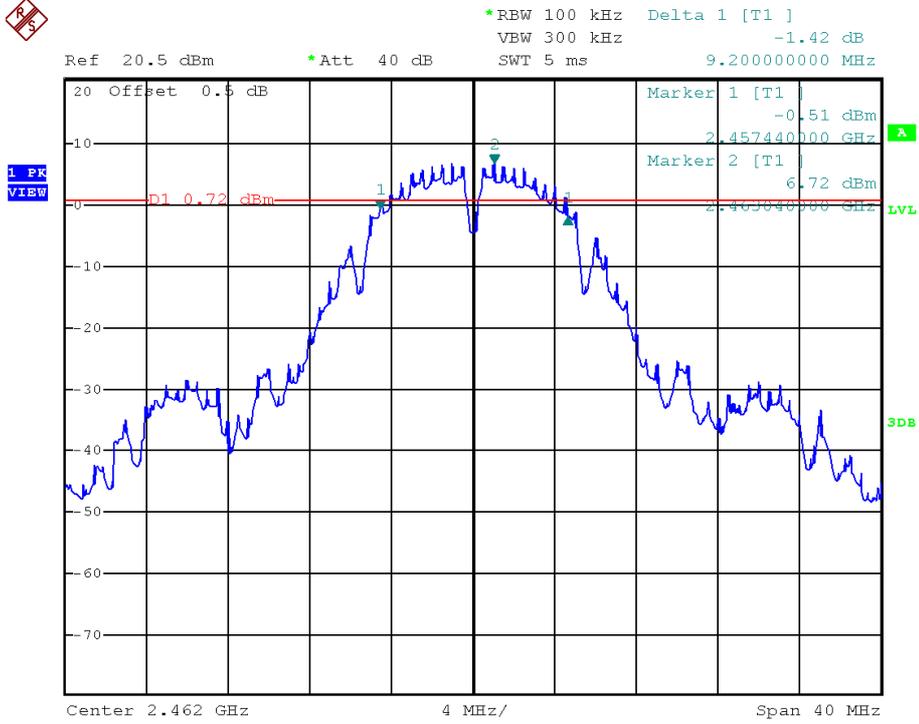


**TEST REPORT**

**PLOTS OF 6dB RF BANDWIDTH**

**802.11g, Lowest Channel**

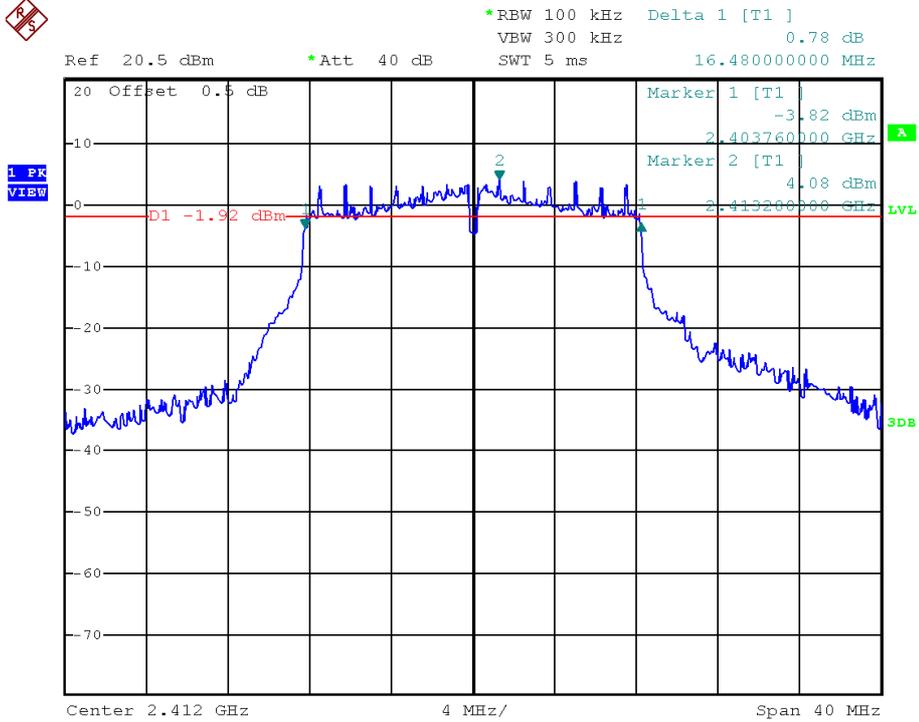


**802.11g, Middle Channel**

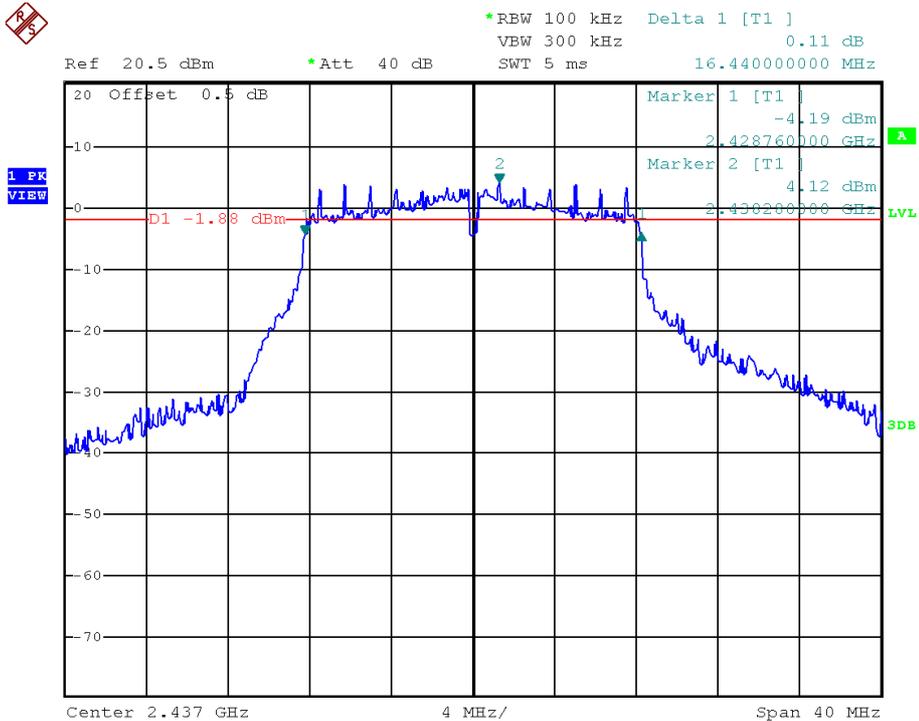

**TEST REPORT**

**PLOTS OF 6dB RF BANDWIDTH**


802.11g, Highest Channel

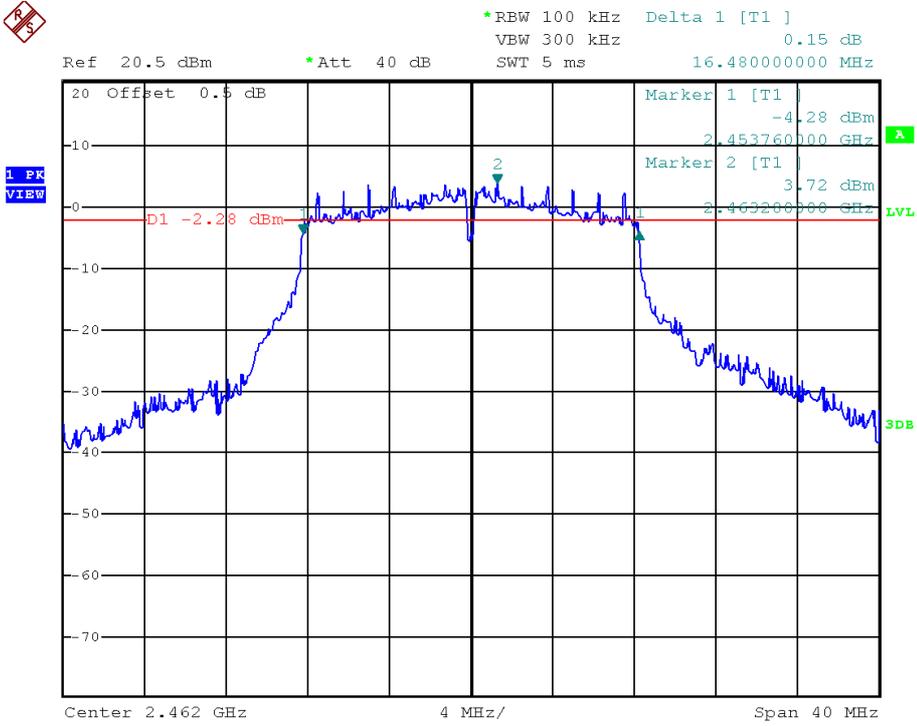


**TEST REPORT**

**PLOTS OF 6dB RF BANDWIDTH**

**802.11n (20MHz), Lowest Channel**

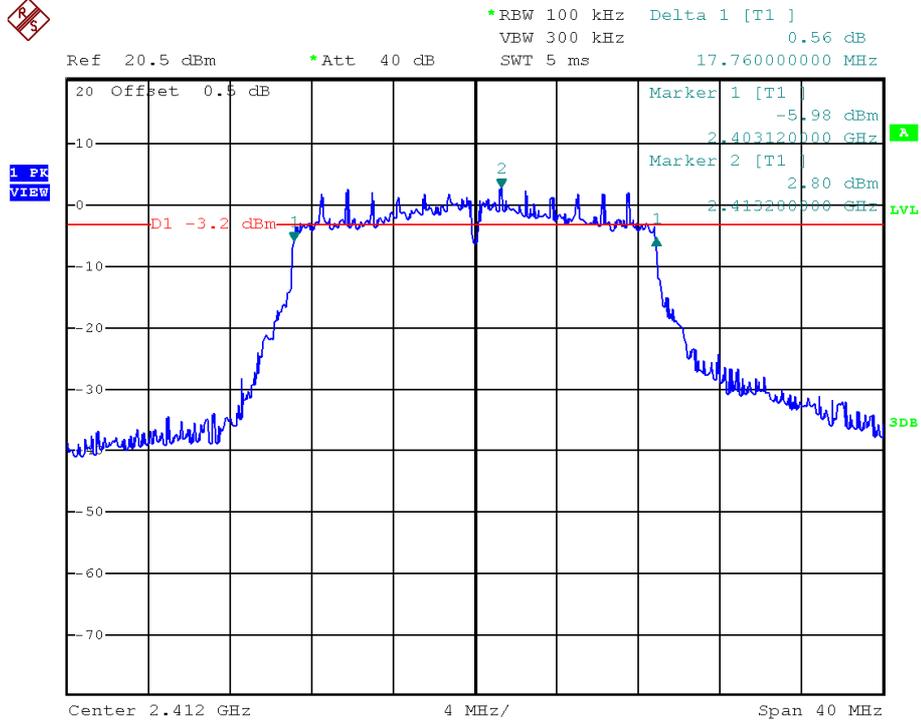


**802.11n (20MHz), Middle Channel**

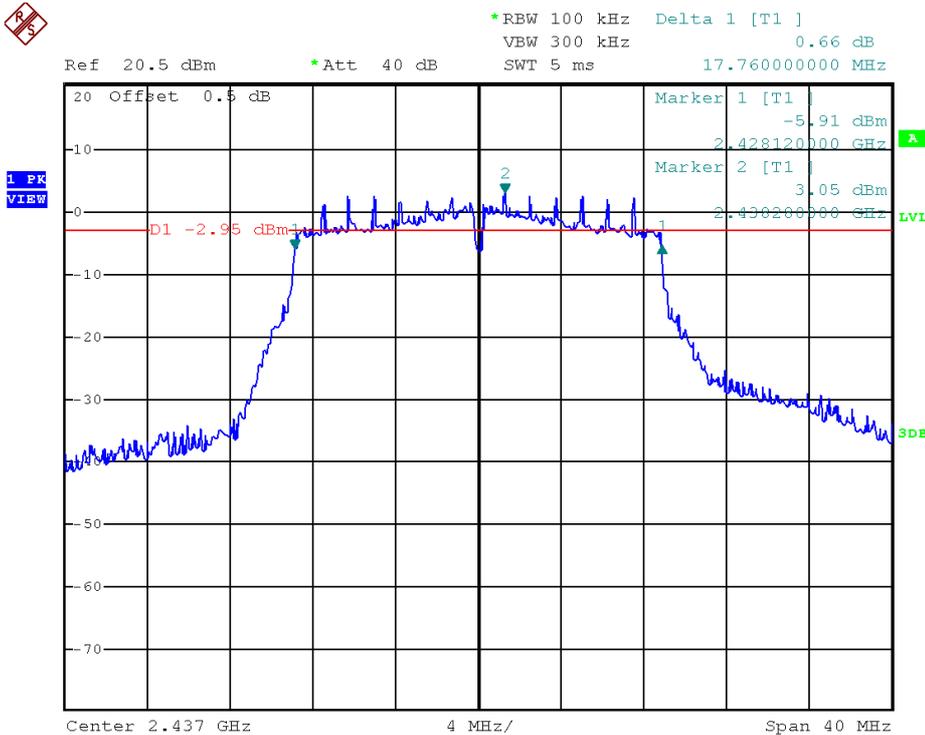

**TEST REPORT**


**PLOTS OF 6dB RF BANDWIDTH**  
802.11n (20MHz), Highest Channel

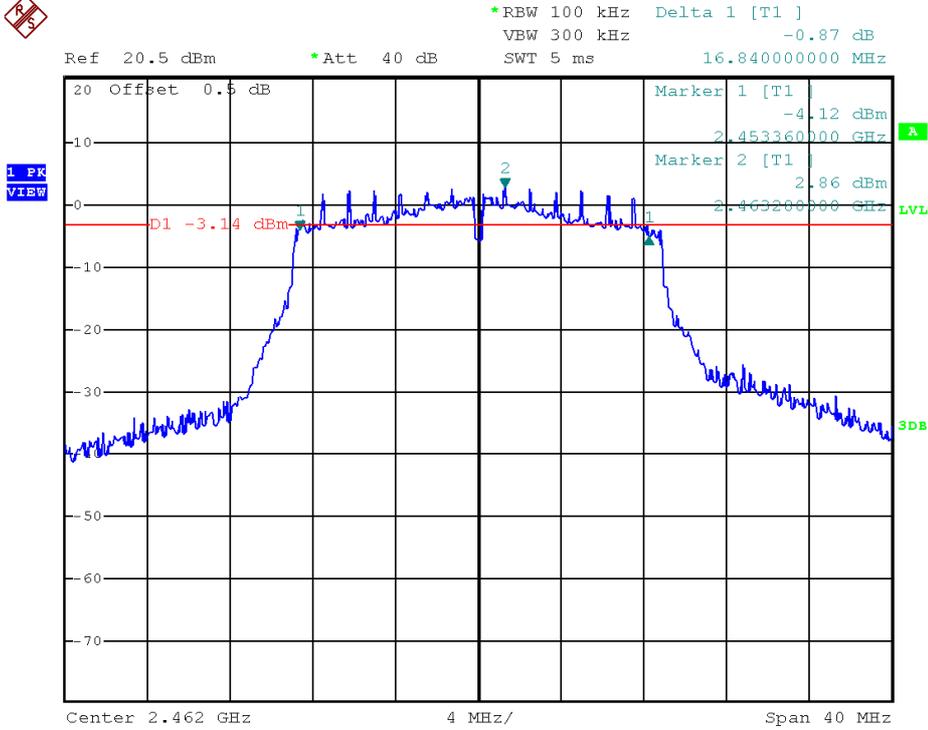


**TEST REPORT**

**PLOTS OF 6dB RF BANDWIDTH**

Bluetooth 4.0, Lowest Channel

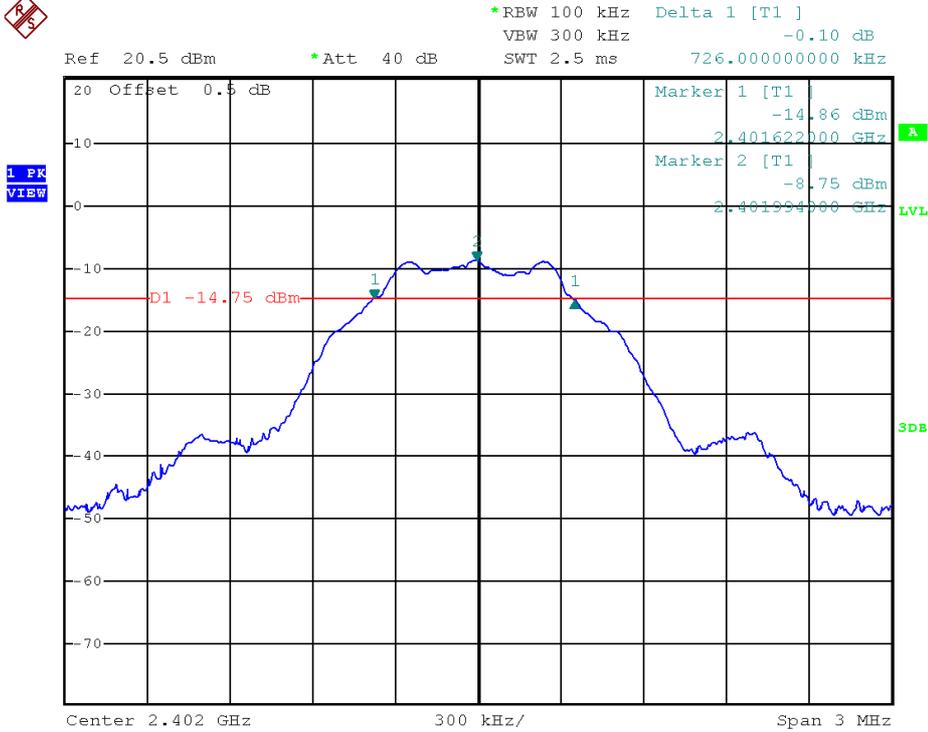


Bluetooth 4.0, Middle Channel

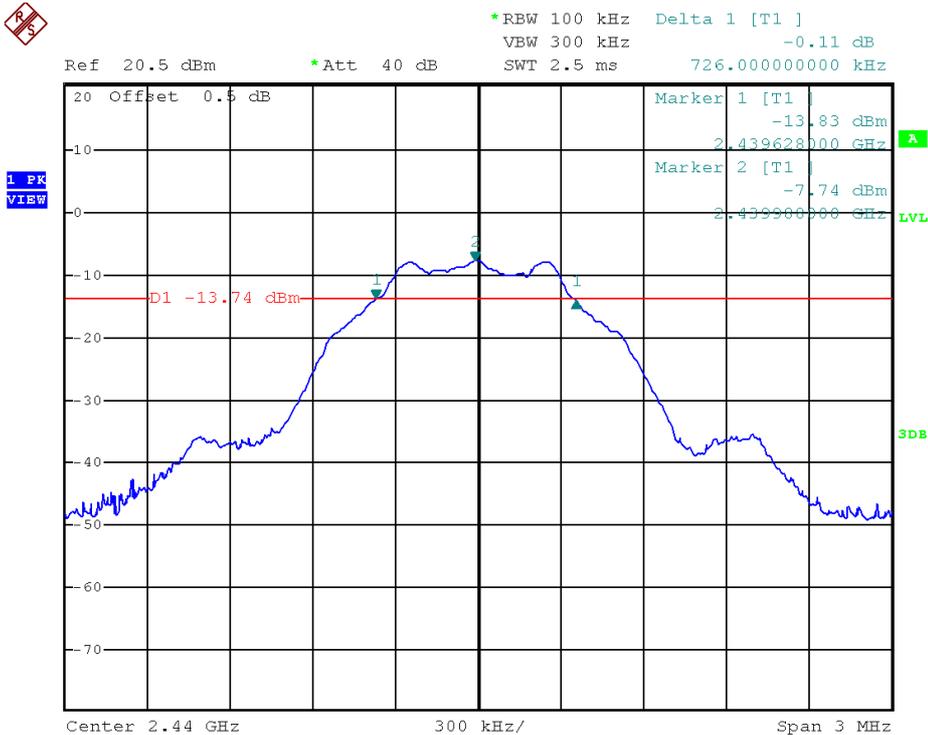

**TEST REPORT**

**PLOTS OF 6dB RF BANDWIDTH**

Bluetooth 4.0, Highest Channel

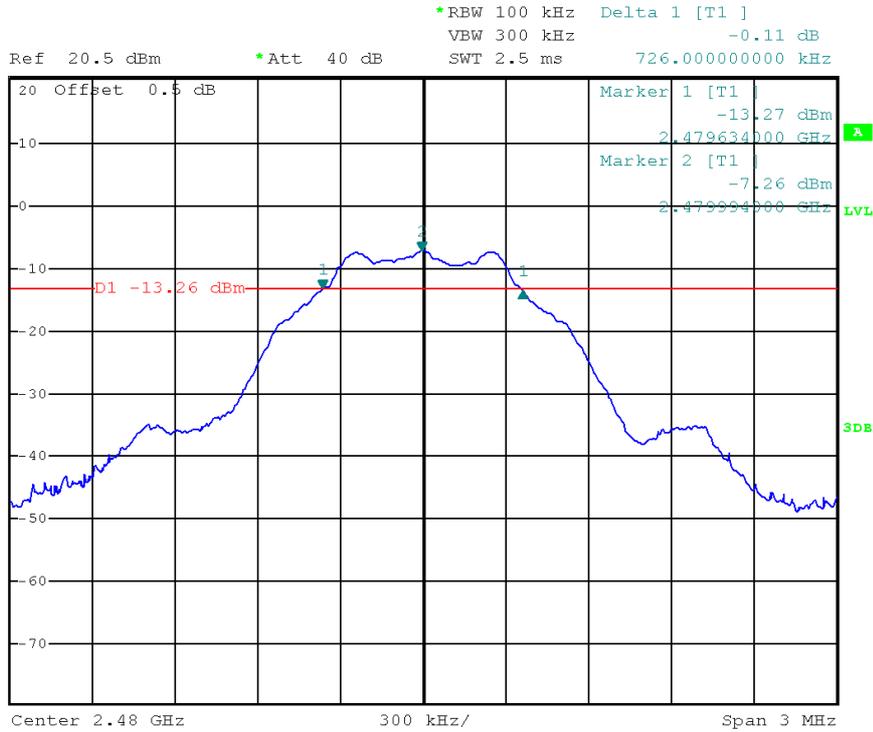

## TEST REPORT

### 4.3 Maximum Power Spectral Density

Antenna output of the EUT was coupled directly to spectrum analyzer. The measurement procedure 10.2 PKPSD was used. If an external attenuator and/or cable was used, these losses are compensated for using the OFFSET function of the analyser.

#### IEEE 802.11b (DSSS, 1 Mbps)

Frequency (MHz)	PSD in 100kHz (dBm)
Low Channel: 2412	6.55
Middle Channel: 2437	6.10
High Channel: 2462	7.40

#### IEEE 802.11g (OFDM, 6 Mbps)

Frequency (MHz)	PSD in 100kHz (dBm)
Low Channel: 2412	3.84
Middle Channel: 2437	4.10
High Channel: 2462	4.12

#### IEEE 802.11n (20MHz) (OFDM, MCS0)

Frequency (MHz)	PSD in 100kHz (dBm)
Low Channel: 2412	2.60
Middle Channel: 2437	2.84
High Channel: 2462	2.72

#### Bluetooth 4.0

Frequency (MHz)	PSD in 100kHz (dBm)
Low Channel: 2402	-8.75
Middle Channel: 2440	-7.65
High Channel: 2480	-7.16

Cable Loss: 0.5 dB


Limit:  
8dBm

The plots of power spectral density are as below.


**TEST REPORT**

**PLOTS OF POWER SPECTRAL DENSITY**

802.11b, Lowest channel

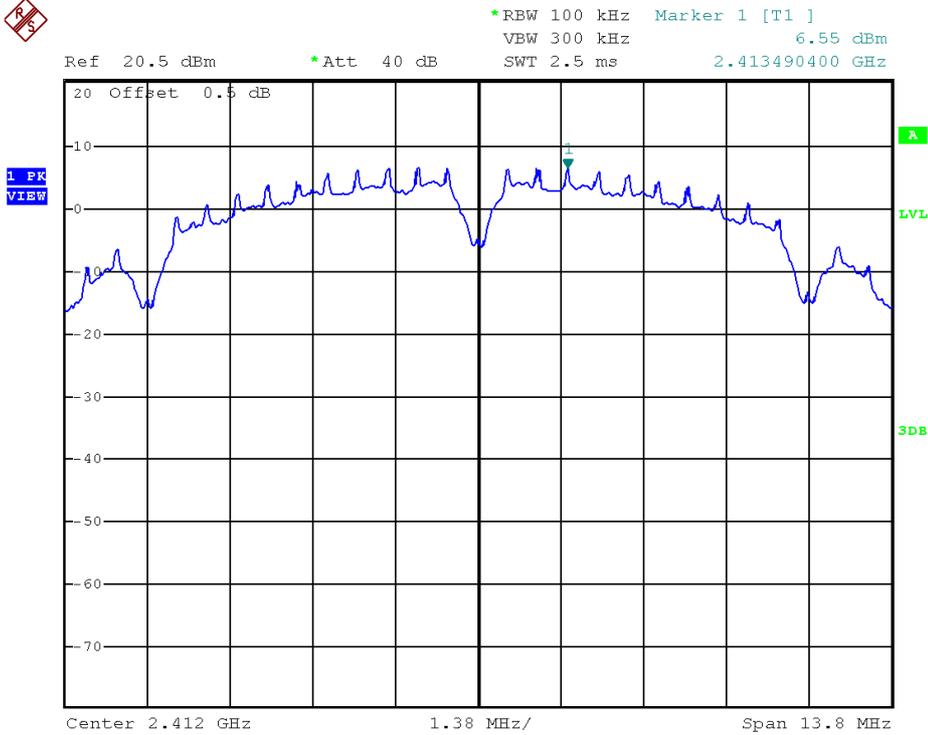

802.11b, Middle channel

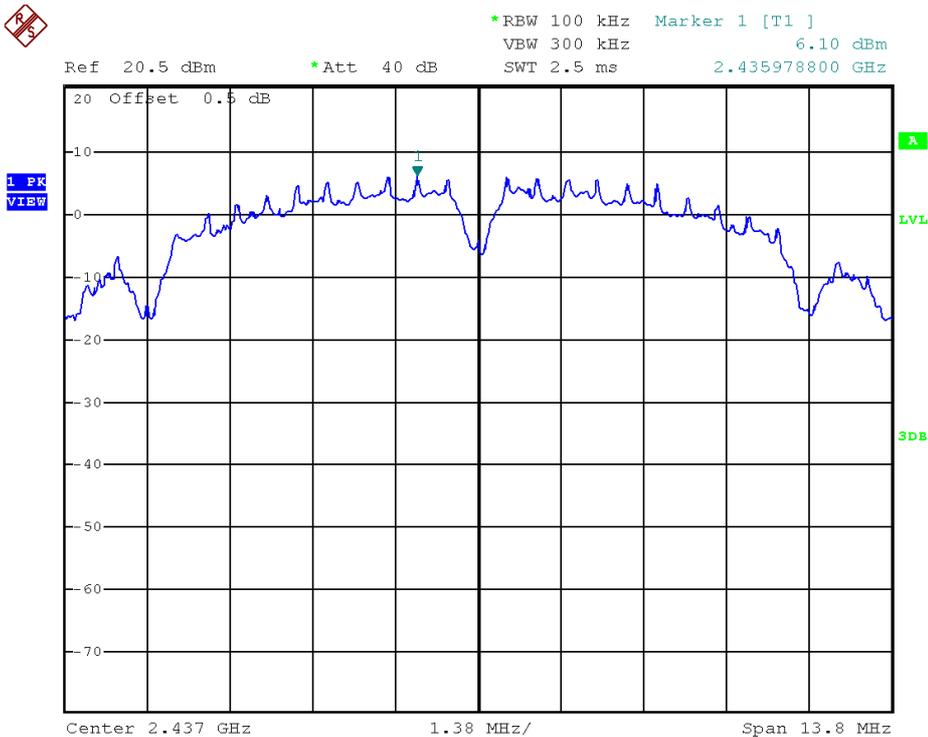


**TEST REPORT**

**PLOTS OF POWER SPECTRAL DENSITY**

802.11b, Highest channel




\*RBW 100 kHz Marker 1 [T1 ]  
VBW 300 kHz 7.40 dBm  
SWT 2.5 ms 2.460978800 GHz

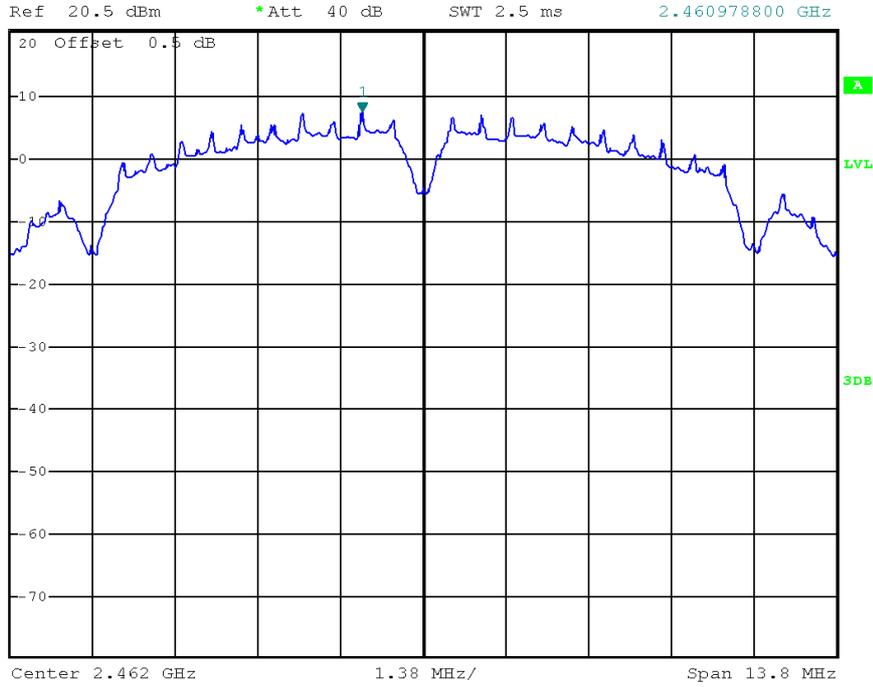


**TEST REPORT**

**PLOTS OF POWER SPECTRAL DENSITY**

802.11g, Lowest channel

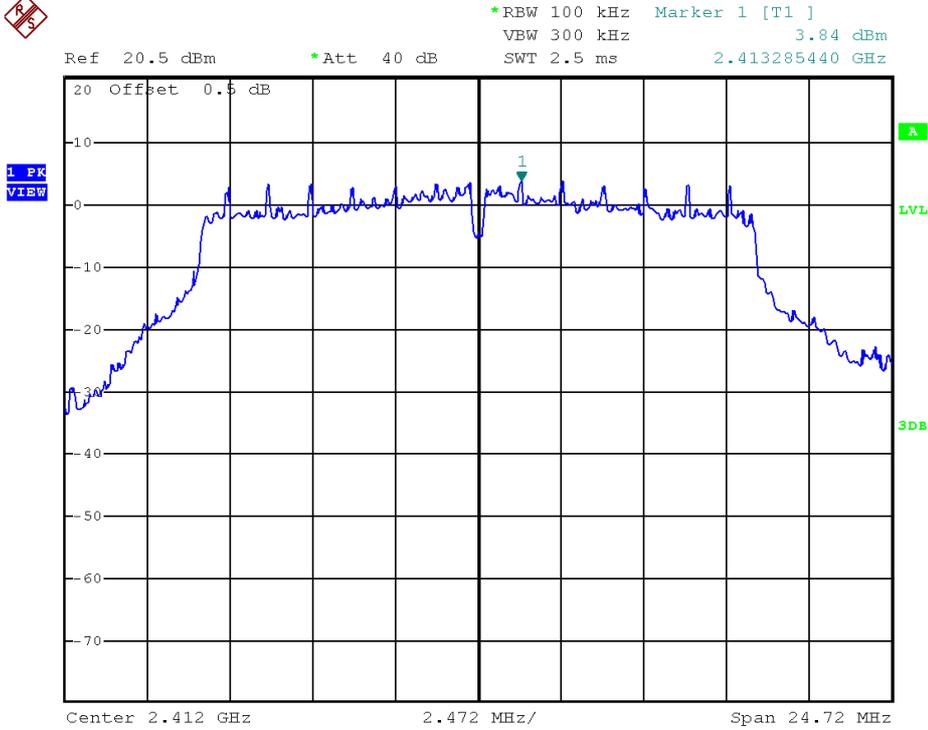

802.11g, Middle channel

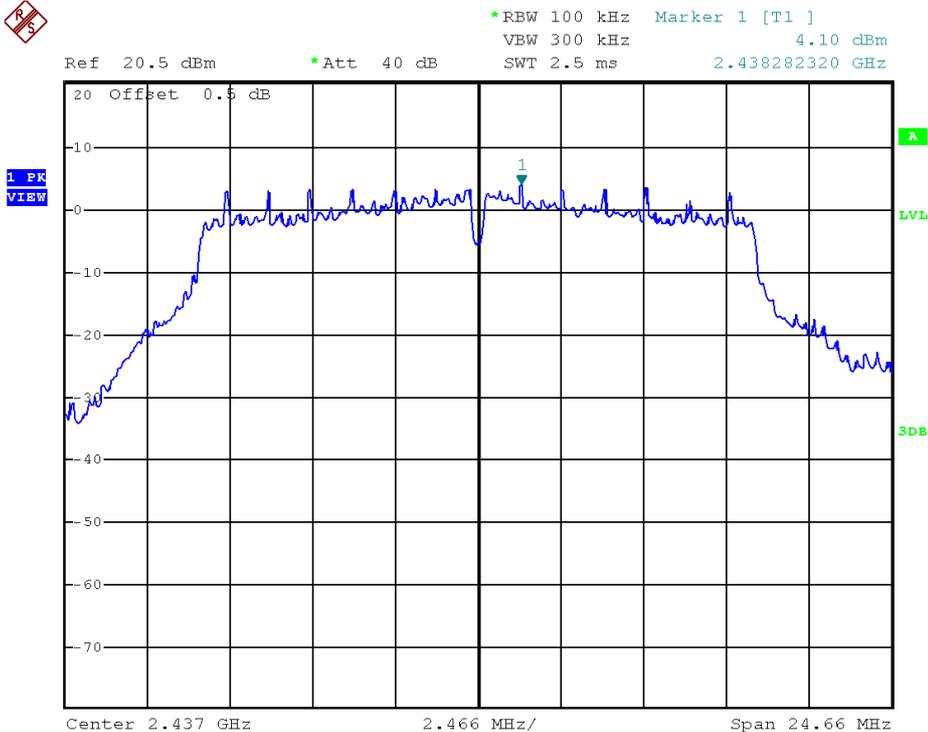


**TEST REPORT**

**PLOTS OF POWER SPECTRAL DENSITY**

802.11g, Highest channel




\*RBW 100 kHz Marker 1 [T1 ]  
VBW 300 kHz 4.12 dBm  
SWT 2.5 ms 2.463285440 GHz

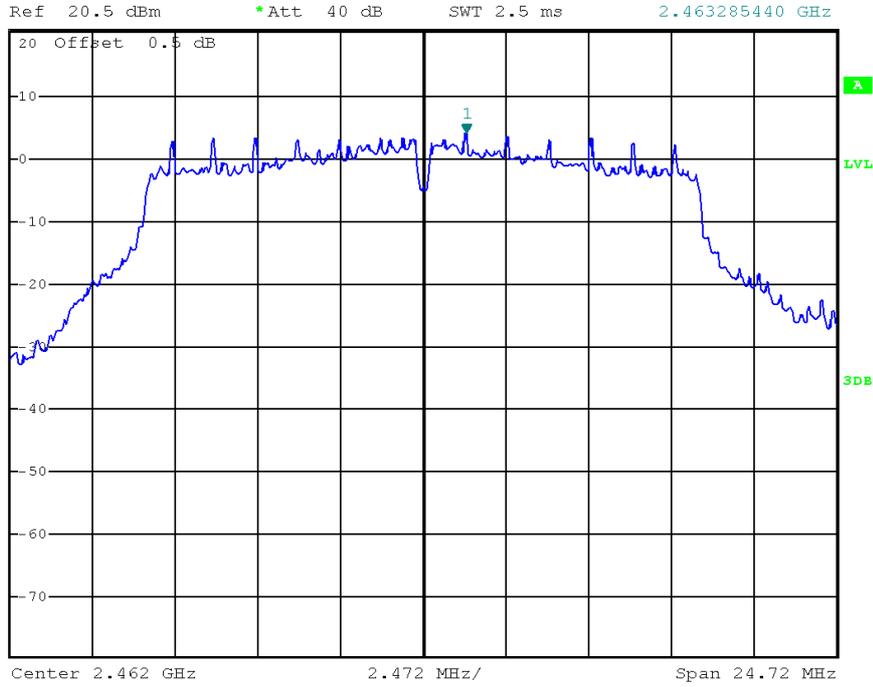


**TEST REPORT**

**PLOTS OF POWER SPECTRAL DENSITY**

802.11n (20MHz), Lowest channel

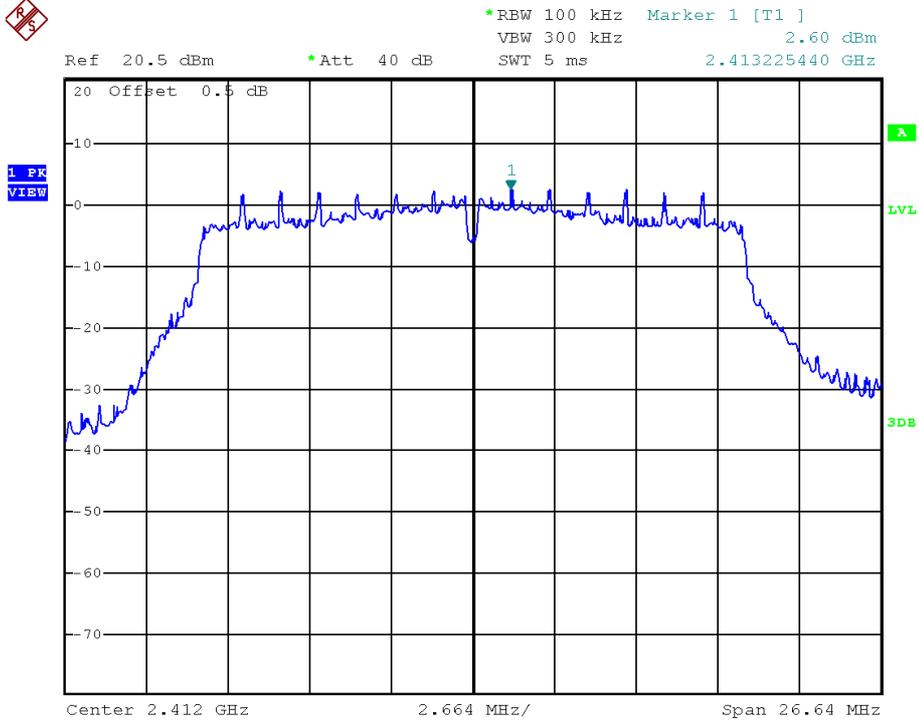


802.11n (20MHz), Middle channel

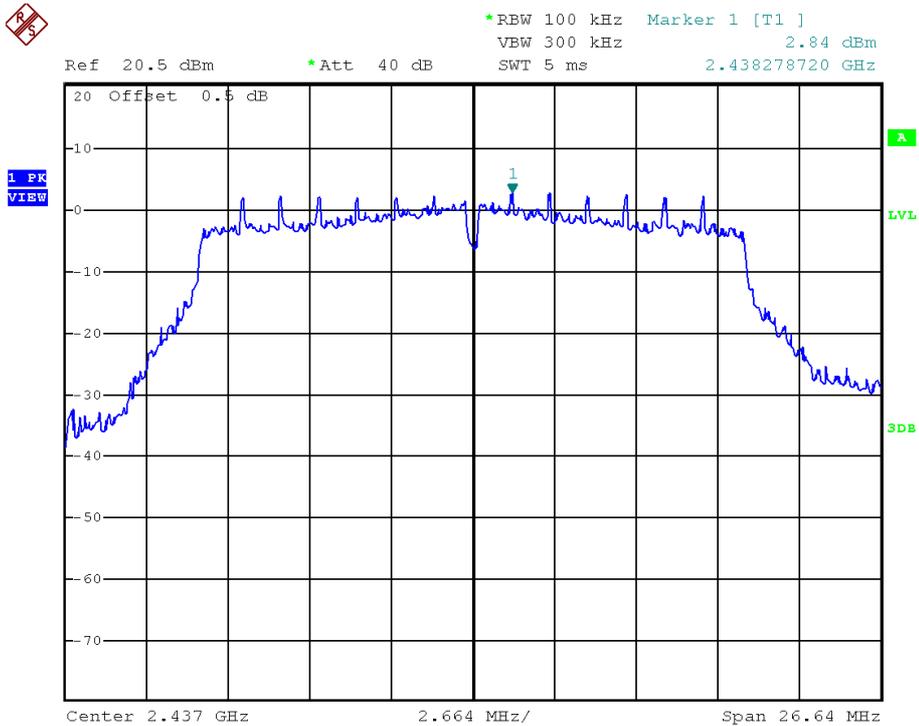

### TEST REPORT

### PLOTS OF POWER SPECTRAL DENSITY


802.11n (20MHz), Highest channel

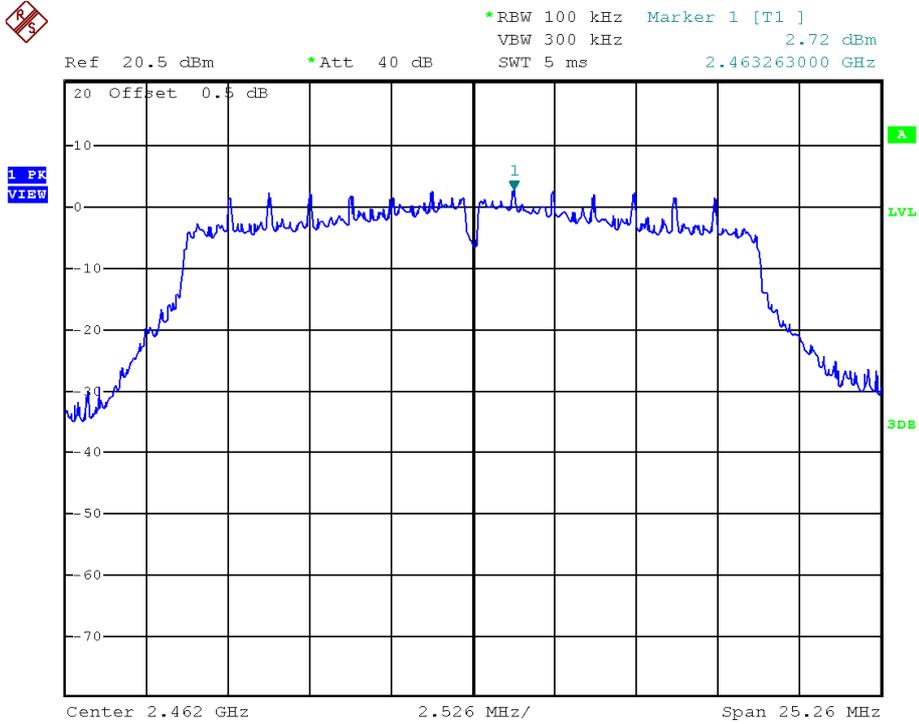


**TEST REPORT**

**PLOTS OF POWER SPECTRAL DENSITY**

Bluetooth 4.0, Lowest channel

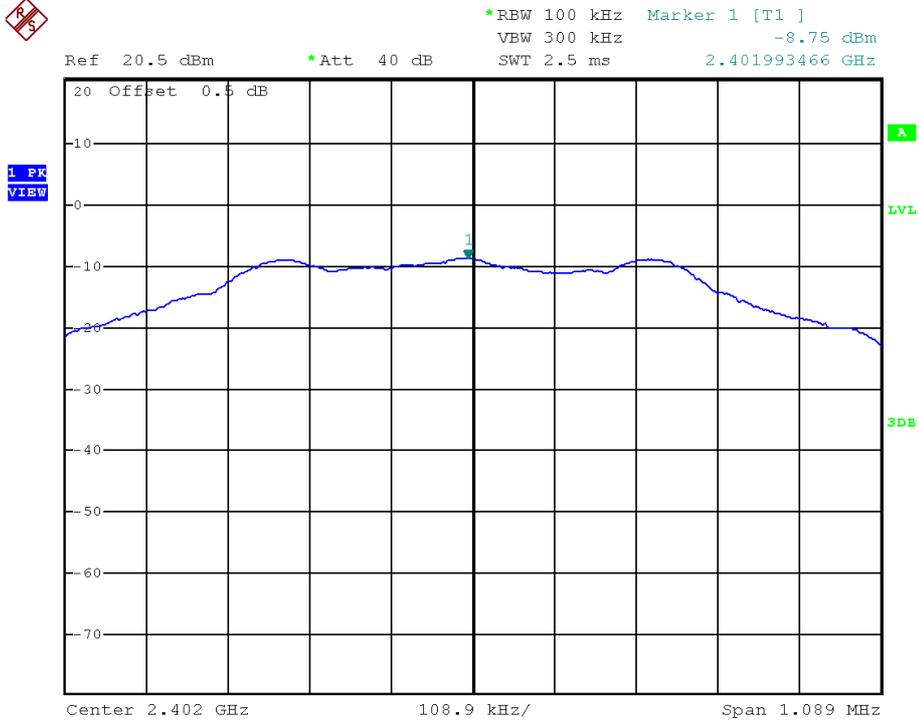


Bluetooth 4.0, Middle channel

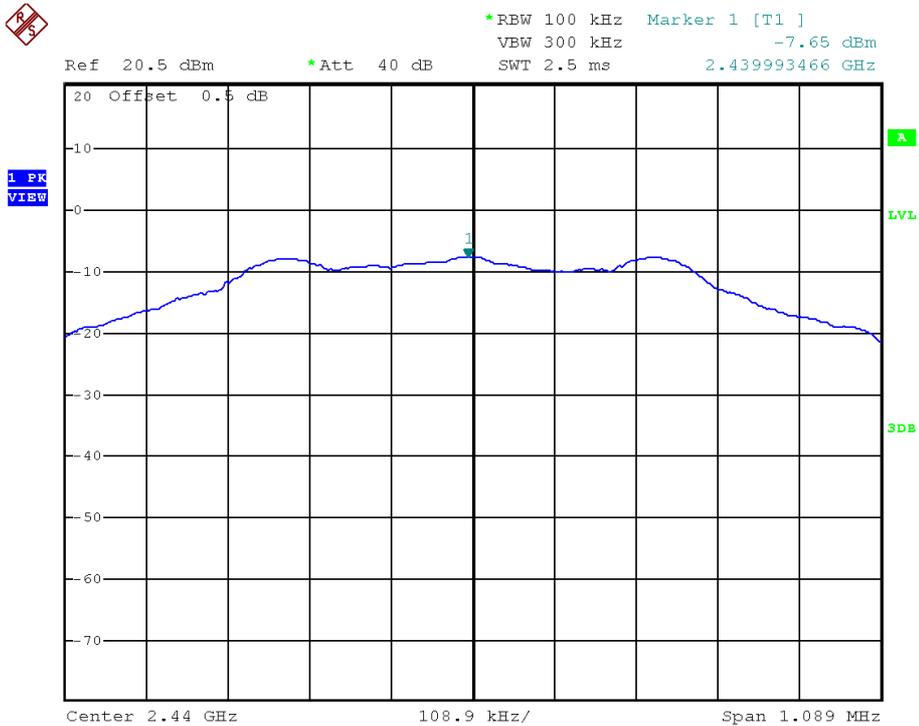

### TEST REPORT

### PLOTS OF POWER SPECTRAL DENSITY

Bluetooth 4.0, Highest channel

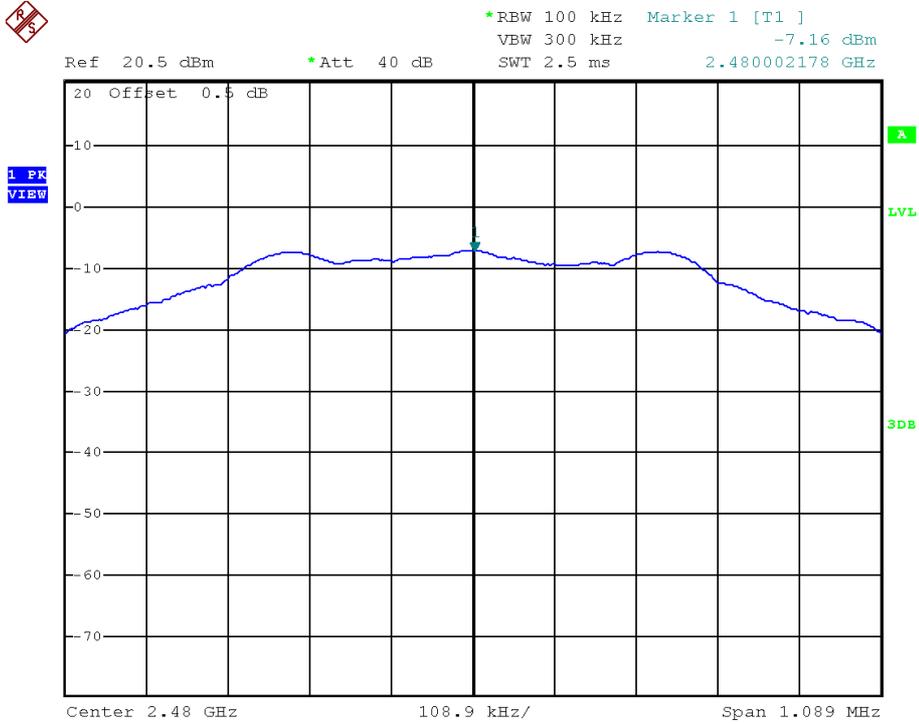

## TEST REPORT

### 4.4 Out of Band Conducted Emissions

For 802.11b/g/n20MHz & Bluetooth 4.0, the maximum conducted (peak) output power was used to demonstrate compliance as described in 9.1. Then the display line (in red) shown in the following plots denotes the limit at 20dB below maximum measured in-band peak PSD level in 100 KHz bandwidth for 802.11b/g/n20MHz & Bluetooth 4.0.

The measurement procedures under sections 11 of KDB558074 D01 v05r01 (11-February-2019) were used.

Furthermore, delta measurement technique for measuring bandedge emissions was incorporated in the test of the edge at 2483.5MHz.


#### Limits:

All spurious emission and up to the tenth harmonic was measured and they were found to be at least 20dB below the maximum measured in-band peak PSD level.


**TEST REPORT**

**PLOTS OF OUT OF BAND CONDUCTED EMISSIONS**

**802.11b, Lowest Channel, Bandedge**

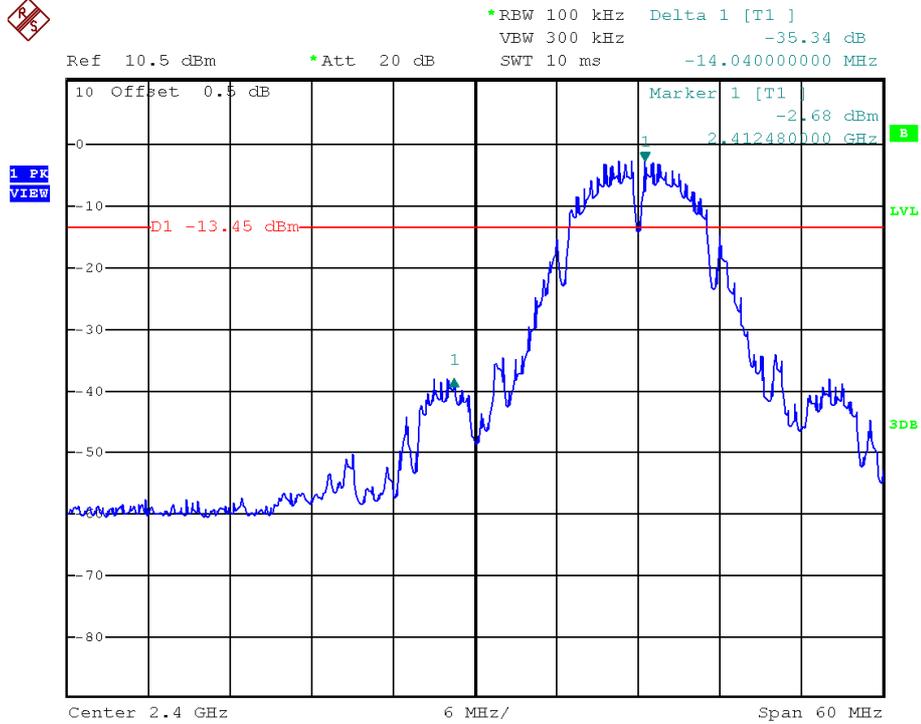


**802.11b, Highest Channel, Bandedge**

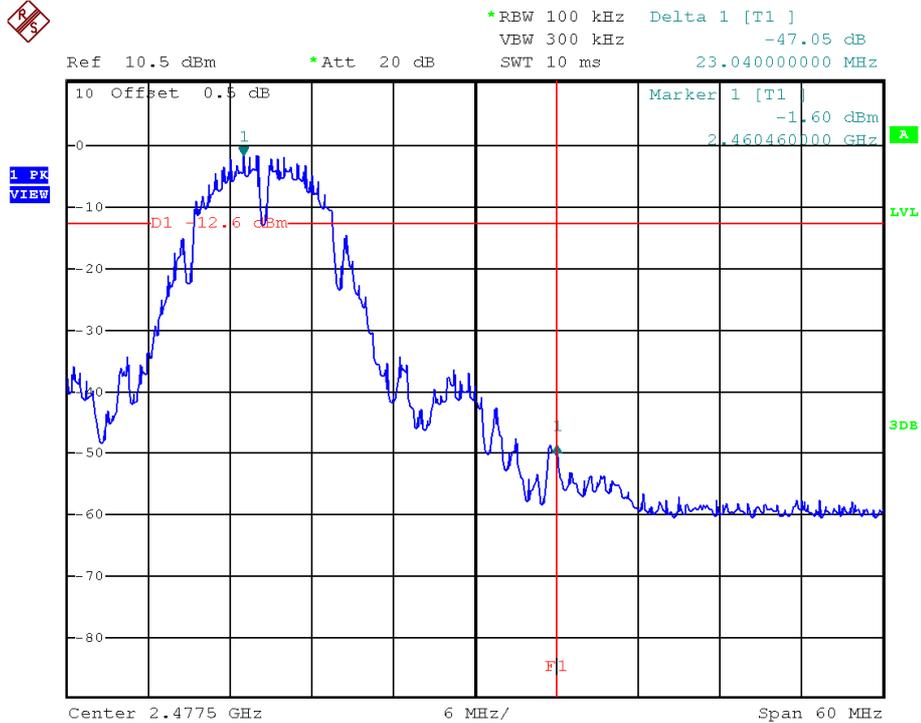


**TEST REPORT**

**PLOTS OF OUT OF BAND CONDUCTED EMISSIONS**

**802.11b, Lowest Channel, Plot A**

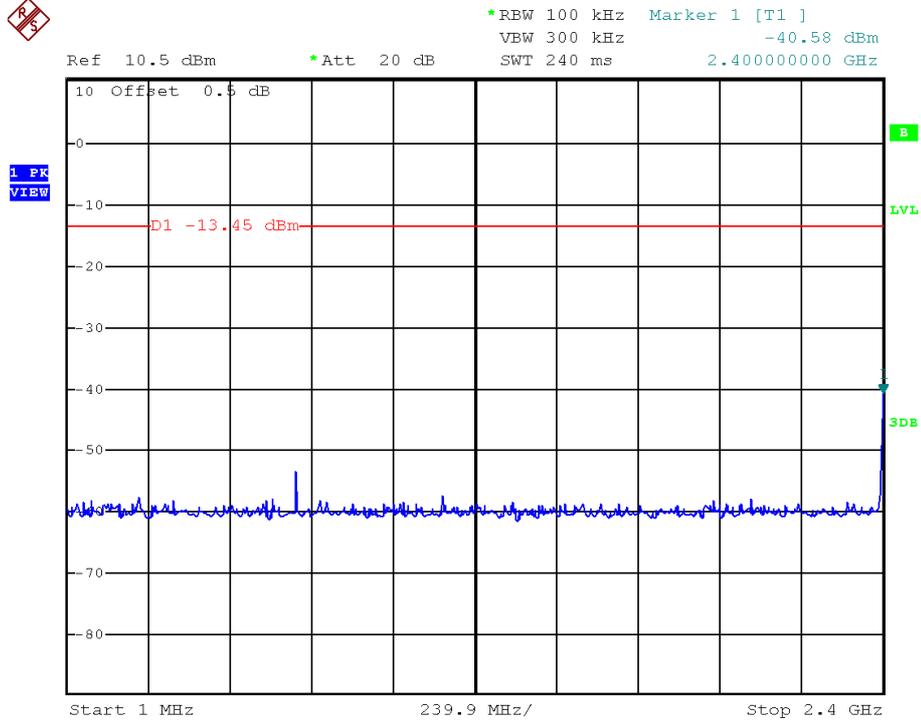


**802.11b, Lowest Channel, Plot B**

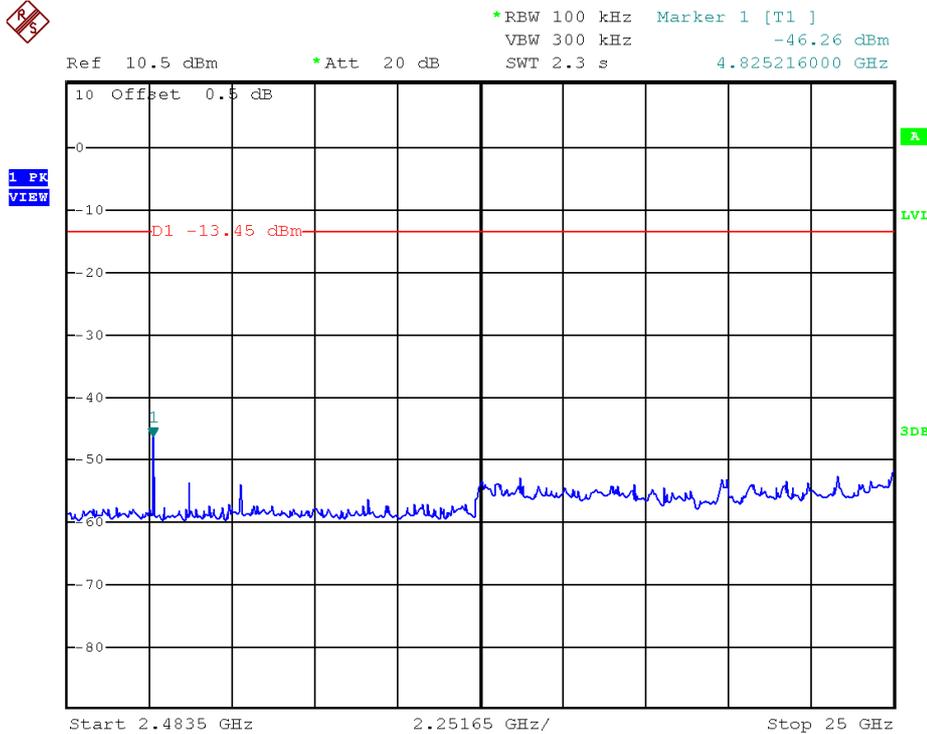


**TEST REPORT**

**PLOTS OF OUT OF BAND CONDUCTED EMISSIONS**

802.11b, Middle Channel, Plot A

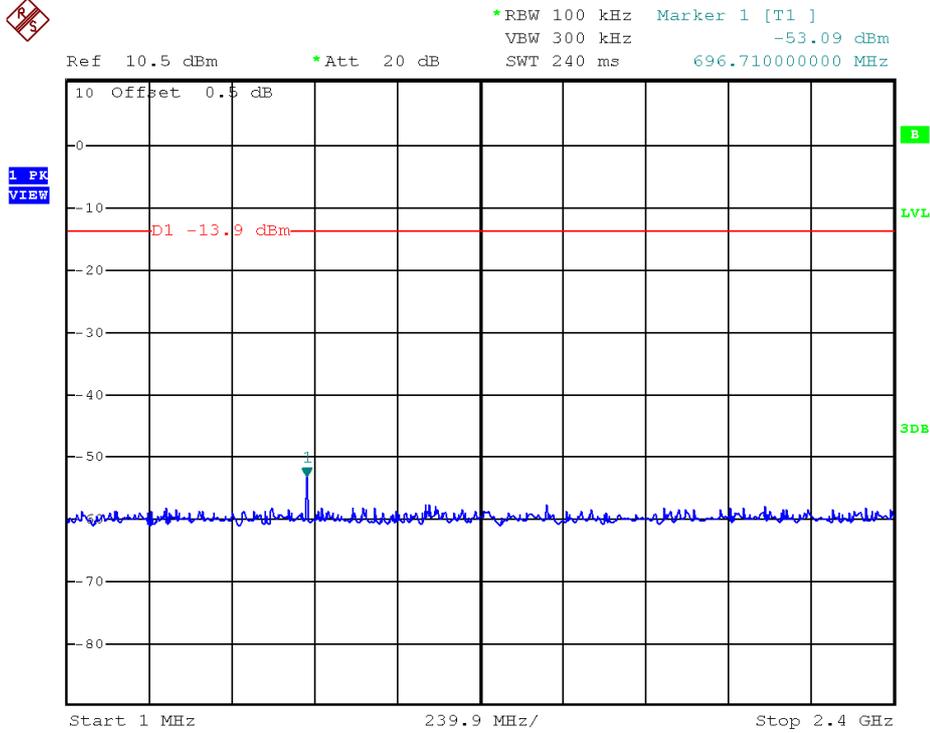


802.11b, Middle Channel, Plot B

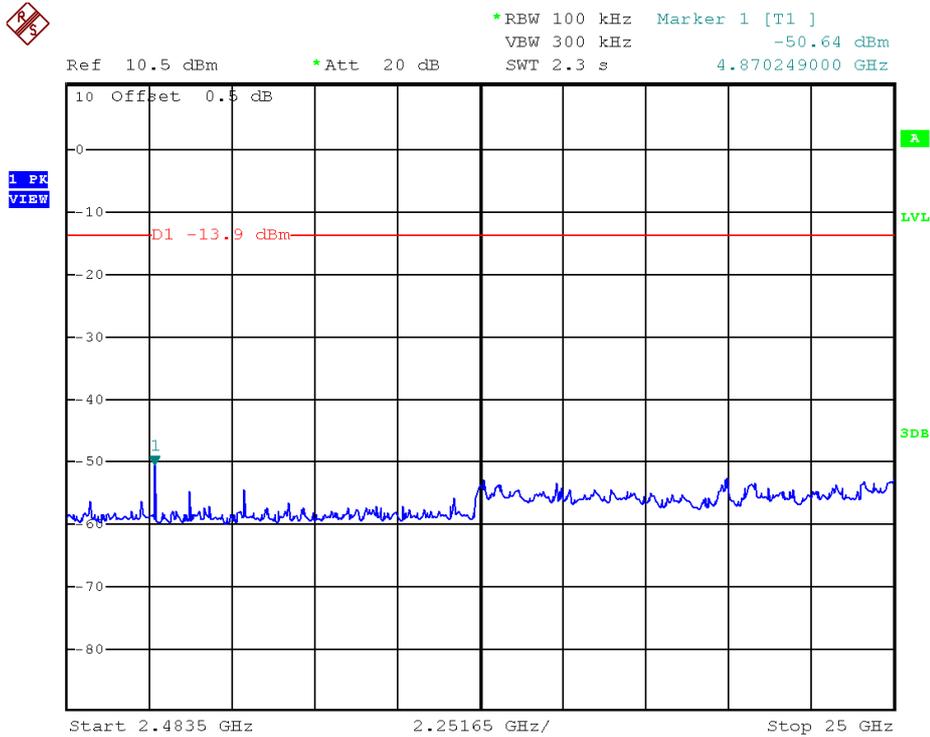


**TEST REPORT**

**PLOTS OF OUT OF BAND CONDUCTED EMISSIONS**

**802.11b, Highest Channel, Plot A**

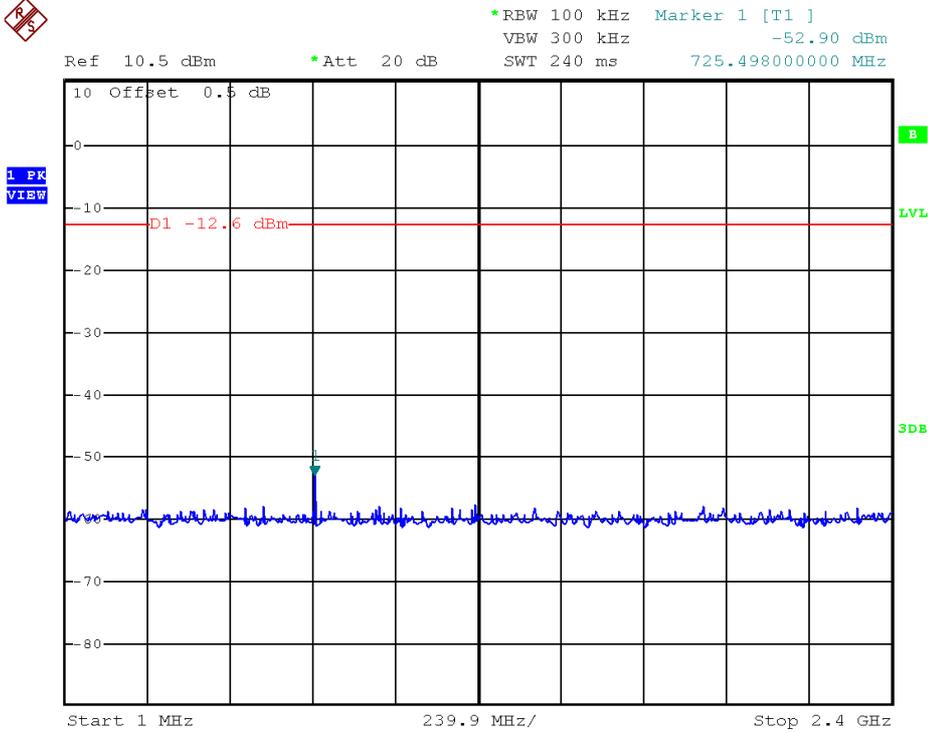


**802.11b, Highest Channel, Plot B**

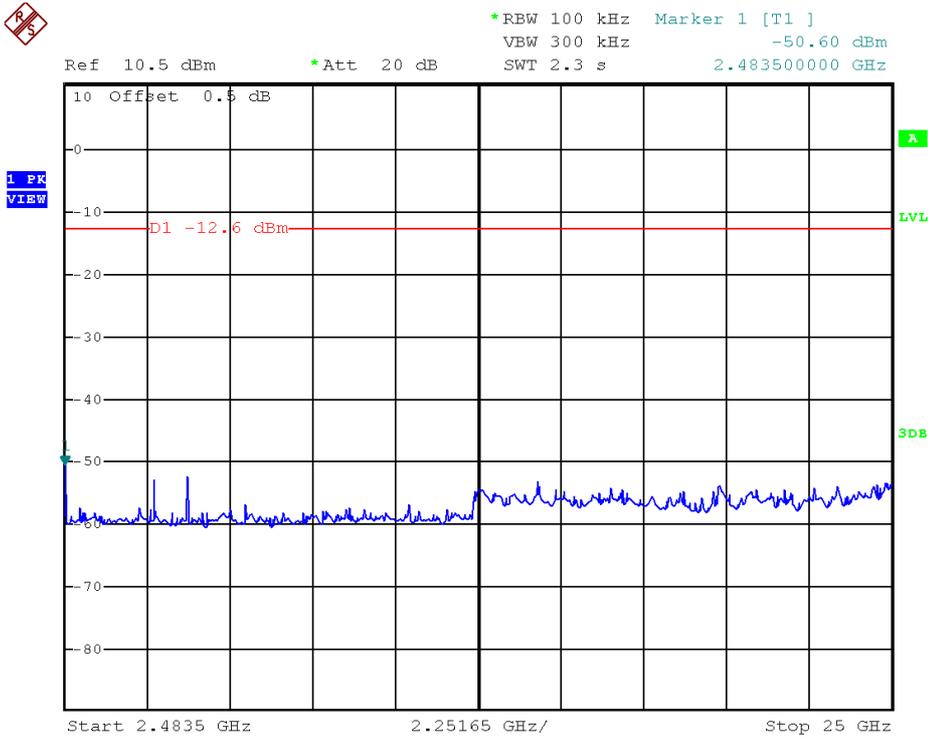


**TEST REPORT**

**PLOTS OF OUT OF BAND CONDUCTED EMISSIONS**

**802.11g, Lowest Channel, Bandedge**

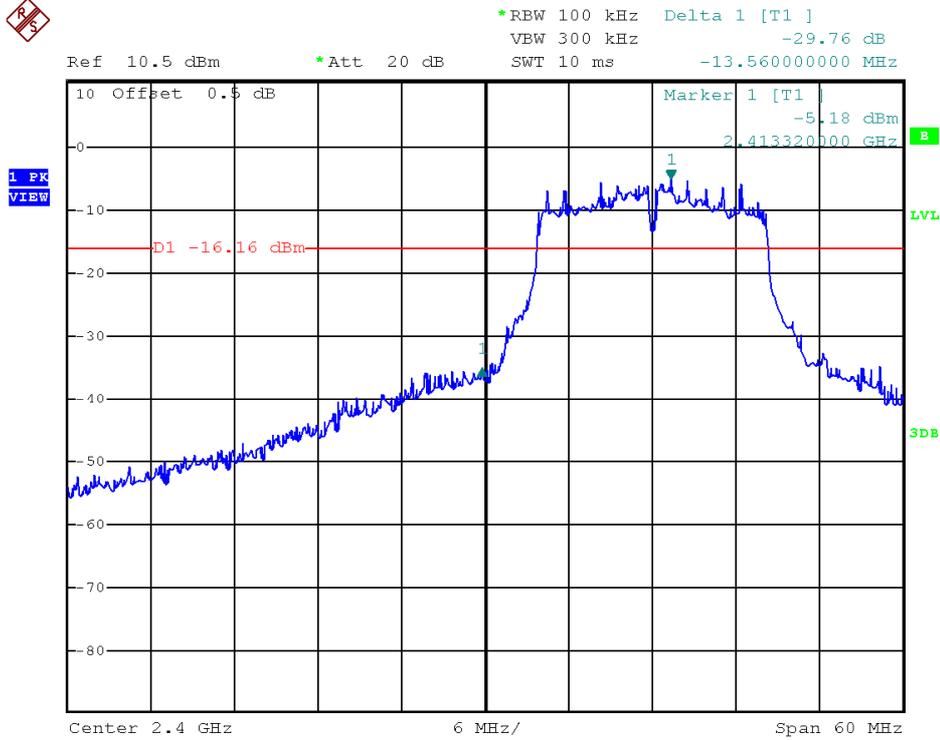


**802.11g, Highest Channel, Bandedge**

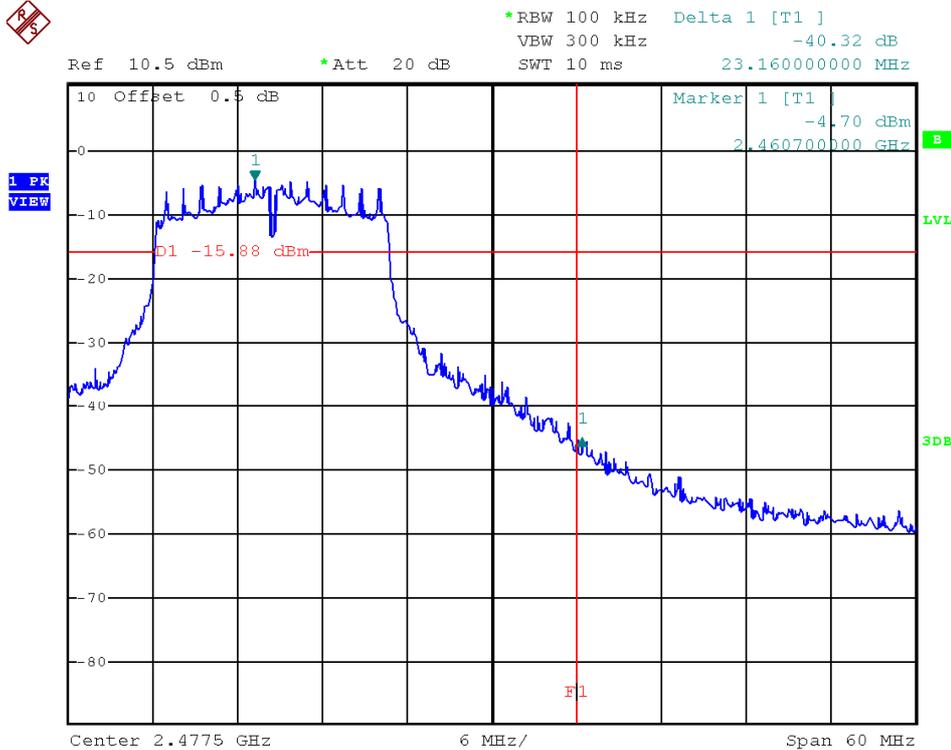


**TEST REPORT**

**PLOTS OF OUT OF BAND CONDUCTED EMISSIONS**

**802.11g, Lowest Channel, Plot A**

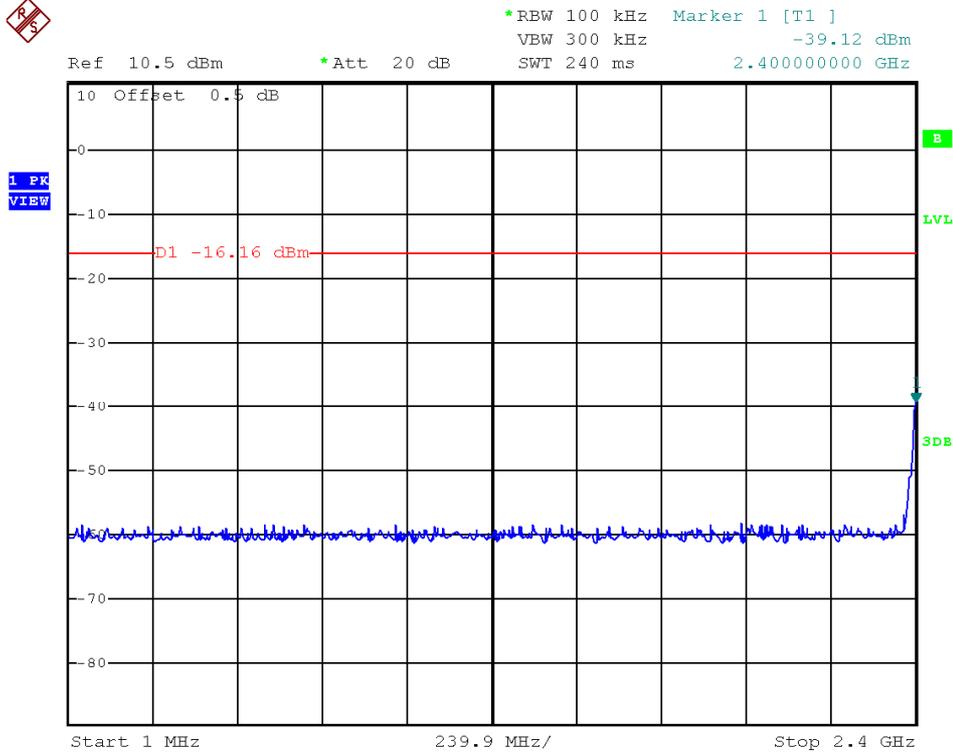


**802.11g, Lowest Channel, Plot B**

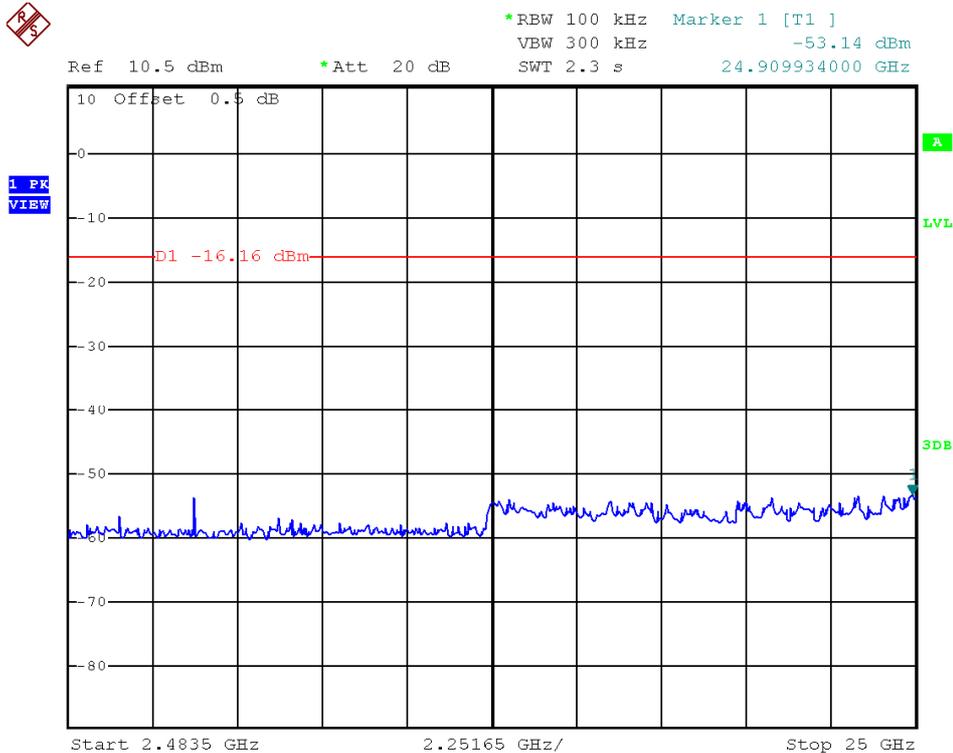


**TEST REPORT**

**PLOTS OF OUT OF BAND CONDUCTED EMISSIONS**

**802.11g, Middle Channel, Plot A**

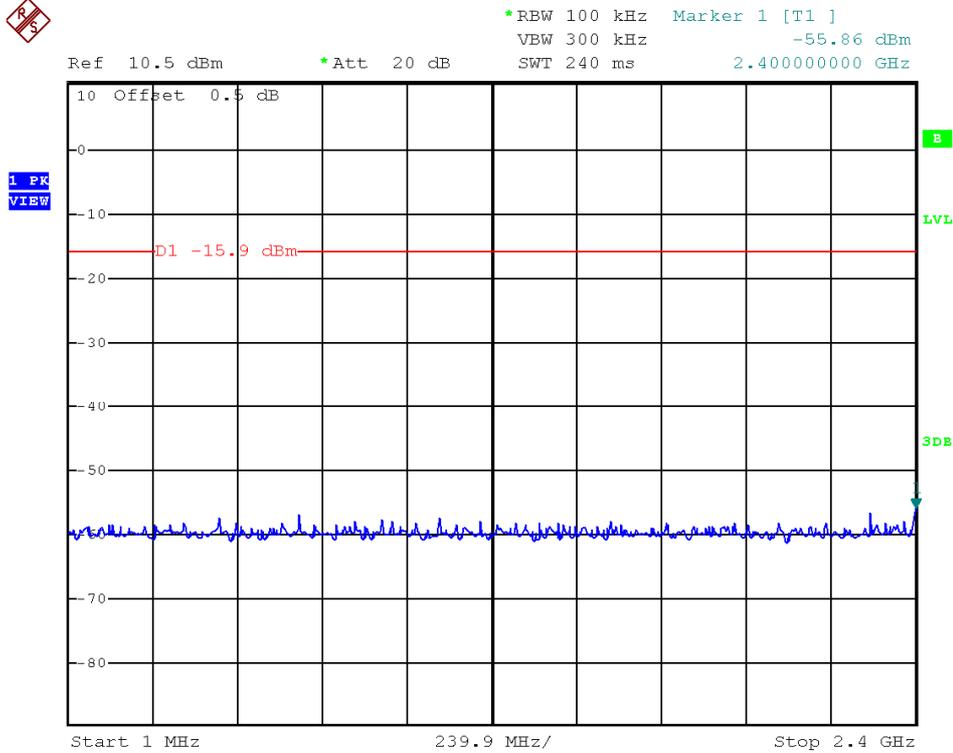


**802.11g, Middle Channel, Plot B**

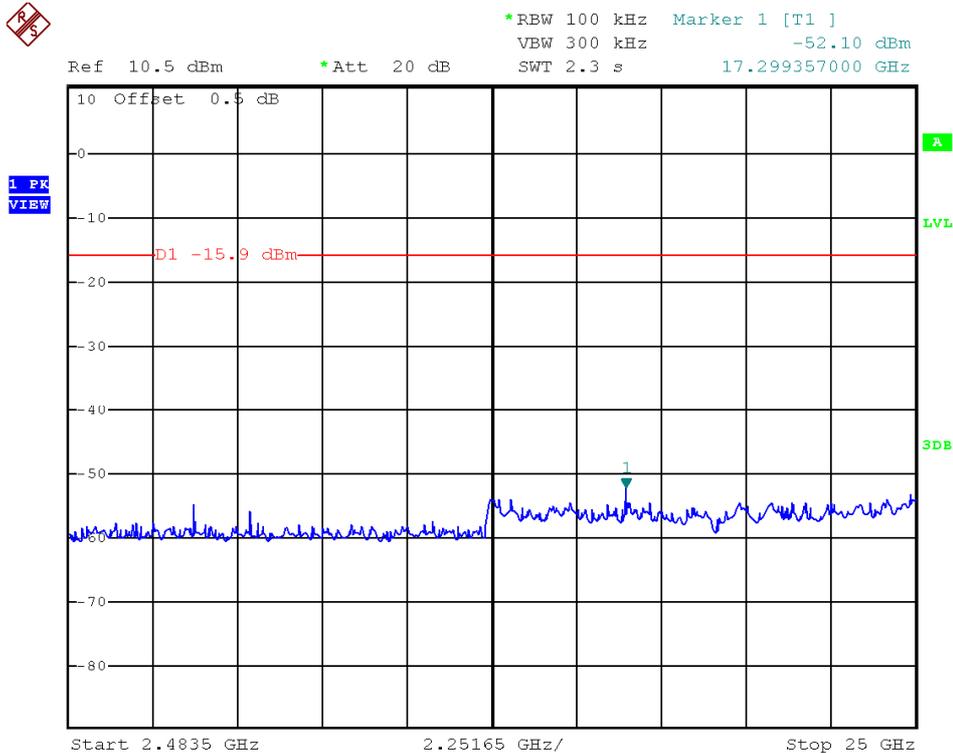


**TEST REPORT**

**PLOTS OF OUT OF BAND CONDUCTED EMISSIONS**

**802.11g, Highest Channel, Plot A**

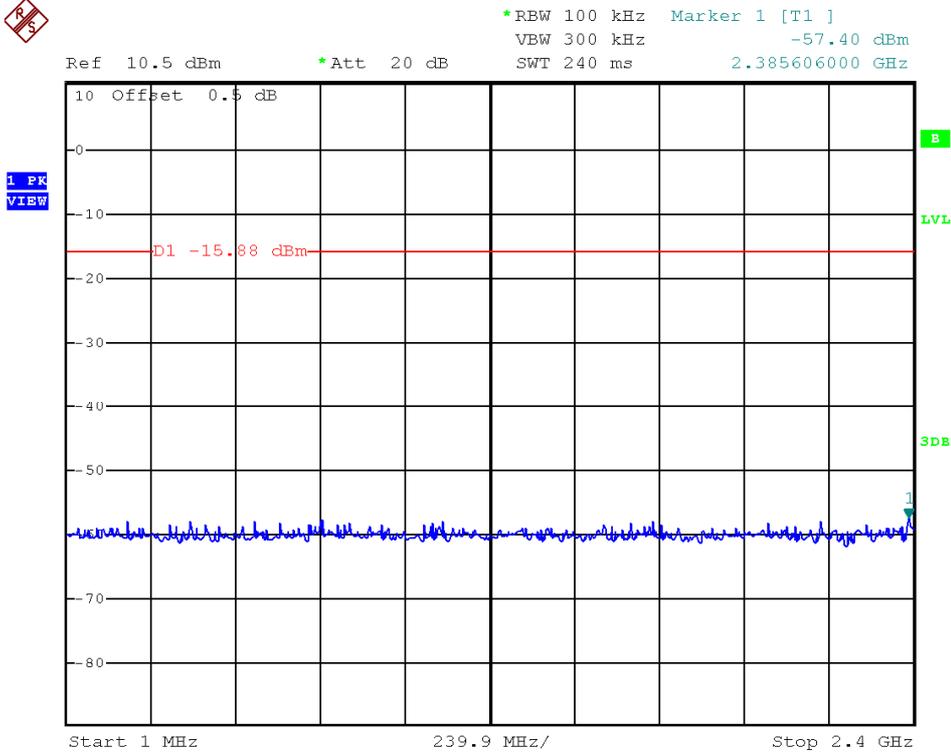


**802.11g, Highest Channel, Plot B**

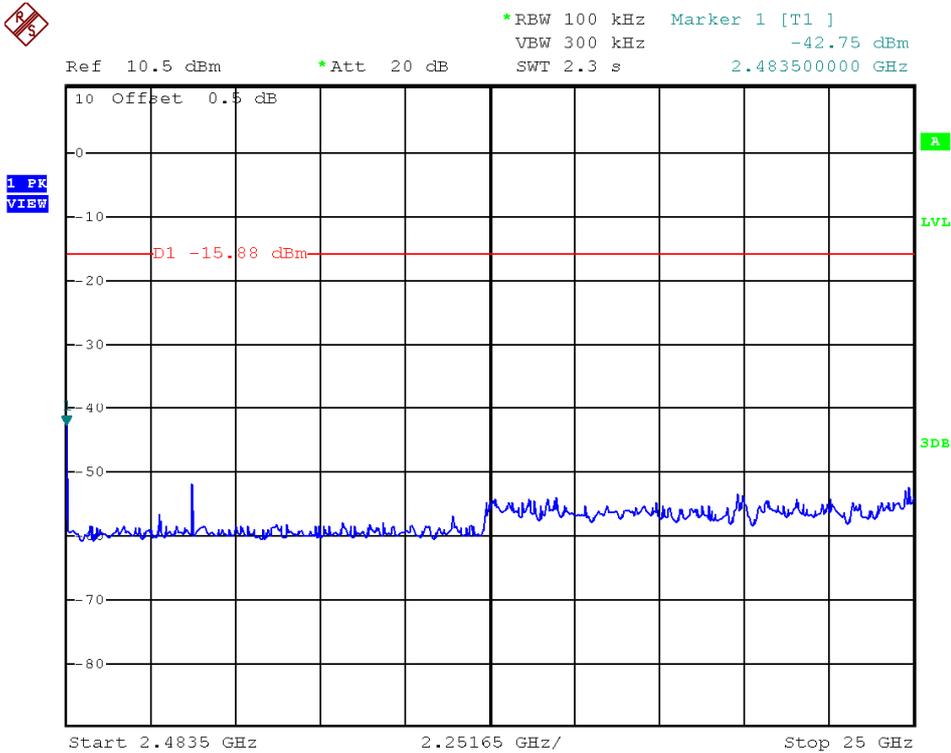


**TEST REPORT**

**PLOTS OF OUT OF BAND CONDUCTED EMISSIONS**

802.11n (20MHz), Lowest Channel, Bandedge

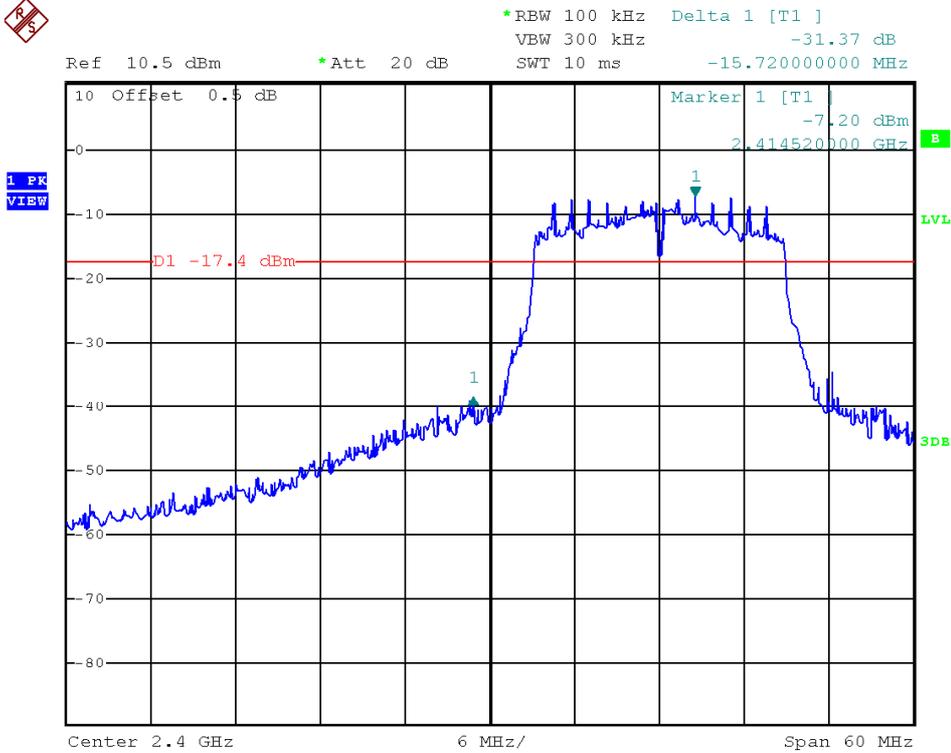


802.11n (20MHz), Highest Channel, Bandedge

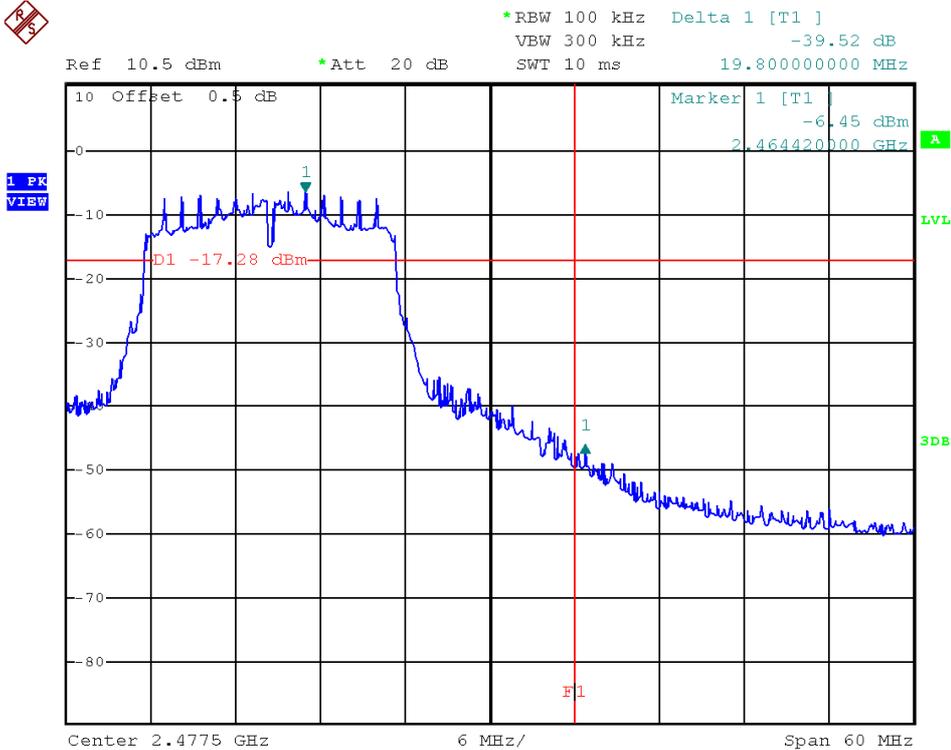


**TEST REPORT**

**PLOTS OF OUT OF BAND CONDUCTED EMISSIONS**

802.11n (20MHz), Lowest Channel, Plot A

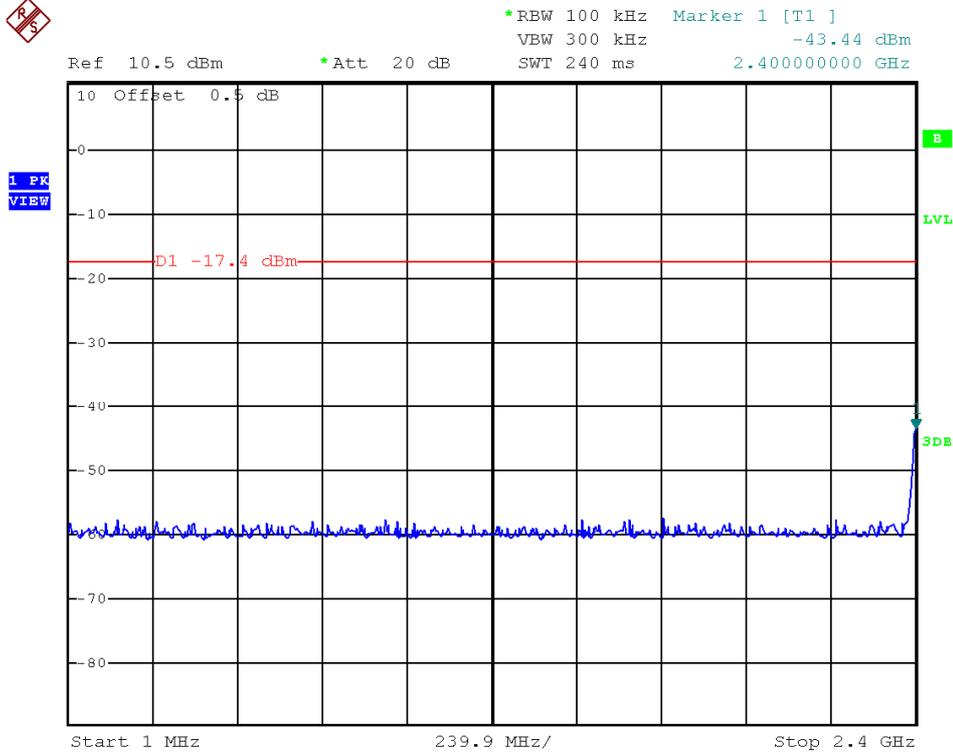


802.11n (20MHz), Lowest Channel, Plot B

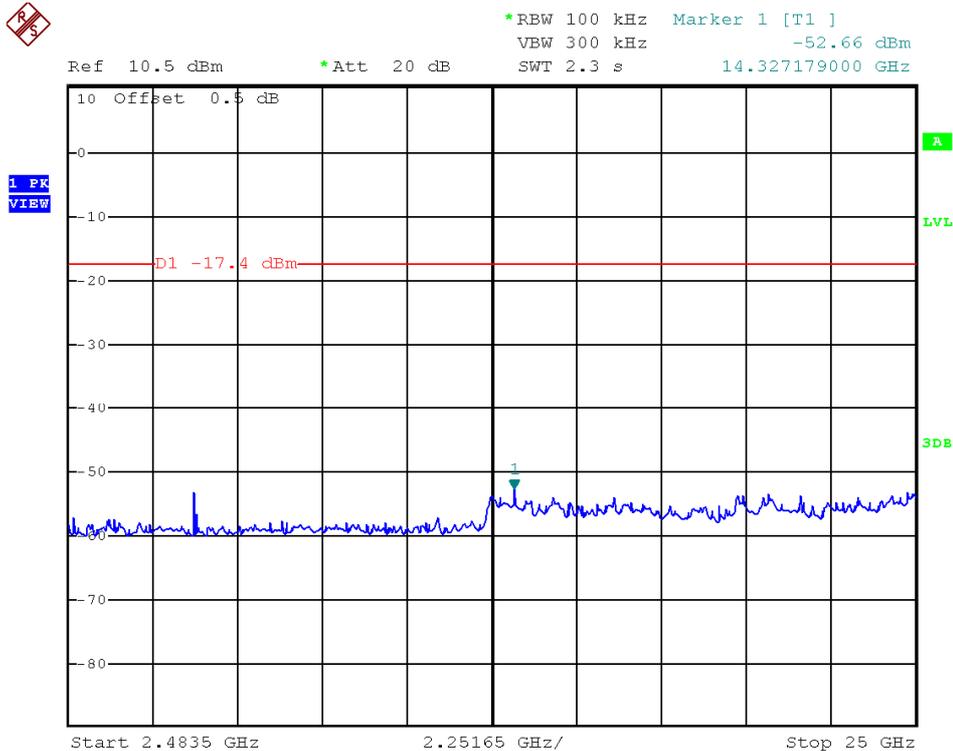


**TEST REPORT**

**PLOTS OF OUT OF BAND CONDUCTED EMISSIONS**

**802.11n (20MHz), Middle Channel, Plot A**

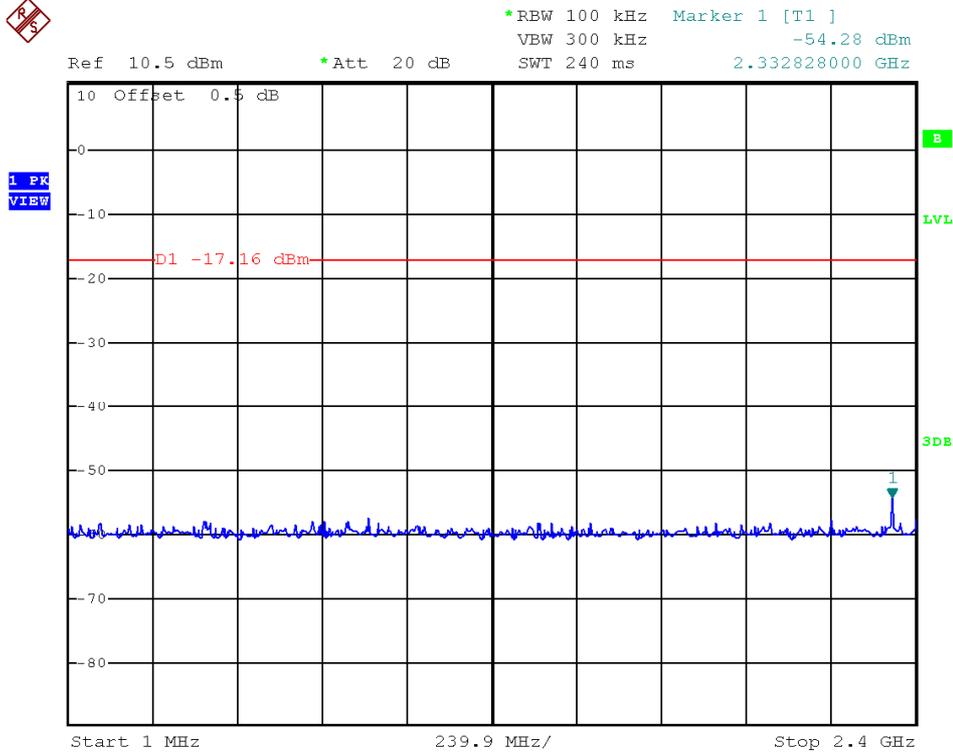


**802.11n (20MHz), Middle Channel, Plot B**

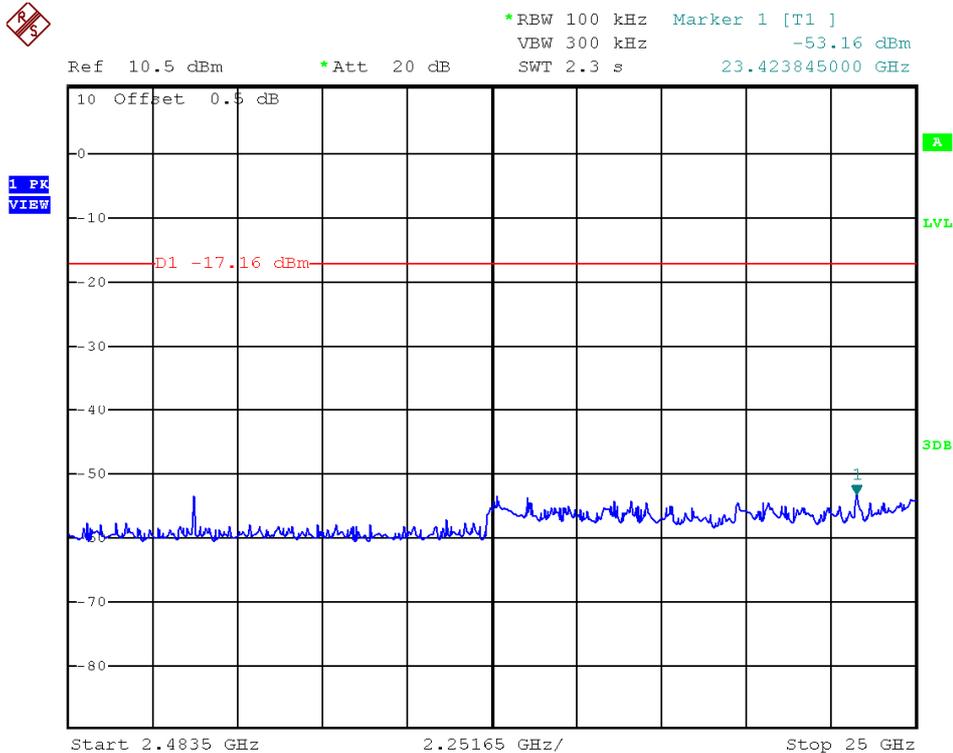


**TEST REPORT**

**PLOTS OF OUT OF BAND CONDUCTED EMISSIONS**

**802.11n (20MHz), Highest Channel, Plot A**

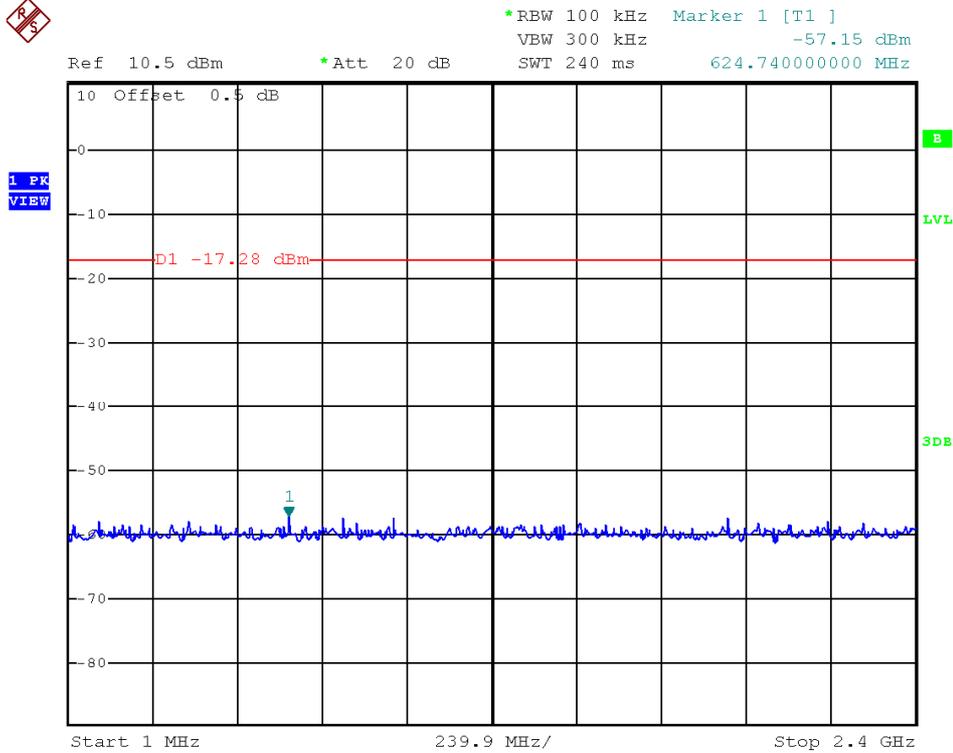


**802.11n (20MHz), Highest Channel, Plot B**

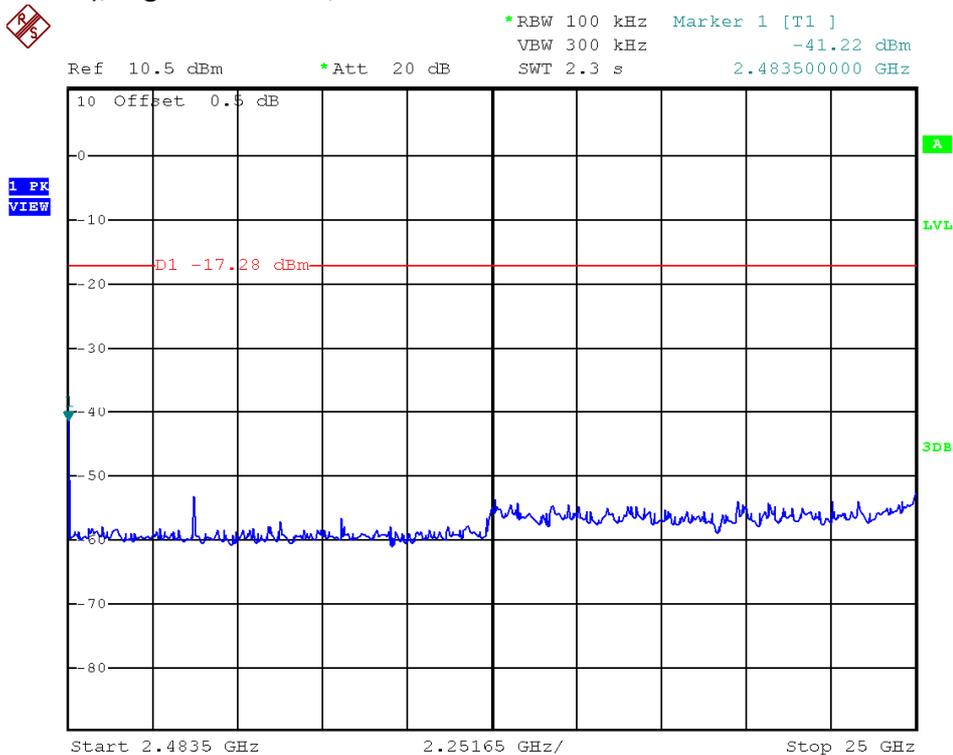


**TEST REPORT**

**PLOTS OF OUT OF BAND CONDUCTED EMISSIONS**

**Bluetooth 4.0, Lowest Channel, Bandedge**

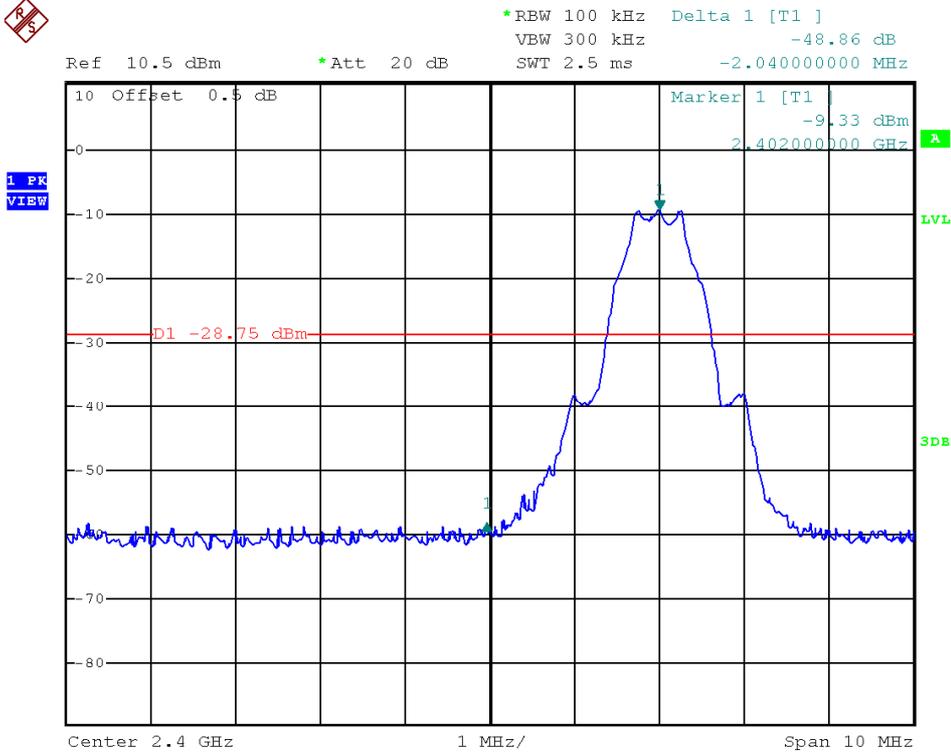


**Bluetooth 4.0, Highest Channel, Bandedge**

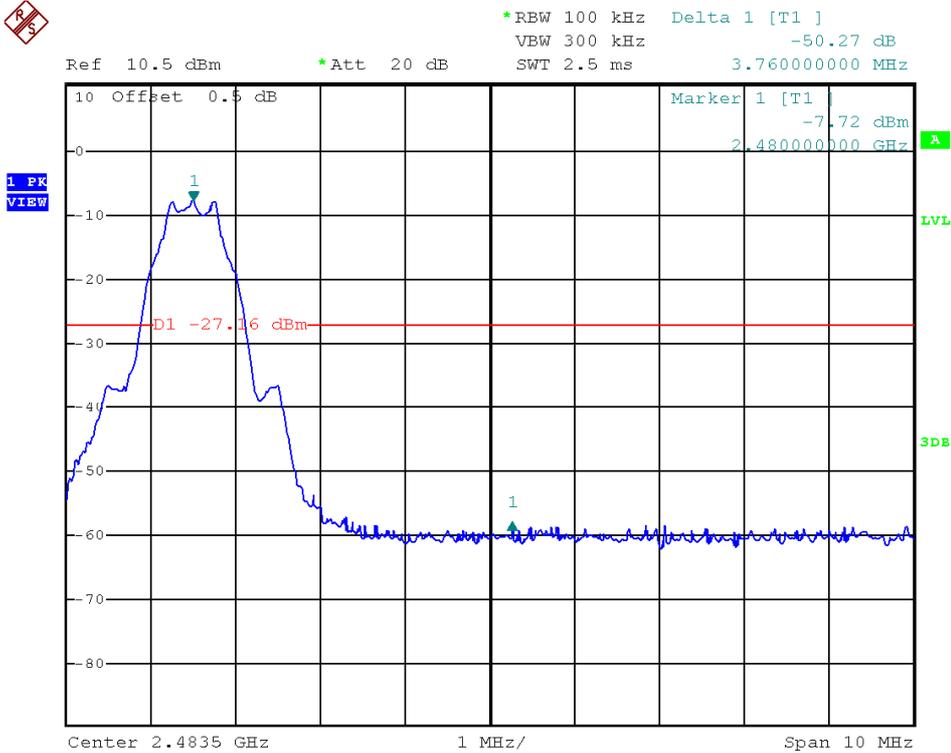


**TEST REPORT**

**PLOTS OF OUT OF BAND CONDUCTED EMISSIONS**

Bluetooth 4.0, Lowest Channel, Plot A

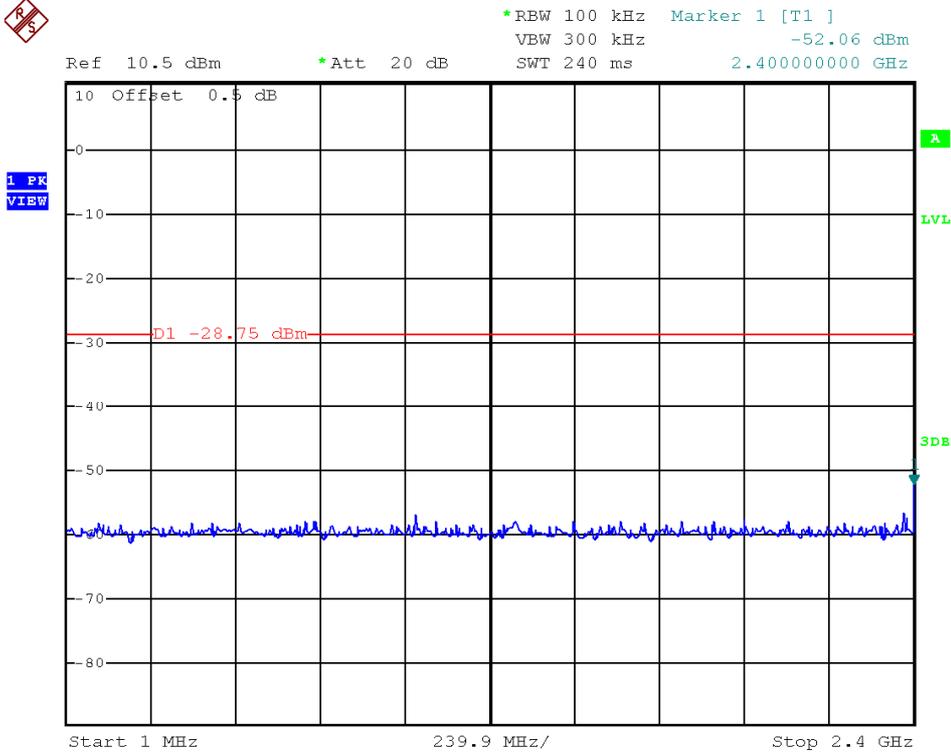


Bluetooth 4.0, Lowest Channel, Plot B

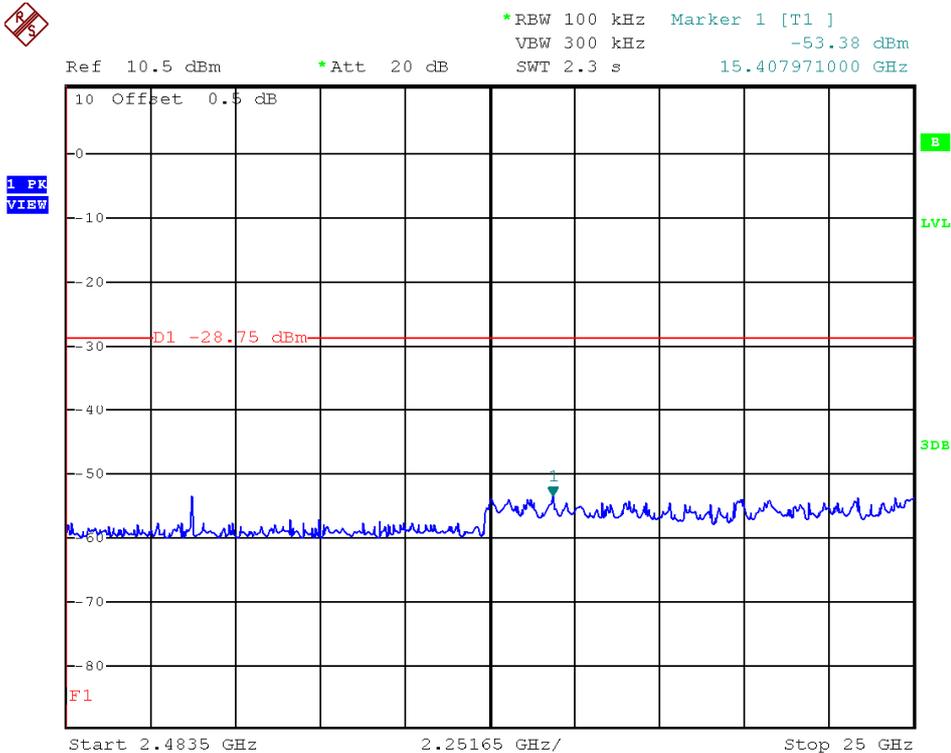


**TEST REPORT**

**PLOTS OF OUT OF BAND CONDUCTED EMISSIONS**

Bluetooth 4.0, Middle Channel, Plot A

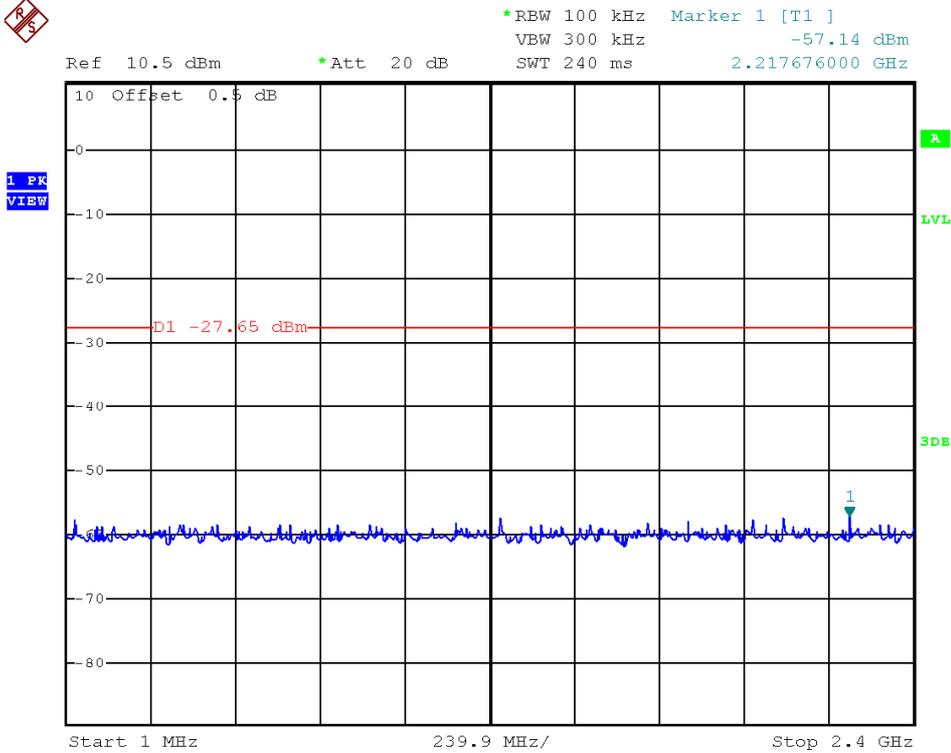


Bluetooth 4.0, Middle Channel, Plot B

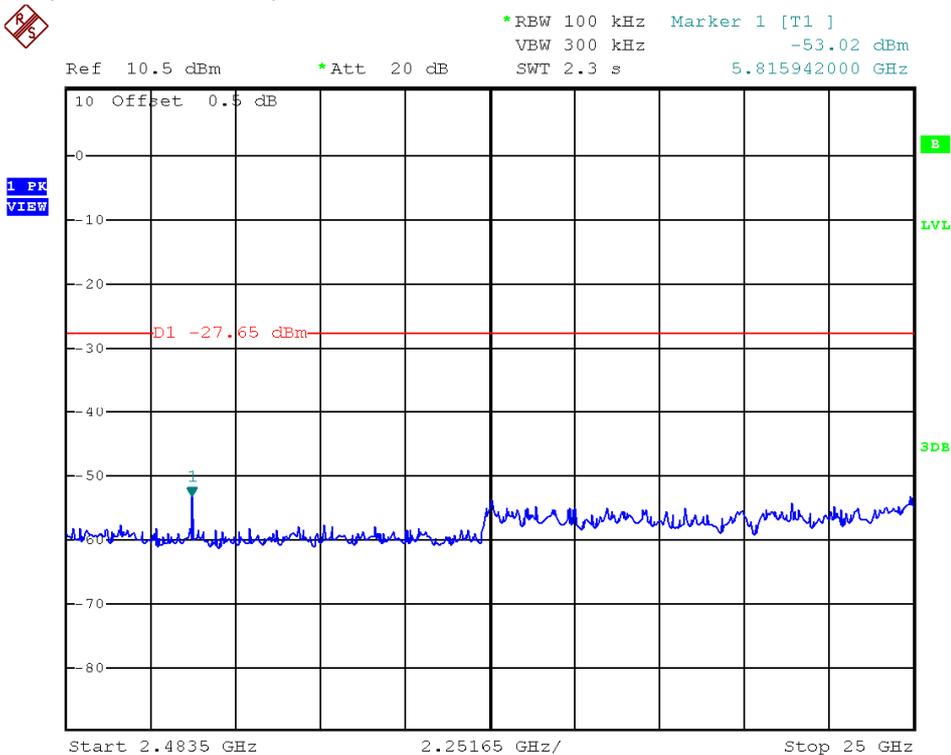


**TEST REPORT**

**PLOTS OF OUT OF BAND CONDUCTED EMISSIONS**

**Bluetooth 4.0, Highest Channel, Plot A**

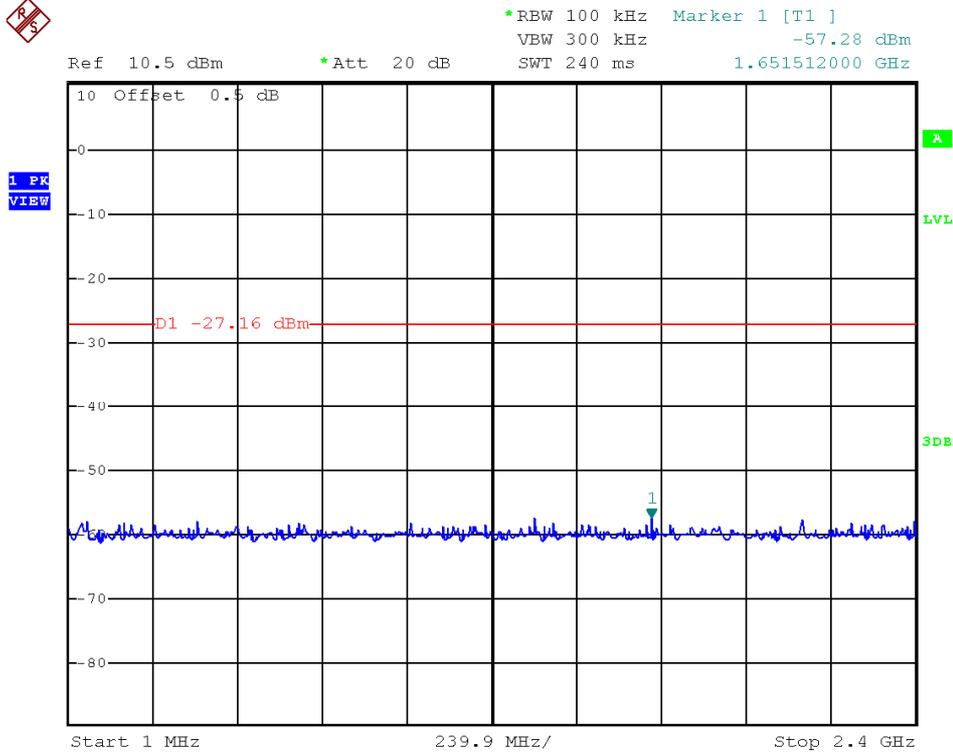

**Bluetooth 4.0, Highest Channel, Plot B**

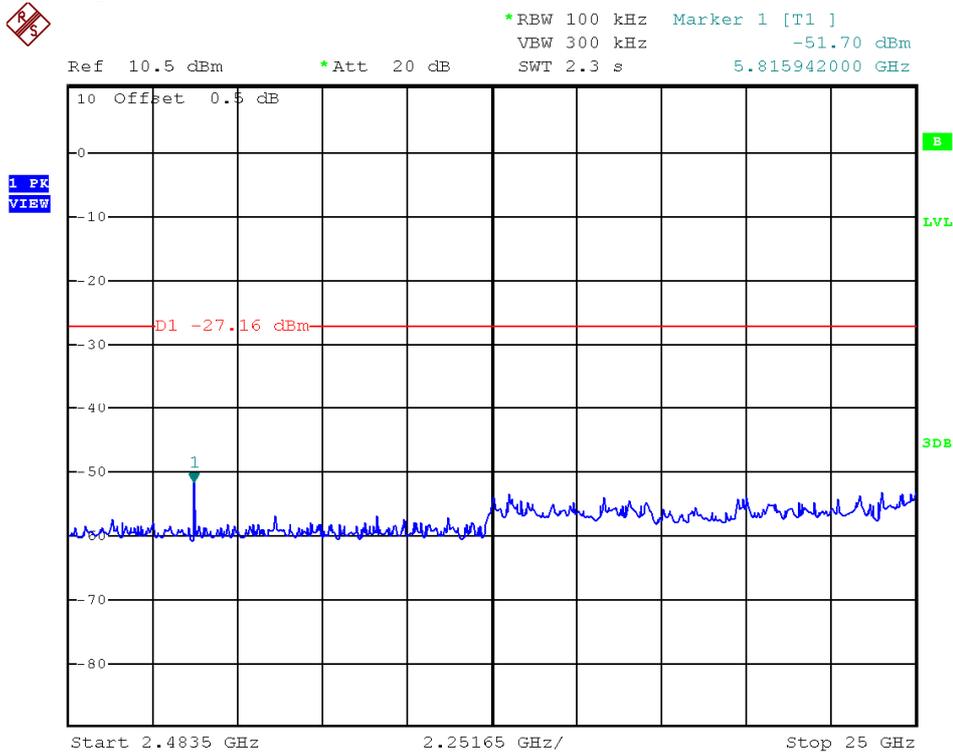


**TEST REPORT**

Occupied Bandwidth Results: (802.11b)

(802.11b)	Occupied Bandwidth (MHz)
Low Channel: 2412	12.16
Middle Channel: 2437	12.08
High Channel: 2462	12.16

The worst case is shown as below

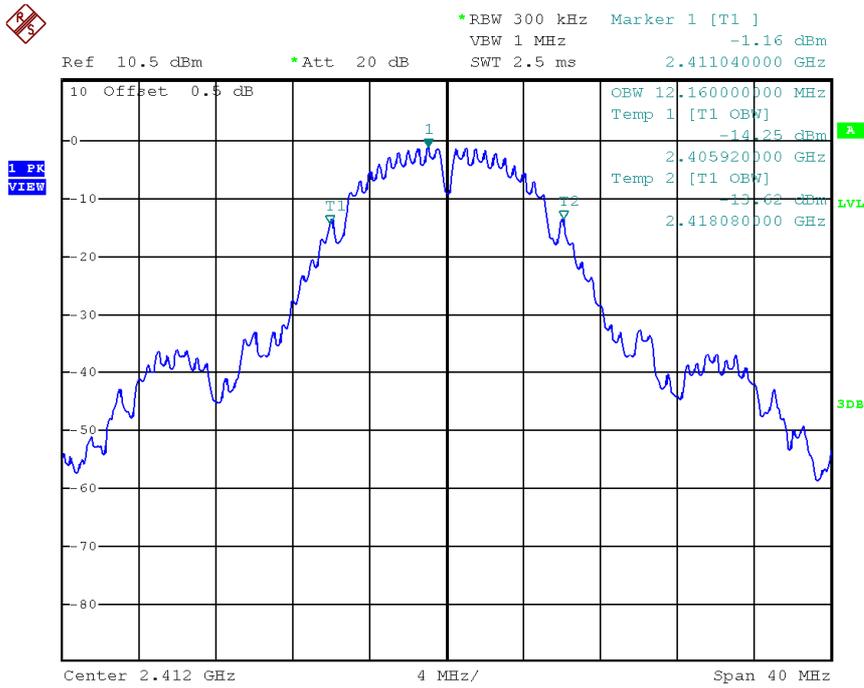


**TEST REPORT**

Occupied Bandwidth Results: (802.11g)

(802.11g)	Occupied Bandwidth (MHz)
Low Channel: 2412	17.28
Middle Channel: 2437	17.20
High Channel: 2462	17.04

The worst case is shown as below

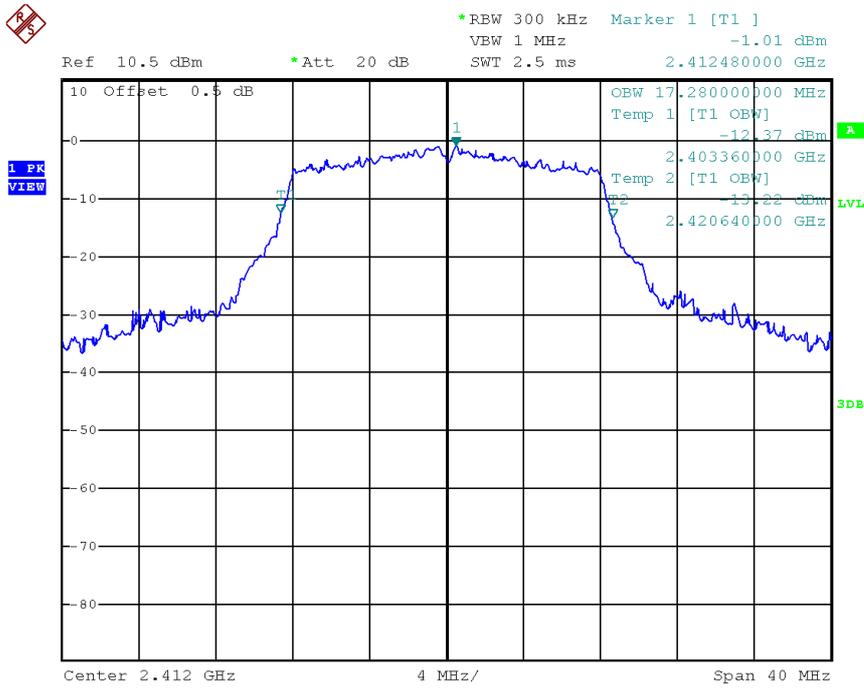


**TEST REPORT**

Occupied Bandwidth Results: (802.11n HT20)

(802.11n HT20)	Occupied Bandwidth (MHz)
Low Channel: 2412	18.16
Middle Channel: 2437	18.16
High Channel: 2462	18.00

The worst case is shown as below

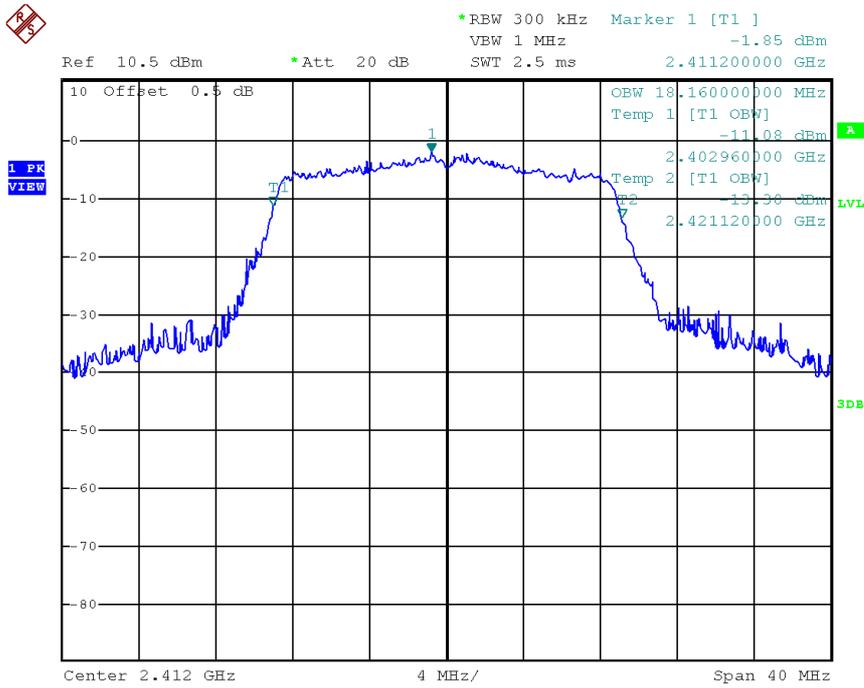


**TEST REPORT**

Occupied Bandwidth Results: Bluetooth

(Bluetooth 4.0)	Occupied Bandwidth (MHz)
Low Channel: 2402	1.062
Middle Channel: 2440	1.062
High Channel: 2480	1.068

The worst case is shown as below

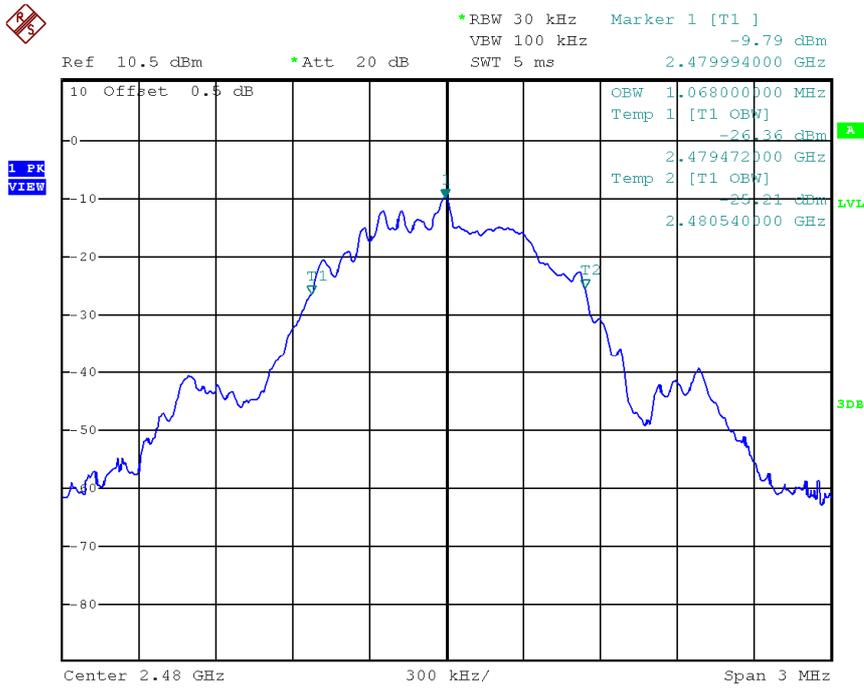

## TEST REPORT

### 4.5 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

Where FS = Field Strength in dB $\mu$ V/m

RA = Receiver Amplitude (including preamplifier) in dB $\mu$ V

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB

AG = Amplifier Gain in dB

PD = Pulse Desensitization in dB

AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

#### Example

Assume a receiver reading of 62.0 dB $\mu$ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29.0 dB is subtracted. The pulse desensitization factor of the spectrum analyzer is 0.0 dB, and the resultant average factor is -10.0 dB. The net field strength for comparison to the appropriate emission limit is 32.0 dB $\mu$ V/m. This value in dB $\mu$ V/m is converted to its corresponding level in  $\mu$ V/m.

$$RA = 62.0 \text{ dB}\mu\text{V}$$

$$AF = 7.4 \text{ dB}$$

$$CF = 1.6 \text{ dB}$$

$$AG = 29.0 \text{ dB}$$

$$PD = 0.0 \text{ dB}$$

$$AV = -10 \text{ dB}$$

$$FS = 62.0 + 7.4 + 1.6 - 29.0 + 0.0 + (-10.0) = 32.0 \text{ dB}\mu\text{V/m}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32.0 \text{ dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}$$

## TEST REPORT

### 4.6 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions

Data is included of the worst-case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

#### 4.6.1 Radiated Emission Configuration Photograph

Worst Case Restricted Band Radiated Emission  
at

2483.5 MHz

The worst-case radiated emission configuration photographs are saved with filename: config photos.pdf

#### 4.6.2 Radiated Emission Data

The data in tables 1-13 list the significant emission frequencies, the limit and the margin of compliance.

Judgement -

Passed by 0.2 dB margin

**TEST REPORT**

**RADIATED EMISSION DATA**

Mode: TX-Channel 01

Table 1  
IEEE 802.11b (DSSS, 1 Mbps)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	2390.000	56.0	33	29.4	52.4	54.0	-1.6
V	4824.000	47.3	33	34.9	49.2	54.0	-4.8
H	12060.000	31.3	33	40.5	38.8	54.0	-15.2

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	2390.000	68.8	33	29.4	65.2	74.0	-8.8
V	4824.000	56.9	33	34.9	58.8	74.0	-15.2
H	12060.000	42.9	33	40.5	50.4	74.0	-23.6

- NOTES:
1. Peak detector is used for the emission measurement.
  2. Average detector is used for the average data of emission measurement.
  3. All measurements were made at 3 meters.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
  7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth
  8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth

**TEST REPORT**

Mode: TX-Channel 06

Table 2  
IEEE 802.11b (DSSS, 1 Mbps)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	4874.000	46.7	33	34.9	48.6	54.0	-5.4
V	7311.000	30.5	33	37.9	35.4	54.0	-18.6
H	12185.000	31.9	33	40.5	39.4	54.0	-14.6

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	4874.000	55.7	33	34.9	57.6	74.0	-16.4
V	7311.000	42.7	33	37.9	47.6	74.0	-26.4
H	12185.000	43.9	33	40.5	51.4	74.0	-22.6

- NOTES:
1. Peak detector is used for the emission measurement.
  2. Average detector is used for the average data of emission measurement
  3. All measurements were made at 3 meters.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
  7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth
  8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth

**TEST REPORT**

Mode: TX-Channel 11

Table 3  
IEEE 802.11b (DSSS, 1 Mbps)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	2483.500	56.0	33	29.4	52.4	54.0	-1.6
V	4924.000	46.5	33	34.9	48.4	54.0	-5.6
V	7386.000	30.5	33	37.9	35.4	54.0	-18.6
H	12310.000	32.0	33	40.5	39.5	54.0	-14.5

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	2483.500	68.2	33	29.4	64.6	74.0	-9.4
V	4924.000	54.9	33	34.9	56.8	74.0	-17.2
V	7386.000	41.9	33	37.9	46.8	74.0	-27.2
H	12310.000	43.1	33	40.5	50.6	74.0	-23.4

- NOTES:
1. Peak detector is used for the emission measurement.
  2. Average detector is used for the average data of emission measurement
  3. All measurements were made at 3 meters.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
  7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth
  8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth

**TEST REPORT**

Mode: TX-Channel 01

Table 4  
IEEE 802.11g (OFDM, 6 Mbps)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	2390.000	57.0	33	29.4	53.4	54.0	-0.6
V	4824.000	39.3	33	34.9	41.2	54.0	-12.8
H	12060.000	31.9	33	40.5	39.4	54.0	-14.6

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	2390.000	75.0	33	29.4	71.4	74.0	-2.6
V	4824.000	52.5	33	34.9	54.4	74.0	-19.6
H	12060.000	43.3	33	40.5	50.8	74.0	-23.2

- NOTES:
1. Peak detector is used for the emission measurement.
  2. Average detector is used for the average data of emission measurement
  3. All measurements were made at 3 meters.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
  7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth
  8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth

**TEST REPORT**

Mode: TX-Channel 06

Table 5  
IEEE 802.11g (OFDM, 6 Mbps)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	4874.000	39.9	33	34.9	41.8	54.0	-12.2
V	7311.000	30.3	33	37.9	35.2	54.0	-18.8
H	12185.000	31.9	33	40.5	39.4	54.0	-14.6

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	4874.000	52.5	33	34.9	54.4	74.0	-19.6
V	7311.000	41.7	33	37.9	46.6	74.0	-27.4
H	12185.000	43.1	33	40.5	50.6	74.0	-23.4

- NOTES:
1. Peak detector is used for the emission measurement.
  2. Average detector is used for the average data of emission measurement
  3. All measurements were made at 3 meters.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
  7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth
  8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth

**TEST REPORT**

Mode: TX-Channel 11

Table 6  
IEEE 802.11g (OFDM, 6 Mbps)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	2483.500	57.4	33	29.4	53.8	54.0	-0.2
V	4924.000	40.9	33	34.9	42.8	54.0	-11.2
V	7386.000	30.7	33	37.9	35.6	54.0	-18.4
H	12310.000	31.1	33	40.5	38.6	54.0	-15.4

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	2483.500	75.0	33	29.4	71.4	74.0	-2.6
V	4924.000	53.9	33	34.9	55.8	74.0	-18.2
V	7386.000	41.9	33	37.9	46.8	74.0	-27.2
H	12310.000	42.9	33	40.5	50.4	74.0	-23.6

- NOTES:
1. Peak detector is used for the emission measurement.
  2. Average detector is used for the average data of emission measurement
  3. All measurements were made at 3 meters.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
  7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth
  8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth

**TEST REPORT**

Mode: TX-Channel 01

Table 7  
IEEE 802.11n (20MHz) (OFDM, MCS0)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	2390.000	56.8	33	29.4	53.2	54.0	-0.8
V	4824.000	40.7	33	34.9	42.6	54.0	-11.4
H	12060.000	32.0	33	40.5	39.5	54.0	-14.5

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	2390.000	<b>77.0</b>	33	29.4	73.4	74.0	-0.6
V	4824.000	53.9	33	34.9	55.8	74.0	-18.2
H	12060.000	43.1	33	40.5	50.6	74.0	-23.4

- NOTES:
1. Peak detector is used for the emission measurement.
  2. Average detector is used for the average data of emission measurement
  3. All measurements were made at 3 meters.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
  7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth
  8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth

**TEST REPORT**

Mode: TX-Channel 06

Table 8  
IEEE 802.11n (20MHz) (OFDM, MCS0)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	4874.000	40.6	33	34.9	42.5	54.0	-11.5
V	7311.000	30.6	33	37.9	35.5	54.0	-18.5
H	12185.000	33.1	33	40.5	40.6	54.0	-13.4

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	4874.000	53.3	33	34.9	55.2	74.0	-18.8
V	7311.000	41.5	33	37.9	46.4	74.0	-27.6
H	12185.000	43.3	33	40.5	50.8	74.0	-23.2

- NOTES:
1. Peak detector is used for the emission measurement.
  2. Average detector is used for the average data of emission measurement
  3. All measurements were made at 3 meters.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
  7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth
  8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth

**TEST REPORT**

Mode: TX-Channel 11

Table 9  
IEEE 802.11n (20MHz) (OFDM, MCS0)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	2483.500	57.3	33	29.4	53.7	54.0	-0.3
V	4924.000	39.7	33	34.9	41.6	54.0	-12.4
V	7386.000	30.7	33	37.9	35.6	54.0	-18.4
H	12310.000	32.3	33	40.5	39.8	54.0	-14.2

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	2483.500	76.4	33	29.4	72.8	74.0	-1.2
V	4924.000	52.9	33	34.9	54.8	74.0	-19.2
V	7386.000	41.8	33	37.9	46.7	74.0	-27.3
H	12310.000	44.3	33	40.5	51.8	74.0	-22.2

- NOTES:
1. Peak detector is used for the emission measurement.
  2. Average detector is used for the average data of emission measurement
  3. All measurements were made at 3 meters.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
  7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth
  8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth

**TEST REPORT**

Mode: TX-Channel 01

Table 10  
Bluetooth 4.0

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	2390.000	46.4	33	29.4	42.8	54.0	-11.2
V	4804.000	38.9	33	34.9	40.8	54.0	-13.2
V	12010.000	39.7	33	40.5	47.2	54.0	-6.8

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	2390.000	57.2	33	29.4	53.6	74.0	-20.4
V	4804.000	47.5	33	34.9	49.4	74.0	-24.6
V	12010.000	45.3	33	40.5	52.8	74.0	-21.2

- NOTES:
1. Peak detector is used for the emission measurement.
  2. Average detector is used for the average data of emission measurement
  3. All measurements were made at 3 meters.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
  7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth
  8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth

**TEST REPORT**

Mode: TX-Channel 20

Table 11  
Bluetooth 4.0

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	4880.000	40.9	33	34.9	42.8	54.0	-11.2
V	7320.000	37.7	33	37.9	42.6	54.0	-11.4
H	12200.000	39.3	33	40.5	46.8	54.0	-7.2

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	4880.000	47.6	33	34.9	49.5	74.0	-24.5
V	7320.000	43.9	33	37.9	48.8	74.0	-25.2
H	12200.000	42.9	33	40.5	50.4	74.0	-23.6

- NOTES:
1. Peak detector is used for the emission measurement.
  2. Average detector is used for the average data of emission measurement
  3. All measurements were made at 3 meters.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
  7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth
  8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth

**TEST REPORT**

Mode: TX-Channel 39

Table 12  
Bluetooth 4.0

Polarization	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m Average (dBµV/m)	Average Limit at 3m (dBµV/m)	Margin (dB)
V	2483.500	47.1	33	29.4	43.5	54.0	-10.5
H	4960.000	40.5	33	34.9	42.4	54.0	-11.6
V	7440.000	38.3	33	37.9	43.2	54.0	-10.8
V	12400.000	40.7	33	40.5	48.2	54.0	-5.8

Polarization	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBµV/m)	Peak Limit at 3m (dBµV/m)	Margin (dB)
V	2483.500	57.4	33	29.4	53.8	74.0	-20.2
H	4960.000	47.9	33	34.9	49.8	74.0	-24.2
V	7440.000	43.3	33	37.9	48.2	74.0	-25.8
V	12400.000	43.1	33	40.5	50.6	74.0	-23.4

- NOTES:
1. Peak detector is used for the emission measurement.
  2. Average detector is used for the average data of emission measurement
  3. All measurements were made at 3 meters.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
  7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth
  8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth

**TEST REPORT**

Mode: WiFi + Bluetooth

Table 13


Polarization	Frequency (MHz)	Reading (dBμV)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
V	45.232	31.8	16	10.0	25.8	40.0	-14.2
V	55.348	30.4	16	11.0	25.4	40.0	-14.6
V	75.702	41.2	16	6.0	31.2	40.0	-8.8
V	600.006	21.8	16	29.0	34.8	46.0	-11.2
H	800.125	21.5	16	31.0	36.5	46.0	-9.5
V	999.998	27.0	16	33.0	44.0	54.0	-10.0

- NOTES:
1. Quasi-Peak detector is used for the emission measurement.
  2. All measurements were made at 3 meters.
  3. Negative value in the margin column shows emission below limit.
  4. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.


**TEST REPORT**

4.6.3 Radiated Emission Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

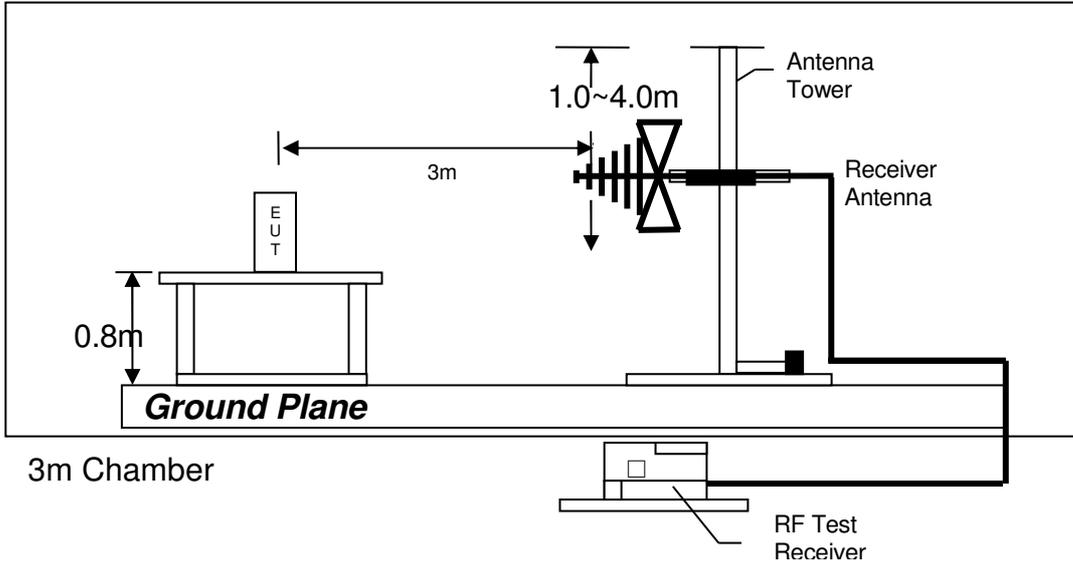

Test setup of radiated emissions up to 1GHz

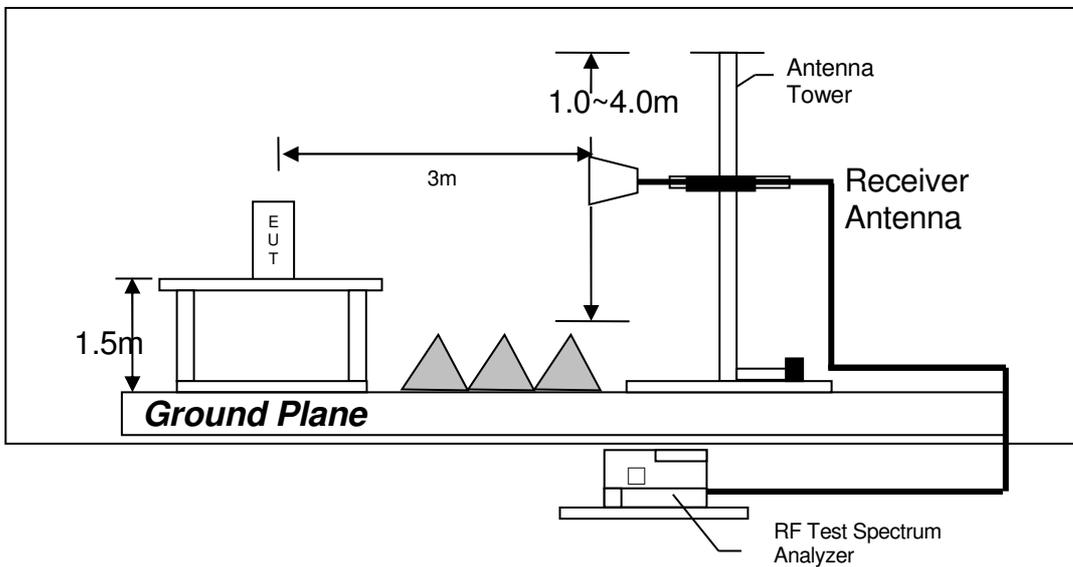

Test setup of radiated emissions above 1GHz

## TEST REPORT

### 4.6.4 Transmitter Duty Cycle Calculation

Not applicable – No average factor is required.

## TEST REPORT

### 4.7 AC Power Line Conducted Emission

- Not applicable – EUT is only powered by battery for operation.
- EUT connects to AC power line. Emission Data is listed in following pages.
  
- Base Unit connects to AC power line and has transmission. Handset connects to AC power line but has no transmission. Emission Data of Base Unit is listed in following pages.

#### 4.7.1 AC Power Line Conducted Emission Configuration Photograph

Worst Case Line-Conducted Configuration  
at

0.155 MHz

The worst-case line conducted configuration photographs are attached in the Appendix and saved with filename: config photos.pdf

#### 4.7.2 AC Power Line Conducted Emission Data

The plot(s) and data in the following pages list the significant emission frequencies, the limit and the margin of compliance.

Passed by 28.7 dB margin

**TEST REPORT**


**AC POWER LINE CONDUCTED EMISSION**

Worst Case: WiFi + Bluetooth



RBW 9 kHz  
MT 1 s

Att 10 dB AUTO PREAMP OFF

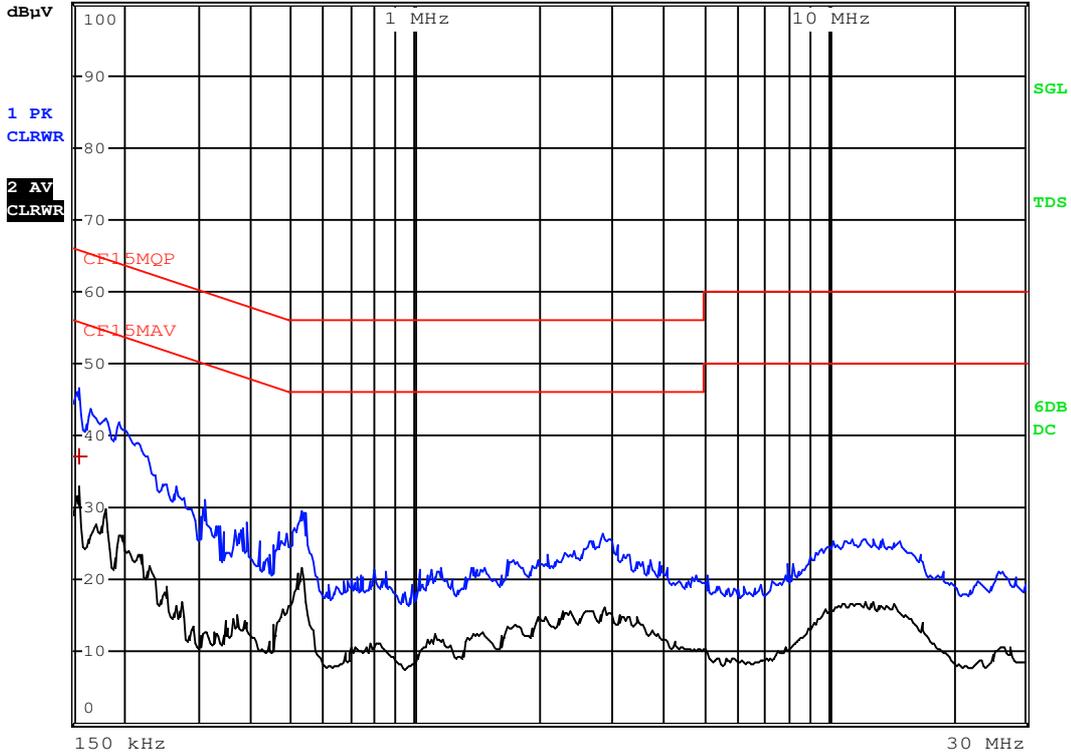


**TEST REPORT**

Worst Case: WiFi + Bluetooth

EDIT PEAK LIST (Final Measurement Results)				
Trace1:		CF15MQP		
Trace2:		CF15MAV		
Trace3:		---		
TRACE	FREQUENCY	LEVEL dBμV	DELTA LIMIT dB	
1 Quasi Peak	154.5 kHz	37.00 L1	-28.74	

## TEST REPORT

### 4.7.3 Conducted Emission Test Setup

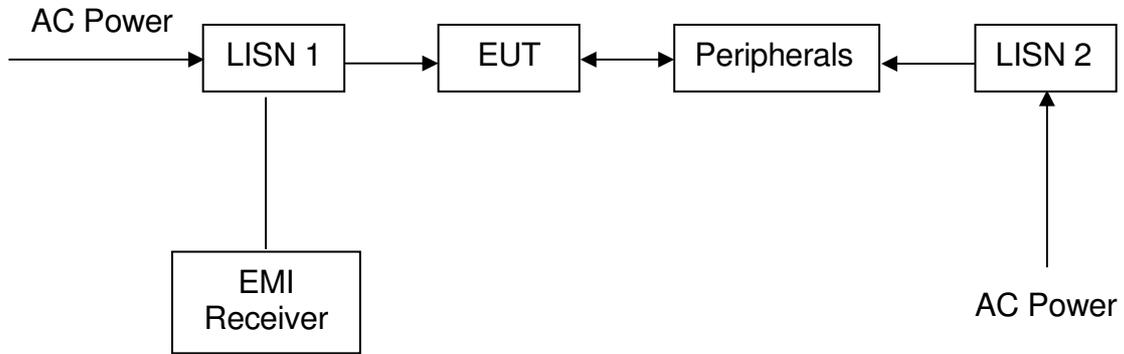

## TEST REPORT

### 5.0 EQUIPMENT LIST

#### 1) Radiated Emissions Test

Equipment	EMI Test Receiver	Spectrum Analyzer	Biconical Antenna (20MHz to 200MHz)
Registration No.	EW-3156	EW-2466	EW-2512
Manufacturer	ROHDESCHWARZ	ROHDESCHWARZ	EMCO
Model No.	ESR26	FSP30	3104C
Calibration Date	January 25, 2021	September 05, 2020	June 03, 2020
Calibration Due Date	January 25, 2022	September 05, 2021	December 03, 2021

Equipment	Log Periodic Antenna	Double Ridged Guide Antenna	Active Loop H-field (9kHz to 30MHz)
Registration No.	EW-0447	EW-0194	EW-2313
Manufacturer	EMCO	EMCO	ELECTROMETRI
Model No.	3146	3115	EM-6876
Calibration Date	September 25, 2019	June 03, 2021	December 17, 2019
Calibration Due Date	June 25, 2021	June 03, 2022	June 17, 2021

Equipment	RF Cable 14m (1GHz to 26.5GHz)	14m Double Shield RF Cable (20MHz to 6GHz)	12 metre RF Cable 40GHz
Registration No.	EW-2781	EW-2074	EW-2774
Manufacturer	GREATBILLION	RADIALL	GREATBILLION
Model No.	SMA m/SHF5MPPU /SMA m ra14m,26G	N(m)-RG142-BNC(m) L= 14M	SMA m-m ra 12m 40G outdoor
Calibration Date	November 24, 2020	August 29, 2020	September 12, 2020
Calibration Due Date	November 24, 2021	August 29, 2021	September 12, 2021

**TEST REPORT**

2) Conducted Emissions Test

<b>Equipment</b>	<b>RF Cable 240cm (RG142) (9kHz to 30MHz)</b>	<b>Artificial Mains Network</b>	<b>EMI Test Receiver</b>
Registration No.	EW-2454	EW-2501	EW-2500
Manufacturer	RADIALL	ROHDESCHWARZ	ROHDESCHWARZ
Model No.	bnc m st / 142 /bnc m ra 240cm	ENV-216	ESCI
Calibration Date	November 10, 2020	September 11, 2020	March 29, 2021
Calibration Due Date	November 10, 2021	September 11, 2021	March 29, 2022

## TEST REPORT

### 3) Conductive Measurement Test

Equipment	5m RF Cable (40GHz)	RF Power Meter with Power Sensor (N1921A)	Spectrum Analyzer
Registration No.	EW-2701	EW-2270	EW-2466
Manufacturer	RADIALL	N/A	ROHDESCHWARZ
Model No.	sma m-m 5m 40G	AGILENTTECH	FSP30
Calibration Date	November 24, 2020	September 03, 2020	September 05, 2020
Calibration Due Date	November 24, 2021	September 03, 2021	September 05, 2021

### 4) Bandedge & Bandwidth Measurement

Equipment	5m RF Cable (40GHz)	Spectrum Analyzer
Registration No.	EW-2701	EW-2466
Manufacturer	RADIALL	ROHDESCHWARZ
Model No.	sma m-m 5m 40G	FSP30
Calibration Date	November 24, 2020	September 05, 2020
Calibration Due Date	November 24, 2021	September 05, 2021

**END OF TEST REPORT**