



FCC TEST REPORT

FCC ID: 2AZXK-13825801415

On Behalf of

ZHONGYEDA TOYS FACTORY

REMOTECONTROL TOYS SERIES

**Model No.: T08B, T01, T02, T03, T05, T06, T07, T08, T01B,
T02B, T03B, T04B, T05B, T06B, T07B, T09B, T10B, T11, T12,
T13, T14, T15B, T16B, T17B, T18B, T19B, T20B, T31B, T32B,
T33B, T34B, T35B, K18, ZYJH135, ZYJH138, ZYJH121**

Prepared for : ZHONGYEDA TOYS FACTORY
Address : CHENGHAI DISTRICT, SHANTOU CITY, GUANGDONG
PROVINCE, CHINA

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

Report Number : A2105084-C01-R01
Date of Receipt : May 13, 2021
Date of Test : May 13, 2021- May 24, 2021
Date of Report : June 3, 2021
Version Number : V0

TABLE OF CONTENTS

Description	Page
1. Summary Of Standards And Results	6
1.1. Description of Standards and Results	6
2. General Information	7
2.1. Description of Device (EUT).....	7
2.2. Accessories of Device (EUT)	8
2.3. Tested Supporting System Details	8
2.4. Block Diagram of connection between EUT and simulators	8
2.5. Test Mode Description.....	8
2.6. Test Conditions	8
2.7. Test Facility	9
2.8. Measurement Uncertainty	9
2.9. Test Equipment List	10
3. Maximum Peak Output Power	11
3.1. Limit	11
3.2. Test Procedure	11
3.3. Test Setup.....	11
3.4. Test Result	11
4. Power Spectral Density.....	12
4.1. Limit	12
4.2. Test Procedure	12
4.3. Test Setup.....	12
4.4. Test Results	12
5. Bandwidth.....	15
5.1. Limit	15
5.2. Test Procedure	15
5.3. Test Result	15
6. Radiated Emissions.....	19
6.1. Limit	19
6.2. Block Diagram of Test setup	20
6.3. Test Procedure	21
6.4. Test Result	21
7. Band Edge Compliance	25
7.1. Block Diagram of Test Setup.....	25
7.2. Limit	25
7.3. Test Procedure	25
7.4. Test Result	25
8. Power Line Conducted Emissions	28
8.1. Block Diagram of Test Setup.....	28
8.2. Limit	28

8.3. Test Procedure	28
8.4. Test Result	28
9. Antenna Requirements.....	29
9.1. Limit	29
9.2. Result	29
10. Test Setup Photo	30
10.1. Photos of Radiated emission.....	30
11. Photos Of EUT	31

TEST REPORT DECLARATION

Applicant : ZHONGYEDA TOYS FACTORY
Address : CHENGHAI DISTRICT,SHANTOU CITY,GUANGDONG PROVINCE,CHINA
Manufacturer : ZHONGYEDA TOYS FACTORY
Address : CHENGHAI DISTRICT,SHANTOU CITY,GUANGDONG PROVINCE,CHINA
EUT Description : REMOTECONTROL TOYS SERIES
(A) Model No. : T08B, T01, T02, T03, T05, T06, T07, T08, T01B, T02B, T03B, T04B, T05B, T06B, T07B, T09B, T10B, T11, T12, T13, T14, T15B, T16B, T17B, T18B, T19B, T20B, T31B, T32B, T33B, T34B, T35B, K18, ZYJH135, ZYJH138, ZYJH121
(B) Trademark : N/A

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.247

ANSI C63.10:2013

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....: Lucas Pang
Project Engineer



Approved by (name + signature).....: Simple Guan
Project Manager



Date of issue..... : June 3, 2021

Revision History

Revision	Issue Date	Revisions	Revised By
V0	June 3, 2021	Initial released Issue	Lucas Pang

1. Summary Of Standards And Results

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Test Requirement	Standards Paragraph	Result
Conducted Emission	FCC PART 15:2017	15.207	P
6dB Bandwidth	FCC PART 15:2017	15.247 (a)(2)	P
Output Power	FCC PART 15:2017	15.247 (b)(3)	P
Radiated Spurious Emission	FCC PART 15:2017	15.247 (c)	P
Conducted Spurious & Band Edge Emission	FCC PART 15:2017	15.247 (d)	P
Power Spectral Density	FCC PART 15:2017	15.247 (e)	P
Radiated Band Edge Emission	FCC PART 15:2017	15.205	P
Antenna Requirement	FCC PART 15:2017	15.203	P
Note: 1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable.			

2. General Information

2.1. Description of Device (EUT)

Description	: REMOTECONTROL TOYS SERIES
Trademark	: N/A
Model Number	: T08B, T01, T02, T03, T05, T06, T07, T08, T01B, T02B, T03B, T04B, T05B, T06B, T07B, T09B, T10B, T11, T12, T13, T14, T15B, T16B, T17B, T18B, T19B, T20B, T31B, T32B, T33B, T34B, T35B, K18, ZYJH135, ZYJH138, ZYJH121
DIFF.	: There is no difference except for the model name. So all the test were performed on the model T08B.
Test Voltage	: DC 3V from battery
Radio Technology	: 2.4G
Operation frequency	: 2407-2475MHz
Channel No.	: 69Channels
Modulation type	: GFSK
Antenna Type	: Internal antenna, Maximum Gain is 0dBi(This value is supplied by applicant).
Software version	: V1.0
Hardware version	: V1.2
Connector cable loss	: 0.5dB (This value is supplied by applicant).


2.2.Accessories of Device (EUT)

Accessories1 : /
 Manufacturer : /
 Model : /
 Ratings : /

2.3.Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification
1.	N/A	N/A	N/A	N/A	N/A

2.4.Block Diagram of connection between EUT and simulators

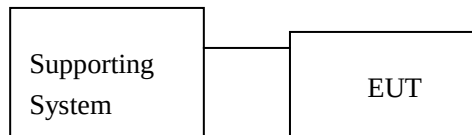

2.5.Test Mode Description

Tested mode, channel, and data rate information		
Mode	Channel	Frequency (MHz)
GFSK	Low :CH1	2407
	Middle: CH39	2445
	High: CH69	2475

Note: New batteries were used during testing.

2.6.Test Conditions

Items	Required	Actual
Temperature range:	15-35 °C	24 °C
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	98kPa

2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission

Registration Number: 293961

July 15, 2019 Certificated by IC

Registration Number: CN0085

2.8. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	2.74dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	2.13 dB(Polarize: V)
	2.57dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.77dB(Polarize: V)
	3.80dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	4.13dB(Polarize: H)
	4.16dB(Polarize: V)
Uncertainty for radio frequency	5.4×10^{-8}
Uncertainty for conducted RF Power	0.37dB
Uncertainty for temperature	0.2°C
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

2.9. Test Equipment List

Equipment	Manufacture	Model No.	Serial No.	Last cal.	Cal Interval
9*6*6 anechoic chamber	CHENYU	9*6*6	N/A	2020.09.02	1Year
Spectrum analyzer	ROHDE&SCHWARZ	FSU	1166.1660.26	2020.09.02	1Year
Spectrum analyzer	Agilent	N9020A	MY499100060	2020.09.02	1Year
Receiver	ROHDE&SCHWARZ	ESR	1316.3003K03-102082-Wa	2020.09.02	1Year
Receiver	R&S	ESCI	101165	2020.09.02	1Year
Bilog Antenna	Schwarzbeck	VULB 9168	VULB9168-438	2019.09.07	2Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D(1201)	2020.04.12	2Year
Loop Antenna	SCHWARZBECK	FMZB 1519B	00059	2019.09.07	2Year
Cable	Resenberger	N/A	No.1	2020.09.02	1Year
Cable	SCHWARZBECK	N/A	No.2	2020.09.02	1Year
Cable	SCHWARZBECK	N/A	No.3	2020.09.02	1Year
Pre-amplifier	HP	HP8347A	2834A00455	2020.09.02	1Year
Pre-amplifier	Agilent	8449B	3008A02664	2020.09.02	1Year
Temperature controller	Terchy	MHQ	120	2020.09.02	1Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	8126-466	2020.09.02	1Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	101043	2020.09.02	1 Year
20db Attenuator	ICPROBING	IATS1	82347	2020.09.02	1 Year
Power meter	Agilent	E4419B	GB40202122	2020.09.02	1 Year

Software Information			
Test Item	Software Name	Manufacturer	Version
RE	EZ-EMC	EZ	Alpha-3A1
CE	EZ-EMC	EZ	Alpha-3A1
RF-CE	MTS 8310	MW	V2.0.0.0

3. Maximum Peak Output Power

3.1.Limit


Please refer section15.247.

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W

3.2.Test Procedure

The transmitter output is connected to the RF Power Meter. The RF Power Meter is set to the average power detection.

3.3.Test Setup

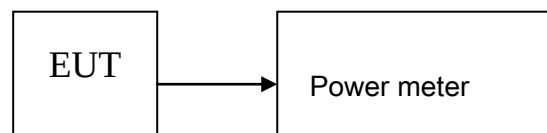

3.4.Test Result

Mode	Freq (MHz)	Average Output Power (dBm)	Limit (dBm)	Result
GFSK	2407	1.073	30	Pass
	2445	2.211	30	Pass
	2475	-0.41	30	Pass
Conclusion: PASS				

4. Power Spectral Density

4.1.Limit

4.1.1 Please refer section RSS-247 & 15.247.

4.1.2 For direct sequence systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

4.1.3 The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

4.2.Test Procedure

Details see the KDB558074 D01 Meas Guidance V05

4.2.1 Place the EUT on the table and set it in transmitting mode.


4.2.2 Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

4.2.3 Detector = RMS. Set the spectrum analyzer as RBW = 3kHz(Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.), VBW = 10kHz(Set the VBW $\geq 3 \times \text{RBW}$), span= $1.5 \times \text{DTS bandwidth}$., detail see the test plot.

4.2.4 Record the max reading.

4.2.5 Repeat the above procedure until the measurements for all frequencies are completed.


4.3.Test Setup

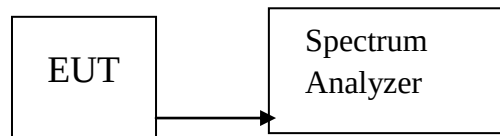

4.4.Test Results


Channel	Frequency (MHz)	Power Spectral Density (dBm)	Limit (dBm)	Result
CH1	2407	-2.613	8	PASS
CH39	2445	-1.118	8	PASS
CH69	2475	-4.007	8	PASS
Conclusion: PASS				

PSD NVNT user 2407MHz Ant1

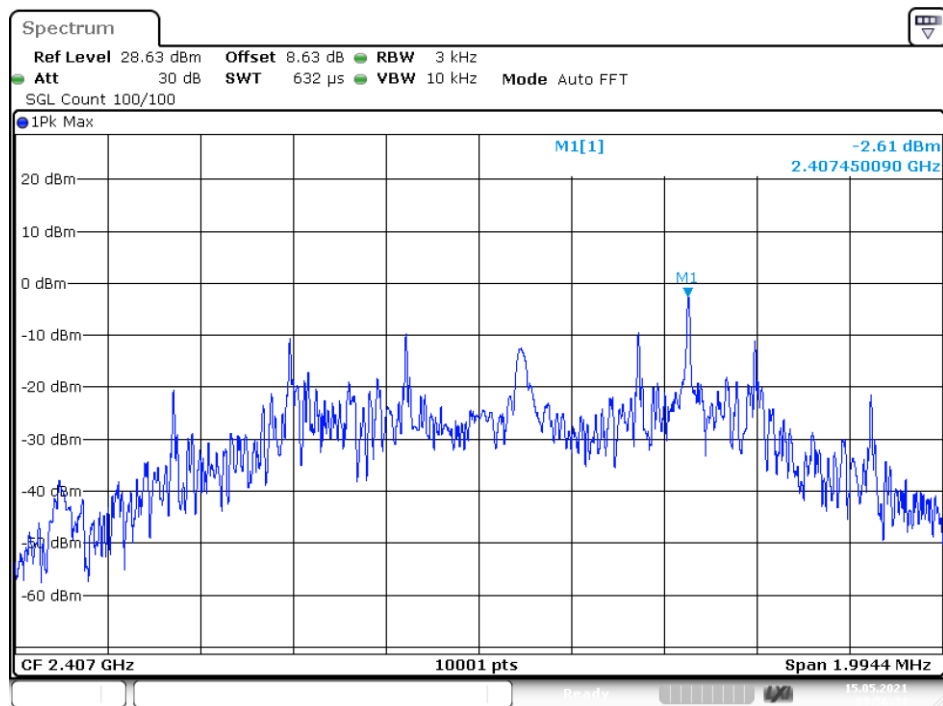


Date: 15.MAY.2021 09:56:34

PSD NVNT user 2445MHz Ant1

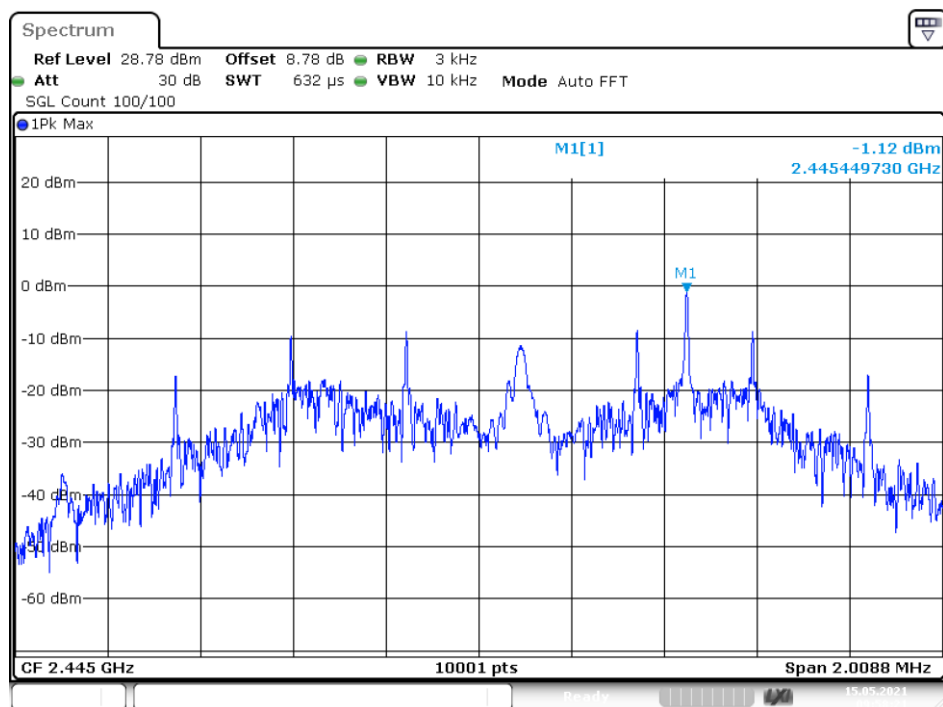

Date: 15.MAY.2021 09:58:21

PSD NVNT user 2475MHz Ant1

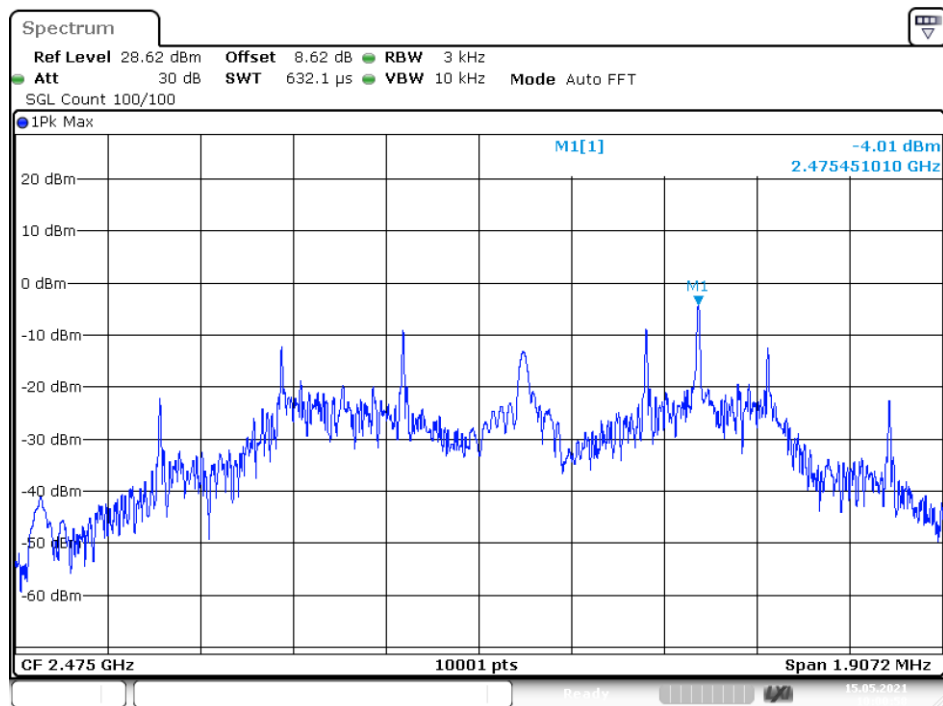

Date: 15.MAY.2021 10:00:57

5. Bandwidth

5.1.Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.


5.2.Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

5.3.Test Result


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	user	2407	Ant 1	1.6434	0.9972	0.5	Pass
NVNT	user	2445	Ant 1	1.6794	1.0044	0.5	Pass
NVNT	user	2475	Ant 1	1.6154	0.9536	0.5	Pass

OBW NVNT user 2407MHz Ant1

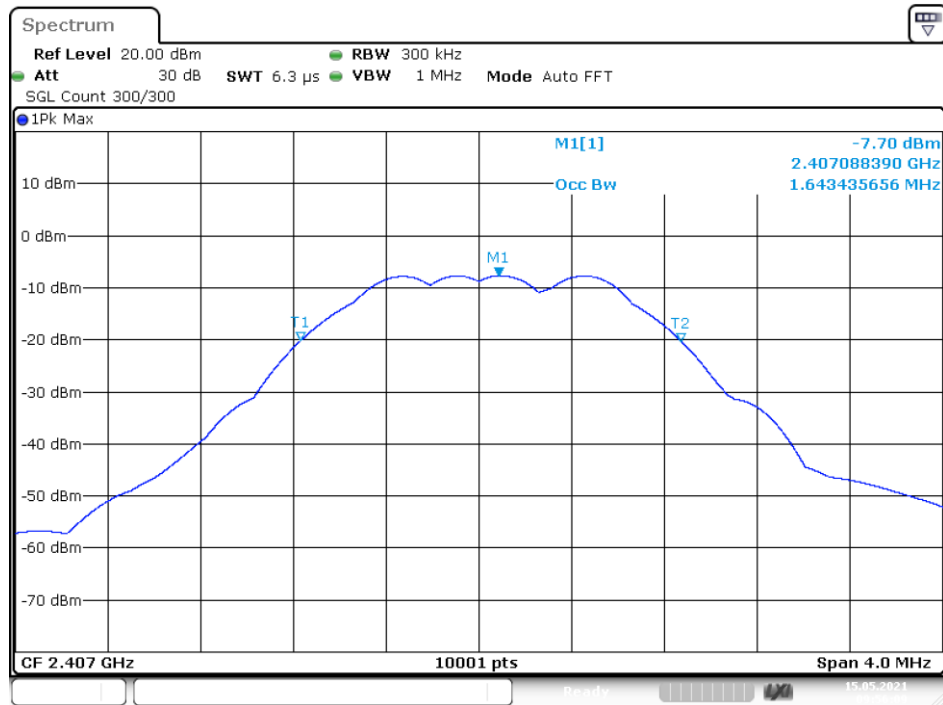


Date: 15.MAY.2021 09:56:09

-6 dB BW NVNT user 2407MHz Ant1

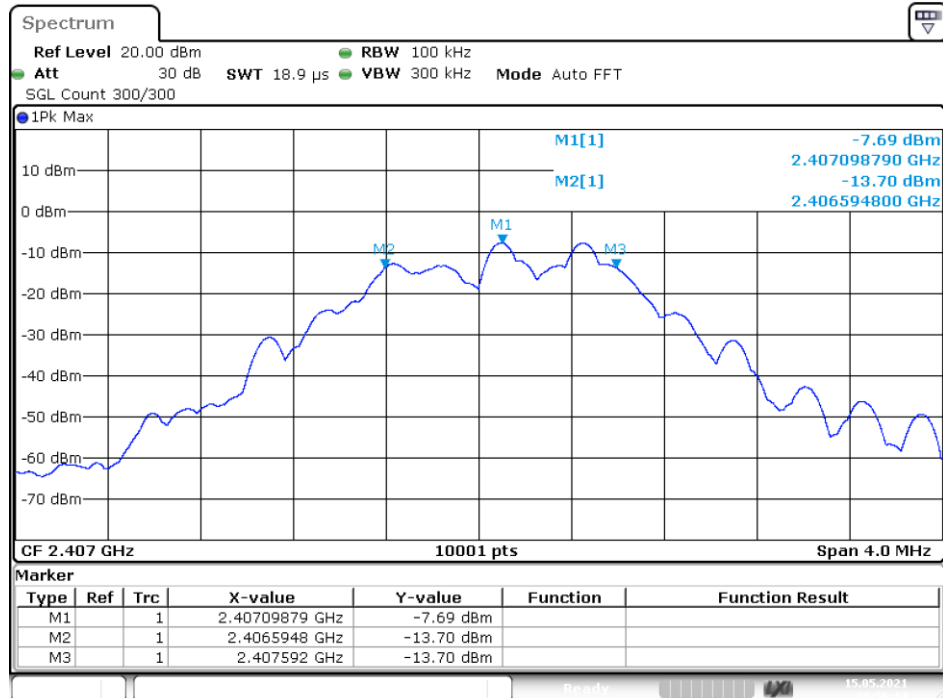


Date: 15.MAY.2021 09:56:14

OBW NVNT user 2445MHz Ant1

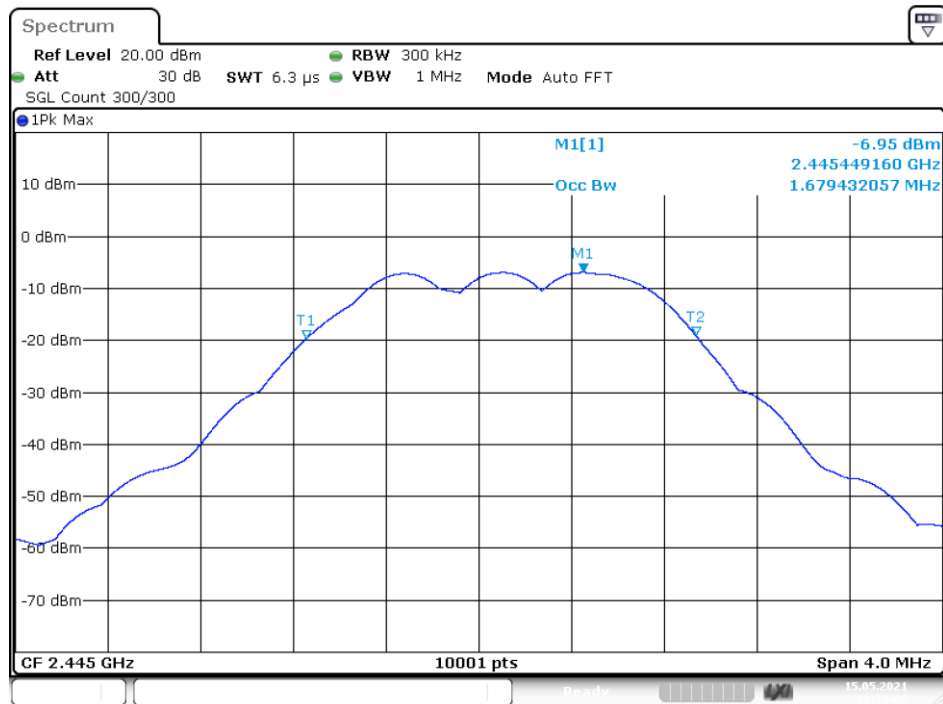


Date: 15.MAY.2021 09:58:02

-6 dB BW NVNT user 2445MHz Ant1

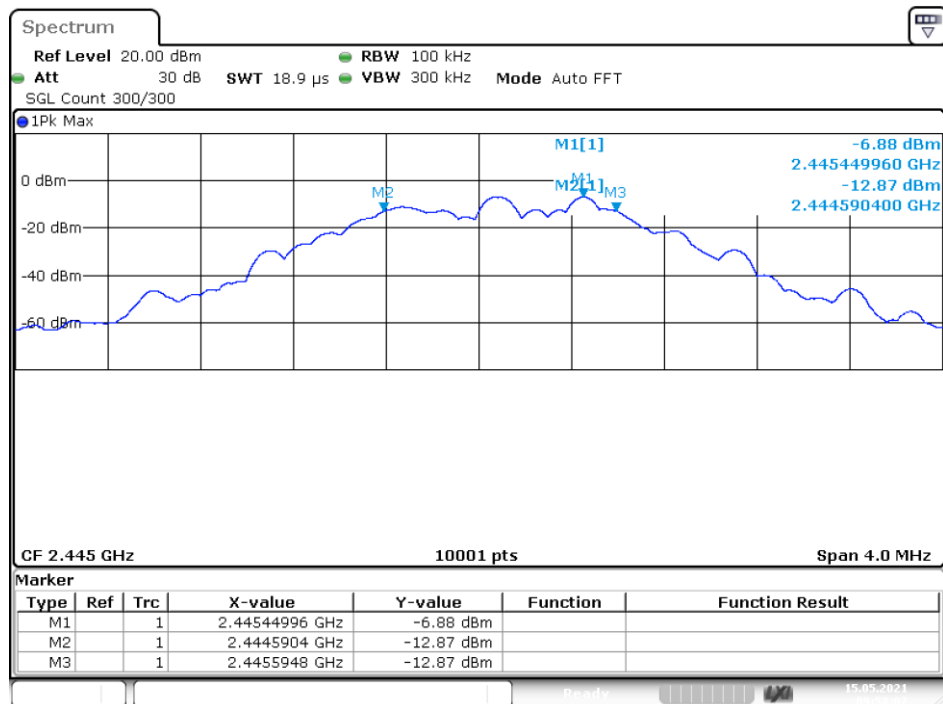


Date: 15.MAY.2021 09:58:07

OBW NVNT user 2475MHz Ant1

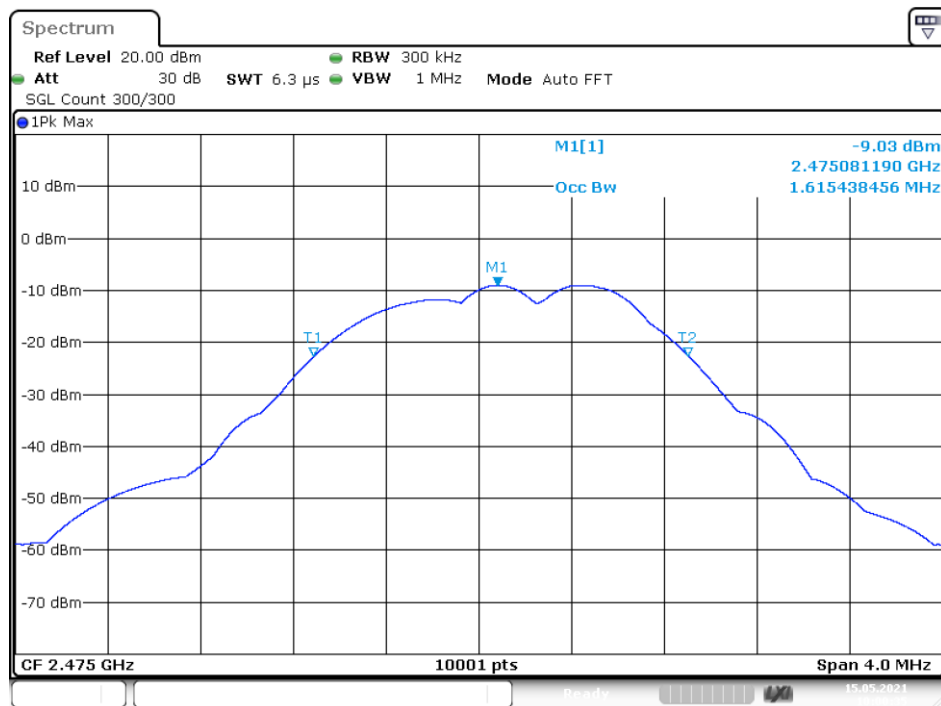

Date: 15.MAY.2021 10:00:34

-6 dB BW NVNT user 2475MHz Ant1

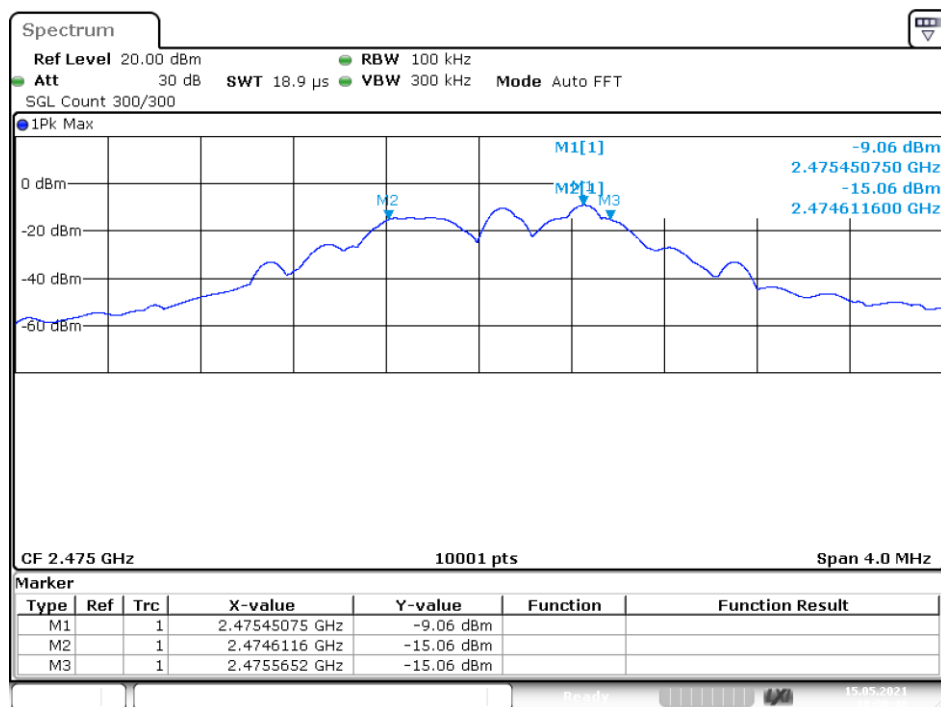

Date: 15.MAY.2021 10:00:39

6. Radiated Emissions

6.1.Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band


MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

15.209 Limit


FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
0.009-0.490	300	2400/F(KHz)	/
0.490-1.705	30	24000/F(KHz)	/
1.705-30	30	30	29.5
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

6.2. Block Diagram of Test setup


8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 30MHz

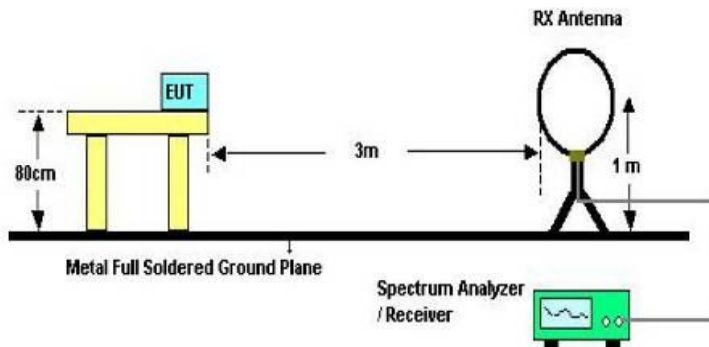

8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 1GHz

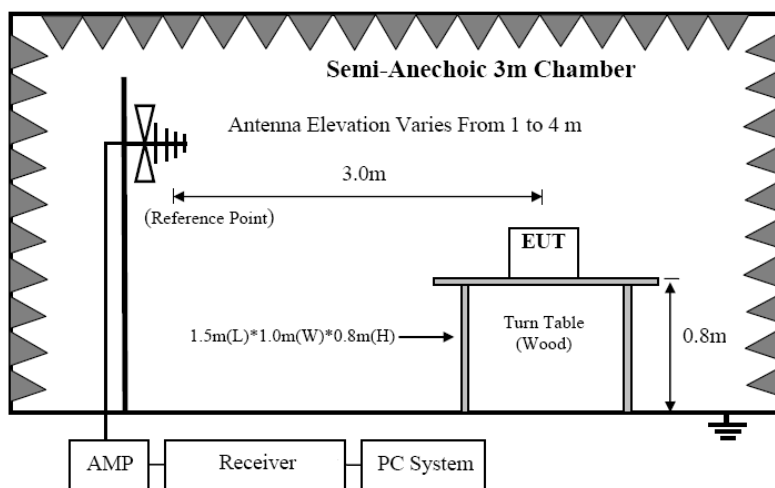

8.2.2 In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

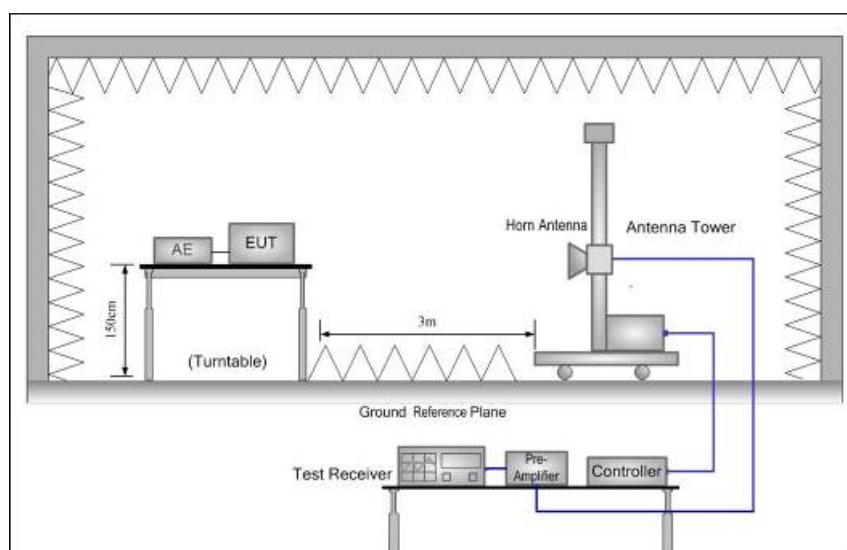

Note: For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP.

6.3. Test Procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber.
- (2) Setup EUT and simulator as shown in section 1.4 and 6.1
- (3) Test antenna was located 3m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
 - (a) Change work frequency or channel of device if practicable.
 - (b) Change modulation type of device if practicable.
- (c) Rotated EUT through three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions
- (4) Spectrum frequency from 9KHz to 25GHz (tenth harmonic of fundamental frequency) was investigated
- (5) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 :2013 on Radiated Emission test.
- (6) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RBW is set at 1MHz, VBW is set at 10Hz for Average measure.


6.4. Test Result

We have scanned the 10th harmonic from 9KHz to the EUT's highest frequency..
Detailed information please see the following page.


From 9KHz to 30MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

From 30MHz to 1000MHz: Conclusion: PASS

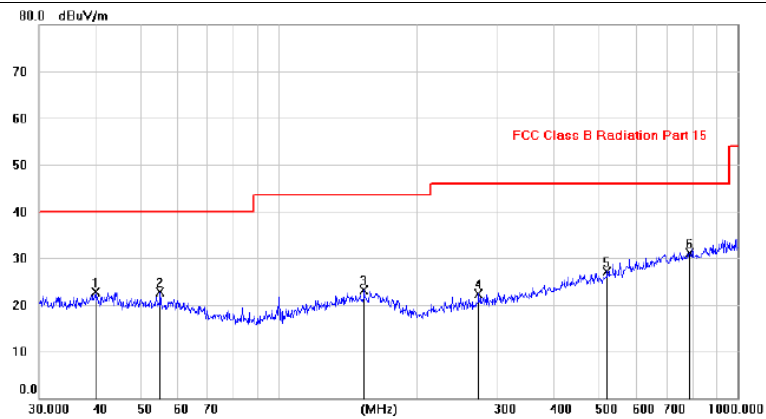Pol**Vertical**

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	39.7146	8.42	14.23	22.65	40.00	-17.35	peak		
2	55.0274	9.40	13.25	22.65	40.00	-17.35	peak		
3	153.2004	8.45	14.56	23.01	43.50	-20.49	peak		
4	272.2776	9.48	12.82	22.30	46.00	-23.70	peak		
5	519.0649	9.21	17.84	27.05	46.00	-18.95	peak		
6 *	787.8513	9.19	21.98	31.17	46.00	-14.83	peak		

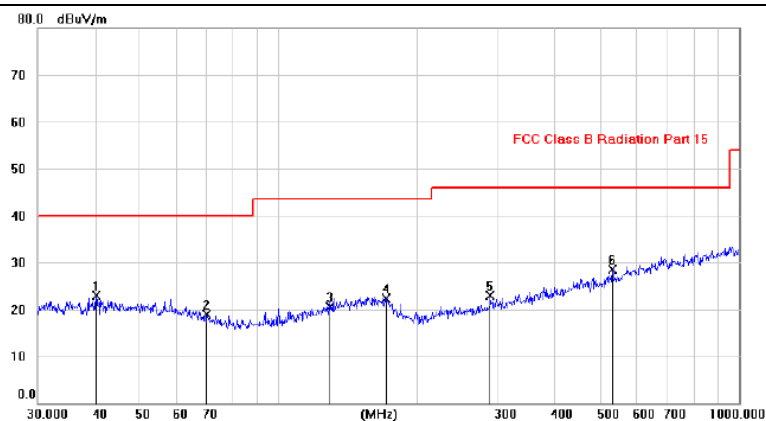Pol**Horizontal**

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1 *	40.1347	8.64	14.22	22.86	40.00	-17.14	peak		
2	70.0901	7.87	11.02	18.89	40.00	-21.11	peak		
3	129.0144	7.30	13.17	20.47	43.50	-23.03	peak		
4	171.3925	8.69	13.54	22.23	43.50	-21.27	peak		
5	287.9904	9.88	13.09	22.97	46.00	-23.03	peak		
6	531.9633	10.30	18.17	28.47	46.00	-17.53	peak		

*:Maximum data x:Over limit !:over margin

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Remark: All modes have been tested, and only worst data of (GFSK) was listed in this report.

From 1G-25GHz

Test Mode: GFSK TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804	46.22	V	33.95	10.18	34.26	56.09	74	17.91	PK
4804	38.41	V	33.95	10.18	34.26	48.28	54	5.72	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
4824	45.98	H	33.95	10.18	34.26	55.85	74	18.15	PK
4824	34.30	H	33.95	10.18	34.26	44.17	54	9.83	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
Test Mode: GFSK TX Mid									
4882	41.20	V	33.93	10.2	34.29	51.04	74	22.96	PK
4882	35.69	V	33.93	10.2	34.29	45.53	54	8.47	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
4882	43.37	H	33.93	10.2	34.29	53.21	74	20.79	PK
4882	34.85	H	33.93	10.2	34.29	44.69	54	9.31	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
Test Mode: GFSK TX High									
4960	46.71	V	33.98	10.22	34.25	56.66	74	17.34	PK
4960	35.87	V	33.98	10.22	34.25	45.82	54	8.18	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
4960	42.78	H	33.98	10.22	34.25	52.73	74	21.27	PK
4960	32.16	H	33.98	10.22	34.25	42.11	54	11.89	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
Note: 1, Result = Read level + Antenna factor + cable loss-Amp factor 2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

Remark: All modes have been tested, and only worst data of (GFSK) was listed in this report.

Conducted method

EUT Description	REMOTECONTROL TOYS SERIES	Model No.	PT1933
Temperature	24°C	Humidity	56%
Test mode	GFSK(2407MHz)	Test mode	GFSK(2445MHz)

Spectrum

Ref Level 8.63 dBm

Offset 8.63 dB

RBW 100 kHz

Att 30 dB

SWT 250 ms

VBW 300 kHz

Mode Auto Sweep

SGL Count 10/10

1Pk Max

M1

M1[1]

0.92 dBm

2.4120 GHz

M2[1]

-42.80 dBm

16.8348 GHz

D1 -19.036 dBm

M3

M4

M5

M2

Start 30.0 MHz

1001 pts

Stop 25.0 GHz

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1	1		2.412 GHz	0.92 dBm		
M2	1		16.8348 GHz	-42.80 dBm		
M3	1		4.6245 GHz	-48.02 dBm		
M4	1		7.3712 GHz	-48.32 dBm		
M5	1		9.6185 GHz	-47.24 dBm		

Date: 15.MAY.2021 09:57:13

Spectrum

Ref Level 8.78 dBm

Offset 8.78 dB

RBW 100 kHz

Att 30 dB

SWT 250 ms

VBW 300 kHz

Mode Auto Sweep

SGL Count 10/10

1Pk Max

M1

M1[1]

-4.46 dBm

2.4370 GHz

M2[1]

-43.28 dBm

16.8098 GHz

D1 -17.817 dBm

M3

M4

M5

M2

Start 30.0 MHz

1001 pts

Stop 25.0 GHz

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1	1		2.437 GHz	-4.46 dBm		
M2	1		16.8098 GHz	-43.28 dBm		
M3	1		4.6994 GHz	-47.85 dBm		
M4	1		7.521 GHz	-48.50 dBm		
M5	1		9.8932 GHz	-47.63 dBm		

Date: 15.MAY.2021 09:59:08

Test mode	GFSK(2475MHz)
-----------	---------------

Spectrum

Ref Level 8.62 dBm

Offset 8.62 dB

RBW 100 kHz

Att 30 dB

SWT 250 ms

VBW 300 kHz

Mode Auto Sweep

SGL Count 10/10

1Pk Max

M1

M1[1]

-0.47 dBm

2.4870 GHz

M2[1]

-43.66 dBm

18.2831 GHz

D1 -20.392 dBm

M3

M4

M5

M2

Start 30.0 MHz

1001 pts

Stop 25.0 GHz


Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1	1		2.487 GHz	-0.47 dBm		
M2	1		18.2831 GHz	-43.66 dBm		
M3	1		5.049 GHz	-49.20 dBm		
M4	1		7.3212 GHz	-48.15 dBm		
M5	1		9.8432 GHz	-47.24 dBm		

Date: 15.MAY.2021 10:01:38

7. Band Edge Compliance

7.1. Block Diagram of Test Setup

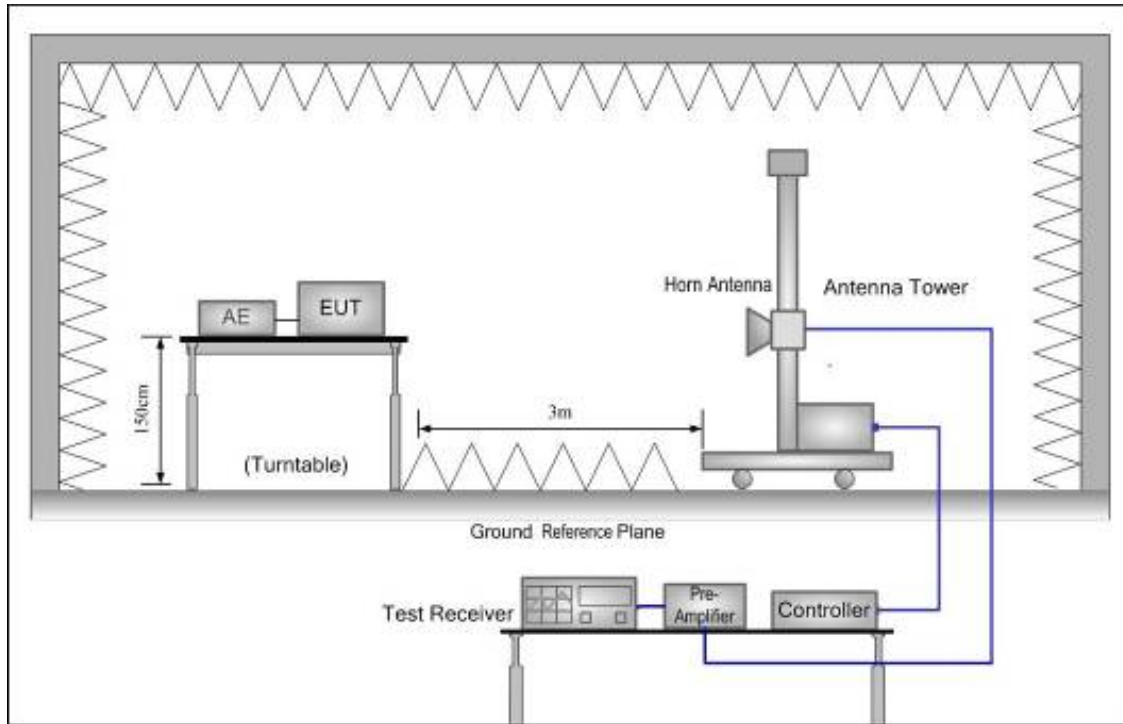

7.2. Limit

All the lower and upper band-edges emissions appearing within restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

7.3. Test Procedure

All restriction band and non- restriction band have been tested, only worse case is reported.

7.4. Test Result


PASS. (See below detailed test data)

Radiated Method:

Hopping-off


Test Mode:

GFSK-Low

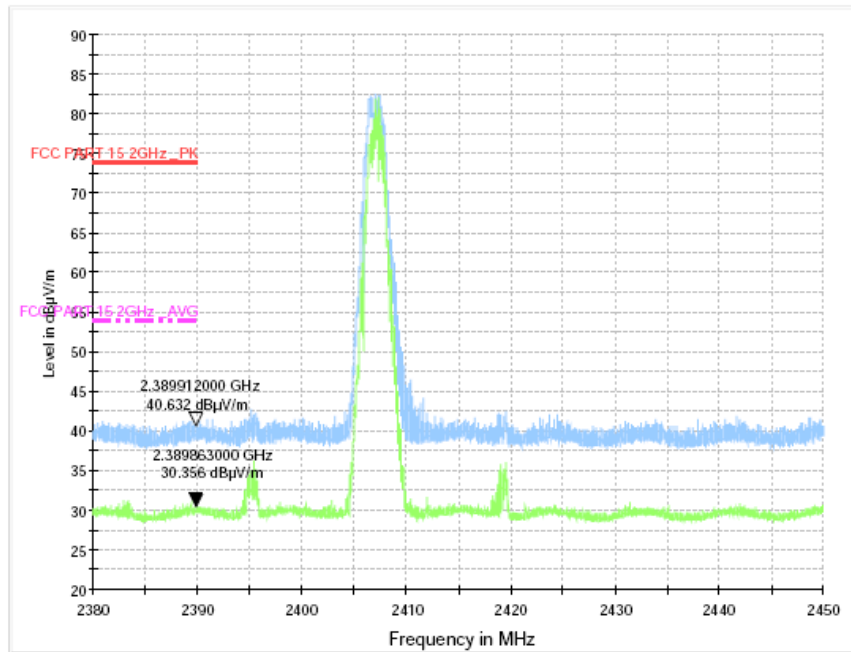


Test Mode:

GFSK-High

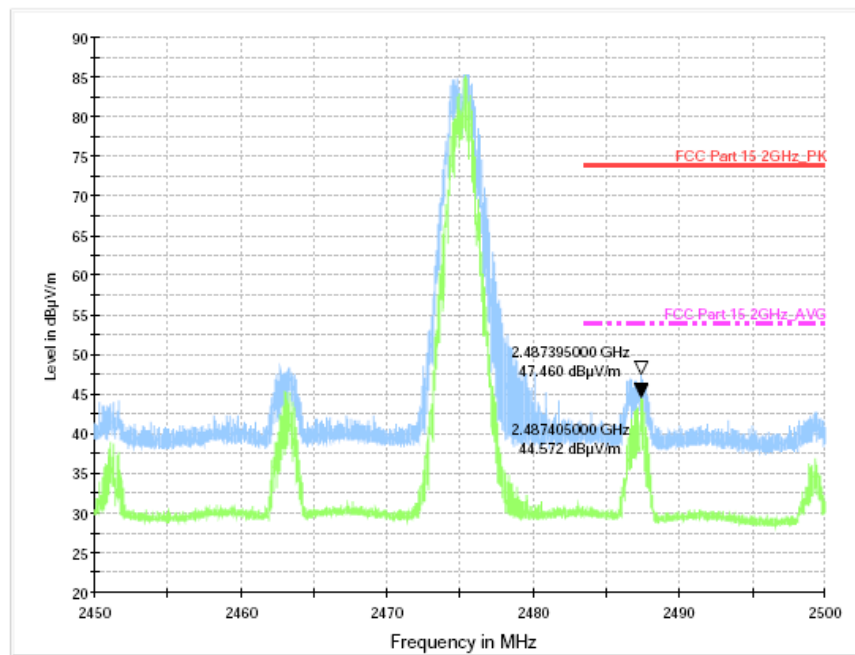


Conducted Method

Band Edge NVNT 1-DH1 2407MHz Ant1 Emission

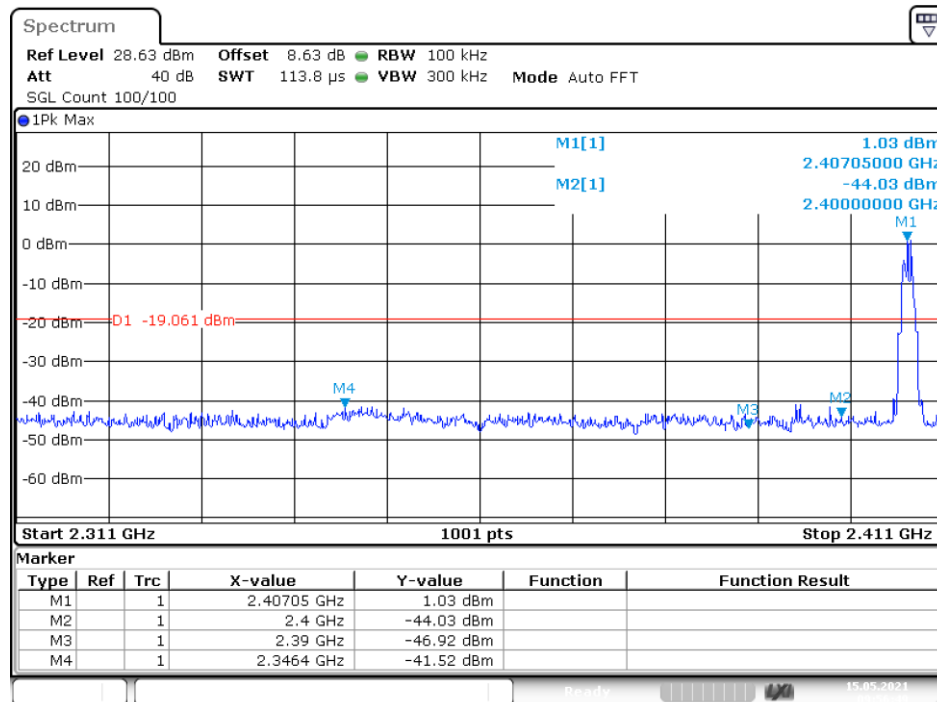

Date: 15.MAY.2021 09:56:49


Band Edge NVNT 1-DH1 2475MHz Ant1 Emission

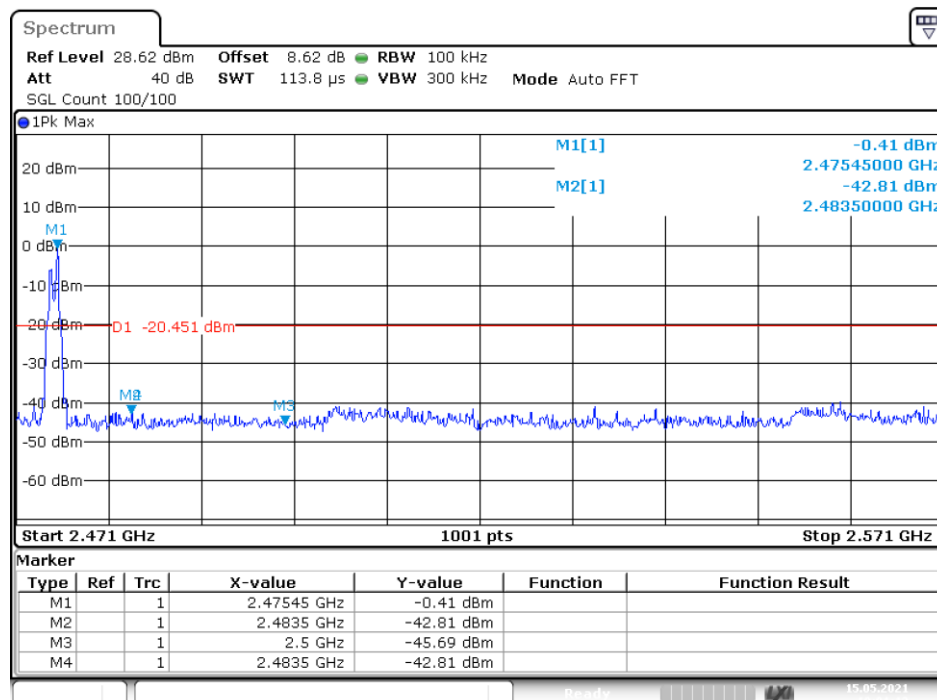

Date: 15.MAY.2021 10:01:12

8. Power Line Conducted Emissions

8.1. Block Diagram of Test Setup

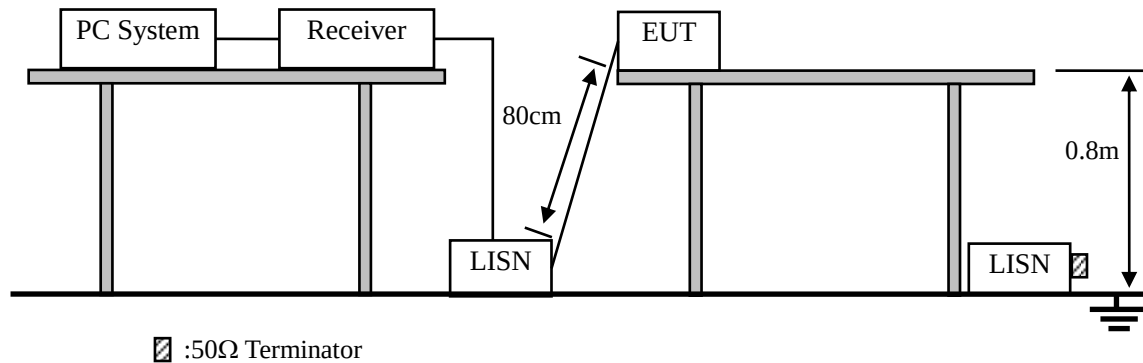

□ :50Ω Terminator

8.2. Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

8.3. Test Procedure

- (1) The EUT was placed on a non-metallic table, 80cm above the ground plane.
- (2) Setup the EUT and simulator as shown in 10.1
- (3) The EUT Power connected to the power mains through a power adapter and a line impedance stabilization network (L.I.S.N1). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N2), this provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 :2013on conducted Emission test.
- (4) The bandwidth of test receiver is set at 10KHz.
- (5) The frequency range from 150 KHz to 30MHz is checked.

8.4. Test Result

The EUT is supplied by battery, so this item does not applicable.

9. Antenna Requirements

9.1.Limit


For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

9.2.Result

The EUT antenna is internal antenna. It complies with the standard requirement.


10. Test Setup Photo


10.1. Photos of Radiated emission

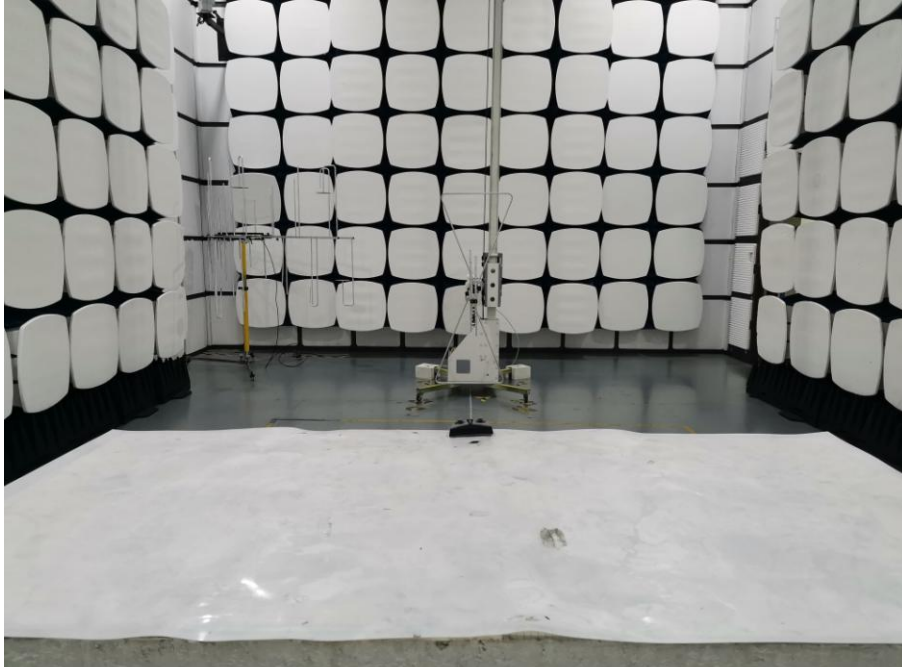



11.Photos Of EUT






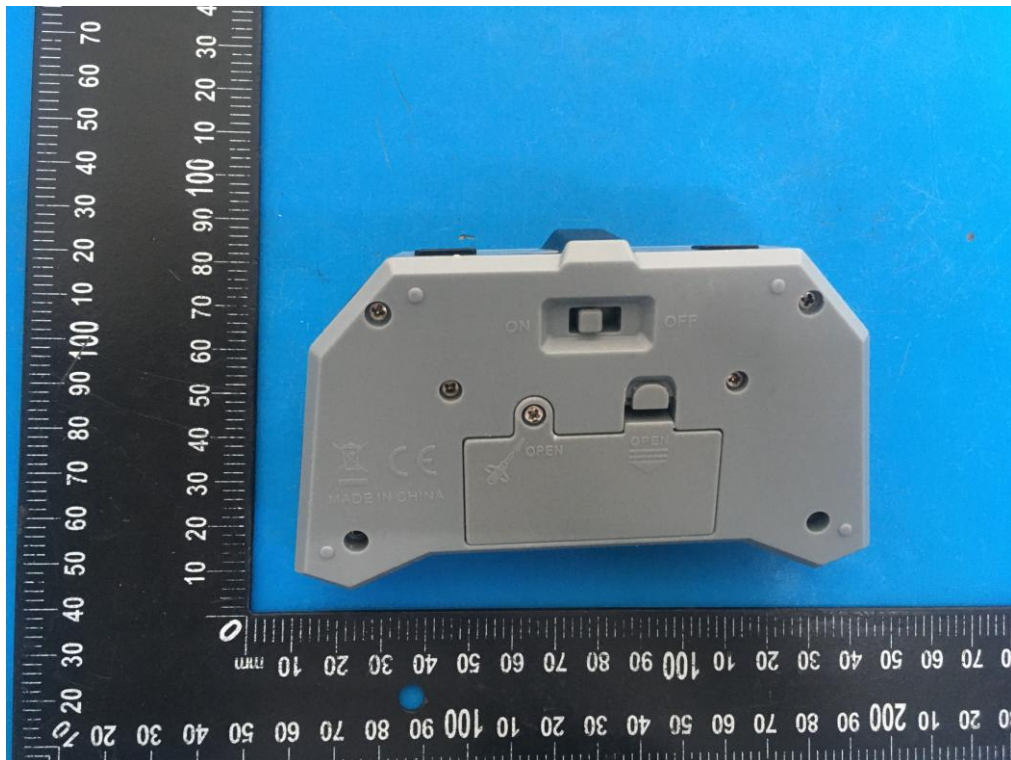


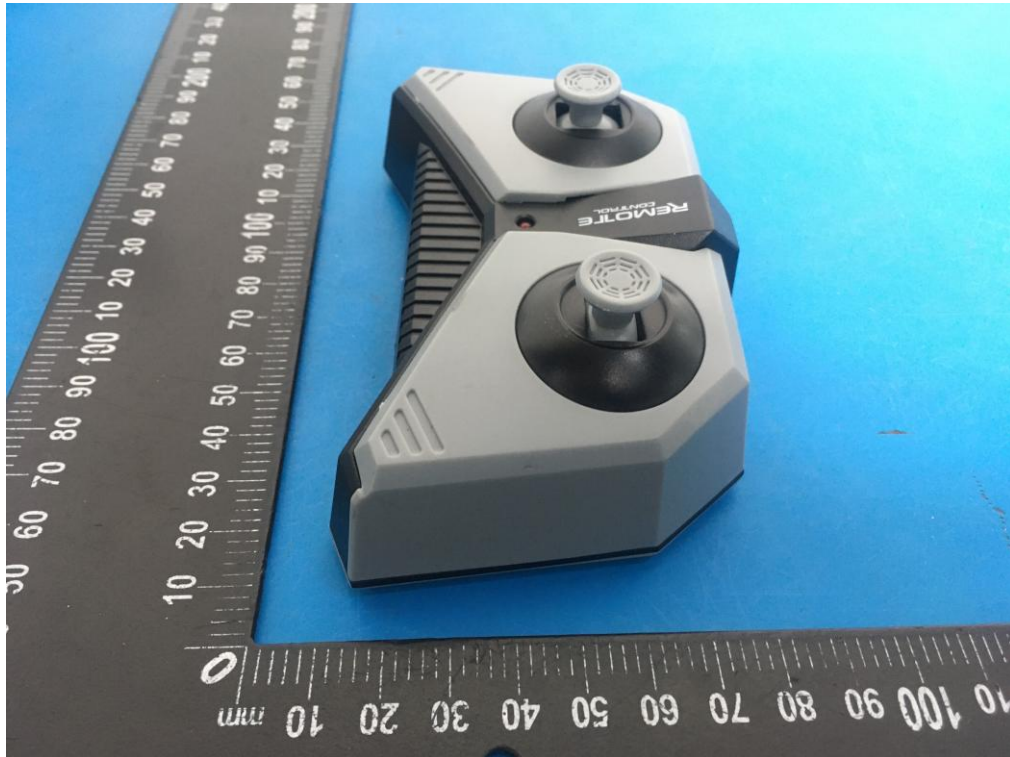

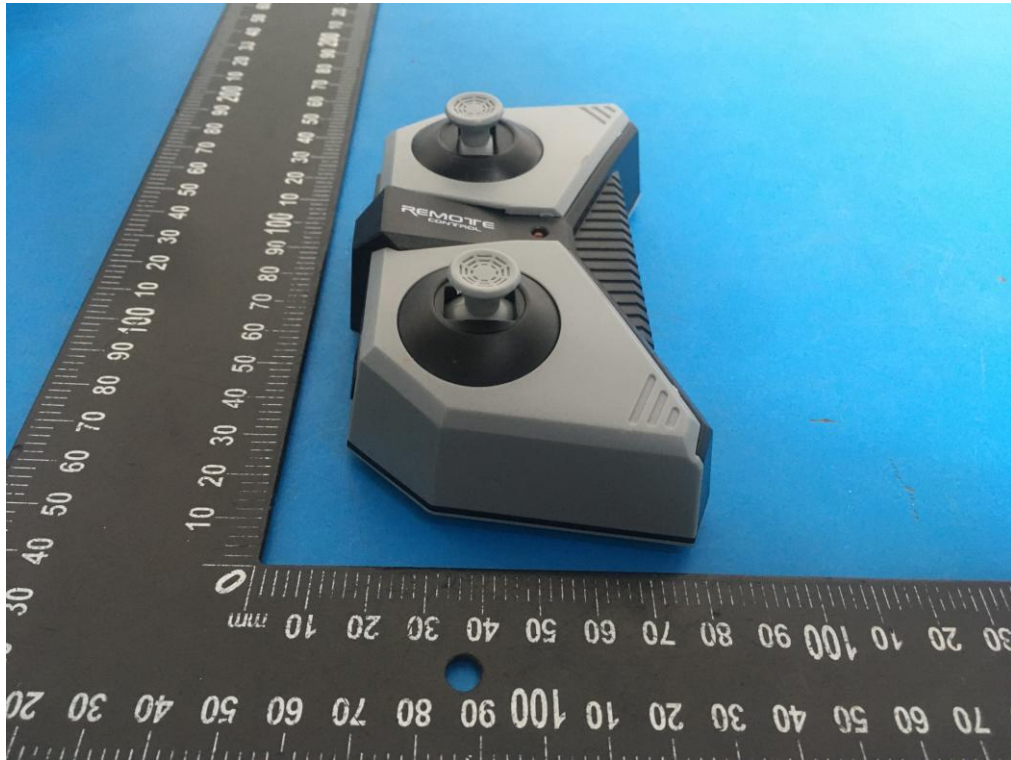

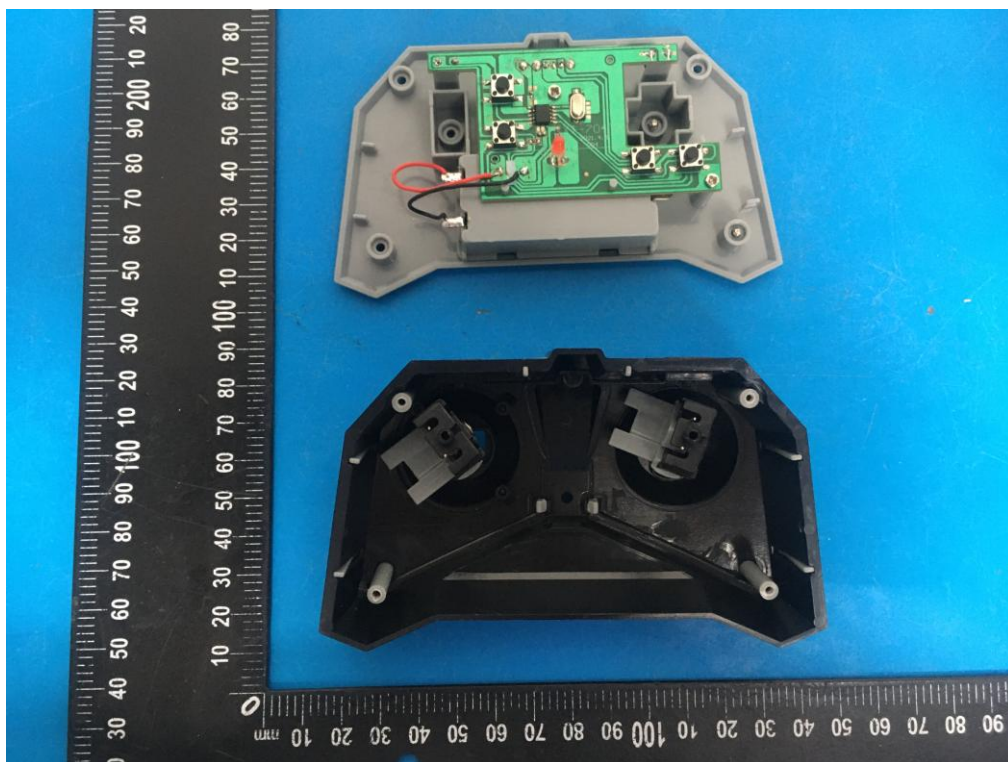

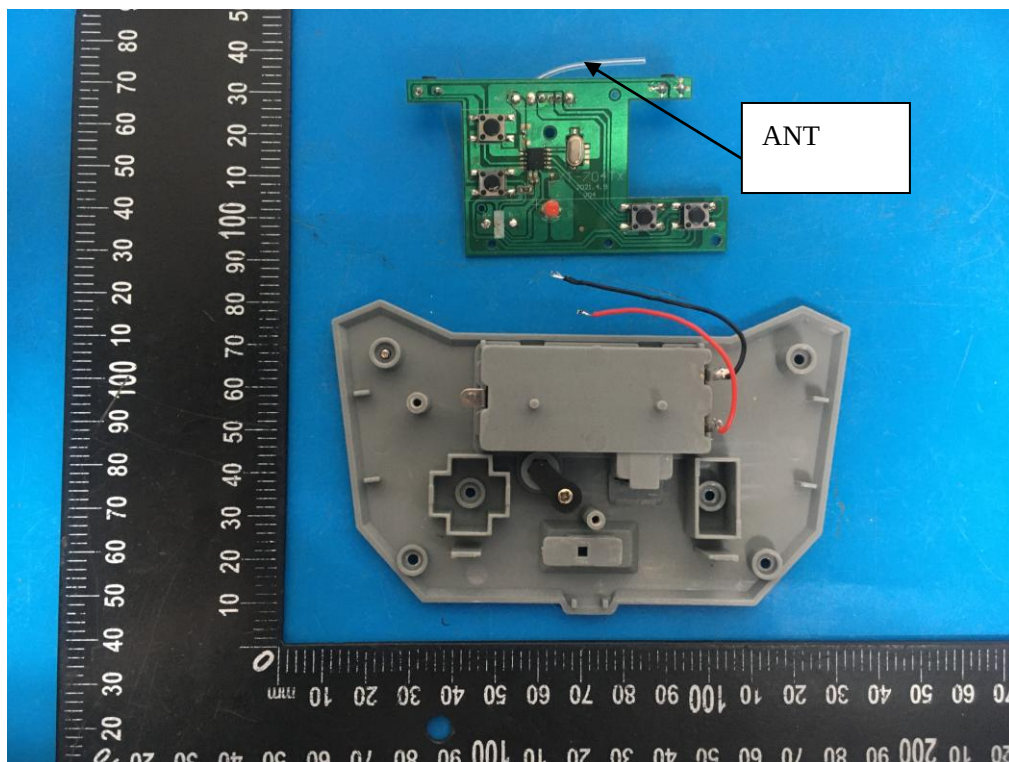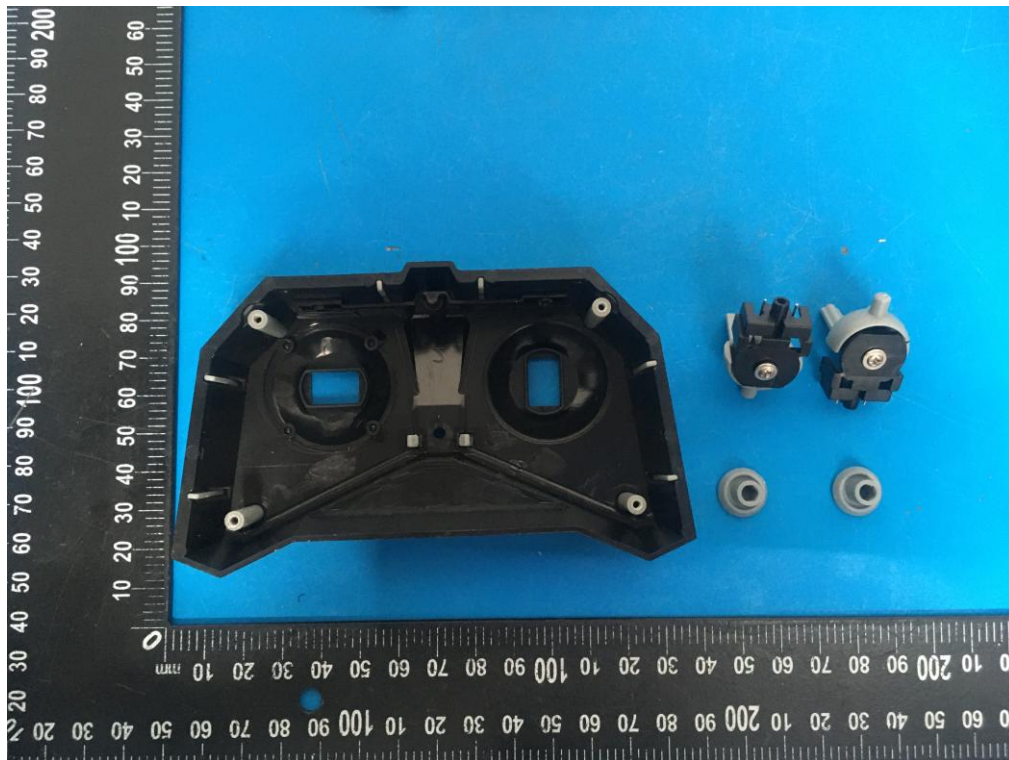

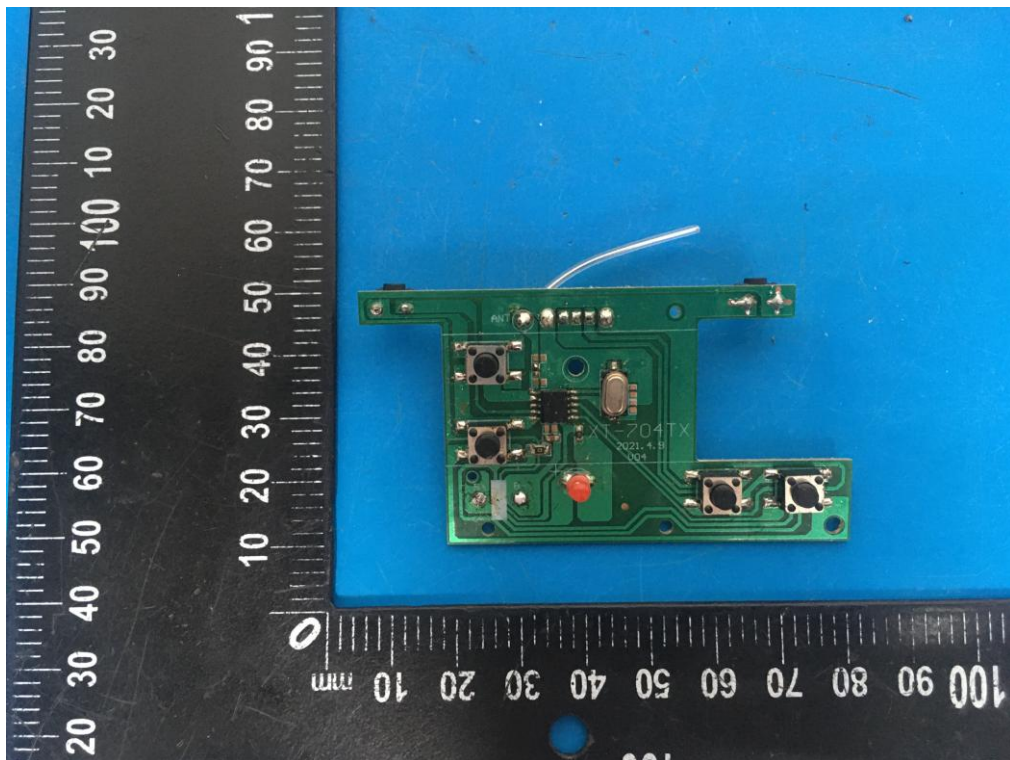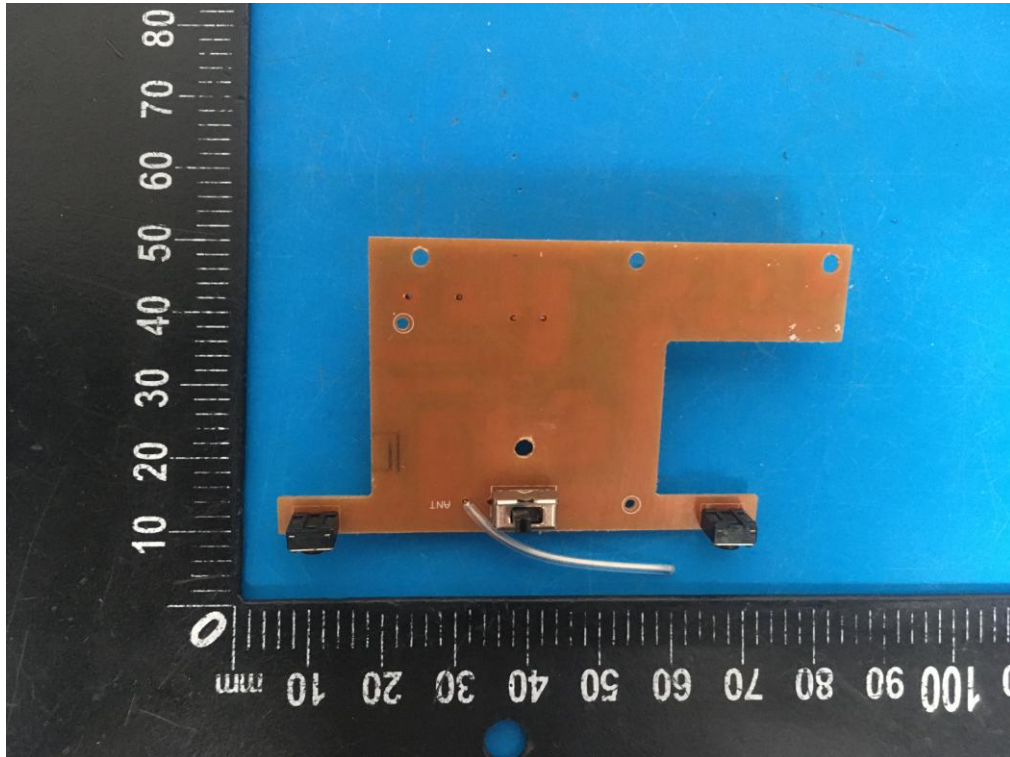

-----THE END OF REPORT-----