

FCC AND ISED CERTIFICATION TEST REPORT

FOR

Applicant	:	BDStar Intelligent & Connected Vehicle Technology Co., Ltd.
Address	:	No. 81 Tonggui Avenue, frontier science and Technology City, Yubei District, Chongqing
Equipment under Test	:	6.75-INCH AUDIO/VIDEO RECEIVER
Model No.	:	iLX-W670
Trade Mark	:	Alpine
FCC ID	:	2BAQLILX670
IC	:	30292-ILX670
Manufacturer	:	ALPS ALPINE CO., LTD.
Address	:	20-1 Yoshima-Industrial Park, Iwaki, Fukushima Japan 970-1192

Issued By: Dongguan Dongdian Testing Service Co., Ltd.

Add.: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park,
Dongguan City, Guangdong Province, China, 523808

Tel.: +86-0769-38826678, **E-mail:** ddt@dgddt.com, <http://www.dgddt.com>

REPORT

Table of Contents

	Test report declares.....	4
1.	Summary of Test Results.....	7
2.	General Test Information	8
2.1.	Description of EUT	8
2.2.	Accessories of EUT.....	9
2.3.	Assistant equipment used for test.....	9
2.4.	Block diagram of EUT configuration for test	9
2.5.	Deviations of test standard.....	9
2.6.	Test environment conditions	10
2.7.	Test laboratory	10
2.8.	Measurement uncertainty.....	10
3.	Equipment Used During Test.....	11
4.	20 dB Bandwidth	12
4.1.	Block diagram of test setup.....	12
4.2.	Limits	12
4.3.	Test procedure	12
4.4.	test result.....	12
4.5.	Test graphs	13
5.	99% Bandwidth	16
5.1.	Block diagram of test setup.....	16
5.2.	Limits	16
5.3.	Test procedure	16
5.4.	Test Result	16
5.5.	Test Graphs.....	17
6.	Maximum Peak Output Power	20
6.1.	Block diagram of test setup.....	20
6.2.	Limits	20
6.3.	Test procedure	20
6.4.	Test Result Peak.....	21
6.5.	Test graphs	21
7.	Carrier Frequency Separation.....	25
7.1.	Block diagram of test setup.....	25
7.2.	Limits	25
7.3.	Test procedure	25
7.4.	Test result.....	25
7.5.	Test graphs	26
8.	Dwell Time.....	27

8.1.	Block diagram of test setup.....	27
8.2.	Limits	27
8.3.	Test procedure	27
8.4.	Test result.....	28
8.5.	Test graphs	28
9.	Number of Hopping Channel	34
9.1.	Block diagram of test setup.....	34
9.2.	Limits	34
9.3.	Test procedure	34
9.4.	Test result.....	34
9.5.	Test graphs	35
10.	Band Edge Compliance (Conducted Method)	36
10.1.	Block diagram of test setup.....	36
10.2.	Limit.....	36
10.3.	Test procedure	36
10.4.	Test result.....	36
10.5.	Test graphs	37
11.	RF Conducted Spurious Emissions	41
11.1.	Block diagram of test setup.....	41
11.2.	Limits	41
11.3.	Test procedure	41
11.4.	Test result.....	42
11.5.	Test graphs	42
12.	Duty cycle.....	52
12.1.	Block diagram of test setup.....	52
12.2.	Limit.....	52
12.3.	Test procedure	52
12.4.	Test result.....	52
12.5.	Test graphs	53
13.	Radiated Emission	56
13.1.	Block diagram of test setup.....	56
13.2.	Limit.....	57
13.3.	Test Procedure.....	59
13.4.	Test result.....	60
14.	Band Edge Compliance (Radiated Method)	69
14.1.	Block diagram of test setup.....	69
14.2.	Limit.....	69
14.3.	Test Procedure.....	69

14.4.	Test result.....	69
15.	Power Line Conducted Emission.....	82
15.1.	Block diagram of test setup.....	82
15.2.	Power line conducted emission limits.....	82
15.3.	Test procedure.....	82
15.4.	Test result.....	83
16.	Antenna Requirements	84
16.1.	Limit.....	84
16.2.	Result	84
17.	Test Setup Photograph	85
18.	Photos of the EUT	87

Test Report Declare

Applicant	:	BDStar Intelligent & Connected Vehicle Technology Co., Ltd.
Address	:	No. 81 Tonggui Avenue, frontier science and Technology City, Yubei District, Chongqing
Equipment under Test	:	6.75-INCH AUDIO/VIDEO RECEIVER
Model No.	:	iLX-W670
Trade Mark	:	Alpine
Manufacturer	:	ALPS ALPINE CO., LTD.
Address	:	20-1 Yoshima-Industrial Park, Iwaki, Fukushima Japan 970-1192

Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C, RSS-247 Issue 2 February 2017.

Test Procedure Used:

ANSI C63.10:2013, RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021)

We Declare:

The equipment described above is tested by Dongguan Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Dongguan Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC&ISED standards.

Report No.:	DDT-R23010302-2E01		
Date of Receipt:	Jan. 05, 2023	Date of Test:	Jan. 05, 2023 ~ Feb. 27, 2023

Prepared By:

Bobo Chen

Bobo Chen/Engineer

Approved By:



Damon Hu/EMC Manager

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Dongguan Dongdian Testing Service Co., Ltd.

Revision History

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	Feb. 27, 2023	

1. Summary of Test Results

Description of Test Item	Standard	Verdict
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1) RSS-247 Issue 2 clause 5.4(b)	Pass
20 dB Bandwidth	FCC Part 15: 15.247(a)(1) RSS-247 Issue 2 clause 5.1(a)	Pass
99% Bandwidth	RSS-Gen Issue 5 clause 6.7	Pass
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1) RSS-247 Issue 2 clause 5.1(b)	Pass
Number of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii) RSS-247 Issue 2 clause 5.1(d)	Pass
Dwell Time	FCC Part 15: 15.247(a)(1)(iii) RSS-247 Issue 2 clause 5.1(d)	Pass
Radiated Emission	FCC Part 15: 15.205(a) FCC Part 15: 15.209(a) FCC Part 15: 15.247(d) RSS-247 Issue 2 clause 5.5 RSS-Gen Issue 5 clause 8.9 RSS-Gen Issue 5 clause 8.10	Pass
Band Edge Compliance	FCC Part 15: 15.205(a) FCC Part 15: 15.209(a) FCC Part 15: 15.247(d) RSS-247 Issue 2 clause 5.5 RSS-Gen Issue 5 clause 8.9 RSS-Gen Issue 5 clause 8.10	Pass
Power Line Conducted Emissions	FCC Part 15: 15.207(a) RSS-Gen Issue 5 clause 8.8	Pass
Antenna Requirement	FCC Part 15: 15.203 RSS-Gen Issue 5 clause 6.8	Pass

2. General Test Information

2.1. Description of EUT

EUT* Name	: 6.75-INCH AUDIO/VIDEO RECEIVER
Model Number	: iLX-W670
EUT* Function Description	: Please reference user manual of this device
Power Supply	: DC 12V
Radio Specification	: Bluetooth V5.0
Operation Frequency	: 2402 MHz - 2480 MHz
Modulation	: GFSK, $\pi/4$ -DQPSK, 8DPSK
Data Rate	: 1 Mbps, 2 Mbps, 3 Mbps
Antenna	: PCB antenna, maximum PK gain:0.08 dBi
Sample Number	: S23010302-03 for conductive S23010302-16 for radiation

Note: EUT is the ab. of equipment under test.

Channel information					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	27	2429	54	2456
1	2403	28	2430	55	2457
2	2404	29	2431	56	2458
3	2405	30	2432	57	2459
4	2406	31	2433	58	2460
5	2407	32	2434	59	2461
6	2408	33	2435	60	2462
7	2409	34	2436	61	2463
8	2410	35	2437	62	2464
9	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

2.2. Accessories of EUT

Description of Accessories	Manufacturer	Model number	Description	Remark
MIC	N/A	N/A	N/A	N/A
USB Cable	N/A	N/A	N/A	N/A

2.3. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	EMC Compliance	SN
N/A	N/A	N/A	N/A	N/A

2.4. Block diagram of EUT configuration for test



Test software: RFTesttoolv5_0.exe

The test software was used to control EUT work in Continuous Tx mode, and select test channel, wireless mode as below table.

The pathloss of external cable: 0.5 dB (According to the manufacturer's claims)

Tested mode, channel, information			
Mode	Setting Tx Power	Channel	Frequency (MHz)
GFSK hopping on Tx mode	Default	CH0 to CH78	2402 to 2480
$\pi/4$ -DQPSK hopping on Tx mode	Default	CH0 to CH78	2402 to 2480
8DPSK hopping on Tx mode	Default	CH0 to CH78	2402 to 2480
GFSK hopping off Tx mode	Default	CH0	2402
	Default	CH39	2441
	Default	CH78	2480
$\pi/4$ -DQPSK hopping off Tx mode	Default	CH0	2402
	Default	CH39	2441
	Default	CH78	2480
8DPSK hopping off Tx mode	Default	CH0	2402
	Default	CH39	2441
	Default	CH78	2480

2.5. Deviations of test standard

No deviation.

2.6. Test environment conditions

Temperature range:	+15°C to +35 °C
Humidity range:	20% to 75%
Pressure range:	86 kPa to 106 kPa

2.7. Test laboratory

Dongguan Dongdian Testing Service Co., Ltd.

Add.: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City, Guangdong Province, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, R-20155, G-20118

2.8. Measurement uncertainty

Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum analyzer)	0.86 dB (10 MHz ≤ f < 3.6 GHz); 1.38 dB (3.6 GHz ≤ f < 8 GHz)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB (10 MHz ≤ f < 3.6 GHz); 1.38 dB (3.6 GHz ≤ f < 8 GHz)
Frequencies Stability	6.7 × 10 ⁻⁸ (Antenna couple method) 5.5 × 10 ⁻⁸ (Conducted method)
Conducted spurious emissions	0.86 dB (10 MHz ≤ f < 3.6 GHz); 1.40 dB (3.6 GHz ≤ f < 8 GHz) 1.66 dB (8 GHz ≤ f < 26.5 GHz)
Uncertainty for radio frequency (RBW < 20 kHz)	3 × 10 ⁻⁸
Temperature	0.4 °C
Humidity	2 %
Uncertainty for Radiation Emission test (9 kHz – 30 MHz)	3.44 dB
Uncertainty for Radiation Emission test (30 MHz - 1 GHz)	4.70 dB (Antenna Polarize: V) 4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz - 40 GHz)	4.10 dB (1 - 6 GHz) 4.40 dB (6 GHz - 18 GHz) 3.54 dB (18 GHz - 26 GHz) 4.30 dB (26 GHz - 40 GHz)
Uncertainty for Power line conduction emission test	3.34 dB (150KHz-30MHz) 3.72 dB (9KHz-150KHz)


Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3. Equipment Used During Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
☑RF Connected Test (Tonscend RF Measurement System 3#)					
Signal & Spectrum analyzer	R&S	FSV40	101407	Jul. 21, 2022	1 Year
Wideband Radio Communication tester	R&S	CMW500	117491	May 18, 2022	1 Year
Vector Signal Generator	Agilent	N5182A	MY19060405	May 18, 2022	1 Year
Vector Signal Generator	Agilent	N5182A	MY48180912	May 18, 2022	1 Year
RF Control Unit	Tonscend	JS0806-2	20C8060230	May 18, 2022	1 Year
Temp&Humi Programmable	ZHIXIANG	ZXGDJS-150L	ZX170110-A	May 26, 2022	1 Year
Test Software	JS Tonscend	JS1120-3	Ver.3.2.22	N/A	N/A
☑Radiation 3#chamber					
EMI Test Receiver	R&S	ESU26	100472	May 19, 2022	1 Year
Spectrum analyzer	Agilent	E4447A	MY50180031	May 17, 2022	1 Year
Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	Sep. 29, 2022	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	01429	Jul. 22, 2022	1 Year
Double Ridged Horn Antenna	Schwarzbeck	BBHA9120 D	02468	Sep. 29, 2022	1 Year
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	May 06, 2022	1 Year
Pre-amplifier	COM-POWER	PAM-118A	18040084	Aug.17, 2022	1 Year
Pre-amplifier	COM-POWER	PAM-840A	461369	Apr. 11, 2022	1 Year
RE Cable	N/A	W23.02 CP1-X2 + W23.09 AP1-X8+ JCT26S-NJ-NJ-1.5M+ JCT26S-NJ-NJ-1.5M	4.5M+8M+1.5M+1.5M	Aug.17, 2022	1 Year
RF Cable	Yuhu Technology	JCTB810-NJ-NJ-9M	21123964	May. 19, 2022	1 Year
RF Cable	Yuhu Technology	ZT26S-SMAJ-SMAJ-1M	21073466	Aug.17, 2022	1 Year
Test software	Tonscend	JS32-RE	V 5.0.0.1	N/A	N/A
Test software	Audix	E3	V 6.1.1.1	N/A	N/A

4. 20 dB Bandwidth

4.1. Block diagram of test setup

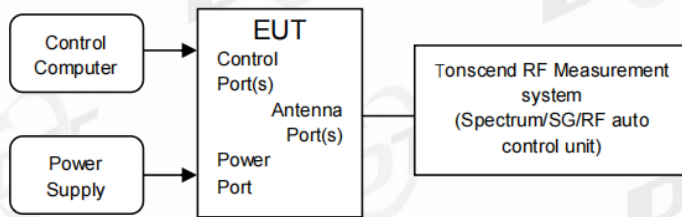

4.2. Limits

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

4.3. Test procedure


- (1) The test according to ANSI C63.10-2013 clause 6.9.2.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for the 20 dB bandwidth measurement:

RBW:	1% to 5% of the OBW
VBW:	approximately three times RBW
Span:	between 2 times and 5 times the OBW
Detector Mode:	peak
Sweep time:	auto
Trace mode:	max hold
- (5) Measure and record the results in the report.


4.4. test result

Test Mode	Antenna	Frequency [MHz]	20db EBW[MHz]
DH5	Ant1	2402	0.96
		2441	0.95
		2480	0.94
2DH5	Ant1	2402	1.22
		2441	1.25
		2480	1.29
3DH5	Ant1	2402	1.27
		2441	1.26
		2480	1.25

4.5. Test graphs

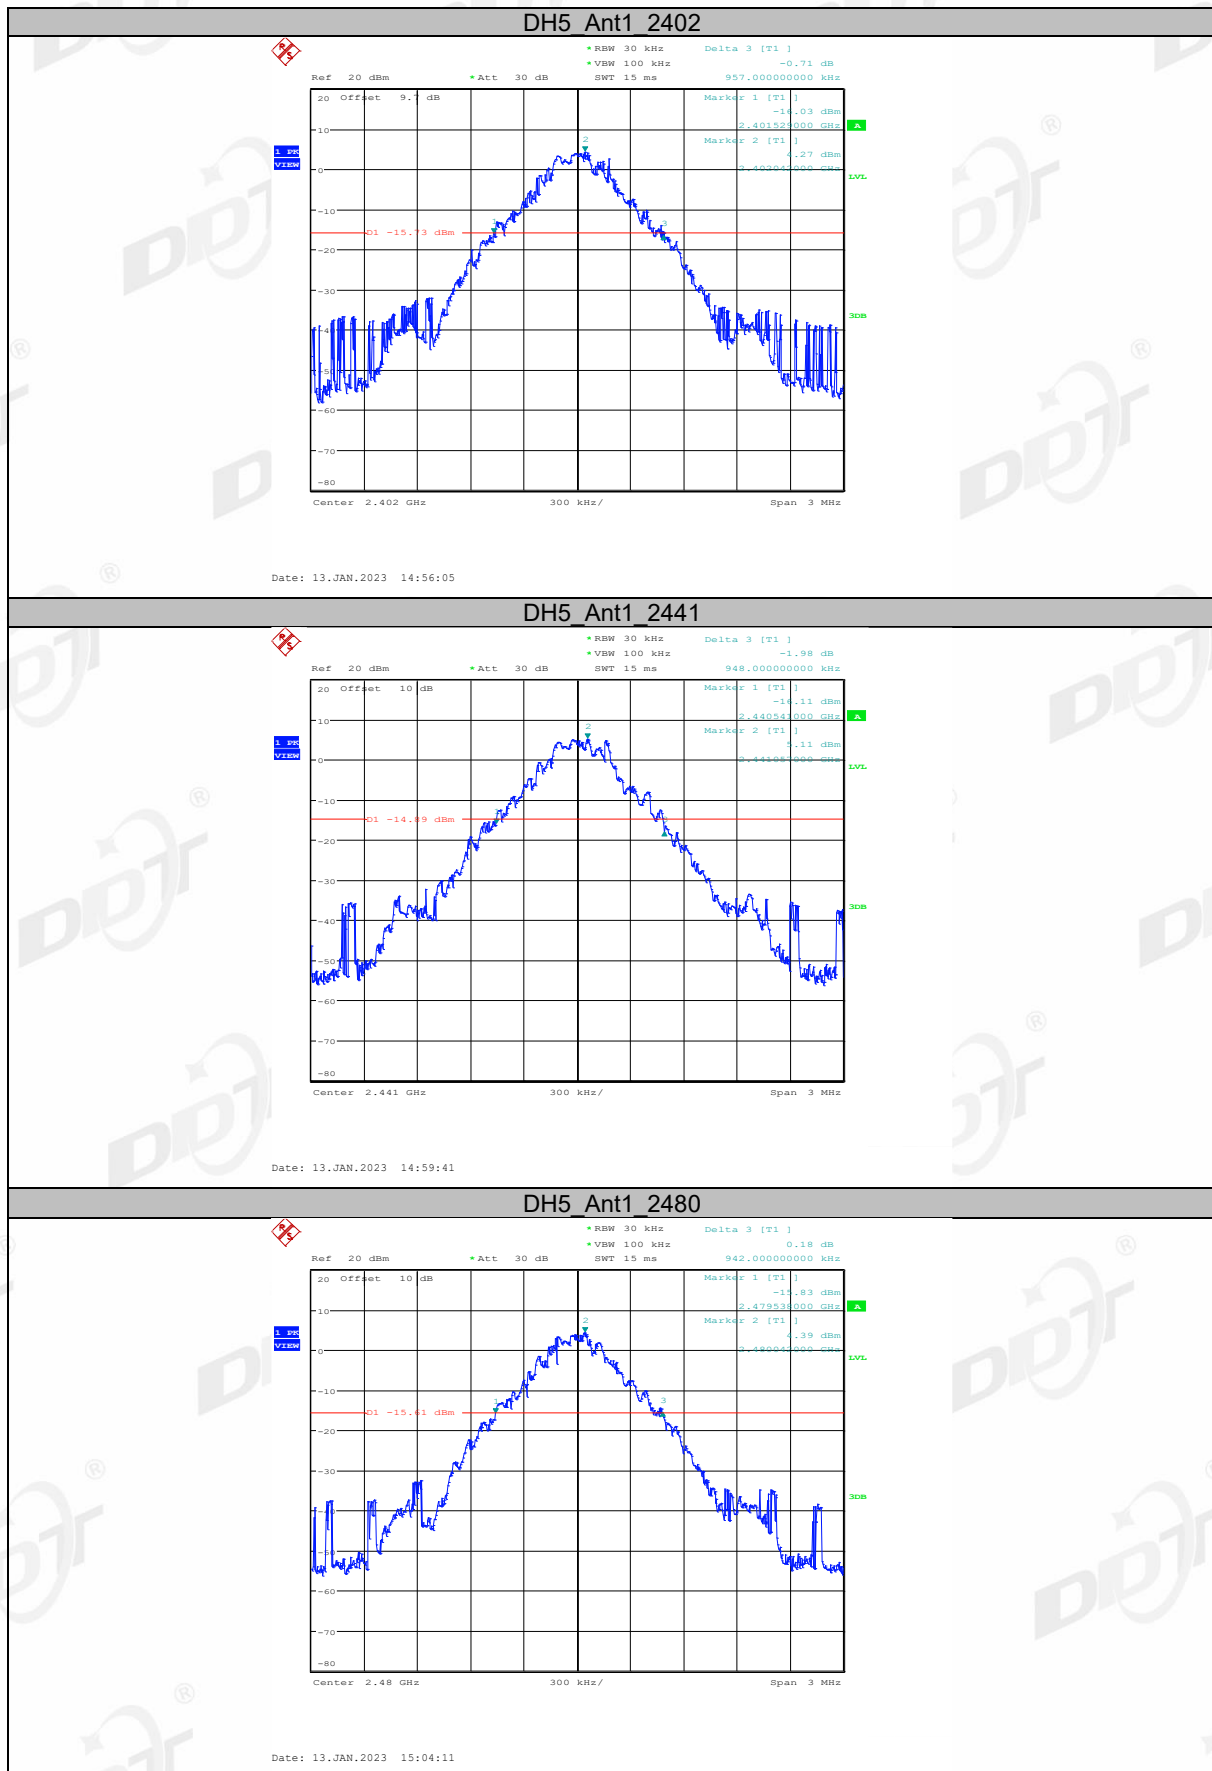


2DH5_Ant1_2402

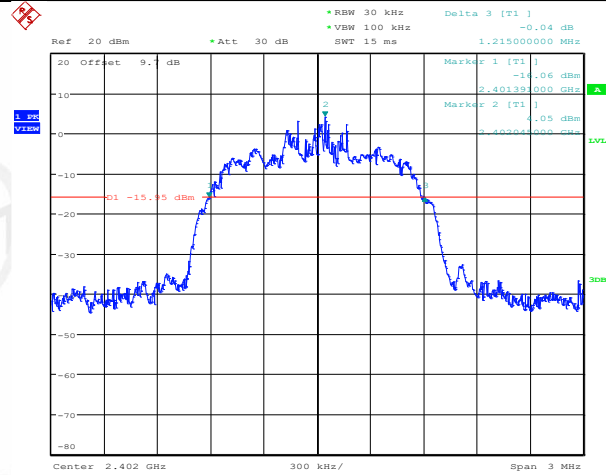


Date: 13.JAN.2023 15:06:04

2DH5_Ant1_2441

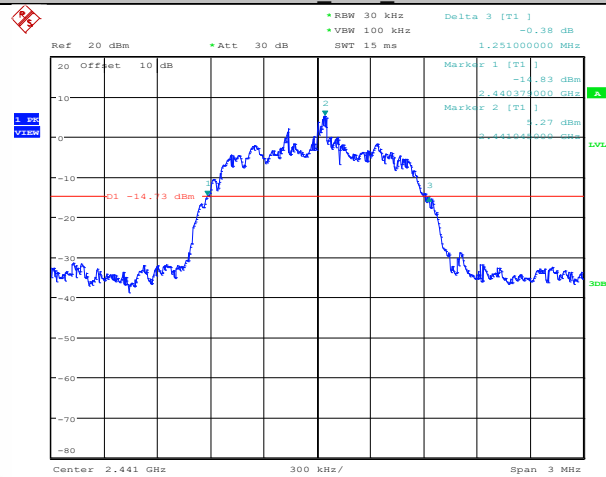


Date: 13.JAN.2023 15:07:42

2DH5_Ant1_2480

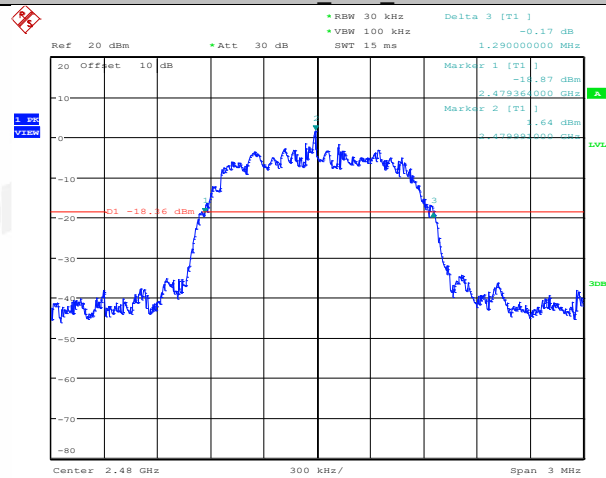


Date: 13.JAN.2023 15:09:26


3DH5_Ant1_2402

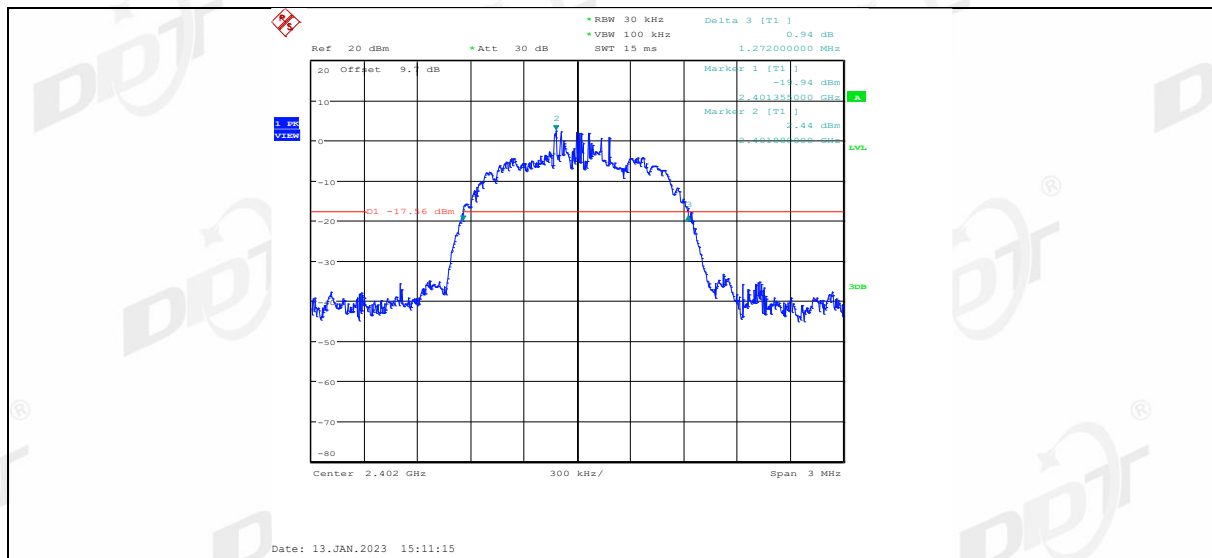

3DH5 Ant1_2441

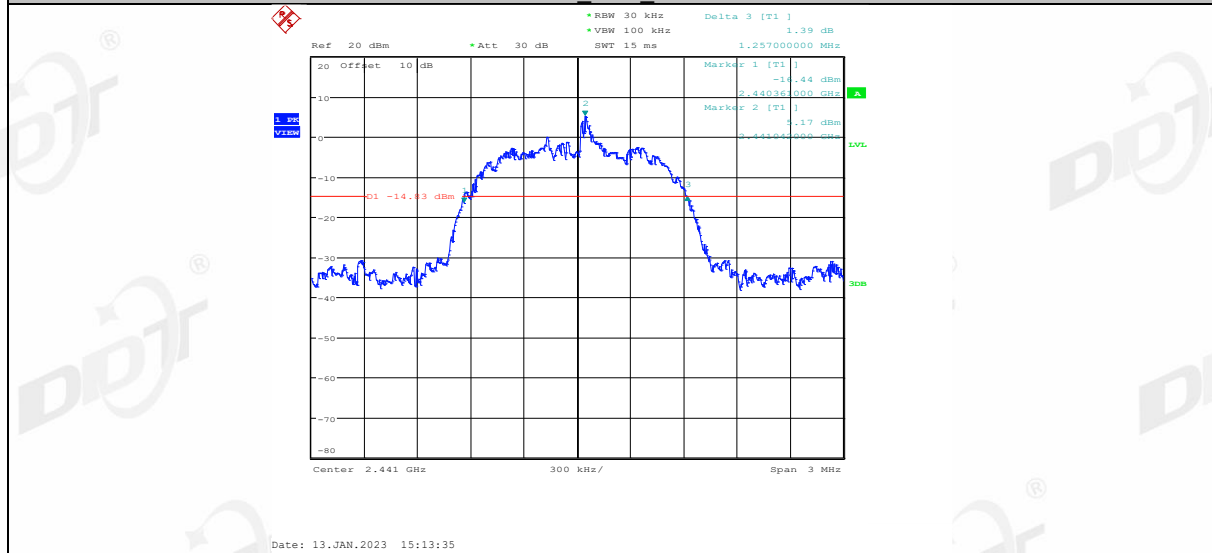


3DH5 Ant1_2480

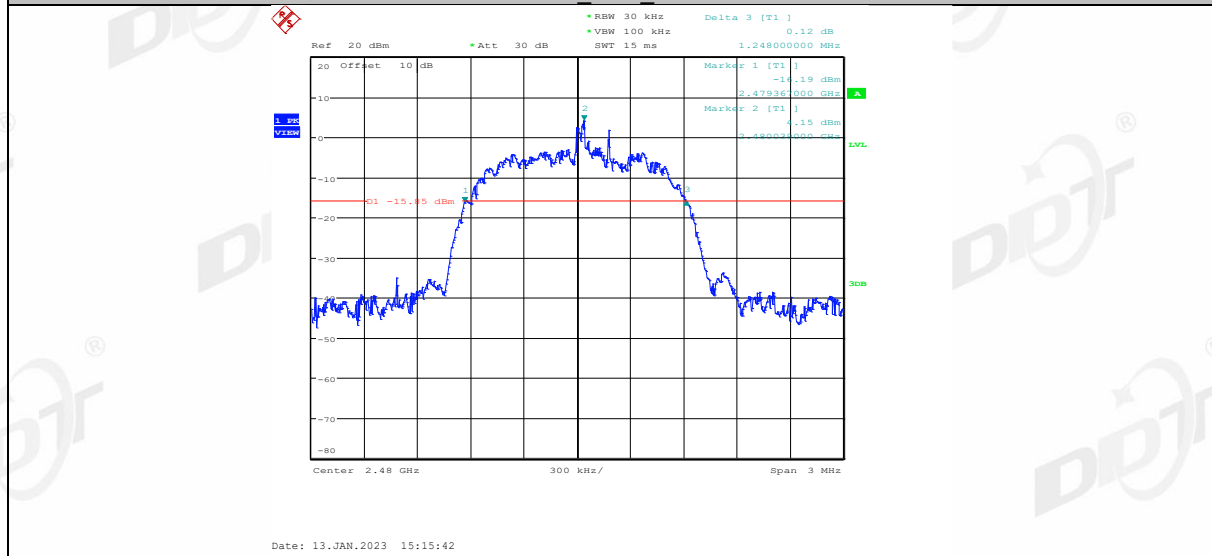

5. 99% Bandwidth

5.1. Block diagram of test setup

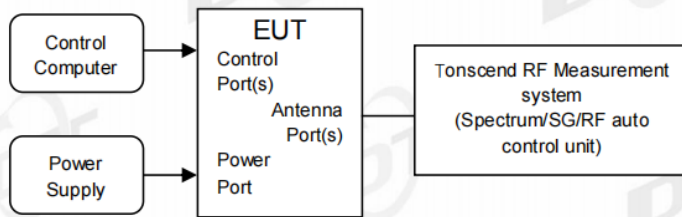

5.2. Limits

Just for Report.

5.3. Test procedure


- (6) The test according to ANSI C63.10-2013 clause 6.9.3.
 - (7) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
 - (8) Set the EUT as maximum power setting and enable the EUT transmit continuously
 - (9) Use the following spectrum analyzer settings for the 99% bandwidth measurement:

RBW:	1% to 5% of the OBW
VBW:	approximately three times RBW
Span:	between 1.5 times and 5.0 times the OBW
Detector Mode:	peak
Sweep time:	auto
Trace mode:	max hold
- Measure and record the results in the report.


5.4. Test Result

TestMode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.867	2401.5620	2402.4290	---	---
		2441	0.867	2440.5620	2441.4290	---	---
		2480	0.867	2479.5620	2480.4290	---	---
2DH5	Ant1	2402	1.164	2401.4150	2402.5790	---	---
		2441	1.188	2440.4060	2441.5940	---	---
		2480	1.164	2479.4150	2480.5790	---	---
3DH5	Ant1	2402	1.158	2401.4180	2402.5760	---	---
		2441	1.197	2440.3970	2441.5940	---	---
		2480	1.155	2479.4210	2480.5760	---	---

5.5. Test Graphs

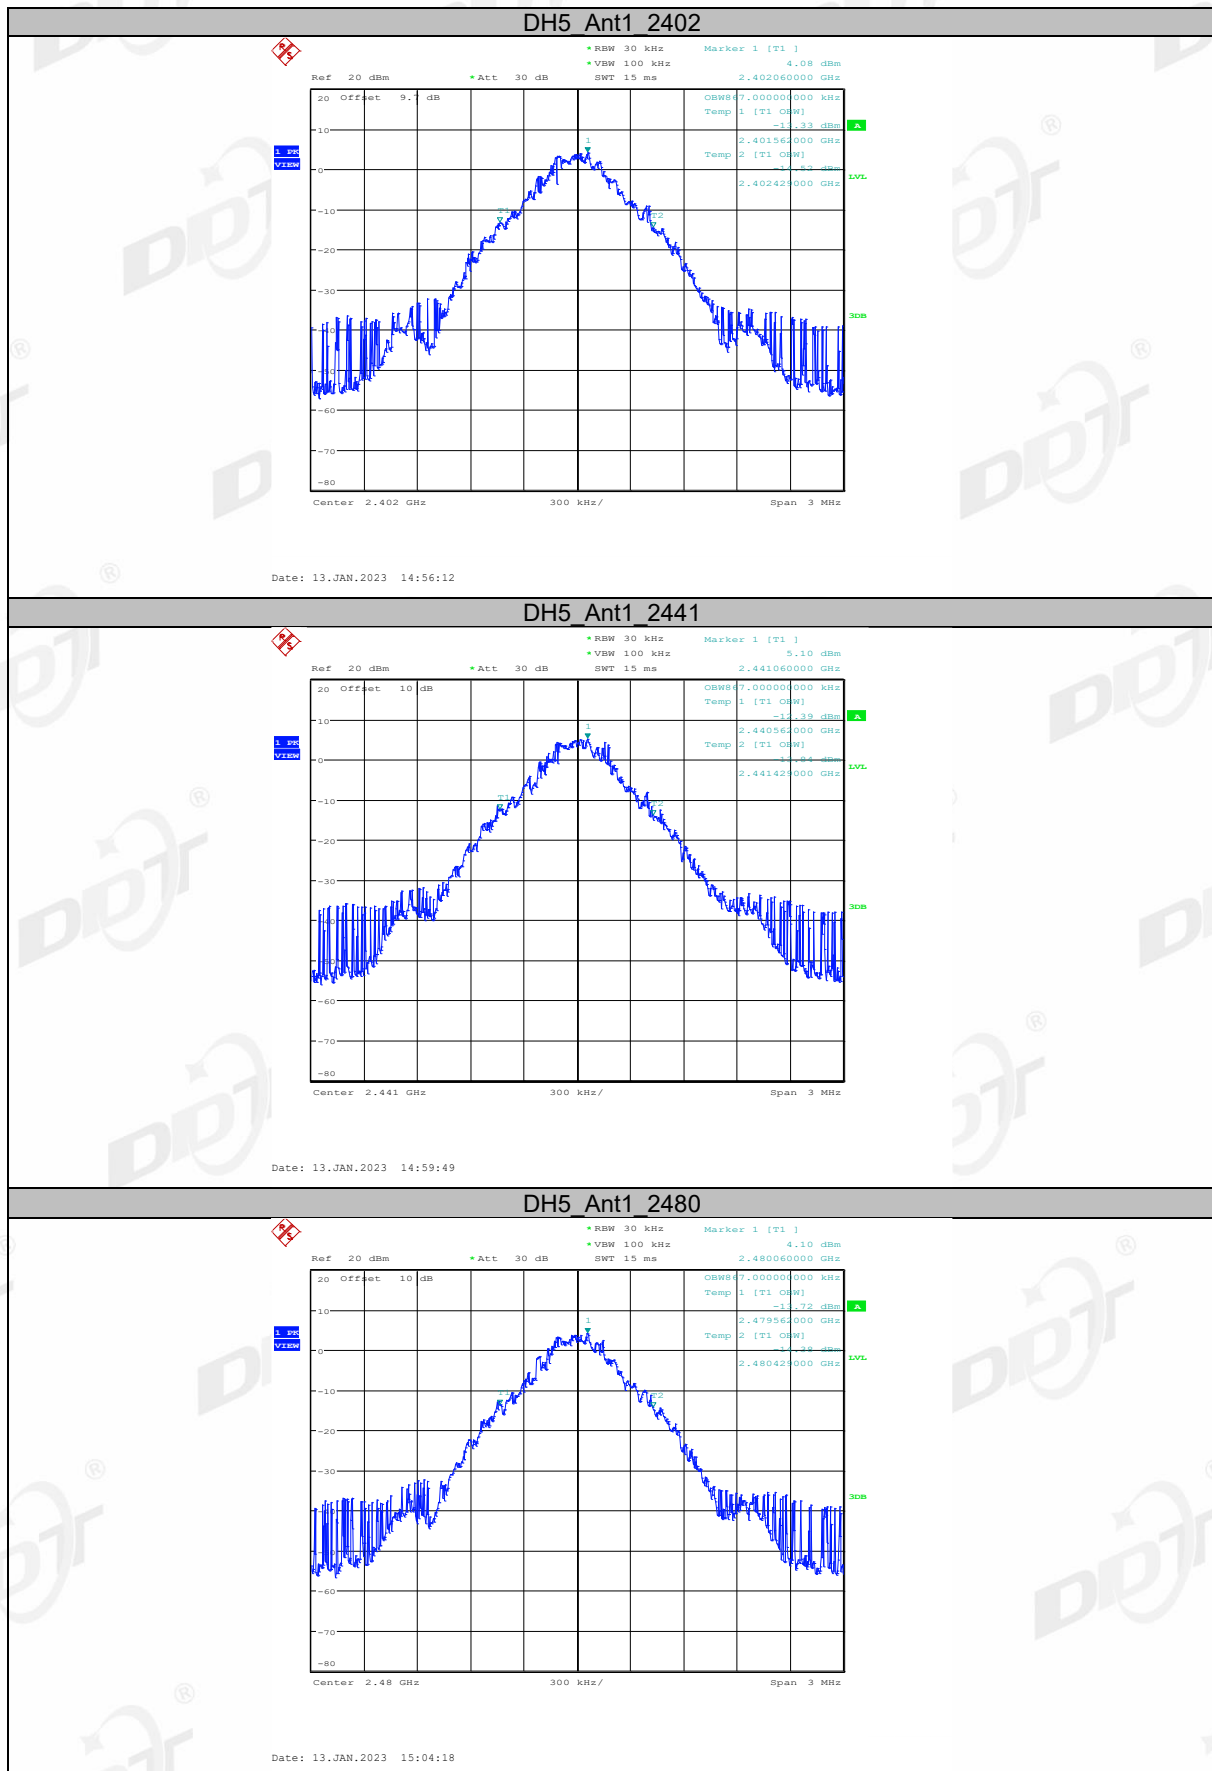


2DH5_Ant1_2402

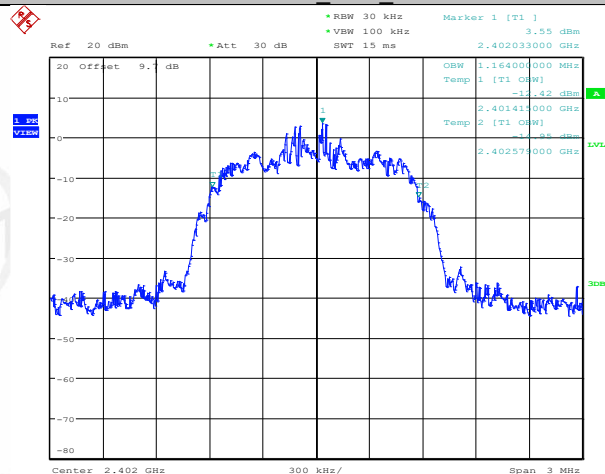


Date: 13.JAN.2023 15:06:12

2DH5_Ant1_2441

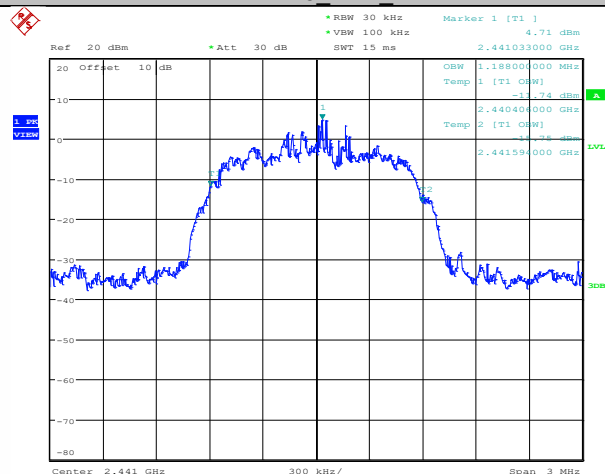


Date: 13.JAN.2023 15:07:49

2DH5_Ant1_2480

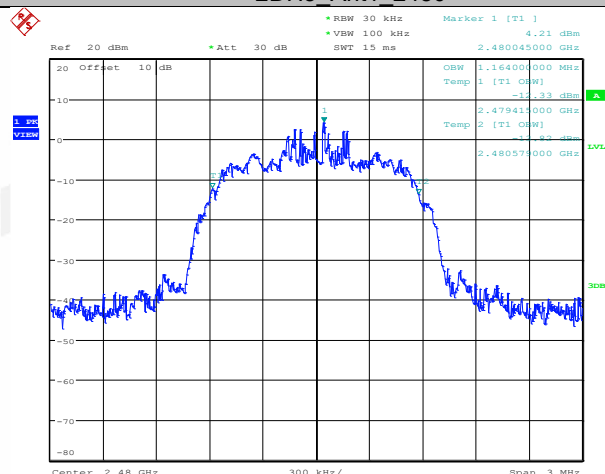


Date: 13.JAN.2023 15:09:33


3DH5_Ant1_2402

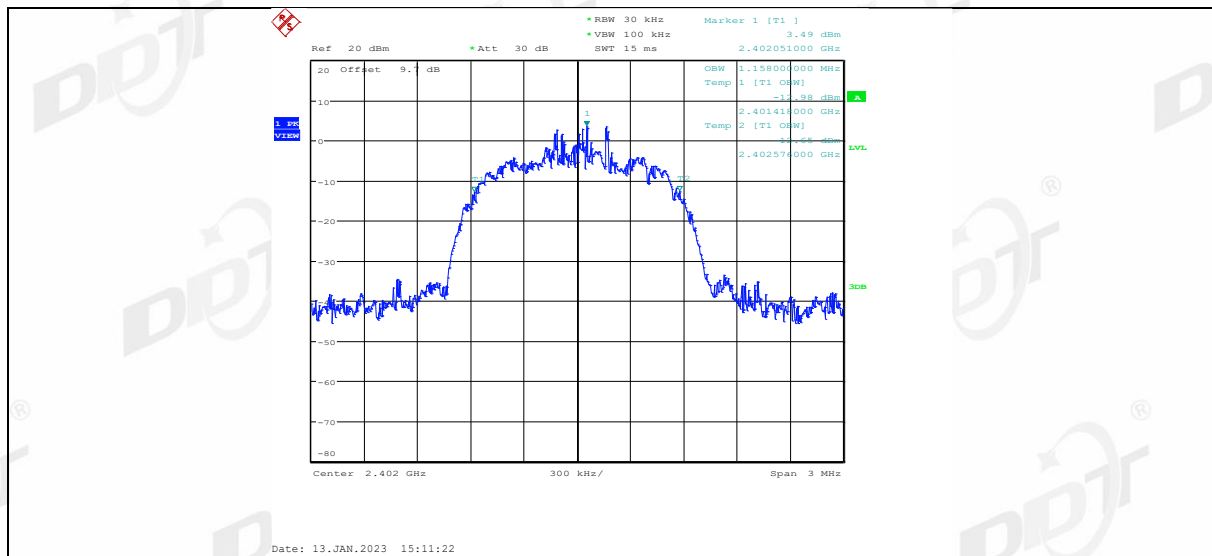

3DH5 Ant1_2441

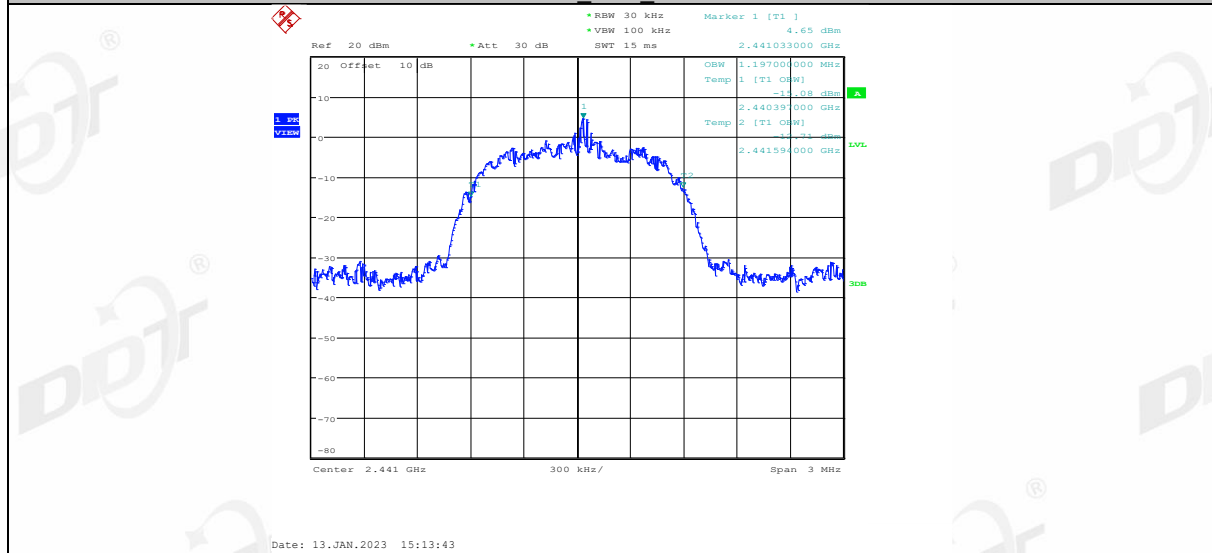


3DH5 Ant1_2480

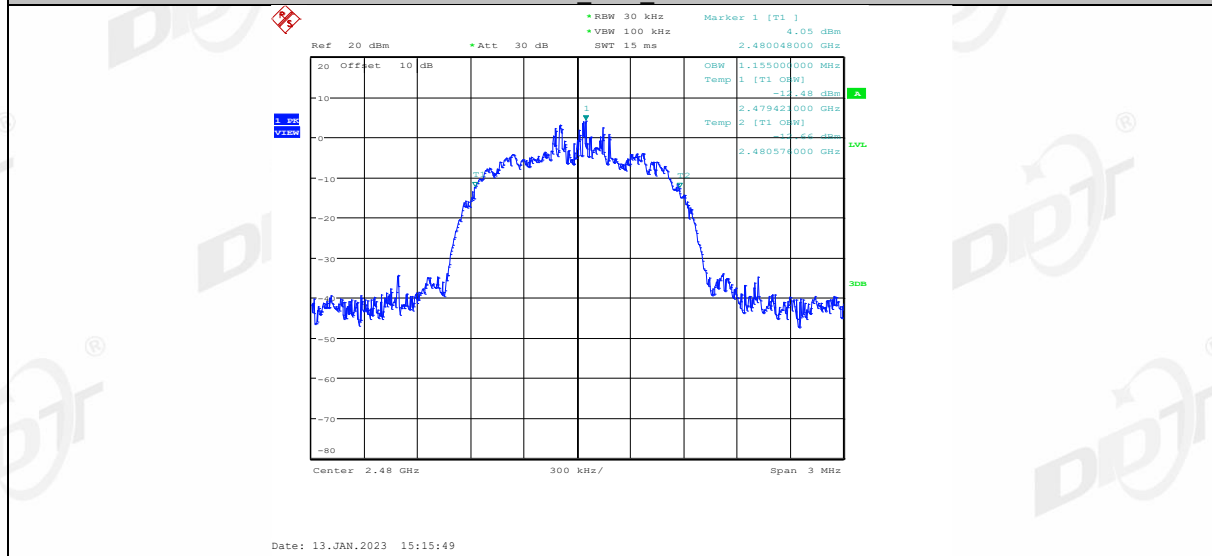

6. Maximum Peak Output Power

6.1. Block diagram of test setup

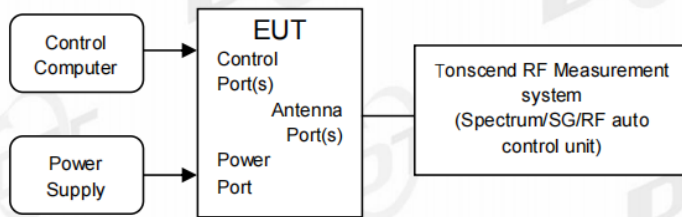

6.2. Limits

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W.

6.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 7.8.5.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:

RBW:	Approximately 5 times the 20 dB bandwidth of the emission being measured.
VBW:	$VBW \geq RBW$.
Span:	5 times the 20 dB bandwidth, centered on a hopping channel.
Detector Mode:	peak
Sweep time:	auto
Trace mode:	max hold


- (5) Use the marker-to-peak function to set the marker to the peak of the emission and record the results in the report.

6.4. Test Result Peak


Test Mode	Antenna	Frequency[MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	EIRP[dBm]	EIRP Limit[dBm]	Verdict
DH5	Ant1	2402	6.57	≤20.97	6.65	≤30	PASS
		2441	7.75	≤20.97	7.83	≤30	PASS
		2480	6.78	≤20.97	6.86	≤30	PASS
2DH5	Ant1	2402	6.60	≤20.97	6.68	≤30	PASS
		2441	7.83	≤20.97	7.91	≤30	PASS
		2480	6.81	≤20.97	6.89	≤30	PASS
3DH5	Ant1	2402	6.62	≤20.97	6.70	≤30	PASS
		2441	7.78	≤20.97	7.86	≤30	PASS
		2480	6.78	≤20.97	6.86	≤30	PASS

6.5. Test graphs




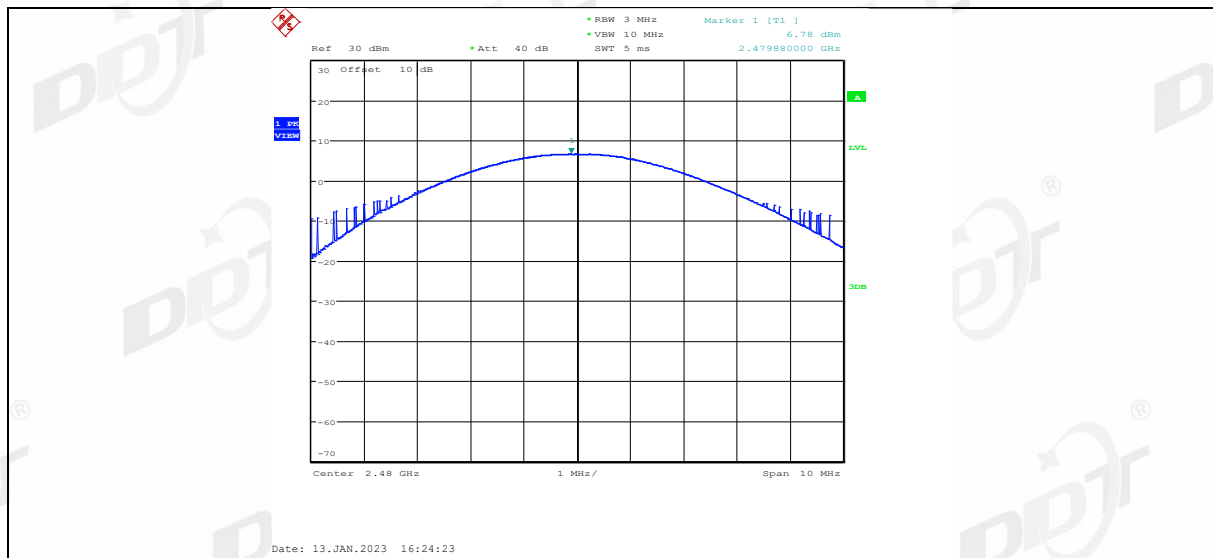


2DH5 Ant1 2402

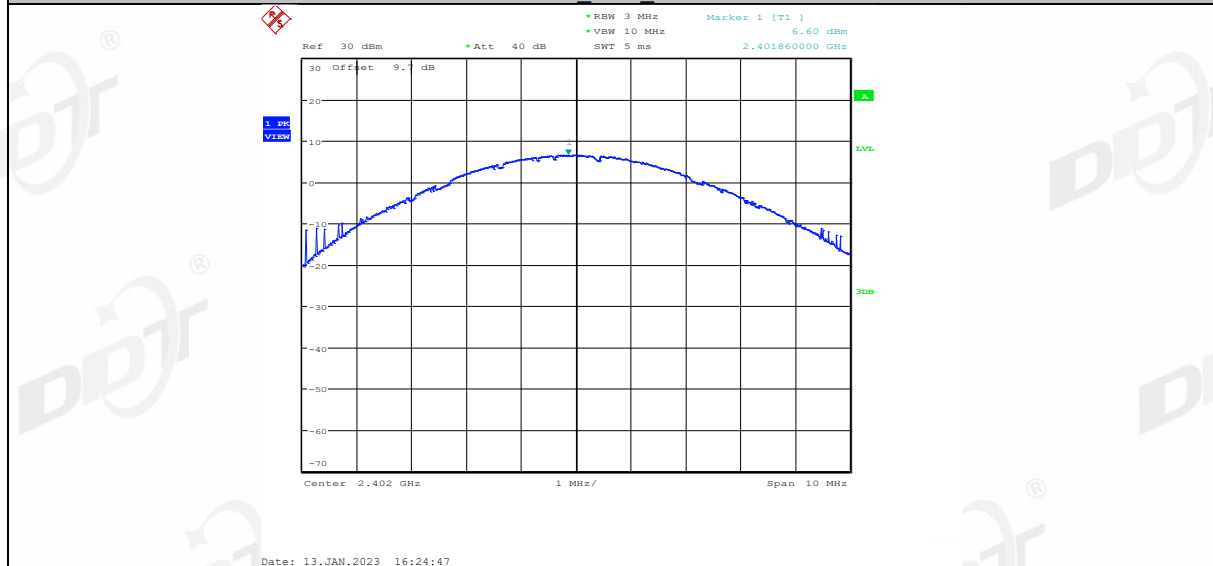


2DH5 Ant1 2441

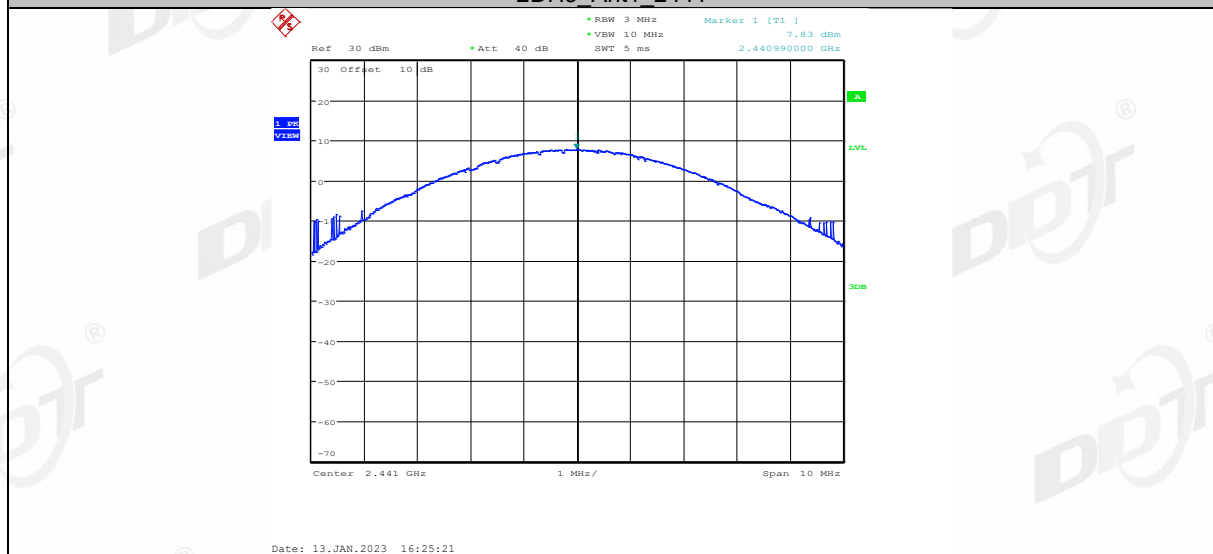


2DH5 Ant1 2480

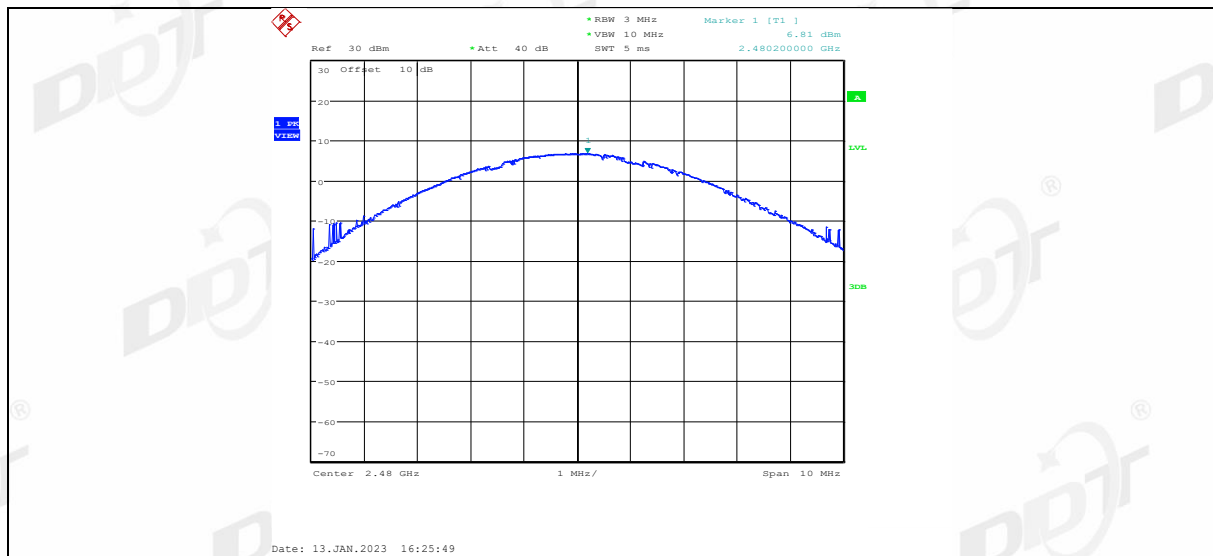


3DH5_Ant1_2402

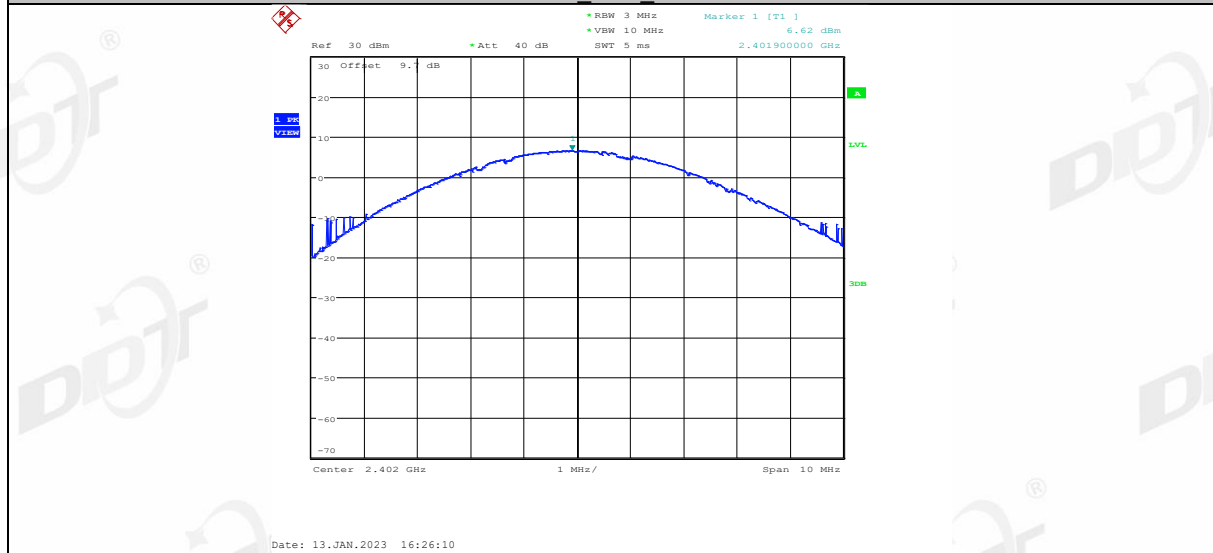

3DH5_Ant1_2441

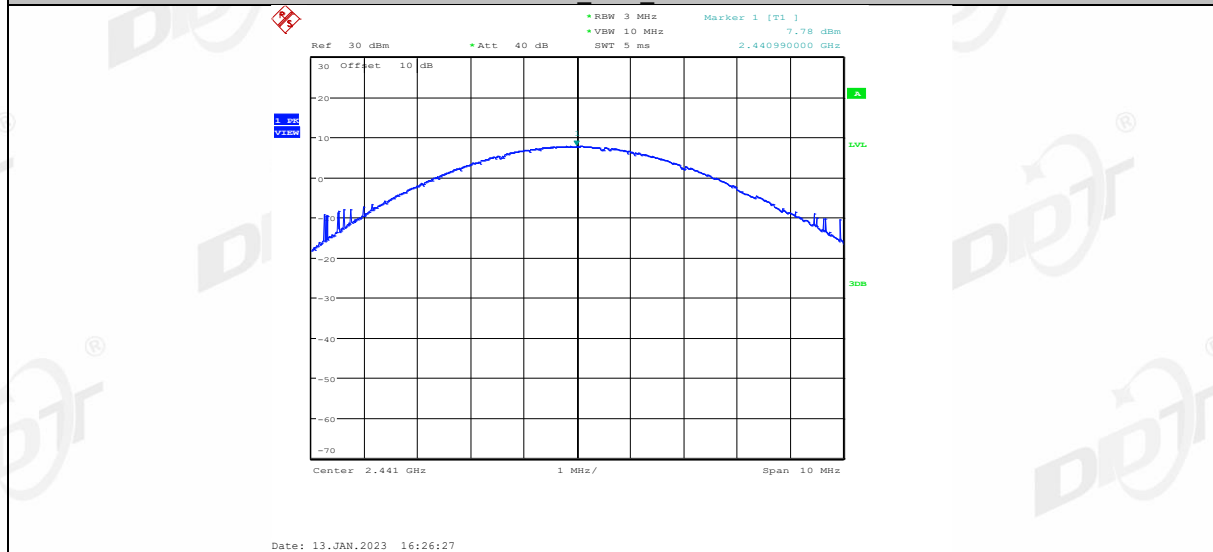


3DH5_Ant1_2480

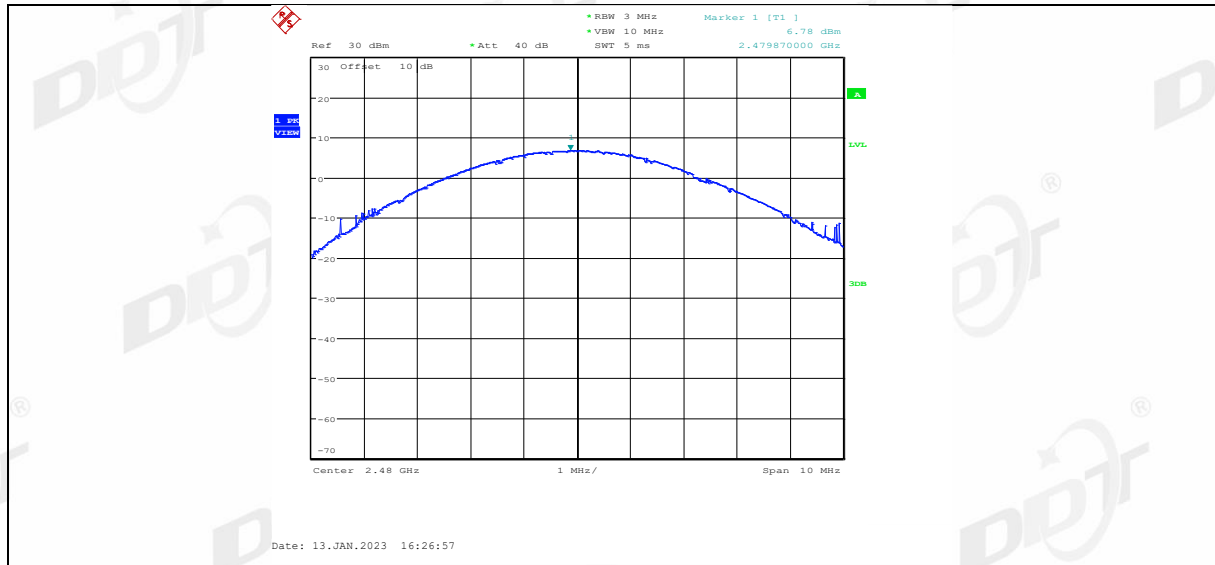

7. Carrier Frequency Separation

7.1. Block diagram of test setup

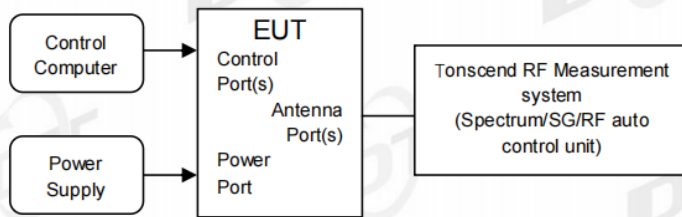

7.2. Limits

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

7.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 7.8.2.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:


RBW:	approximately 30% of the channel spacing
VBW:	$VBW \geq RBW$.
Span:	Wide enough to capture the peaks of two adjacent channels.
Detector Mode:	peak
Sweep time:	auto
Trace mode:	max hold

- (5) Use the marker-delta function to determine the separation between the peaks of the adjacent channels and record the results in the report.

7.4. Test result


Test Mode	Antenna	Frequency [MHz]	Result [MHz]	Limit [MHz]	Verdict
DH5	Ant1	Hop	0.987	≥ 0.640	PASS
2DH5	Ant1	Hop	1.006	≥ 0.860	PASS
3DH5	Ant1	Hop	1.01	≥ 0.847	PASS

7.5. Test graphs

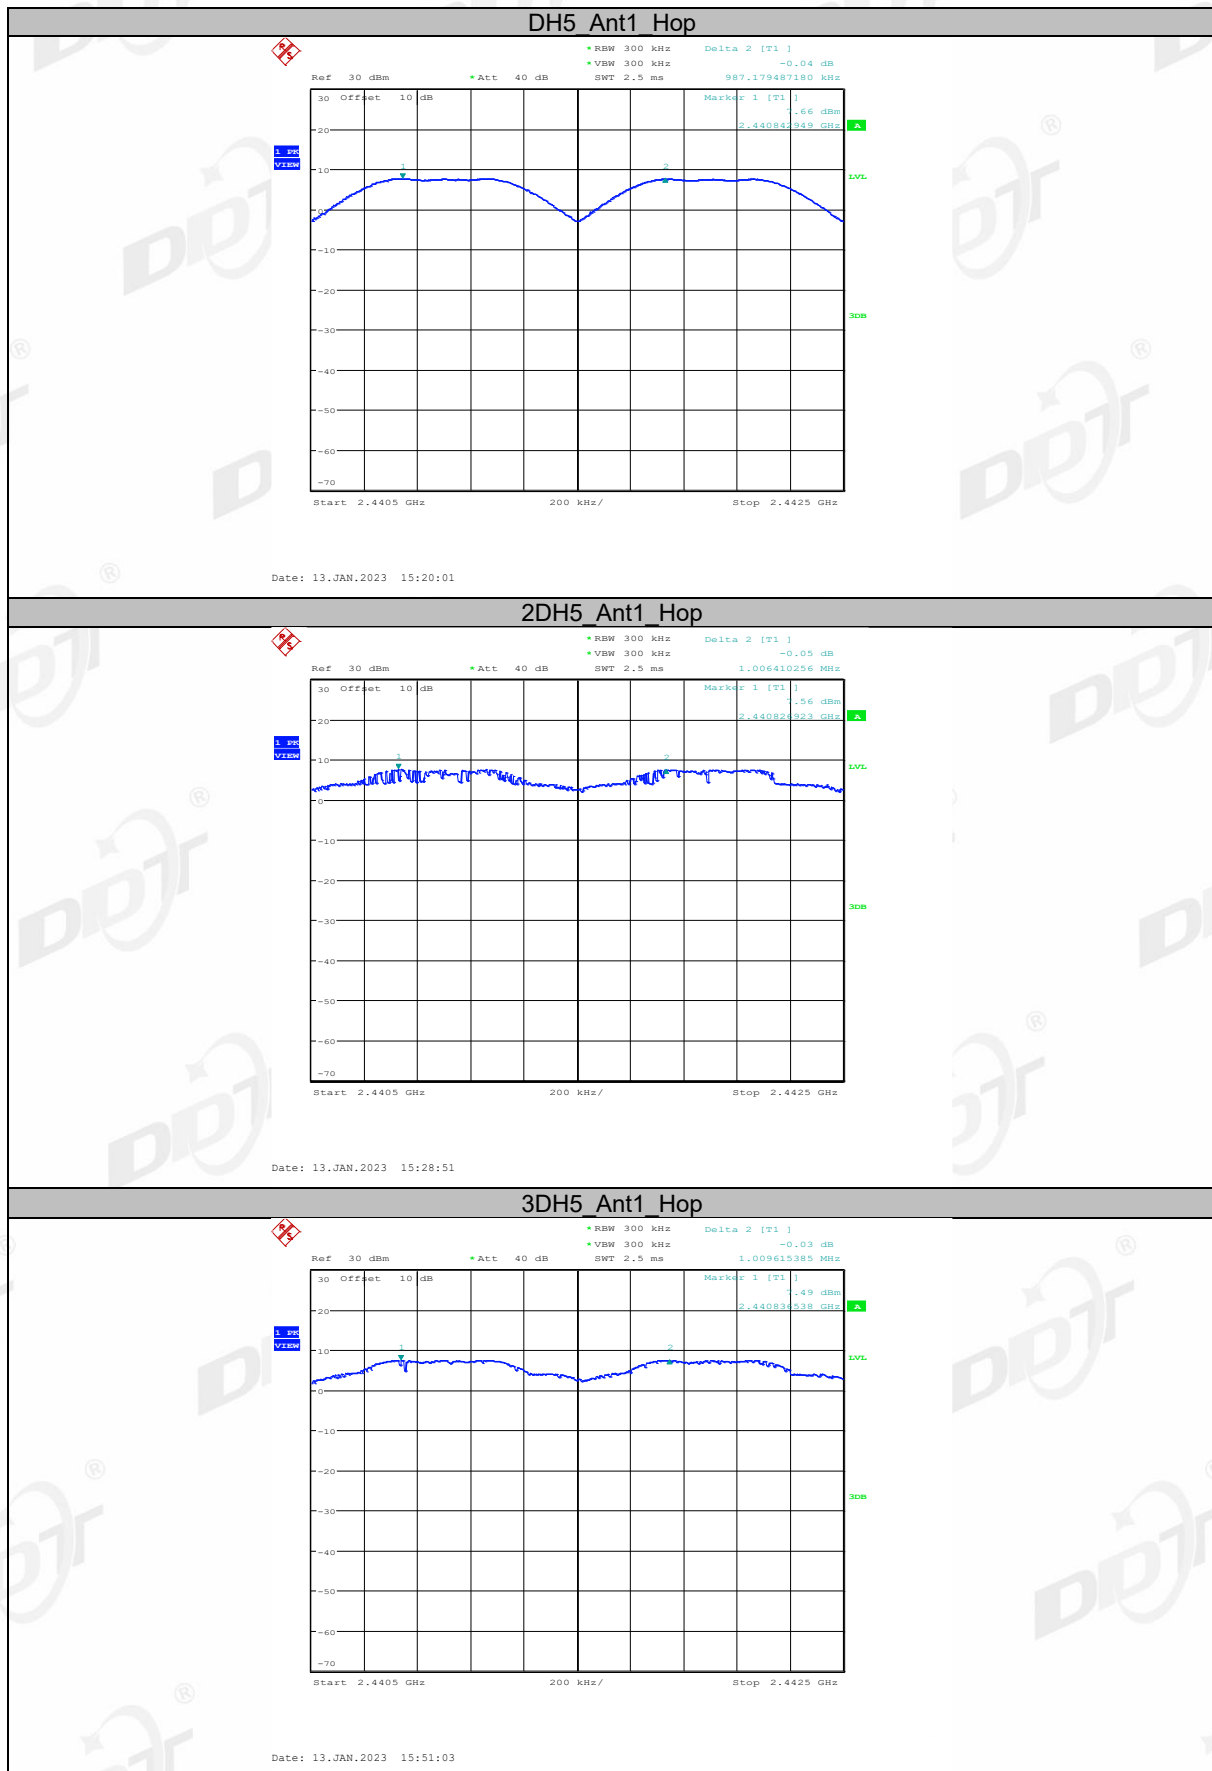

8. Dwell Time

8.1. Block diagram of test setup

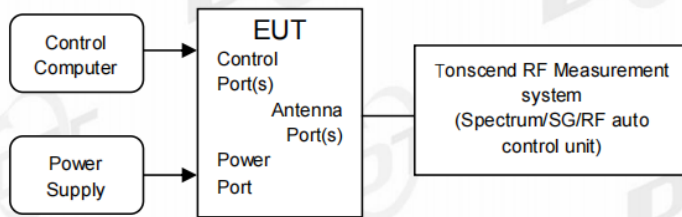

8.2. Limits

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.



8.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 7.8.4.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:


RBW:	$\leq$ channel spacing and where possible RBW should be set $\gg 1/T$
VBW:	$VBW \geq RBW$.
Span:	Zero span, centered on a hopping channel.
Detector Mode:	peak
Sweep time:	auto
Trace mode:	max hold




Measure and record the results in the report.

- (5) The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$
- (6) Measure the hopping number and on time of each pulse with spectrum analyzer in zero span set, and calculate dwell time with formula Dwell time = total hops * pulse's on time.

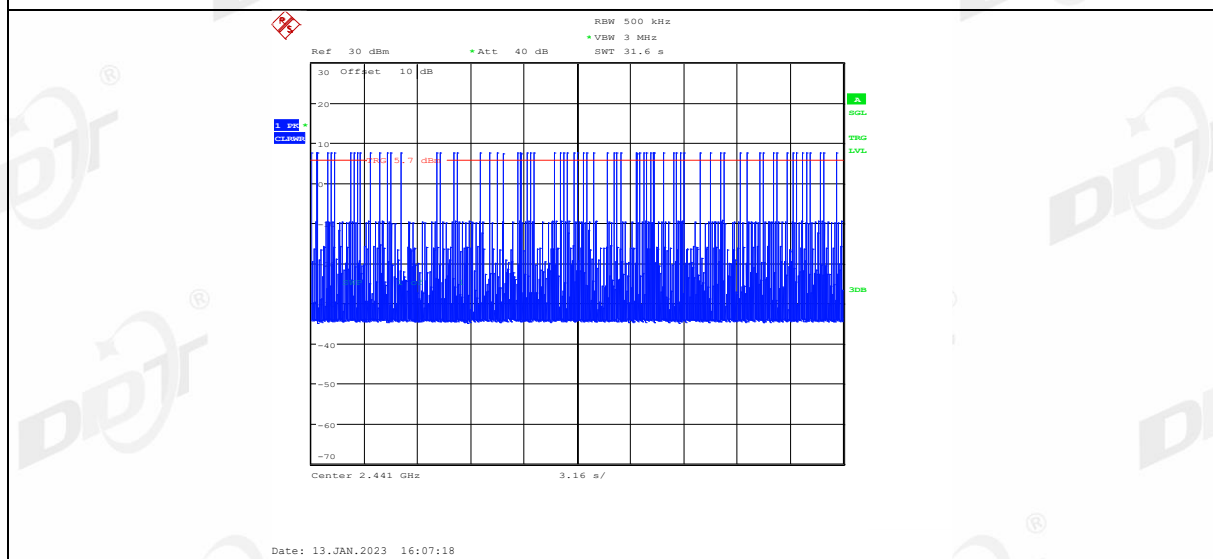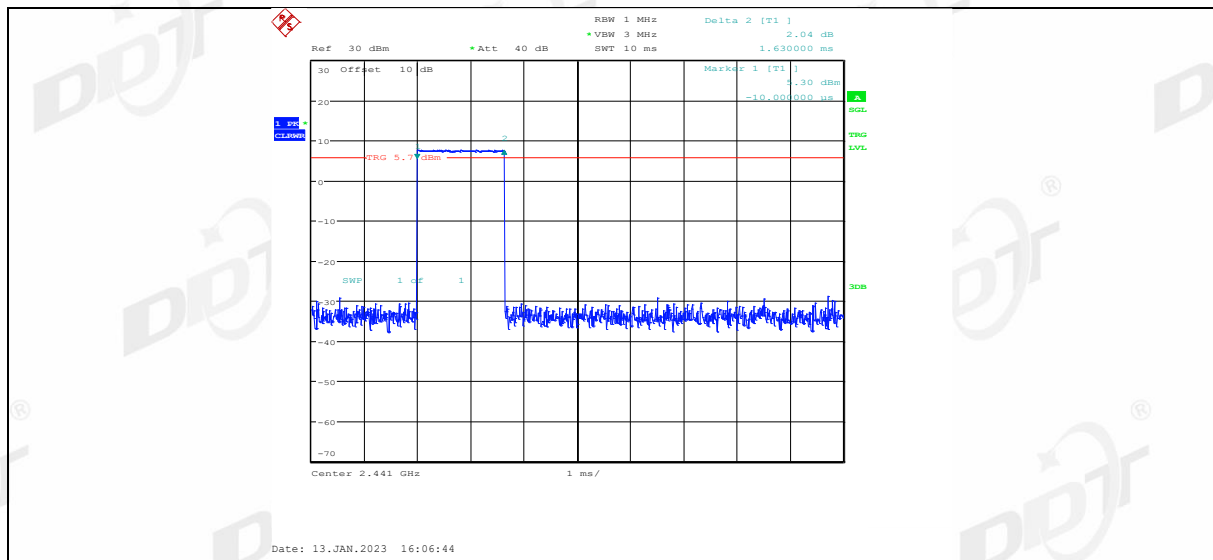


DH5_Ant1_Hop

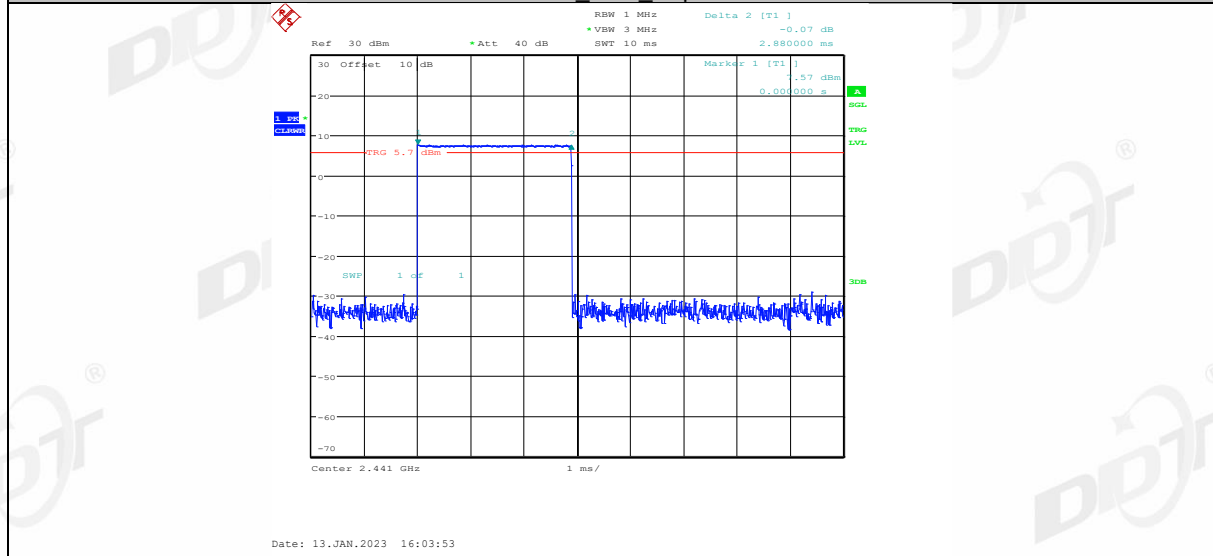

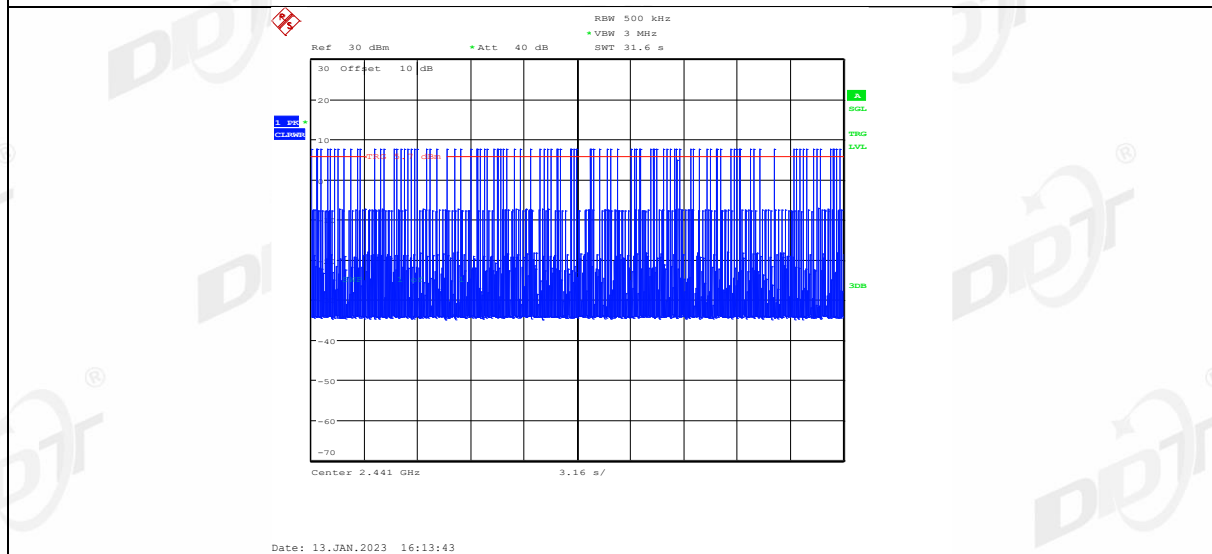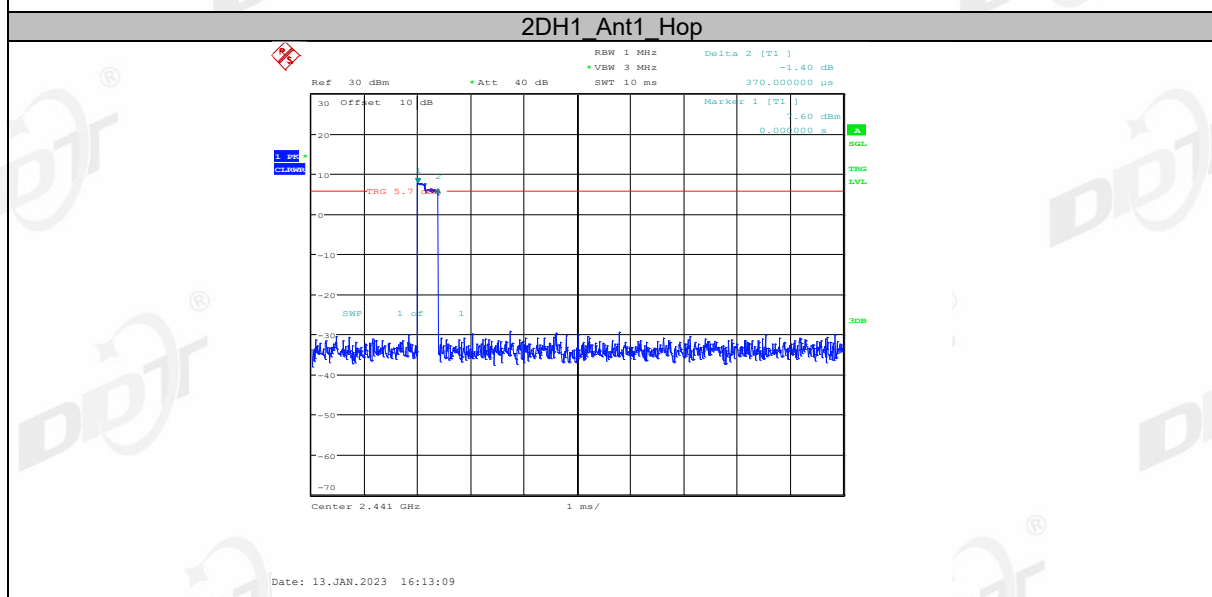
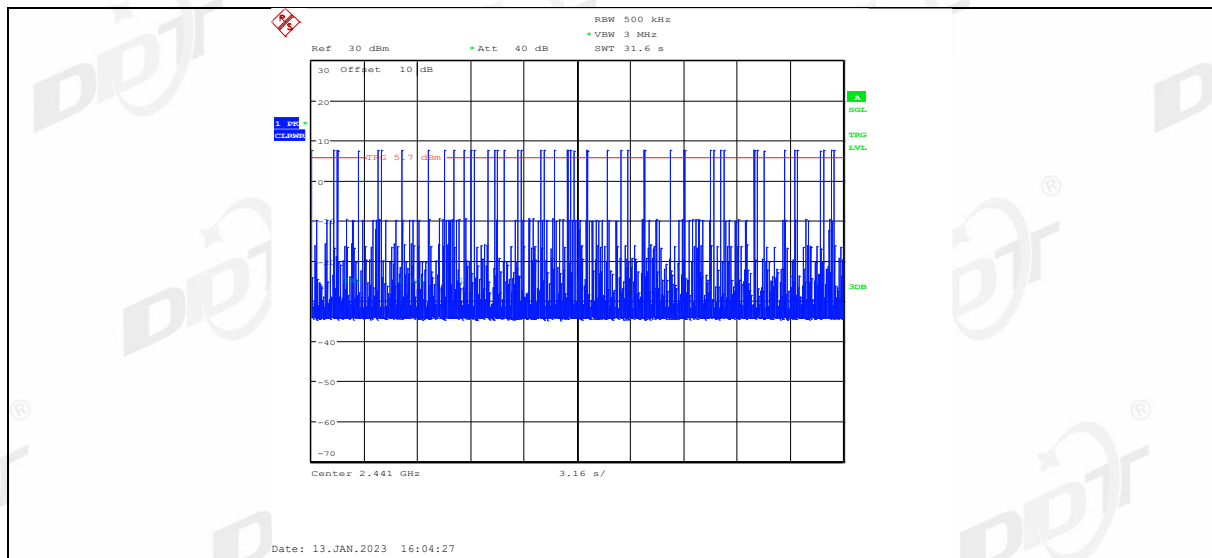


2DH3 Ant1 Hop



7.4

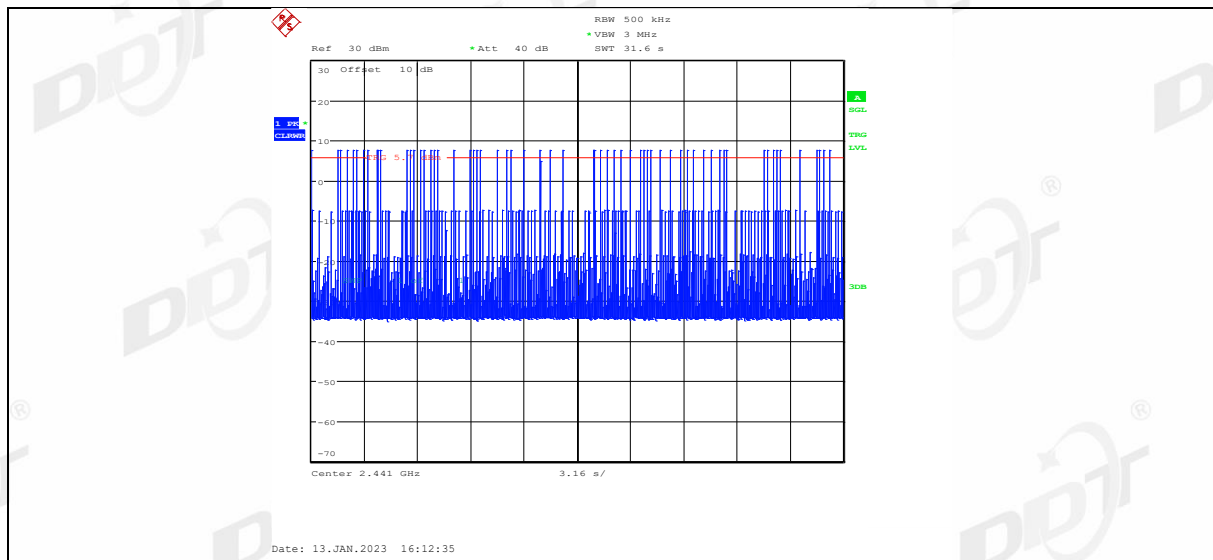


2DH5 Ant1 Hop

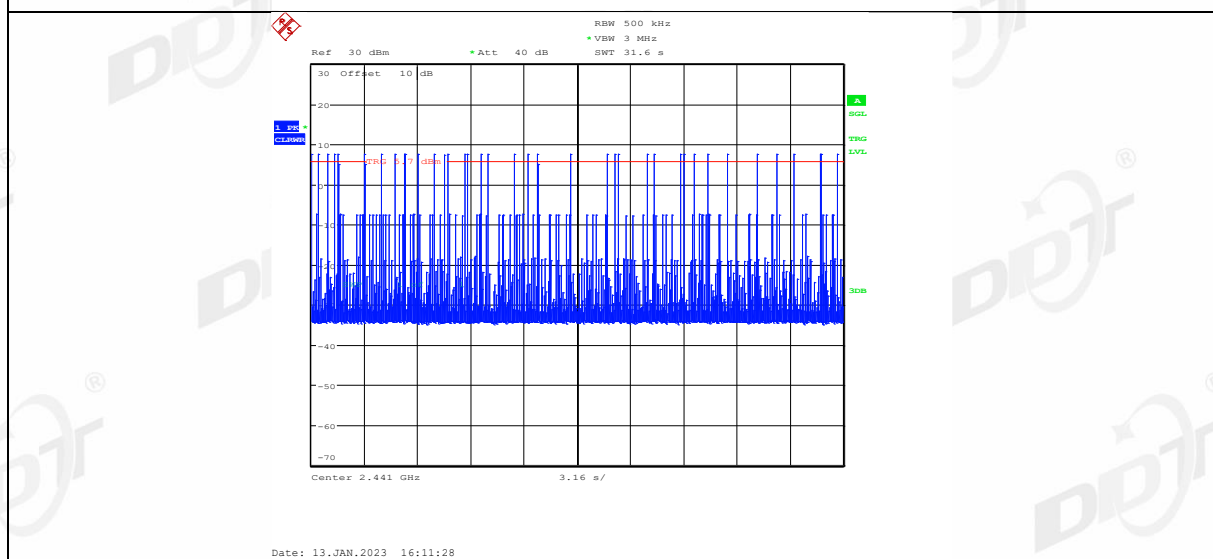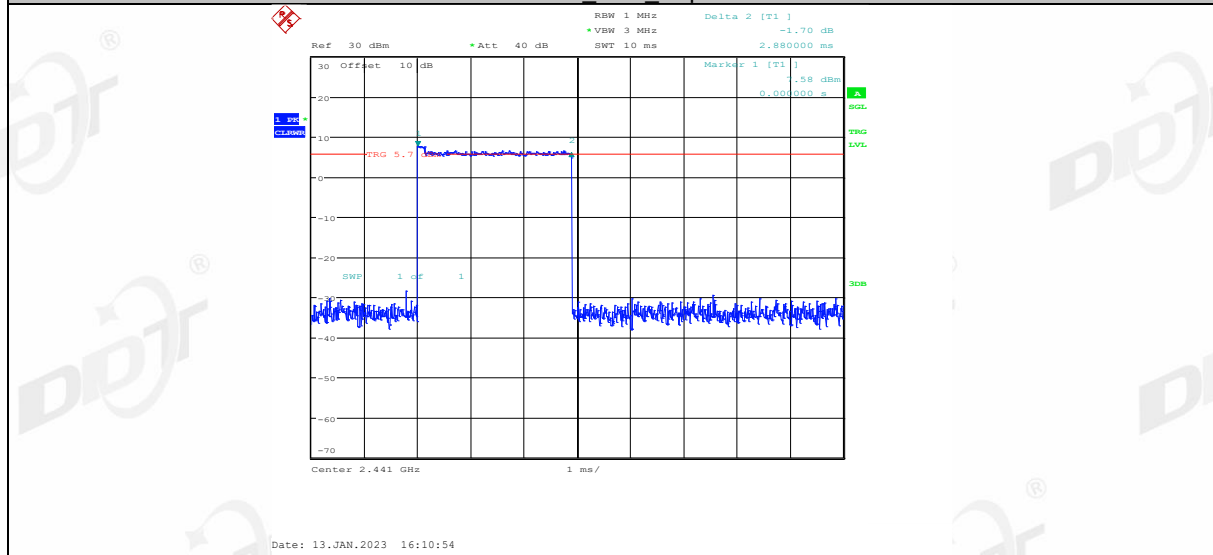


3DH1 Ant1 Hop

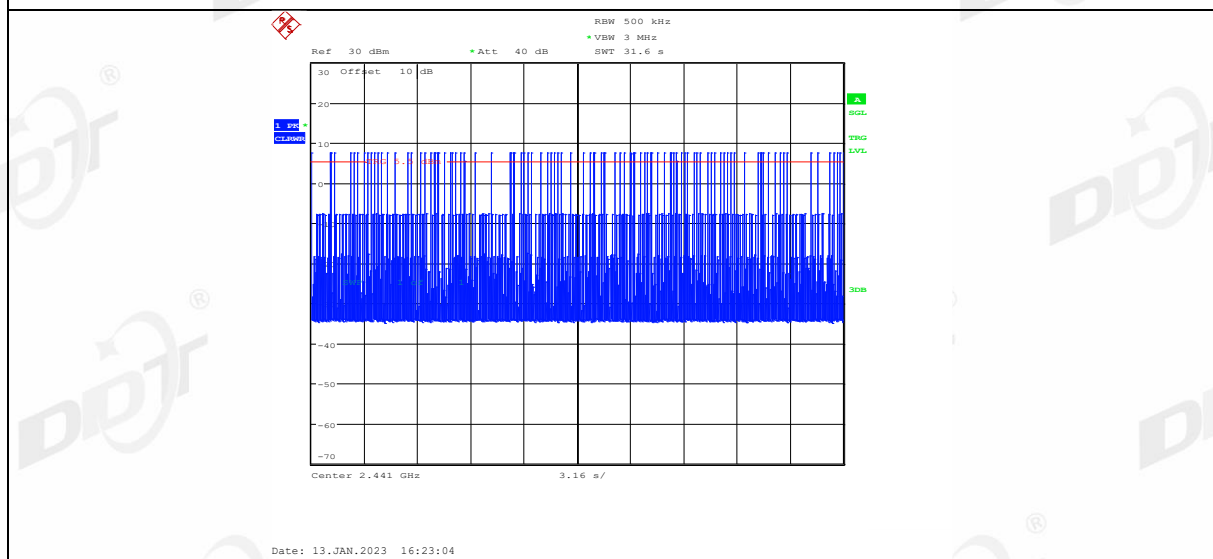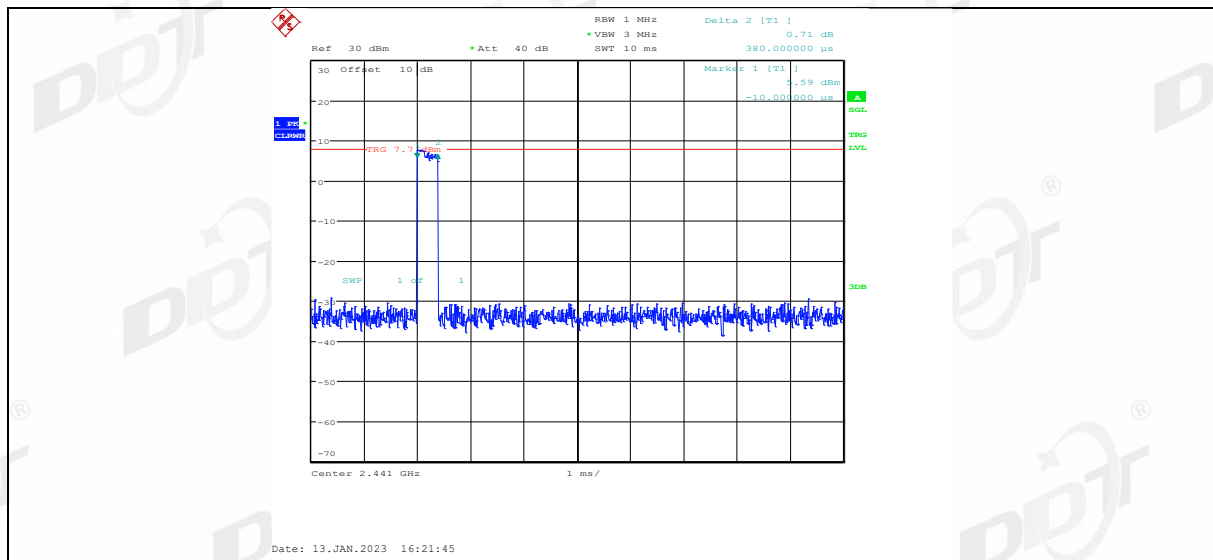


3DH3_Ant1_Hop

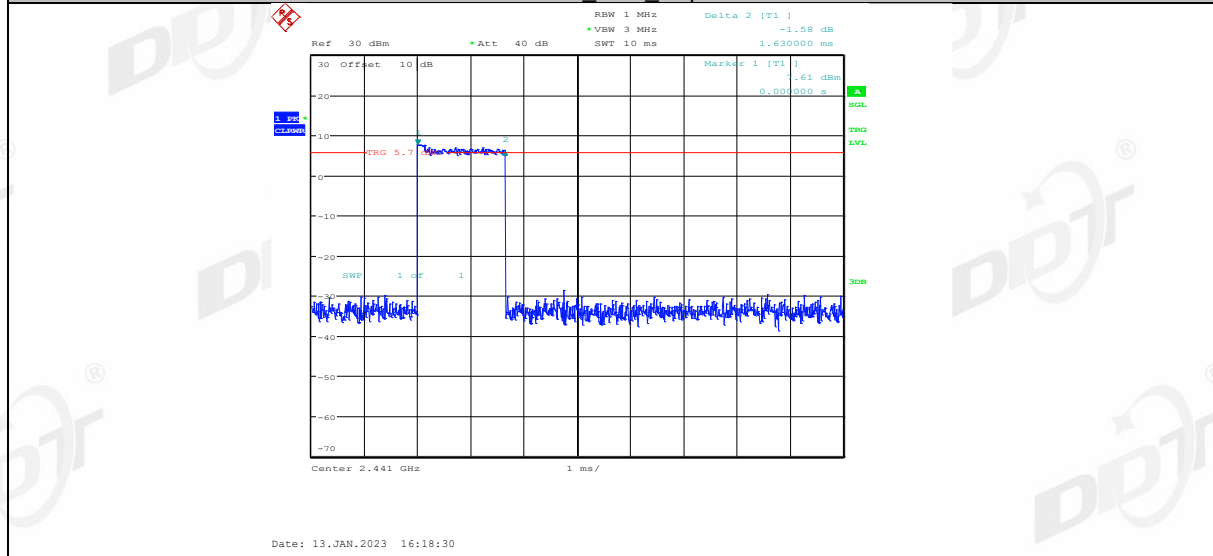

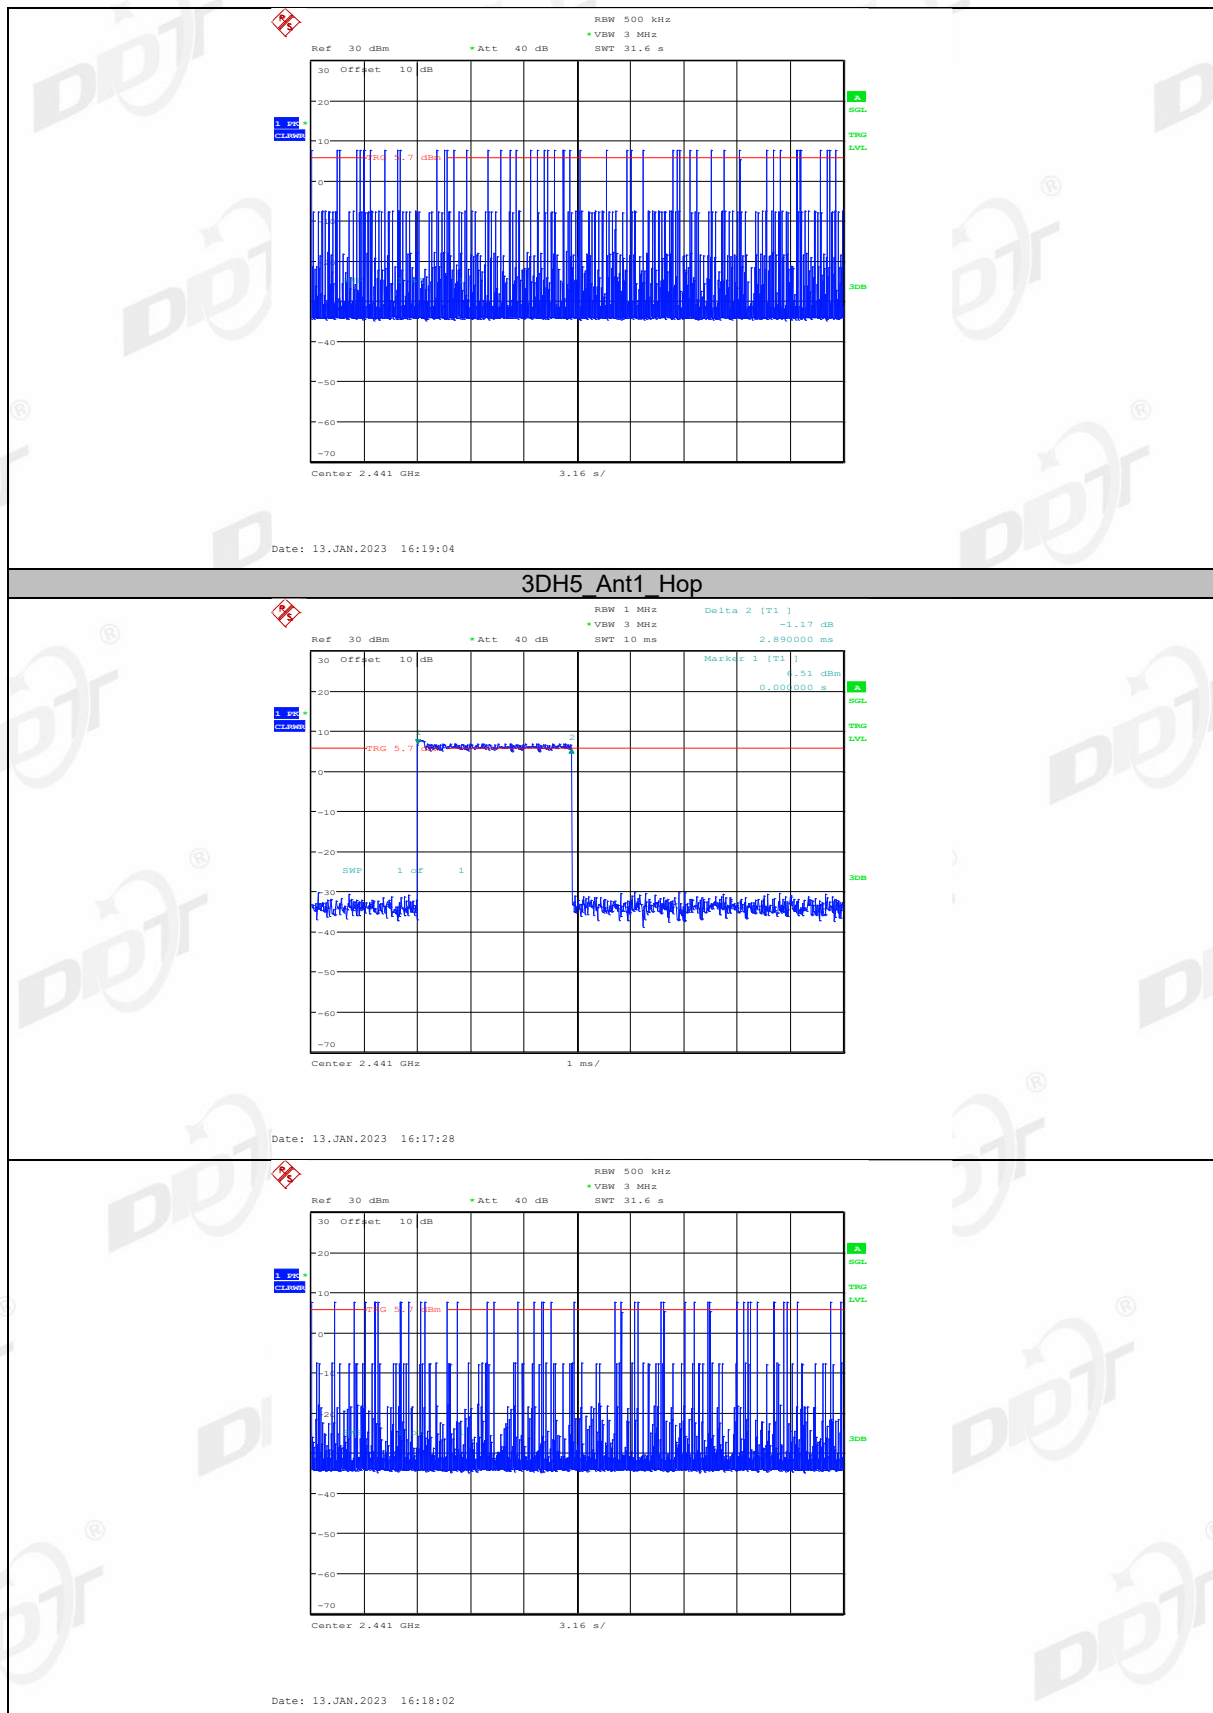

9. Number of Hopping Channel

9.1. Block diagram of test setup

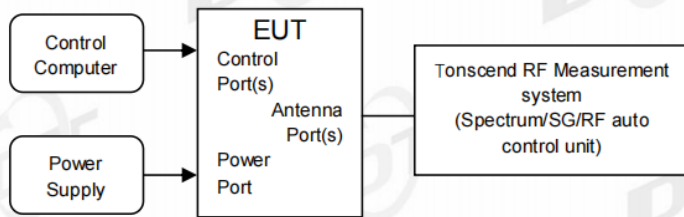

9.2. Limits

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

9.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 7.8.3.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:

RBW:	RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
VBW:	VBW $\geq$ RBW.
Span:	The frequency band of operation
Detector Mode:	peak
Sweep time:	auto
Trace mode:	max hold


Measure and record the results in the report.

Measure the hopping number and record the results in the report.

9.4. Test result


Test Mode	Antenna	Frequency [MHz]	Result [Num]	Limit [Num]	Verdict
DH5	Ant1	Hop	79	≥ 15	PASS
2DH5	Ant1	Hop	79	≥ 15	PASS
3DH5	Ant1	Hop	79	≥ 15	PASS

9.5. Test graphs

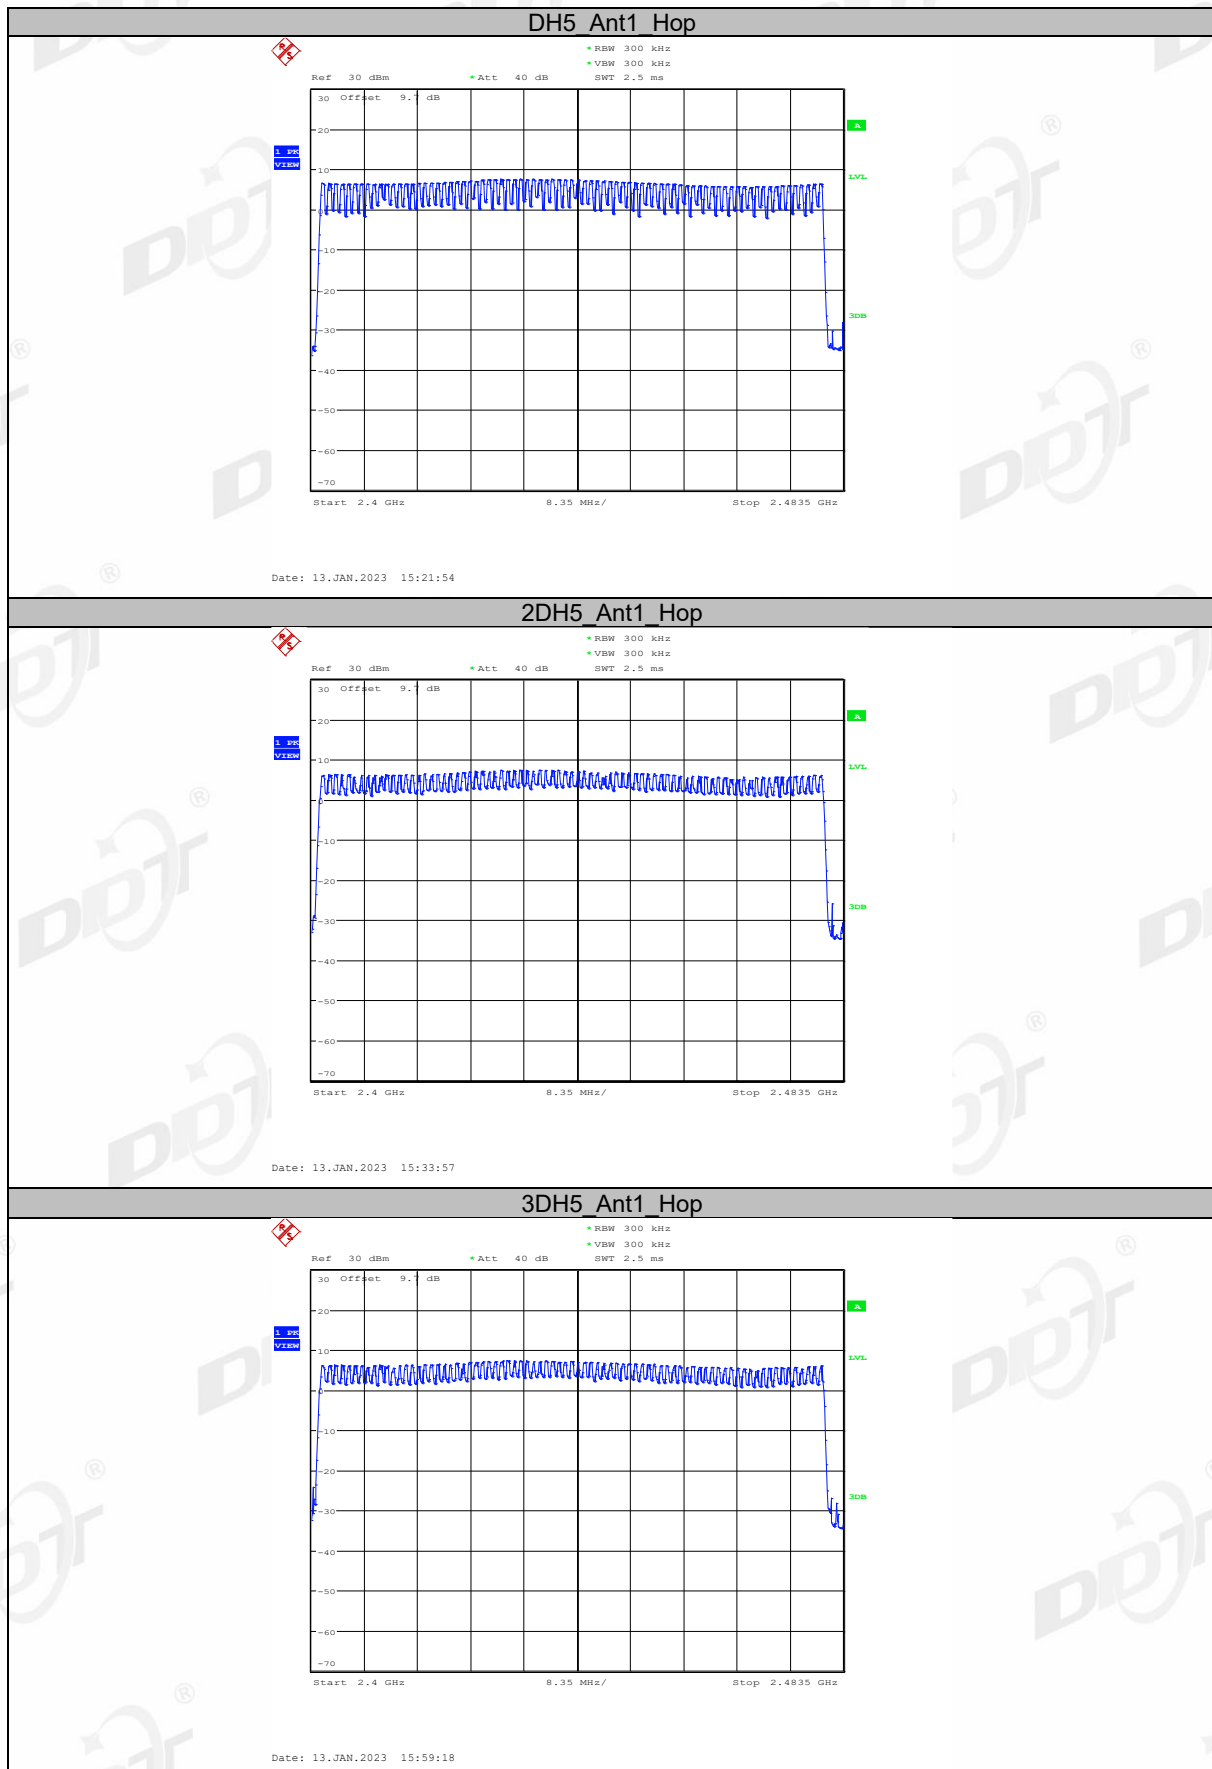

10. Band Edge Compliance (Conducted Method)

10.1. Block diagram of test setup

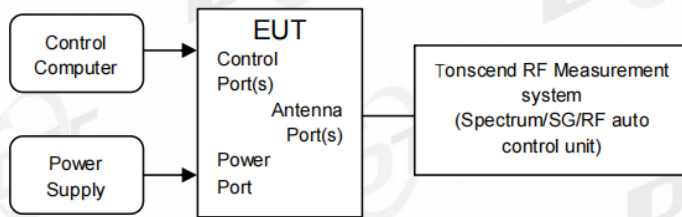

10.2. Limit

All restriction band should comply with 15.209, other emission should be at least 20dB below the fundamental.

10.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold


(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.


(4) Then mark the maximum amplitude of all unwanted emissions outside of the authorized frequency band.


10.4. Test result

Mode	Freq. (MHz)	Verdict
GFSK	Hopping off 2402	Pass
	Hopping off 2480	Pass
	Hopping on	Pass
$\pi/4$ -DQPSK	Hopping off 2402	Pass
	Hopping off 2480	Pass
	Hopping on	Pass
8DPSK	Hopping off 2402	Pass
	Hopping off 2480	Pass
	Hopping on	Pass


10.5. Test graphs

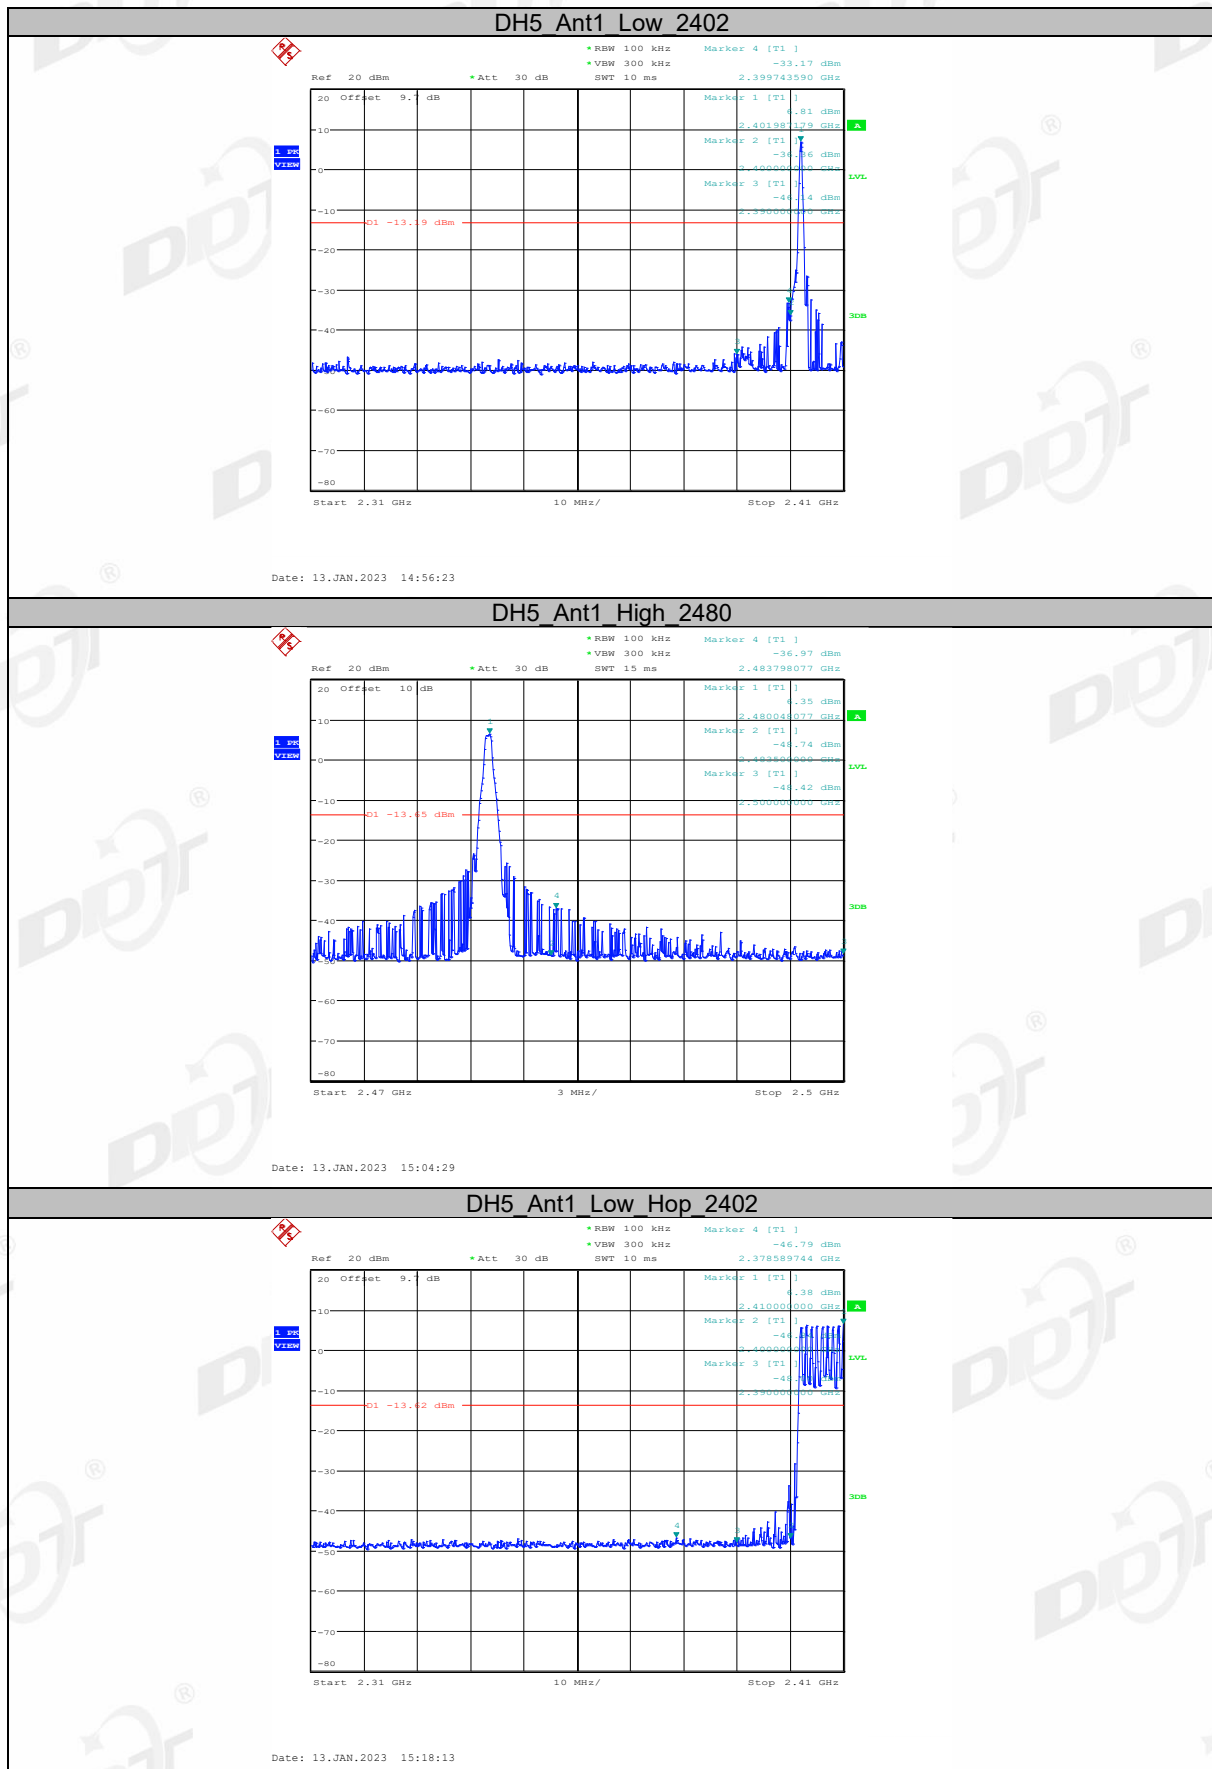

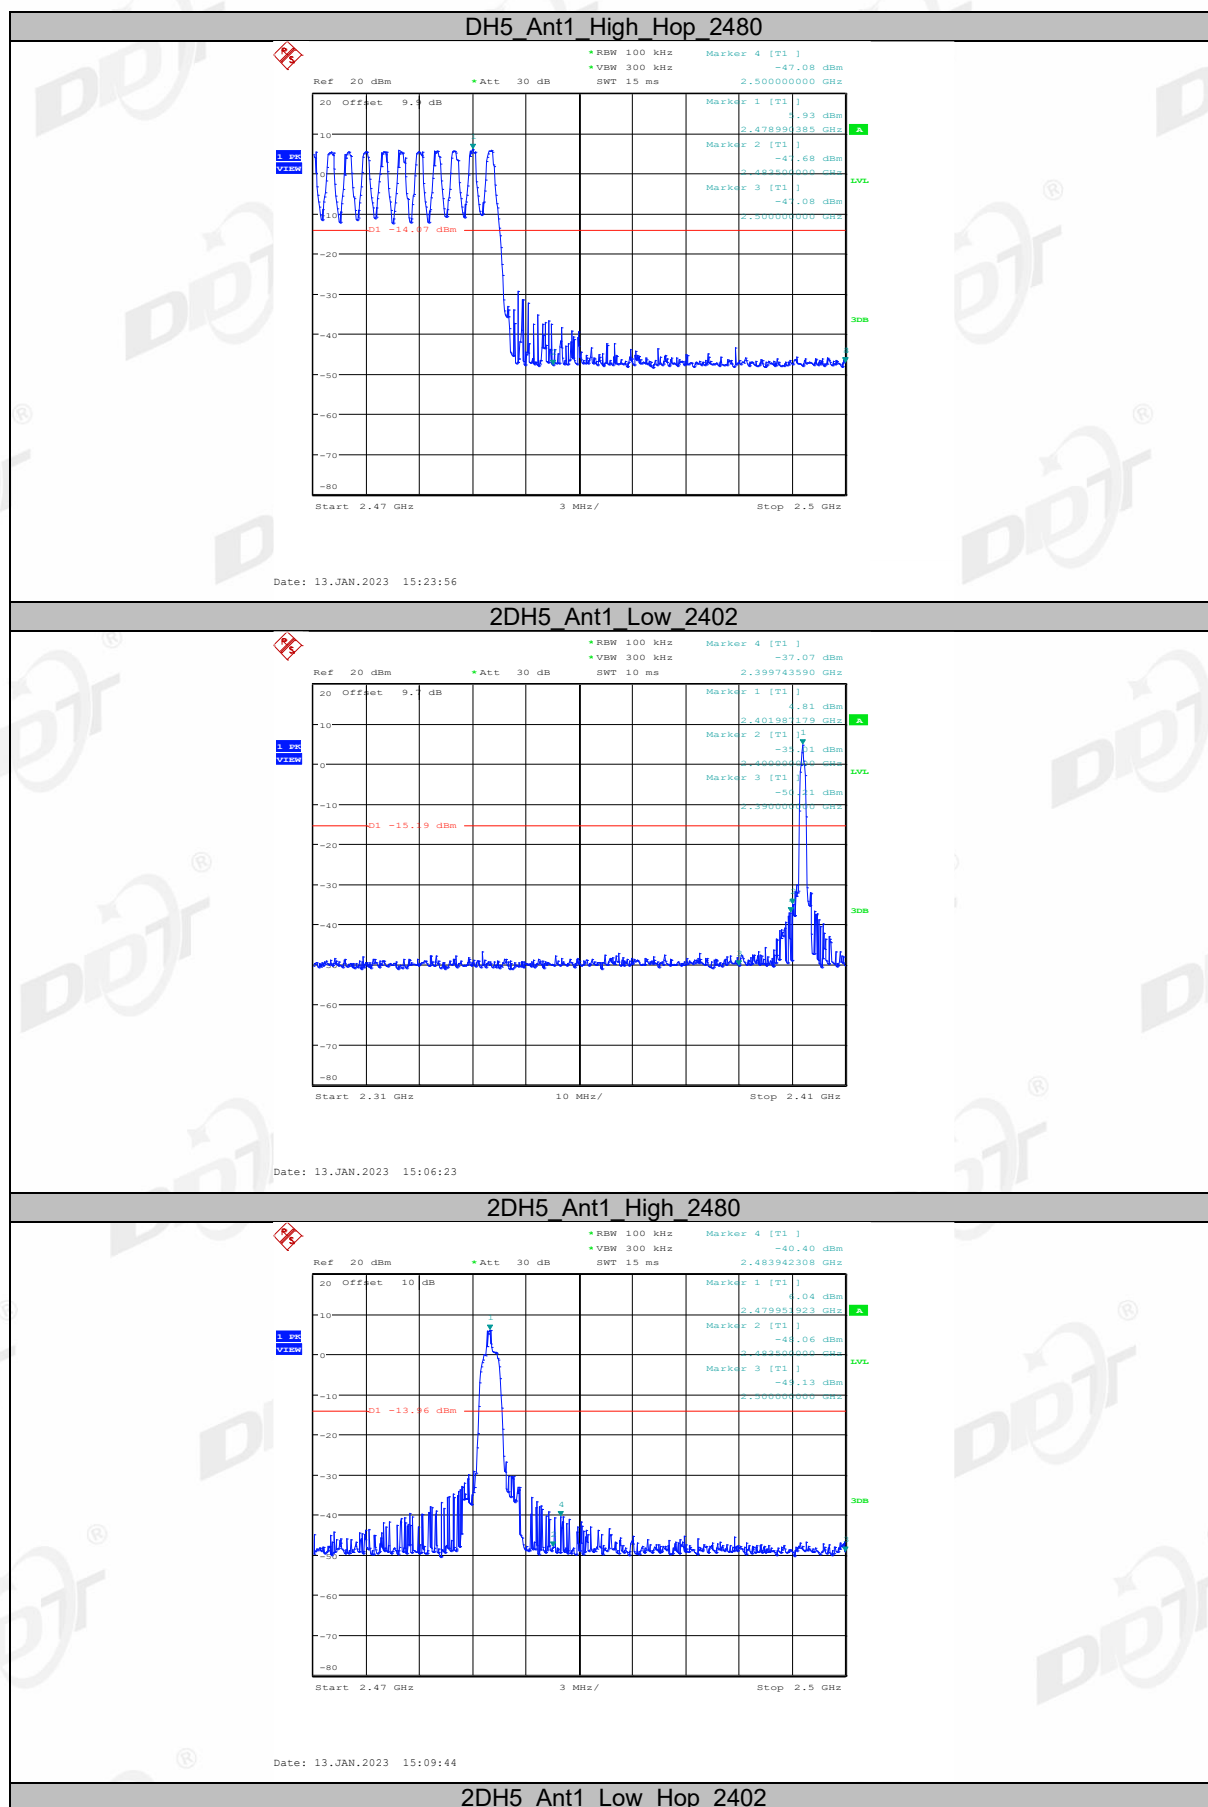


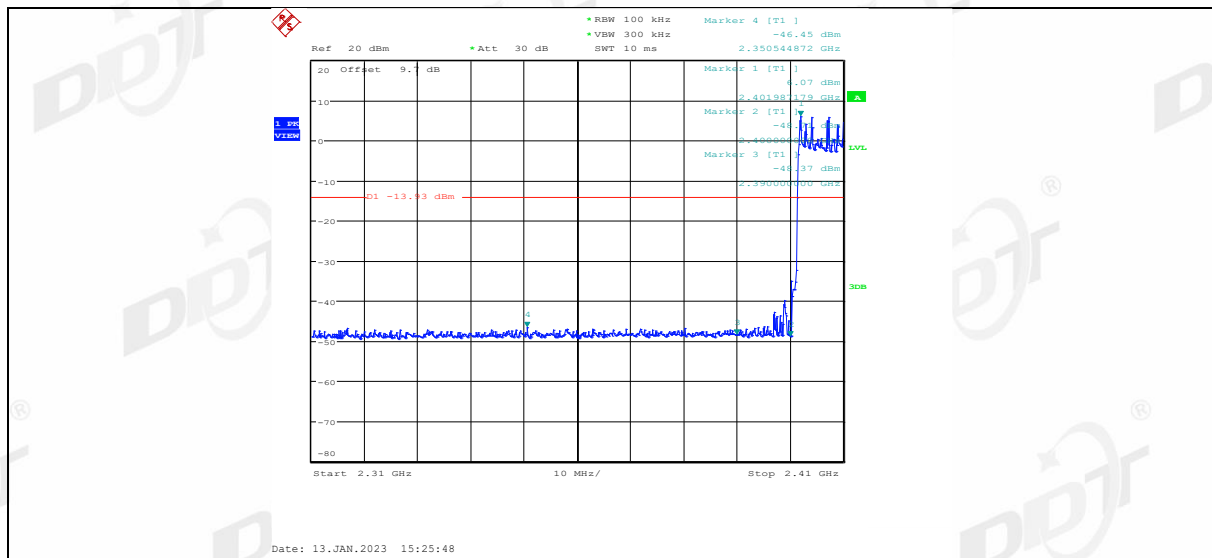




2DH5_Ant1_High_Hop_2480

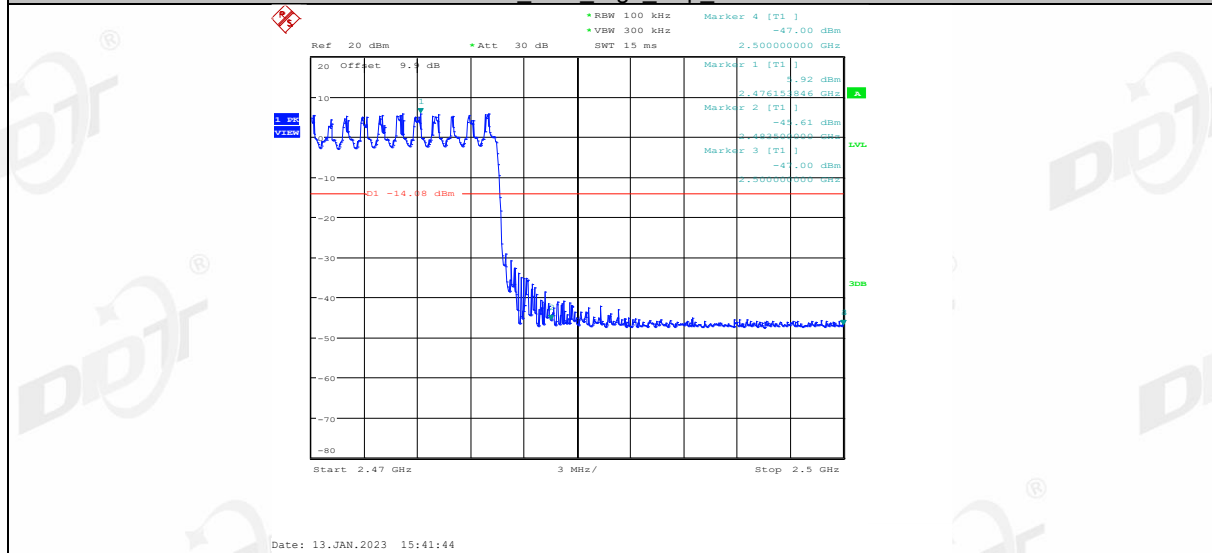

3DH5_Ant1_Low_2402

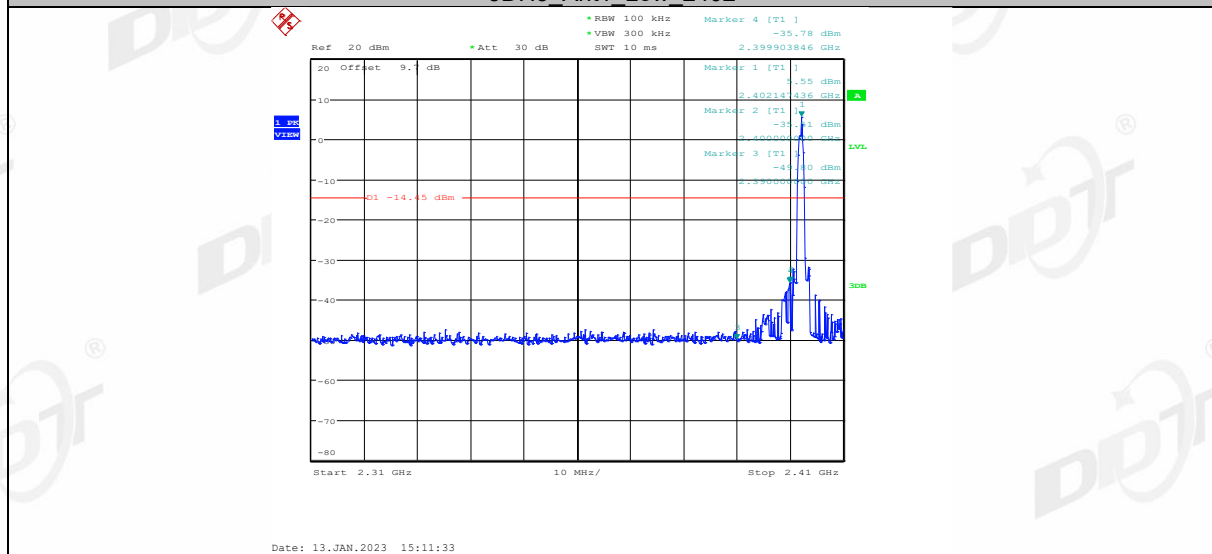


3DH5_Ant1_High_2480

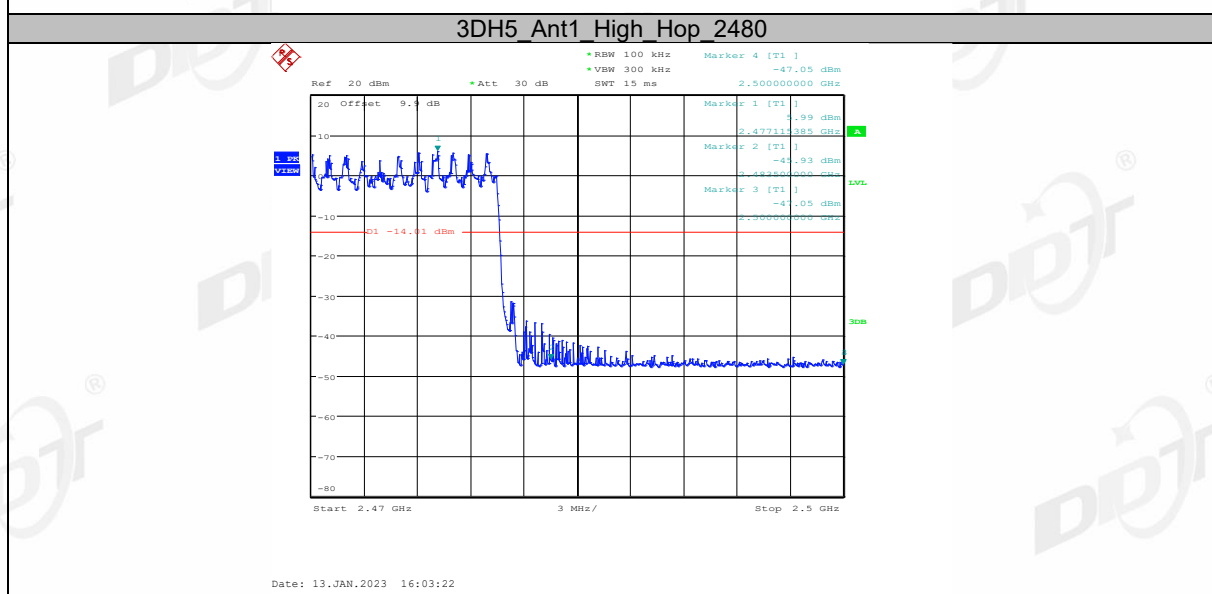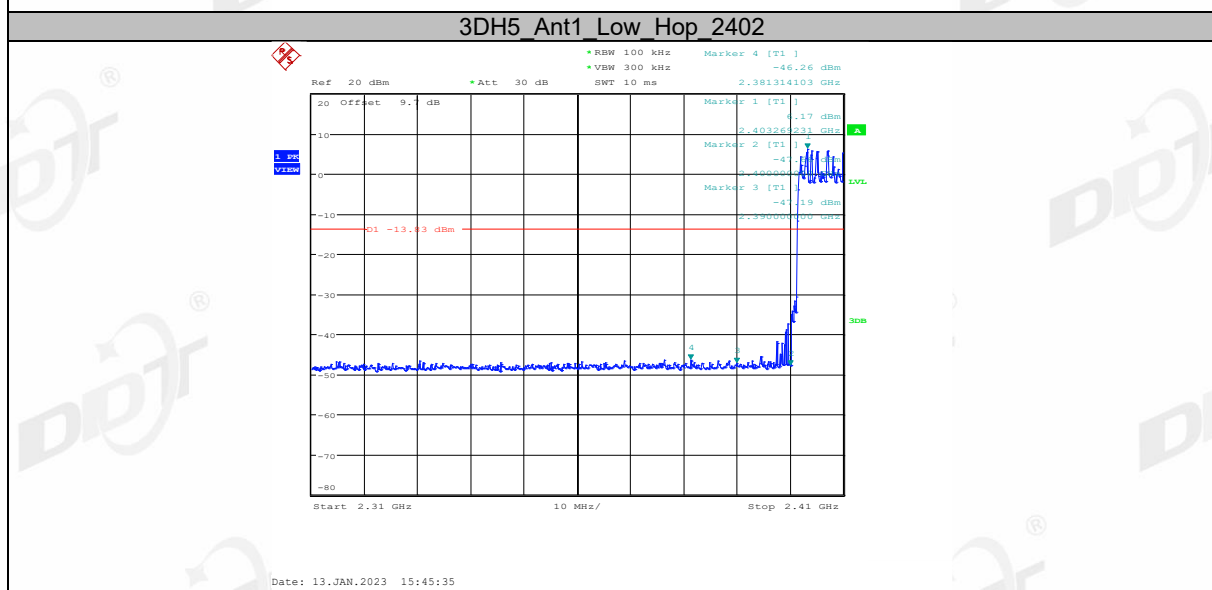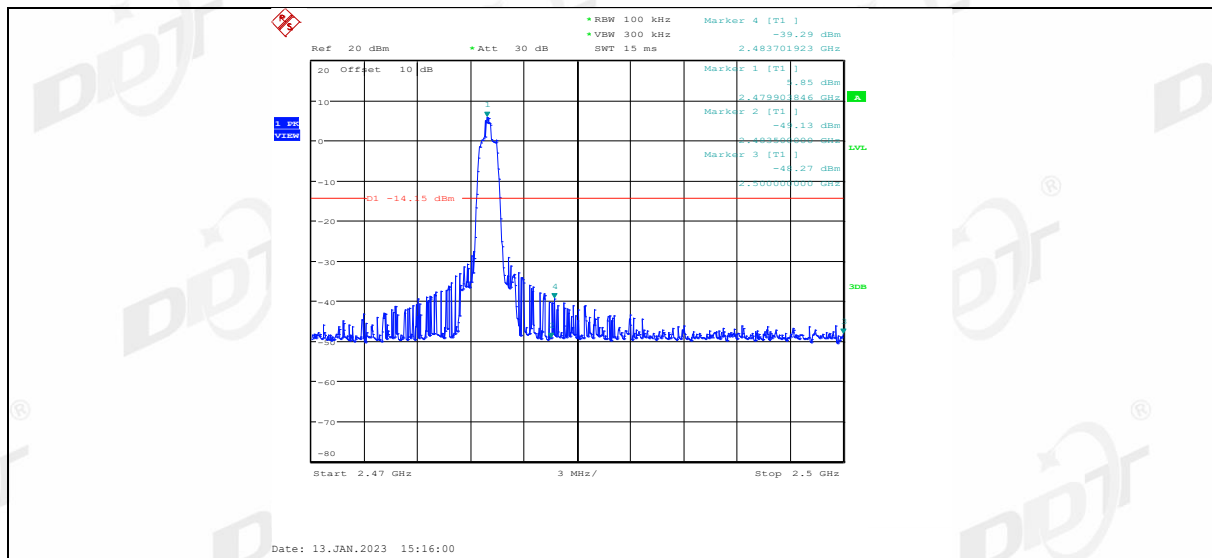

11. RF Conducted Spurious Emissions

11.1. Block diagram of test setup

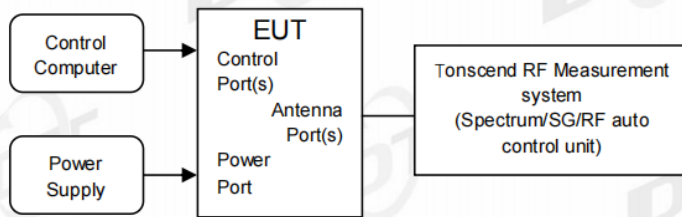

11.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

11.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

Center frequency	Test frequency
RBW:	100 kHz
VBW:	300 kHz
Span	Wide enough to capture the peak level of the in-band emission
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Number of measurement points	$\geq \text{span/RBW}$
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold


Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band

11.4. Test result


Mode	Freq. (MHz)	Verdict
GFSK	Hopping off 2402	Pass
	Hopping off 2441	Pass
	Hopping off 2480	Pass
$\pi/4$ -DQPSK	Hopping off 2402	Pass
	Hopping off 2441	Pass
	Hopping off 2480	Pass
8DPSK	Hopping off 2402	Pass
	Hopping off 2441	Pass
	Hopping off 2480	Pass

11.5. Test graphs




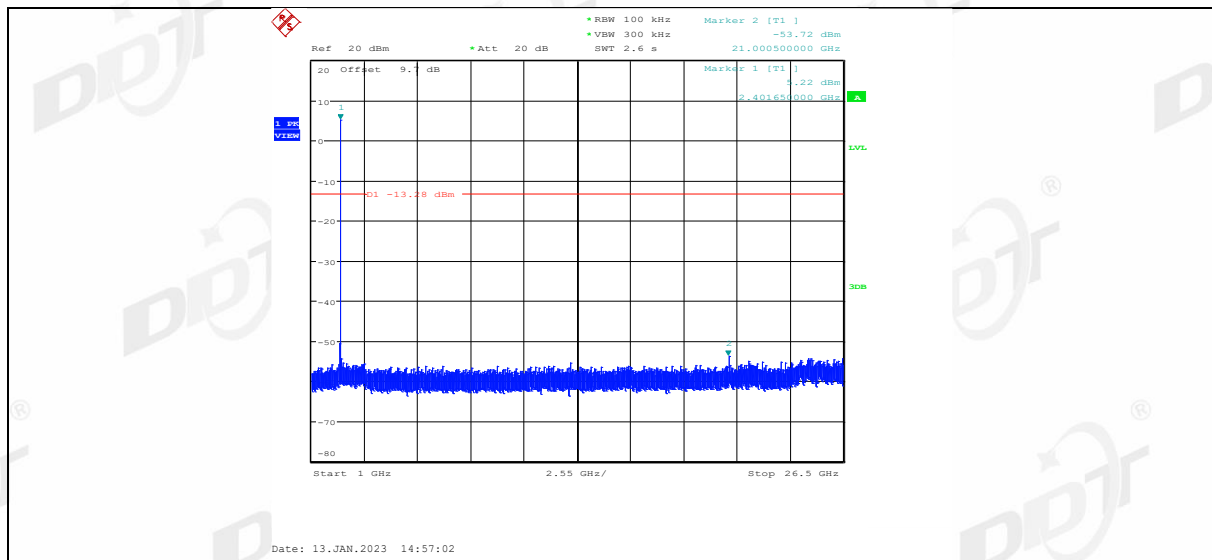


DH5_Ant1_2441_0~Reference

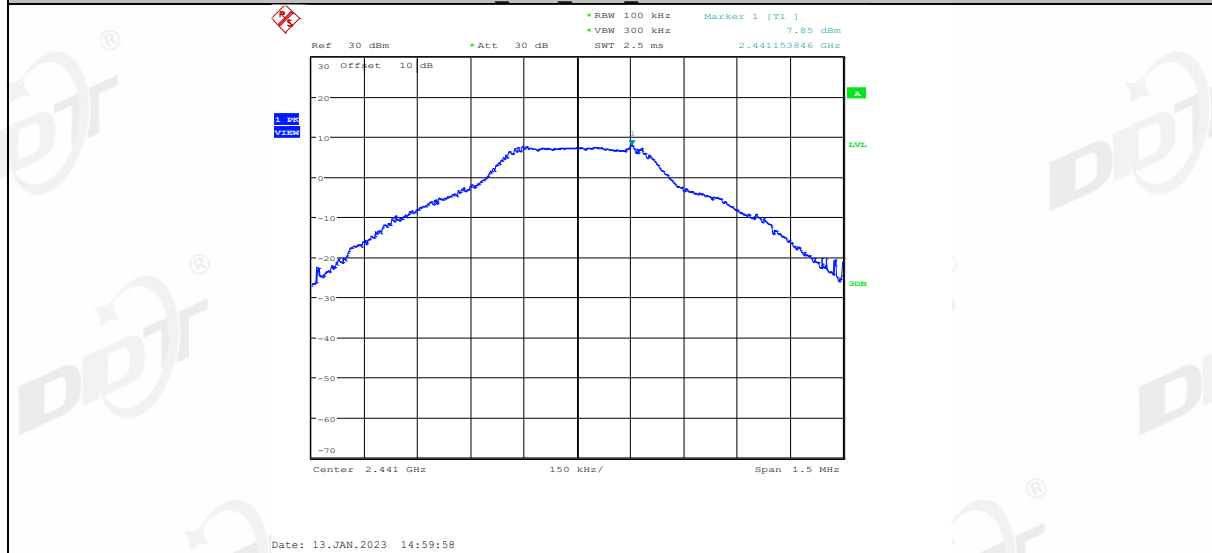


DH5_Ant1_2441_30~1000

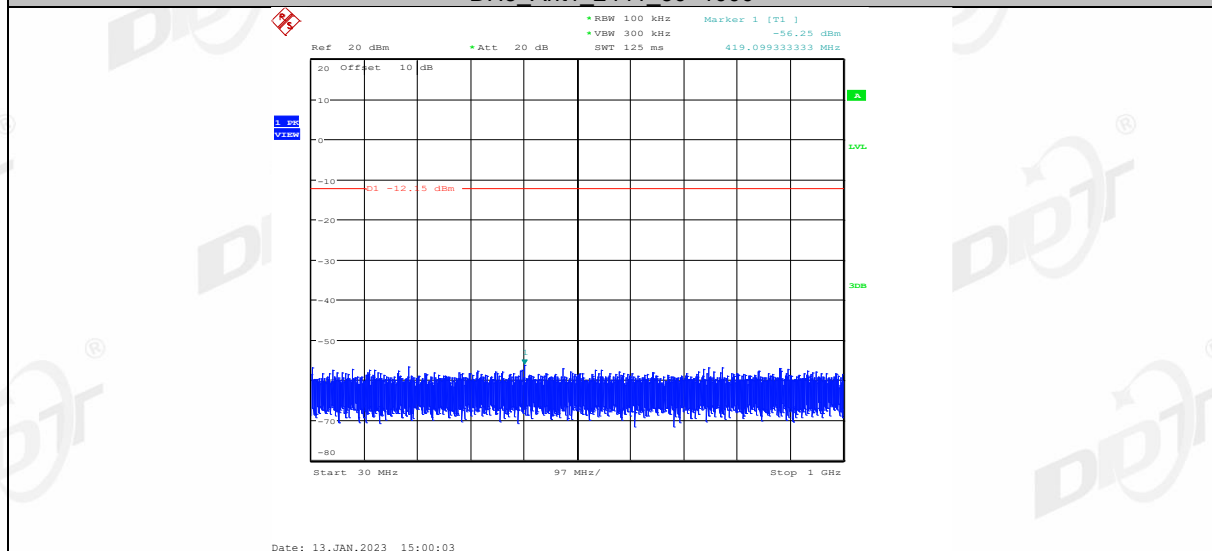


DH5_Ant1_2441_1000~26500

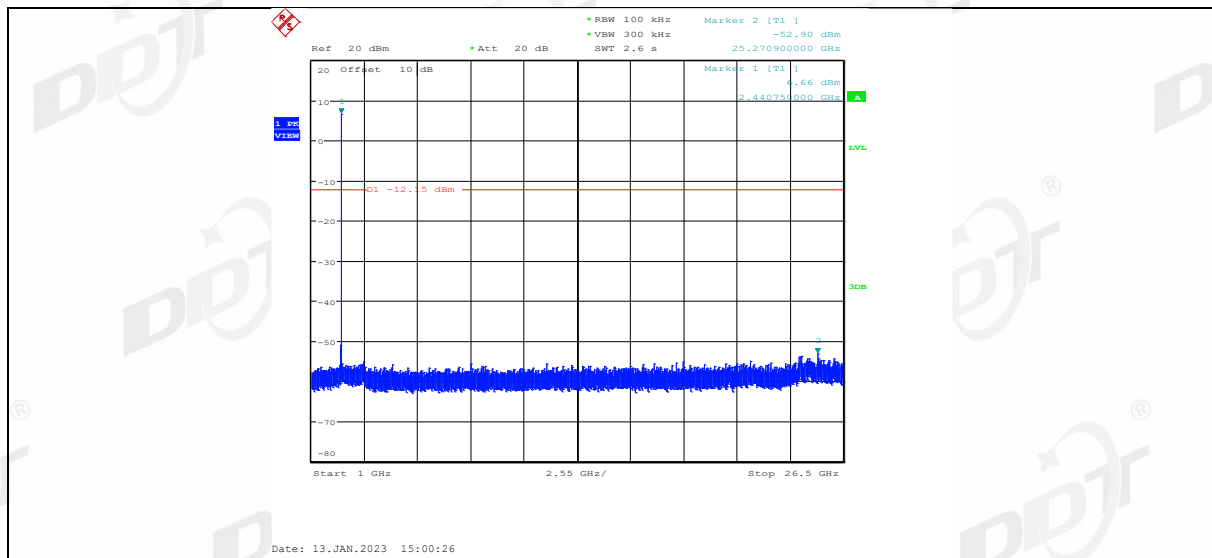


DH5_Ant1_2480_0~Reference

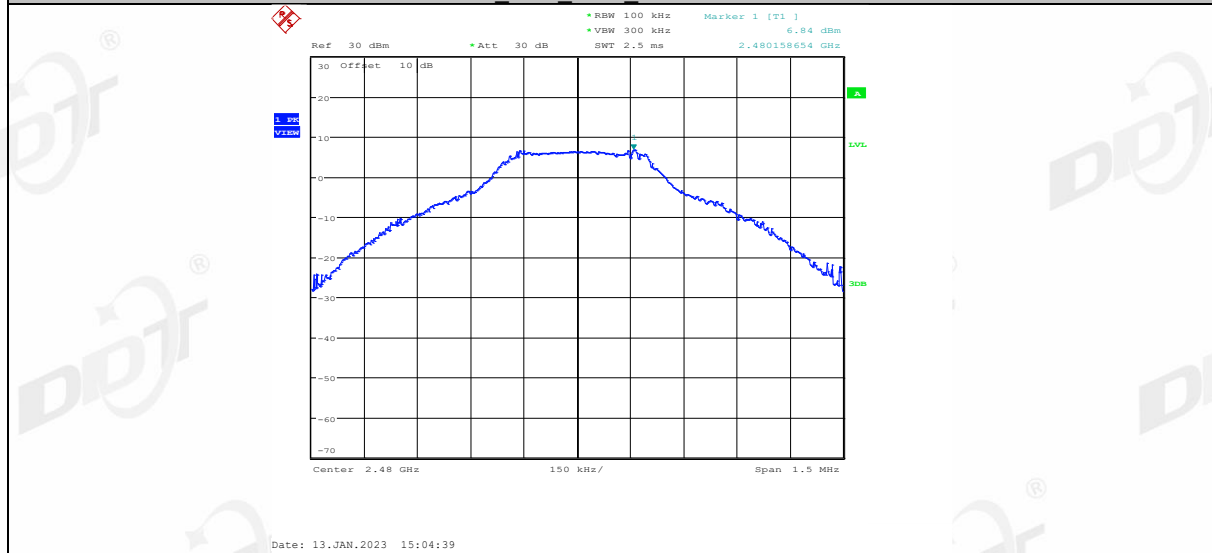


DH5_Ant1_2480_30~1000

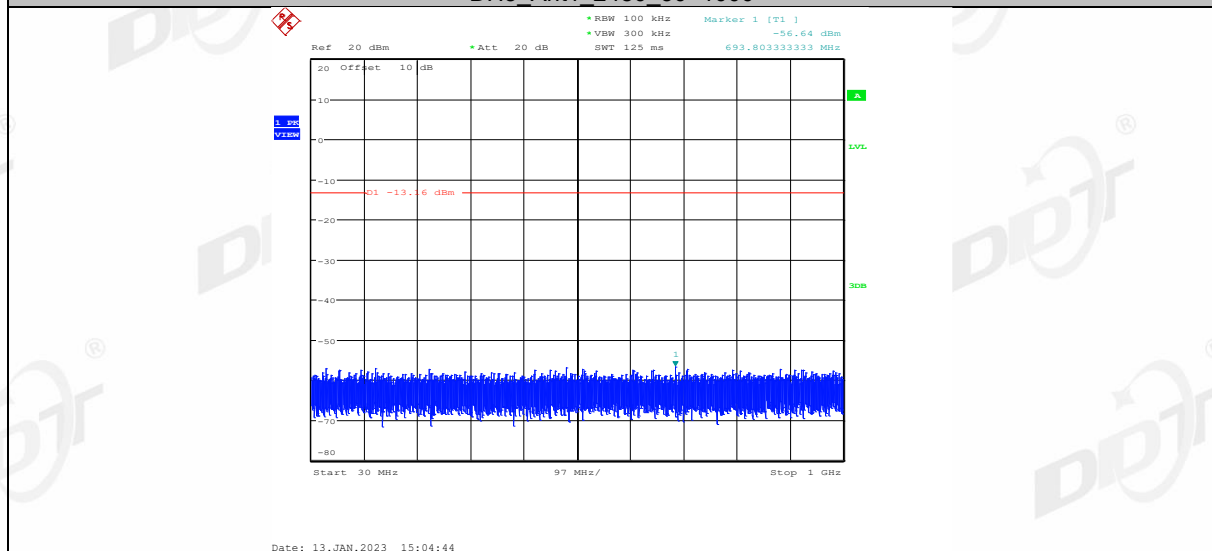


DH5_Ant1_2480_1000~26500

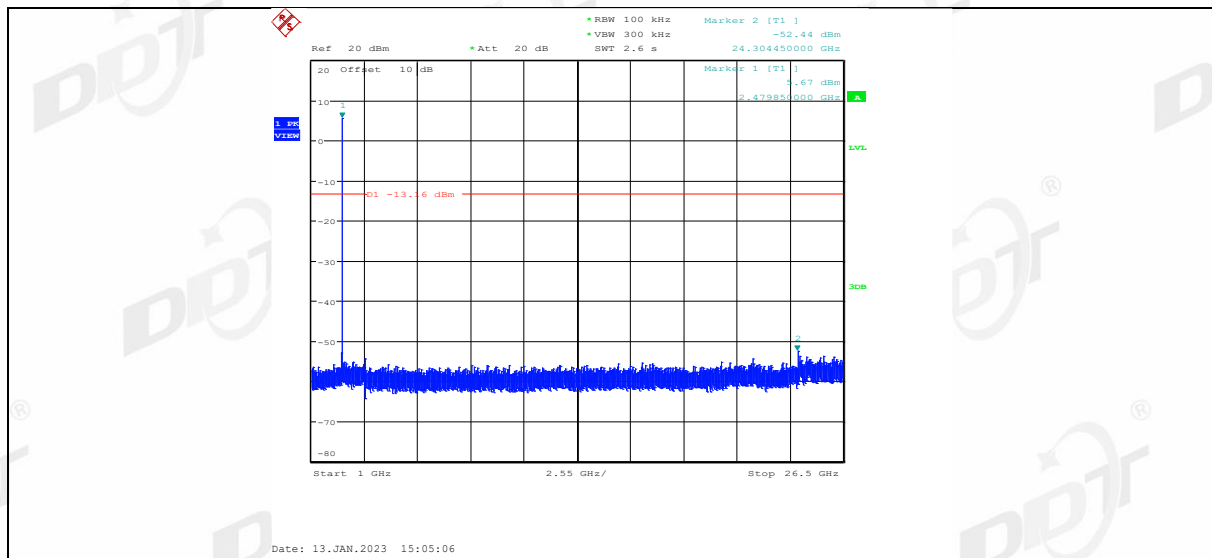


2DH5_Ant1_2402_0~Reference

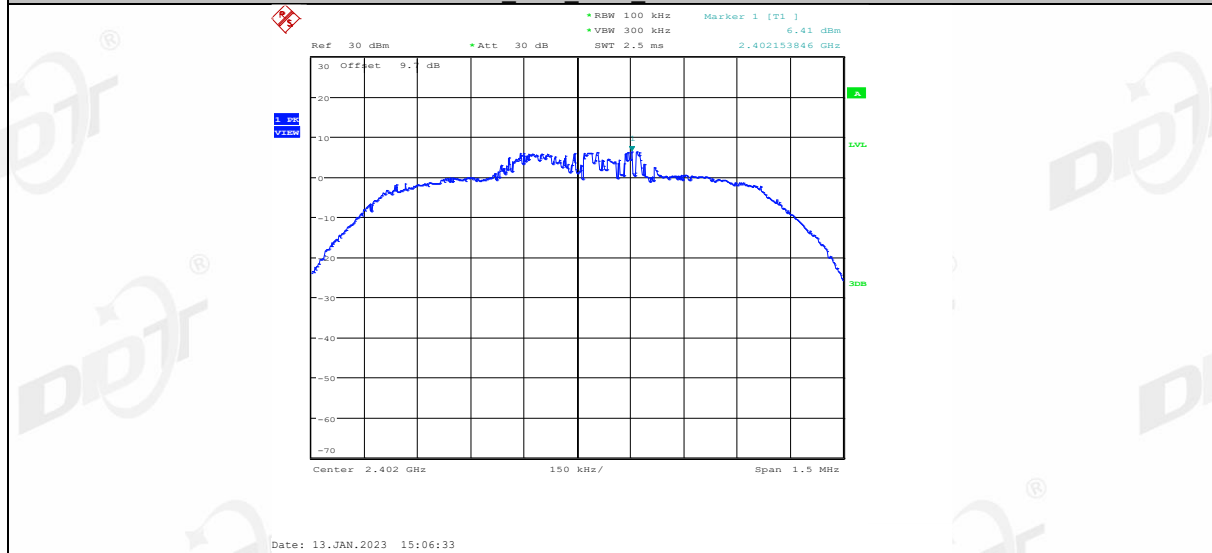


2DH5_Ant1_2402_30~1000

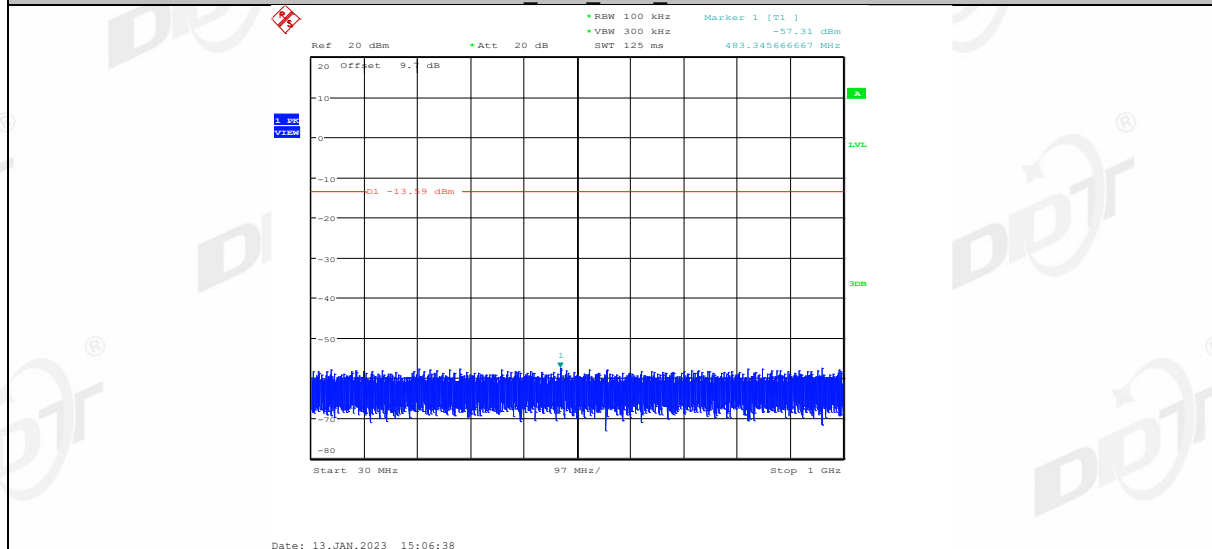


2DH5_Ant1_2402_1000~26500

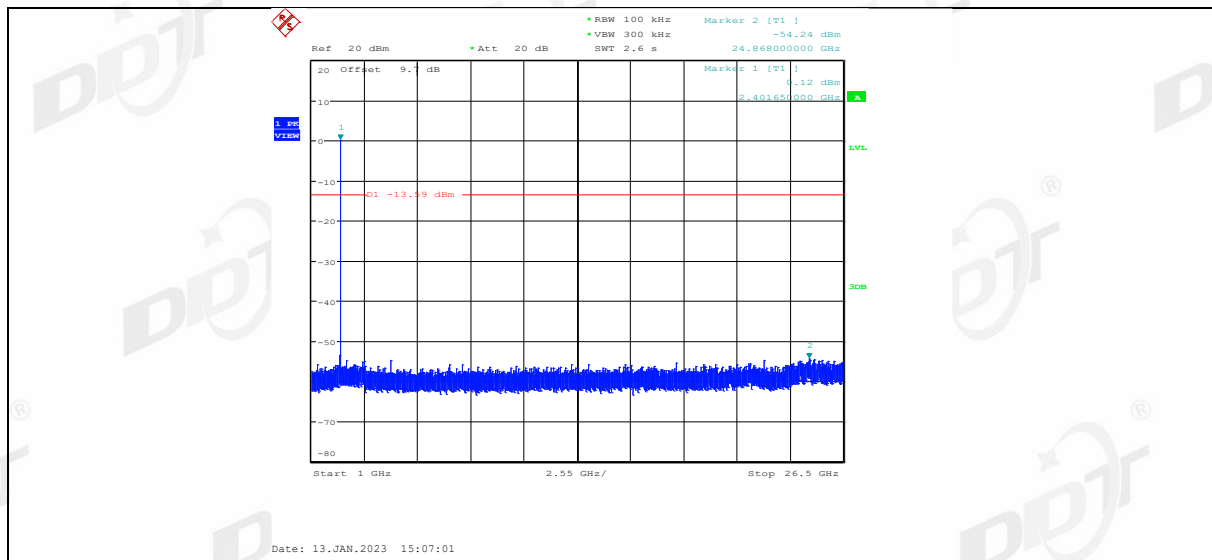


2DH5_Ant1_2441_0~Reference

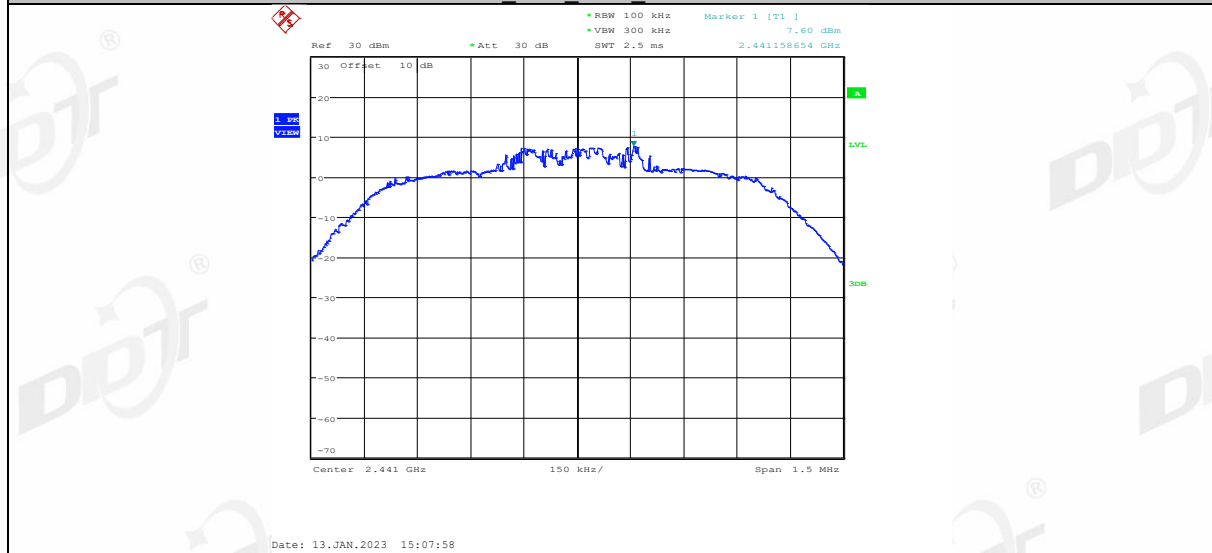


2DH5_Ant1_2441_30~1000

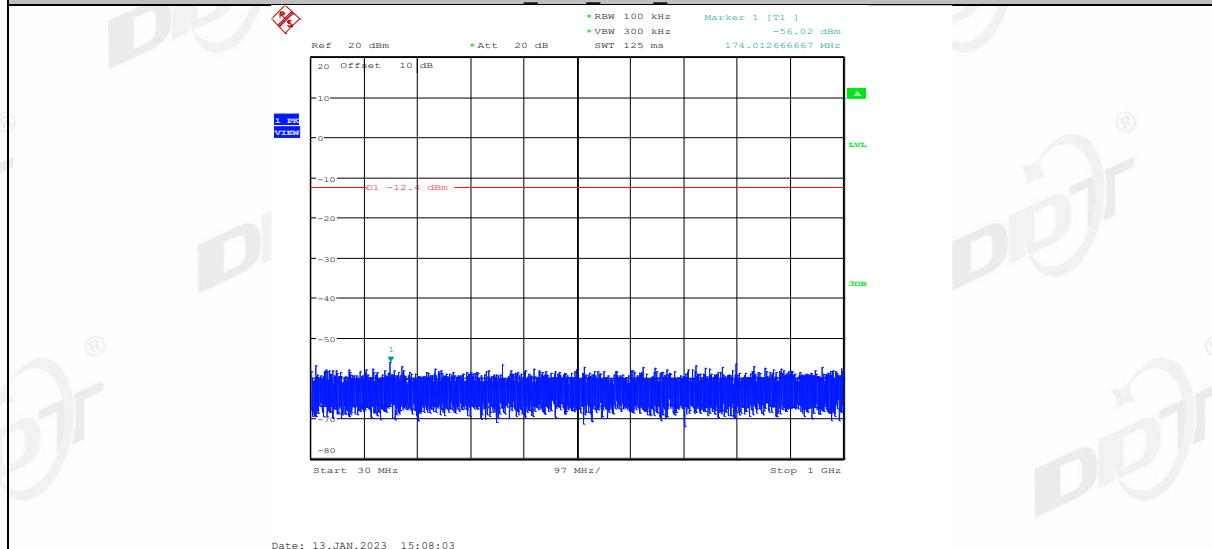


2DH5_Ant1_2441_1000~26500

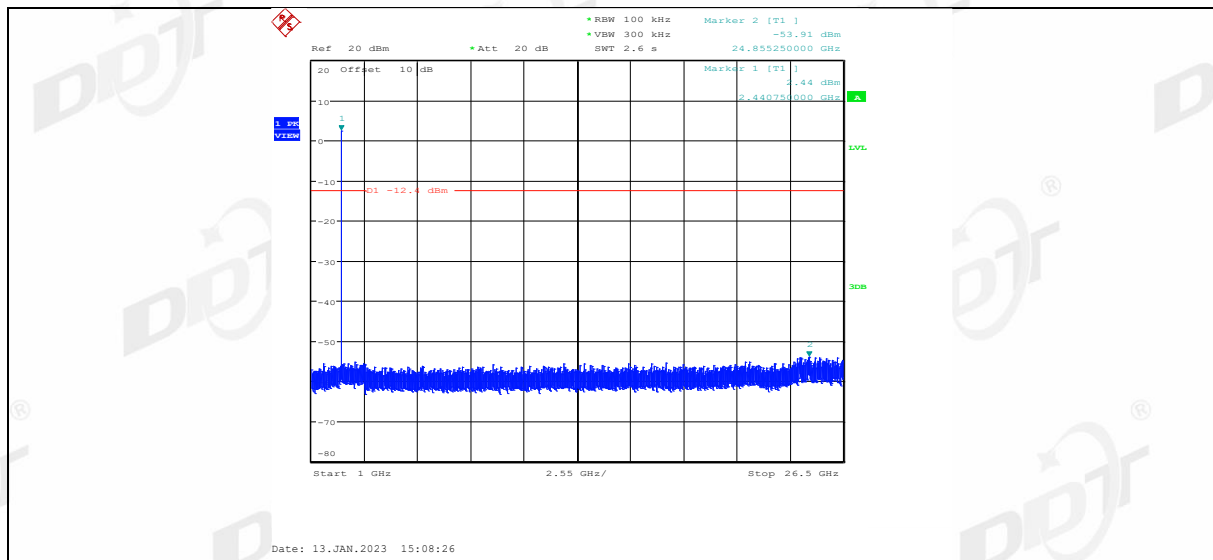


2DH5_Ant1_2480_0~Reference

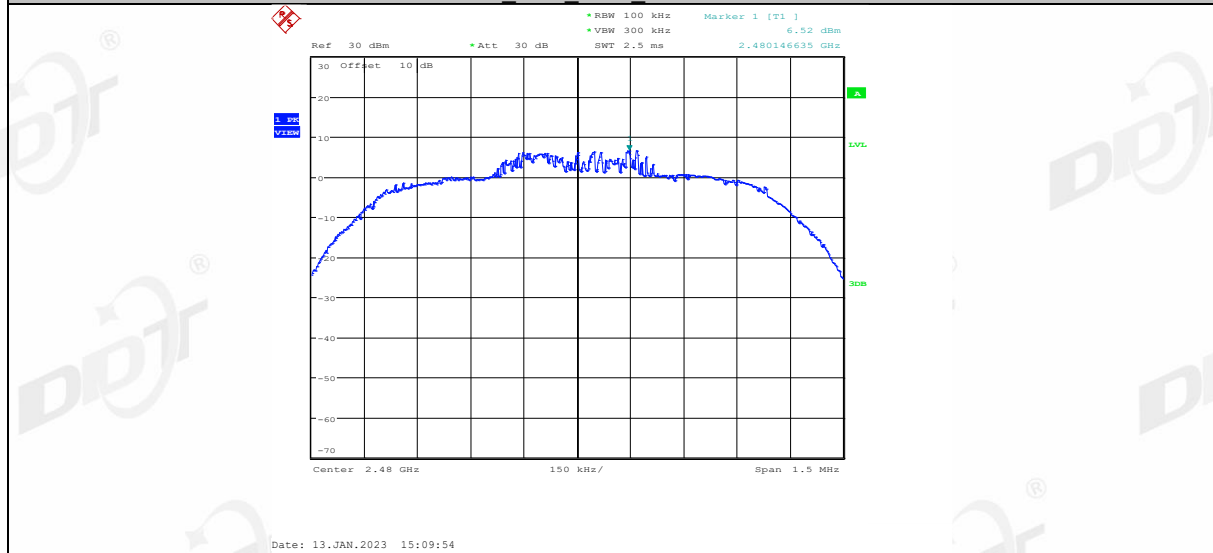


2DH5_Ant1_2480_30~1000

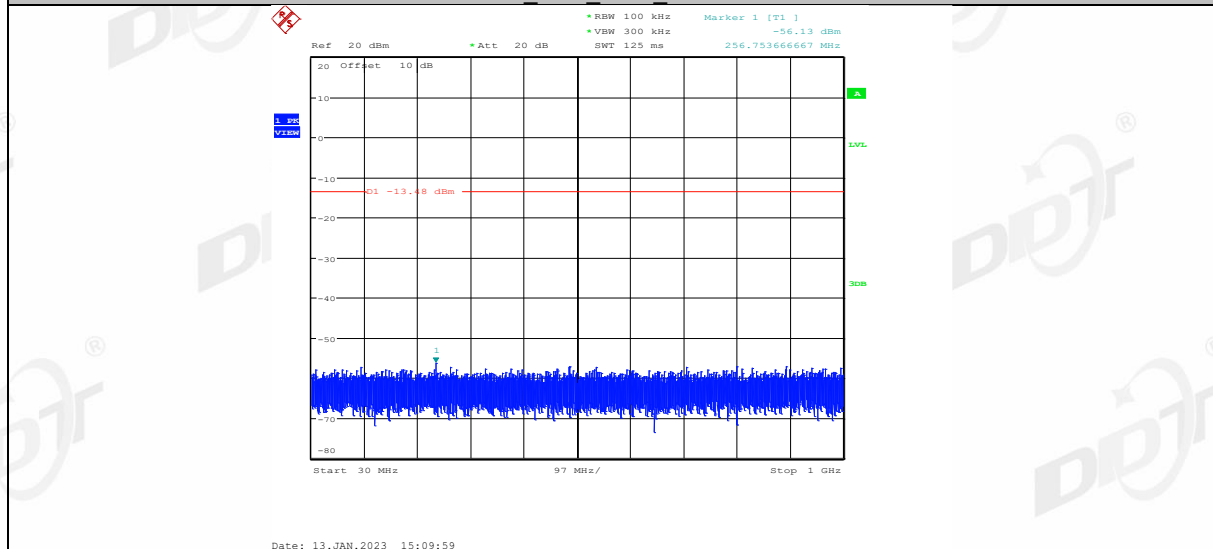


2DH5_Ant1_2480_1000~26500

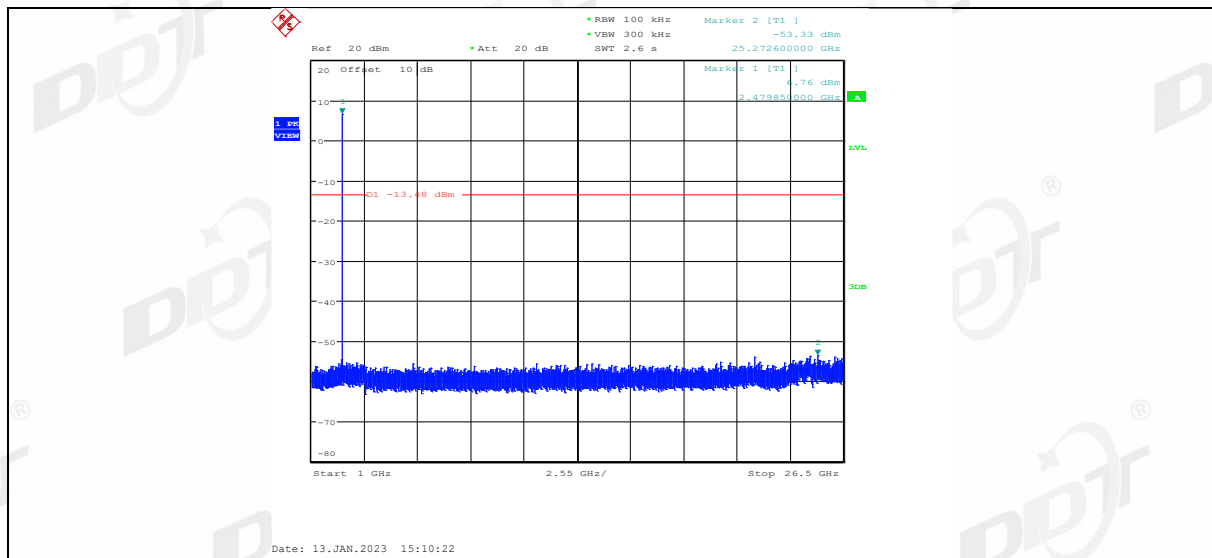


3DH5_Ant1_2402_0~Reference

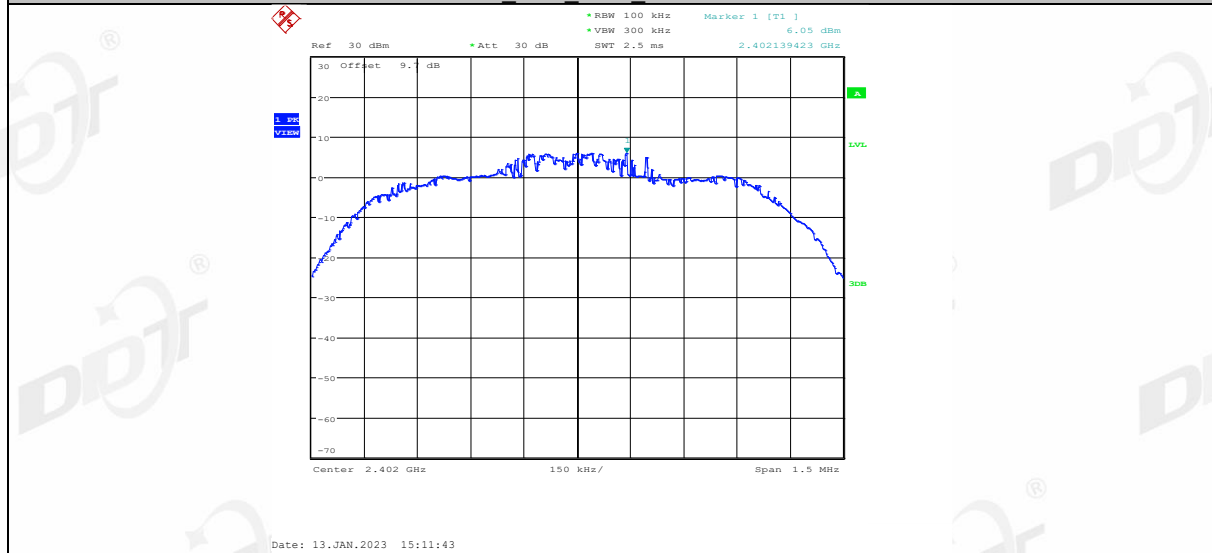


3DH5_Ant1_2402_30~1000

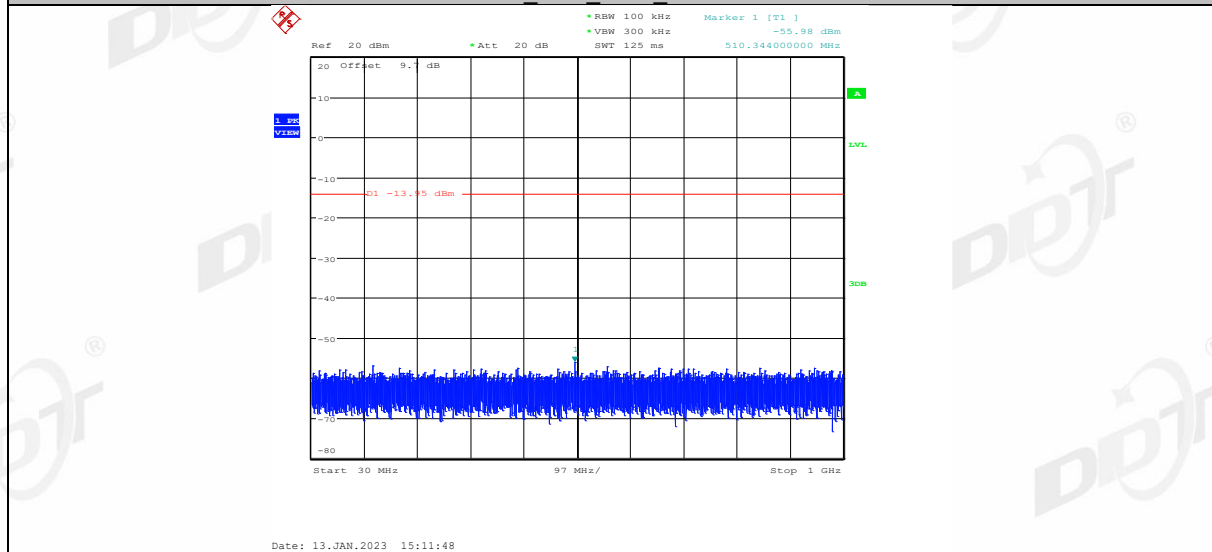


3DH5_Ant1_2402_1000~26500

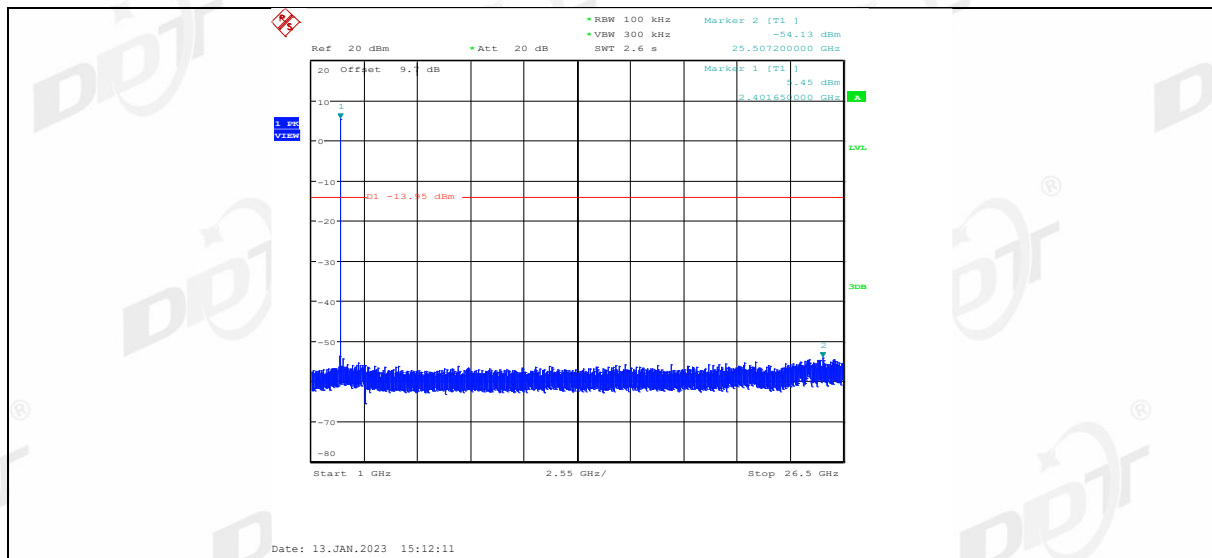


3DH5_Ant1_2441_0~Reference

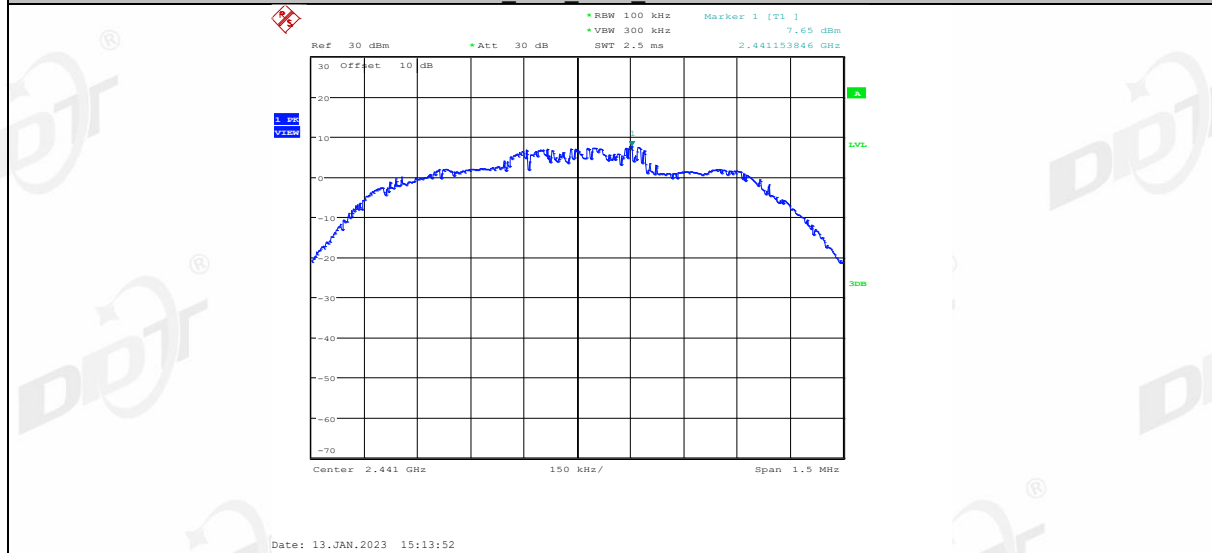


3DH5_Ant1_2441_30~1000

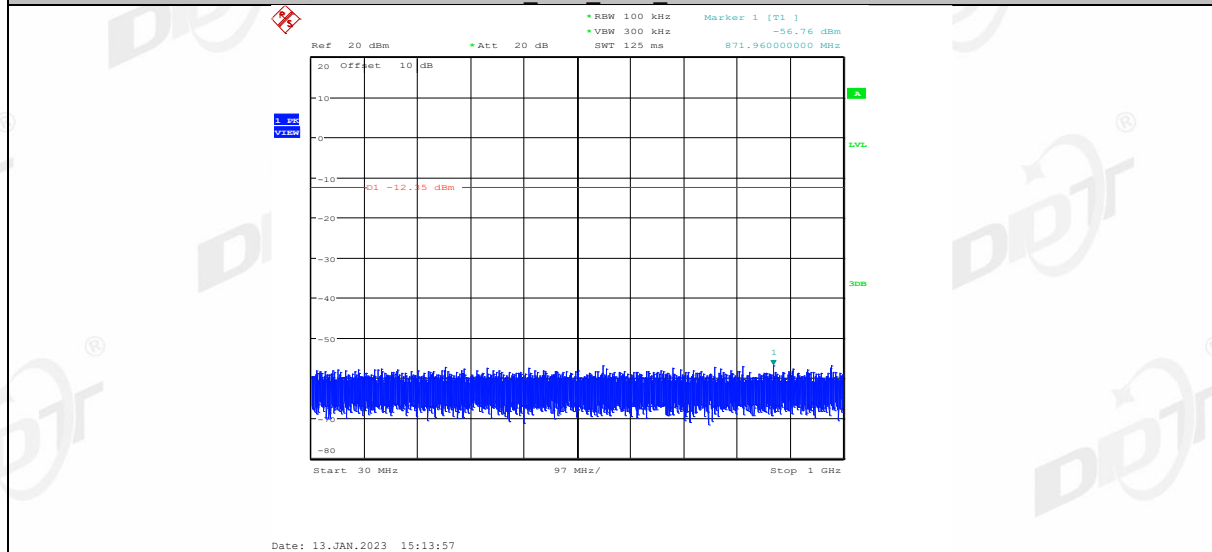


3DH5_Ant1_2441_1000~26500

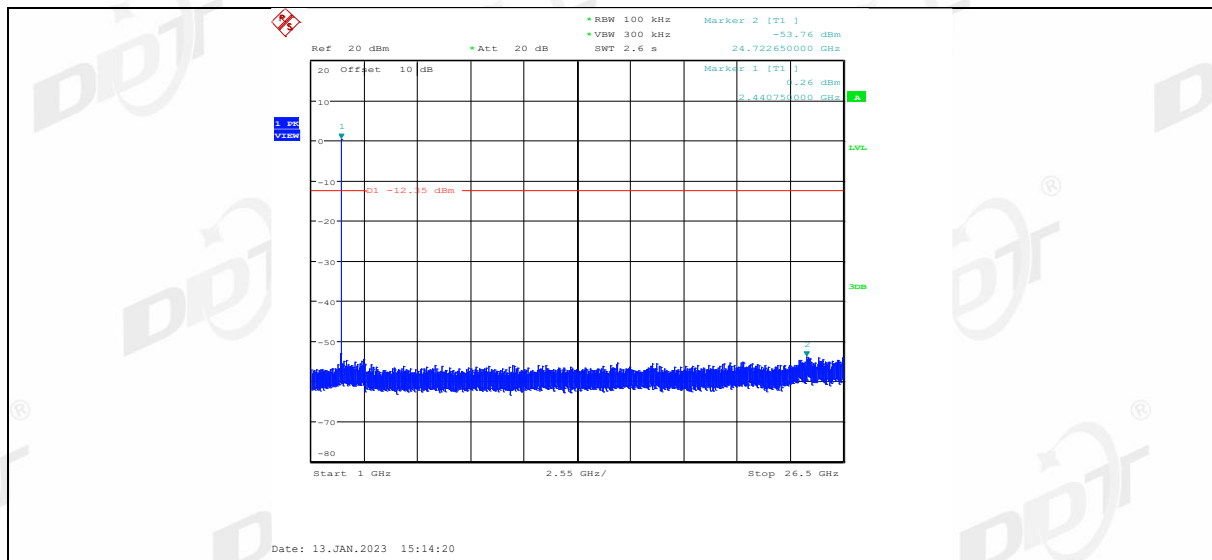


3DH5 Ant1 2480 0~Reference

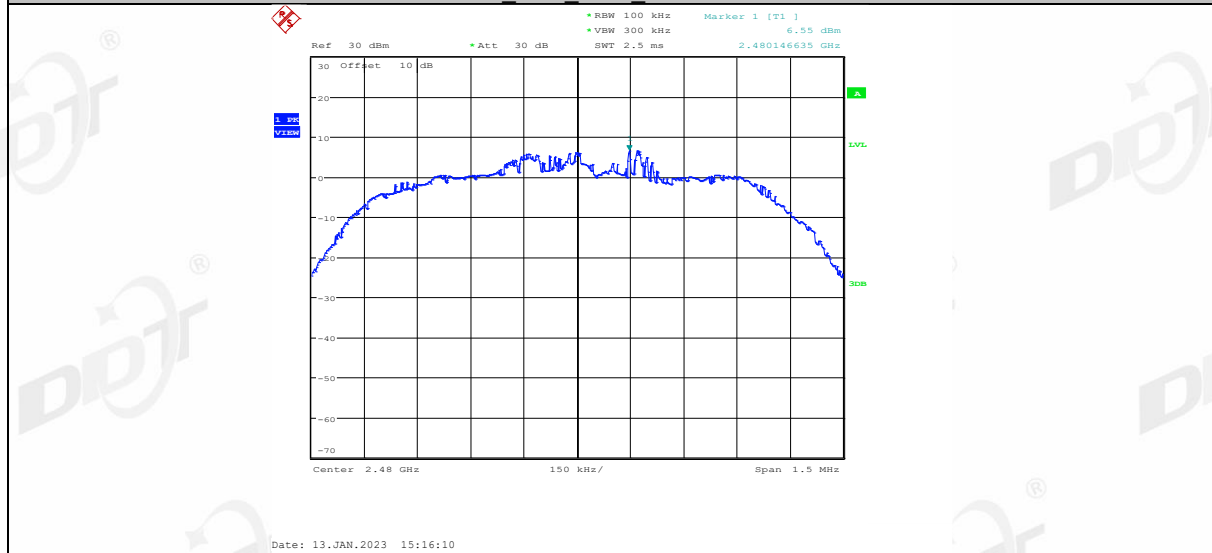

3DH5 Ant1 2480 30~1000

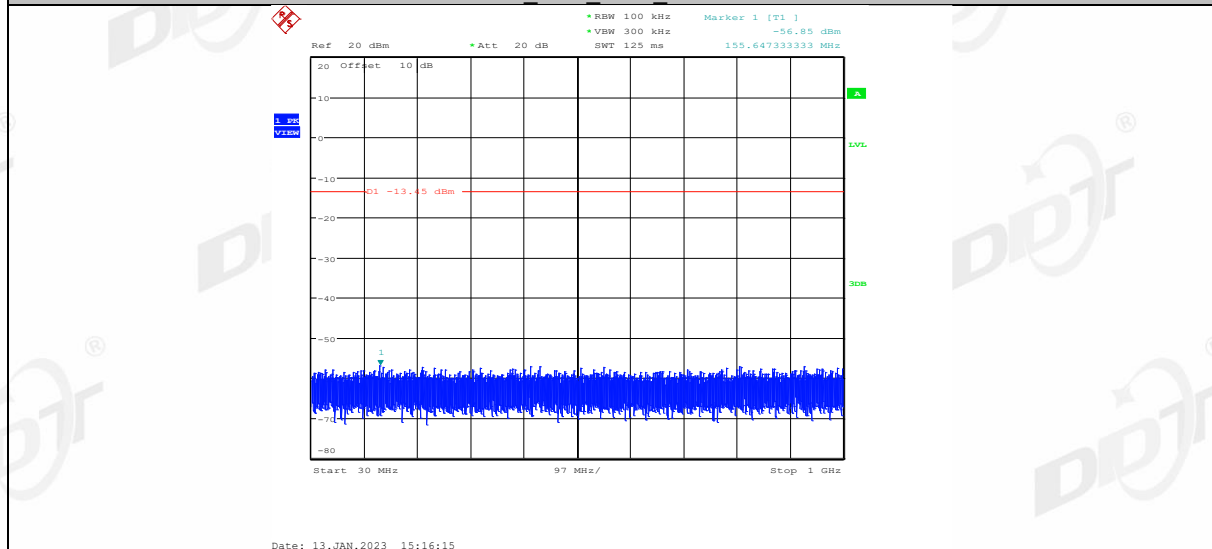


3DH5 Ant1 2480 1000~26500

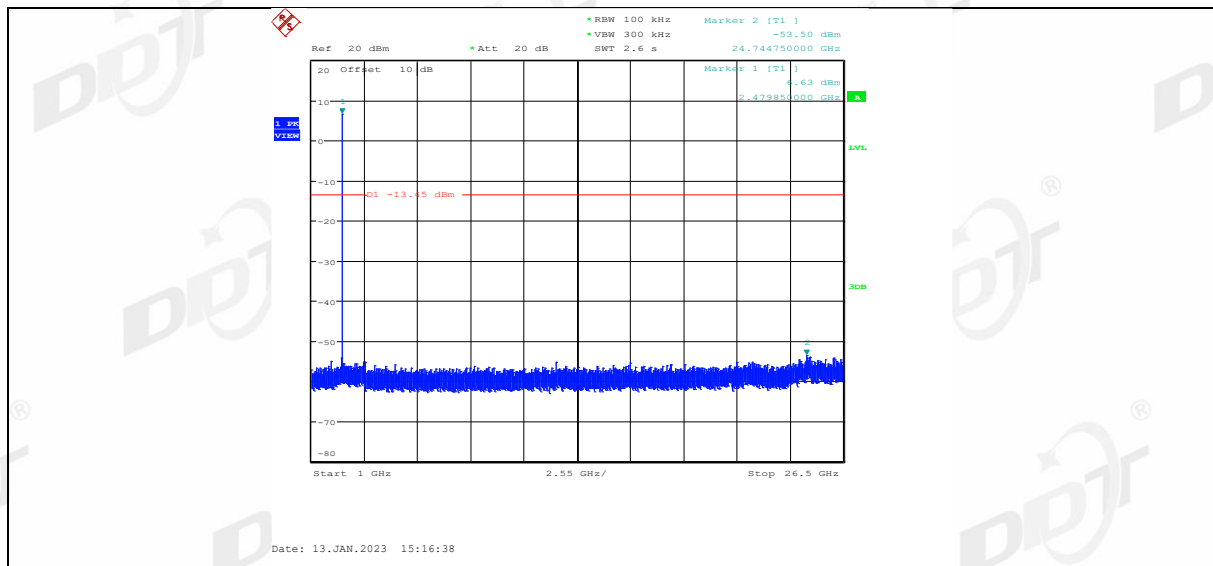

12. Duty cycle

12.1. Block diagram of test setup

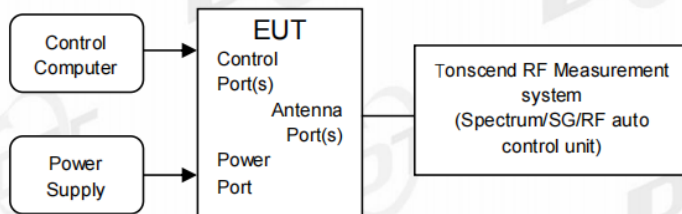

12.2. Limit

Just for Report.

12.3. Test procedure

- (1) Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, The cable loss and attenuator loss have been put into spectrum analyzer as amplitude offset.

set the Spectrum Analyzer as below:

Centre Frequency: The centre frequency of the middle hopping channel.

Resolution BW: 10 MHz.

Video BW: 10 MHz.

Span: Zero span.

Detector: Peak.

Trace Mode: Max Hold.

Sweep: Video Trigger

- (2) When the trace is complete, measure the sending time of 1 burst and the duty cycle of 1 burst cycle.


- (3) Calculate dwell time follow below formula:


Duty cycle= Pulse's on time / Burst cycle

12.4. Test result


Test Mode	Antenna	Frequency [MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor[dB]
DH5	Ant1	2402	2.89	8.77	32.95	4.82
		2441	2.89	8.77	32.95	4.82
		2480	2.89	8.77	32.95	4.82
2DH5	Ant1	2402	2.91	8.77	33.18	4.79
		2441	2.89	8.77	32.95	4.82
		2480	2.89	8.77	32.95	4.82
3DH5	Ant1	2402	2.91	8.77	33.18	4.79
		2441	2.91	8.77	33.18	4.79
		2480	2.89	8.77	32.95	4.82

12.5. Test graphs

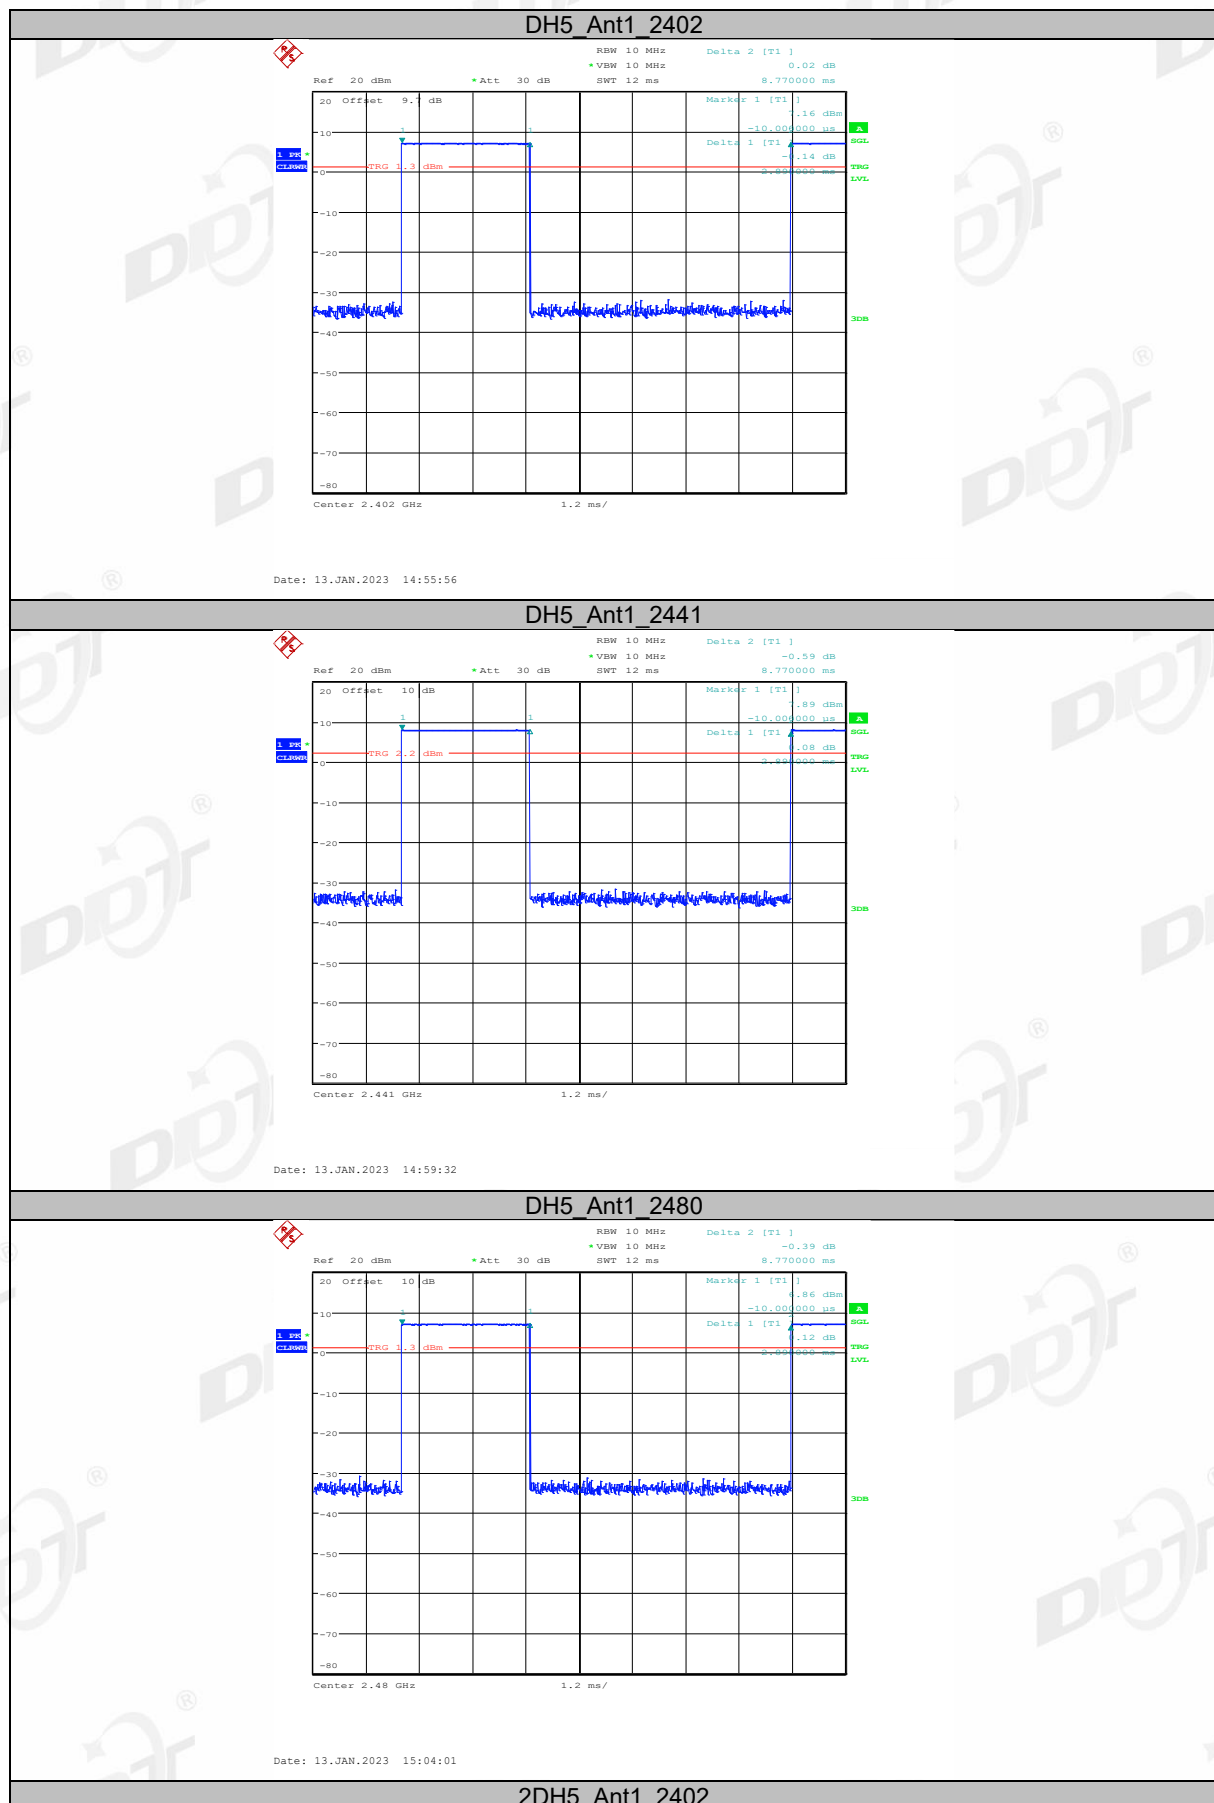


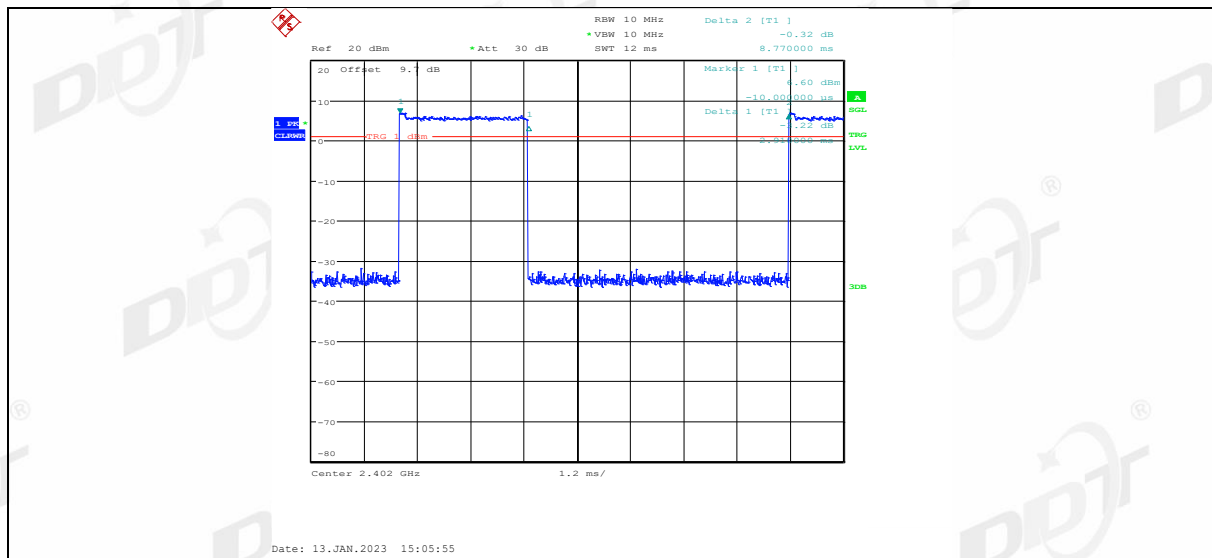


2DH5_Ant1_2441

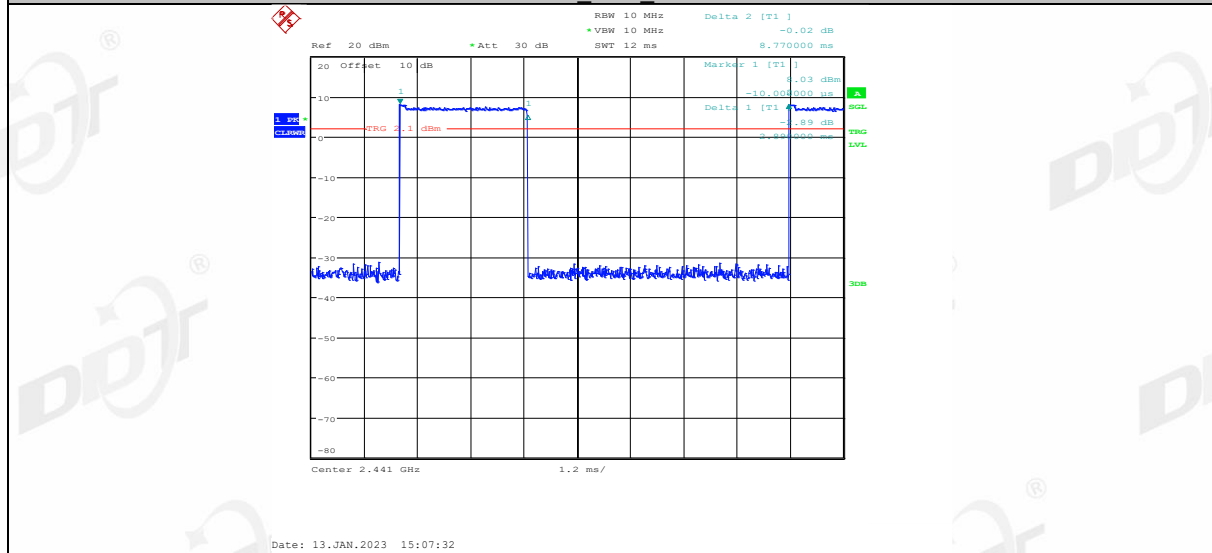


2DH5_Ant1_2480

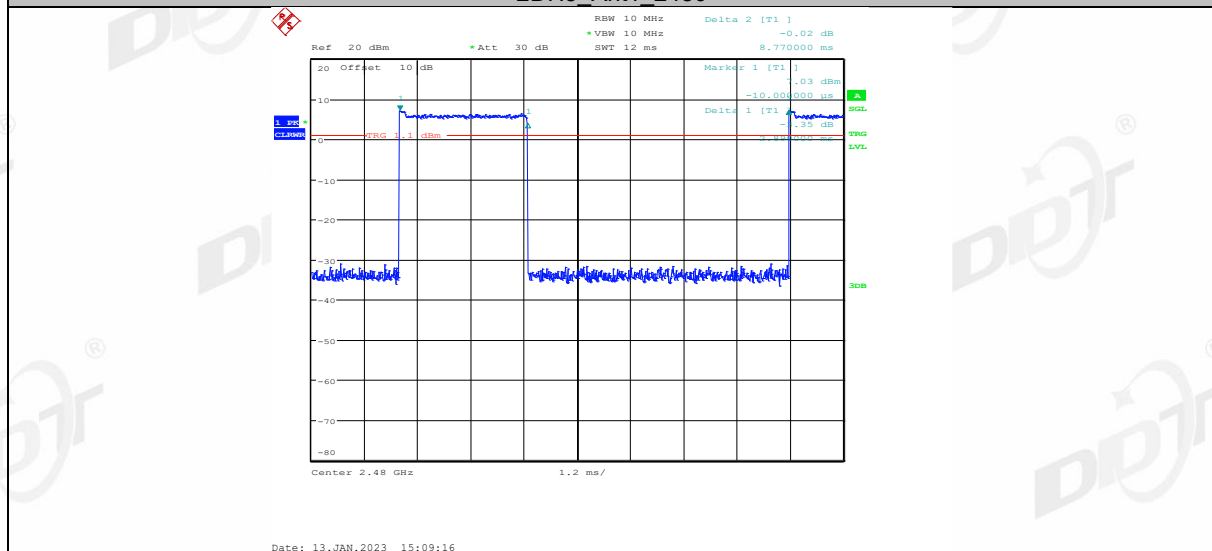


3DH5_Ant1_2402

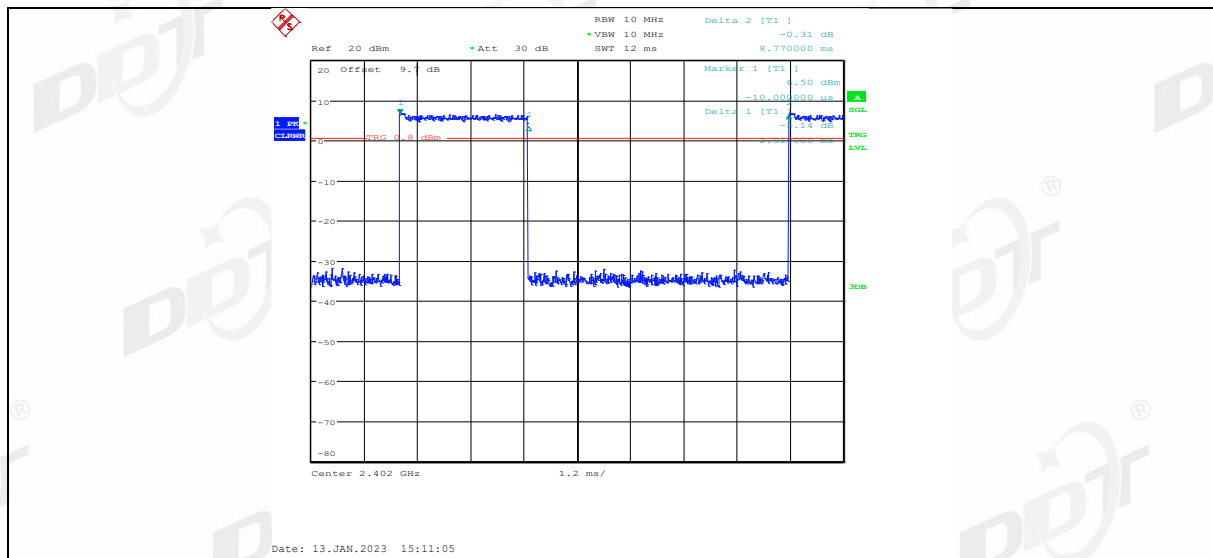

3DH5 Ant1_2441

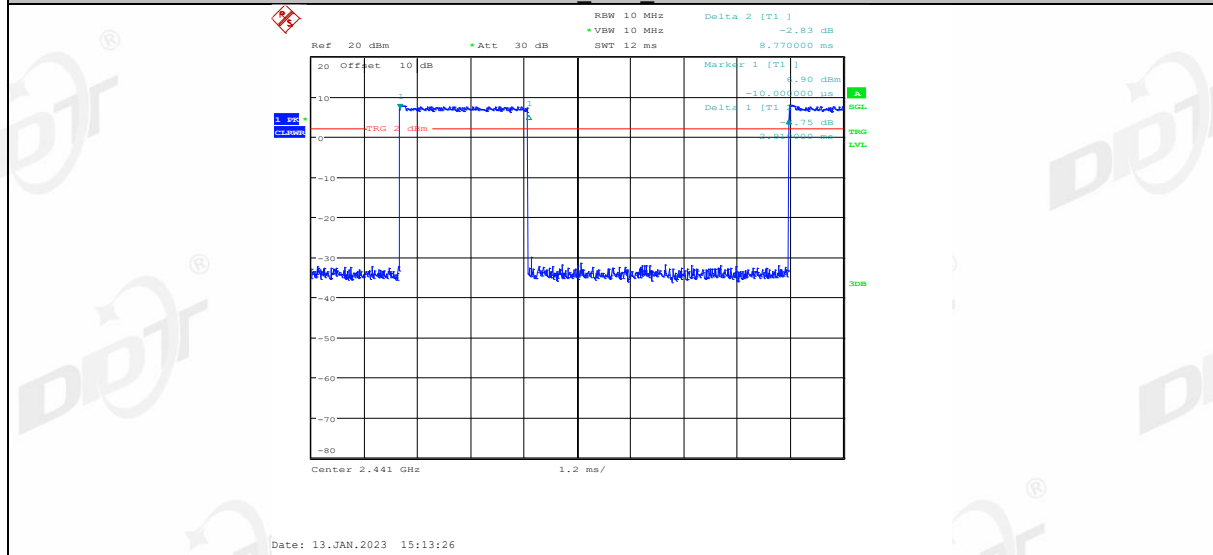


3DH5 Ant1_2480

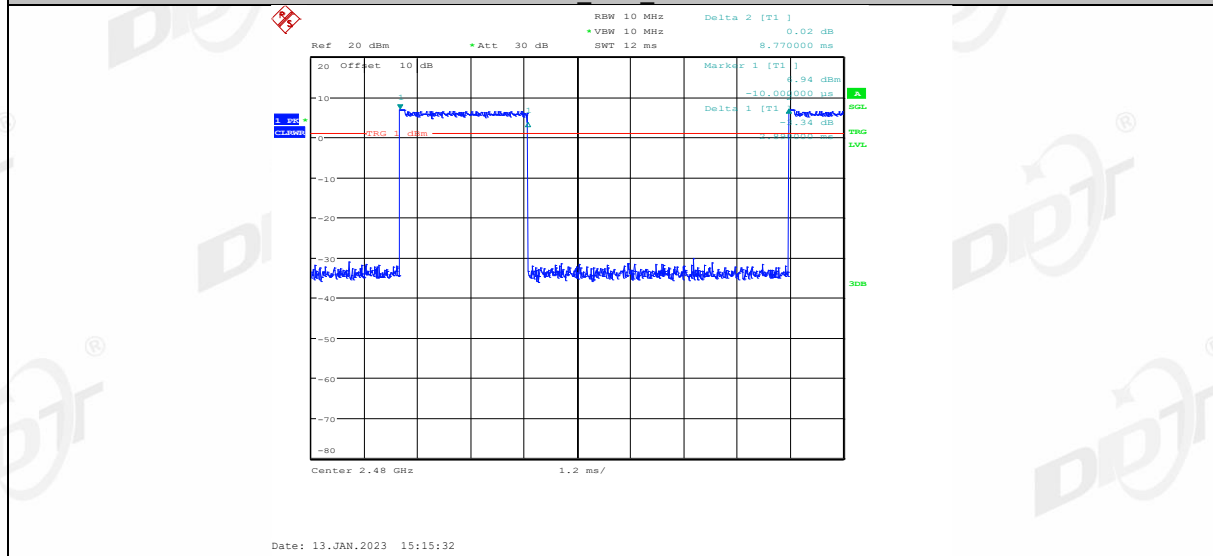


13. Radiated Emission

13.1. Block diagram of test setup


In 3 m Anechoic Chamber, test setup diagram for 9 kHz - 30 MHz:

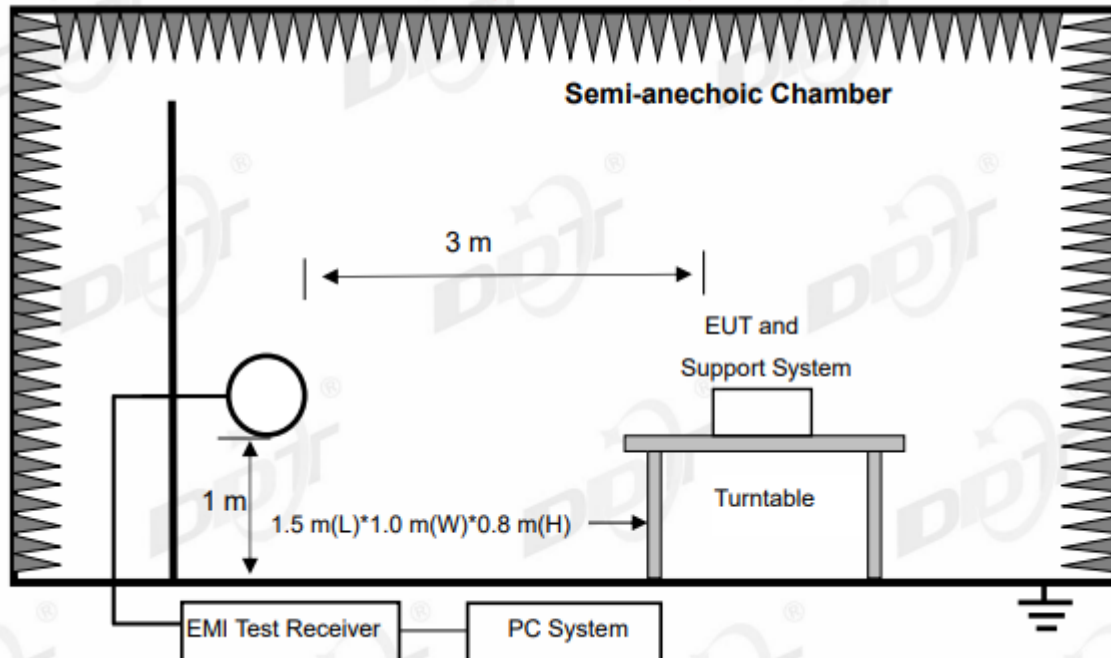

In 3 m Anechoic Chamber, test setup diagram for 30 MHz - 1 GHz:

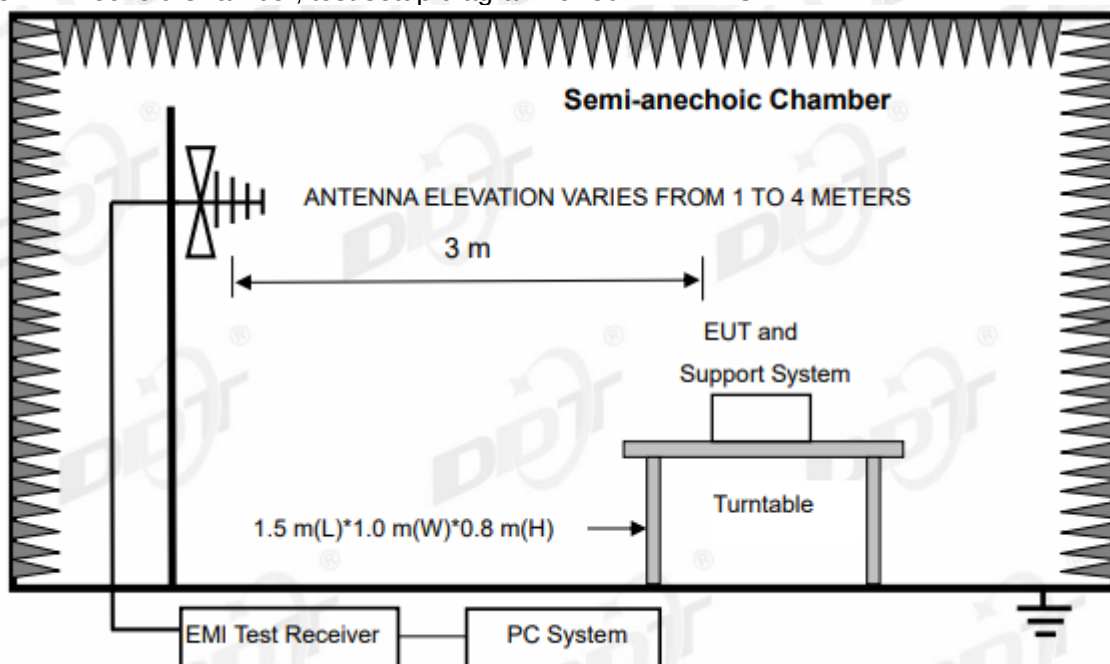

In 3 m Anechoic Chamber, test setup diagram for frequency above 1 GHz:

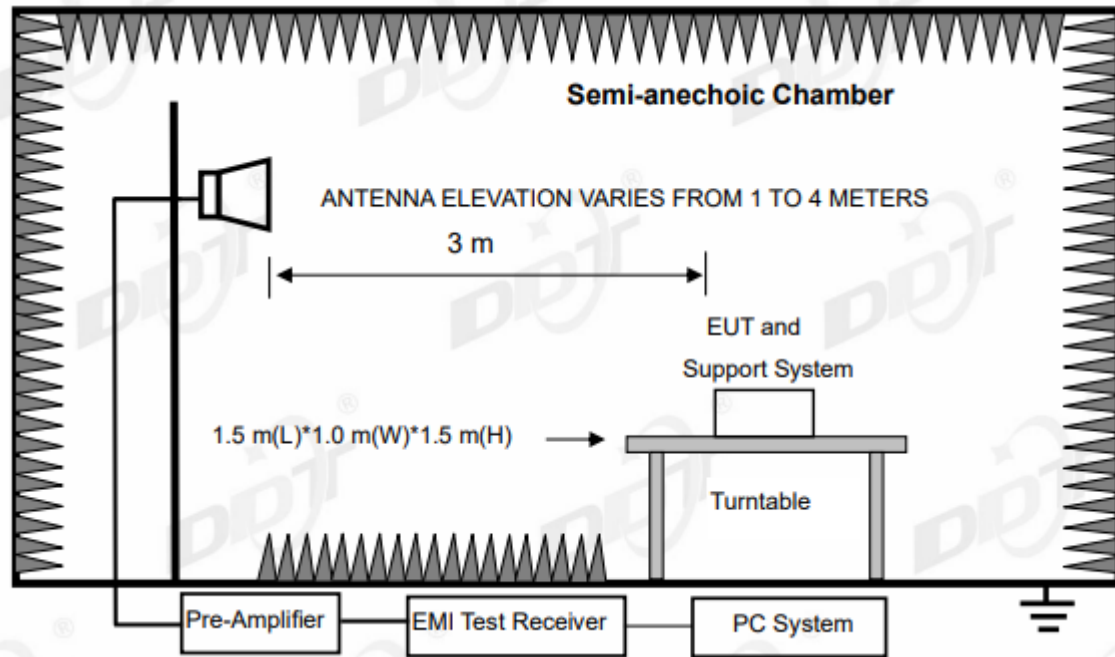

Note: For harmonic emissions test an appropriate high pass filter was inserted in the input port of AMP.

13.2. Limit

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

²Above 38.6

RSS-Gen section 8.10 Restricted frequency bands*

MHz	MHz	MHz	GHz
0.090-0.110	12.51975-12.52025	240-285	3.5-4.4
0.495-0.505	12.57675-12.57725	322-335.4	4.5-5.15
2.1735-2.1905	13.36-13.41	399.9-410	5.35-5.46
3.020-3.026	16.42-16.423	608-614	7.25-7.75
4.125-4.128	16.69475-16.69525	960-1427	8.025-8.5
4.1772&4.17775	16.80425-16.80475	1435-1626.5	9.0-9.2
4.2072&4.20775	25.5-25.67	1645.5-1646.5	9.3-9.5
5.677-5.683	37.5-38.25	1660-1710	10.6-12.7
6.215-6.218	73-74.6	1718.8-1722.2	13.25-13.4
6.26775-6.26825	74.8-75.2	2200-2300	14.47-14.5
6.31175-6.31225	108-138	2310-2390	15.35-16.2
8.291-8.294	149.9-150.05	2483.5-2500	17.7-21.4
8.362-8.366	156.52475-156.52525	2655-2900	22.01-23.12
8.37625-8.38675	156.7-156.9	3260-3267	23.6-24.0
8.41425-8.41475	162.0125-167.17	3332-3339	31.2-31.8
12.29-12.293	167.72-173.2	3345.8-3358	36.43-36.5
			Above 38.6

* Certain frequency bands listed in table and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

(2) FCC 15.209 Limit & RSS-Gen section 8.9 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009 ~ 0.490	300	$2400/\text{F}(\text{kHz})$	$67.6-20\log(\text{F})$
0.490 ~ 1.705	30	$24000/\text{F}(\text{kHz})$	$87.6-20\log(\text{F})$
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

Note: (1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz and above 1000 MHz, radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3\text{m}}(\text{dB}\mu\text{V}/\text{m}) = \text{Limit}_{30\text{m}}(\text{dB}\mu\text{V}/\text{m}) + 40\log(30\text{m}/3\text{m})$$

(3) Limit for this EUT

The emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, and the emissions appearing within RSS-Gen section 8.10 Restricted frequency bands shall not exceed the limits shown in RSS-Gen section 8.9, all the other emissions shall be at least 20 dB below the fundamental emissions or comply with 15.209 limits and RSS-Gen section 8.9 limits.

13.3. Test Procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1G and 150 cm above the ground plane inside a fully-anechoic chamber for above 1G.
- (2) Test antenna was located 3 m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used	Test antenna distance
9 kHz - 30 MHz	Active Loop antenna	3 m
30 MHz - 1 GHz	Trilog Broadband Antenna	3 m
1 GHz - 18 GHz	Double Ridged Horn Antenna (1 GHz - 18 GHz)	3 m
18 GHz - 40 GHz	Horn Antenna (18 GHz - 40 GHz)	1 m

According ANSI C63.10:2013 clause 6.4.6 and 6.5.3, for measurements below 30 MHz, Antenna was located 3 m from EUT, the loop antenna was positioned in three antenna orientations (parallel, perpendicular, and round-parallel), for each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable, and the lowest height of the magnetic antenna shall be 1 m above the ground. For measurement above 30MHz, the trilog Broadband Antenna or Horn Antenna was located 3m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1 m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was

investigated, and no any obvious emission were detected from 18 GHz to 25 GHz, so below final test was performed with frequency range from 9 kHz to 18 GHz.

- (4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to ANSI C63.10:2013 on Radiated Emission test.
- (5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz, for emissions from 9 kHz - 90 kHz, 110 kHz - 490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.
- (6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW.

Frequency band	RBW
9 kHz - 150 kHz	200 Hz
150 kHz - 30 MHz	9 kHz
30 MHz - 1 GHz	120 kHz

- (7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; According ANSI C63.10:2013 clause 4.1.4.2.2 procedure for average measure.

13.4. Test result

Pass. (See below detailed test result)

All the emissions except fundamental emission from 9 kHz to 25 GHz were comply with 15.209 limits and RSS-Gen section 8.9 limits.

Note1: According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

Note2: 30 MHz ~ 25 GHz: (Scan with GFSK, $\pi/4$ -DQPSK and 8DPSK, the worst case is $\pi/4$ -DQPSK Mode)

Note3: For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in $\pi/4$ -DQPSK, Tx 2441 MHz mode.

Note4: For emissions above 1 GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.

Radiated Emission test (below 1 GHz)

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-01-10

Tested By: Bairong

EUT: 6.75-INCH AUDIO/VIDEO RECEIVER

Model Number: iLX-W670

Test Mode: Tx mode


Power Supply: DC 12V

Condition: Temp:22.6°C;Humi:54.3%;Press:100.3kPa

Test Site: DDT 3# Chamber

File Path: d:\ts\2022 report data\Q23010302-2E iLX-W670\FCC BELOW 1G\20230110-192022_H

Memo:

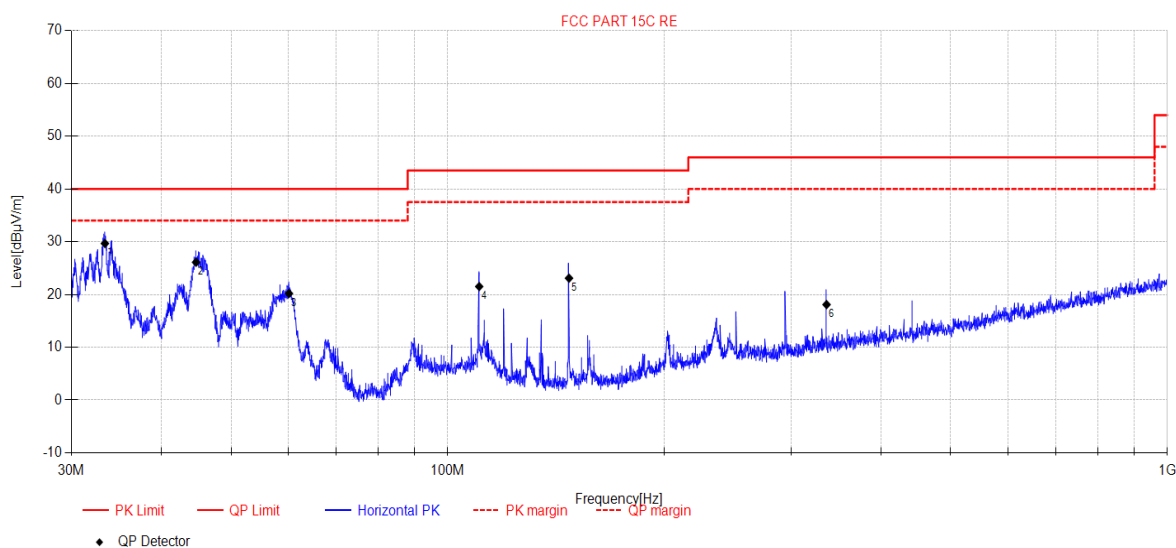


Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	AMP [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	33.40	50.84	10.48	0.64	-32.29	29.67	40.00	10.33	QP	Horizontal
2	44.71	44.66	12.97	0.76	-32.28	26.11	40.00	13.89	QP	Horizontal
3	60.19	39.69	11.84	0.93	-32.27	20.19	40.00	19.81	QP	Horizontal
4	110.62	41.9	10.38	1.46	-32.23	21.51	43.50	21.99	QP	Horizontal
5	147.46	46.14	7.45	1.68	-32.18	23.09	43.50	20.41	QP	Horizontal
6	336.11	33.59	14.24	2.59	-32.33	18.09	46.00	27.91	QP	Horizontal

Note:

1. Result = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

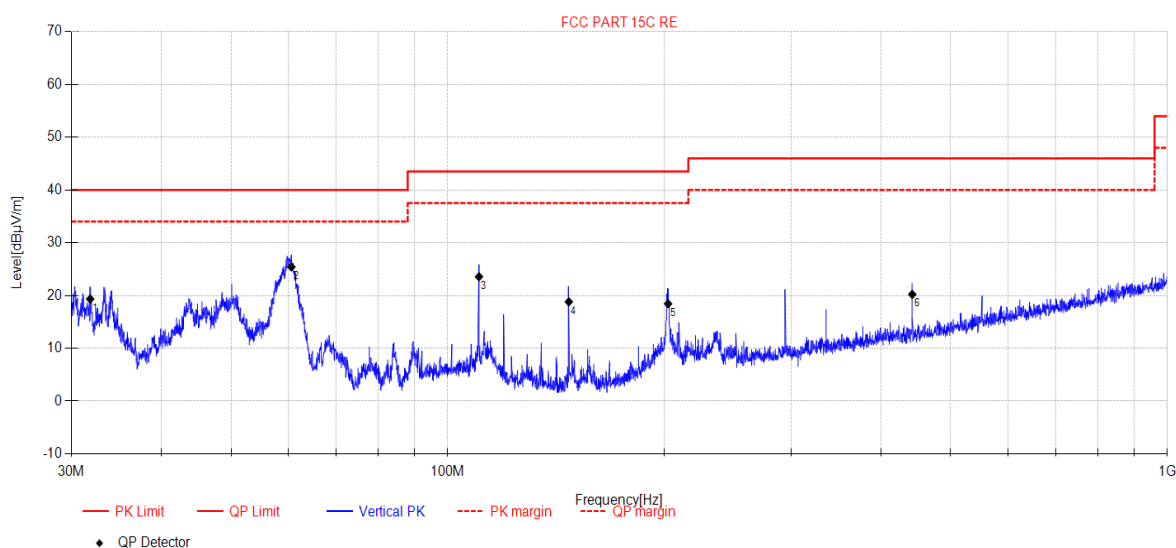Test Date: 2023-01-10**Tested By:** Bairong**EUT:** 6.75-INCH AUDIO/VIDEO RECEIVER**Model Number:** iLX-W670**Test Mode:** Tx mode**Power Supply:** DC 12V**Condition:** Temp:22.6°C;Humi:54.3%;Press:100.3kPa**Test Site:** DDT 3# Chamber**File Path:** d:\ts\2022 report data\Q23010302-2E iLX-W670\FCC BELOW 1G\20230110-192109_V**Memo:**

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	AMP [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	31.86	40.62	10.39	0.62	-32.29	19.34	40.00	20.66	QP	Vertical
2	60.65	45.05	11.70	0.94	-32.27	25.42	40.00	14.58	QP	Vertical
3	110.54	43.94	10.39	1.46	-32.23	23.56	43.50	19.94	QP	Vertical
4	147.36	41.87	7.44	1.68	-32.18	18.81	43.50	24.69	QP	Vertical
5	202.45	37.94	10.75	2.01	-32.27	18.43	43.50	25.07	QP	Vertical
6	442.12	33.67	16.00	2.98	-32.43	20.22	46.00	25.78	QP	Vertical

Note:

1. Result = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Radiated Emission test (above 1 GHz)

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-01-10

Tested By: Bairong

EUT: 6.75-INCH AUDIO/VIDEO RECEIVER

Model Number: iLX-W670

Test Mode: Tx mode

Power Supply: DC 12V


Condition: Temp:22.6°C;Humi:54.3%;Press:100.3kPa

Test Site: DDT 3# Chamber

File Path: d:\ts\2022 report data\Q23010302-2E iLX-W670\FCC ABOVE 1G\2

Memo: 2DH5 2402

Test Graph

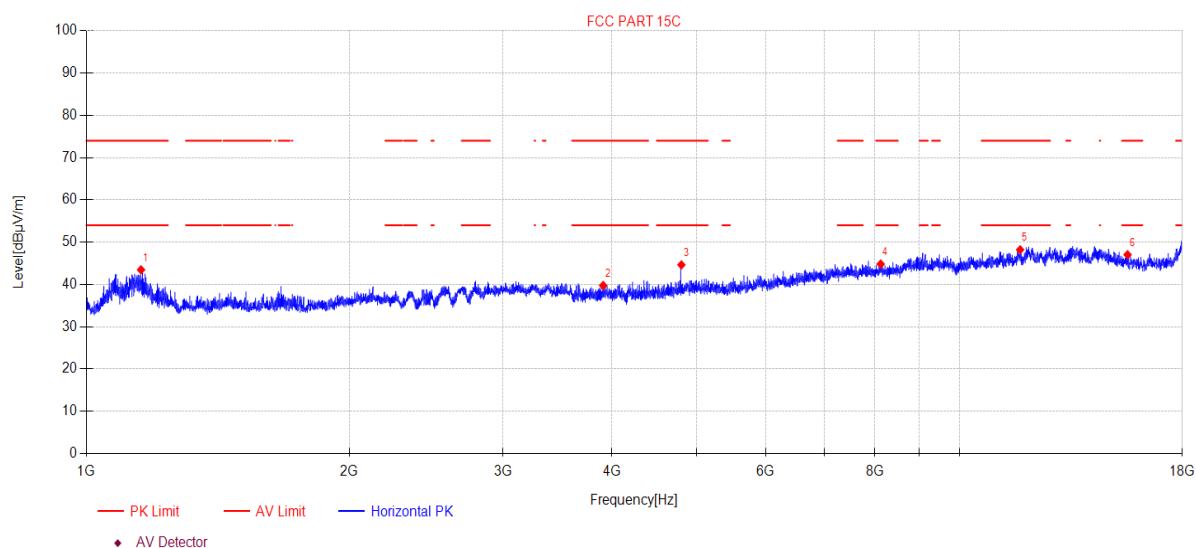

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1155.13	54.53	1.76	25.60	-38.43	43.46	74.00	30.54	PK	Horizontal
2	3907.75	47.34	3.24	30.52	-41.34	39.76	74.00	34.24	PK	Horizontal
3	4803.36	50.21	3.28	32.31	-41.16	44.64	74.00	29.36	PK	Horizontal
4	8123.26	44.75	3.88	37.00	-40.80	44.83	74.00	29.17	PK	Horizontal
5	11735.75	44.00	4.74	38.80	-39.32	48.22	74.00	25.78	PK	Horizontal
6	15578.12	42.31	6.39	38.44	-40.10	47.04	74.00	26.96	PK	Horizontal


Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-01-10 **Tested By:** Bairong
EUT: 6.75-INCH AUDIO/VIDEO RECEIVER **Model Number:** iLX-W670
Test Mode: Tx mode **Power Supply:** DC 12V
Condition: Temp:22.6°C;Humi:54.3%;Press:100.3kPa **Test Site:** DDT 3# Chamber
File Path: d:\ts\2022 report data\Q23010302-2E iLX-W670\FCC ABOVE 1G\3
Memo: 2DH5 2402

Test Graph

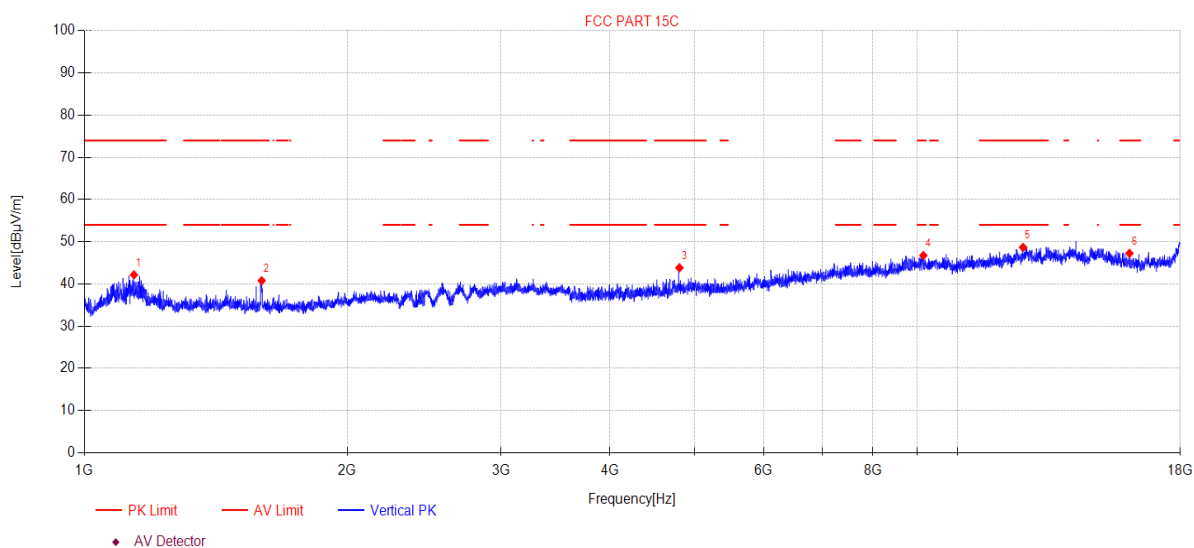

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1139.88	53.25	1.74	25.58	-38.41	42.16	74.00	31.84	PK	Vertical
2	1596.18	52.17	2.29	25.40	-39.09	40.77	74.00	33.23	PK	Vertical
3	4803.36	49.39	3.28	32.31	-41.16	43.82	74.00	30.18	PK	Vertical
4	9139.88	44.01	4.01	38.28	-39.57	46.73	74.00	27.27	PK	Vertical
5	11889.37	44.17	4.77	38.80	-39.08	48.66	74.00	25.34	PK	Vertical
6	15741.05	42.70	6.51	38.26	-40.22	47.25	74.00	26.75	PK	Vertical


Note:

- Level = Reading + Cable Loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-01-10 **Tested By:** Bairong
EUT: 6.75-INCH AUDIO/VIDEO RECEIVER **Model Number:** iLX-W670
Test Mode: Tx mode **Power Supply:** DC 12V
Condition: Temp:22.6°C;Humi:54.3%;Press:100.3kPa **Test Site:** DDT 3# Chamber
File Path: d:\ts\2022 report data\Q23010302-2E iLX-W670\FCC ABOVE 1G\4
Memo: 2DH5 2441

Test Graph

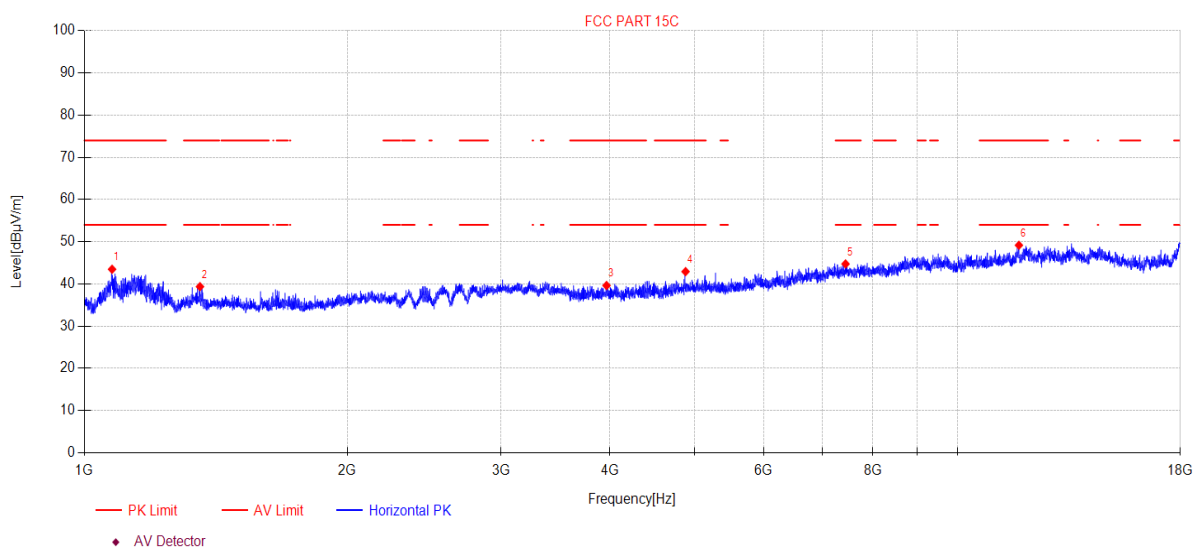

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1075.86	54.62	1.66	25.50	-38.31	43.47	74.00	30.53	PK	Horizontal
2	1356.49	50.49	2.00	25.60	-38.73	39.36	74.00	34.64	PK	Horizontal
3	3963.49	47.16	3.21	30.63	-41.38	39.62	74.00	34.38	PK	Horizontal
4	4881.73	48.21	3.29	32.56	-41.14	42.92	74.00	31.08	PK	Horizontal
5	7444.32	45.50	3.74	36.50	-41.00	44.74	74.00	29.26	PK	Horizontal
6	11759.51	44.90	4.75	38.80	-39.28	49.17	74.00	24.83	PK	Horizontal


Note:

- Level = Reading + Cable Loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-01-10 **Tested By:** Bairong
EUT: 6.75-INCH AUDIO/VIDEO RECEIVER **Model Number:** iLX-W670
Test Mode: Tx mode **Power Supply:** DC 12V
Condition: Temp:22.6°C;Humi:54.3%;Press:100.3kPa **Test Site:** DDT 3# Chamber
File Path: d:\ts\2022 report data\Q23010302-2E iLX-W670\FCC ABOVE 1G\5
Memo: 2DH5 2441

Test Graph

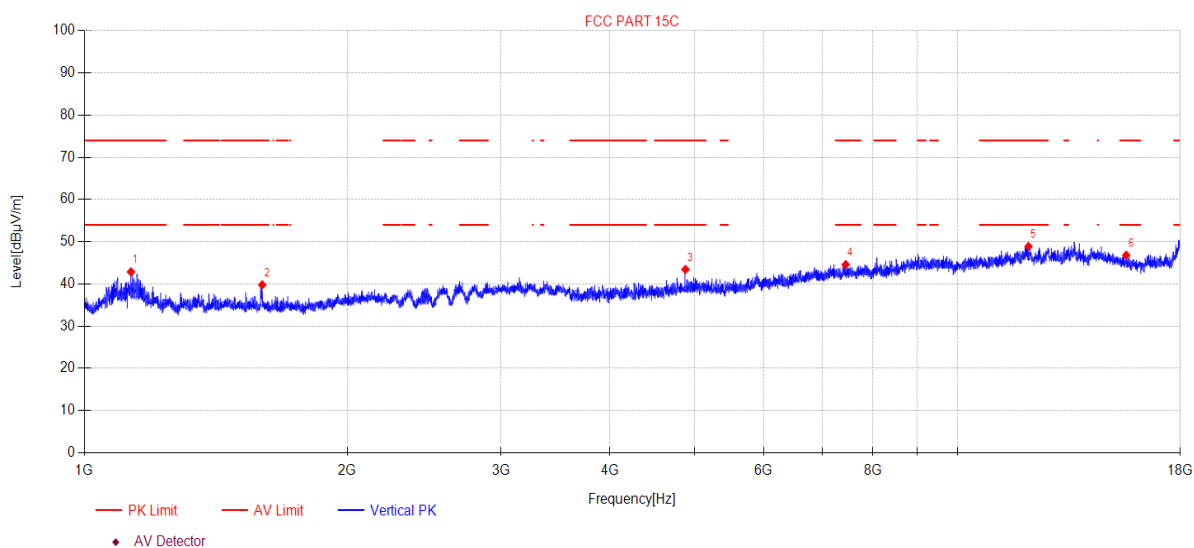

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1130.69	53.97	1.73	25.56	-38.40	42.86	74.00	31.14	PK	Vertical
2	1598.49	51.20	2.29	25.40	-39.10	39.79	74.00	34.21	PK	Vertical
3	4880.32	48.73	3.29	32.56	-41.14	43.44	74.00	30.56	PK	Vertical
4	7446.47	45.35	3.74	36.50	-41.00	44.59	74.00	29.41	PK	Vertical
5	12058.94	44.02	4.81	39.02	-38.96	48.89	74.00	25.11	PK	Vertical
6	15605.16	42.13	6.41	38.39	-40.12	46.81	74.00	27.19	PK	Vertical


Note:

- Level = Reading + Cable Loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-01-10 **Tested By:** Bairong
EUT: 6.75-INCH AUDIO/VIDEO RECEIVER **Model Number:** iLX-W670
Test Mode: Tx mode **Power Supply:** DC 12V
Condition: Temp:22.6°C;Humi:54.3%;Press:100.3kPa **Test Site:** DDT 3# Chamber
File Path: d:\ts\2022 report data\Q23010302-2E iLX-W670\FCC ABOVE 1G\6
Memo: 2DH5 2480

Test Graph

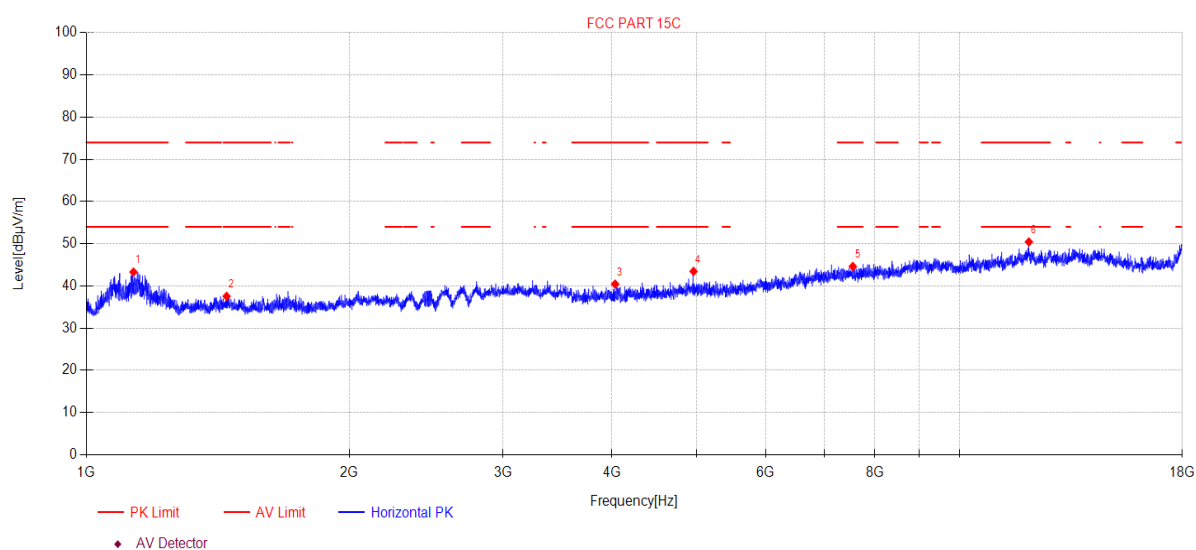

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1132.33	54.40	1.73	25.56	-38.40	43.29	74.00	30.71	PK	Horizontal
2	1447.63	48.72	2.11	25.60	-38.87	37.56	74.00	36.44	PK	Horizontal
3	4032.82	47.86	3.19	30.77	-41.39	40.43	74.00	33.57	PK	Horizontal
4	4959.95	48.47	3.30	32.80	-41.11	43.46	74.00	30.54	PK	Horizontal
5	7548.31	45.44	3.77	36.40	-41.00	44.61	74.00	29.39	PK	Horizontal
6	12010.25	45.63	4.79	38.92	-38.91	50.43	74.00	23.57	PK	Horizontal


Note:

- Level = Reading + Cable Loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-01-10 **Tested By:** Bairong
EUT: 6.75-INCH AUDIO/VIDEO RECEIVER **Model Number:** iLX-W670
Test Mode: Tx mode **Power Supply:** DC 12V
Condition: Temp:22.6°C;Humi:54.3%;Press:100.3kPa **Test Site:** DDT 3# Chamber
File Path: d:\ts\2022 report data\Q23010302-2E iLX-W670\FCC ABOVE 1G\7
Memo: 2DH5 2480

Test Graph

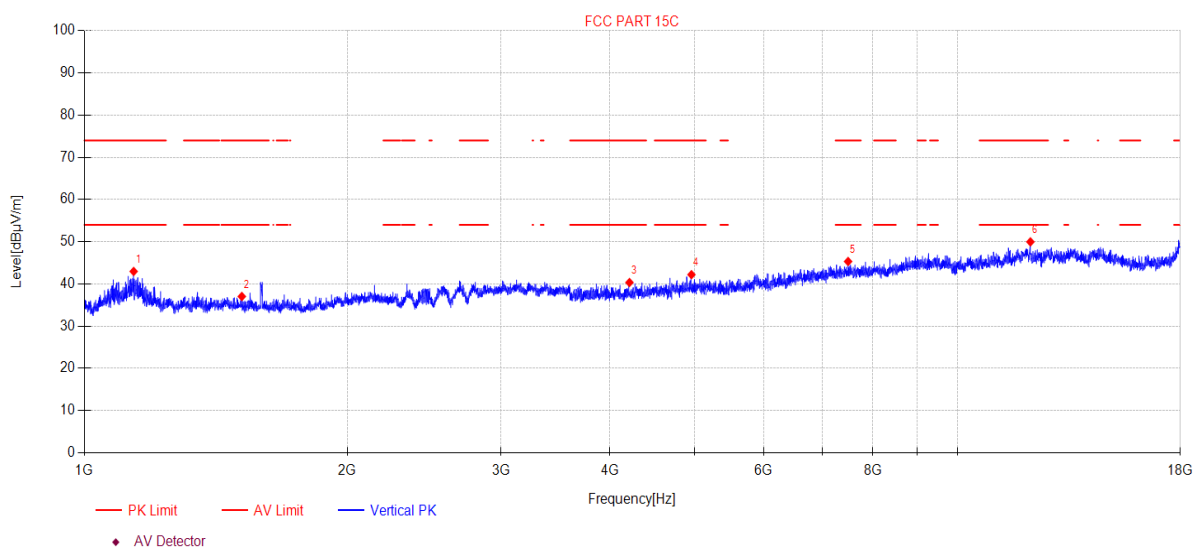

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1138.89	54.06	1.74	25.58	-38.41	42.97	74.00	31.03	PK	Vertical
2	1514.83	48.34	2.19	25.47	-38.97	37.03	74.00	36.97	PK	Vertical
3	4210.27	47.35	3.21	31.12	-41.34	40.34	74.00	33.66	PK	Vertical
4	4958.51	47.22	3.30	32.80	-41.11	42.21	74.00	31.79	PK	Vertical
5	7493.97	46.16	3.75	36.41	-41.00	45.32	74.00	28.68	PK	Vertical
6	12121.84	45.06	4.83	39.10	-39.02	49.97	74.00	24.03	PK	Vertical


Note:

- Level = Reading + Cable Loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

14. Band Edge Compliance (Radiated Method)

14.1. Block diagram of test setup

In 3 m Anechoic Chamber, test setup diagram for frequency above 1 GHz:

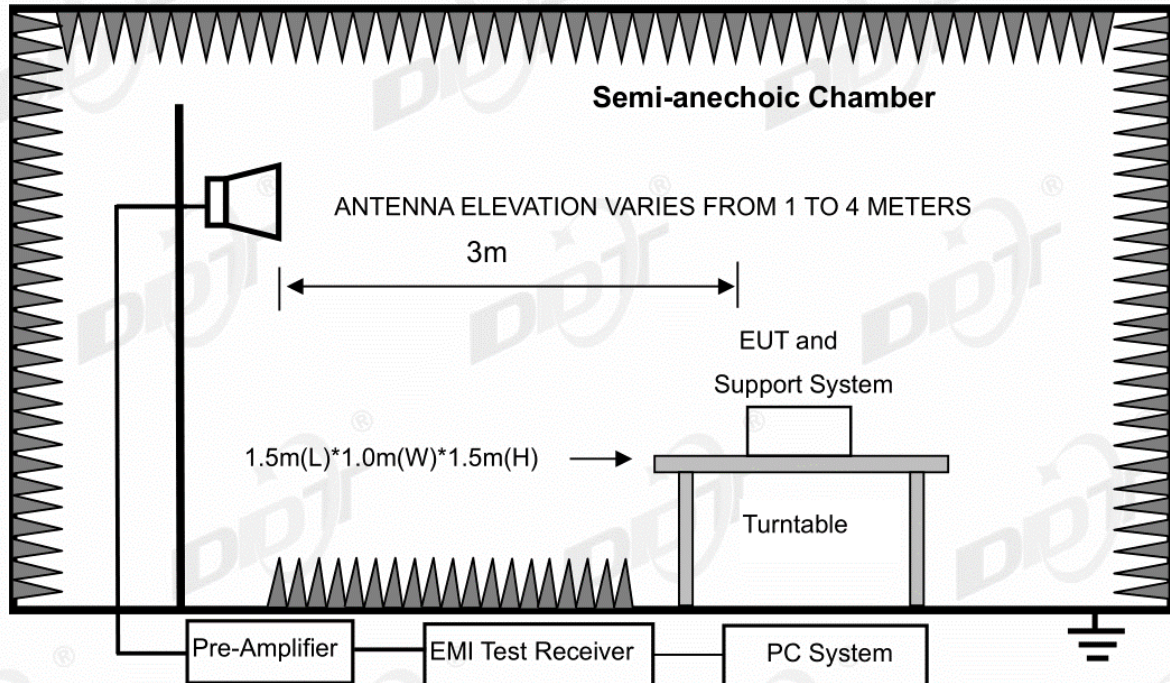

14.2. Limit

All restriction band should comply with 15.209 and RSS-Gen section 8.9 limits, other emission should be at least 20 dB below the fundamental.

14.3. Test Procedure

Same with Radiated Emission except change investigated frequency range from 2310 MHz to 2410 MHz and 2475 MHz to 2500 MHz.

Remark: All restriction band have been tested, and only the worst case is shown in report.

14.4. Test result


Pass. (See below detailed test result)

Remark: hopping on and hopping off mode all have been test, hopping off mode is worse and reported only. Scan with all mode, the worst case is recorded in this report.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-01-10 **Tested By:** Bairong
EUT: 6.75-INCH AUDIO/VIDEO RECEIVER **Model Number:** iLX-W670
Test Mode: Tx mode **Power Supply:** DC 12V
Condition: Temp:22.6°C;Humi:54.3%;Press:100.3kPa **Test Site:** DDT 3# Chamber
File Path: d:\ts\2022 report data\Q23010302-2E iLX-W670\FCC ABOVE 1G\8
Memo: DH5 2402

Test Graph

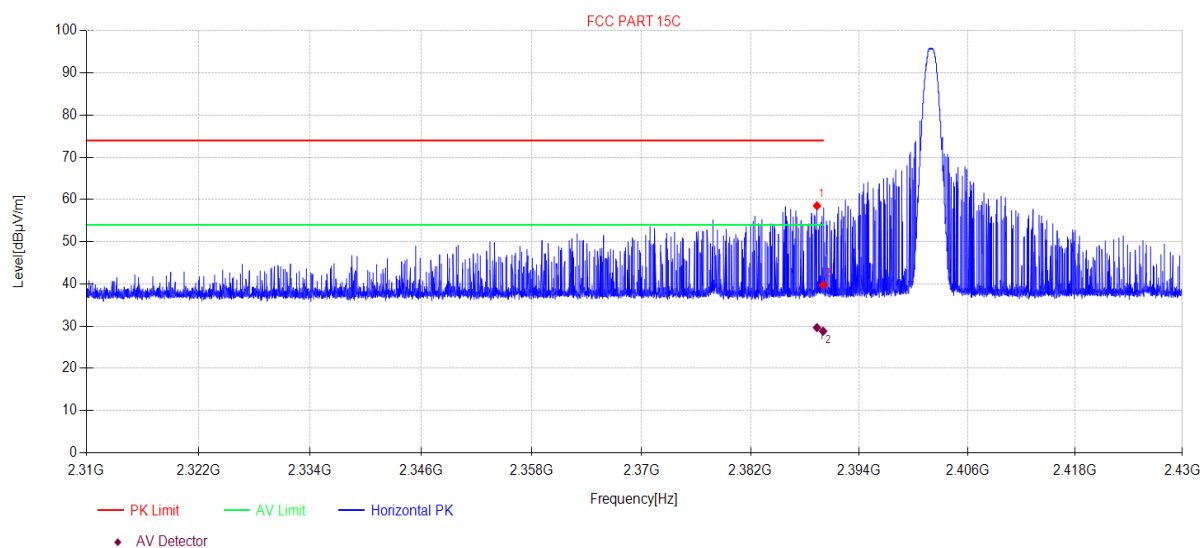

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2389.32	68.11	3.05	27.48	-40.13	58.51	74.00	15.49	PK	Horizontal
2	2390.00	49.35	3.06	27.48	-40.13	39.76	74.00	34.24	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2389.32	39.26	3.05	27.48	-40.13	29.66	54.00	24.34	AV	Horizontal
2	2390.00	38.41	3.06	27.48	-40.13	28.82	54.00	25.18	AV	Horizontal


Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-01-10 **Tested By:** Bairong
EUT: 6.75-INCH AUDIO/VIDEO RECEIVER **Model Number:** iLX-W670
Test Mode: Tx mode **Power Supply:** DC 12V
Condition: Temp:22.6°C;Humi:54.3%;Press:100.3kPa **Test Site:** DDT 3# Chamber
File Path: d:\ts\2022 report data\Q23010302-2E iLX-W670\FCC ABOVE 1G\9
Memo: DH5 2402

Test Graph

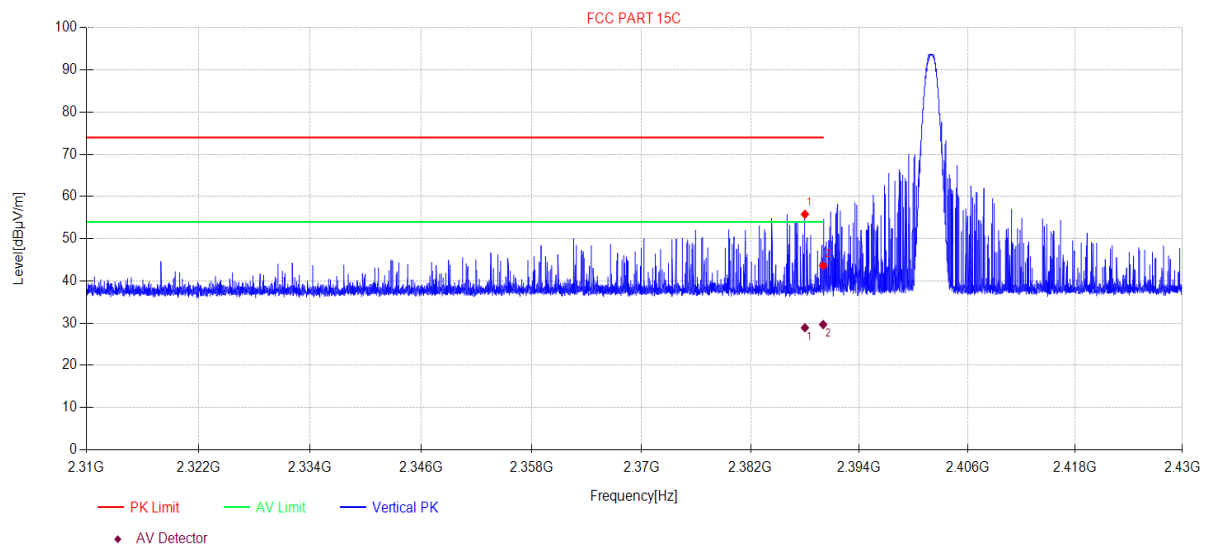

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2387.99	65.40	3.05	27.48	-40.13	55.80	74.00	18.20	PK	Vertical
2	2390.00	53.20	3.06	27.48	-40.13	43.61	74.00	30.39	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2387.99	38.51	3.05	27.48	-40.13	28.91	54.00	25.09	AV	Vertical
2	2390.00	39.26	3.06	27.48	-40.13	29.67	54.00	24.33	AV	Vertical


Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-01-10 **Tested By:** Bairong
EUT: 6.75-INCH AUDIO/VIDEO RECEIVER **Model Number:** iLX-W670
Test Mode: Tx mode **Power Supply:** DC 12V
Condition: Temp:22.6°C;Humi:54.3%;Press:100.3kPa **Test Site:** DDT 3# Chamber
File Path: d:\ts\2022 report data\Q23010302-2E iLX-W670\FCC ABOVE 1G\14
Memo: DH5 2480

Test Graph

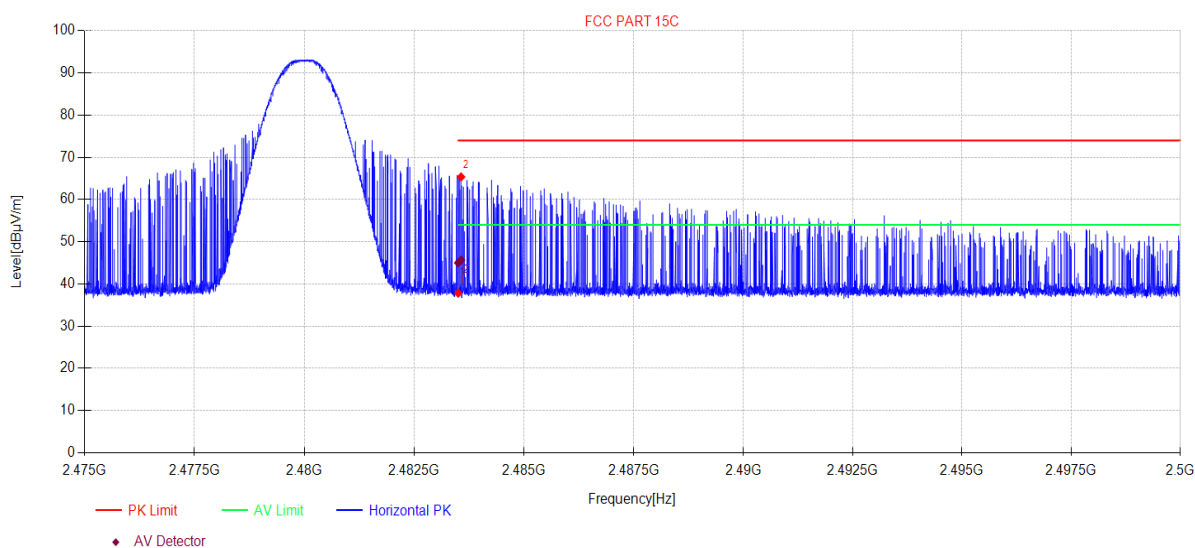

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.50	47.17	3.15	27.73	-40.23	37.82	74.00	36.18	PK	Horizontal
2	2483.57	74.70	3.15	27.73	-40.23	65.35	74.00	8.65	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.50	54.36	3.15	27.73	-40.23	45.01	54.00	8.99	AV	Horizontal
2	2483.57	55.01	3.15	27.73	-40.23	45.66	54.00	8.34	AV	Horizontal


Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-01-10 **Tested By:** Bairong
EUT: 6.75-INCH AUDIO/VIDEO RECEIVER **Model Number:** iLX-W670
Test Mode: Tx mode **Power Supply:** DC 12V
Condition: Temp:22.6°C;Humi:54.3%;Press:100.3kPa **Test Site:** DDT 3# Chamber
File Path: d:\ts\2022 report data\Q23010302-2E iLX-W670\FCC ABOVE 1G\15
Memo: DH5 2480

Test Graph

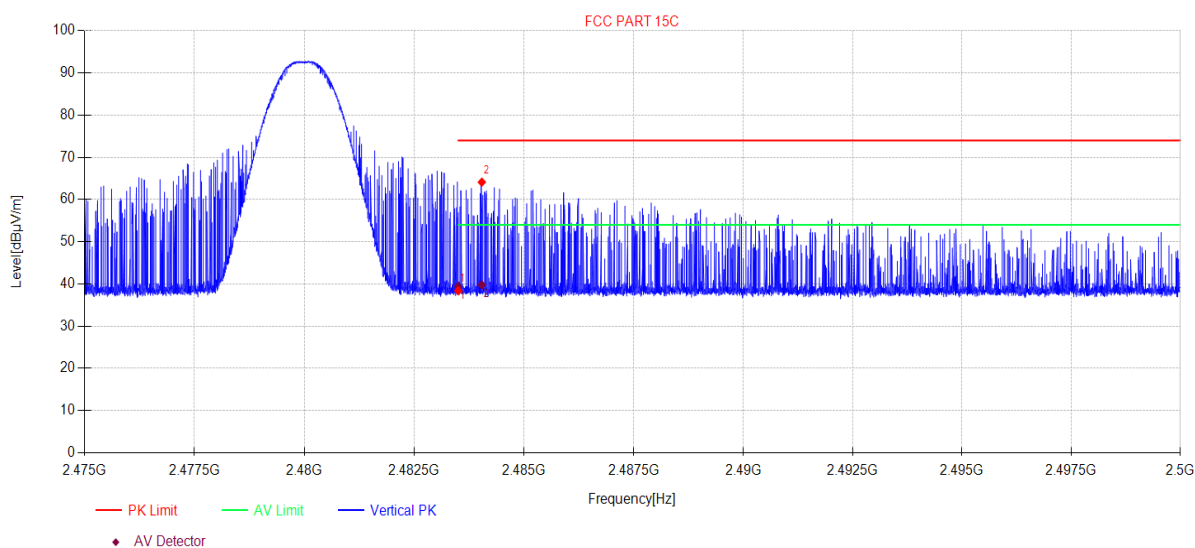

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.50	47.74	3.15	27.73	-40.23	38.39	74.00	35.61	PK	Vertical
2	2484.04	73.45	3.15	27.74	-40.23	64.11	74.00	9.89	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.50	48.75	3.15	27.73	-40.23	39.40	54.00	14.60	AV	Vertical
2	2484.04	49.12	3.15	27.74	-40.23	39.78	54.00	14.22	AV	Vertical


Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-01-10 **Tested By:** Bairong
EUT: 6.75-INCH AUDIO/VIDEO RECEIVER **Model Number:** iLX-W670
Test Mode: Tx mode **Power Supply:** DC 12V
Condition: Temp:22.6°C;Humi:54.3%;Press:100.3kPa **Test Site:** DDT 3# Chamber
File Path: d:\ts\2022 report data\Q23010302-2E iLX-W670\FCC ABOVE 1G\10
Memo: 2DH5 2402

Test Graph

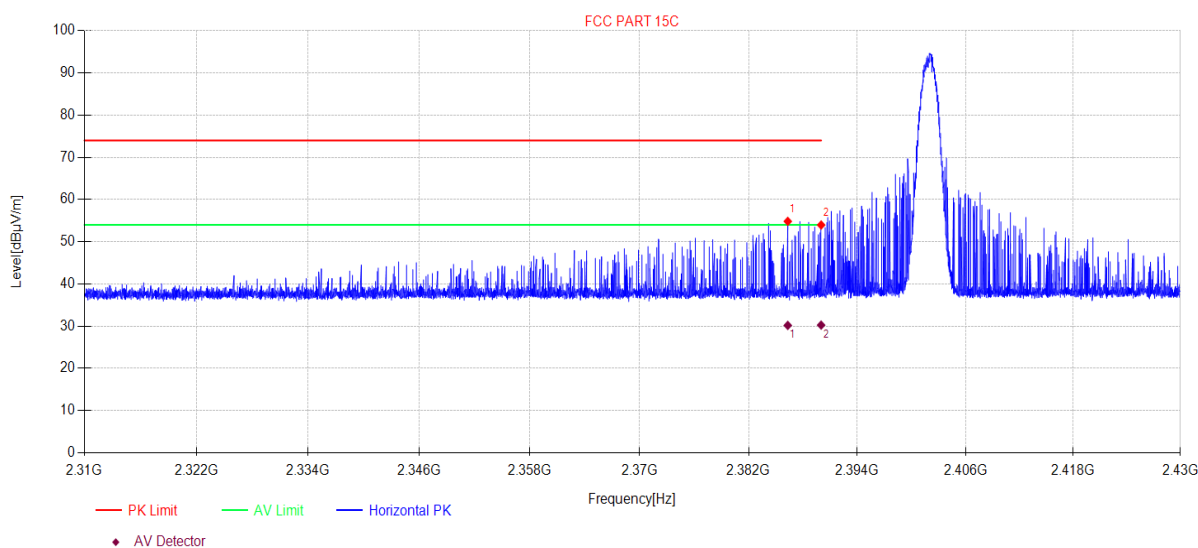

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2386.32	64.43	3.05	27.47	-40.12	54.83	74.00	19.17	PK	Horizontal
2	2390.00	63.55	3.06	27.48	-40.13	53.96	74.00	20.04	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2386.32	39.78	3.05	27.47	-40.12	30.18	54.00	23.82	AV	Horizontal
2	2390.00	39.84	3.06	27.48	-40.13	30.25	54.00	23.75	AV	Horizontal


Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-01-10 **Tested By:** Bairong
EUT: 6.75-INCH AUDIO/VIDEO RECEIVER **Model Number:** iLX-W670
Test Mode: Tx mode **Power Supply:** DC 12V
Condition: Temp:22.6°C;Humi:54.3%;Press:100.3kPa **Test Site:** DDT 3# Chamber
File Path: d:\ts\2022 report data\Q23010302-2E iLX-W670\FCC ABOVE 1G\11
Memo: 2DH5 2402

Test Graph

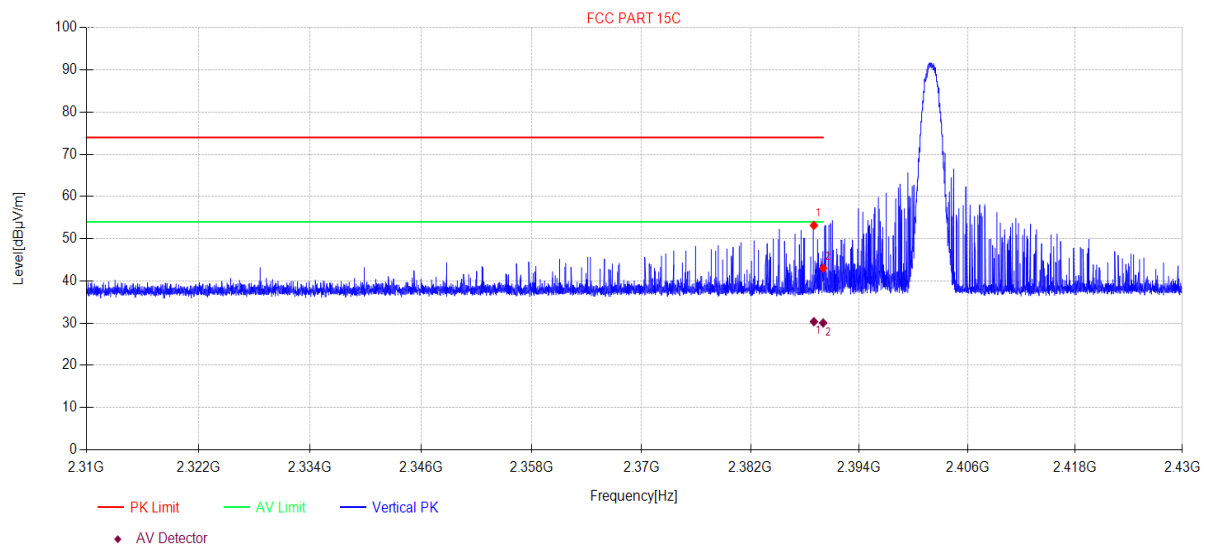

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.98	62.76	3.05	27.48	-40.13	53.16	74.00	20.84	PK	Vertical
2	2390.00	52.60	3.06	27.48	-40.13	43.01	74.00	30.99	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.98	39.95	3.05	27.48	-40.13	30.35	54.00	23.65	AV	Vertical
2	2390.00	39.63	3.06	27.48	-40.13	30.04	54.00	23.96	AV	Vertical


Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-01-10 **Tested By:** Bairong
EUT: 6.75-INCH AUDIO/VIDEO RECEIVER **Model Number:** iLX-W670
Test Mode: Tx mode **Power Supply:** DC 12V
Condition: Temp:22.6°C;Humi:54.3%;Press:100.3kPa **Test Site:** DDT 3# Chamber
File Path: d:\ts\2022 report data\Q23010302-2E iLX-W670\FCC ABOVE 1G\16
Memo: 2DH5 2480

Test Graph

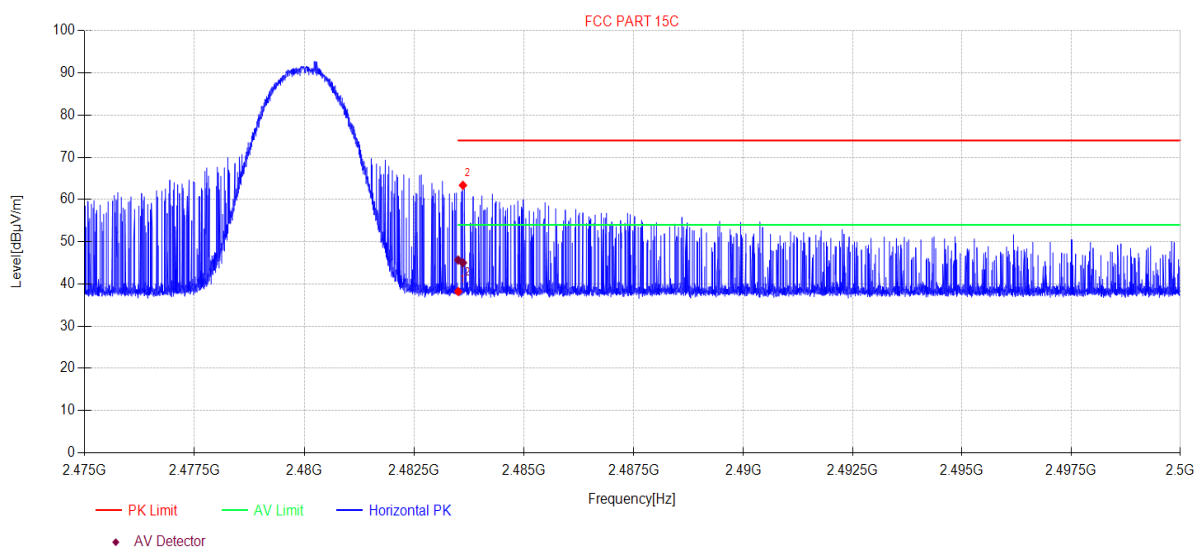

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.50	47.55	3.15	27.73	-40.23	38.20	74.00	35.80	PK	Horizontal
2	2483.61	72.72	3.15	27.73	-40.23	63.37	74.00	10.63	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.50	55.01	3.15	27.73	-40.23	45.66	54.00	8.34	AV	Horizontal
2	2483.61	54.36	3.15	27.73	-40.23	45.01	54.00	8.99	AV	Horizontal


Note:

- Level = Reading + Cable Loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-01-10 **Tested By:** Bairong
EUT: 6.75-INCH AUDIO/VIDEO RECEIVER **Model Number:** iLX-W670
Test Mode: Tx mode **Power Supply:** DC 12V
Condition: Temp:22.6°C;Humi:54.3%;Press:100.3kPa **Test Site:** DDT 3# Chamber
File Path: d:\ts\2022 report data\Q23010302-2E iLX-W670\FCC ABOVE 1G\17
Memo: 2DH5 2480

Test Graph

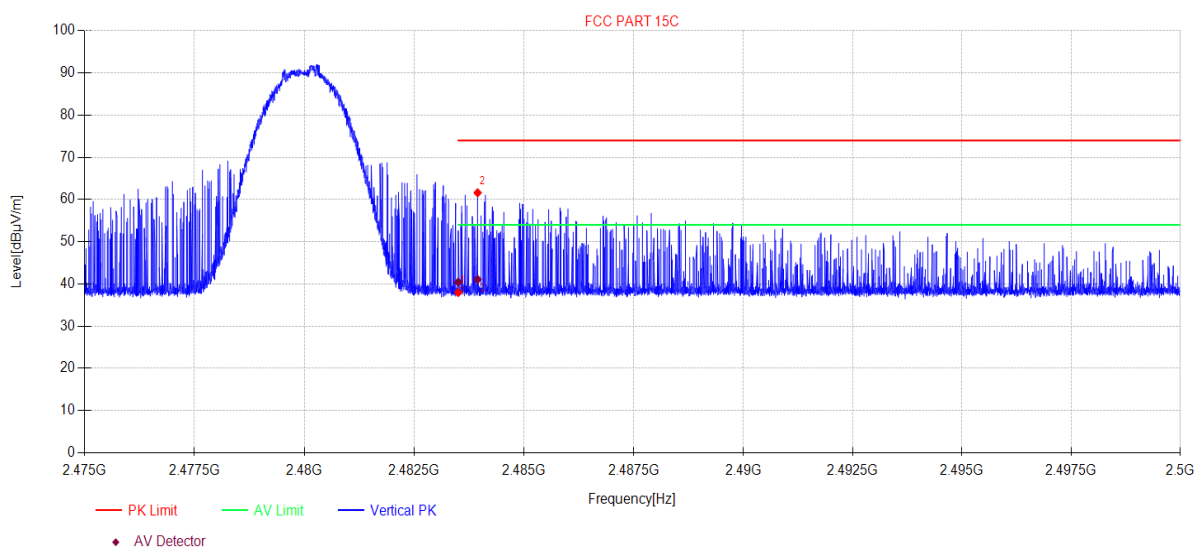

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.50	47.33	3.15	27.73	-40.23	37.98	74.00	36.02	PK	Vertical
2	2483.94	70.94	3.15	27.74	-40.23	61.60	74.00	12.40	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.50	49.78	3.15	27.73	-40.23	40.43	54.00	13.57	AV	Vertical
2	2483.94	50.41	3.15	27.74	-40.23	41.07	54.00	12.93	AV	Vertical


Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-01-10 **Tested By:** Bairong
EUT: 6.75-INCH AUDIO/VIDEO RECEIVER **Model Number:** iLX-W670
Test Mode: Tx mode **Power Supply:** DC 12V
Condition: Temp:22.6°C;Humi:54.3%;Press:100.3kPa **Test Site:** DDT 3# Chamber
File Path: d:\ts\2022 report data\Q23010302-2E iLX-W670\FCC ABOVE 1G\12
Memo: 3DH5 2402

Test Graph

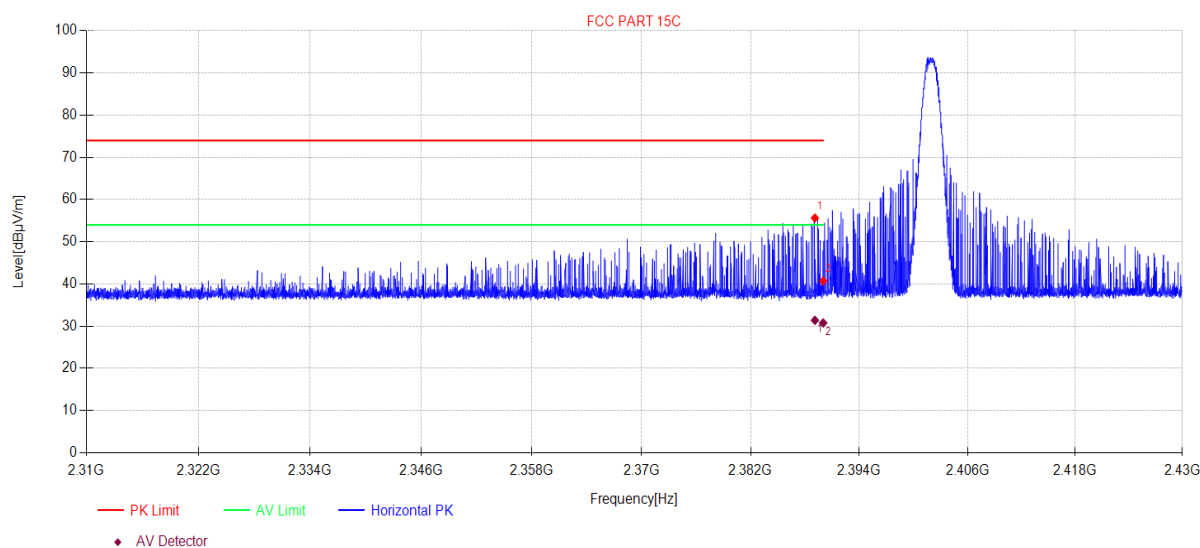

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2389.09	65.24	3.05	27.48	-40.13	55.64	74.00	18.36	PK	Horizontal
2	2390.00	50.31	3.06	27.48	-40.13	40.72	74.00	33.28	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2389.09	40.98	3.05	27.48	-40.13	31.38	54.00	22.62	AV	Horizontal
2	2390.00	40.36	3.06	27.48	-40.13	30.77	54.00	23.23	AV	Horizontal


Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-01-10 **Tested By:** Bairong
EUT: 6.75-INCH AUDIO/VIDEO RECEIVER **Model Number:** iLX-W670
Test Mode: Tx mode **Power Supply:** DC 12V
Condition: Temp:22.6°C;Humi:54.3%;Press:100.3kPa **Test Site:** DDT 3# Chamber
File Path: d:\ts\2022 report data\Q23010302-2E iLX-W670\FCC ABOVE 1G\13
Memo: 3DH5 2402

Test Graph

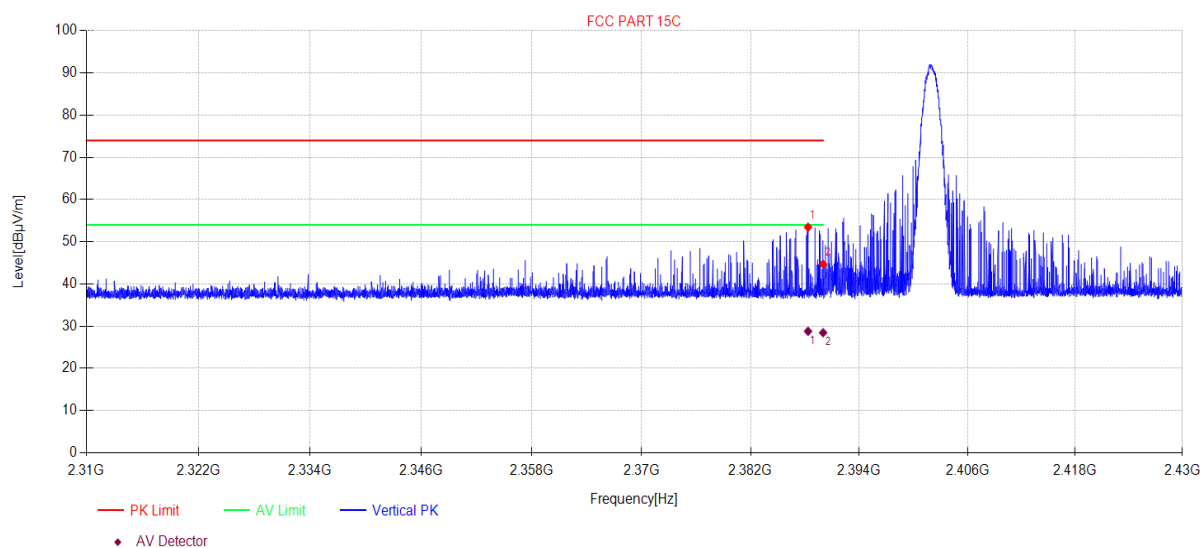

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.34	63.04	3.05	27.48	-40.13	53.44	74.00	20.56	PK	Vertical
2	2390.00	54.27	3.06	27.48	-40.13	44.68	74.00	29.32	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.34	38.37	3.05	27.48	-40.13	28.77	54.00	25.23	AV	Vertical
2	2390.00	38.04	3.06	27.48	-40.13	28.45	54.00	25.55	AV	Vertical


Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-01-10 **Tested By:** Bairong
EUT: 6.75-INCH AUDIO/VIDEO RECEIVER **Model Number:** iLX-W670
Test Mode: Tx mode **Power Supply:** DC 12V
Condition: Temp:22.6°C;Humi:54.3%;Press:100.3kPa **Test Site:** DDT 3# Chamber
File Path: d:\ts\2022 report data\Q23010302-2E iLX-W670\FCC ABOVE 1G\18
Memo: 3DH5 2480

Test Graph

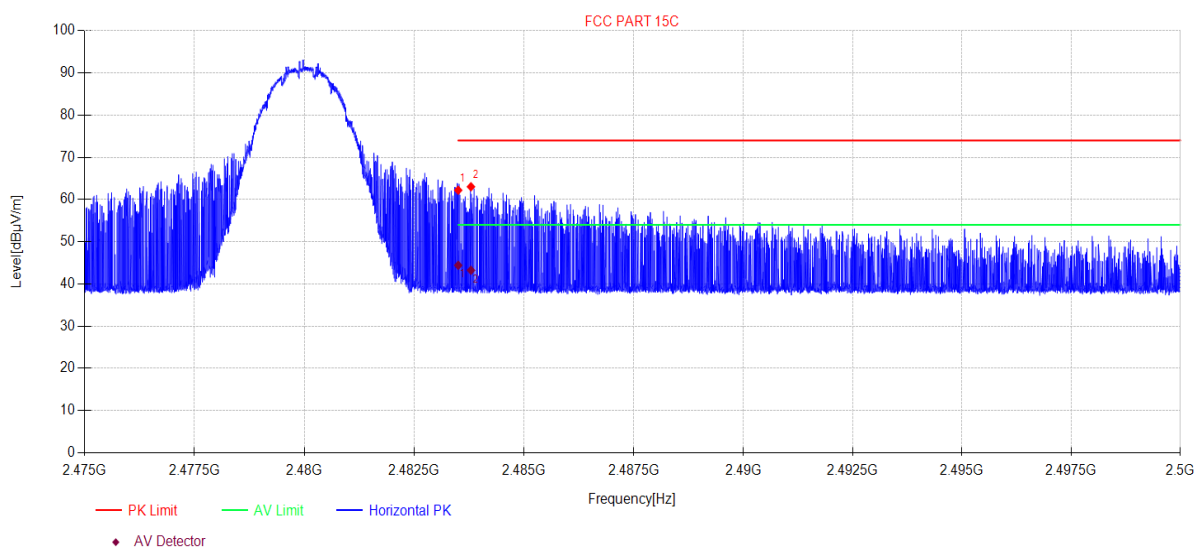

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.50	71.55	3.15	27.73	-40.23	62.20	74.00	11.80	PK	Horizontal
2	2483.79	72.37	3.15	27.74	-40.23	63.03	74.00	10.97	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.50	53.76	3.15	27.73	-40.23	44.41	54.00	9.59	AV	Horizontal
2	2483.79	52.58	3.15	27.74	-40.23	43.24	54.00	10.76	AV	Horizontal


Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-01-10 **Tested By:** Bairong
EUT: 6.75-INCH AUDIO/VIDEO RECEIVER **Model Number:** iLX-W670
Test Mode: Tx mode **Power Supply:** DC 12V
Condition: Temp:22.6°C;Humi:54.3%;Press:100.3kPa **Test Site:** DDT 3# Chamber
File Path: d:\ts\2022 report data\Q23010302-2E iLX-W670\FCC ABOVE 1G\19
Memo: 3DH5 2480

Test Graph

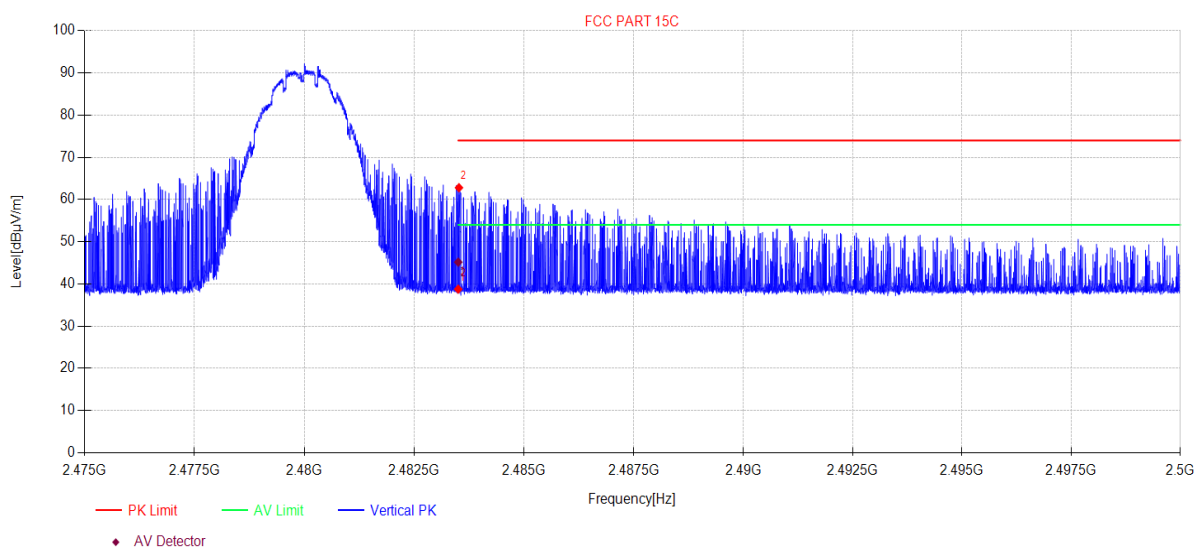

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.50	48.11	3.15	27.73	-40.23	38.76	74.00	35.24	PK	Vertical
2	2483.52	72.15	3.15	27.73	-40.23	62.80	74.00	11.20	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.50	54.51	3.15	27.73	-40.23	45.16	54.00	8.84	AV	Vertical
2	2483.52	54.07	3.15	27.73	-40.23	44.72	54.00	9.28	AV	Vertical

Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

15. Power Line Conducted Emission

15.1. Block diagram of test setup

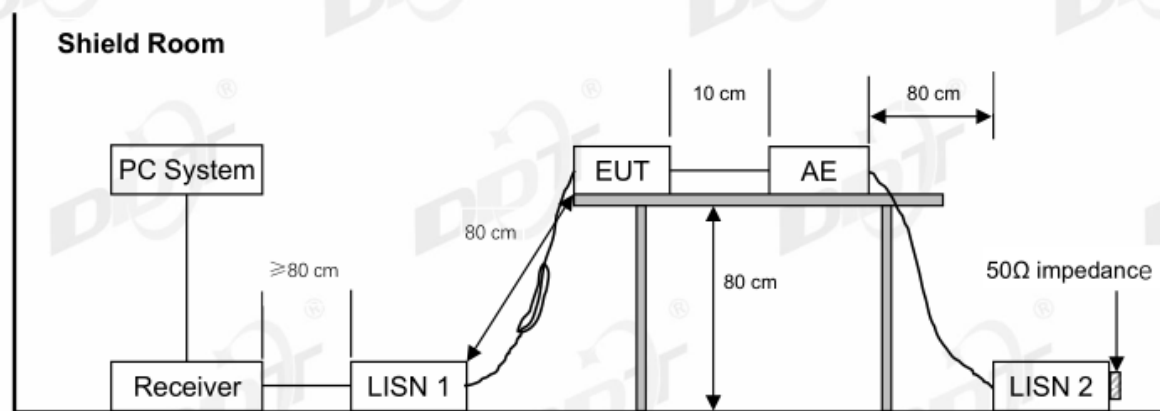

15.2. Power line conducted emission limits

Frequency	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150 kHz ~ 500 kHz	66 ~ 56*	56 ~ 46*
500 kHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

15.3. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest

emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

15.4. Test result

Not Applicable

Remark: Conducted limits are not required for devices which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines according to 15.207(C).

16. Antenna Requirements

16.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For intentional device, according to RSS-Gen issue 5 section 6.8.

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna.

The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

16.2. Result

The antenna used for this product is PCB antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 0.08 dBi.

18. Photos of the EUT

Please refer to appendix I .

END OF REPORT