

# TEST REPORT

Applicant Name : ShenZhen Bijiasuo Electronic Co.,Ltd  
Address : 1F,B13,DayunSoftwareTown,Heao,Yuanshan,longgang,Shenzhen,China  
Report Number : RA230619-34931E-RF-00B  
FCC ID: 2BB2X-CP82

**Test Standard (s)**

FCC PART 15.407

**Sample Description**


Product: Car Adapter  
Model No.: CP82, PCS47, PCS51, PCS55, PCS56, AA82, CP85, AA85, CP86, CP87, CA361, AP-ACP, PCS60, PCS61, PCS65, PCS66, CP88, CP89, CP90, CP91, CA451, CA481, C5, C5SE  
Trade Mark N/A  
Date Received: 2023-06-19  
Date of Test: 2023-06-28 to 2023-07-27  
Report Date: 2023-07-27

|              |       |
|--------------|-------|
| Test Result: | PASS* |
|--------------|-------|

\* In the configuration tested, the EUT complied with the standards above.

**Prepared and Checked By:**

Amanda Wei  
EMC Engineer

**Approved By:**

Candy Li  
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk ★.

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk \*. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

**Shenzhen Accurate Technology Co., Ltd.**

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China  
Tel: +86 755-26503290 Fax: +86 755-26503290 Web: [www.atc-lab.com](http://www.atc-lab.com)

## **TABLE OF CONTENTS**

|   |           |
|---|-----------|
| <b>DOCUMENT REVISION HISTORY .....</b>                                  | <b>3</b>  |
| <b>GENERAL INFORMATION.....</b>   | <b>4</b>  |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....                | 4         |
| OBJECTIVE .....   | 4         |
| TEST METHODOLOGY .....  | 4         |
| MEASUREMENT UNCERTAINTY .....   | 5         |
| TEST FACILITY .....   | 5         |
| <b>SYSTEM TEST CONFIGURATION.....</b>                                   | <b>6</b>  |
| DESCRIPTION OF TEST CONFIGURATION .....                                 | 6         |
| EUT EXERCISE SOFTWARE .....   | 6         |
| DUTY CYCLE .....  | 6         |
| EQUIPMENT MODIFICATIONS .....   | 6         |
| SUPPORT EQUIPMENT LIST AND DETAILS .....                                | 6         |
| EXTERNAL I/O CABLE.....   | 6         |
| BLOCK DIAGRAM OF TEST SETUP .....                                       | 7         |
| <b>SUMMARY OF TEST RESULTS .....</b>                                    | <b>8</b>  |
| <b>TEST EQUIPMENT LIST .....</b>  | <b>9</b>  |
| <b>FCC §1.1307 (b)-RF EXPOSURE.....</b>                                 | <b>10</b> |
| <b>FCC §15.203-ANTENNA REQUIREMENT.....</b>                             | <b>11</b> |
| APPLICABLE STANDARD .....   | 11        |
| ANTENNA CONNECTOR CONSTRUCTION .....                                    | 11        |
| <b>§15.205 &amp; §15.209 &amp; §15.407(B)-UNDESIRABLE EMISSION.....</b> | <b>12</b> |
| APPLICABLE STANDARD .....   | 12        |
| EUT SETUP .....   | 12        |
| EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....                       | 13        |
| TEST PROCEDURE .....  | 13        |
| CALCULATION .....   | 14        |
| TEST DATA .....   | 14        |
| <b>FCC §15.407(a)-BANDWIDTH.....</b>                                    | <b>22</b> |
| APPLICABLE STANDARD .....   | 22        |
| TEST PROCEDURE .....  | 22        |
| TEST DATA .....   | 23        |
| <b>FCC §15.407(a)-CONDUCTED TRANSMITTER OUTPUT POWER .....</b>          | <b>24</b> |
| APPLICABLE STANDARD .....   | 24        |
| TEST PROCEDURE .....  | 24        |
| TEST DATA .....   | 24        |
| <b>FCC §15.407(a)-POWER SPECTRAL DENSITY .....</b>                      | <b>25</b> |
| APPLICABLE STANDARD .....   | 25        |
| TEST PROCEDURE .....  | 25        |
| TEST DATA .....   | 25        |
| <b>APPENDIX .....</b>   | <b>26</b> |
| APPENDIX A1: EMISSION BANDWIDTH .....                                   | 26        |
| APPENDIX A2: OCCUPIED CHANNEL BANDWIDTH .....                           | 34        |
| APPENDIX B: MAXIMUM CONDUCTED AVERAGE OUTPUT POWER .....                | 42        |
| APPENDIX C: MAXIMUM POWER SPECTRAL DENSITY .....                        | 43        |
| APPENDIX D: DUTY CYCLE.....   | 51        |
| TEST DATA .....   | 51        |

**DOCUMENT REVISION HISTORY**

| Revision Number | Report Number          | Description of Revision | Date of Revision |
|-----------------|------------------------|-------------------------|------------------|
| 0               | RA230619-34931E-RF-00B | Original Report         | 2023-07-27       |

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

|  |   |                      |
|--|---|----------------------|
| Product                                | Car Adapter   |                      |
| Tested Model                           | CP82  |                      |
| Multiple Model                         | PCS47, PCS51, PCS55, PCS56, AA82, CP85, AA85, CP86, CP87, CA361, AP-ACP, PCS60, PCS61, PCS65, PCS66, CP88, CP89, CP90, CP91, CA451, CA481, C5, C5SE |                      |
| Model Difference                       | Please refer to DOS letter.   |                      |
| Frequency Range                        | 5G Wi-Fi: 5150-5250 MHz(802.11a/ n20/n40/ac20/ac40)   |                      |
| Maximum Average Conducted Output Power | 11.10dBm(802.11a)   | 11.09dBm(802.11ac20) |
|  | 11.09dBm(802.11n20)   | 10.71dBm(802.11ac40) |
|  | 10.69Bm(802.11n40)  |                      |
| Modulation Technique                   | OFDM  |                      |
| Antenna Specification*                 | -1.05dBi(provided by the applicant)   |                      |
| Voltage Range                          | DC 5V from USB port   |                      |
| Sample number                          | 277Q-1 (RE) & 277Q-2 (RF Conducted Test)<br>(Assigned by ATC, Shenzhen)   |                      |
| Sample/EUT Status                      | Good condition  |                      |

### Objective

This type approval report is in accordance with Part 2-Subpart J, Part 15-Subparts A and E of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart E, section 15.203, 15.205, 15.209 and 15.407 rules.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. And KDB789033D02 General U-NII Test Procedures New Rules v02r01.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

## Measurement Uncertainty

| Parameter                    | Uncertainty     |        |
|------------------------------|-----------------|--------|
| Occupied Channel Bandwidth   | 5%              |        |
| RF output power, conducted   | 0.71dB          |        |
| Unwanted Emission, conducted | 1.6dB           |        |
| Emissions, Radiated          | 30MHz - 1GHz    | 5.08dB |
|                              | 1GHz - 18GHz    | 4.96dB |
|                              | 18GHz - 26.5GHz | 5.16dB |
|                              | 26.5GHz - 40GHz | 4.64dB |
| Temperature                  | 1°C             |        |
| Humidity                     | 6%              |        |
| Supply voltages              | 0.4%            |        |

*Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.*

## Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189.

Accredited by American Association for Laboratory Accreditation (A2LA). The Certificate Number is 4297.01.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0016. The Registration Number is 30241.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in an engineering mode, which was provided by manufacturer.

The device supports 5G Wi-Fi 802.11a /n20/n40/ac20/ac40 modes.

For 5150-5250MHz Band, 6 channels are provided to testing:

| Channel | Frequency(MHz) | Channel | Frequency(MHz) |
|---------|----------------|---------|----------------|
| 36      | 5180           | 44      | 5220           |
| 38      | 5190           | 46      | 5230           |
| 40      | 5200           | 48      | 5240           |

For 802.11a, 802.11n20/ac20 channel 36, 40, 48 were tested;

For 802.11n40/ac40 channel 38, 46 were tested.

### EUT Exercise Software

“SecureCRT \*” was used to test and power level as below, which provided by manufacturer.

| Frequency Range | Mode       | Date rate | Power Level* |
|-----------------|------------|-----------|--------------|
| 5150 - 5250 MHz | 802.11a    | 6Mbps     | Default      |
|                 | 802.11n20  | MCS0      | Default      |
|                 | 802.11n40  | MCS0      | Default      |
|                 | 802.11ac20 | MCS0      | Default      |
|                 | 802.11ac40 | MCS0      | Default      |

The worst-case data rates are determined to be as above for each mode based upon investigations by measuring the average power and PSD across all data rates, bandwidths and modulations.

### Duty cycle

Please refer to the Appendix.

### Equipment Modifications

No modification was made to the EUT tested.

### Support Equipment List and Details


| Manufacturer | Description | Model         | Serial Number |
|--------------|-------------|---------------|---------------|
| Lenovo       | Notebook    | ThinkPad X240 | unknow        |

### External I/O Cable

| Cable Description | Length (m) | From Port | To  |
|-------------------|------------|-----------|-----|
| USB cable         | 2.3        | Notebook  | EUT |

## Block Diagram of Test Setup

### Radiated Emission:

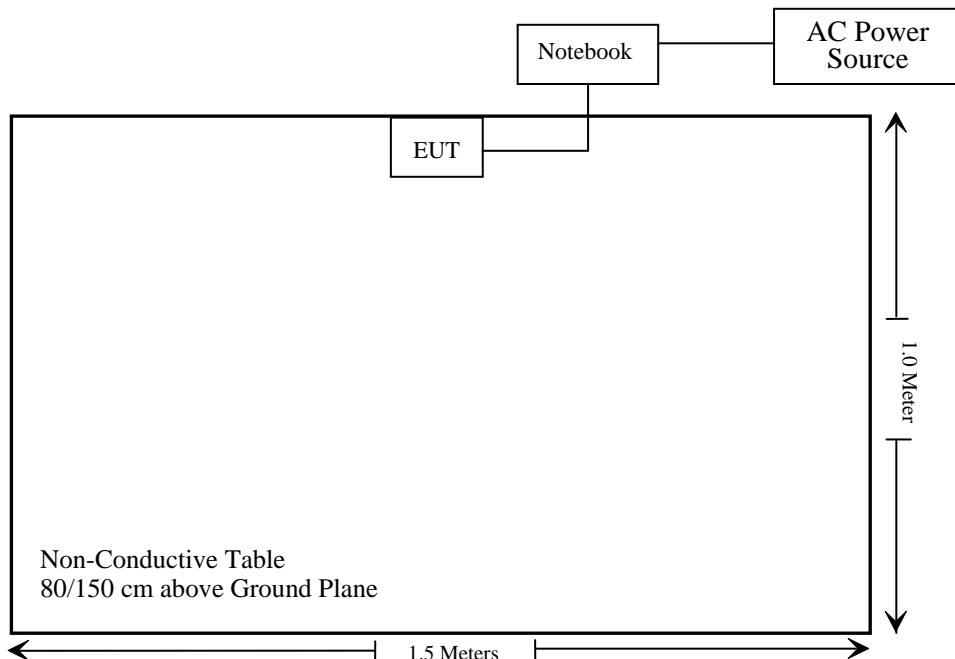

Note: the support table edge was flush with the center of turntable.

## SUMMARY OF TEST RESULTS

| FCC Rules                      | Description of Test                    | Result          |
|--------------------------------|--|-----------------|
| §1.1307 (b)                    | RF Exposure                            | Compliant       |
| §15.203                        | Antenna Requirement                    | Compliant       |
| §15.407(b)(9) & §15.207(a)     | Conducted Emissions                    | Not Applicable* |
| §15.205 & §15.209 & §15.407(b) | Undesirable Emission& Restricted Bands | Compliant       |
| §15.407(a)                     | Bandwidth                              | Compliant       |
| §15.407(a)                     | Conducted Transmitter Output Power     | Compliant       |
| §15.407 (a)                    | Power Spectral Density                 | Compliant       |
| §15.407 (h)                    | Transmit Power Control (TPC)           | Not Applicable  |
| §15.407 (h)                    | Dynamic Frequency Selection (DFS)      | Not Applicable  |

Not Applicable: the EUT not operating within frequency range of 5250-5350MHz&5470-5725MHz.

Not Applicable\*: the device is intend for vehicle use.

**TEST EQUIPMENT LIST**

| Manufacturer                                   | Description                  | Model             | Serial Number   | Calibration Date | Calibration Due Date |
|--|------------------------------|-------------------|-----------------|------------------|----------------------|
| <b>Radiated Emissions Test</b>                 |                              |                   |                 |                  |                      |
| Rohde & Schwarz                                | Test Receiver                | ESR               | 102725          | 2022/11/25       | 2023/11/24           |
| Rohde & Schwarz                                | Spectrum Analyzer            | FSV40             | 101949          | 2022/11/25       | 2023/11/24           |
| SONOMA INSTRUMENT                              | Amplifier                    | 310 N             | 186131          | 2022/11/08       | 2023/11/07           |
| A.H. Systems, inc.                             | Preamplifier                 | PAM-0118P         | 135             | 2022/11/08       | 2023/11/07           |
| Quinstar                                       | Amplifier                    | QLW-184055 36-J0  | 15964001002     | 2022/11/08       | 2023/11/07           |
| Schwarzbeck                                    | Bilog Antenna                | VULB9163          | 9163-323        | 2021/7/6         | 2024/7/5             |
| Schwarzbeck                                    | Horn Antenna                 | BBHA9120D         | 837             | 2023/02/22       | 2026/02/21           |
| Schwarzbeck                                    | HORN ANTENNA                 | BBHA9170          | 9170-359        | 2022/12/26       | 2025/12/25           |
| CD   | High PASS Filter             | HPM-8.0/18G -60   | 020             | 2022/11/25       | 2023/11/24           |
| Unknown  | RF Coaxial Cable             | No.10             | N050            | 2022/11/25       | 2023/11/24           |
| Unknown  | RF Coaxial Cable             | No.11             | N1000           | 2022/11/25       | 2023/11/24           |
| Unknown  | RF Coaxial Cable             | No.12             | N040            | 2022/11/25       | 2023/11/24           |
| Unknown  | RF Coaxial Cable             | No.13             | N300            | 2022/11/25       | 2023/11/24           |
| Unknown  | RF Coaxial Cable             | No.14             | N800            | 2022/11/25       | 2023/11/24           |
| Unknown  | RF Coaxial Cable             | No.15             | N600            | 2022/11/25       | 2023/11/24           |
| Unknown  | RF Coaxial Cable             | No.15             | N650            | 2022/11/25       | 2023/11/24           |
| Radiated Emission Test Software:e3 191218 (V9) |                              |                   |                 |                  |                      |
| <b>RF Conducted Test</b>                       |                              |                   |                 |                  |                      |
| Rohde & Schwarz                                | Spectrum Analyzer            | FSV-40            | 101495          | 2022/11/25       | 2023/11/24           |
| Rohde & Schwarz                                | Open Switch and Control Unit | OSP120 + OSP-B157 | 101244 + 100866 | 2022/11/25       | 2023/11/24           |
| Agilent  | Power Sensor                 | U2021XA           | MY5425003       | 2023/02/25       | 2024/02/24           |
| WEINSCHEL                                      | 10dB Attenuator              | 5324              | AU 3842         | 2022/11/25       | 2023/11/24           |
| Unknown  | RF Coaxial Cable             | No.31             | RF-01           | Each time        |                      |

**\* Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## FCC §1.1307 (b)-RF EXPOSURE

### Applicable Standard

According to FCC §1.1307(b), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D04 Interim General RF Exposure Guidance v01, clause 2.1.4 –MPE-Based Exemption:

An alternative to the SAR-based exemption is provided in § 1.1307(b)(3)(i)(C), for a much wider frequency range, from 300 kHz to 100 GHz, applicable for separation distances greater or equal to  $\lambda/2\pi$ , where  $\lambda$  is the free-space operating wavelength in meters. The MPE-based test exemption condition is in terms of ERP, defined as the product of the maximum antenna gain and the delivered maximum time-averaged power. For this case, a RF source is an RF exempt device if its ERP (watts) is no more than a frequency-dependent value, as detailed tabular form in Appendix B. These limits have been derived based on the basic specifications on Maximum Permissible Exposure (MPE) considered for the FCC rules in § 1.1310(e)(1).

Table to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

| RF Source frequency (MHz) | Threshold ERP (watts) |
|---------------------------|-----------------------|
| 0.3-1.34                  | 1,920 $R^2$ .         |
| 1.34-30                   | 3,450 $R^2/f^2$ .     |
| 30-300                    | 3.83 $R^2$ .          |
| 300-1,500                 | 0.0128 $R^2f$ .       |
| 1,500-100,000             | 19.2 $R^2$ .          |

f = frequency in MHz;

R = minimum separation distance from the body of a nearby person (appropriate units, e.g., m);

### Test result

For worst case:

| Mode     | Frequency Range (MHz) | Tune-up Output Power |       | Antenna Gain |       | ERP   |      | Evaluation Distance (cm) | MPE-Based Exemption Threshold (mW) |
|----------|-----------------------|----------------------|-------|--------------|-------|-------|------|--------------------------|------------------------------------|
|          |                       | (dBm)                | (mW)  | (dBi)        | (dBd) | (dBm) | (mW) |                          |                                    |
| 5G Wi-Fi | 5150-5250             | 11.5                 | 14.13 | -1.05        | -3.2  | 8.3   | 6.76 | 20                       | 768                                |

Note 1: The tune-up power was declared by the applicant.

Note 2: 0dBd=2.15dBi.

Note 3: The BLE and 5G Wi-Fi cannot transmit at same time.

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

**Result:** Compliant.

## FCC §15.203-ANTENNA REQUIREMENT

### Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.407 (a), if the transmitting antennas of directional gain greater than 6dBi are used, the transmit power and power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### Antenna Connector Construction

The EUT has one internal antenna arrangement for 5G Wi-Fi, which were permanently attached to the EUT and the antenna gains is -1.05dBi, fulfill the requirement of this section. Please refer to the EUT photos.

**Result:** Compliant.

## §15.205 & §15.209 & §15.407(B)-UNDESIRABLE EMISSION

### Applicable Standard

FCC §15.407 (b); §15.209; §15.205;


(b) Undesirable emission limits. Except as shown in paragraph (b) (7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:


- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
  - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

### EUT Setup

#### Below 1 GHz:

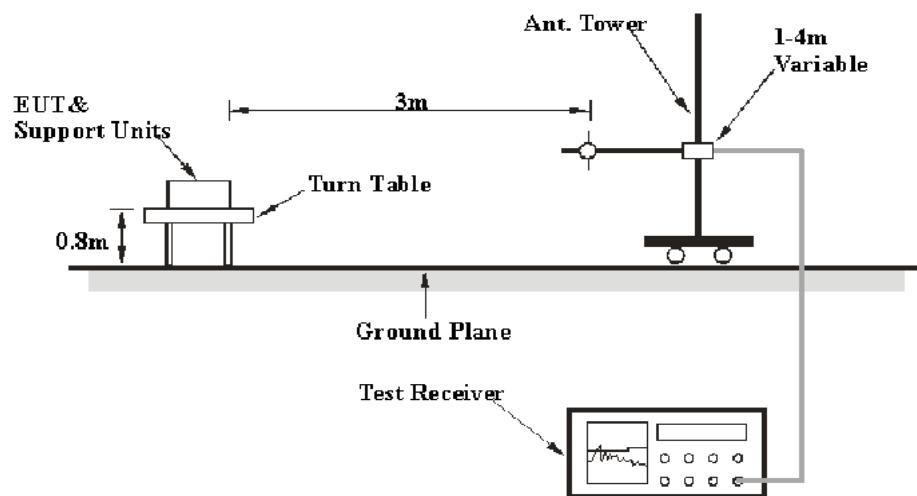

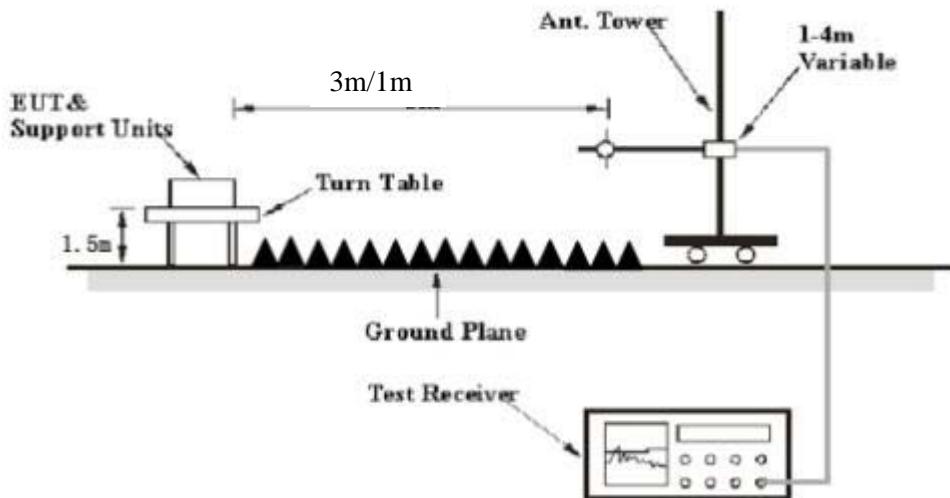**Above 1 GHz:**

Note: 1-18GHz tested @3m, 18-40GHz tested @1m.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC 15.209 and FCC 15.407 limits.

**EMI Test Receiver & Spectrum Analyzer Setup**

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

| Frequency Range   | RBW     | Video B/W    | IF B/W  | Measurement |
|-------------------|---------|--------------|---------|-------------|
| 30 MHz – 1000 MHz | 100 kHz | 300 kHz      | 120 kHz | QP          |
| Above 1 GHz       | 1 MHz   | 3 MHz        | /       | PK          |
|                   | 1MHz    | 10 Hz Note 1 | /       | Average     |
|                   | 1MHz    | >1/T Note 2  | /       | Average     |

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

If the maximized peak measured value complies with the limit, then it is unnecessary to perform QP/Average measurement.

**Test Procedure****Radiated Spurious Emission**

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all the installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

According to ANSI C63.10-2013,9.4: For field strength measurements made at other than the distance at which the applicable limit is specified, extrapolate the measured field strength to the field strength at the distance specified by the limit using an inverse distance correction factor (20 dB/decade of distance). In some cases, a different distance correction factor may be required;

$$E_{\text{SpecLimit}} = E_{\text{Meas}} + 20 \log \left( \frac{d_{\text{Meas}}}{d_{\text{SpecLimit}}} \right)$$

where

$E_{\text{SpecLimit}}$  is the field strength of the emission at the distance specified by the limit, in dB $\mu$ V/m

$E_{\text{Meas}}$  is the field strength of the emission at the measurement distance, in dB $\mu$ V/m

$d_{\text{Meas}}$  is the measurement distance, in m

$d_{\text{SpecLimit}}$  is the distance specified by the limit, in m

So the extrapolation factor of 1m is  $20 \log(1/3) = -9.5$  dB, for 18-40GHz range, the limit of 1m distance was added by 9.5dB from limit of 3m to compared with the result measurement at 1m distance.

## Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Over Limit/Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Level} / \text{Corrected Amplitude} - \text{Limit} \\ \text{Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

## Test Data

### Environmental Conditions

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 22-23°C   |
| <b>Relative Humidity:</b> | 53-58 %   |
| <b>ATM Pressure:</b>      | 101.0 kPa |

*The Below 1GHz testing was performed by Jason Liu on 2023-06-29.*

*The Above 1GHz testing was performed by Jimi Zheng on 2023-06-28.*

*EUT operation mode: 5G WIFI Transmitting*


*(Pre-scan in the X, Y and Z axes of orientation, the worst case orientation was photo and recorded)*

**Test Result:** Please refer the below tables and plots.

*Note: For below 1GHz, when the test result of peak was 6dB below to the limit of QP, just peak value was recorded.*


**30 MHz~1 GHz: (worst case for 802.11a, 5200MHz)**

**Horizontal**

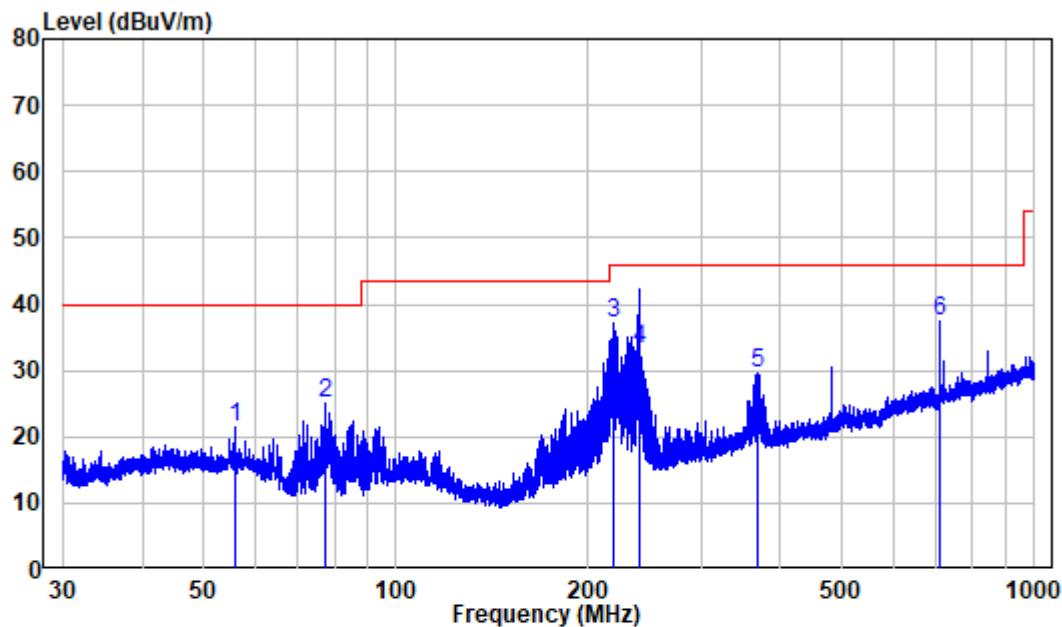

Site : chamber  
Condition: 3m HORIZONTAL  
Job No. : RA230619-34931E-RF  
Test Mode: 5G WIFI Transmitting

| Freq | Factor  | Read   |       | Limit |       | Over   | Remark |
|------|---------|--------|-------|-------|-------|--------|--------|
|      |         | Level  | Level | Line  | Line  |        |        |
| 1    | 55.854  | -10.20 | 31.49 | 21.29 | 40.00 | -18.71 | Peak   |
| 2    | 77.593  | -16.57 | 41.61 | 25.04 | 40.00 | -14.96 | Peak   |
| 3    | 219.268 | -11.45 | 48.43 | 36.98 | 46.00 | -9.02  | Peak   |
| 4    | 239.987 | -10.91 | 44.11 | 33.20 | 46.00 | -12.80 | QP     |
| 5    | 367.306 | -7.44  | 37.04 | 29.60 | 46.00 | -16.40 | Peak   |
| 6    | 711.986 | -1.43  | 38.91 | 37.48 | 46.00 | -8.52  | Peak   |

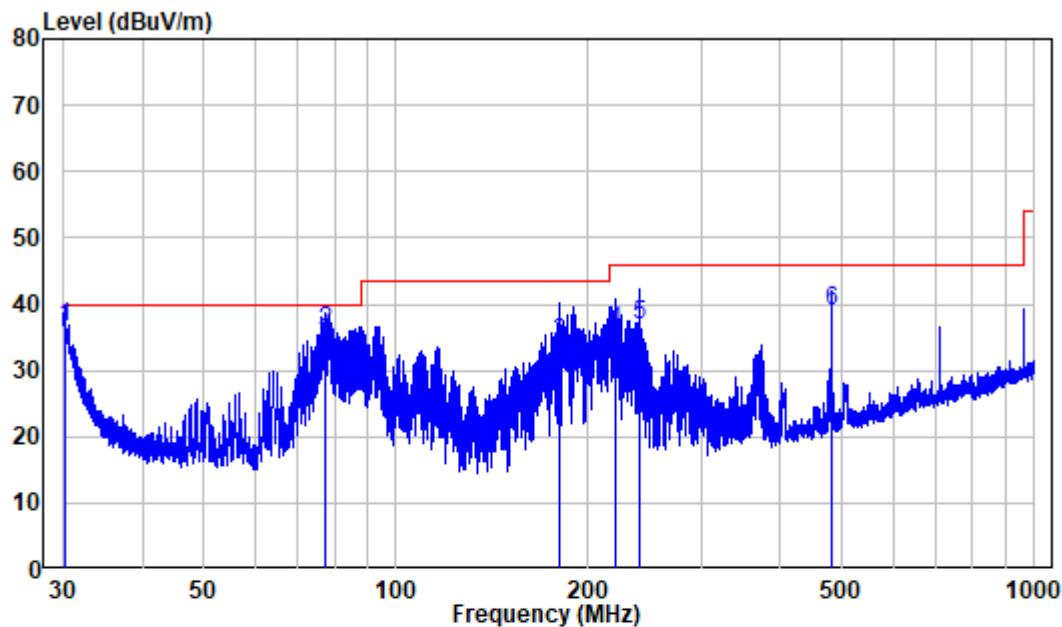**Vertical**

Site : chamber  
Condition: 3m VERTICAL  
Job No. : RA230619-34931E-RF  
Test Mode: 5G WIFI Transmitting

| Freq | Factor  | Read   |       | Limit |        | Over   | Remark |
|------|---------|--------|-------|-------|--------|--------|--------|
|      |         | MHz    | dB/m  | dBuV  | dBuV/m | Line   | Limit  |
| 1    | 30.357  | -12.35 | 48.89 | 36.54 | 40.00  | -3.46  | QP     |
| 2    | 77.559  | -16.57 | 52.40 | 35.83 | 40.00  | -4.17  | QP     |
| 3    | 180.017 | -12.77 | 47.03 | 34.26 | 43.50  | -9.24  | QP     |
| 4    | 220.327 | -11.40 | 47.26 | 35.86 | 46.00  | -10.14 | QP     |
| 5    | 240.093 | -10.90 | 47.70 | 36.80 | 46.00  | -9.20  | QP     |
| 6    | 480.107 | -5.00  | 43.90 | 38.90 | 46.00  | -7.10  | QP     |

## 1-40GHz:

## 5150-5250MHz:

| Frequency (MHz)           | Receiver             |          | Turntable Degree | Rx Antenna |             | Corrected Factor (dB/m) | Corrected Amplitude (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
|---------------------------|----------------------|----------|------------------|------------|-------------|-------------------------|------------------------------------|----------------------|-------------|
|                           | Reading (dB $\mu$ V) | PK/QP/AV |                  | Height (m) | Polar (H/V) |                         |                                    |                      |             |
| 802.11A, Low Channel      |                      |          |                  |            |             |                         |                                    |                      |             |
| 4500                      | 57.68                | PK       | 27               | 1.3        | H           | -6.01                   | 51.67                              | 74                   | -22.33      |
| 4500                      | 56.98                | PK       | 165              | 2.0        | V           | -6.01                   | 50.97                              | 74                   | -23.03      |
| 5150                      | 57.70                | PK       | 91               | 1.3        | H           | -4.29                   | 53.41                              | 74                   | -20.59      |
| 5150                      | 57.65                | PK       | 217              | 1.1        | V           | -4.29                   | 53.36                              | 74                   | -20.64      |
| 10360                     | 46.13                | PK       | 236              | 1.1        | H           | 6.03                    | 52.16                              | 68.2                 | -16.04      |
| 10360                     | 45.29                | PK       | 112              | 1.3        | V           | 6.03                    | 51.32                              | 68.2                 | -16.88      |
| 802.11A, Middle Channel   |                      |          |                  |            |             |                         |                                    |                      |             |
| 10400                     | 46.46                | PK       | 56               | 1.9        | H           | 6.30                    | 52.76                              | 68.2                 | -15.44      |
| 10400                     | 45.58                | PK       | 175              | 1.2        | V           | 6.30                    | 51.88                              | 68.2                 | -16.32      |
| 802.11A, High Channel     |                      |          |                  |            |             |                         |                                    |                      |             |
| 5350                      | 56.26                | PK       | 233              | 1.1        | H           | -3.15                   | 53.11                              | 74                   | -20.89      |
| 5350                      | 56.34                | PK       | 241              | 1.5        | V           | -3.15                   | 53.19                              | 74                   | -20.81      |
| 5460                      | 55.43                | PK       | 111              | 1.3        | H           | -2.38                   | 53.05                              | 74                   | -20.95      |
| 5460                      | 56.35                | PK       | 249              | 1.5        | V           | -2.38                   | 53.97                              | 74                   | -20.03      |
| 10480                     | 44.48                | PK       | 240              | 2.0        | H           | 6.00                    | 50.48                              | 68.2                 | -17.72      |
| 10480                     | 45.34                | PK       | 356              | 1.1        | V           | 6.00                    | 51.34                              | 68.2                 | -16.86      |
| 802.11N20, Low Channel    |                      |          |                  |            |             |                         |                                    |                      |             |
| 4500                      | 56.20                | PK       | 345              | 1.1        | H           | -6.01                   | 50.19                              | 74                   | -23.81      |
| 4500                      | 57.20                | PK       | 255              | 1.7        | V           | -6.01                   | 51.19                              | 74                   | -22.81      |
| 5150                      | 57.38                | PK       | 111              | 1.4        | H           | -4.29                   | 53.09                              | 74                   | -20.91      |
| 5150                      | 57.54                | PK       | 124              | 1.7        | V           | -4.29                   | 53.25                              | 74                   | -20.75      |
| 10360                     | 45.58                | PK       | 177              | 1.4        | H           | 6.03                    | 51.61                              | 68.2                 | -16.59      |
| 10360                     | 46.55                | PK       | 167              | 1.6        | V           | 6.03                    | 52.58                              | 68.2                 | -15.62      |
| 802.11N20, Middle Channel |                      |          |                  |            |             |                         |                                    |                      |             |
| 10400                     | 44.99                | PK       | 223              | 1.7        | H           | 6.30                    | 51.29                              | 68.2                 | -16.91      |
| 10400                     | 45.63                | PK       | 279              | 2.2        | V           | 6.30                    | 51.93                              | 68.2                 | -16.27      |
| 802.11N20, High Channel   |                      |          |                  |            |             |                         |                                    |                      |             |
| 5350                      | 55.79                | PK       | 115              | 1.9        | H           | -3.15                   | 52.64                              | 74                   | -21.36      |
| 5350                      | 57.12                | PK       | 306              | 1.8        | V           | -3.15                   | 53.97                              | 74                   | -20.03      |
| 5460                      | 56.27                | PK       | 210              | 1.8        | H           | -2.38                   | 53.89                              | 74                   | -20.11      |
| 5460                      | 56.29                | PK       | 306              | 1.1        | V           | -2.38                   | 53.91                              | 74                   | -20.09      |
| 10480                     | 44.74                | PK       | 106              | 1.4        | H           | 6.00                    | 50.74                              | 68.2                 | -17.46      |
| 10480                     | 46.40                | PK       | 10               | 1.1        | V           | 6.00                    | 52.40                              | 68.2                 | -15.8       |

| Frequency (MHz)             | Receiver             |          | Turntable Degree | Rx Antenna |             | Corrected Factor (dB/m) | Corrected Amplitude (dB $\mu$ V/m) | Limit          | Margin |
|-----------------------------|----------------------|----------|------------------|------------|-------------|-------------------------|------------------------------------|----------------|--------|
|                             | Reading (dB $\mu$ V) | PK/QP/AV |                  | Height (m) | Polar (H/V) |                         |                                    | (dB $\mu$ V/m) | (dB)   |
| 802.11N40, Low Channel      |                      |          |                  |            |             |                         |                                    |                |        |
| 4500                        | 56.71                | PK       | 124              | 1.1        | H           | -6.01                   | 50.70                              | 74             | -23.3  |
| 4500                        | 58.44                | PK       | 303              | 2.1        | V           | -6.01                   | 52.43                              | 74             | -21.57 |
| 5150                        | 58.01                | PK       | 248              | 1.2        | H           | -4.29                   | 53.72                              | 74             | -20.28 |
| 5150                        | 57.10                | PK       | 260              | 2.0        | V           | -4.29                   | 52.81                              | 74             | -21.19 |
| 10380                       | 45.34                | PK       | 103              | 1.4        | H           | 6.17                    | 51.51                              | 68.2           | -16.69 |
| 10380                       | 45.21                | PK       | 332              | 1.2        | V           | 6.17                    | 51.38                              | 68.2           | -16.82 |
| 802.11N40, High Channel     |                      |          |                  |            |             |                         |                                    |                |        |
| 5350                        | 56.81                | PK       | 188              | 1.6        | H           | -3.15                   | 53.66                              | 74             | -20.34 |
| 5350                        | 56.91                | PK       | 230              | 1.3        | V           | -3.15                   | 53.76                              | 74             | -20.24 |
| 5460                        | 55.78                | PK       | 128              | 1.8        | H           | -2.38                   | 53.40                              | 74             | -20.6  |
| 5460                        | 56.32                | PK       | 79               | 1.6        | V           | -2.38                   | 53.94                              | 74             | -20.06 |
| 10460                       | 45.43                | PK       | 359              | 1.7        | H           | 5.91                    | 51.34                              | 68.2           | -16.86 |
| 10460                       | 45.26                | PK       | 352              | 2.1        | V           | 5.91                    | 51.17                              | 68.2           | -17.03 |
| 802.11ac 20, Low Channel    |                      |          |                  |            |             |                         |                                    |                |        |
| 4500                        | 59.36                | PK       | 111              | 1.2        | H           | -6.01                   | 53.35                              | 74             | -20.65 |
| 4500                        | 56.54                | PK       | 198              | 2.2        | V           | -6.01                   | 50.53                              | 74             | -23.47 |
| 5150                        | 58.27                | PK       | 289              | 1.9        | H           | -4.29                   | 53.98                              | 74             | -20.02 |
| 5150                        | 57.58                | PK       | 7                | 1.1        | V           | -4.29                   | 53.29                              | 74             | -20.71 |
| 10360                       | 46.43                | PK       | 299              | 1.9        | H           | 6.03                    | 52.46                              | 68.2           | -15.74 |
| 10360                       | 45.85                | PK       | 67               | 1.7        | V           | 6.03                    | 51.88                              | 68.2           | -16.32 |
| 802.11ac 20, Middle Channel |                      |          |                  |            |             |                         |                                    |                |        |
| 10400                       | 45.92                | PK       | 308              | 1.8        | H           | 6.30                    | 52.22                              | 68.2           | -15.98 |
| 10400                       | 45.26                | PK       | 313              | 1.3        | V           | 6.30                    | 51.56                              | 68.2           | -16.64 |
| 802.11ac 20, High Channel   |                      |          |                  |            |             |                         |                                    |                |        |
| 5350                        | 56.60                | PK       | 106              | 1.9        | H           | -3.15                   | 53.45                              | 74             | -20.55 |
| 5350                        | 55.91                | PK       | 135              | 1.4        | V           | -3.15                   | 52.76                              | 74             | -21.24 |
| 5460                        | 56.33                | PK       | 128              | 2.0        | H           | -2.38                   | 53.95                              | 74             | -20.05 |
| 5460                        | 55.87                | PK       | 136              | 1.2        | V           | -2.38                   | 53.49                              | 74             | -20.51 |
| 10480                       | 46.40                | PK       | 262              | 1.1        | H           | 6.00                    | 52.40                              | 68.2           | -15.8  |
| 10480                       | 45.66                | PK       | 27               | 1.3        | V           | 6.00                    | 51.66                              | 68.2           | -16.54 |
| 802.11ac 40, Low Channel    |                      |          |                  |            |             |                         |                                    |                |        |
| 4500                        | 56.82                | PK       | 16               | 2.0        | H           | -6.01                   | 50.81                              | 74             | -23.19 |
| 4500                        | 56.84                | PK       | 7                | 1.1        | V           | -6.01                   | 50.83                              | 74             | -23.17 |
| 5150                        | 57.74                | PK       | 293              | 1.8        | H           | -4.29                   | 53.45                              | 74             | -20.55 |
| 5150                        | 57.89                | PK       | 67               | 1.7        | V           | -4.29                   | 53.60                              | 74             | -20.4  |
| 10380                       | 46.30                | PK       | 308              | 1.8        | H           | 6.17                    | 52.47                              | 68.2           | -15.73 |
| 10380                       | 46.16                | PK       | 313              | 1.3        | V           | 6.17                    | 52.33                              | 68.2           | -15.87 |

| Frequency<br>(MHz)       | Receiver                |          | Turntable<br>Degree | Rx Antenna    |                | Corrected<br>Factor<br>(dB/m) | Corrected<br>Amplitude<br>(dB $\mu$ V/m) | Limit<br>(dB $\mu$ V/m) | Margin<br>(dB) |
|--------------------------|-------------------------|----------|---------------------|---------------|----------------|-------------------------------|--|-------------------------|----------------|
|                          | Reading<br>(dB $\mu$ V) | PK/QP/AV |                     | Height<br>(m) | Polar<br>(H/V) |                               |  |                         |                |
| 802.11ac 40,High Channel |                         |          |                     |               |                |                               |  |                         |                |
| 5350                     | 57.10                   | PK       | 262                 | 1.1           | H              | -3.15                         | 53.95                                    | 74                      | -20.05         |
| 5350                     | 56.96                   | PK       | 106                 | 1.9           | V              | -3.15                         | 53.81                                    | 74                      | -20.19         |
| 5460                     | 56.15                   | PK       | 135                 | 1.4           | H              | -2.38                         | 53.77                                    | 74                      | -20.23         |
| 5460                     | 56.10                   | PK       | 128                 | 2.0           | V              | -2.38                         | 53.72                                    | 74                      | -20.28         |
| 10460                    | 45.79                   | PK       | 136                 | 1.2           | H              | 5.91                          | 51.70                                    | 68.2                    | -16.5          |
| 10460                    | 46.14                   | PK       | 53                  | 1.5           | V              | 5.91                          | 52.05                                    | 68.2                    | -16.15         |

**Note:**



Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor



Corrected Amplitude = Corrected Factor + Reading

Margin = Corrected Amplitude – Limit

The other spurious emission which is in the noise floor level was not recorded.

When the test result of peak was 20dB below to the limit of peak, which can be compliant to the average limit, just peak value was recorded.

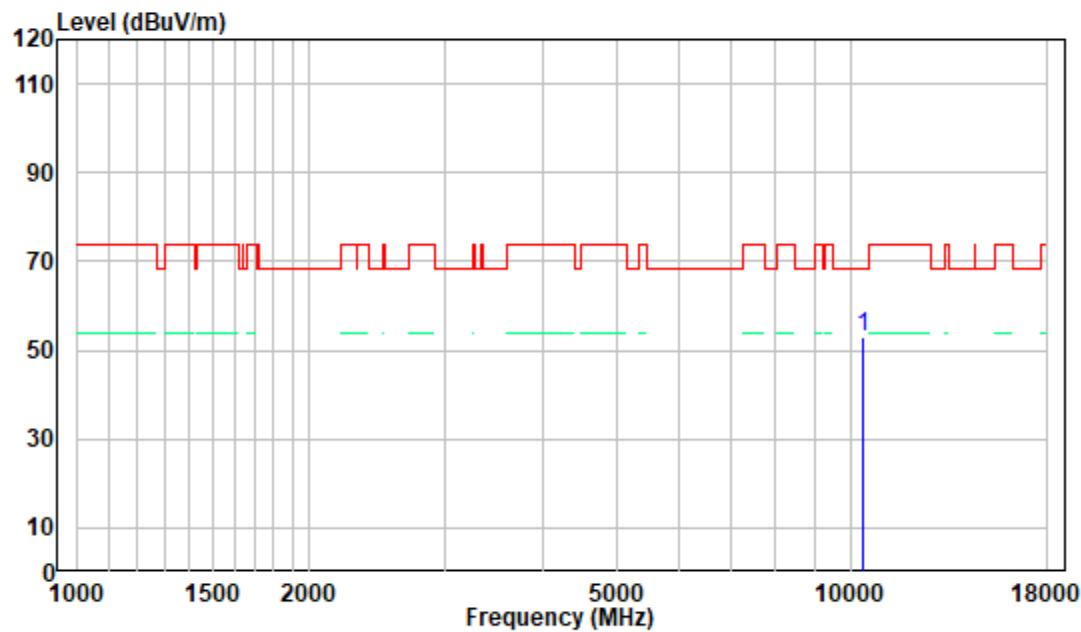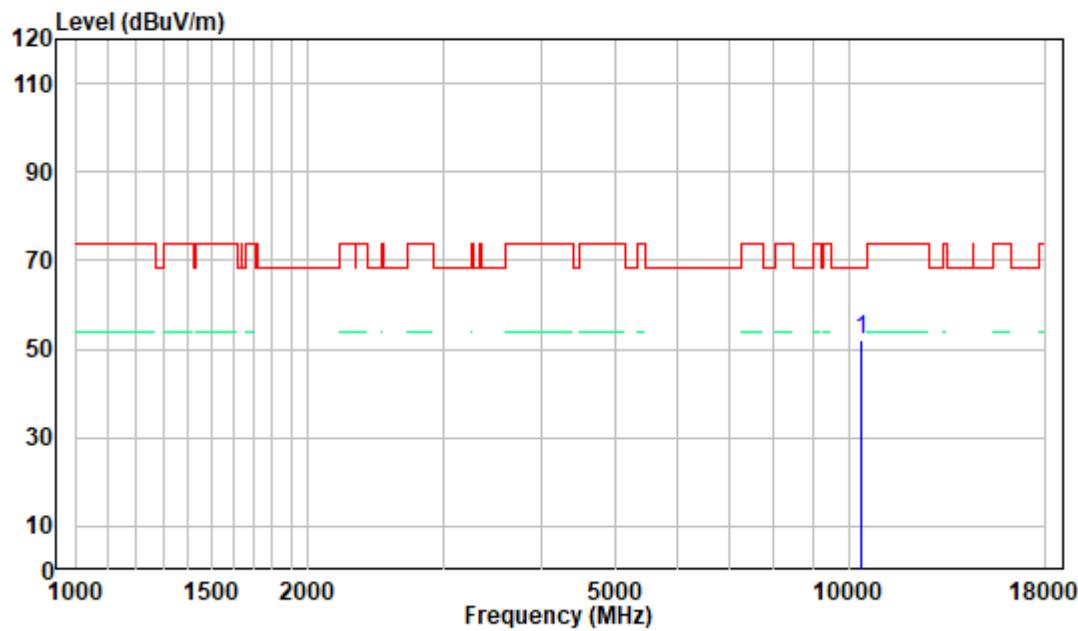**1-18 GHz:****Pre-scan plots:****802.11a, 5200MHz  
Horizontal****Vertical**

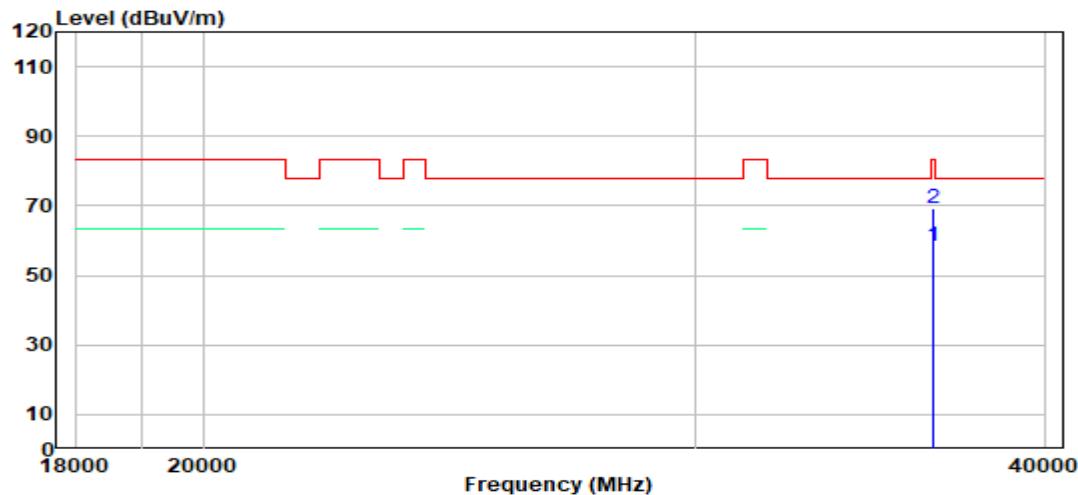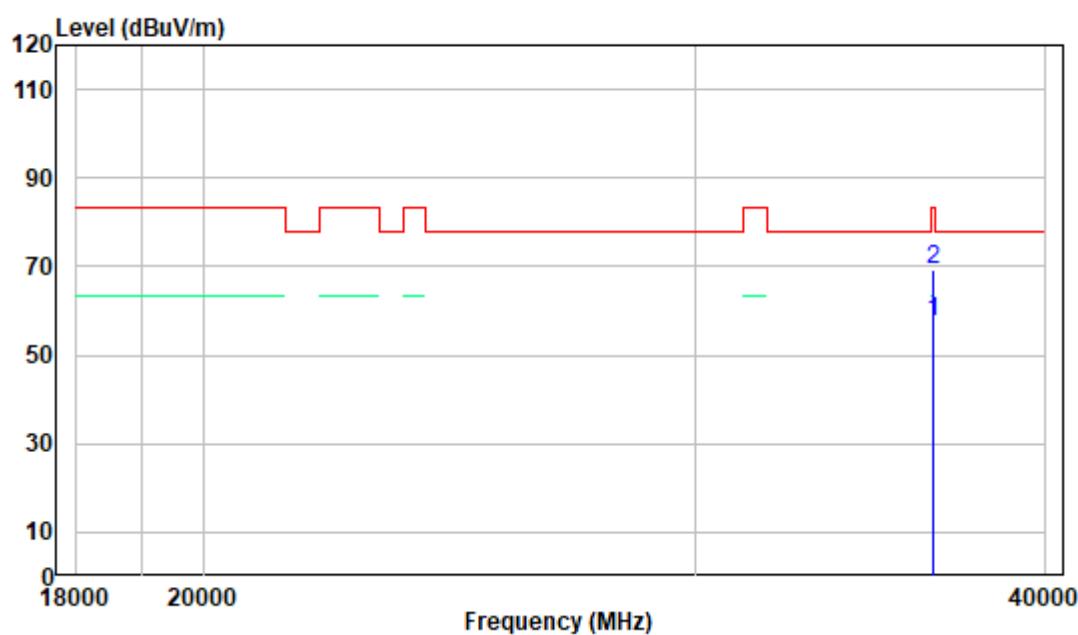**18-40 GHz:****Pre-scan plots:****802.11a, 5200MHz  
Horizontal****Vertical**

## FCC §15.407(a)-BANDWIDTH

### Applicable Standard

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

### Test Procedure

According to KDB789033 D02 section II.C. and section II.D.

#### 1. Emission Bandwidth (EBW)

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW  $>$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.


#### 2. 99% Occupied Bandwidth

The 99% occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. Measurement of the 99% occupied bandwidth is *required* only as a condition for using the optional bandedge measurement techniques described in II.G.3.d). Measurements of 99% occupied bandwidth may also optionally be used in lieu of the EBW to define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with Section 15.407(a).

The following procedure shall be used for measuring (99%) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1% to 5% of the OBW
4. Set VBW  $\geq 3 \times$  RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99% power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99% power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

Note: For devices that use channel aggregation refer to III.A and III.C for determining 99% bandwidth.

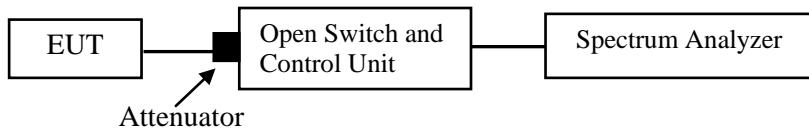

## Test Data

### Environmental Conditions

|                    |            |
|--------------------|------------|
| Temperature:       | 26 °C      |
| Relative Humidity: | 46 %       |
| ATM Pressure:      | 100.19 kPa |

*The testing was performed by Matt Liang on 2023-07-07.*

*EUT operation mode: Transmitting*

**Test Result:** PASS. Please refer to the Appendix.

## FCC §15.407(a)-CONDUCTED TRANSMITTER OUTPUT POWER

### Applicable Standard


For an outdoor access point operating in the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

For an indoor access point operating in the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### Test Procedure

According to KDB789033 D02 section II.E.3.b).

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



### Test Data

#### Environmental Conditions

|                    |            |
|--------------------|------------|
| Temperature:       | 26 °C      |
| Relative Humidity: | 42 %       |
| ATM Pressure:      | 100.19 kPa |

*The testing was performed by Matt Liang on 2023-07-27.*

*EUT operation mode: Transmitting*

**Test Result:** PASS. Please refer to the Appendix.

## FCC §15.407(a)-POWER SPECTRAL DENSITY

### Applicable Standard

For an outdoor access point operating in the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

For an indoor access point operating in the band 5.15 - 5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

**Duty cycle ≥98%**


KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-1 should be applied.

**Duty cycle <98%, duty cycle variations are less than ±2%**

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-2 should be applied.

**Duty cycle <98%, duty cycle variations exceed ±2%**

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-3 should be applied.



### Test Data

#### Environmental Conditions

|                    |            |
|--------------------|------------|
| Temperature:       | 26 °C      |
| Relative Humidity: | 42 %       |
| ATM Pressure:      | 100.19 kPa |

*The testing was performed by Matt Liang on 2023-07-27.*

*EUT operation mode: Transmitting*


**Test Result:** PASS. Please refer to the Appendix.

**APPENDIX****Appendix A1: Emission Bandwidth****Test Result****5150-5250 MHz**


| Test Mode  | Antenna | Freq(MHz) | 26db EBW [MHz] | FL[MHz] | FH[MHz] | Limit[MHz] | Verdict |
|------------|---------|-----------|----------------|---------|---------|------------|---------|
| 11A        | Ant1    | 5180      | 23.04          | 5168.20 | 5191.24 | ---        | PASS    |
|            |         | 5200      | 23.40          | 5188.24 | 5211.64 | ---        | PASS    |
|            |         | 5240      | 23.32          | 5228.36 | 5251.68 | ---        | PASS    |
| 11N20SISO  | Ant1    | 5180      | 24.32          | 5167.40 | 5191.72 | ---        | PASS    |
|            |         | 5200      | 23.76          | 5188.12 | 5211.88 | ---        | PASS    |
|            |         | 5240      | 24.36          | 5227.32 | 5251.68 | ---        | PASS    |
| 11N40SISO  | Ant1    | 5190      | 48.72          | 5165.44 | 5214.16 | ---        | PASS    |
|            |         | 5230      | 49.76          | 5205.28 | 5255.04 | ---        | PASS    |
| 11AC20SISO | Ant1    | 5180      | 24.40          | 5167.44 | 5191.84 | ---        | PASS    |
|            |         | 5200      | 24.68          | 5188.12 | 5212.80 | ---        | PASS    |
|            |         | 5240      | 25.00          | 5227.44 | 5252.44 | ---        | PASS    |
| 11AC40SISO | Ant1    | 5190      | 49.36          | 5165.04 | 5214.40 | ---        | PASS    |
|            |         | 5230      | 49.68          | 5204.88 | 5254.56 | ---        | PASS    |

## Test Graphs


11A\_Ant1\_5180

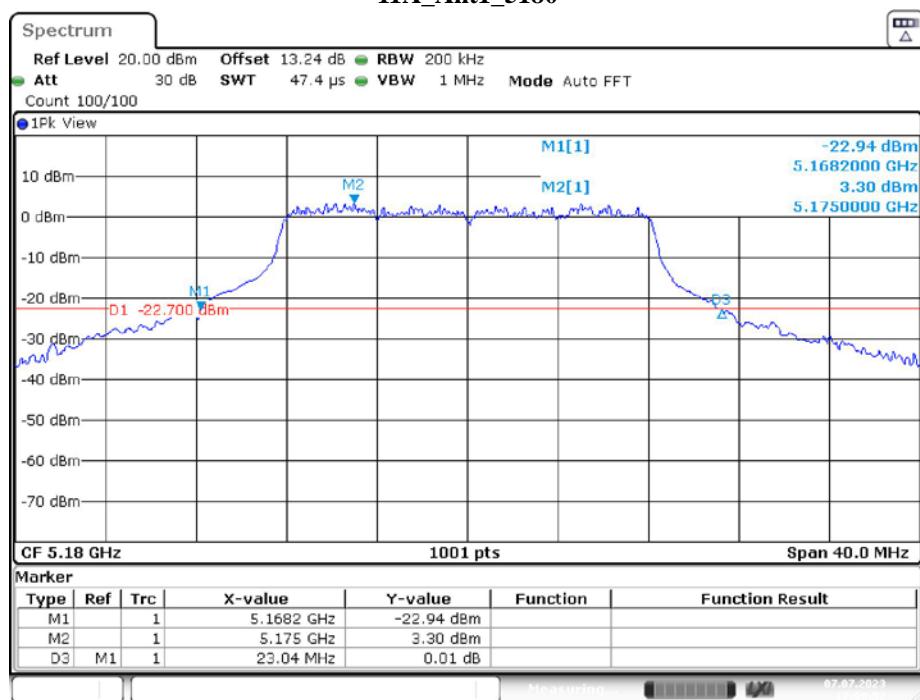

11A\_Ant1\_5200

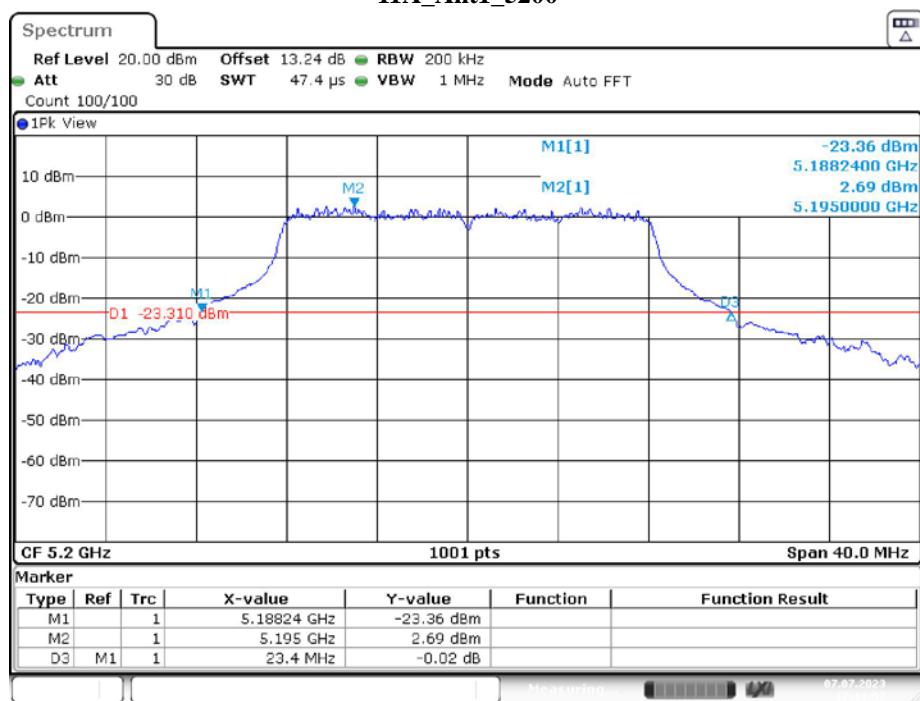


## 11A\_Ant1\_5240

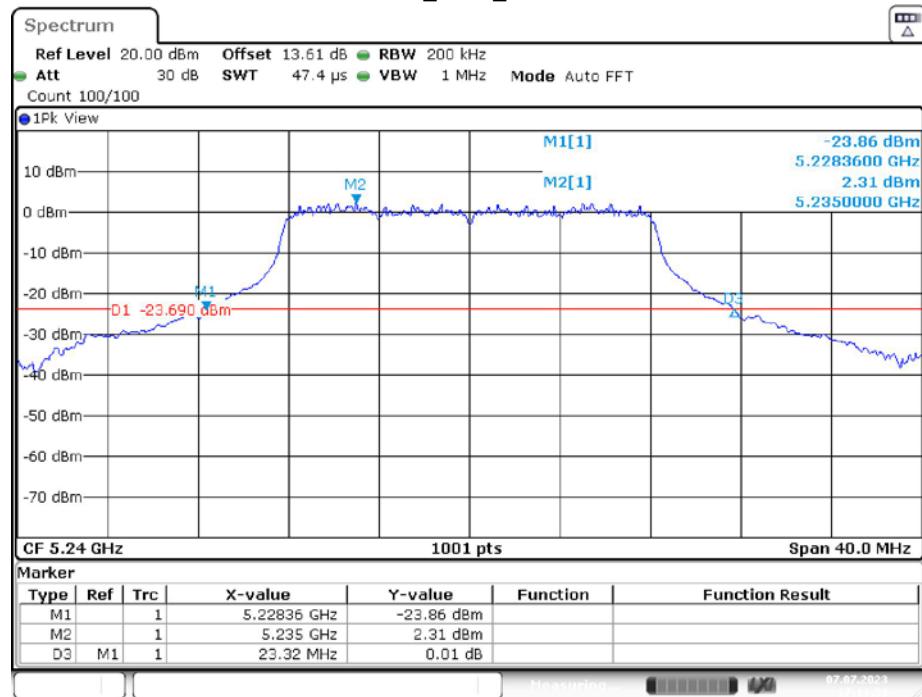


Date: 7.JUL.2023 17:13:34


## 11N20SISO\_Ant1\_5180

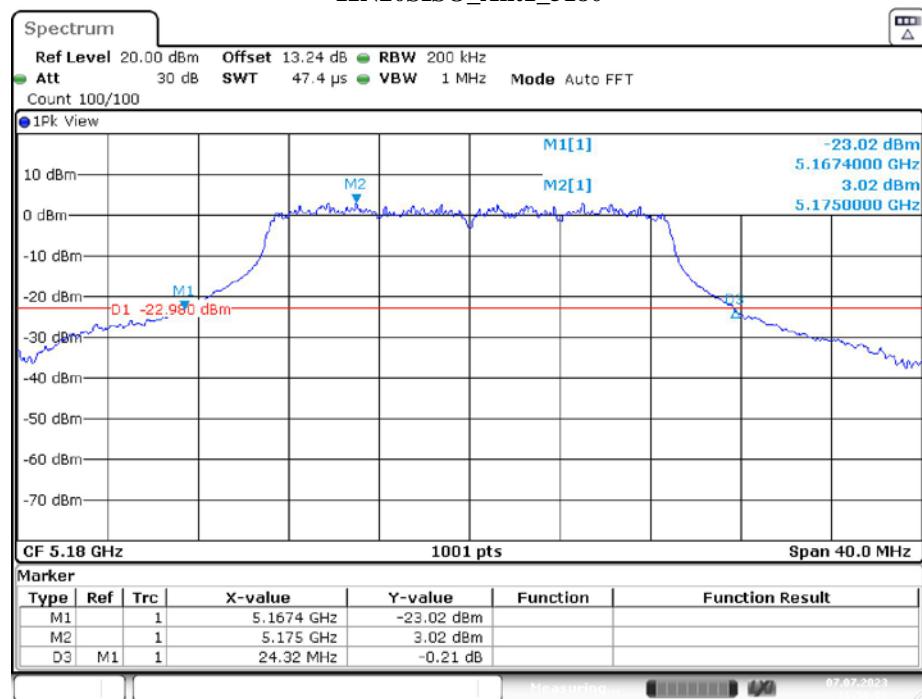

Date: 7.JUL.2023 16:58:02

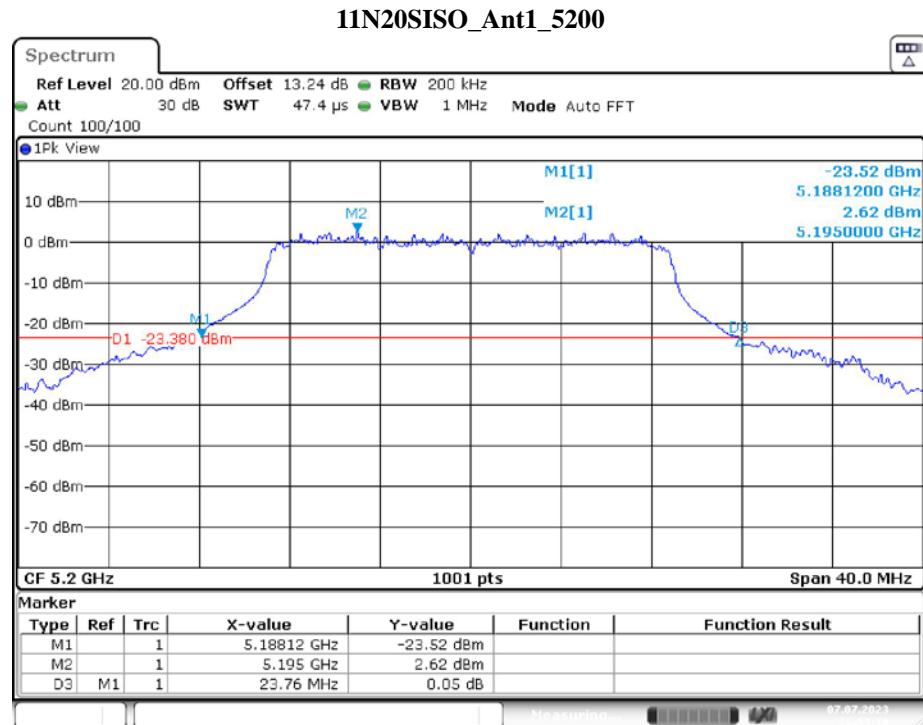


Date: 7.JUL.2023 16:59:11

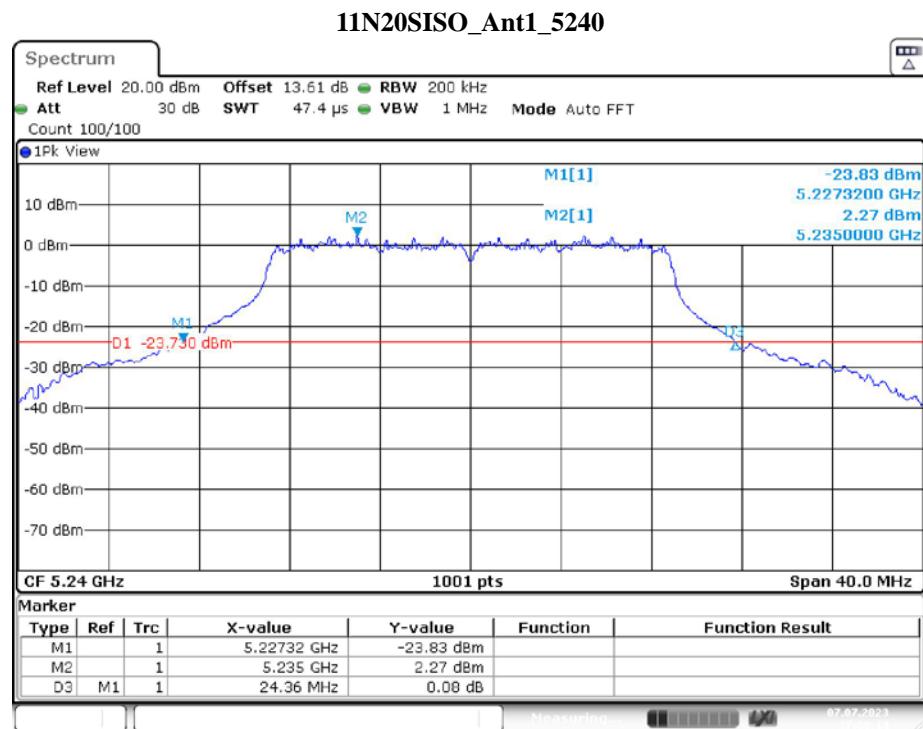


Date: 7.JUL.2023 17:00:14


## 11N40SISO\_Ant1\_5190

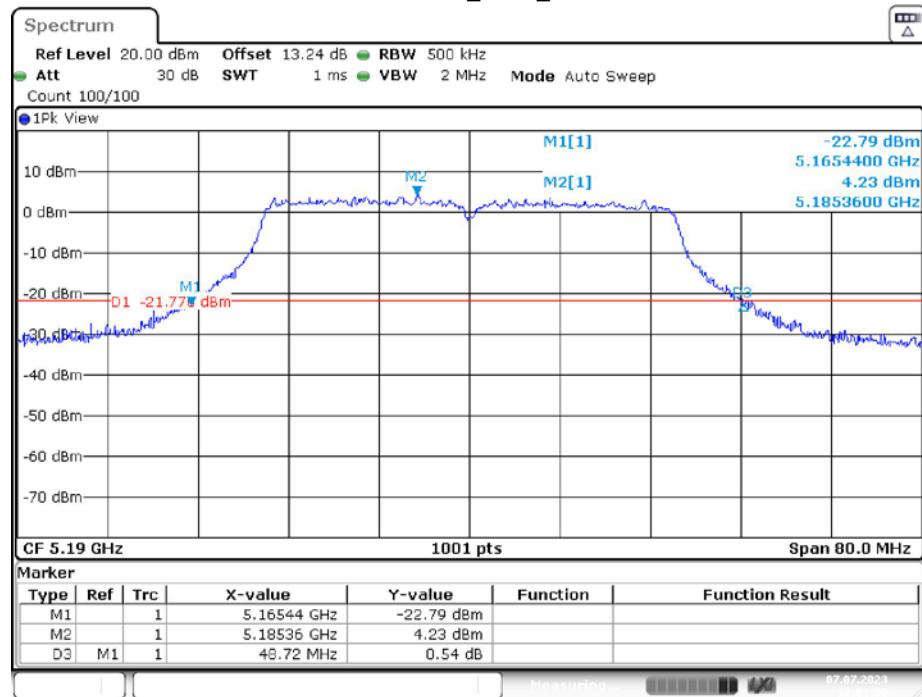

## 11N40SISO\_Ant1\_5230

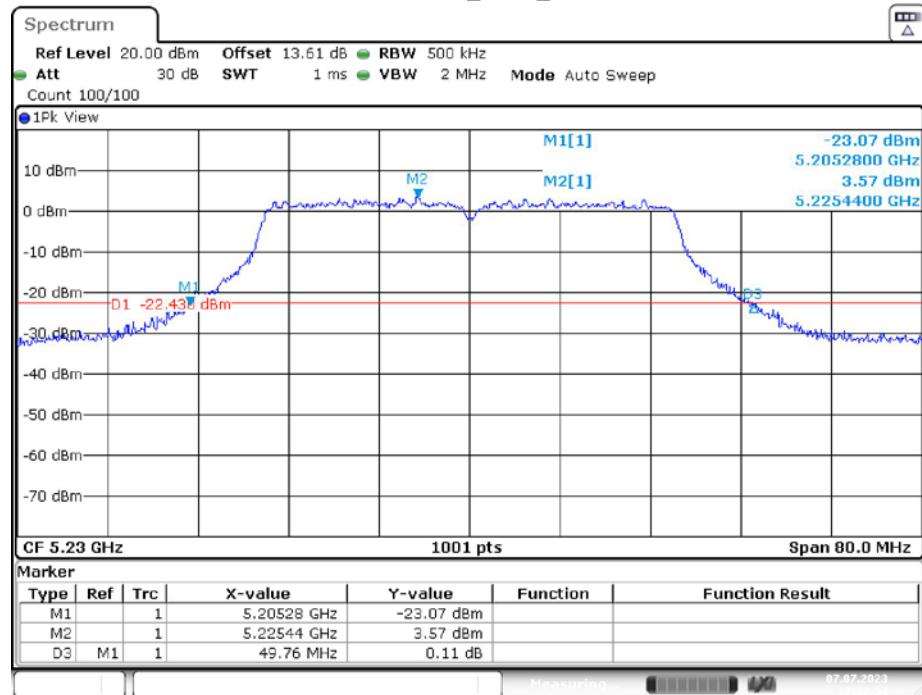


## 11AC20SISO\_Ant1\_5180

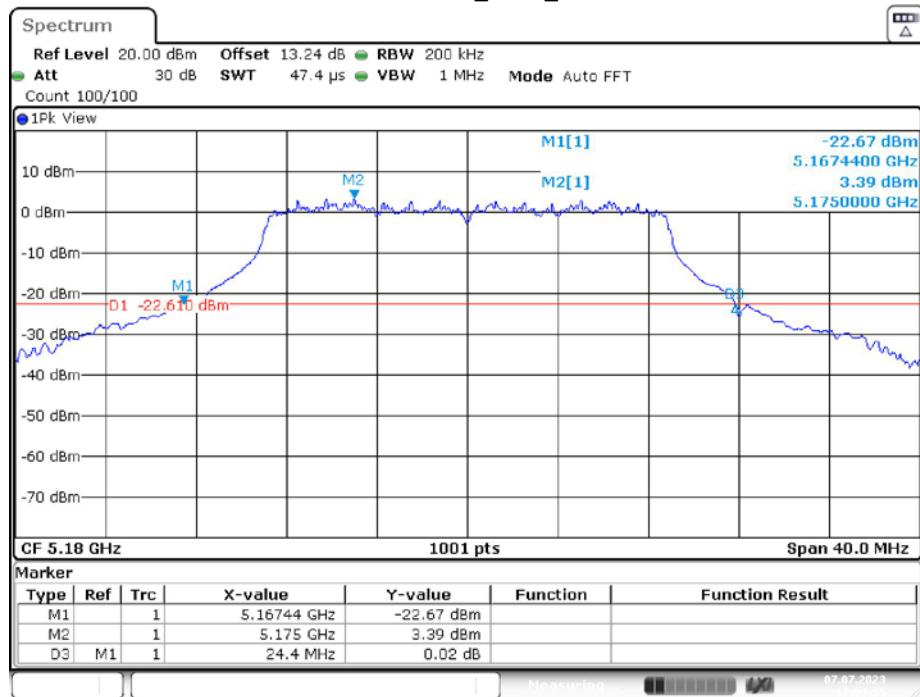


Date: 7.JUL.2023 17:03:55

## 11AC20SISO\_Ant1\_5200

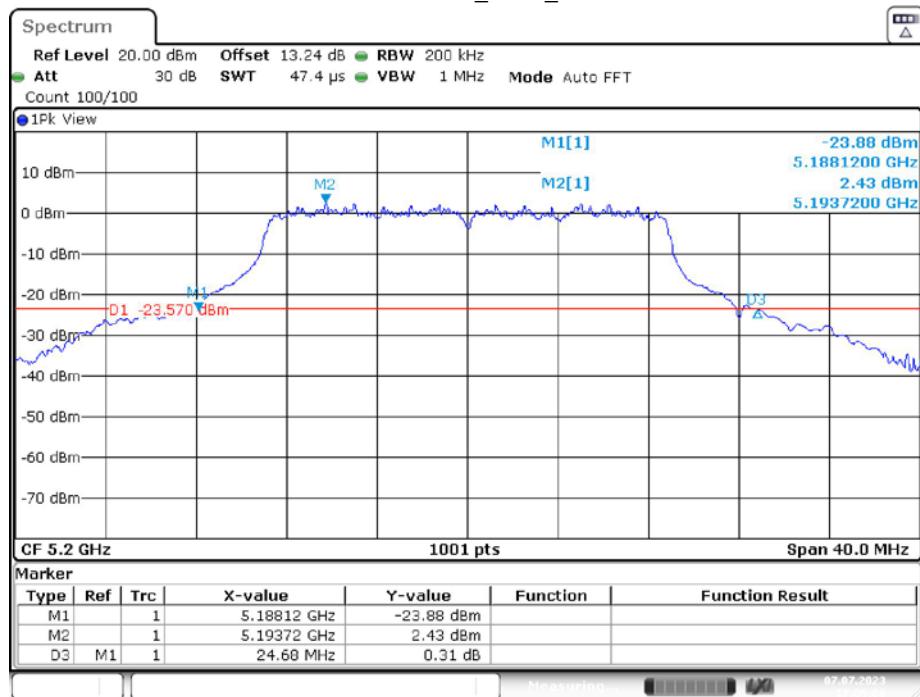


Date: 7.JUL.2023 17:05:01

## 11AC20SISO\_Ant1\_5240

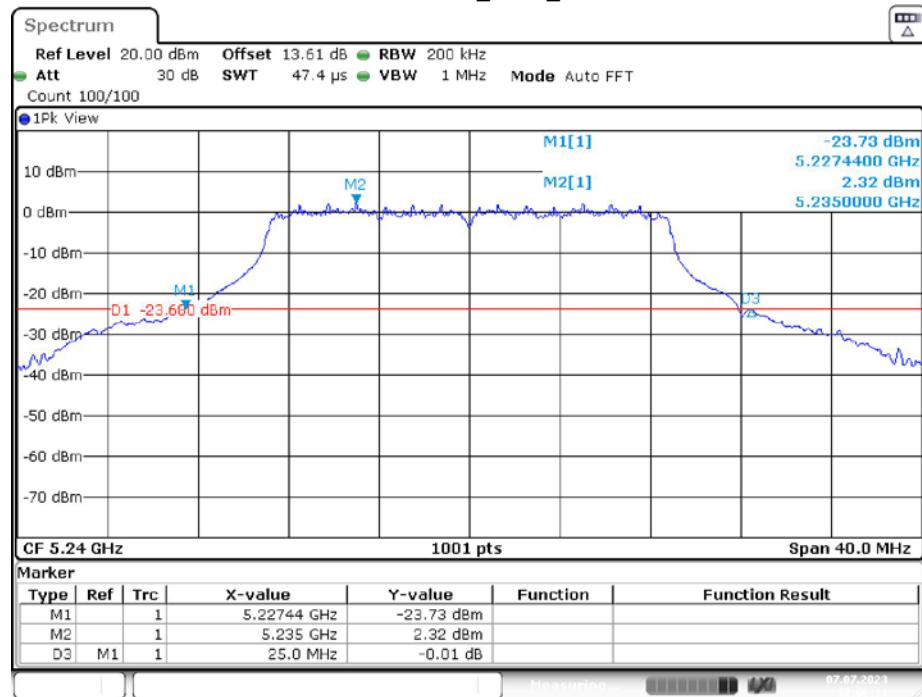


Date: 7.JUL.2023 17:06:11

## 11AC40SISO\_Ant1\_5190

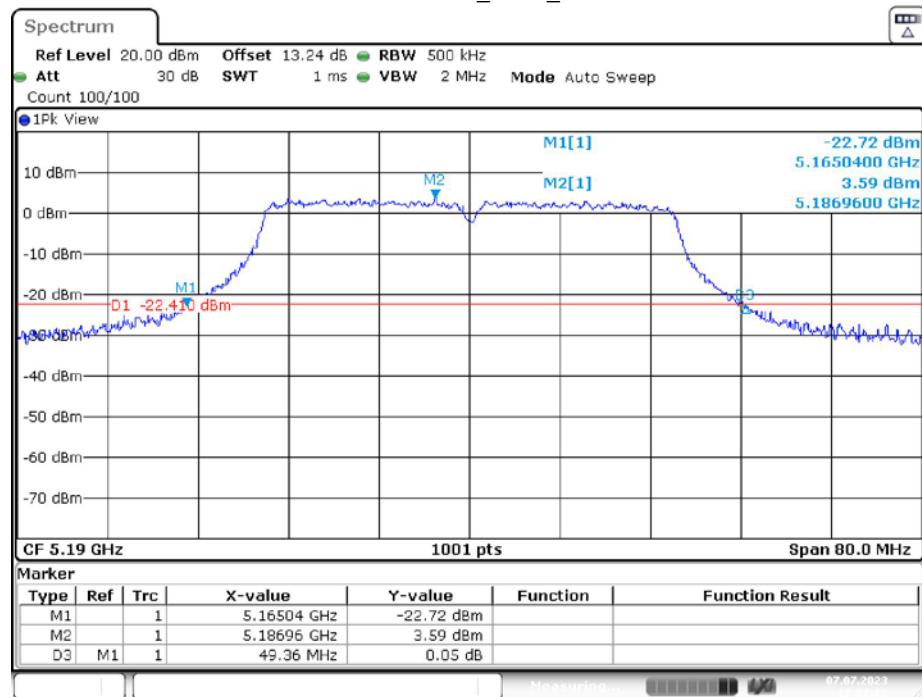

Date: 7.JUL.2023 17:07:22

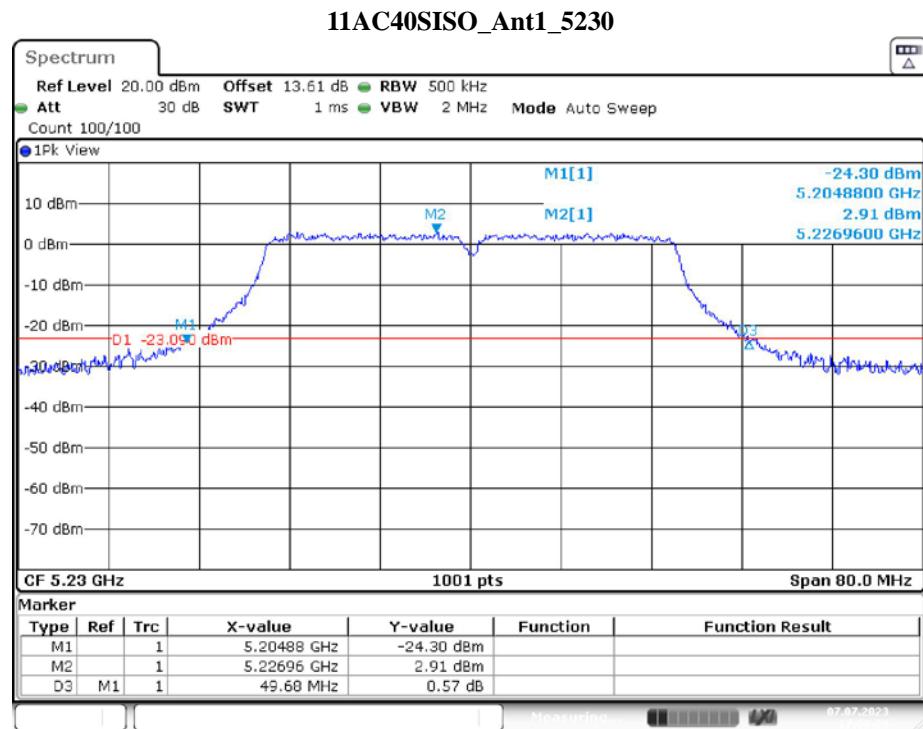

## Appendix A2: Occupied Channel Bandwidth

### Test Result


#### 5150-5250 MHz

| Test Mode  | Antenna | Freq(MHz) | OCB [MHz] | FL[MHz]   | FH[MHz]   | Limit[MHz] | Verdict |
|------------|---------|-----------|-----------|-----------|-----------|------------|---------|
| 11A        | Ant1    | 5180      | 18.462    | 5170.6094 | 5189.0709 | ---        | PASS    |
|            |         | 5200      | 18.581    | 5190.5295 | 5209.1109 | ---        | PASS    |
|            |         | 5240      | 18.462    | 5230.6893 | 5249.1508 | ---        | PASS    |
| 11N20SISO  | Ant1    | 5180      | 19.78     | 5169.9301 | 5189.7103 | ---        | PASS    |
|            |         | 5200      | 20.06     | 5189.7303 | 5209.7902 | ---        | PASS    |
|            |         | 5240      | 20.1      | 5229.8102 | 5249.9101 | ---        | PASS    |
| 11N40SISO  | Ant1    | 5190      | 38.122    | 5170.8192 | 5208.9411 | ---        | PASS    |
|            |         | 5230      | 37.962    | 5211.0589 | 5249.0210 | ---        | PASS    |
| 11AC20SISO | Ant1    | 5180      | 19.7      | 5170.0500 | 5189.7502 | ---        | PASS    |
|            |         | 5200      | 19.94     | 5189.9301 | 5209.8701 | ---        | PASS    |
|            |         | 5240      | 19.86     | 5230.0899 | 5249.9500 | ---        | PASS    |
| 11AC40SISO | Ant1    | 5190      | 37.962    | 5170.8991 | 5208.8611 | ---        | PASS    |
|            |         | 5230      | 37.962    | 5210.9790 | 5248.9411 | ---        | PASS    |

Note: the EUT not operate with any part of OBW fall within 5250-5350MHz.


## Test Graphs

11A\_Ant1\_5180

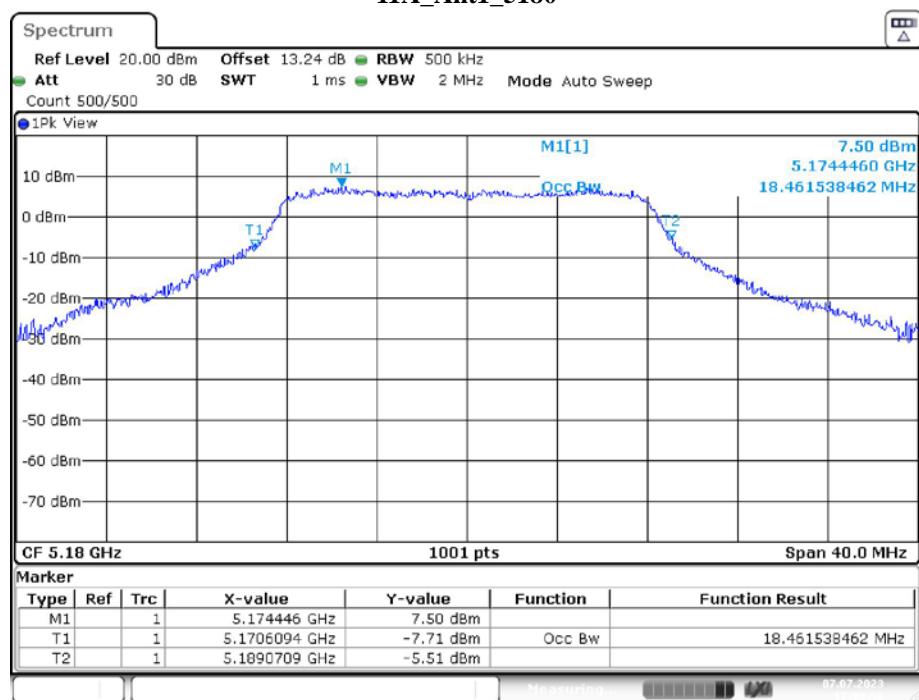


Date: 7.JUL.2023 17:09:59

11A\_Ant1\_5200

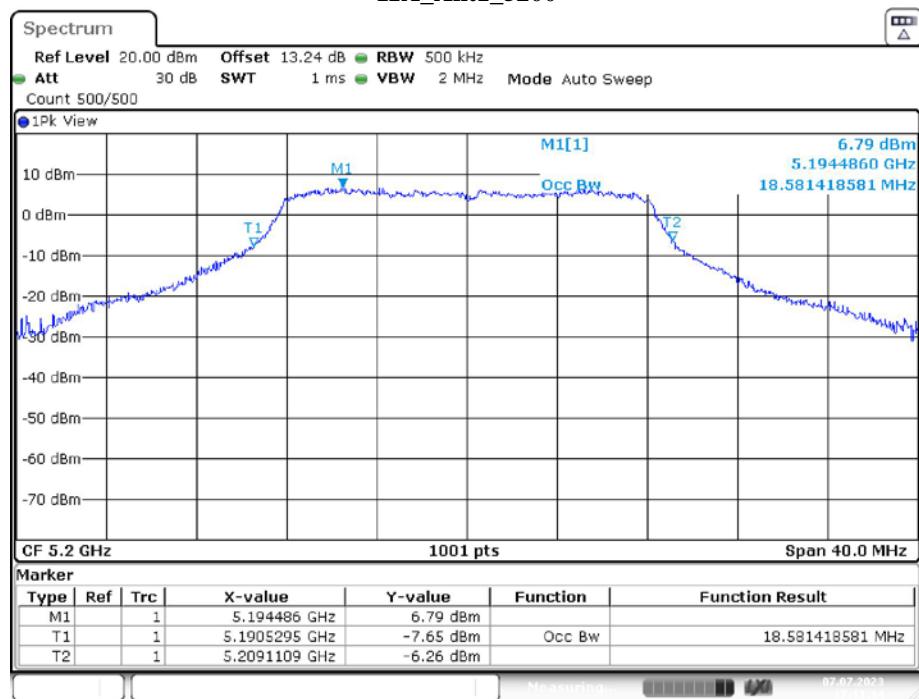


Date: 7.JUL.2023 17:11:14

## 11A\_Ant1\_5240


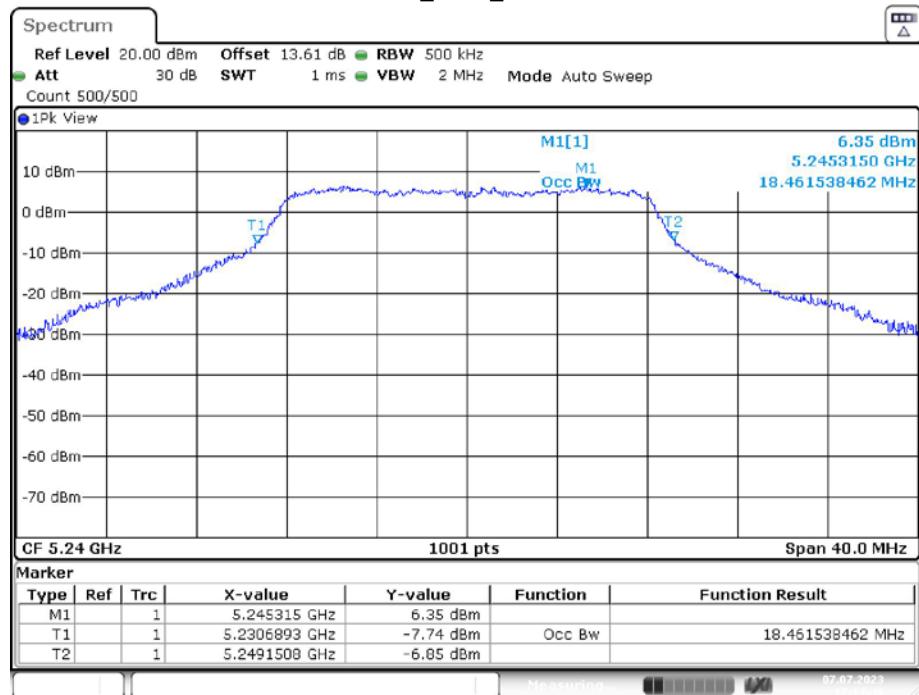


Date: 7.JUL.2023 17:13:40


## 11N20SISO\_Ant1\_5180

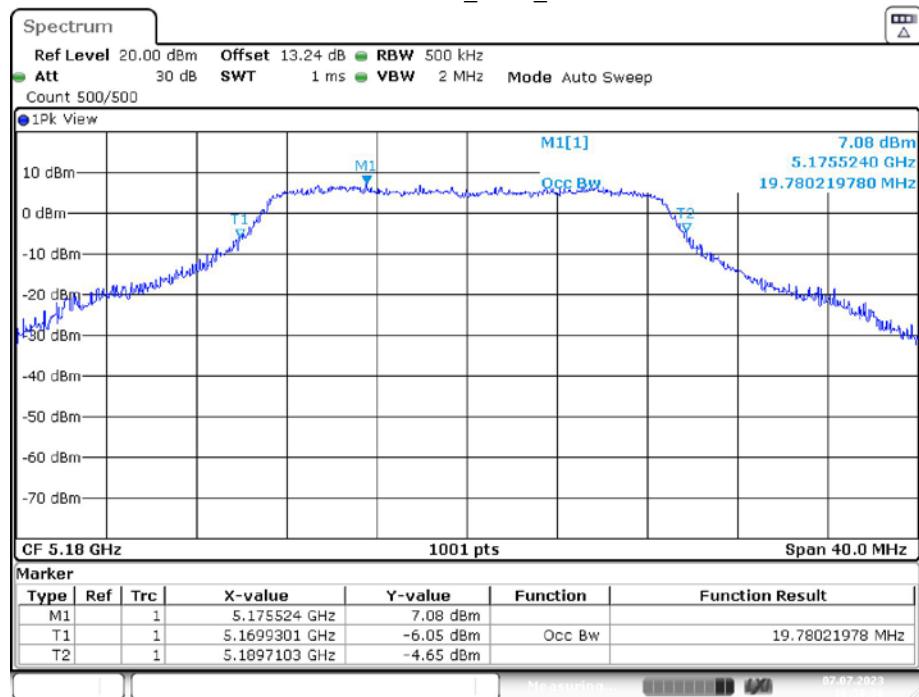


Date: 7.JUL.2023 16:58:09

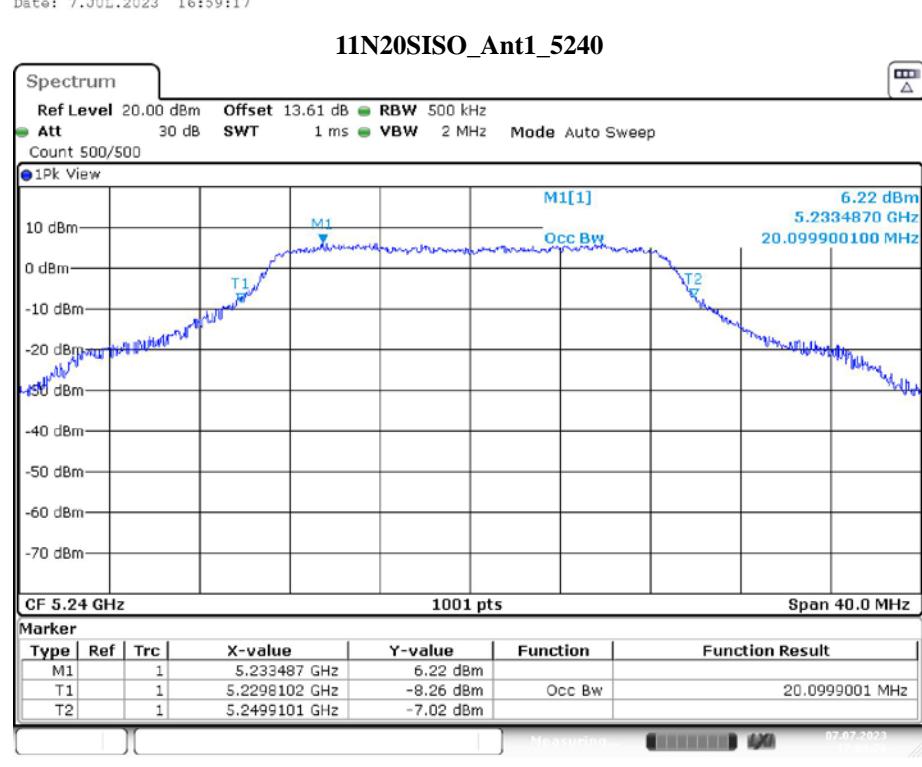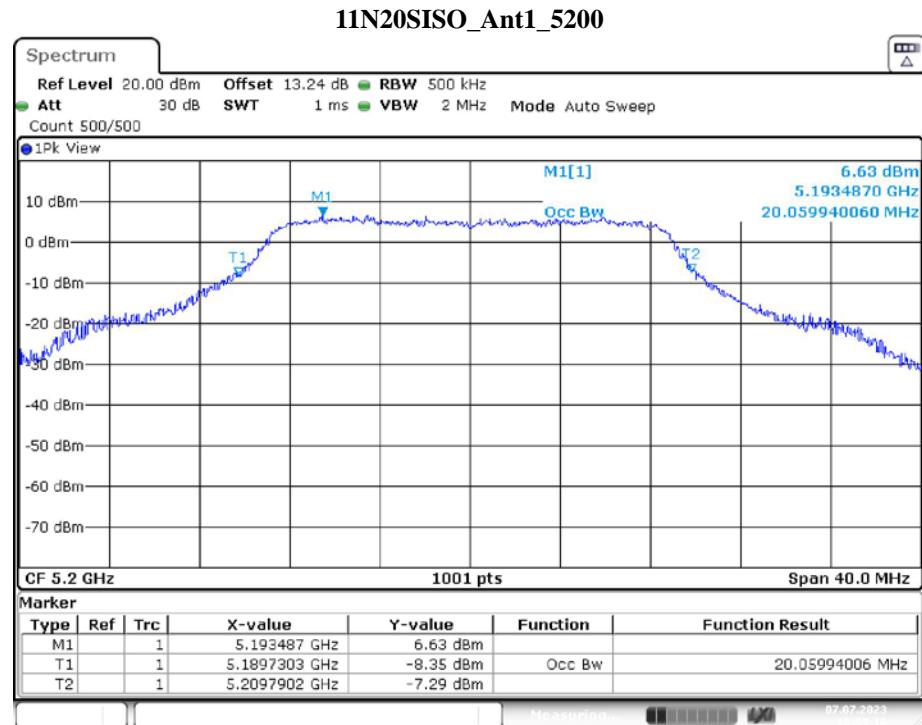


## 11N40SISO\_Ant1\_5190

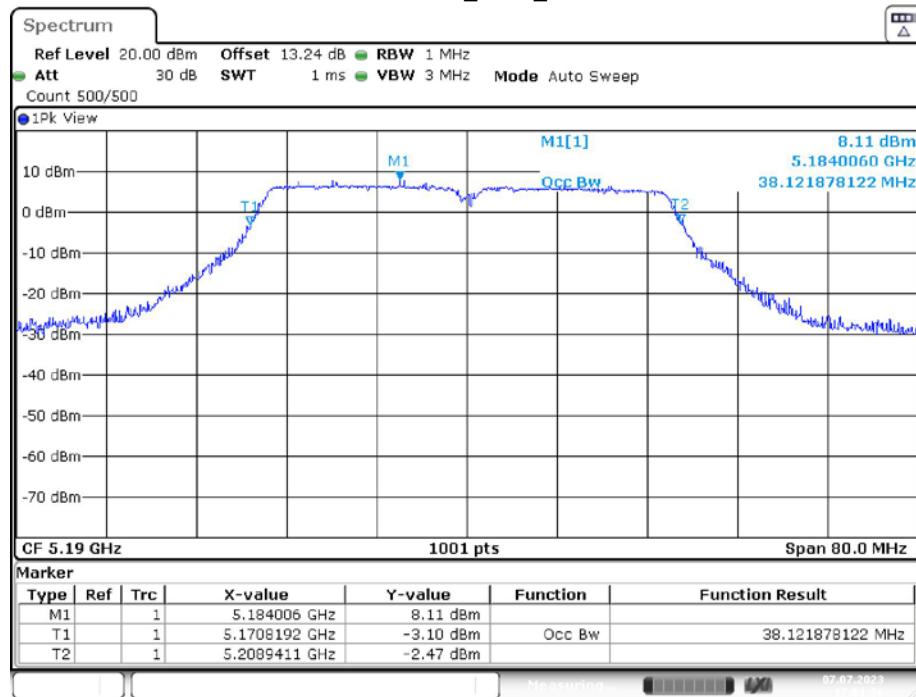

## 11N40SISO\_Ant1\_5230

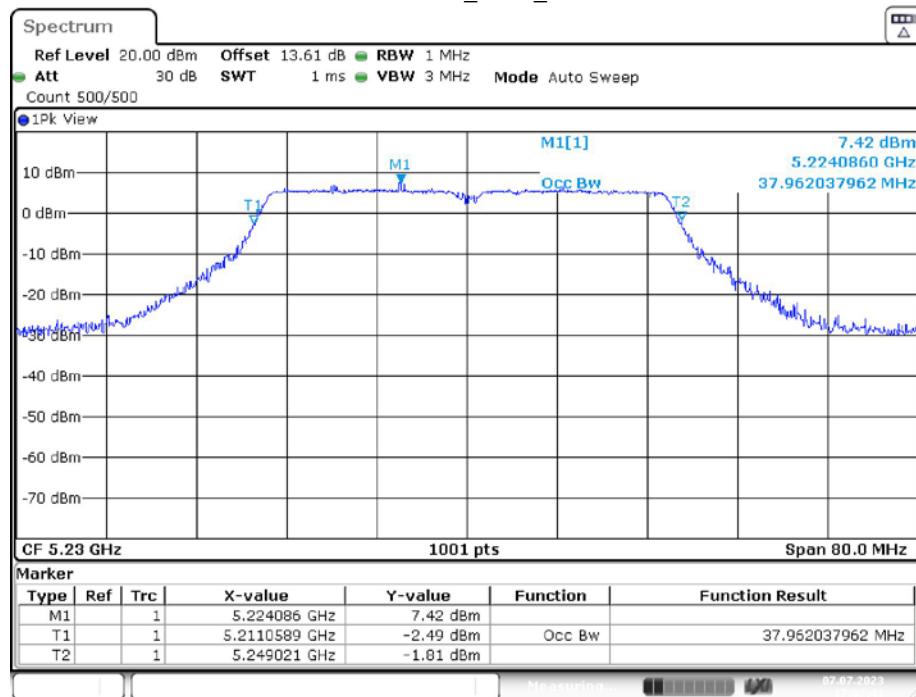


## 11AC20SISO\_Ant1\_5180

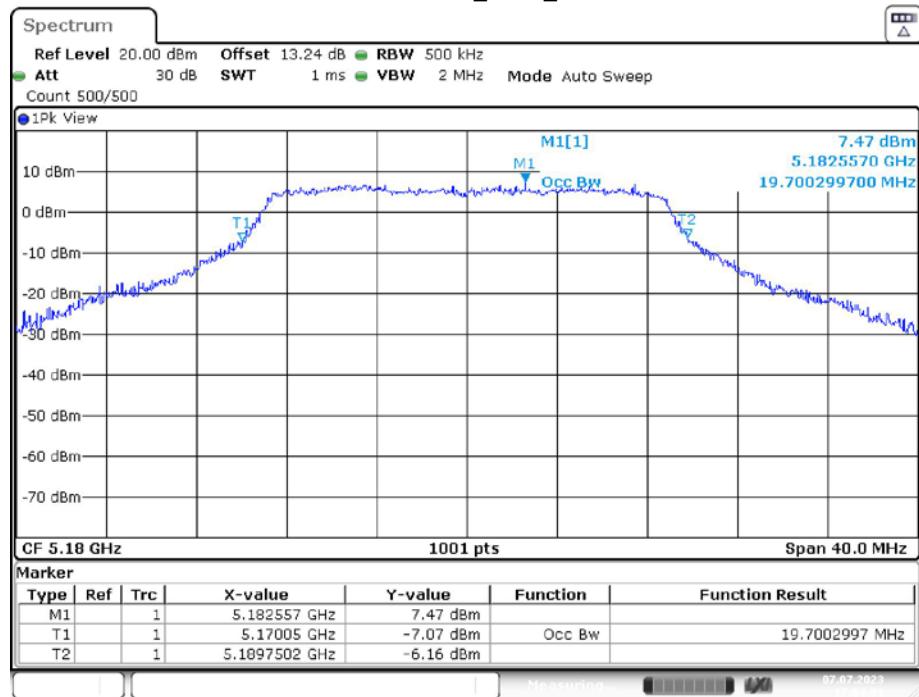


Date: 7.JUL.2023 17:04:01

## 11AC20SISO\_Ant1\_5200

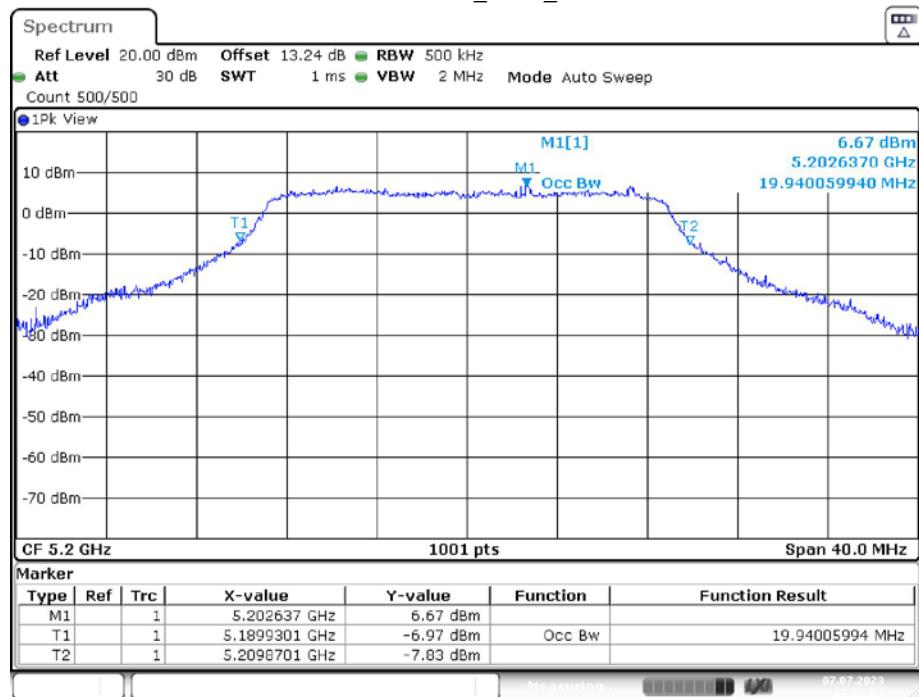


Date: 7.JUL.2023 17:05:07

## 11AC20SISO\_Ant1\_5240

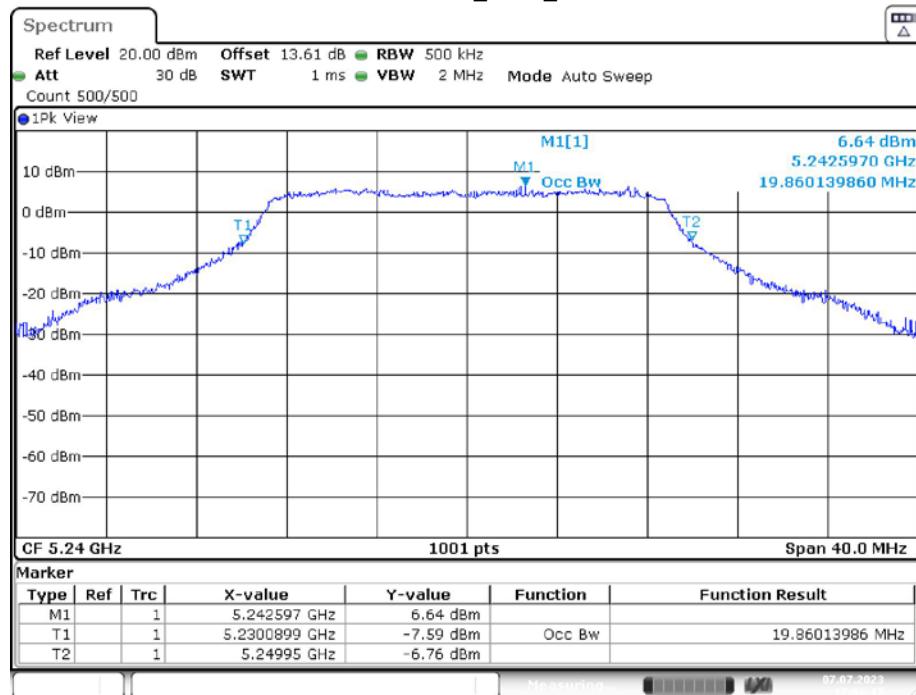

Date: 7.JUL.2023 17:06:17

## 11AC40SISO\_Ant1\_5190

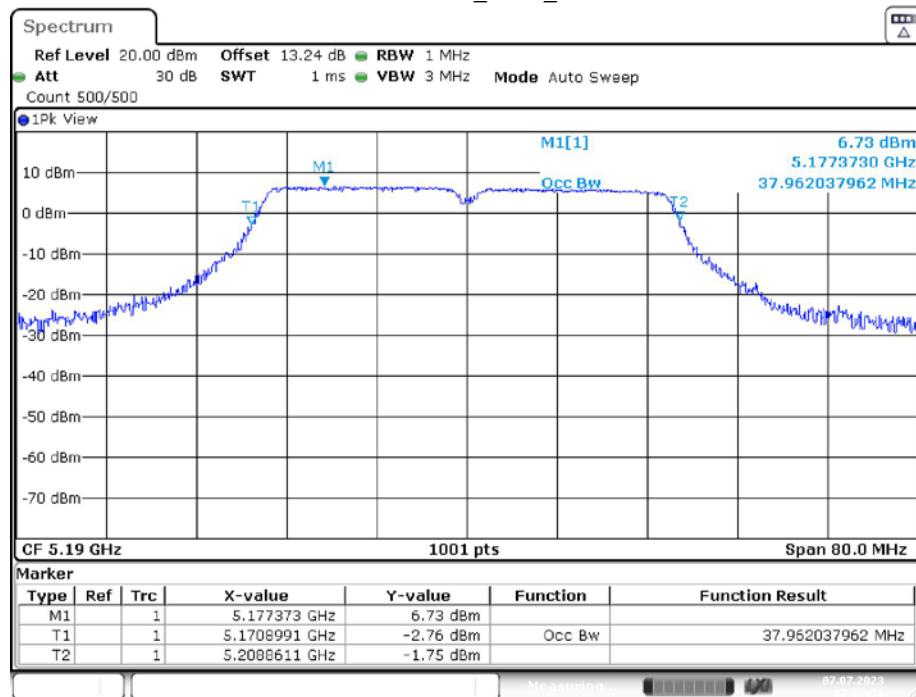

Date: 7.JUL.2023 17:07:29

