



FCC Test Report

Report Reference No.: **HK2407314284-10E**
FCC ID : **2BBBN-VISIONSYNC**
Compiled by
(position+printed name+signature) : RF Department Manager Len Liao
Supervised by
(position+printed name+signature) : Technical Manager Sliver Wan
Approved by
(position+printed name+signature) : General Manager Jason Zhou

Len Liao
Sliver Wan
Jason Zhou

Date of issue: Sept. 18, 2024

Testing Laboratory Name.....: **Shenzhen HUAKE Testing Technology Co., Ltd.**

Address: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park,
Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Applicant's name: **Hangzhou Tanlink Technology Co.,Ltd.**

Address: Room 701, South Building, Building 3, No.16, Longtan Road,
Cangqian Street, Yuhang District, Hangzhou, Zhejiang, China

Test specification:

Standard.....: **FCC CFR Title 47 Part 2, Part 22H**

Shenzhen HUAKE Testing Technology Co., Ltd.All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd. as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd .takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description: 4G driving recorder

Trade Mark: Redtiger

Manufacturer: **Hangzhou Tanlink Technology Co.,Ltd.**

Model/Type reference: VisionSync 10

Series Models: VisionSync 30, VisionSync 30 Pro, VisionSync 50, VisionSync 50 Pro,
VisionSync 70, VisionSync 70 Pro, VisionSync 90, VisionSync 90 Pro,
LinkStream 10, LinkStream 30

Ratings: DC 5V from Type-C

Modulation: QPSK, 16QAM

Hardware version: V2.0

Software version: V2.0

Frequency: LTE Band 26

Result: **PASS**

**TEST REPORT****Test Report No. :****HK2407314284-10E**

Sept. 18, 2024

Date of issue

Equipment under Test : 4G driving recorder**Model /Type :** VisionSync 10**Series Models**:
VisionSync 30, VisionSync 30 Pro, VisionSync 50,
VisionSync 50 Pro, VisionSync 70, VisionSync 70
Pro, VisionSync 90, VisionSync 90 Pro,
LinkStream 10, LinkStream 30**Applicant :** Hangzhou Tanlink Technology Co.,Ltd.**Address :** Room 701, South Building, Building 3, No.16,
Longtan Road, Cangqian Street, Yuhang District,
Hangzhou, Zhejiang, China**Manufacturer :** Hangzhou Tanlink Technology Co.,Ltd.**Address :** Room 701, South Building, Building 3, No.16,
Longtan Road, Cangqian Street, Yuhang District,
Hangzhou, Zhejiang, China**Test result****Pass**

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



TABLE OF CONTENTS

1. SUMMARY	4
1.1 Test Standards.....	4
1.2 Test Description.....	5
2. EUT DESCRIPTION	6
3. GENERAL INFORMATION	7
3.1. Test environment and mode.....	7
3.2. Test Mode.....	8
3.3. Description of Support Units.....	8
3.4. Configuration of Tested System	9
3.5. Measurement Results Explanation Example.....	9
3.6. Equipments Used during the Test	10
4. FACILITIES AND ACCREDITATIONS	12
4.1. Information of The Test Laboratory	12
4.2. Measurement Uncertainty.....	12
5. TEST RESULTS AND MEASUREMENT DATA	13
5.1. Conducted Output Power Measurement	13
5.2. Radiated Output Power.....	16
5.3. Peak to Average Ratio.....	19
5.4. 99% Occupied Bandwidth and 26dB Bandwidth Measurement	25
5.5. Band Edge and Conducted Spurious Emission Measurement	32
5.6. Field Strength of Spurious Radiation Measurement	53
5.7. Frequency Stability Measurement	61
6. PHOTOGRAPHS OF TEST SETUP.....	63
7. PHOTOGRAPHS OF EUT.....	64



1. SUMMARY

1.1 Test Standards

The tests were performed according to following standards:

[FCC Part 2](#):Frequency Alloca-Tions And Radio Treaty Mat-Ters; General Rules And Reg-Ulations.

[FCC Part 22Subpart H](#):Private Land Mobile Radio Services.

[ANSI/TIA-603-E-2016](#): Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

[ANSI C63.26-2015](#): IEEE/ANSI Standard for Compliance Testing of Transmitters Used in Licensed Radio Services.

[FCC KDB 971168D01 v03r01](#) Power Meas License Digital Systems.



1.2 Test Description

Test Item	FCCRuleNo	Requirements	Verdict
Effective(Isotropic) Radiated Output Power	§2.1046, §22.913	EIRP $\leq$ 7W	Pass
Peak-Average Ratio	§22.917	FCC:Limit $\leq$ 13dB	Pass
Modulation Characteristics	§2.1047	Digital modulation	Pass
Bandwidth	§2.1049	OBW: Nolimit. EBW: Nolimit.	Pass
Band Edges Compliance	§2.1051, §22.917	$\leq$ -13dBm/1%*EBW, In1MHz bands immediately outside and adjacent to Thefrequency block.	Pass
Spurious Emission at AntennaTerminals	§2.1051, §22.917	$\leq$ -13dBm/1MHz, from9kHz to 10th harmonics but outside authorized Operating frequency ranges.	Pass
Field Strength of Spurious Radiation	§2.1051, §22.917	$\leq$ -13dBm/1MHz.	Pass
Frequency Stability	§2.1055, §22.355,	FCC:within authorized frequency block.	Pass
NOTE 1:For theverdict, the"N/A"denotes"not applicable", the"N/T"denotes "nottested".			

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.



2. EUT DESCRIPTION

Product Name:	4G driving recorder
Model :	VisionSync 10
Series Models:	VisionSync 30, VisionSync 30 Pro, VisionSync 50, VisionSync 50 Pro, VisionSync 70, VisionSync 70 Pro, VisionSync 90, VisionSync 90 Pro, LinkStream 10, LinkStream 30
Trade Mark:	Redtiger
Tx Frequency:	LTE Band 26: 824 MHz ~ 849 MHz
Rx Frequency:	LTE Band 26: 869MHz ~ 894 MHz
Bandwidth:	LTE Band 26: 1.4MHz /3MHz /5MHz /10MHz /15MHz
Type of Modulation:	QPSK/16QAM
Antenna Type:	Internal Antenna
Antenna Gain:	LTE Band 26: -1.43dBi
Power Supply:	DC 5V from Type-C



3. GENERAL INFORMATION

3.1. Test environment and mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Operation mode:	Keep the EUT in continuous transmitting with modulation
The sample was placed 0.8m above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.	

Description Operation Frequency

LTE Band 26(1.4MHz)		LTE Band 26(3MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
26797	824.7	26805	825.5
26915	836.5	26915	836.5
27033	848.3	27025	847.5
LTE Band 26(5MHz)		LTE Band 26(10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
26815	826.5	26840	829.0
26915	836.5	26915	836.5
27015	846.5	26990	844.0
LTE Band 26(15MHz)			
Channel	Frequency (MHz)		
26865	831.5		
26915	836.5		
26965	841.5		



3.2. Test Mode

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Mode		
Band	Radiated TCs	Conducted TCs
LTE Band 26	QPSK Link (1.4MHz / 3MHz / 5MHz / 10MHz/ 15MHz)	16QAM Link (1.4MHz / 3MHz / 5MHz / 10MHz/ 15MHz)

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas License Digital Systems v03 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

3.3. Description of Support Units


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
/	/	/	/	/

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

3.4. Configuration of Tested System

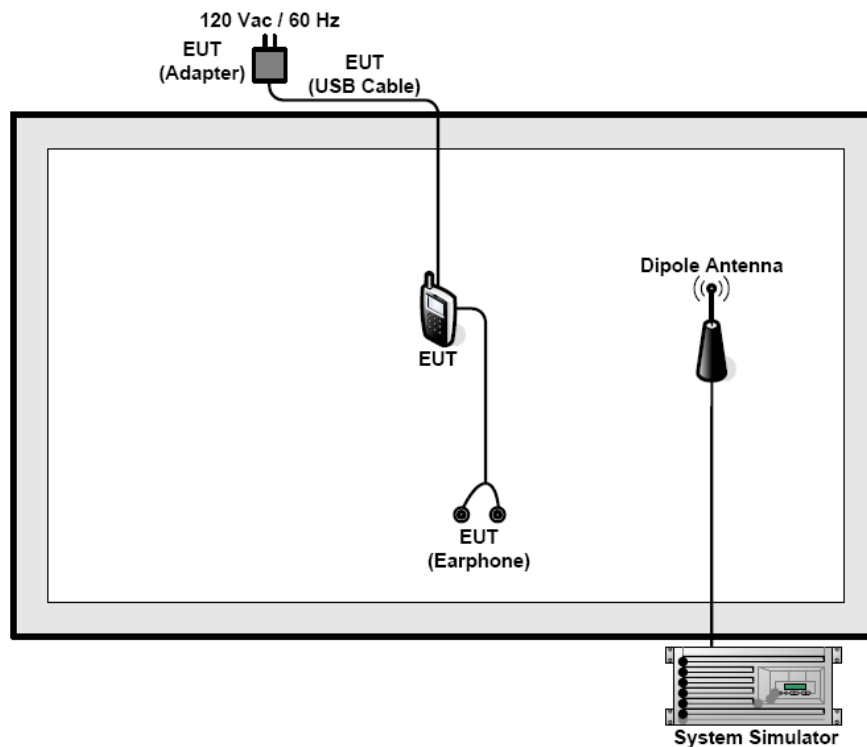

3.5. Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level. The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.



3.6. Equipments Used during the Test

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
1	L.I.S.N.	R&S	ENV216	HKE-002	2024/02/20	2025/02/19
2	L.I.S.N.	R&S	ENV216	HKE-059	2024/02/20	2025/02/19
3	EMI Test Receiver	R&S	ESR	HKE-005	2024/02/20	2025/02/19
4	Spectrum analyzer	Agilent	N9020A	HKE-048	2024/02/20	2025/02/19
5	Spectrum	R&S	FSV3044	HKE-126	2024/02/20	2025/02/19
6	Preamplifier	EMCI	EMC05184 5S	HKE-006	2024/02/20	2025/02/19
7	Preamplifier	Schwarzbeck	BBV 9743	HKE-016	2024/02/20	2025/02/19
8	Preamplifier	A.H. Systems	SAS-574	HKE-182	2024/02/20	2025/02/19
9	6d Attenuator	Pasternack	6db	HKE-184	2024/02/20	2025/02/19
10	EMI Test Receiver	Rohde & Schwarz	ESR-7	HKE-010	2024/02/20	2025/02/19
11	Broadband Antenna	Schwarzbeck	VULB916 8	HKE-167	2024/02/21	2026/02/20
12	Loop Antenna	COM-POWER	AL-130R	HKE-014	2024/02/21	2026/02/20
13	Horn Antenna	Schwarzbeck	9120D	HKE-013	2024/02/21	2026/02/20
14	EMI Test Software	Tonscend	JS32-CE 2.5.0.6	HKE-081	/	/
15	EMI Test Software	Tonscend	JS32-RE 5.0.0	HKE-082	/	/
16	RF Automatic control unit	Tonscend	JS0806-1	HKE-096	2024/02/20	2025/02/19
17	High pass filter unit	Tonscend	JS0806-F	HKE-055	2024/02/20	2025/02/19
18	Wireless Communication Test Set	R&S	CMU200	HKE-026	2024/02/20	2025/02/19



19	Wireless Communication Test Set	R&S	CMW500	HKE-027	2024/02/20	2025/02/19
20	High-low temperature chamber	Guangke	HT-80L	HKE-118	2024/06/10	2025/06/09
21	Temperature and humidity meter	Boyang	HTC-1	HKE-075	2024/06/10	2025/06/09
22	RF Test Software	Tonscend	JS1120 Version 3.1.46	HKE-183	/	/



4. FACILITIES AND ACCREDITATIONS

4.1. Information of The Test Laboratory

Shenzhen HUAKE Testing Technology Co., Ltd.

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Testing Laboratory Authorization :

A2LA Accreditation Code is 4781.01.

FCC Designation Number is CN1229.

Canada IC CAB identifier is CN0045.

CNAS Registration Number is L9589.

4.2. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10dB	(1)
Radiated Emission	Above 1GHz	4.32dB	(1)
Conducted Disturbance	0.15~30MHz	3.20dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.




5. TEST RESULTS AND MEASUREMENT DATA

5.1. Conducted Output Power Measurement

TEST APPLICABLE

During the process of testing, the EUT was controlled via R&S Digital Radio Communication tester (CMW500) to ensure max power transmission and proper modulation. This result contains output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

TEST CONFIGURATION

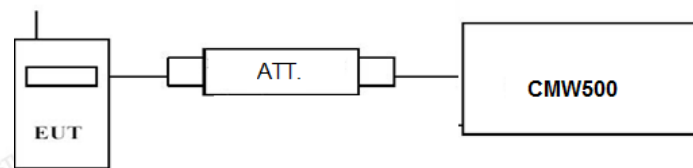

TEST PROCEDURE

Conducted Power Measurement:

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a CMW500 by an Att.
- EUT Communicate with CMW500 then selects a channel for testing.
- Add a correction factor to the display CMW500, and then test.

TEST RESULTS

**Conducted Measurement:**

LTE FDD Band 26				
TX Channel Bandwidth	RB Size/Offset	Frequency (MHz)	Average Power [dBm]	
			QPSK	16QAM
1.4 MHz	1 RB low	824.7	22.79	22.05
		836.5	22.72	22.02
		848.3	22.83	22.14
	1 RB high	824.7	22.90	21.84
		836.5	22.87	21.77
		848.3	22.95	21.84
	50% RB mid	824.7	21.86	21.01
		836.5	23.07	22.69
		848.3	23.11	22.52
	100% RB	824.7	23.04	22.67
		836.5	23.09	21.93
		848.3	23.08	21.76
3 MHz	1 RB low	825.5	22.82	21.64
		836.5	22.81	21.56
		847.5	22.77	21.59
	1 RB high	825.5	22.02	21.23
		836.5	22.02	21.14
		847.5	21.95	21.13
	50% RB mid	825.5	21.90	20.96
		836.5	23.07	21.49
		847.5	23.10	21.42
	100% RB	825.5	23.09	21.44
		836.5	21.96	21.10
		847.5	21.97	21.11
5 MHz	1 RB low	826.5	23.06	21.55
		836.5	22.99	21.39
		846.5	22.97	21.40
	1 RB high	826.5	22.01	21.02
		836.5	22.01	21.02
		846.5	21.98	21.06
	50% RB mid	826.5	22.01	21.12
		836.5	22.99	22.16
		846.5	23.11	22.10
	100% RB	826.5	23.11	22.23
		836.5	22.06	21.16
		846.5	21.97	21.17

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



10 MHz	1 RB low	829.0	22.94	22.15
		836.5	22.92	21.96
		844.0	23.01	21.65
	1 RB high	829.0	21.97	21.00
		836.5	21.97	21.00
		844.0	22.10	21.04
	50% RB mid	829.0	22.13	21.06
		836.5	23.05	21.93
		844.0	23.06	21.94
	100% RB	829.0	23.12	21.99
		836.5	22.09	21.13
		844.0	21.96	21.15
15 MHz	1 RB low	831.5	22.99	22.16
		836.5	22.96	22.02
		841.5	23.04	22.18
	1 RB high	831.5	22.02	22.01
		836.5	22.17	21.87
		841.5	22.23	22.17
	50% RB mid	831.5	22.07	21.11
		836.5	22.68	21.69
		841.5	22.60	21.72
	100% RB	831.5	22.84	21.89
		836.5	22.16	22.16
		841.5	22.33	22.36

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China


5.2. Radiated Output Power

LIMIT

This is the test for the maximum radiated power from the EUT.

Rule Part 22H.232(b) specifies, "Mobile/portable stations are limited to 7 watts e.i.r.p.

TEST CONFIGURATION

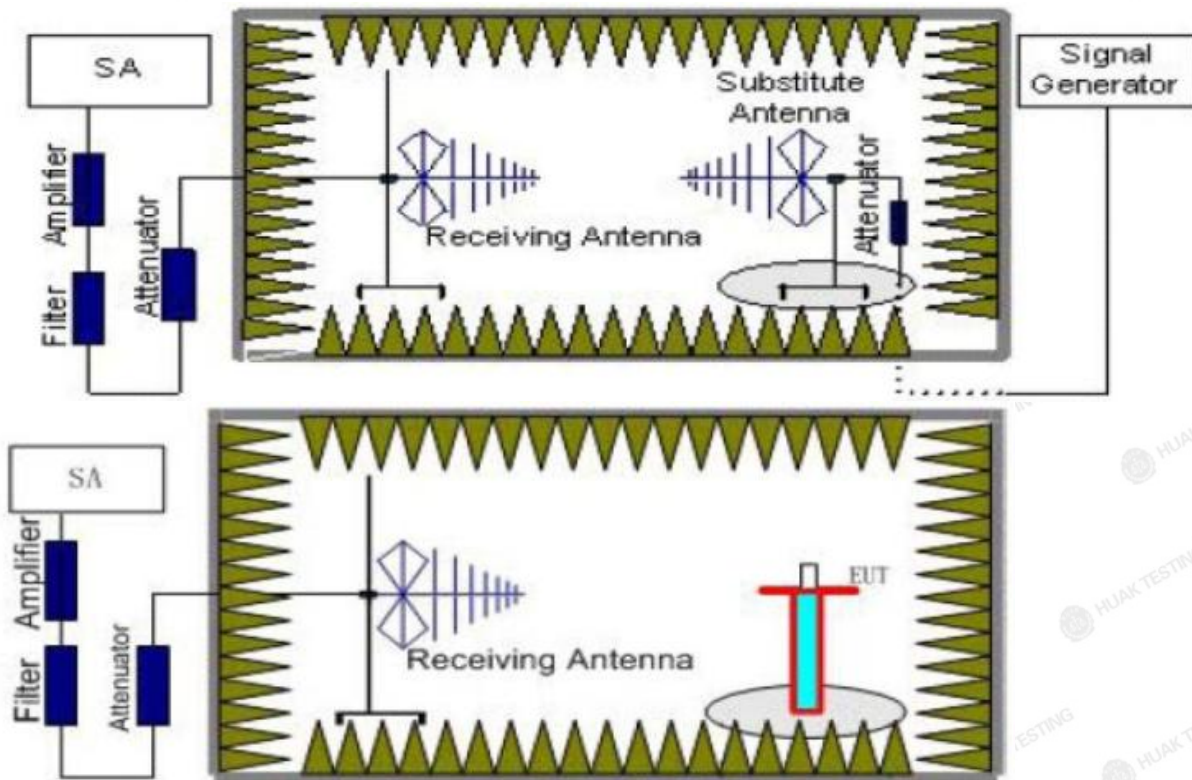

TEST PROCEDURE

1. EUT was placed on a 0.1 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 0.1m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (P_r).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver.



- reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
- A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below: $\text{Power(EIRP)} = P_{Mea} - P_{Ag} - P_{cl} + G_a$

We used SMF100A microwave signal generator which signal level can up to 33dBm, so we not used power

Amplifier for substitution test; The measurement results are amend as described below:

$\text{Power(EIRP)} = P_{Mea} - P_{cl} + G_a$

- This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
- ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$.

TEST RESULTS

Radiated Measurement:

Remark:

- We measured all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 26; recorded worst case for each Channel Bandwidth of LTE FDD Band 26.
- $\text{EIRP} = P_{Mea}(\text{dBm}) - P_{cl}(\text{dB}) + P_{Ag}(\text{dB}) + G_a(\text{dBi})$
- We measured both Horizontal and Vertical direction, recorded worst case direction.

LTE FDD Band 26_Channel Bandwidth 1.4MHz_QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
824.7	-18.25	2.42	8.45	36.82	24.6	22.45	38.45	16	V
836.5	-17.19	2.46	8.45	36.82	25.62	23.47	38.45	14.98	V
848.3	-18.68	2.53	8.36	36.82	23.97	21.82	38.45	16.63	V

LTE FDD Band 26_Channel Bandwidth 3MHz_QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
825.5	-18.62	2.42	8.45	36.82	24.23	22.08	38.45	16.37	V
836.5	-17.29	2.46	8.45	36.82	25.52	23.37	38.45	15.08	V
847.5	-18.15	2.53	8.36	36.82	24.5	22.35	38.45	16.1	V

LTE FDD Band 26_Channel Bandwidth 5MHz_QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
826.5	-17.93	2.42	8.45	36.82	24.92	22.77	38.45	15.68	V
836.5	-17.11	2.46	8.45	36.82	25.7	23.55	38.45	14.9	V
846.5	-17.85	2.53	8.36	36.82	24.8	22.65	38.45	15.8	V

LTE FDD Band 26_Channel Bandwidth 10MHz_QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
829.0	-18.08	2.42	8.45	36.82	24.77	22.62	38.45	15.83	V
836.5	-17.04	2.46	8.45	36.82	25.77	23.62	38.45	14.83	V
844.0	-18.36	2.53	8.36	36.82	24.29	22.14	38.45	16.31	V

*LTE FDD Band 26 Channel Bandwidth 15MHz_QPSK*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
831.5	-18.11	2.42	8.45	36.82	24.74	22.59	38.45	15.86	V
836.5	-16.71	2.46	8.45	36.82	26.1	23.95	38.45	14.5	V
841.5	-18.39	2.53	8.36	36.82	24.26	22.11	38.45	16.34	V

LTE FDD Band 26 Channel Bandwidth 1.4MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
824.7	-18.83	2.42	8.45	36.82	24.02	21.87	38.45	16.58	V
836.5	-17.29	2.46	8.45	36.82	25.52	23.37	38.45	15.08	V
848.3	-18.14	2.53	8.36	36.82	24.51	22.36	38.45	16.09	V

LTE FDD Band 26 Channel Bandwidth 3MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
825.5	-17.99	2.42	8.45	36.82	24.86	22.71	38.45	15.74	V
836.5	-17.23	2.46	8.45	36.82	25.58	23.43	38.45	15.02	V
847.5	-18.43	2.53	8.36	36.82	24.22	22.07	38.45	16.38	V

LTE FDD Band 26 Channel Bandwidth 5MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
826.5	-18.06	2.42	8.45	36.82	24.79	22.64	38.45	15.81	V
836.5	-16.82	2.46	8.45	36.82	25.99	23.84	38.45	14.61	V
846.5	-18.59	2.53	8.36	36.82	24.06	21.91	38.45	16.54	V

LTE FDD Band 26 Channel Bandwidth 10MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
829.0	-18.4	2.42	8.45	36.82	24.45	22.3	38.45	16.15	V
836.5	-16.63	2.46	8.45	36.82	26.18	24.03	38.45	14.42	V
844.0	-18.11	2.53	8.36	36.82	24.54	22.39	38.45	16.06	V

LTE FDD Band 26 Channel Bandwidth 15MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
831.5	-18.45	2.42	8.45	36.82	24.4	22.25	38.45	16.2	V
836.5	-16.52	2.46	8.45	36.82	26.29	24.14	38.45	14.31	V
841.5	-18.71	2.53	8.36	36.82	23.94	21.79	38.45	16.66	V




5.3. Peak to Average Ratio

LIMIT

The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13 dB.

TEST CONFIGURATION

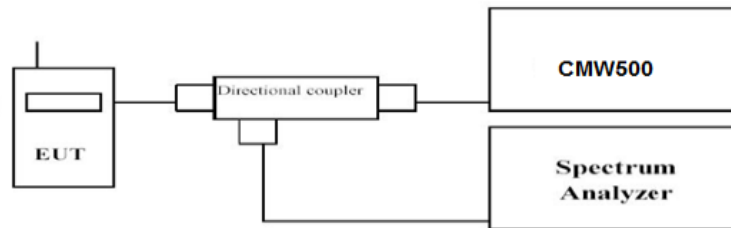

TEST PROCEDURE

1. Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
2. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
3. Set the number of counts to a value that stabilizes the measured CCDF curve;
4. Set the measurement interval as follows:
 - 1). for continuous transmissions, set to 1 ms;
 - 2). for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
5. Record the maximum PAPR level associated with a probability of 0.1%.

TEST RESULTS

Remark:


1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 26; recorded worst case for each Channel Bandwidth of LTE FDD Band 26.

LTE FDD Band 26				
TX Channel Bandwidth	Frequency (MHz)	RB Size/Offset	PAPR (dB)	
			QPSK	16QAM
1.4 MHz	824.7	1RB#0	5.07	6.02
	836.5		5.24	5.95
	848.3		5.19	6.15
3 MHz	825.5	1RB#0	5.28	6.16
	836.5		5.18	5.95
	847.5		5.30	6.15
5 MHz	826.5	1RB#0	5.29	5.81
	836.5		5.21	5.83
	846.5		5.08	5.71
10 MHz	829.0	1RB#0	5.08	5.76
	836.5		4.87	5.59
	844.0		5.35	6.08
15 MHz	831.5	1RB#0	8.48	5.91
	836.5		4.74	5.49
	841.5		5.23	6.08




LTE FDD Band 26-1.4MHz Channel Bandwidth PAPR

QPSK

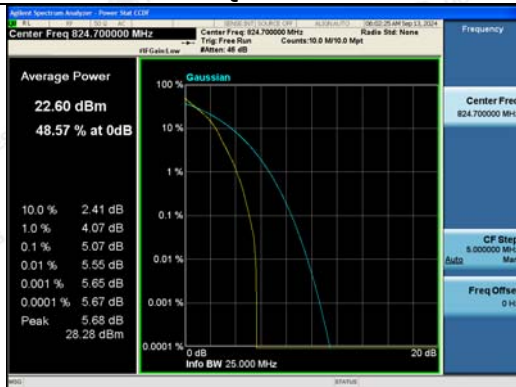

1RB#0

16QAM

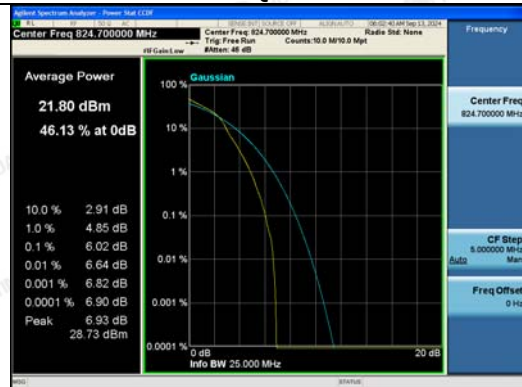

1RB#0

Low Channel




1RB#0



1RB#0

Middle Channel

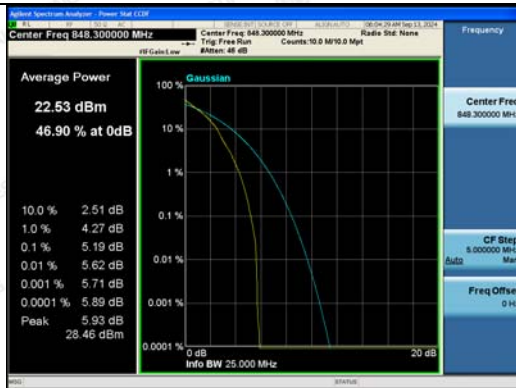



1RB#0



1RB#0

High Channel

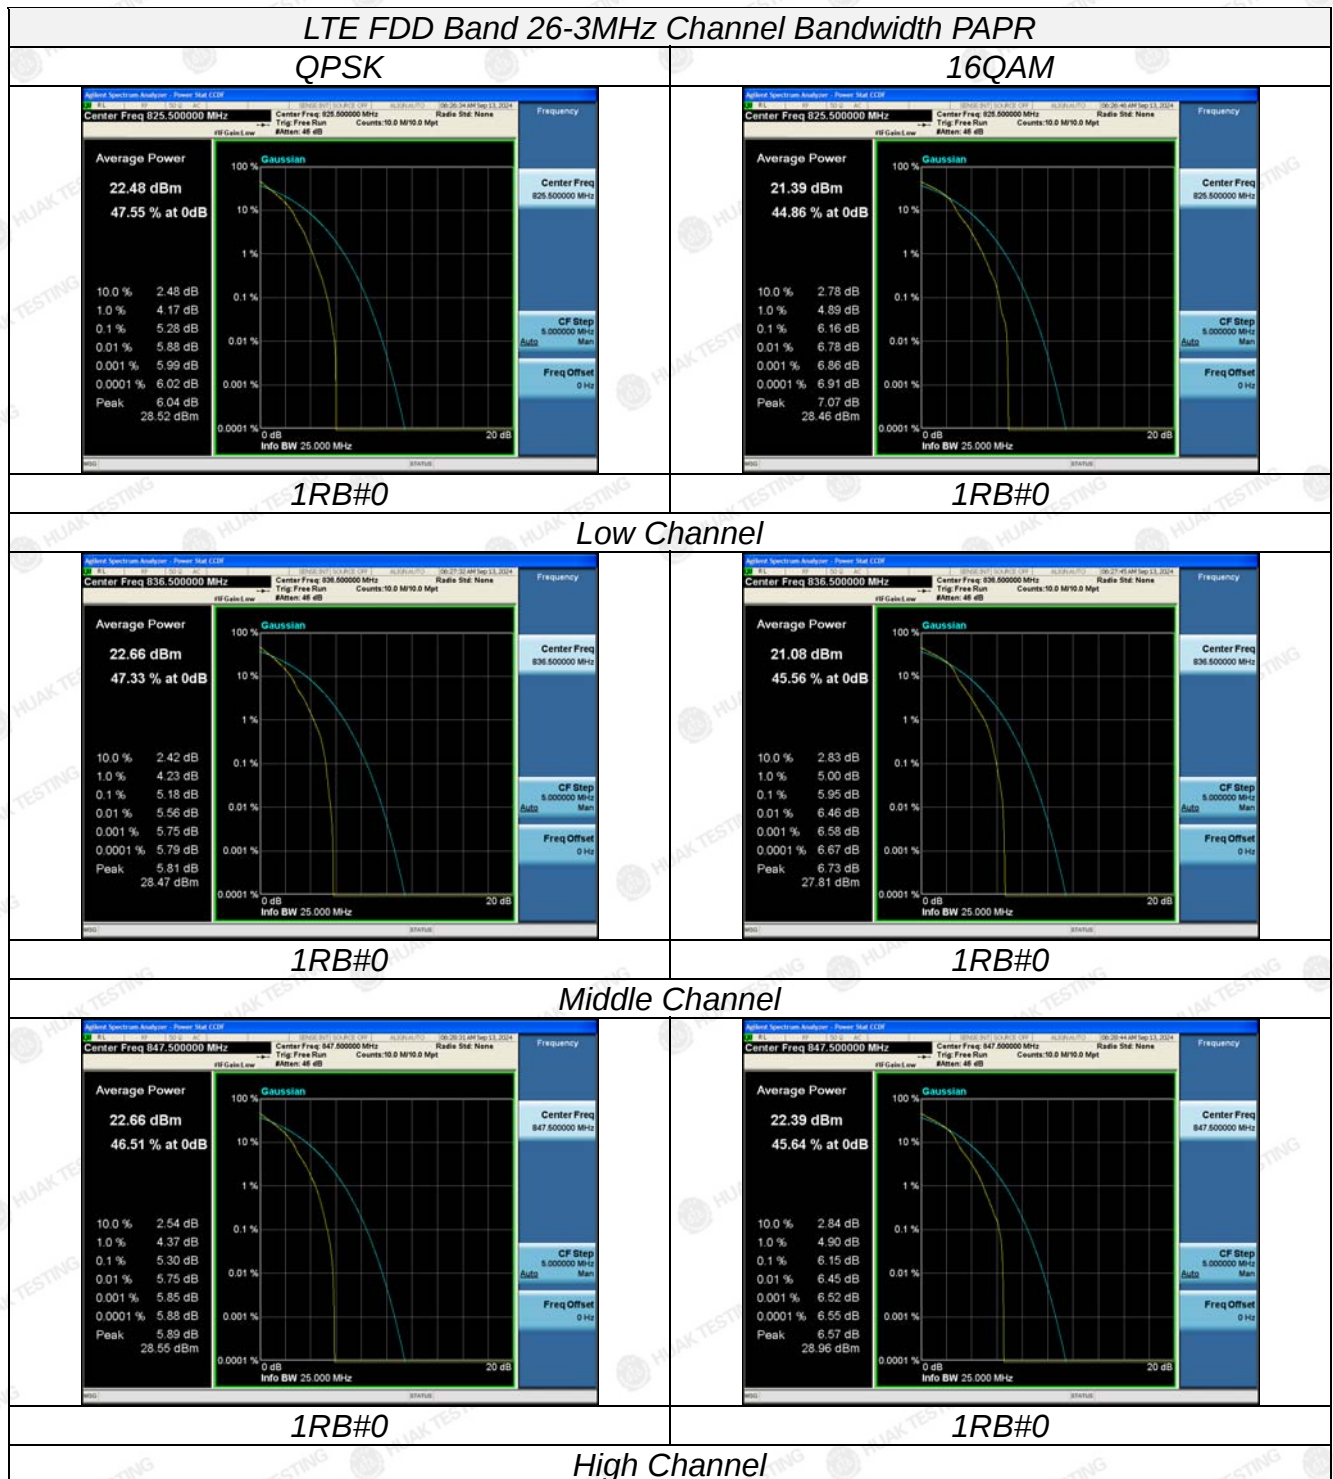

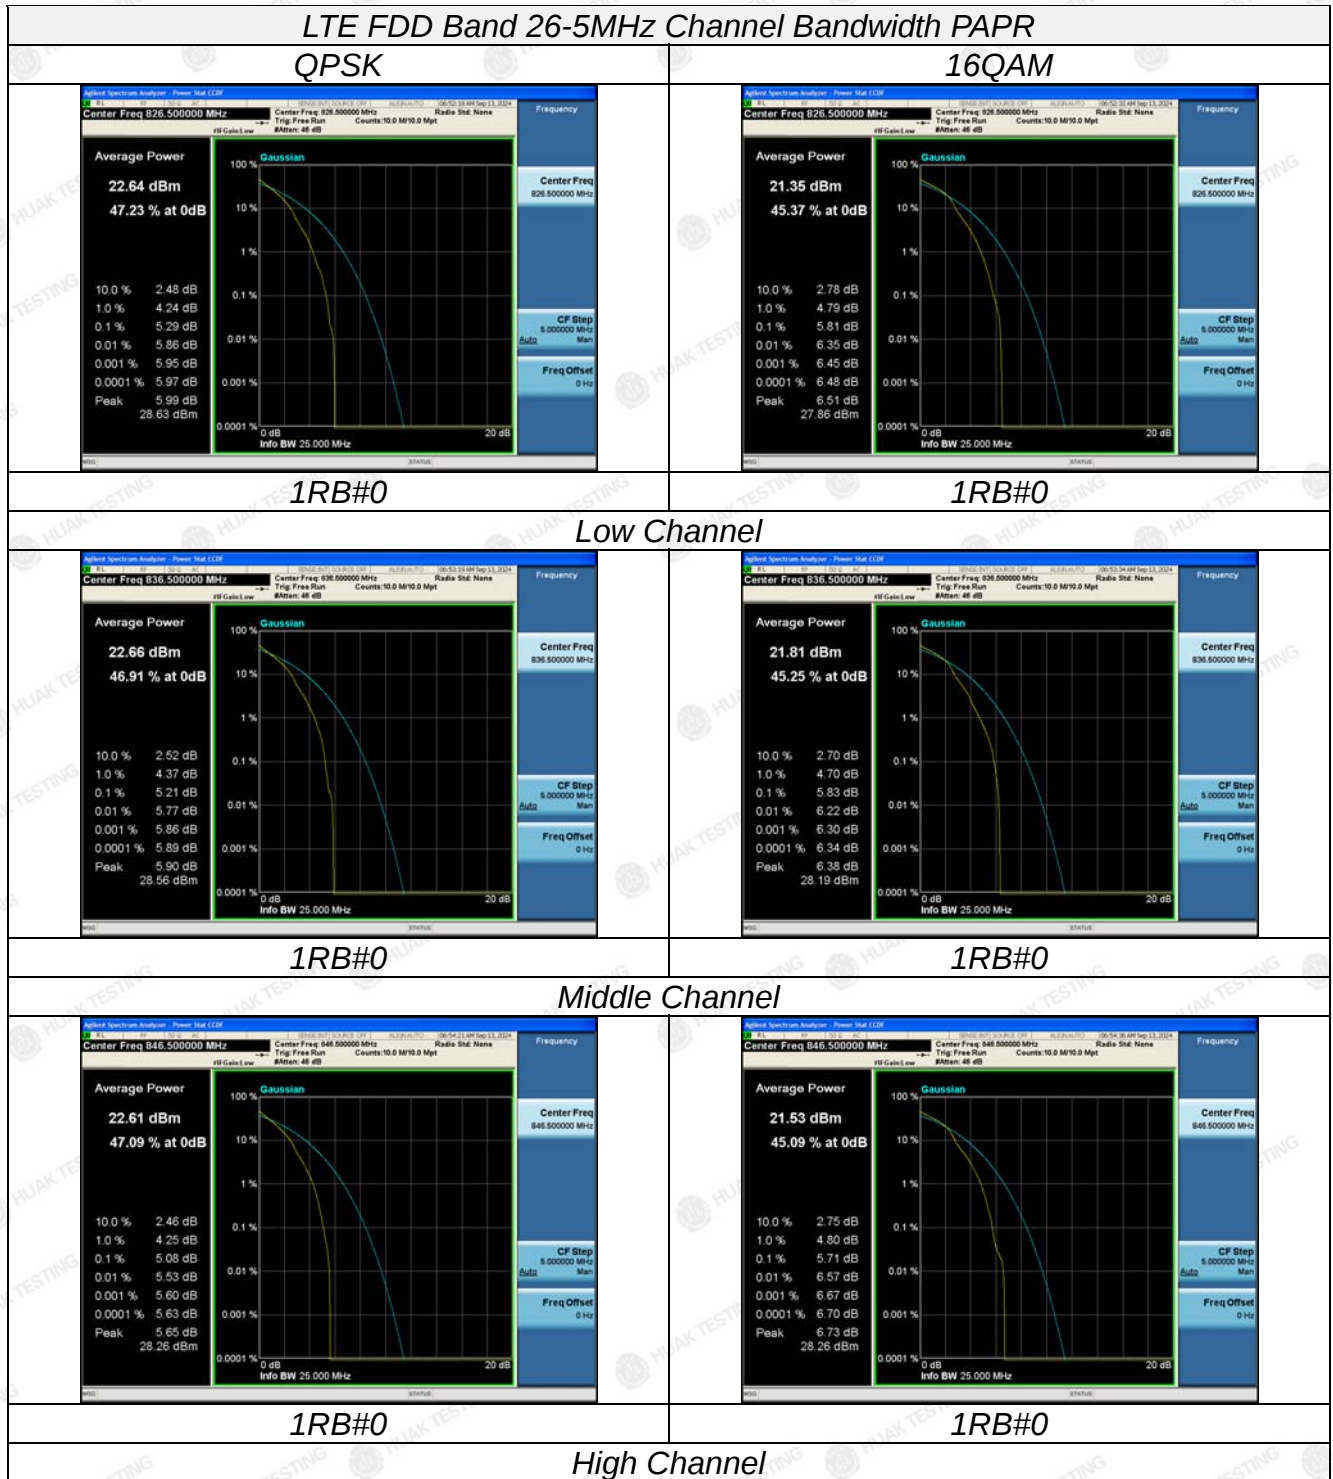



LTE FDD Band 26-10MHz Channel Bandwidth PAPR

QPSK




16QAM



1RB#0

1RB#0


Low Channel

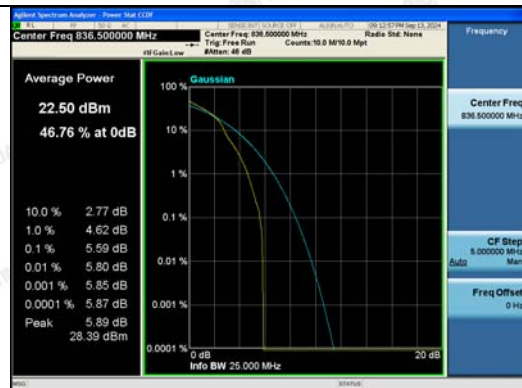

1RB#0

1RB#0

Middle Channel

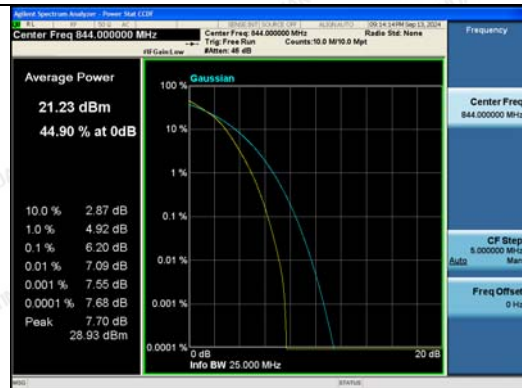

1RB#0

1RB#0



High Channel



LTE FDD Band 26-15MHz Channel Bandwidth PAPR

QPSK


16QAM

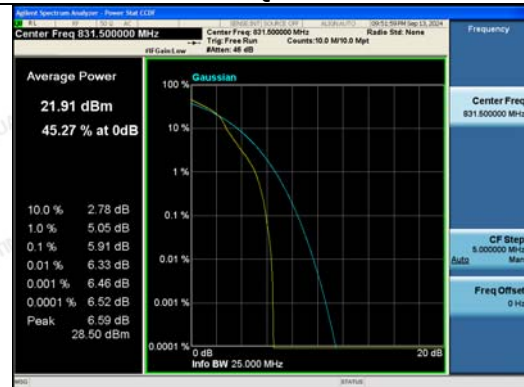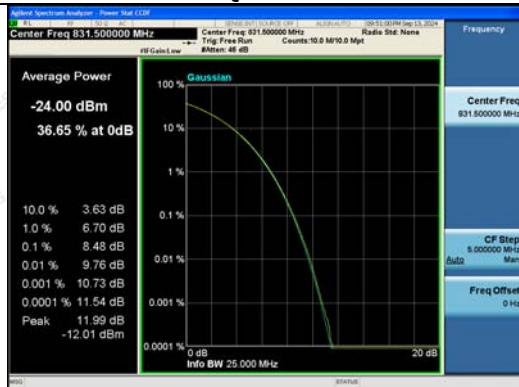

1RB#0

1RB#0


Low Channel

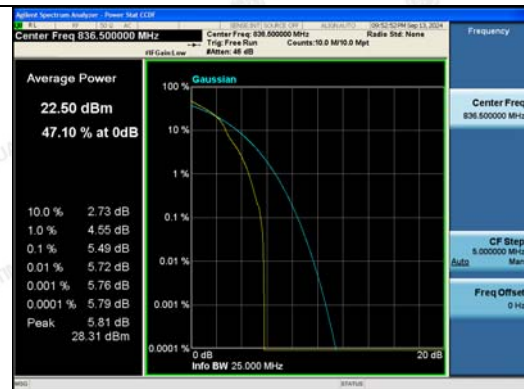

1RB#0

1RB#0

Middle Channel

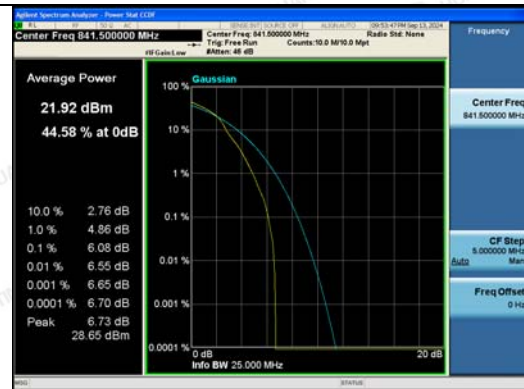

1RB#0


1RB#0

High Channel



5.4. 99% Occupied Bandwidth and 26dB Bandwidth Measurement

5.4.1. Test Specification

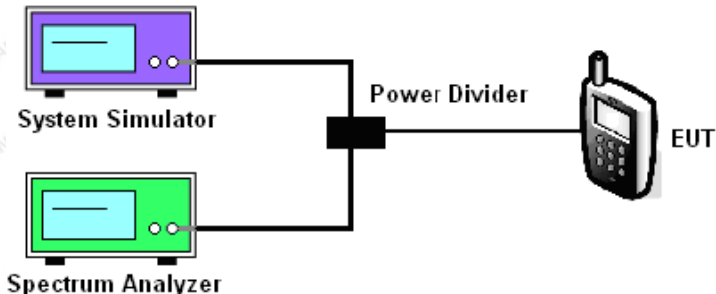Test Method:	FCC part 2.1049
Limit:	N/A
Test Setup:	 The diagram shows a System Simulator (purple box) and a Spectrum Analyzer (green box) connected to a Power Divider (black box). The Power Divider is then connected to the EUT (Equipment Under Test, represented by a mobile phone icon).
Test Procedure:	1. The testing follows FCC KDB 971168 D01v03 Section 4.2. 2. The EUT was connected to the spectrum analyzer and system simulator via a power divider. 3. The RF output of the EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 4. The 99% occupied bandwidth were measured, set RBW= 1% of OBW, VBW= 3*RBW, sample detector, trace maximum hold. 5. The 26dB bandwidth were measured, set RBW= 1% of EBW, VBW= 3*RBW, peak detector, trace maximum hold.
Test Result:	PASS

TEST RESULTS




Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 26; recorded worst case for each Channel Bandwidth of LTE FDD Band 26.



LTE FDD Band 26						
TX Channel Bandwidth	RB Size/Offset	Frequency (MHz)	-26dBc Emission bandwidth (MHz)		99% Occupied bandwidth (MHz)	
			QPSK	16QAM	QPSK	16QAM
1.4 MHz	6RB#0	824.7	1.249	1.242	1.0988	1.0896
		836.5	1.244	1.253	1.0908	1.1008
		848.3	1.238	1.252	1.0950	1.0971
3 MHz	15RB#0	825.5	3.032	3.033	2.7116	2.6980
		836.5	3.023	3.028	2.7074	2.7065
		847.5	3.037	3.014	2.7088	2.7042
5 MHz	25RB#0	826.5	4.971	4.976	4.5086	4.5066
		836.5	4.976	4.984	4.5023	4.5108
		846.5	5.000	4.992	4.5039	4.5308
10 MHz	50RB#0	829.0	9.904	9.902	8.9617	8.9727
		836.5	9.910	9.889	9.0062	9.0032
		844.0	9.906	9.910	8.9861	8.9851
15 MHz	75RB#0	831.5	14.89	14.96	13.447	13.492
		836.5	15.04	14.92	13.510	13.501
		841.5	14.96	14.85	13.466	13.478

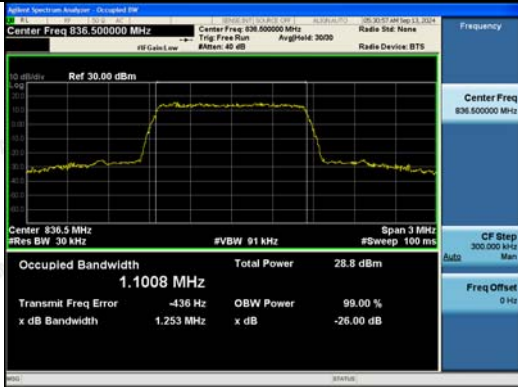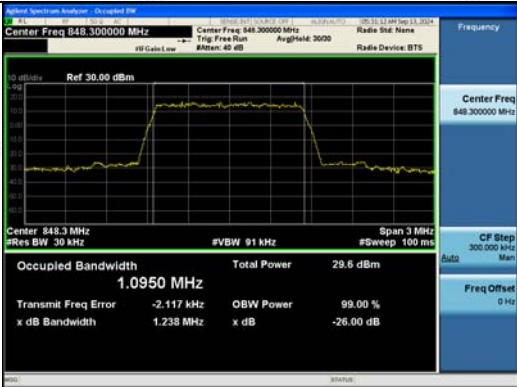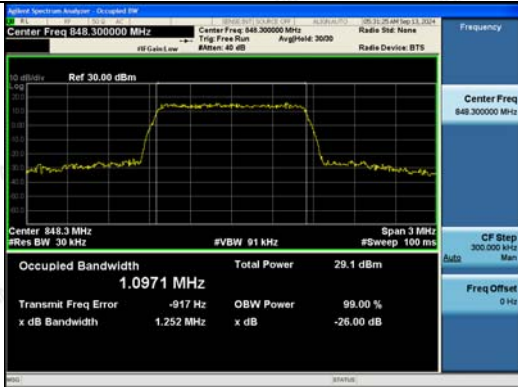

LTE FDD Band 26-1.4MHz Channel Bandwidth	
QPSK	16QAM
	
6RB#0	6RB#0
Low Channel	
	
6RB#0	6RB#0
Middle Channel	
	
6RB#0	6RB#0
High Channel	



LTE FDD Band 26-3MHz Channel Bandwidth

QPSK



16QAM



15RB#0

15RB#0


Low Channel



15RB#0

15RB#0

Middle Channel

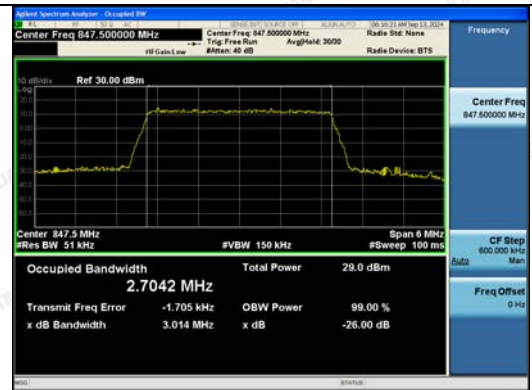

15RB#0

15RB#0

High Channel







LTE FDD Band 26-5MHz Channel Bandwidth	
QPSK 	16QAM 
25RB#0	25RB#0
Low Channel	
	
25RB#0	25RB#0
Middle Channel	
	
25RB#0	25RB#0
High Channel	



LTE FDD Band 26-10MHz Channel Bandwidth	
QPSK 	16QAM 
50RB#0	50RB#0
Low Channel	
	
50RB#0	50RB#0
Middle Channel	
	
50RB#0	50RB#0
High Channel	

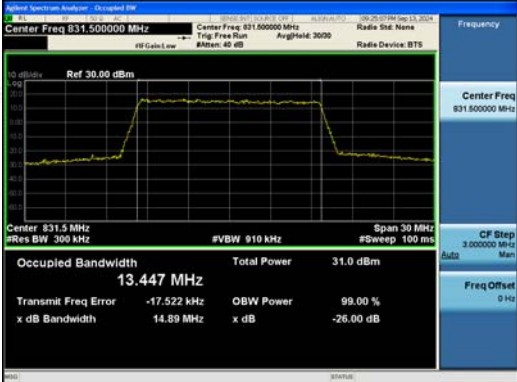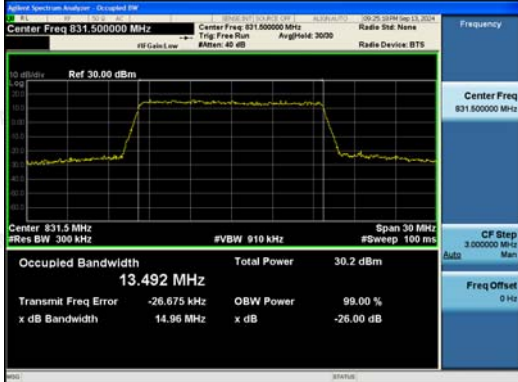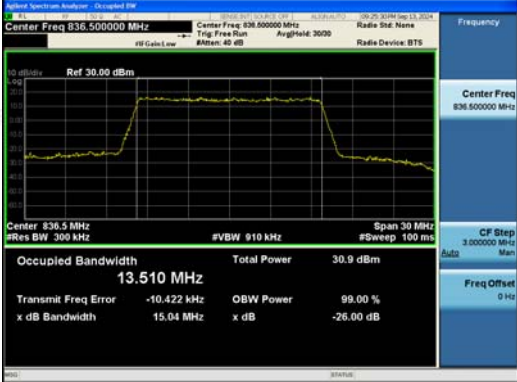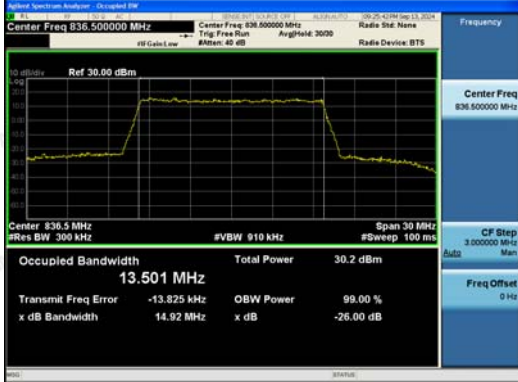


LTE FDD Band 26-15MHz Channel Bandwidth	
QPSK	16QAM
	
75RB#0	75RB#0
Low Channel	
	
75RB#0	75RB#0
Middle Channel	
	
75RB#0	75RB#0
High Channel	



5.5. Band Edge and Conducted Spurious Emission Measurement

5.5.1. Test Specification

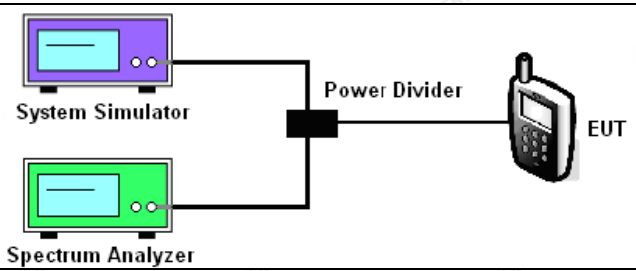Test Requirement:	FCC part 22.917
Test Method:	FCC part2.1051
Limit:	the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.
Test Setup:	 The diagram shows a System Simulator (purple box) and a Spectrum Analyzer (green box) connected to a Power Divider (black box). The Power Divider is connected to the EUT (Equipment Under Test, represented by a mobile phone icon).
Test Procedure:	1. The testing follows FCC KDB 971168 D01v03 Section 6.0. 2. The EUT was connected to the spectrum analyzer and system simulator via a power divider. 3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement. 4. The band edges of low and high channels for the highest RF powers were measured. 5. The conducted spurious emission for the whole frequency range was taken. 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
Test Result:	PASS

TEST RESULTS


Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 26; recorded worst case for each Channel Bandwidth of LTE FDD Band 26.




LTE FDD Band 26-1.4MHz Channel Bandwidth Band Edge Compliance

QPSK

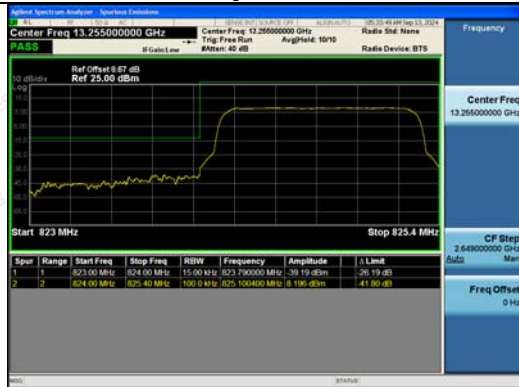


16QAM

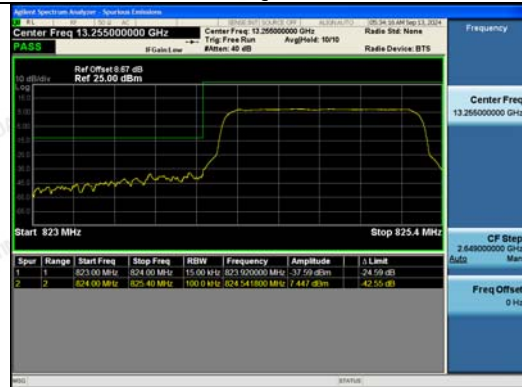

6RB#0

6RB#0


Low Channel

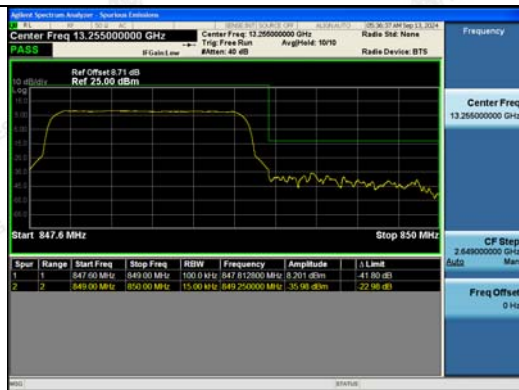



6RB#0

6RB#0

High Channel

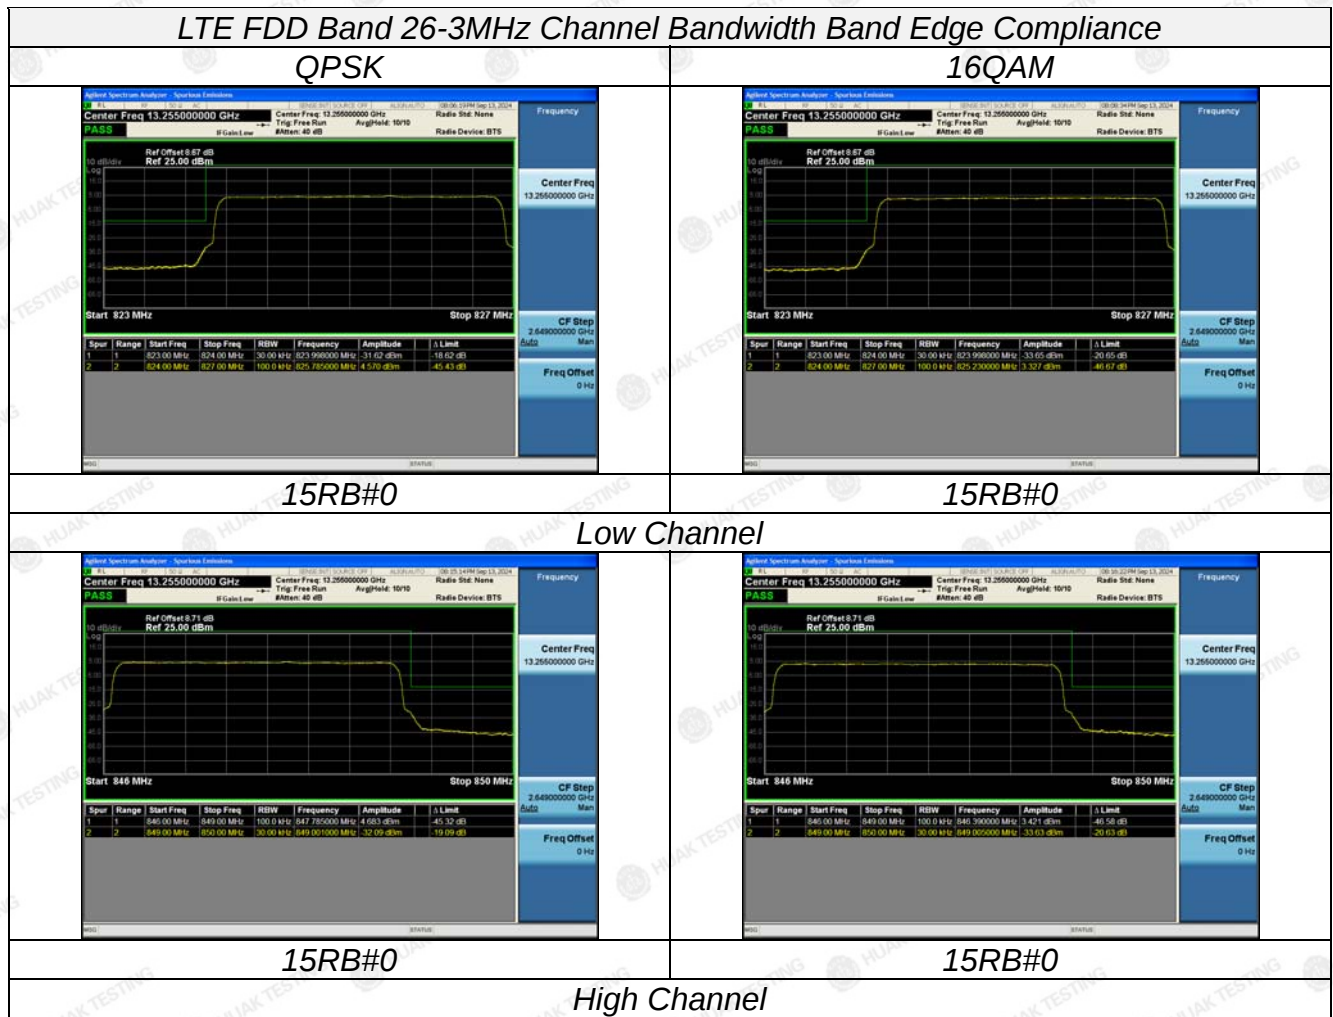

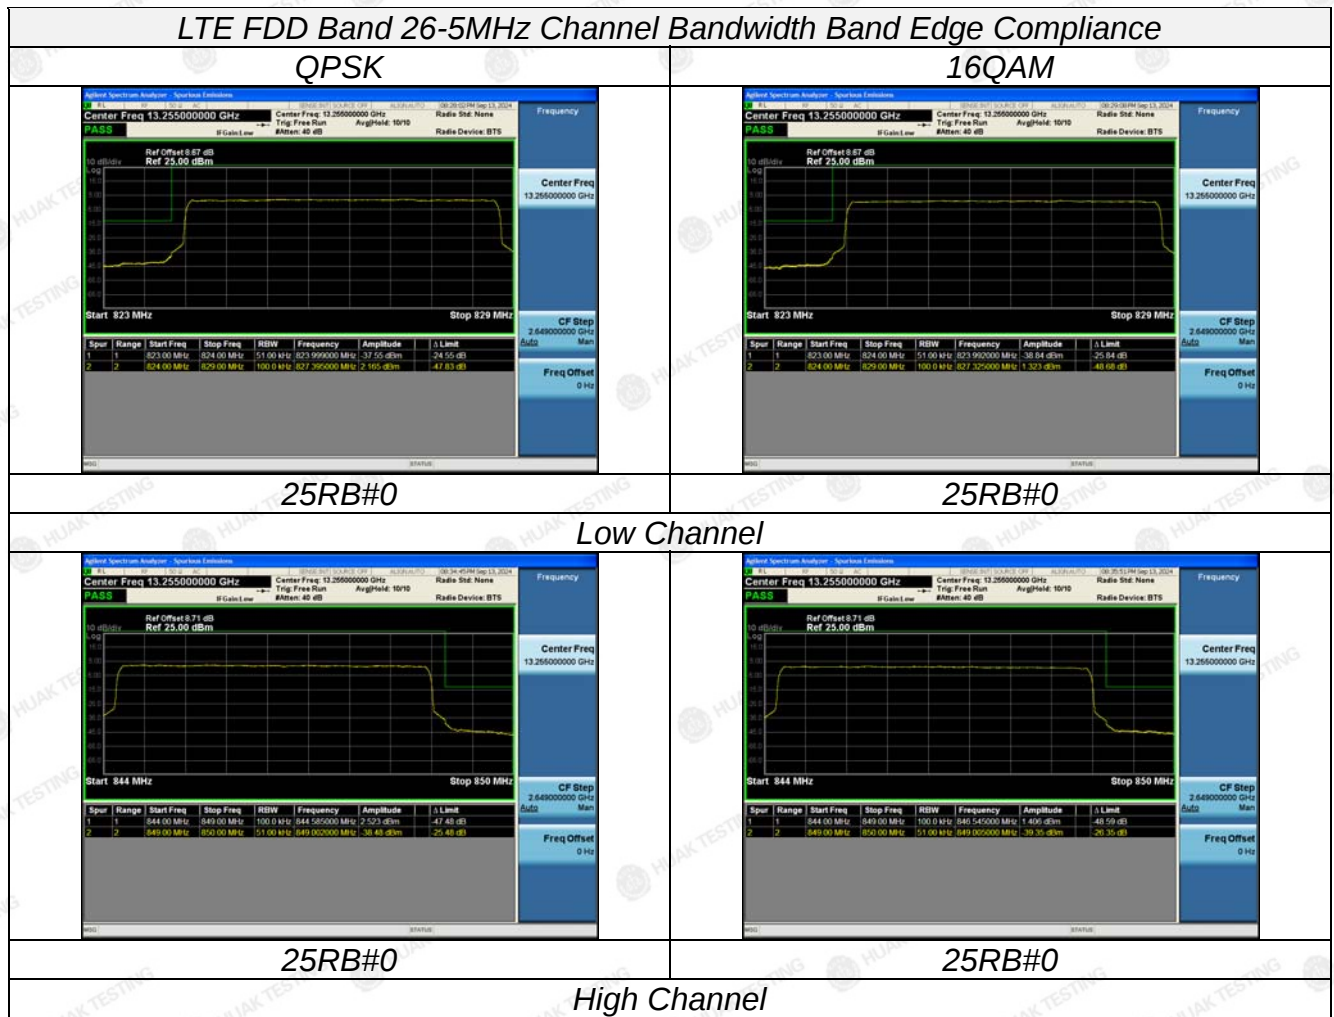




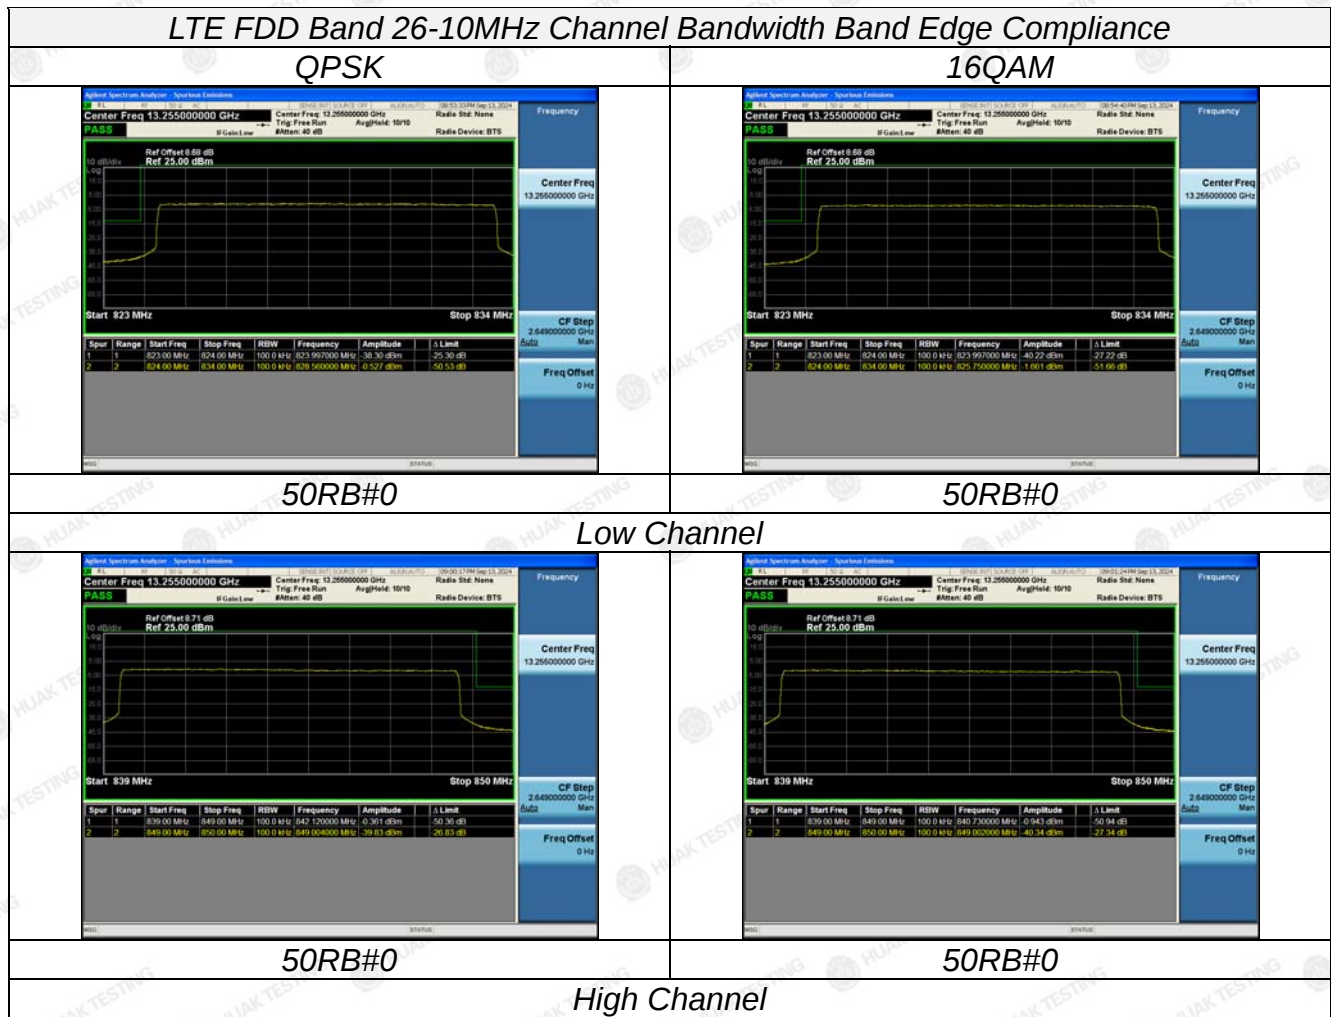


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

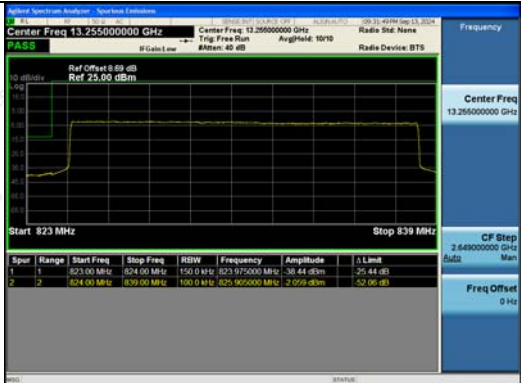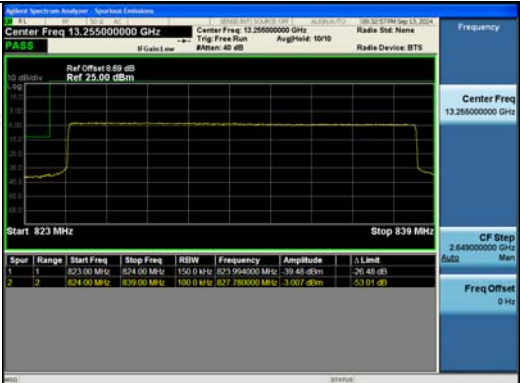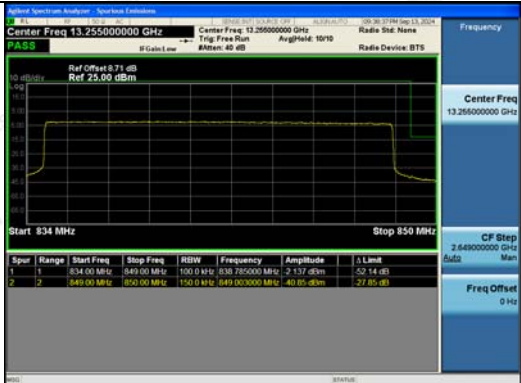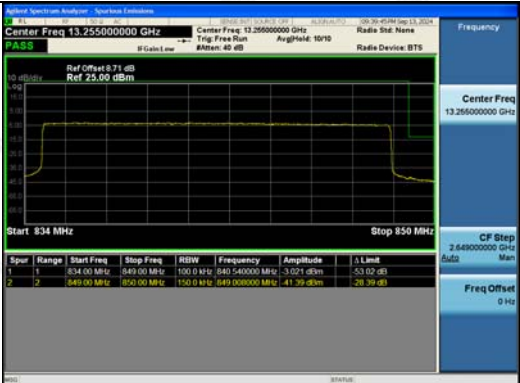

LTE FDD Band 26-15MHz Channel Bandwidth Band Edge Compliance			
QPSK		16QAM	
			
75RB#0		75RB#0	
Low Channel			
			
75RB#0		75RB#0	
High Channel			

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.


TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



Conducted Measurement:


LTE FDD Band 26-1.4MHz Channel Bandwidth	
Low Channel	
QPSK	16QAM
30MHz~1GHz	30MHz~1GHz
1GHz~3GHz	1GHz~3GHz
3GHz~10GHz	3GHz~10GHz
1RB#0	1RB#0

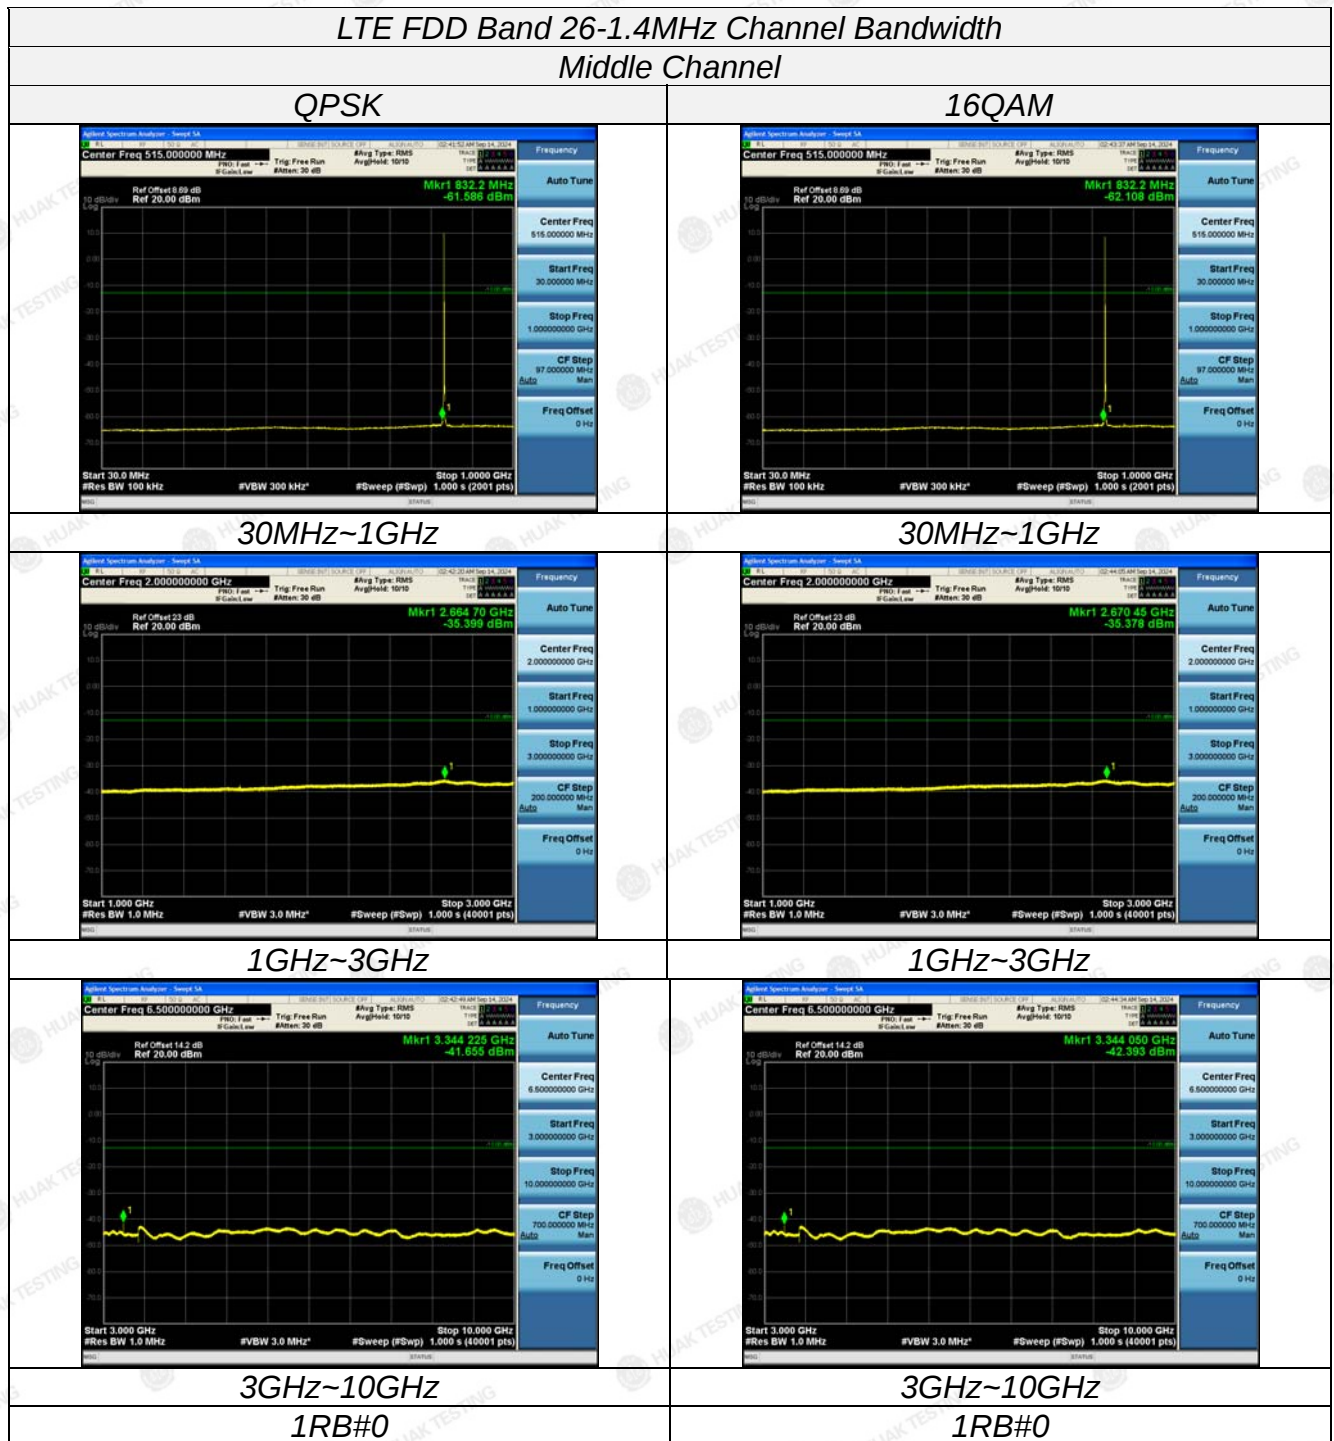

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China


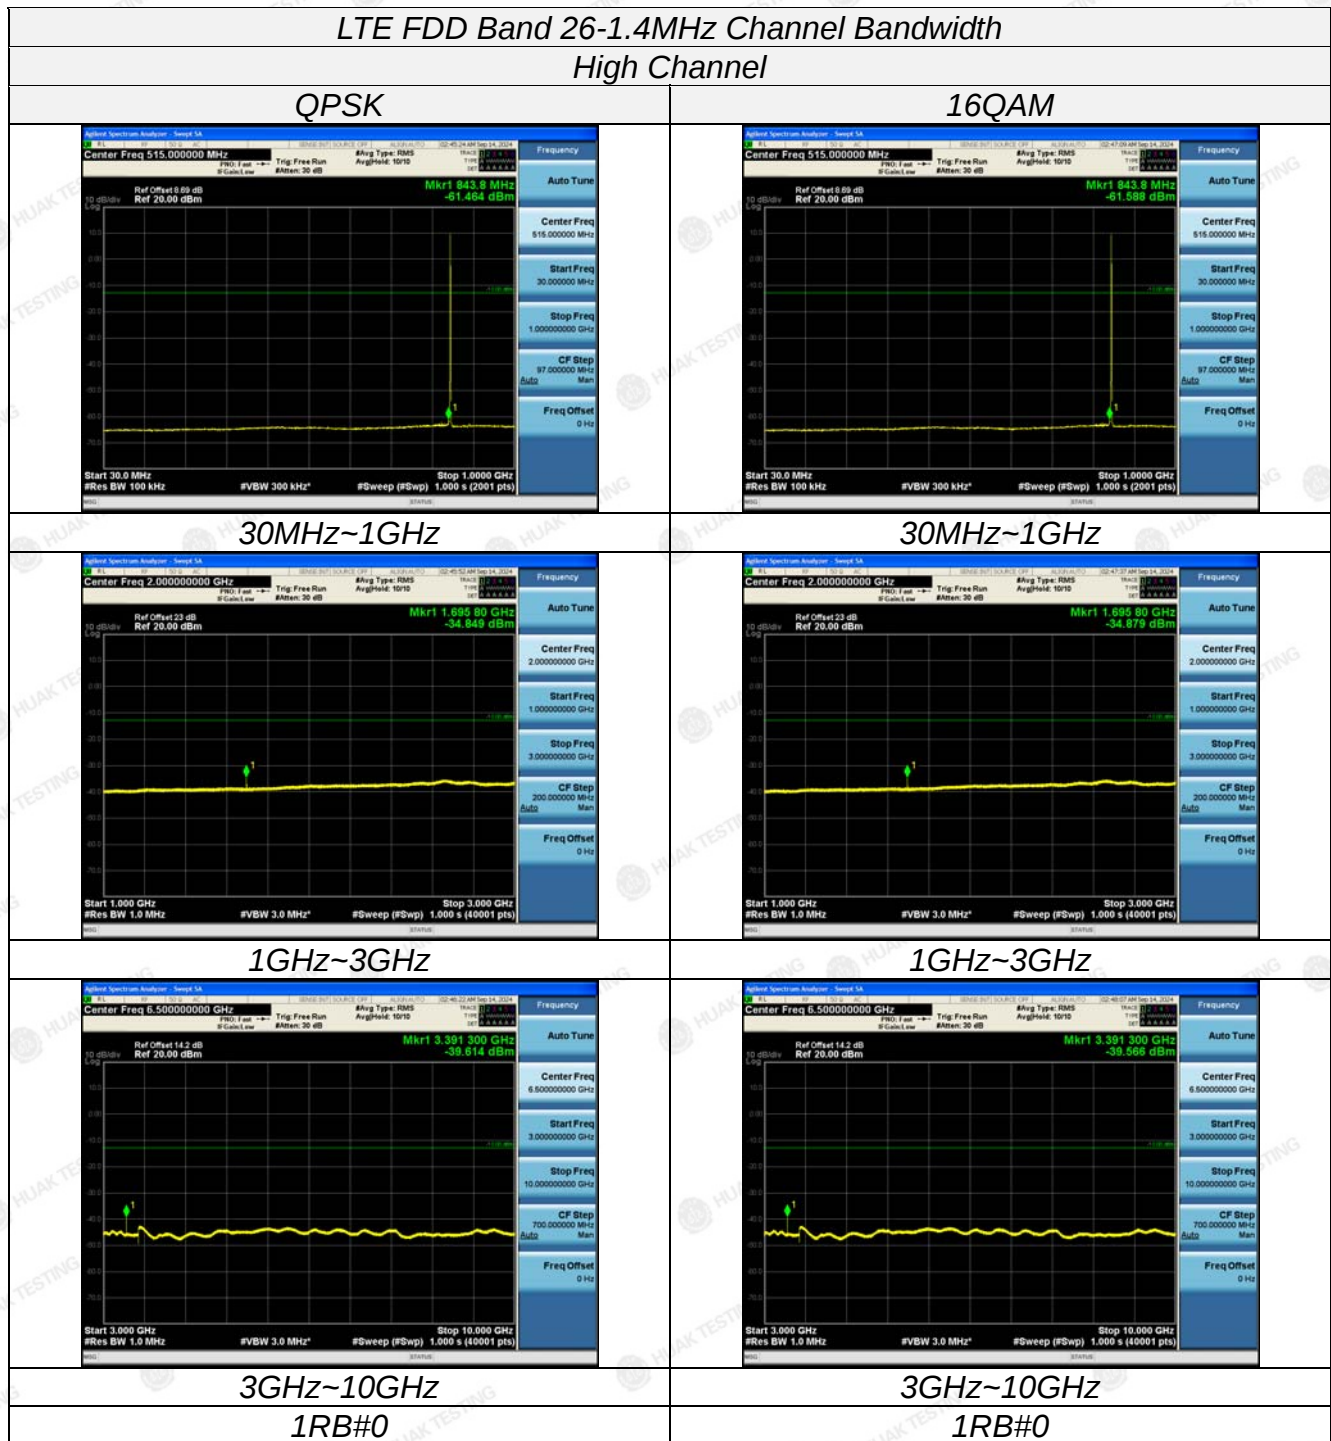




LTE FDD Band 26-3MHz Channel Bandwidth
Low Channel


QPSK

16QAM

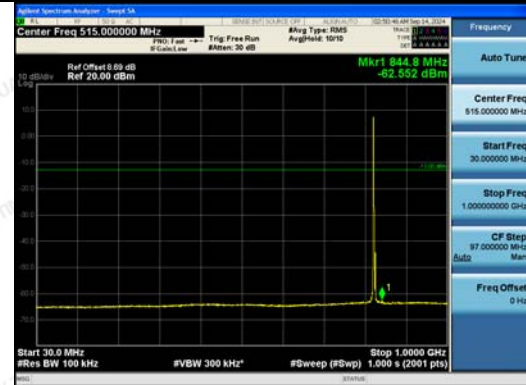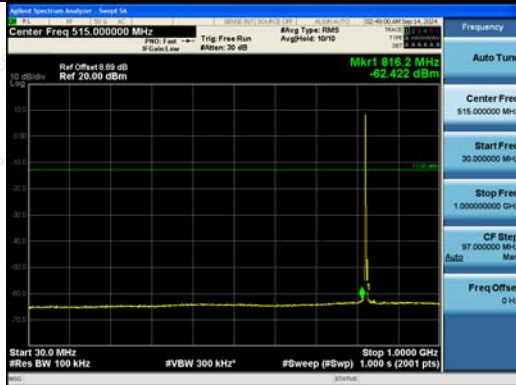



30MHz~1GHz

30MHz~1GHz

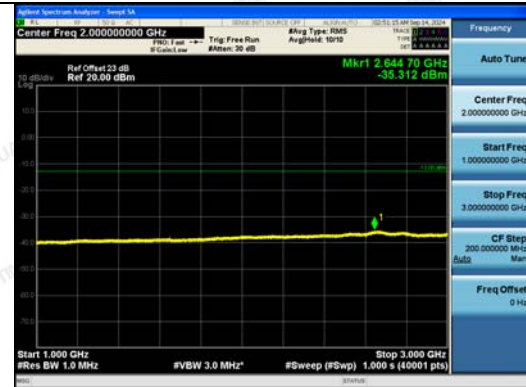

1GHz~3GHz

1GHz~3GHz

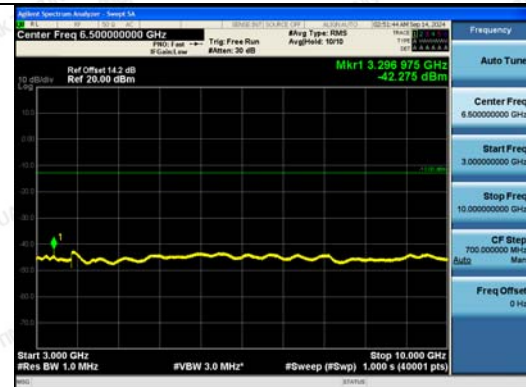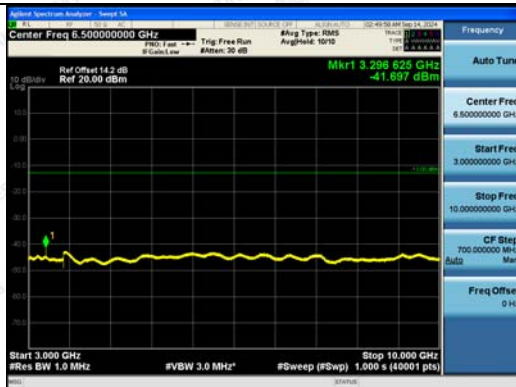

3GHz~10GHz

3GHz~10GHz

1RB#0



1RB#0



LTE FDD Band 26-3MHz Channel Bandwidth
Middle Channel


QPSK

16QAM

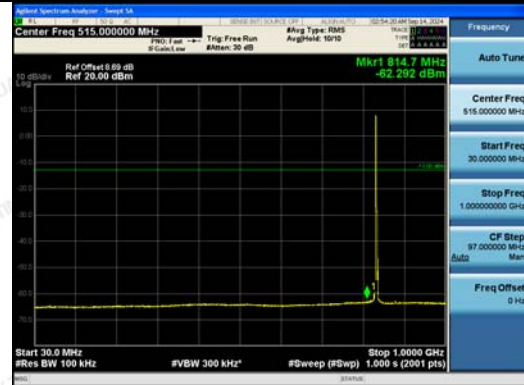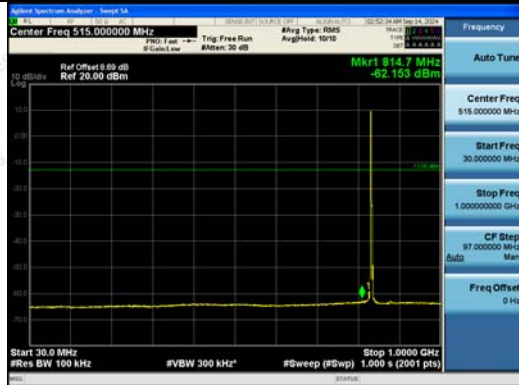



30MHz~1GHz

30MHz~1GHz

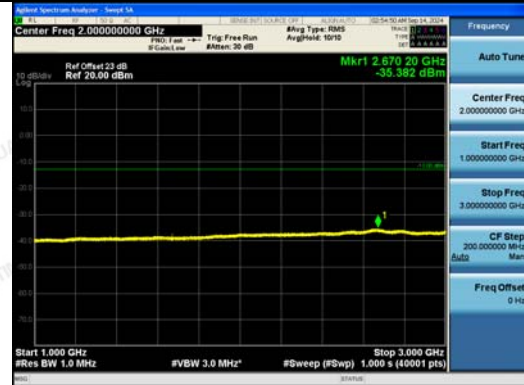

1GHz~3GHz

1GHz~3GHz

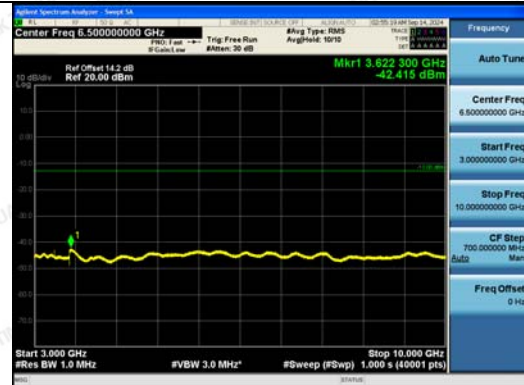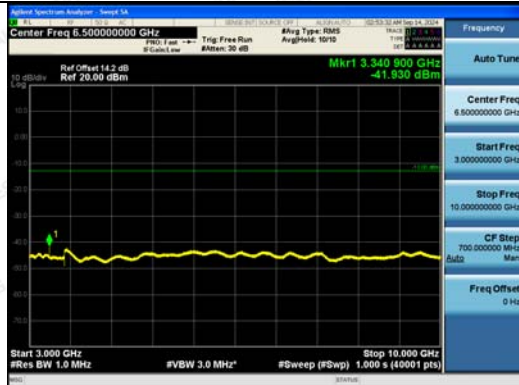

3GHz~10GHz

3GHz~10GHz

1RB#0



1RB#0



LTE FDD Band 26-3MHz Channel Bandwidth
High Channel



QPSK

16QAM

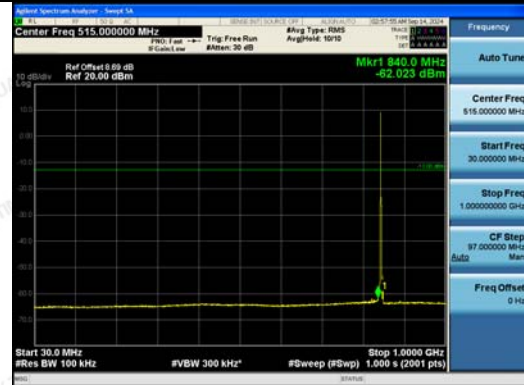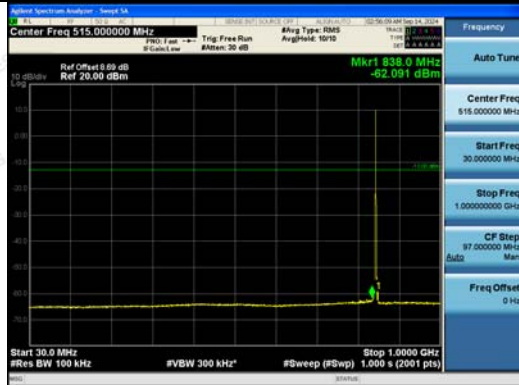



30MHz~1GHz

30MHz~1GHz

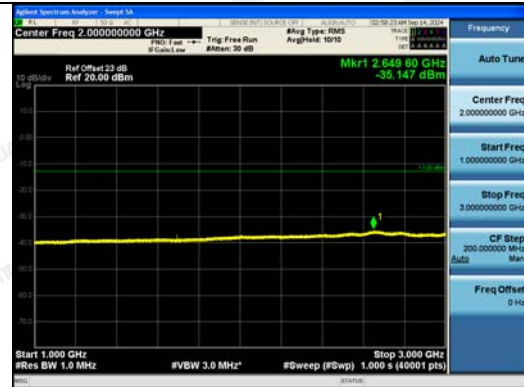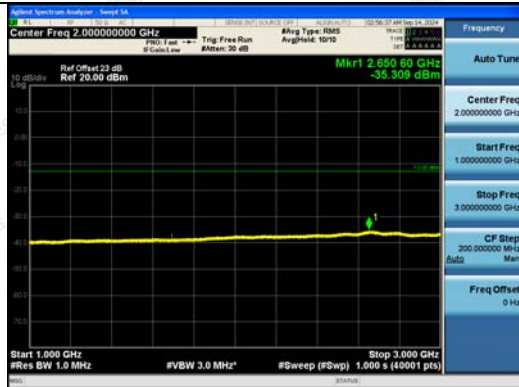

1GHz~3GHz

1GHz~3GHz

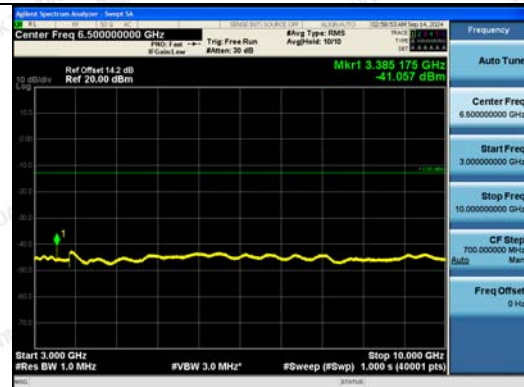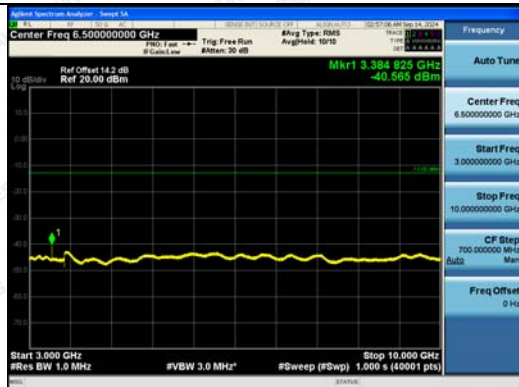

3GHz~10GHz

3GHz~10GHz

1RB#0



1RB#0



LTE FDD Band 26-5MHz Channel Bandwidth
Low Channel



QPSK

16QAM

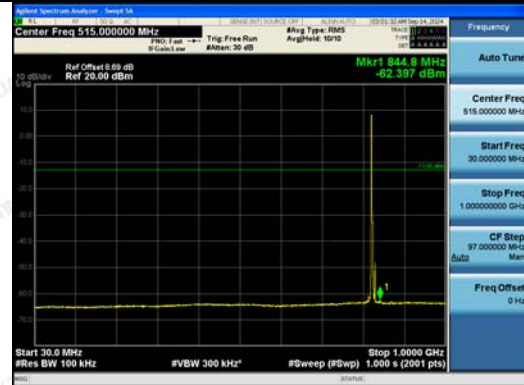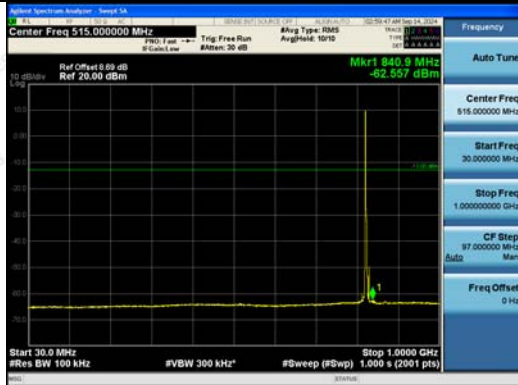



30MHz~1GHz

30MHz~1GHz

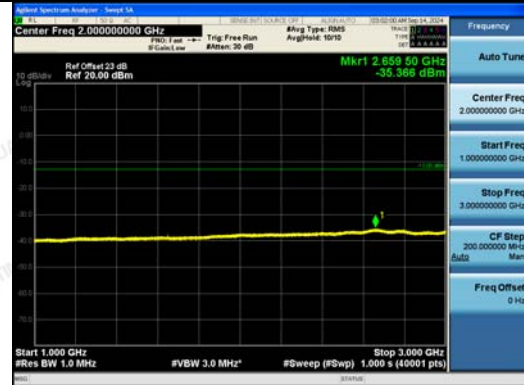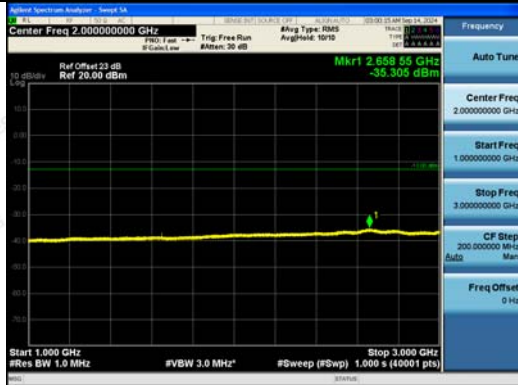

1GHz~3GHz

1GHz~3GHz

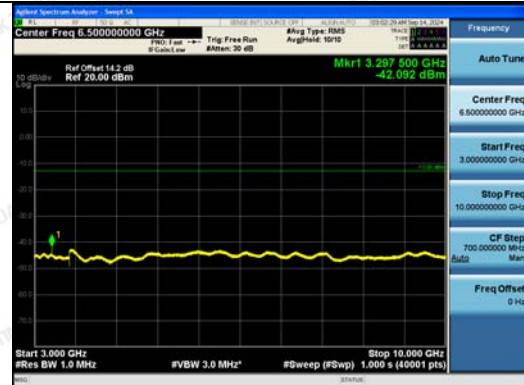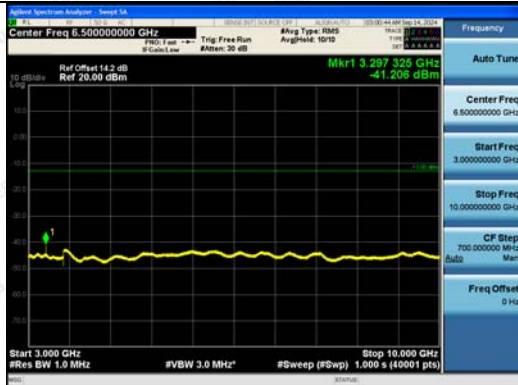


3GHz~10GHz

3GHz~10GHz

1RB#0

1RB#0


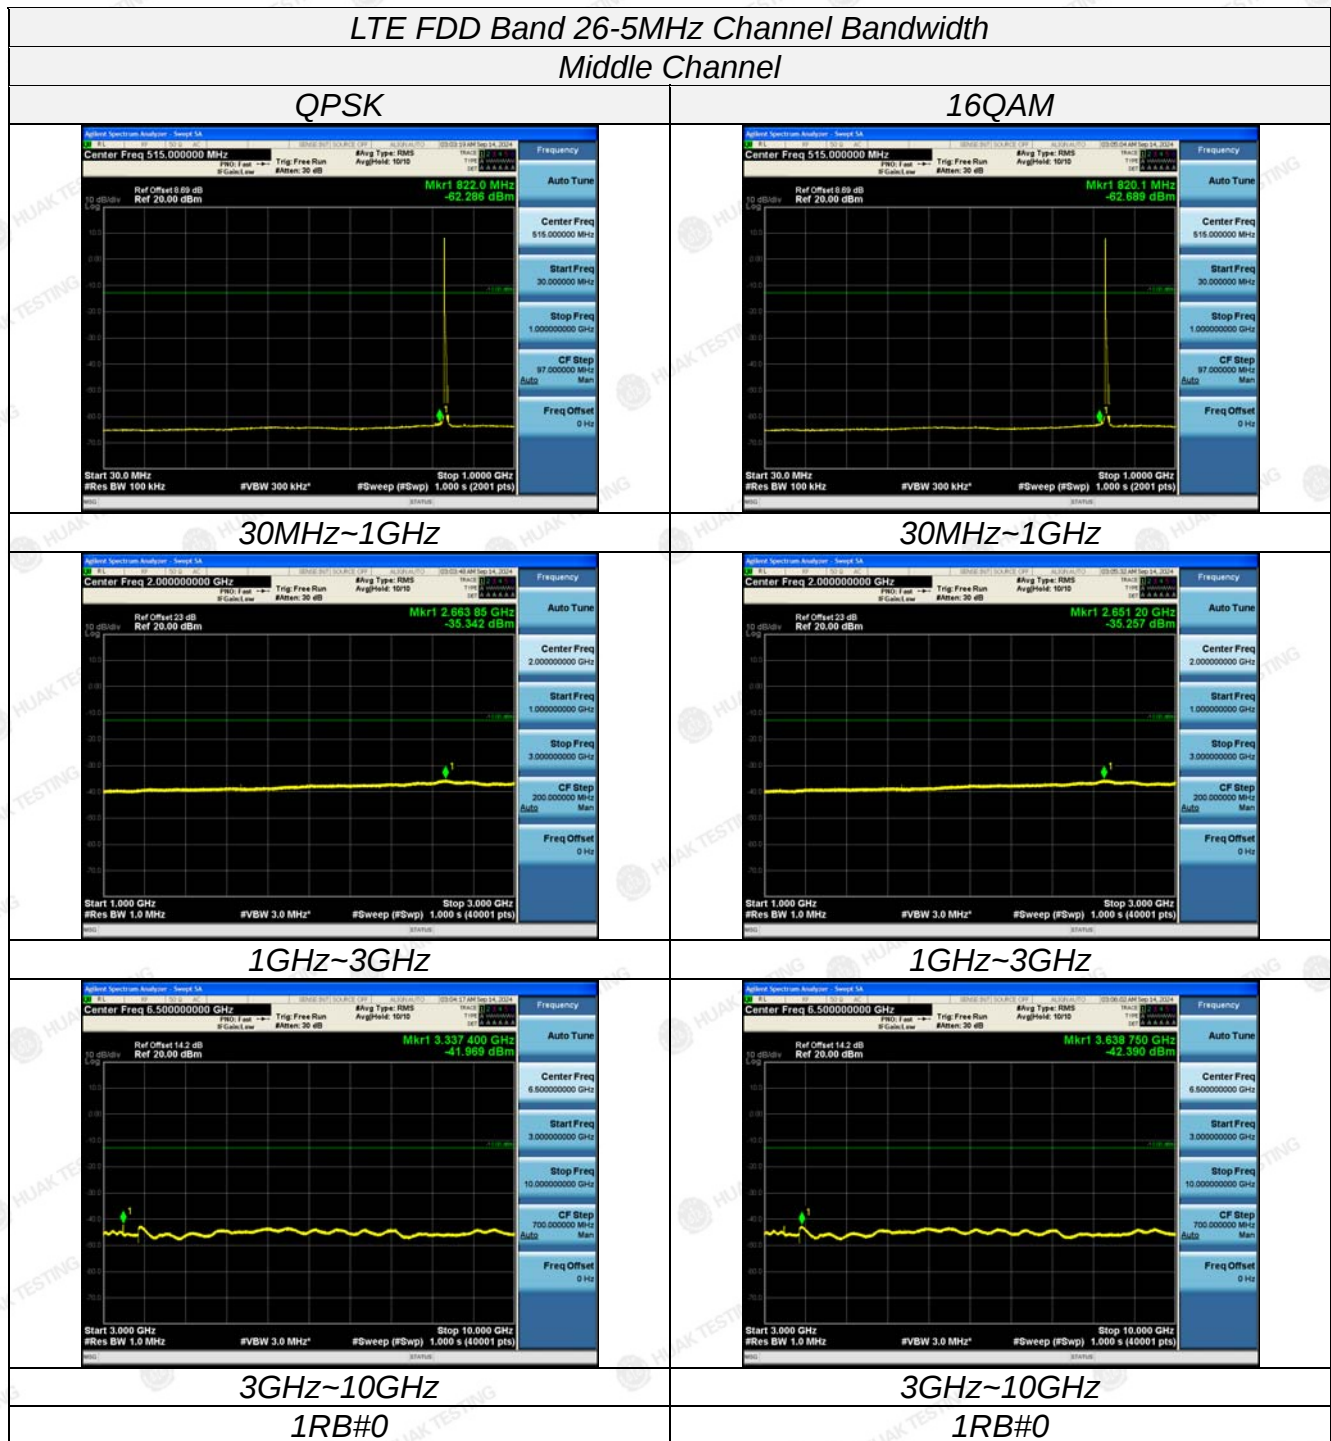




LTE FDD Band 26-5MHz Channel Bandwidth
High Channel



QPSK

16QAM

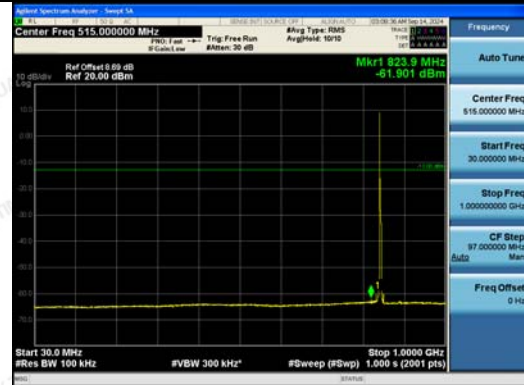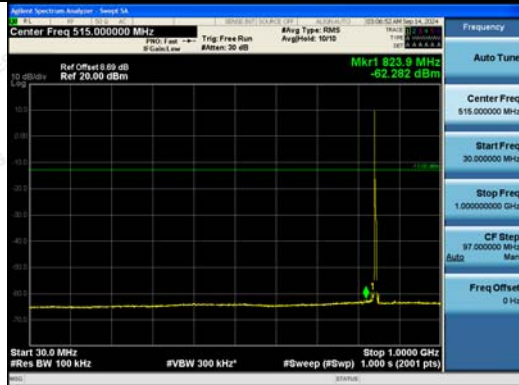



30MHz~1GHz

30MHz~1GHz

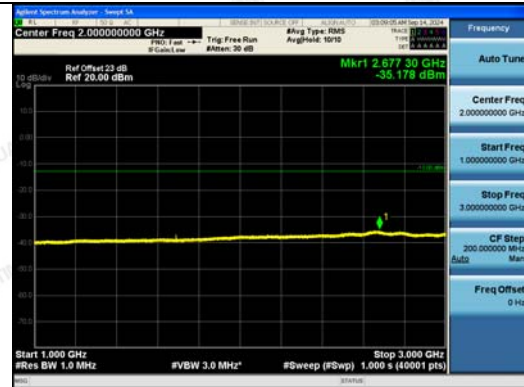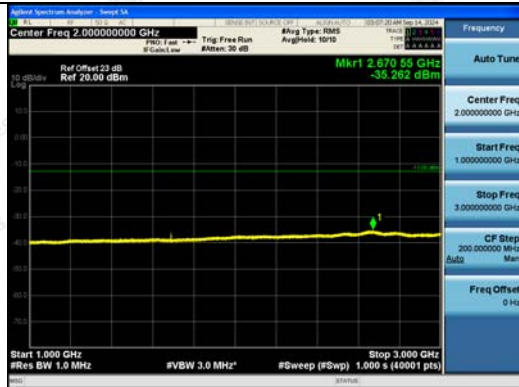

1GHz~3GHz

1GHz~3GHz

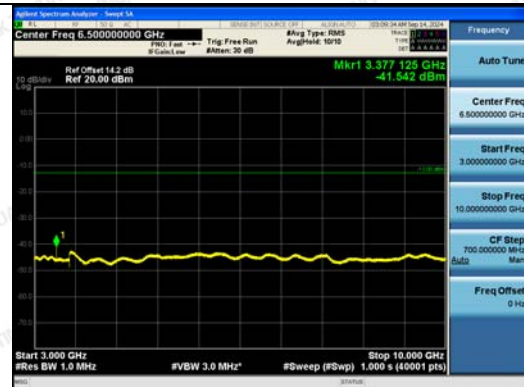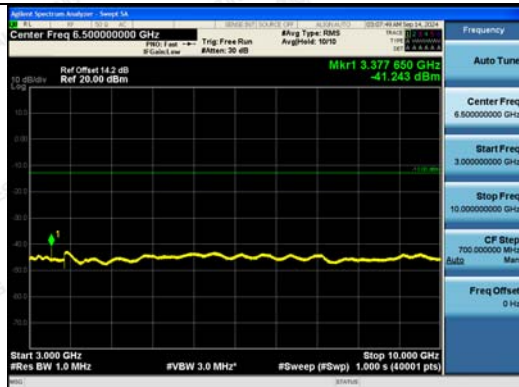


3GHz~10GHz

3GHz~10GHz

1RB#0


1RB#0

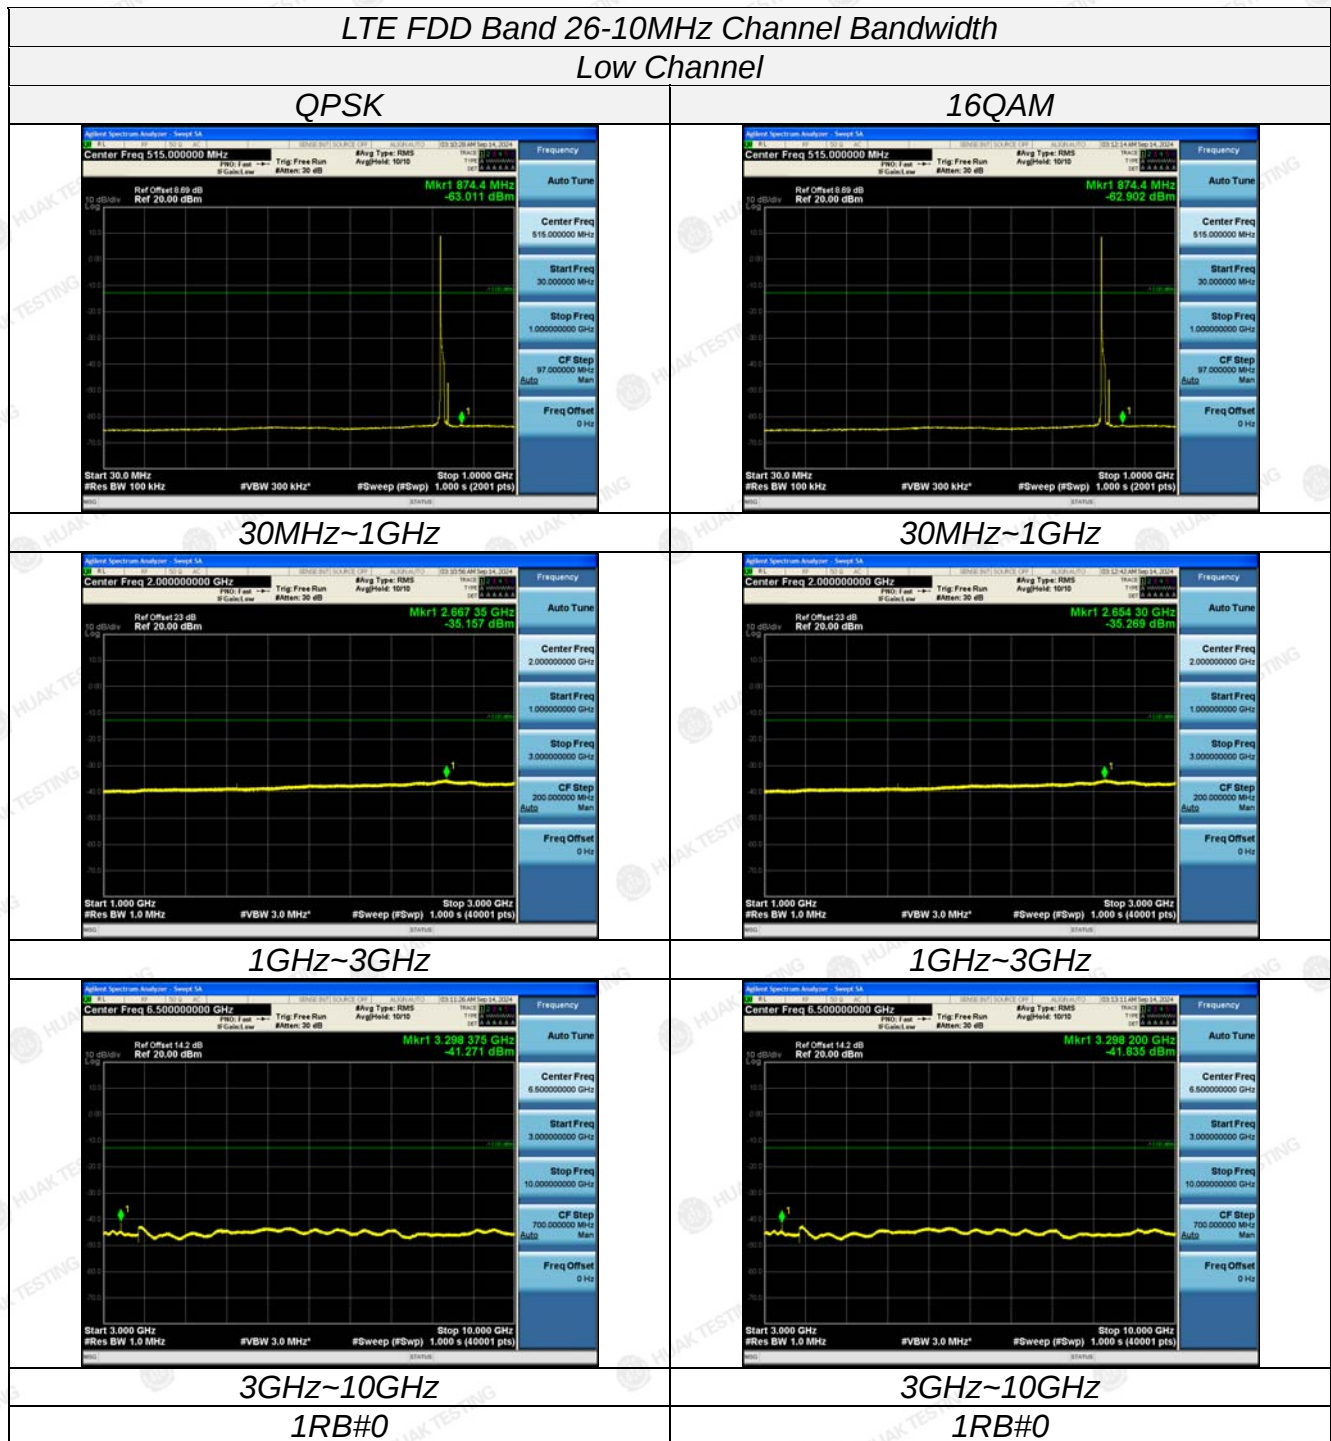

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

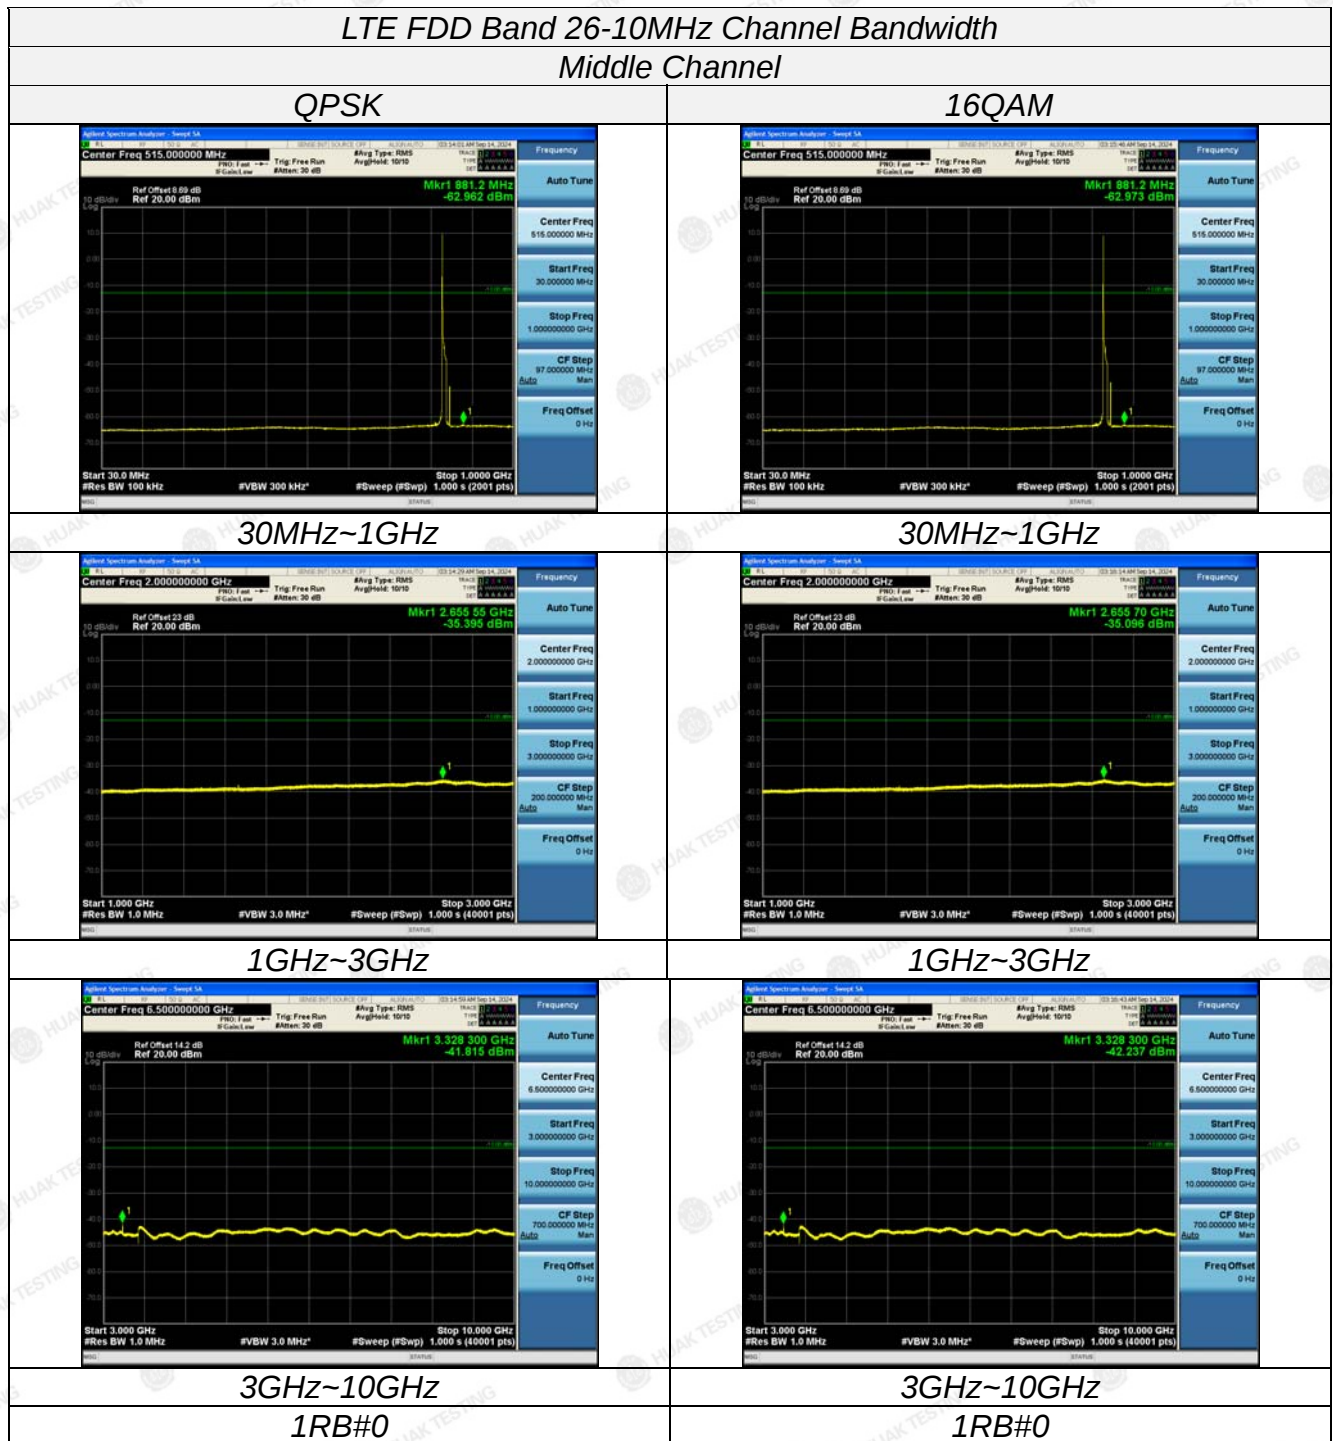




LTE FDD Band 26-10MHz Channel Bandwidth	
High Channel	
QPSK	16QAM
30MHz~1GHz	30MHz~1GHz
1GHz~3GHz	1GHz~3GHz
3GHz~10GHz	3GHz~10GHz
1RB#0	1RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China


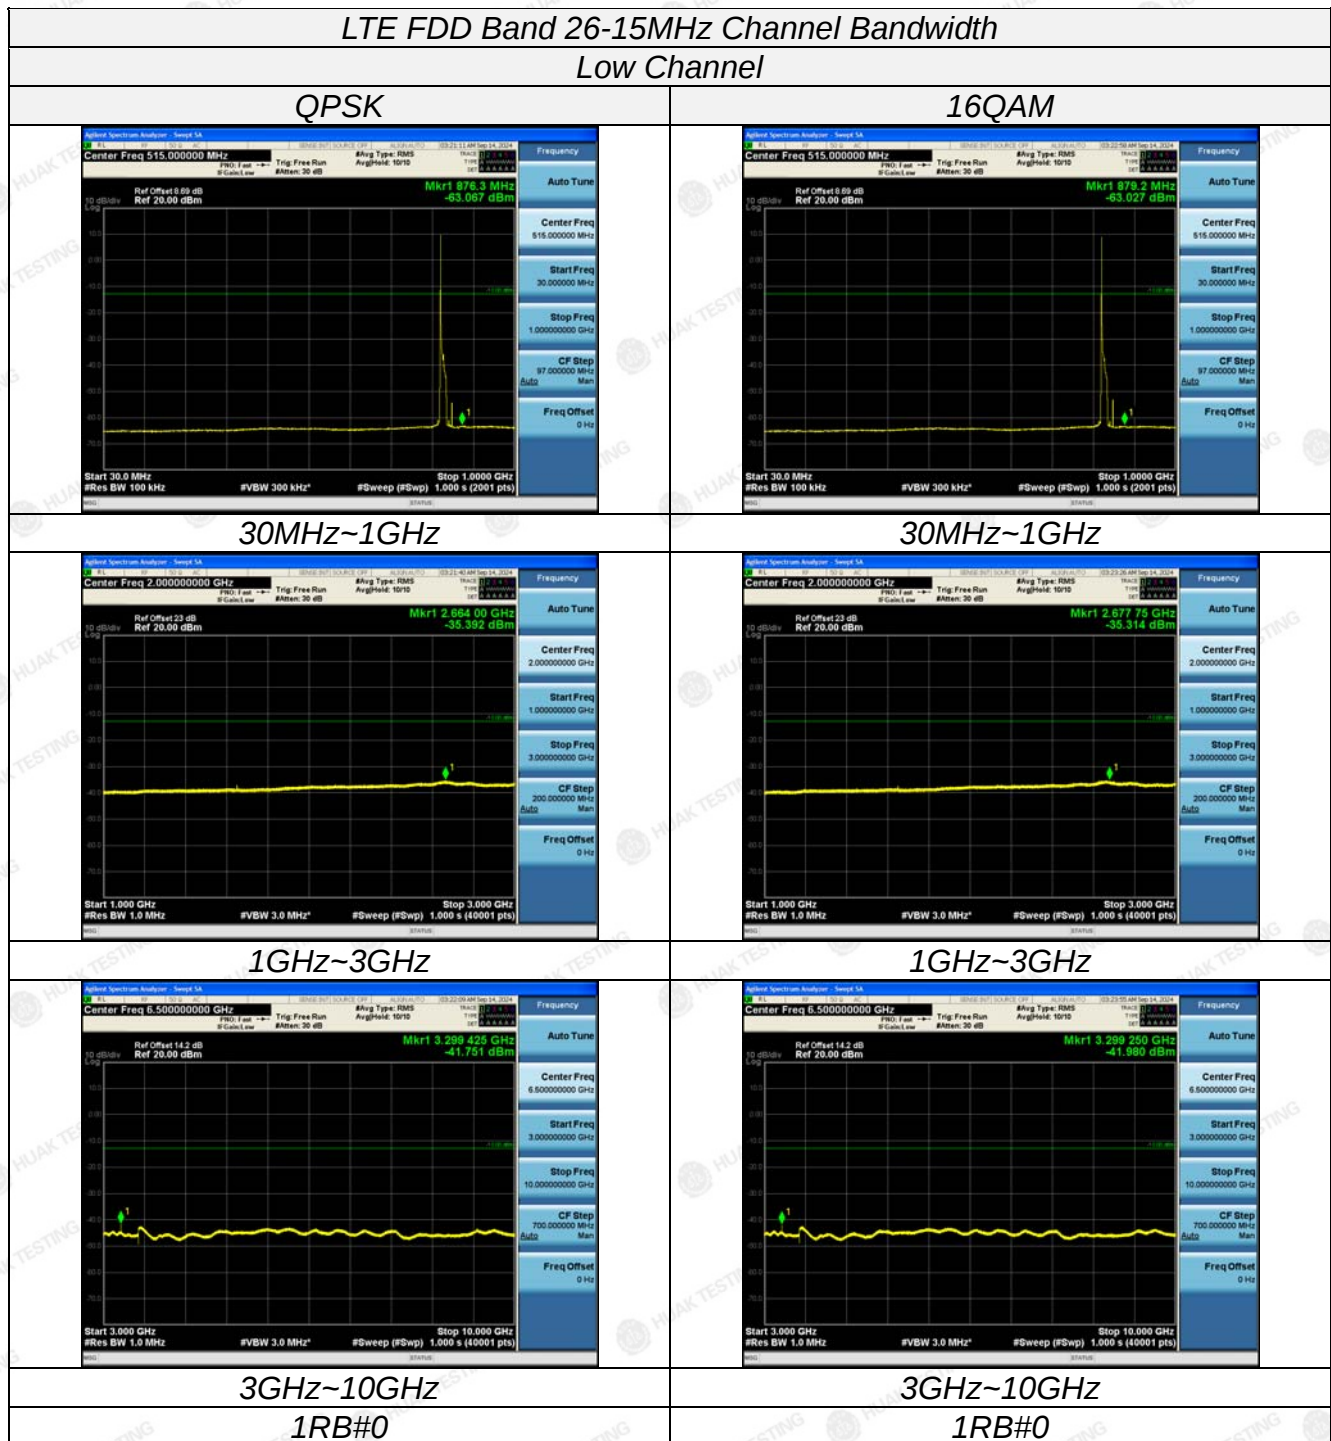




LTE FDD Band 26-15MHz Channel Bandwidth
Middle Channel



QPSK

16QAM

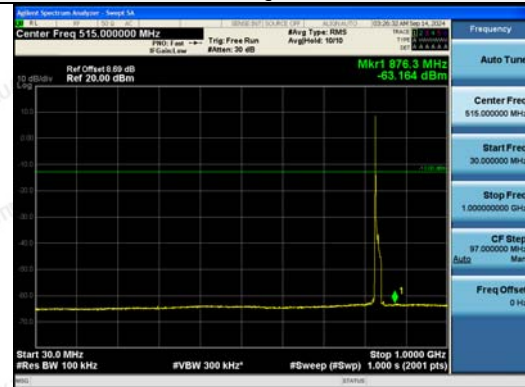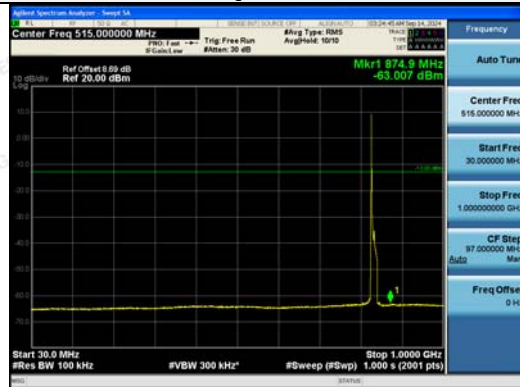



30MHz~1GHz

30MHz~1GHz

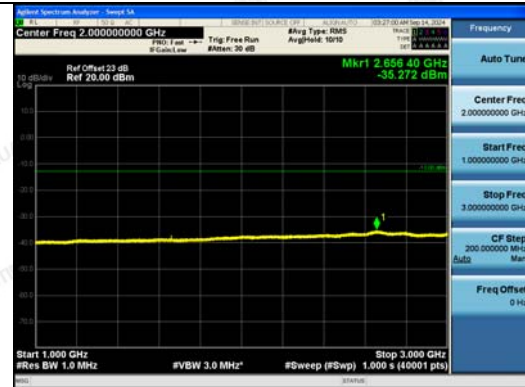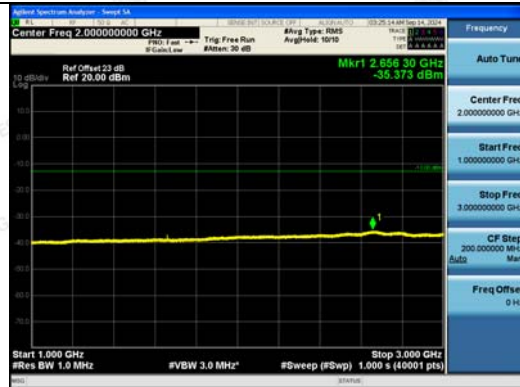

1GHz~3GHz

1GHz~3GHz

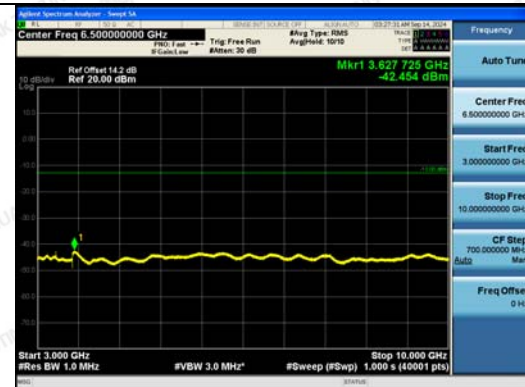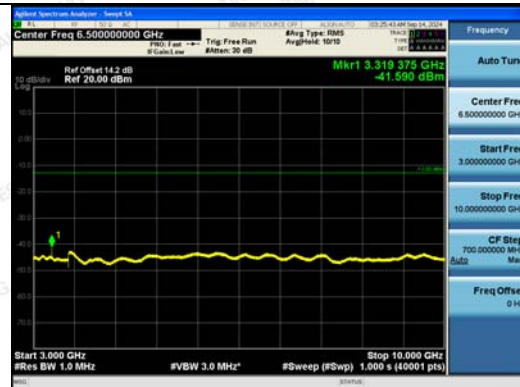


3GHz~10GHz

3GHz~10GHz

1RB#0



1RB#0

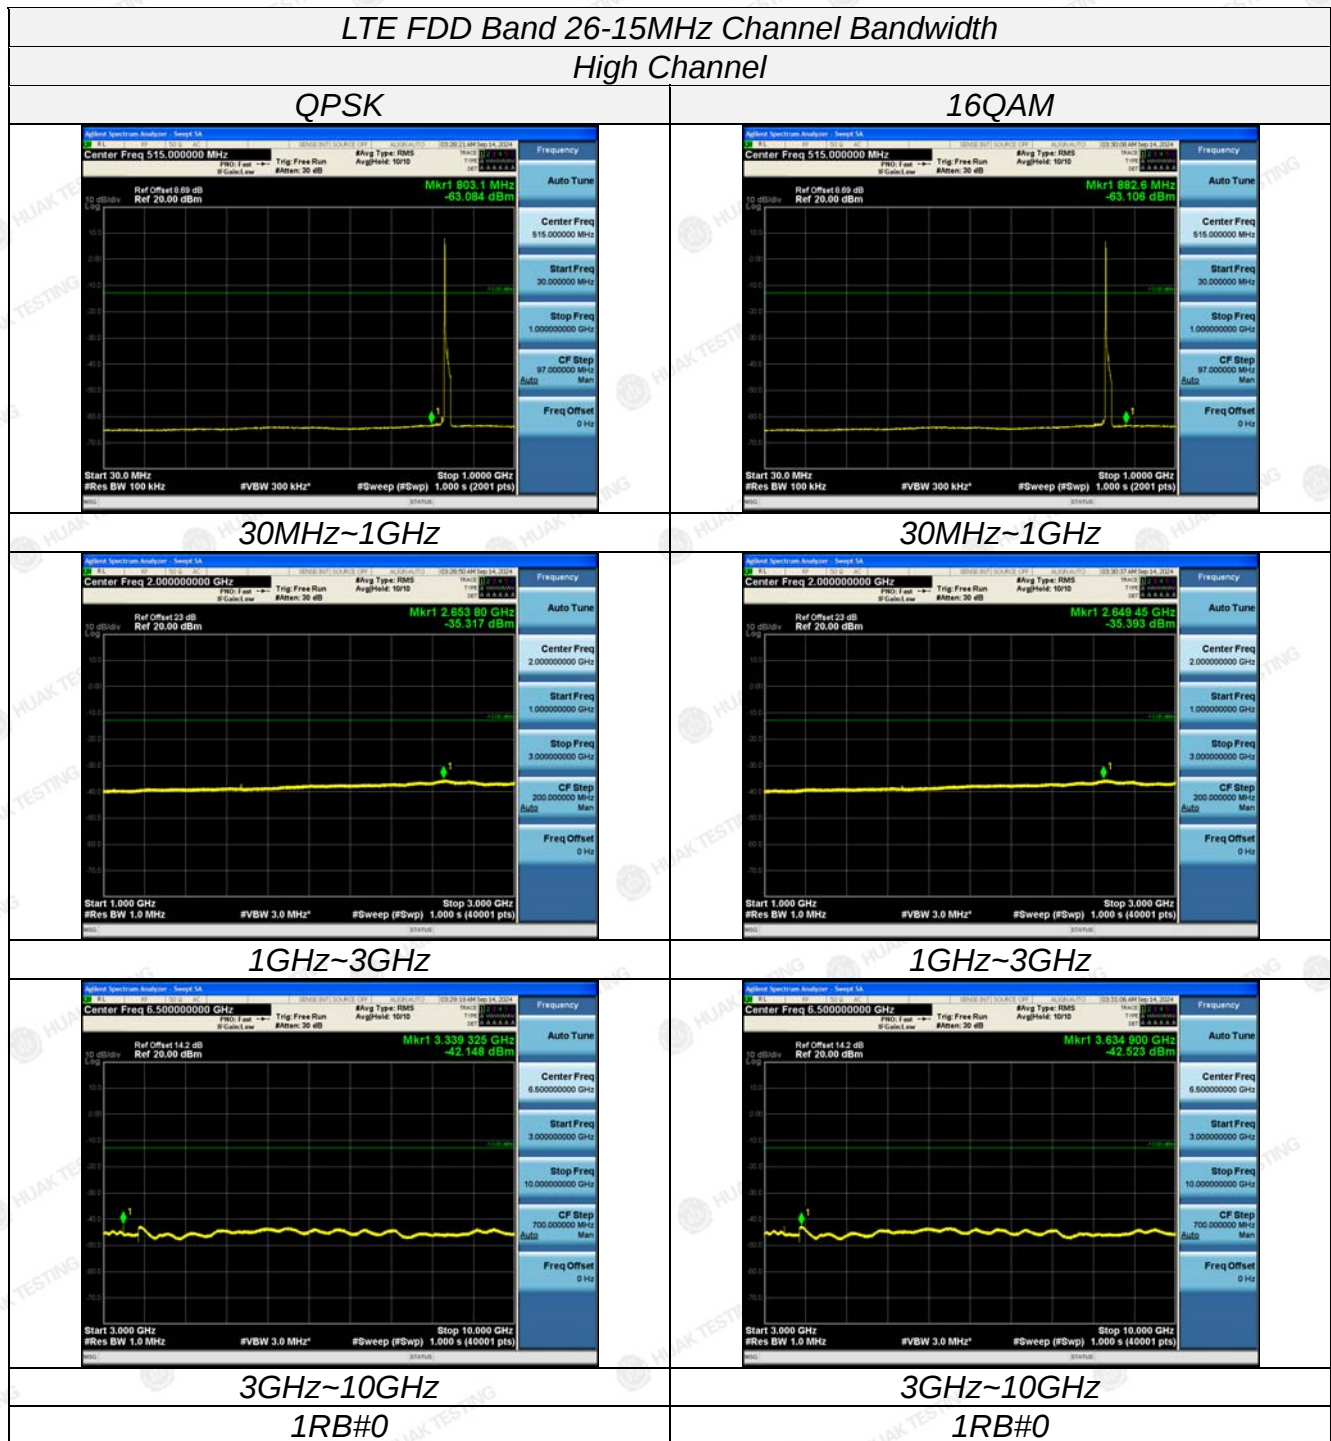



5.6. Field Strength of Spurious Radiation Measurement

5.6.1. Test Specification

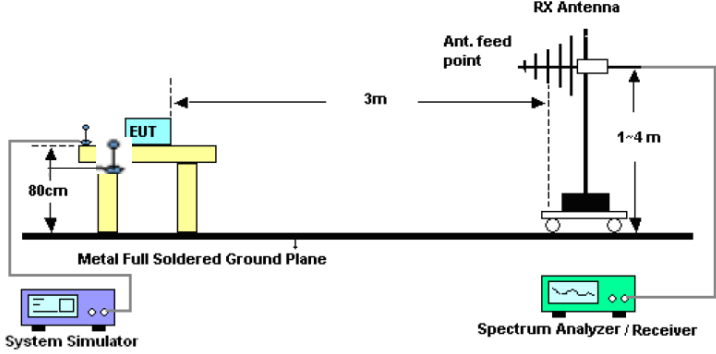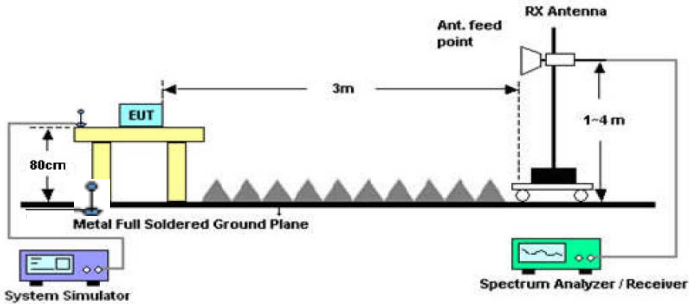Test Requirement:	FCC part22.917
Test Method:	FCC part 2.1053
Limit:	30MHz~20GHz -13dBm
Test setup:	From 30MHz to 1GHz  Above 1GHz 
Test Procedure:	1. The testing follows FCC KDB 971168 D01v03 Section 5.8 and ANSI / TIA-603-D-2010Section 2.2.12. 2. The EUT was placed on a rotatable wooden table 0.8 meters above the ground. 3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower. 4. The table was rotated 360 degrees to determine the position of the highest spurious emission. 5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.



	6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission. 7. A horn antenna was substituted in place of the EUT and was driven by a signal generator. 8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission. 9. Taking the record of output power at antenna port. 10. Repeat step 7 to step 8 for another polarization. 11. $EIRP (dBm) = S.G. Power - Tx Cable Loss + Tx Antenna Gain$ 12. $ERP (dBm) = EIRP - 2.15$ 13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
Test results:	PASS

Radiated Measurement:

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 26; recorded worst case for each Channel Bandwidth of LTE FDD Band 26.

2. $EIRP = P_{Mea}(dBm) - P_{cl}(dB) + G_a(dBi)$

3. We were not recorded other points as values lower than limits.

4. $Margin = Limit - EIRP$

LTE FDD Band 26 Channel Bandwidth 1.4MHz QPSK Low Channel

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	Diatance	G_a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1649.4	-35.23	2.86	3.00	7.25	-30.84	-13.00	17.84	H
2474.1	-43.95	2.94	3.00	9.53	-37.36	-13.00	24.36	H
1649.4	-43.79	2.86	3.00	7.25	-39.4	-13.00	26.4	V
2474.1	-46.73	2.94	3.00	9.53	-40.14	-13.00	27.14	V

LTE FDD Band 26 Channel Bandwidth 1.4MHz QPSK Middle Channel

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	Diatance	G_a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.0	-35.58	2.86	3.00	7.25	-31.19	-13.00	18.19	H
2509.5	-43.1	2.94	3.00	9.53	-36.51	-13.00	23.51	H
1673.0	-44.28	2.86	3.00	7.25	-39.89	-13.00	26.89	V
2509.5	-47.28	2.94	3.00	9.53	-40.69	-13.00	27.69	V

*LTE FDD Band 26_Channel Bandwidth 1.4MHz_QPSK_High Channel*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1696.6	-45.82	2.86	3.00	7.82	-40.86	-13.00	27.86	H
2544.9	-46.79	2.94	3.00	9.35	-40.38	-13.00	27.38	H
1696.6	-45.6	2.86	3.00	7.82	-40.64	-13.00	27.64	V
2544.9	-47.99	2.94	3.00	9.35	-41.58	-13.00	28.58	V

LTE FDD Band 26_Channel Bandwidth 3MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1651.0	-46.42	2.86	3.00	7.25	-42.03	-13.00	29.03	H
2476.5	-43.96	2.94	3.00	9.53	-37.37	-13.00	24.37	H
1651.0	-46.23	2.86	3.00	7.25	-41.84	-13.00	28.84	V
2476.5	-48.38	2.94	3.00	9.53	-41.79	-13.00	28.79	V

LTE FDD Band 26_Channel Bandwidth 3MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.0	-45.23	2.86	3.00	7.25	-40.84	-13.00	27.84	H
2509.5	-43.64	2.94	3.00	9.53	-37.05	-13.00	24.05	H
1673.0	-47.14	2.86	3.00	7.25	-42.75	-13.00	29.75	V
2509.5	-48.41	2.94	3.00	9.53	-41.82	-13.00	28.82	V

LTE FDD Band 26_Channel Bandwidth 3MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1695.0	-46.05	2.86	3.00	7.82	-41.09	-13.00	28.09	H
2542.5	-46.06	2.94	3.00	9.35	-39.65	-13.00	26.65	H
1695.0	-44.95	2.86	3.00	7.82	-39.99	-13.00	26.99	V
2542.5	-47.67	2.94	3.00	9.35	-41.26	-13.00	28.26	V

LTE FDD Band 26_Channel Bandwidth 5MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1653.0	-45.14	2.86	3.00	7.25	-40.75	-13.00	27.75	H
2479.5	-44.86	2.94	3.00	9.53	-38.27	-13.00	25.27	H
1653.0	-46.06	2.86	3.00	7.25	-41.67	-13.00	28.67	V
2479.5	-48.12	2.94	3.00	9.53	-41.53	-13.00	28.53	V

*LTE FDD Band 26_Channel Bandwidth 5MHz_QPSK_Middle Channel*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.0	-46.19	2.86	3.00	7.25	-41.8	-13.00	28.8	H
2509.5	-46.26	2.94	3.00	9.53	-39.67	-13.00	26.67	H
1673.0	-45.05	2.86	3.00	7.25	-40.66	-13.00	27.66	V
2509.5	-48.21	2.94	3.00	9.53	-41.62	-13.00	28.62	V

LTE FDD Band 26_Channel Bandwidth 5MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1693.0	-46.82	2.86	3.00	7.82	-41.86	-13.00	28.86	H
2539.5	-45.07	2.94	3.00	9.35	-38.66	-13.00	25.66	H
1693.0	-46.29	2.86	3.00	7.82	-41.33	-13.00	28.33	V
2539.5	-47.76	2.94	3.00	9.35	-41.35	-13.00	28.35	V

LTE FDD Band 26_Channel Bandwidth 10MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1658.0	-44.57	2.86	3.00	7.25	-40.18	-13.00	27.18	H
2487.0	-43.52	2.94	3.00	9.53	-36.93	-13.00	23.93	H
1658.0	-45.68	2.86	3.00	7.25	-41.29	-13.00	28.29	V
2487.0	-46.96	2.94	3.00	9.53	-40.37	-13.00	27.37	V

LTE FDD Band 26_Channel Bandwidth 10MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.0	-45.82	2.86	3.00	7.25	-41.43	-13.00	28.43	H
2509.5	-47.04	2.94	3.00	9.53	-40.45	-13.00	27.45	H
1673.0	-45.05	2.86	3.00	7.25	-40.66	-13.00	27.66	V
2509.5	-46.21	2.94	3.00	9.53	-39.62	-13.00	26.62	V

LTE FDD Band 26_Channel Bandwidth 10MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1688.0	-46.04	2.86	3.00	7.82	-41.08	-13.00	28.08	H
2532.0	-44.91	2.94	3.00	9.35	-38.5	-13.00	25.5	H
1688.0	-43.69	2.86	3.00	7.82	-38.73	-13.00	25.73	V
2532.0	-48.03	2.94	3.00	9.35	-41.62	-13.00	28.62	V

*LTE FDD Band 26_Channel Bandwidth 15MHz_QPSK_Low Channel*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1663.0	-43.54	2.86	3.00	7.25	-39.15	-13.00	26.15	H
2494.5	-46.29	2.94	3.00	9.53	-39.7	-13.00	26.7	H
1663.0	-44.23	2.86	3.00	7.25	-39.84	-13.00	26.84	V
2494.5	-46.61	2.94	3.00	9.53	-40.02	-13.00	27.02	V

LTE FDD Band 26_Channel Bandwidth 15MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.0	-46.38	2.86	3.00	7.25	-41.99	-13.00	28.99	H
2509.5	-45.28	2.94	3.00	9.53	-38.69	-13.00	25.69	H
1673.0	-43.65	2.86	3.00	7.25	-39.26	-13.00	26.26	V
2509.5	-48.18	2.94	3.00	9.53	-41.59	-13.00	28.59	V

LTE FDD Band 26_Channel Bandwidth 15MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1683.0	-45.51	2.86	3.00	7.82	-40.55	-13.00	27.55	H
2524.5	-43.88	2.94	3.00	9.35	-37.47	-13.00	24.47	H
1683.0	-46.64	2.86	3.00	7.82	-41.68	-13.00	28.68	V
2524.5	-47.38	2.94	3.00	9.35	-40.97	-13.00	27.97	V

*LTE FDD Band 26_Channel Bandwidth 1.4MHz_16QAM_Low Channel*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1649.4	-45.19	2.86	3.00	7.25	-40.8	-13.00	27.8	H
2474.1	-44.76	2.94	3.00	9.53	-38.17	-13.00	25.17	H
1649.4	-45.54	2.86	3.00	7.25	-41.15	-13.00	28.15	V
2474.1	-47.93	2.94	3.00	9.53	-41.34	-13.00	28.34	V

LTE FDD Band 26_Channel Bandwidth 1.4MHz_16QAM_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.0	-45.56	2.86	3.00	7.25	-41.17	-13.00	28.17	H
2509.5	-45.19	2.94	3.00	9.53	-38.6	-13.00	25.6	H
1673.0	-46.63	2.86	3.00	7.25	-42.24	-13.00	29.24	V
2509.5	-48.04	2.94	3.00	9.53	-41.45	-13.00	28.45	V

LTE FDD Band 26_Channel Bandwidth 1.4MHz_16QAM_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1696.6	-45.13	2.86	3.00	7.82	-40.17	-13.00	27.17	H
2544.9	-46.11	2.94	3.00	9.35	-39.7	-13.00	26.7	H
1696.6	-45.56	2.86	3.00	7.82	-40.6	-13.00	27.6	V
2544.9	-50.24	2.94	3.00	9.35	-43.83	-13.00	30.83	V

LTE FDD Band 26_Channel Bandwidth 3MHz_16QAM_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1651.0	-45.96	2.86	3.00	7.25	-41.57	-13.00	28.57	H
2476.5	-43.49	2.94	3.00	9.53	-36.9	-13.00	23.9	H
1651.0	-45.52	2.86	3.00	7.25	-41.13	-13.00	28.13	V
2476.5	-48.09	2.94	3.00	9.53	-41.5	-13.00	28.5	V

LTE FDD Band 26_Channel Bandwidth 3MHz_16QAM_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.0	-46.42	2.86	3.00	7.25	-42.03	-13.00	29.03	H
2509.5	-45.37	2.94	3.00	9.53	-38.78	-13.00	25.78	H
1673.0	-44.95	2.86	3.00	7.25	-40.56	-13.00	27.56	V
2509.5	-47.76	2.94	3.00	9.53	-41.17	-13.00	28.17	V

*LTE FDD Band 26_Channel Bandwidth 3MHz_16QAM_High Channel*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1695.0	-44.29	2.86	3.00	7.82	-39.33	-13.00	26.33	H
2542.5	-42.87	2.94	3.00	9.35	-36.46	-13.00	23.46	H
1695.0	-45.29	2.86	3.00	7.82	-40.33	-13.00	27.33	V
2542.5	-49.96	2.94	3.00	9.35	-43.55	-13.00	30.55	V

LTE FDD Band 26_Channel Bandwidth 5MHz_16QAM_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1653.0	-45.88	2.86	3.00	7.25	-41.49	-13.00	28.49	H
2479.5	-44.82	2.94	3.00	9.53	-38.23	-13.00	25.23	H
1653.0	-46.17	2.86	3.00	7.25	-41.78	-13.00	28.78	V
2479.5	-48.29	2.94	3.00	9.53	-41.7	-13.00	28.7	V

LTE FDD Band 26_Channel Bandwidth 5MHz_16QAM_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.0	-45.42	2.86	3.00	7.25	-41.03	-13.00	28.03	H
2509.5	-46.9	2.94	3.00	9.53	-40.31	-13.00	27.31	H
1673.0	-44.95	2.86	3.00	7.25	-40.56	-13.00	27.56	V
2509.5	-46.97	2.94	3.00	9.53	-40.38	-13.00	27.38	V

LTE FDD Band 26_Channel Bandwidth 5MHz_16QAM_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1693.0	-44.98	2.86	3.00	7.82	-40.02	-13.00	27.02	H
2539.5	-45.26	2.94	3.00	9.35	-38.85	-13.00	25.85	H
1693.0	-47.36	2.86	3.00	7.82	-42.4	-13.00	29.4	V
2539.5	-49.67	2.94	3.00	9.35	-43.26	-13.00	30.26	V

LTE FDD Band 26_Channel Bandwidth 10MHz_16QAM_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1658.0	-45.11	2.86	3.00	7.25	-40.72	-13.00	27.72	H
2487.0	-44.84	2.94	3.00	9.53	-38.25	-13.00	25.25	H
1658.0	-46.94	2.86	3.00	7.25	-42.55	-13.00	29.55	V
2487.0	-48.36	2.94	3.00	9.53	-41.77	-13.00	28.77	V

*LTE FDD Band 26_Channel Bandwidth 10MHz_16QAM _ Middle Channel*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.0	-45.8	2.86	3.00	7.25	-41.41	-13.00	28.41	H
2509.5	-45.99	2.94	3.00	9.53	-39.4	-13.00	26.4	H
1673.0	-44.92	2.86	3.00	7.25	-40.53	-13.00	27.53	V
2509.5	-46.89	2.94	3.00	9.53	-40.3	-13.00	27.3	V

LTE FDD Band 26_Channel Bandwidth 10MHz_10QAM _ High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1688.0	-45.36	2.86	3.00	7.82	-40.4	-13.00	27.4	H
2532.0	-44.96	2.94	3.00	9.35	-38.55	-13.00	25.55	H
1688.0	-47.16	2.86	3.00	7.82	-42.2	-13.00	29.2	V
2532.0	-48.17	2.94	3.00	9.35	-41.76	-13.00	28.76	V

LTE FDD Band 26_Channel Bandwidth 15MHz_16QAM _ Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1663.0	-45.09	2.86	3.00	7.25	-40.7	-13.00	27.7	H
2494.5	-45.19	2.94	3.00	9.53	-38.6	-13.00	25.6	H
1663.0	-44.04	2.86	3.00	7.25	-39.65	-13.00	26.65	V
2494.5	-48.08	2.94	3.00	9.53	-41.49	-13.00	28.49	V

LTE FDD Band 26_Channel Bandwidth 15MHz_16QAM _ Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
167.03	-44.93	2.86	3.00	7.25	-40.54	-13.00	27.54	H
2509.5	-46.05	2.94	3.00	9.53	-39.46	-13.00	26.46	H
167.03	-43.18	2.86	3.00	7.25	-38.79	-13.00	25.79	V
2509.5	-47.26	2.94	3.00	9.53	-40.67	-13.00	27.67	V

LTE FDD Band 26_Channel Bandwidth 15MHz_10QAM _ High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1683.0	-45.09	2.86	3.00	7.82	-40.13	-13.00	27.13	H
2524.5	-44.82	2.94	3.00	9.35	-38.41	-13.00	25.41	H
1683.0	-47.01	2.86	3.00	7.82	-42.05	-13.00	29.05	V
2524.5	-47.12	2.94	3.00	9.35	-40.71	-13.00	27.71	V



5.7. Frequency Stability Measurement

5.7.1. Test Specification

Test Requirement:	FCC part 22.355
Test Method:	FCC Part 2.1055
Limit:	± 2.5 ppm
Test Setup:	 The diagram shows a 'System Simulator' box connected by a line to a 'Thermal Chamber' box. Inside the Thermal Chamber is a mobile phone labeled 'EUT'.
Test Procedure:	Test Procedures for Temperature Variation 1. The testing follows FCC KDB 971168 D01v03 Section 9.0. 2. The EUT was set up in the thermal chamber and connected with the system simulator. 3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute. 4. With power OFF, the temperature was raised in 10°C steps up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute. Test Procedures for Voltage Variation 1. The testing follows FCC KDB 971168 D01v03 Section 9.0. 2. The EUT was placed in a temperature chamber at $25 \pm 5^{\circ}\text{C}$ and connected with the system simulator. 3. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT. 4. The variation in frequency was measured for the worst case.
Test Result:	PASS



TEST RESULTS

Remark:

1. We tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 26; recorded worst case.

LTE Band 26, 1.4MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)		Limit (ppm)
	QPSK	16QAM	QPSK	16QAM	
4.25	2.15	10.10	0.002607	0.012247	2.50
5.0	12.53	22.12	0.015193	0.026822	2.50
5.75	25.61	38.32	0.031054	0.046465	2.50


Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)		Limit (ppm)
	QPSK	16QAM	QPSK	16QAM	
-30°	24.81	12.13	0.029247	0.014299	2.50
-20°	10.39	32.77	0.012248	0.038630	2.50
-10°	37.14	1.87	0.043782	0.002204	2.50
0°	14.10	19.56	0.016621	0.023058	2.50
10°	45.42	38.64	0.053542	0.045550	2.50
20°	20.23	2.40	0.023848	0.002829	2.50
30°	41.56	18.77	0.048992	0.022127	2.50
40°	31.23	37.55	0.036815	0.044265	2.50
50°	6.69	4.52	0.007886	0.005328	2.50



6. PHOTOGRAPHS OF TEST SETUP

Radiated Emission

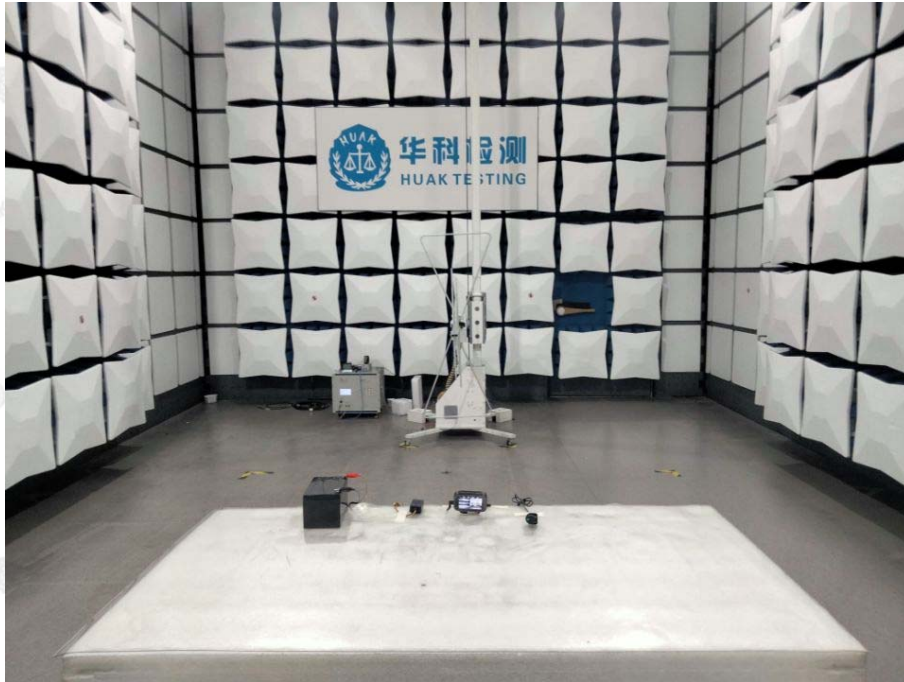



7. PHOTOGRAPHS OF EUT

Refer to test report ANNEX A of external photos and ANNEX B of internal photos

.....**End of Report**.....

