

## 2.4GHz 3216 Chip Antenna: RANT3216F245C03

### Application:

WLAN, 802.11b/g, Bluetooth, WLAN, etc...

### Features

SMD, high reliability, ultra Impact, Omni-directional...

### Part number Information

RANT   3216   F   245   C   03  
(A)   (B)   (C)   (D)   (E)   (F)


|                  |                       |
|------------------|-----------------------|
| (A)Product Type  | Chip Antenna          |
| (B) Size Code    | 3.2x1.6mm(±0.2mm)     |
| (C) Material     | High K material       |
| (D) Frequency    | 2.4 ~ 2.5GHz          |
| (E) Feeding mode | PIFA & Single Feeding |
| (F) Antenna type | Type=03               |

### Electrical Specification

|                               |                    |
|-------------------------------|--------------------|
| Working Frequency Range       | 2400 ~2500 MHz     |
| Bandwidth                     | 120 MHz (Min.)     |
| Peak Gain                     | 1.24 dBi (Typ.)    |
| Impedance                     | 50 Ohm             |
| Return loss                   | 10 dB ( Min)       |
| Polarization                  | Linear             |
| Azimuth Beamwidth             | Omni-directional   |
| Operation Temperature(°C)     | -40 ~85°C          |
| Resistance to Soldering Heats | 10sec. ( @ 280°C)  |
| Termination                   | Ni / Au (Leadless) |

The specification is defined on EVB.



### Dimension and Terminal Configuration

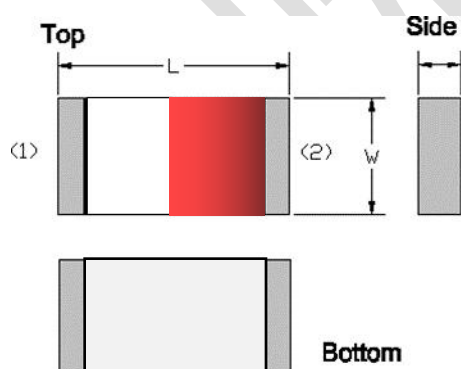



| Dimension (mm) |             |
|----------------|-------------|
| L              | 3.20 ± 0.20 |
| W              | 1.60 ± 0.20 |
| T              | 0.45 ± 0.20 |

| No. | Terminal Name |
|-----|---------------|
| 1   | Feeding/GNG   |
| 2   | GND/Feeding   |

Evaluation Board Reference
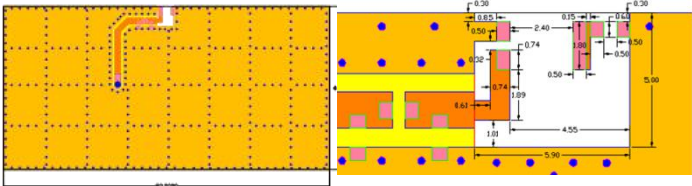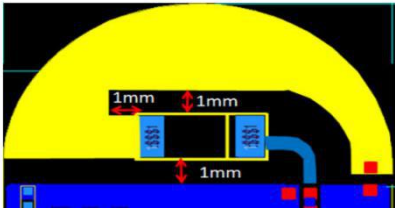
| 长条板PCB<br>推荐<br>Dimension                                                         | 圆板Antenna Layout Reference                                                                             |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|
|  |  <div>Unit :mm</div> |



Electrical Characteristics
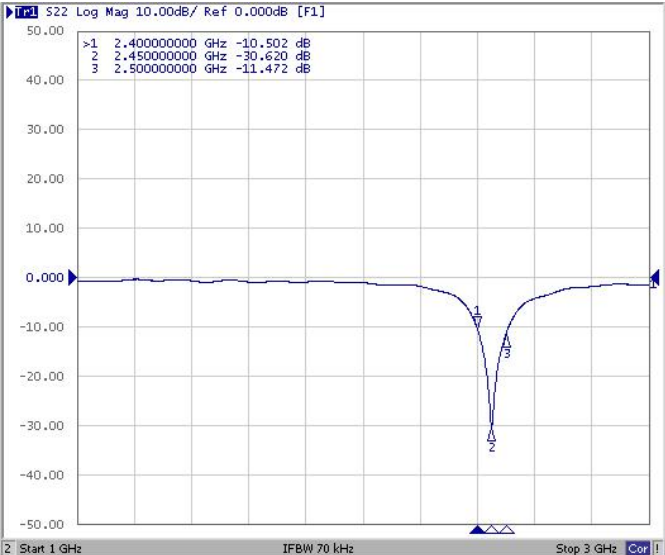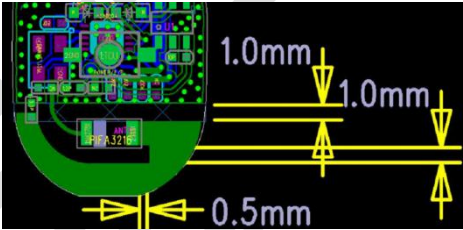
| Return Loss & Radiation                                                                                   |                                                                                                                                                                                                                                                                               |                |          |      |        |      |        |      |        |
|-----------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|----------|------|--------|------|--------|------|--------|
| <div>Return Loss</div>  | <div></div> <table><tr><th>Frequency(MHz)</th><th>S11 (dB)</th></tr><tr><td>2400</td><td>-10.50</td></tr><tr><td>2450</td><td>-30.62</td></tr><tr><td>2500</td><td>-11.47</td></tr></table> | Frequency(MHz) | S11 (dB) | 2400 | -10.50 | 2450 | -30.62 | 2500 | -11.47 |
| Frequency(MHz)                                                                                            | S11 (dB)                                                                                                                                                                                                                                                                      |                |          |      |        |      |        |      |        |
| 2400                                                                                                      | -10.50                                                                                                                                                                                                                                                                        |                |          |      |        |      |        |      |        |
| 2450                                                                                                      | -30.62                                                                                                                                                                                                                                                                        |                |          |      |        |      |        |      |        |
| 2500                                                                                                      | -11.47                                                                                                                                                                                                                                                                        |                |          |      |        |      |        |      |        |


2.4GHz 3216 Chip Antenna: RANT3216F245C03



Radiation

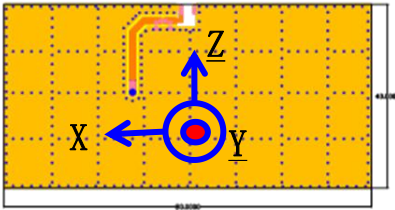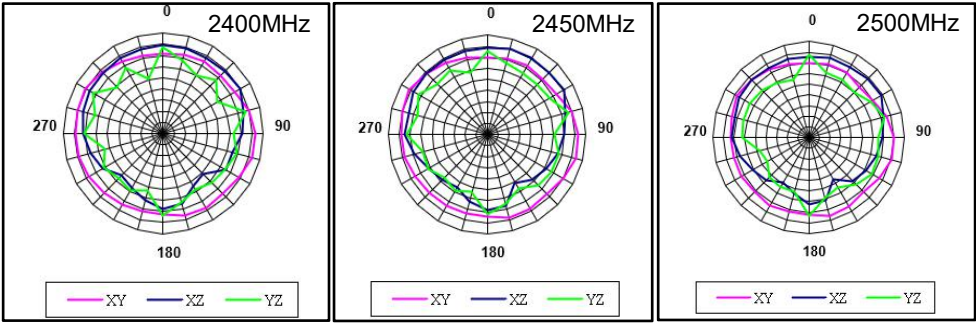


|             | 2400MHz  | 2450MHz  | 2500MHz  |
|-------------|----------|----------|----------|
| Efficiency  | 82.52%   | 85.26%   | 83.01%   |
| Peak Gain   | 1.15 dBi | 1.24 dBi | 1.19 dBi |
| Directivity | 1.89 dBi | 1.97 dBi | 1.91 dBi |

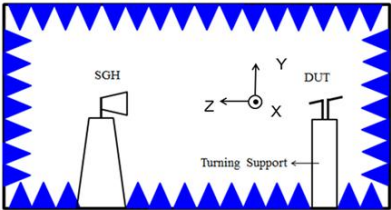

Taping Specifications


Reel and Taping Specification

Reel Specification

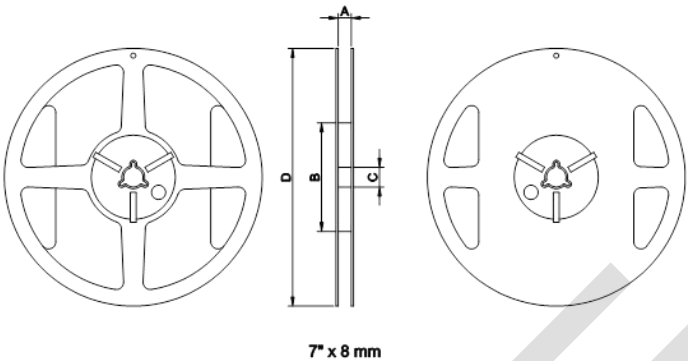

| TYPE | SIZE |         | A       | B    | C        | D     |
|------|------|---------|---------|------|----------|-------|
| 3216 | 7"   | 5K/Reel | 9.0±0.5 | 60±2 | 13.5±0.5 | 178±2 |

Tapping Specification

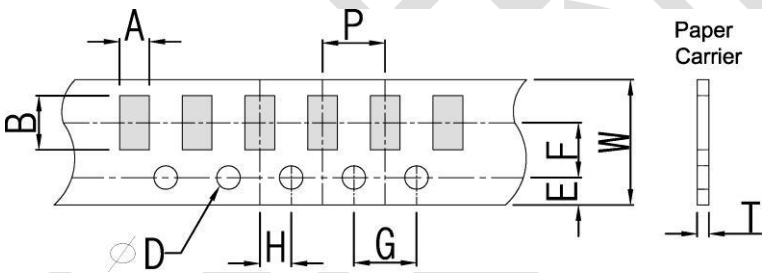

| Packaging  | Type | A             | B             | W            | E             | F        | G        | H        | T             | ψD            | P       |
|------------|------|---------------|---------------|--------------|---------------|----------|----------|----------|---------------|---------------|---------|
| Paper Type | 3216 | 1.90±0.2<br>0 | 3.50±0.2<br>0 | 8.0±0.2<br>0 | 1.75±0.1<br>0 | 3.5±0.05 | 4.0±0.10 | 2.0±0.05 | 0.75±0.1<br>0 | 1.50±0.1<br>0 | 4.0±0.1 |


## 2.4GHz 3216 Chip Antenna: RANT3216F245C03



### Reliability Table

| Test Item                              | Procedure                                                                                                                                                                                                                                                                                                                                                | Requirements<br>Ceramic Type                                          | Remark<br>(Reference)     |
|----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------|---------------------------|
| <b>Electrical Characterization</b>     |                                                                                                                                                                                                                                                                                                                                                          | Fulfill the electrical specification                                  | User Spec.                |
| <b>Thermal Shock</b>                   | 1. Preconditioning:<br>$50 \pm 10^{\circ}\text{C}$ / 1 hr , then keep for $24 \pm 1$ hrs at room temp.<br>2. Initial measure: Spec: refer Initialspec.<br>3. Rapid change of temperature test:<br>$-30^{\circ}\text{C}$ to $+85^{\circ}\text{C}$ ; 100 cycles;<br>15 minutes at Lower category temperature;<br>15 minutes at Upper category temperature. | No Visible Damage.<br>Fulfill the electrical specification.           | MIL-STD-202<br>107        |
| <b>Temperature Cycling</b>             | 1. Initial measure: Spec: refer Initialspec.<br>2. 100 Cycles ( $-30^{\circ}\text{C}$ to $+85^{\circ}\text{C}$ ), Soak Mode=1 (2 Cycle/hours).<br>3. Measurement at $24 \pm 2$ Hours after test condition.                                                                                                                                               | No Visible Damage.<br>Fulfill the electrical specification.           | JESD22<br>JA104           |
| <b>High Temperature Exposure</b>       | 1. Initial measure: Spec: refer Initialspec.<br>2. Unpowered; 500hours @ $T=+85^{\circ}\text{C}$ .<br>3. Measurement at $24 \pm 2$ hours aftertest.                                                                                                                                                                                                      | No Visible Damage.<br>Fulfill the electrical specification.           | MIL-STD-202<br>108        |
| <b>Low Temperature Storage</b>         | 1. Initial measure: Spec: refer Initialspec.<br>2. Unpowered: 500hours @ $T=-30^{\circ}\text{C}$ .<br>3. Measurement at $24 \pm 2$ hours aftertest.                                                                                                                                                                                                      | No Visible Damage.<br>Fulfill the electrical specification.           | MIL-STD-202<br>108        |
| <b>Solderability (SMD Bottom Side)</b> | Dipping method:<br>a. Temperature: $235 \pm 5^{\circ}\text{C}$<br>b. Dipping time: $3 \pm 0.5\text{s}$                                                                                                                                                                                                                                                   | The solder should cover over 95% of the critical area of bottom side. | IEC 60384-21/22<br>4.10   |
| <b>Soldering Heat Resistance (RSH)</b> | Preheating temperature: $150 \pm 10^{\circ}\text{C}$ .<br>Preheating time: 1~2 min.<br>Solder temperature: $260 \pm 5^{\circ}\text{C}$ .<br>Dipping time: $5 \pm 0.5\text{s}$                                                                                                                                                                            | No Visible Damage.                                                    | IEC 60384-21/22<br>4.10   |
| <b>Vibration</b>                       | 5g's for 20 min., 12 cycles each of 3 orientations<br>Note: Use 8"X5" PCB .031" thick 7 secure points on, one long side and 2 secure points at corners of opposite sides. Parts mounted within 2" from any secure point. Test from 10-2000 Hz.                                                                                                           | No Visible Damage.                                                    | MIL-STD-202<br>Method 204 |
| <b>Mechanical Shock</b>                | Three shocks in each direction shall be applied along the three mutually perpendicular axes of the test specimen (18 shocks)<br>Peak value: 1,500g's<br>Duration: 0.5ms<br>Velocity change: 15.4 ft/s<br>Waveform: Half-sine                                                                                                                             | No Visible Damage.                                                    | MIL-STD-202<br>Method 213 |
| <b>Humidity Bias</b>                   | 1. Humidity: 85% R.H., Temperature: $85 \pm 2^{\circ}\text{C}$ .<br>2. Time: $500 \pm 24$ hours.<br>3. Measurement at $24 \pm 2$ hrs after test condition.                                                                                                                                                                                               | No Visible Damage.<br>Fulfill the electrical specification.           | MIL-STD-202<br>Method 106 |

## 2.4GHz 3216 Chip Antenna: RANT3216F245C01
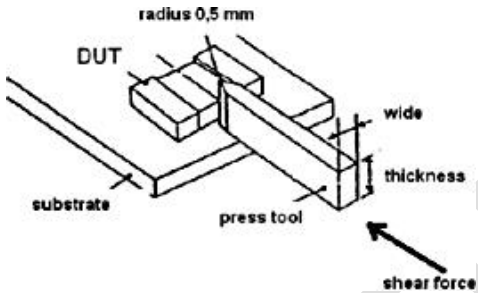
|                           |                                                                                                                                                                                        |                                                                                                                                                                          |                 |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>Board Flex (SMD)</b>   | 1. Mounting method:<br>IR-Reflow. PCB Size (L:100 × W:40 × T:1.6mm)<br>2. Apply the load in direction of the arrow until bending reaches 2 mm.                                         | No Visible Damage.                                                                                                                                                       | AEC-Q200<br>005 |
| <b>Adhesion</b>           | Force of 1.8Kg for 60 seconds.<br>                                                                    | No Visible Damage<br>Magnification of 20X or greater may be employed for inspection of the mechanical integrity of the device body terminals and body/terminal junction. | AEC-Q200<br>006 |
| <b>Physical Dimension</b> | Any applicable method using x10 magnification, micrometers, calipers, gauges, contour projectors, or other measuring equipment, capable of determining the actual specimen dimensions. | In accordance with specification.                                                                                                                                        | JESD22<br>JB100 |

### Revision History

| Revision | Date       | Content                         |
|----------|------------|---------------------------------|
| 1        | 2019/03/01 | New Datasheet                   |
| 2        | 2020/02/22 | Add 2D radiation characteristic |