



## FCC / ISED Test Report

**For:**  
Faraday Future

**Model:**  
FF MMU 5G x3

**Product Description:**  
Provide Cellular, Wifi and BLE connectivity to FF vehicle for internet access

**FCC ID:** 2BBLDTI2642FF91

**Applied Rules and Standards:**  
47 CFR Part 15.247 (DTS)  
RSS-247 Issue 2 (DTSs) & RSS-Gen Issue 5

**REPORT #:** EMC\_FARAD\_001\_23001\_15\_247\_BTLE\_DTS\_Rev1

**DATE:** 2023-08-17



A2LA Accredited

IC recognized #  
3462B

**CETECOM Inc.**

411 Dixon Landing Road ♦ Milpitas, CA 95035 ♦ U.S.A.

Phone: + 1 (408) 586 6200 ♦ Fax: + 1 (408) 586 6299 ♦ E-mail: [info@cetecom.com](mailto:info@cetecom.com) ♦ <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2905571

**TABLE OF CONTENTS**

**1 ASSESSMENT..... 3**

**2 ADMINISTRATIVE DATA ..... 4**

2.1 IDENTIFICATION OF THE TESTING LABORATORY ISSUING THE EMC TEST REPORT ..... 4

2.2 IDENTIFICATION OF THE CLIENT ..... 4

2.3 IDENTIFICATION OF THE MANUFACTURER..... 4

**3 EQUIPMENT UNDER TEST (EUT)..... 5**

3.1 EUT SPECIFICATIONS ..... 5

3.1 EUT DETAILS..... 6

3.2 ACCESSORY EQUIPMENT (AE) DETAILS..... 6

3.3 SUPPORT EQUIPMENT (SE) DETAILS ..... 6

3.4 TEST SAMPLE CONFIGURATION ..... 6

3.5 JUSTIFICATION FOR WORST CASE MODE OF OPERATION..... 6

**4 SUBJECT OF INVESTIGATION ..... 7**

**5 MEASUREMENT RESULTS SUMMARY ..... 7**

**6 MEASUREMENT UNCERTAINTY..... 8**

6.1 ENVIRONMENTAL CONDITIONS DURING TESTING:..... 8

6.2 DATES OF TESTING: ..... 8

6.3 DECISION RULE:..... 8

**7 MEASUREMENT PROCEDURES ..... 9**

7.1 RADIATED MEASUREMENT..... 9

7.2 POWER LINE CONDUCTED MEASUREMENT PROCEDURE ..... 11

7.3 RF CONDUCTED MEASUREMENT PROCEDURE ..... 12

**8 TEST RESULT DATA ..... 13**

8.1 MAXIMUM PEAK CONDUCTED OUTPUT POWER..... 13

8.2 POWER SPECTRAL DENSITY ..... 17

8.3 DUTY CYCLE..... 21

8.4 BAND EDGE COMPLIANCE ..... 22

8.5 EMISSION BANDWIDTH 6DB AND 99% OCCUPIED BANDWIDTH..... 28

8.6 RADIATED TRANSMITTER SPURIOUS EMISSIONS AND RESTRICTED BANDS ..... 36

**9 TEST SETUP PHOTOS..... 54**

**10 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTING ..... 54**

**11 HISTORY ..... 55**

**1 Assessment**

The following device was evaluated against the applicable criteria specified in FCC rules Parts 15.247 of Title 47 of the Code of Federal Regulations and the relevant ISED Canada standard RSS-247.

No deviations were ascertained.

Company Name	Product Description	Model No.
Faraday Future	Provide Cellular, Wi-Fi and BLE connectivity to FF vehicle for internet access	FF MMU 5G x3

**Responsible for Testing Laboratory:**

2023-08-17	Compliance	Arndt Stoecker (Director of Regulatory Services)	
Date	Section	Name	Signature

**Responsible for the Report:**

2023-08-17	Compliance	Art Thammanavarat (Senior EMC Engineer)	
Date	Section	Name	Signature

The test results of this test report relate exclusively to the test item specified in Section3. CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM Inc. USA.

## 2 Administrative Data

### 2.1 Identification of the Testing Laboratory Issuing the EMC Test Report

<b>Company Name:</b>	CETECOM Inc.
<b>Department:</b>	Compliance
<b>Street Address:</b>	411 Dixon Landing Road
<b>City/Zip Code</b>	Milpitas, CA 95035
<b>Country</b>	USA
<b>Telephone:</b>	+1 (408) 586 6200
<b>Fax:</b>	+1 (408) 586 6299
<b>EMC Lab Manager:</b>	Arndt Stoecker
<b>Responsible Project Leader:</b>	Phillip Quintal

### 2.2 Identification of the Client

<b>Client Firm/Name:</b>	Faraday Future
<b>Street Address:</b>	2895 Zanker Road
<b>City/Zip Code</b>	San Jose/CA 95134
<b>Country</b>	USA

### 2.3 Identification of the Manufacturer

<b>Manufacturer's Name:</b>	Same as client
<b>Manufacturers Address:</b>	
<b>City/Zip Code</b>	
<b>Country</b>	

### 3 Equipment Under Test (EUT)

#### 3.1 EUT Specifications

<b>Brand:</b>	Faraday Future
<b>Marketing Name:</b>	FF MMU
<b>Product Description:</b>	Provide Cellular, Wifi and BLE connectivity to FF vehicle for internet access
<b>Model Name :</b>	FF MMU
<b>Contains FCC-ID :</b>	CONTAINS FCC ID: 2BBLDNF3219FF91 (Wi-Fi) CONTAINS FCC ID: XMR2022AG550QNA (Cellular)
<b>HW Version :</b>	B2
<b>SW Version :</b>	1.0.9
<b>Frequency Range / number of channels:</b>	Nominal band: 2400 MHz – 2483.5 MHz; Center to center: 2402 MHz (ch 0) – 2480 MHz (ch 39), 40 channels
<b>Bands/Modes Supported</b>	<b><u>Bluetooth Modules</u></b> <b>Model Name :</b> TI CC264R <b><u>Wireless Technologies</u></b> <b>Bluetooth LE</b>
<b>Modes of Operation:</b>	Bluetooth LE in both advertising and connected mode of operation
<b>Antenna Information as declared:</b>	<u>Main Antenna:</u> <ul style="list-style-type: none"> <li>• P/N: P-02818410C</li> <li>• Type: Omni Directional Antenna</li> <li>• Location: External</li> <li>• Maximum Gain in band: 1.57 dBi</li> </ul> Frequency Range: 2400 – 2500 MHz
<b>Max. Peak Output Power:</b>	Conducted Power 0.88 dBm
<b>Power Supply/ Rated Operating Voltage Range</b>	+8 ~ +18V
<b>Operating Temperature Range</b>	Low : -40°C Norm45°C High +60°C
<b>Sample Revision</b>	<input checked="" type="checkbox"/> Production <input type="checkbox"/> Pre-Production
<b>EUT Dimensions</b>	210mm x 160mm x 52.8mm
<b>Weight</b>	1600g
<b>EUT Diameter</b>	<input checked="" type="checkbox"/> < 60 cm <input type="checkbox"/> Other _____

**3.1 EUT details**

EUT #	Model Number	HW Version	SW Version	Comments
1	FF MMU	B2	1.0.9	N/A

**3.2 Accessory Equipment (AE) details**

AE #	Type	Model	Manufacturer	Serial Number
1	Automotive adaptor	Rad-moon2	N/A	N/A
2	USB Adapter	PCAN	Peak-system Technik	N/A
3	GPS Antenna	P 02818387C	Faraday Future	100337222070900005

**3.3 Support Equipment (SE) details**

SE #	Type	Model	Manufacturer	Serial Number
1	Laptop	P135G	Dell	12243628947

**3.4 Test Sample Configuration**

EUT Set-up #	Combination of AE used for test set up	Comments
1	EUT1 + AE1,2,3	The radio of the EUT was configured to a fixed channel transmission with highest possible duty cycle using software that is not available to the end user.

**3.5 Justification for Worst Case Mode of Operation**

During the testing process, the EUT was tested with transmitter sets at highest power on mid channel, and highest possible duty cycle. For radiated measurements, all data in this report shows the worst case between horizontal and vertical antenna polarizations and for all orientations of the EUT.

#### 4 Subject of Investigation

The objective of the measurements done by CETECOM Inc. was to assess the performance of the EUT according to the relevant requirements specified in FCC rules Part 15.247 of Title 47 of the Code of Federal Regulations and Radio Standard Specification RSS-247 of ISED Canada.

This test report is to support a request for new equipment authorization under the FCC ID: 2BBLDTI2642FF91

#### 5 Measurement Results Summary

Test Specification	Test Case	Temperature and Voltage Conditions	Mode	Pass	NA	NP	Result
§15.247(a)(1) RSS-247 5.2(a)	Emission Bandwidth	Nominal	BTLE	■	□	□	Complies
§15.247(e) RSS-247 5.2(b)	Power Spectral Density	Nominal	BTLE	■	□	□	Complies
§15.247(b)(1) RSS-247 5.4(d)	Maximum Conducted Output Power and EIRP	Nominal	BTLE	■	□	□	Complies
§15.247(d) RSS-247 5.5	Band edge compliance Unrestricted Band Edges	Nominal	BTLE	■	□	□	Complies
§15.247; 15.209; 15.205 RSS-Gen 8.9; 8.10	Band edge compliance Restricted Band Edges	Nominal	BTLE	■	□	□	Complies
§15.247(d); §15.209 RSS-Gen 6.13	TX Spurious emissions-Radiated	Nominal	BTLE	■	□	□	Complies
§15.207(a) RSS Gen 8.8	AC Conducted Emissions	Nominal	BTLE	□	■	□	Note 1

**Note 1:** NA= Not Applicable; NP= Not Performed.

## 6 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus, with 95% confidence interval (in dB delta to result), based on a coverage factor k=2.

Radiated measurement

Measurement System	EMC 1	EMC 2
Conducted emissions (mains port)	1.12 dB	0.46 dB
Radiated emissions (< 30 MHz)	3.66 dB	3.88 dB
(30 MHz – 1GHz)	3.17 dB	3.34 dB
(1 GHz – 3 GHz)	5.01 dB	4.45 dB
(>3 GHz)	4.0 dB	4.79 dB

RF conducted measurement ±0.5 dB

According to TR 102 273 a multiplicative propagation of error is assumed for RF measurement systems. For this reason the RMS method is applied to dB values and not to linear values as appropriate for additive propagation of error. Also used: <http://physics.nist.gov/cuu/Uncertainty/typeb.html>. The above calculated uncertainties apply to direct application of the Substitution method. The Substitution method is always used when the EUT comes closer than 3dB to the limit.

### 6.1 Environmental Conditions During Testing:

The following environmental conditions were maintained during the course of testing:

- Ambient Temperature: 20-25°C
- Relative humidity: 40-60%

### 6.2 Dates of Testing:

2023-05-01 – 2023-05-25

### 6.3 Decision Rule:

Cetecom advanced follows ILAC G8:2019 chapter 4.2.1 (Simple Acceptance Rule).

Only the measured values related to their corresponding limits will be used to decide whether the equipment under test meets the requirements of the test standards listed in chapter 3. The measurement uncertainty is mentioned in this test report, See chapter 9, but is not taken into account – neither to the limits nor to the measurement results. Measurement results with a smaller margin to the corresponding limits than the measurement uncertainty have a potential risk of more than 5% that the decision might be wrong.




## 7 Measurement Procedures

### 7.1 Radiated Measurement


The radiated measurement is performed according to ANSI C63.10 (2013)


- The exploratory measurement is accomplished by running a matrix of 16 sweeps over the required frequency range with R&S Test-SW EMC32 for 4 positions of the turntable, two orthogonal positions of the EUT and both antenna polarizations. This procedure exceeds the requirement of the above standards to cover the 3 orthogonal axis of the EUT. A max peak detector is utilized during the exploratory measurement. The Test-SW creates an overall maximum trace for all 12 sweeps and saves the settings for each point of this trace. The maximum trace is part of the test report.
- The 10 highest emissions are selected with an automatic algorithm of EMC32 searching for peaks in the noise floor and ensuring that broadband signals are not selected multiple times.
- The maxima are then put through the final measurement and again maximized in a 90deg range of the turntable, fine search in frequency domain and height scan between 1m and 4m.
- The above procedure is repeated for all possible ways of power supply to EUT and for all supported modulations.
- In case there are no emissions above noise floor level only the maximum trace is reported as described above.
- The results are split up into up to 4 frequency ranges due to antenna bandwidth restrictions. A magnetic loop is used from 9 kHz to 30 MHz, a Biconilog antenna is used from 30 MHz to 1 GHz, and two different horn antennas are used to cover frequencies up to 40 GHz.

### Radiated Emissions Test Setup below 30MHz Measurements

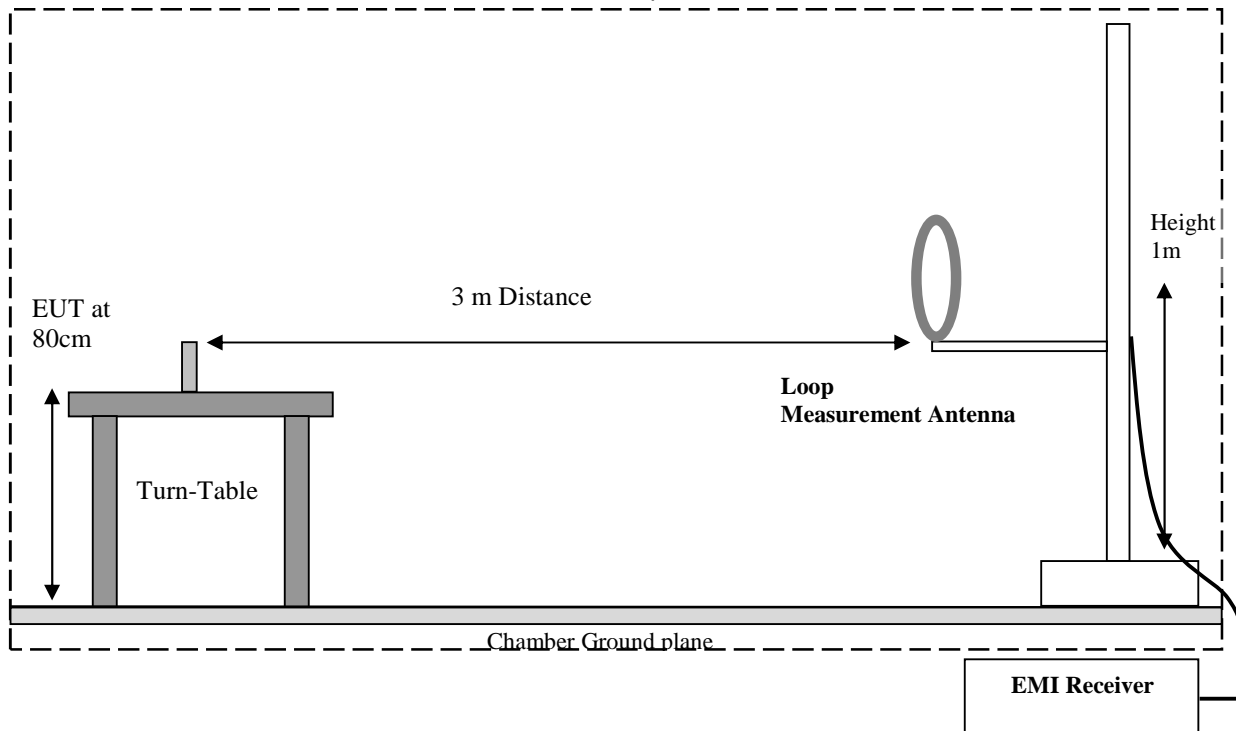

### Radiated Emissions Test Setup 30MHz-1GHz Measurements

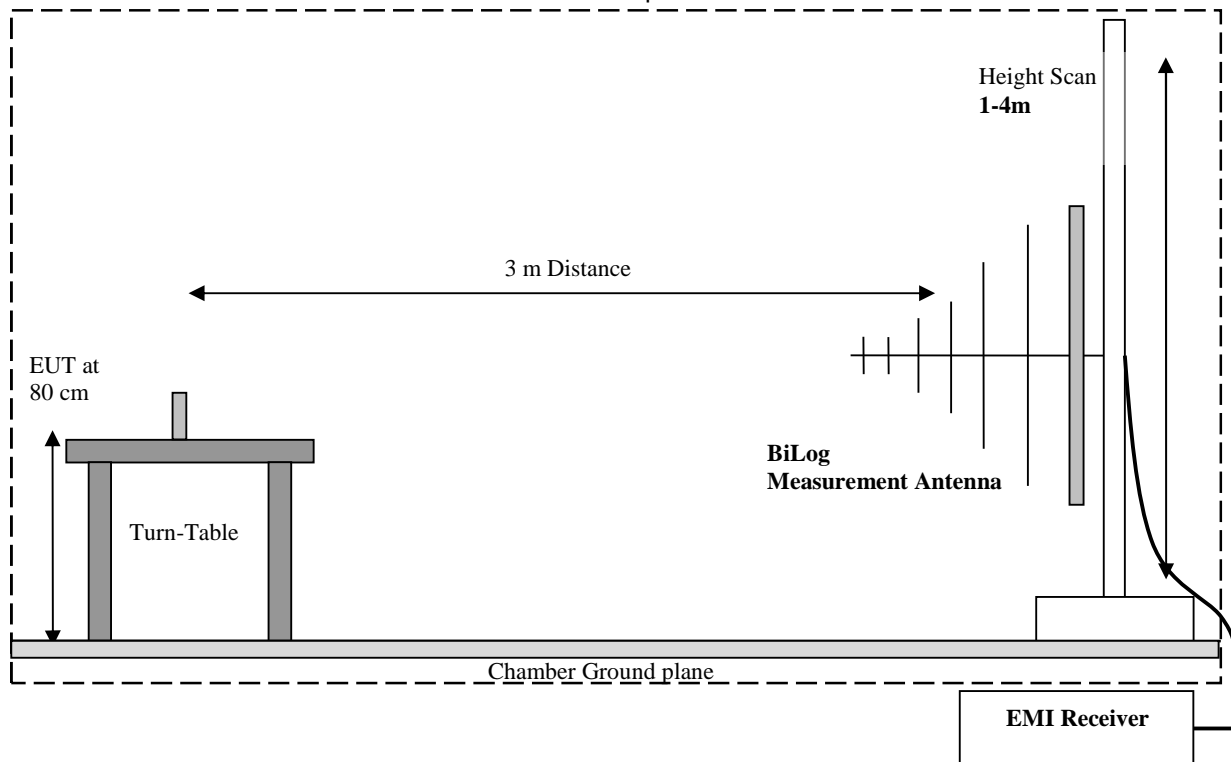

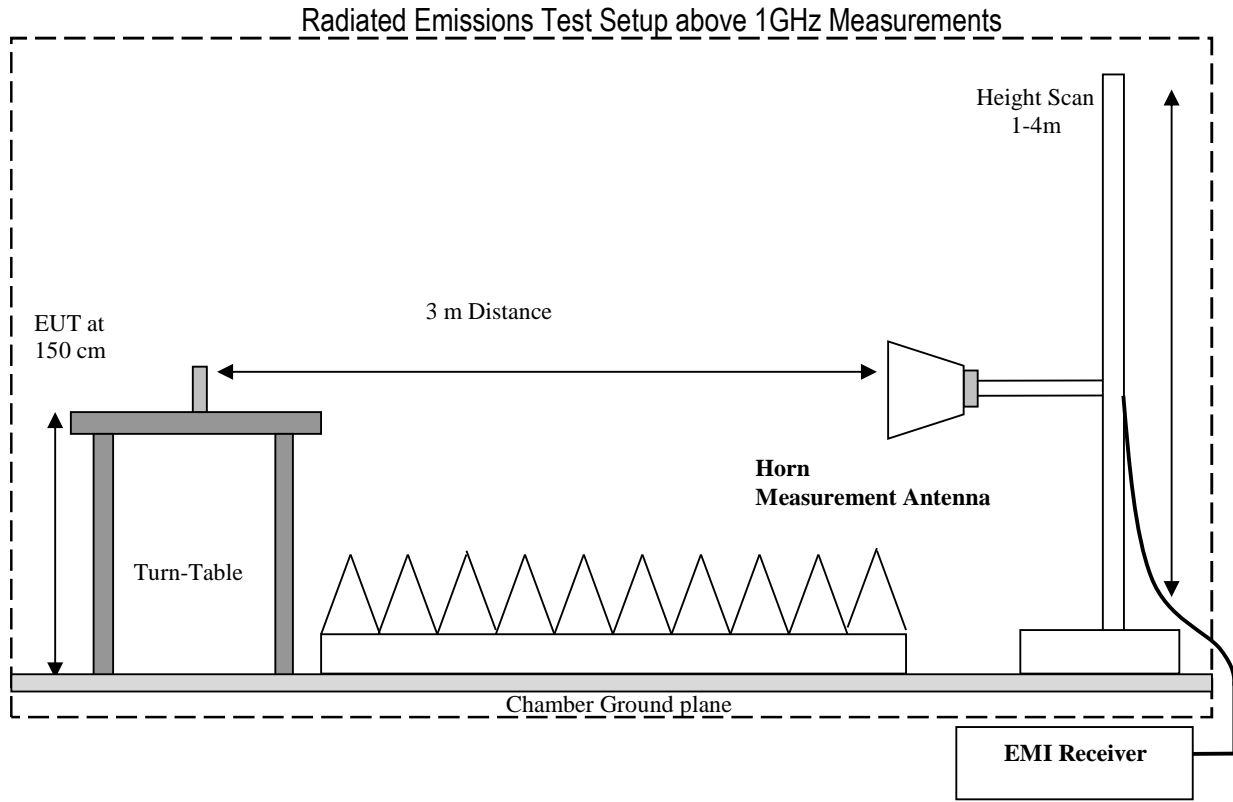

**7.1.1 Sample Calculations for Field Strength Measurements**

Field Strength is calculated from the Spectrum Analyzer/ Receiver readings, taking into account the following parameters:

1. Measured reading in dBµV
2. Cable Loss between the receiving antenna and SA in dB and
3. Antenna Factor in dB/m

All radiated measurement plots in this report are taken from a test SW that calculates the Field Strength based on the following equation:

$$FS \text{ (dB}\mu\text{V/m)} = \text{Measured Value on SA (dB}\mu\text{V)} + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$$

Example:


Frequency (MHz)	Measured SA (dBµV)	Cable Loss (dB)	Antenna Factor Correction (dB)	Field Strength Result (dBµV/m)
1000	80.5	3.5	14	98.0

**7.2 Power Line Conducted Measurement Procedure**

AC Power Line conducted emissions measurements performed according to: ANSI C63.4 (2014)

### 7.3 RF Conducted Measurement Procedure

Testing procedures are based on 558074 D01 15.247 Meas Guidance v05r02 – “GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES” - April 2, 2019, by the Federal Communications Commission, Office of Engineering and Technology, Laboratory Division.



- Connect the equipment as shown in the above diagram.
- Adjust the settings of the SA (Rohde-Schwarz Spectrum Analyzer) to connect the EUT at the required mode of test.
- Measurements are to be performed with the EUT set to the low, middle and high channels and for worst case modulation schemes.

## 8 Test Result Data

### 8.1 Maximum Peak Conducted Output Power

#### 8.1.1 Measurement according to FCC 558074 D01 15.247 Meas Guidance v05r02

##### Spectrum Analyzer settings:

- RBW  $\geq$  DTS bandwidth
- VBW  $\geq$  3 x RBW
- Span  $\geq$  3 x RBW
- Sweep = Auto couple
- Detector function = Peak
- Trace = Max hold
- Use peak marker function to determine the peak amplitude level

#### 8.1.2 Limits:

##### Maximum Peak Output Power:

- FCC §15.247 (b)(1): 1 W
- IC RSS-247: 1 W



#### 8.1.3 Test conditions and setup:



Ambient Temperature	EUT Set-Up #	EUT operating mode	Power Input	Antenna Gain
21.1° C	1	GFSK continuous fixed channel	12 VDC	1.57 dBi



#### 8.1.4 Measurement result:

Plot #	Frequency (MHz)	PHY	Maximum Peak Conducted Output Power (dBm)	EIRP (dBm)	Limit (dBm)	Result
1	2402	LE 1Mbit	0.88	2.45	30 (Pk) / 36 (EIRP)	Pass
2	2441	LE 1Mbit	0.35	1.92	30 (Pk) / 36 (EIRP)	Pass
3	2480	LE 1Mbit	-0.18	1.39	30 (Pk) / 36 (EIRP)	Pass
4	2402	LE 2Mbit	0.85	2.42	30 (Pk) / 36 (EIRP)	Pass
5	2441	LE 2Mbit	0.31	1.88	30 (Pk) / 36 (EIRP)	Pass
6	2480	LE 2Mbit	-0.22	1.35	30 (Pk) / 36 (EIRP)	Pass

### 8.1.5 Measurement Plots:

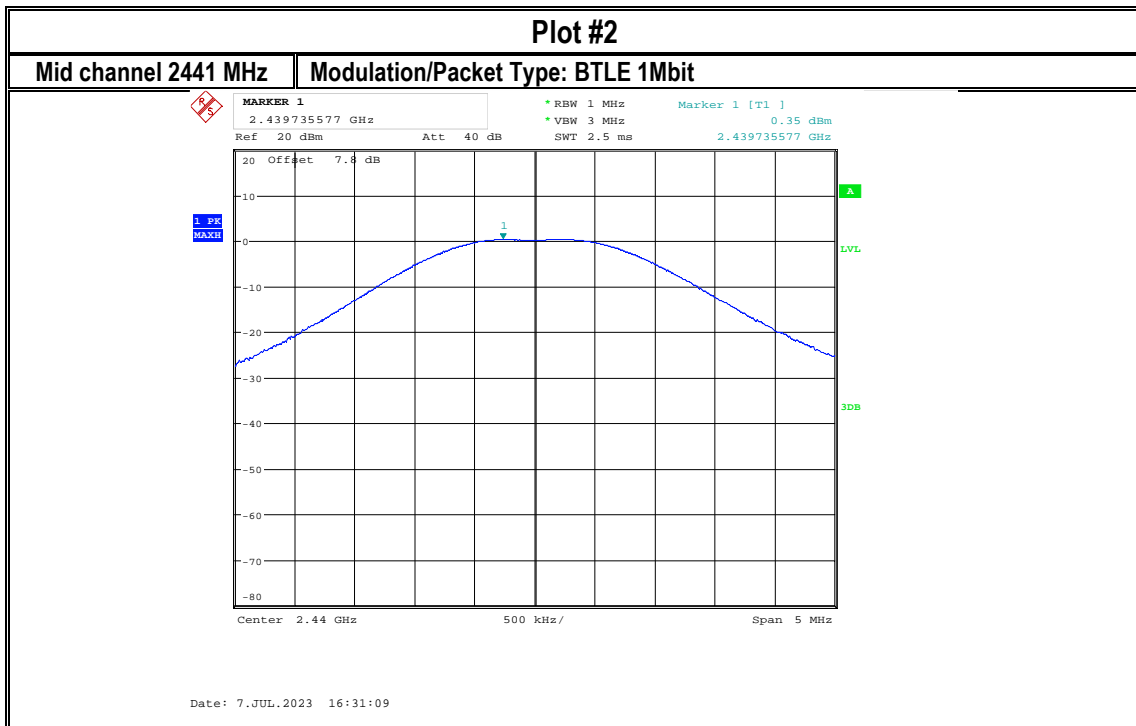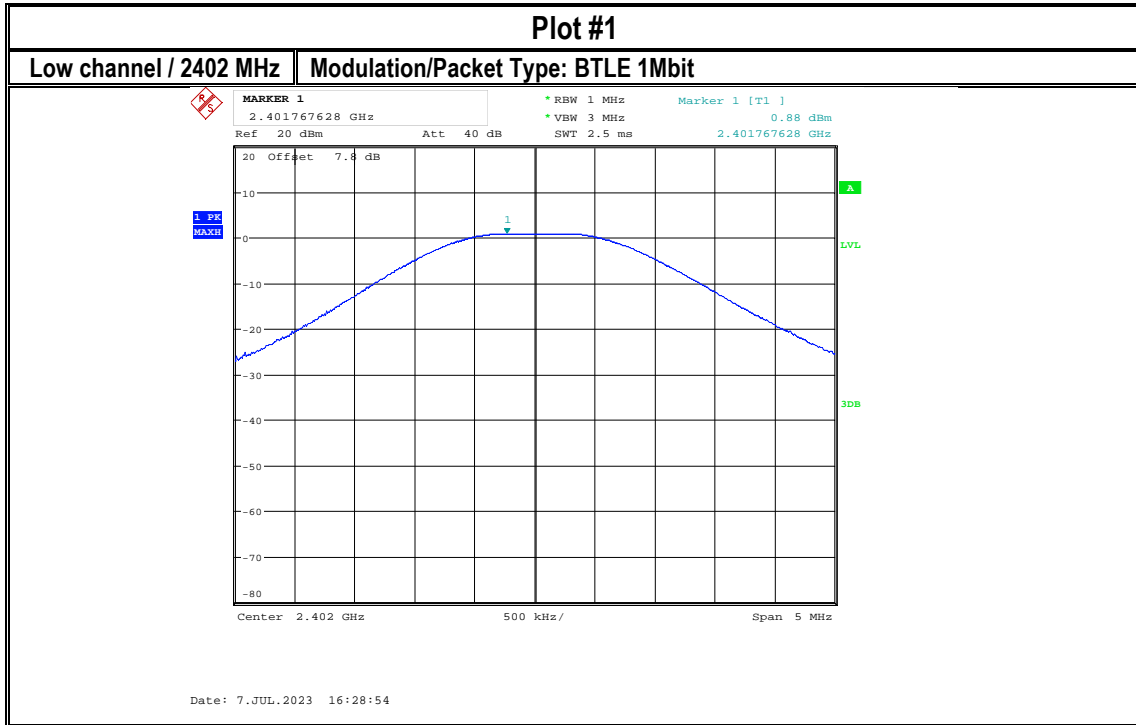

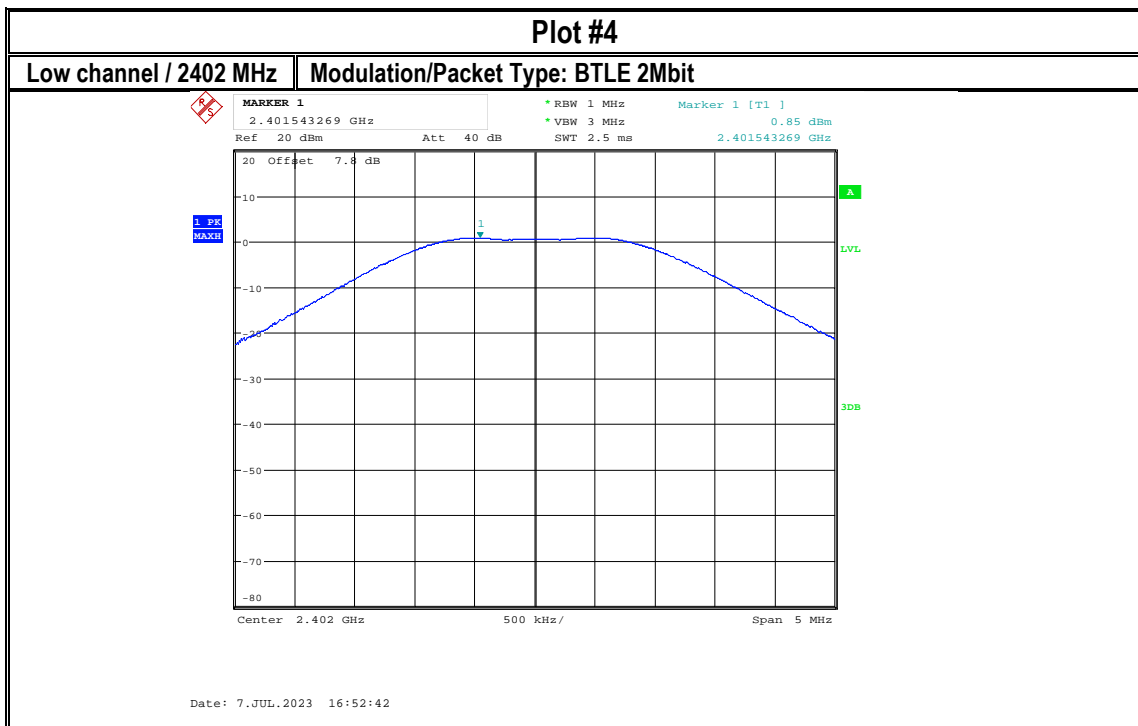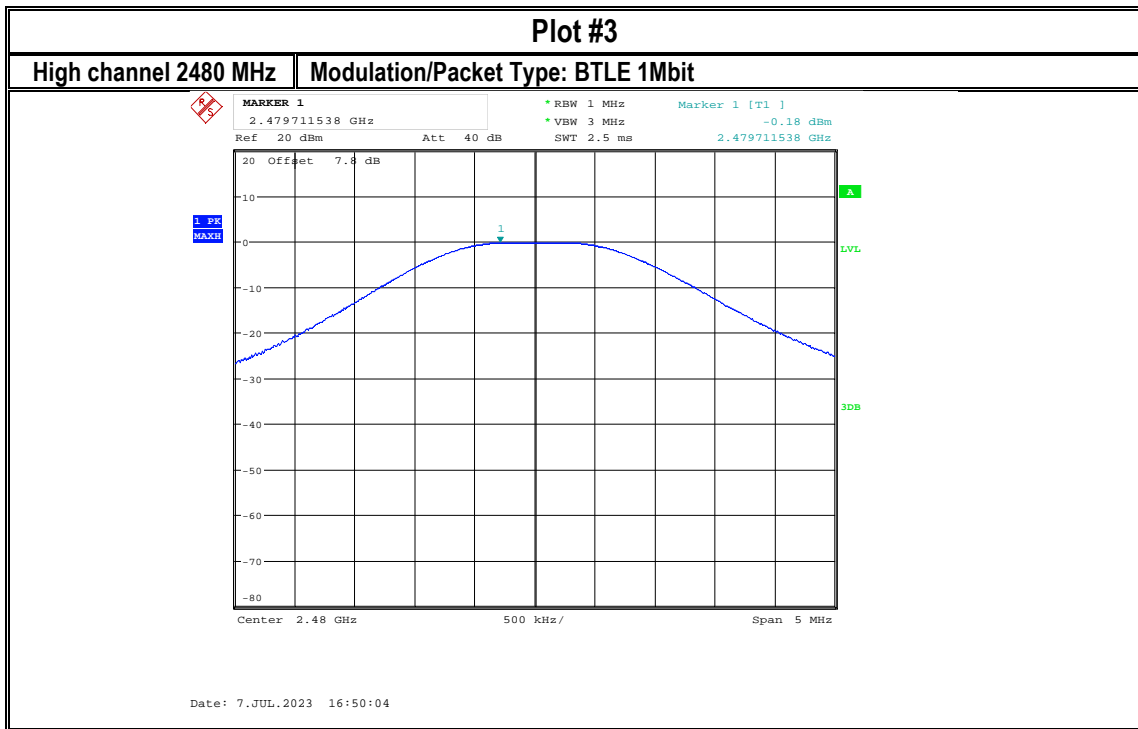

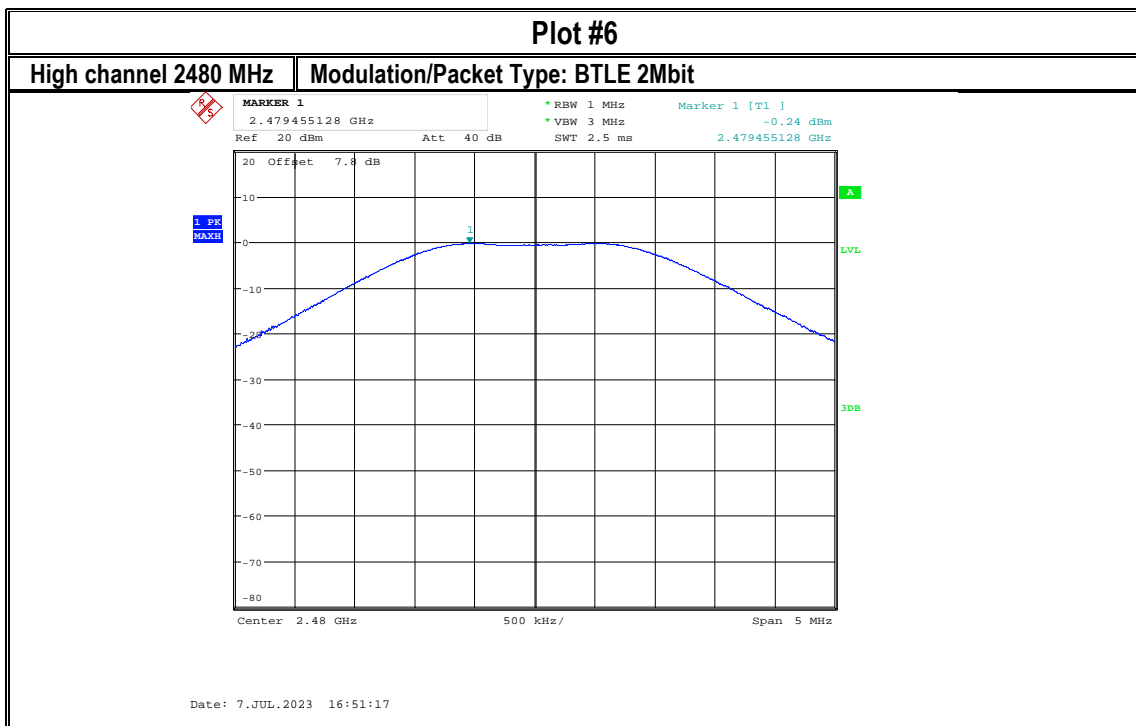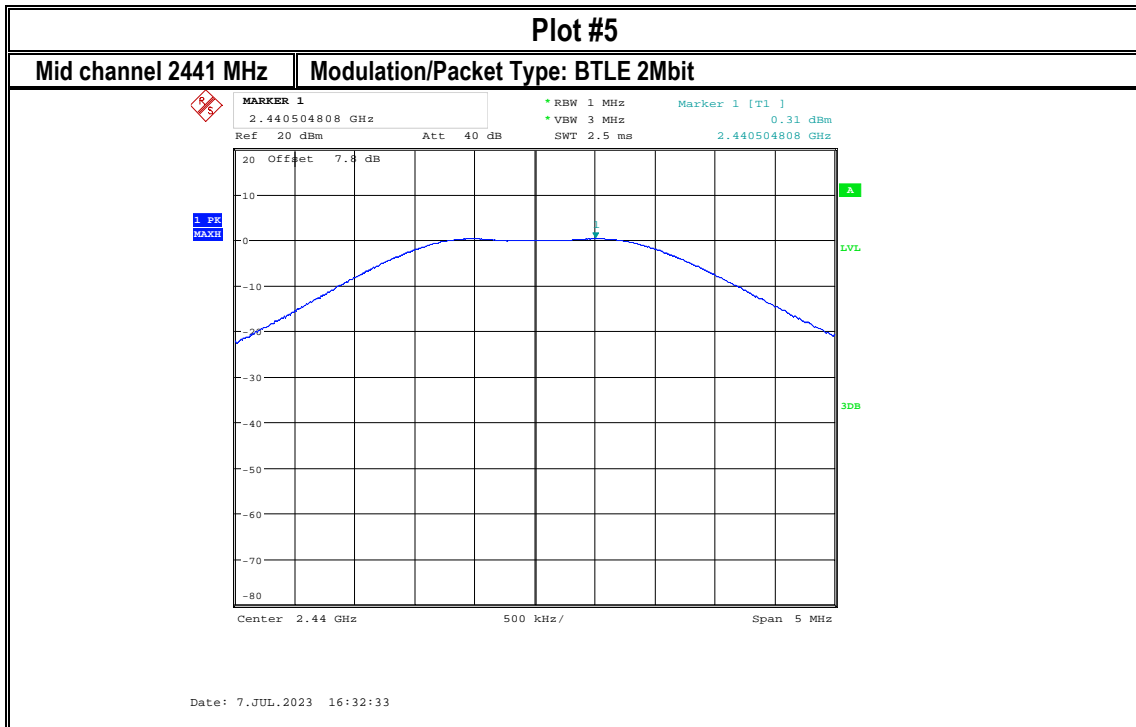



## 8.2 Power Spectral Density

### 8.2.1 Measurement according to FCC 558074 D01 15.247 Meas Guidance v05r02

#### Spectrum Analyzer settings for Peak PSD method:

- Set analyzer center frequency to DTS channel center frequency
- Set the span to 1.5 x DTS bandwidth
- Set RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
- Set the VBW  $\geq 3 \times \text{RBW}$
- Detector = Peak
- Sweep time = Auto couple
- Trace mode = Max hold
- Allow trace to fully stabilize
- Use the peak marker function to determine the maximum amplitude level within the RBW
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat

### 8.2.2 Limits:

FCC§15.247(e) & RSS-247 5.2(b)

- For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.



### 8.2.3 Test conditions and setup:



Ambient Temperature	EUT Set-Up #	EUT operating mode	Power Input	Antenna Gain
21.1° C	1	GFSK continuous fixed channel	12 VDC	1.57 dBi



### 8.2.4 Measurement result:

Plot #	Frequency (MHz)	Maximum Power Spectral Density (dBm/3 kHz)	Limit ( dBm / 3 kHz )	Result
1	2402	-8.38	8	Pass
2	2441	-8.95	8	Pass
3	2480	-9.55	8	Pass
4	2402	-13.00	8	Pass
5	2441	-12.99	8	Pass
6	2480	-12.83	8	Pass

### 8.2.5 Measurement Plots:

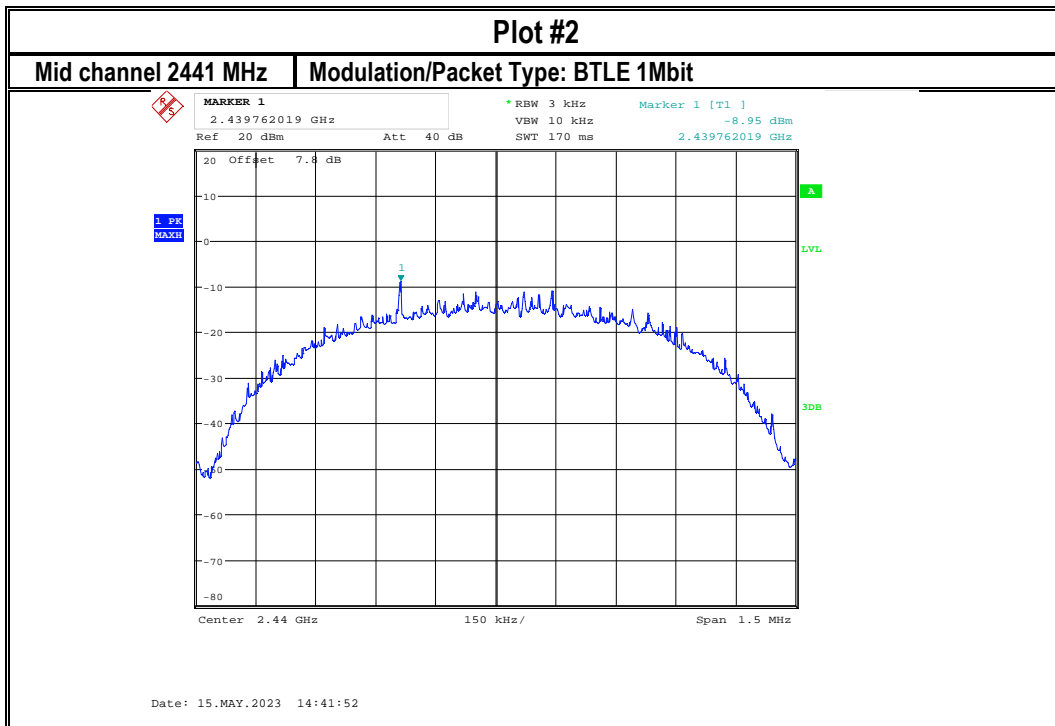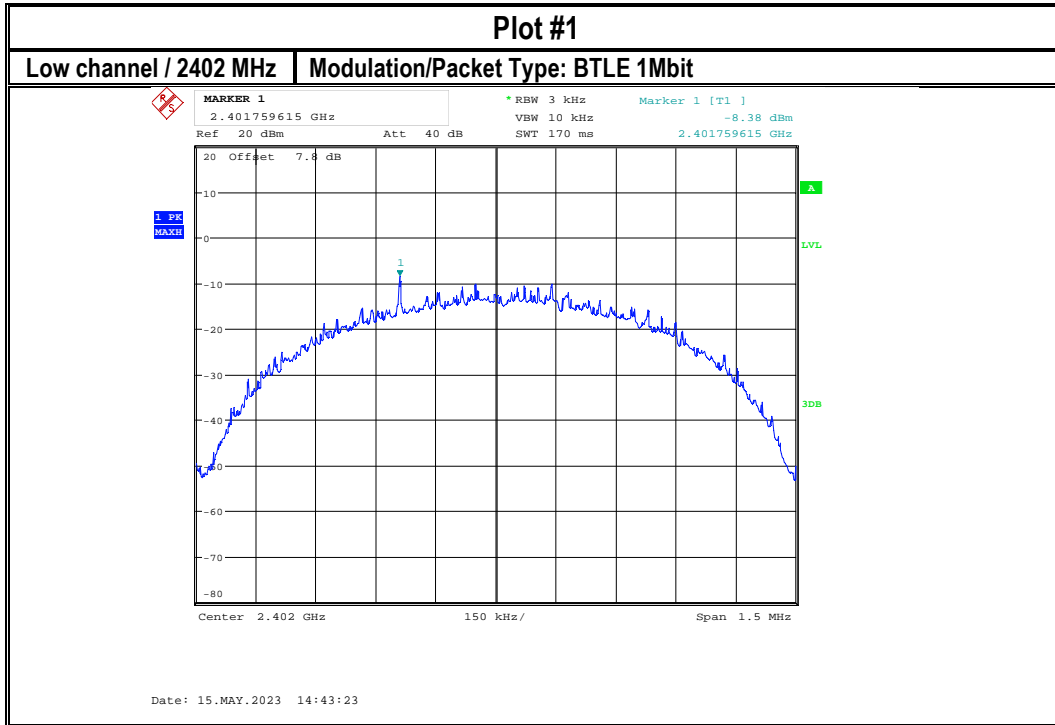

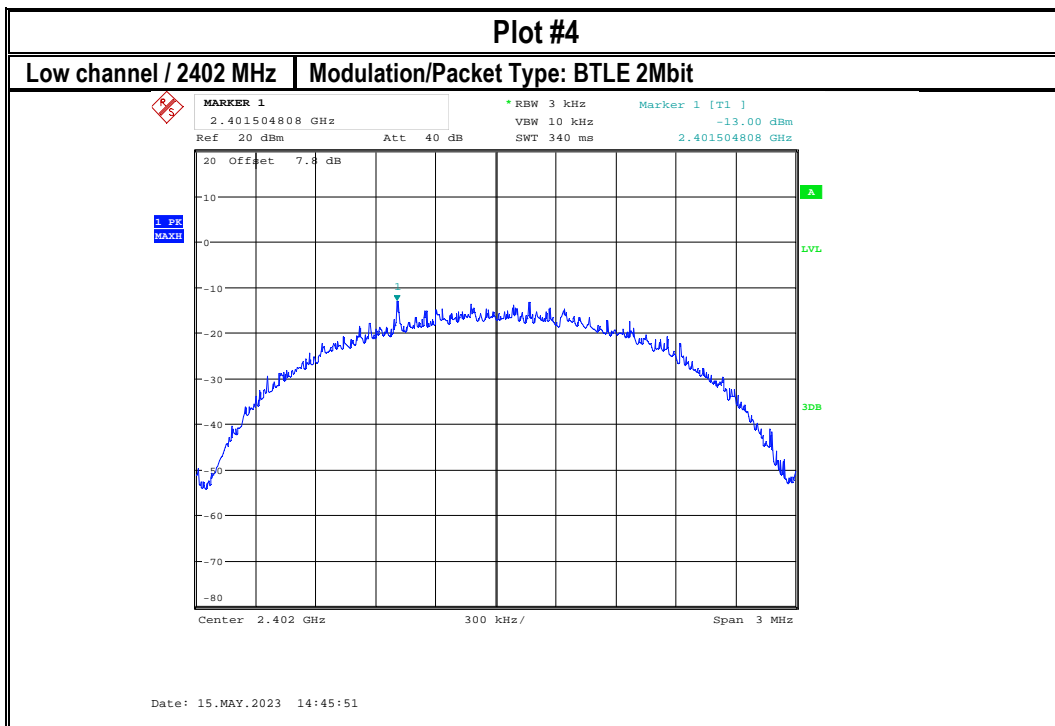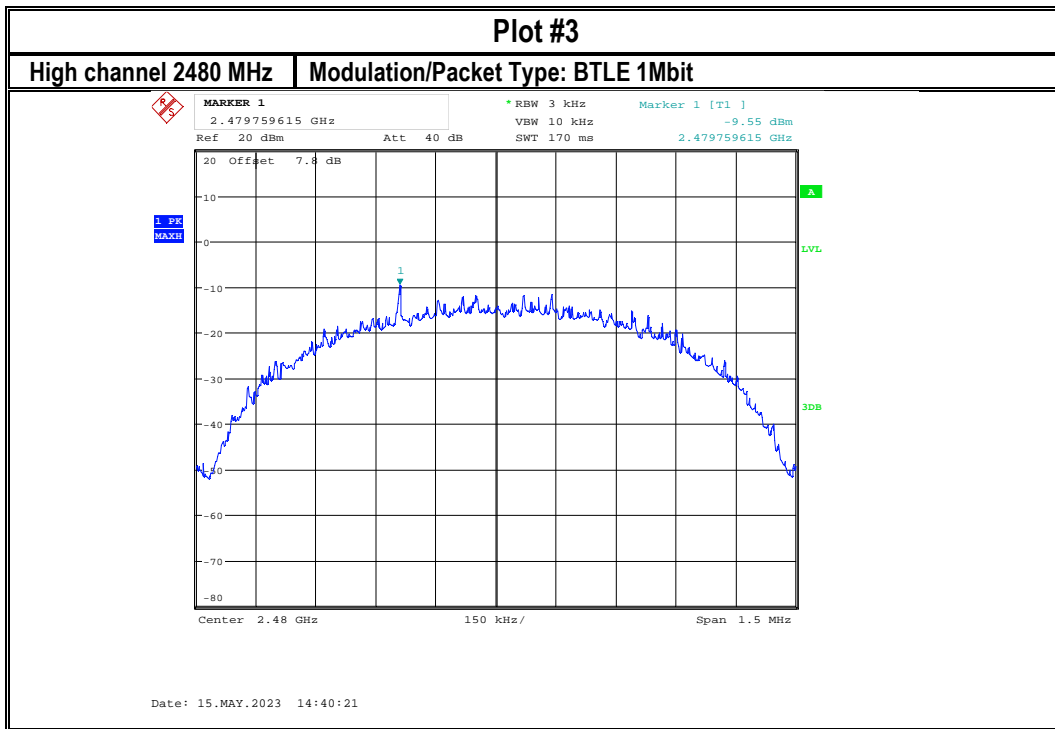

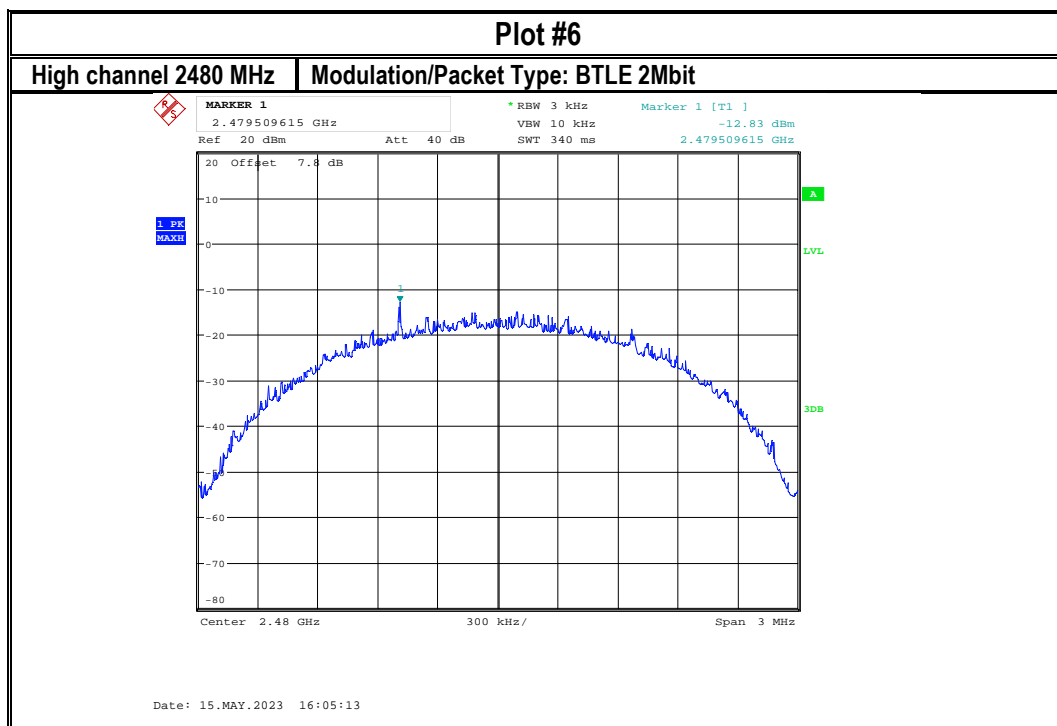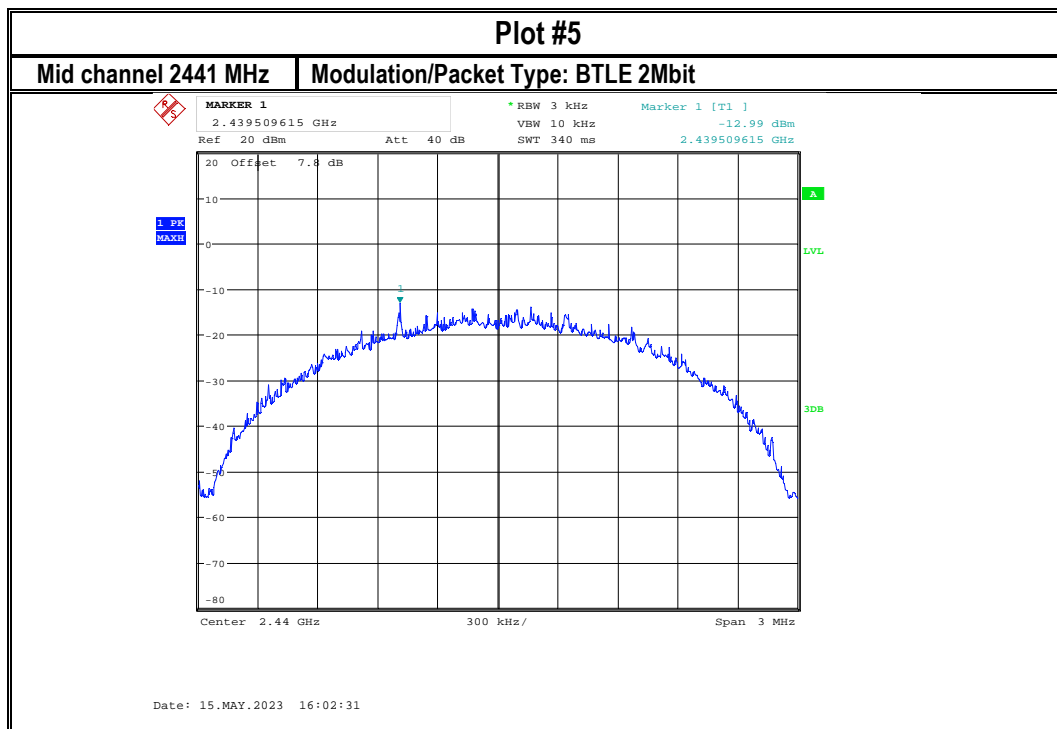


### 8.3 Duty cycle

#### 8.3.1 Measurement according to FCC 558074 D01 15.247 Meas Guidance v05r02

##### Spectrum Analyzer settings:

- Set the center frequency and of the instrument to the center frequency of the transmission
- Zero span
- Set RBW >=OBW if possible; otherwise, set RBW to the largest available value
- Detector = Peak or average

#### 8.3.2 Measurement result

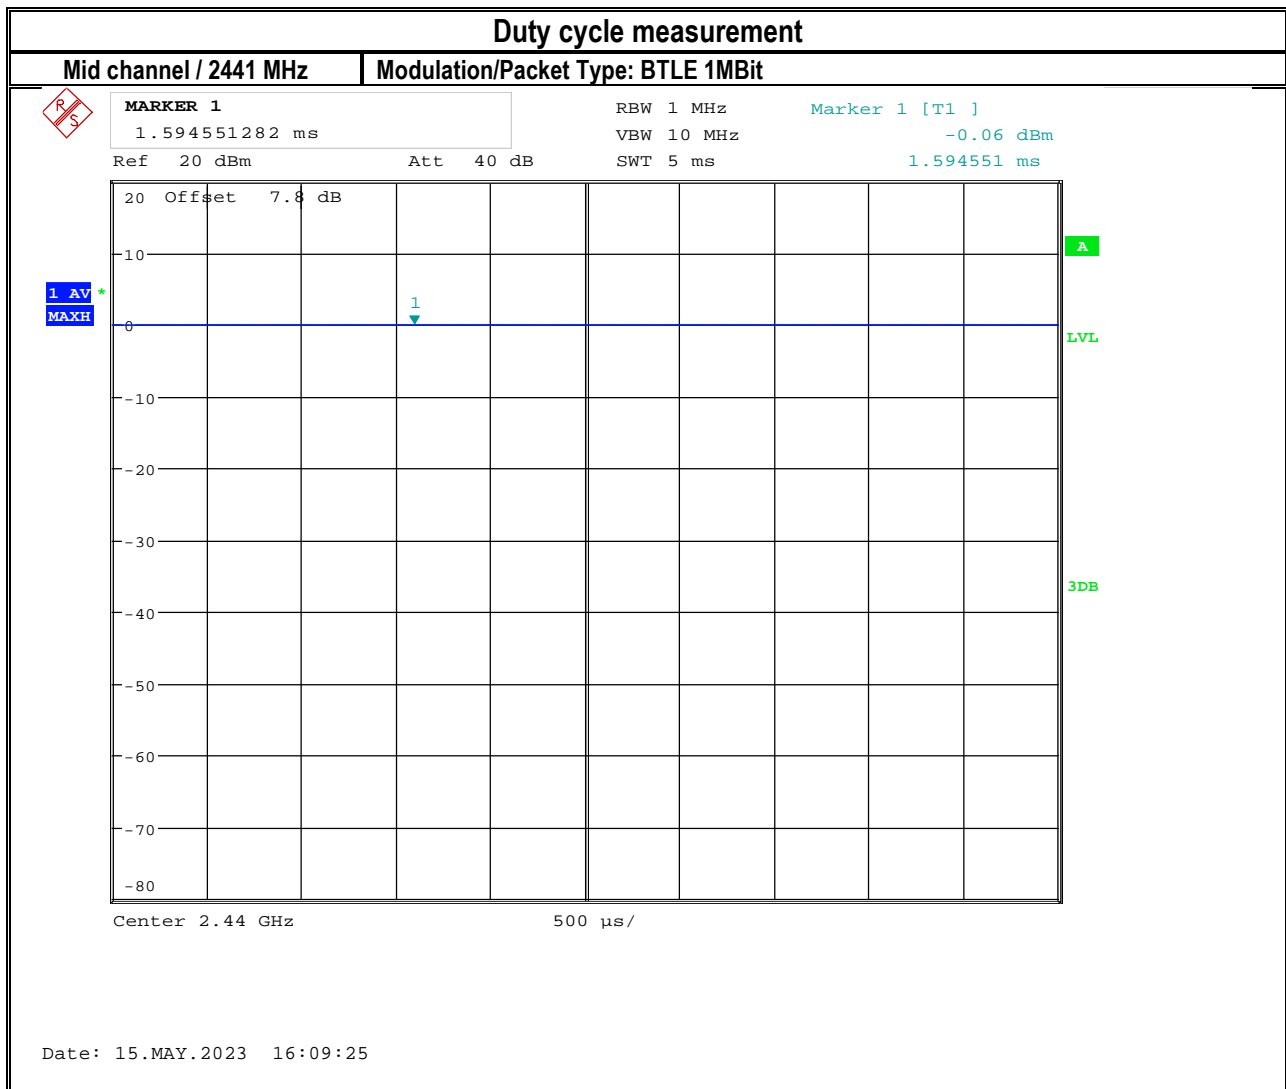

## 8.4 Band Edge Compliance

### 8.4.1 Measurement according to FCC 558074 D01 15.247 Meas Guidance v05r02

#### Spectrum Analyzer settings for band edge:

- Set the center frequency and span to encompass frequency range to be measured
- RBW = 100 kHz
- VBW  $\geq 3 \times$  RBW
- Sweep Time: Auto couple
- Detector = Peak
- Trace = Max hold
- Allow trace to fully stabilize
- Use the peak marker function to determine the maximum amplitude level
- Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge

### 8.4.2 Limits non restricted band:

#### FCC§15.247 (d)

- In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

#### RSS-247 5/5

- In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB.

#### Spectrum Analyzer settings for restricted band:

- Peak measurements are made using a peak detector and RBW=1 MHz

**8.4.3 Limits restricted band §15.247/15.209/15.205 and RSS-Gen 8.9/8.10**

- \*PEAK LIMIT= 74 dBµV/m @3m =-21.23 dBm
- \*AVG. LIMIT= 54 dBµV/m @3m =-41.23 dBm
- Start frequency & stop frequency according to frequency range specified in the restricted band table in FCC section 15.205 & RSS-Gen 8.10
- Measurements with a peak detector were used to show compliance to average limits, thus showing compliance to both peak and average limits.

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

**8.4.4 Test conditions and setup:**


Ambient Temperature	EUT Set-Up #	EUT operating mode	Power Input	Antenna Gain
21.1° C	1	GFSK continuous fixed channel	12 VDC	1.57 dBi

**8.4.5 Measurement result:**


Plot #	PHY	EUT operating mode	Band Edge	Band Edge Delta (dBc)	Limit (dBc)	Result
1	1 Mbit	GFSK continuous fixed channel	Lower, Non-restricted	-37.63	20	Pass
2	2 Mbit	GFSK continuous fixed channel	Lower, Non-restricted	-29.04	20	Pass


Plot #	PHY	EUT operating mode	Band Edge	Measured Peak Value (dBm)	Limit (dBm)	Result
3	1 Mbit	GFSK continuous fixed channel	Upper Restricted Peak	43.98	74 Peak	Pass
	1 Mbit	GFSK continuous fixed channel	Upper Restricted AVG	30.10	54 AVG	Pass
4	2 Mbit	GFSK continuous fixed channel	Upper Restricted Peak	45.40	74 Peak	Pass
	2 Mbit	GFSK continuous fixed channel	Upper Restricted AVG	33.46	54 AVG	Pass


8.4.6 Measurement Plots:

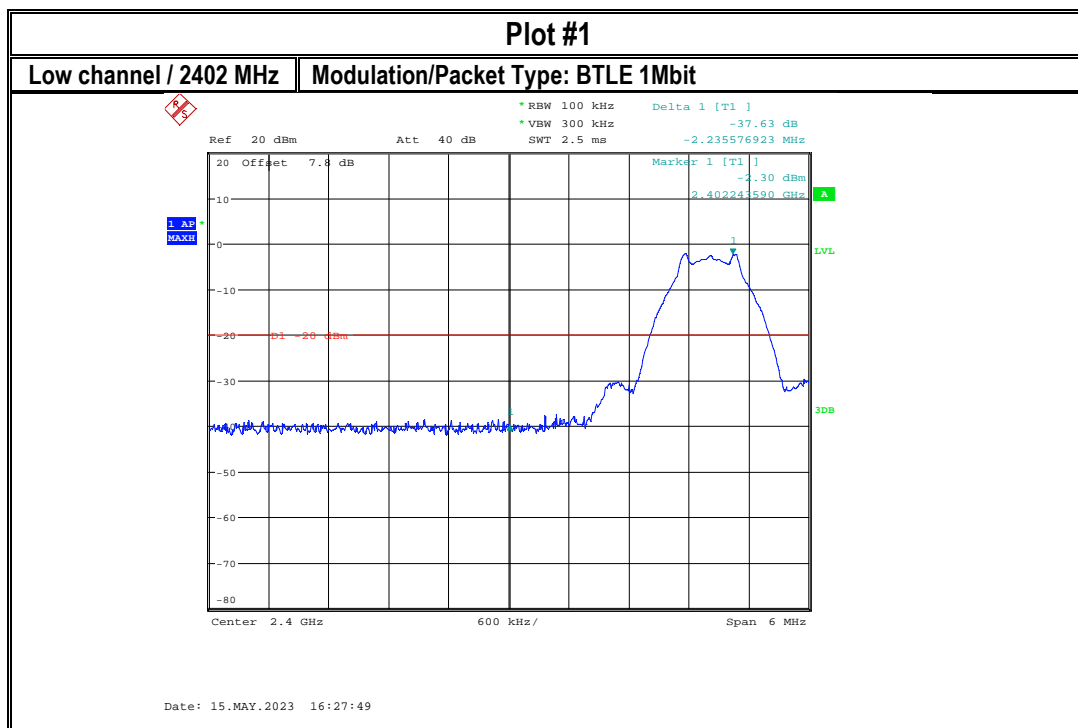



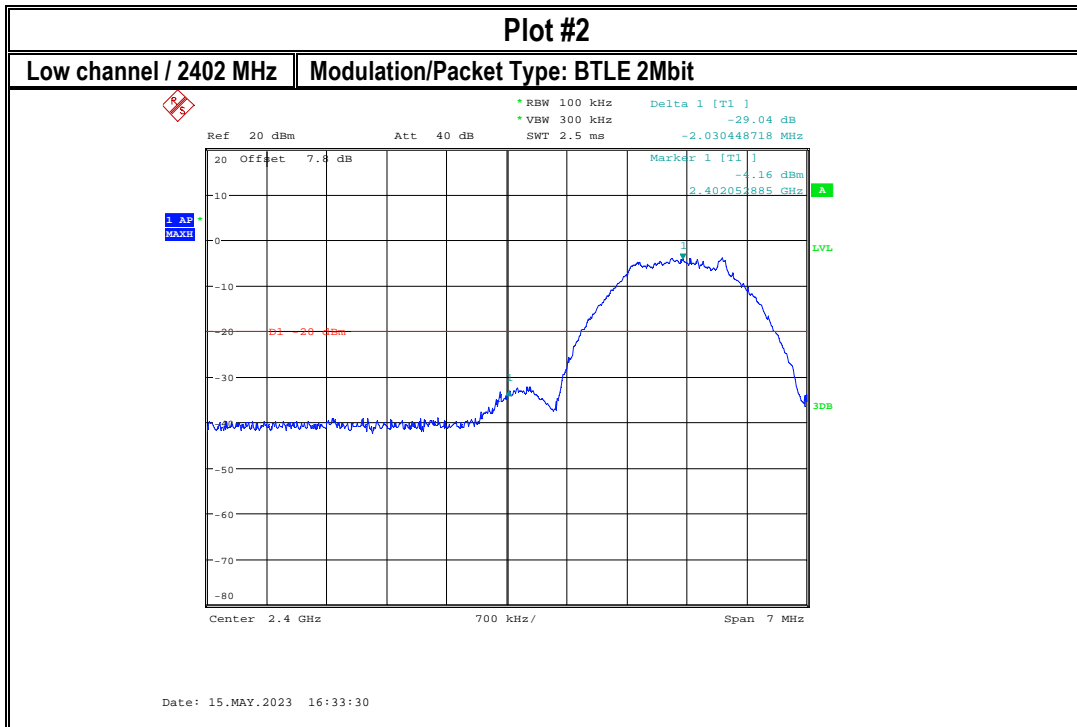

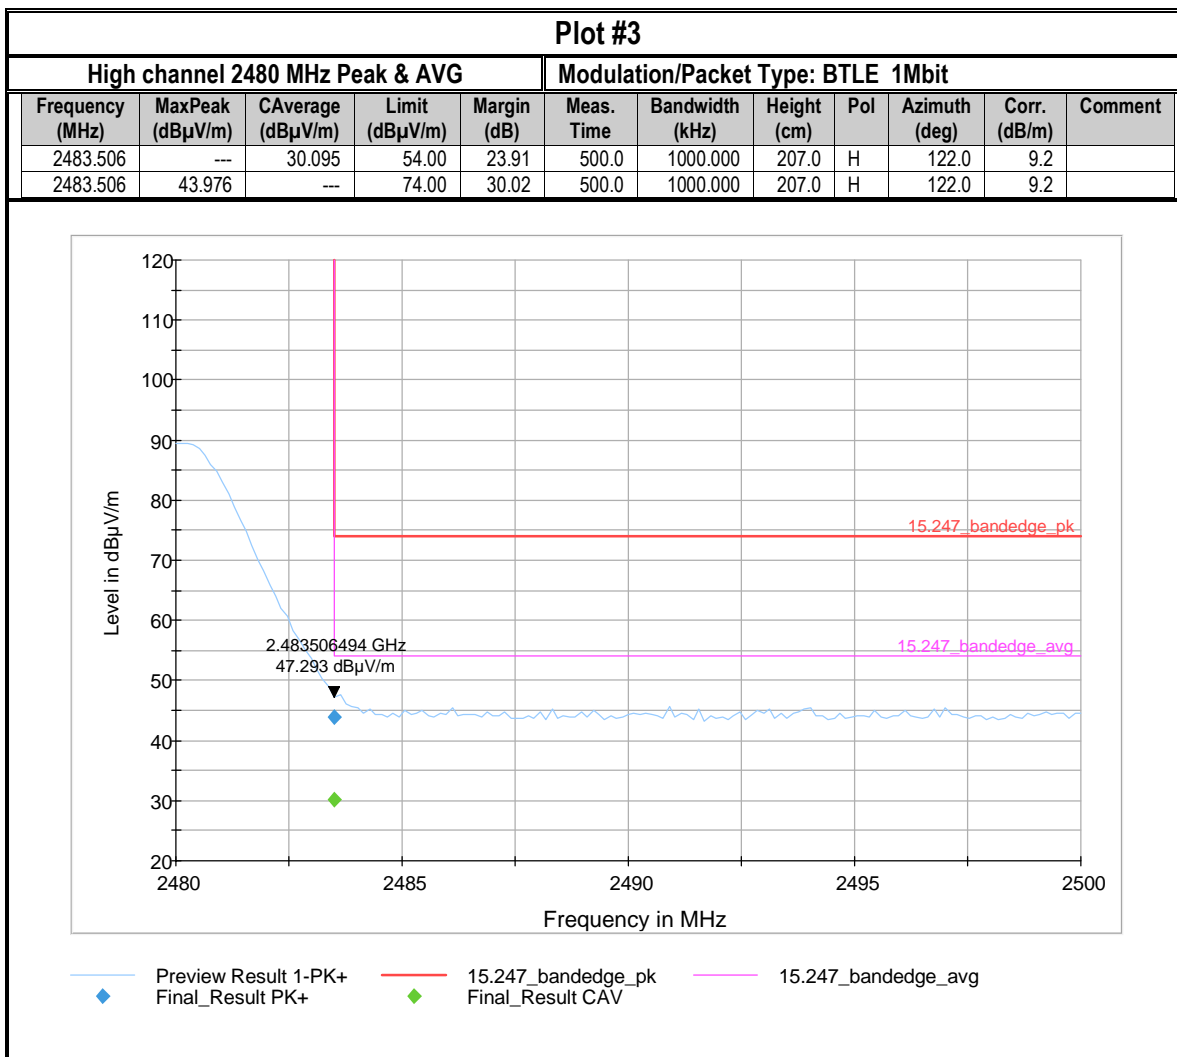

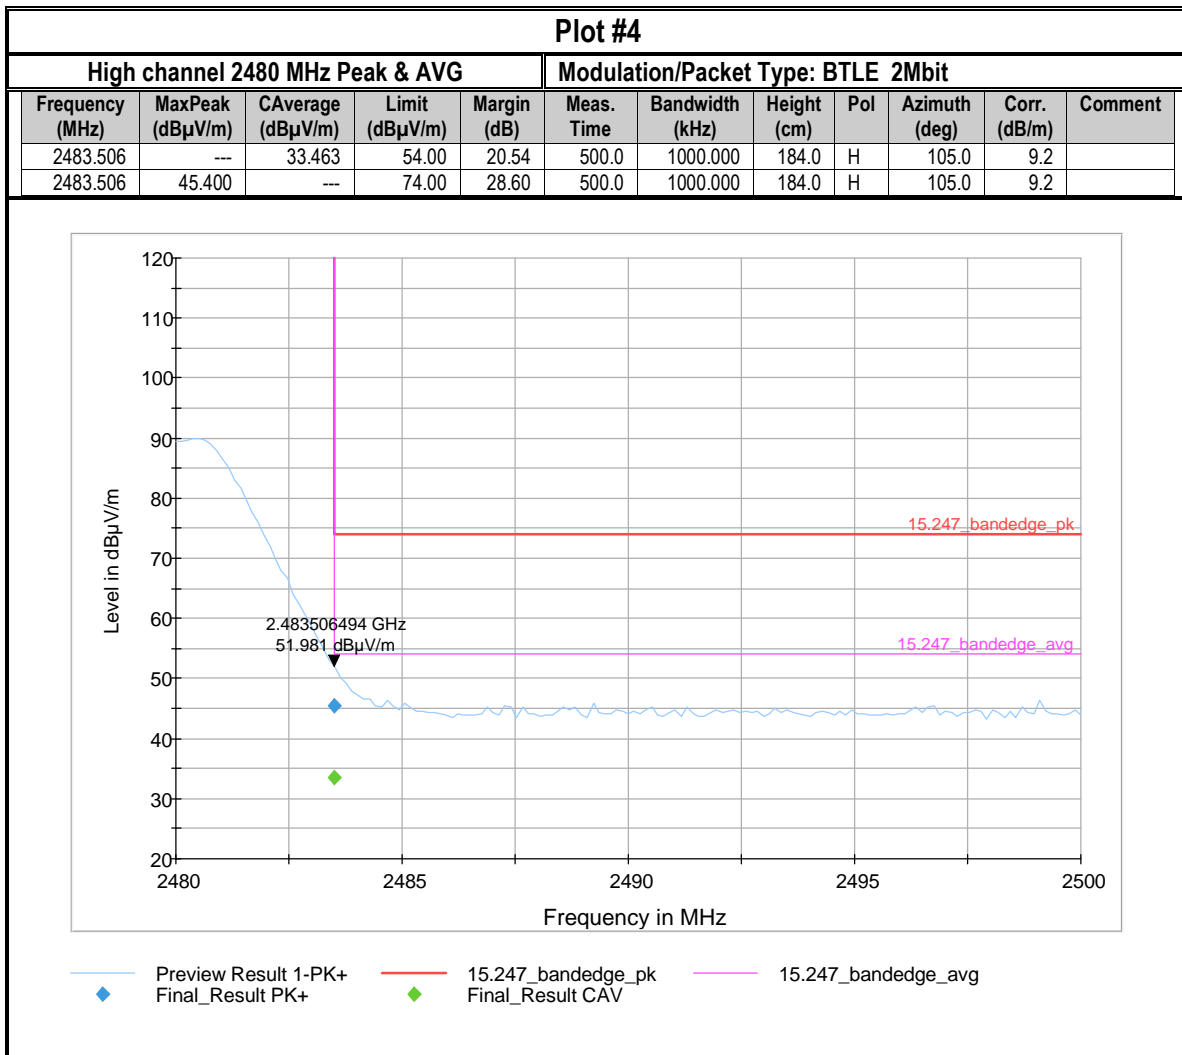

## 8.5 Emission Bandwidth 6dB and 99% Occupied Bandwidth

### 8.5.1 Measurement according to FCC 558074 D01 15.247 Meas Guidance v05r02

#### Spectrum Analyzer settings:

##### 6dB (DTS) Bandwidth:

- Set RBW = 100 kHz
- Set the video bandwidth (VBW)  $\geq 3 \times$  RBW
- Detector = Peak
- Trace mode = Max hold
- Sweep = Auto couple
- Allow the trace to stabilize
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

##### 99% Occupied Bandwidth:

- Set frequency = nominal EUT channel center frequency
- Set Span = 1.5 x to 5.0 x OBW
- Set RBW = 1% to 5% of OBW
- Set the video bandwidth (VBW)  $\approx 3 \times$  RBW
- Detector = Peak
- Trace mode = Max hold
- Sweep = Auto couple
- Allow the trace to stabilize
- Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth
- If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.

### 8.5.2 Limits:

#### FCC §15.247(a)(2) and RSS-247 5.2(a)

- Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

**8.5.3 Test conditions and setup:**



Ambient Temperature	EUT Set-Up #	EUT operating mode	Power Input
21.1° C	1	GFSK continuous fixed channel	12 VDC



**8.5.4 Measurement result:**



Plot #	PHY	Frequency (MHz)	6dB Emissions Bandwidth (MHz)	Limit (MHz)	Result
1	1Mbit	2402	0.713	> 0.5	Pass
2	1Mbit	2441	0.729	> 0.5	Pass
3	1Mbit	2480	0.729	> 0.5	Pass
4	2Mbit	2402	1.450	> 0.5	Pass
5	2Mbit	2441	1.450	> 0.5	Pass
6	2Mbit	2480	1.442	> 0.5	Pass

Plot #	PHY	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Limit (MHz)	Result
7	1Mbit	2402	1.058	> 0.5	Pass
8	1Mbit	2441	1.098	> 0.5	Pass
9	1Mbit	2480	1.090	> 0.5	Pass
10	2Mbit	2402	2.099	> 0.5	Pass
11	2Mbit	2441	2.123	> 0.5	Pass
12	2Mbit	2480	2.123	> 0.5	Pass

### 8.5.5 Measurement Plots for 6dB Emissions Bandwidth

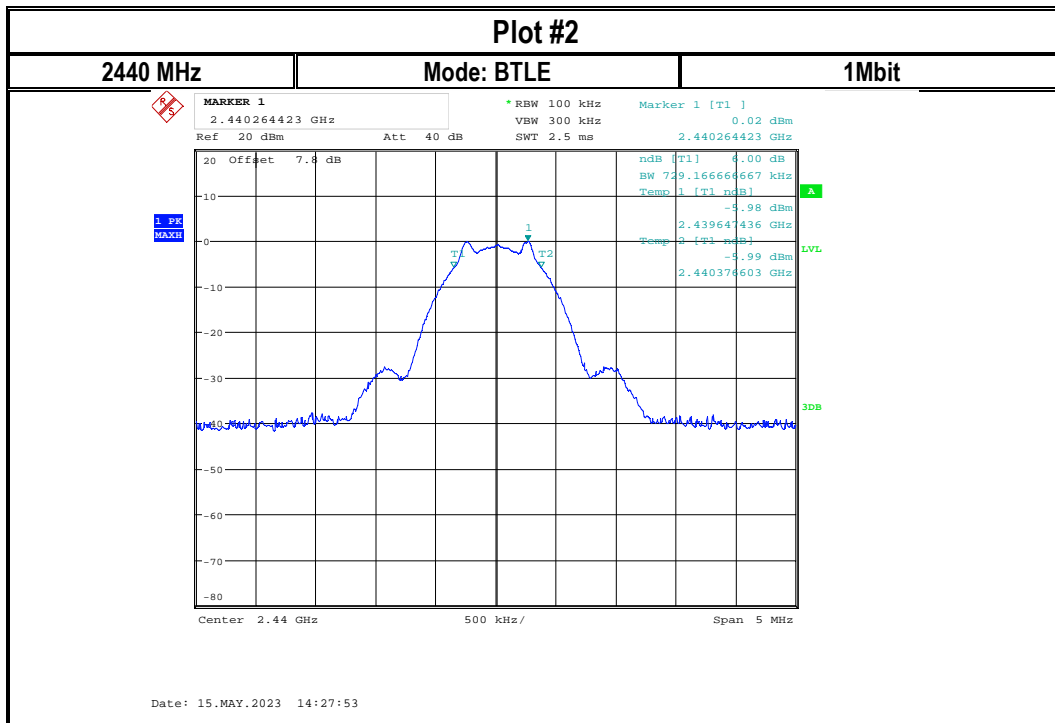
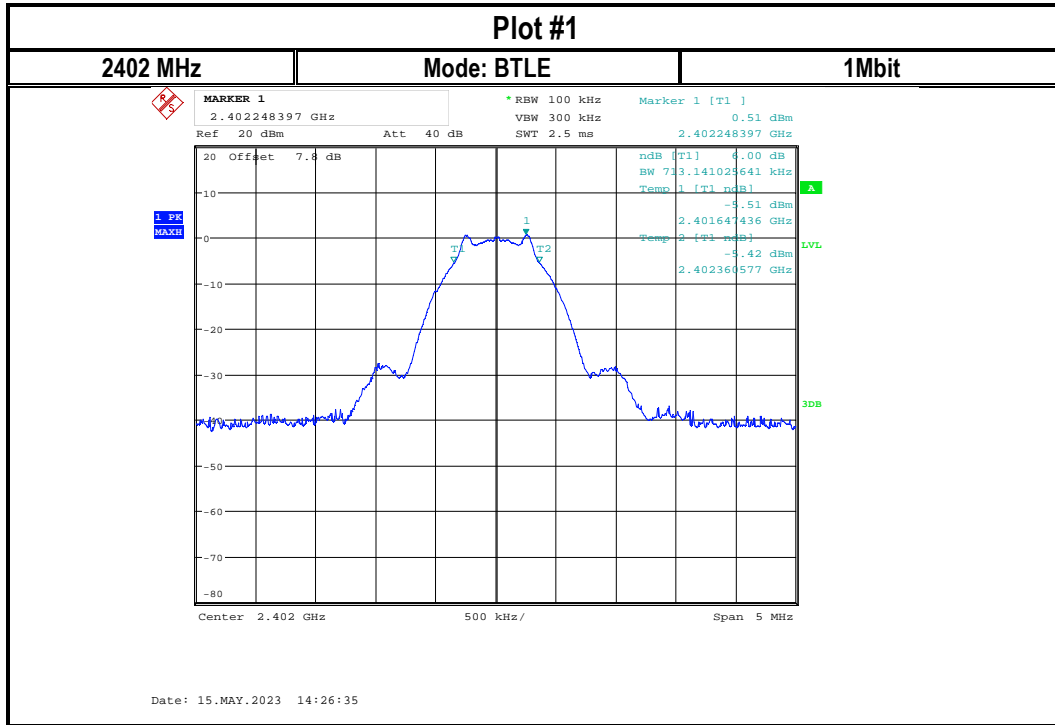


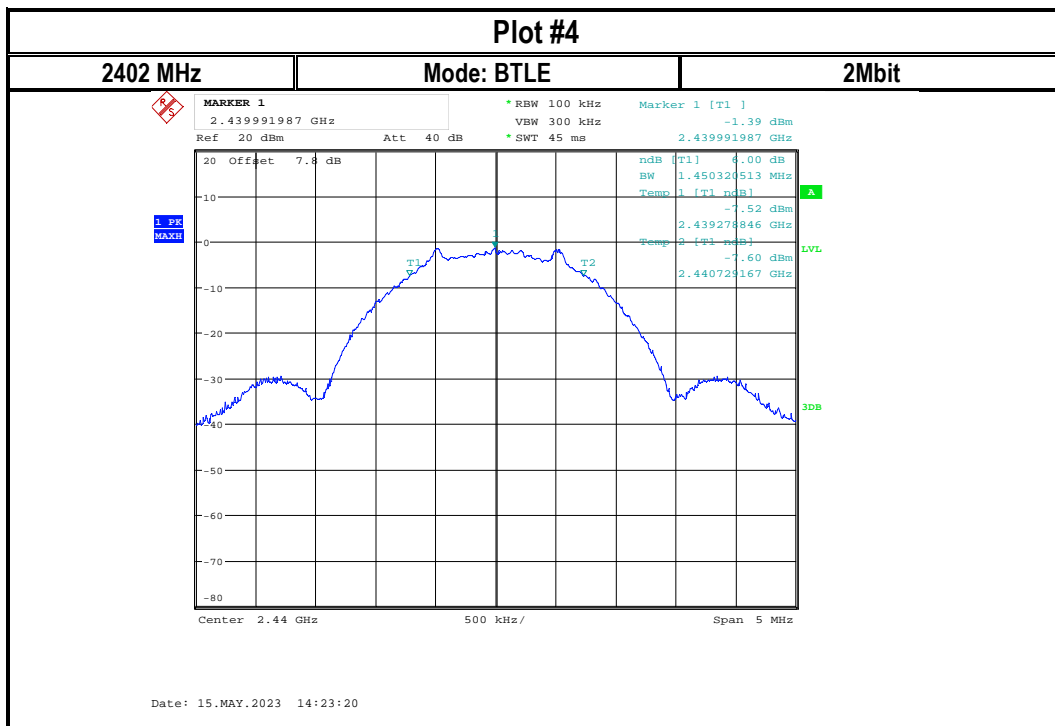
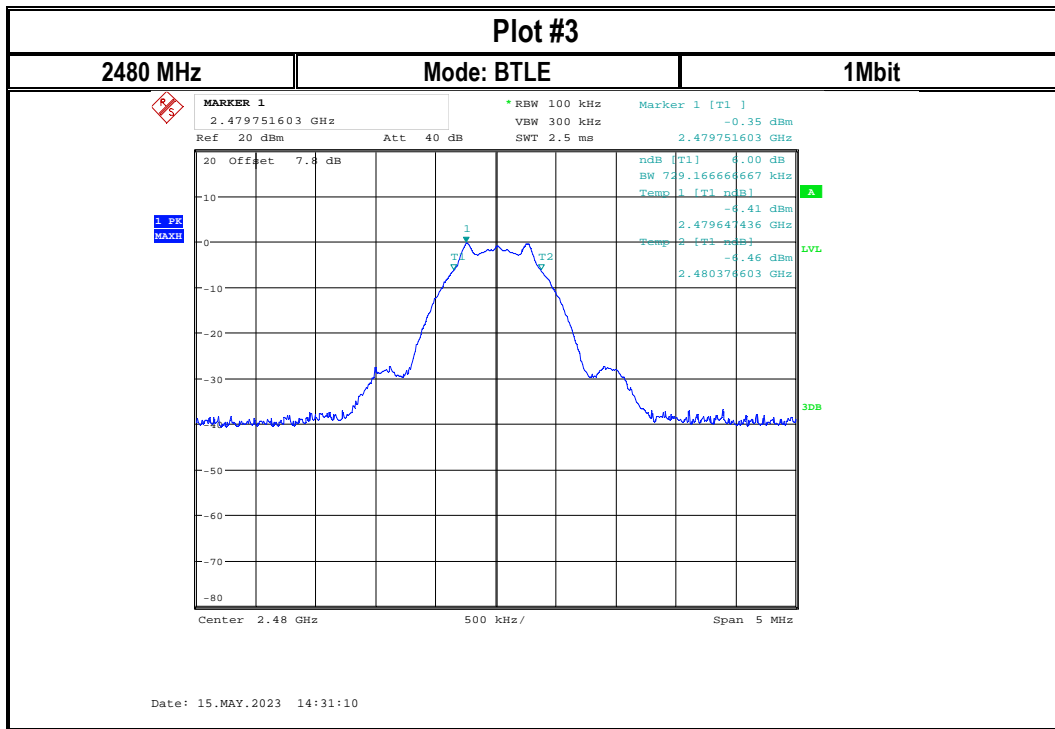


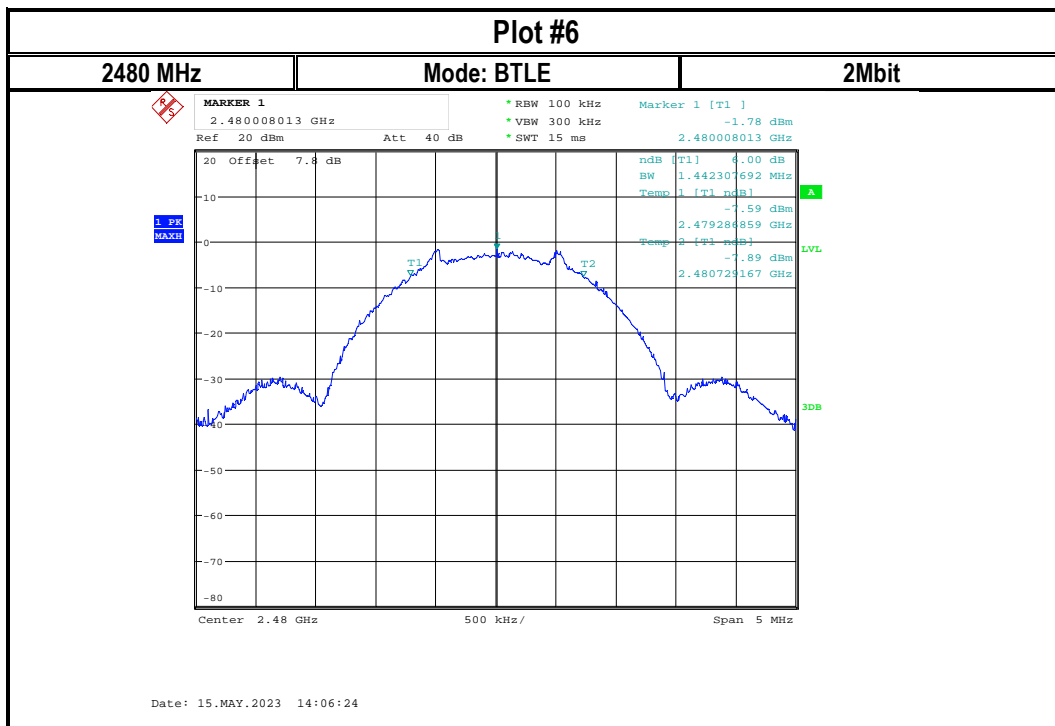
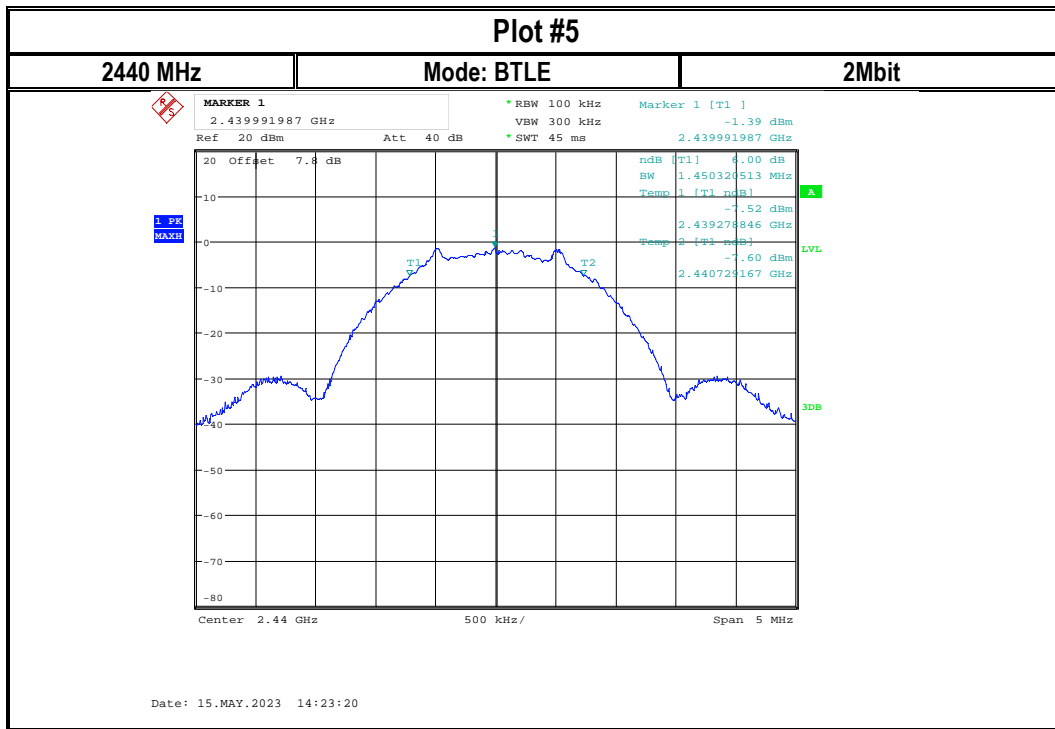




### 8.5.6 Measurement Plots for 99% Occupied Bandwidth

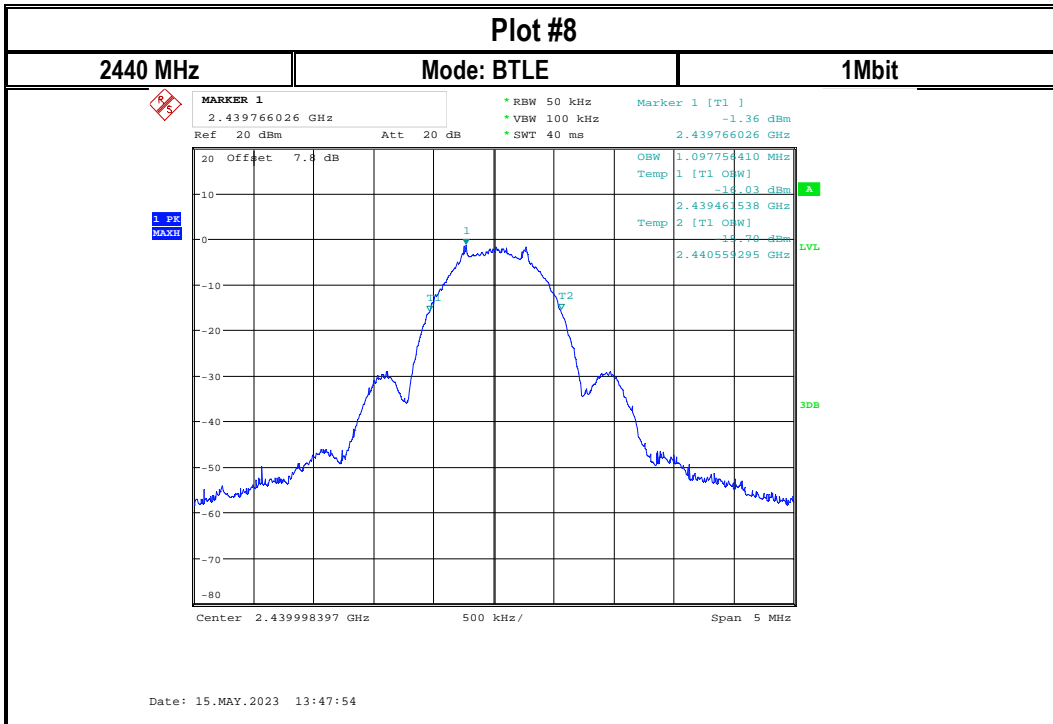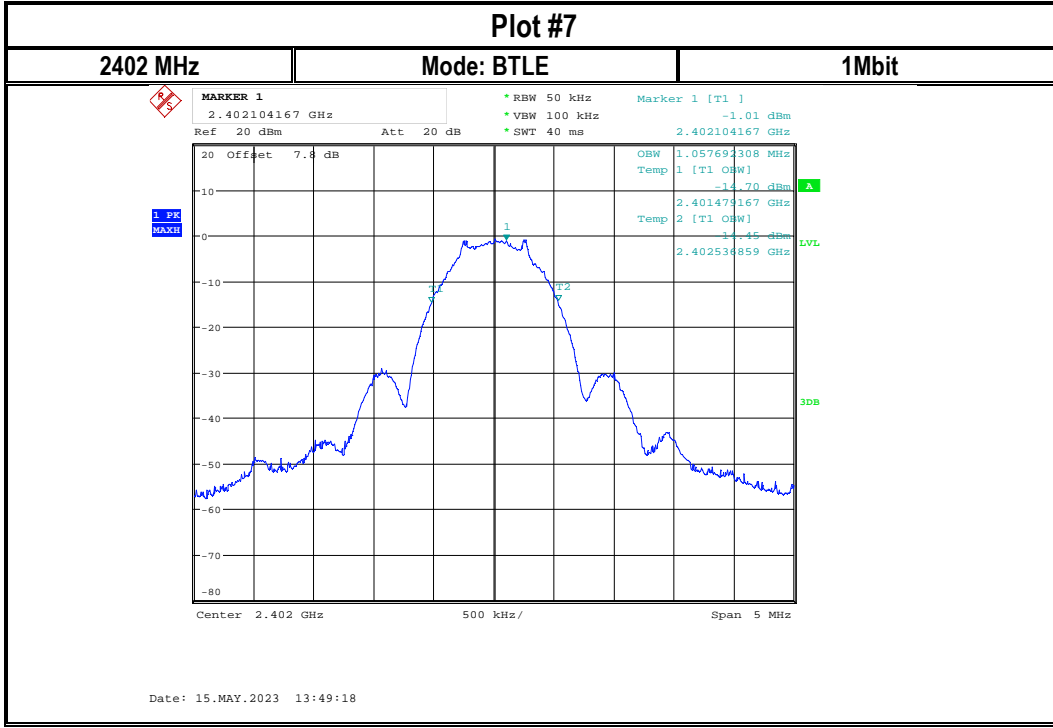

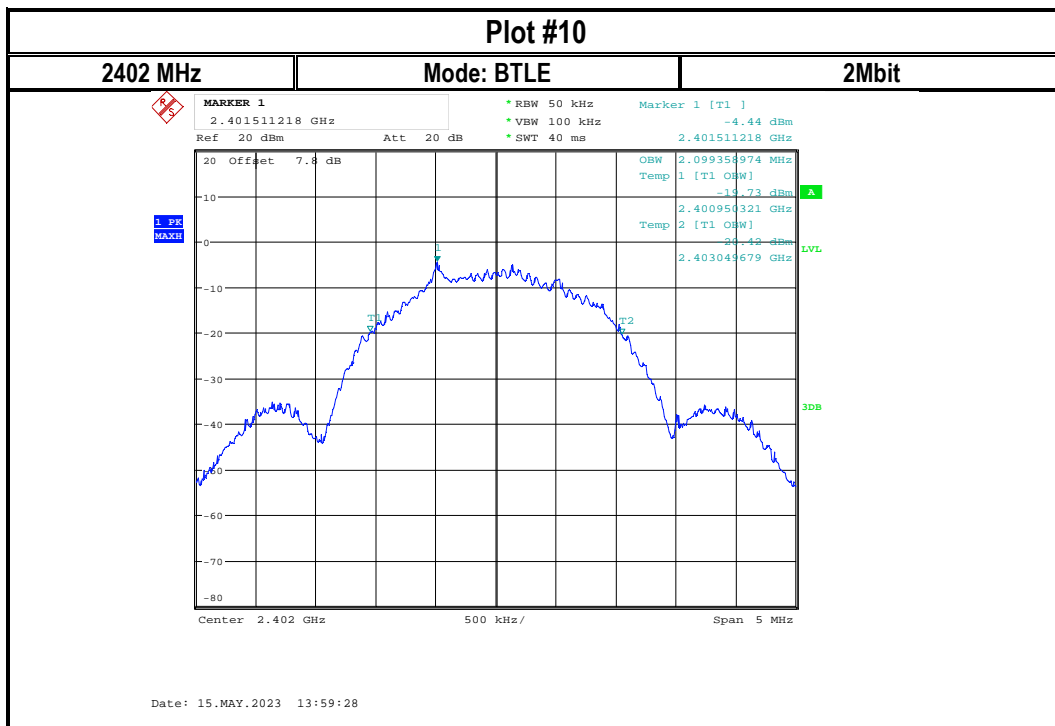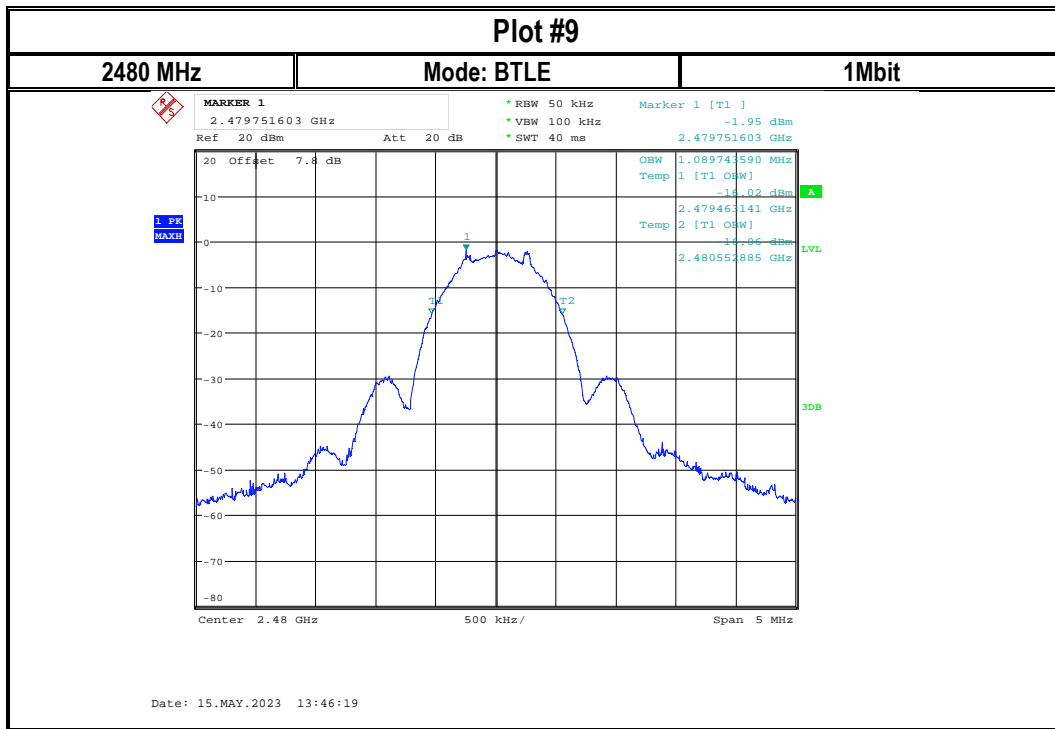

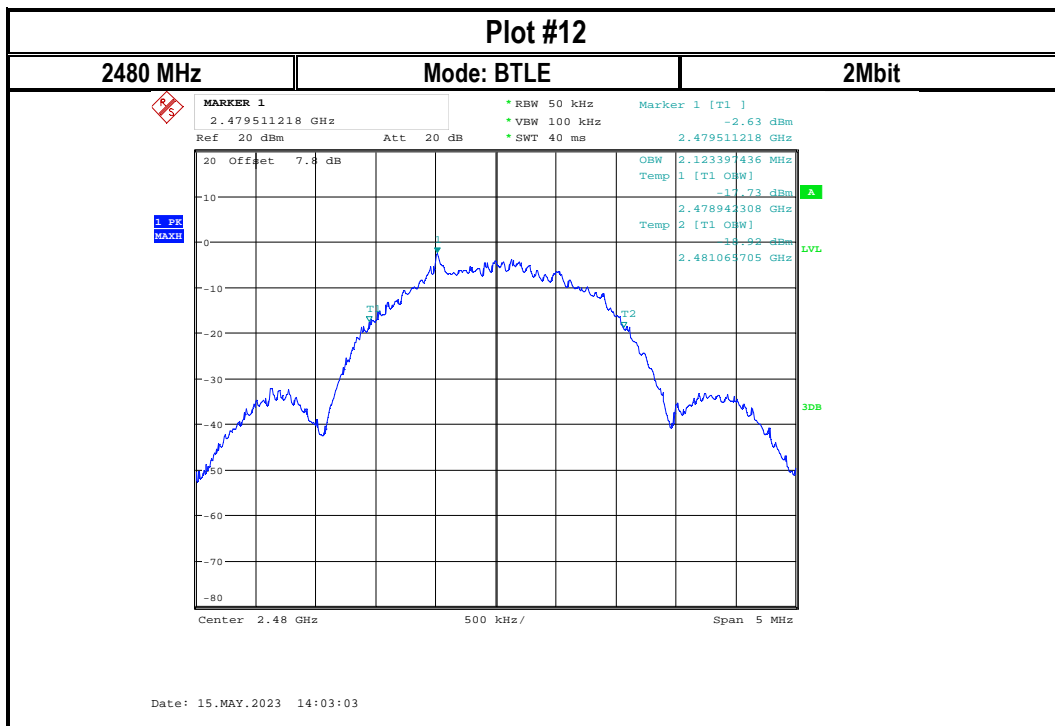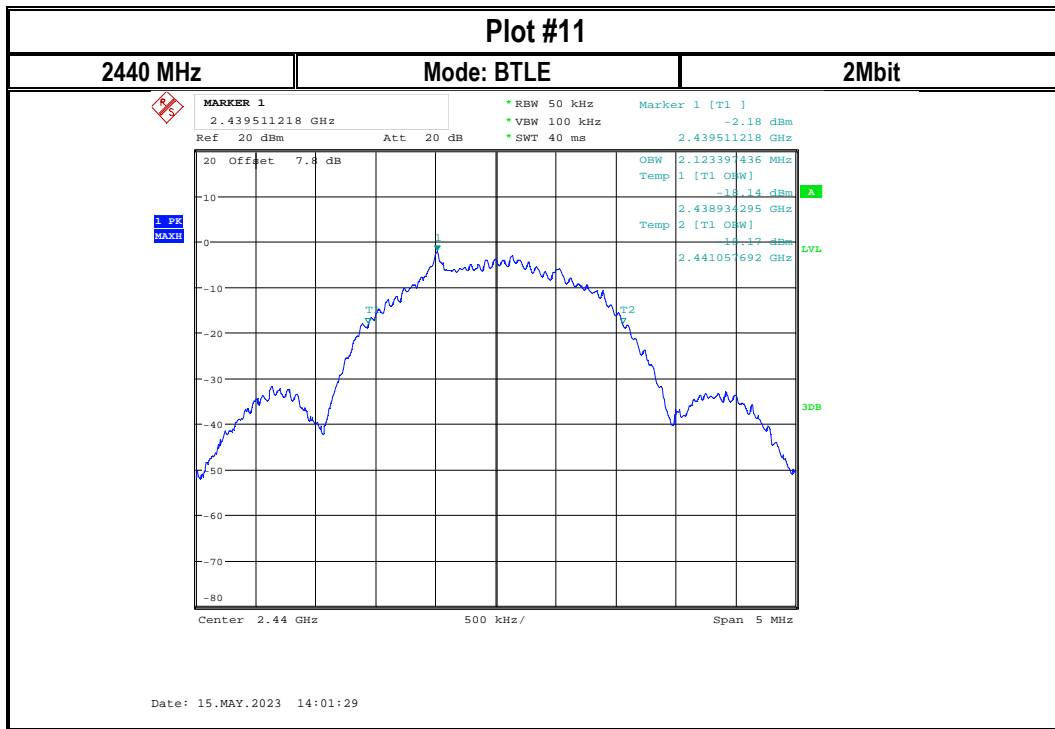

## 8.6 Radiated Transmitter Spurious Emissions and Restricted Bands

### 8.6.1 Measurement according to ANSI C63.10 (2013)

#### Spectrum Analyzer Settings:

- Frequency = 9 KHz – 30 MHz
- RBW = 9 KHz
- Detector: Peak
  
- Frequency = 30 MHz – 1 GHz
- Detector = Peak / Quasi-Peak
- RBW= 120 KHz (<1GHz)
  
- Frequency > 1 GHz
- Detector = Peak / Average
- RBW = 1 MHz
  
- Radiated spurious emissions shall be measured for the transmit frequencies, transmit power, and data rate for the lowest, middle and highest channel in each frequency band of operation and for the highest gain antenna for each antenna type, and using the appropriate parameters and test requirements.
- The highest (or worst-case) data rate shall be recorded for each measurement.
- For testing frequencies below 30 MHz at distance other than the specified in the standard, the limit conversion is calculated by using the FCC materials for the ANSI 63 committee issued on January, 27 1991.

### 8.6.2 Limits:

#### FCC §15.247

- In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

FCC §15.209 & RSS-Gen 8.9

- Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency of emission (MHz)	Field strength (µV/m)	Measurement Distance (m)	Field strength @ 3m (dBµV/m)
0.009–0.490	2400/F(kHz) / -----	300	-
0.490–1.705	24000/F(kHz) / -----	30	-
1.705–30.0	30 / (29.5)	30	-
30–88	100	3	40 dBµV/m
88–216	150	3	43.5 dBµV/m
216–960	200	3	46 dBµV/m
Above 960	500	3	54 dBµV/m

FCC §15.205 & RSS-Gen 8.10

- Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

- Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
  - \*PEAK LIMIT= 74 dBµV/m
  - \*AVG. LIMIT= 54 dBµV/m

**8.6.3 Test conditions and setup:**

Ambient Temperature	EUT Set-Up #	EUT operating mode	Power Input
21.1° C	1	GFSK continuous fixed channel	12 VDC

**8.6.4 Measurement result:**


Plot #	Channel #	Scan Frequency	Limit	Result
1-3	Low	30 MHz – 18 GHz	See section 8.6.2	Pass
4-8	Mid	9 kHz – 40 GHz	See section 8.6.2	Pass
9-11	High	30 MHz – 18 GHz	See section 8.6.2	Pass
12-15	Co-Transmission *	30 MHz – 18 GHz	See section 8.6.2	Pass

\*Note: Co-Transmission was determined by the worst case combination of the following:  
Cell+BLE+Wi-Fi 5GHz.

8.6.5 Measurement Plots:

Plot # 1 Radiated Emission 30MHz – 1000MHz Low Ch


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
129.96	26.59	43.50	16.91	500.0	120.0	134.0	V	83.0	-10.7
187.79	31.65	43.50	11.85	500.0	120.0	167.0	H	221.0	-15.5

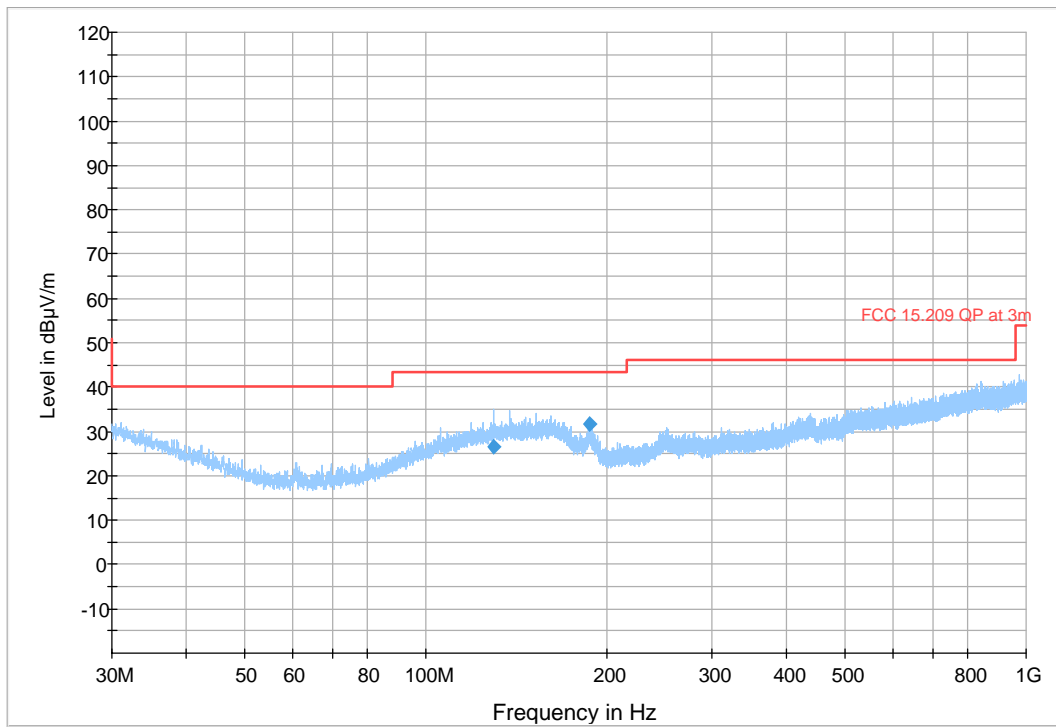

Preview Result 2-AVG    Preview Result 1-PK+    FCC 15.209 QP at 3m    Final\_Result C

**Plot # 2 Radiated Emission 1GHz – 3GHz Low Ch**

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1318.43	---	23.32	53.98	30.66	500.0	1000.0	345.0	V	355.0	2.5
1318.43	36.26	---	73.98	37.72	500.0	1000.0	345.0	V	355.0	2.5

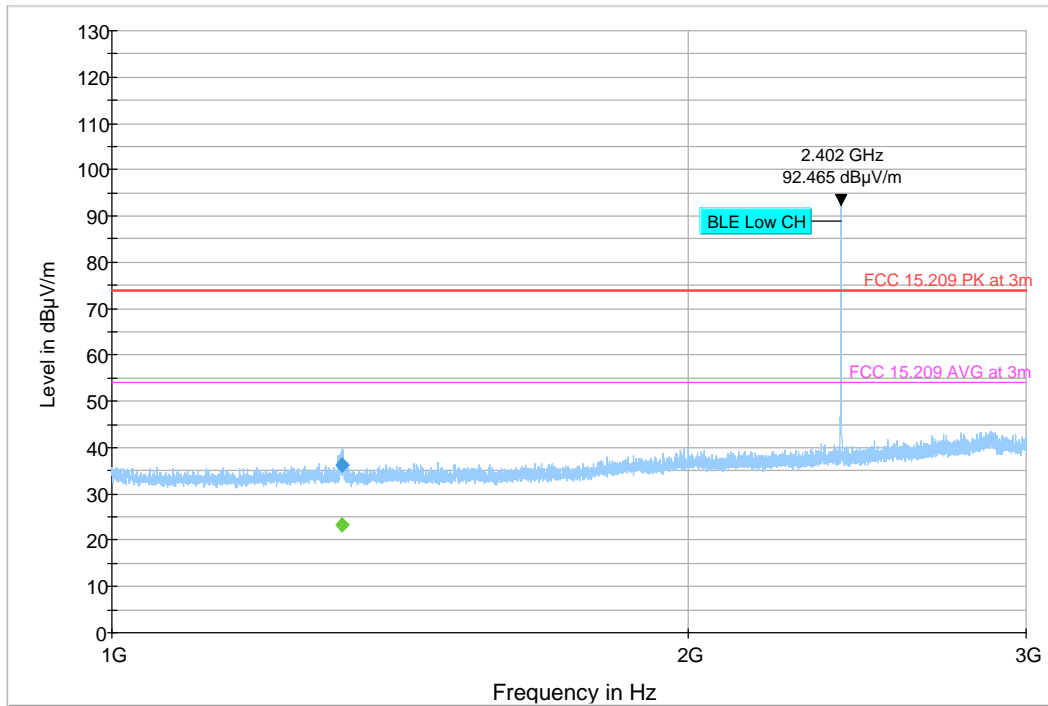


— Preview Result 2-AVG     — Preview Result 1-PK+     — FCC 15.209 PK at 3m  
— FCC 15.209 AVG at 3m     ◆ Final\_Result PK+     ◆ Final\_Result CAV



**Plot # 3 Radiated Emission 3GHz – 18GHz Low Ch**


Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
17737.75	---	40.29	53.98	13.69	500.0	1000.0	116.0	H	209.0	16.2
17737.75	52.89	---	73.98	21.09	500.0	1000.0	116.0	H	209.0	16.2

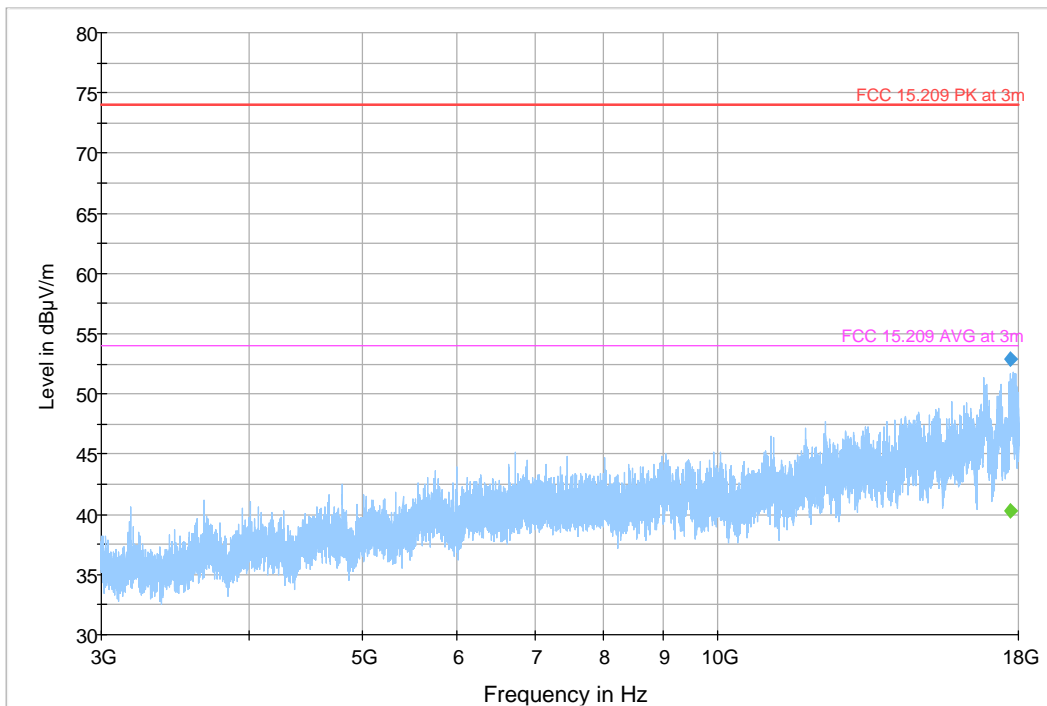

— Preview Result 2-AVG     — Preview Result 1-PK+     — FCC 15.209 PK at 3m  
— FCC 15.209 AVG at 3m     ◆ Final\_Result PK+     ◆ Final\_Result CAV

**Plot # 4 Radiated Emission 9kHz-30MHz Mid Ch**


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
19.41	33.73	56.40	22.67	500.0	9.0	100.0	H	350.0	16.5
29.24	35.25	51.36	16.11	500.0	9.0	100.0	H	291.0	15.9

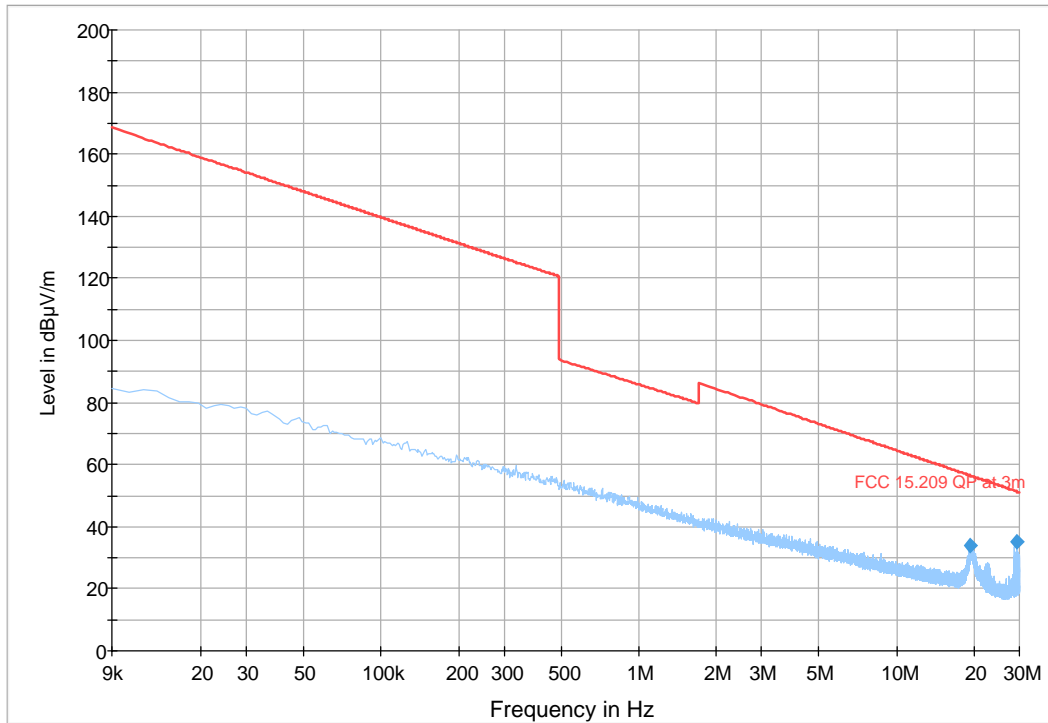

— Preview Result 2-AVG   
 — Preview Result 1-PK+   
 — FCC 15.209 QP at 3m   
 ◆ Final\_Result C

**Plot # 5 Radiated Emission 30MHz – 1000MHz Mid Ch**


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
916.31	22.24	46.02	23.78	500.0	120.0	100.0	V	16.0	-3.0

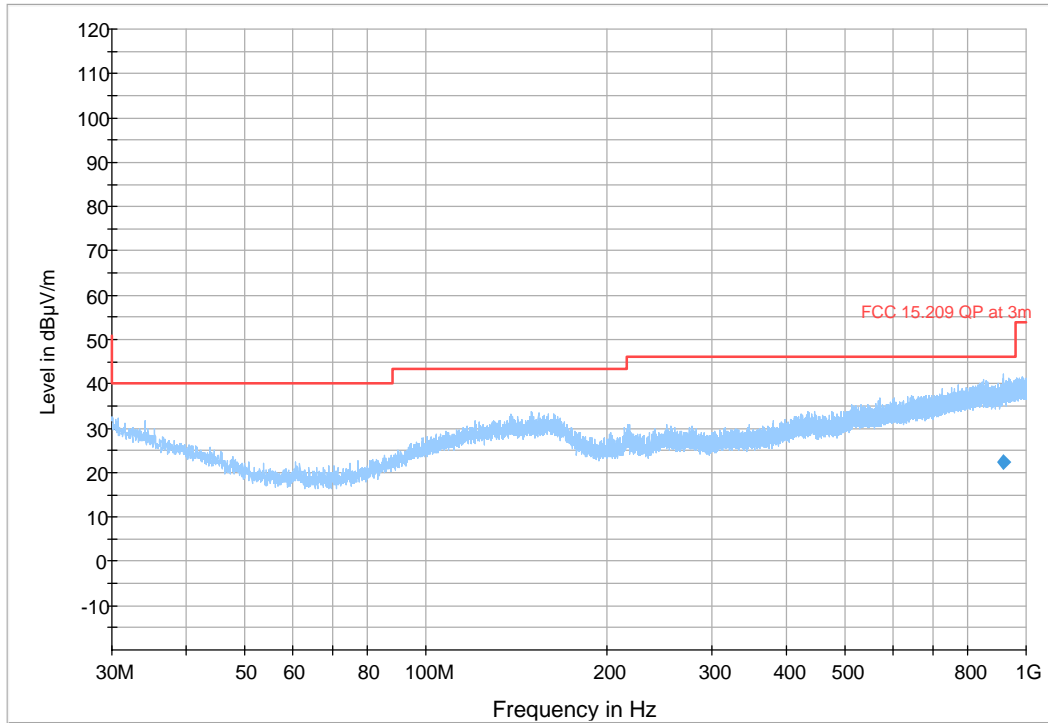

— Preview Result 2-AVG   
 — Preview Result 1-PK+   
 — FCC 15.209 QP at 3m   
 ◆ Final\_Result C

**Plot # 6 Radiated Emission 1GHz – 3GHz Mid Ch**


Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1317.14	---	39.87	53.98	14.11	500.0	1000.0	350.0	H	313.0	2.5
1317.14	52.72	---	73.98	21.26	500.0	1000.0	350.0	H	313.0	2.5

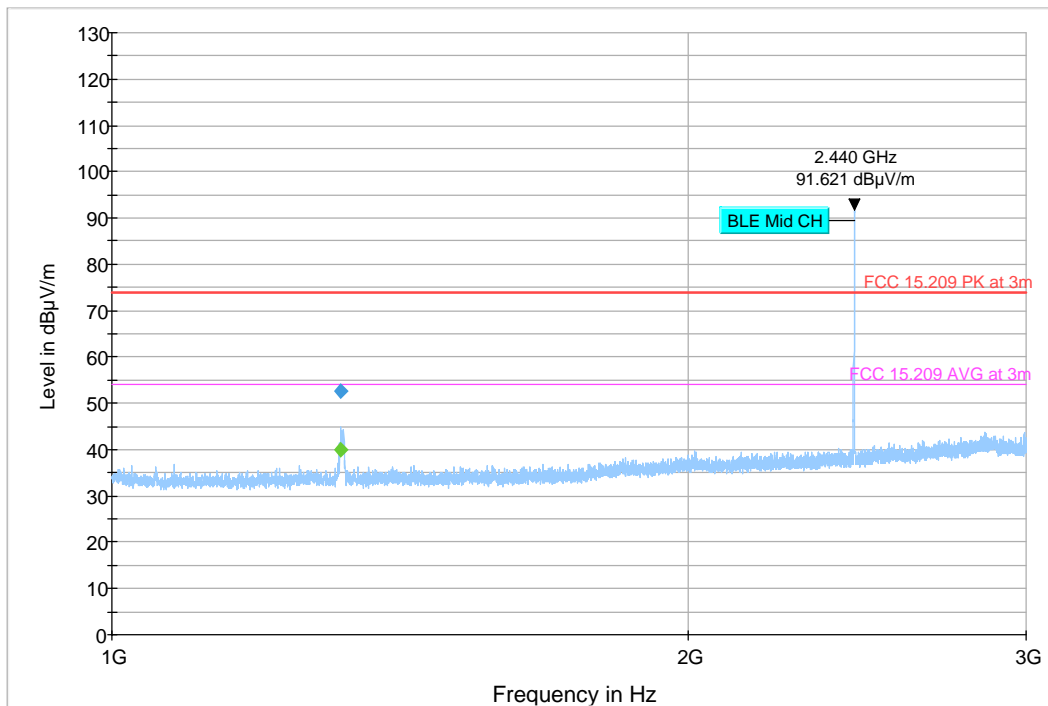

— Preview Result 2-AVG     — Preview Result 1-PK+     — FCC 15.209 PK at 3m  
— FCC 15.209 AVG at 3m     ◆ Final\_Result PK+     ◆ Final\_Result CAV

**Plot # 7 Radiated Emission 3GHz – 18GHz Mid Ch**


Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---		---	---

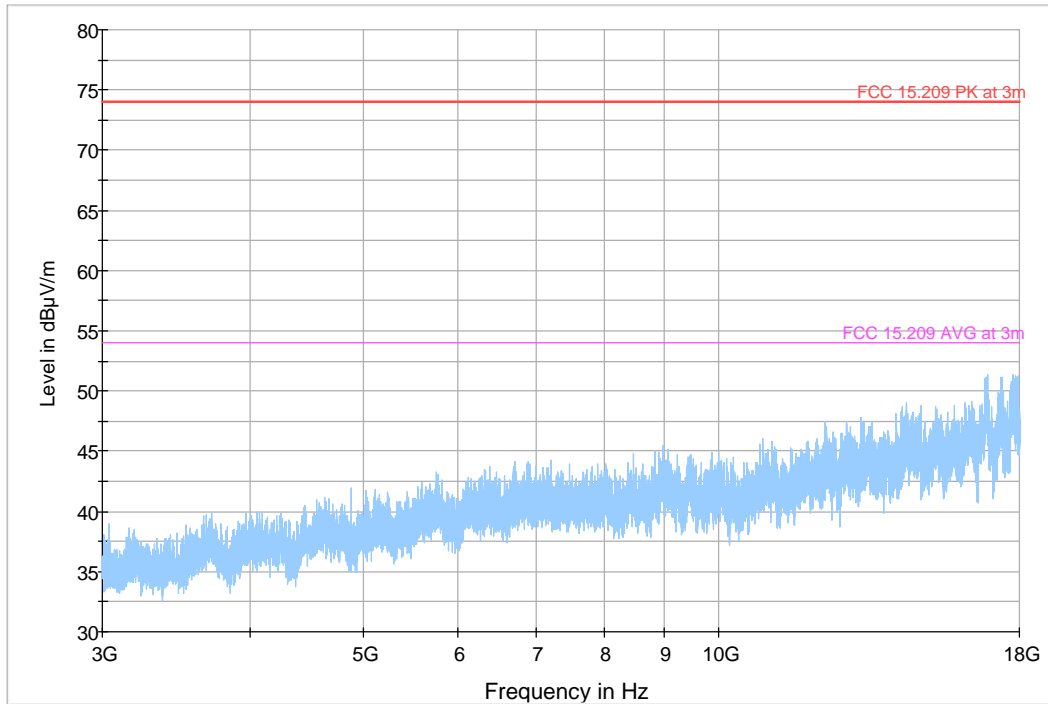

— Preview Result 2-AVG     — Preview Result 1-PK+     — FCC 15.209 PK at 3m  
— FCC 15.209 AVG at 3m     ◆ Final\_Result PK+     ◆ Final\_Result CAV

**Plot # 8 Radiated Emission 18GHz – 40GHz Mid Ch**


Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---		---	---

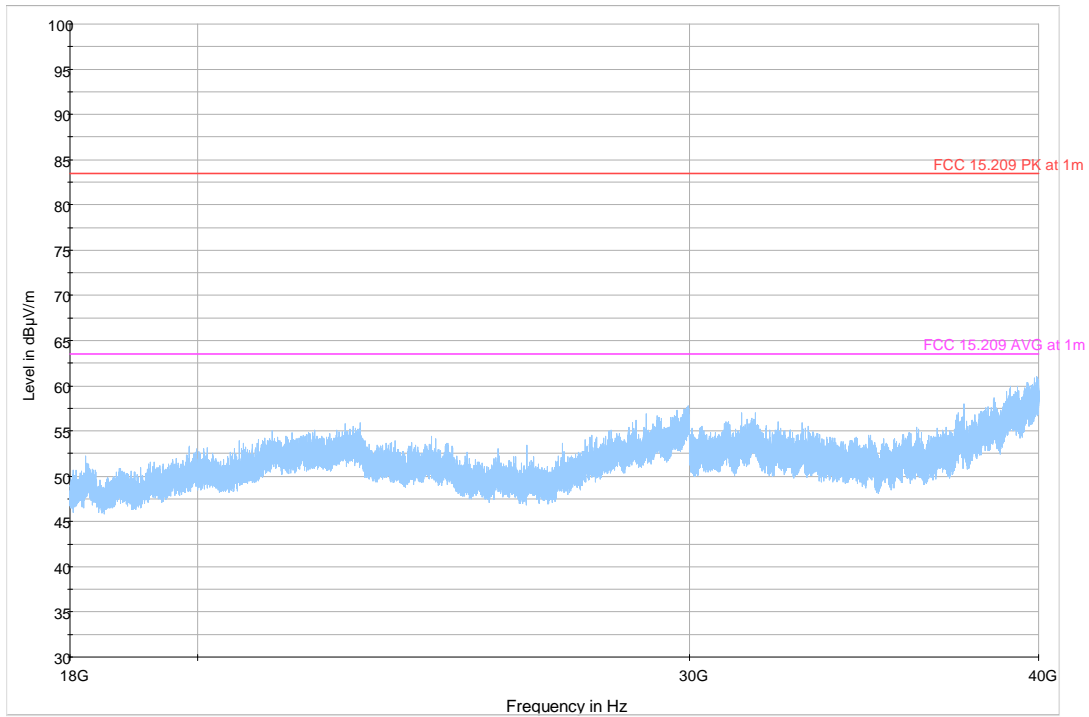

— Preview Result 2-AVG   
 — Preview Result 1-PK+   
 \* Critical\_Freqs AVG   
 \* Critical\_Freqs PK+  
— FCC 15.209 PK at 1m   
— FCC 15.209 AVG at 1m   
\* Final\_Result PK+   
♦ Final\_Result CAV

**Plot # 9 Radiated Emission 30MHz – 1000MHz High Ch**


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
105.66	34.31	43.50	9.19	500.0	120.0	275.0	V	160.0	-13.6

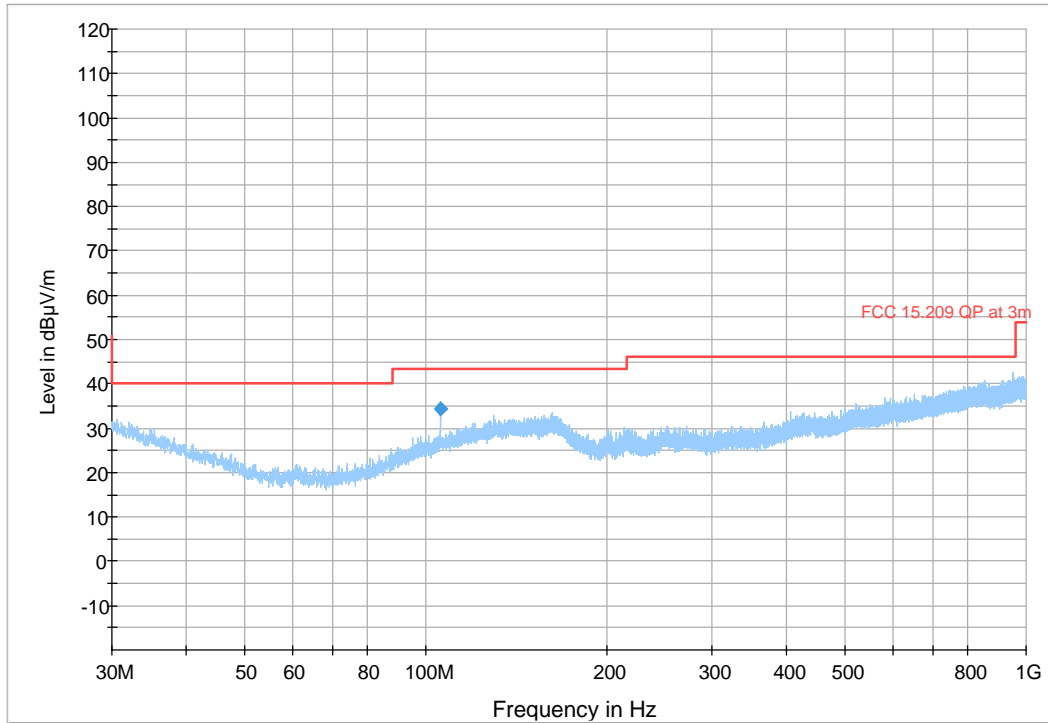

— Preview Result 2-AVG   
 — Preview Result 1-PK+   
 — FCC 15.209 QP at 3m   
 ◆ Final\_Result C

**Plot # 10 Radiated Emission 1GHz – 3GHz High Ch**

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---		---	---

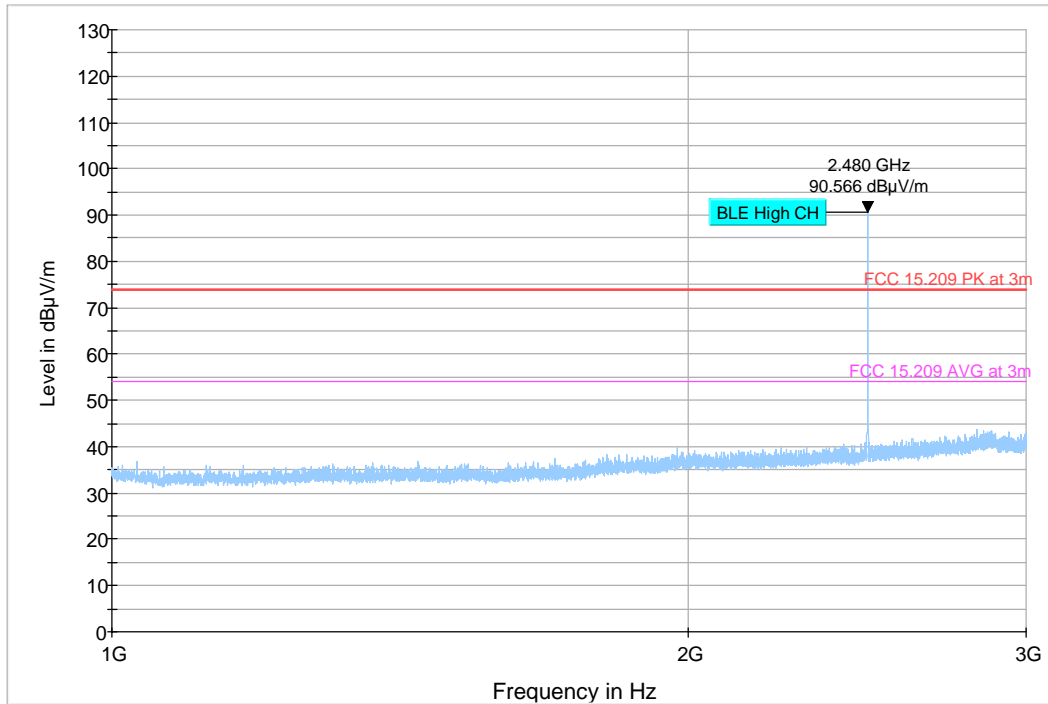


- Preview Result 2-AVG
- Preview Result 1-PK+
- FCC 15.209 PK at 3m
- FCC 15.209 AVG at 3m
- Final\_Result PK+
- Final\_Result CAV



**Plot # 11 Radiated Emission 3GHz – 18GHz High Ch**


Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4631.75	43.39	---	73.98	30.59	500.0	1000.0	218.0	V	314.0	-3.3
4631.75	---	31.05	53.98	22.93	500.0	1000.0	218.0	V	314.0	-3.3
5816.25	45.09	---	73.98	28.89	500.0	1000.0	126.0	H	162.0	-1.1
5816.25	---	33.02	53.98	20.96	500.0	1000.0	126.0	H	162.0	-1.1
7874.00	46.96	---	73.98	27.02	500.0	1000.0	193.0	H	13.0	0.5
7874.00	---	33.49	53.98	20.49	500.0	1000.0	193.0	H	13.0	0.5
9078.00	46.63	---	73.98	27.35	500.0	1000.0	258.0	V	42.0	1.0
9078.00	---	34.27	53.98	19.71	500.0	1000.0	258.0	V	42.0	1.0
12344.75	49.30	---	73.98	24.68	500.0	1000.0	143.0	H	114.0	6.7
12344.75	---	36.13	53.98	17.85	500.0	1000.0	143.0	H	114.0	6.7
17338.25	53.70	---	73.98	20.28	500.0	1000.0	135.0	H	291.0	15.8
17338.25	---	41.04	53.98	12.94	500.0	1000.0	135.0	H	291.0	15.8

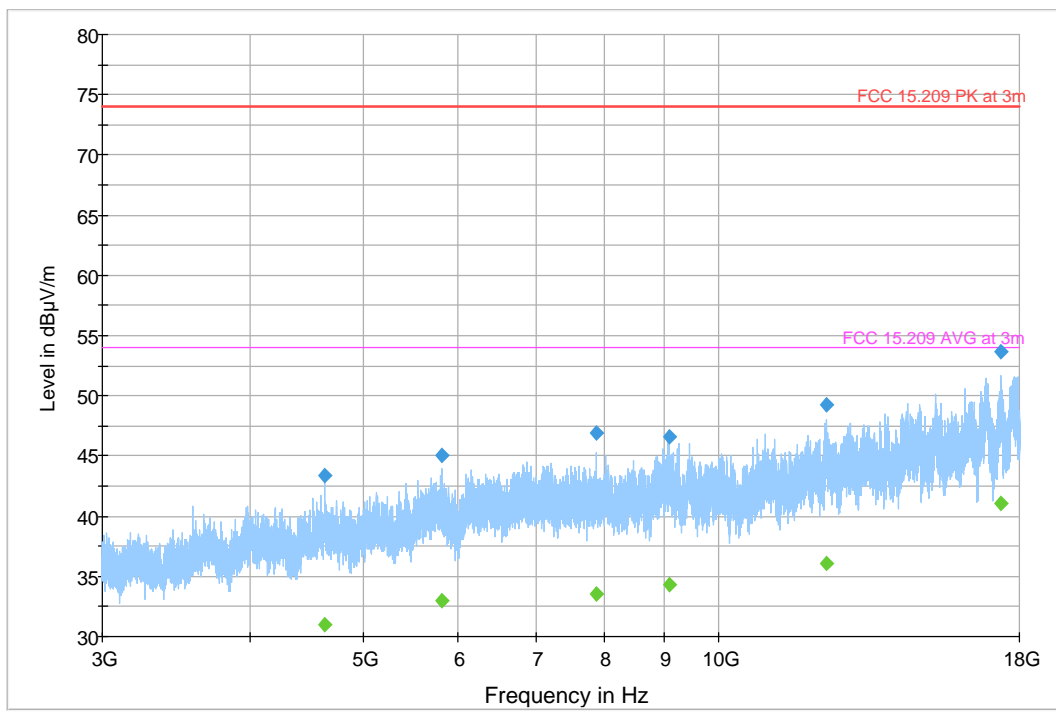

—◆ Preview Result 2-AVG    
 —◆ Preview Result 1-PK+    
 — FCC 15.209 PK at 3m  
— FCC 15.209 AVG at 3m    
 ◆ Final\_Result PK+    
 ◆ Final\_Result CAV

**Plot # 12 Radiated Emission 30MHz – 1000MHz Co-Transmission LTE Band 2+BLE+Wi-Fi 5GHz**


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
110.801	30.277	43.50	13.22	500.0	120.000	173.0	V	20.0	16.2
157.264	27.984	43.50	15.52	500.0	120.000	218.0	H	127.0	17.9

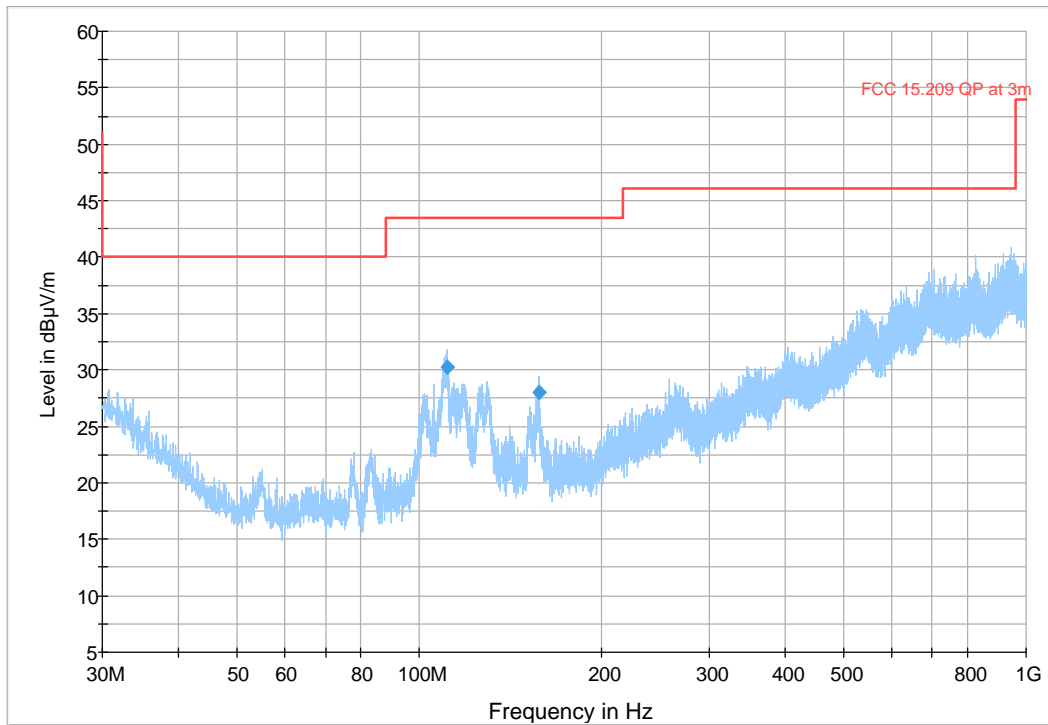

— Preview Result 1-PK+ — FCC 15.209 QP at 3m ◆ Final\_Result QPK

**Plot # 13 Radiated Emission 1GHz – 3GHz Co-Transmission LTE Band 2+BLE+Wi-Fi 5GHz**


Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
---	---	---	---	---	---	---	---		---	---	

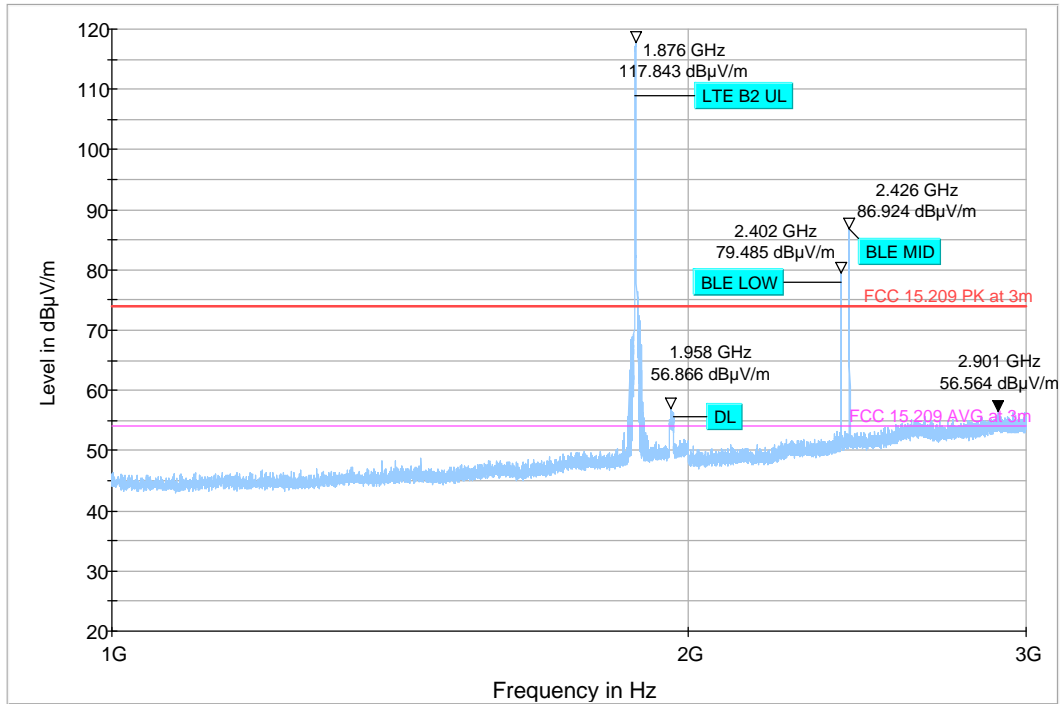

◆ Preview Result 1-PK+ Final\_Result PK+    
 ◆ FCC 15.209 PK at 3m    
 ◆ FCC 15.209 AVG at 3m  
◆ Final\_Result CAV

**Plot # 14 Radiated Emission 3GHz – 6.2GHz Co-Transmission LTE Band 2+BLE+Wi-Fi 5GHz**


Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3338.500	---	37.520	53.98	16.46	500.0	1000.000	286.0	H	195.0	-8.4
3338.500	52.112	---	73.98	21.87	500.0	1000.000	286.0	H	195.0	-8.4
3759.500	---	30.039	53.98	23.94	500.0	1000.000	150.0	H	244.0	-6.1
3759.500	45.270	---	73.98	28.71	500.0	1000.000	150.0	H	244.0	-6.1
5640.000	---	39.238	53.98	14.74	500.0	1000.000	288.0	H	171.0	-2.6
5640.000	54.583	---	73.98	19.40	500.0	1000.000	288.0	H	171.0	-2.6

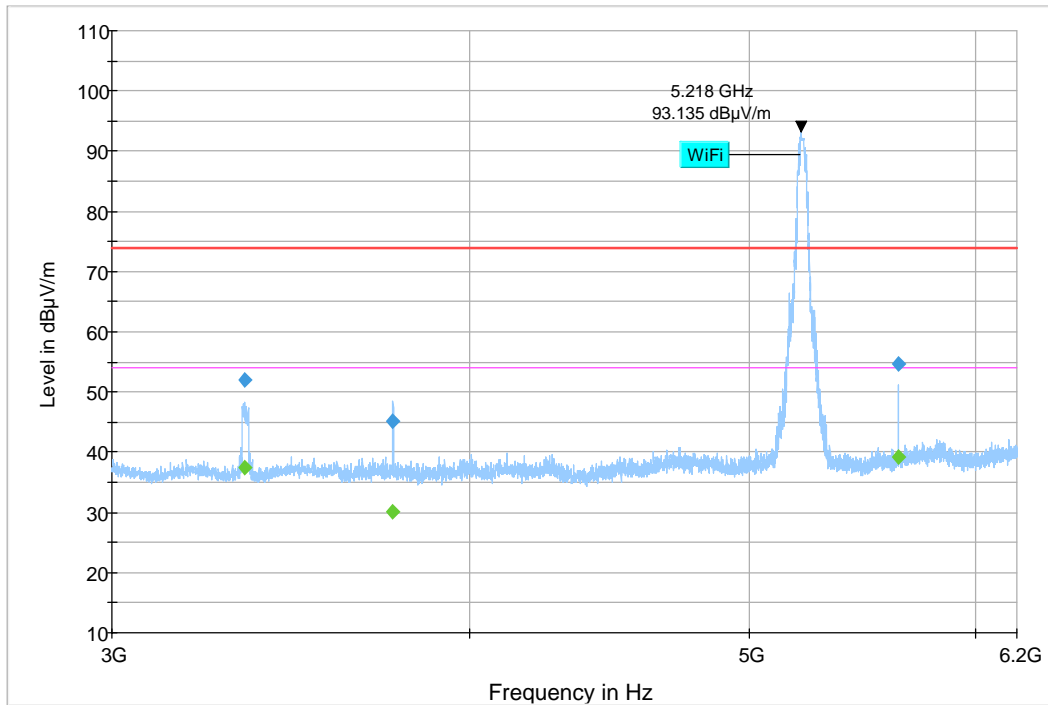

◆ Preview Result 1-PK+    — FCC 15.209 PK at 3m    — FCC 15.209 AVG at 3m  
◆ Final\_Result PK+    ◆ Final\_Result CAV

**Plot # 15 Radiated Emission 6.2GHz – 18GHz Co-Transmission LTE Band 2+BLE+Wi-Fi 5GHz**

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---		---	---

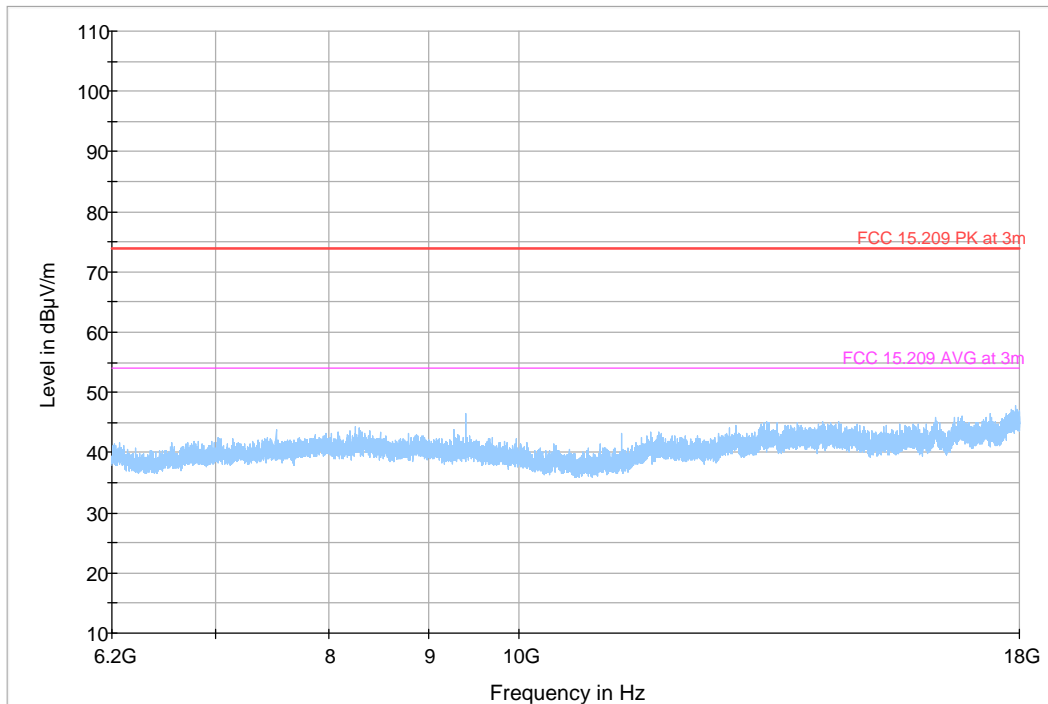

◆ Preview Result 1-PK+ Final\_Result PK+
 ◆ FCC 15.209 PK at 3m Final\_Result CAV
 ◆ FCC 15.209 AVG at 3m

## 9 Test setup photos

Setup photos are included in supporting file name: "EMC\_FARAD\_001\_23001\_15\_247\_BTLE\_DTS\_Setup\_Photos.pdf"

## 10 Test Equipment And Ancillaries Used For Testing

Equipment Type	Manufacturer	Model	Serial #	Calibration Cycle	Last Calibration Date
ACTIVE LOOP ANTENNA	ETS LINDGREN	6507	00161344	3 YEARS	10/30/2020
BILOG ANTENNA	A.H. SYSTEMS	BiLA2G	569	3 YEARS	11/16/2021
HORN ANTENNA	EMCO	3115	00035111	3 YEARS	9/30/2021
HORN ANTENNA	ETS LINDGREN	3117-PA	00169547	3 YEARS	9/1/2020
HORN ANTENNA	ETS LINDGREN	3116C-PA	00169535	3 YEARS	9/23/2020
ESW.EMI TEST RECEIVER	ROHDE & SCHWARZ	ESW44	101715	3 YEARS	9/14/2021
Spectrum Analyzer	Rohde & Schwarz	FSU. Spectrum Analyzer	200302	3 YEARS	9/13/2021

**Note:** Equipment used meets the measurement uncertainty requirements as required per applicable standards for 95% confidence levels. Calibration due dates, unless defined specifically, falls on the last day of the month. Items indicated "N/A" for cal status either do not specifically require calibration or is internally characterized before use.

11 History

Date	Template Revision	Changes to report	Prepared by
2023-08-16	EMC_FARAD_001_23001_15.247_BTLE_DTS	Initial Version	Art Thammanavarat
2023-08-17	EMC_FARAD_001_23001_15.247_BTLE_DTS_Rev1	<u>Report Revised</u> 1. Section 3.1: Corrected Typo & Updated table.	Art Thammanavarat

<<< The End >>>