Page 56 of 79

Report No.: CTC20231526E02




3.5. 20dB Bandwidth

Limit

N/A

Test Configuration



Test Procedure

- 1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- 2. OCB and 20dB Spectrum Setting:
 - (1) Set RBW = $1\% \sim 5\%$ occupied bandwidth.
 - (2) Set the video bandwidth (VBW) ≥ 3 RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.

Note: The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.


Test Mode


Please refer to the clause 2.4.

Test Mode	Frequency (MHz)	99% Bandwidth (MHz)	20 dB Bandwidth (MHz)	20dB Bandwidth *2/3 (MHz)
	2402	0.950	1.041	0.694
DH5	2441	0.968	1.074	0.716
	2480	0.971	1.047	0.698
	2402	1.214	1.335	0.890
2DH5	2441	1.223	1.338	0.892
	2480	1.238	1.341	0.894
	2402	1.211	1.302	0.868
3DH5	2441	1.214	1.296	0.864
	2480	1.220	1.287	0.858



99% Bandwidth:

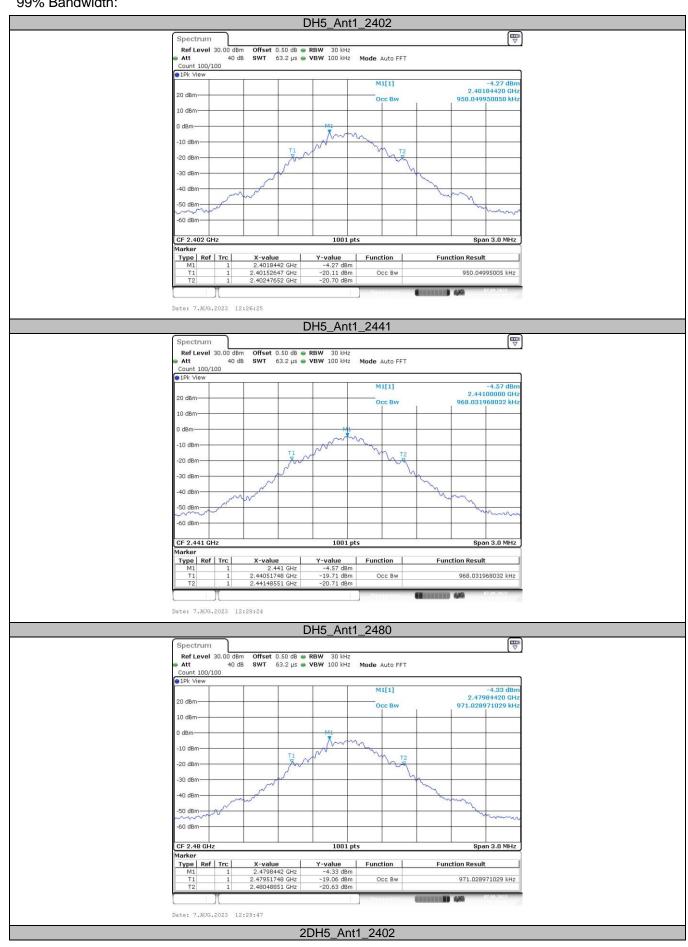

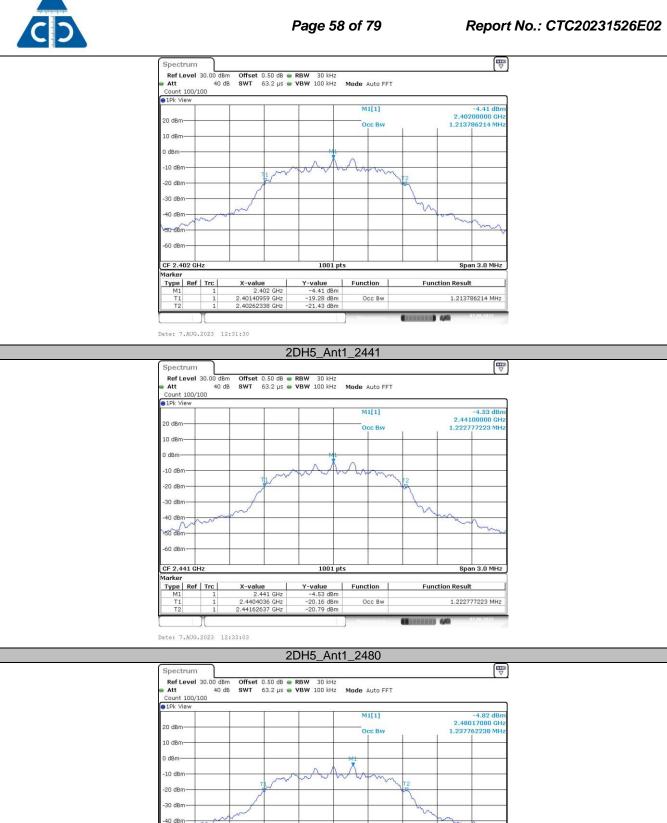

CTC Laboratories, Inc.

3DH5_Ant1_2402

Function

Function Result

1.237762238 MHz

50 dBm

CF 2.48 GH Type Ref Trc

Date: 7.AUG.2023 12:34:27

Function

CF 2.48 GH Type Ref Trc

中国国家认证认可监督管理委员会


Date: 7.AUG.2023 12:38:57

Function Result


1.21978022 MHz




20dB Bandwidth:

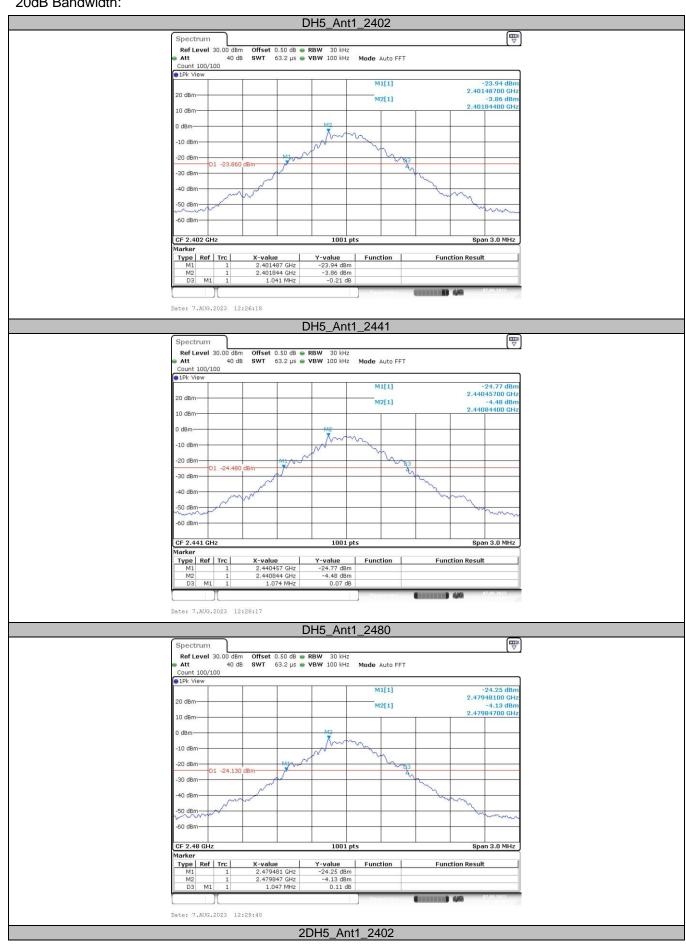




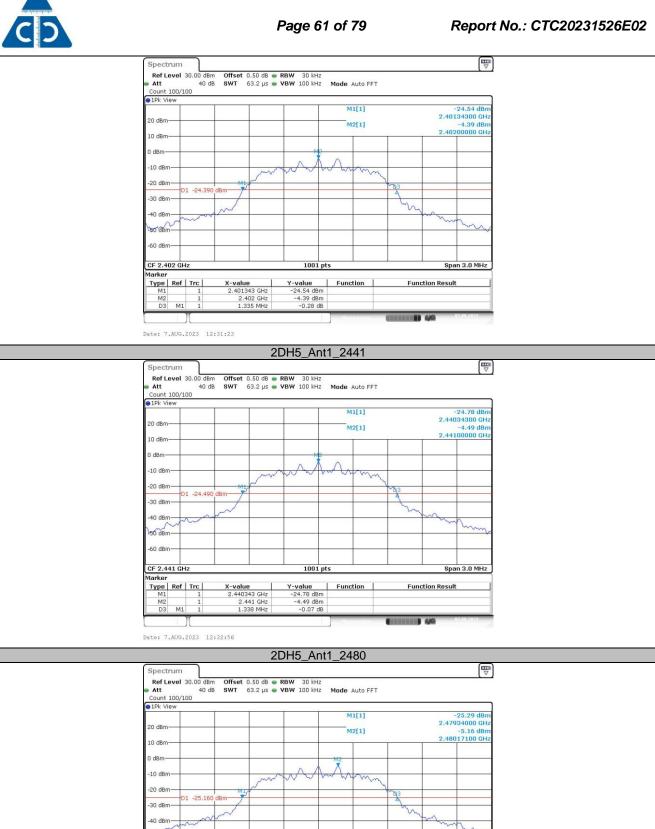

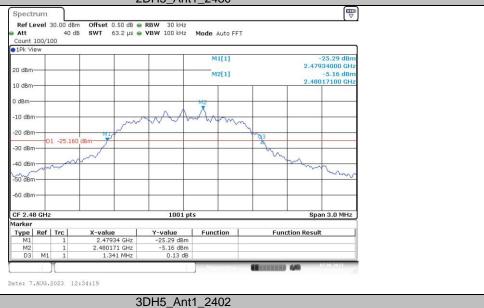



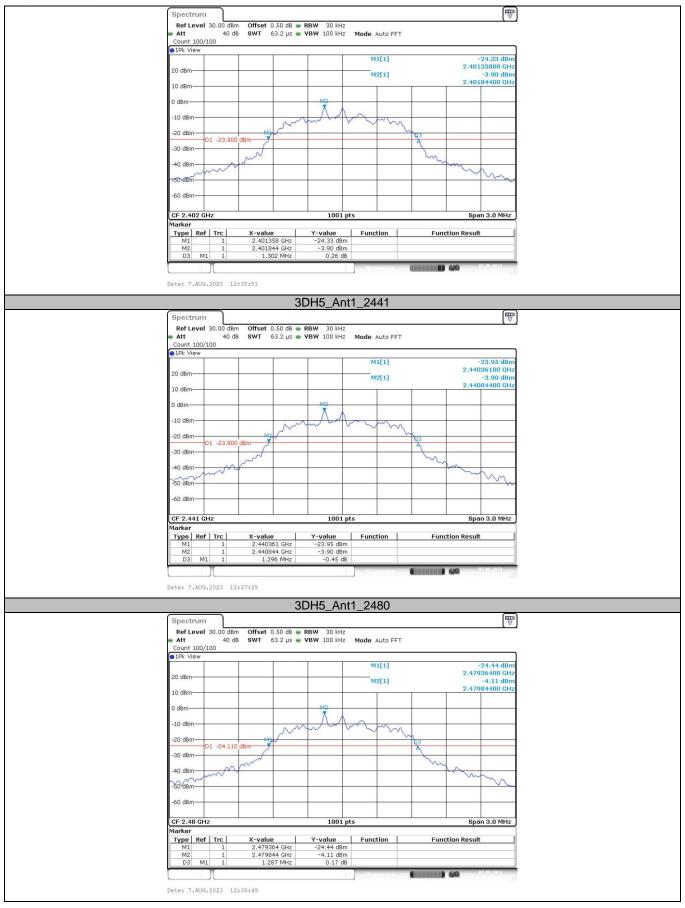

Page 63 of 79

Report No.: CTC20231526E02



3.6. Channel Separation

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1) / RSS-247 5.1 b

Test Item	Limit	Frequency Range (MHz)
Channel Separation	>25kHz or >two-thirds of the 20 dB bandwidth Which is greater	2400~2483.5

Test Configuration



Test Procedure

- 1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- 2. Spectrum Setting:
 - (1) Set RBW = 100 kHz.
 - (2) Set the video bandwidth (VBW) ≥ 3 RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.

Test Mode

Please refer to the clause 2.4.

Test Mode	Frequency (MHz)	Result (MHz)	Limit (MHz)	Verdict
DH5	Нор	1.058	≥0.716	PASS
2DH5	Нор	1.070	≥0.892	PASS
3DH5	Нор	0.974	≥0.864	PASS



Test Graphs:





Page 65 of 79

Report No.: CTC20231526E02



3.7. Number of Hopping Channel

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(iii) / RSS-247 5.1 d

Section	Test Item	Limit	
15.247 (a)(iii) RSS-247 5.1 d	Number of Hopping Channel	≥15	

Test Configuration



Test Procedure


- 1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- 2. Spectrum Setting:
 - (1) Peak Detector: RBW=100 kHz, VBW ≥ RBW, Sweep time= Auto.

Test Mode

Please refer to the clause 2.4.

Test Mode	Frequency (MHz)	Result [Num]	Limit [Num]	Verdict
DH5	Нор	79	≥15	PASS
2DH5	Нор	79	≥15	PASS
3DH5	Нор	79	≥15	PASS



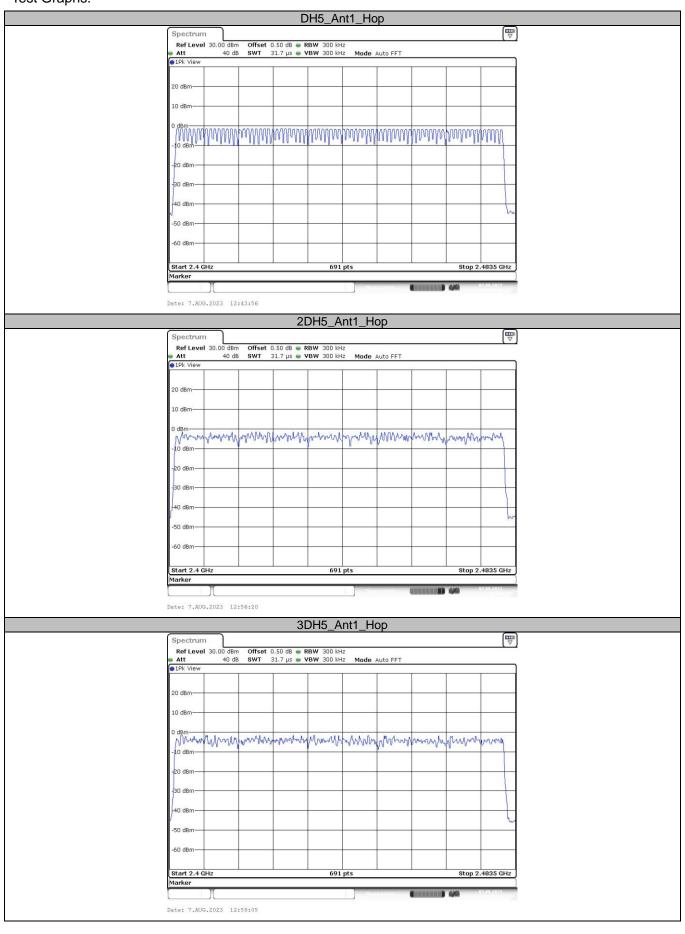

Page 67 of 79

Report No.: CTC20231526E02




3.8. Dwell Time

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(iii) / RSS-247 5.1 d

Section	Test Item	Limit
15.247 (a)(iii) RSS-247 5.1 d	Average Time of Occupancy	0.4 sec

Test Configuration



Test Procedure


- 1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- 2. Spectrum Setting:
 - (1) Spectrum Setting: RBW=1MHz, VBW≥RBW.
 - (2) Use video trigger with the trigger level set to enable triggering only on full pulses.
 - (3) Sweep Time is more than once pulse time.
- (4) Set the center frequency on any frequency would be measure and set the frequency span to zero.
 - (5) Measure the maximum time duration of one single pulse.
 - (6) Set the EUT for packet transmitting.

Test Mode

Please refer to the clause 2.4.


Test Mode	Freq(MHz)	Burst Width [ms]	Total Hops [Num]	Result[ms]	Limit[s]	Verdict
DH1	Нор	0.375	320	120.00	≤0.4	PASS
DH3	Нор	1.631	160	260.96	≤0.4	PASS
DH5	Нор	2.879	106.67	307.09	≤0.4	PASS
2DH1	Нор	0.385	320	123.20	≤0.4	PASS
2DH3	Нор	1.636	160	261.76	≤0.4	PASS
2DH5	Нор	2.884	106.67	307.63	≤0.4	PASS
3DH1	Нор	0.386	320	123.52	≤0.4	PASS
3DH3	Нор	1.636	160	261.76	≤0.4	PASS
3DH5	Нор	2.887	106.67	307.95	≤0.4	PASS


Test plot as follows:

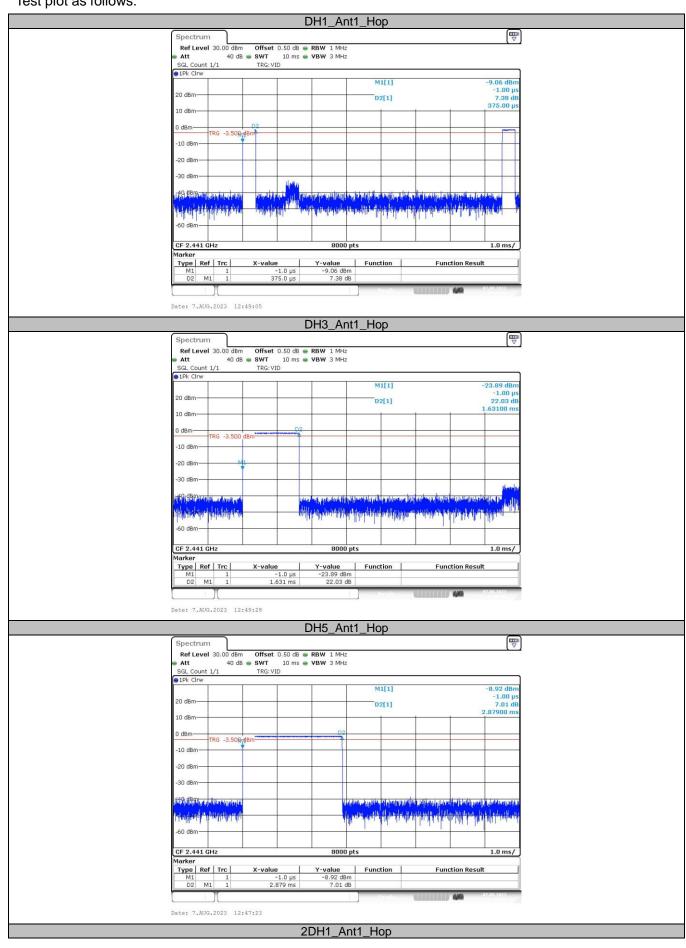





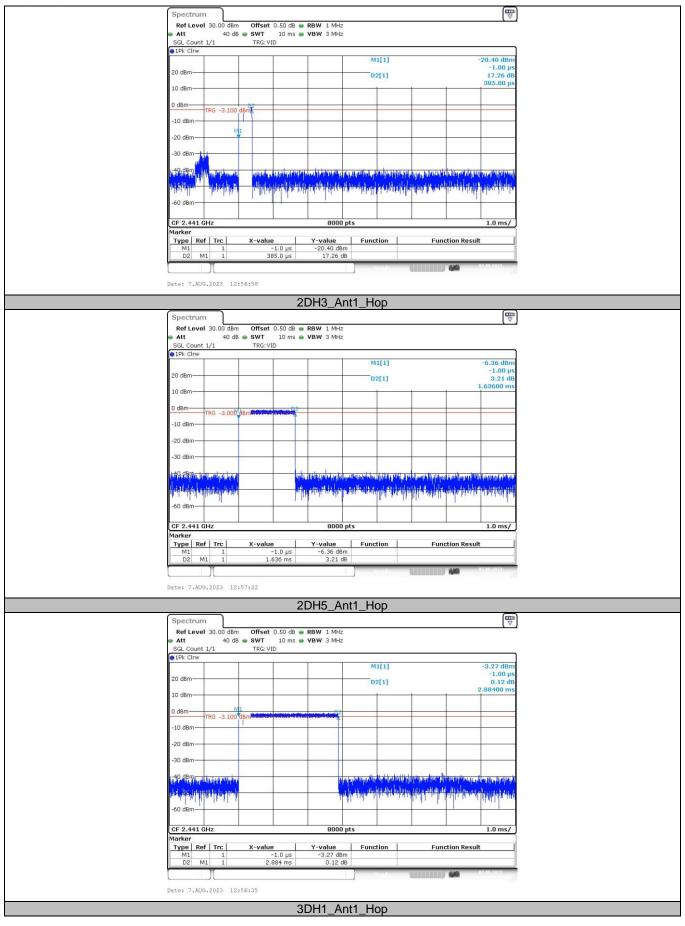

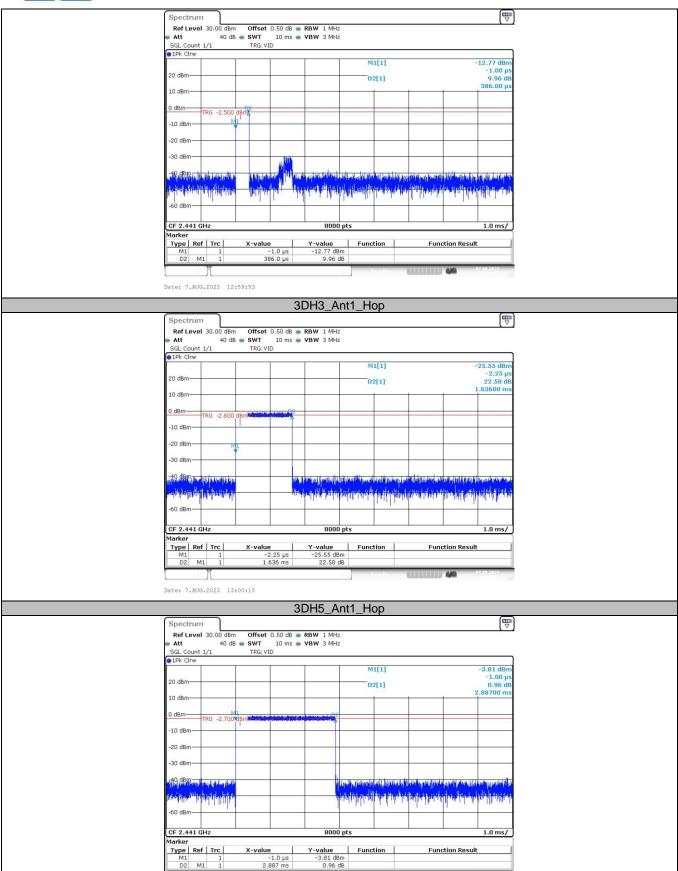

Date: 7.AUG.2023 12:59:21

Page 71 of 79

Report No.: CTC20231526E02




3.9. Peak Output Power

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(1) / RSS-247 5.4 b

Section	on Test Item Limit		Frequency Range (MHz)
FCC CFR 47 Maximum Conduction Part15.247 (b)(1) Output Power		Hopping Channels≥75, Power <1W(30dBm); Others <125mW(21dBm)	2400~2483.5
ISED RSS-247 5.4 b	EIRP	4 Watt or 36dBm	2400~2483.5

Test Configuration



Test Procedure


- 1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- 2. Spectrum Setting:
 - (1) Set RBW > 20dB Bandwidth.
 - (2) Set VBW ≥ RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.
 - (6) Span = Approximately five times the 20dB bandwidth, centered on a hopping channel.


Test Mode

Please refer to the clause 2.4.

Test Mode	Frequency(MHz)	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
	2402	-1.49	≤30	PASS
DH5	2441	-1.47	≤30	PASS
	2480	-1.79	≤30	PASS
	2402	-0.78	≤30	PASS
2DH5	2441	-0.94	≤30	PASS
	2480	-1.25	≤30	PASS
	2402	-0.58	≤30	PASS
3DH5	2441	-0.59	≤30	PASS
	2480	-0.69	≤30	PASS



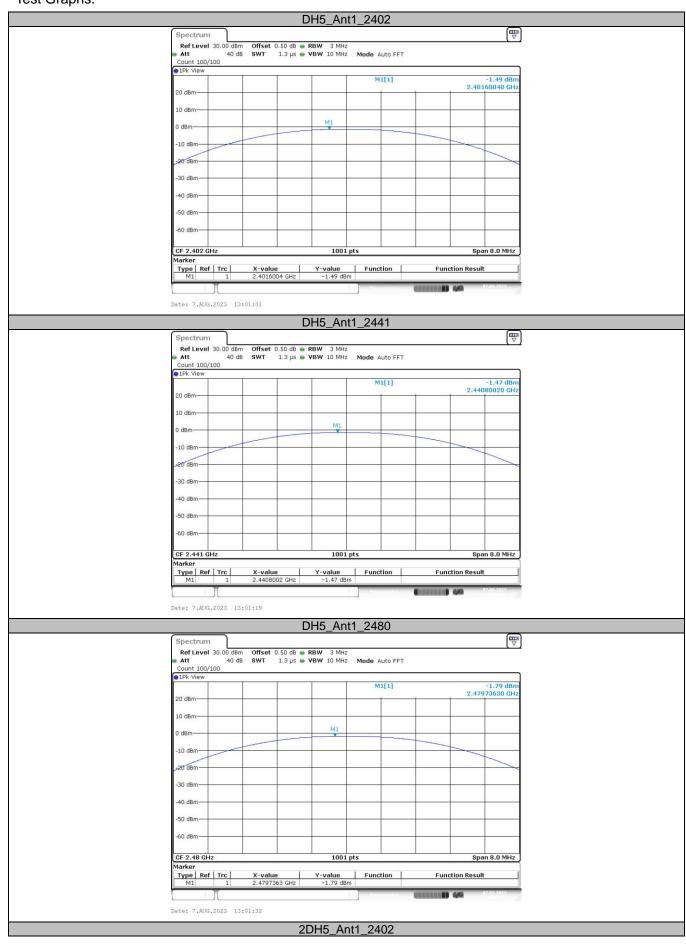


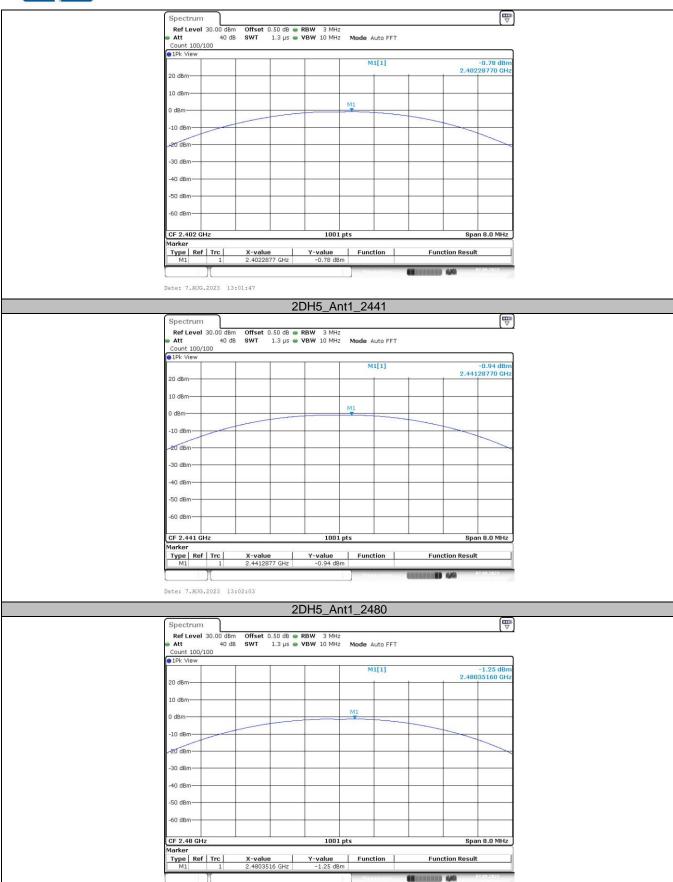

3DH5_Ant1_2402

Date: 7.AUG.2023 13:02:23



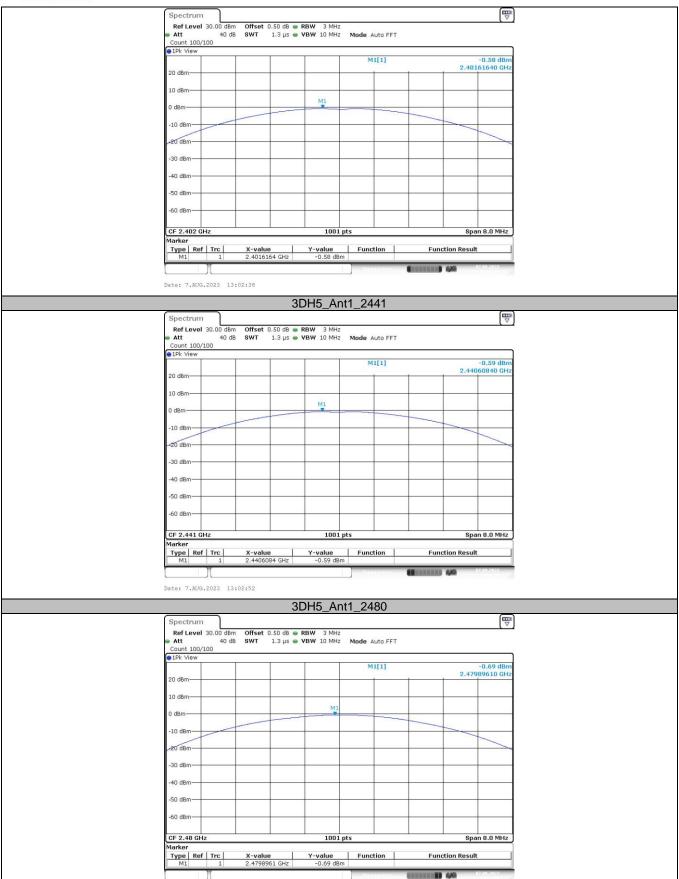

Date: 7.AUG.2023 13:03:03

Page 75 of 79

Report No.: CTC20231526E02




3.10. Duty Cycle

Limit

None, for report purposes only.

Test Configuration



Test Procedure

- 1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- 2. The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 DTS Meas Guidance v05r02.
- 3. Spectrum Setting:

Set analyzer center frequency to test channel center frequency.

Set the span to 0Hz. Set the RBW to 10MHz. Set the VBW to 10MHz.

Detector: Peak. Sweep time: Auto.

Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

Test Mode


Please refer to the clause 2.4.


Test Mode	Freq(MHz)	ON Time	Period	Duty Cycle	1/T Minimum	Final Setting for
	i req(ivii iz)	[ms]	[ms]	[%]	VBW (kHz)	VBW (kHz)
	2402	2.88	3.76	76.60	0.35	1
DH5	2441	2.88	3.76	76.60	0.35	1
	2480	2.88	3.76	76.60	0.35	1
	2402	2.88	3.76	76.60	0.35	1
2DH5	2441	2.88	3.76	76.60	0.35	1
	2480	2.88	3.76	76.60	0.35	1
	2402	2.88	3.74	77.01	0.35	1
3DH5	2441	2.88	3.74	77.01	0.35	1
	2480	2.88	3.74	77.01	0.35	1



CTC Laboratories, Inc.



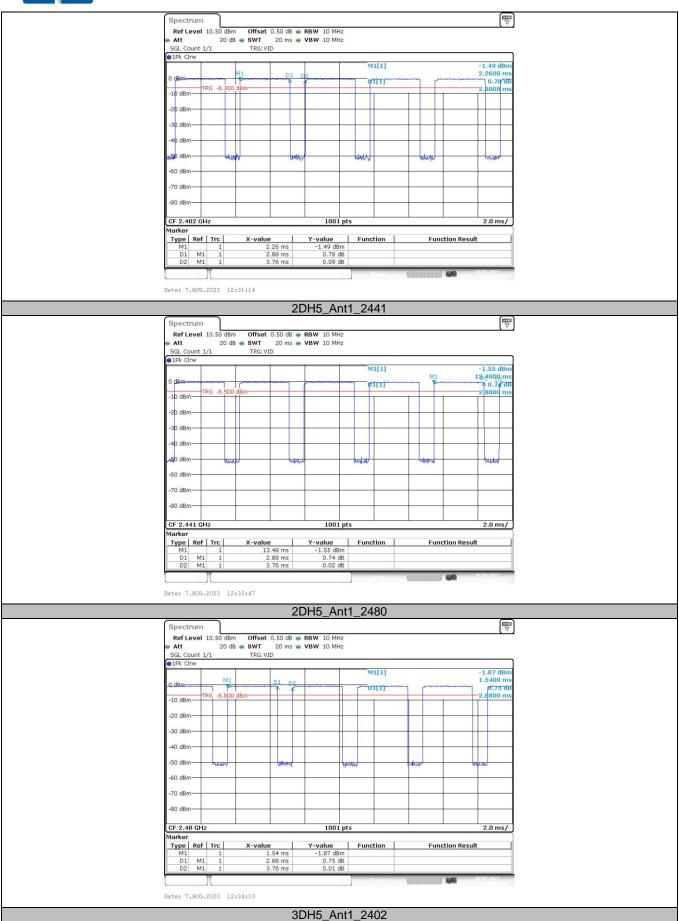

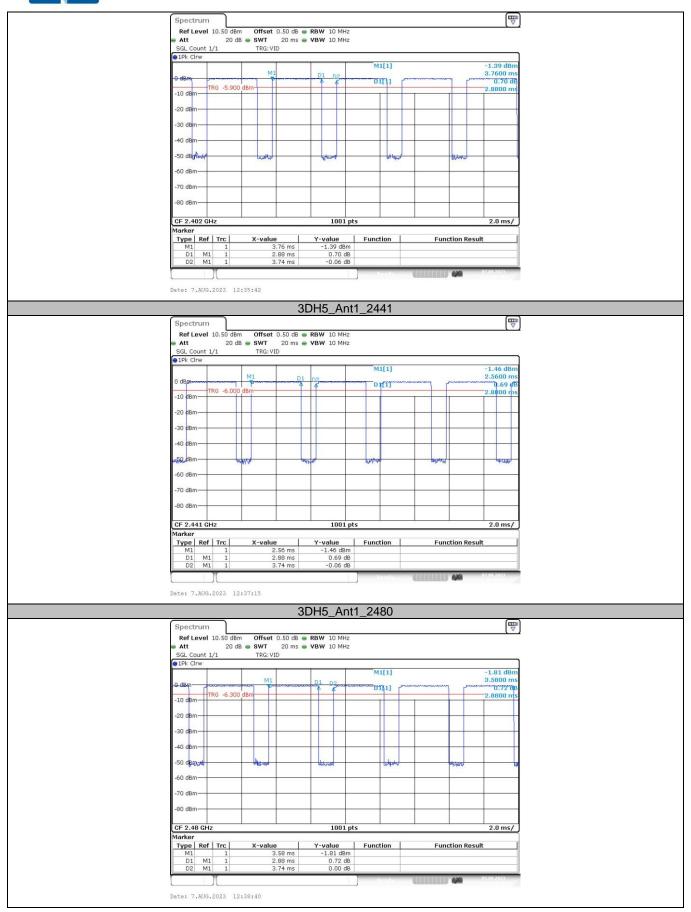





3.11. Antenna Requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i)

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

Test Result

The directional gain of the antenna is less than 6dBi, please refer to the EUT internal photographs antenna photo.



