


EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-30
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

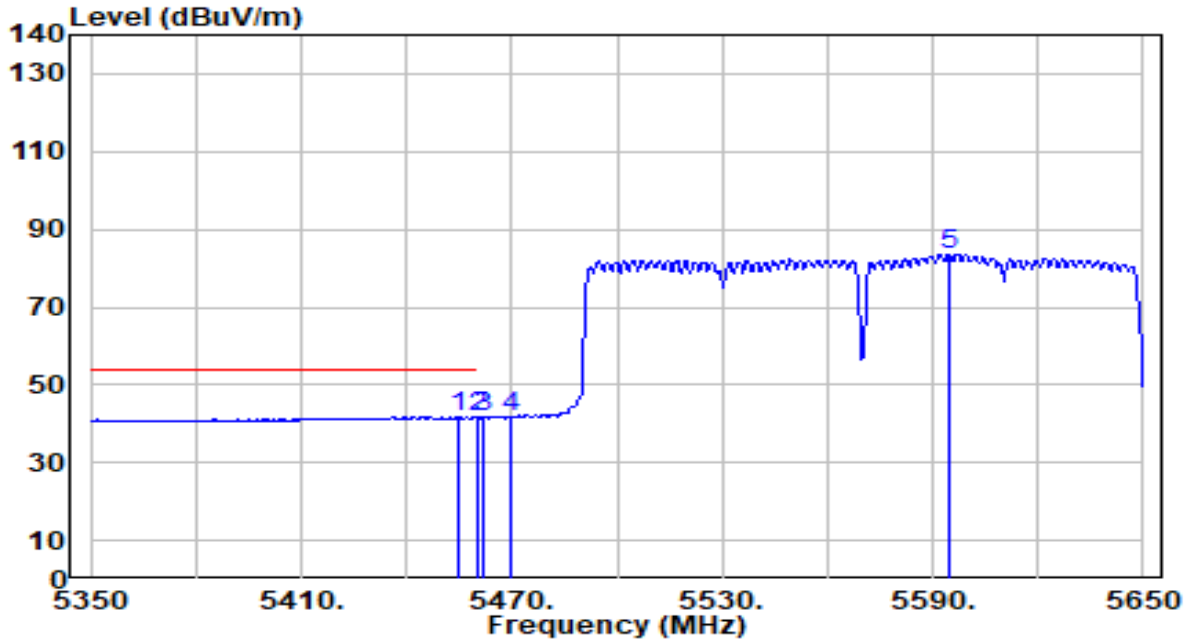


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5454.700	41.11	0.64	41.74	-12.26	54.00	215	25	Average
2	5460.000	40.97	0.65	41.63	-12.37	54.00	215	25	Average
3	5462.200	41.23	0.66	41.89	N/A	N/A	215	25	Average
4	5470.000	41.20	0.69	41.89	N/A	N/A	215	25	Average
5	5594.800	82.44	1.14	83.58	N/A	N/A	215	25	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-30
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

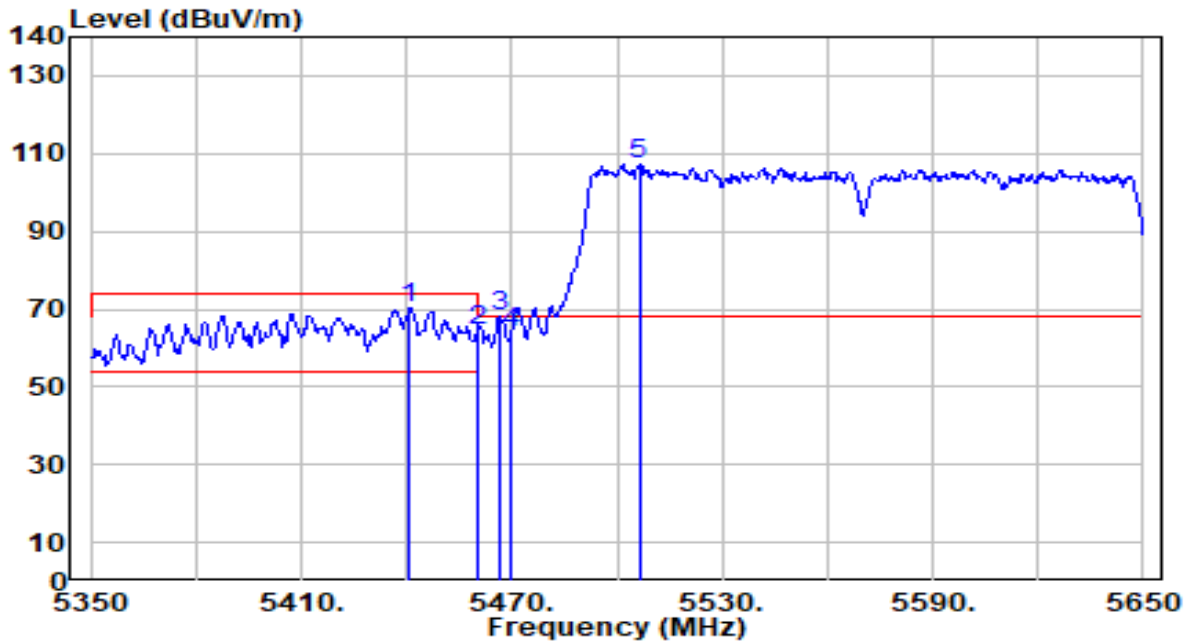


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5440.900	69.65	0.59	70.24	-3.76	74.00	105	5	Peak
2	5460.000	63.54	0.65	64.19	-9.81	74.00	105	5	Peak
3	* 5466.400	67.41	0.68	68.09	-0.11	68.20	105	5	Peak
4	5470.000	63.31	0.69	64.00	-4.20	68.20	105	5	Peak
5	5506.300	106.47	0.81	107.29	N/A	N/A	105	5	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-30
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

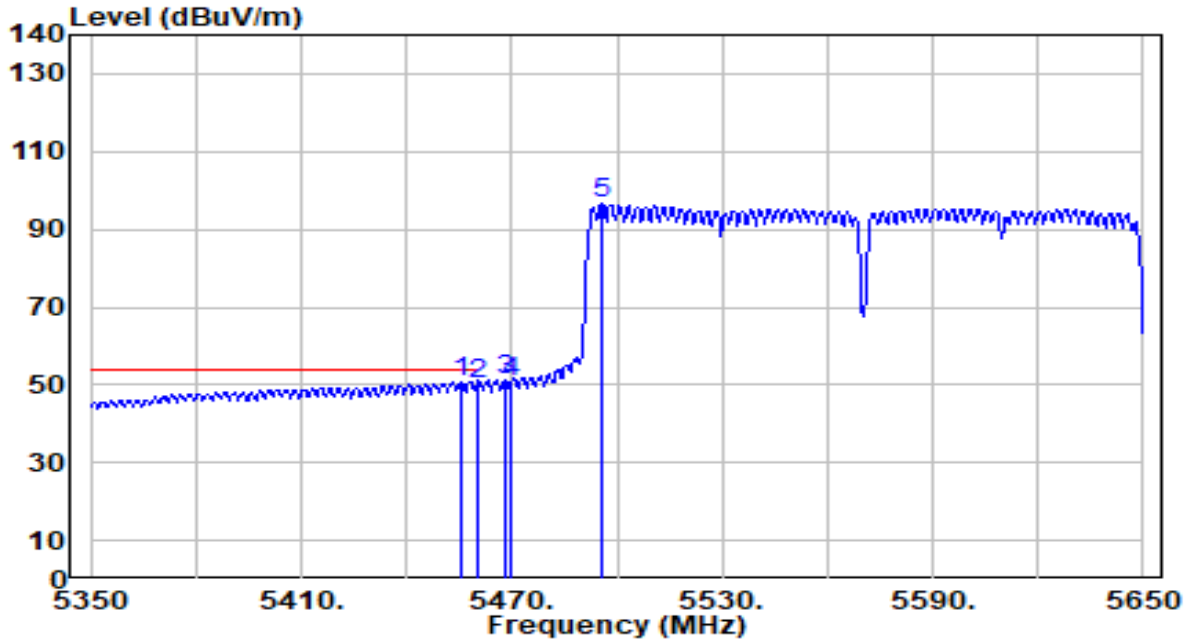


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	50.24	0.64	50.88	-3.12	54.00	105	5	Average
2		49.79	0.65	50.44	-3.56	54.00	105	5	Average
3		50.71	0.68	51.39	N/A	N/A	105	5	Average
4		50.10	0.69	50.79	N/A	N/A	105	5	Average
5		95.84	0.78	96.62	N/A	N/A	105	5	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-30
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

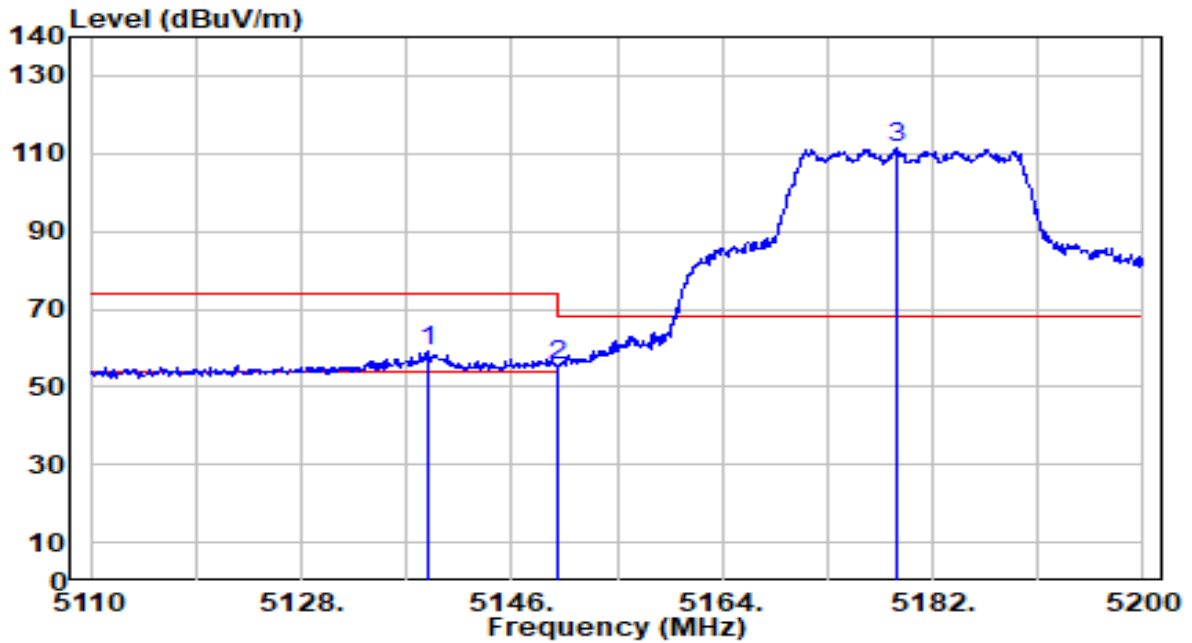


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5138.800	58.51	0.68	59.19	-14.81	74.00	188	342	Peak
2		5150.000	54.80	0.68	55.48	-18.52	74.00	188	342	Peak
3		5179.030	110.57	0.67	111.24	N/A	N/A	188	342	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-30
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

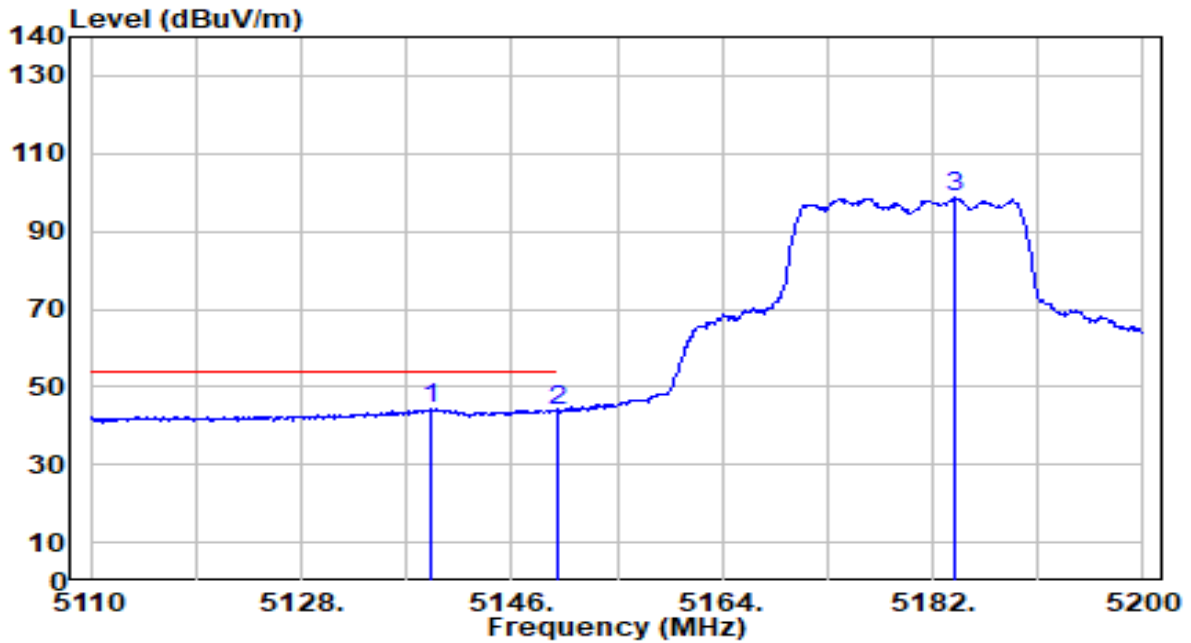


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5138.980	43.75	0.68	44.43	-9.57	54.00	188	342	Average
2		5150.000	43.34	0.68	44.02	-9.98	54.00	188	342	Average
3		5183.980	98.06	0.67	98.73	N/A	N/A	188	342	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-30
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

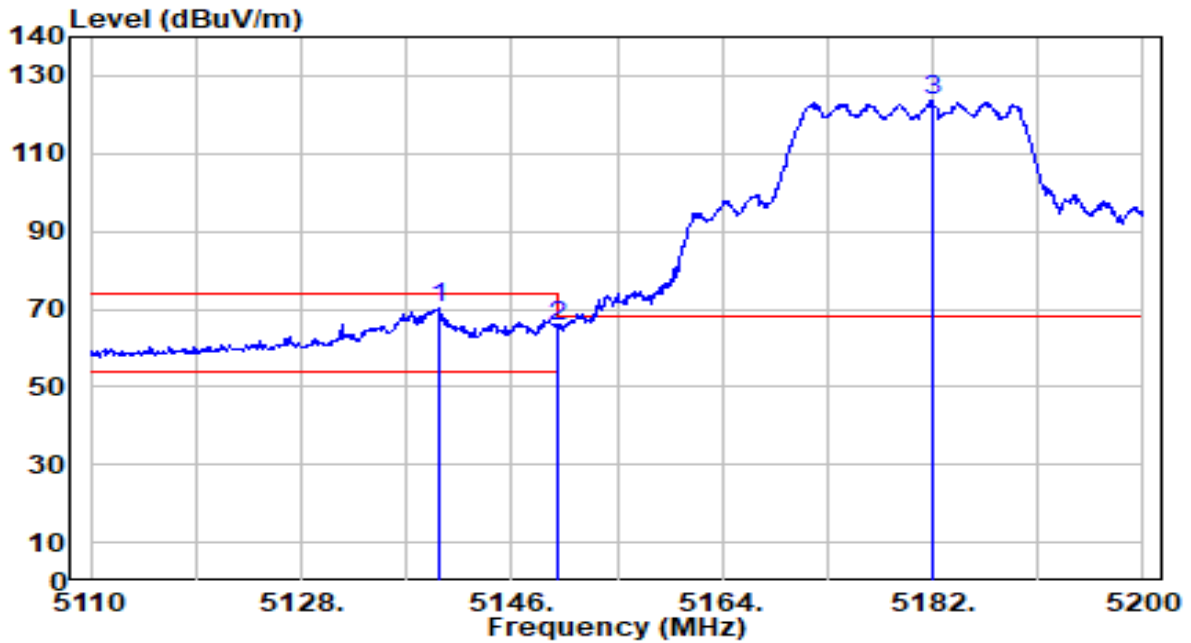


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5139.700	69.50	0.68	70.18	-3.82	74.00	103	0	Peak
2		5150.000	65.03	0.68	65.71	-8.29	74.00	103	0	Peak
3		5181.910	122.74	0.67	123.41	N/A	N/A	103	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-30
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

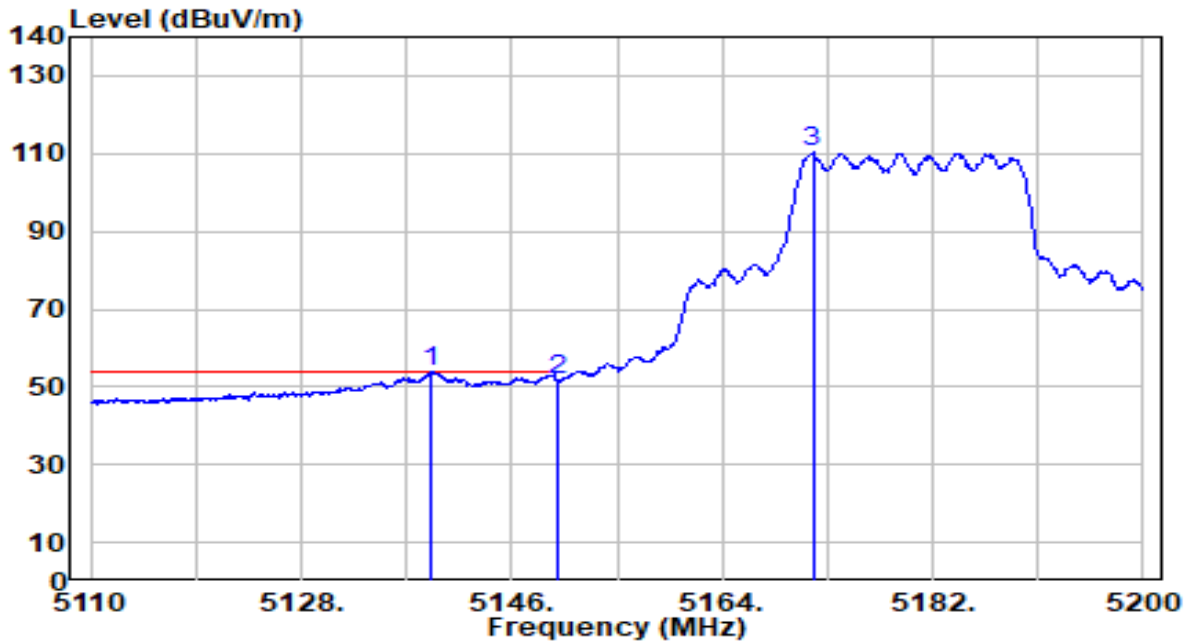


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	53.21	0.68	53.89	-0.11	54.00	103	0	Average
2		51.10	0.68	51.78	-2.22	54.00	103	0	Average
3		109.59	0.67	110.26	N/A	N/A	103	0	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-30
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

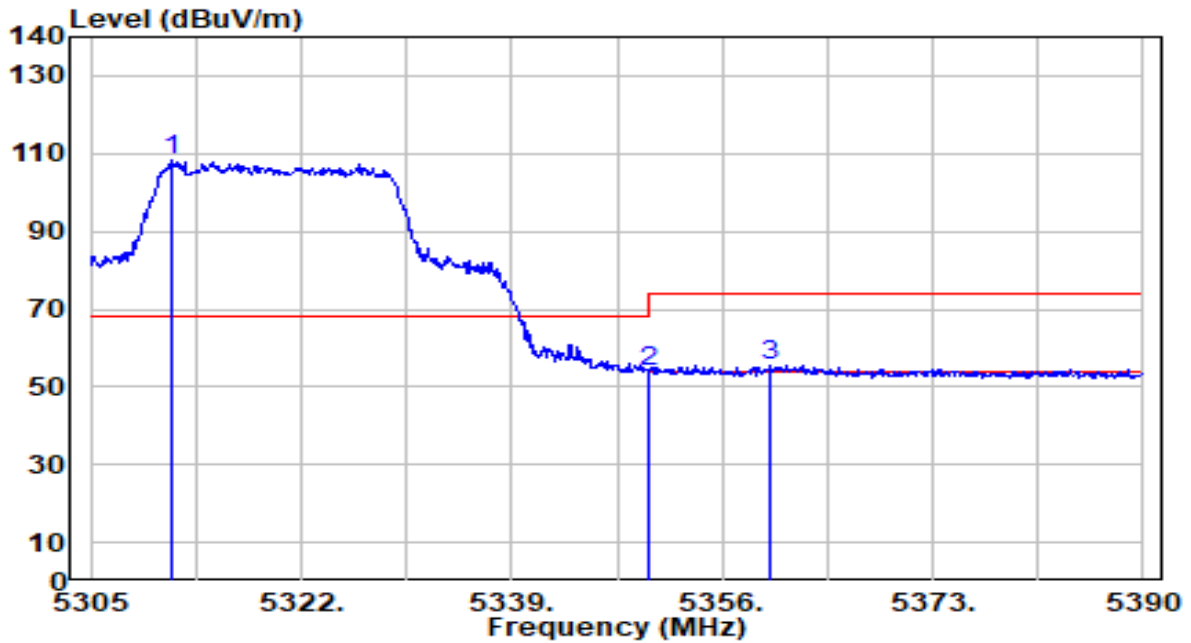


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5311.630	107.54	0.55	108.08	N/A	N/A	203	341	Peak
2	5350.000	53.55	0.51	54.05	-19.95	74.00	203	341	Peak
3	* 5359.910	55.01	0.49	55.51	-18.49	74.00	203	341	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-30
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

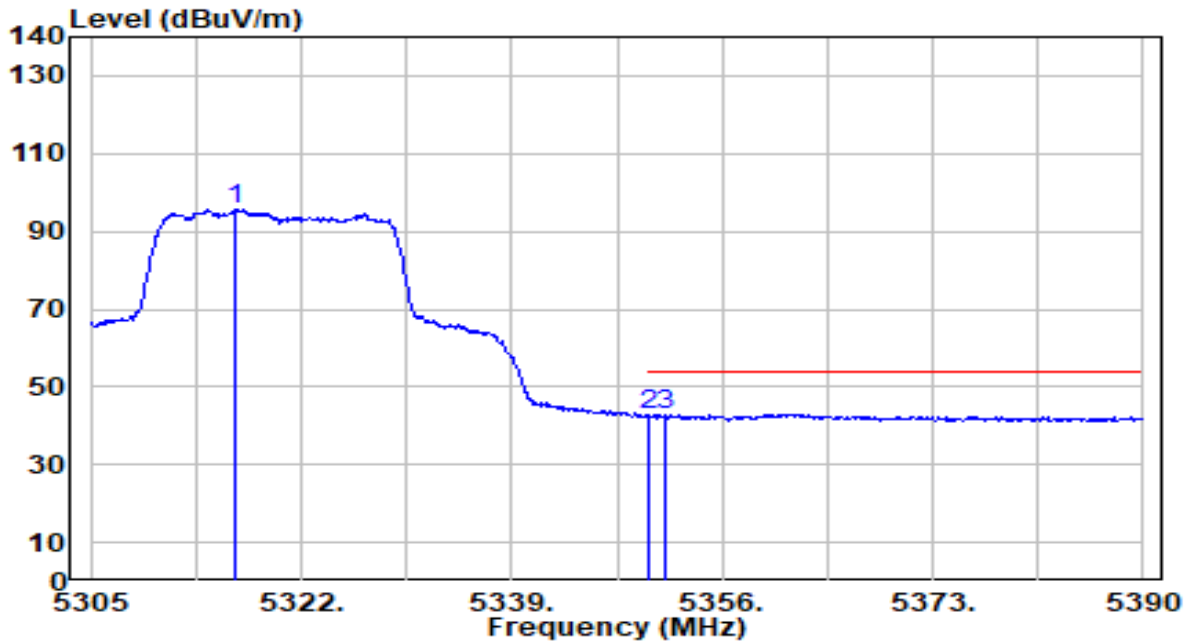


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5316.730	95.23	0.54	95.77	N/A	N/A	203	341	Average
2	* 5350.000	42.49	0.51	43.00	-11.00	54.00	203	341	Average
3	5351.495	42.37	0.50	42.87	-11.13	54.00	203	341	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-30
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

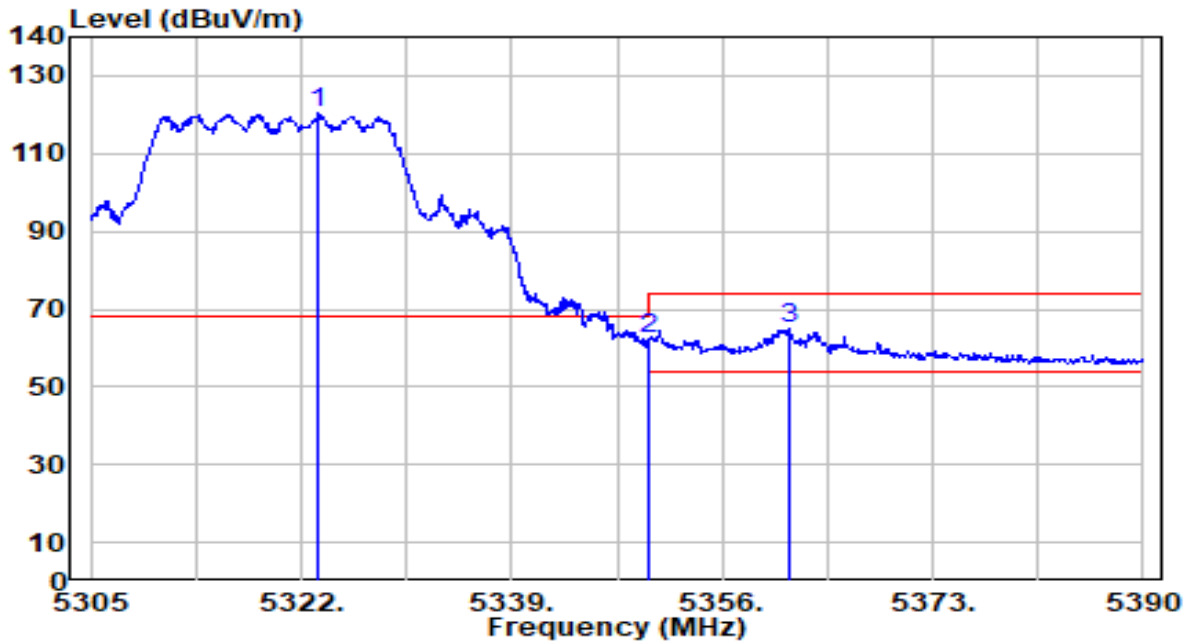


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5323.445	119.77	0.53	120.30	N/A	N/A	126	7	Peak
2	5350.000	61.84	0.51	62.35	-11.65	74.00	126	7	Peak
3	* 5361.355	64.74	0.49	65.24	-8.76	74.00	126	7	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-30
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

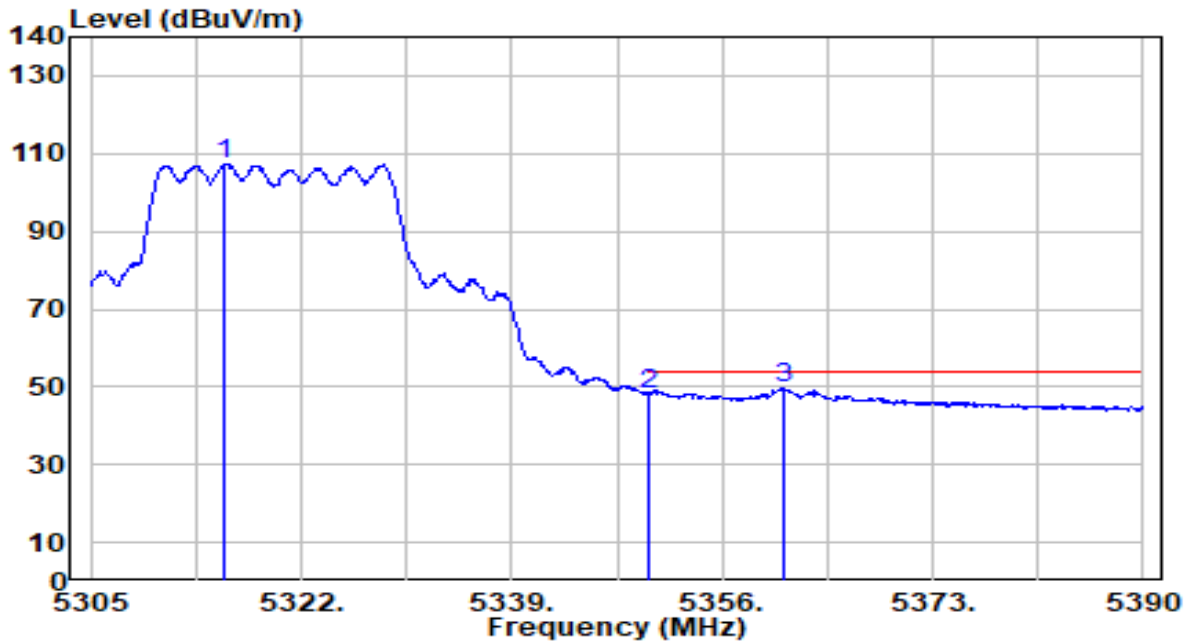


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5315.710	106.94	0.54	107.48	N/A	N/A	126	7	Average
2	5350.000	47.79	0.51	48.30	-5.70	54.00	126	7	Average
3	* 5360.930	49.06	0.49	49.56	-4.44	54.00	126	7	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-30
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

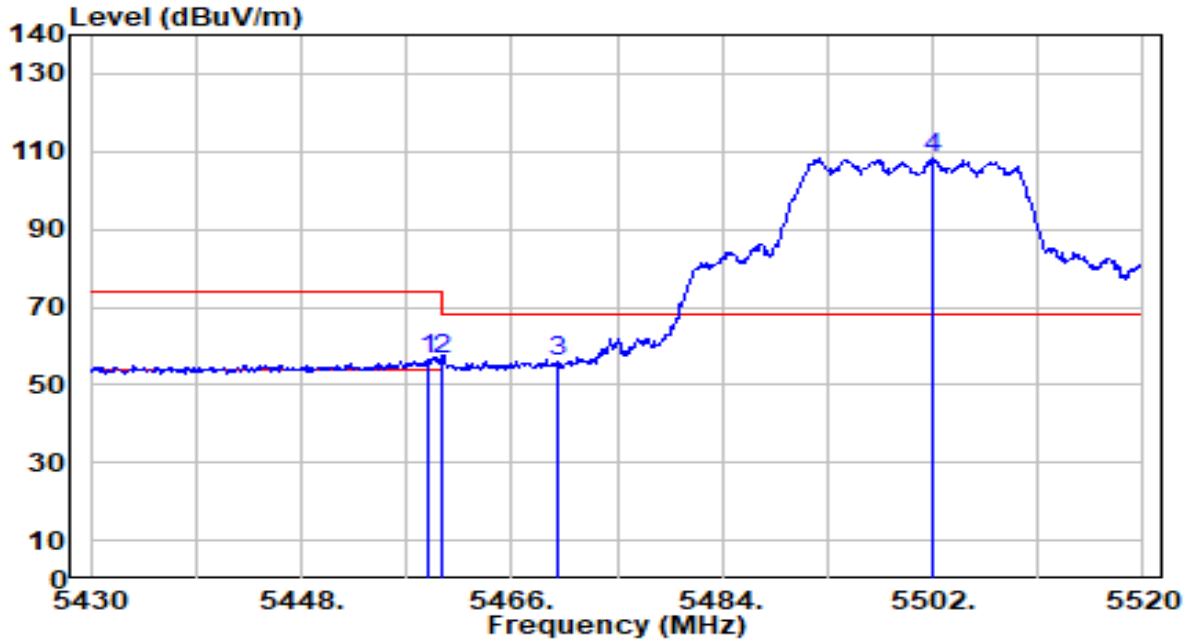


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.890	55.74	0.65	56.39	-17.61	74.00	223	25	Peak
2	5460.000	55.70	0.65	56.35	-17.65	74.00	223	25	Peak
3	* 5470.000	55.45	0.69	56.14	-12.06	68.20	223	25	Peak
4	5502.000	107.45	0.80	108.25	N/A	N/A	223	25	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-30
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

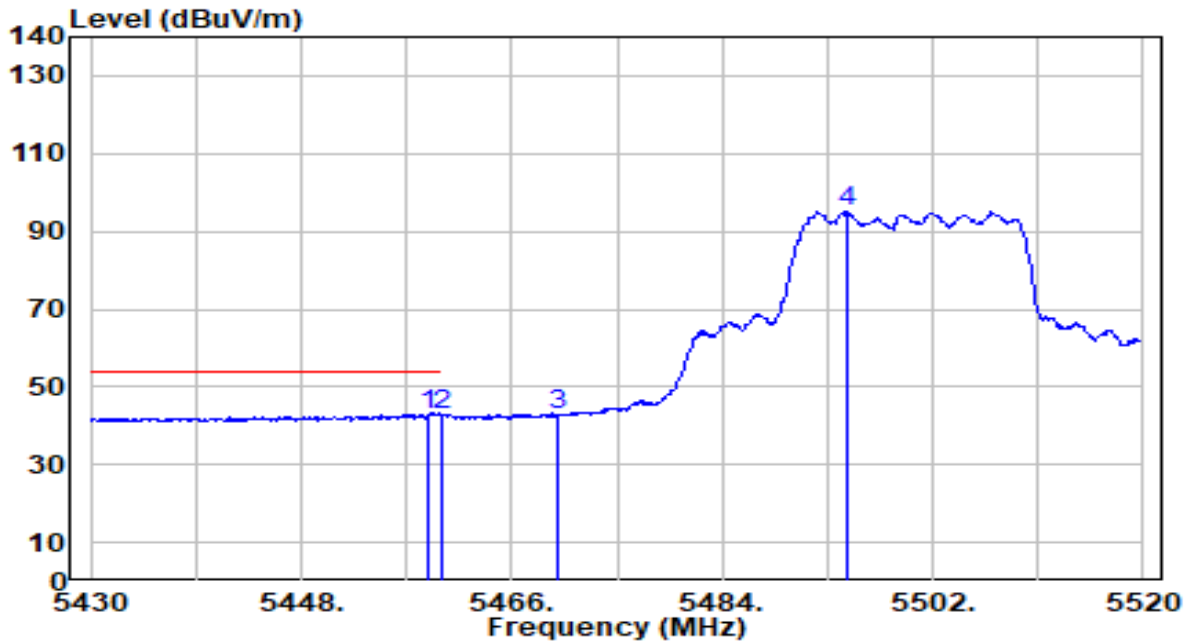


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5458.800	42.27	0.65	42.92	-11.08	54.00	223	25	Average
2	5460.000	41.89	0.65	42.55	-11.45	54.00	223	25	Average
3	5470.000	42.05	0.69	42.74	N/A	N/A	223	25	Average
4	5494.710	94.56	0.77	95.33	N/A	N/A	223	25	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-30
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

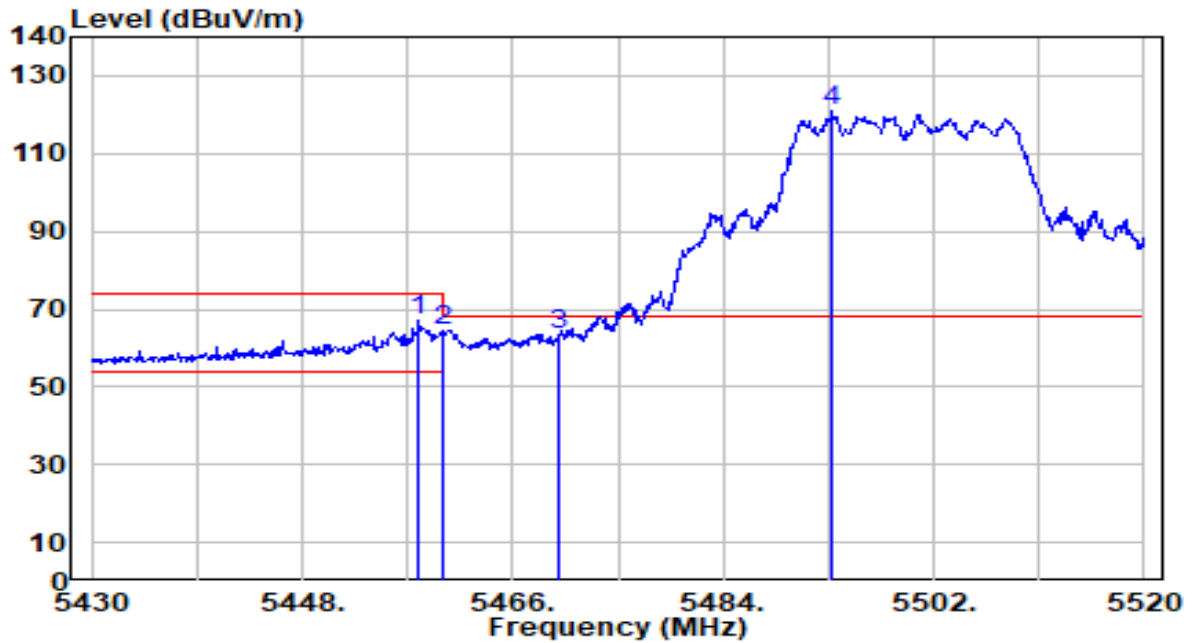


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.900	66.36	0.65	67.01	-6.99	74.00	113	3	Peak
2	5460.000	63.74	0.65	64.39	-9.61	74.00	113	3	Peak
3	* 5470.000	62.91	0.69	63.60	-4.60	68.20	113	3	Peak
4	5493.360	120.00	0.77	120.77	N/A	N/A	113	3	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-30
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

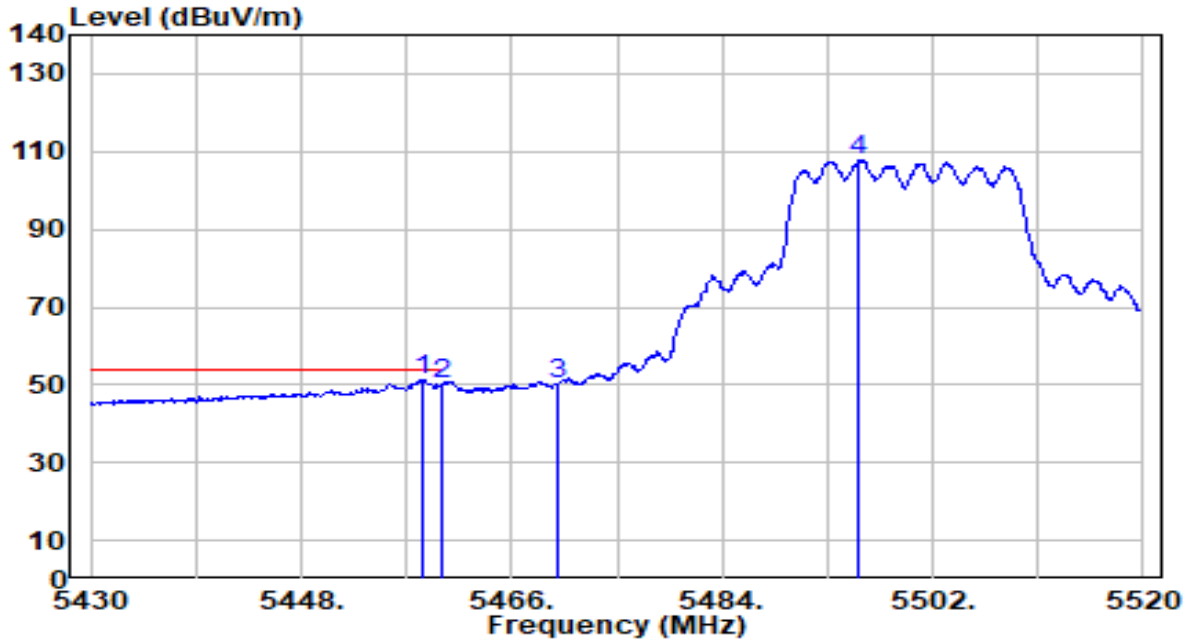


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5458.350	50.68	0.65	51.33	-2.67	54.00	113	3	Average
2	5460.000	49.35	0.65	50.01	-3.99	54.00	113	3	Average
3	5470.000	49.30	0.69	49.98	N/A	N/A	113	3	Average
4	5495.700	107.09	0.78	107.87	N/A	N/A	113	3	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-30
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

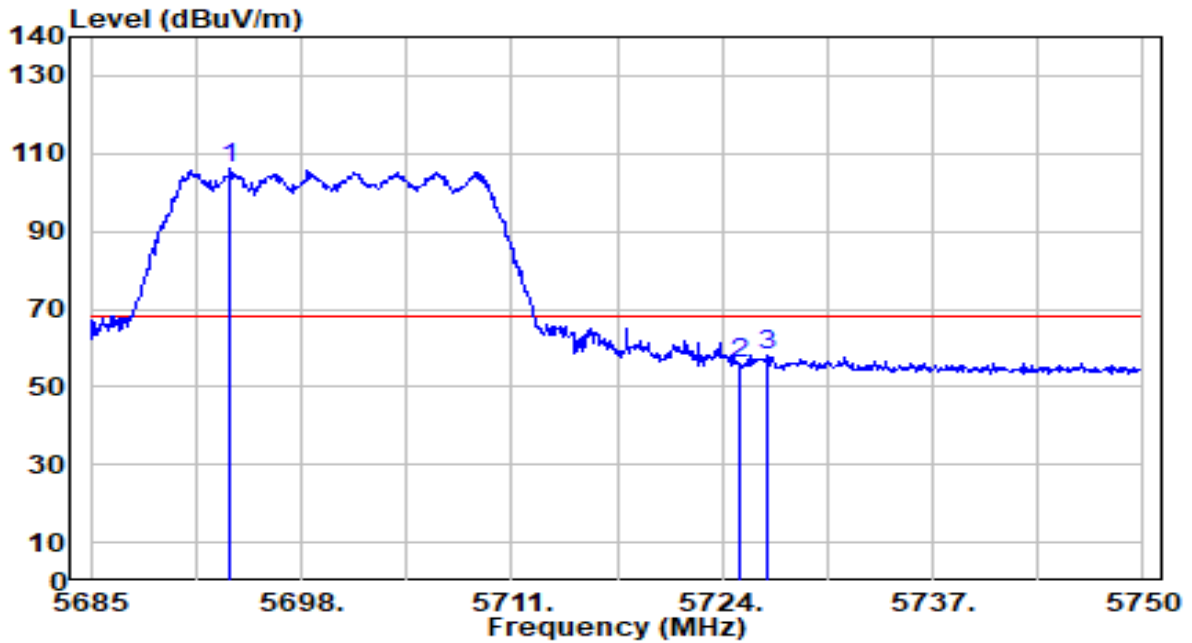


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5693.645	104.53	1.69	106.22	N/A	N/A	100	101	Peak
2	5725.000	53.95	1.86	55.81	-12.39	68.20	100	101	Peak
3	* 5726.860	56.25	1.87	58.12	-10.08	68.20	100	101	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-30
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

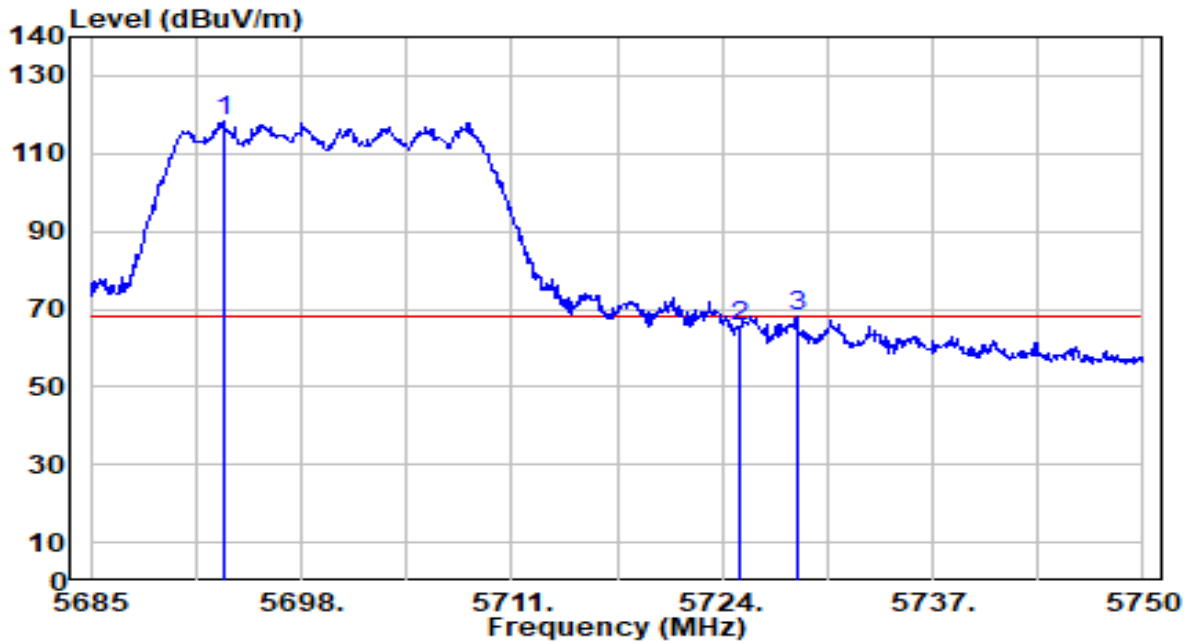


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5693.255	116.63	1.68	118.31	N/A	N/A	163	0	Peak
2	5725.000	63.70	1.86	65.56	-2.64	68.20	163	0	Peak
3	* 5728.615	66.17	1.88	68.05	-0.15	68.20	163	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-30
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

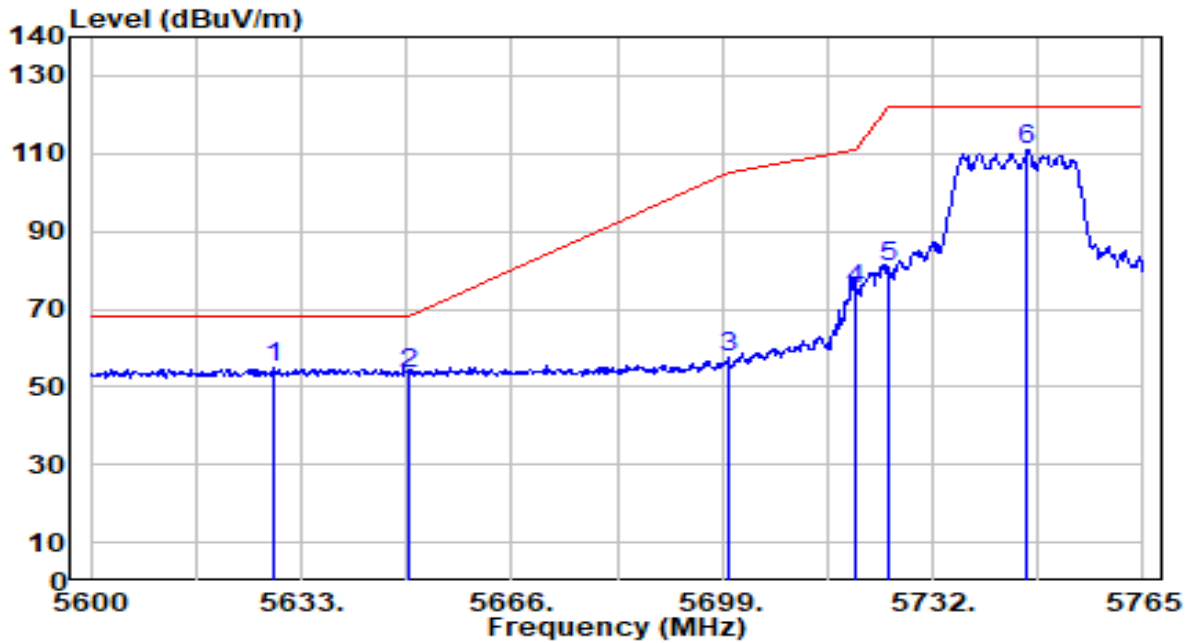


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5628.545	53.38	1.32	54.70	-13.50	68.20	208	30	Peak
2		5650.000	52.13	1.44	53.57	-14.63	68.20	208	30	Peak
3		5700.000	55.75	1.72	57.47	-47.73	105.20	208	30	Peak
4		5720.000	73.25	1.84	75.08	-35.72	110.80	208	30	Peak
5		5725.000	78.87	1.86	80.74	-41.46	122.20	208	30	Peak
6		5746.685	108.94	1.99	110.93	N/A	N/A	208	30	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-30
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

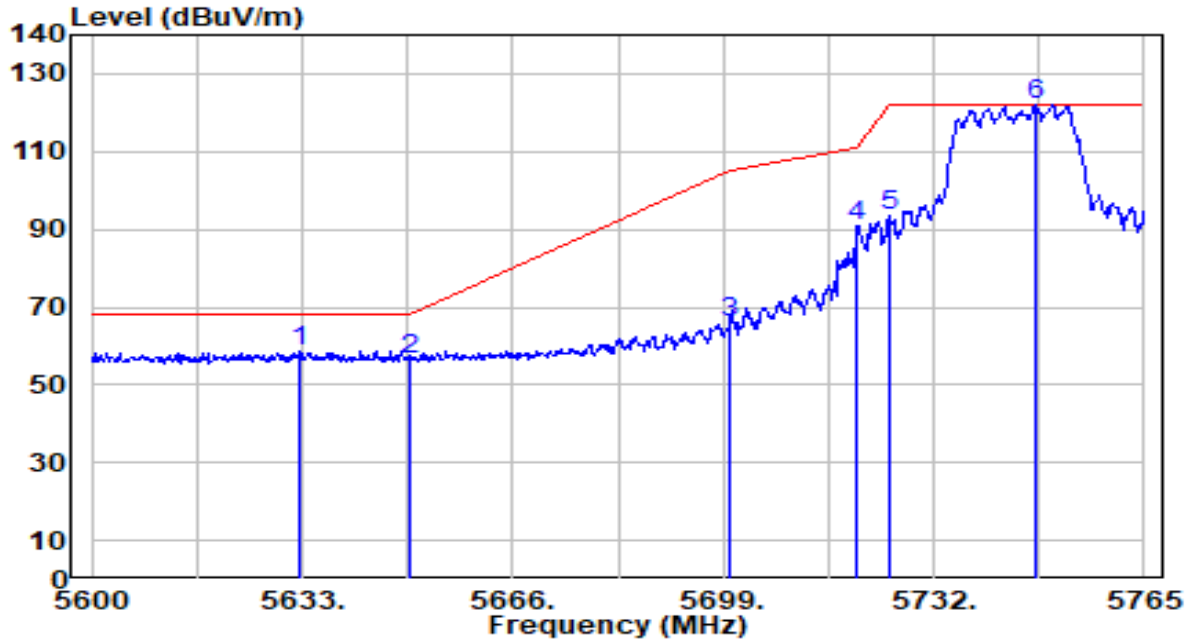


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	57.22	1.34	58.57	-9.63	68.20	128	5	Peak
2		55.25	1.44	56.69	-11.51	68.20	128	5	Peak
3		64.14	1.72	65.86	-39.34	105.20	128	5	Peak
4		88.80	1.84	90.63	-20.17	110.80	128	5	Peak
5		91.47	1.86	93.33	-28.87	122.20	128	5	Peak
6		120.15	1.99	122.14	N/A	N/A	128	5	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-30
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

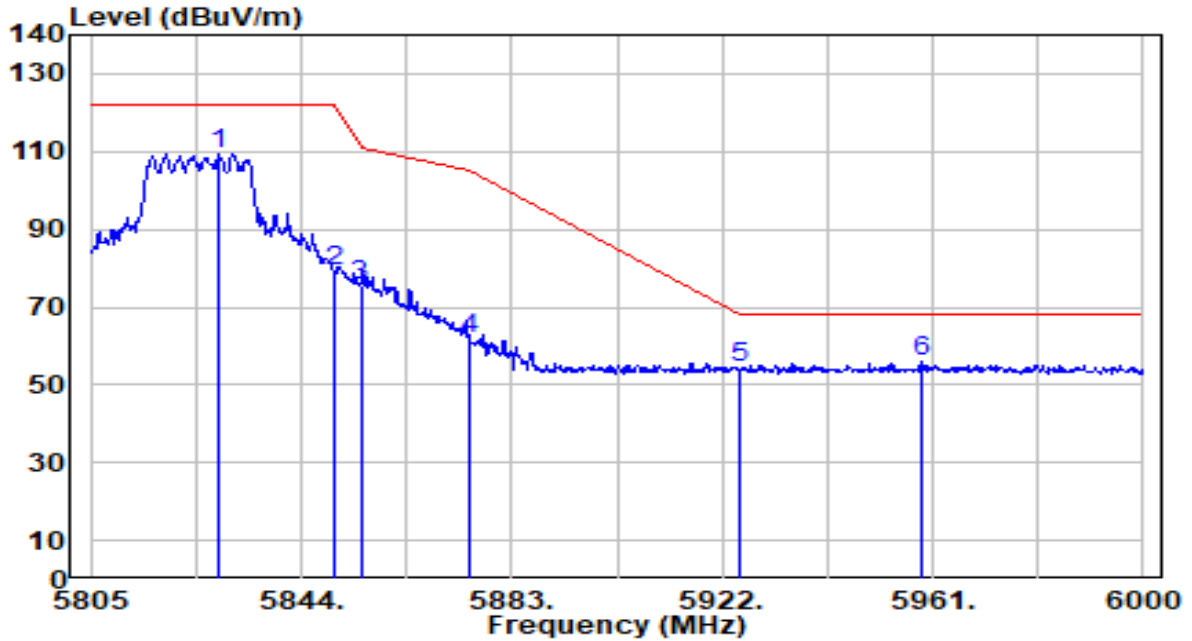


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5828.790	107.13	2.28	109.40	N/A	N/A	100	104	Peak
2	5850.000	77.10	2.27	79.37	-42.83	122.20	100	104	Peak
3	5855.000	73.23	2.27	75.50	-35.30	110.80	100	104	Peak
4	5875.000	59.37	2.26	61.63	-43.57	105.20	100	104	Peak
5	5925.000	52.01	2.25	54.26	-13.94	68.20	100	104	Peak
6	* 5958.855	53.92	2.23	56.16	-12.04	68.20	100	104	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-30
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

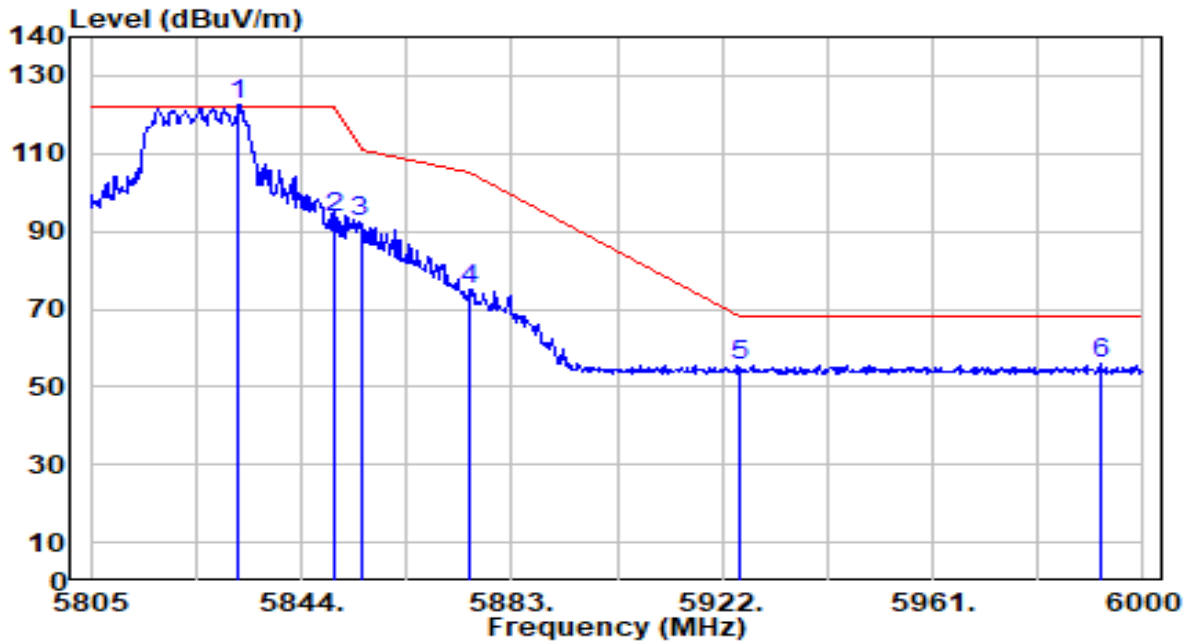


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5832.495	120.33	2.28	122.61	N/A	N/A	135	6	Peak
2	5850.000	90.98	2.27	93.25	-28.95	122.20	135	6	Peak
3	5855.000	90.23	2.27	92.50	-18.30	110.80	135	6	Peak
4	5875.000	72.89	2.26	75.15	-30.05	105.20	135	6	Peak
5	5925.000	53.23	2.25	55.48	-12.72	68.20	135	6	Peak
6	* 5992.005	53.56	2.22	55.78	-12.42	68.20	135	6	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

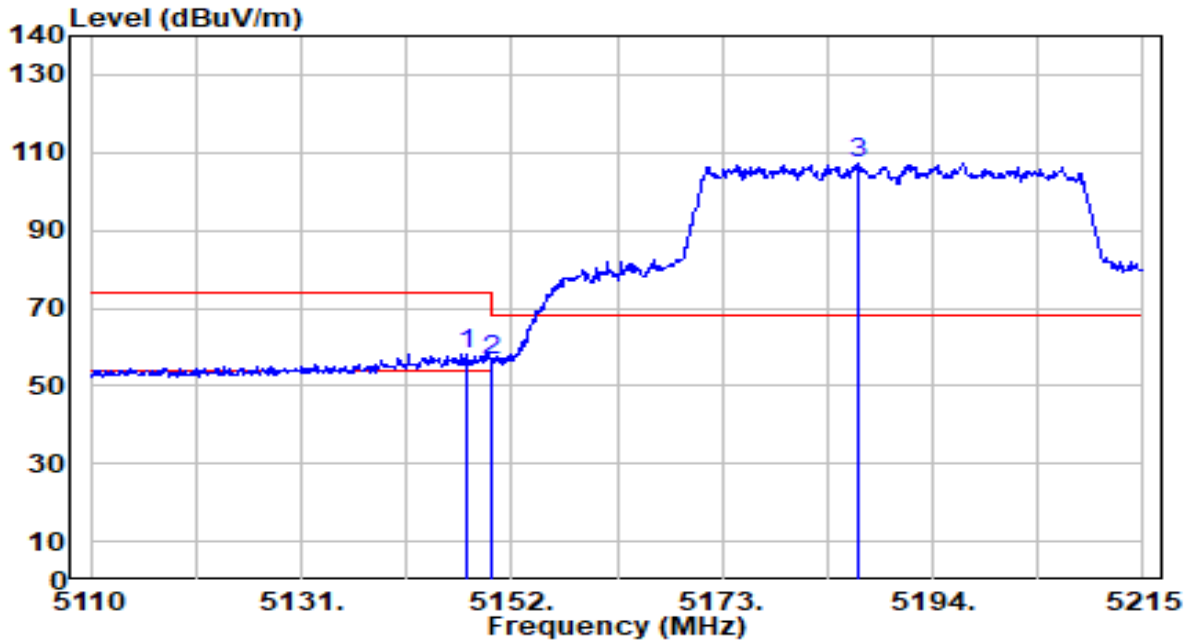


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5147.485	57.53	0.68	58.20	-15.80	74.00	189	342	Peak
2	5150.000	55.69	0.68	56.37	-17.63	74.00	189	342	Peak
3	5186.545	106.78	0.67	107.45	N/A	N/A	189	342	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

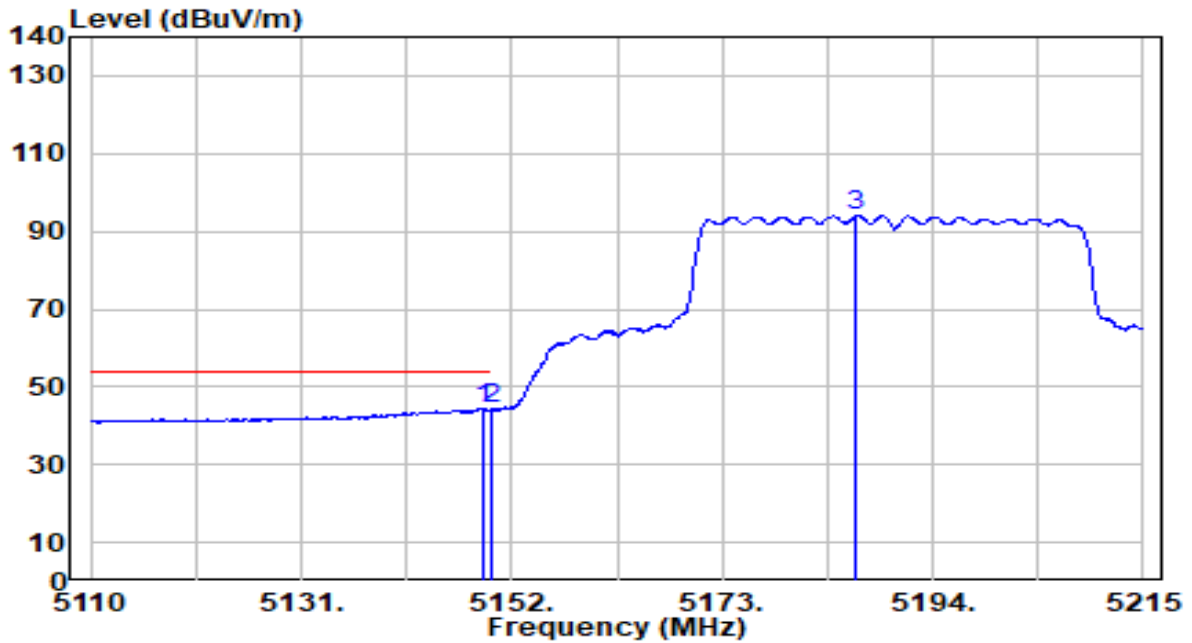


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5149.270	43.57	0.68	44.25	-9.75	54.00	189	342	Average
2		5150.000	43.45	0.68	44.12	-9.88	54.00	189	342	Average
3		5186.335	93.44	0.67	94.11	N/A	N/A	189	342	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

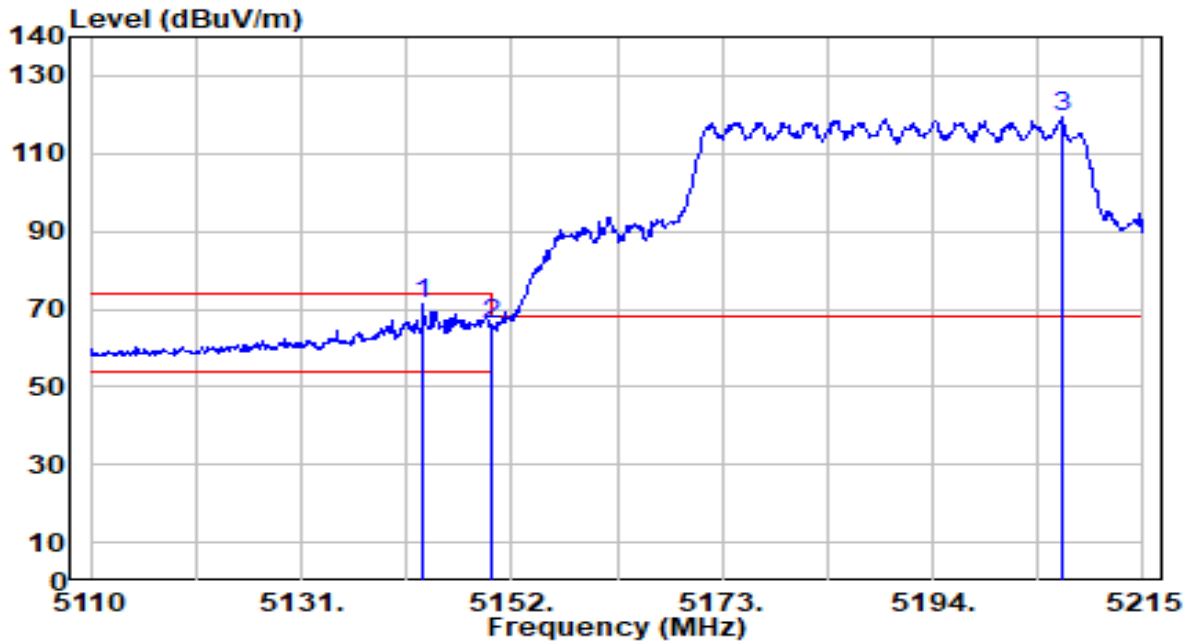


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5143.180	70.49	0.68	71.16	-2.84	74.00	102	0	Peak
2		5150.000	65.62	0.68	66.29	-7.71	74.00	102	0	Peak
3		5206.810	118.49	0.66	119.16	N/A	N/A	102	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

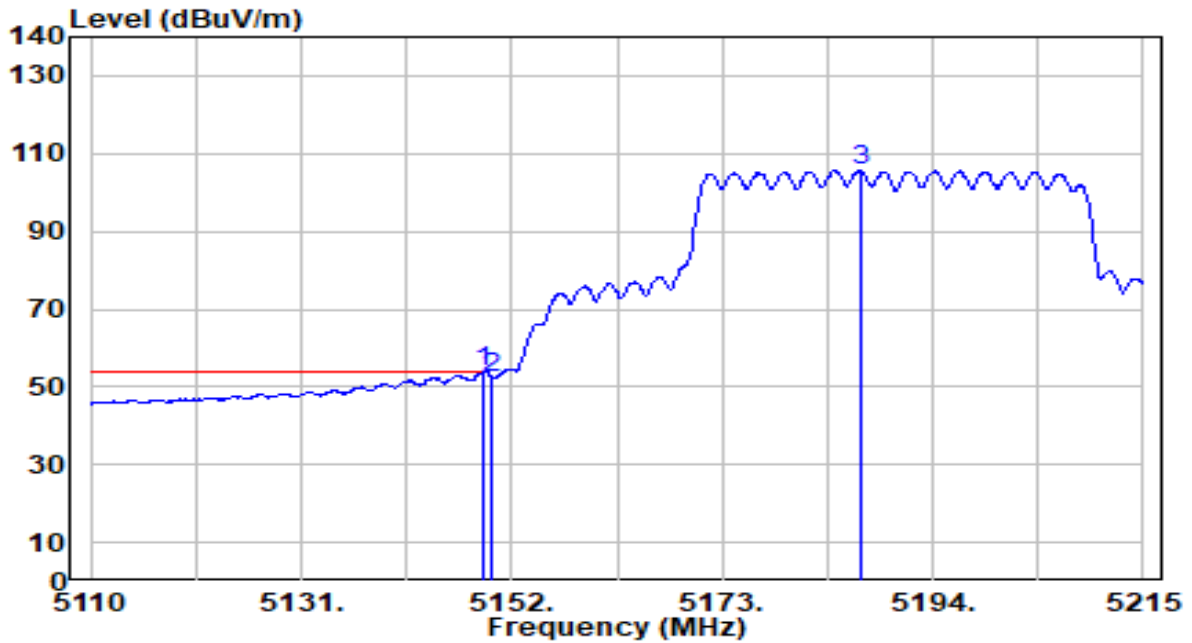


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	53.16	0.68	53.83	-0.17	54.00	102	0	Average
2		51.86	0.68	52.53	-1.47	54.00	102	0	Average
3		104.95	0.67	105.62	N/A	N/A	102	0	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

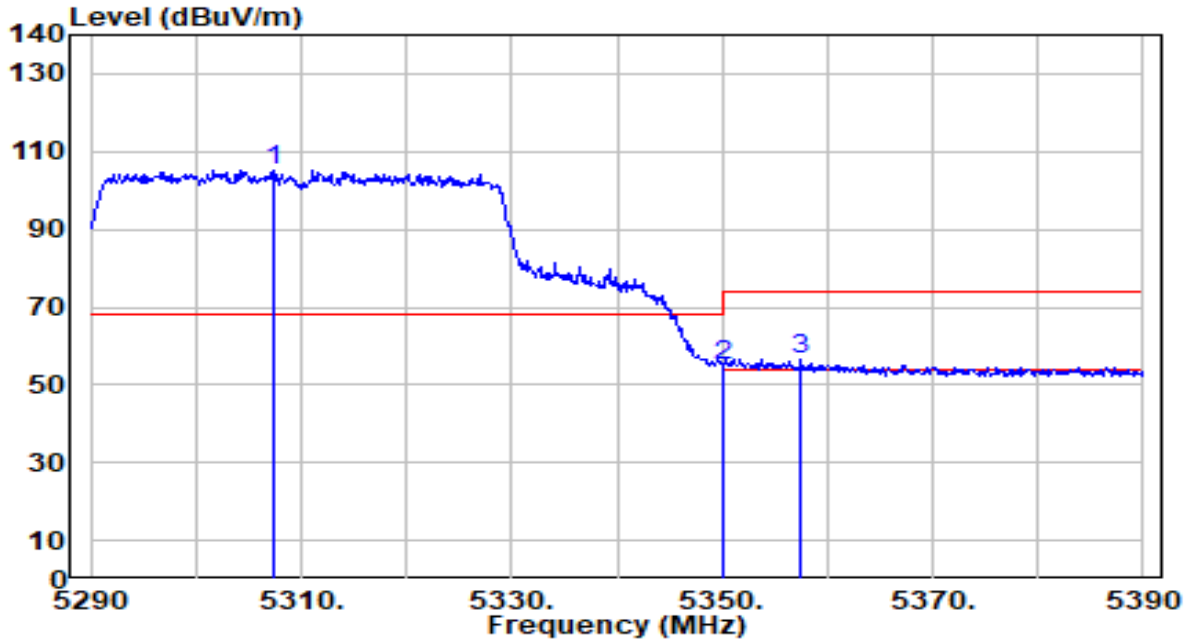


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5307.300	104.77	0.55	105.33	N/A	N/A	202	341	Peak
2	5350.000	54.54	0.51	55.04	-18.96	74.00	202	341	Peak
3	* 5357.400	56.10	0.50	56.60	-17.40	74.00	202	341	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

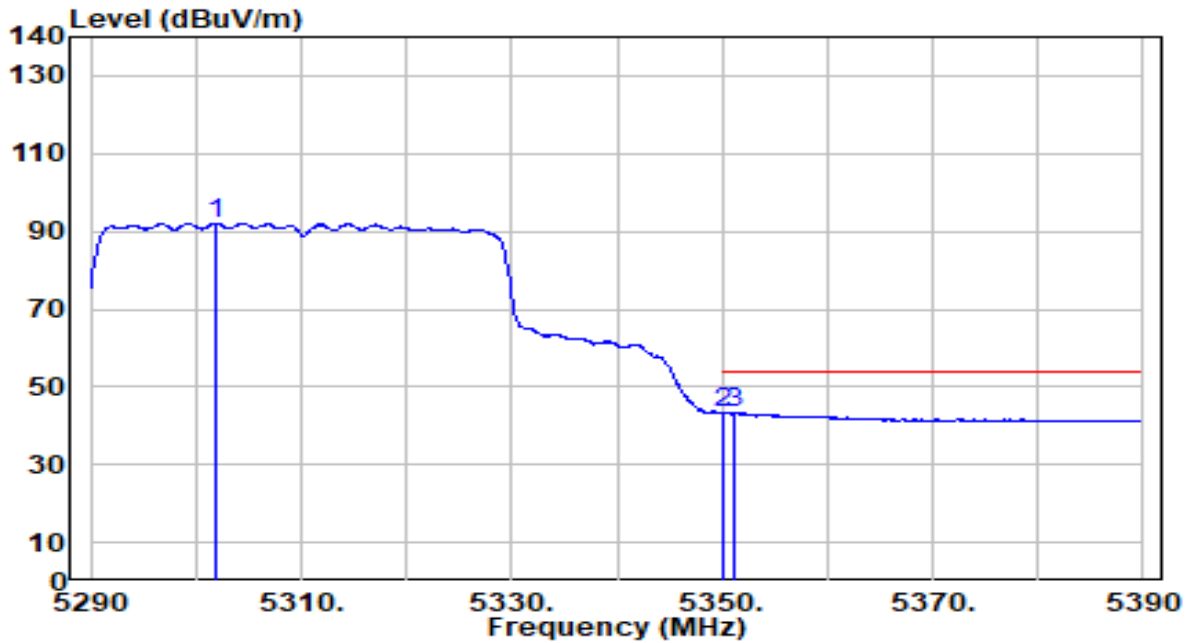


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5301.800	91.52	0.56	92.08	N/A	N/A	202	341	Average
2	* 5350.000	42.84	0.51	43.34	-10.66	54.00	202	341	Average
3	5351.100	42.75	0.50	43.25	-10.75	54.00	202	341	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

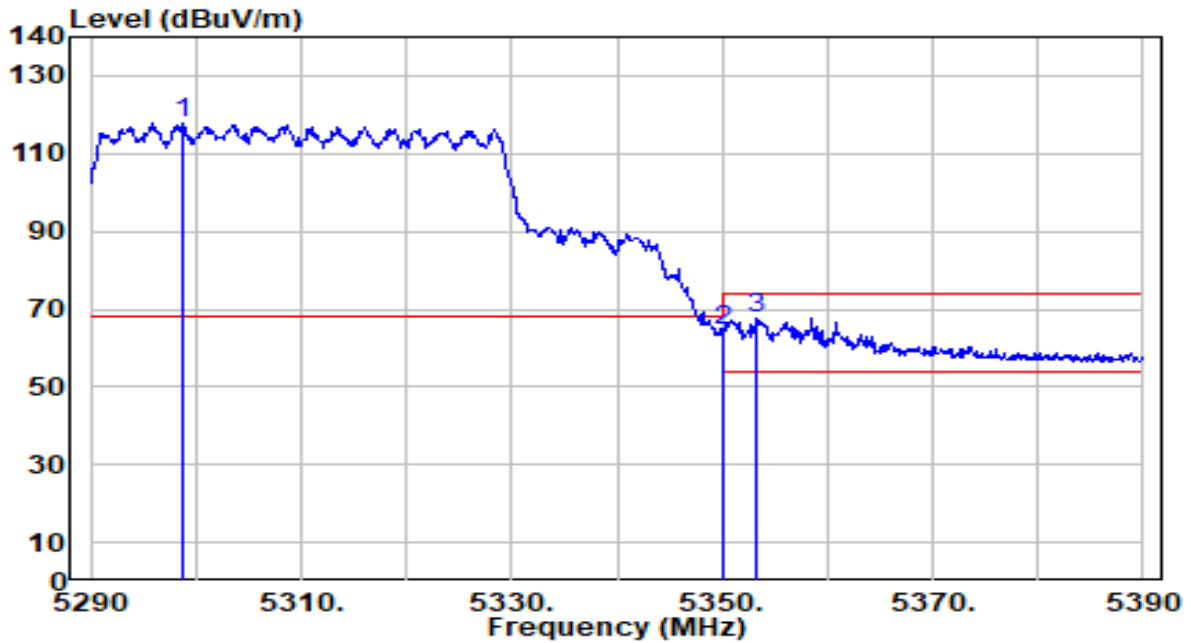


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5298.700	117.42	0.56	117.98	N/A	N/A	126	7	Peak
2	5350.000	64.15	0.51	64.65	-9.35	74.00	126	7	Peak
3	* 5353.300	66.94	0.50	67.44	-6.56	74.00	126	7	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

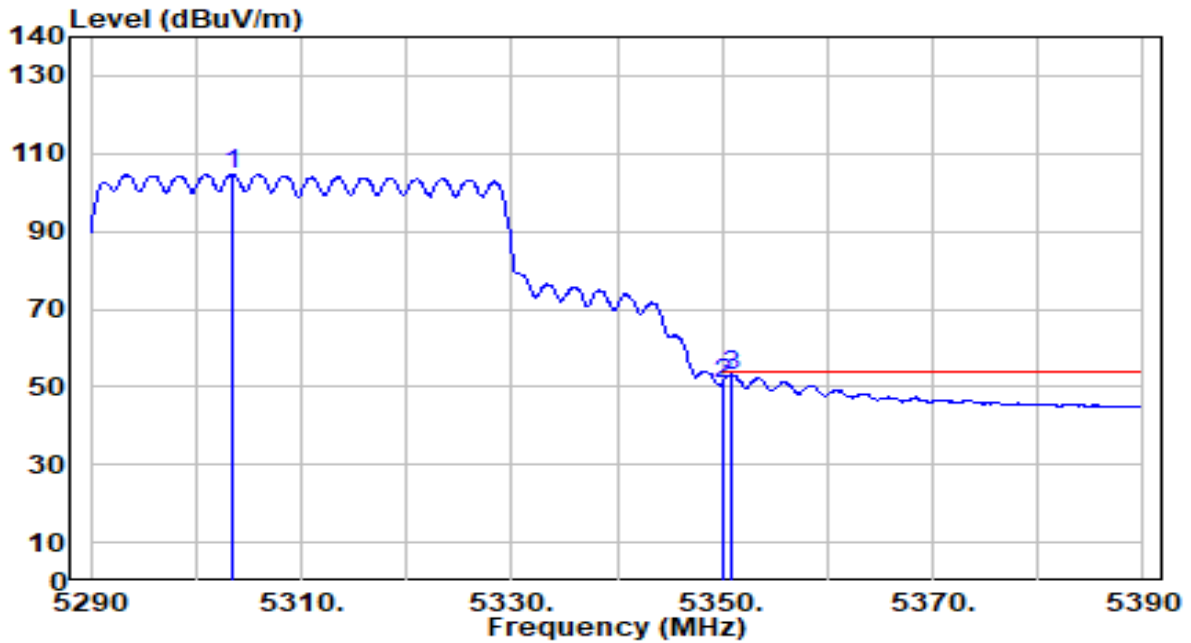


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5303.500	104.13	0.56	104.69	N/A	N/A	126	7	Average
2	5350.000	50.46	0.51	50.97	-3.03	54.00	126	7	Average
3	* 5351.000	52.42	0.50	52.92	-1.08	54.00	126	7	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

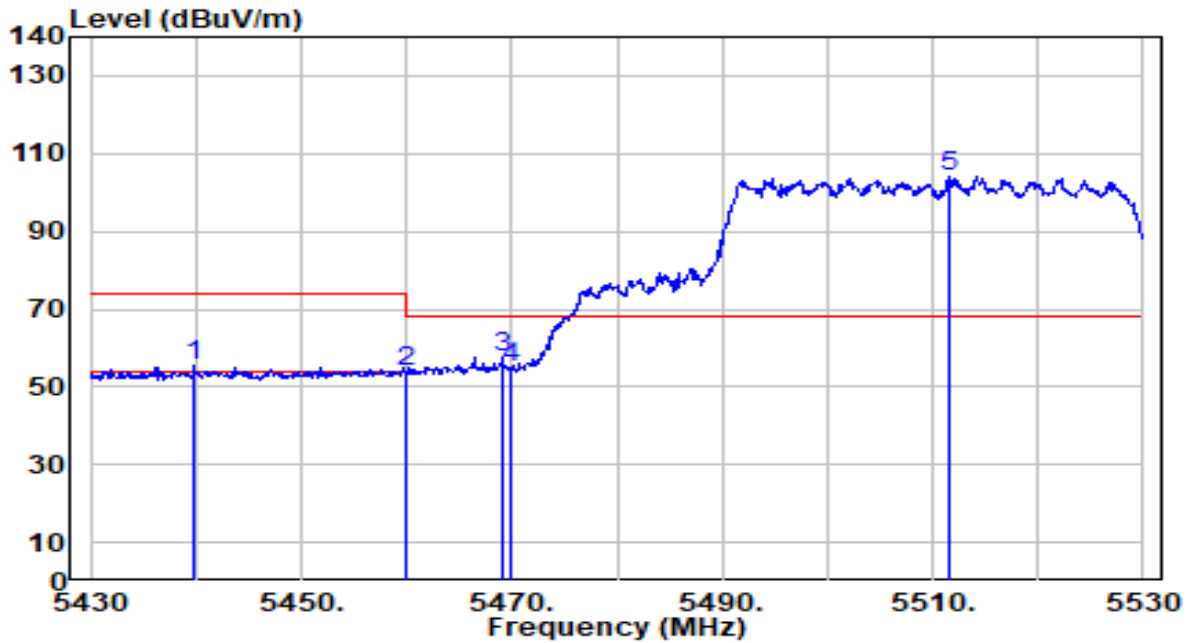


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5439.900	54.69	0.59	55.27	-18.73	74.00	222	25	Peak
2	5460.000	53.00	0.65	53.66	-20.34	74.00	222	25	Peak
3	* 5469.100	57.03	0.68	57.72	-10.48	68.20	222	25	Peak
4	5470.000	54.30	0.69	54.99	-13.21	68.20	222	25	Peak
5	5511.600	103.38	0.83	104.21	N/A	N/A	222	25	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

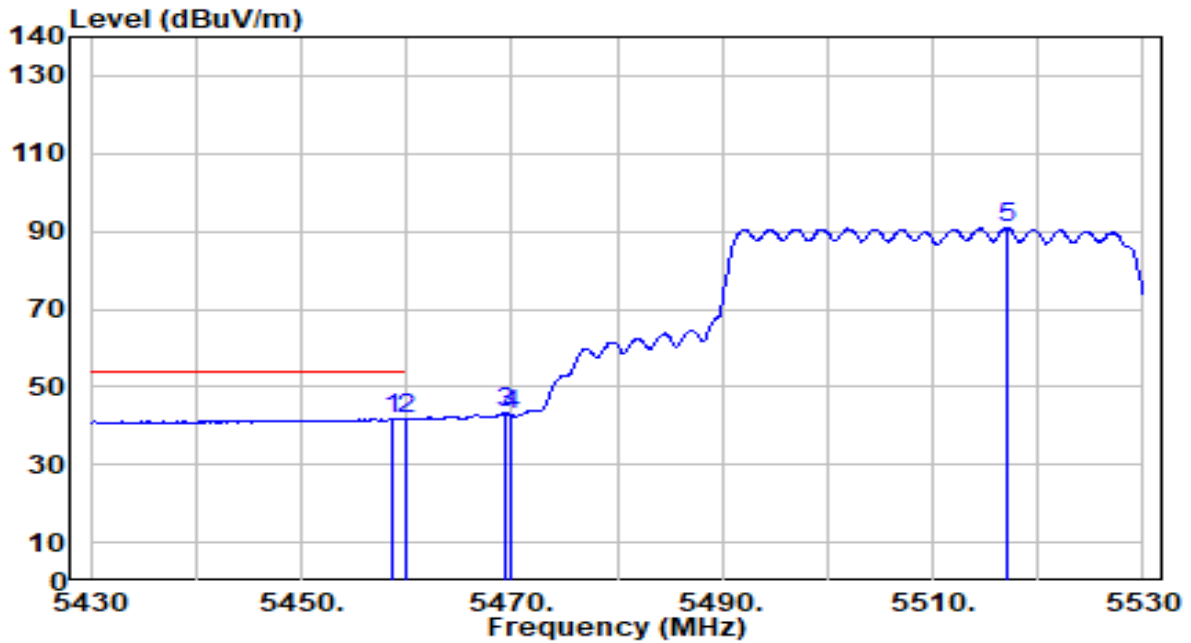


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5458.600	41.15	0.65	41.80	-12.20	54.00	222	25	Average
2	5460.000	40.87	0.65	41.53	-12.47	54.00	222	25	Average
3	5469.300	42.55	0.69	43.24	N/A	N/A	222	25	Average
4	5470.000	41.88	0.69	42.57	N/A	N/A	222	25	Average
5	5517.000	89.94	0.85	90.79	N/A	N/A	222	25	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

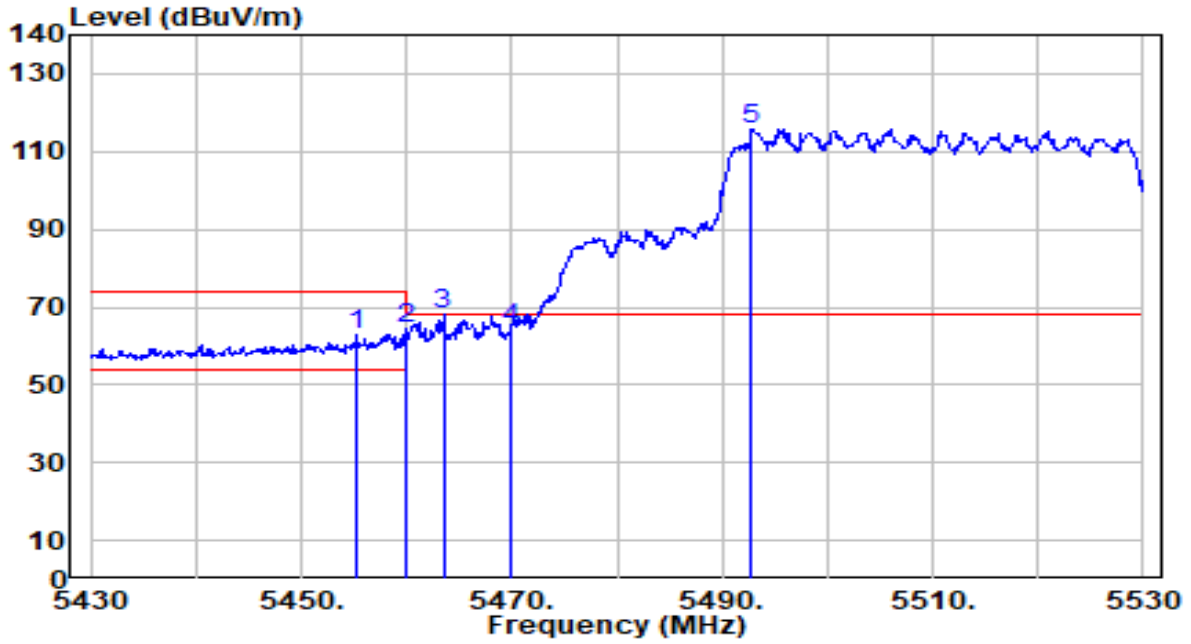


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5455.300	62.34	0.64	62.97	-11.03	74.00	113	3	Peak
2	5460.000	63.95	0.65	64.61	-9.39	74.00	113	3	Peak
3	* 5463.500	67.38	0.67	68.04	-0.16	68.20	113	3	Peak
4	5470.000	63.61	0.69	64.30	-3.90	68.20	113	3	Peak
5	5492.800	115.11	0.77	115.87	N/A	N/A	113	3	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

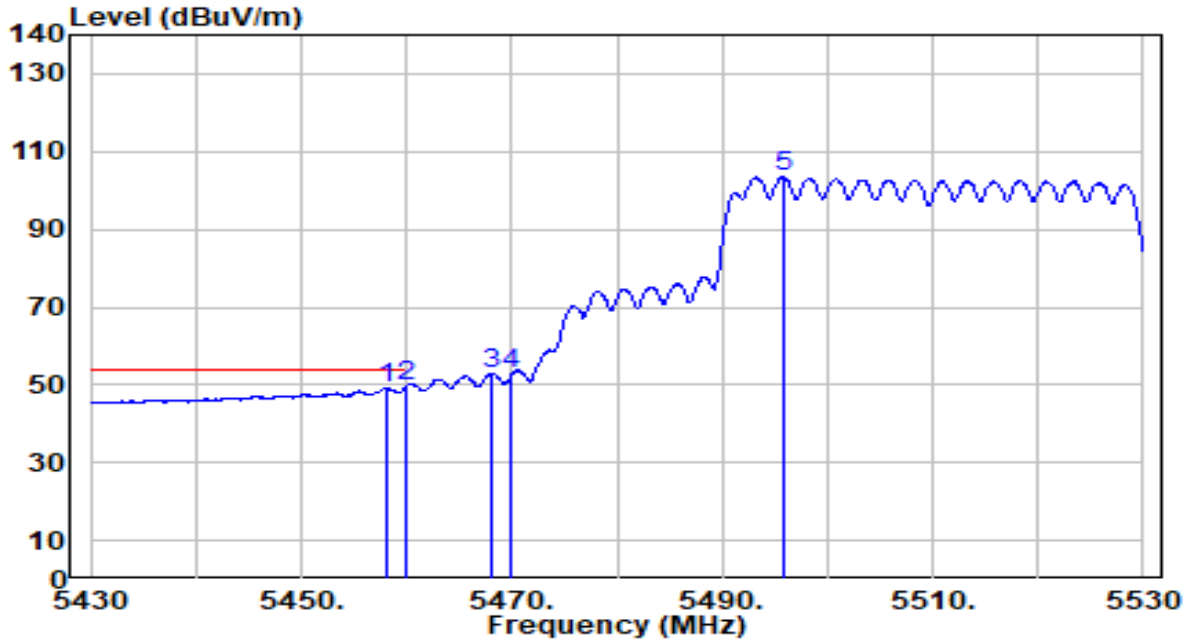


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.100	48.50	0.65	49.15	-4.85	54.00	113	3	Average
2	* 5460.000	48.75	0.65	49.41	-4.59	54.00	113	3	Average
3	5468.000	52.40	0.68	53.08	N/A	N/A	113	3	Average
4	5470.000	52.16	0.69	52.85	N/A	N/A	113	3	Average
5	5495.800	102.71	0.78	103.49	N/A	N/A	113	3	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

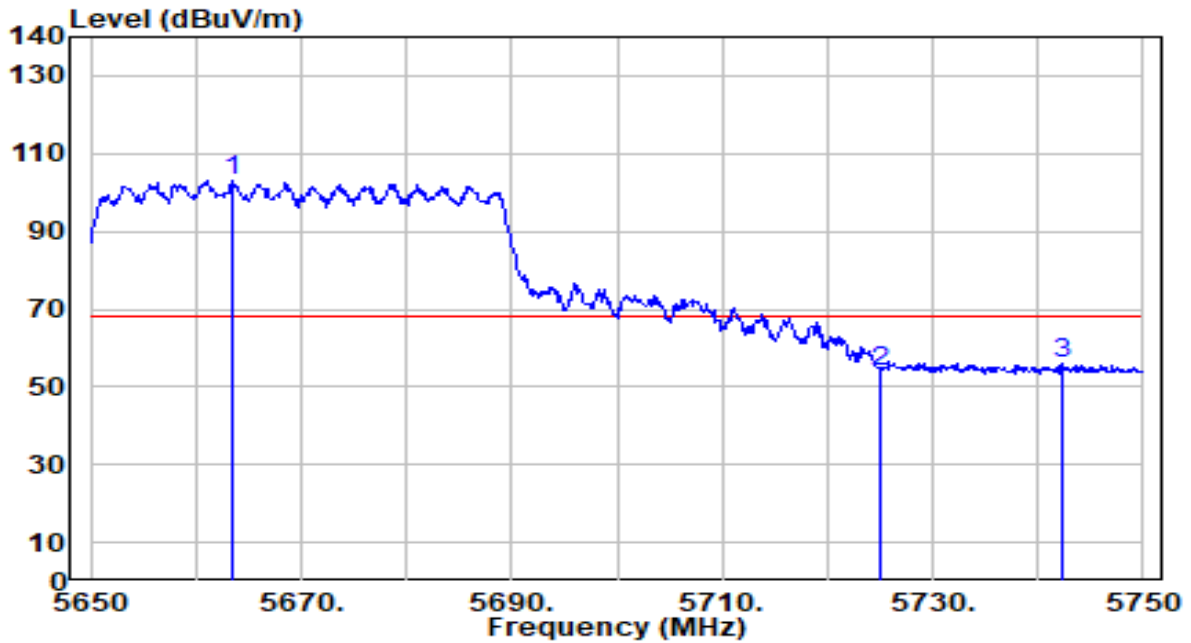


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5663.400	101.53	1.51	103.04	N/A	N/A	100	100	Peak
2	5725.000	52.13	1.86	53.99	-14.21	68.20	100	100	Peak
3	* 5742.200	54.16	1.96	56.12	-12.08	68.20	100	100	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

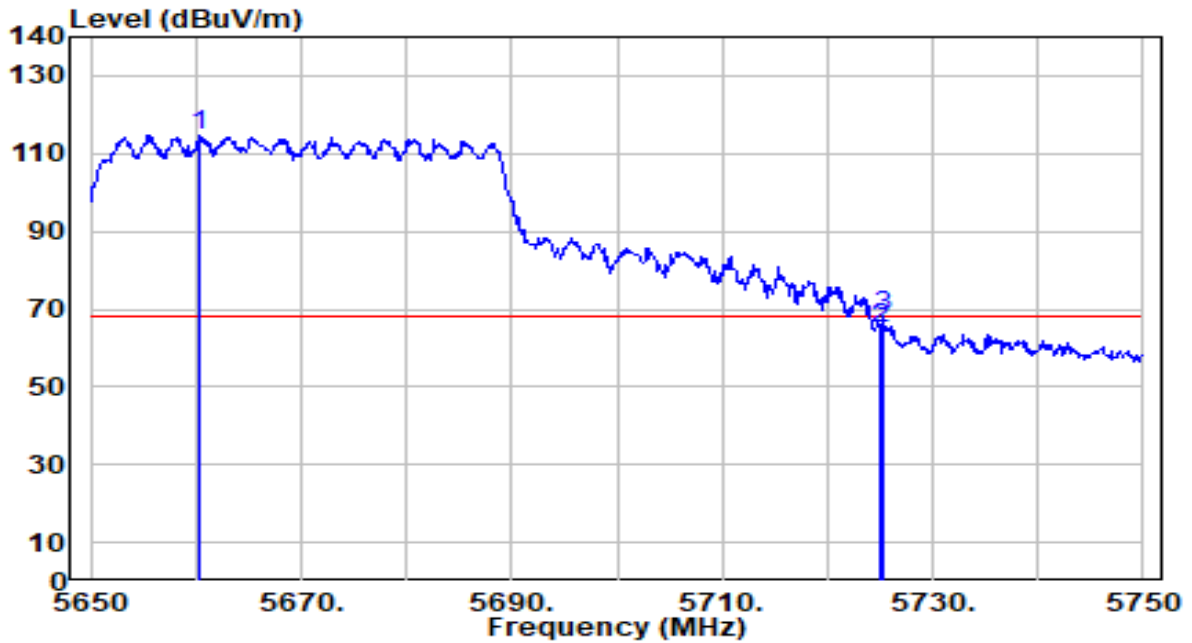


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5660.400	113.04	1.50	114.54	N/A	N/A	163	360	Peak
2	5725.000	63.15	1.86	65.01	-3.19	68.20	163	360	Peak
3	* 5725.300	66.15	1.87	68.02	-0.18	68.20	163	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

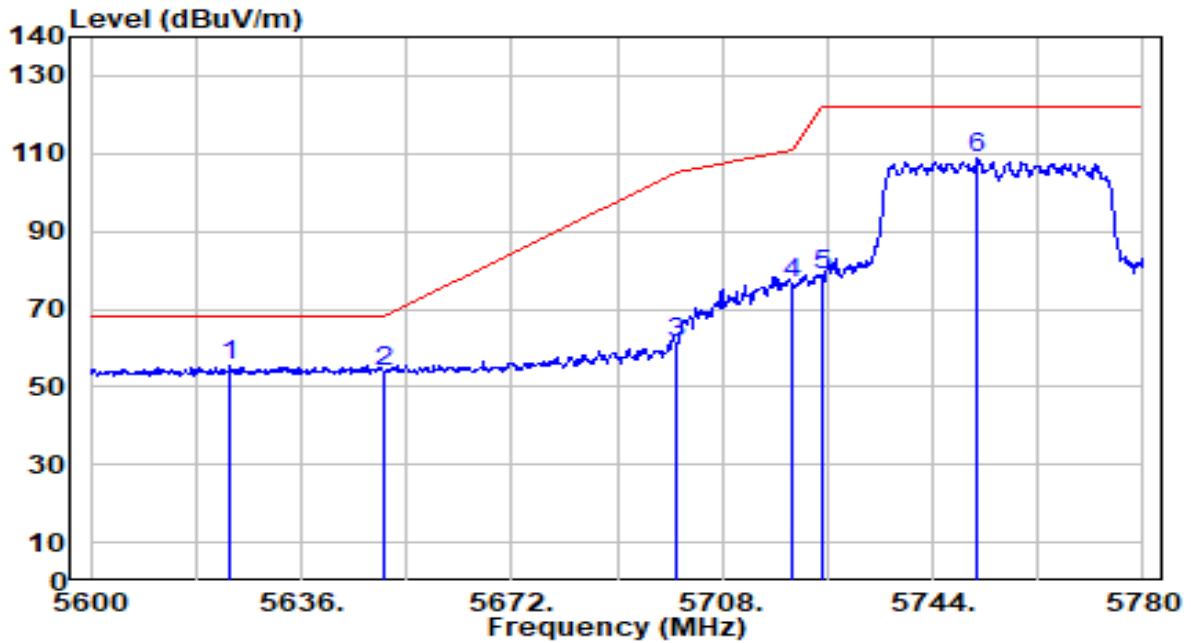


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	54.29	1.29	55.59	-12.61	68.20	210	28	Peak
2		52.36	1.44	53.80	-14.40	68.20	210	28	Peak
3		59.47	1.72	61.19	-44.01	105.20	210	28	Peak
4		74.55	1.84	76.39	-34.41	110.80	210	28	Peak
5		76.60	1.86	78.46	-43.74	122.20	210	28	Peak
6		107.01	2.01	109.03	N/A	N/A	210	28	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

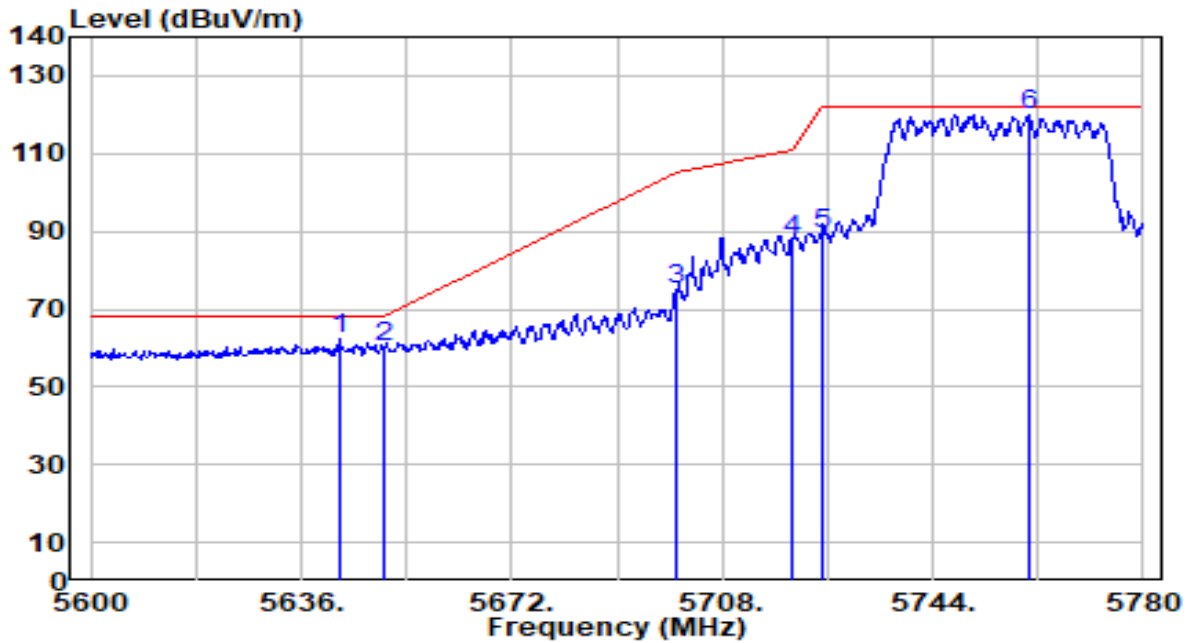


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5642.480	61.12	1.40	62.52	-5.68	68.20	130	5	Peak
2		5650.000	58.85	1.44	60.29	-7.91	68.20	130	5	Peak
3		5700.000	73.05	1.72	74.77	-30.43	105.20	130	5	Peak
4		5720.000	85.82	1.84	87.65	-23.15	110.80	130	5	Peak
5		5725.000	87.40	1.86	89.26	-32.94	122.20	130	5	Peak
6		5760.380	117.78	2.06	119.85	N/A	N/A	130	5	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

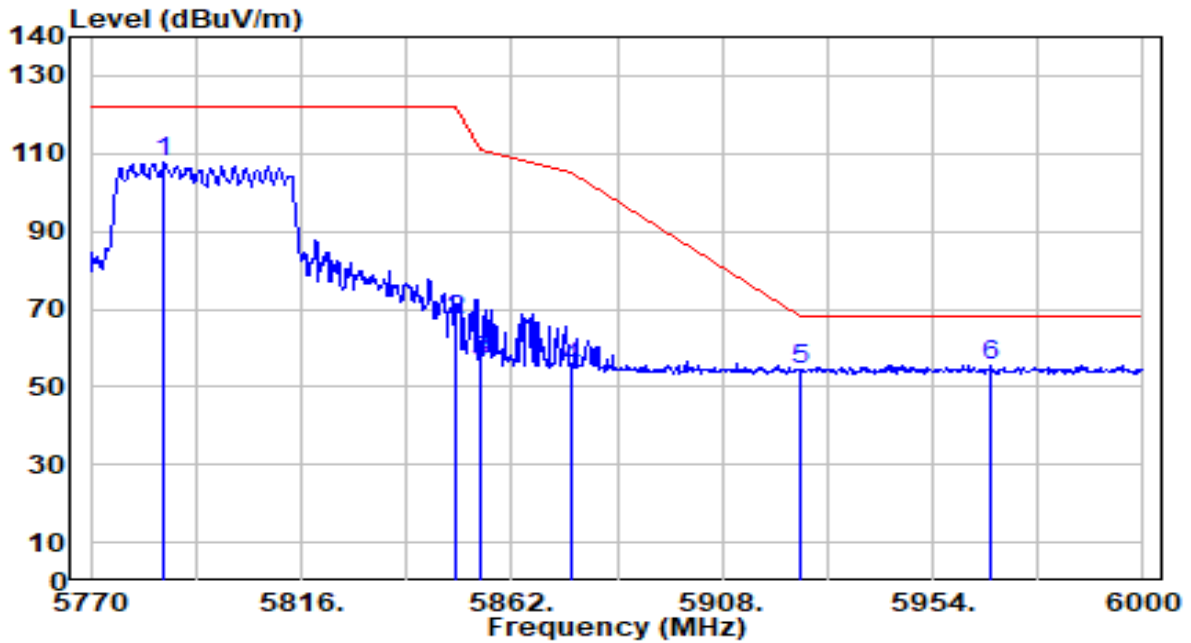


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5786.100	105.42	2.21	107.63	N/A	N/A	100	104	Peak
2	5850.000	64.80	2.27	67.07	-55.13	122.20	100	104	Peak
3	5855.000	54.33	2.27	56.60	-54.20	110.80	100	104	Peak
4	5875.000	52.45	2.26	54.71	-50.49	105.20	100	104	Peak
5	5925.000	51.96	2.25	54.20	-14.00	68.20	100	104	Peak
6	* 5966.880	53.41	2.23	55.64	-12.56	68.20	100	104	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

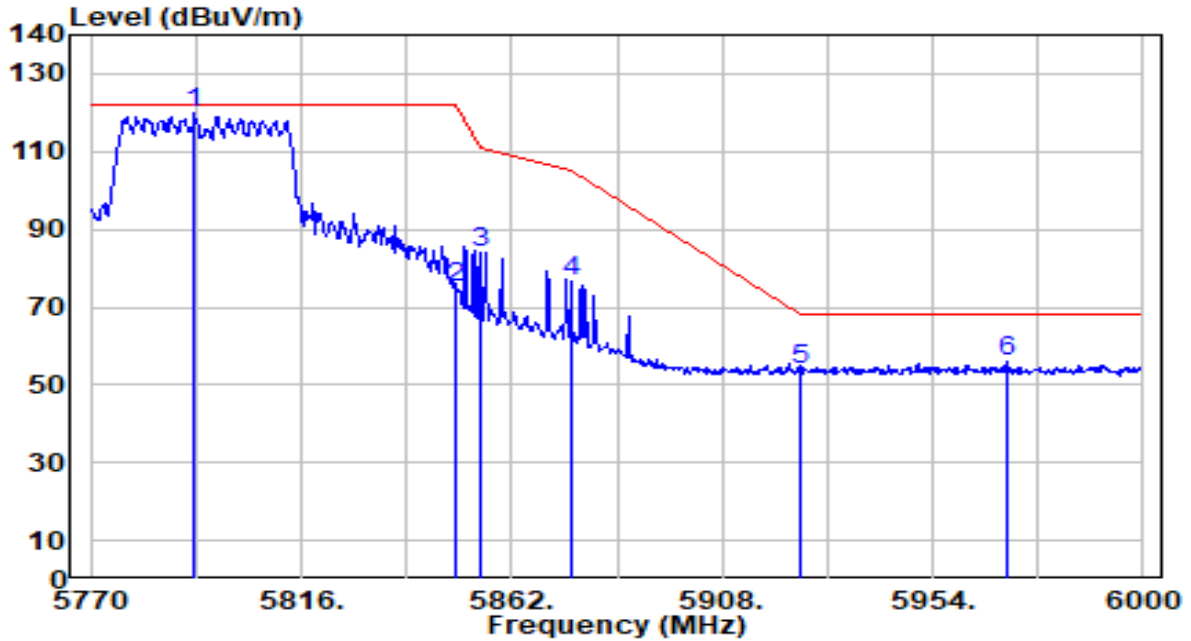


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5792.540	117.64	2.25	119.88	N/A	N/A	115	4	Peak
2	5850.000	72.68	2.27	74.96	-47.24	122.20	115	4	Peak
3	5855.000	81.97	2.27	84.24	-26.56	110.80	115	4	Peak
4	5875.000	74.09	2.26	76.35	-28.85	105.20	115	4	Peak
5	5925.000	51.65	2.25	53.90	-14.30	68.20	115	4	Peak
6	* 5970.100	53.99	2.23	56.22	-11.98	68.20	115	4	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

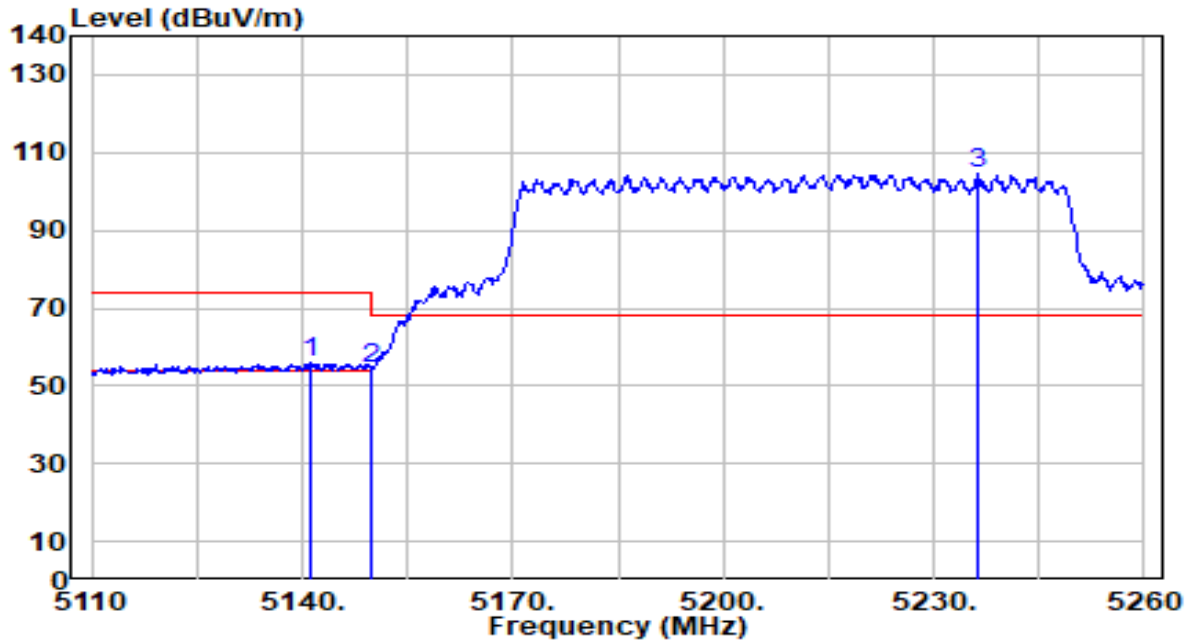


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5141.050	55.20	0.68	55.88	-18.12	74.00	186	336	Peak
2	5150.000	53.76	0.68	54.43	-19.57	74.00	186	336	Peak
3	5236.300	103.77	0.63	104.40	N/A	N/A	186	336	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

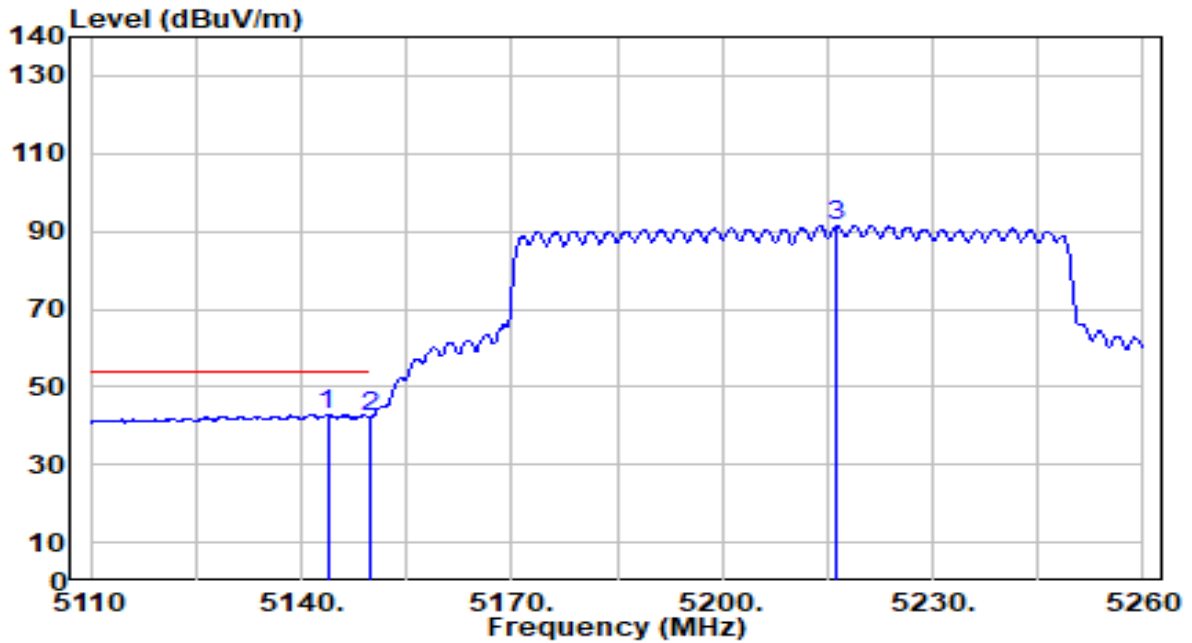


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5143.750	42.22	0.68	42.89	-11.11	54.00	186	336	Average
2	5150.000	41.39	0.68	42.06	-11.94	54.00	186	336	Average
3	5216.350	90.82	0.65	91.47	N/A	N/A	186	336	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

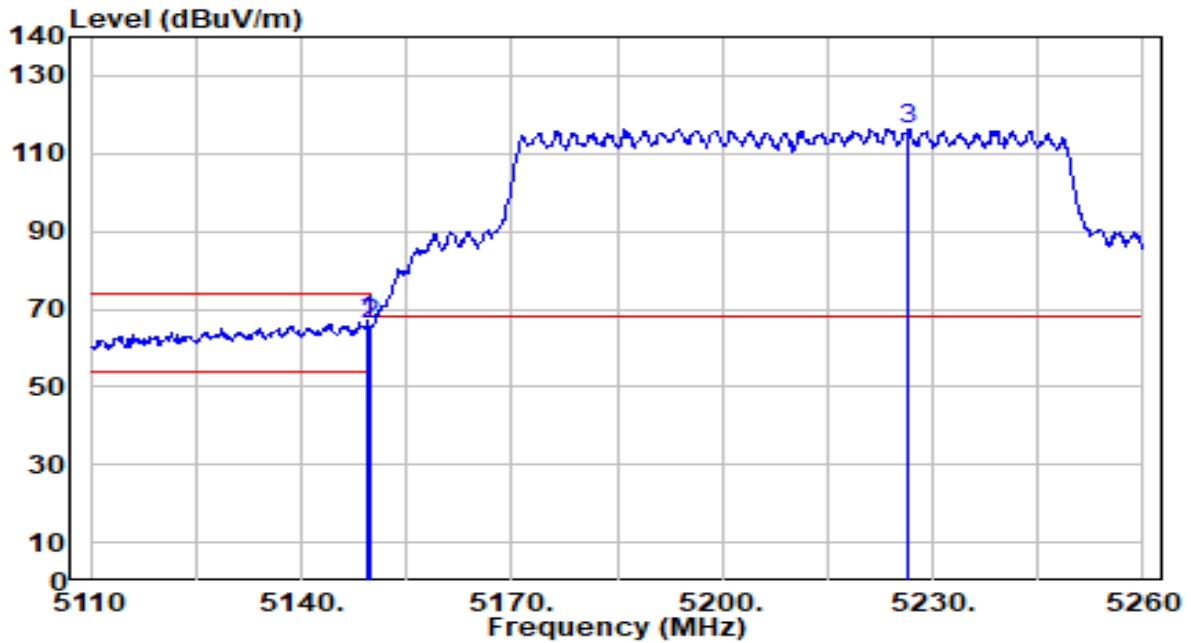


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5149.450	66.45	0.68	67.13	-6.87	74.00	130	5	Peak
2		5150.000	65.22	0.68	65.90	-8.10	74.00	130	5	Peak
3		5226.550	115.80	0.64	116.44	N/A	N/A	130	5	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

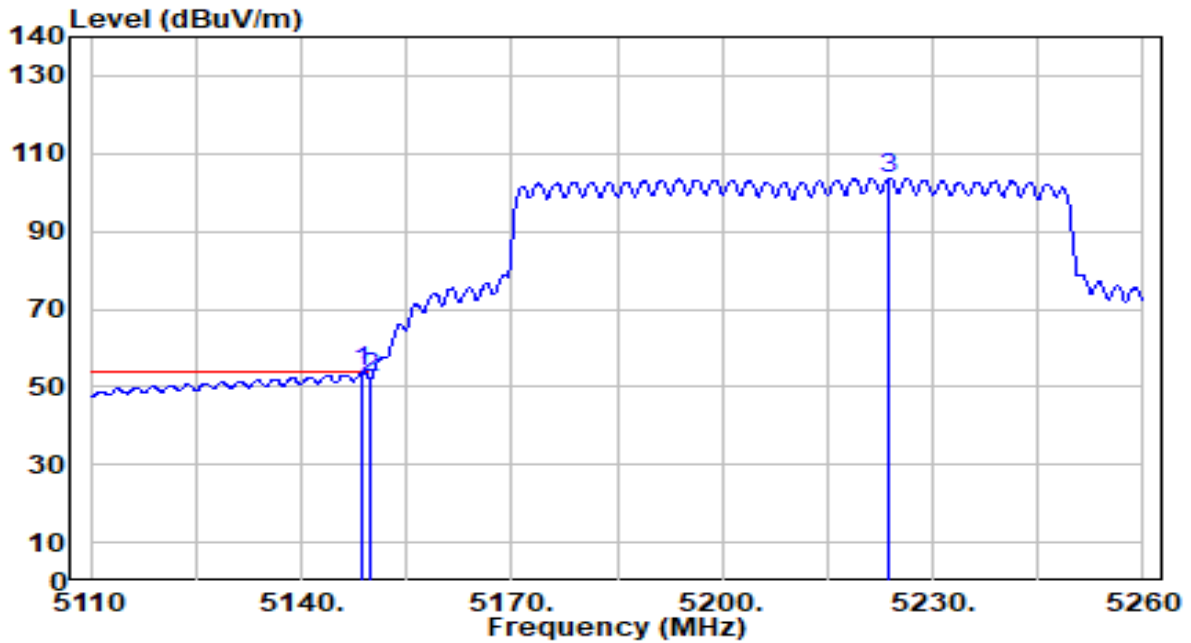


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	53.14	0.68	53.82	-0.18	54.00	130	5	Average
2		51.89	0.68	52.57	-1.43	54.00	130	5	Average
3		102.94	0.64	103.58	N/A	N/A	130	5	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

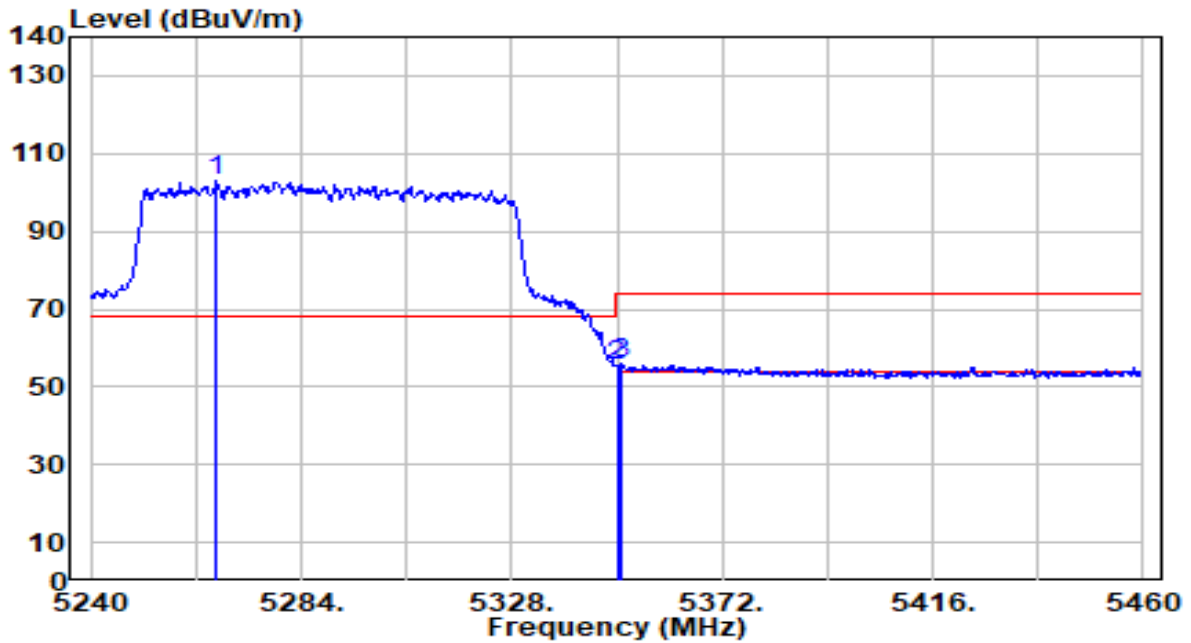


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5266.180	102.35	0.60	102.95	N/A	N/A	204	338	Peak
2	5350.000	54.84	0.51	55.35	-18.65	74.00	204	338	Peak
3	* 5350.880	55.44	0.50	55.95	-18.05	74.00	204	338	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

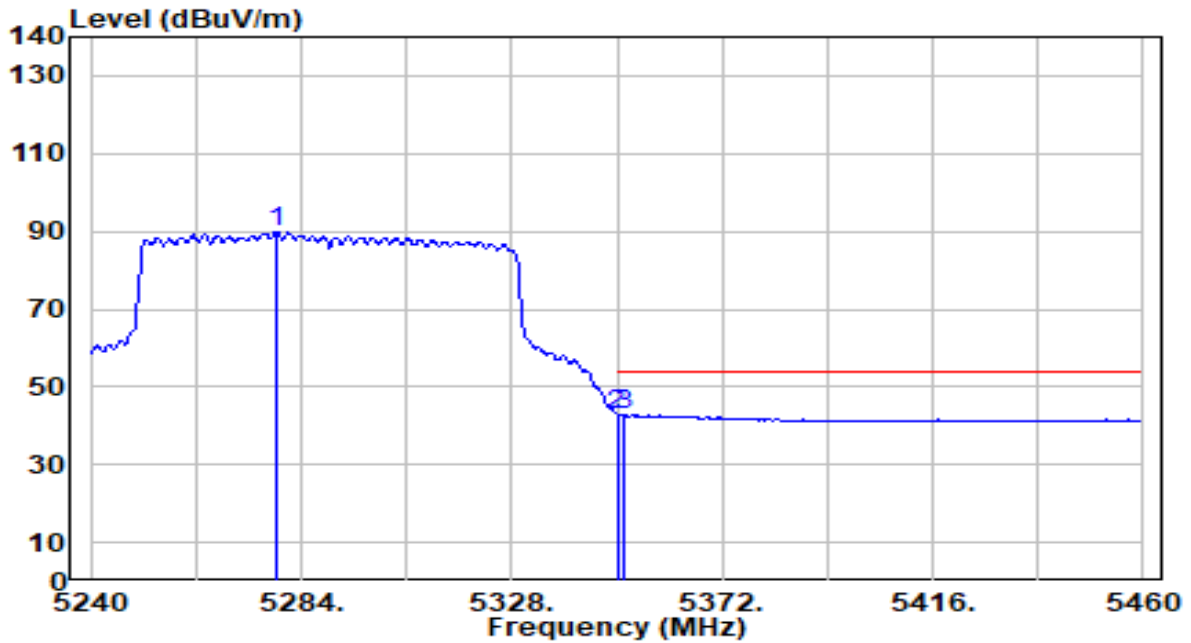


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5278.940	89.30	0.58	89.88	N/A	N/A	204	338	Average
2	* 5350.000	42.41	0.51	42.91	-11.09	54.00	204	338	Average
3	5351.320	42.37	0.50	42.87	-11.13	54.00	204	338	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

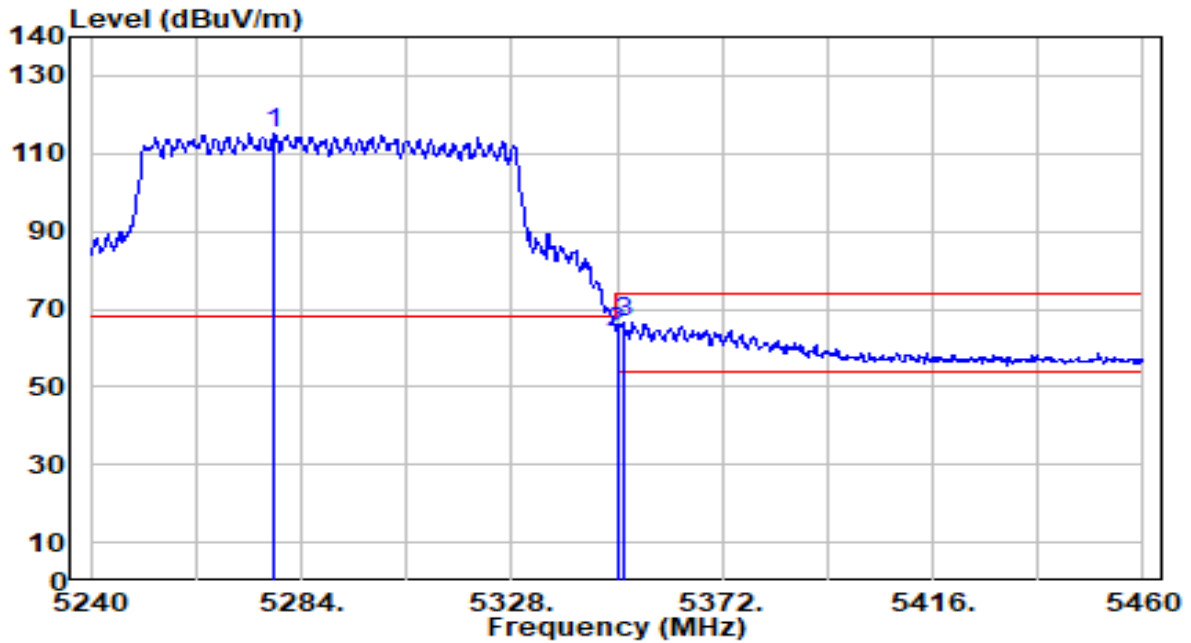


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5278.280	114.85	0.58	115.43	N/A	N/A	119	7	Peak
2	5350.000	63.37	0.51	63.88	-10.12	74.00	119	7	Peak
3	* 5351.320	65.87	0.50	66.38	-7.62	74.00	119	7	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

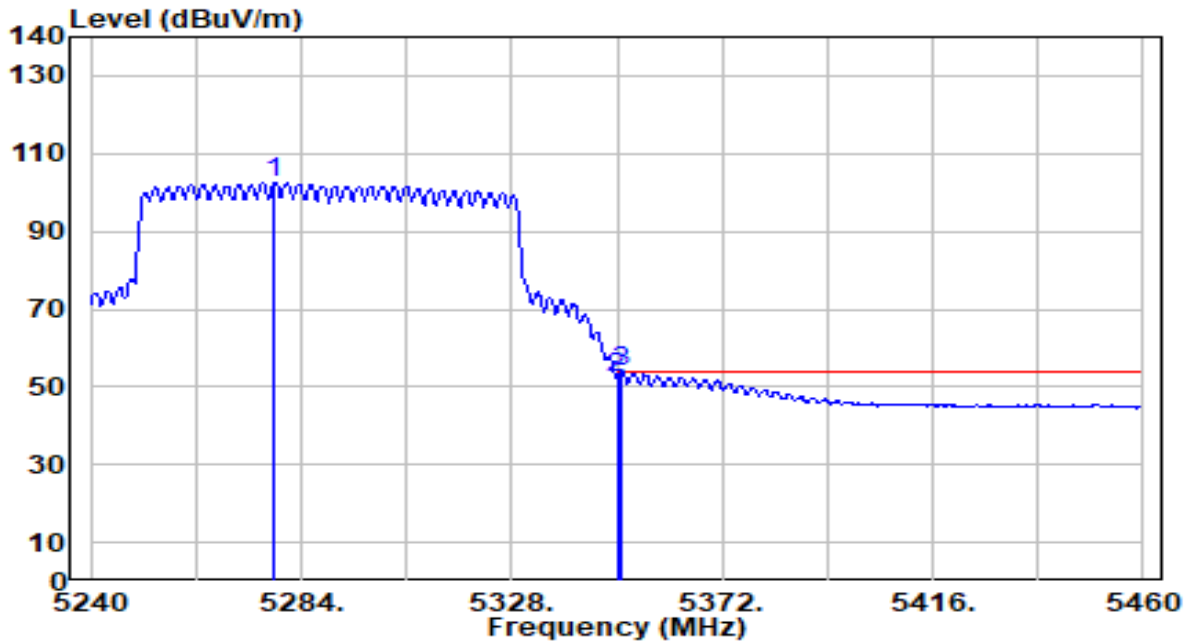


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5278.500	101.85	0.58	102.44	N/A	N/A	119	7	Average
2	5350.000	51.70	0.51	52.20	-1.80	54.00	119	7	Average
3	* 5351.100	53.37	0.50	53.88	-0.12	54.00	119	7	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

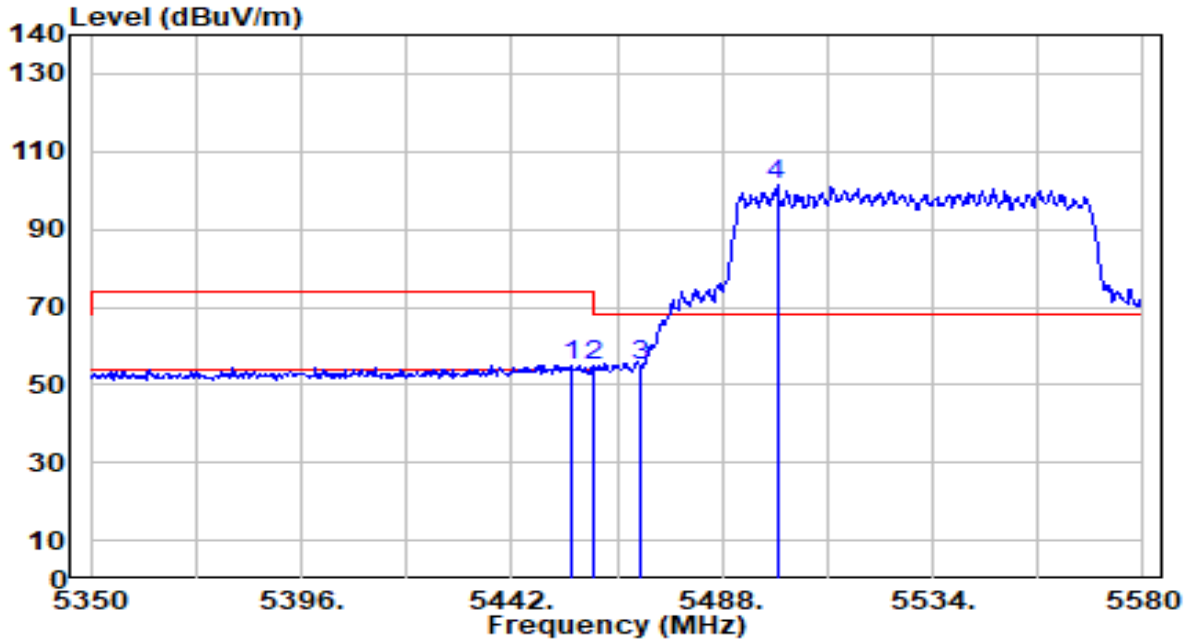


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5454.880	54.51	0.64	55.14	-18.86	74.00	222	25	Peak
2	5460.000	54.22	0.65	54.87	-19.13	74.00	222	25	Peak
3	* 5470.000	54.43	0.69	55.12	-13.08	68.20	222	25	Peak
4	5499.960	100.73	0.79	101.52	N/A	N/A	222	25	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

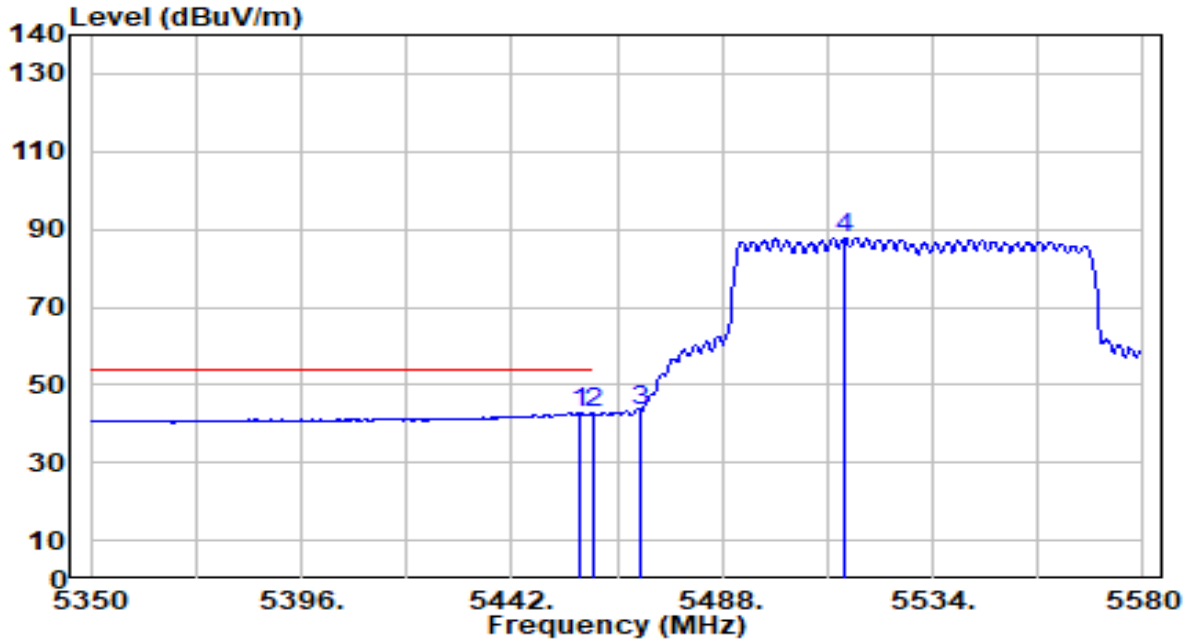


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5456.720	42.22	0.64	42.86	-11.14	54.00	222	25	Average
2	5460.000	41.97	0.65	42.62	-11.38	54.00	222	25	Average
3	5470.000	42.88	0.69	43.57	N/A	N/A	222	25	Average
4	5514.910	87.01	0.84	87.86	N/A	N/A	222	25	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

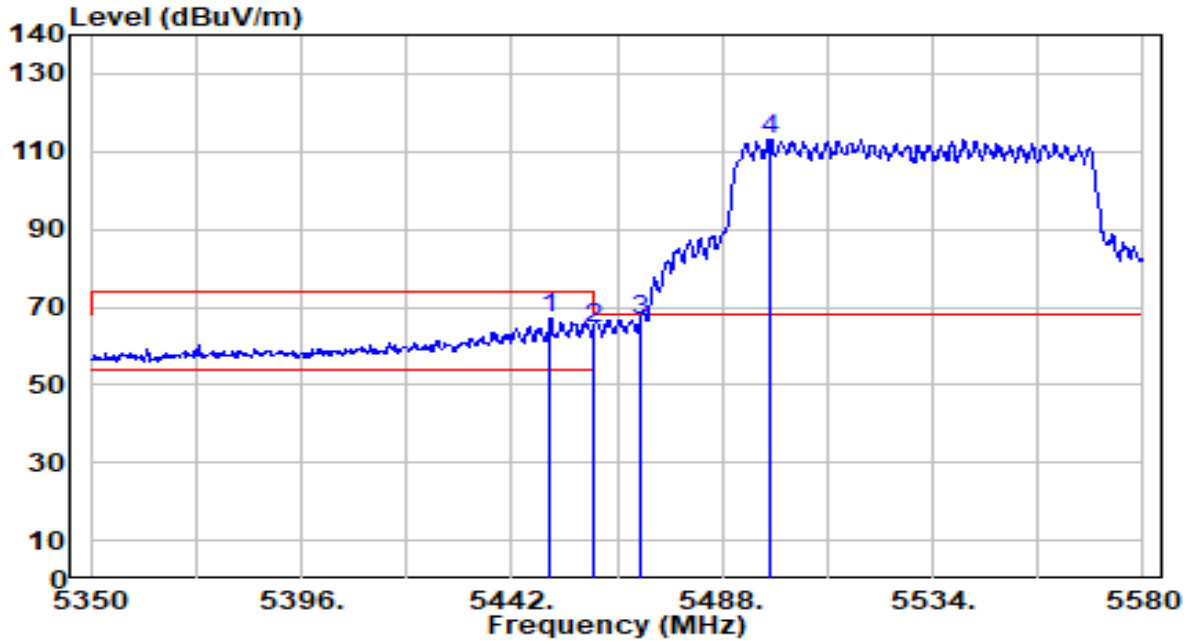


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5450.510	66.30	0.62	66.92	-7.08	74.00	102	6	Peak
2	5460.000	64.05	0.65	64.71	-9.29	74.00	102	6	Peak
3	* 5470.000	65.80	0.69	66.49	-1.71	68.20	102	6	Peak
4	5498.580	112.49	0.79	113.28	N/A	N/A	102	6	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

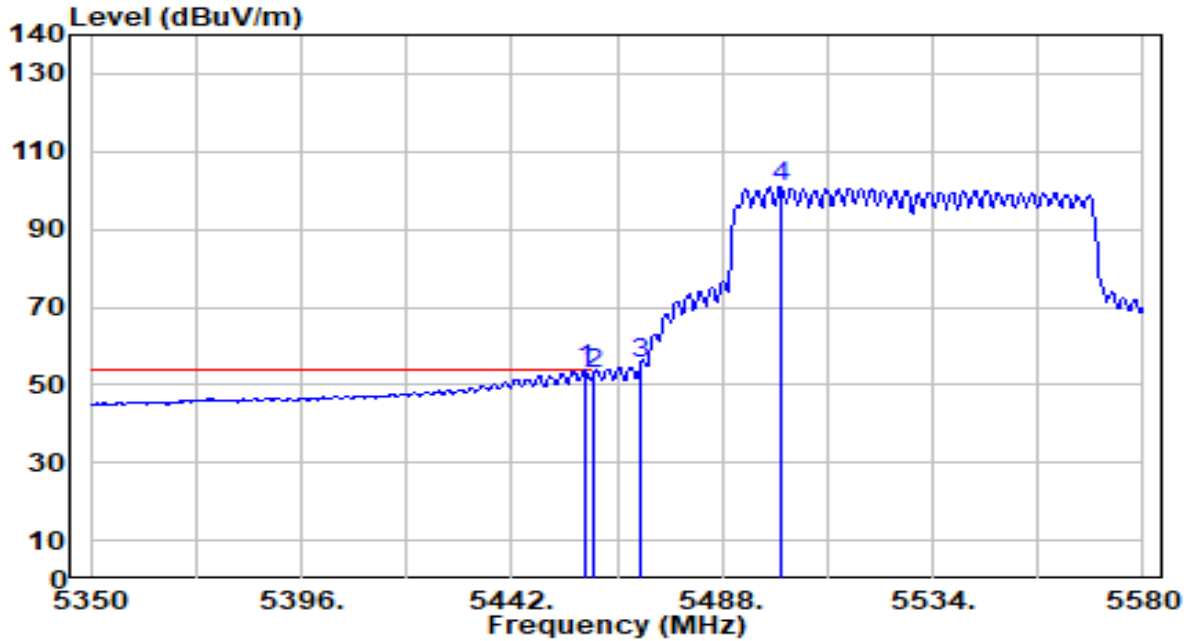


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5457.870	53.22	0.65	53.87	-0.13	54.00	102	6	Average
2		5460.000	52.22	0.65	52.87	-1.13	54.00	102	6	Average
3		5470.000	54.59	0.69	55.28	N/A	N/A	102	6	Average
4		5500.650	100.15	0.79	100.94	N/A	N/A	102	6	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

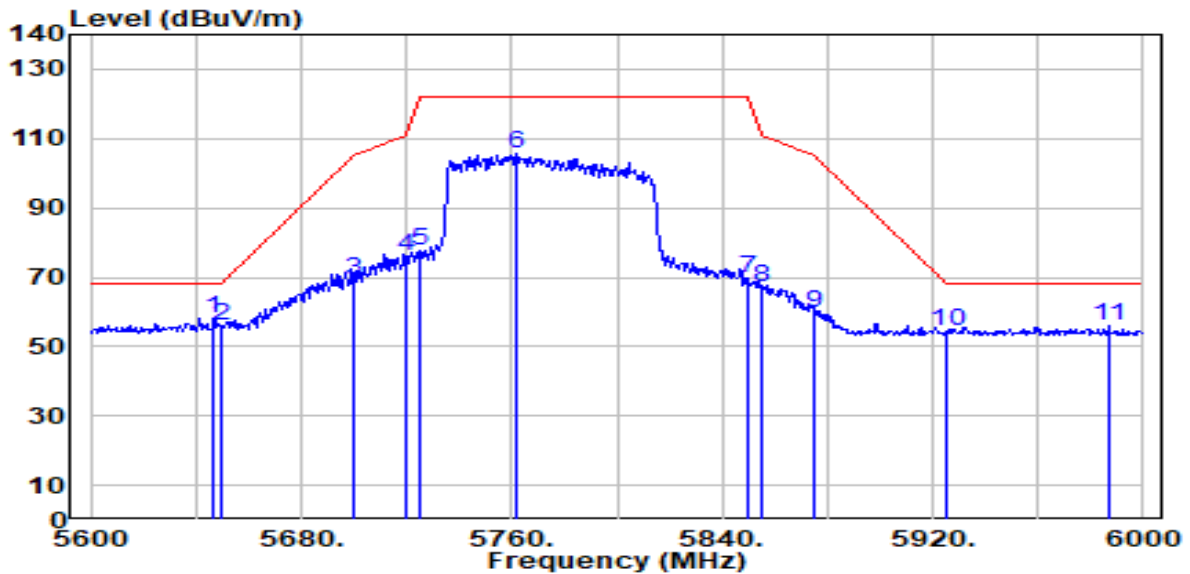


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	56.64	1.42	58.06	-10.14	68.20	205	28	Peak
2		54.45	1.44	55.89	-12.31	68.20	205	28	Peak
3		67.50	1.72	69.22	-35.98	105.20	205	28	Peak
4		74.40	1.84	76.23	-34.57	110.80	205	28	Peak
5		75.65	1.86	77.52	-44.68	122.20	205	28	Peak
6		103.56	2.07	105.63	N/A	N/A	205	28	Peak
7		67.61	2.27	69.88	-52.32	122.20	205	28	Peak
8		64.92	2.27	67.19	-43.61	110.80	205	28	Peak
9		57.31	2.26	59.57	-45.63	105.20	205	28	Peak
10		51.91	2.25	54.16	-14.04	68.20	205	28	Peak
11		53.53	2.22	55.75	-12.45	68.20	205	28	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

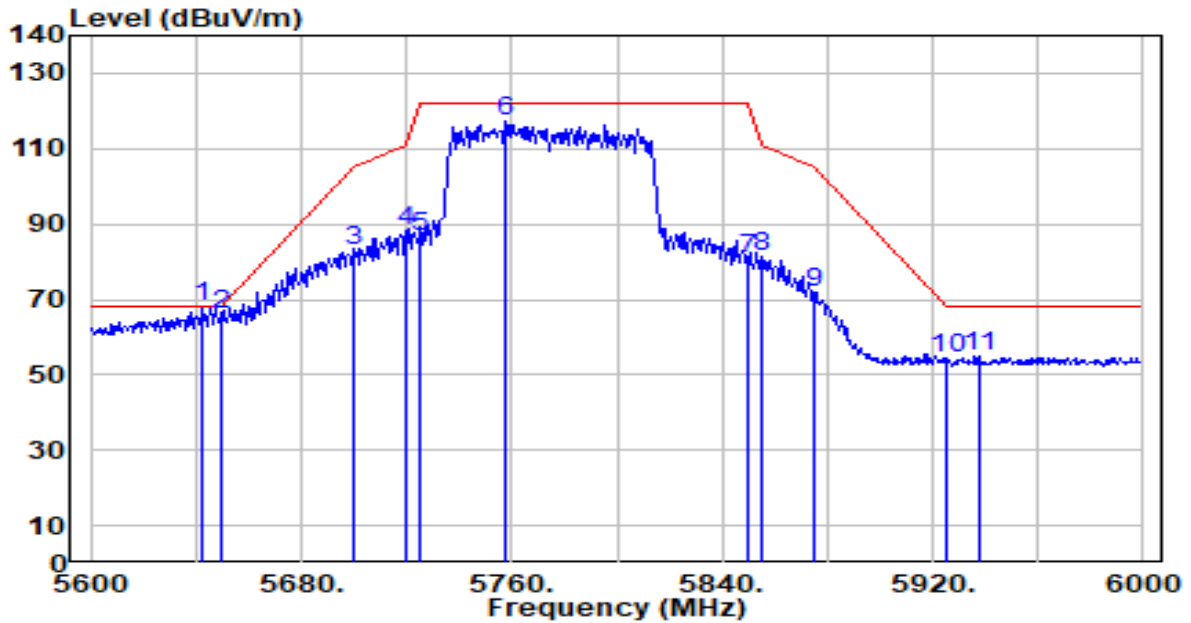


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5642.400	66.67	1.40	68.07	-0.13	68.20	120	4	Peak
2	5650.000	64.58	1.44	66.02	-2.18	68.20	120	4	Peak
3	5700.000	81.15	1.72	82.87	-22.33	105.20	120	4	Peak
4	5720.000	86.15	1.84	87.98	-22.82	110.80	120	4	Peak
5	5725.000	84.78	1.86	86.65	-35.55	122.20	120	4	Peak
6	5758.000	115.13	2.05	117.18	N/A	N/A	120	4	Peak
7	5850.000	78.73	2.27	81.01	-41.19	122.20	120	4	Peak
8	5855.000	79.19	2.27	81.46	-29.34	110.80	120	4	Peak
9	5875.000	69.66	2.26	71.92	-33.28	105.20	120	4	Peak
10	5925.000	51.91	2.25	54.16	-14.04	68.20	120	4	Peak
11	5937.600	52.56	2.24	54.80	-13.40	68.20	120	4	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

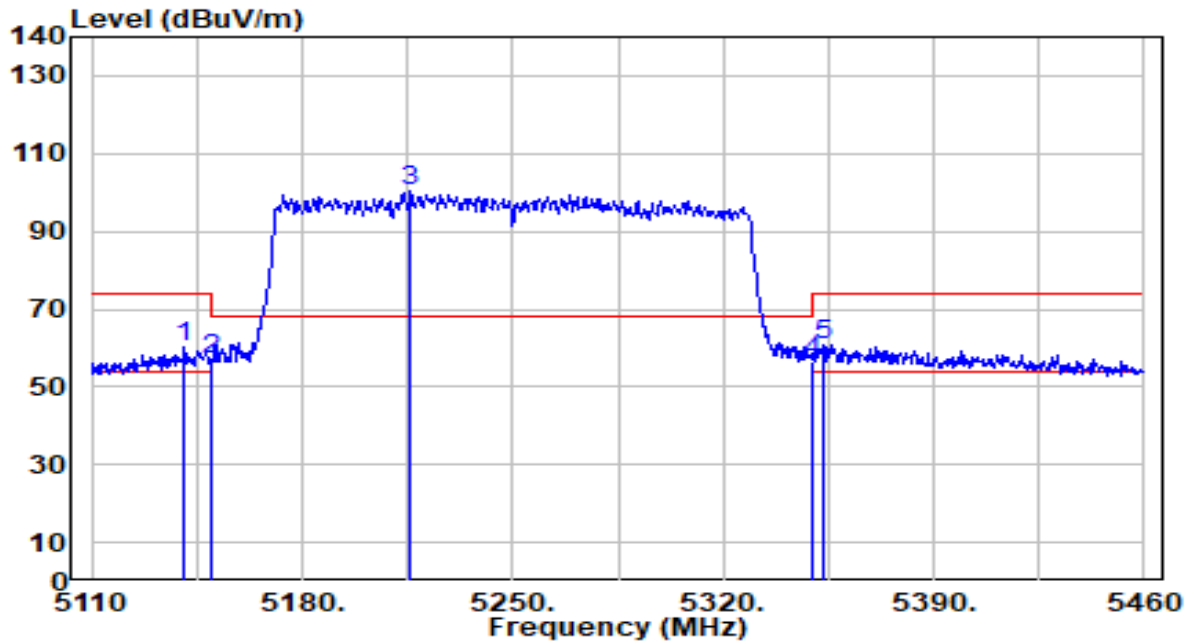


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5140.800	59.72	0.68	60.40	-13.60	74.00	186	336	Peak
2	5150.000	56.47	0.68	57.14	-16.86	74.00	186	336	Peak
3	5216.050	99.62	0.65	100.27	N/A	N/A	186	336	Peak
4	5350.000	56.20	0.51	56.70	-17.30	74.00	186	336	Peak
5	* 5353.600	60.08	0.50	60.58	-13.42	74.00	186	336	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

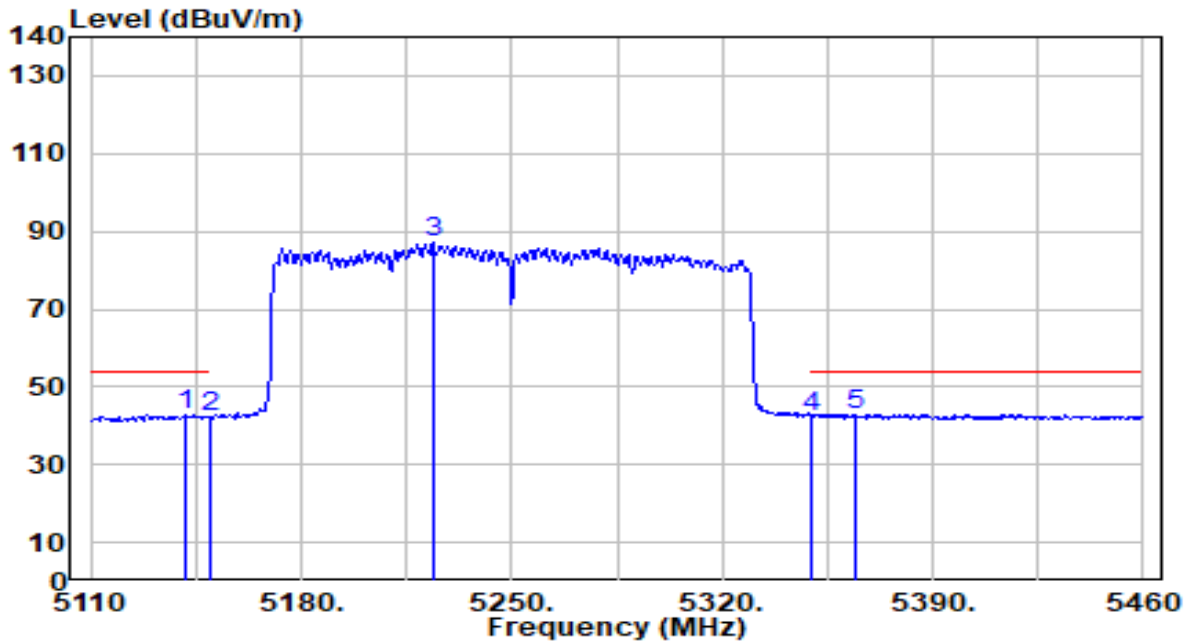


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5141.500	42.16	0.68	42.84	-11.16	54.00	186	336	Average
2	5150.000	41.70	0.68	42.38	-11.62	54.00	186	336	Average
3	5223.750	86.66	0.64	87.31	N/A	N/A	186	336	Average
4	5350.000	41.90	0.51	42.40	-11.60	54.00	186	336	Average
5	* 5364.100	42.53	0.49	43.02	-10.98	54.00	186	336	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

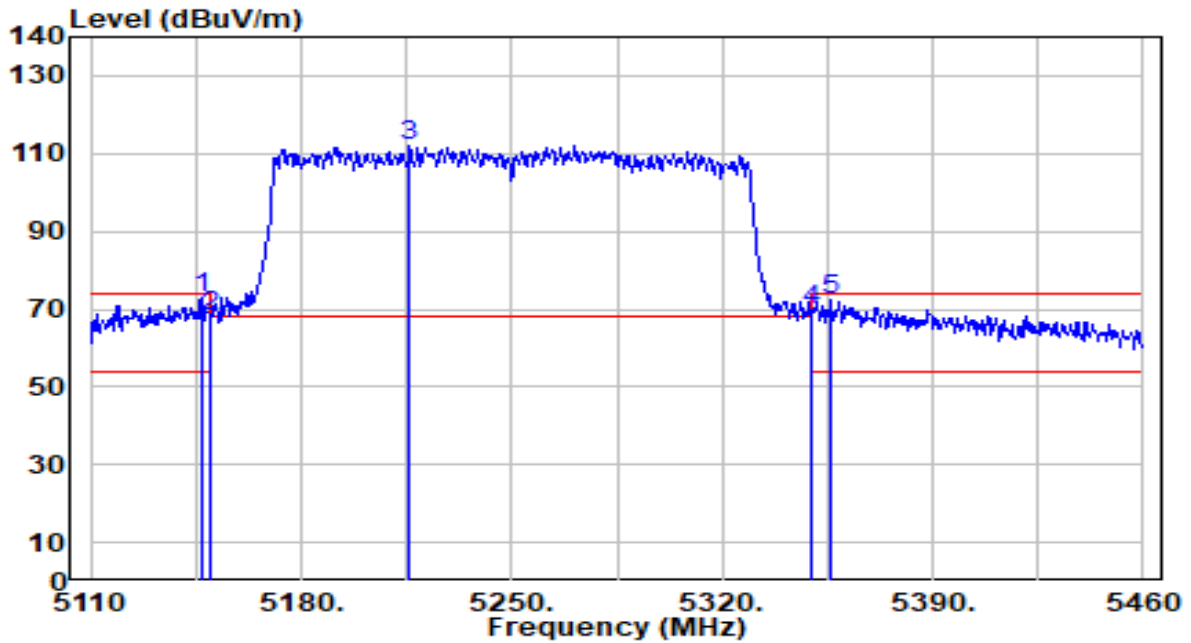


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5146.750	72.29	0.68	72.97	-1.03	74.00	139	7	Peak
2		5150.000	67.49	0.68	68.17	-5.83	74.00	139	7	Peak
3		5216.050	111.30	0.65	111.95	N/A	N/A	139	7	Peak
4		5350.000	69.40	0.51	69.91	-4.09	74.00	139	7	Peak
5		5356.050	72.04	0.50	72.53	-1.47	74.00	139	7	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

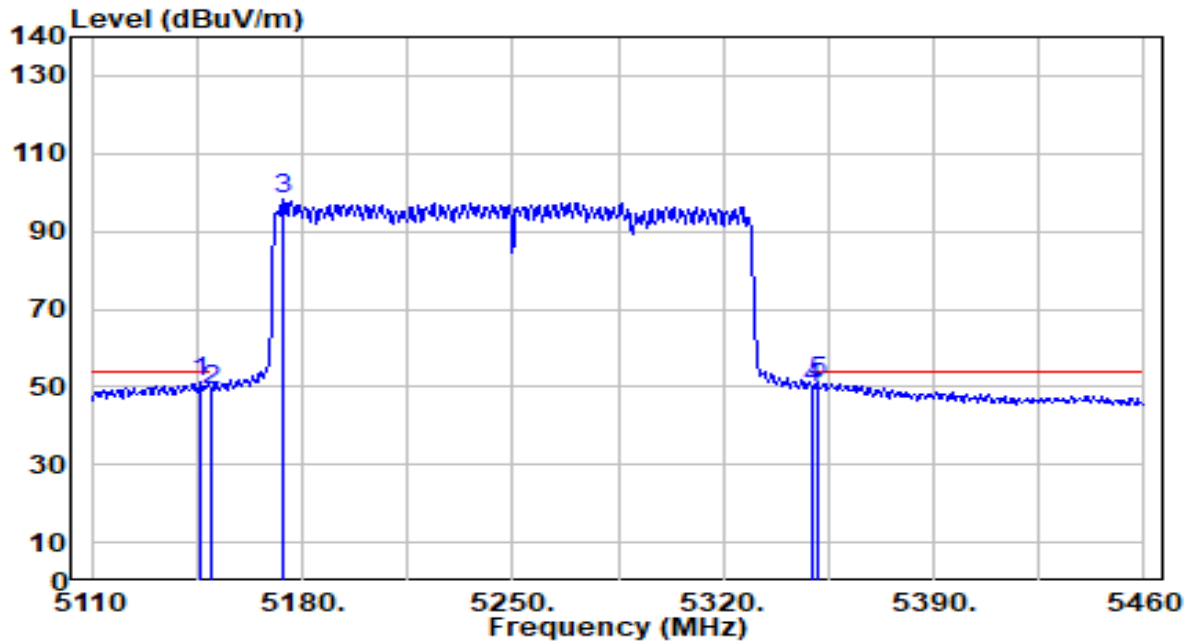


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	50.65	0.68	51.33	-2.67	54.00	139	7	Average
2		48.55	0.68	49.23	-4.77	54.00	139	7	Average
3		97.61	0.67	98.29	N/A	N/A	139	7	Average
4		49.22	0.51	49.73	-4.27	54.00	139	7	Average
5		50.55	0.50	51.05	-2.95	54.00	139	7	Average

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

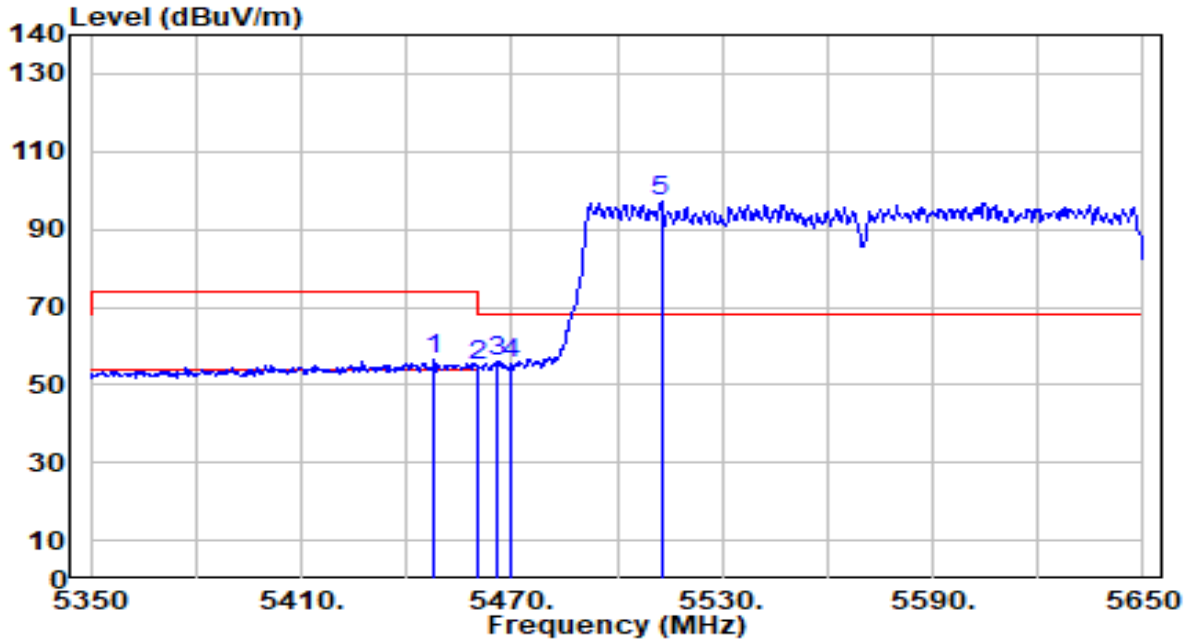


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5448.100	55.78	0.61	56.40	-17.60	74.00	233	25	Peak
2	5460.000	54.31	0.65	54.97	-19.03	74.00	233	25	Peak
3	* 5466.100	55.39	0.67	56.06	-12.14	68.20	233	25	Peak
4	5470.000	54.74	0.69	55.43	-12.77	68.20	233	25	Peak
5	5512.600	96.34	0.84	97.17	N/A	N/A	233	25	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

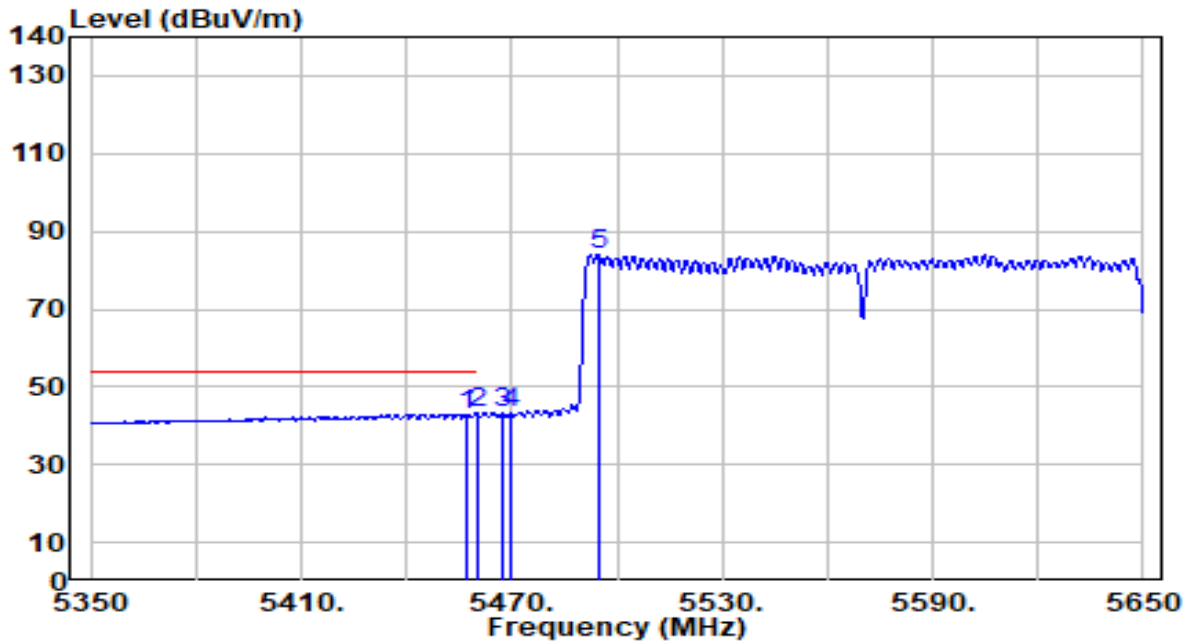


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.100	42.41	0.64	43.05	-10.95	54.00	233	25	Average
2	* 5460.000	42.63	0.65	43.29	-10.71	54.00	233	25	Average
3	5467.300	42.65	0.68	43.32	N/A	N/A	233	25	Average
4	5470.000	42.55	0.69	43.24	N/A	N/A	233	25	Average
5	5494.600	83.35	0.77	84.12	N/A	N/A	233	25	Average

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

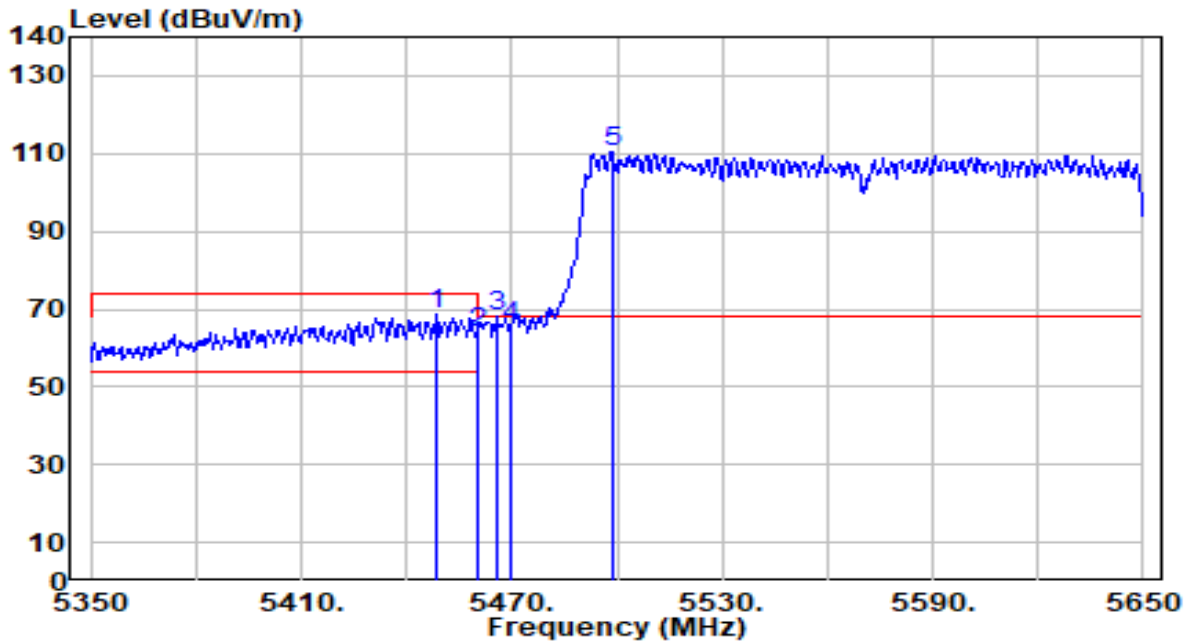


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5448.700	67.88	0.62	68.49	-5.51	74.00	107	4	Peak
2	5460.000	63.18	0.65	63.83	-10.17	74.00	107	4	Peak
3	* 5465.800	67.36	0.67	68.03	-0.17	68.20	107	4	Peak
4	5470.000	64.64	0.69	65.33	-2.87	68.20	107	4	Peak
5	5498.500	109.70	0.78	110.49	N/A	N/A	107	4	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

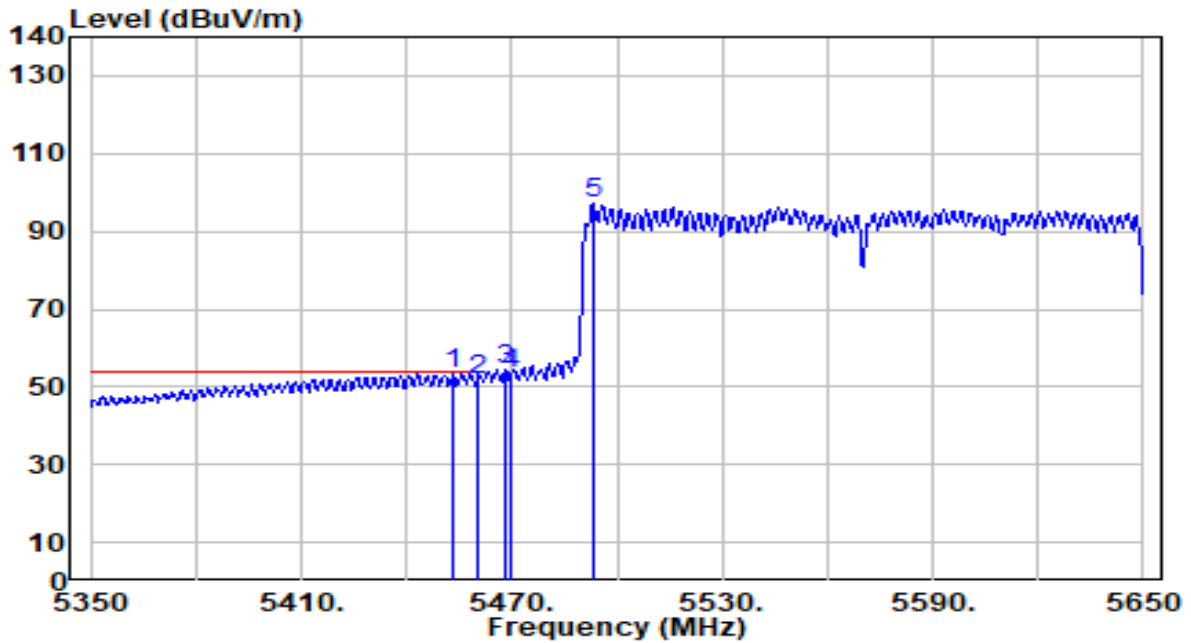


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5453.500	52.70	0.63	53.33	-0.67	54.00	107	4	Average
2	5460.000	51.33	0.65	51.99	-2.01	54.00	107	4	Average
3	5468.200	53.92	0.68	54.60	N/A	N/A	107	4	Average
4	5470.000	52.78	0.69	53.47	N/A	N/A	107	4	Average
5	5493.100	96.50	0.77	97.27	N/A	N/A	107	4	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11be-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

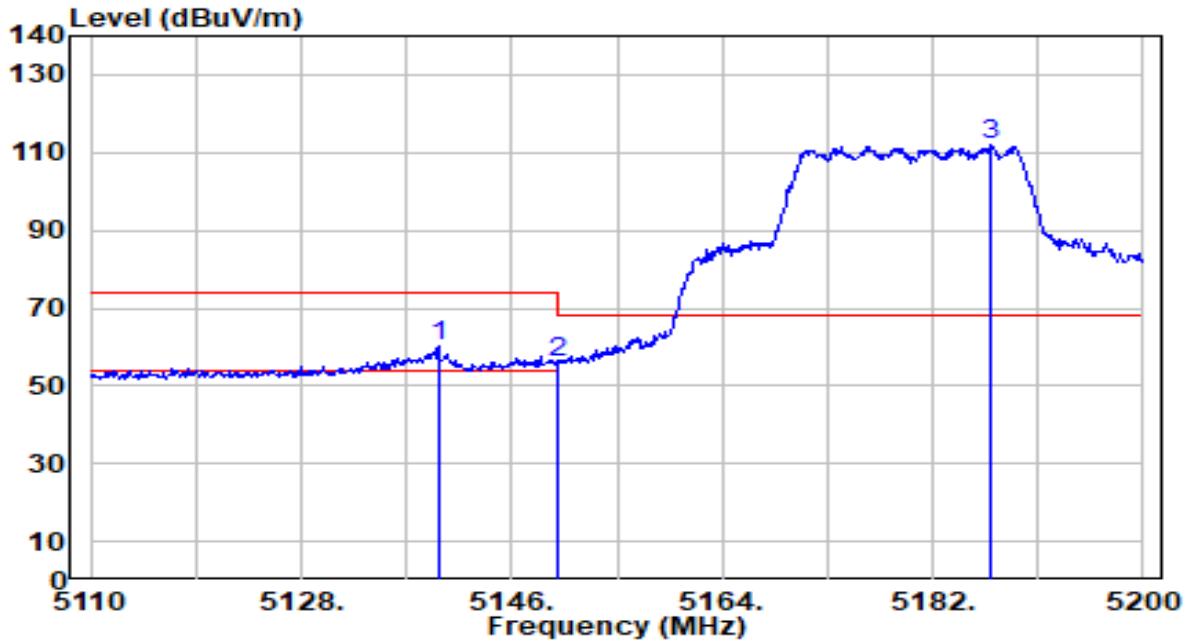


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5139.700	59.32	0.68	60.00	-14.00	74.00	190	339	Peak
2	5150.000	55.48	0.68	56.15	-17.85	74.00	190	339	Peak
3	5186.950	111.54	0.67	112.21	N/A	N/A	190	339	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11be-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

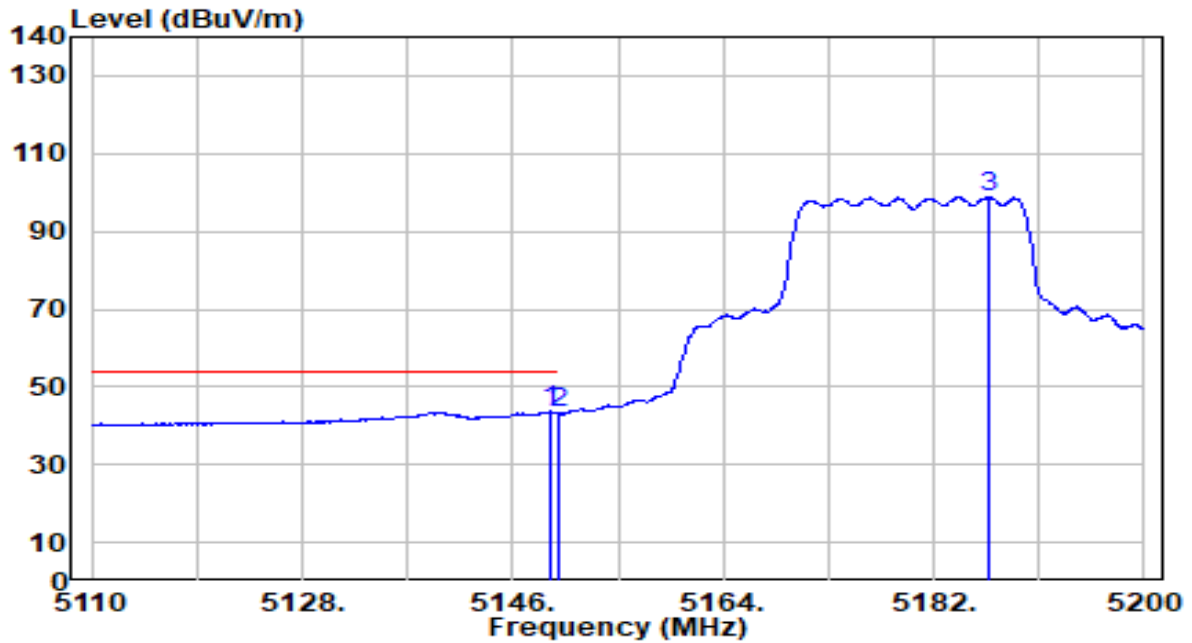


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5149.330	42.93	0.68	43.61	-10.39	54.00	190	339	Average
2		5150.000	42.45	0.68	43.13	-10.87	54.00	190	339	Average
3		5186.680	98.23	0.67	98.90	N/A	N/A	190	339	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11be-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

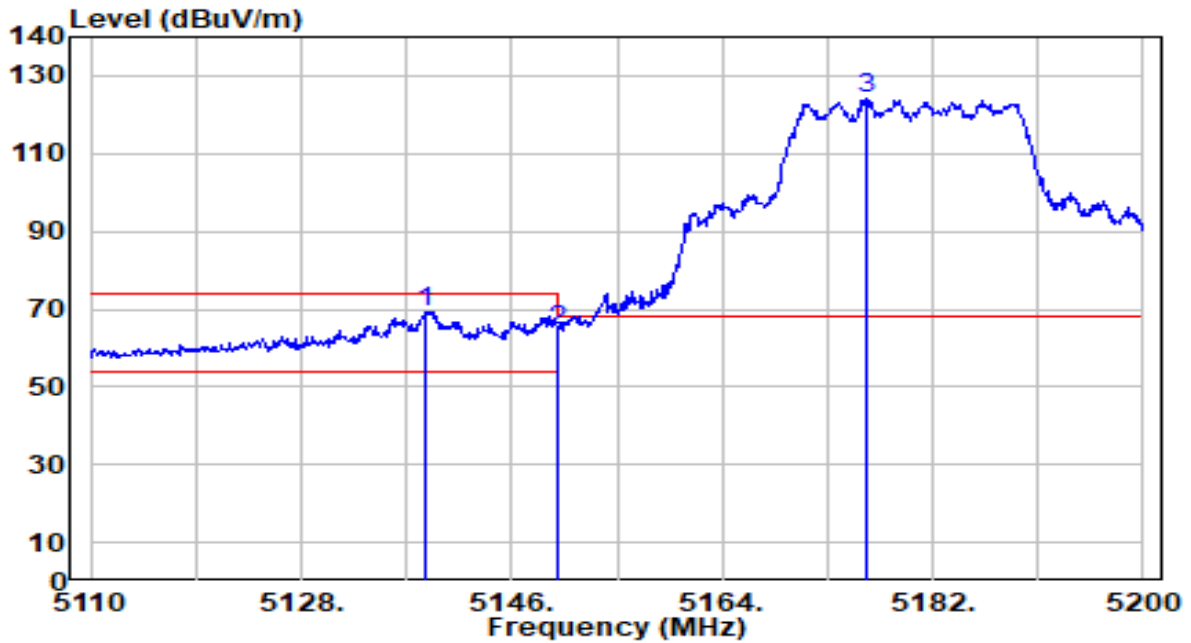


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5138.710	68.79	0.68	69.47	-4.53	74.00	135	6	Peak
2		5150.000	63.53	0.68	64.20	-9.80	74.00	135	6	Peak
3		5176.240	123.46	0.67	124.13	N/A	N/A	135	6	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11be-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

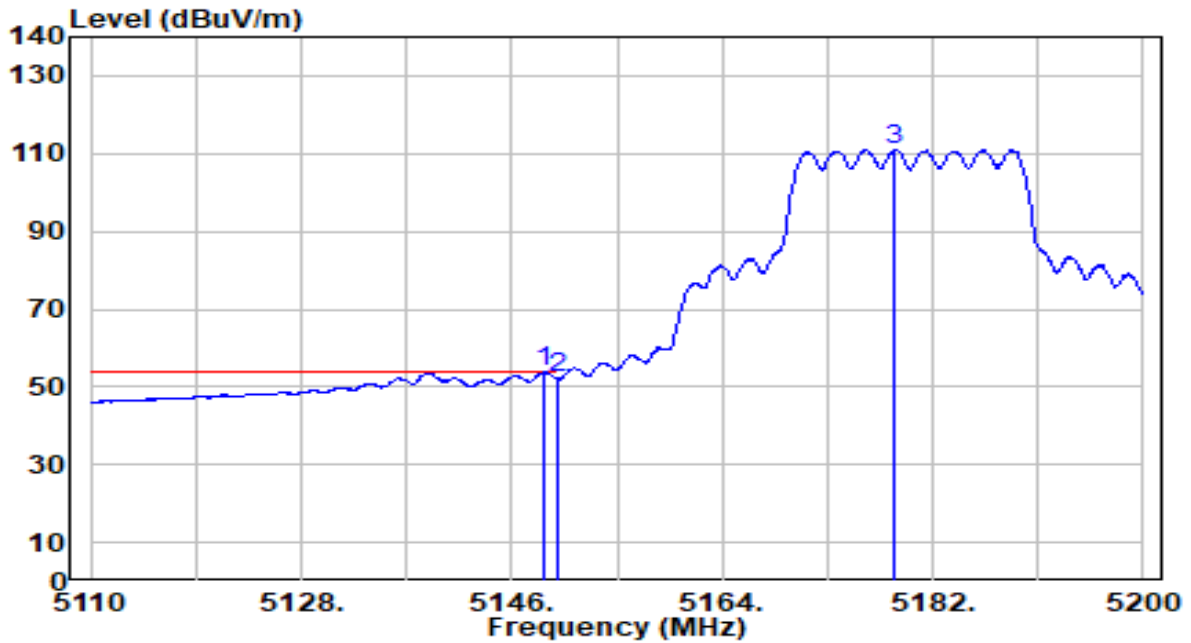


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5148.790	53.14	0.68	53.81	-0.19	54.00	135	6	Average
2		5150.000	51.41	0.68	52.09	-1.91	54.00	135	6	Average
3		5178.670	110.22	0.67	110.90	N/A	N/A	135	6	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

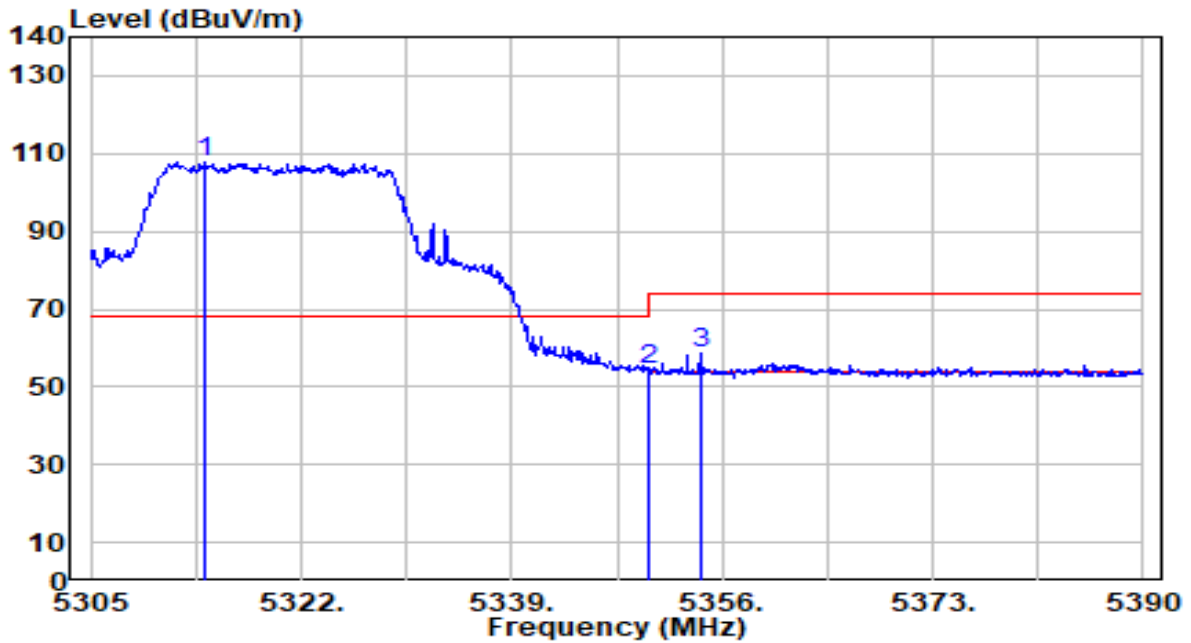


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5314.265	107.31	0.54	107.85	N/A	N/A	203	341	Peak
2	5350.000	53.90	0.51	54.40	-19.60	74.00	203	341	Peak
3	* 5354.215	57.91	0.50	58.41	-15.59	74.00	203	341	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

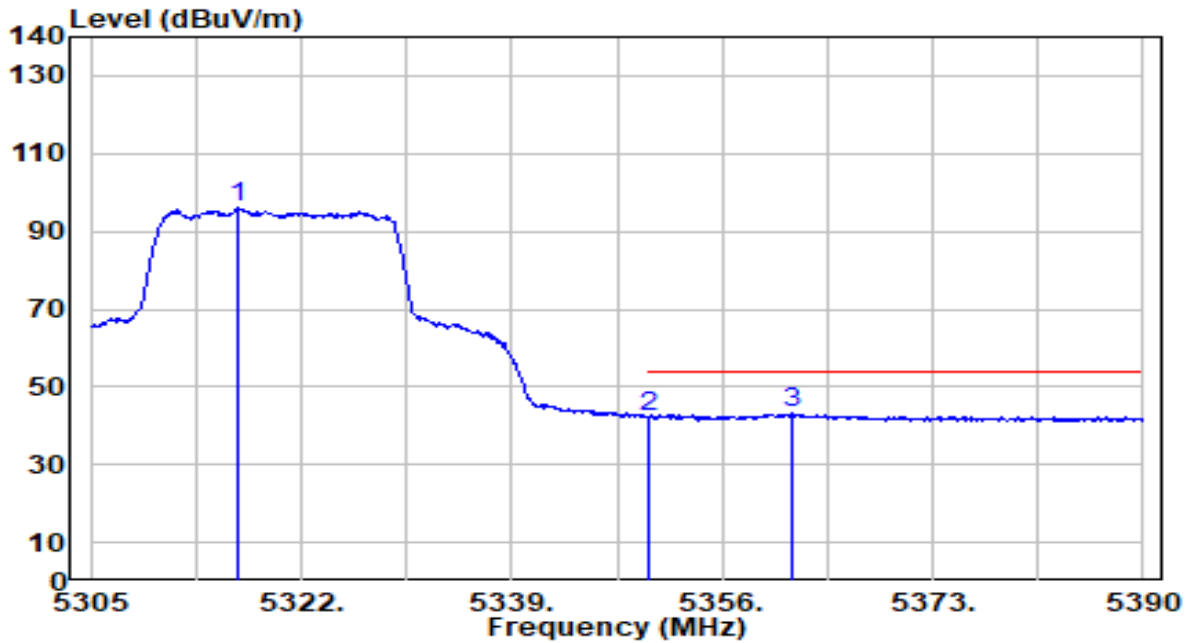


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5316.815	95.46	0.54	96.00	N/A	N/A	203	341	Average
2	5350.000	41.59	0.51	42.09	-11.91	54.00	203	341	Average
3	* 5361.610	42.63	0.49	43.13	-10.87	54.00	203	341	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

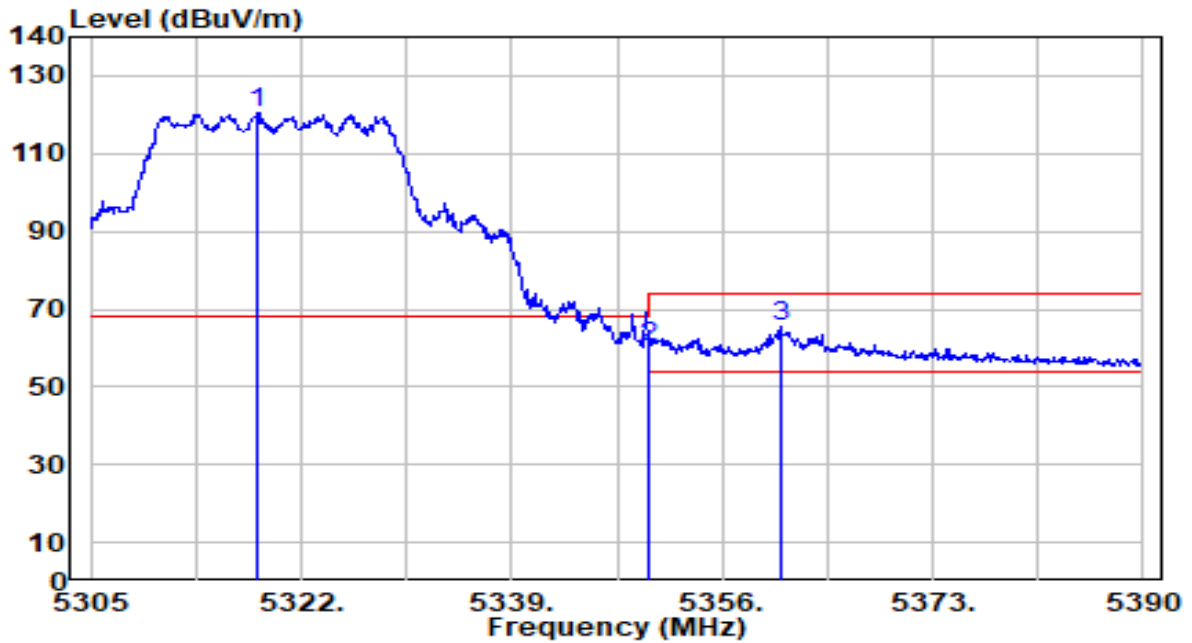


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.430	119.76	0.54	120.30	N/A	N/A	129	6	Peak
2	5350.000	59.95	0.51	60.46	-13.54	74.00	129	6	Peak
3	* 5360.760	64.81	0.49	65.31	-8.69	74.00	129	6	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

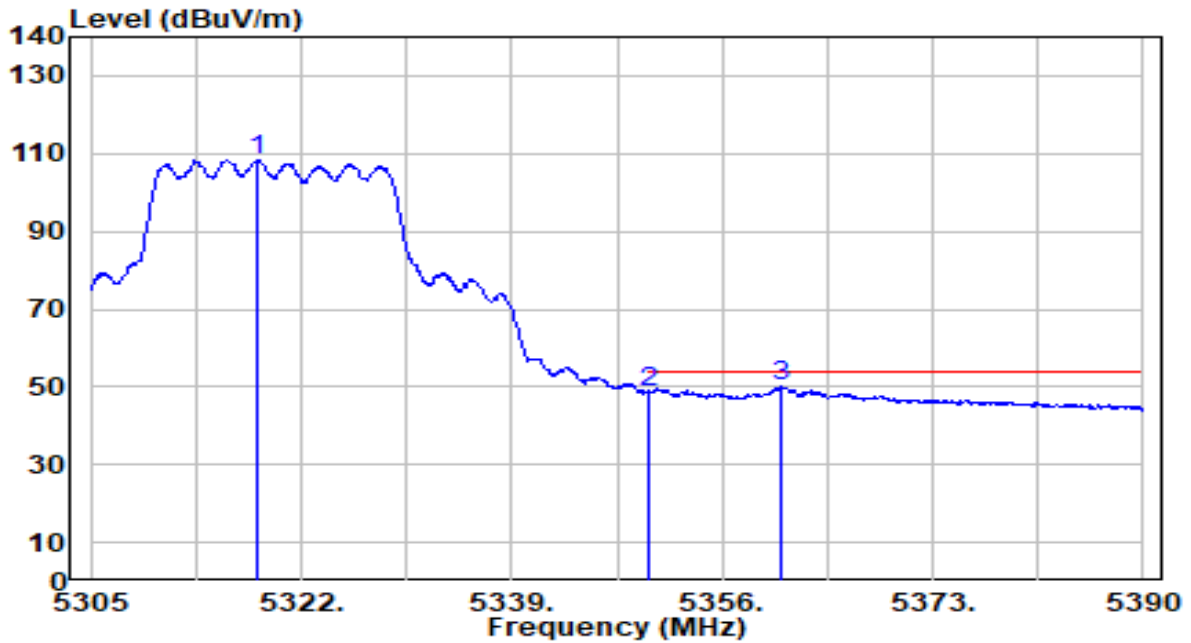


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.515	107.85	0.54	108.39	N/A	N/A	129	6	Average
2	5350.000	48.06	0.51	48.56	-5.44	54.00	129	6	Average
3	* 5360.845	49.54	0.49	50.03	-3.97	54.00	129	6	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

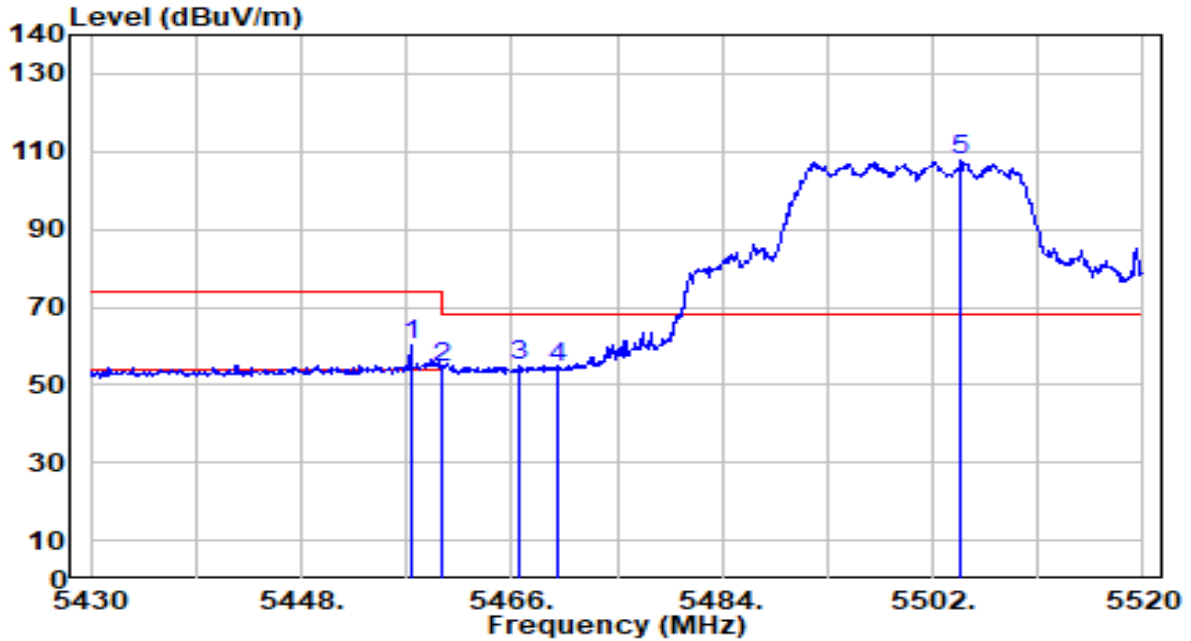


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.360	59.80	0.65	60.45	-13.55	74.00	223	25	Peak
2	5460.000	53.79	0.65	54.44	-19.56	74.00	223	25	Peak
3	* 5466.630	54.20	0.68	54.88	-13.32	68.20	223	25	Peak
4	5470.000	53.75	0.69	54.43	-13.77	68.20	223	25	Peak
5	5504.430	106.71	0.81	107.51	N/A	N/A	223	25	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

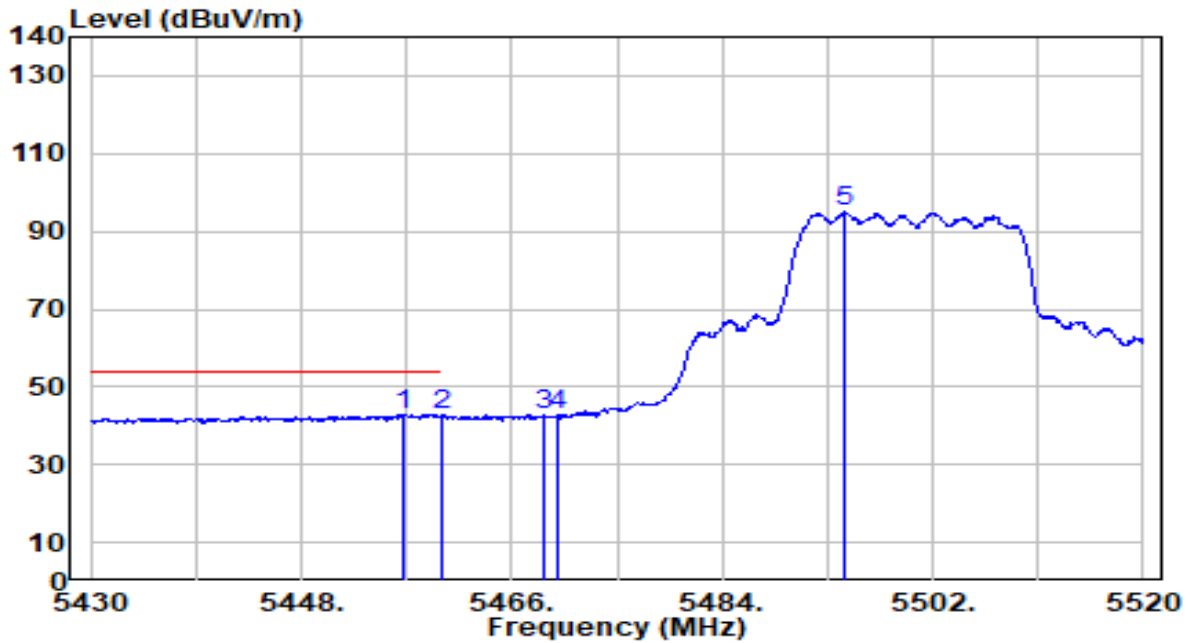


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5456.640	42.32	0.64	42.96	-11.04	54.00	223	25	Average
2		5460.000	42.19	0.65	42.85	-11.15	54.00	223	25	Average
3		5468.700	42.02	0.68	42.70	N/A	N/A	223	25	Average
4		5470.000	41.91	0.69	42.60	N/A	N/A	223	25	Average
5		5494.350	94.12	0.77	94.89	N/A	N/A	223	25	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

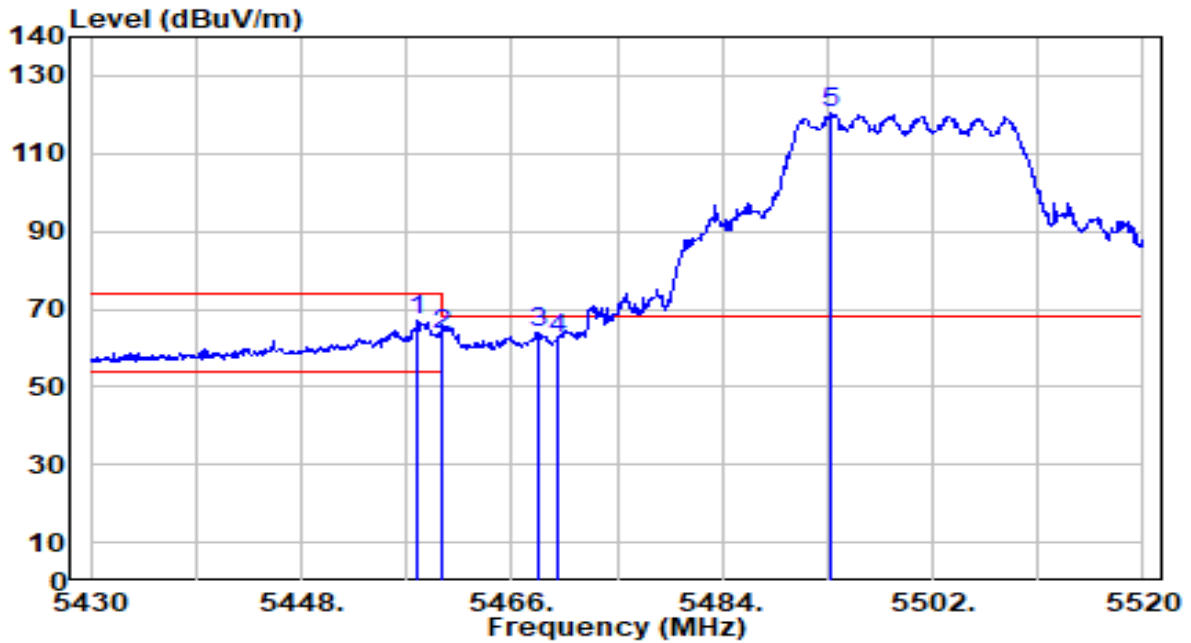


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.990	66.59	0.65	67.24	-6.76	74.00	113	2	Peak
2	5460.000	63.00	0.65	63.66	-10.34	74.00	113	2	Peak
3	* 5468.250	63.27	0.68	63.95	-4.25	68.20	113	2	Peak
4	5470.000	61.44	0.69	62.12	-6.08	68.20	113	2	Peak
5	5493.270	119.52	0.77	120.28	N/A	N/A	113	2	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

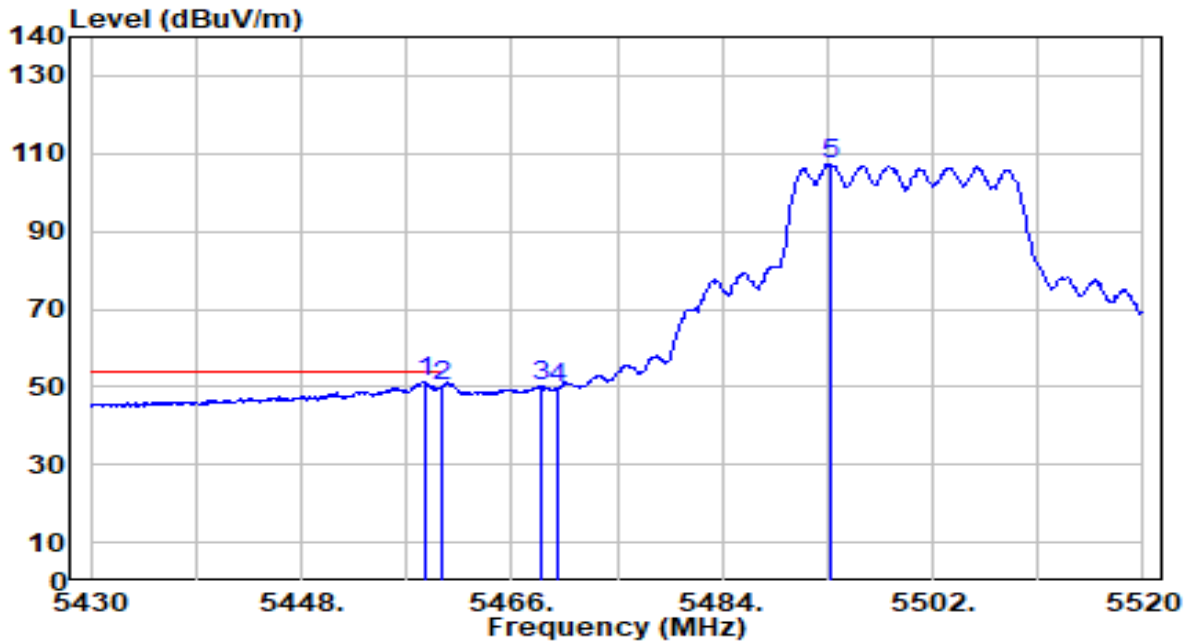


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5458.530	50.49	0.65	51.14	-2.86	54.00	113	2	Average
2	5460.000	49.69	0.65	50.34	-3.66	54.00	113	2	Average
3	5468.430	49.38	0.68	50.07	N/A	N/A	113	2	Average
4	5470.000	49.23	0.69	49.92	N/A	N/A	113	2	Average
5	5493.180	106.73	0.77	107.50	N/A	N/A	113	2	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

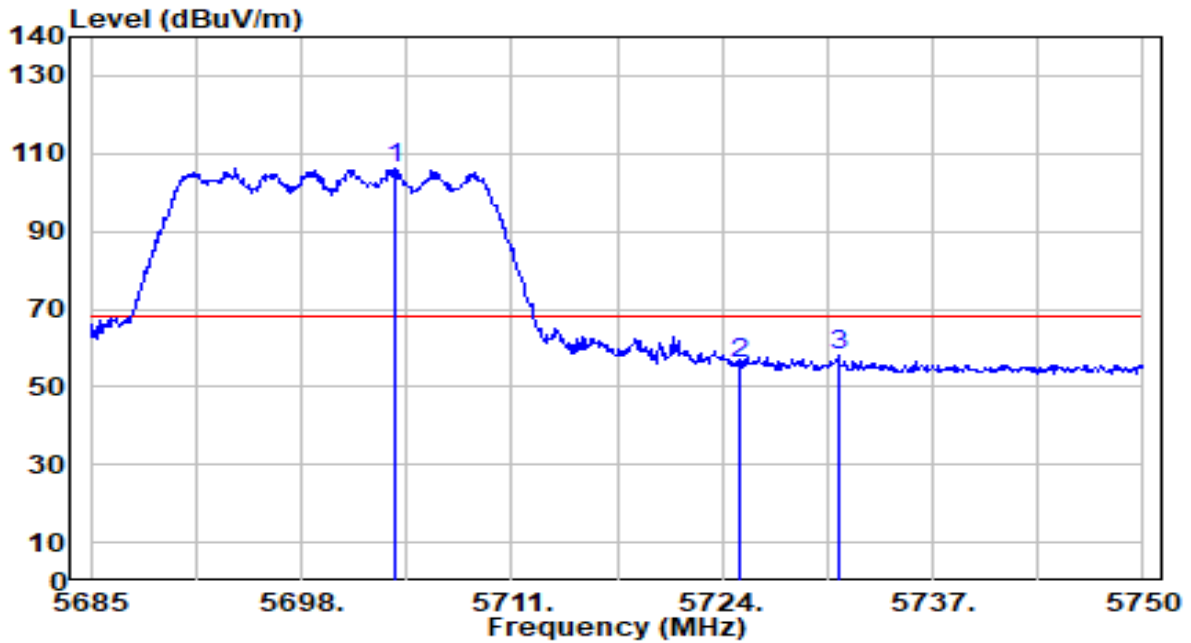


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5703.720	104.60	1.74	106.34	N/A	N/A	100	100	Peak
2	5725.000	54.16	1.86	56.02	-12.18	68.20	100	100	Peak
3	* 5731.150	55.99	1.90	57.89	-10.31	68.20	100	100	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

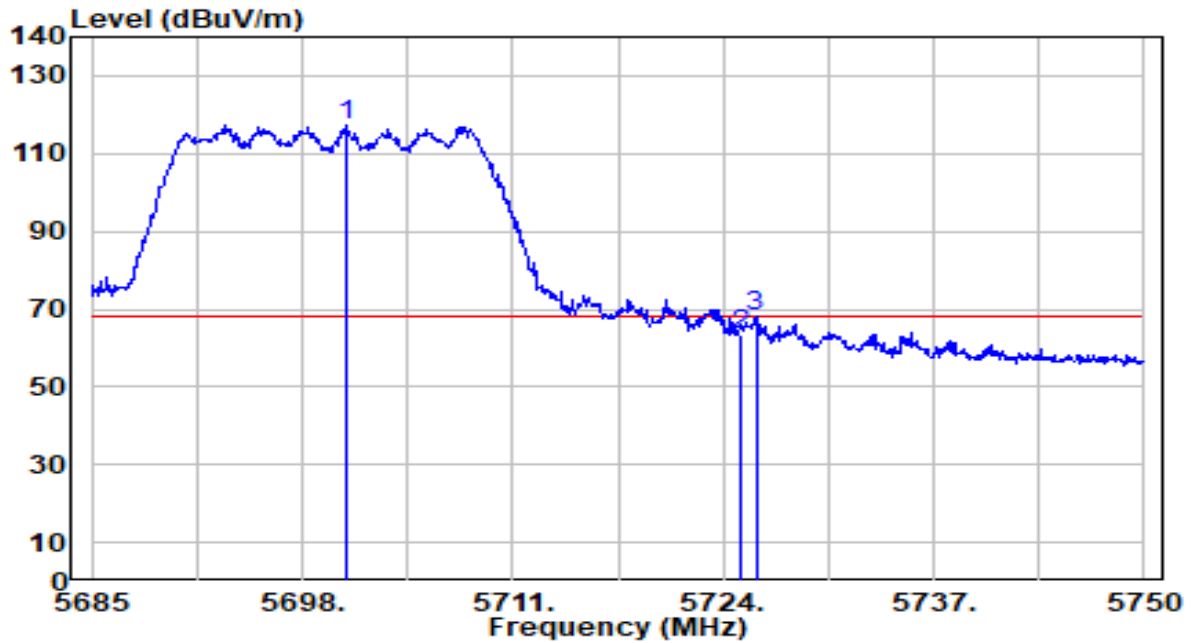


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5700.795	115.54	1.73	117.27	N/A	N/A	164	360	Peak
2	5725.000	61.69	1.86	63.55	-4.65	68.20	164	360	Peak
3	* 5726.015	66.16	1.87	68.03	-0.17	68.20	164	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

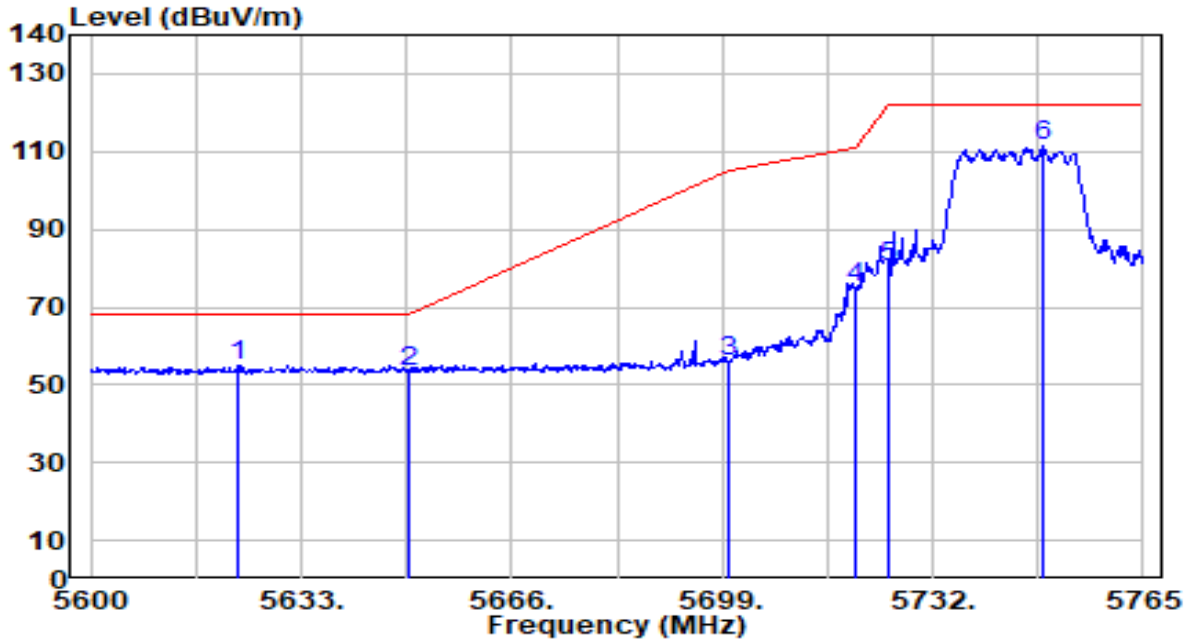


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	53.90	1.29	55.18	-13.02	68.20	210	27	Peak
2		51.81	1.44	53.25	-14.95	68.20	210	27	Peak
3		54.54	1.72	56.26	-48.94	105.20	210	27	Peak
4		73.11	1.84	74.95	-35.85	110.80	210	27	Peak
5		78.60	1.86	80.47	-41.73	122.20	210	27	Peak
6		109.59	2.00	111.59	N/A	N/A	210	27	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

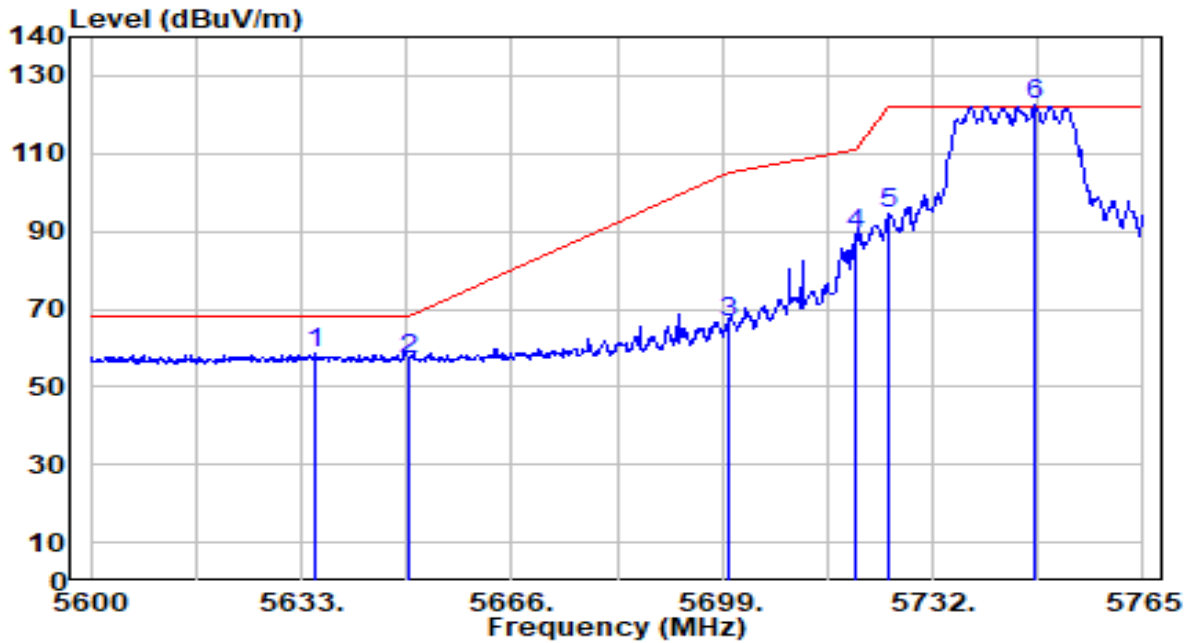


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5634.980	57.42	1.35	58.78	-9.42	68.20	130	3	Peak
2		5650.000	55.75	1.44	57.19	-11.01	68.20	130	3	Peak
3		5700.000	64.60	1.72	66.32	-38.88	105.20	130	3	Peak
4		5720.000	87.61	1.84	89.44	-21.36	110.80	130	3	Peak
5		5725.000	92.48	1.86	94.35	-27.85	122.20	130	3	Peak
6		5748.170	120.68	1.99	122.68	N/A	N/A	130	3	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

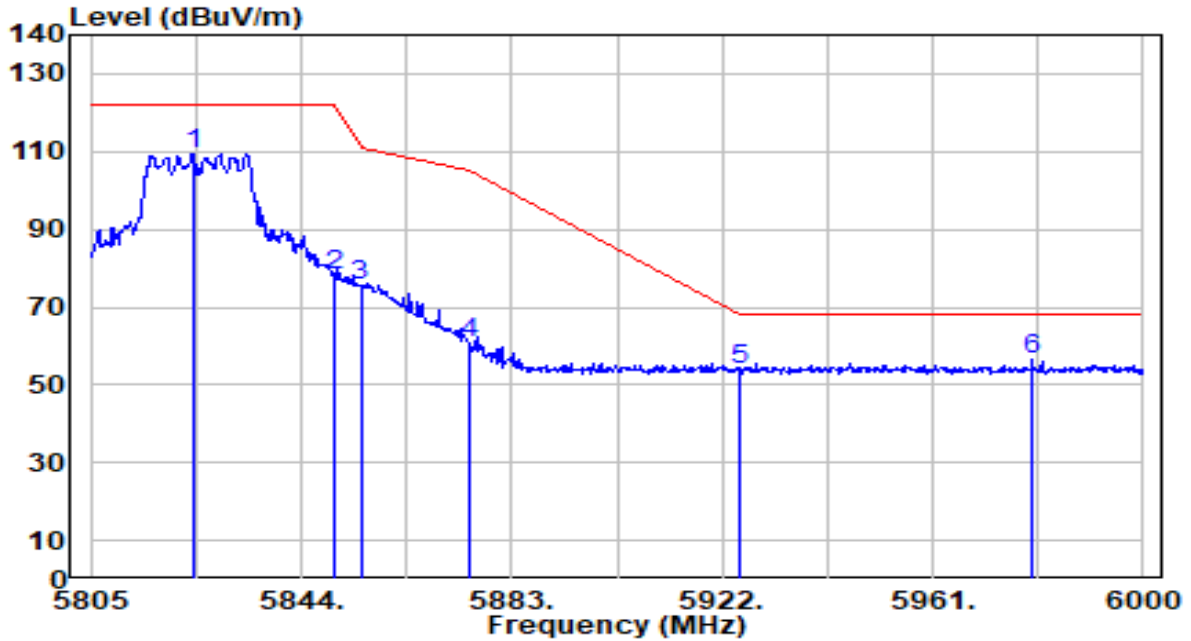


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5823.915	107.15	2.28	109.43	N/A	N/A	100	103	Peak
2	5850.000	75.95	2.27	78.22	-43.98	122.20	100	103	Peak
3	5855.000	73.16	2.27	75.43	-35.37	110.80	100	103	Peak
4	5875.000	58.71	2.26	60.98	-44.22	105.20	100	103	Peak
5	5925.000	51.78	2.25	54.02	-14.18	68.20	100	103	Peak
6	* 5979.330	54.08	2.23	56.31	-11.89	68.20	100	103	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

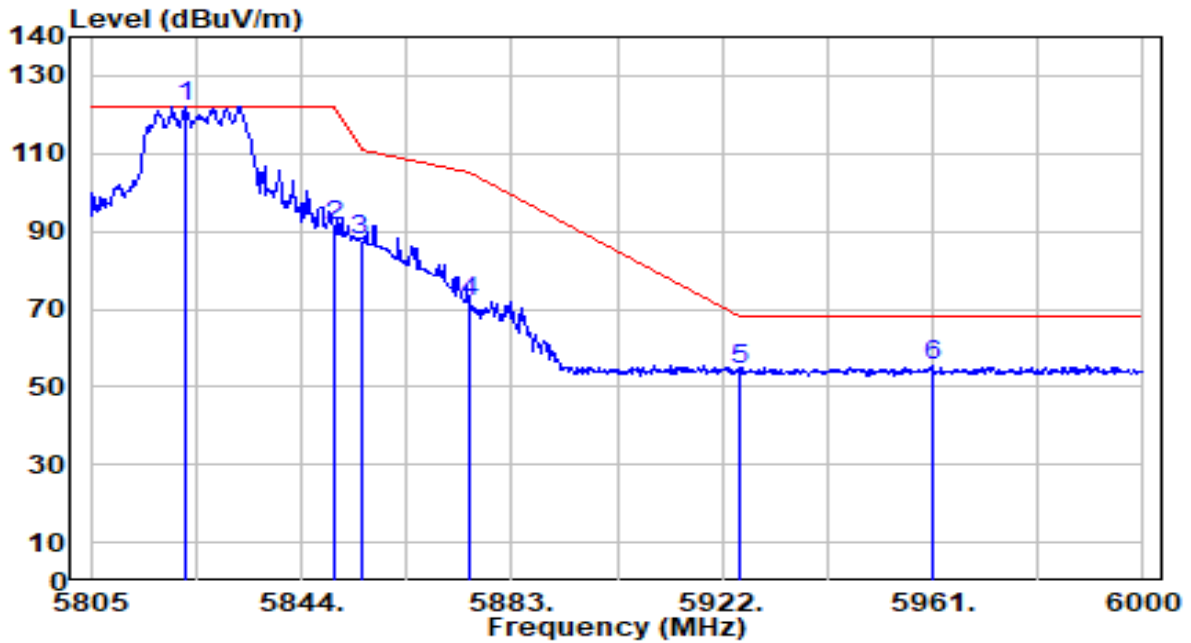


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5822.355	119.88	2.28	122.16	N/A	N/A	133	5	Peak
2	5850.000	89.25	2.27	91.52	-30.68	122.20	133	5	Peak
3	5855.000	85.30	2.27	87.57	-23.23	110.80	133	5	Peak
4	5875.000	69.61	2.26	71.87	-33.33	105.20	133	5	Peak
5	5925.000	52.06	2.25	54.30	-13.90	68.20	133	5	Peak
6	* 5960.805	53.07	2.23	55.30	-12.90	68.20	133	5	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

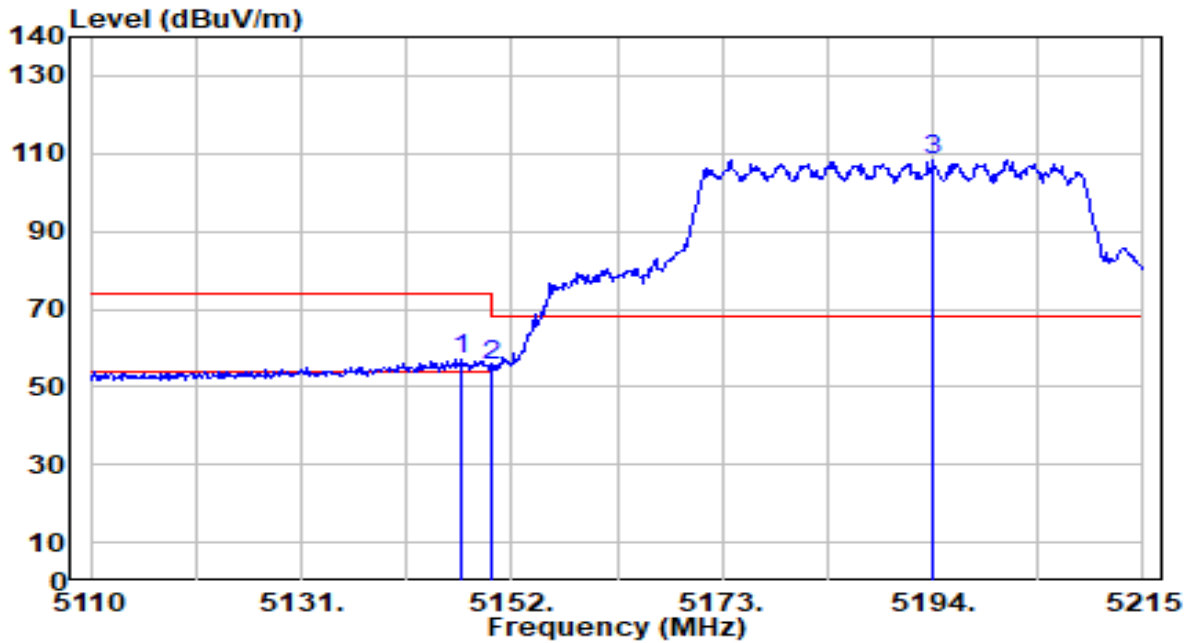


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5147.065	56.56	0.68	57.24	-16.76	74.00	188	336	Peak
2		5150.000	54.60	0.68	55.27	-18.73	74.00	188	336	Peak
3		5194.000	107.86	0.67	108.53	N/A	N/A	188	336	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

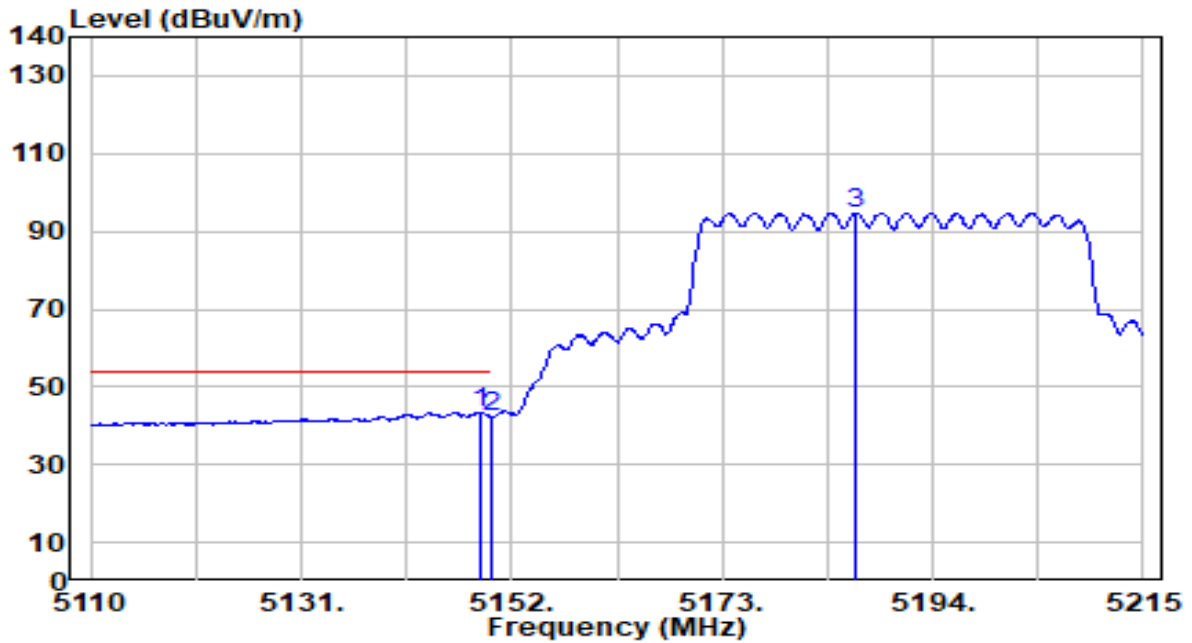


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5148.850	42.85	0.68	43.52	-10.48	54.00	188	336	Average
2		5150.000	41.41	0.68	42.09	-11.91	54.00	188	336	Average
3		5186.230	94.09	0.67	94.76	N/A	N/A	188	336	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

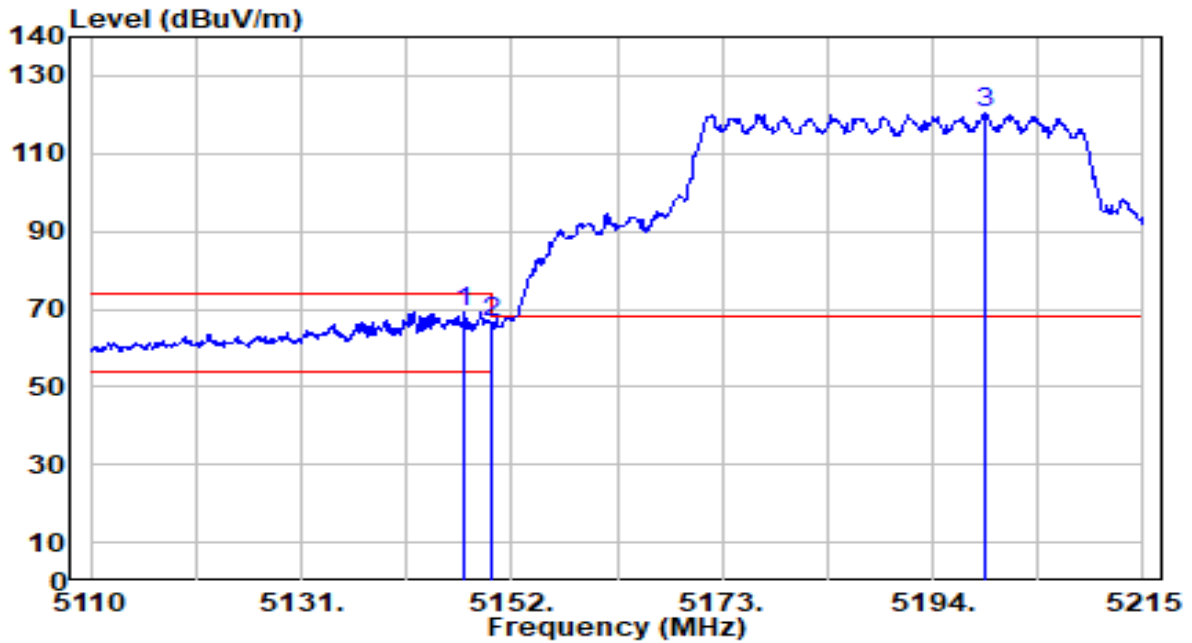


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5147.275	68.57	0.68	69.25	-4.75	74.00	106	1	Peak
2		5150.000	65.65	0.68	66.32	-7.68	74.00	106	1	Peak
3		5199.145	119.93	0.67	120.60	N/A	N/A	106	1	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

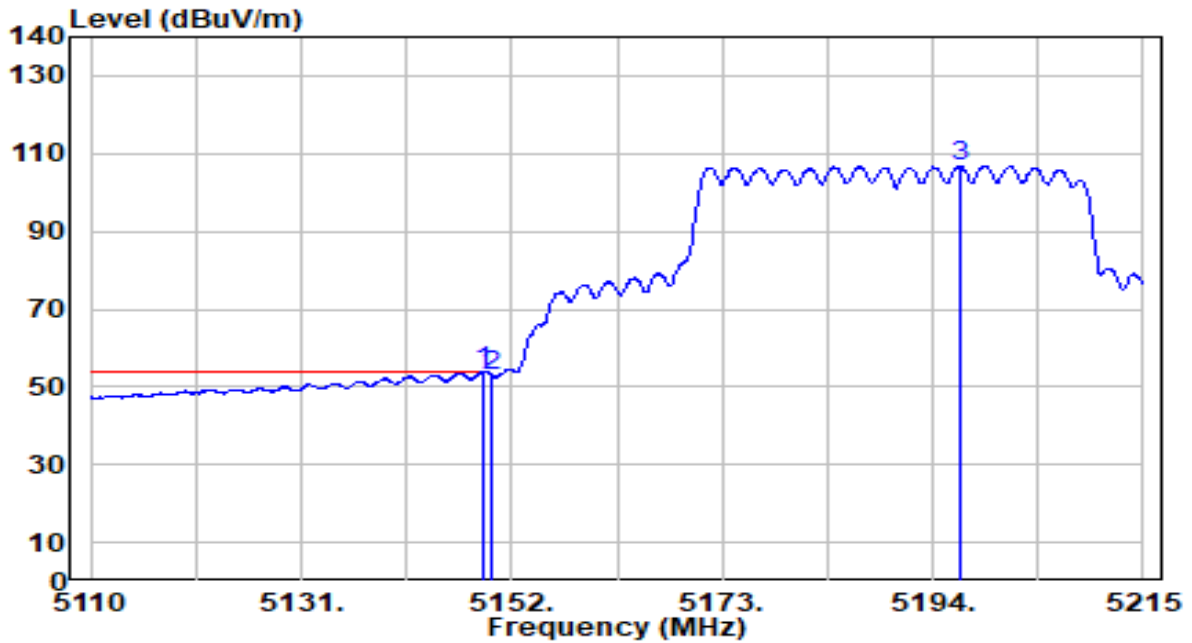


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	53.14	0.68	53.82	-0.18	54.00	106	1	Average
2		52.35	0.68	53.02	-0.98	54.00	106	1	Average
3		106.13	0.67	106.80	N/A	N/A	106	1	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

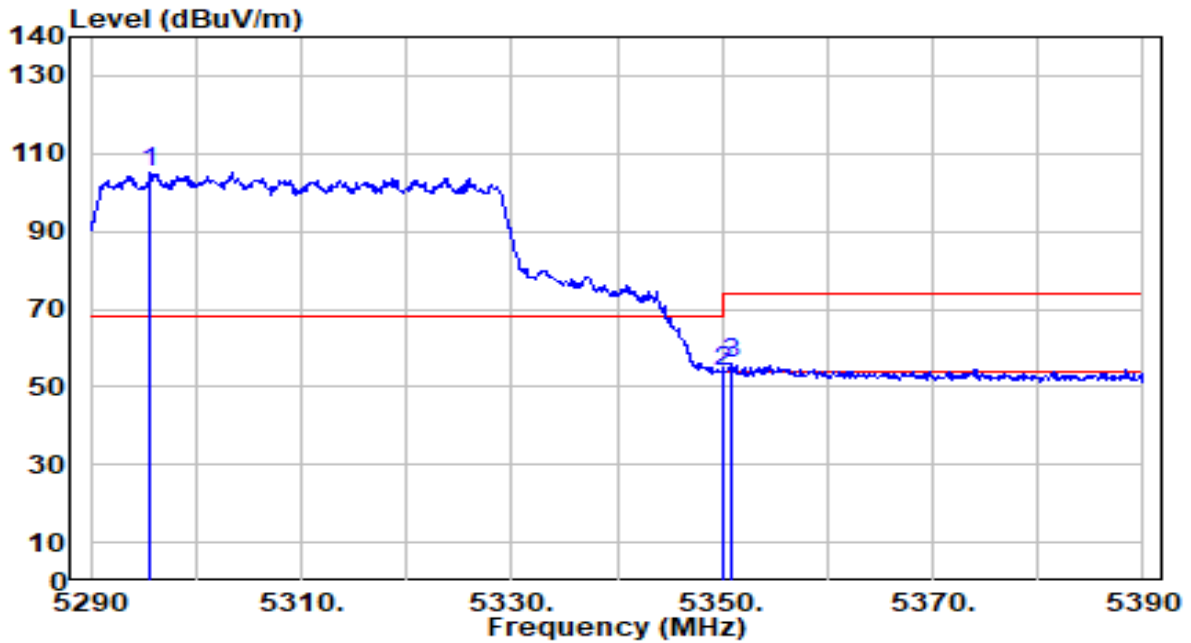


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5295.700	104.48	0.56	105.04	N/A	N/A	183	338	Peak
2	5350.000	53.28	0.51	53.78	-20.22	74.00	183	338	Peak
3	* 5351.000	55.72	0.50	56.23	-17.77	74.00	183	338	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

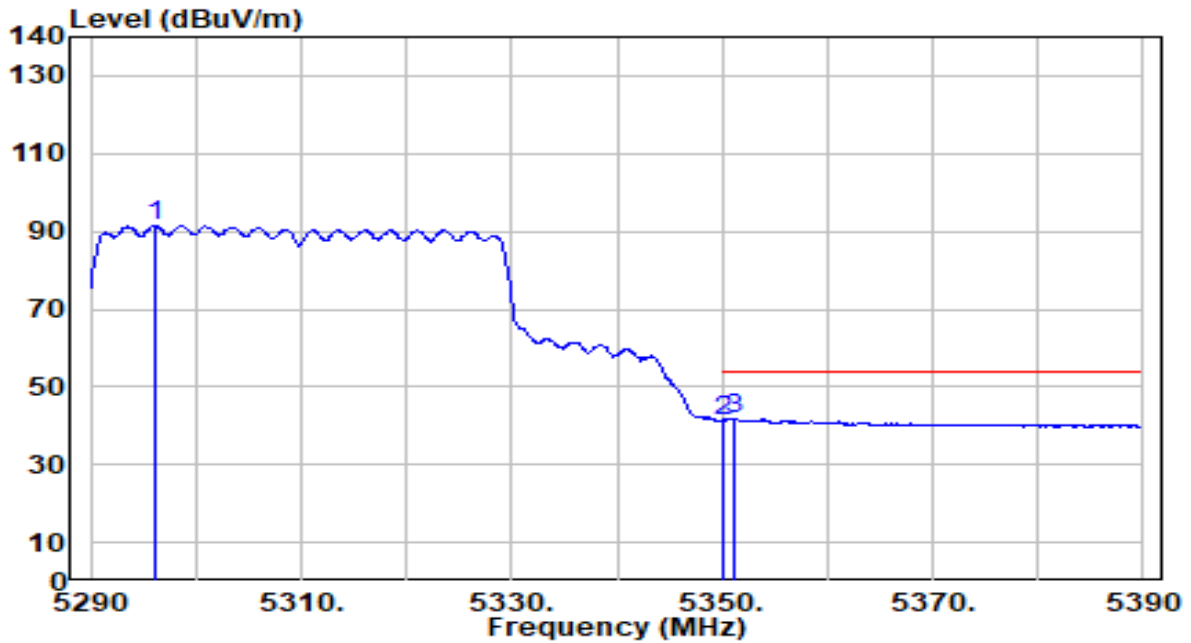


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5296.100	90.90	0.56	91.46	N/A	N/A	183	338	Average
2	5350.000	40.80	0.51	41.30	-12.70	54.00	183	338	Average
3	* 5351.200	41.25	0.50	41.75	-12.25	54.00	183	338	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

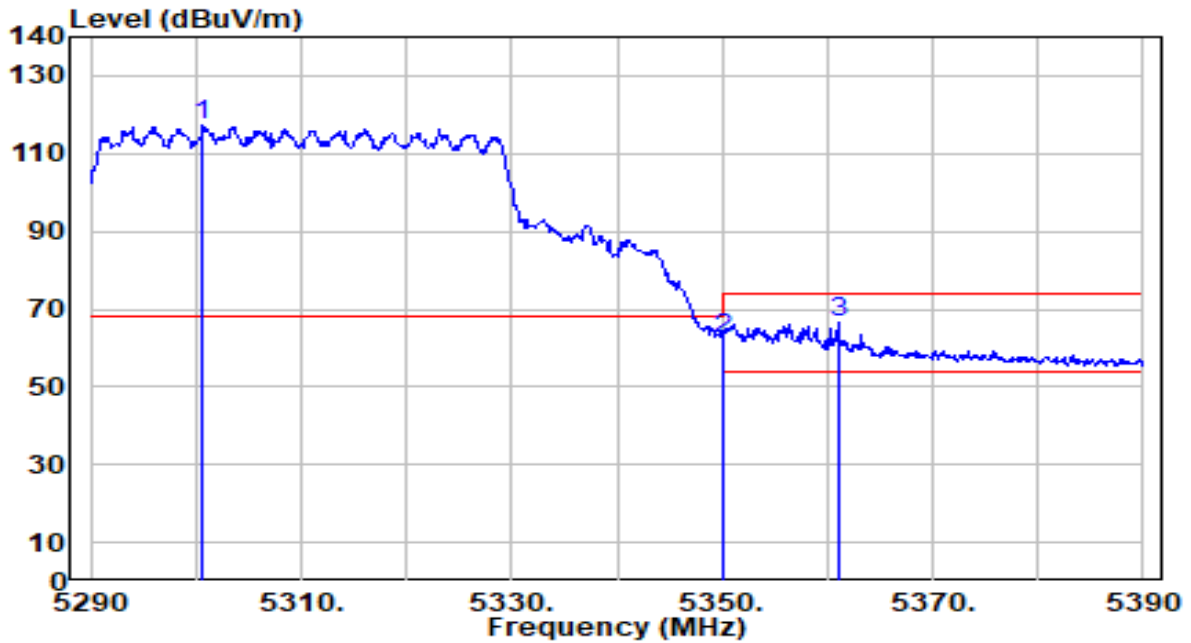


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5300.700	116.95	0.56	117.51	N/A	N/A	140	7	Peak
2	5350.000	61.72	0.51	62.23	-11.77	74.00	140	7	Peak
3	* 5361.000	65.92	0.49	66.42	-7.58	74.00	140	7	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

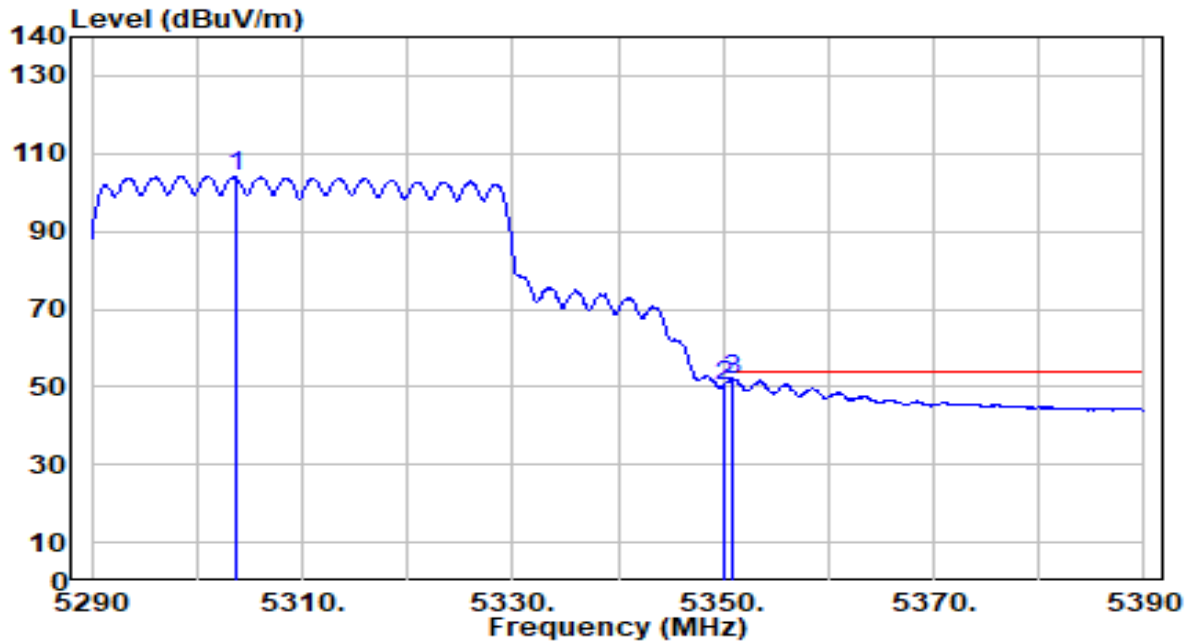


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5303.600	103.50	0.56	104.05	N/A	N/A	140	7	Average
2	5350.000	49.75	0.51	50.26	-3.74	54.00	140	7	Average
3	* 5351.000	51.48	0.50	51.98	-2.02	54.00	140	7	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

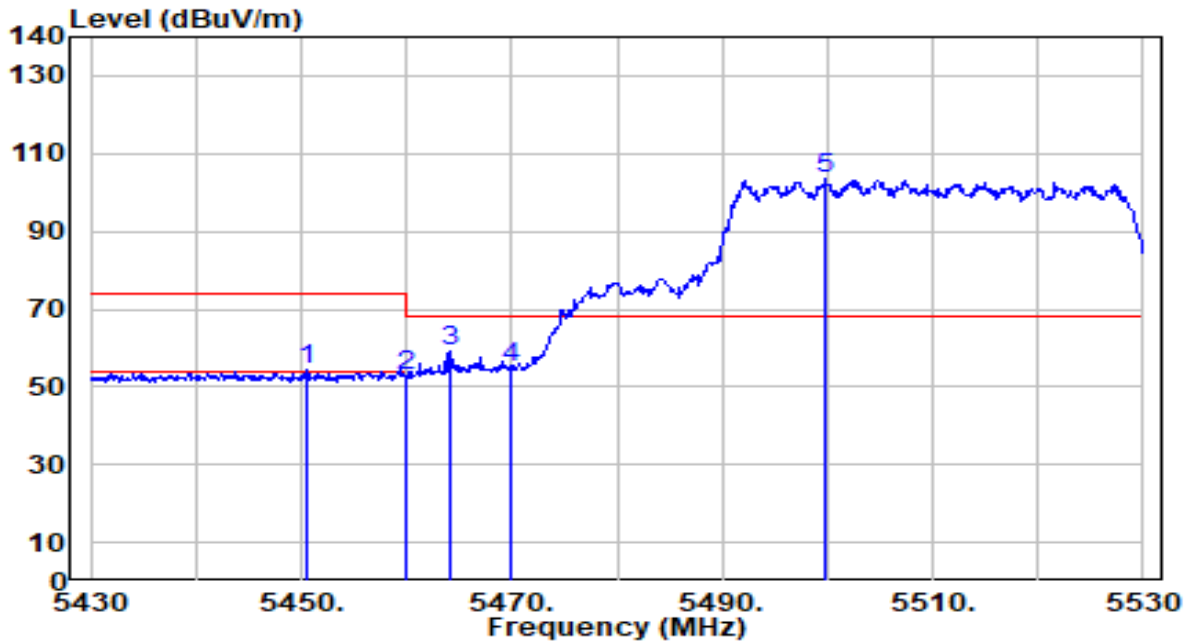


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5450.500	53.71	0.62	54.33	-19.67	74.00	213	26	Peak
2	5460.000	52.16	0.65	52.81	-21.19	74.00	213	26	Peak
3	* 5464.100	58.50	0.67	59.17	-9.03	68.20	213	26	Peak
4	5470.000	54.50	0.69	55.19	-13.01	68.20	213	26	Peak
5	5499.800	102.66	0.79	103.45	N/A	N/A	213	26	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

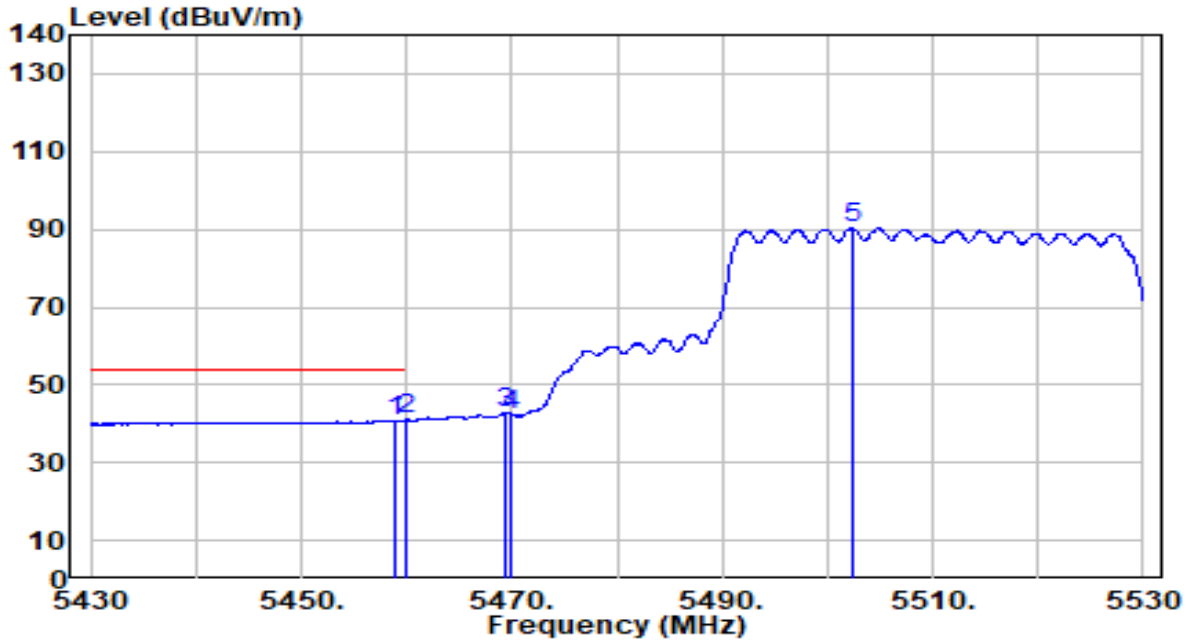


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.900	40.29	0.65	40.94	-13.06	54.00	213	26	Average
2	* 5460.000	40.30	0.65	40.96	-13.04	54.00	213	26	Average
3	5469.500	42.16	0.69	42.85	N/A	N/A	213	26	Average
4	5470.000	41.69	0.69	42.38	N/A	N/A	213	26	Average
5	5502.300	89.43	0.80	90.22	N/A	N/A	213	26	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

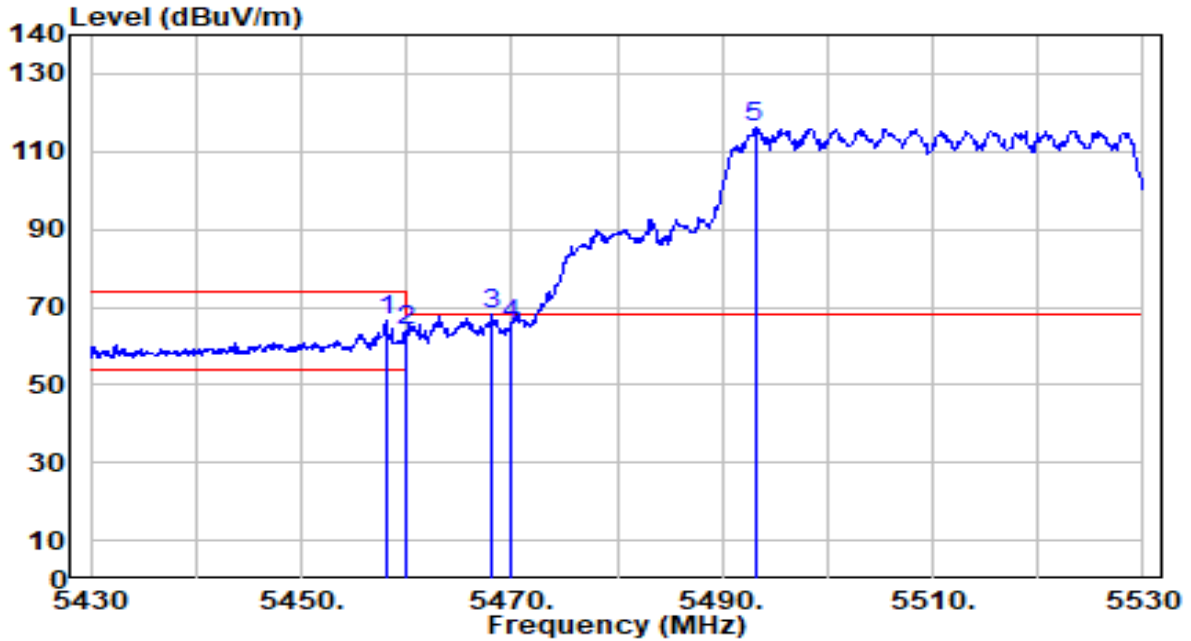


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.100	66.12	0.65	66.77	-7.23	74.00	118	4	Peak
2	5460.000	63.44	0.65	64.10	-9.90	74.00	118	4	Peak
3	* 5468.200	67.33	0.68	68.02	-0.18	68.20	118	4	Peak
4	5470.000	64.96	0.69	65.65	-2.55	68.20	118	4	Peak
5	5493.100	115.34	0.77	116.11	N/A	N/A	118	4	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

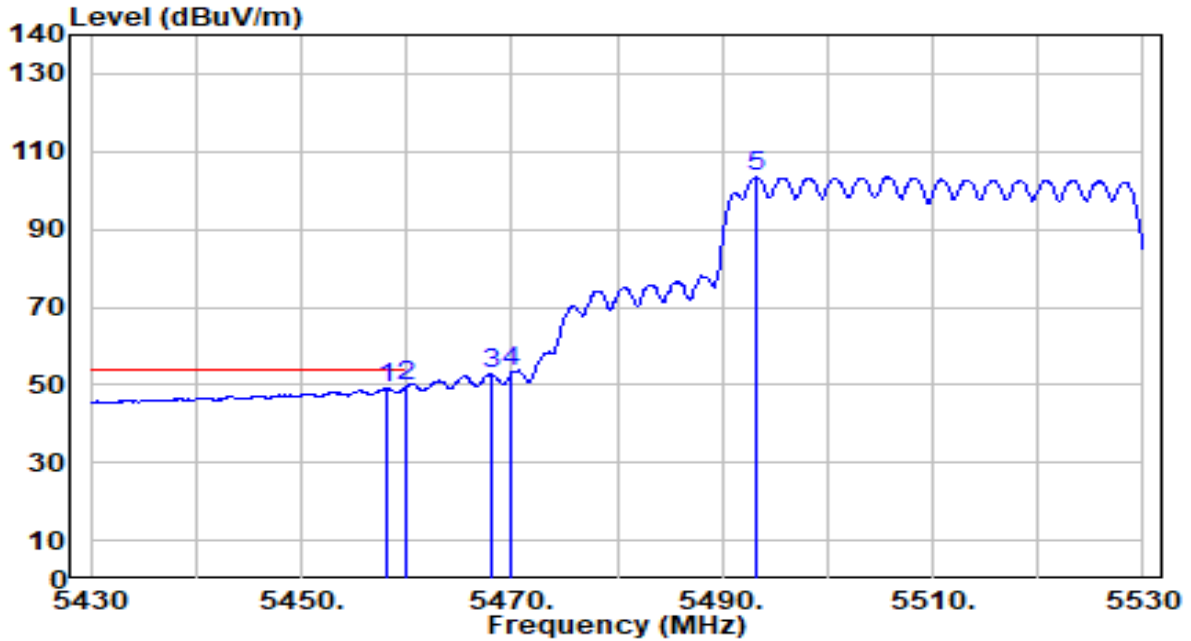


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.100	48.37	0.65	49.02	-4.98	54.00	118	4	Average
2	* 5460.000	48.89	0.65	49.55	-4.45	54.00	118	4	Average
3	5468.000	52.07	0.68	52.75	N/A	N/A	118	4	Average
4	5470.000	52.47	0.69	53.16	N/A	N/A	118	4	Average
5	5493.200	102.57	0.77	103.34	N/A	N/A	118	4	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

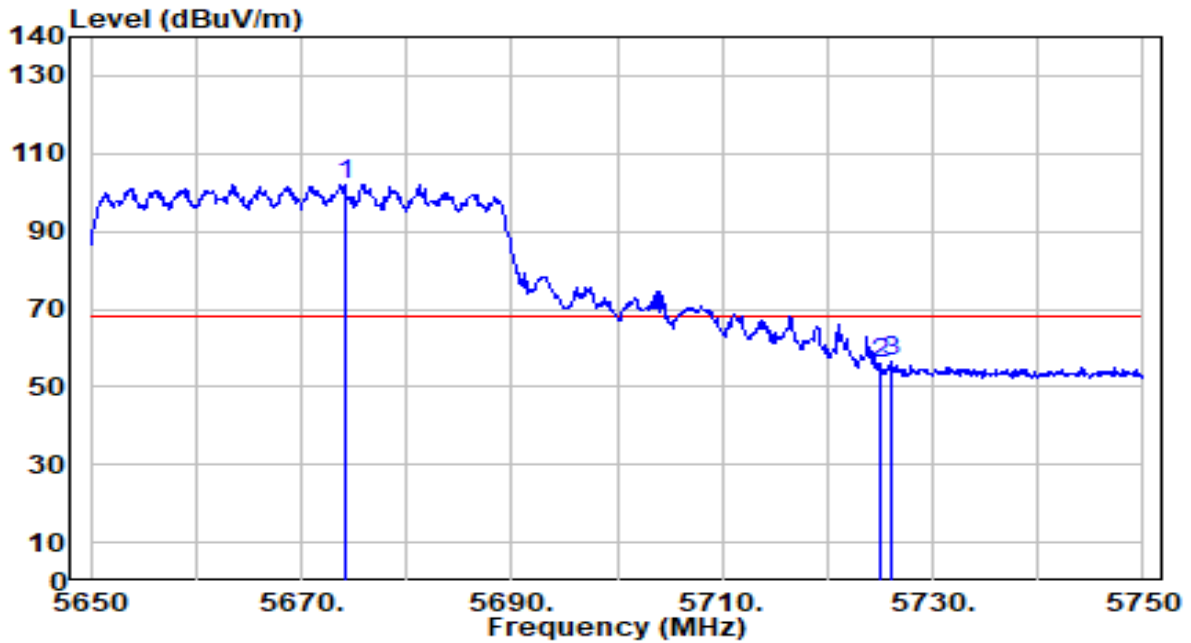


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5674.100	100.34	1.58	101.91	N/A	N/A	100	102	Peak
2	5725.000	54.10	1.86	55.97	-12.23	68.20	100	102	Peak
3	* 5726.000	54.63	1.87	56.50	-11.70	68.20	100	102	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

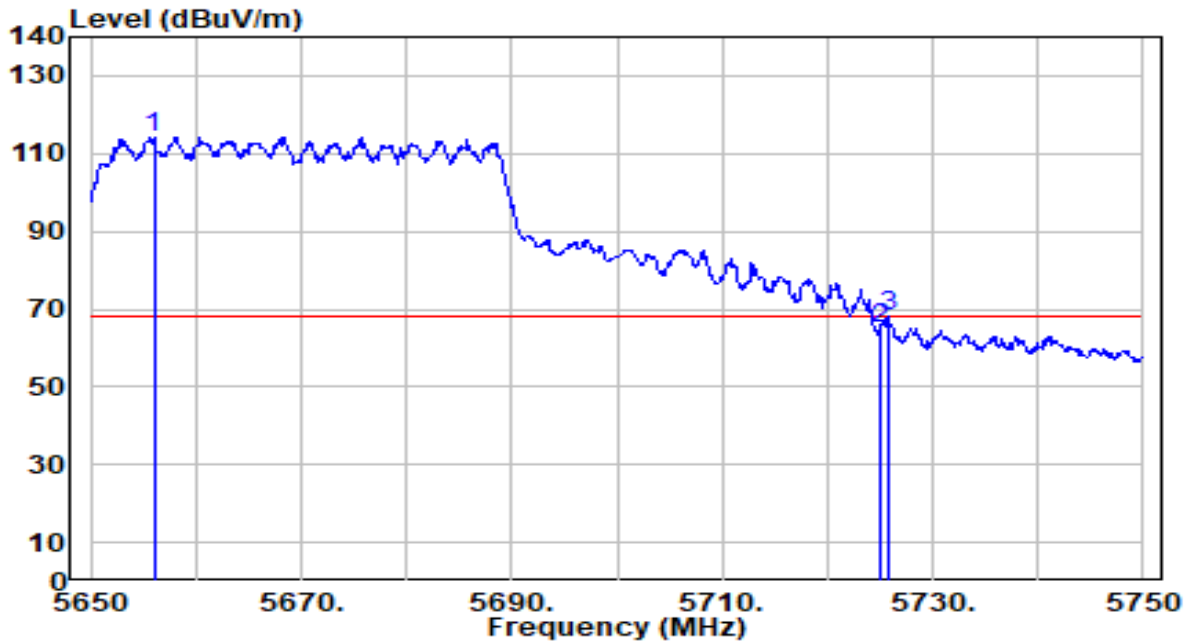


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5656.000	112.89	1.47	114.37	N/A	N/A	109	0	Peak
2	5725.000	63.15	1.86	65.01	-3.19	68.20	109	0	Peak
3	* 5725.700	66.15	1.87	68.02	-0.18	68.20	109	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

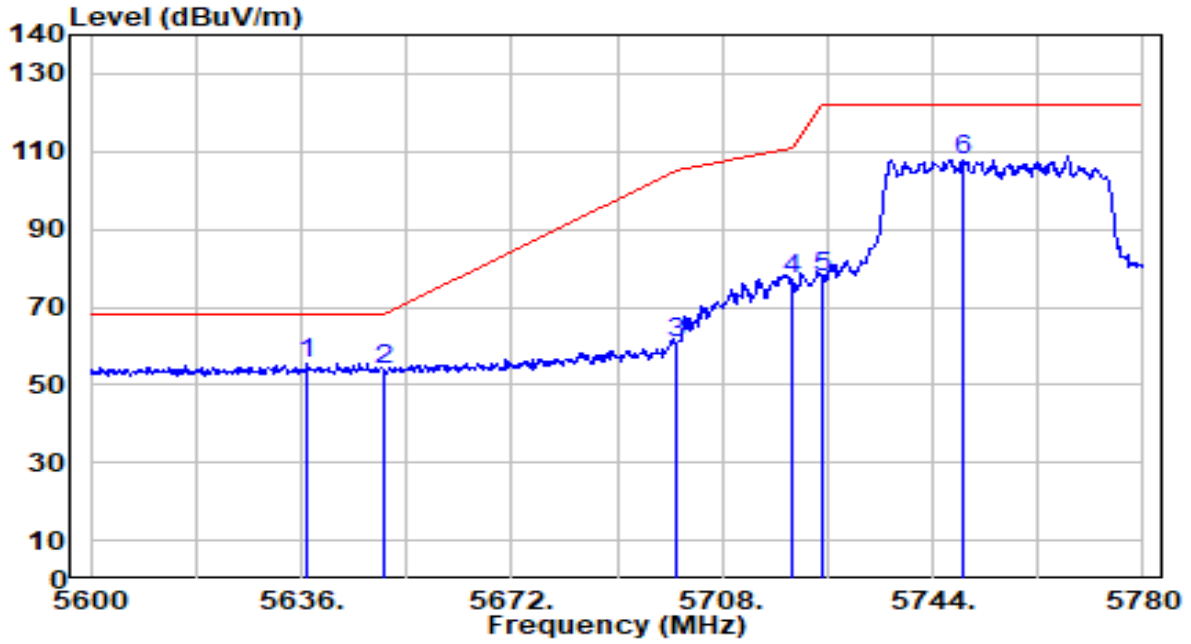


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5637.080	54.04	1.37	55.41	-12.79	68.20	210	28	Peak
2		5650.000	52.43	1.44	53.87	-14.33	68.20	210	28	Peak
3		5700.000	59.16	1.72	60.88	-44.32	105.20	210	28	Peak
4		5720.000	75.16	1.84	77.00	-33.80	110.80	210	28	Peak
5		5725.000	75.96	1.86	77.82	-44.38	122.20	210	28	Peak
6		5749.400	105.97	2.00	107.97	N/A	N/A	210	28	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

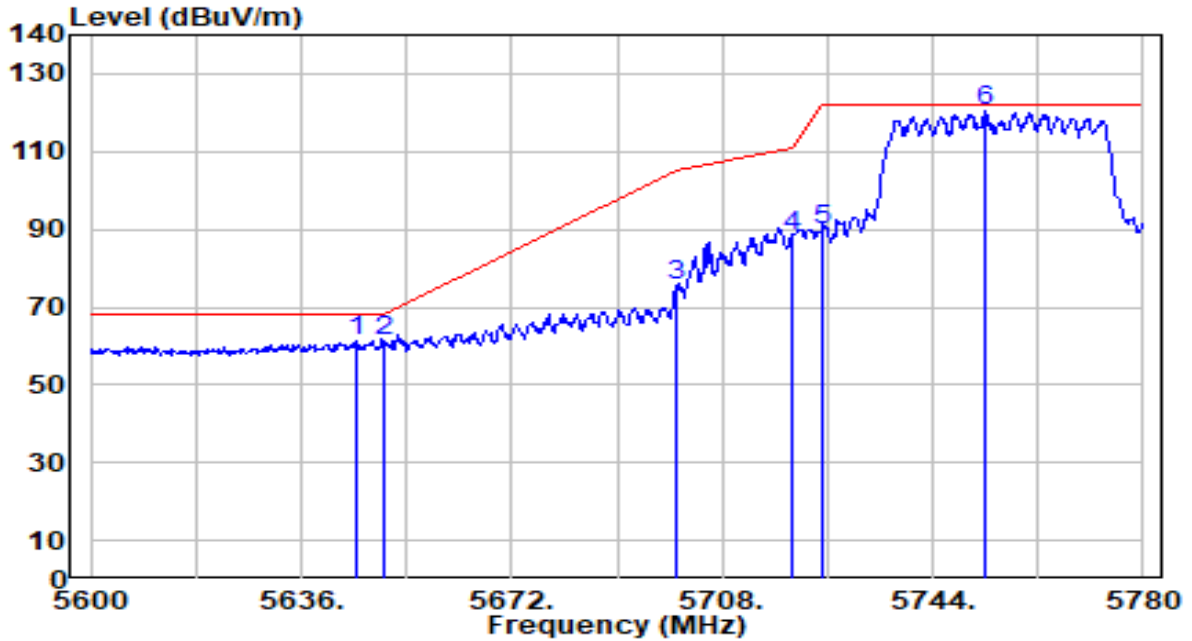


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5645.540	59.96	1.41	61.37	-6.83	68.20	125	3	Peak
2	5650.000	59.70	1.44	61.14	-7.06	68.20	125	3	Peak
3	5700.000	73.89	1.72	75.61	-29.59	105.20	125	3	Peak
4	5720.000	86.22	1.84	88.06	-22.74	110.80	125	3	Peak
5	5725.000	88.11	1.86	89.97	-32.23	122.20	125	3	Peak
6	5753.180	118.62	2.02	120.65	N/A	N/A	125	3	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

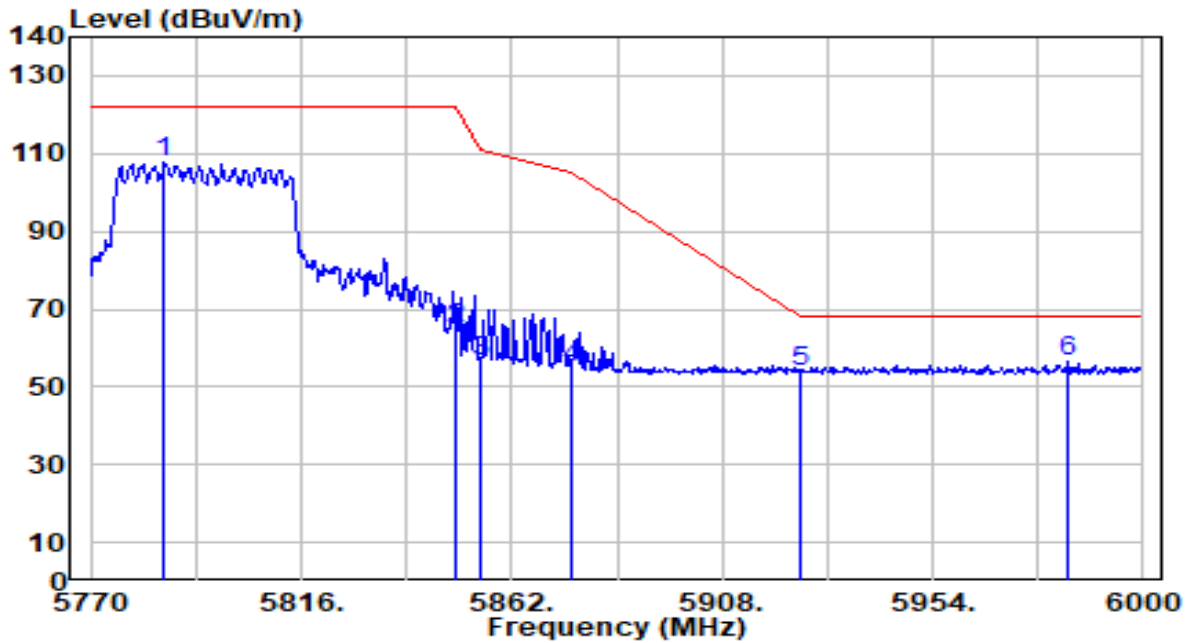


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5785.870	105.32	2.21	107.53	N/A	N/A	100	104	Peak
2	5850.000	62.85	2.27	65.12	-57.08	122.20	100	104	Peak
3	5855.000	54.19	2.27	56.46	-54.34	110.80	100	104	Peak
4	5875.000	52.61	2.26	54.87	-50.33	105.20	100	104	Peak
5	5925.000	51.66	2.25	53.91	-14.29	68.20	100	104	Peak
6	* 5983.440	54.06	2.23	56.29	-11.91	68.20	100	104	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

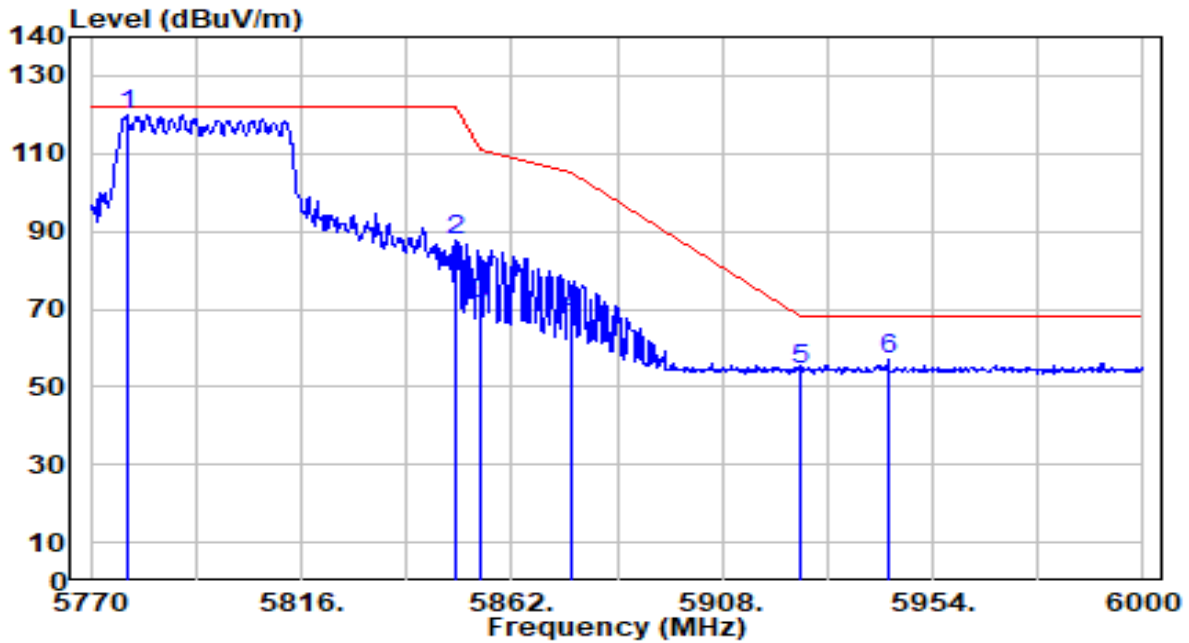


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5778.050	117.63	2.16	119.80	N/A	N/A	116	6	Peak
2	5850.000	85.68	2.27	87.95	-34.25	122.20	116	6	Peak
3	5855.000	69.24	2.27	71.51	-39.29	110.80	116	6	Peak
4	5875.000	65.86	2.26	68.12	-37.08	105.20	116	6	Peak
5	5925.000	52.05	2.25	54.29	-13.91	68.20	116	6	Peak
6	* 5944.110	54.56	2.24	56.79	-11.41	68.20	116	6	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

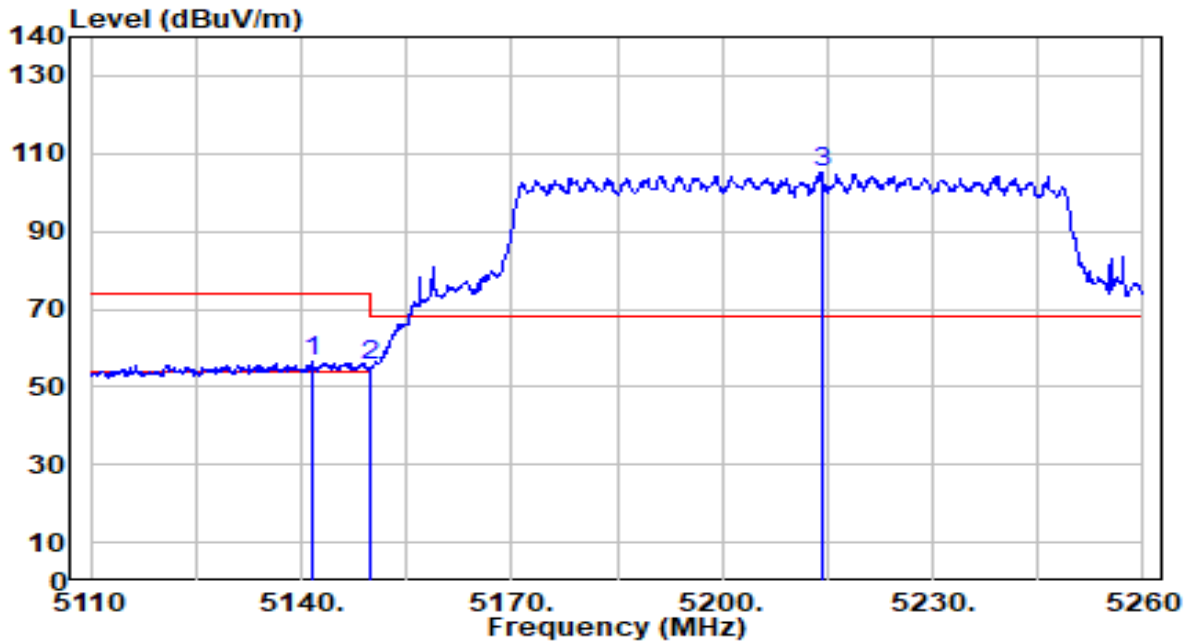


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	55.83	0.68	56.50	-17.50	74.00	188	336	Peak
2		54.75	0.68	55.42	-18.58	74.00	188	336	Peak
3		104.30	0.65	104.95	N/A	N/A	188	336	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

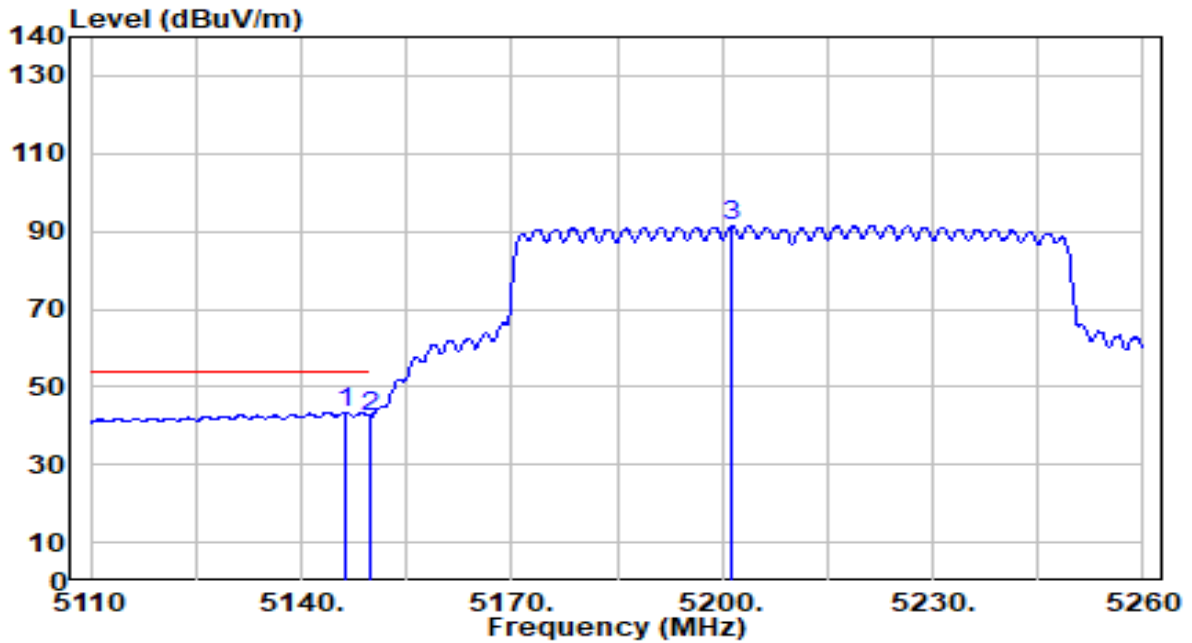


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5146.450	42.82	0.68	43.49	-10.51	54.00	188	336	Average
2		5150.000	41.74	0.68	42.41	-11.59	54.00	188	336	Average
3		5201.350	90.77	0.67	91.44	N/A	N/A	188	336	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

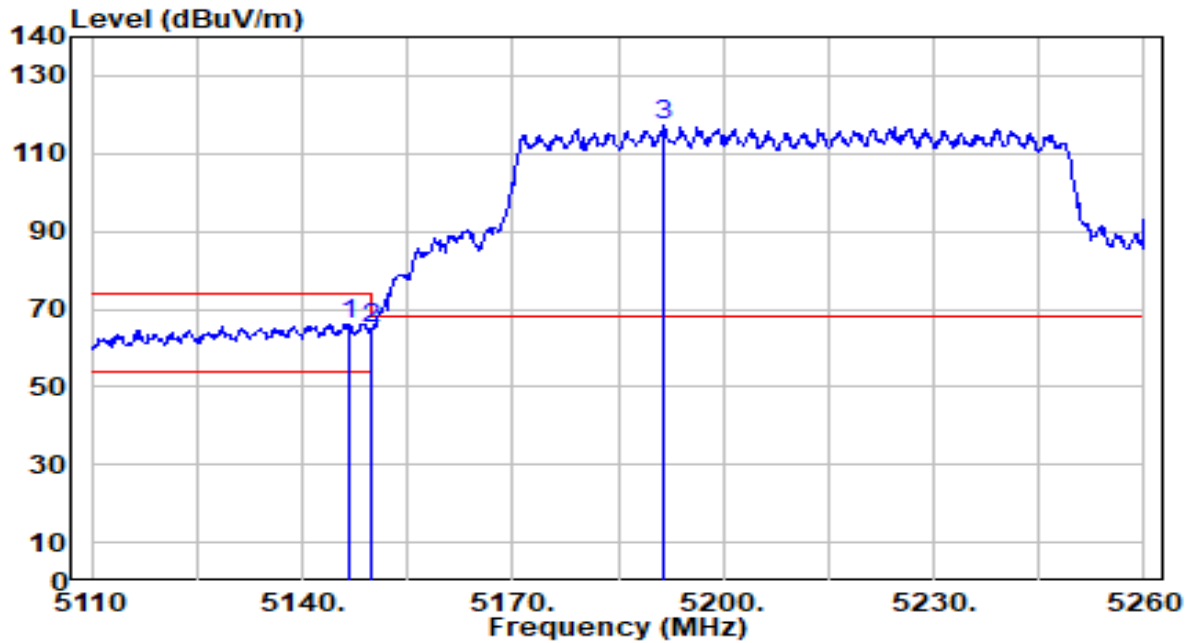


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5146.750	65.46	0.68	66.13	-7.87	74.00	130	4	Peak
2		5150.000	64.15	0.68	64.83	-9.17	74.00	130	4	Peak
3		5191.450	116.83	0.67	117.51	N/A	N/A	130	4	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

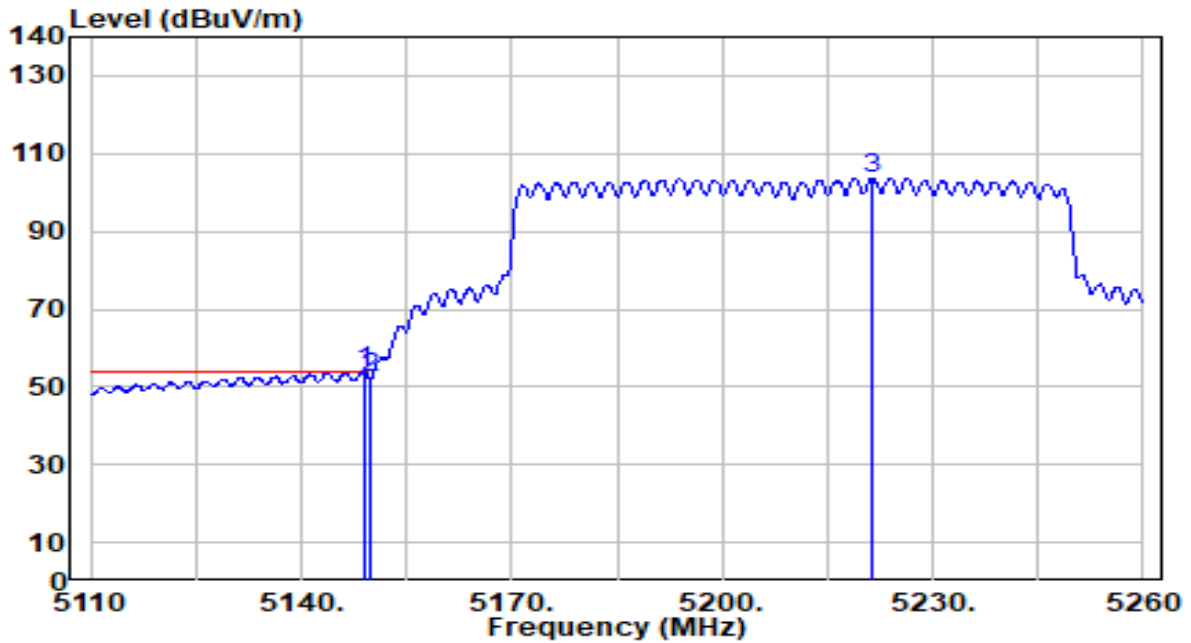


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	53.19	0.68	53.87	-0.13	54.00	130	4	Average
2		51.83	0.68	52.51	-1.49	54.00	130	4	Average
3		102.98	0.65	103.62	N/A	N/A	130	4	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

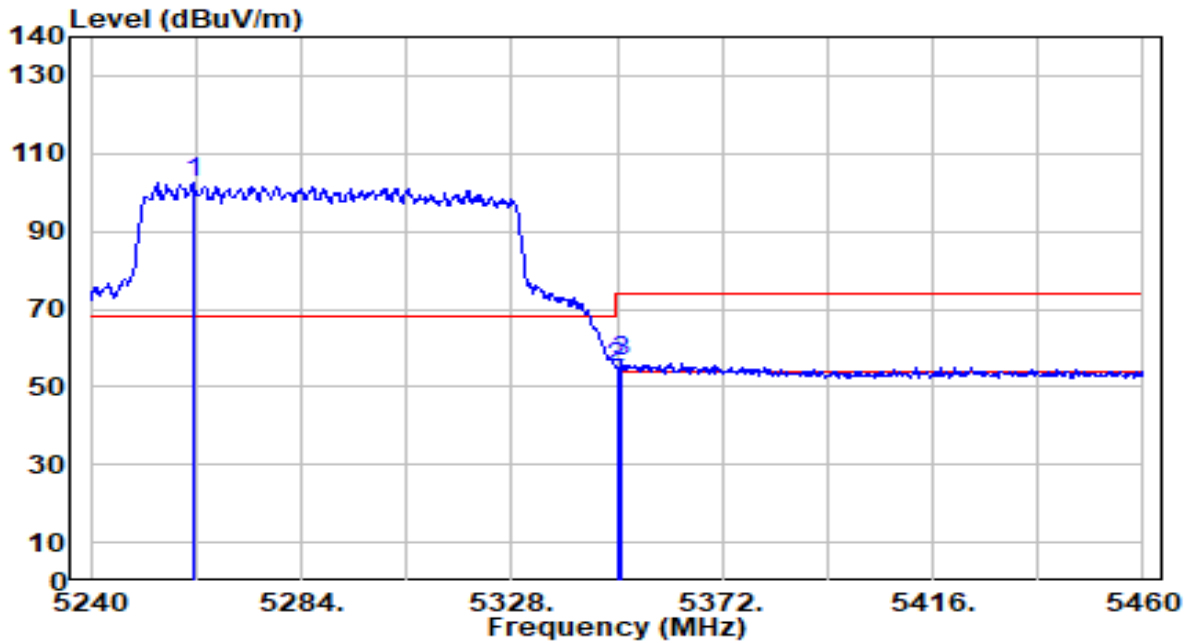


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5261.560	101.87	0.60	102.48	N/A	N/A	188	337	Peak
2	5350.000	54.41	0.51	54.91	-19.09	74.00	188	337	Peak
3	* 5351.100	56.05	0.50	56.56	-17.44	74.00	188	337	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

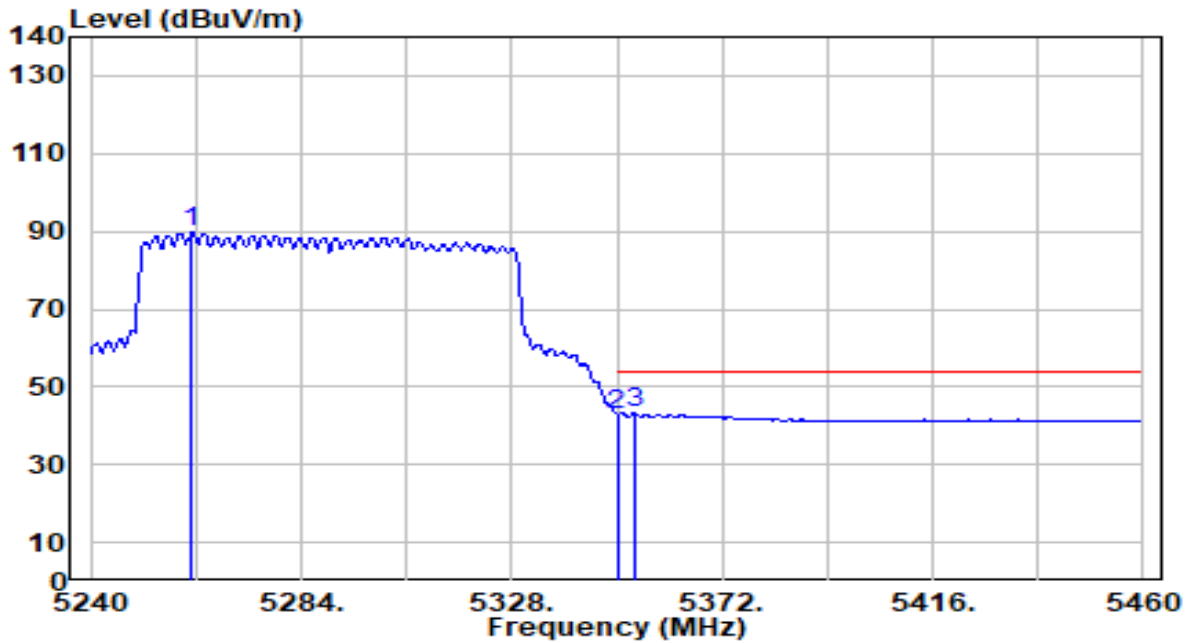


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5261.120	89.07	0.60	89.67	N/A	N/A	188	337	Average
2	5350.000	42.33	0.51	42.83	-11.17	54.00	188	337	Average
3	* 5353.520	42.68	0.50	43.18	-10.82	54.00	188	337	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

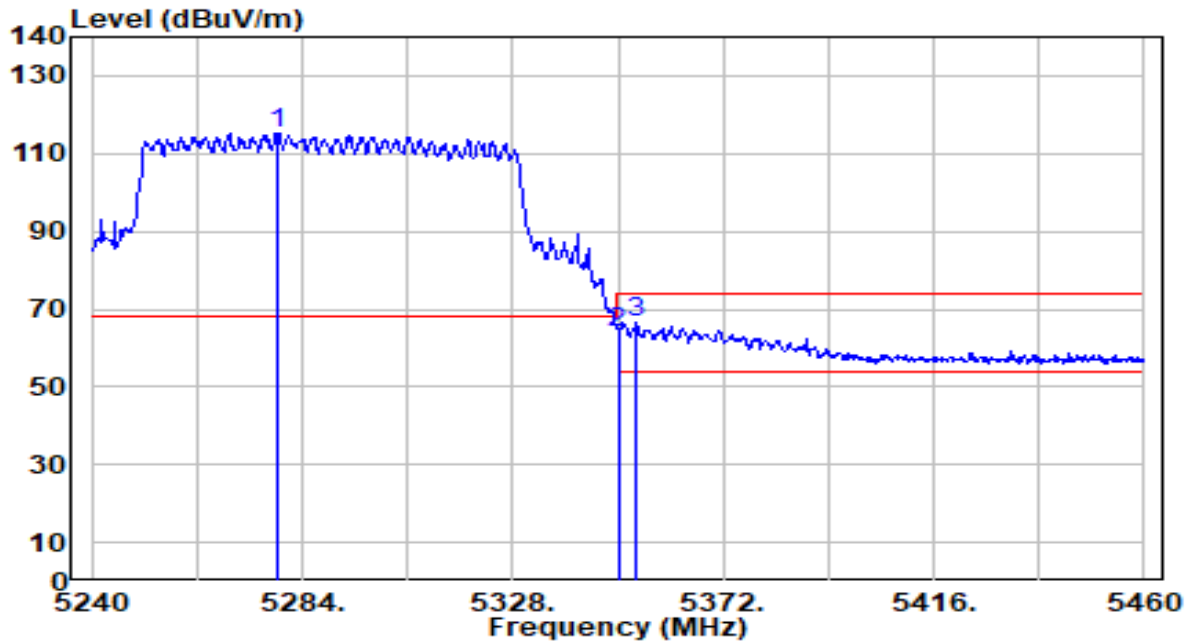


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5278.940	114.65	0.58	115.24	N/A	N/A	118	4	Peak
2	5350.000	63.29	0.51	63.79	-10.21	74.00	118	4	Peak
3	* 5353.740	65.87	0.50	66.37	-7.63	74.00	118	4	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

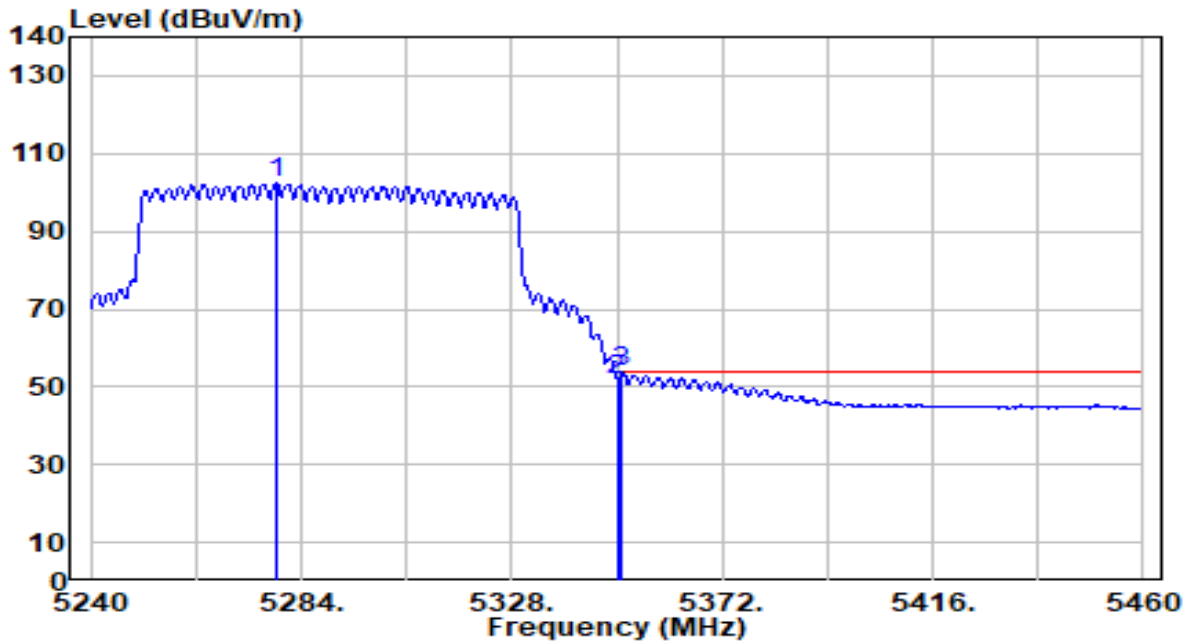


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5278.720	101.69	0.58	102.28	N/A	N/A	118	4	Average
2	5350.000	51.29	0.51	51.79	-2.21	54.00	118	4	Average
3	* 5351.100	53.12	0.50	53.62	-0.38	54.00	118	4	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

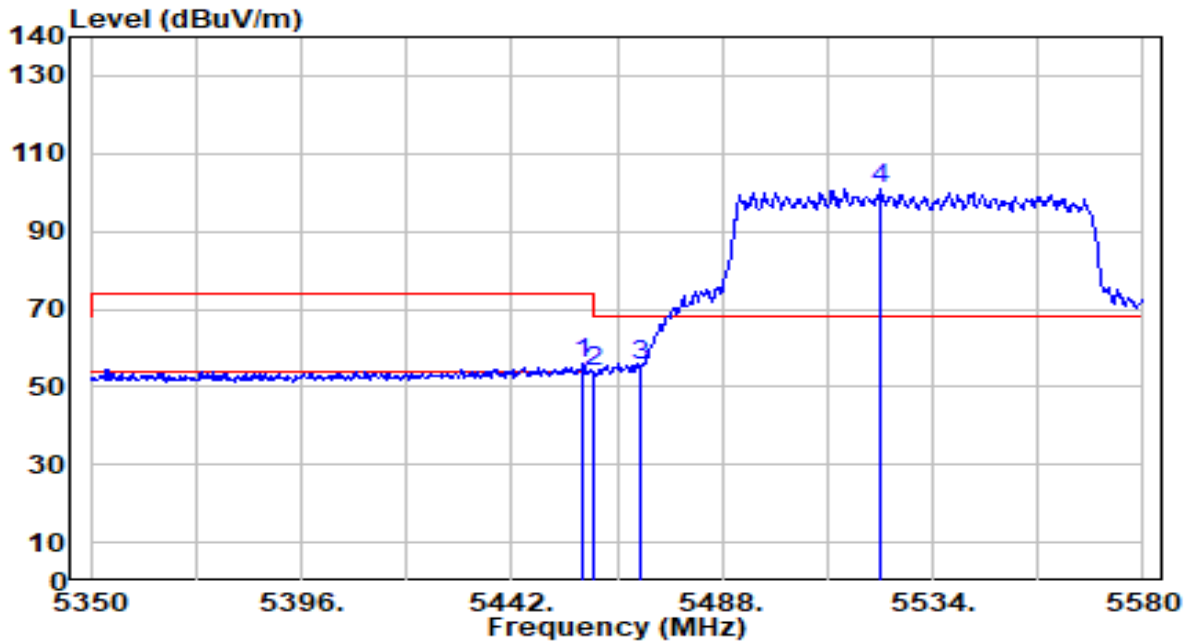


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.640	55.13	0.65	55.77	-18.23	74.00	222	25	Peak
2	5460.000	53.13	0.65	53.78	-20.22	74.00	222	25	Peak
3	* 5470.000	54.69	0.69	55.38	-12.82	68.20	222	25	Peak
4	5522.270	100.20	0.87	101.07	N/A	N/A	222	25	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

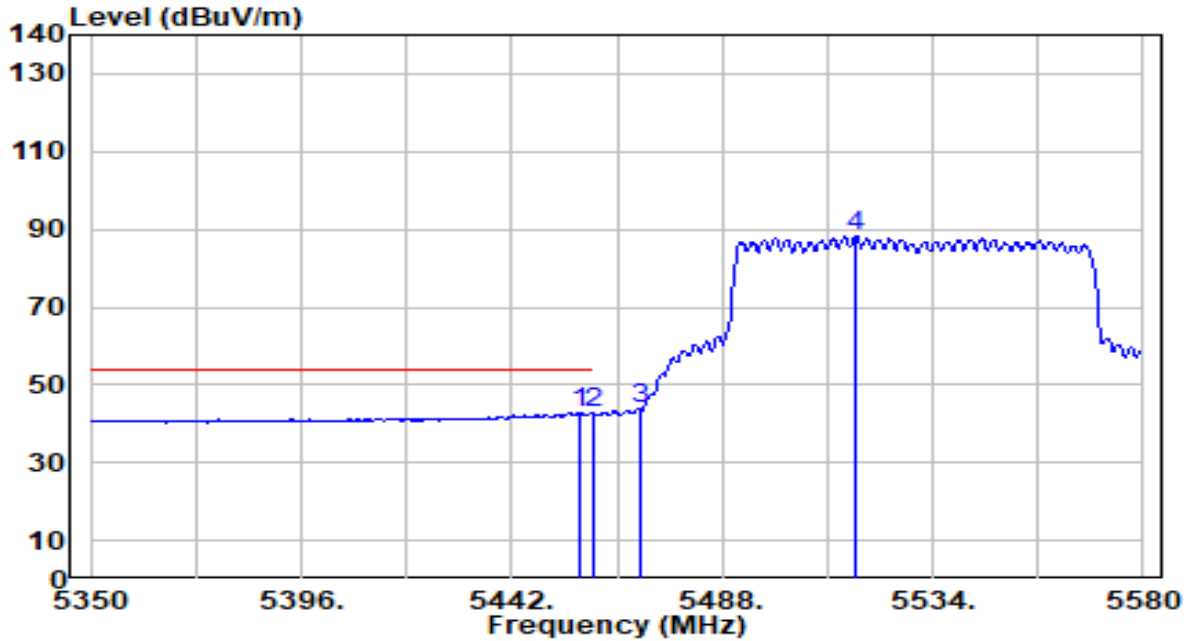


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5456.720	42.22	0.64	42.86	-11.14	54.00	222	25	Average
2		5460.000	42.06	0.65	42.72	-11.28	54.00	222	25	Average
3		5470.000	43.17	0.69	43.86	N/A	N/A	222	25	Average
4		5517.210	87.27	0.85	88.12	N/A	N/A	222	25	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

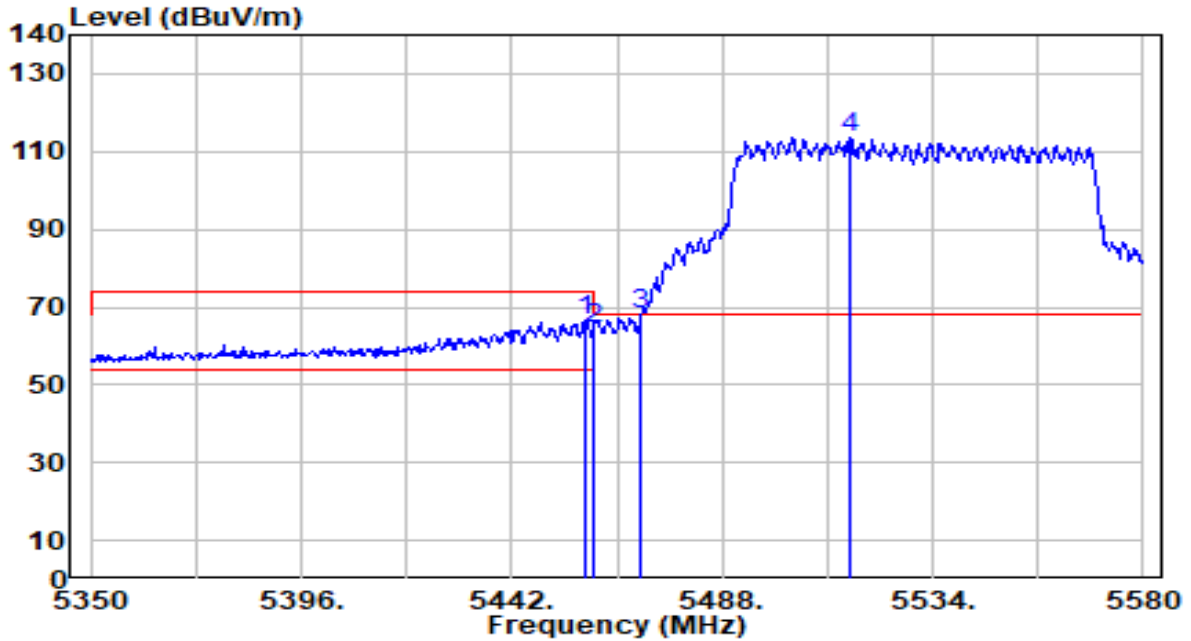


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.100	65.85	0.65	66.50	-7.50	74.00	100	5	Peak
2	5460.000	63.80	0.65	64.46	-9.54	74.00	100	5	Peak
3	* 5470.000	67.41	0.69	68.10	-0.10	68.20	100	5	Peak
4	5515.830	112.61	0.85	113.46	N/A	N/A	100	5	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

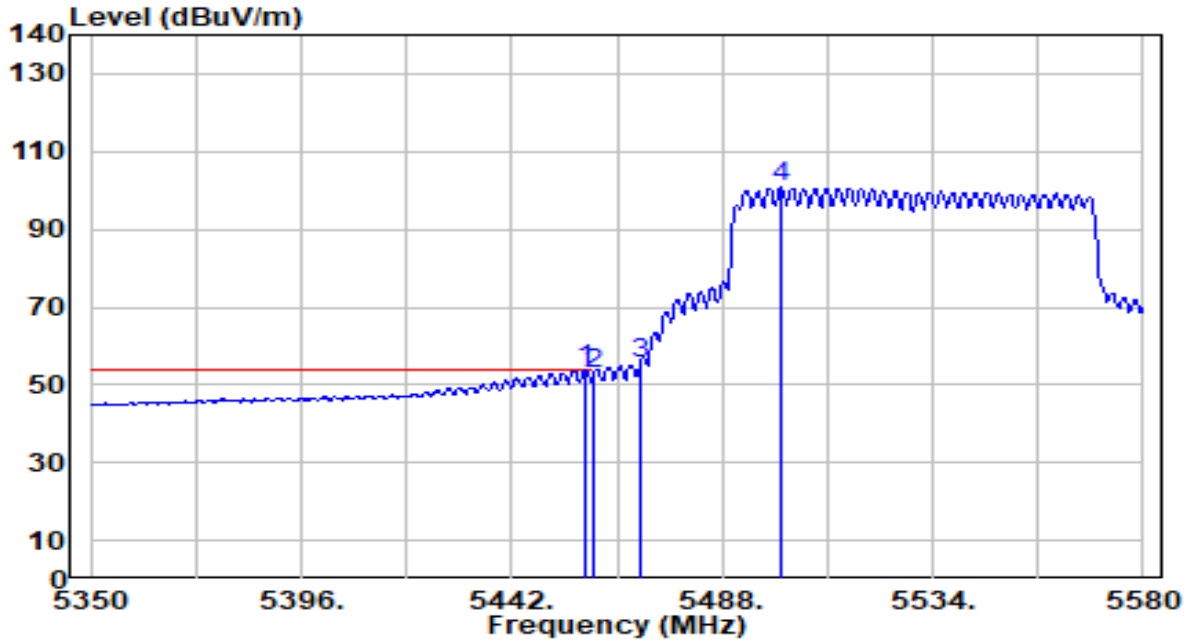


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5458.100	53.18	0.65	53.82	-0.18	54.00	100	5	Average
2	5460.000	52.01	0.65	52.67	-1.33	54.00	100	5	Average
3	5470.000	55.03	0.69	55.71	N/A	N/A	100	5	Average
4	5500.650	99.91	0.79	100.70	N/A	N/A	100	5	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

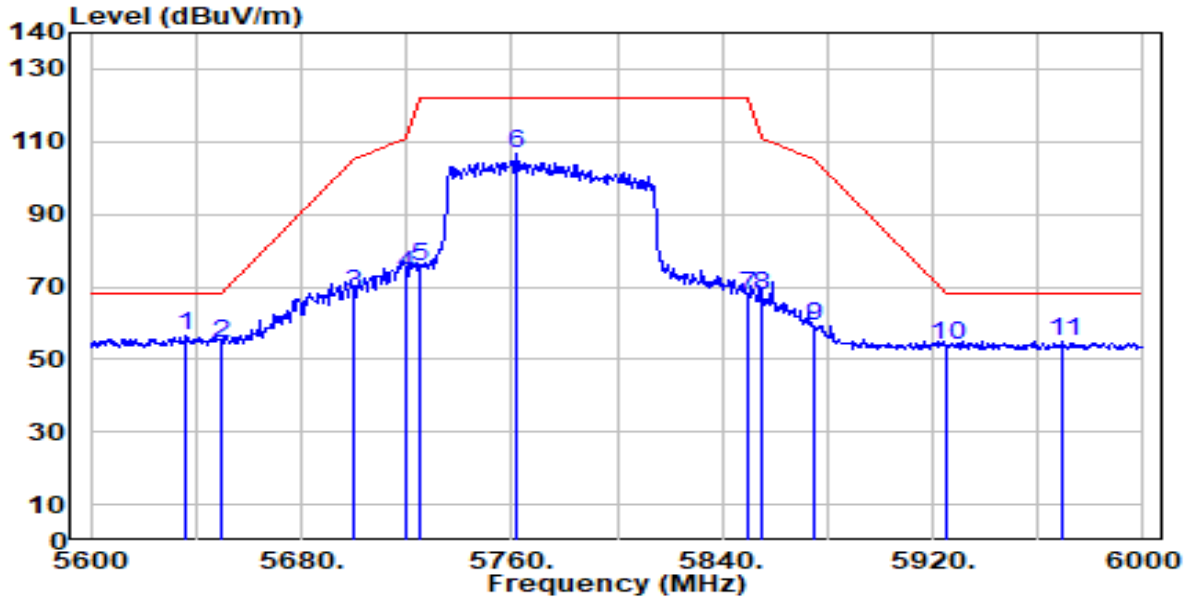


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5636.400	54.96	1.36	56.33	-11.87	68.20	205	29	Peak
2	5650.000	53.24	1.44	54.68	-13.52	68.20	205	29	Peak
3	5700.000	66.58	1.72	68.30	-36.90	105.20	205	29	Peak
4	5720.000	71.51	1.84	73.35	-37.45	110.80	205	29	Peak
5	5725.000	73.82	1.86	75.69	-46.51	122.20	205	29	Peak
6	5761.600	104.81	2.07	106.88	N/A	N/A	205	29	Peak
7	5850.000	65.41	2.27	67.68	-54.52	122.20	205	29	Peak
8	5855.000	65.38	2.27	67.65	-43.15	110.80	205	29	Peak
9	5875.000	56.86	2.26	59.13	-46.07	105.20	205	29	Peak
10	5925.000	51.60	2.25	53.85	-14.35	68.20	205	29	Peak
11	5969.600	52.84	2.23	55.07	-13.13	68.20	205	29	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

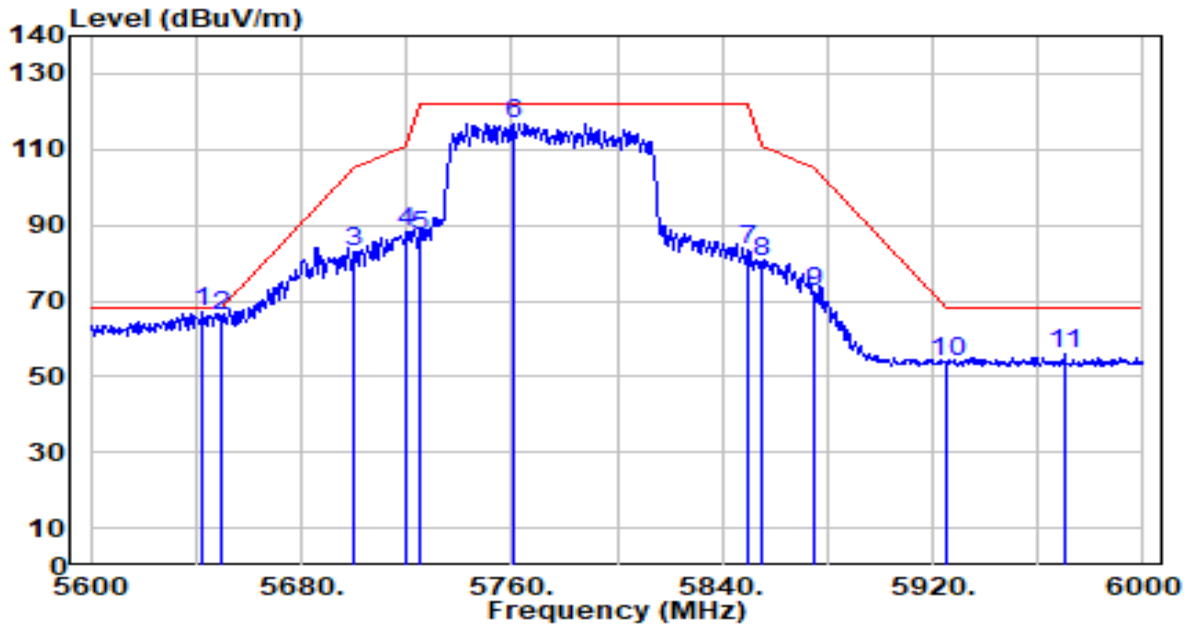


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5642.800	65.68	1.40	67.08	-1.12	68.20	127	5	Peak
2	5650.000	64.63	1.44	66.07	-2.13	68.20	127	5	Peak
3	5700.000	81.00	1.72	82.72	-22.48	105.20	127	5	Peak
4	5720.000	86.13	1.84	87.97	-22.83	110.80	127	5	Peak
5	5725.000	85.27	1.86	87.13	-35.07	122.20	127	5	Peak
6	5760.400	114.92	2.06	116.99	N/A	N/A	127	5	Peak
7	5850.000	81.06	2.27	83.33	-38.87	122.20	127	5	Peak
8	5855.000	78.19	2.27	80.46	-30.34	110.80	127	5	Peak
9	5875.000	69.95	2.26	72.21	-32.99	105.20	127	5	Peak
10	5925.000	51.49	2.25	53.74	-14.46	68.20	127	5	Peak
11	5970.000	53.60	2.23	55.83	-12.37	68.20	127	5	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

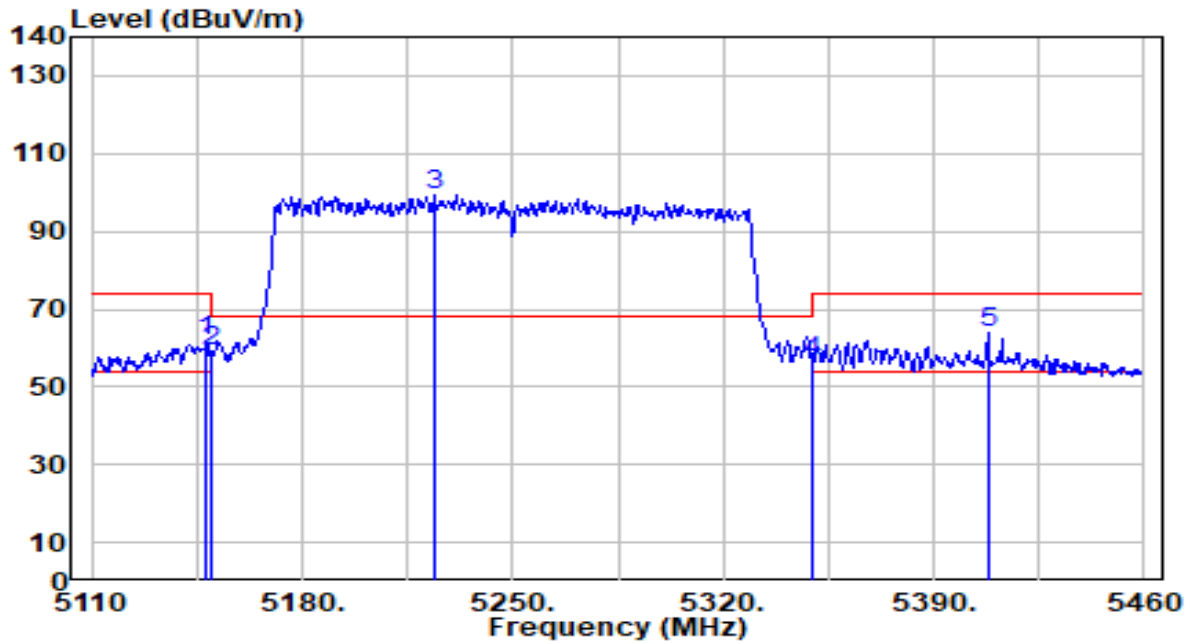


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5148.150	61.05	0.68	61.73	-12.27	74.00	189	336	Peak
2	5150.000	58.24	0.68	58.92	-15.08	74.00	189	336	Peak
3	5224.100	98.57	0.64	99.22	N/A	N/A	189	336	Peak
4	5350.000	56.20	0.51	56.70	-17.30	74.00	189	336	Peak
5	* 5408.200	63.19	0.48	63.67	-10.33	74.00	189	336	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

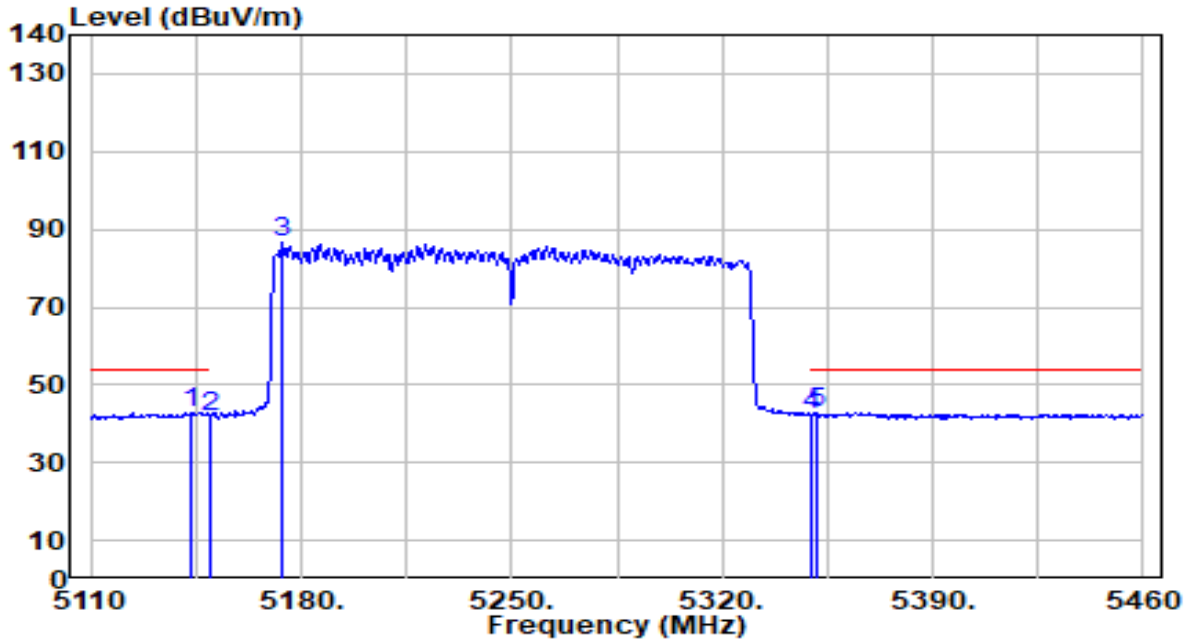


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5143.600	42.31	0.68	42.99	-11.01	54.00	189	336	Average
2		5150.000	40.92	0.68	41.59	-12.41	54.00	189	336	Average
3		5173.700	85.76	0.67	86.43	N/A	N/A	189	336	Average
4		5350.000	41.57	0.51	42.08	-11.92	54.00	189	336	Average
5		5351.850	42.34	0.50	42.84	-11.16	54.00	189	336	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

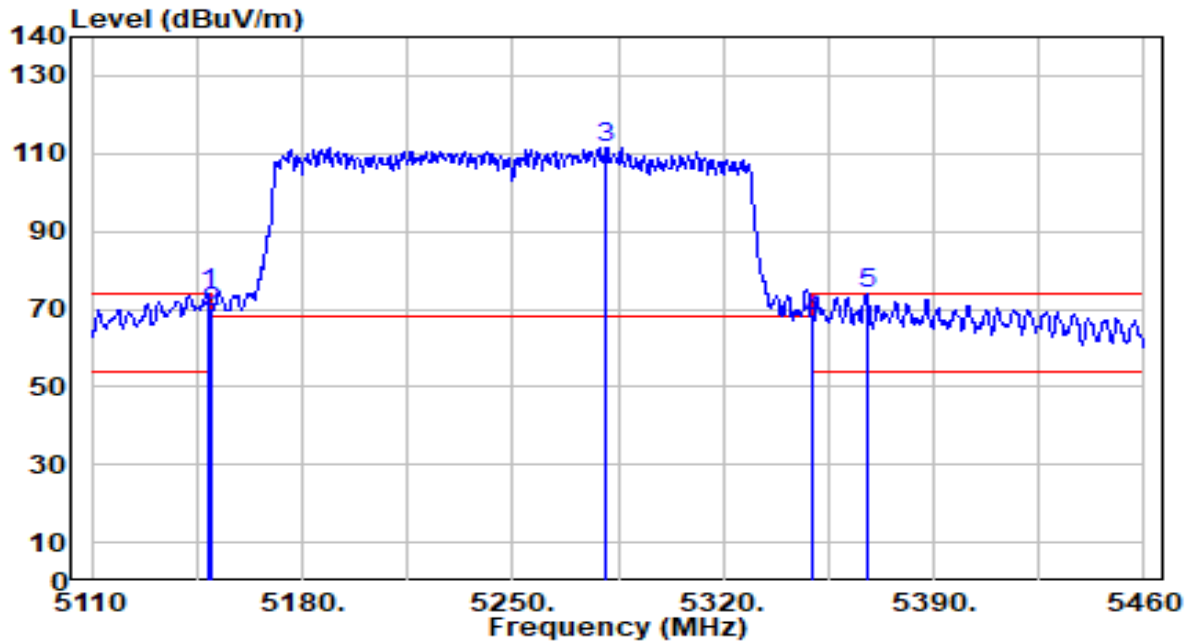


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5148.500	73.18	0.68	73.86	-0.14	74.00	112	8	Peak
2		5150.000	68.62	0.68	69.29	-4.71	74.00	112	8	Peak
3		5281.150	111.03	0.58	111.61	N/A	N/A	112	8	Peak
4		5350.000	66.85	0.51	67.36	-6.64	74.00	112	8	Peak
5		5367.600	73.31	0.49	73.80	-0.20	74.00	112	8	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

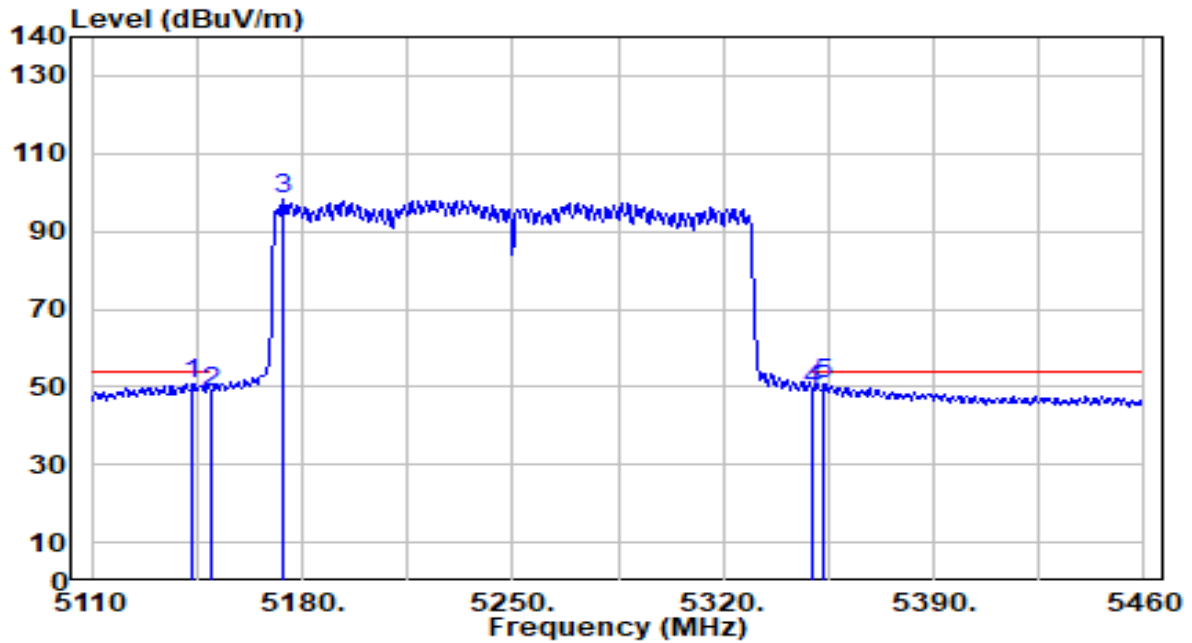


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5143.600	50.03	0.68	50.70	-3.30	54.00	112	8	Average
2	5150.000	48.17	0.68	48.84	-5.16	54.00	112	8	Average
3	5173.700	97.57	0.67	98.25	N/A	N/A	112	8	Average
4	5350.000	48.84	0.51	49.34	-4.66	54.00	112	8	Average
5	* 5353.600	50.45	0.50	50.95	-3.05	54.00	112	8	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

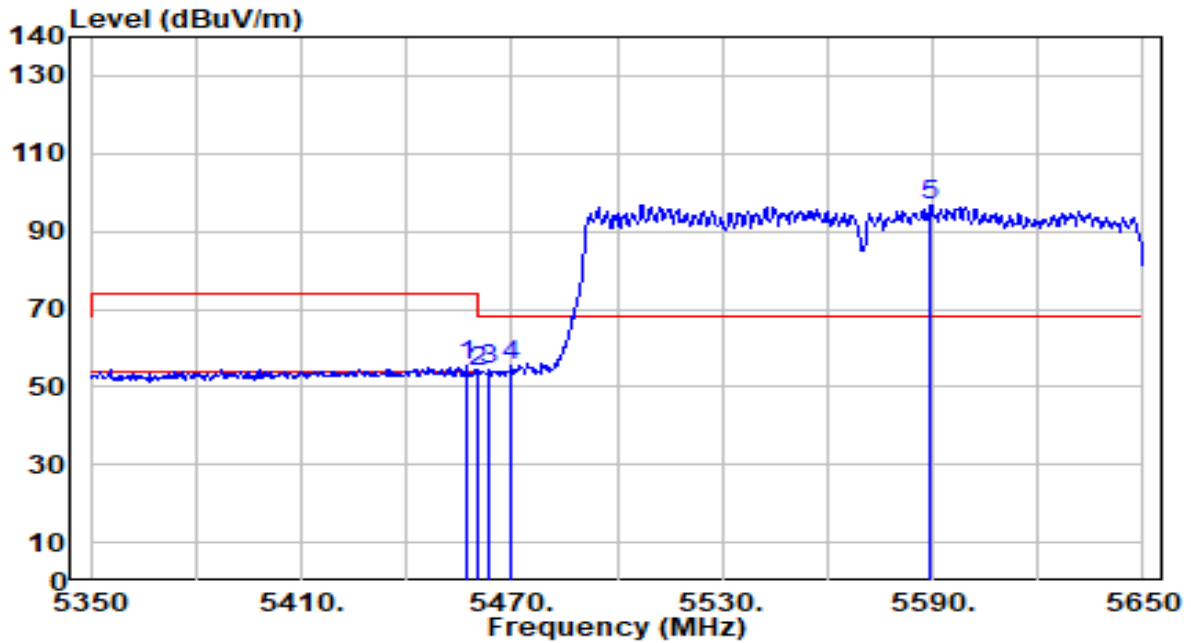


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.100	54.97	0.64	55.62	-18.38	74.00	220	25	Peak
2	5460.000	52.99	0.65	53.64	-20.36	74.00	220	25	Peak
3	5463.700	53.62	0.67	54.28	-13.92	68.20	220	25	Peak
4	* 5470.000	54.87	0.69	55.56	-12.64	68.20	220	25	Peak
5	5589.400	95.79	1.12	96.90	N/A	N/A	220	25	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

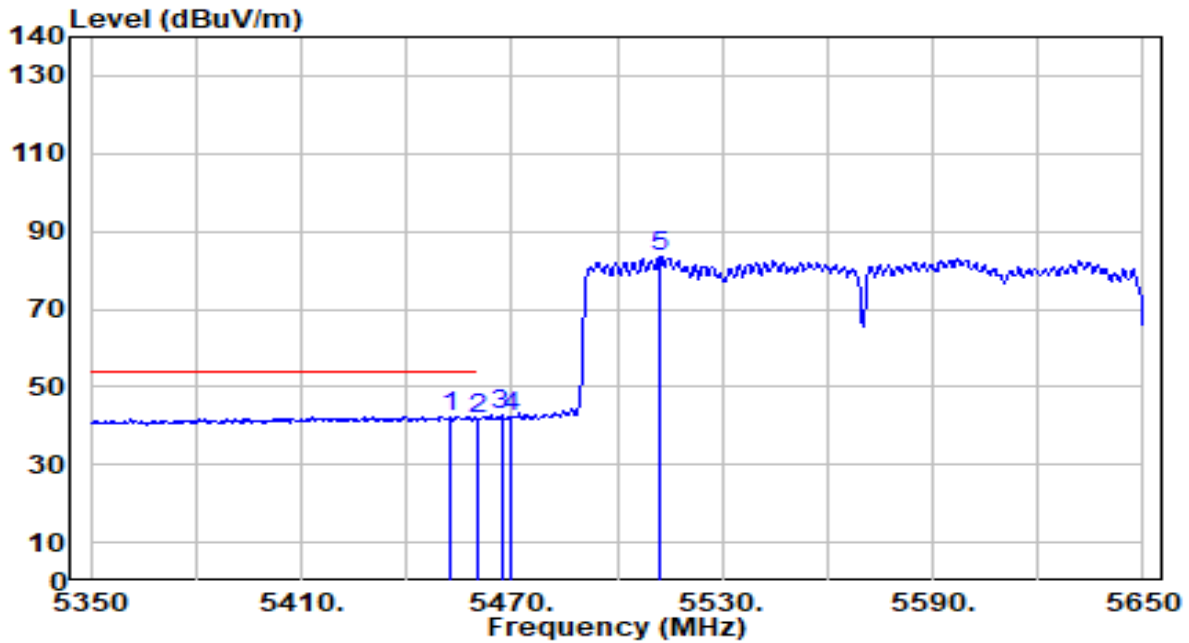


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5452.300	41.88	0.63	42.51	-11.49	54.00	220	25	Average
2	5460.000	41.15	0.65	41.80	-12.20	54.00	220	25	Average
3	5467.000	41.90	0.68	42.57	N/A	N/A	220	25	Average
4	5470.000	41.59	0.69	42.28	N/A	N/A	220	25	Average
5	5512.000	82.71	0.83	83.54	N/A	N/A	220	25	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

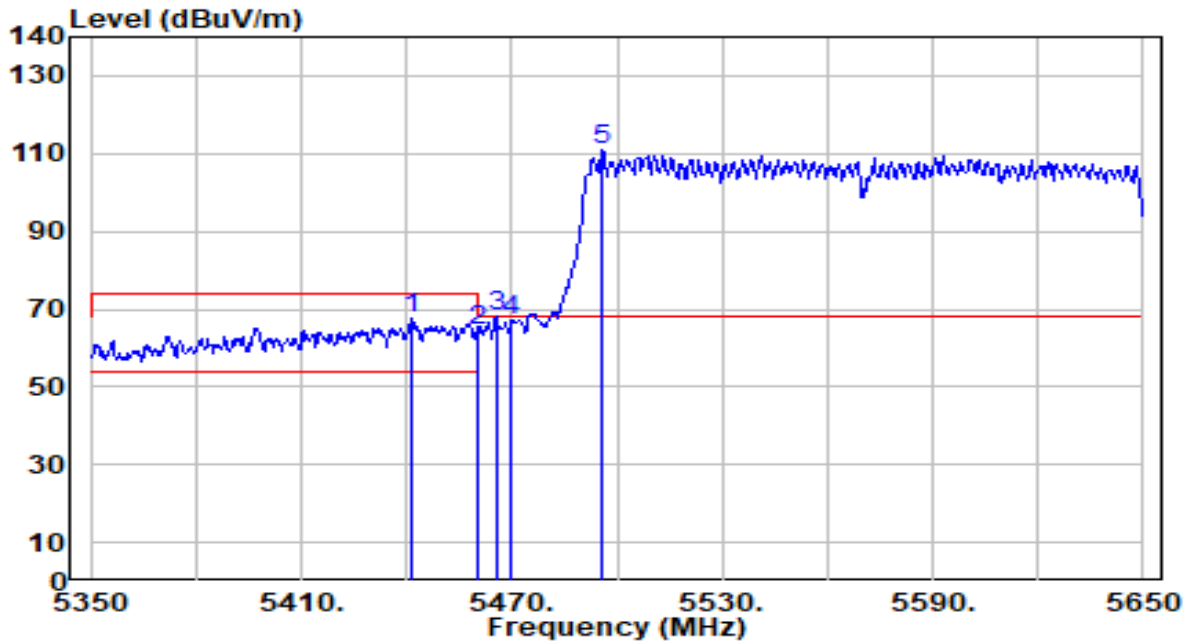


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5441.800	67.04	0.59	67.64	-6.36	74.00	112	6	Peak
2	5460.000	63.58	0.65	64.24	-9.76	74.00	112	6	Peak
3	* 5465.500	67.38	0.67	68.06	-0.14	68.20	112	6	Peak
4	5470.000	66.48	0.69	67.16	-1.04	68.20	112	6	Peak
5	5495.800	110.31	0.78	111.09	N/A	N/A	112	6	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-01-31
Factor	DRH18-E	Temp. / Humidity	21°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

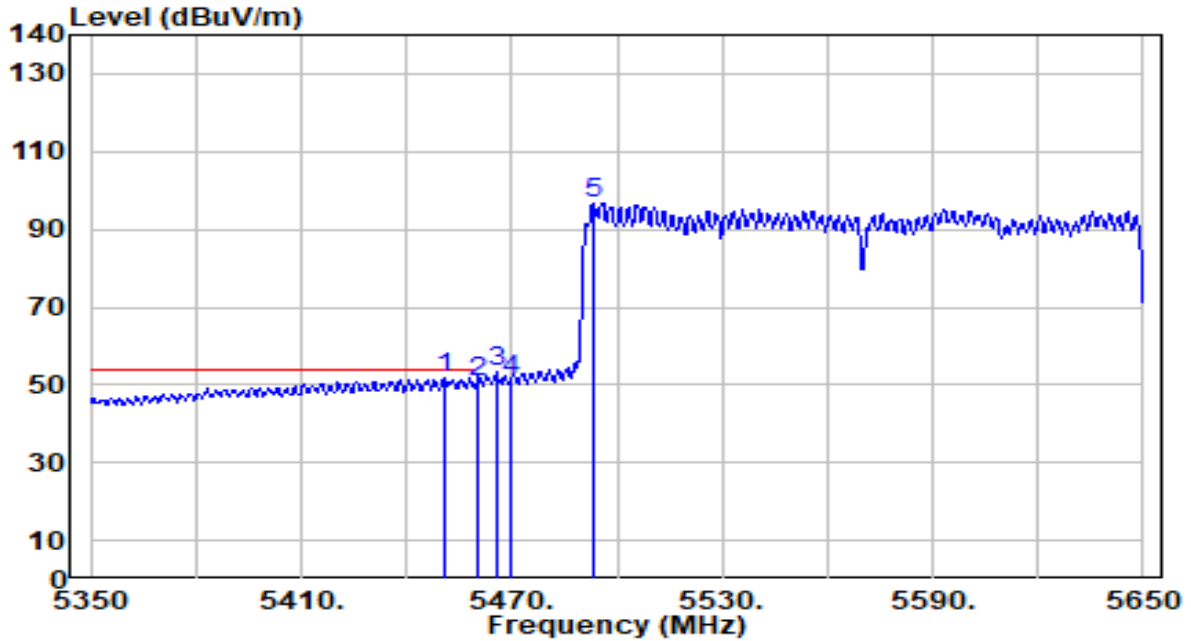

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5450.800	51.22	0.62	51.84	-2.16	54.00	112	6	Average
2	5460.000	50.22	0.65	50.87	-3.13	54.00	112	6	Average
3	5465.800	52.42	0.67	53.10	N/A	N/A	112	6	Average
4	5470.000	50.72	0.69	51.40	N/A	N/A	112	6	Average
5	5493.400	96.17	0.77	96.94	N/A	N/A	112	6	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.10.AC Conducted Emissions Measurement

7.10.1.Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.


7.10.2.Test Procedure

The EUT was setup according to ANSI C63.4, 2009 and tested according to KDB 789033 for compliance to FCC 47CFR 15.247 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.


Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

7.10.3. Test Setup

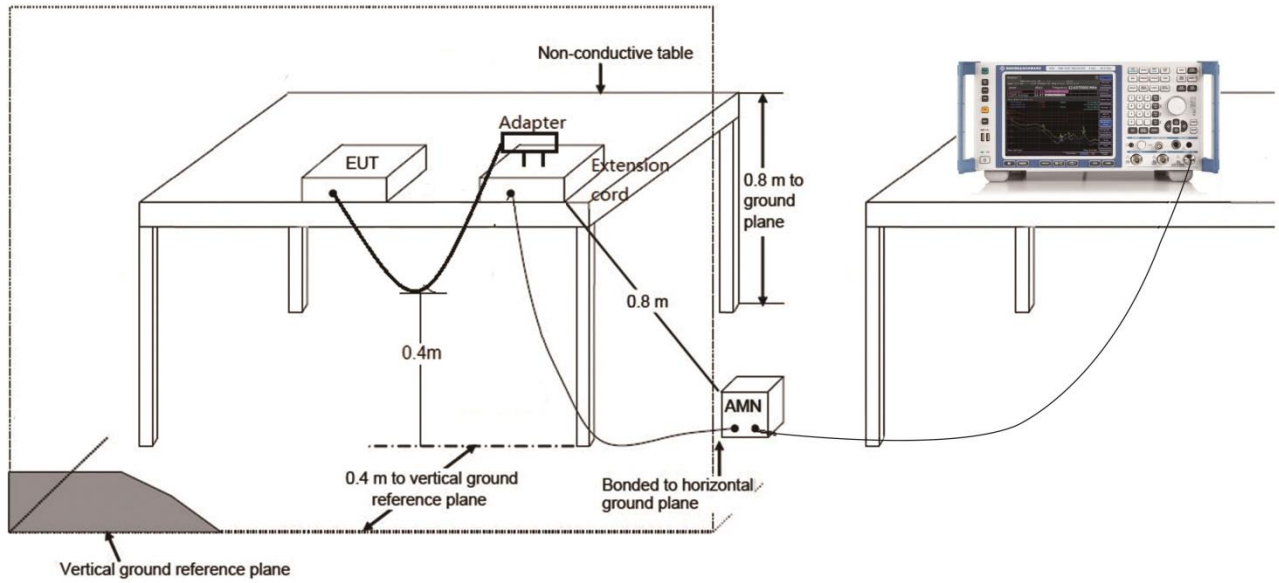

7.10.4. Test Result

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-02-27
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	20.9°C / 56%
Polarity	Line1	Site / Test Engineer	SR2 / Bob
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 120V/60Hz

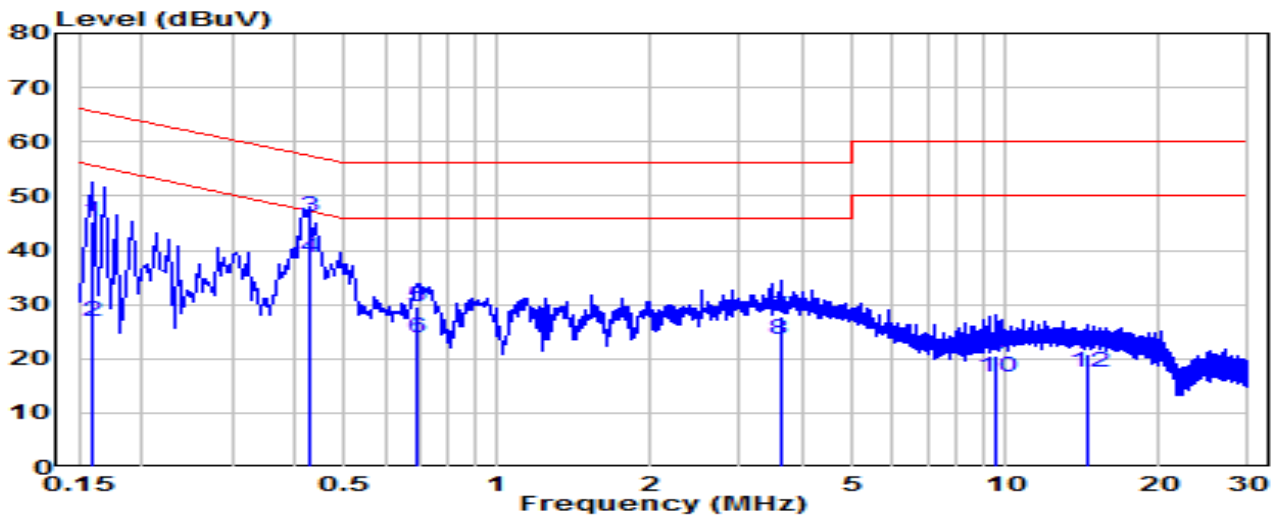


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV)	Margin (dB)	Limit (dBUV)	Remark (QP/PK/AV)
1	0.159	35.64	9.62	45.26	-20.26	65.52	QP
2	0.159	17.13	9.62	26.75	-28.76	55.52	Average
3	* 0.424	36.46	9.64	46.10	-11.26	57.36	QP
4	* 0.424	28.99	9.64	38.62	-8.74	47.36	Average
5	0.690	19.92	9.65	29.57	-26.43	56.00	QP
6	0.690	14.29	9.65	23.94	-22.06	46.00	Average
7	3.597	17.90	9.72	27.63	-28.37	56.00	QP
8	3.597	13.71	9.72	23.43	-22.57	46.00	Average
9	9.599	10.80	9.85	20.65	-39.35	60.00	QP
10	9.599	6.87	9.85	16.72	-33.28	50.00	Average
11	14.490	11.09	9.89	20.98	-39.02	60.00	QP
12	14.490	7.55	9.89	17.43	-32.57	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-02-27
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	20.9°C /56%
Polarity	Neutral	Site / Test Engineer	SR2 / Bob
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 120V/60Hz

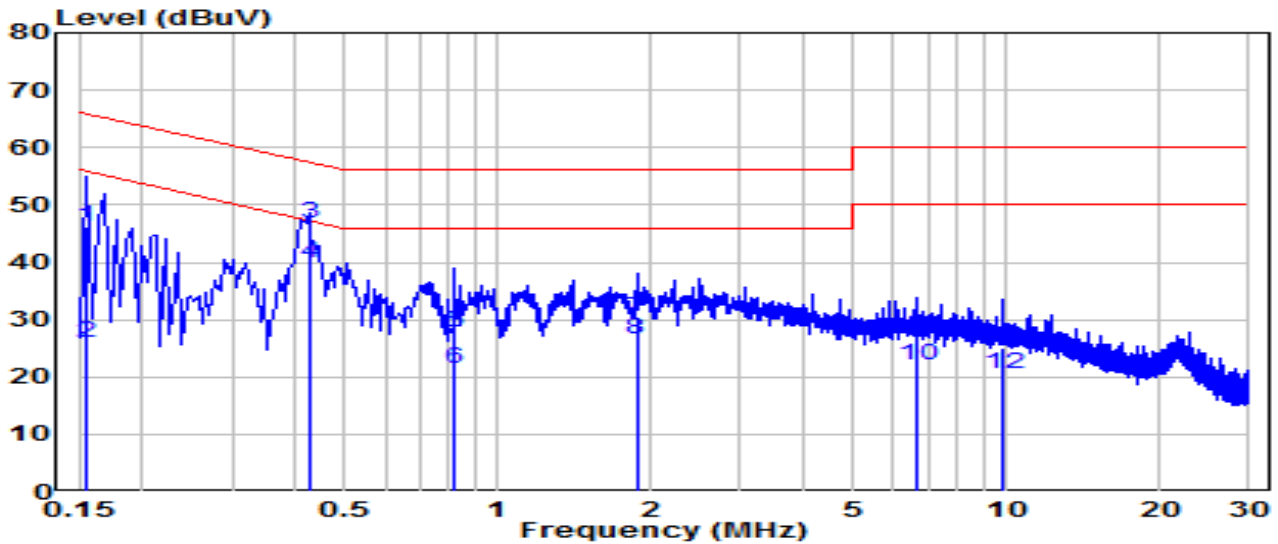


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV)	Margin (dB)	Limit (dBUV)	Remark (QP/PK/AV)
1	0.154	36.60	9.62	46.22	-19.54	65.75	QP
2	0.154	16.22	9.62	25.84	-29.92	55.75	Average
3	* 0.424	37.11	9.64	46.75	-10.62	57.36	QP
4	* 0.424	30.29	9.64	39.93	-7.43	47.36	Average
5	0.820	18.14	9.66	27.80	-28.20	56.00	QP
6	0.820	11.71	9.66	21.37	-24.63	46.00	Average
7	1.873	20.55	9.69	30.23	-25.77	56.00	QP
8	1.873	16.84	9.69	26.53	-19.47	46.00	Average
9	6.647	17.27	9.79	27.06	-32.94	60.00	QP
10	6.647	12.35	9.79	22.14	-27.86	50.00	Average
11	9.892	15.24	9.87	25.11	-34.89	60.00	QP
12	9.892	10.53	9.87	20.39	-29.61	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-02-27
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	20.9°C /56%
Polarity	Line1	Site / Test Engineer	SR2 / Bob
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 240V/60Hz

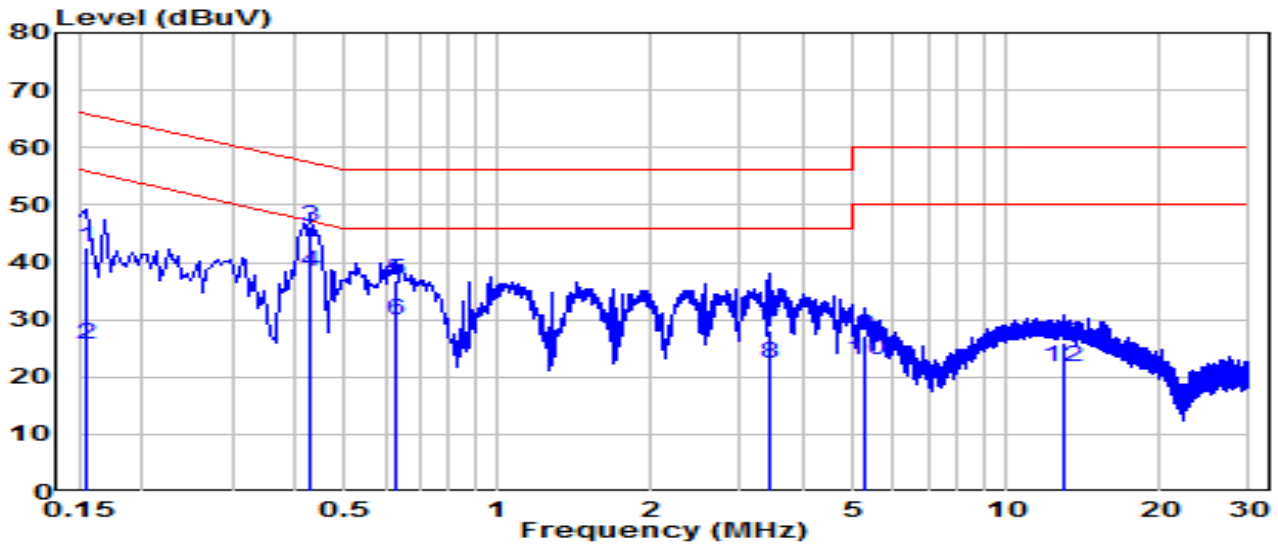


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.154	32.91	9.62	42.53	-23.22	65.75	QP
2	0.154	15.98	9.62	25.60	-30.16	55.75	Average
3	* 0.429	36.46	9.64	46.10	-11.18	57.27	QP
4	* 0.429	28.84	9.64	38.47	-8.80	47.27	Average
5	0.627	27.32	9.65	36.97	-19.03	56.00	QP
6	0.627	20.22	9.65	29.87	-16.13	46.00	Average
7	3.408	18.37	9.72	28.09	-27.91	56.00	QP
8	3.408	12.72	9.72	22.44	-23.56	46.00	Average
9	5.252	17.57	9.75	27.32	-32.68	60.00	QP
10	5.252	13.21	9.75	22.96	-27.04	50.00	Average
11	12.902	15.97	9.88	25.85	-34.15	60.00	QP
12	12.902	11.93	9.88	21.81	-28.19	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	BE15000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-02-27
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	20.9°C /56%
Polarity	Neutral	Site / Test Engineer	SR2 / Bob
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 240V/60Hz

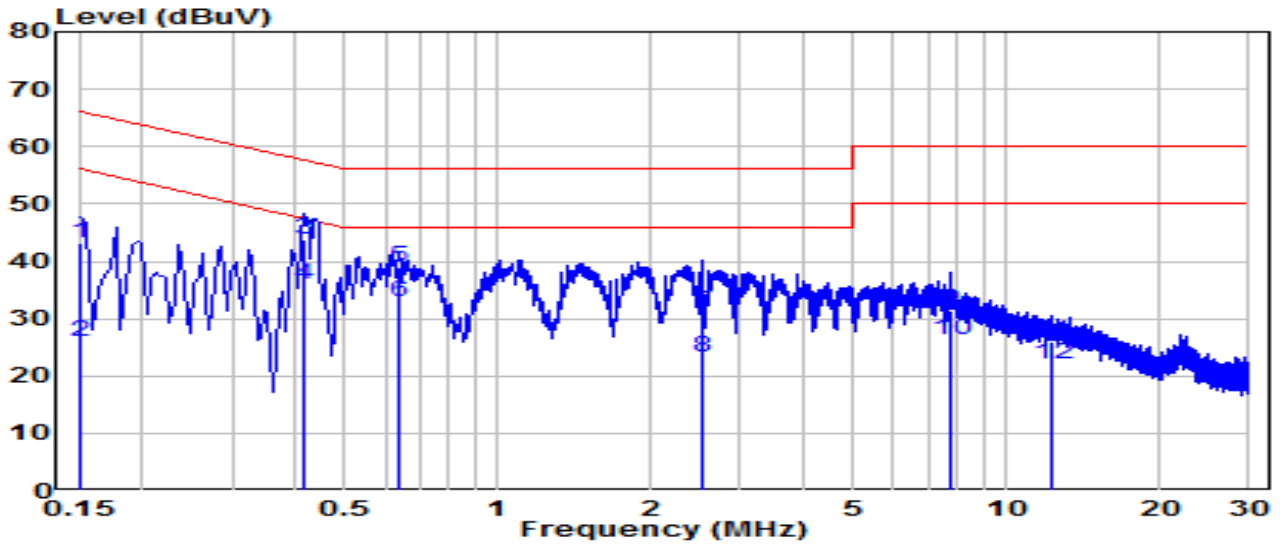

No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV)	Margin (dB)	Limit (dBUV)	Remark (QP/PK/AV)
1	0.150	33.40	9.62	43.02	-22.98	66.00	QP
2	0.150	16.21	9.62	25.83	-30.17	56.00	Average
3	* 0.415	34.18	9.64	43.81	-13.72	57.54	QP
4	* 0.415	26.16	9.64	35.80	-11.74	47.54	Average
5	0.640	29.19	9.65	38.84	-17.16	56.00	QP
6	0.640	23.39	9.65	33.04	-12.96	46.00	Average
7	2.521	21.36	9.70	31.06	-24.94	56.00	QP
8	2.521	13.58	9.70	23.28	-22.72	46.00	Average
9	7.723	21.71	9.81	31.53	-28.47	60.00	QP
10	7.723	16.44	9.81	26.26	-23.74	50.00	Average
11	12.290	15.96	9.90	25.86	-34.14	60.00	QP
12	12.290	12.08	9.90	21.98	-28.02	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15E of the FCC Rules.

Appendix A : Test Setup Photograph

Refer to “2401TW0112-UT” file.

Appendix B : EUT Photograph

Refer to “2401TW0112-UE” file.

Appendix C : Internal Photograph

Refer to “2401TW0112-UI” file.

————— The End —————