



FCC TEST REPORT

For

SHENZHEN HOPEPOWER TECHNOLOGY CO.,LTD

Magnetic wireless charging power bank

Test Model: H45

Prepared for : SHENZHEN HOPEPOWER TECHNOLOGY CO.,LTD
Address : NO.302-326 Room, 3Floor ChangAn ZhiGu, Xitou community, Songgang Street, Bao'an district, Shenzhen city, China.

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Shajing Street, Baoan District, Shenzhen, China
Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : April 28, 2025
Number of tested samples : 2
Sample No. : A250425048-1(Engineer sample), A250425048-2(Normal sample)
Date of Test : April 28, 2025 ~ May 20, 2025
Date of Report : May 20, 2025





FCC TEST REPORT KDB 680106 D01 Wireless Power Transfer v04	
Report Reference No.	: LCSA04255100EB
Date of Issue	: May 20, 2025
Testing Laboratory Name	: Shenzhen LCS Compliance Testing Laboratory Ltd.
Address	: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Shajing Street, Baoan District, Shenzhen, China
Testing Location/ Procedure	: Full application of Harmonised standards <input checked="" type="checkbox"/> Partial application of Harmonised standards <input type="checkbox"/> Other standard testing method <input type="checkbox"/>
Applicant's Name	: SHENZHEN HOPEPOWER TECHNOLOGY CO.,LTD
Address	: NO.302-326 Room, 3Floor ChangAn ZhiGu, Xitou community, Songgang Street, Bao'an district, Shenzhen city, China.
Test Specification	
Standard	: FCC CFR 47 PART 1, § 1.1310 KDB 680106 D01 Wireless Power Transfer v04
Test Report Form No.	: LCSEMC-1.0
TRF Originator	: Shenzhen LCS Compliance Testing Laboratory Ltd.
Master TRF	: Dated 2023-12
Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved. This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.	
EUT Description.	: Magnetic wireless charging power bank
Trade Mark	: N/A
Test Model	: H45
Ratings	: Please Refer to Page 6
Result	: PASS

Compiled by:

Supervised by:

Approved by:

Vera Deng/ Administrator

Jack Liu/ Technique principal

Gavin Liang/ Manager





ISED -- TEST REPORT

Test Report No. : LCSA04255100EB	<u>May 20, 2025</u> Date of issue
---	--------------------------------------

Test Model.....	: H45
EUT.....	: Magnetic wireless charging power bank
Applicant.....	: SHENZHEN HOPEPOWER TECHNOLOGY CO.,LTD
Address.....	: NO.302-326 Room, 3Floor ChangAn ZhiGu, Xitou community, Songgang Street, Bao'an district, Shenzhen city, China.
Telephone.....	:
Fax.....	:
Manufacturer.....	: SHENZHEN HOPEPOWER TECHNOLOGY CO.,LTD
Address.....	: NO.302-326 Room, 3Floor ChangAn ZhiGu, Xitou community, Songgang Street, Bao'an district, Shenzhen city, China.
Telephone.....	:
Fax.....	:
Factory.....	: SHENZHEN HOPEPOWER TECHNOLOGY CO.,LTD
Address.....	: NO.302-326 Room, 3Floor ChangAn ZhiGu, Xitou community, Songgang Street, Bao'an district, Shenzhen city, China.
Telephone.....	:
Fax.....	:

Test Result	PASS
--------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.





Revision History

Revision	Issue Date	Revisions	Revised By
000	May 20, 2025	Initial Issue	--





TABLE OF CONTENTS

1. GENERAL INFORMATION..... 6

1.1. DESCRIPTION OF DEVICE (EUT) 6

1.2. SUPPORT EQUIPMENT LIST 6

1.3 EXTERNAL I/O CABLE 6

1.4. DESCRIPTION OF TEST FACILITY 6

1.5. TEST EQUIPMENT 7

1.6. MEASUREMENT UNCERTAINTY 7

1.7. DESCRIPTION OF TEST MODES 7

1.8. COIL DESCRIPTION..... 8

1.10. COIL SPECIFICATIONS 8

1.11. DUTY CYCLE..... 8

2. TEST METHODOLOGY 10

2.1. REFERENCE EVALUATION METHOD 10

2.2. LIMIT 10

2.3. TEST SETUP DIAGRAM..... 10

2.4. MEASUREMENT PROCEDURE 11

2.5. EQUIPMENT APPROVAL CONSIDERATIONS OF KDB 680106 D01V04..... 12

3. TEST RESULTS..... 13

3.3 CONCLUSION 17

4. TEST SETUP PHOTOS 18





1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	: Magnetic wireless charging power bank
Test Model	: H45
Ratings	: Capacity: 3.85V, 10000mAh, 38.5Wh Type-C input (charging): 5V $\overline{=}$ 3A, 9V $\overline{=}$ 2A, 12V $\overline{=}$ 1.5A (18W Max) Type-C output(own line): 5V $\overline{=}$ 3A, 9V $\overline{=}$ 2A, 12V $\overline{=}$ 1.5A (22.5W Max) Type-C output: 5V $\overline{=}$ 3A, 9V $\overline{=}$ 2A,12V $\overline{=}$ 1.5A(22.5W Max) USB output: 5V $\overline{=}$ 3A, 9V $\overline{=}$ 2A,12V $\overline{=}$ 1.5A(20W Max) Magnetic wireless charging: 5W/7.5W/10W/15W(Max)
Hardware Version	: /
Software Version	: /
Wireless Charging	:
Operating Frequency	: 110.0~205.0KHz
Modulation Type	: ASK
Antenna Type	: Coil Antenna
Note: For a more detailed antenna description, please refer to the antenna specifications or the antenna report provided by the customer.	

1.2. Support equipment List

Manufacturer	Description	Model	Serial Number	Certificate
SHENZHEN TIANYIN ELECTRONICS CO., LTD	Power Adapter	TPA-46050200UU	--	FCC
Huawei	Mobile phone	FRD-AL10	FRD-AL10C00B373	FCC

Note: Auxiliary equipment is provided by the laboratory.

1.3 External I/O Cable

I/O Port Description	Quantity	Cable
Type-C Port	2	N/A
USB Port	1	N/A

1.4. Description of Test Facility

NVLAP Accreditation Code is 600167-0.

FCC Designation Number is CN5024

CAB identifier is CN0071.

CNAS Registration Number is L4595.

Test Firm Registration Number: 254912.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



1.5. Test Equipment

Equipment	Manufacturer	Model	Serial no.	Calibrated date	Calibrated Due
Exposure Level Tester	Narda	ELT-400	N-0713	2024-11-11	2025-11-10
B-Field Probe	Narda	100cm ²	M-1154	2024-10-08	2025-10-07

Exposure Level Tester ELT-400 detailed parameters are as follows:

Common parameter	
Operating temperature	-10 °C ~ +50 °C
Operation humidity	< 95 % (30 °C) or < 29 g/m ³
Weight	910 g
Size	180 mm x 100 mm x 55 mm(Main engine) / 290 mm x 125 mm Ø (Probe)
Display	LCD backlit display, 4 refresh rates per second
Battery	Nimh battery (4 x Mignon, AA), rechargeable
Operating time, typical	12 h
Power supply	100 ~240 V AC / 47 ~ 63 Hz
Charging time, typical	2 hours
Recommended calibration cycle	24 months
Country of origin	Germany

1.6. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Field Strength Uncertainty	1Hz~400KHz	1%	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.7. Description of Test Modes

Equipment under test was operated during the measurement under the following conditions:

Charging and communication mode

Test Modes		
Mode 1	AC/DC Adapter (12V/1.5A) + EUT + Watch (Battery Status: <1%)	Record
Mode 2	AC/DC Adapter (12V/1.5A) + EUT + Watch (Battery Status: <50%)	Record
Mode 3	AC/DC Adapter (12V/1.5A) + EUT + Watch (Battery Status: 100%)	Record
Mode 4	AC/DC Adapter (9V/2A) + EUT + Watch (Battery Status: <1%)	Pre-tested
Mode 5	AC/DC Adapter (9V/2A) + EUT + Watch (Battery Status: <50%)	Pre-tested
Mode 6	AC/DC Adapter (9V/2A) + EUT + Watch (Battery Status: 100%)	Pre-tested
Mode 7	AC/DC Adapter (5V/3A) + EUT + Watch (Battery Status: <1%)	Pre-tested
Mode 8	AC/DC Adapter (5V/3A) + EUT + Watch (Battery Status: <50%)	Pre-tested
Mode 9	AC/DC Adapter (5V/3A) + EUT + Watch (Battery Status: 100%)	Pre-tested


Note: All test modes were pre-tested for ac and dc mode, but we only recorded the worst case in this report for ac mode.



1.8. Coil Description

Config.	Mode	Descriptions
1	Standby (Flatbed Position) @327.2kHz	EUT Alone powered by AC/DC adapter
2	Operating (Flatbed Position) (Phone @327.2kHz, ~10%, 20~50%, and >75% Power Charging)	EUT with lightning to AC/DC Adapter & Wireless Charging to WPT Client. 2.5W: Direct Contact 2.5W: 2mm Airgap, 2mm Shift Top as Worst-Case Position

1.9. Coil Size

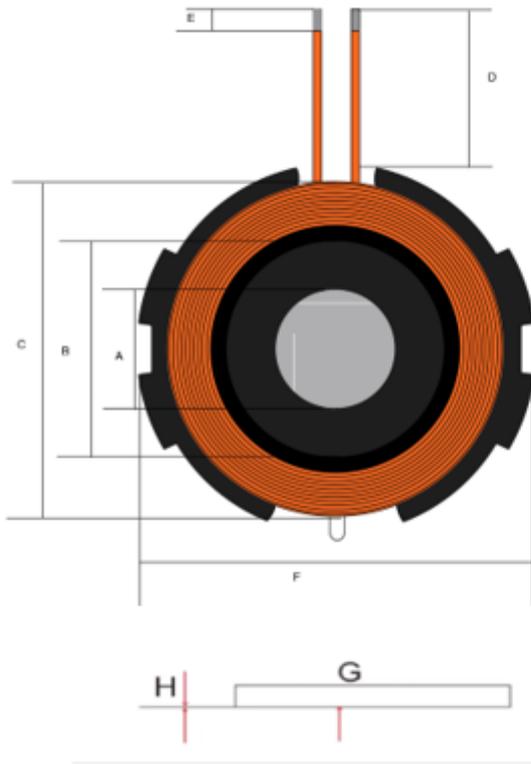

A	7.6 ± 0.5
B	13.5 ± 1
C	21MAX
D	30 ± 2
E	2MAX
F	25 ± 1
G	Total thickness: 2.8MAX
H	The release paper thickness is 0.15MAX

(Unit: mm)


1.10. Coil Specifications

Item	Parameter
Input inductance:	Transmitter 1: 6.5 μH±10%
Material of enclosure(s):	Multiple strands of enamelled wire
Number of turns:	Transmitter 1: 10 turns

1.11. Duty Cycle

Mode	ON Time (ms)	Period (ms)	Duty Cycle (%)
Operating (110.0-205kHz)	/	/	100



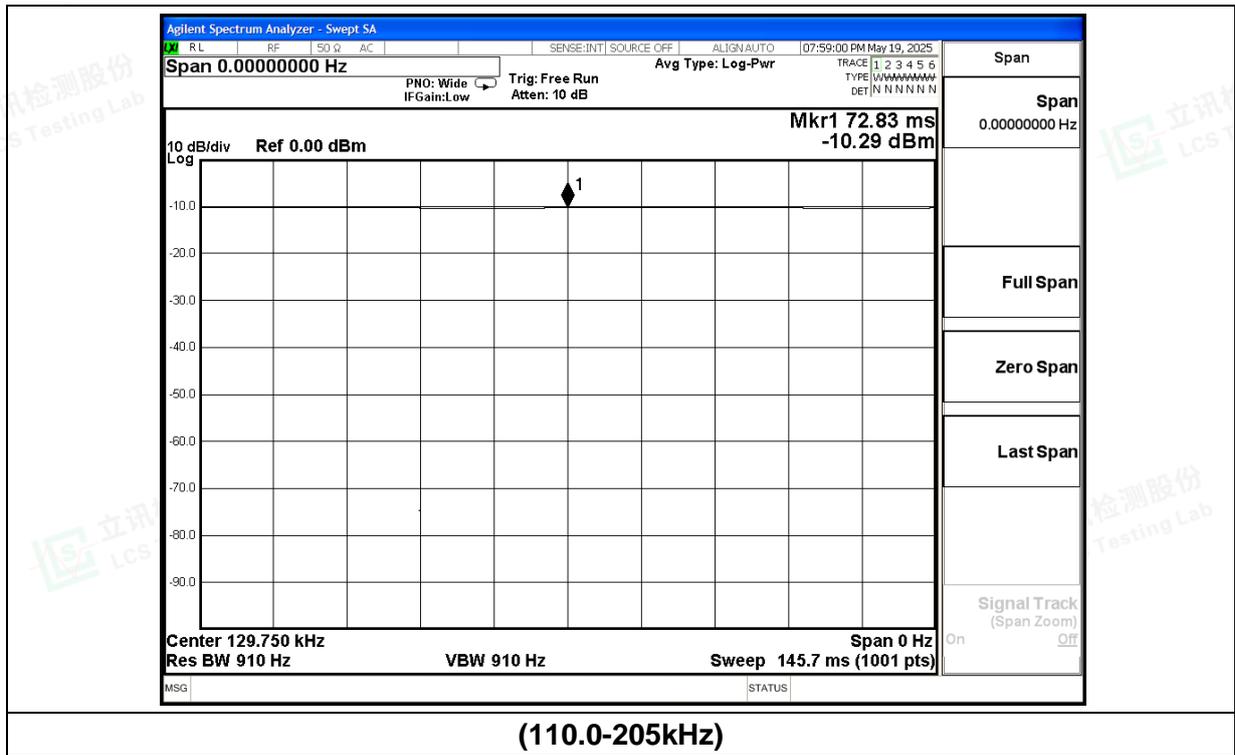



2. TEST METHODOLOGY

2.1. Reference Evaluation Method

ANSI C95.1–1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

FCC KDB publication 680106 D01 RF Exposure Wireless Charging Apps v04: RF Exposure Considerations for Low Power Consumer Wireless Power Transfer Applications

FCC CFR 47 part1 1.1310: Radiofrequency radiation exposure limits.

FCC CFR 47 part2 2.1093: Radiofrequency radiation exposure evaluation: portable devices

FCC CFR 47 part 18.107: Industrial, Scientific, and Medical Equipment

April 2024 TCBC Workshop: Part 18 Wireless Power Transfer Devices: Clarifications on KDB 680106v04 and ECR Processes

2.2. Limit

§1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of FCC part 2.1093 of this chapter.

Table 1 to §1.1310(e)(1) - Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(i) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*(100)	≤6
3.0-30	1842/f	4.89/f	*(900/f ²)	<6
30-300	61.4	0.163	1.0	<6
300-1500	/	/	f/300	<6
1500-100000	/	/	5	<6
(ii) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f ²)	<30
30-300	27.5	0.073	0.2	<30
300-1500	/	/	f/1500	<30
1500-100000	/	/	1.0	<30

f = frequency in MHz

* = Plane-wave equivalent power density

Note 1: Occupational/controlled exposure limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure.

Note 2: General population/uncontrolled exposure limits apply in situations in which the general public may be exposed, or in which persons who are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.

2.3. Test Setup Diagram

Mobile Exposure Conditions





- c. The highest emission level was recorded and compared with limit.
- d. The EUT was measured according to the KDB 680106 D01 Wireless Power Transfer v04.

2.5. Equipment Approval Considerations of KDB 680106 D01v04

Requirements of KDB 680106 D01	Yes / No	Description
Power transfer frequency is less than 1 MHz	Yes	The device operates in the frequency range 300.0-360.0kHz
The output power from each transmitting element (e.g., coil) is less than or equal to 15 watts.	Yes	The maximum output power of each primary coil is 2.5W.
A client device providing the maximum permitted load is placed in physical contact with the transmitter (i.e., the surfaces of the transmitter and client device enclosures need to be in physical contact)	Yes	Client device is placed directly in contact with the transmitter.
Only § 2.1091- Mobile exposure conditions apply (i.e., this provision does not cover § 2.1093-Portable exposure conditions).	No	Mixed mobile and portable exposure conditions
The E-field and H-field strengths, at and beyond 20 cm surrounding the device surface, are demonstrated to be less than 50% of the applicable MPE limit, per KDB 447498, Table 1. These measurements shall be taken along the principal axes of the device, with one axis oriented along the direction of the estimated maximum field strength, and for three points per axis or until a 1/d (inverse distance from the emitter structure) field strength decay is observed. Symmetry considerations may be used for test reduction purposes. The device shall be operated in documented worst-case compliance scenarios (i.e., the ones that lead to the maximum field components), and while all the radiating structures (e.g., coils or antennas) that by design can simultaneously transmit are energized at their nominal maximum power.	Yes	The E-field and H-field strengths from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.
For systems with more than one radiating structure, the conditions specified in (5) must be met when the system is fully loaded (i.e., clients absorbing maximum power available), and with all the radiating structures operating at maximum power at the same time, as per design conditions. If the design allows one or more radiating structures to be powered at a higher level while other radiating structures are not powered, then those cases must be tested as well. For instance, a device may use three RF coils powered at 5 W, or one coil powered at 15 W: in this case, both scenarios shall be tested	Yes	Only one radiating structure and tested at maximum Output Power



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

3. TEST RESULTS

For portable exposure condition

- (1) The portable test modes have covered the considerations of the mobile test, only record the test data of the portable conditions in this report.
- (2) Operating modes with client device (1 %, 50%, 99% battery status of client device) have been test, only show the data of worst case of 1% battery status of client device.
- (3) Test performed with all the radiating structures operating at maximum power at the same time.
- (4) H-field measurements are taken along all three axes the device from 0cm~20cm in 2cm minimum increment for each edge surface of the host/client pair. If the center of the probe sensing element is more than 5mm from the probe outer edge, the field strengths need to be estimated for the positions that are not reachable.
- (5) Validation of Field Estimates
 - (a) If R is the probe radius and the probe tip is in contact with the coil, then the probe center is R cm from the coil surface as bellowing picture

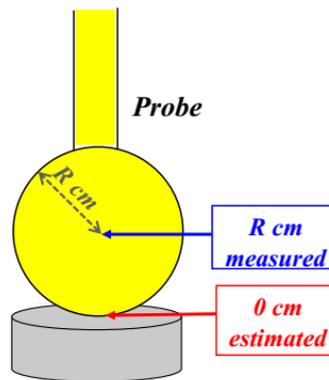


- (b) The probe then is measuring the field correctly at R cm from the surface, and only estimating the field at the 0 cm point of contact with the coil surface.
- (c) The validation requires showing that the model used to estimate the field provides data within 30% accuracy for at least the two, 2-cm-spaced closest points to where the estimates were made.
- (d) If there is only one estimated value, then a single validation point is sufficient.
- (e) Validation Example for 4 cm Probe Radius as following
 - Step 1






Validation Example for 4 cm Probe Radius

1. Measure the field at 4 cm (closest position)




Step 2


2. Position the probe 2 cm from the DUT. Measure the field at 6 cm (probe calibration point)

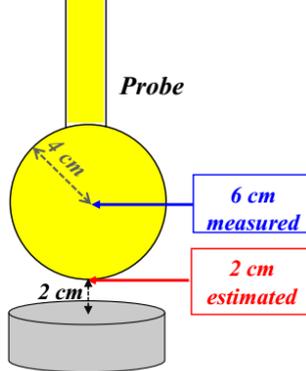

3. Position the probe 4 cm from the DUT. Estimate the field at 4 cm. Compare with Step 1

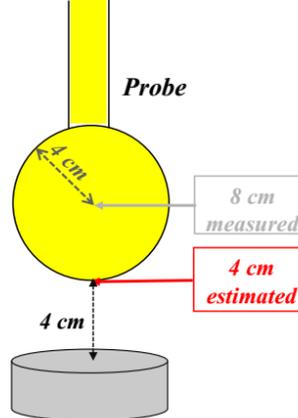


4. Position the probe 6 cm from the DUT. Estimate the field at 6 cm. Compare with Step 2

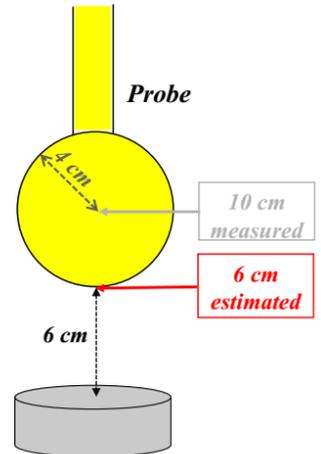


Validation Example for 4 cm Probe Radius

1. Measure the field at 4 cm (closest position)




Step 3


2. Position the probe 2 cm from the DUT. Measure the field at 6 cm (probe calibration point)

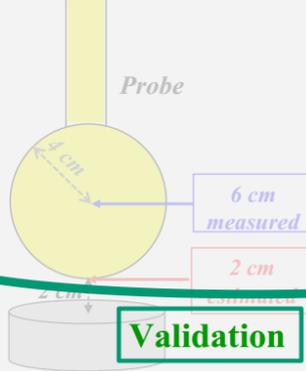


3. Position the probe 4 cm from the DUT. Estimate the field at 4 cm. Compare with Step 1

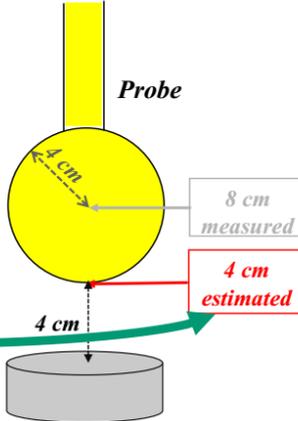

4. Position the probe 6 cm from the DUT. Estimate the field at 6 cm. Compare with Step 2

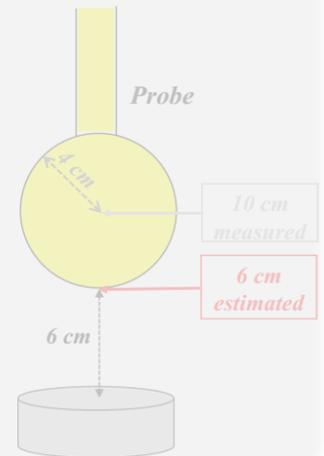

Validation Example for 4 cm Probe Radius

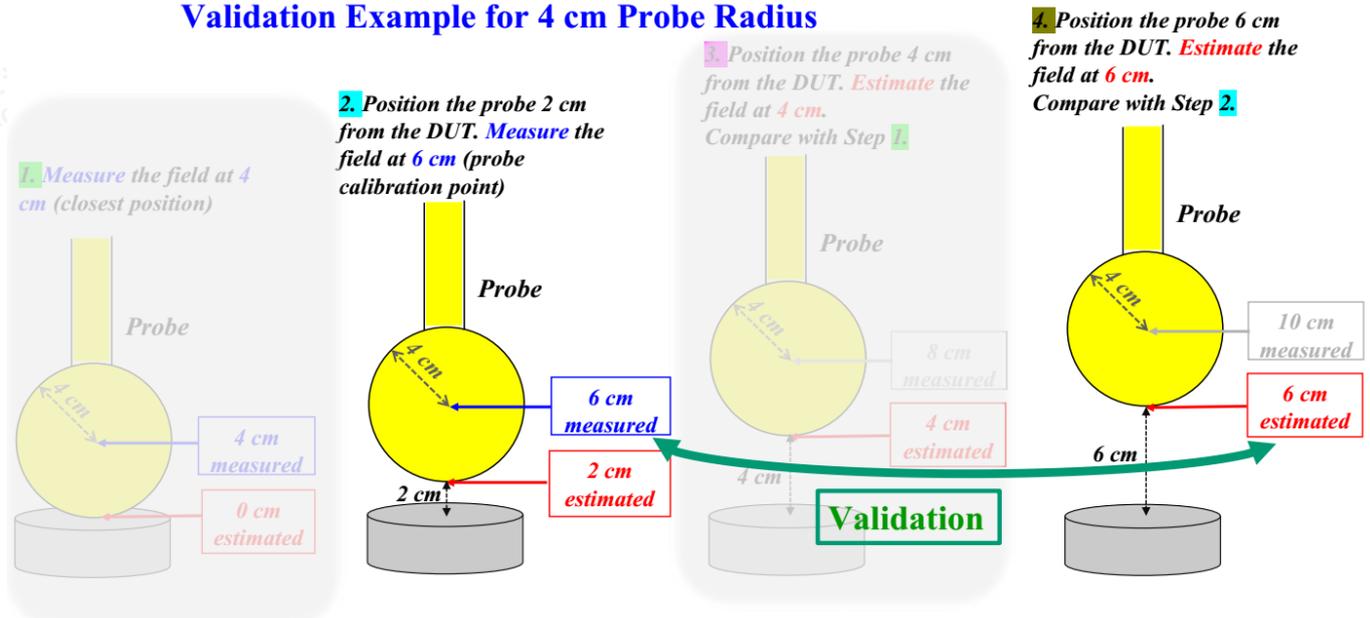

Description of the Validation Example for 4 cm Probe Radius

- Assume that $R=4$ cm. The field at 0 cm can only be estimated, but the field at 4 cm is measured exactly (at the center of the probe).
 - Move the probe at 2 cm from the surface. The field at 2 cm can still only be estimated, but the field at 6 cm is measured exactly.
 - Compare the estimates with the values at the same positions where the field was measured exactly (i.e., 4 cm and 6 cm)
 - The difference between measurements and estimates needs to be no more than 30%.
 - That validation of the estimates needs to be for the two closest points to the coil, but at least 2 cm apart (in this case they are). This is to avoid a validation at, say 2 cm and another one at 2.1 cm, that is essentially a repetition
- (6) According to Calibration information and specification about ETL-400 Probe (the B-Field Probe size is 100cm^2 , the probe radius is 5.65cm), The Probe ETL-400 Probe's sensitive elements center is located in the probe's center, and the distance from the sensitive elements center to the tip of probe is 5.65cm.
 - (7) The actual 0cm, 2cm, 4cm and 6cm field strengths need to be estimated for the positions that are not reachable via numerical calculation.
 - (8) For validation purposes: If the value to show a 30% agreement between the mode and the probe measurements for the two closest points to the device surface, and with 2cm increments. Then this extrapolation method is reasonable.
 - (9) Validation E-Field and H-Field as bellowing;





Validation Mode: TM1 H-Field (A/m)			Validation Position: Top	
	Results	Difference Values	Difference Limit	Conclusion
Estimated Distance: 0 cm	0.6645	24.89%	≤ 30%	Compliance
Measured Distance: 5.65 cm	0.5321		≤ 30%	Compliance
Estimated Distance: 2 cm	0.6962	15.36%	≤ 30%	Compliance
Measured Distance: 7.65 cm	0.6035		≤ 30%	Compliance
Estimated Distance: 4 cm	0.6457	22.24%	≤ 30%	Compliance
Measured Distance: 9.65 cm	0.5282		≤ 30%	Compliance

Validation Mode: TM1 E-Field (V/m)			Validation Position: Top	
	Results	Difference Values	Difference Limit	Conclusion
Estimated Distance: 0 cm	37.6405	27.03%	≤ 30%	Compliance
Measured Distance: 5.65 cm	29.6313		≤ 30%	Compliance
Estimated Distance: 2 cm	34.6624	27.37%	≤ 30%	Compliance
Measured Distance: 7.65 cm	27.2144		≤ 30%	Compliance
Estimated Distance: 4 cm	31.4220	23.19%	≤ 30%	Compliance
Measured Distance: 9.65 cm	25.5063		≤ 30%	Compliance

Note 1: The compliance location as probe tip;

Note 2: The format of difference is;

$$\text{The E Validation Difference} = (E_{\text{Estimated Distance}} - E_{\text{Measured Distance}}) / E_{\text{Measured Distance}} * 100\%$$

$$\text{The H Validation Difference} = (H_{\text{Estimated Distance}} - H_{\text{Measured Distance}}) / H_{\text{Measured Distance}} * 100\%$$



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



H-Field and E-Field Emission level with a combination of measured and estimated results.

Test condition: Mode 1

Distance(cm)	H-Field Result(A/m)							Limit(A/m)
	Type	Top	Bottom	Left	Right	Front	Back	
0	Estimate	0.7577	0.6776	0.5543	0.4816	0.5100	0.5311	1.63
2	Estimate	0.6634	0.3822	0.4669	0.4421	0.5097	0.3841	1.63
4	Estimate	0.5167	0.5614	0.4604	0.6250	0.4776	0.4891	1.63
6	Measured	0.3387	0.5583	0.1862	0.5257	0.2359	0.3878	1.63
8	Measured	0.2605	0.2563	0.1899	0.1437	0.2721	0.3127	1.63
10	Measured	0.1458	0.3778	0.0748	0.0691	0.0241	-0.0164	1.63
12	Measured	0.0716	0.0844	0.0505	0.0590	0.0041	0.1180	1.63
14	Measured	0.1680	0.0027	0.0648	0.1867	0.0024	0.0885	1.63
16	Measured	0.0539	0.0410	0.1672	0.0075	0.0992	0.1923	1.63
18	Measured	0.1310	0.0727	0.0216	0.1033	0.0815	0.0116	1.63
20	Measured	0.0083	0.0144	0.0292	0.0606	0.0077	0.0171	1.63

Distance(cm)	E-Field Result(V/m)							Limit(V/m)
	Type	Top	Bottom	Left	Right	Front	Back	
0	Estimate	37.6910	36.1871	36.4424	31.9963	31.7762	31.4087	613
2	Estimate	34.4804	34.3273	33.8924	30.7117	29.6460	29.1633	613
4	Estimate	31.3555	30.7559	31.0297	27.7646	27.0013	26.5236	613
6	Measured	28.9719	26.7985	27.8104	23.7618	22.6432	22.4106	613
8	Measured	24.4925	23.0626	23.6969	20.6414	19.3312	19.2251	613
10	Measured	22.3398	21.2341	21.5177	17.5138	16.0653	16.1775	613
12	Measured	20.1893	19.1533	19.7050	15.3968	13.5054	13.0775	613
14	Measured	17.2478	17.0418	16.9694	13.0542	11.3655	11.2891	613
16	Measured	15.8474	14.8241	15.5685	9.9425	9.2649	9.0749	613
18	Measured	12.6461	11.6099	12.2577	8.3690	7.5127	7.1518	613
20	Measured	7.5955	7.3694	7.5740	5.4351	4.3718	3.8844	613


3.3 Conclusion

A minimum safety distance of 0 cm to the antenna is required when the device is charging a smart phone for portable exposure. The detected emissions are below the limitations according FCC KDB 680106.




4. TEST SETUP PHOTOS

(The separation distance from the geometric center of the probe to the edge of the device is 6.25cm)

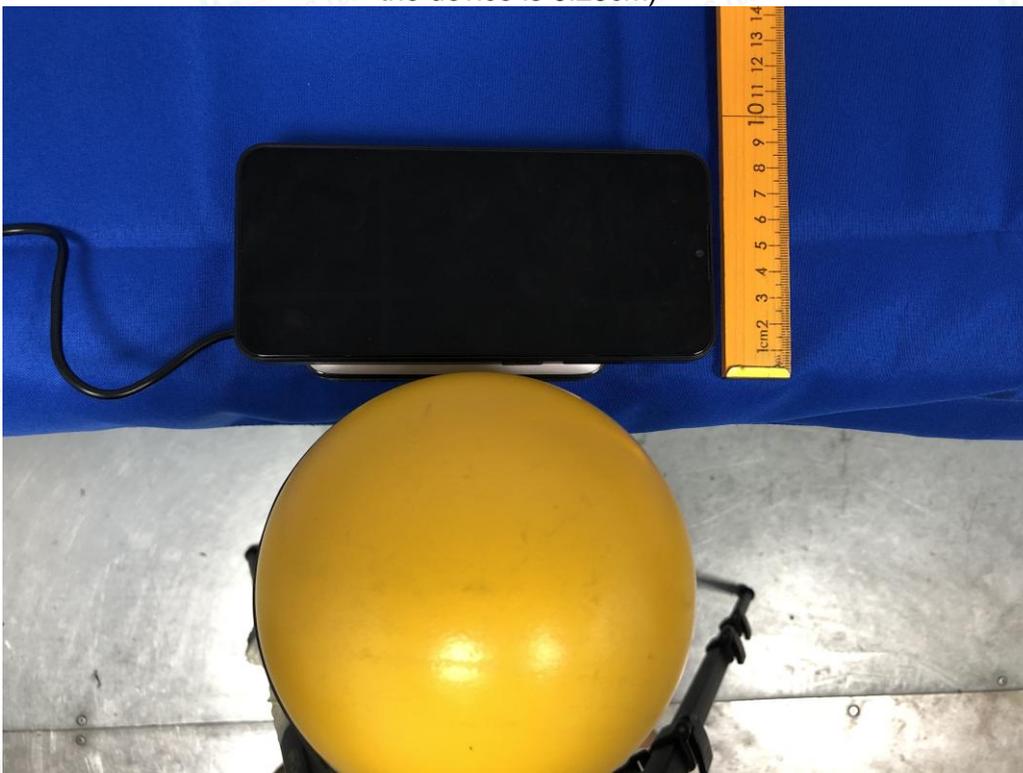


0cm-Left

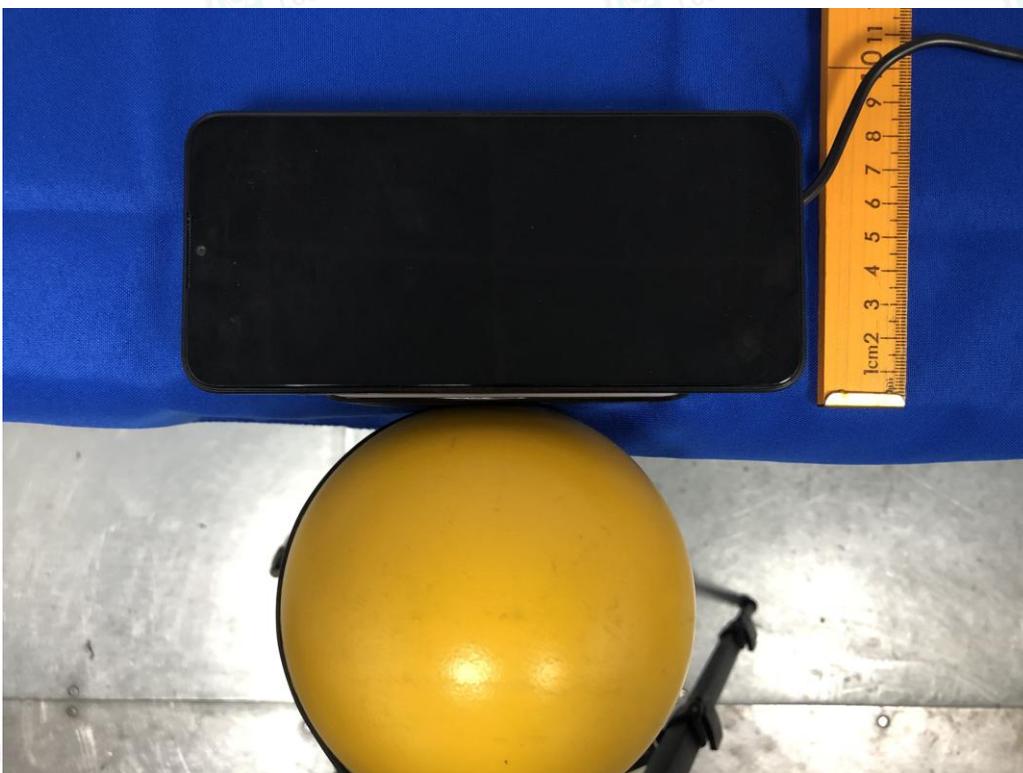


0cm-Right



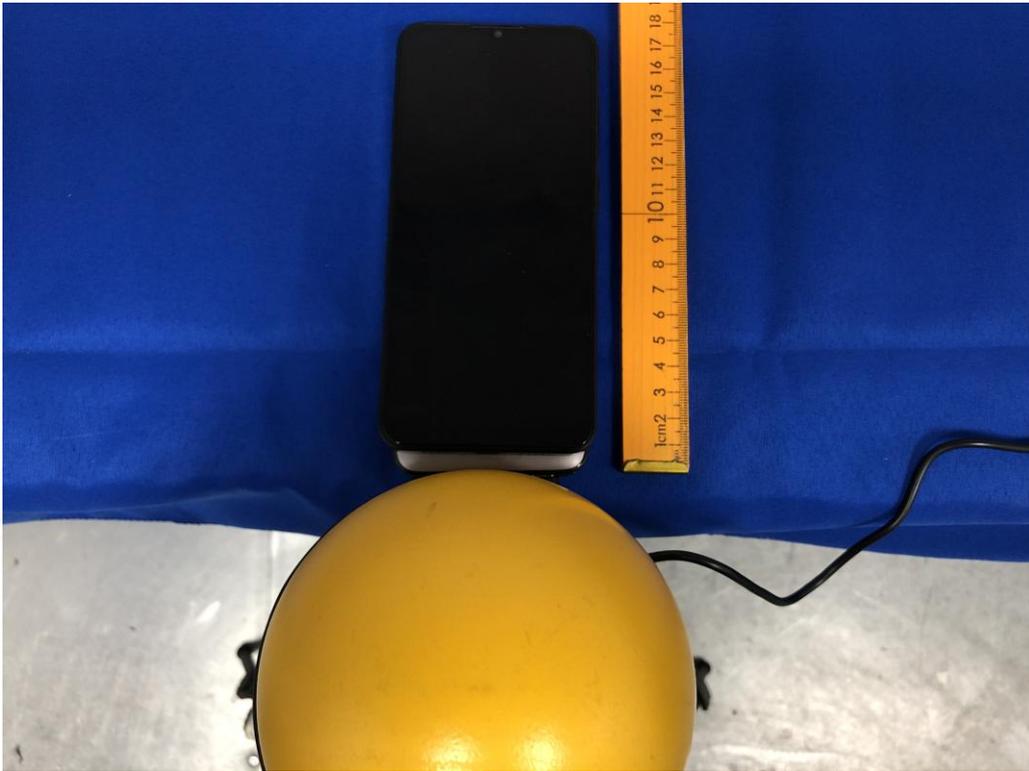


0cm-Top

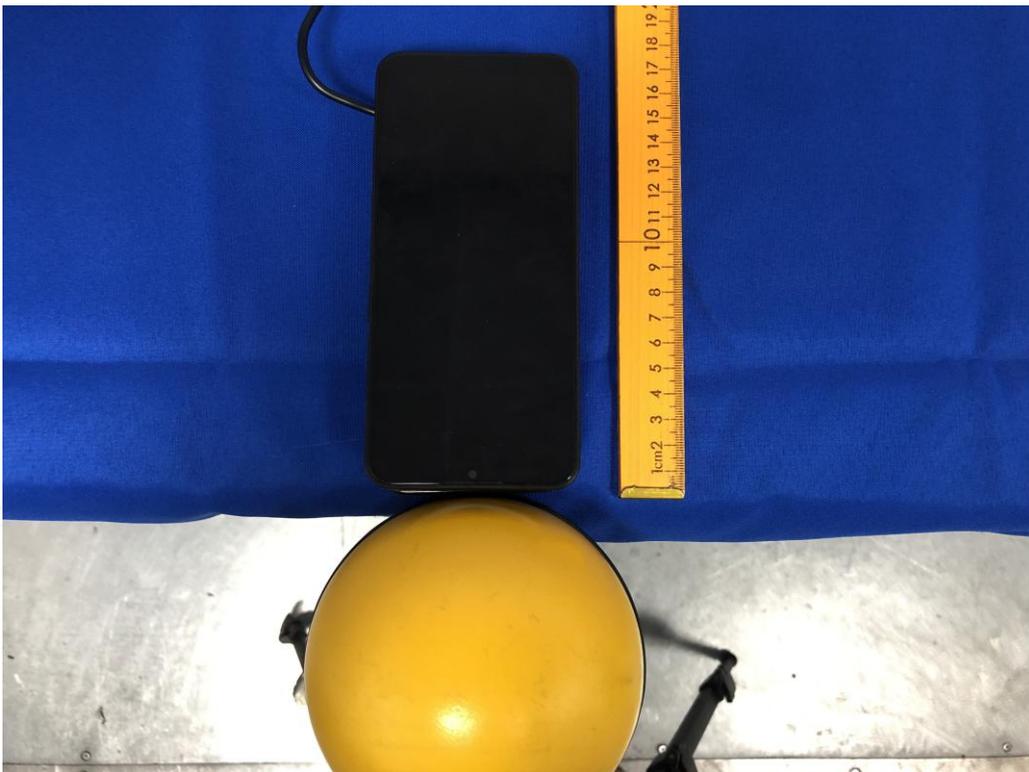

0cm-Bottom



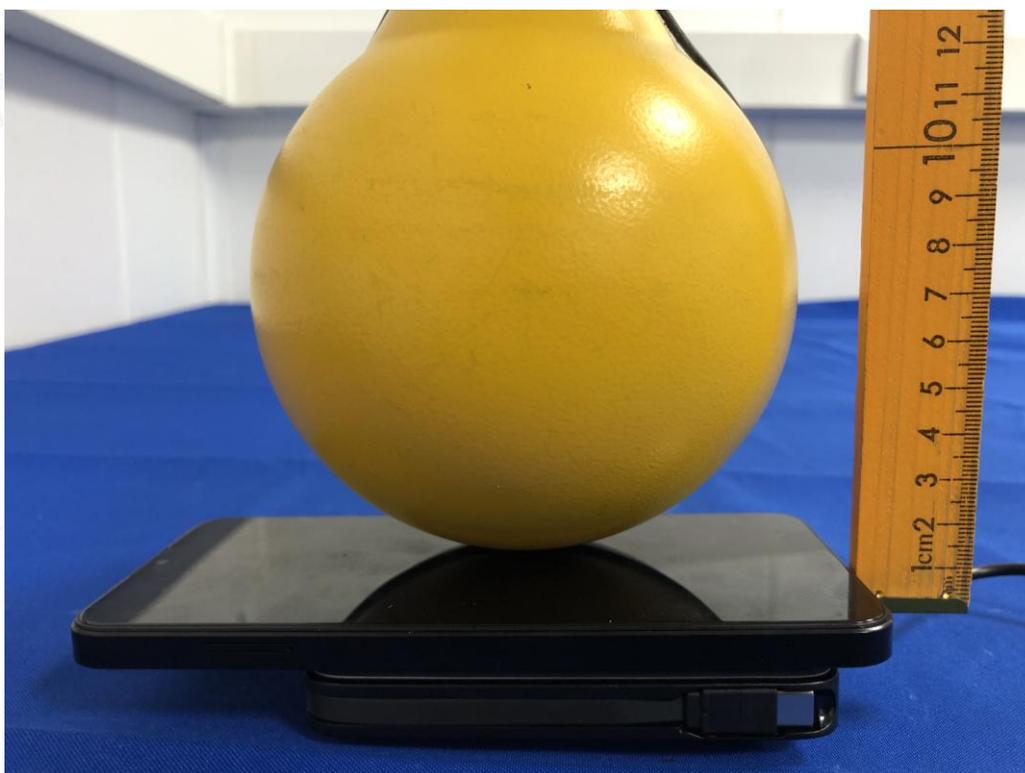


0cm-Front




0cm-Back



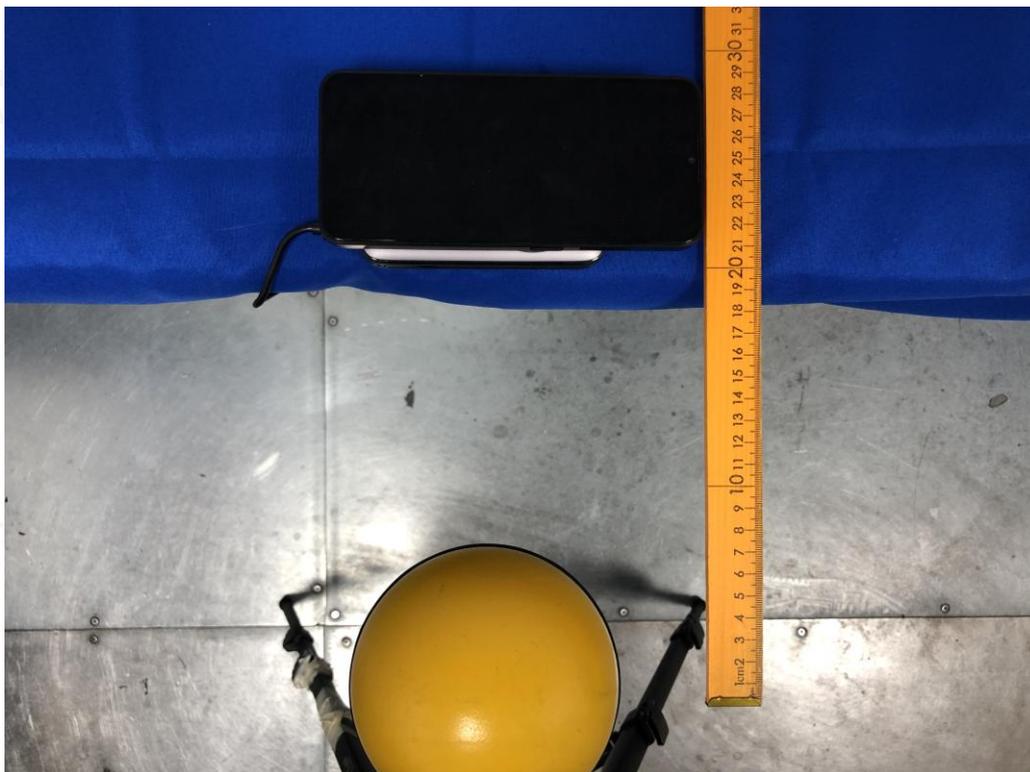


20cm-Left

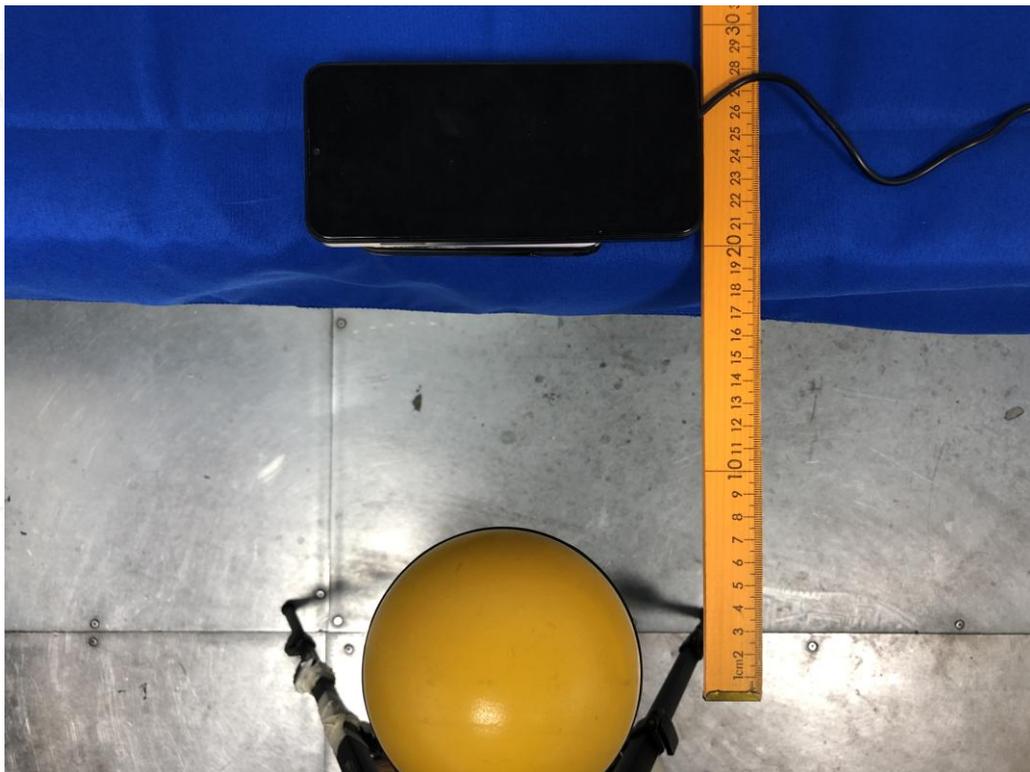


20cm-Right



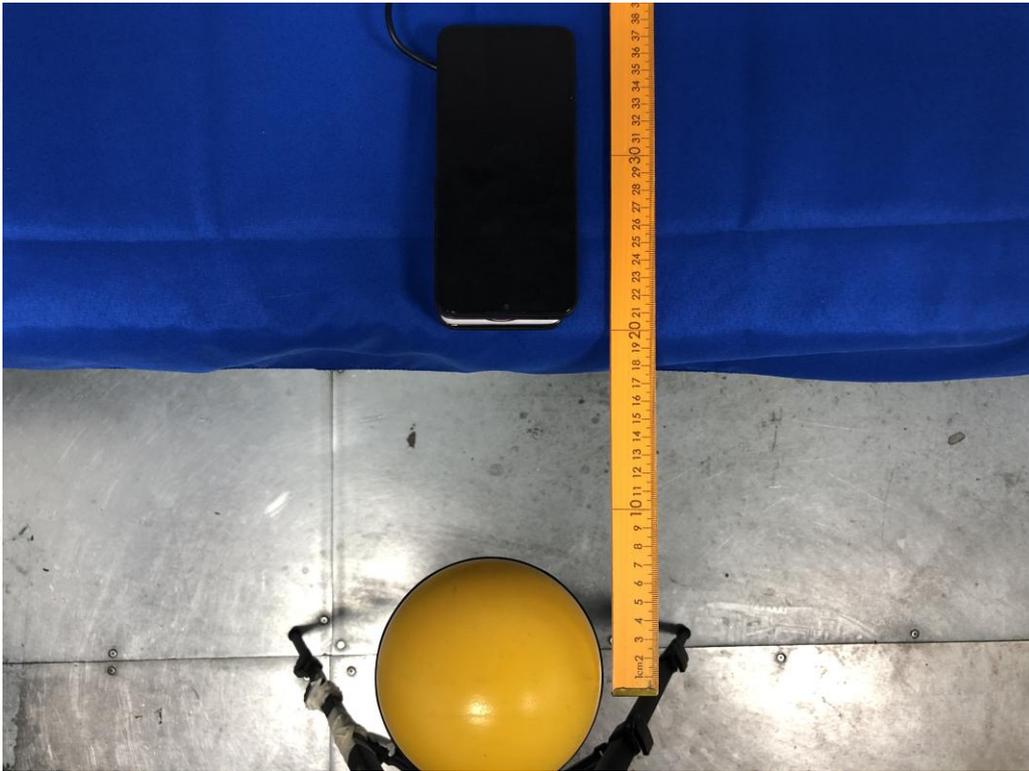


20cm-Top

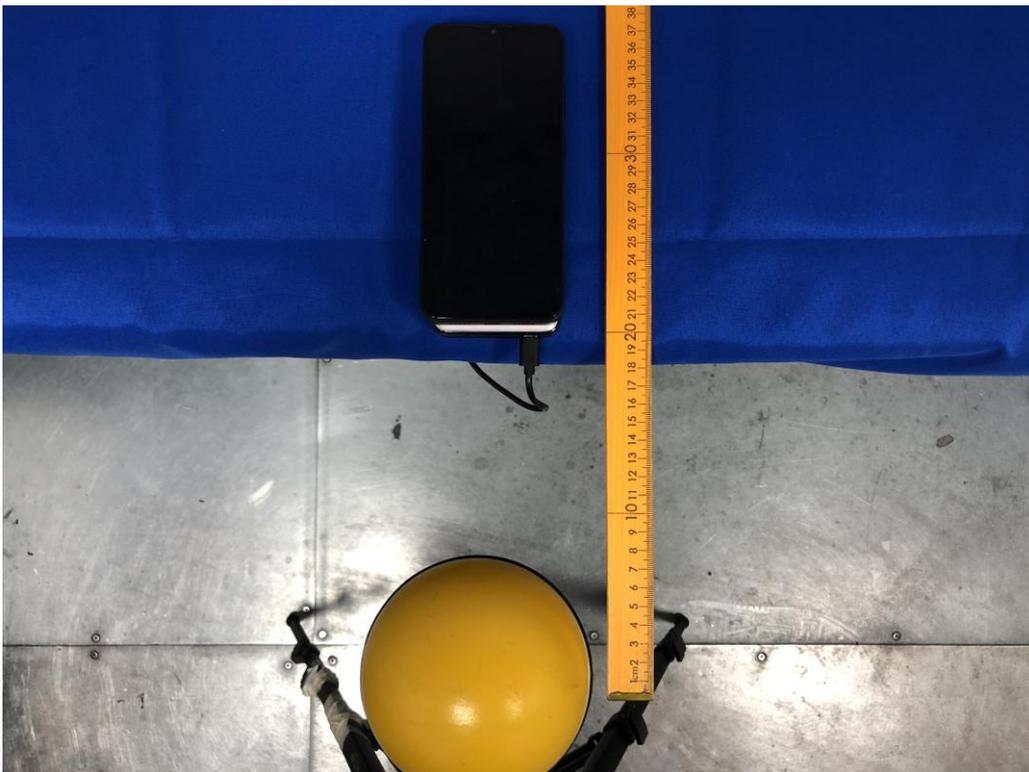


20cm-Bottom



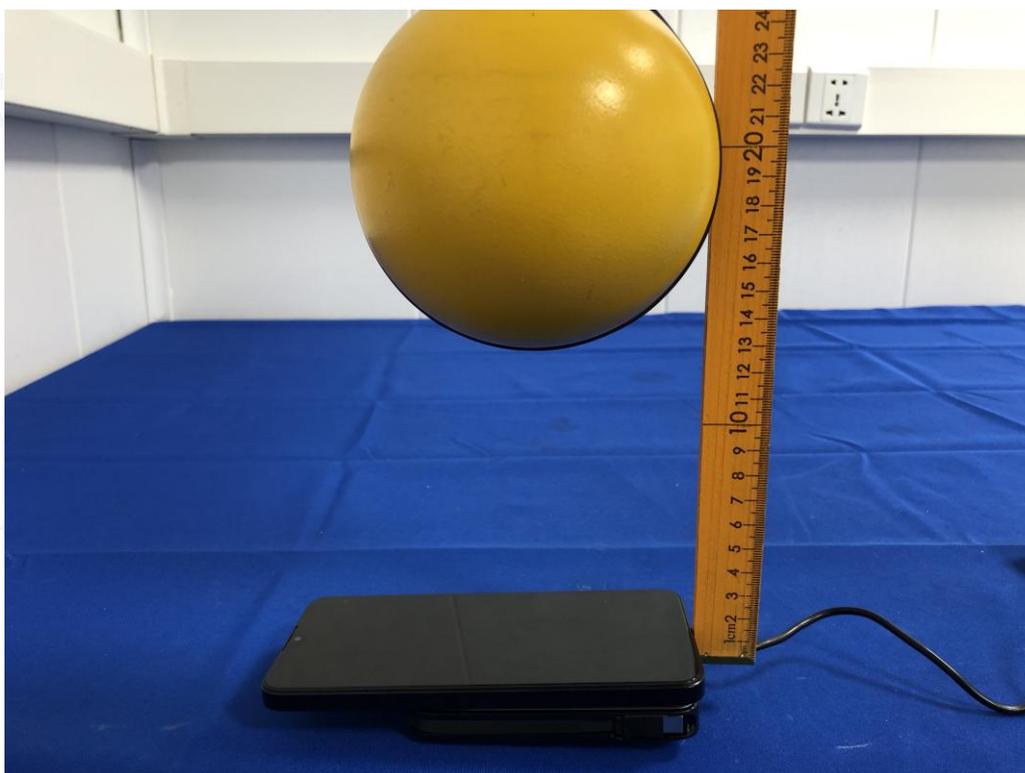

20cm-Front

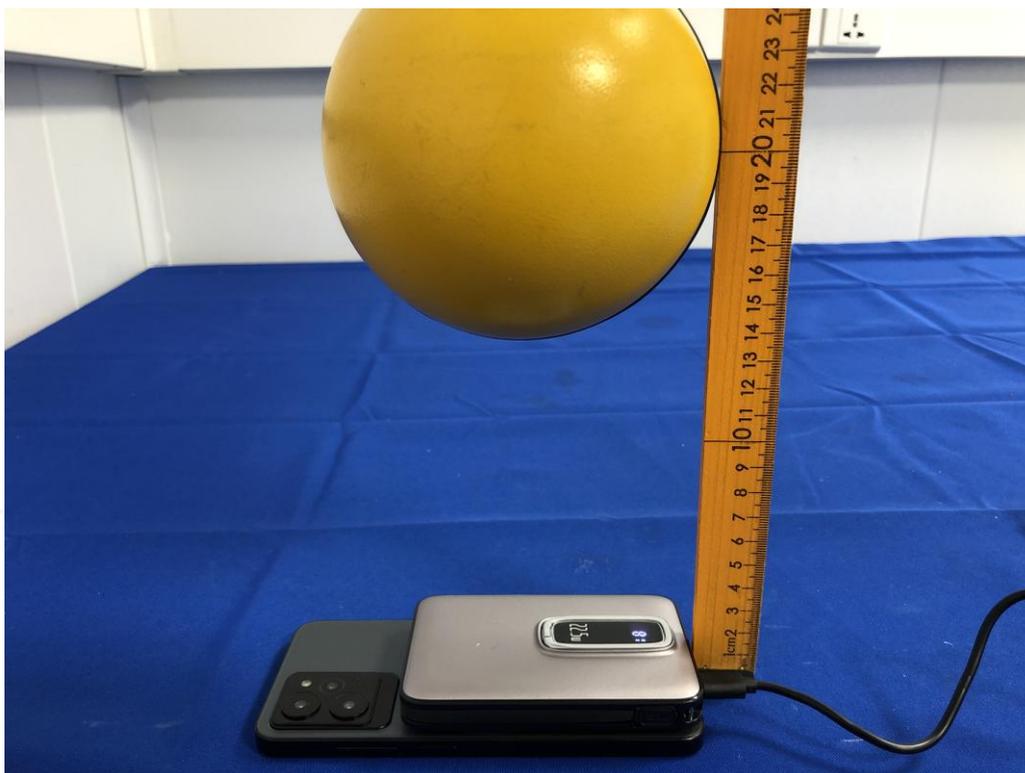

20cm-Back

-----THE END OF REPORT-----

