


EXHIBIT 2 - EUT EXTERNAL PHOTOGRAPHS

Model: Shelly Pro Dimmer 2PM


EUT View 1




EUT View 2


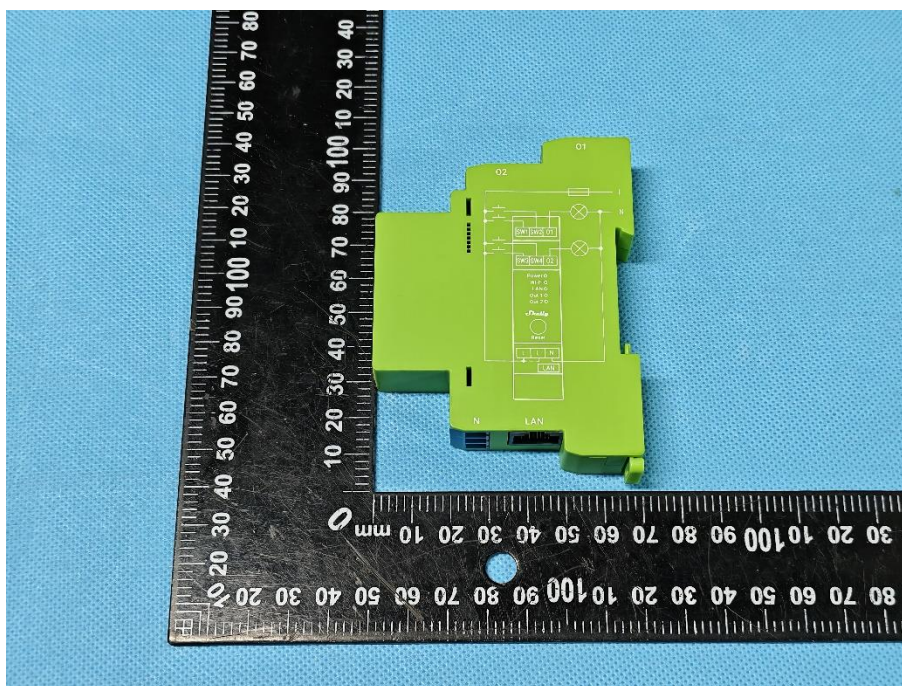


EUT View 3

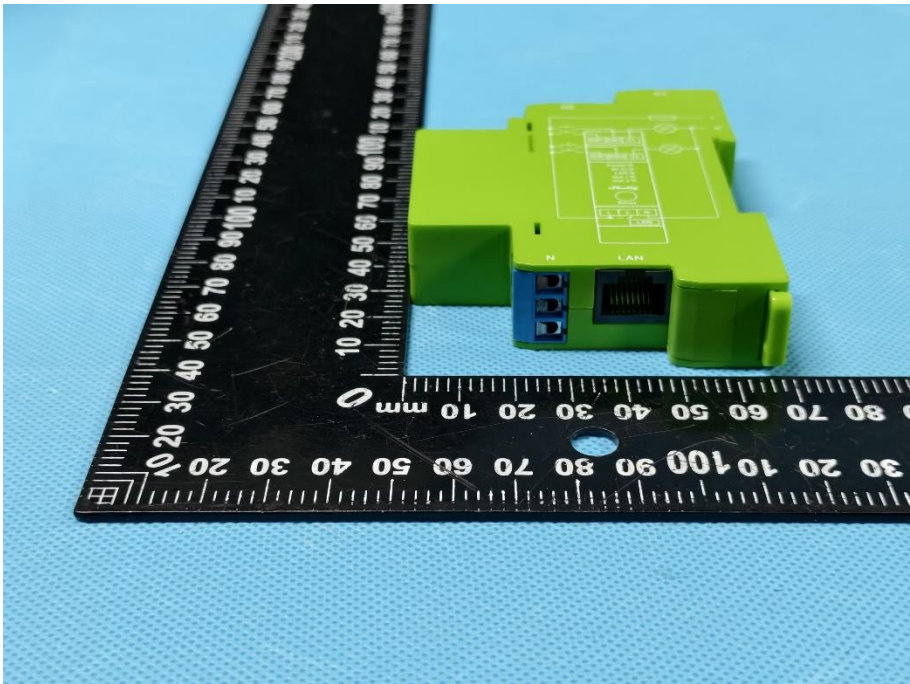


EUT View 4


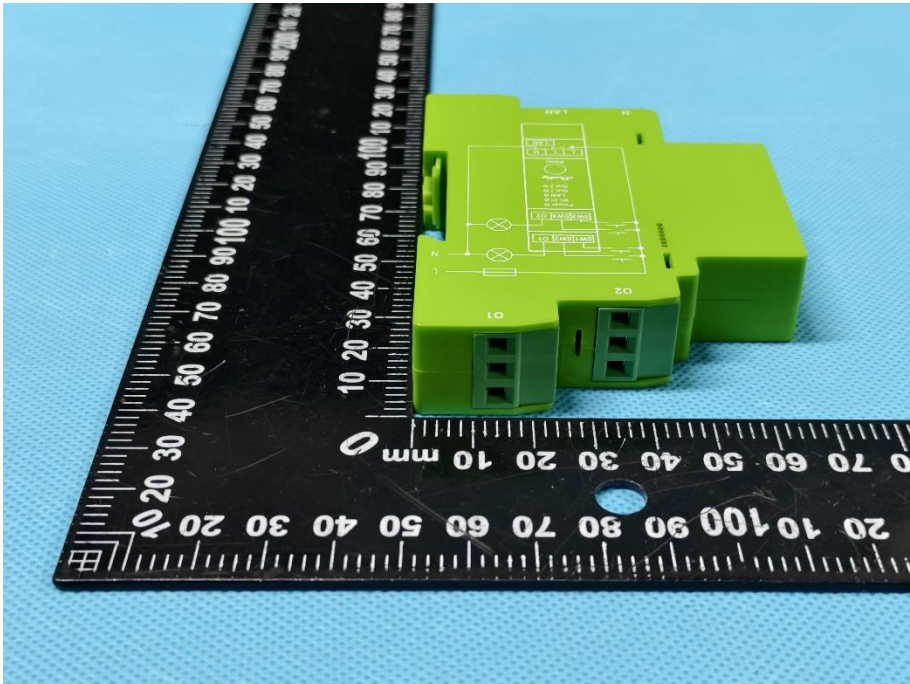


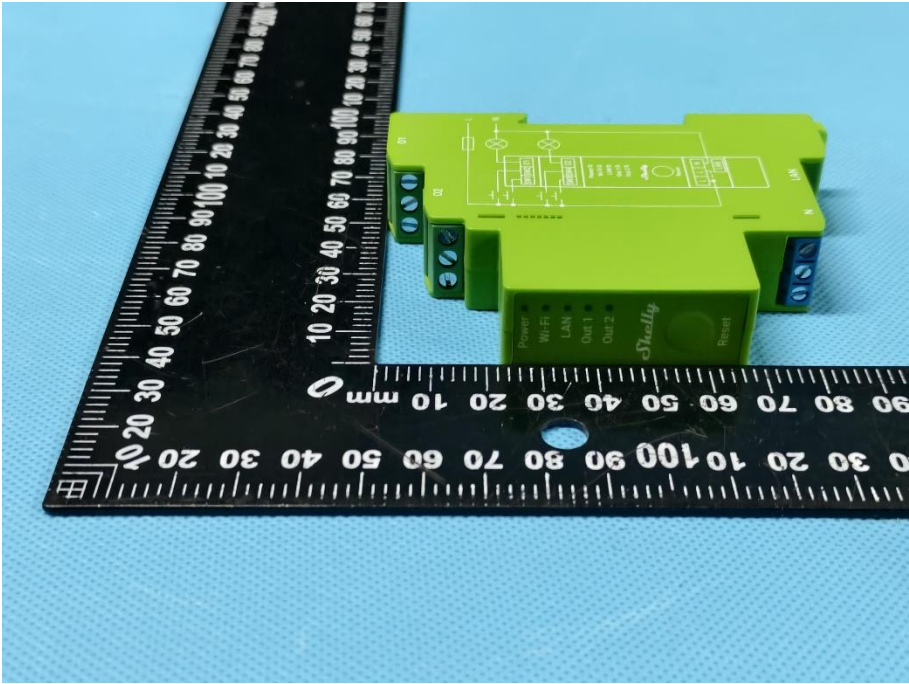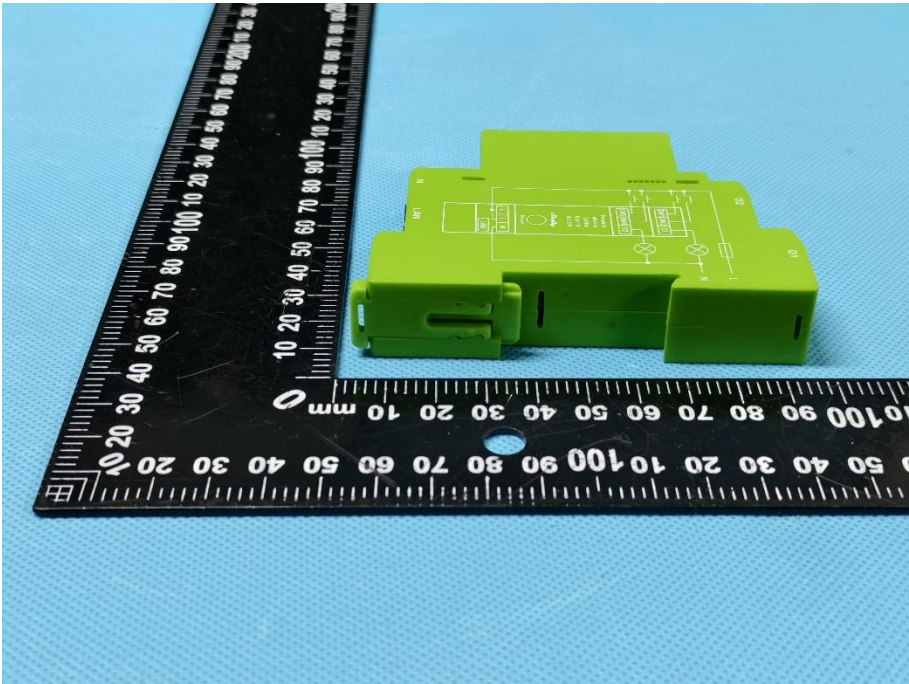EUT View 5	
EUT View 6	


EUT View 7

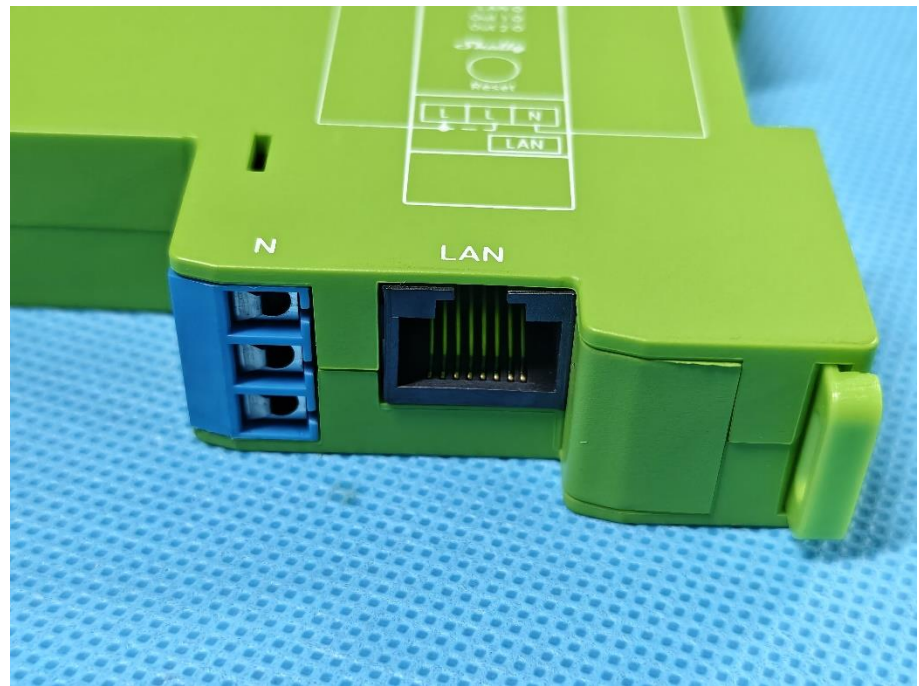


Model: Shelly Pro Dimmer 1PM

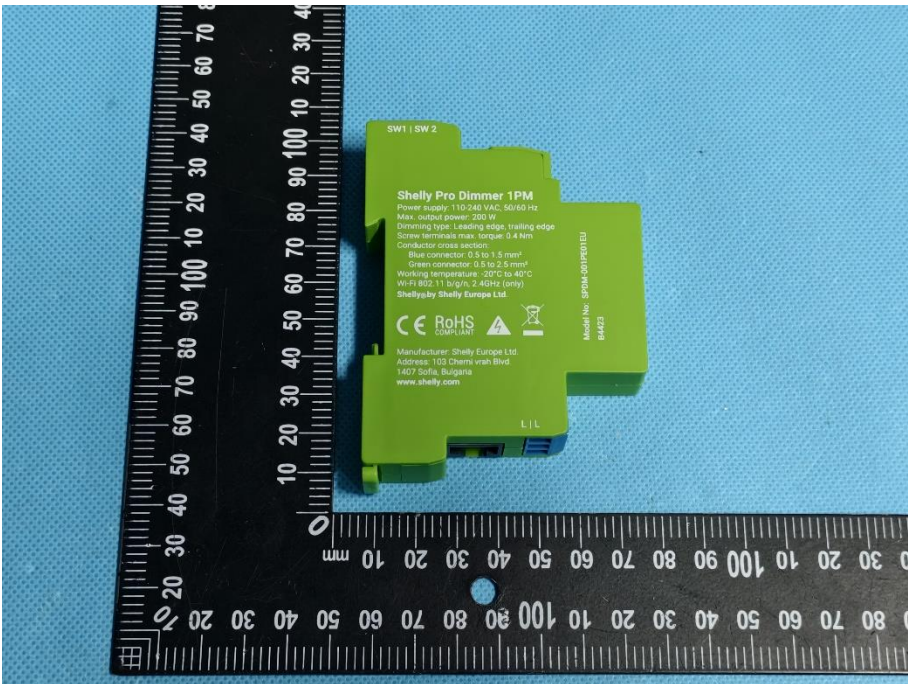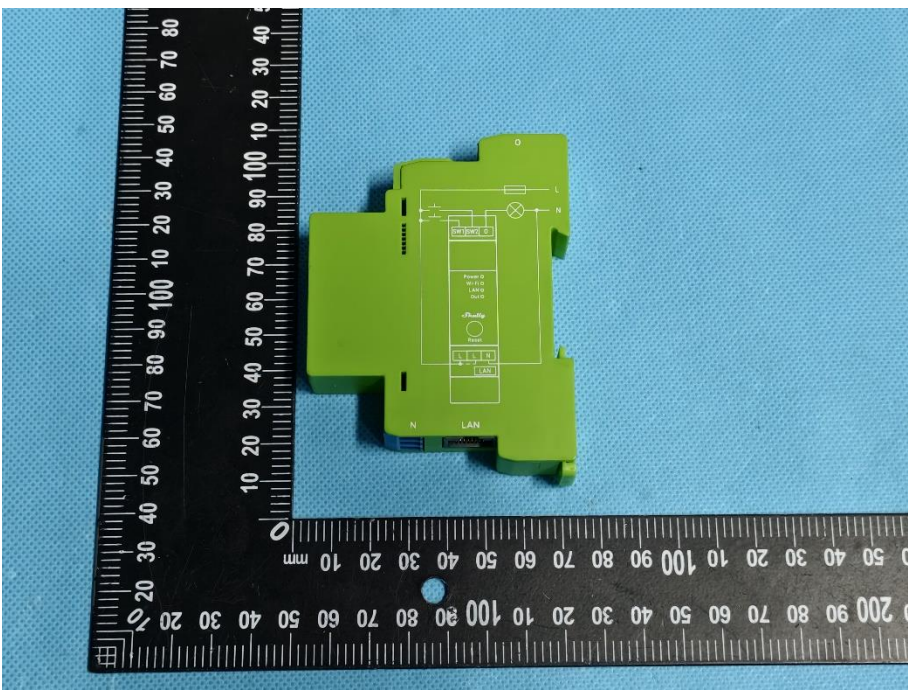EUT View 1	 SW1 SW 2 Shelly Pro Dimmer 1PM Power supply: 110-240 VAC, 50/60 Hz Max. in-rdled power: 200 W Dimming type: Leading edge, trailing edge Screw terminals max. torque: 0.4 Nm Conductor cross section: Blue conductor: 0.5 to 1.5 mm² Green conductor: 0.5 to 2.5 mm² Working temperature: -20°C to 40°C Wi-Fi 802.11 b/g/n, 2.4GHz (only) Shellysly Shelly Europe Ltd. Model No.: SPDM-001P001EU 8M425 CE RoHS Manufacturer: Shelly Europe Ltd. Address: 110 Cherni van Blvd. 1407 Sofia, Bulgaria www.shelly.com LIL
EUT View 2	 Diagram illustrating the internal wiring and components of the Shelly Pro Dimmer 1PM module, including power input (N, L), LAN, and internal components like the power supply, dimmer, and Wi-Fi module.


EUT View 3

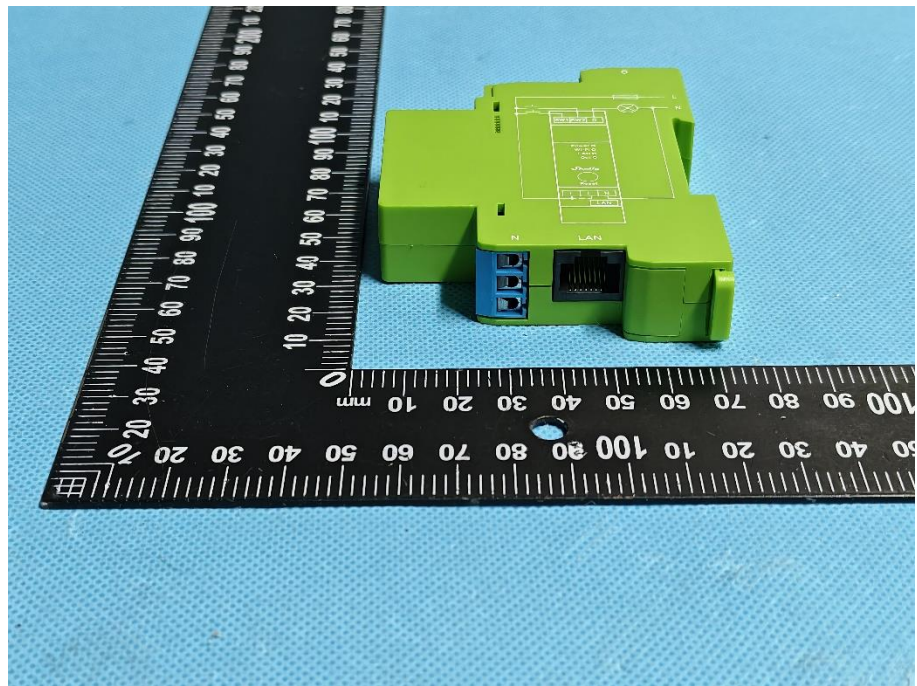

EUT View 4

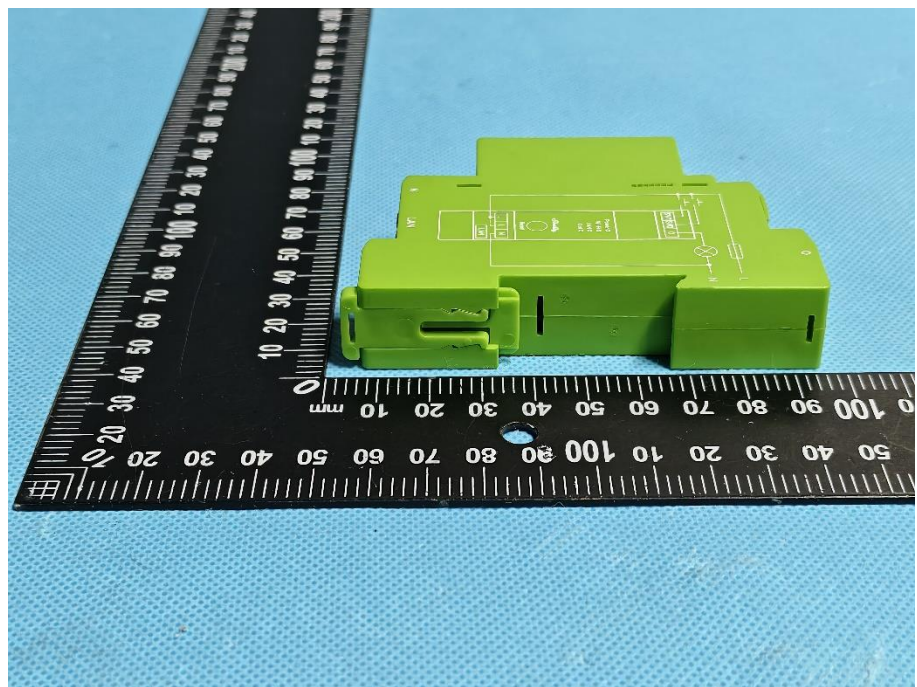

EUT View 5

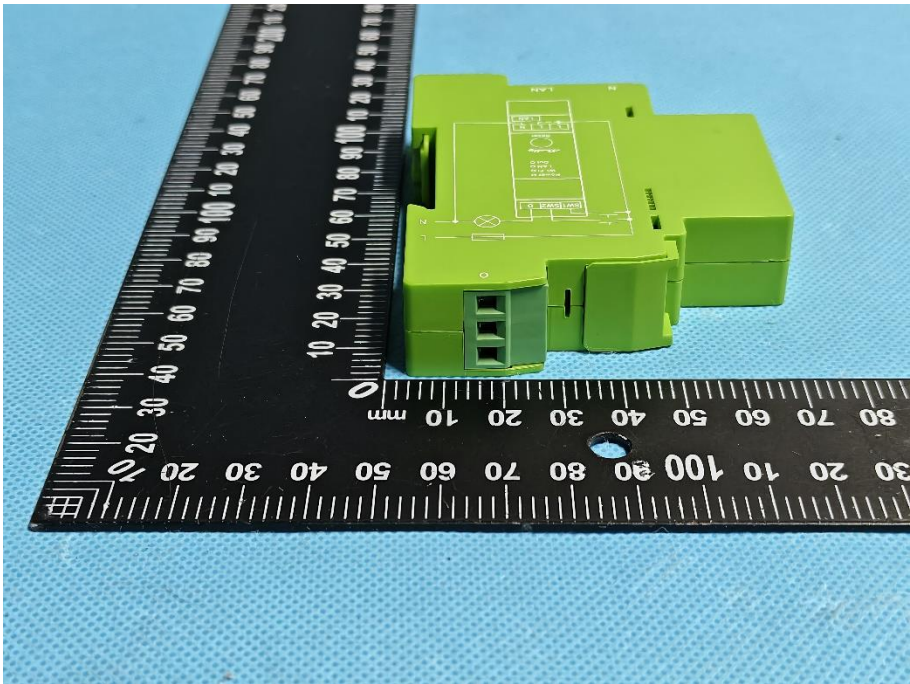

EUT View 6

