

### GSM850\_GPRS12\_Rear Face\_15mm\_128

#### DUT: EUT


Communication System: GPRS 850-4solt; Frequency: 824.2 MHz;Duty Cycle: 1:2  
Medium: H835 Medium parameters used :  $f = 824.2$  MHz;  $\sigma = 0.906$  mho/m;  $\epsilon_r = 41.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

#### DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.25, 6.25, 6.25); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

**Area Scan (71x61x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 0.683 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 6.21 V/m; Power Drift = -0.033 dB  
Peak SAR (extrapolated) = 1.07 W/kg  
**SAR(1 g) = 0.652 mW/g; SAR(10 g) = 0.418 mW/g**  
Maximum value of SAR (measured) = 0.754 mW/g

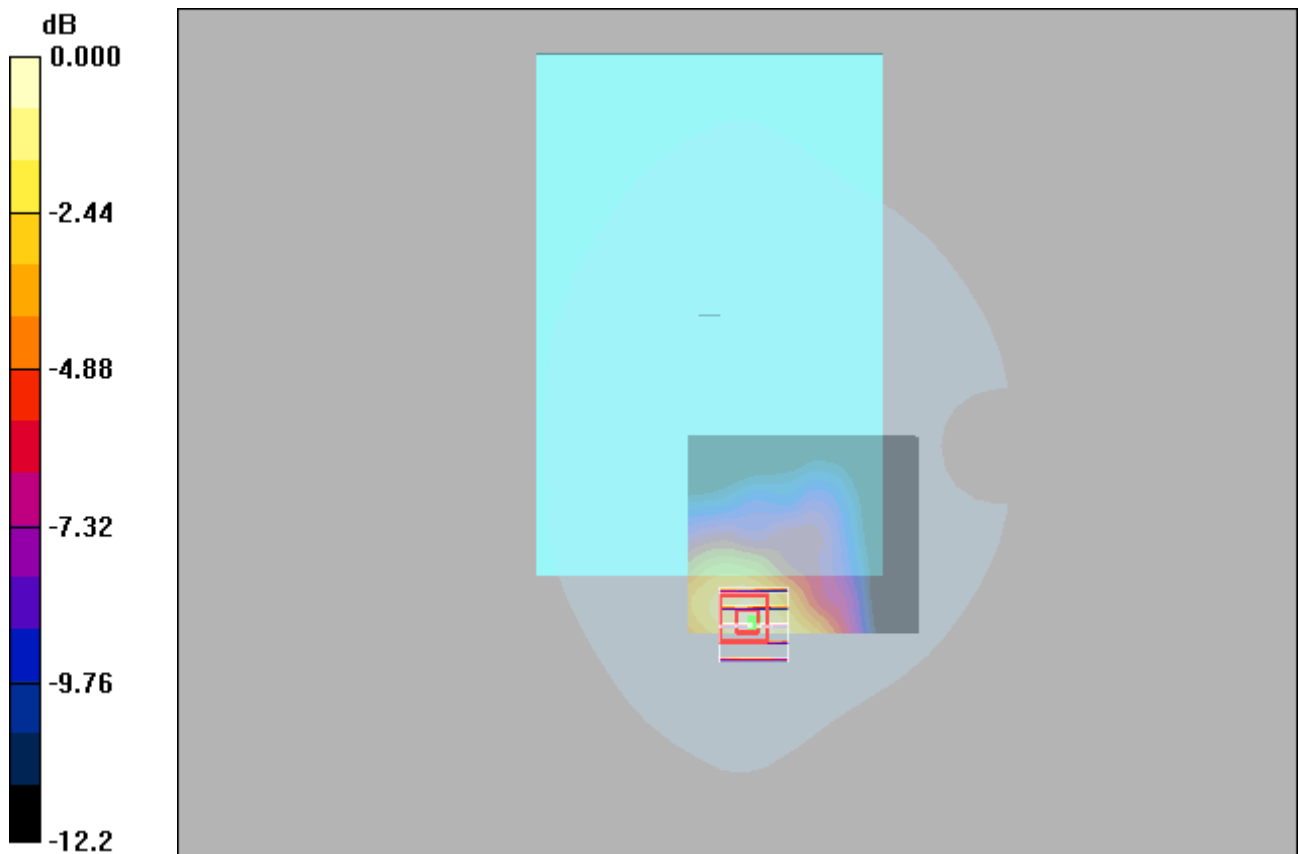

0 dB = 0.754mW/g

### GSM1900\_GPRS12\_Top Side\_0mm\_810

**DUT: EUT**

Communication System: GPRS1900-4slots; Frequency: 1909.8 MHz; Duty Cycle: 1:2

Medium: H1900 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.37$  mho/m;  $\epsilon_r = 39.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.11, 5.11, 5.11); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

**Area Scan (51x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.791 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.85 V/m; Power Drift = 0.060 dB

Peak SAR (extrapolated) = 1.78 W/kg

**SAR(1 g) = 0.648 mW/g; SAR(10 g) = 0.239 mW/g**

Maximum value of SAR (measured) = 0.967 mW/g

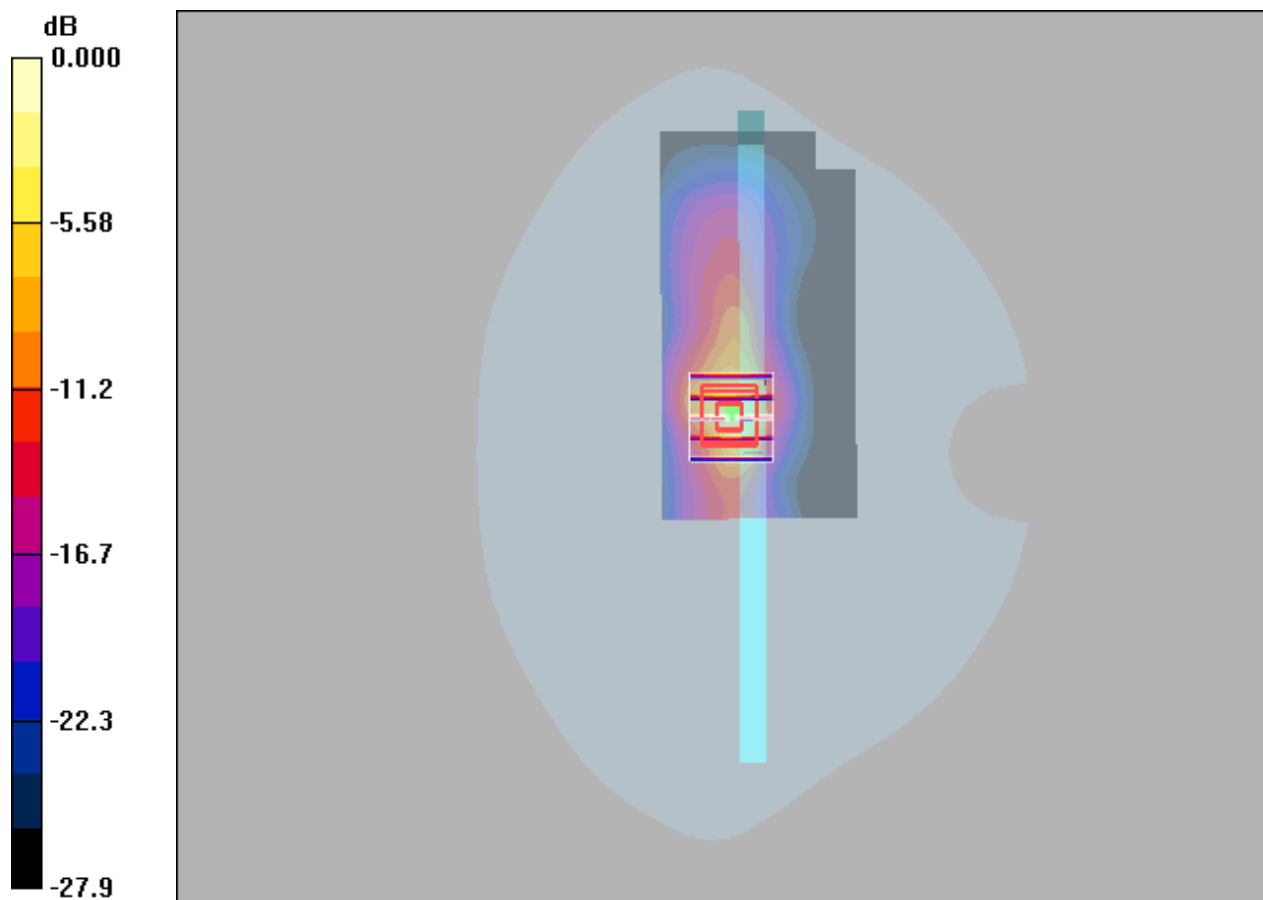

0 dB = 0.967mW/g

## WCDMA II\_RMC12.2K\_Top Side\_0mm\_9262

### DUT: EUT


Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1  
 Medium: H1900 Medium parameters used :  $f = 1852.4 \text{ MHz}$ ;  $\sigma = 1.36 \text{ mho/m}$ ;  $\epsilon_r = 39.4$ ;  $\rho = 1000 \text{ kg/m}^3$

#### DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.11, 5.11, 5.11); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

**Area Scan (51x81x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
 Maximum value of SAR (interpolated) = 0.430 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 3.87 V/m; Power Drift = 0.038 dB  
 Peak SAR (extrapolated) = 1.22 W/kg  
**SAR(1 g) = 0.464 mW/g; SAR(10 g) = 0.176 mW/g**  
 Maximum value of SAR (measured) = 0.645 mW/g

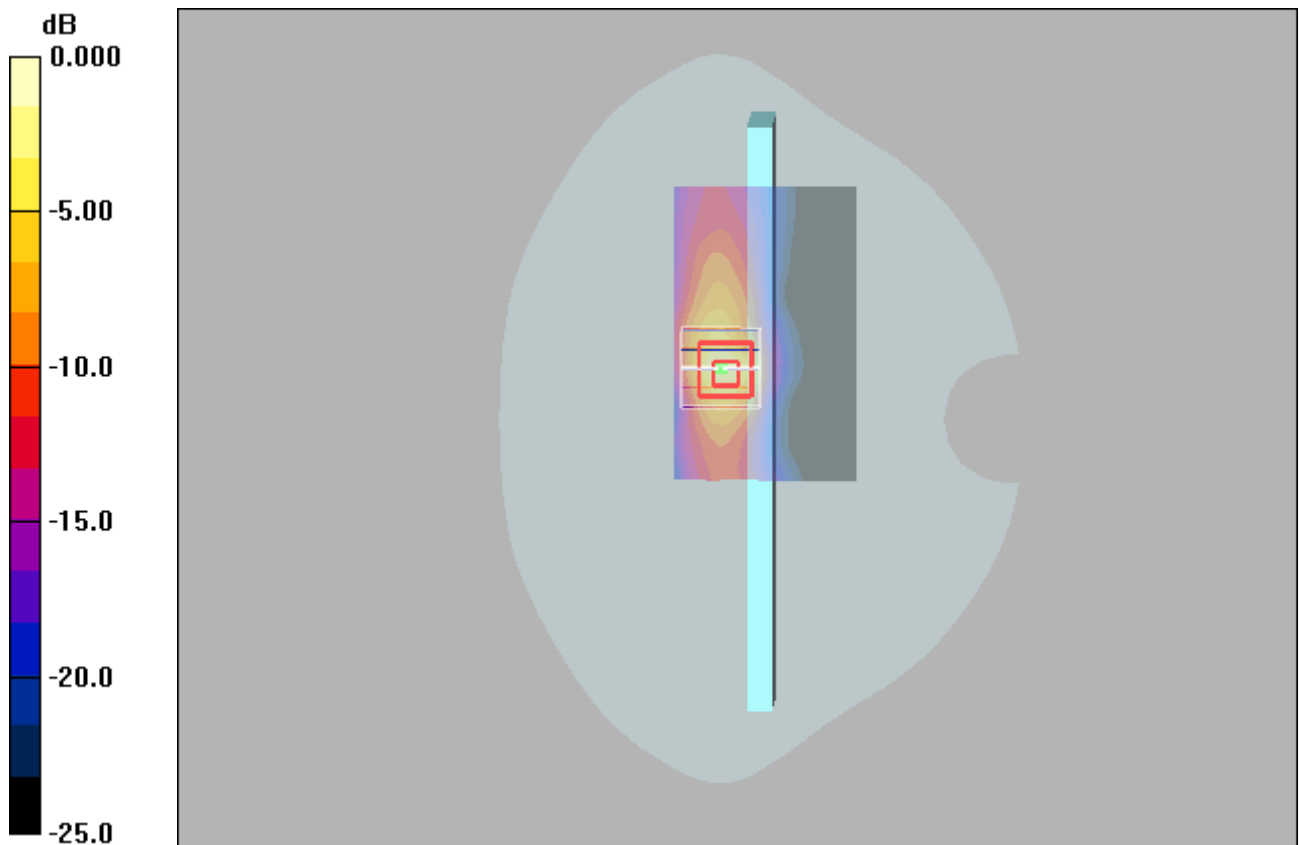

0 dB = 0.645mW/g

## WCDMA IV\_RMC12.2K\_Top Side\_15mm\_1312

### DUT: EUT


Communication System: WCDMA Band IV; Frequency: 1712.4 MHz; Duty Cycle: 1:1  
Medium: H1750 Medium parameters used :  $f = 1712.4$  MHz;  $\sigma = 1.36$  mho/m;  $\epsilon_r = 39.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

#### DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.37, 5.37, 5.37); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

**Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 0.293 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 7.73 V/m; Power Drift = 0.136 dB  
Peak SAR (extrapolated) = 0.410 W/kg  
**SAR(1 g) = 0.240 mW/g; SAR(10 g) = 0.136 mW/g**  
Maximum value of SAR (measured) = 0.295 mW/g

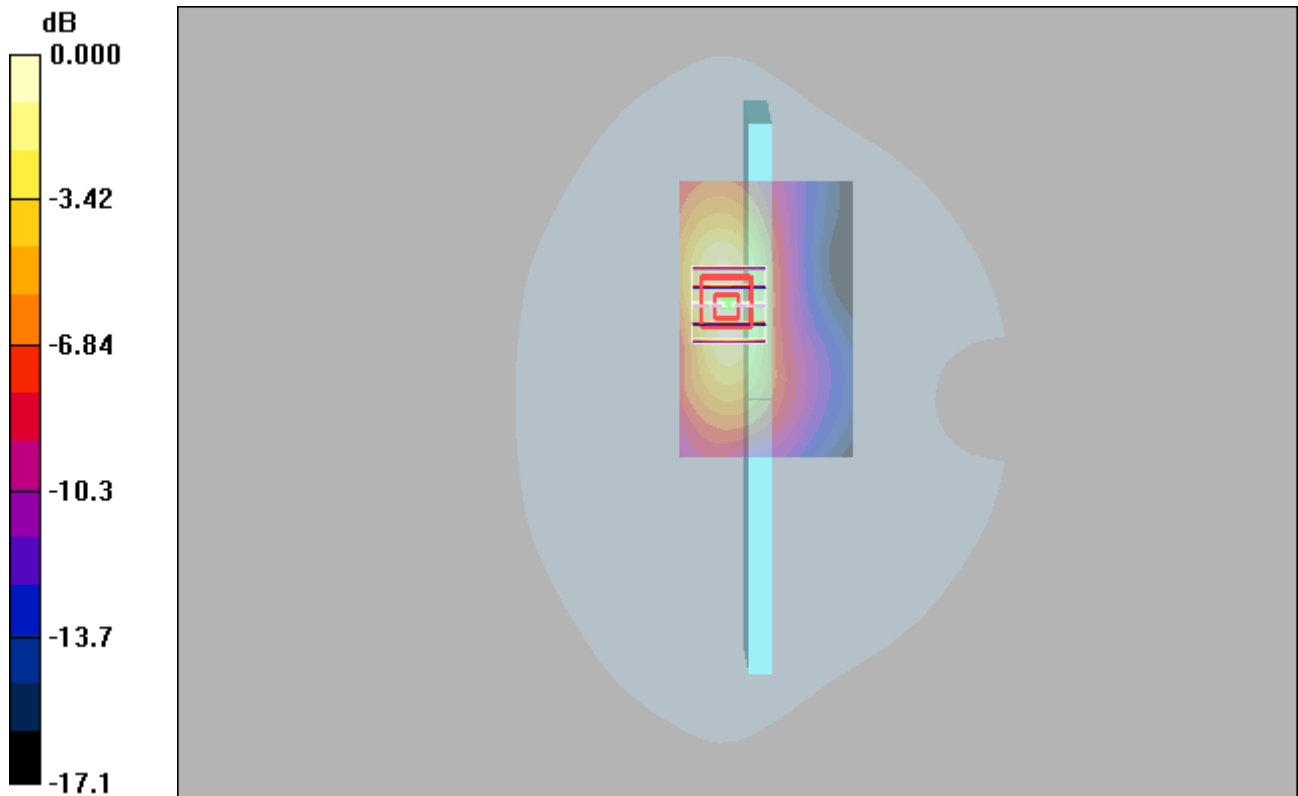

0 dB = 0.295mW/g

## WCDMA V\_RMC12.2K\_Rear Face\_0mm\_4233

### DUT: EUT

Communication System: WCDMA Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: H835 Medium parameters used:  $f = 847 \text{ MHz}$ ;  $\sigma = 0.921 \text{ mho/m}$ ;  $\epsilon_r = 41.1$ ;  $\rho = 1000 \text{ kg/m}^3$

#### DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.25, 6.25, 6.25); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

**Area Scan (71x51x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.798 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 4.91 V/m; Power Drift = 0.052 dB

Peak SAR (extrapolated) = 1.28 W/kg

**SAR(1 g) = 0.574 mW/g; SAR(10 g) = 0.287 mW/g**

Maximum value of SAR (measured) = 0.789 mW/g

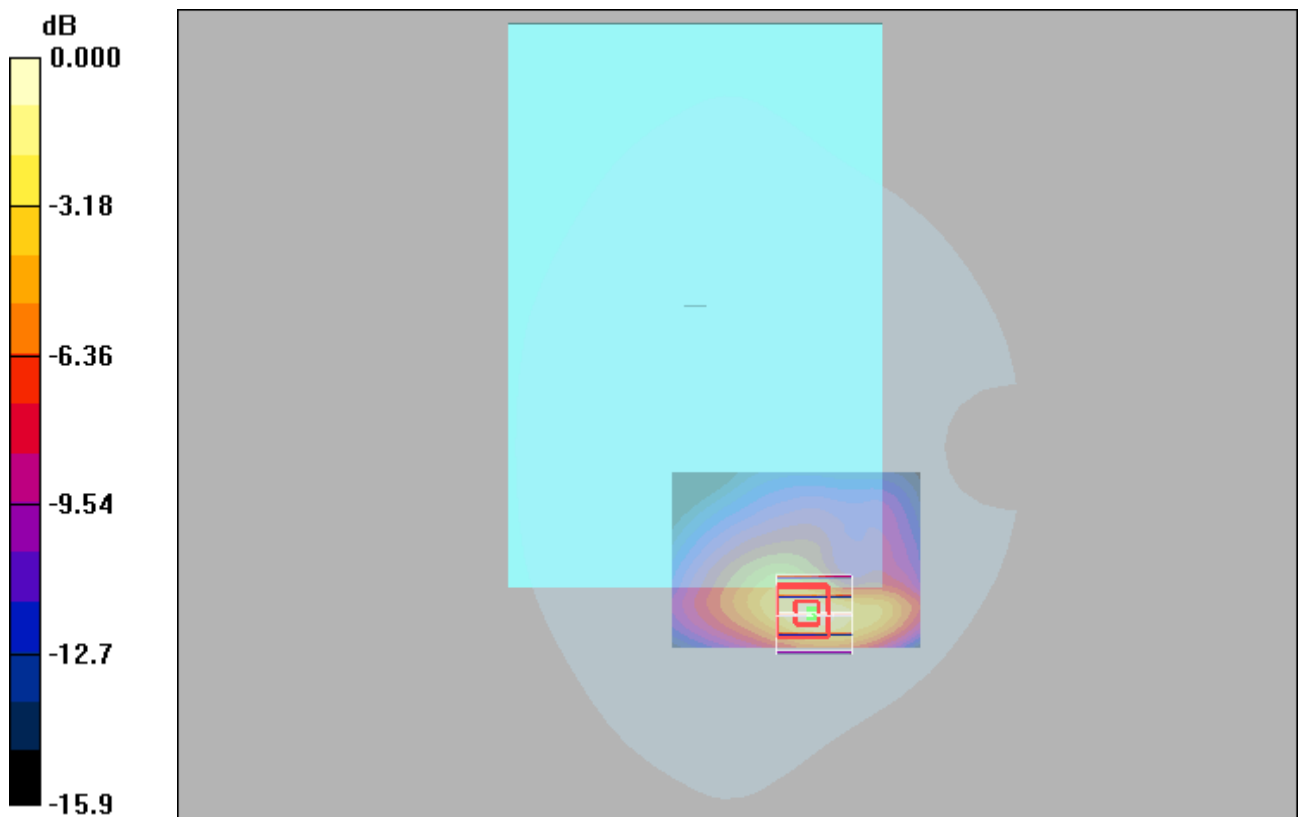

0 dB = 0.789mW/g

### LTE 2\_QPSK20M\_1\_0\_Top Side\_0mm\_19100

#### DUT: EUT


Communication System: LTE Band 2; Frequency: 1900 MHz; Duty Cycle: 1:1  
Medium: H1900 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.36$  mho/m;  $\epsilon_r = 39.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

#### DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.11, 5.11, 5.11); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

**Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 0.446 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 3.76 V/m; Power Drift = 0.068 dB  
Peak SAR (extrapolated) = 1.14 W/kg  
**SAR(1 g) = 0.430 mW/g; SAR(10 g) = 0.161 mW/g**  
Maximum value of SAR (measured) = 0.581 mW/g

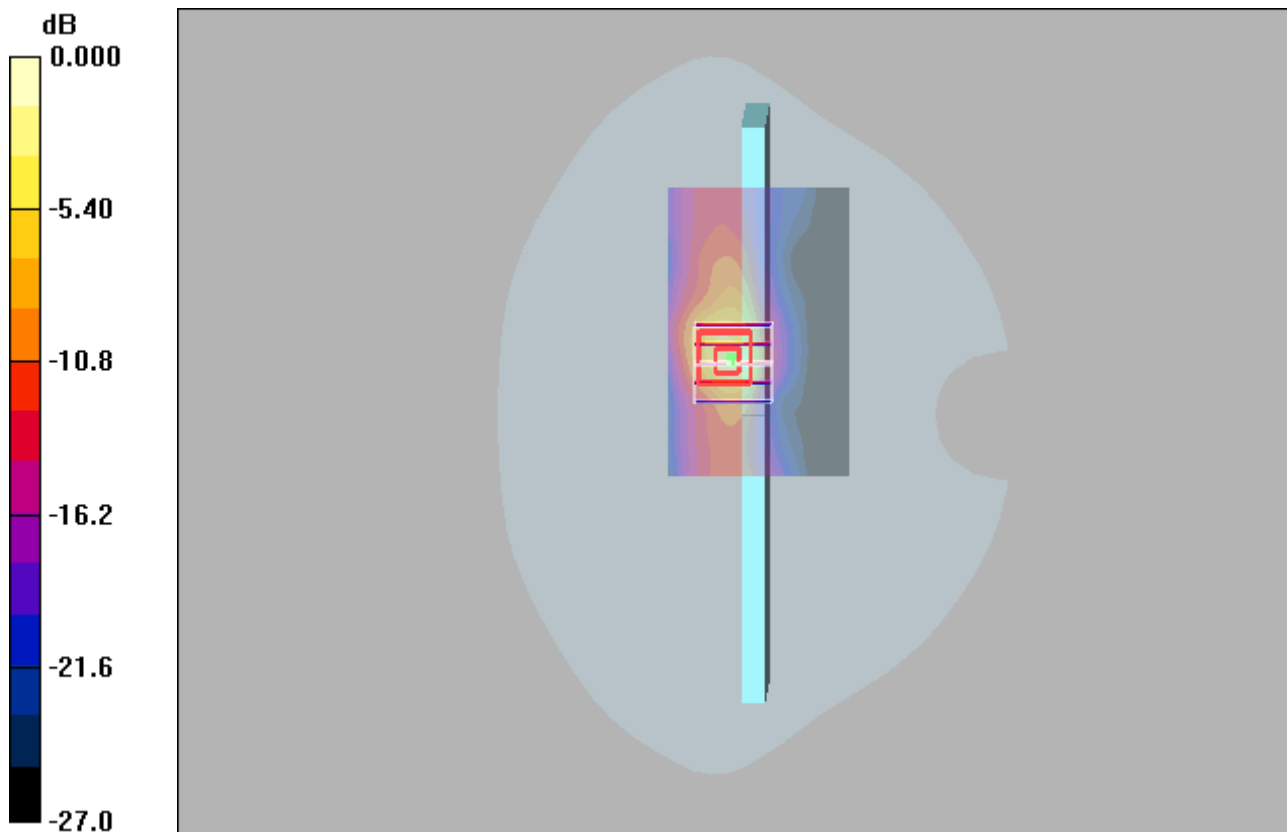

0 dB = 0.581mW/g

### LTE 5\_QPSK10M\_25\_0\_Rear Face\_0mm\_20450

#### DUT: EUT

Communication System: LTE Band5; Frequency: 829 MHz; Duty Cycle: 1:1

Medium: H835 Medium parameters used:  $f = 829$  MHz;  $\sigma = 0.912$  mho/m;  $\epsilon_r = 41.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

#### DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.25, 6.25, 6.25); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

**Area Scan (71x51x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.095 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.01 V/m; Power Drift = 0.151 dB

Peak SAR (extrapolated) = 0.239 W/kg

**SAR(1 g) = 0.096 mW/g; SAR(10 g) = 0.044 mW/g**

Maximum value of SAR (measured) = 0.124 mW/g

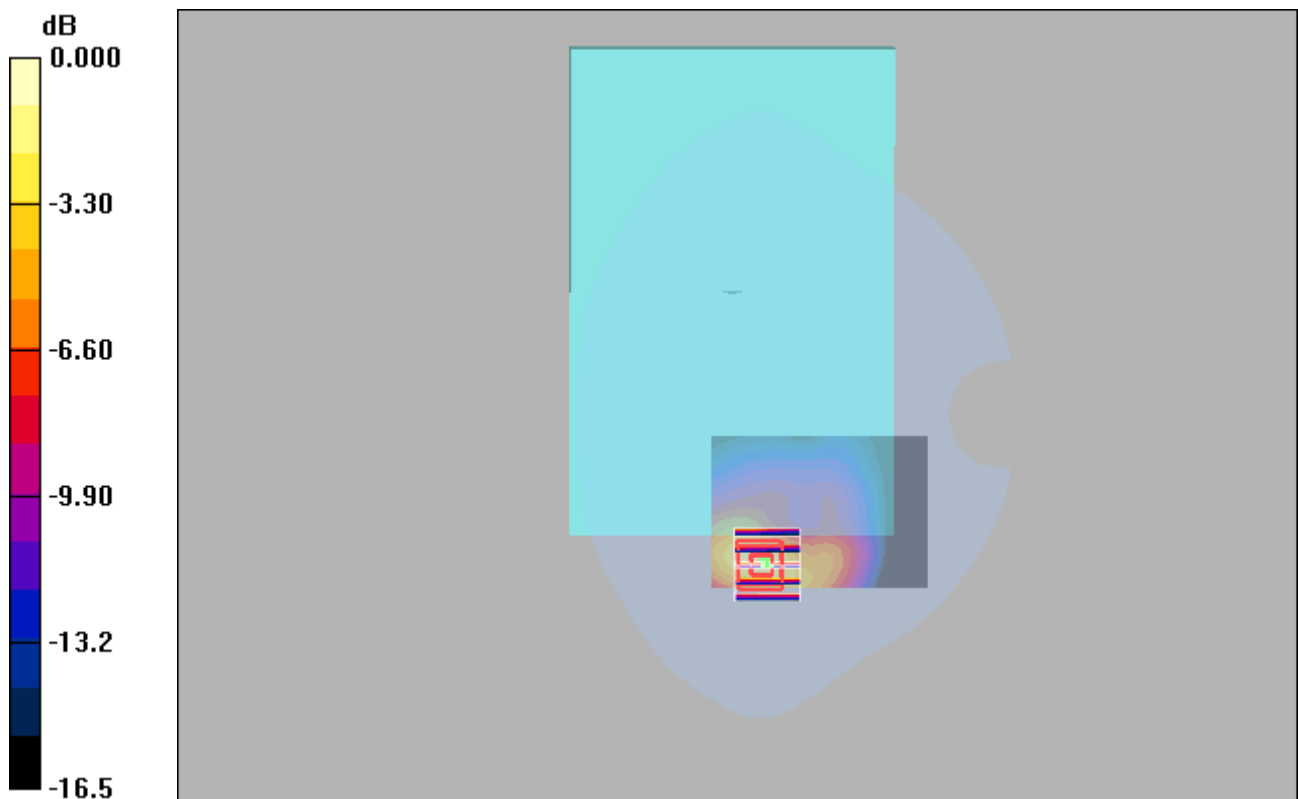

0 dB = 0.124mW/g

### LTE 7\_QPSK20M\_100\_0\_Top Side\_0mm\_20850

#### DUT: EUT

Communication System: LTE Band 7&20M; Frequency: 2510 MHz;Duty Cycle: 1:1

Medium: H2600 Medium parameters used:  $f = 2510$  MHz;  $\sigma = 1.875$  mho/m;  $\epsilon_r = 38$ ;  $\rho = 1000$  kg/m<sup>3</sup>

#### DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.68, 4.68, 4.68); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

**Area Scan (61x91x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 1.12 mW/g


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.5 V/m; Power Drift = 0.021 dB

Peak SAR (extrapolated) = 3.02 W/kg

**SAR(1 g) = 0.916 mW/g; SAR(10 g) = 0.332 mW/g**

Maximum value of SAR (measured) = 1.25 mW/g

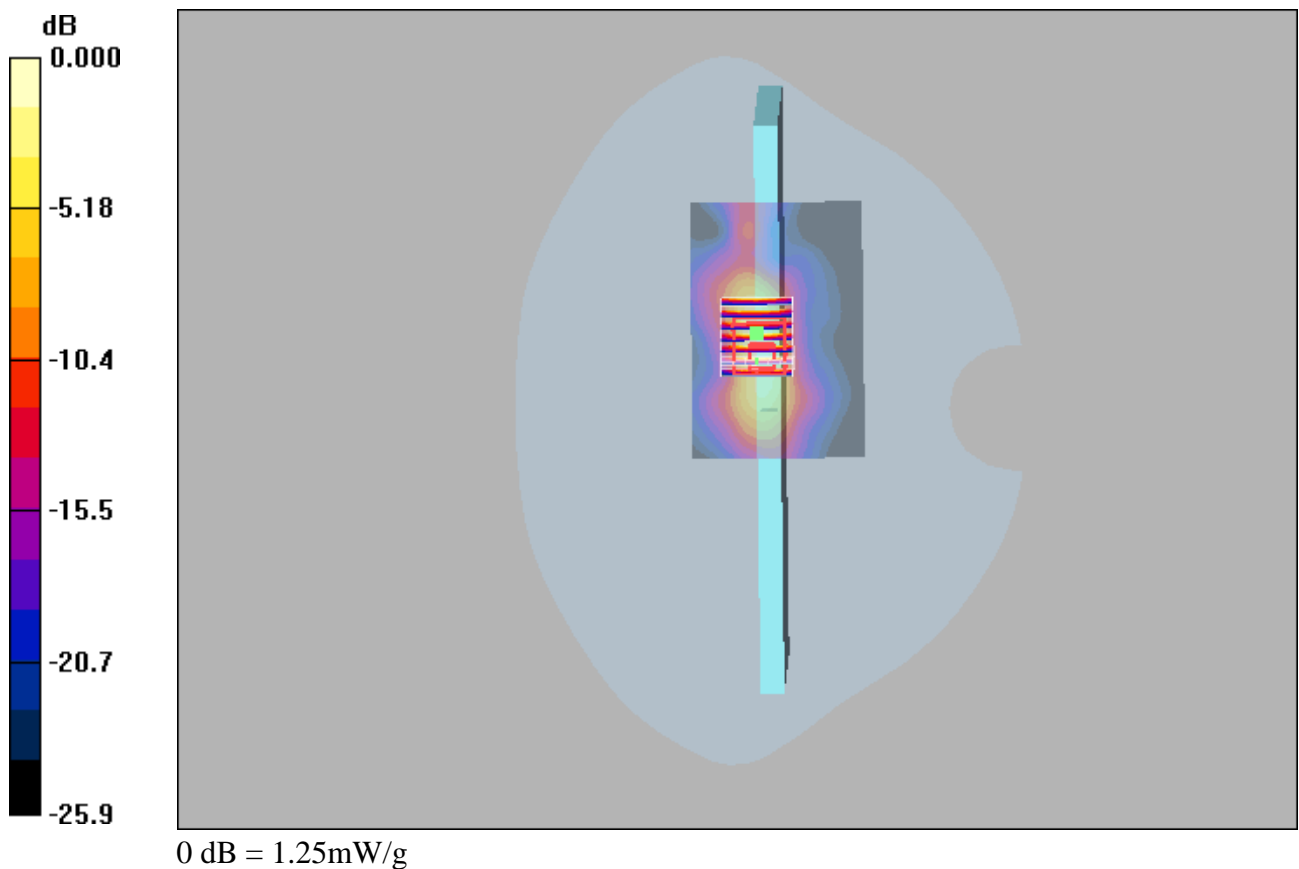



### LTE 12\_QPSK10M\_1\_0\_Rear Face\_0mm\_23060

#### DUT: EUT

Communication System: LTE Band 12; Frequency: 704 MHz; Duty Cycle: 1:1

Medium: H750 Medium parameters used:  $f = 704 \text{ MHz}$ ;  $\sigma = 0.851 \text{ mho/m}$ ;  $\epsilon_r = 41.7$ ;  $\rho = 1000 \text{ kg/m}^3$

#### DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.42, 6.42, 6.42); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

**Area Scan (51x81x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.144 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 2.97 V/m; Power Drift = -0.042 dB

Peak SAR (extrapolated) = 0.294 W/kg

**SAR(1 g) = 0.100 mW/g; SAR(10 g) = 0.047 mW/g**

Maximum value of SAR (measured) = 0.155 mW/g

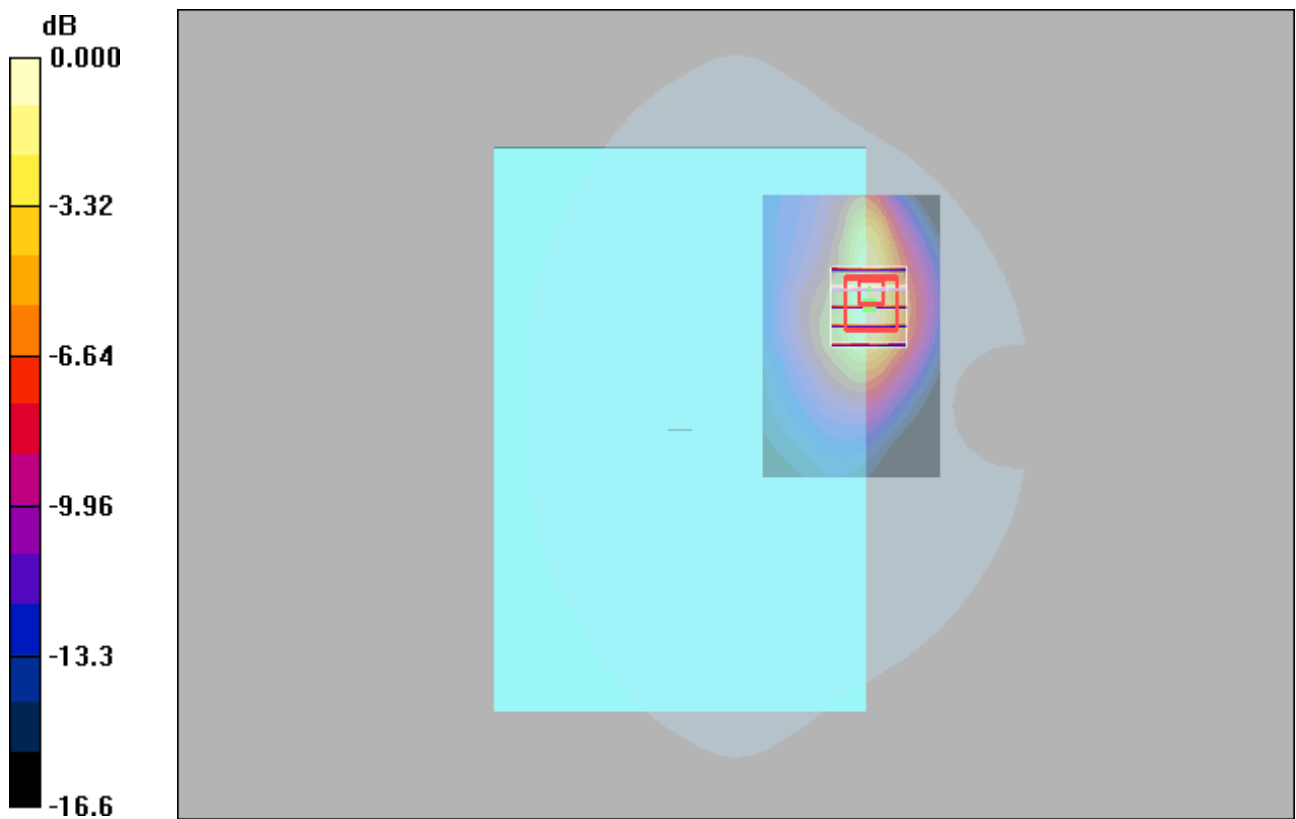

### LTE 13\_QPSK10M\_25\_0\_Top Side\_0mm\_23230

#### DUT: EUT

Communication System: LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: H750 Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.868 \text{ mho/m}$ ;  $\epsilon_r = 41.2$ ;  $\rho = 1000 \text{ kg/m}^3$

#### DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.42, 6.42, 6.42); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

**Area Scan (51x81x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.492 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 7.82 V/m; Power Drift = 0.037 dB

Peak SAR (extrapolated) = 1.03 W/kg

**SAR(1 g) = 0.313 mW/g; SAR(10 g) = 0.127 mW/g**

Maximum value of SAR (measured) = 0.493 mW/g

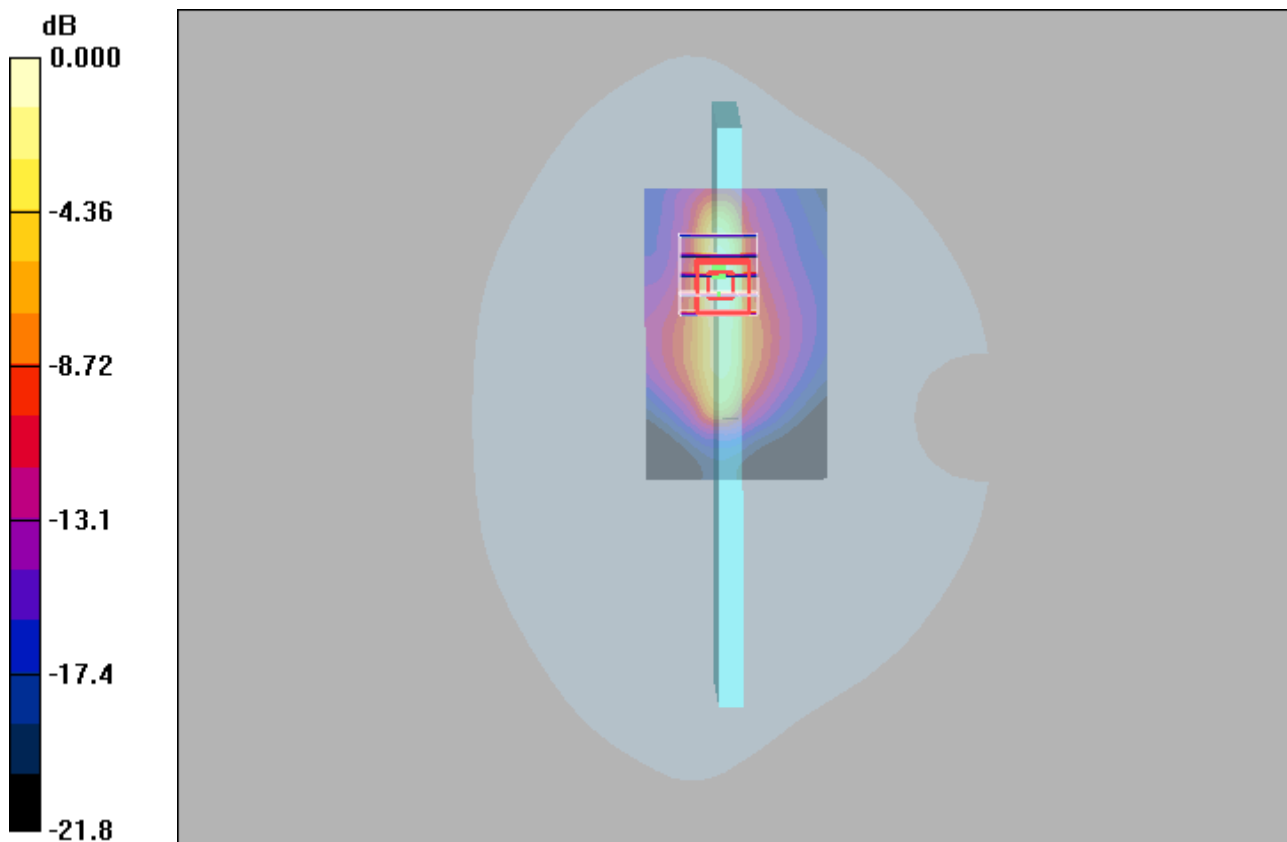

0 dB = 0.493mW/g

### LTE 17\_QPSK10M\_25\_0\_Rear Face\_0mm\_23790

#### DUT: EUT

Communication System: LTE Band 17; Frequency: 710 MHz; Duty Cycle: 1:1

Medium: H750 Medium parameters used:  $f = 710 \text{ MHz}$ ;  $\sigma = 0.856 \text{ mho/m}$ ;  $\epsilon_r = 41.7$ ;  $\rho = 1000 \text{ kg/m}^3$

#### DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.42, 6.42, 6.42); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

**Area Scan (51x81x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.193 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 3.07 V/m; Power Drift = 0.052 dB

Peak SAR (extrapolated) = 0.375 W/kg

**SAR(1 g) = 0.122 mW/g; SAR(10 g) = 0.056 mW/g**

Maximum value of SAR (measured) = 0.192 mW/g

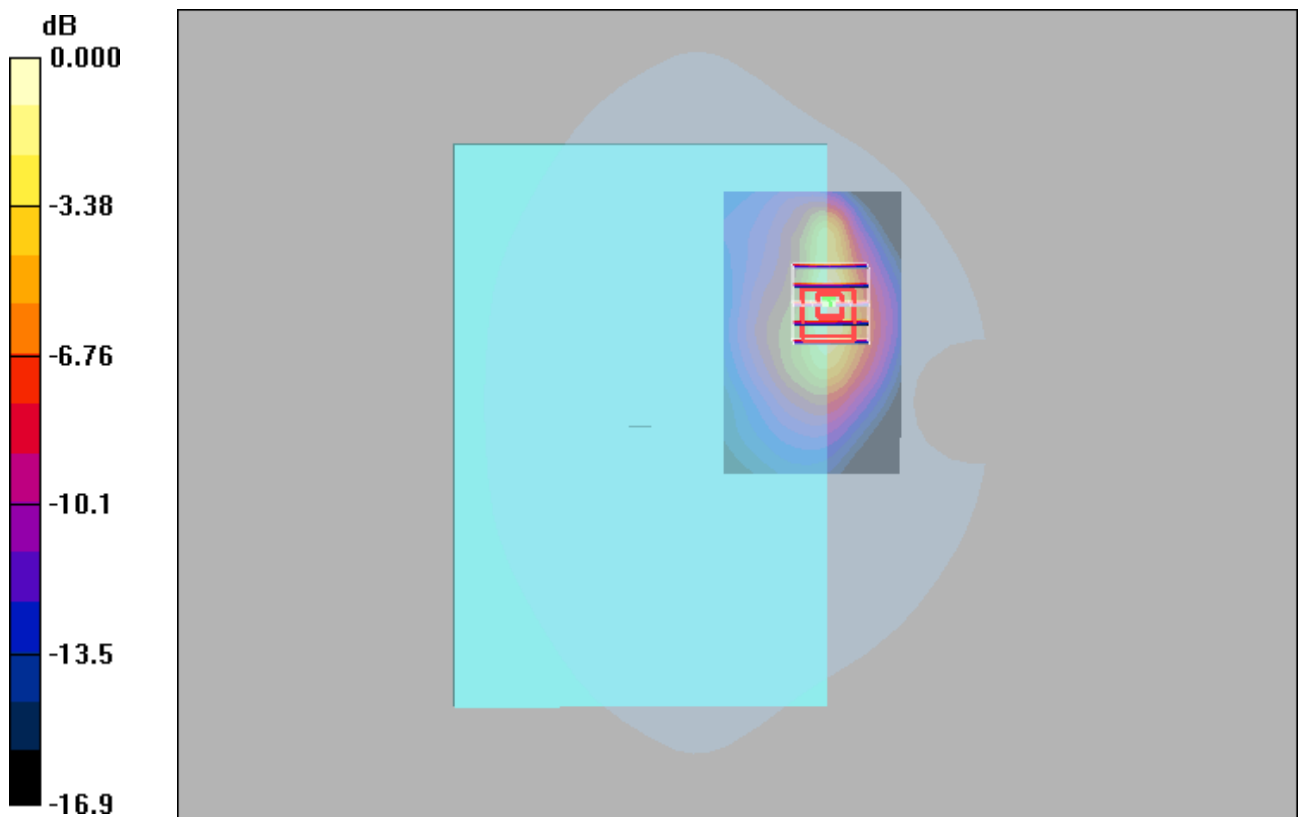

0 dB = 0.192mW/g

## LTE 25\_QPSK20M\_50\_50\_Top Side\_0mm\_26140

### DUT: EUT


Communication System: LTE Band 25; Frequency: 1860 MHz; Duty Cycle: 1:1  
 Medium: H1900 Medium parameters used :  $f = 1860$  MHz;  $\sigma = 1.36$  mho/m;  $\epsilon_r = 39.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

#### DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.11, 5.11, 5.11); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

**Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (interpolated) = 0.411 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 4.00 V/m; Power Drift = 0.054 dB  
 Peak SAR (extrapolated) = 1.19 W/kg  
**SAR(1 g) = 0.440 mW/g; SAR(10 g) = 0.166 mW/g**  
 Maximum value of SAR (measured) = 0.634 mW/g

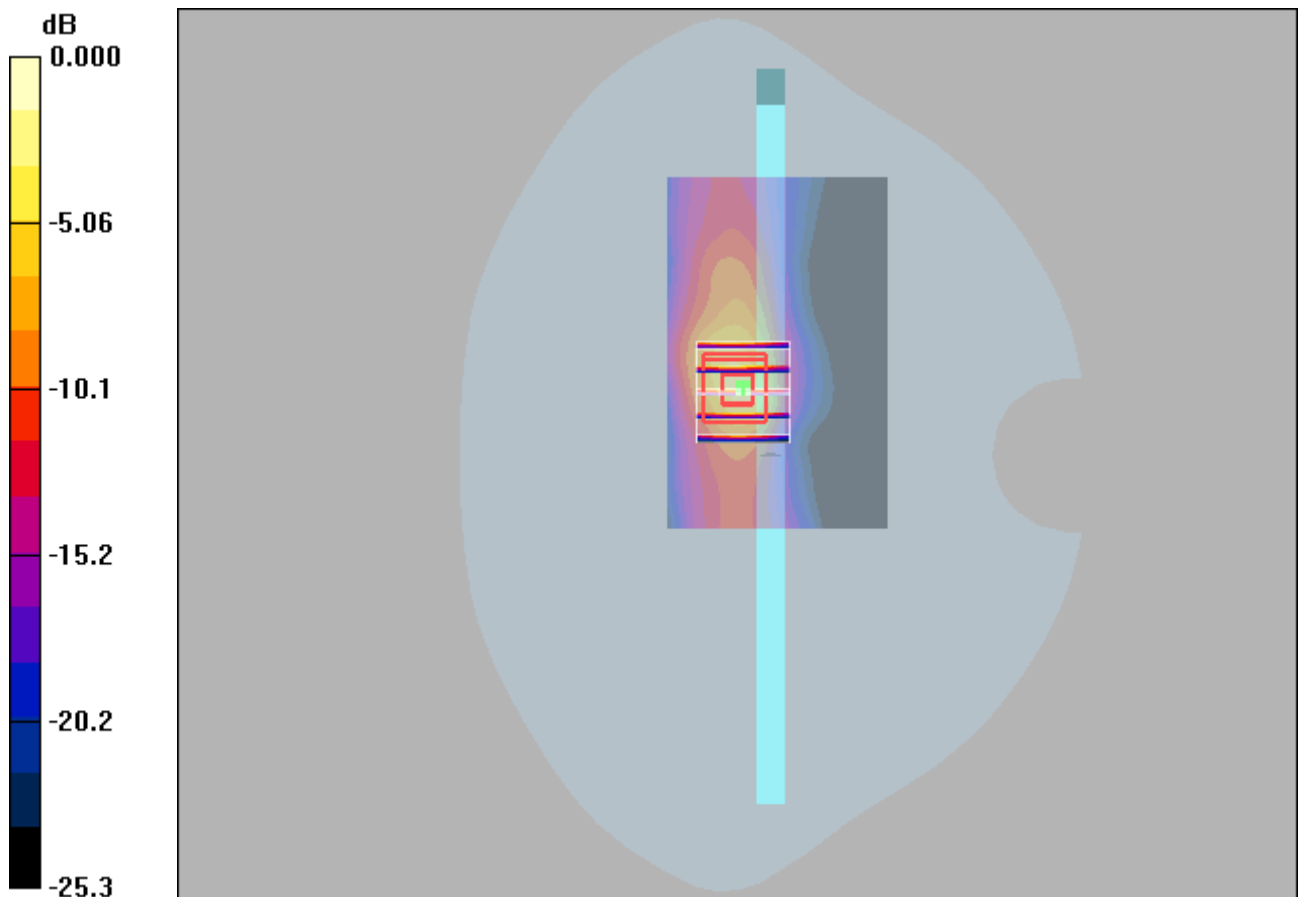

0 dB = 0.634mW/g

### LTE 26\_QPSK15M\_1\_74\_Rear Face\_0mm\_26765

#### DUT: EUT


Communication System: LTE Band26; Frequency: 821.5 MHz; Duty Cycle: 1:1  
Medium: H835 Medium parameters used :  $f = 821.5$  MHz;  $\sigma = 0.91$  mho/m;  $\epsilon_r = 41.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

#### DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.25, 6.25, 6.25); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

**Area Scan (71x51x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 0.094 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 1.42 V/m; Power Drift = 0.108 dB  
Peak SAR (extrapolated) = 0.225 W/kg  
**SAR(1 g) = 0.088 mW/g; SAR(10 g) = 0.040 mW/g**  
Maximum value of SAR (measured) = 0.105 mW/g

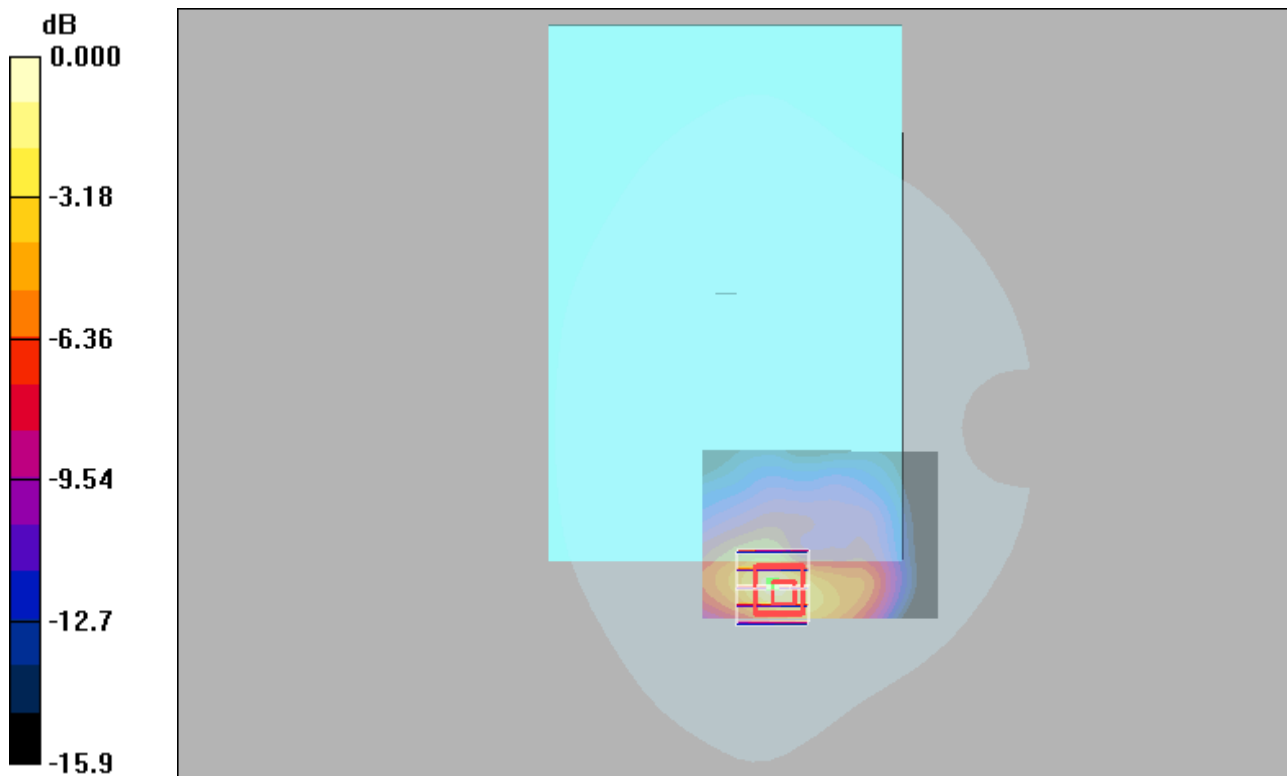

0 dB = 0.105mW/g

### LTE 30\_QPSK10M\_1\_49\_Top Side\_15mm\_27710

#### DUT: EUT


Communication System: LTE 30; Frequency: 2310 MHz; Duty Cycle: 1:1  
Medium: H2300 Medium parameters used:  $f = 2310$  MHz;  $\sigma = 1.74$  mho/m;  $\epsilon_r = 38.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

#### DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.92, 4.92, 4.92); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

**Area Scan (61x91x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (interpolated) = 1.15 mW/g

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 8.04 V/m; Power Drift = 0.073 dB  
Peak SAR (extrapolated) = 1.63 W/kg  
**SAR(1 g) = 0.902 mW/g; SAR(10 g) = 0.465 mW/g**  
Maximum value of SAR (measured) = 1.13 mW/g

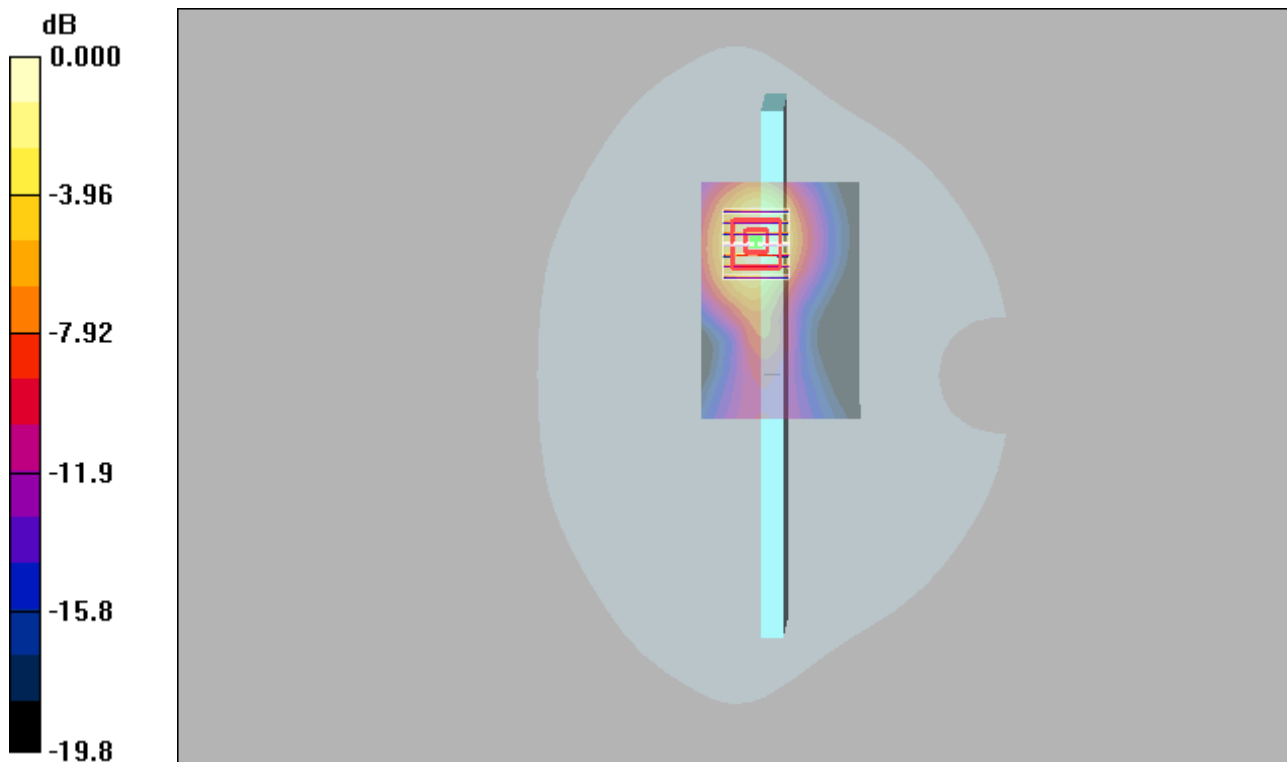

0 dB = 1.13mW/g

### LTE 38\_QPSK20M\_1\_99\_Top Side\_0mm\_38150

#### DUT: EUT


Communication System: TDD-LTE Band38&20M; Frequency: 2610 MHz;Duty Cycle: 1:1.58  
Medium: H2600 Medium parameters used :  $f = 2610$  MHz;  $\sigma = 1.96$  mho/m;  $\epsilon_r = 37.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

#### DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.53, 4.53, 4.53); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

**Area Scan (61x91x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (interpolated) = 0.925 mW/g

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 12.6 V/m; Power Drift = 0.117 dB  
Peak SAR (extrapolated) = 2.29 W/kg  
**SAR(1 g) = 0.687 mW/g; SAR(10 g) = 0.247 mW/g**  
Maximum value of SAR (measured) = 0.954 mW/g

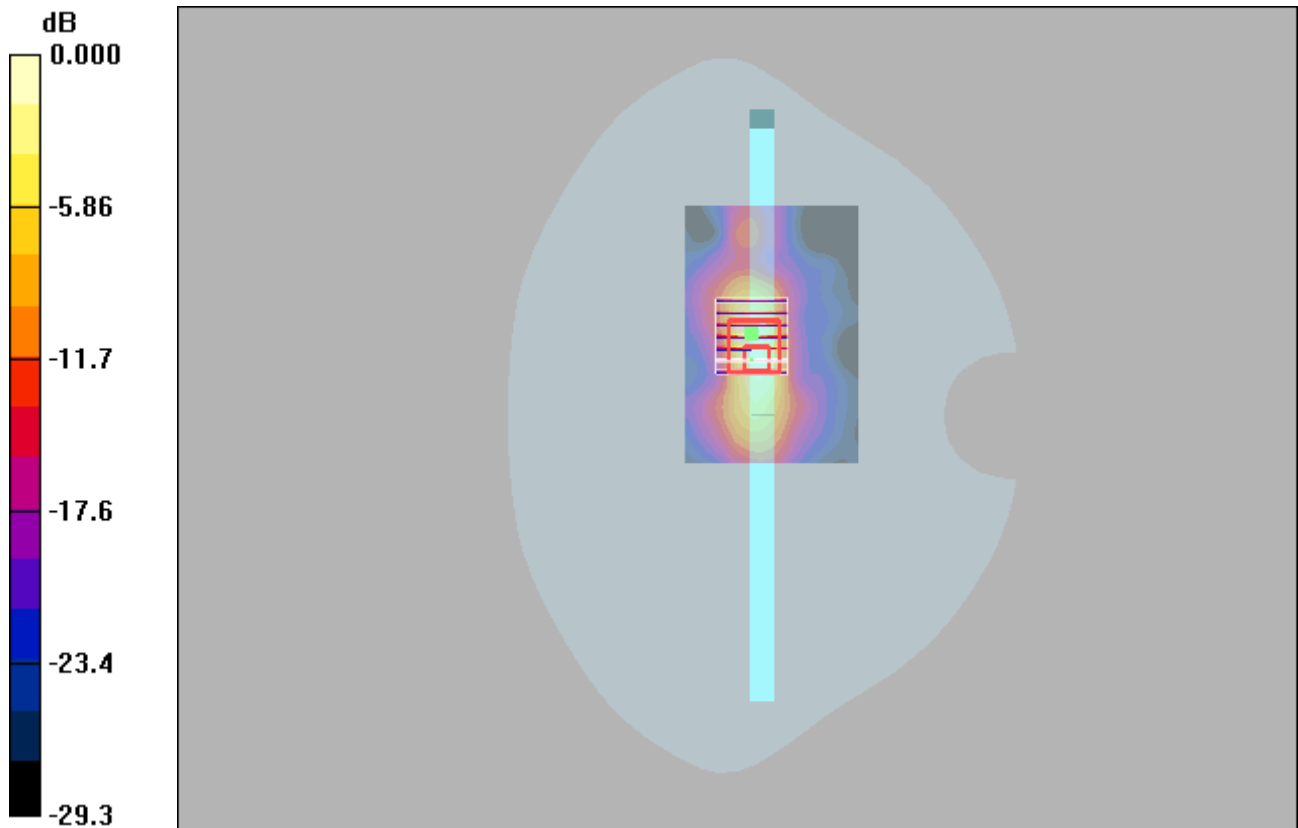

0 dB = 0.954mW/g

### LTE 40\_QPSK10M\_25\_25\_Rear Face\_0mm\_38750

#### DUT: EUT


Communication System: TDD-LTE Band40&10M; Frequency: 2310 MHz; Duty Cycle: 1:1.58  
Medium: H2300 Medium parameters used:  $f = 2310$  MHz;  $\sigma = 1.72$  mho/m;  $\epsilon_r = 38.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

#### DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.92, 4.92, 4.92); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

**Area Scan (51x81x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (interpolated) = 0.872 mW/g

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 2.38 V/m; Power Drift = -0.161 dB  
Peak SAR (extrapolated) = 2.10 W/kg  
**SAR(1 g) = 0.697 mW/g; SAR(10 g) = 0.253 mW/g**  
Maximum value of SAR (measured) = 1.00 mW/g

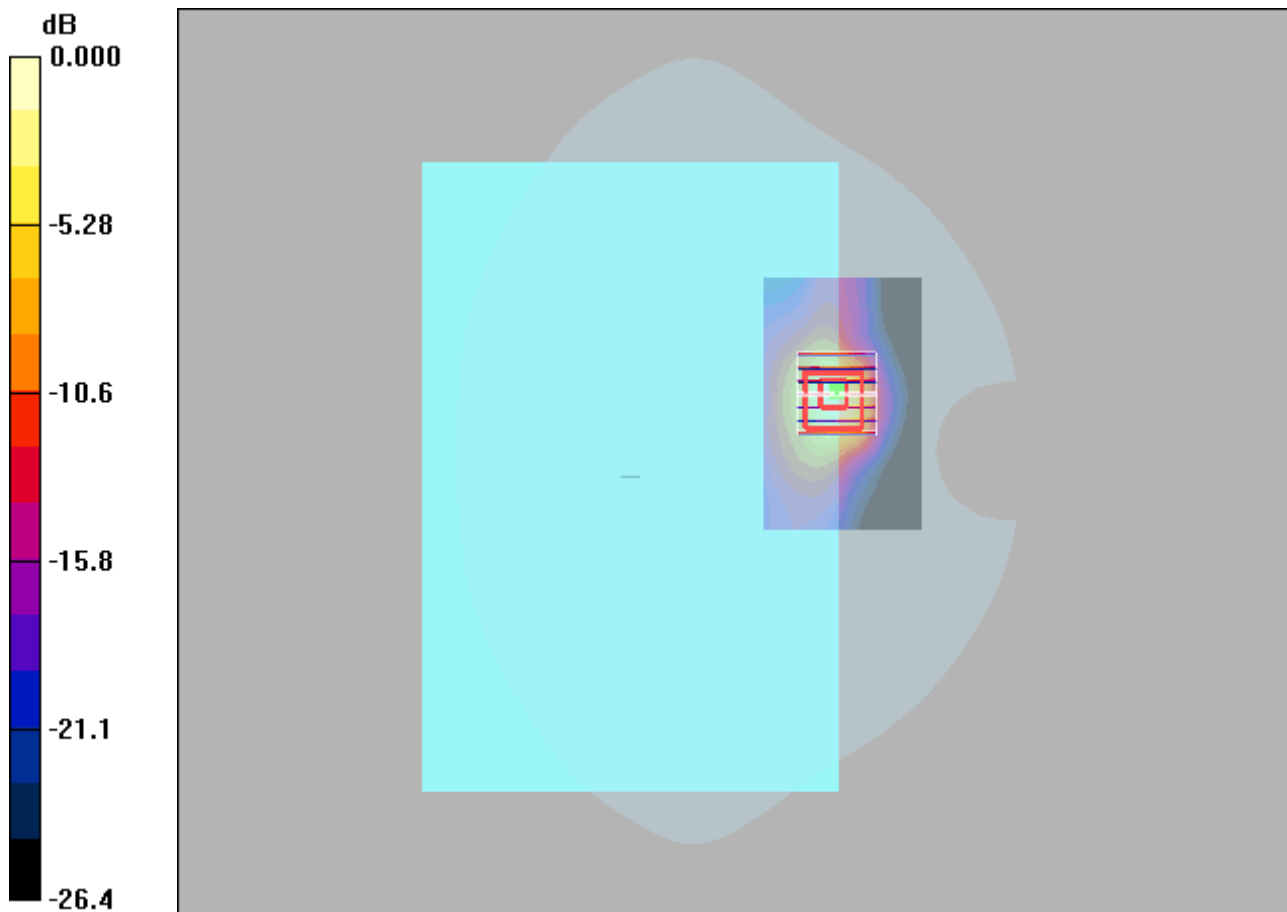

0 dB = 1.00mW/g



### LTE 41\_QPSK20M\_50\_50\_Top Side\_0mm\_40620

#### DUT: EUT


Communication System: TDD-LTE Band41; Frequency: 2593 MHz; Duty Cycle: 1:1.58  
Medium: H2600 Medium parameters used:  $f = 2593$  MHz;  $\sigma = 1.93$  mho/m;  $\epsilon_r = 37.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

#### DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.53, 4.53, 4.53); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

**Area Scan (61x91x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (interpolated) = 0.766 mW/g

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 10.4 V/m; Power Drift = 0.029 dB  
Peak SAR (extrapolated) = 1.98 W/kg  
**SAR(1 g) = 0.582 mW/g; SAR(10 g) = 0.205 mW/g**  
Maximum value of SAR (measured) = 0.884 mW/g

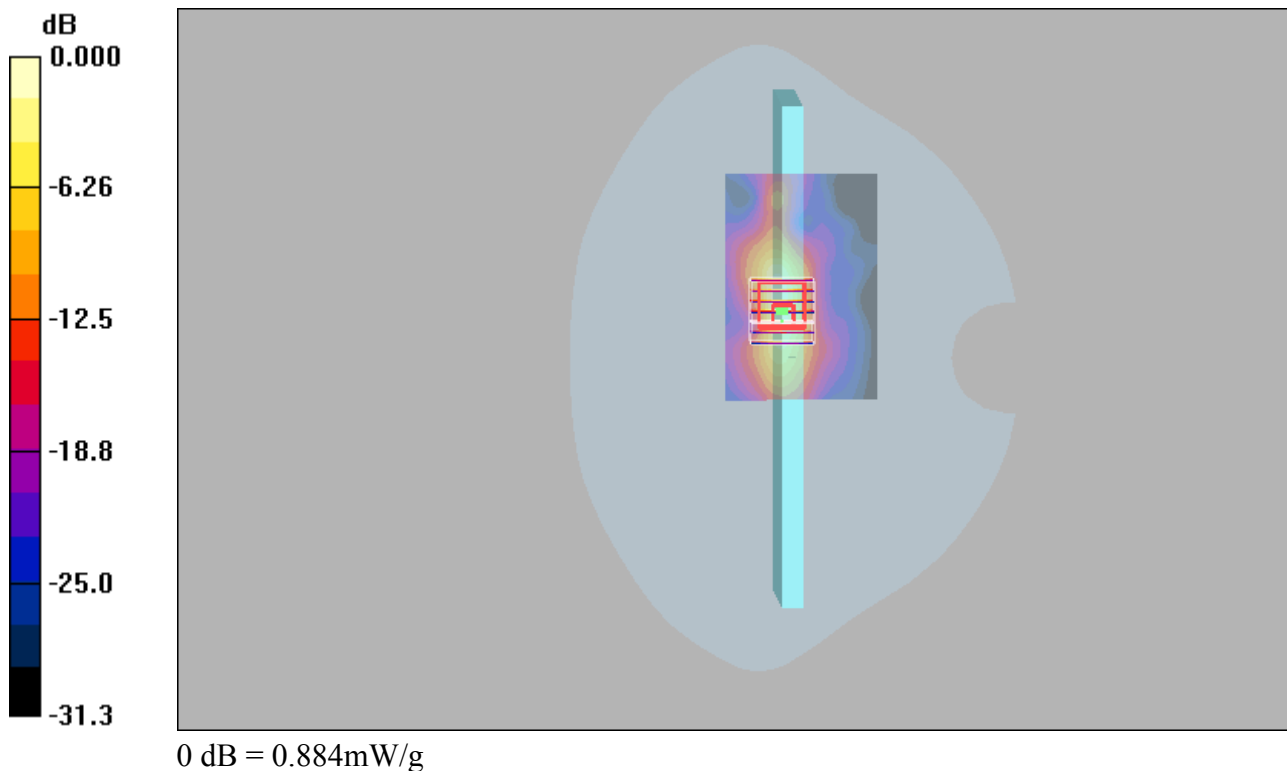

### LTE 66\_QPSK20M\_50\_50\_Top Side\_0mm\_132072

#### DUT: EUT


Communication System: LTE Band 66&QPSK20M; Frequency: 1720 MHz;Duty Cycle: 1:1  
Medium: H1750 Medium parameters used:  $f = 1720$  MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r = 39.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

#### DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.37, 5.37, 5.37); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

**Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 0.375 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 5.14 V/m; Power Drift = 0.070 dB  
Peak SAR (extrapolated) = 1.11 W/kg  
**SAR(1 g) = 0.425 mW/g; SAR(10 g) = 0.169 mW/g**  
Maximum value of SAR (measured) = 0.662 mW/g

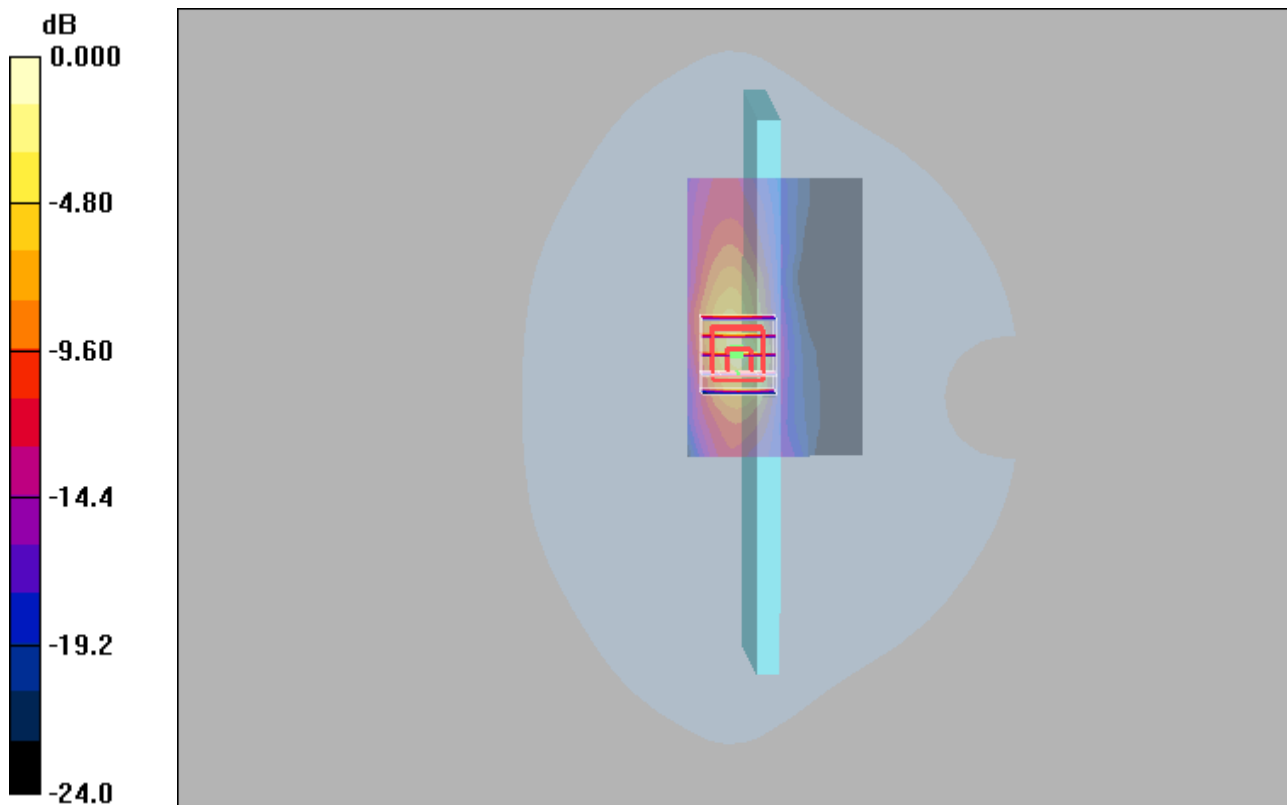

0 dB = 0.662mW/g

### LTE 71\_QPSK20M\_50\_25\_Top Side\_0mm\_133322

#### DUT: EUT

Communication System: LTE Band 71&QPSK20M; Frequency: 683 MHz;Duty Cycle: 1:1

Medium: H750 Medium parameters used :  $f = 683 \text{ MHz}$ ;  $\sigma = 0.854 \text{ mho/m}$ ;  $\epsilon_r = 42$ ;  $\rho = 1000 \text{ kg/m}^3$

#### DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.42, 6.42, 6.42); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

**Area Scan (51x81x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.930 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 8.16 V/m; Power Drift = 0.023 dB

Peak SAR (extrapolated) = 2.05 W/kg

**SAR(1 g) = 0.579 mW/g; SAR(10 g) = 0.228 mW/g**

Maximum value of SAR (measured) = 0.953 mW/g

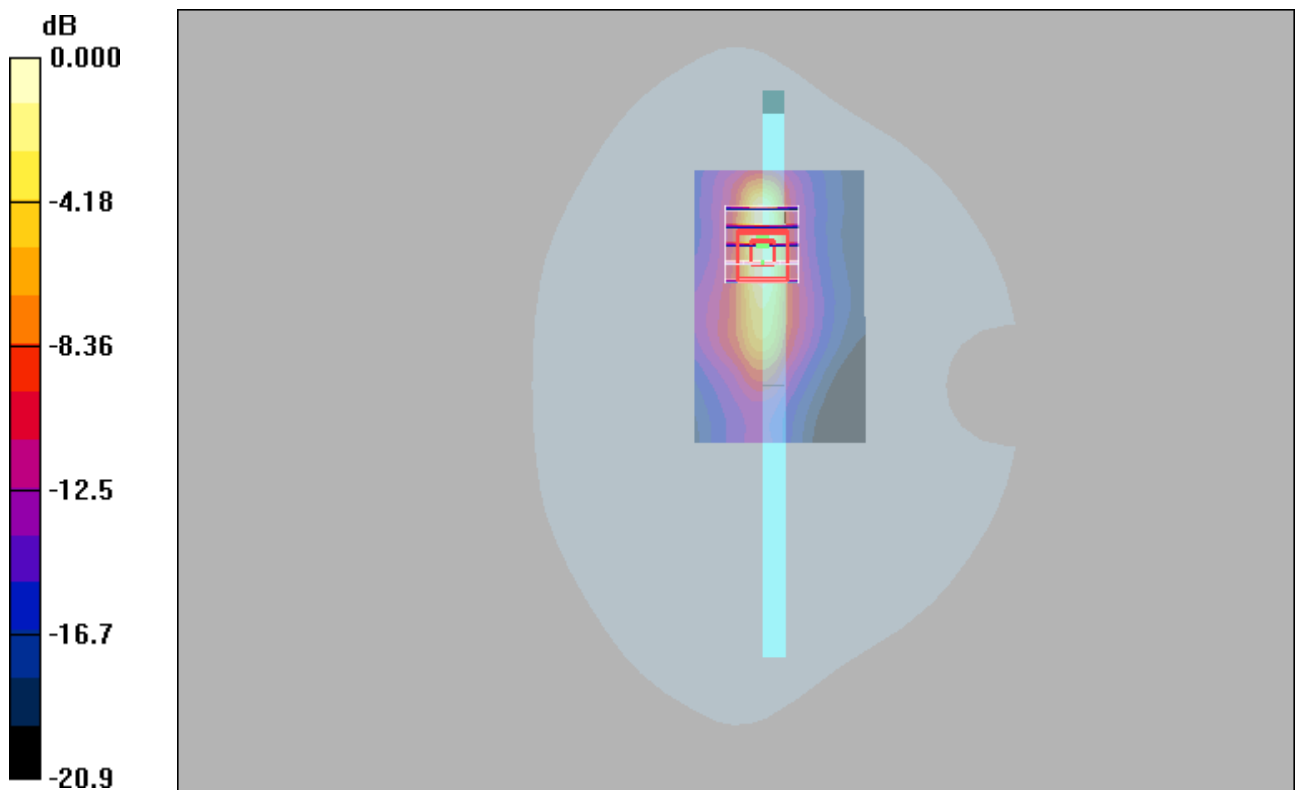

0 dB = 0.953mW/g

## EDR\_DH5\_Rear Face\_0mm\_78

### DUT: EUT

Communication System: Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:1

Medium: H2450 Medium parameters used:  $f = 2480$  MHz;  $\sigma = 1.8$  mho/m;  $\epsilon_r = 38$ ;  $\rho = 1000$  kg/m<sup>3</sup>

#### DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.68, 4.68, 4.68); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

**Area Scan (51x81x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.430 mW/g


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.70 V/m; Power Drift = 0.089 dB

Peak SAR (extrapolated) = 1.28 W/kg

**SAR(1 g) = 0.345 mW/g; SAR(10 g) = 0.123 mW/g**

Maximum value of SAR (measured) = 0.533 mW/g

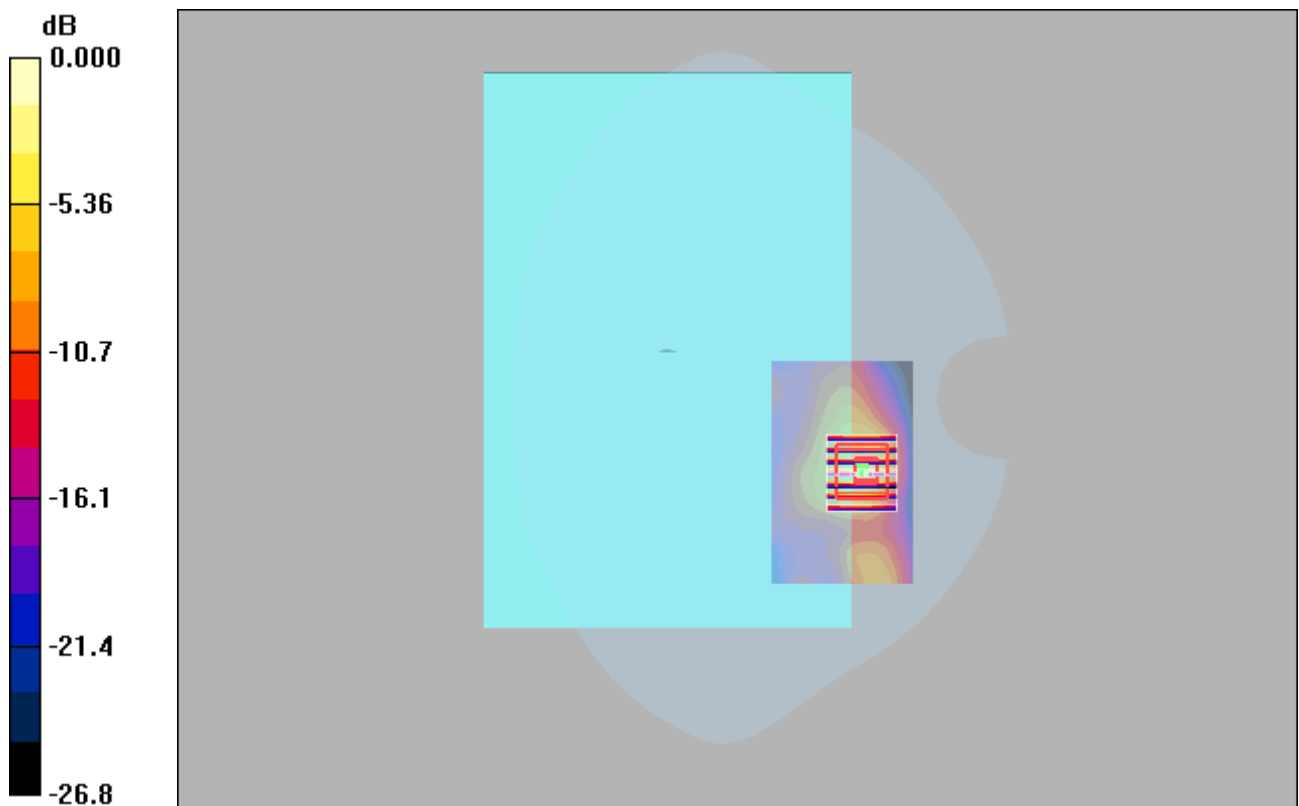

0 dB = 0.533mW/g

## WIFI 2.4G\_802.11b\_Rear Face\_0mm\_11

### DUT: EUT


Communication System: Wlan 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1  
Medium: H2450 Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.79$  mho/m;  $\epsilon_r = 38.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

#### DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.68, 4.68, 4.68); Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

**Area Scan (51x81x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (interpolated) = 0.800 mW/g

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 2.502 V/m; Power Drift = 0.055 dB  
Peak SAR (extrapolated) = 1.85 W/kg  
**SAR(1 g) = 0.488 mW/g; SAR(10 g) = 0.176 mW/g**  
Maximum value of SAR (measured) = 0.790 mW/g

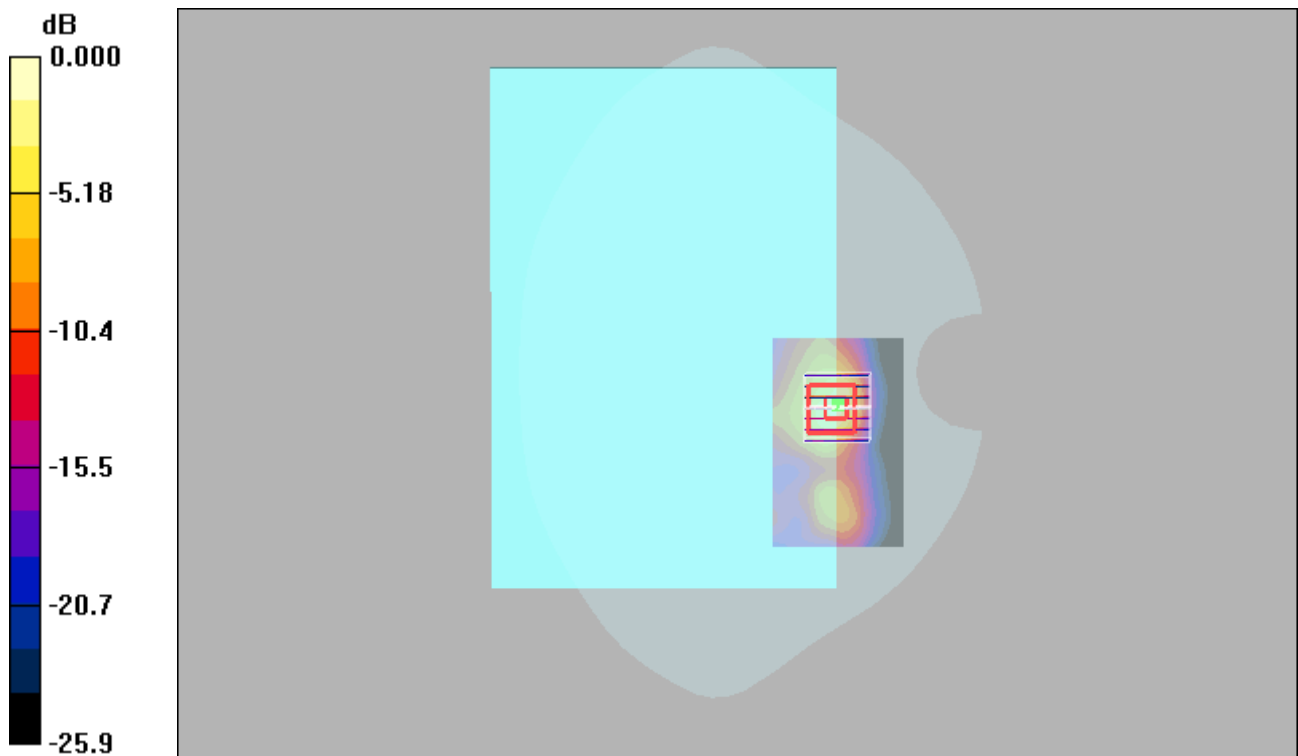

0 dB = 0.790mW/g

### P01 802.11a\_Top Side\_0cm\_Ch60

#### DUT: EUT

Communication System: 802.11a; Frequency: 5300 MHz; Duty Cycle: 1:1


Medium: H5G Medium parameters used:  $f = 5300$  MHz;  $\sigma = 4.788$  S/m;  $\epsilon_r = 36.216$ ;  $\rho = 1000$  kg/m<sup>3</sup>

#### DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(5.48, 5.48, 5.48) @ 5300 MHz; Calibrated: 2023/6/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2023/6/26
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

**Area Scan (81x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 0.901 W/kg

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 14.03 V/m; Power Drift = -0.06 dB  
Peak SAR (extrapolated) = 1.67 W/kg  
**SAR(1 g) = 0.355 W/kg; SAR(10 g) = 0.078 W/kg**  
Smallest distance from peaks to all points 3 dB below = 4.5 mm  
Ratio of SAR at M2 to SAR at M1 = 63.3%  
Maximum value of SAR (measured) = 0.922 W/kg

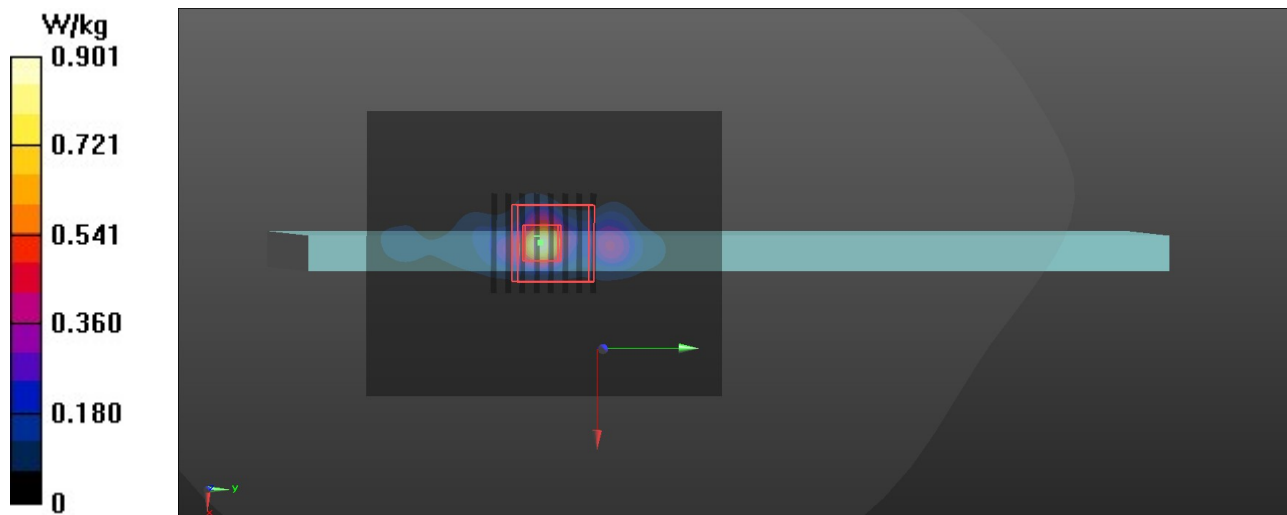

**P02 802.11a\_Rear Face\_0cm\_Ch140****DUT: EUT**

Communication System: 802.11a; Frequency: 5700 MHz; Duty Cycle: 1:1

Medium: H5G Medium parameters used:  $f = 5700$  MHz;  $\sigma = 5.2$  S/m;  $\epsilon_r = 35.641$ ;  $\rho = 1000$  kg/m<sup>3</sup>

**DASY4 Configuration:**

- Probe: EX3DV4 - SN7506; ConvF(4.99, 4.99, 4.99) @ 5700 MHz; Calibrated: 2023/6/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2023/6/26
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

**Area Scan (81x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.929 W/kg

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 6.253 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 1.81 W/kg

**SAR(1 g) = 0.322 W/kg; SAR(10 g) = 0.077 W/kg**

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 54.1%

Maximum value of SAR (measured) = 1.05 W/kg

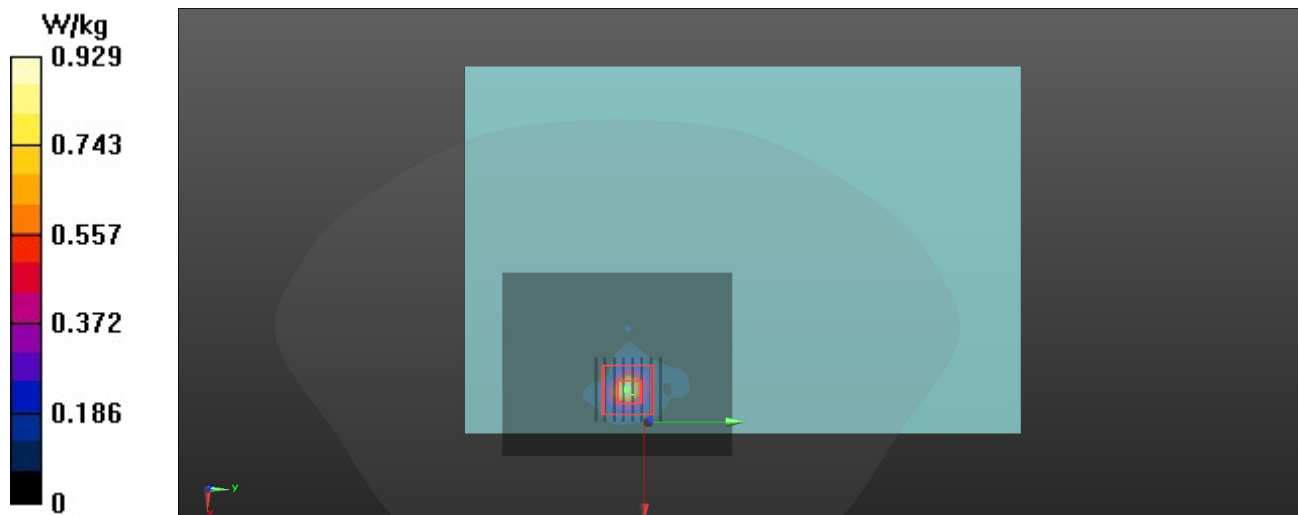

### P03 802.11a\_Rear Face\_0cm\_Ch165

#### DUT: EUT

Communication System: 802.11a; Frequency: 5825 MHz; Duty Cycle: 1:1

Medium: H5G Medium parameters used:  $f = 5825$  MHz;  $\sigma = 5.329$  S/m;  $\epsilon_r = 35.468$ ;  $\rho = 1000$  kg/m<sup>3</sup>

#### DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(4.95, 4.95, 4.95) @ 5825 MHz; Calibrated: 2023/6/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2023/6/26
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

**Area Scan (81x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 0.900 W/kg

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 4.884 V/m; Power Drift = 0.07 dB  
Peak SAR (extrapolated) = 2.65 W/kg  
**SAR(1 g) = 0.358 W/kg; SAR(10 g) = 0.081 W/kg**  
Smallest distance from peaks to all points 3 dB below = 4.3 mm  
Ratio of SAR at M2 to SAR at M1 = 52.2%  
Maximum value of SAR (measured) = 1.20 W/kg

