



TEST REPORT

Applicant: Shenzhen Guoanvision Technology Co., Ltd
Address of Applicant: Room 309, Building 5, Phase II, Tianan Yungu Industrial Park, Gangtou Community, Bantian Street, Longgang District, Shenzhen
Manufacturer: Shenzhen Guoanvision Technology Co., Ltd
Address of Manufacturer: Room 309, Building 5, Phase II, Tianan Yungu Industrial Park, Gangtou Community, Bantian Street, Longgang District, Shenzhen
Factory: Dongguan JuYi Electronic Co.,Ltd
Address of Factory: Room101. No2 Xinfeng Street, Changlong, Huangjiang, Dongguan, Guangdong
Product Name: Security Camera
Model No.: S700,S600,S800,S900,S1000
Trade Mark: Guoanvision
FCC ID: 2BEA8-S900
Applicable standards: FCC CFR Title 47 Part 15 Subpart E Section 15.407
Date of Test: May.21, 2025-Jun.04, 2025
Date of report issued: Jun.05, 2025

Remark:

The results shown in this test report refer only to the sample(s) tested , this test report cannot be reproduced, except in full without prior written permission of the company.

The report would be invalid without specific stamp of test institute and the signatures of compiler and approver

Prepared By

Shenzhen ETR Standard Technology Co., Ltd.

Address: No.103, No.10, Phase I, Zone 3, Xinxing Industrial Park, Xinhe, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Compiled by:

Reviewed by:

Approved by:

Project Engineer

Project Manager

Authorized Signature



Report Revision History		
Report No.	Description	Issue Date
ET-25051487E03	Original	Jun.05, 2025



Contents

Page

1	TEST SUMMARY	4
1.1	MEASUREMENT UNCERTAINTY	4
2	GENERAL INFORMATION	5
2.1	GENERAL DESCRIPTION OF EUT	5
2.2	TEST MODE	7
2.3	DESCRIPTION OF SUPPORT UNITS	8
2.4	DEVIATION FROM STANDARDS	8
2.5	ABNORMALITIES FROM STANDARD CONDITIONS	8
2.6	TEST FACILITY	8
2.7	TEST LOCATION	8
2.8	ADDITIONAL INSTRUCTIONS	8
3	TEST INSTRUMENTS LIST	9
4	TEST RESULTS AND MEASUREMENT DATA	10
4.1	ANTENNA REQUIREMENT	10
4.2	CONDUCTED EMISSIONS	11
4.3	DUTY CYCLE	14
4.4	CONDUCTED OUTPUT POWER	18
4.5	BANDWIDTH & 99% OCCUPY BANDWIDTH	20
4.6	POWER SPECTRAL DENSITY	28
4.7	BAND EDGE	36
4.7.1	Conducted test Method	36
4.8	SPURIOUS EMISSION	43
4.8.1	Radiated Emission Method	43
4.9	FREQUENCY STABILITY	53
5	TEST SETUP PHOTO	59
6	EUT CONSTRUCTIONAL DETAILS	59

1 Test Summary

Test Item	Section in CFR 47	Result	Test by
Antenna requirement	15.203	Pass	/
AC Power Line Conducted Emission	15.207	Pass	Jason Huang
Conducted Output Power	15.407 (a)(1)/(a)(3)	Pass	Kara Wu
26dB Bandwidth and 99% Occupied Bandwidth	15.407 (a)(12)	Pass	Kara Wu
6dB Bandwidth	15.407 (e)	Pass	Kara Wu
Power Spectral Density	15.407(a)(1)/(a)(3)	Pass	Kara Wu
Band Edge	15.407(b)(1)/(b)(4)	Pass	Kara Wu
Spurious Emission	15.205/15.209 15.407(b)(1)/(b)(4)/(b)(8)	Pass	Jason Huang
Frequency Stability	15.407(g)	Pass	Kara Wu

Remarks:

1. Pass: The EUT complies with the essential requirements in the standard.
2. Test according to ANSI C63.10:2013
3. Note: Compliance determination rules
 - 1).The Compliance determination of test results does not take into account measurement uncertainty. Measurement results are determined based on regulatory limitations or requirements specified by the applicant/manufacture. If measurement uncertainty is taken into account, the applicant/manufacture will bear all possible risks of non-compliance.
 - 2).The measurement uncertainty please refer to each test result in the "Measurement Uncertainty"

1.1 Measurement Uncertainty

Test Item	Measurement Uncertainty	Notes
Duty cycle	±0.05%	(1)
Occupied Channel Bandwidth	0.55%	(1)
RF output power, conducted	±0.57 dB	(1)
Power Spectral Density, conducted	±0.61 dB	(1)
Unwanted Emissions, conducted	±0.64 dB	(1)
AC Power Line Conducted Emission	± 2.55 dB	(1)
Radiated emissions 9K-30MHz	±3.79 dB	(1)
Radiated emissions 30M- 1GHz	± 4.24 dB	(1)
Radiated emissions 1GHz-18GHz	± 4.26 dB	(1)
Radiated emissions 18GHz-40GHz	±4.17 dB	(1)
Frequency error	Uc=1X10-7	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

2 General Information

2.1 General Description of EUT

Product Name:	Security Camera
Model No.:	S700,S600,S800,S900,S1000
Difference of model(s)	All models have the same circuit and RF module, except for the model name and color.
Test Model:	S700
Hardware Version:	V1_5
Software Version:	1.0
Sample(s) Status:	Engineer sample
Operation Frequency:	☒ 5180-5240MHz for 802.11a/n(HT20)/ac20(VHT20); 5190-5230MHz for 802.11n(HT40)/ac40(VHT40); 5210MHz for 802.11 ac80(VHT40); ☒ 5745-5825 MHz for 802.11a/n(HT20)/ac20(VHT20); 5755-5795 MHz for 802.11n(HT40)/ac40(VHT40); 5775MHz for 802.11 ac80(VHT40);
Channel numbers:	☒ 4 channels for 802.11a/n20(HT20)/ac20(VHT20) in the 5180-5240MHz band; 2 channels for 802.11 n40(HT40)/ac40(VHT40) in the 5190-5230MHz band ; 1 channels for 802.11 ac80 in the 5210(VHT80)MHz band ; ☒ 5 channels for 802.11802.11a/n20(HT20)/ac20(VHT20) in the 5745-5825MHz band ; 2 channels for 802.11 n40(HT40)/ac40(VHT40) in the 5755-5795MHz band ; 1 channels for 802.11 5210(VHT80) in the 5775MHz band
Channel bandwidth:	802.11a/802.11n(HT20)/ 802.11ac(VHT20): 20MHz 802.11n(HT40)/ 802.11ac(VHT40) : 40MHz 802.11ac(VHT80) : 80MHz
Data Rate	802.11a: 6,9,12,18,24,36,48,54Mbps; 802.11n(HT20/HT40):MCS0-MCS15; 802.11ac(VHT20/40/80):NSS1, MCS0-MCS9
Modulation technology:	Orthogonal Frequency Division Multiplexing (OFDM) with BPSK/QPSK/16QAM/64QAM/256QAM
Antenna Type:	FPC Antenna
Antenna gain:	5.09 dBi(Declare by applicant) Note: Antenna information is provided by applicant, Testing lab is not responsible for the accuracy of the information.
Battery	N/A
Power supply:	DC 5V From Adapter
Adapter Model:	Model: GV05W-0501000US Input:100-240V 50/60Hz 0.2A Output: DC 5V 1.5A

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180MHz	38	5190MHz	40	5200MHz	42	5210MHz
44	5220MHz	46	5230MHz	48	5240MHz	/	/
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
149	5745MHz	151	5755MHz	153	5765MHz	155	5775MHz
157	5785MHz	159	5795MHz	161	5805MHz	/	/
165	5825MHz	/					

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)		
	802.11 a /n(HT20)/ac(VHT20)	802.11 n(HT40)/ac(VHT40)	802.11ac(VHT80)
Lowest channel	5180	5190	5210
Middle channel	5200	X	
Highest channel	5240		

Test channel	Frequency (MHz)		
	802.11 a /n(HT20)/ac(VHT20)	802.11 n(HT40)/ac(VHT40)	802.11ac(VHT80)
Lowest channel	5745	5755	5775
Middle channel	5785	X	
Highest channel	5825		

2.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode(or with a duty cycle $\geq 98\%$)
<i>Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Pretest Mode	Description
Mode 1	802.11a / n 20/ ac 20 CH36/ CH40/ CH 48 802.11a /n 20/ac 20 CH149/ CH157/ CH 165
Mode 2	802.11n 40/ac 40 CH38/ CH 46 802.11n 40/ac 40 CH 151 / CH 159
Mode 3	802.11 ac80 CH 42/CH 155
Mode 4	/
Mode 5	Link Mode

Conducted Emission	
Final Test Mode	Description
Mode 5	Link Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11a / n 20/ ac 20 CH36/ CH40/ CH 48 802.11a /n 20/ac 20 CH149/ CH157/ CH 165
Mode 2	802.11n 40/ac 40 CH38/ CH 46 802.11n 40/ac 40 CH 151 / CH 159
Mode 3	802.11 ac80 CH 42/CH 155
Mode 4	/

Note:

(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.

2.3 Description of Support Units

No.	Description	Manufacturer	Model	Serial Number
/	/	/	/	/
/	/	/	/	/
/	/	/	/	/

2.4 Deviation from Standards

None.

2.5 Abnormalities from Standard Conditions

None.

2.6 Test Facility

Test laboratory: Shenzhen ETR Standard Technology Co., Ltd.
CNAS Registration Number: L11864
A2LA Certificate Number: 6640.01
FCC Designation Number: CN1326
FCC Test Firm Registration: 183064

2.7 Test Location

All tests were performed at:

Laboratory location: No.103, No.10, Phase I, Zone 3, Xinxing Industrial Park, Xinhe, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 755 85259392

2.8 Additional Instructions

Test Software	SecureCRT_6.7.0.15.EXE
Power level setup	Default

3 Test Instruments list

Conducted Emission

Item	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	EMI Test Receiver	Rohde&schwarz	ESC13	100605	2025.3.06	2026.3.05
2	Artificial power network	schwarabeck	NSLK8127	8127483	2025.3.06	2026.3.05
3	Artificial power network	ETS	3186/2NM	1132	2025.3.06	2026.3.05
4	10dB attenuator	HUBER+SUHNER	10dB	/	2025.3.06	2026.3.05
5	Cable 4	HUBER SUNNER	3M	/	2025.3.06	2026.3.05
6	Absorbing Clamp	schwarabeck	MDS21	D69250	2025.3.06	2026.3.05

Radiated Emission &RF Conducted test:


Item	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	EMI Test Receiver	Rohde&schwarz	ESC17	101032	2025.3.06	2026.3.05
2	Broadband antenna	schwarabeck	VULB9168	1064	2024.3.26	2026.3.25
3	Horn antenna	schwarabeck	BBHA9120D	9120D-1145	2024.3.22	2026.3.21
4	Amplifier	EMtrace	RP01A	50117	2025.3.06	2026.3.05
5	Amplifier	Space-Dtronic	EWLAN0118G-P40	19113001	2025.3.06	2026.3.05
6	Spectrum analyzer	KEYSIGHT	N9020A	MY55370280	2025.3.06	2026.3.05
7	Power detector meter	MWRFtest	MW100-PSB	MW201020JYT	2025.3.06	2026.3.05
8	Signal generator	Agilent	N5182A	MY49060455	2025.3.06	2026.3.05
9	Spectrum analyzer	Rohde&schwarz	FSV-40N	101321	2025.3.06	2026.3.05
10	Amplifier	SKET	LNPA_1840-50	SK2019040302	2025.3.06	2026.3.05
11	Horn antenna	schwarabeck	BBHA 9170	946	2024.3.22	2026.3.21
12	Loop antenna	schwarabeck	FMZB 1519 B	1519	2024.3.22	2026.3.21
13	Cable 6	HUBER SUNNER	0.5M	/	2025.3.06	2026.3.05
14	Cable7	HUBER SUNNER	2.0M	/	2025.3.06	2026.3.05
15	Cable8	HUBER SUNNER	6.0M	/	2025.3.06	2026.3.05
16	Filter	Xin bo	XBLBQ-GTA29	210410-3-2	2025.3.06	2026.3.05
17	Power Sensor	Keysight	U2021XA	MY54111006	2025.3.06	2026.3.05
18	Temp. & Humidity Chamber	Jiecheng Instrument	QA-LP-80	20160705001	2025/3/07	2026/3/06

Note: the calibration interval of the above test instruments is 12 or 24 months and the calibrations are traceable to international system unit (SI).

Software Name	Manufacturer	Model	Version
RF test software	MWRFtest	MTS 8310	V2.0.0.0
Conducted test software	EZ-EMC	Farad	Ver.EMC-CON 3A1.1
Radiated test software	EZ-EMC	Farad	Ver.FA-03A2 RE

4 Test results and Measurement Data

4.1 Antenna requirement

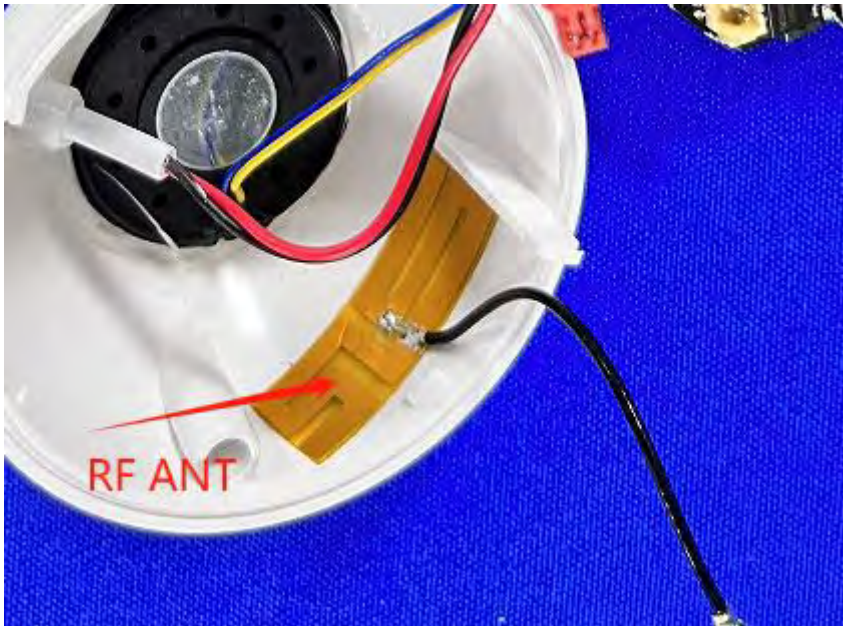Standard requirement:	FCC Part15 C Section 15.203
<i>15.203 requirement:</i> <i>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</i>	
E.U.T Antenna:	
<i>The antennas are FPC Antenna, the best case gain of the antennas are 5.09dBi, reference to the below for details</i> 	

4.2 Conducted Emissions


Test Requirement:	FCC Part15 C Section 15.207					
Test Method:	ANSI C63.10:2013					
Test Frequency Range:	150KHz to 30MHz					
Class / Severity:	Class B					
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto					
Limit:	Frequency range (MHz)		Limit (dBuV)			
			Quasi-peak		Average	
	0.15-0.5		66 to 56*		56 to 46*	
	0.5-5		56		46	
	5-30		60		50	
* Decreases with the logarithm of the frequency.						
Test setup:	Reference Plane 40cm LISN AUX Equipment E.U.T Test table/Insulation plane 80cm LISN Filter EMI Receiver AC power Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m					
Test procedure:	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.					
Test Instruments:	Refer to section 3.0 for details					
Test mode:	Refer to section 2.2 for details					
Test environment:	Temp.:	25.7°C	Humid.:	58%	Press.:	1012mbar
Test voltage:	AC 120V 60Hz					
Test results:	Pass					

Remark:

1. Both high voltage and low voltage have been tested, and the report only shows the worst case data with AC 120V/60Hz.
2. All mode have been tested, the report only shows the worst mode (802.11ac 5200MHz)


Measurement Result

Line:

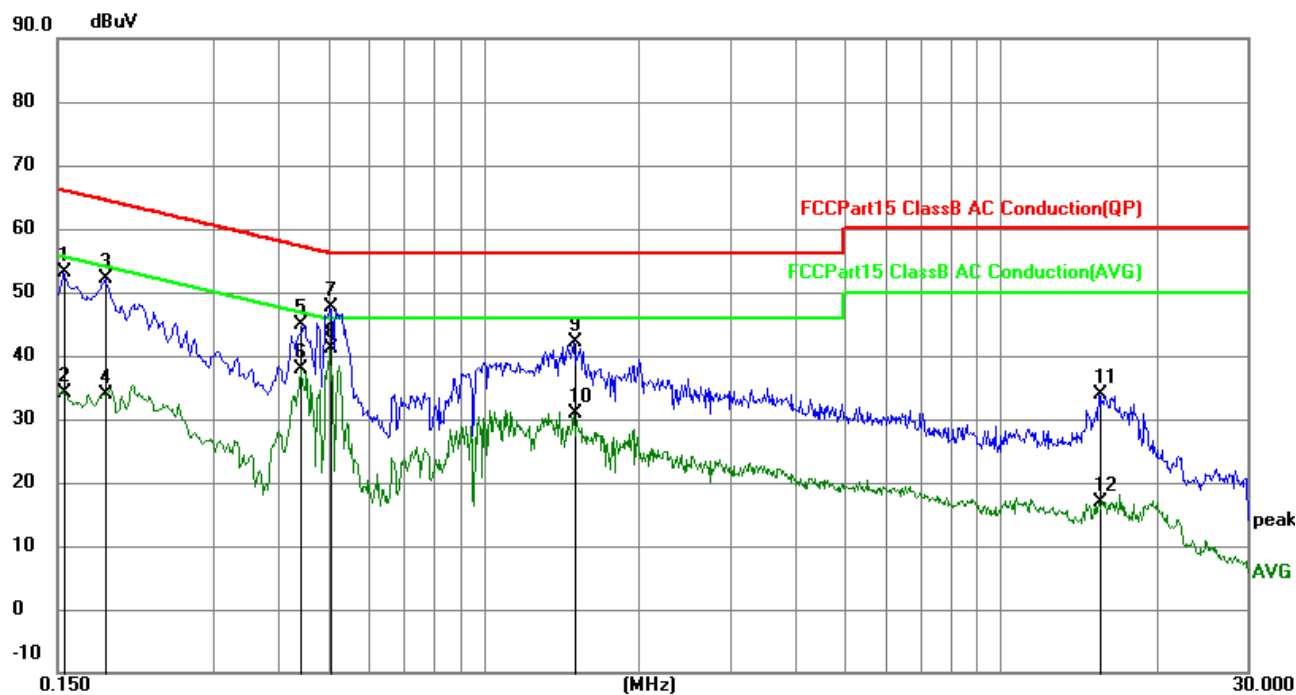

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1544	43.33	9.70	53.03	65.76	-12.73	QP
2	0.1544	24.39	9.70	34.09	55.76	-21.67	AVG
3	0.1859	42.33	9.71	52.04	64.22	-12.18	QP
4	0.1859	24.27	9.71	33.98	54.22	-20.24	AVG
5	0.4425	35.04	9.74	44.78	57.01	-12.23	QP
6	0.4425	28.06	9.74	37.80	47.01	-9.21	AVG
7	0.5052	37.95	9.74	47.69	56.00	-8.31	QP
8	0.5052	31.34	9.74	41.08	46.00	-4.92	AVG
9	1.4954	32.47	9.75	42.22	56.00	-13.78	QP
10	1.4954	21.22	9.75	30.97	46.00	-15.03	AVG
11	15.5038	24.60	9.35	33.95	60.00	-26.05	QP
12	15.5038	7.50	9.35	16.85	50.00	-33.15	AVG

Neutral:

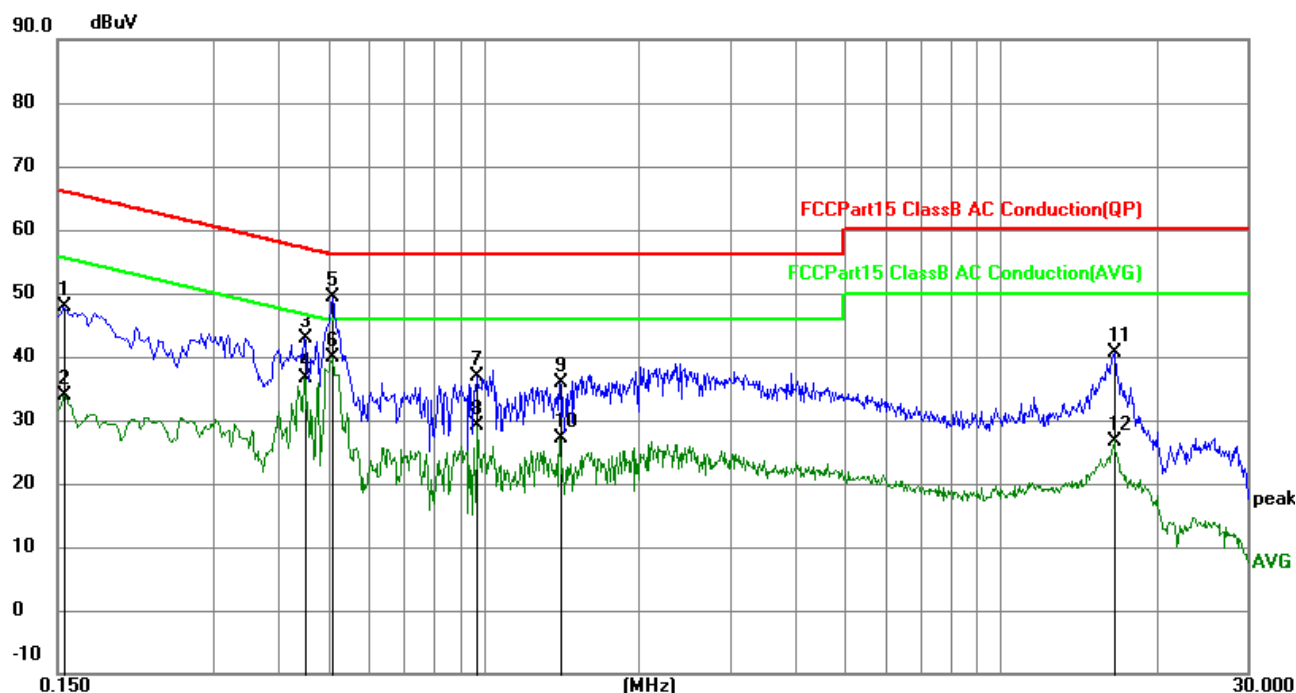


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1544	38.22	9.70	47.92	65.76	-17.84	QP
2	0.1544	24.28	9.70	33.98	55.76	-21.78	AVG
3	0.4515	33.11	9.74	42.85	56.85	-14.00	QP
4	0.4515	26.77	9.74	36.51	46.85	-10.34	AVG
5	0.5100	39.54	9.74	49.28	56.00	-6.72	QP
6	0.5100	30.08	9.74	39.82	46.00	-6.18	AVG
7	0.9734	27.02	9.76	36.78	56.00	-19.22	QP
8	0.9734	19.44	9.76	29.20	46.00	-16.80	AVG
9	1.4052	26.08	9.75	35.83	56.00	-20.17	QP
10	1.4052	17.47	9.75	27.22	46.00	-18.78	AVG
11	16.6245	31.21	9.30	40.51	60.00	-19.49	QP
12	16.6245	17.45	9.30	26.75	50.00	-23.25	AVG

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level =Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

4.3 Duty cycle

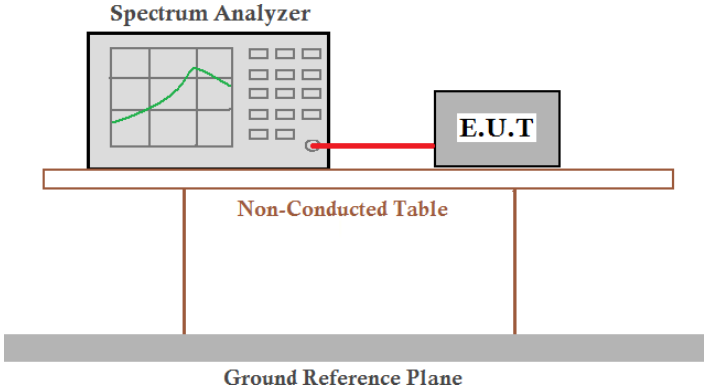Test Method :	ANSI C63.10:2013	
Limit:	/	
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. The table is supported by two vertical legs. Below the table is a Ground Reference Plane.	
Test Instruments:	Refer to section 3.0 for details	
Test mode:	Refer to section 2.2 for details	
Test environment:	Temp.: 23.4°C	Humid.: 62%RH
Test voltage:	DC 5V From Adapter	
Test results:	Pass	

Measurement Result

5180-5240MHz

Mode	Duty cycle (%)	Correction Factor (dB)
TX 802.11a Mode	84.71	0.72
TX 802.11n20 Mode	84.35	0.74
TX 802.11ac20 Mode	84.73	0.72
TX 802.11n40 Mode	84.48	0.73
TX 802.11ac40 Mode	83.76	0.77
TX 802.11ac80 Mode	84.40	0.74


5745-5825 MHz

Mode	Duty cycle (%)	Correction Factor (dB)
TX 802.11a Mode	85.42	0.68
TX 802.11n20 Mode	83.67	0.77
TX 802.11ac20 Mode	85.42	0.68
TX 802.11n40 Mode	84.21	0.75
TX 802.11ac40 Mode	84.21	0.75
TX 802.11ac80 Mode	91.43	0.39


Test plot

5180-5240MHz


(802.11a) plot

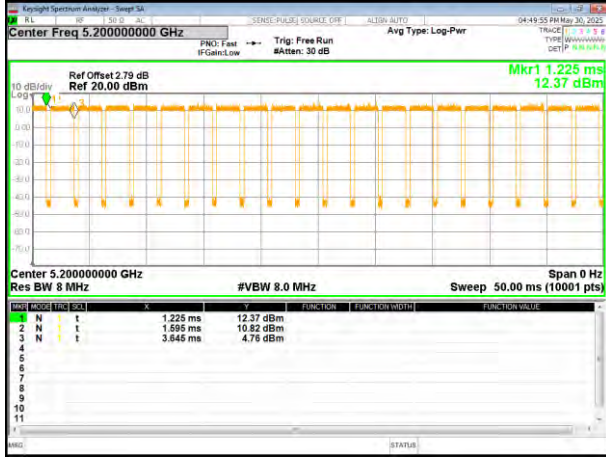


(802.11 n20) plot

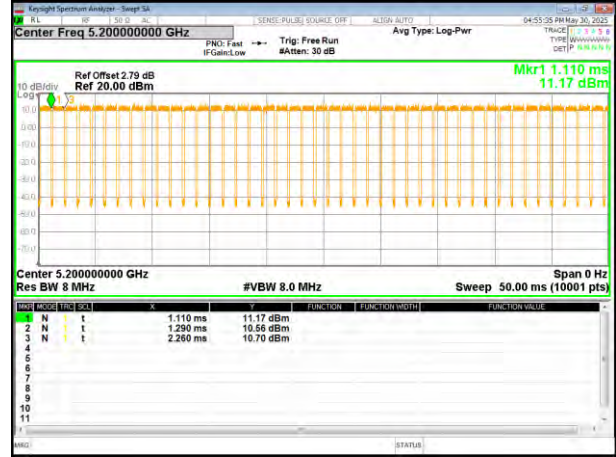


(802.11ac20) plot

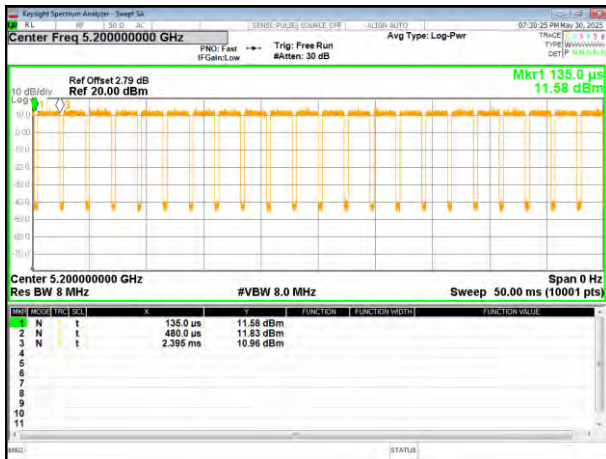


(802.11 n40) plot

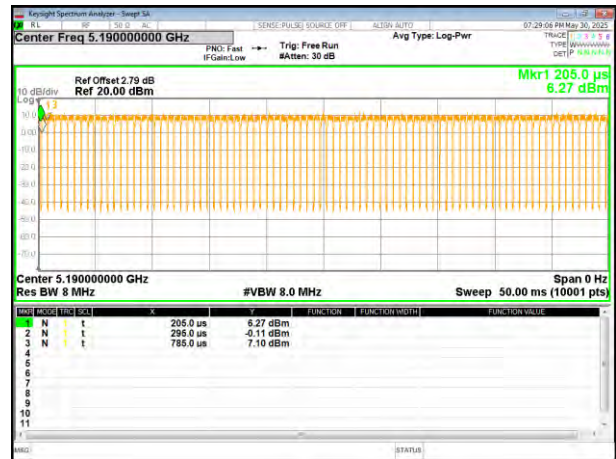

(802.11ac40) plot

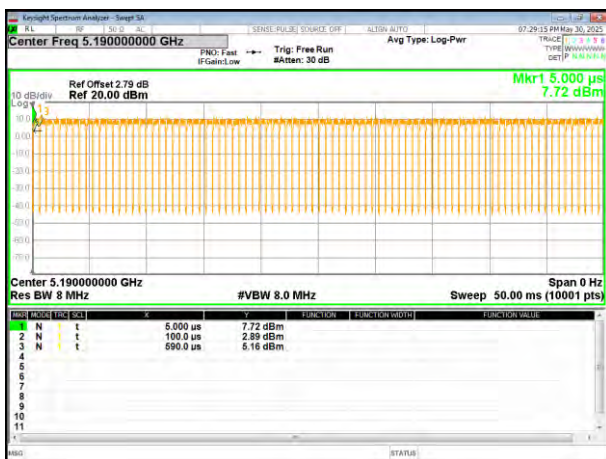


(802.11ac80) plot

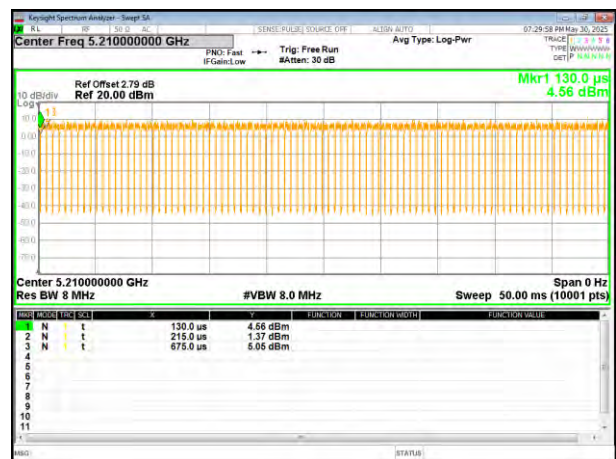


5745-5825 MHz


(802.11a) plot

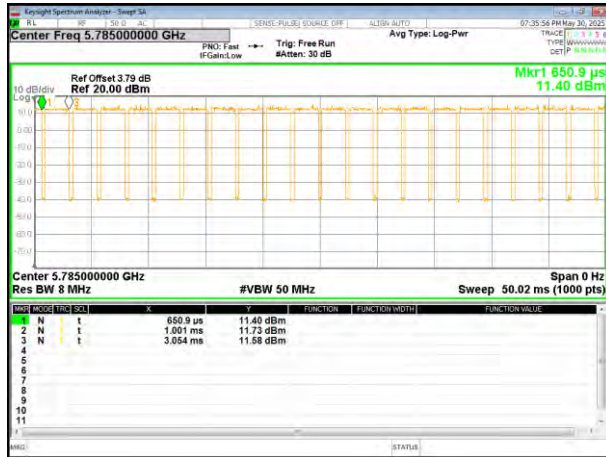

(802.11 n20) plot

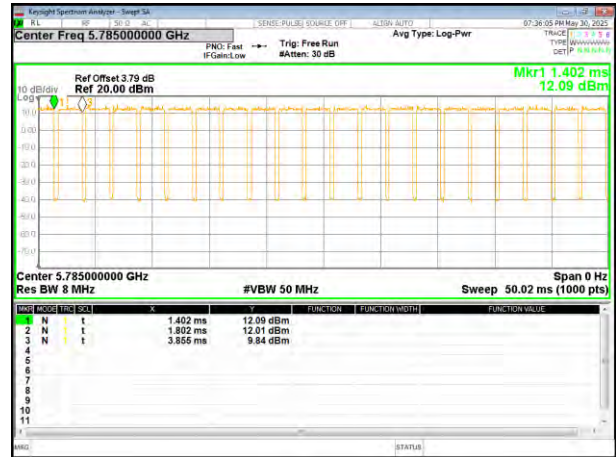

(802.11ac20) plot

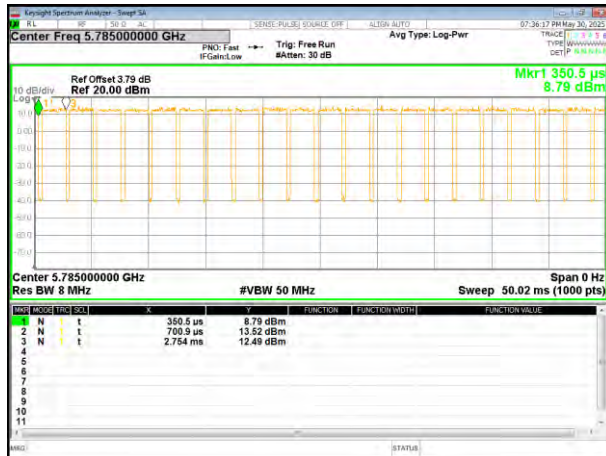


(802.11 n40) plot




(802.11ac40) plot



(802.11ac80) plot

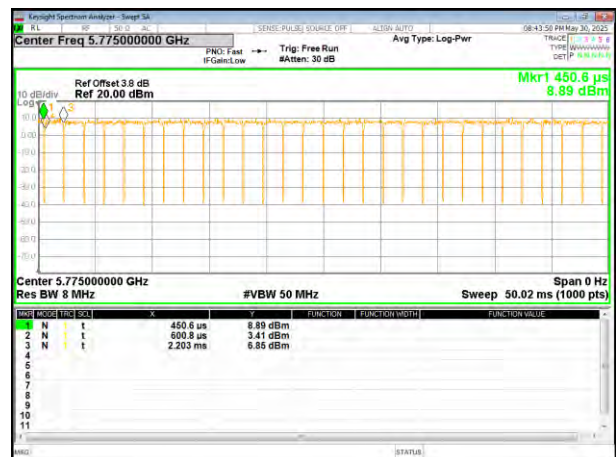

4.4 Conducted Output Power

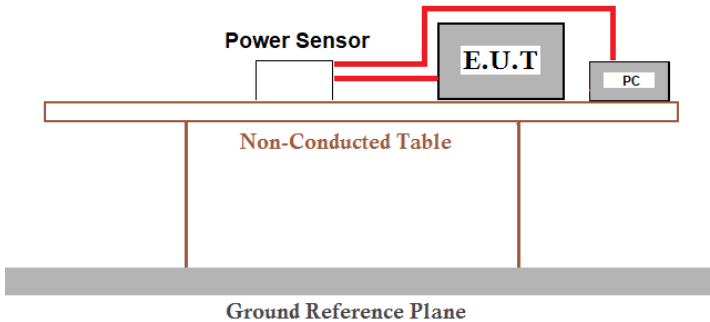Test Requirement:	FCC Part15 E Section 15.407 (a)(1)/(a)(3)	
Test Method:	ANSI C63.10:2013 and KDB 789033 D02 General U-NII Test Procedures New Rules v02r01	
Limit:	5150-5250MHz : 250mW 5725~5850MHz : 1W	
Test setup:	 The diagram illustrates the test setup. A Power Sensor is connected via red wires to an E.U.T. (Equipment Under Test) and a PC. The E.U.T. is placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.	
Test Instruments:	Refer to section 3.0 for details	
Test mode:	Refer to section 2.2 for details	
Test environment:	Temp.: 23.4°C	Humid.: 62%RH
Test voltage:	DC 5V From Adapter	
Test results:	Pass	

Measurement Result


5180-5240MHz

Test Channel	Frequency	Correction Factor	Maximum output power	Total Power	LIMIT	Result
	(MHz)	(dB)	(dBm)	(dBm)	dBm	
TX 802.11a Mode						
CH36	5180	0.72	13.09	13.81	23.98	Pass
CH40	5200	0.72	13.27	13.99	23.98	Pass
CH48	5240	0.72	13.16	13.88	23.98	Pass
TX 802.11 n20 Mode						
CH36	5180	0.74	13.02	13.76	23.98	Pass
CH40	5200	0.74	13.77	14.51	23.98	Pass
CH48	5240	0.74	13.41	14.15	23.98	Pass
TX 802.11 ac20 Mode						
CH36	5180	0.72	13.04	13.76	23.98	Pass
CH40	5200	0.72	13.51	14.23	23.98	Pass
CH48	5240	0.72	13.16	13.88	23.98	Pass
TX 802.11 n40 Mode						
CH38	5190	0.73	13.10	13.83	23.98	Pass
CH46	5230	0.73	13.77	14.50	23.98	Pass
TX 802.11 ac40 Mode						
CH38	5190	0.77	13.27	14.04	23.98	Pass
CH46	5230	0.77	13.09	13.86	23.98	Pass
TX 802.11 ac80 Mode						
CH42	5210	0.74	12.81	13.55	23.98	Pass

5745-5825 MHz

Test Channel	Frequency	Correction Factor	Maximum output power	Total Power	LIMIT	Result
	(MHz)	(dB)	(dBm)	(dBm)	dBm	
TX 802.11a Mode						
CH149	5745	0.68	13.22	13.90	30	Pass
CH157	5785	0.68	13.05	13.73	30	Pass
CH165	5825	0.68	13.38	14.06	30	Pass
TX 802.11 n20 Mode						
CH149	5745	0.77	13.30	14.07	30	Pass
CH157	5785	0.77	13.18	13.95	30	Pass
CH165	5825	0.77	13.53	14.30	30	Pass
TX 802.11 ac20 Mode						
CH149	5745	0.68	13.82	14.50	30	Pass
CH157	5785	0.68	13.76	14.44	30	Pass
CH165	5825	0.68	13.00	13.68	30	Pass
TX 802.11 n40 Mode						
CH151	5755	0.75	12.98	13.73	30	Pass
CH159	5795	0.75	12.51	13.26	30	Pass
TX 802.11 ac40 Mode						
CH151	5755	0.75	13.00	13.75	30	Pass
CH159	5795	0.75	12.92	13.67	30	Pass
TX 802.11 ac80 Mode						
CH155	5775	0.39	12.98	13.37	30	Pass

4.5 Bandwidth &99% Occupy Bandwidth

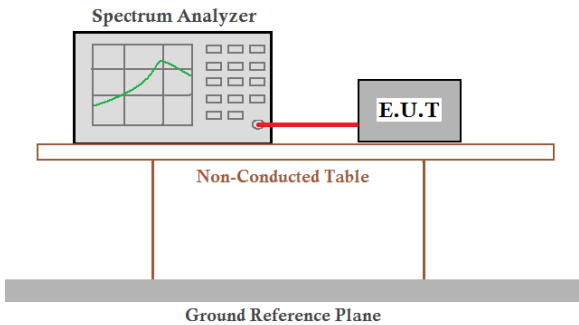Test Requirement:	FCC Part15 E Section 15.407(a)(12)&15.407(e)	
Test Method:	ANSI C63.10:2013 and KDB 789033 D02 General U-NII Test Procedures New Rules v02r01	
Limit:	Measurements in the 5.725-5.85 GHz band, the minimum bandwidth 6 dB bandwidth of U-NII devices shall be at least 500KHz. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.	
Test setup:		
Test Instruments:	Refer to section 3.0 for details	
Test mode:	Refer to section 2.2 for details	
Test environment:	Temp.: 23.4°C	Humid.: 62%RH
Test voltage:	DC 5V From Adapter	
Test results:	Pass	

Measurement Result


5180-5240MHz

Test CH	-26dB Channel Bandwidth (MHz)						Result
	802.11a	802.11n (HT20)	802.11ac (VHT20)	802.11n (HT40)	802.11ac (VHT40)	802.11ac (VHT80)	
Lowest	22.28	19.70	20.14	40.29	40.19	--	Pass
Middle	22.14	19.56	19.79	--	--	79.73	
Highest	22.83	19.75	19.83	39.98	40.76	--	


Test CH	99% Occupy Bandwidth (MHz)						Result
	802.11a	802.11n (HT20)	802.11ac (VHT20)	802.11n (HT40)	802.11ac (VHT40)	802.11ac (VHT80)	
Lowest	16.669	16.385	17.544	35.974	35.939	--	Pass
Middle	16.676	16.380	17.532	--	--	75.251	
Highest	16.644	16.400	17.607	35.974	35.960	--	

Test plot 99% Occupy Bandwidth


(802.11a) plot on channel 36

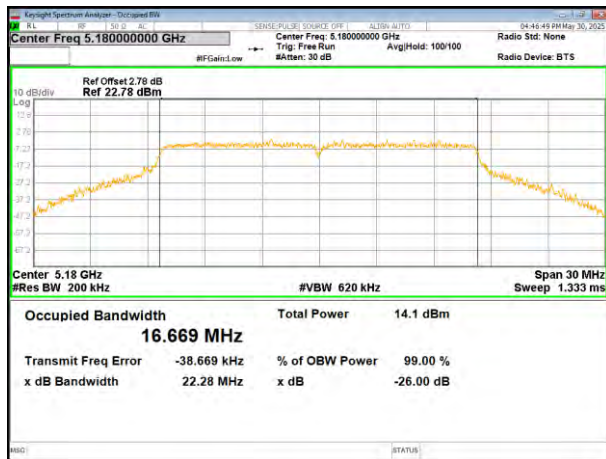


(802.11 n20) plot on channel 36

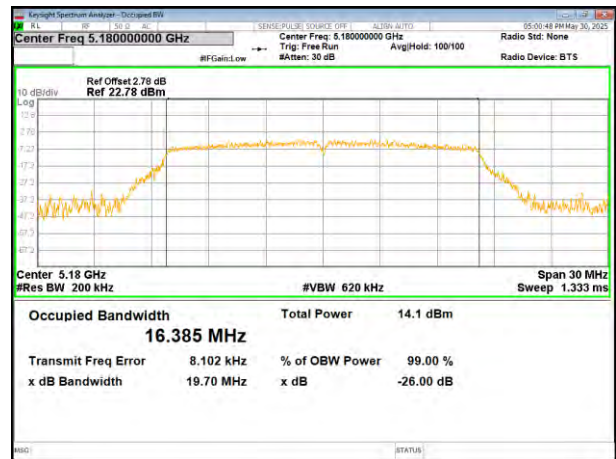


(802.11a) plot on channel 40

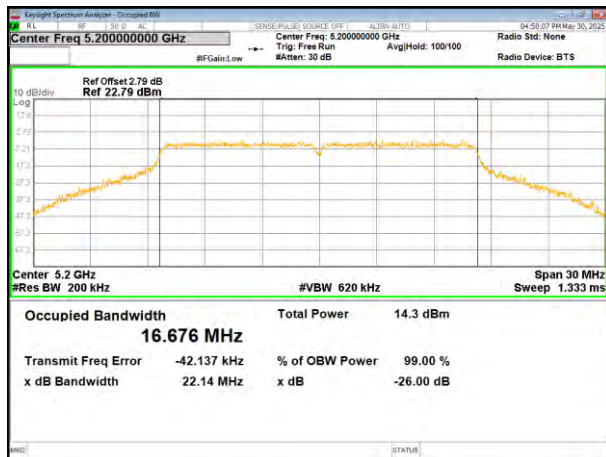


(802.11 n20) plot on channel 40

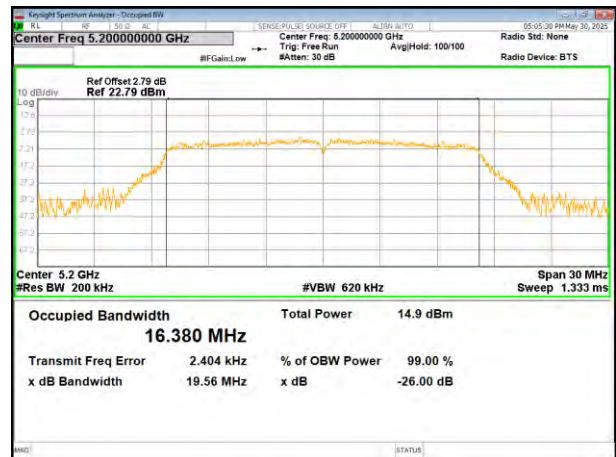

(802.11a) plot on channel 48

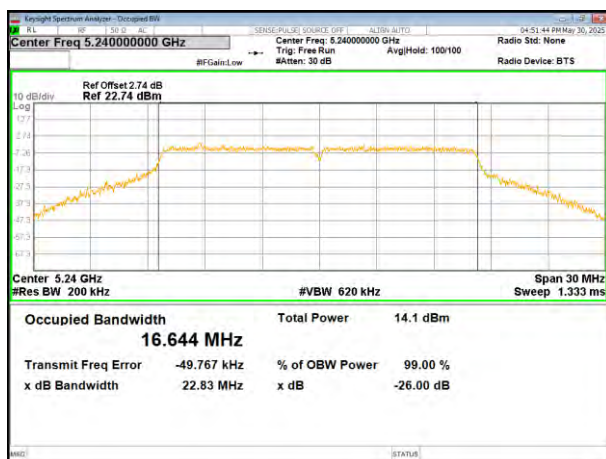


(802.11 n20) plot on channel 48

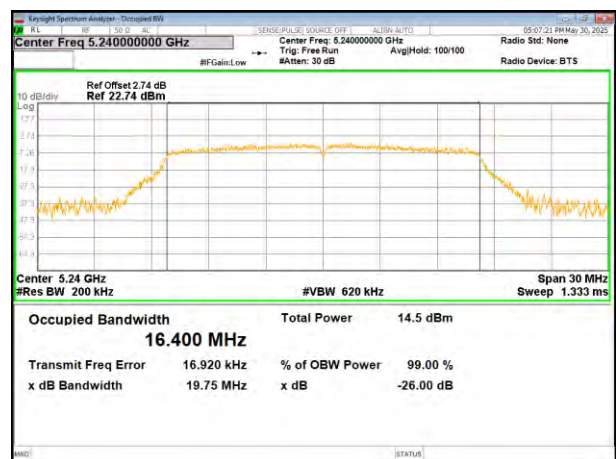


Test plot


(802.11ac20) plot on channel 36

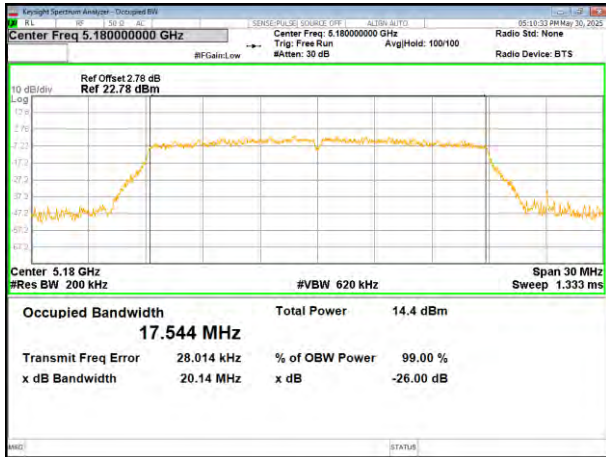


(802.11 n40) plot on channel 38

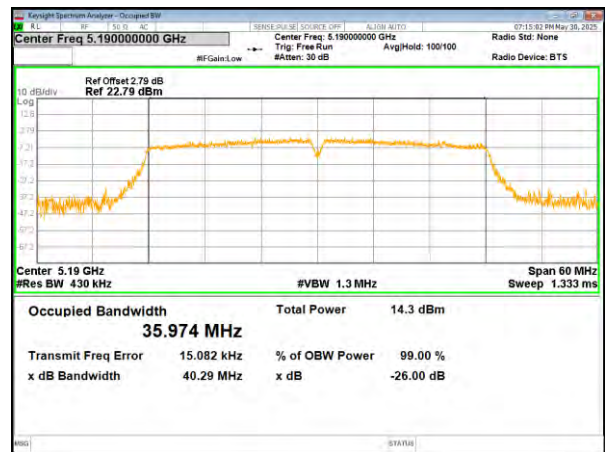


(802.11ac20) plot on channel 40

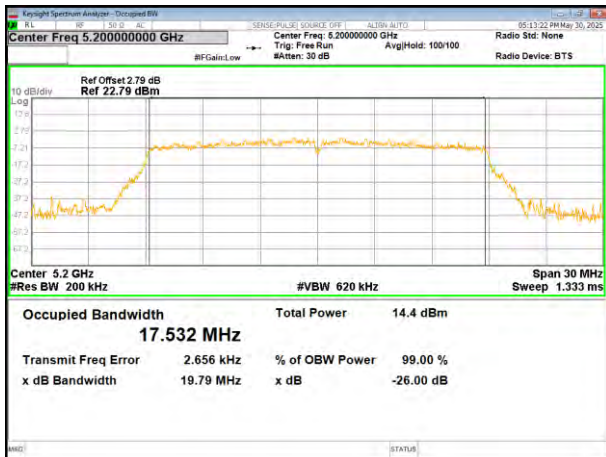

(802.11 n40) plot on channel 46

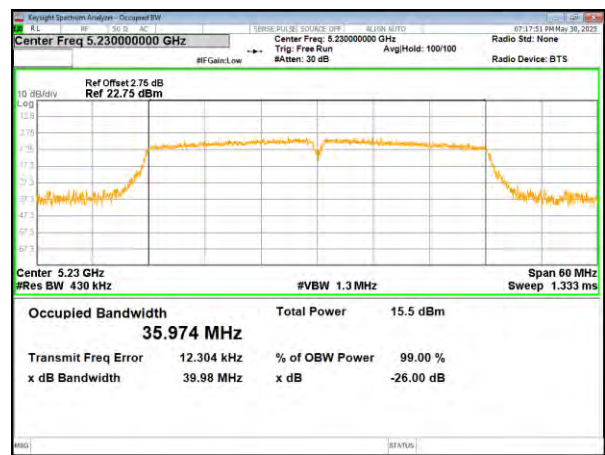


(802.11ac20) plot on channel 48

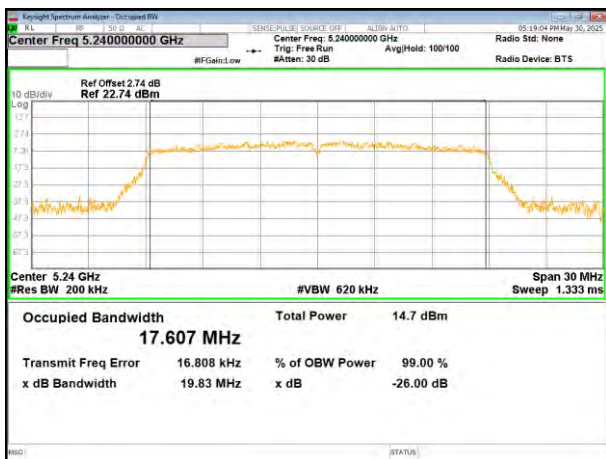


Test plot


(802.11ac40) plot on channel 38

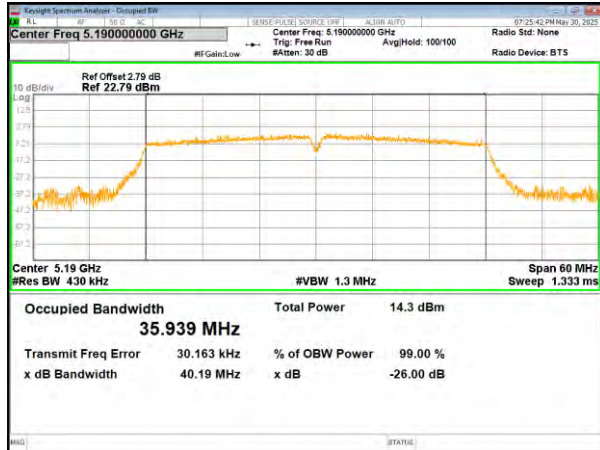

(802.11ac80) plot on channel 42

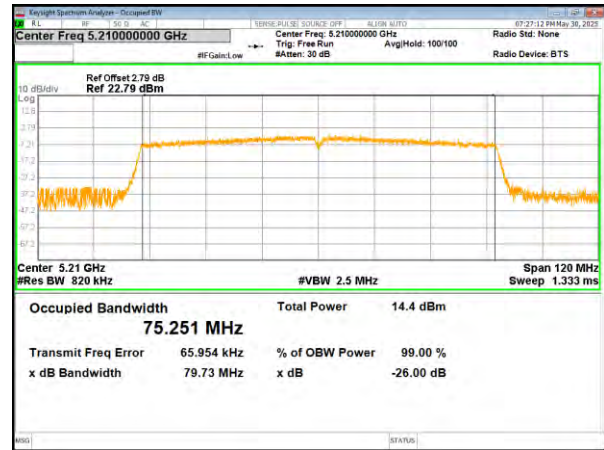

(802.11ac40) plot on channel 46

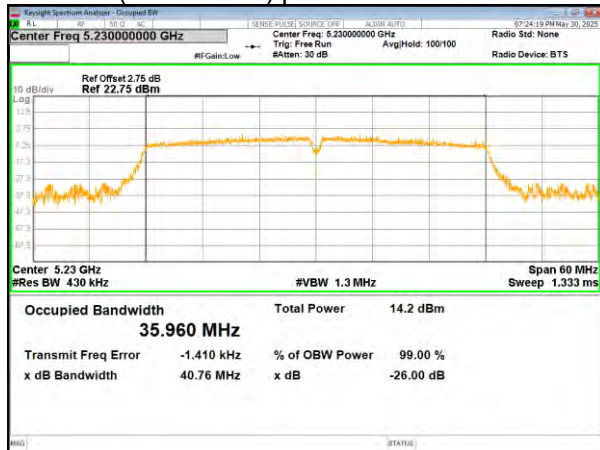


5745-5825MHz

Test CH	-6dB Channel Bandwidth (MHz)						Limit (KHz)	Result
	802.11a	802.11n (HT20)	802.11ac (VHT20)	802.11n (HT40)	802.11ac (VHT40)	802.11ac (VHT80)		
Lowest	16.32	17.65	17.63	36.35	36.36	--	>500	Pass
Middle	16.28	17.54	17.63	--	--	72.54		
Highest	16.36	17.56	17.60	36.34	36.07	--		


Remark: “---”is not applicable

Test plot


(802.11a) plot on channel 149

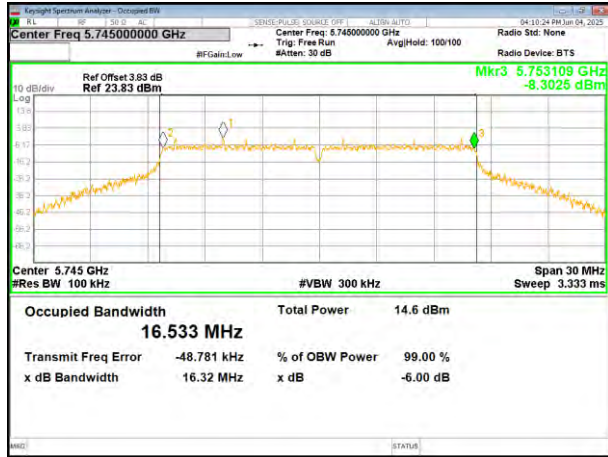


(802.11 n20) plot on channel 149

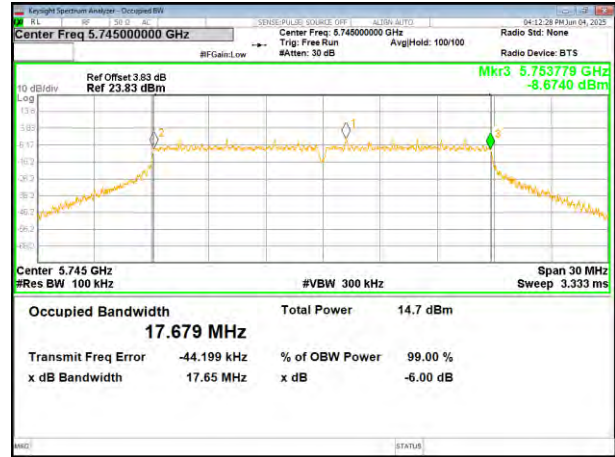


(802.11a) plot on channel 157

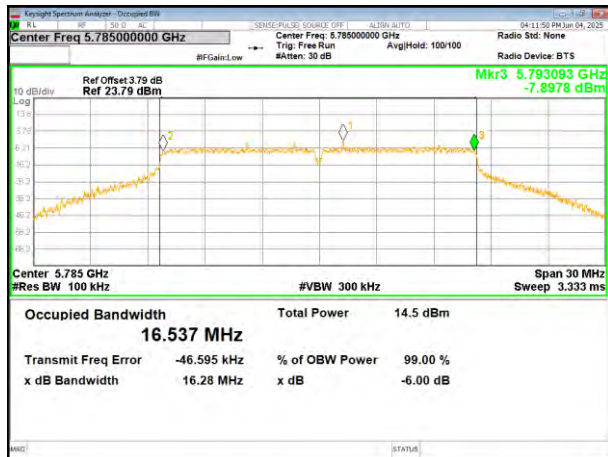


(802.11 n20) plot on channel 157

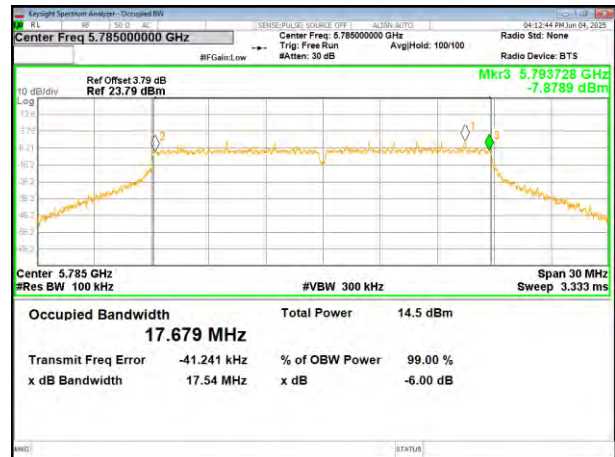

(802.11a) plot on channel 165

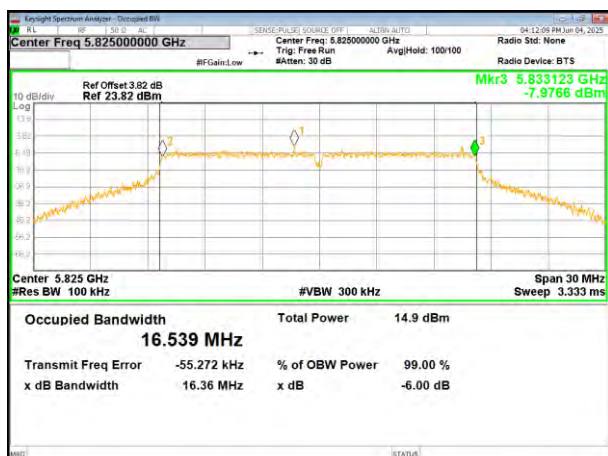


(802.11 n20) plot on channel 165

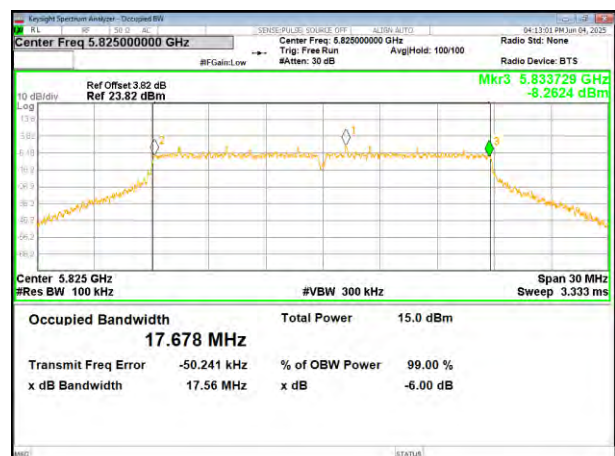


Test plot


(802.11ac20) plot on channel 149

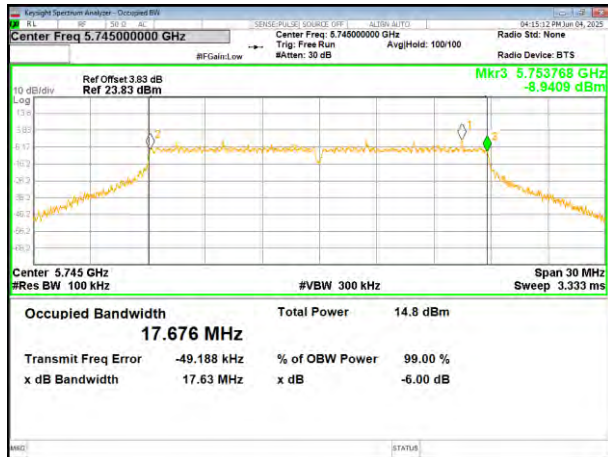


(802.11 n40) plot on channel 151

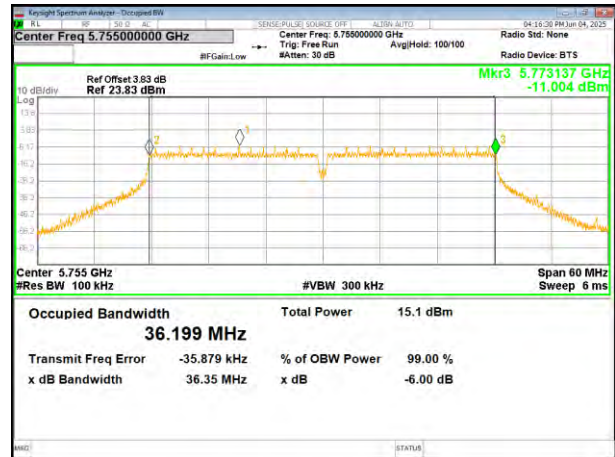

(802.11ac20) plot on channel 157

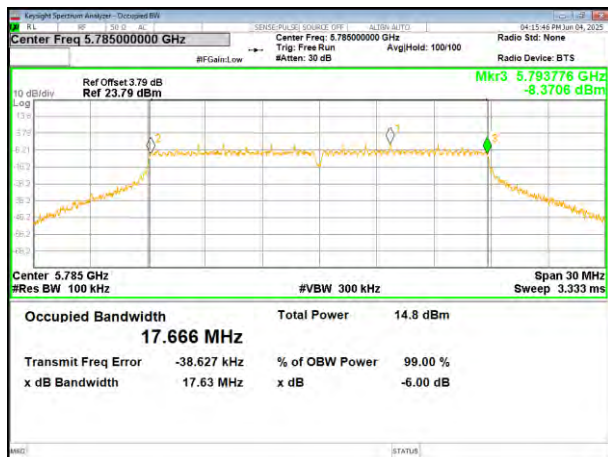

(802.11 n40) plot on channel 159

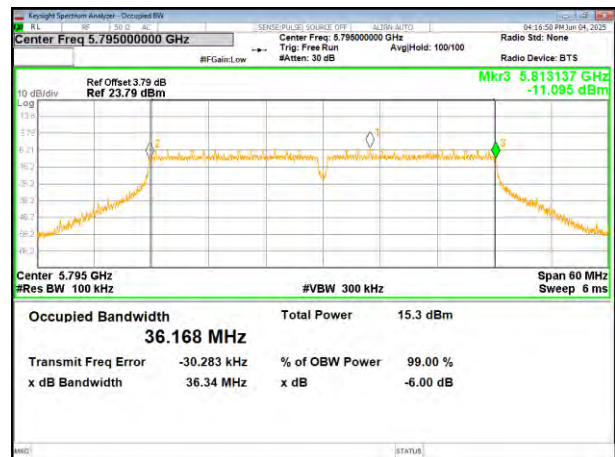


(802.11ac20) plot on channel 165




Test plot

(802.11 ac40) plot on channel 151

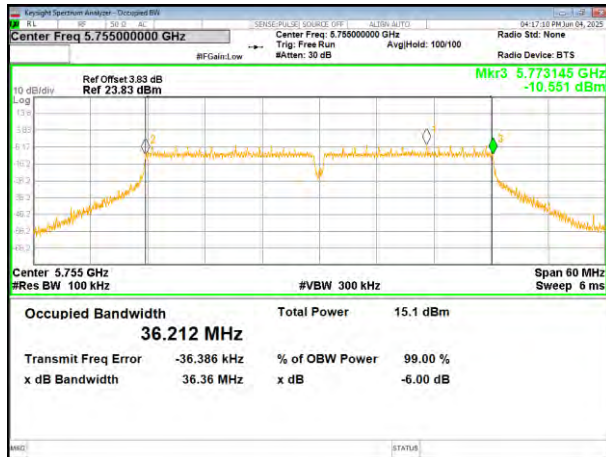


(802.11 ac80) plot on channel 155

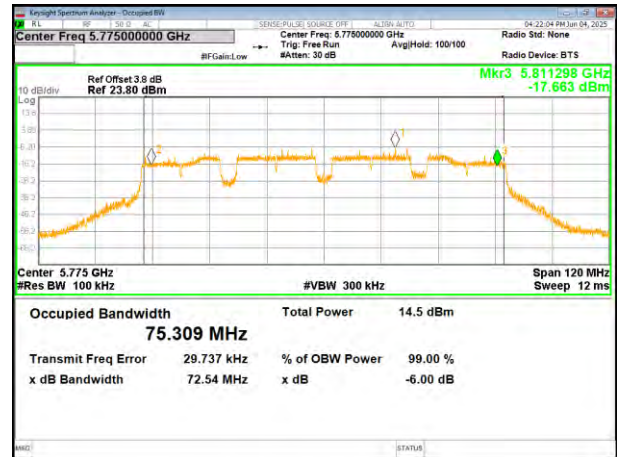

(802.11 ac40) plot on channel 159



4.6 Power Spectral Density

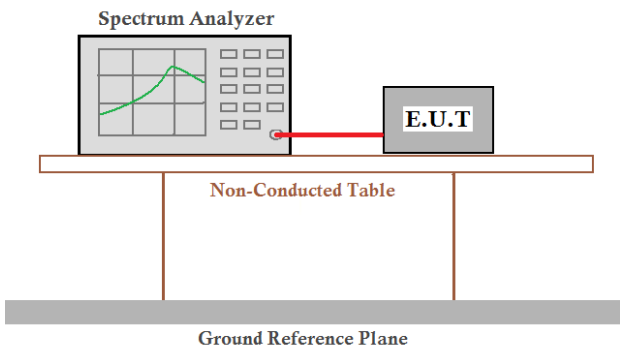Test Requirement:	FCC Part15 E Section 15.407(a)(1)/ (a)(3)	
Test Method:	ANSI C63.10:2013 and KDB 789033 D02 General U-NII Test Procedures New Rules v02r01	
Limit:	Frequency band (MHz)	Limit
	5150-5250	≤17dBm/1MHz for master device
		≤11dBm/1MHz for client device
	5250-5350	≤11dBm/1MHz for client device
	5470-5725	≤11dBm/1MHz for client device
	5725-5850	≤30dBm/500kHz
Test setup:		
Test Instruments:	Refer to section 3.0 for details	
Test mode:	Refer to section 2.2 for details	
Test environment:	Temp.: 23.4°C	Humid.: 62%RH
Test voltage:	DC 5V From Adapter	
Test results:	Pass	

Measurement Result


5180-5240MHz

Mode	Frequency	Measured Power Density (dBm/MHz)	Correction Factor (dB)	Total Measured Power Density (dBm/MHz)	Limit (dBm/MHz)
802.11 a	5180 MHz	-2.932	0.720	-2.212	11
	5200 MHz	-2.563	0.720	-1.843	11
	5240 MHz	-2.700	0.720	-1.980	11
802.11 n20	5180 MHz	-1.290	0.740	-0.550	11
	5200 MHz	-0.032	0.740	0.708	11
	5240 MHz	-3.796	0.740	-3.056	11
802.11 ac20	5180 MHz	-1.748	0.720	-1.028	11
	5200 MHz	-1.692	0.720	-0.972	11
	5240 MHz	-1.652	0.720	-0.932	11
802.11 n40	5190 MHz	-4.745	0.730	-4.015	11
	5230 MHz	-3.906	0.730	-3.176	11
802.11 ac40	5190 MHz	-4.867	0.770	-4.097	11
	5230 MHz	-5.098	0.770	-4.328	11
802.11 ac80	5210 MHz	-8.667	0.740	-7.927	11

(802.11a) PSD plot on channel 36



(802.11n20) PSD plot on channel 36

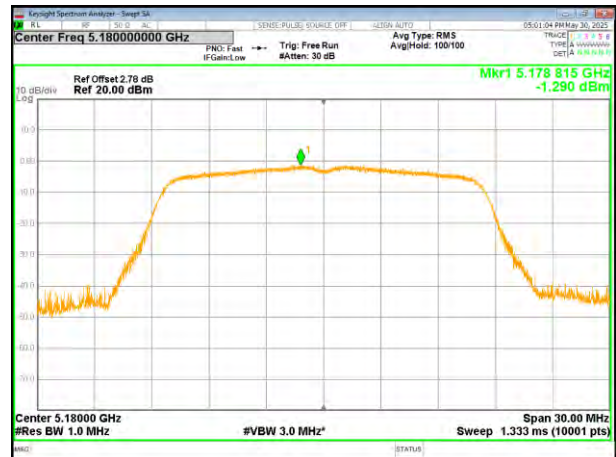

(802.11a) PSD plot on channel 40




(802.11n20) PSD plot on channel 40




(802.11a) PSD plot on channel 48



(802.11n20) PSD plot on channel 48

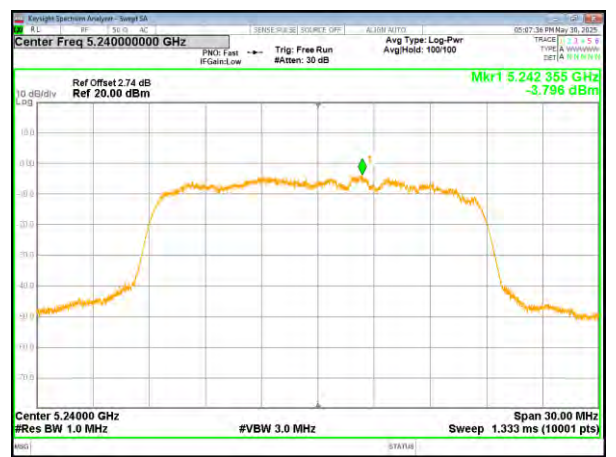


(802.11ac20) PSD plot on channel 36

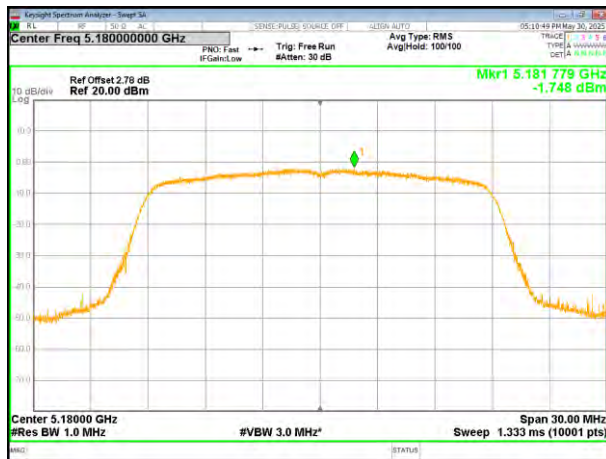

(802.11n40) PSD plot on channel 38




(802.11ac20) PSD plot on channel 40

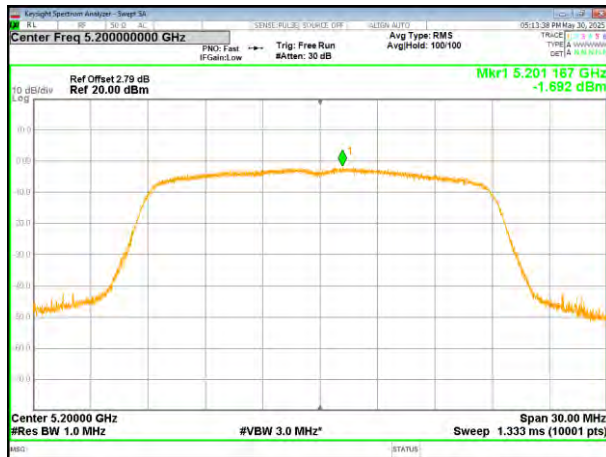

(802.11n40) PSD plot on channel 46




(802.11ac20) PSD plot on channel 48

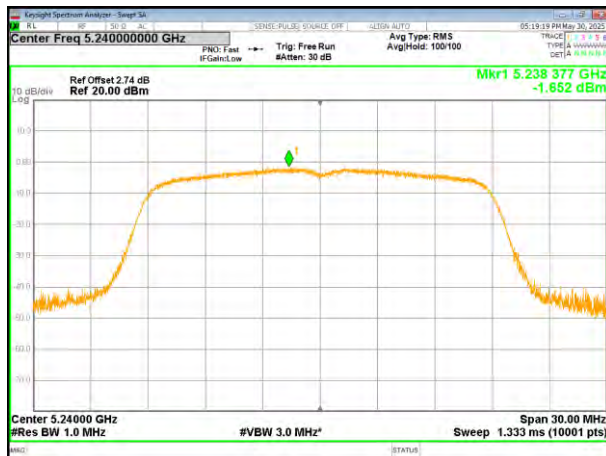

(802.11ac40) PSD plot on channel 38



(802.11ac80) PSD plot on channel 42

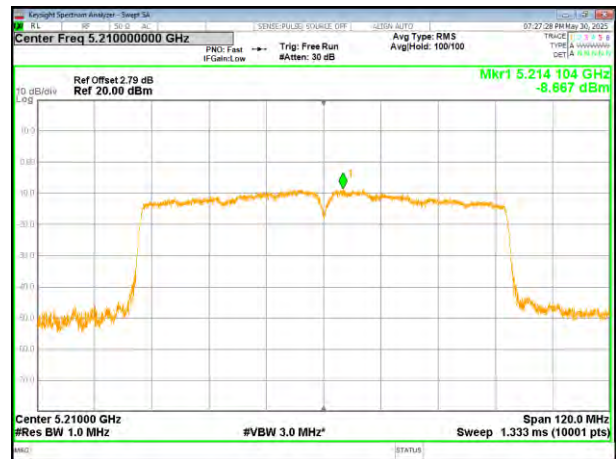

(802.11ac40) PSD plot on channel 46



Mode	Frequency	Measured Power Density (dBm/510KHz)	Measured Power Density (dBm/500KHz)	Correction Factor (dB)	Total Measured Power Density (dBm/500KHz)	Limit (dBm/MHz)
802.11 a	5745 MHz	-4.100	-4.186	0.680	-3.506	30
	5785 MHz	-4.180	-4.266	0.680	-3.586	30
	5825 MHz	-4.027	-4.113	0.680	-3.433	30
802.11 n20	5745 MHz	-4.524	-4.610	0.770	-3.840	30
	5785 MHz	-4.752	-4.838	0.770	-4.068	30
	5825 MHz	-4.106	-4.192	0.770	-3.422	30
802.11ac20	5745 MHz	-4.141	-4.227	0.680	-3.547	30
	5785 MHz	-3.867	-3.953	0.680	-3.273	30
	5825 MHz	-4.514	-4.600	0.680	-3.920	30
802.11 n40	5755 MHz	-8.051	-8.137	0.750	-7.387	30
	5795 MHz	-8.348	-8.434	0.750	-7.684	30
802.11ac40	5755 MHz	-8.015	-8.101	0.750	-7.351	30
	5795 MHz	-7.813	-7.899	0.750	-7.149	30
802.11ac80	5775 MHz	-11.129	-11.215	0.390	-10.825	30

Note: 1. If the measurement is X dBm/510kHz, thus $X \text{ dBm/510kHz} = (10^{X/10}) \cdot (500 / 510) \text{ dBm/500kHz}$

2. Correction Factor (dB)= duty cycle factor

(802.11a) PSD plot on channel 149



(802.11n20) PSD plot on channel 149



(802.11a) PSD plot on channel 157



(802.11n20) PSD plot on channel 157



(802.11a) PSD plot on channel 165



(802.11n20) PSD plot on channel 165



(802.11ac20) PSD plot on channel 149



(802.11n40) PSD plot on channel 151



(802.11ac20) PSD plot on channel 157



(802.11n40) PSD plot on channel 159



(802.11ac20) PSD plot on channel 165




(802.11ac40) PSD plot on channel 151



(802.11ac80) PSD plot on channel 155




(802.11ac40) PSD plot on channel 159

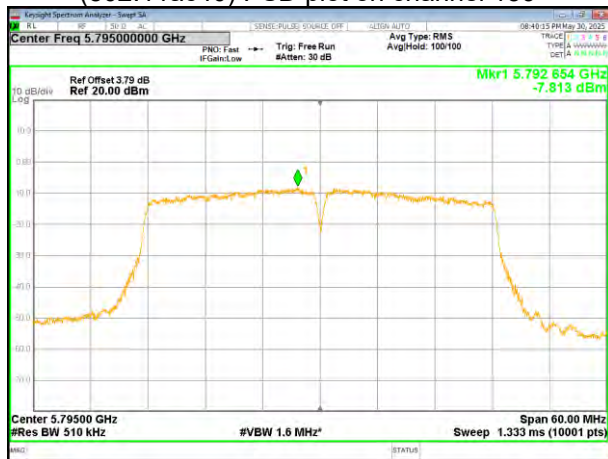

4.7 Band edge


4.7.1 Conducted test Method

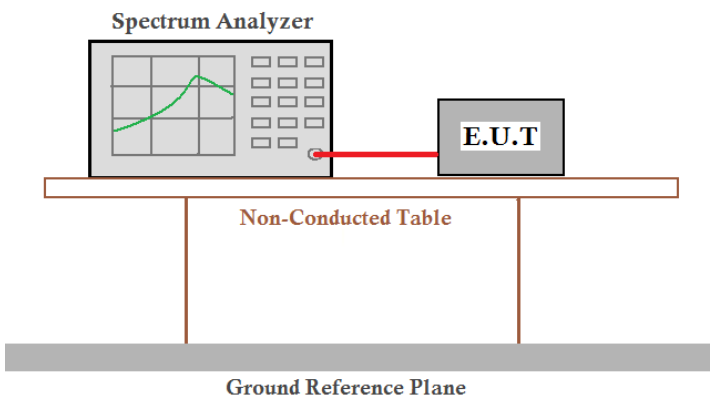Test Requirement:	FCC Part15 C Section 15.209 and 15.205	
Test Method:	ANSI C63.10: 2013	
Limit:	All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.	
Test setup:		
Test Procedure:	1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator. 2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range. 3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span. 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency. 5. Repeat above procedures until all measured frequencies were complete..	
Test Instruments:	Refer to section 3.0 for details	
Test mode:	Refer to section 2.2 for details	
Test environment:	Temp.: 23.4°C	Humid.: 62%RH
Test voltage:	DC 5V From Adapter	
Test results:	Pass	


Remark: Due to the margin value of the sideband test being greater than the antenna gain value, the test meets the requirements

5.180~5.240 GHz


(802.11a) Band Edge, Left Side

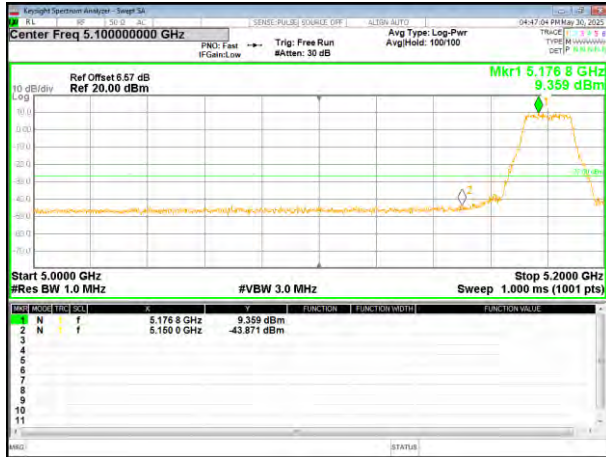

(802.11n20) Band Edge, Left Side

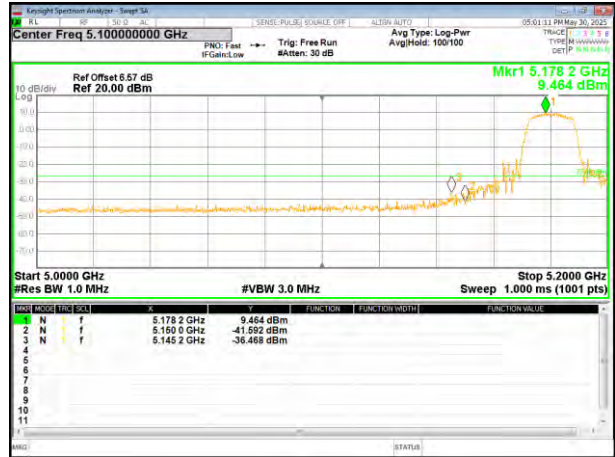

(802.11a) Band Edge, Right Side

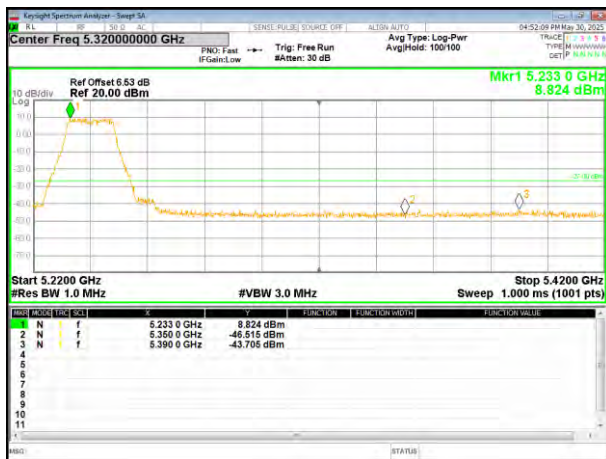


(802.11n20) Band Edge, Right Side



Remark: The antenna gain and cable loss were not compensated in the test data, and the margin value of the Band Edge test was greater than the sum of the antenna gain and cable loss, so the test met the requirements


(802.11ac20) Band Edge, Left Side

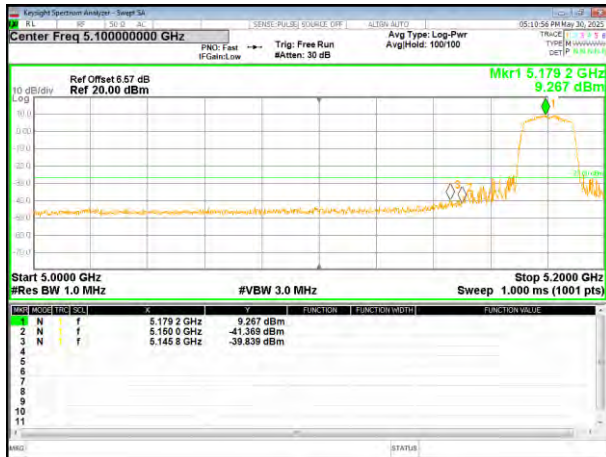

(802.11n40) Band Edge, Left Side



(802.11ac20) Band Edge, Right Side

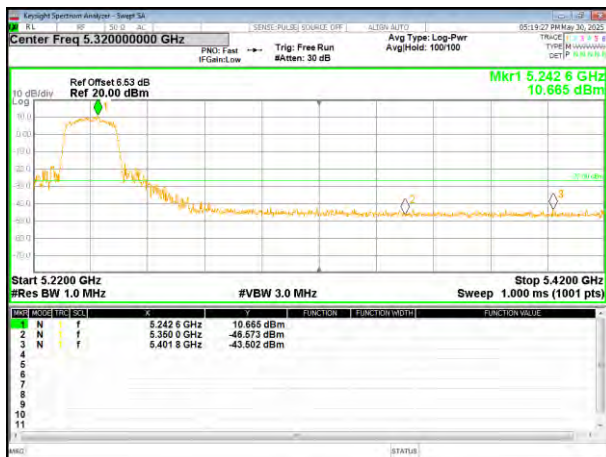


(802.11n40) Band Edge, Right Side




Remark: The antenna gain and cable loss were not compensated in the test data, and the margin value of the Band Edge test was greater than the sum of the antenna gain and cable loss, so the test met the requirements


(802.11ac40) Band Edge, Left Side

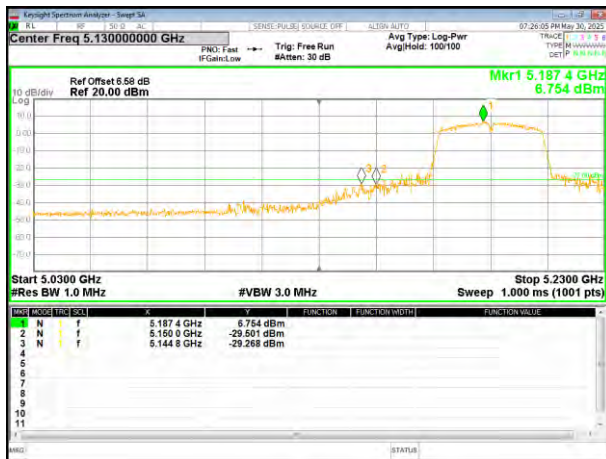

(802.11ac80) Band Edge

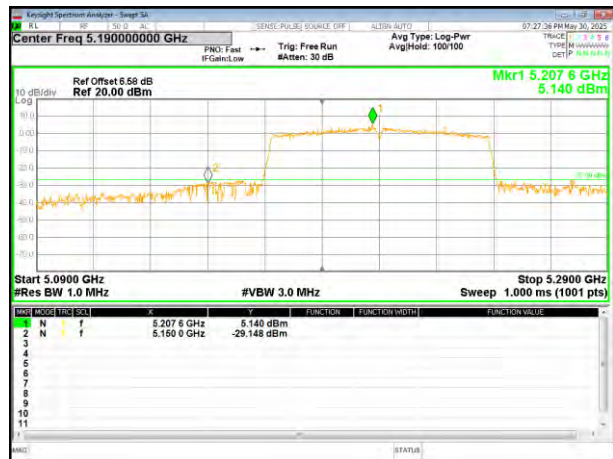


(802.11ac40) Band Edge, Right Side

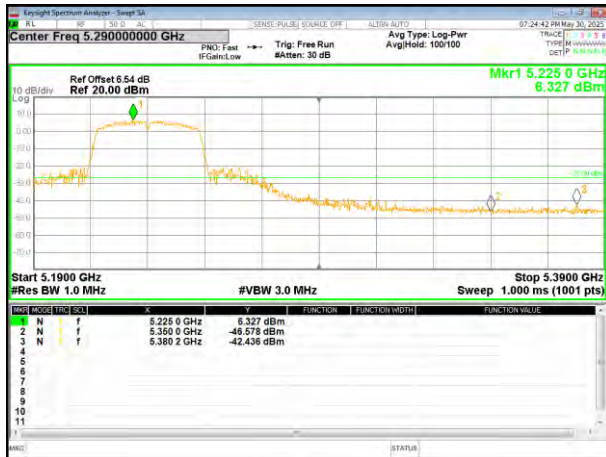


Remark: The antenna gain and cable loss were not compensated in the test data, and the margin value of the Band Edge test was greater than the sum of the antenna gain and cable loss, so the test met the requirements

5.745~5.825 GHz


(802.11a) Band Edge, Left Side

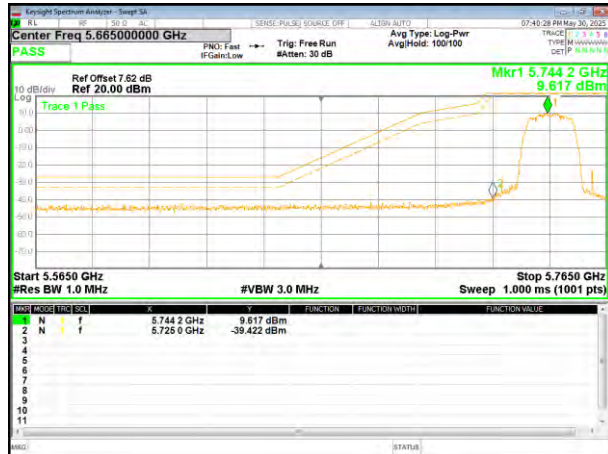

(802.11n20) Band Edge, Left Side

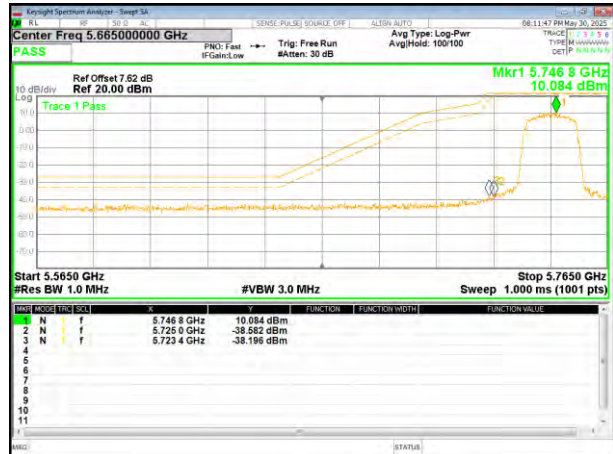

(802.11a) Band Edge, Right Side

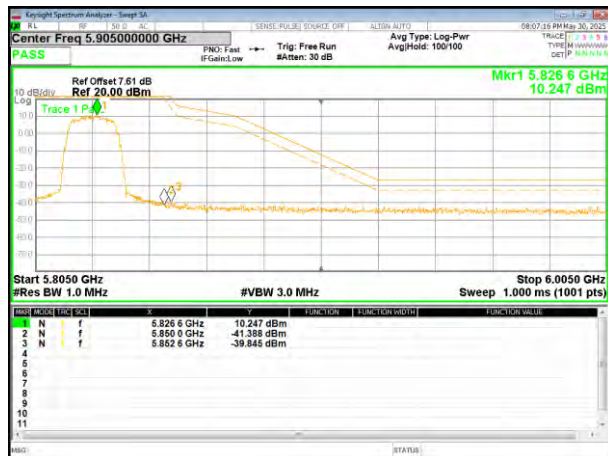


(802.11n20) Band Edge, Right Side




Remark: Antenna gain and cable loss data included in Offset.


(802.11ac20) Band Edge, Left Side

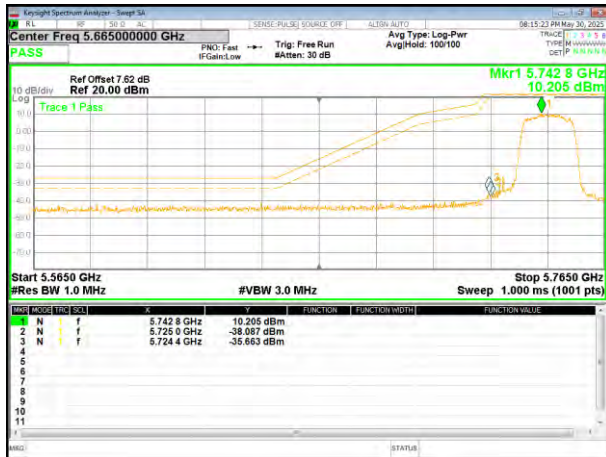

(802.11n40) Band Edge, Left Side

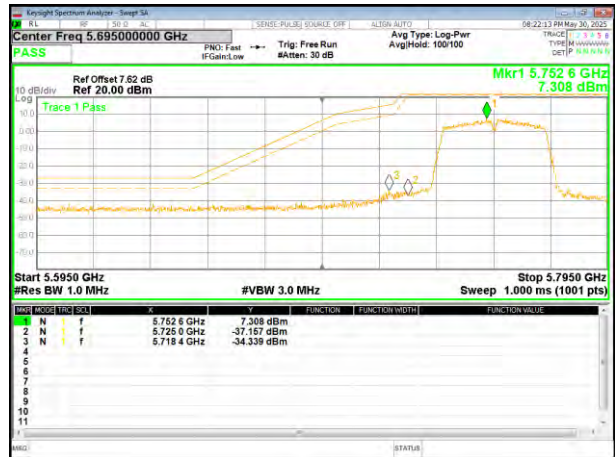

(802.11ac20) Band Edge, Right Side

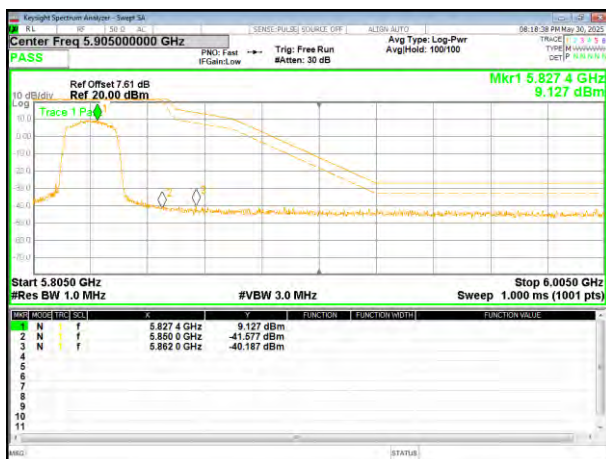


(802.11n40) Band Edge, Right Side




Remark: Antenna gain and cable loss data included in Offset.


(802.11ac40) Band Edge, Left Side

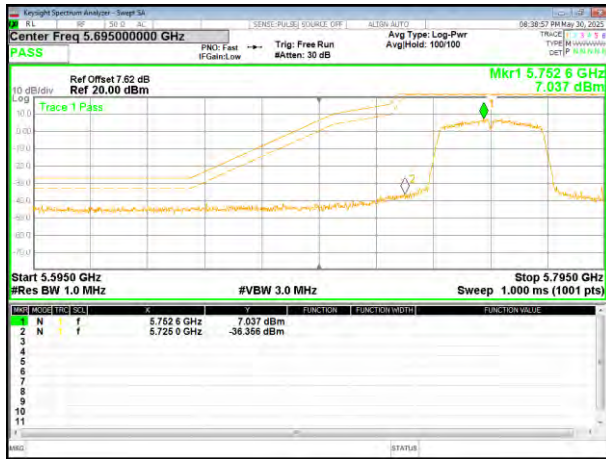

(802.11ac80) Band Edge

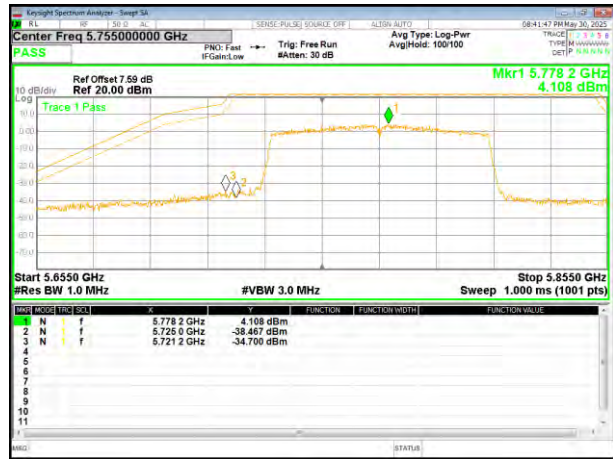



(802.11ac40) Band Edge, Right Side

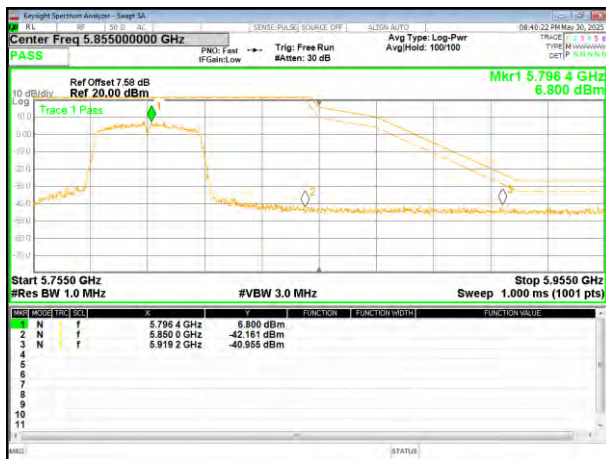


Remark: Antenna gain and cable loss data included in Offset.

4.8 Spurious Emission

4.8.1 Radiated Emission Method

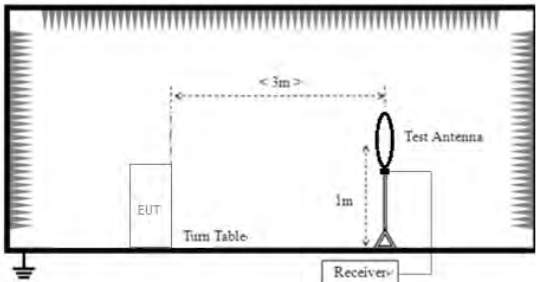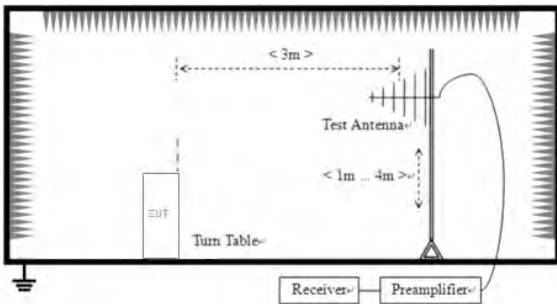Test Requirement:	FCC Part15 C Section 15.209, Part 15E Section 15.407(b)(4)				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 40GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9kHz-150KHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
	150kHz-30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		AV	1MHz	3MHz	Average Value
Limit:	Frequency	Limit (uV/m)	Value	Measurement Distance	
	0.009MHz-0.490MHz	2400/F(KHz)	QP	300m	
	0.490MHz-1.705MHz	24000/F(KHz)	QP	300m	
	1.705MHz-30MHz	30	QP	30m	
	30MHz-88MHz	100	QP	3m	
	88MHz-216MHz	150	QP		
	216MHz-960MHz	200	QP		
	960MHz-1GHz	500	QP		
	Frequency	Limit (dBm/MHz)	Remark		
	Above 1GHz	-27.0	Peak Value		
Test setup:	For radiated emissions from 9kHz to 30MHz				
					
	For radiated emissions from 30MHz to 1GHz				
					
	For radiated emissions above 1GHz				

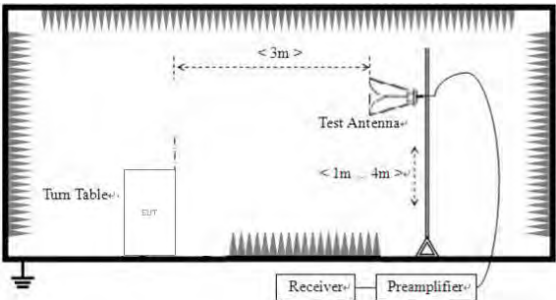	
Test Procedure:	1. Place the EUT on a rotating table on a horizontal surface. Rotate the table 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.
Test Instruments:	Refer to section 3.0 for details
Test mode:	Refer to section 2.2 for details
Test results:	Pass

Remarks:

1. The report only shows the worst mode.
2. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

Measurement Data:
9 kHz ~ 30 MHz


The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.

Below 1GHz

Remark: The test data shows only the worst case 802.11ac mode.


Temperature:	23.4°C	Relative Humidity:	62%
Pressure:	101.2kPa	Test Voltage :	AC 120V 60Hz
Test Mode :	5.2G TX- 802.11ac(5200MHz)		

Horizontal:

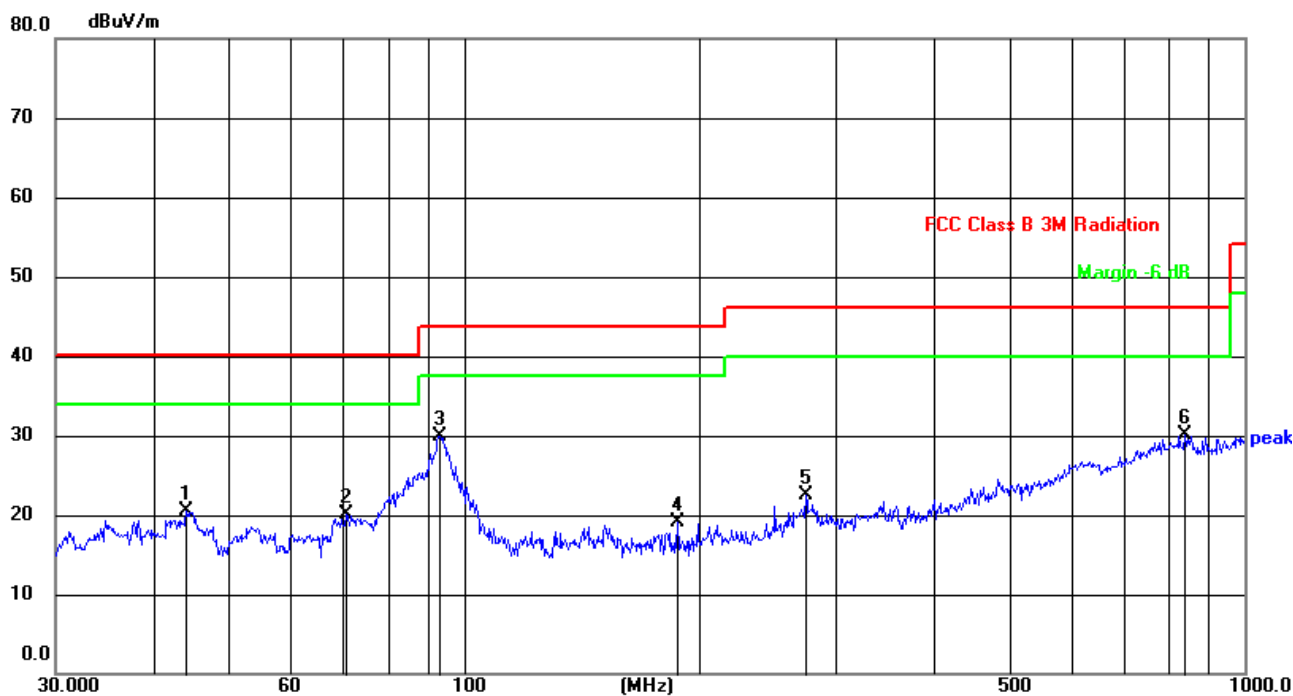

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	44.1200	41.32	-20.87	20.45	40.00	-19.55	QP
2	70.5835	40.68	-20.60	20.08	40.00	-19.92	QP
3	93.1131	50.18	-20.21	29.97	43.50	-13.53	QP
4	187.7529	37.21	-18.04	19.17	43.50	-24.33	QP
5	274.1938	40.78	-18.37	22.41	46.00	-23.59	QP
6	839.1816	37.20	-7.13	30.07	46.00	-15.93	QP

Vertical:

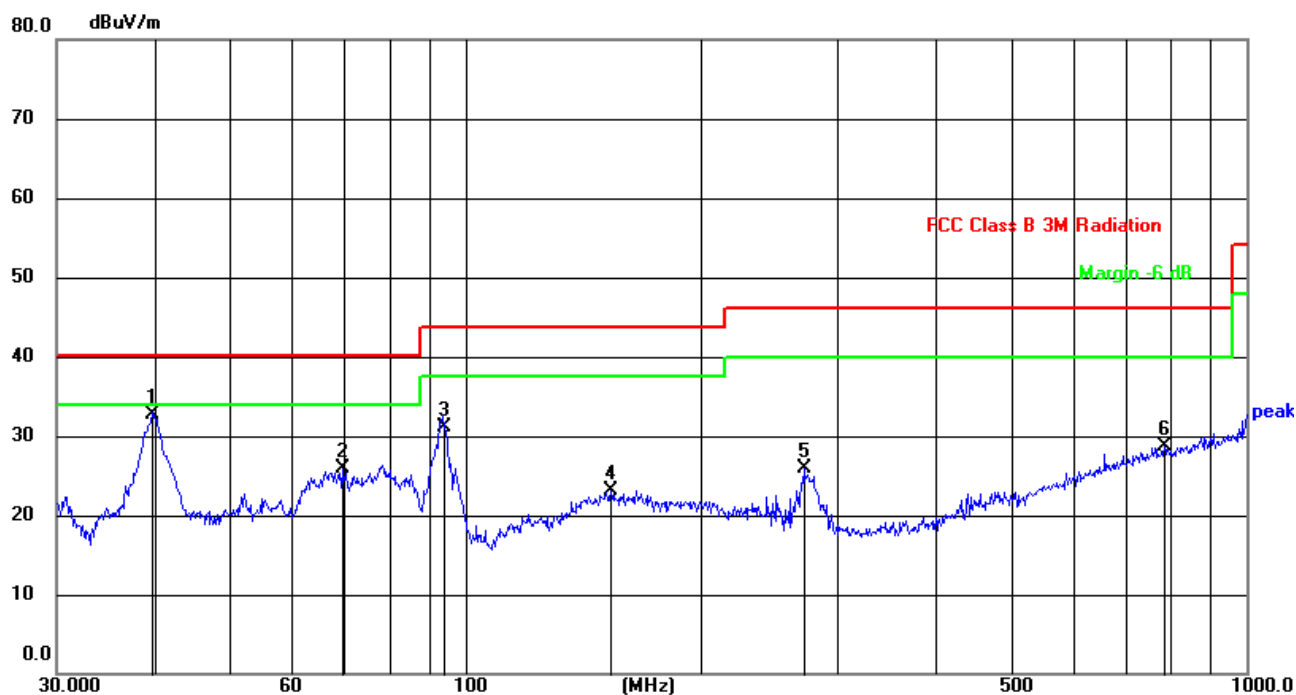

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	39.7146	53.42	-20.62	32.80	40.00	-7.20	QP
2	69.6003	46.36	-20.54	25.82	40.00	-14.18	QP
3	94.0978	51.20	-20.05	31.15	43.50	-12.35	QP
4	153.7384	42.08	-18.94	23.14	43.50	-20.36	QP
5	271.3245	43.82	-18.01	25.81	46.00	-20.19	QP
6	785.0933	36.39	-7.72	28.67	46.00	-17.33	QP

Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. The test data shows only the worst case 802.11a mode

Above 1GHz:

Remark: The test data shows only the worst case 802.11ac mode.

Temperature:	23.4°C	Relative Humidity:	62%
Pressure:	101.2kPa	Test Voltage :	AC 120V 60Hz
Test Mode :	5.2G TX- 802.11ac		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detect or Type
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
Low Channel:5180MHz							
V	10360.00	42.27	1.77	44.04	68.20	-24.16	PK
V	10360.00	37.60	1.77	39.37	54.00	-14.63	AV
V	15540.00	46.92	7.72	54.64	74.00	-19.36	PK
V	15540.00	36.15	7.72	43.87	54.00	-10.13	AV
V	20720.00	52.48	-5.73	46.75	68.20	-21.45	PK
V	20720.00	47.92	-5.73	42.19	54.00	-11.81	AV
V	25900.00	49.10	-2.89	46.21	68.20	-21.99	PK
V	25900.00	43.78	-2.89	40.89	54.00	-13.11	AV
V	31080.00	46.04	1.66	47.70	68.20	-20.50	PK
V	31080.00	41.24	1.66	42.90	54.00	-11.10	AV
V	36260.00	43.08	4.63	47.71	68.20	-20.49	PK
V	36260.00	38.24	4.63	42.87	54.00	-11.13	AV
H	10360.00	41.73	1.77	43.50	68.20	-24.70	PK
H	10360.00	37.07	1.77	38.84	54.00	-15.16	AV
H	15540.00	46.70	7.72	54.42	74.00	-19.58	PK
H	15540.00	36.54	7.72	44.26	54.00	-9.74	AV
H	20720.00	52.25	-5.73	46.52	68.20	-21.68	PK
H	20720.00	47.03	-5.73	41.30	54.00	-12.70	AV
H	25900.00	49.08	-2.89	46.19	68.20	-22.01	PK
H	25900.00	44.17	-2.89	41.28	54.00	-12.72	AV
H	31080.00	45.28	1.66	46.94	68.20	-21.26	PK
H	31080.00	40.08	1.66	41.74	54.00	-12.26	AV
H	36260.00	42.95	4.63	47.58	68.20	-20.62	PK
H	36260.00	38.72	4.63	43.35	54.00	-10.65	AV

Remark:

1. Emission Level = Meter Reading + Factor,
Factor=Antenna Factor + Cable Loss – Pre-amplifier
Margin= Emission Level – Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detect or Type
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
Middle Channel:5200Hz							
V	10400.00	41.71	1.85	43.56	68.20	-24.64	PK
V	10400.00	37.45	1.85	39.30	54.00	-14.70	AV
V	15600.00	46.42	7.64	54.06	74.00	-19.94	PK
V	15600.00	35.80	7.64	43.44	54.00	-10.56	AV
V	20800.00	52.25	-5.67	46.58	68.20	-21.62	PK
V	20800.00	47.21	-5.67	41.54	54.00	-12.46	AV
V	26000.00	49.23	-2.85	46.38	68.20	-21.82	PK
V	26000.00	43.97	-2.85	41.12	54.00	-12.88	AV
V	31200.00	45.39	1.57	46.96	68.20	-21.24	PK
V	31200.00	40.43	1.57	42.00	54.00	-12.00	AV
V	36400.00	43.08	4.93	48.01	68.20	-20.19	PK
V	36400.00	38.73	4.93	43.66	54.00	-10.34	AV
H	10400.00	42.17	1.85	44.02	68.20	-24.18	PK
H	10400.00	38.13	1.85	39.98	54.00	-14.02	AV
H	15600.00	48.10	7.64	55.74	74.00	-18.26	PK
H	15600.00	37.62	7.64	45.26	54.00	-8.74	AV
H	20800.00	53.25	-5.67	47.58	68.20	-20.62	PK
H	20800.00	47.90	-5.67	42.23	54.00	-11.77	AV
H	26000.00	47.09	-2.85	44.24	68.20	-23.96	PK
H	26000.00	34.64	-2.85	31.79	54.00	-22.21	AV
H	31200.00	45.25	1.57	46.82	68.20	-21.38	PK
H	31200.00	40.05	1.57	41.62	54.00	-12.38	AV
H	36400.00	42.81	4.93	47.74	68.20	-20.46	PK
H	36400.00	37.85	4.93	42.78	54.00	-11.22	AV

Remark:

1. Emission Level = Meter Reading + Factor,
Factor=Antenna Factor + Cable Loss – Pre-amplifier
Margin= Emission Level – Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detect or Type
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
High Channel:5240MHz							
V	10480.00	43.34	2.02	45.36	68.20	-22.84	PK
V	10480.00	38.53	2.02	40.55	54.00	-13.45	AV
V	15720.00	45.46	7.46	52.92	74.00	-21.08	PK
V	15720.00	35.38	7.46	42.84	54.00	-11.16	AV
V	20960.00	52.58	-5.56	47.02	68.20	-21.18	PK
V	20960.00	47.52	-5.56	41.96	54.00	-12.04	AV
V	26200.00	48.45	-2.50	45.95	68.20	-22.25	PK
V	26200.00	44.14	-2.50	41.64	54.00	-12.36	AV
V	31440.00	45.56	1.39	46.95	68.20	-21.25	PK
V	31440.00	40.61	1.39	42.00	54.00	-12.00	AV
V	36680.00	42.54	5.25	47.79	68.20	-20.41	PK
V	36680.00	38.28	5.25	43.53	54.00	-10.47	AV
H	10480.00	42.53	2.02	44.55	68.20	-23.65	PK
H	10480.00	37.56	2.02	39.58	54.00	-14.42	AV
H	15720.00	46.83	7.46	54.29	74.00	-19.71	PK
H	15720.00	36.37	7.46	43.83	54.00	-10.17	AV
H	20960.00	53.34	-5.56	47.78	68.20	-20.42	PK
H	20960.00	47.86	-5.56	42.30	54.00	-11.70	AV
H	26200.00	48.89	-2.50	46.39	68.20	-21.81	PK
H	26200.00	44.86	-2.50	42.36	54.00	-11.64	AV
H	31440.00	45.81	1.39	47.20	68.20	-21.00	PK
H	31440.00	41.65	1.39	43.04	54.00	-10.96	AV
H	36680.00	43.57	5.15	48.72	68.20	-19.48	PK
H	36680.00	43.34	5.15	48.49	54.00	-5.51	AV

Remark:

1. Emission Level = Meter Reading + Factor,
Factor=Antenna Factor + Cable Loss – Pre-amplifier
Margin= Emission Level – Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Temperature:	23.4°C	Relative Humidity:	62%
Pressure:	101.2kPa	Test Voltage :	AC 120V 60Hz
Test Mode :	5.8G TX- 802.11ac		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detect or Type
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
Low Channel:5745MHz							
V	11490.00	46.13	3.31	49.44	74.00	-24.56	PK
V	11490.00	36.77	3.31	40.08	54.00	-13.92	AV
V	17235.00	42.55	10.10	52.65	68.20	-15.55	PK
V	17235.00	37.36	10.10	47.46	54.00	-6.54	AV
V	22980.00	54.44	-4.61	49.83	74.00	-24.17	PK
V	22980.00	45.12	-4.61	40.51	54.00	-13.49	AV
V	28725.00	47.04	0.87	47.91	68.20	-20.29	PK
V	28725.00	41.92	0.87	42.79	54.00	-11.21	AV
V	34470.00	43.22	3.82	47.04	68.20	-21.16	PK
V	34470.00	38.67	3.82	42.49	54.00	-11.51	AV
H	11490.00	46.43	3.31	49.74	74.00	-24.26	PK
H	11490.00	36.12	3.31	39.43	54.00	-14.57	AV
H	17235.00	41.09	10.10	51.19	68.20	-17.01	PK
H	17235.00	36.03	10.10	46.13	54.00	-7.87	AV
H	22980.00	56.71	-4.61	52.10	74.00	-21.90	PK
H	22980.00	46.00	-4.61	41.39	54.00	-12.61	AV
H	28725.00	47.02	0.87	47.89	68.20	-20.31	PK
H	28725.00	42.74	0.87	43.61	54.00	-10.39	AV
H	34470.00	43.61	3.82	47.43	68.20	-20.77	PK
H	34470.00	39.44	3.82	43.26	54.00	-10.74	AV

Remark:

1. Emission Level = Meter Reading + Factor,
Factor=Antenna Factor + Cable Loss – Pre-amplifier
Margin= Emission Level – Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detect or Type
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
Low Channel:5785MHz							
V	11570.00	46.79	3.34	50.13	74.00	-23.87	PK
V	11570.00	36.51	3.34	39.85	54.00	-14.15	AV
V	17355.00	42.53	10.52	53.05	68.20	-15.15	PK
V	17355.00	37.91	10.52	48.43	54.00	-5.57	AV
V	23140.00	54.11	-4.66	49.45	74.00	-24.55	PK
V	23140.00	44.45	-4.66	39.79	54.00	-14.21	AV
V	28925.00	46.54	1.36	47.90	68.20	-20.30	PK
V	28925.00	42.85	1.36	44.21	54.00	-9.79	AV
V	34710.00	43.01	3.95	46.96	68.20	-21.24	PK
V	34710.00	38.29	3.95	42.24	54.00	-11.76	AV
H	11570.00	47.59	3.34	50.93	74.00	-23.07	PK
H	11570.00	37.47	3.34	40.81	54.00	-13.19	AV
H	17355.00	40.89	10.52	51.41	68.20	-16.79	PK
H	17355.00	39.51	10.52	50.03	54.00	-3.97	AV
H	23140.00	53.49	-4.66	48.83	74.00	-25.17	PK
H	23140.00	53.49	-4.66	48.83	54.00	-5.17	AV
H	28925.00	52.26	1.36	53.62	68.20	-14.58	PK
H	28925.00	47.26	1.36	48.62	54.00	-5.38	AV
H	34710.00	52.55	3.95	56.50	68.20	-11.70	PK
H	34710.00	43.60	3.95	47.55	54.00	-6.45	AV

Remark:


1. Emission Level = Meter Reading + Factor,
Factor=Antenna Factor + Cable Loss – Pre-amplifier
Margin= Emission Level – Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detect or Type
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
Low Channel:5825MHz							
V	11650.00	45.19	3.36	48.55	74.00	-25.45	PK
V	11650.00	35.90	3.36	39.26	54.00	-14.74	AV
V	17475.00	41.84	10.93	52.77	68.20	-15.43	PK
V	17475.00	37.41	10.93	48.34	54.00	-5.66	AV
V	23300.00	52.36	-4.77	47.59	68.20	-20.61	PK
V	23300.00	47.09	-4.77	42.32	54.00	-11.68	AV
V	29125.00	47.00	1.65	48.65	68.20	-19.55	PK
V	29125.00	41.60	1.65	43.25	54.00	-10.76	AV
V	34950.00	41.58	4.09	45.67	68.20	-22.53	PK
V	34950.00	37.89	4.09	41.98	54.00	-12.02	AV
H	11650.00	48.02	3.36	51.38	74.00	-22.62	PK
H	11650.00	37.32	3.36	40.68	54.00	-13.32	AV
H	17475.00	40.00	10.93	50.93	68.20	-17.27	PK
H	17475.00	36.32	10.93	47.25	54.00	-6.75	AV
H	23300.00	51.35	-4.77	46.58	68.20	-21.62	PK
H	23300.00	47.92	-4.77	43.15	54.00	-10.85	AV
H	29125.00	47.86	1.65	49.51	68.20	-18.69	PK
H	29125.00	43.43	1.65	45.08	54.00	-8.92	AV
H	34950.00	45.19	4.09	49.28	68.20	-18.92	PK
H	34950.00	35.90	4.09	39.99	54.00	-14.01	AV

Remark:

1. Emission Level = Meter Reading + Factor,
Factor=Antenna Factor + Cable Loss – Pre-amplifier
Margin= Emission Level – Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

4.9 Frequency stability

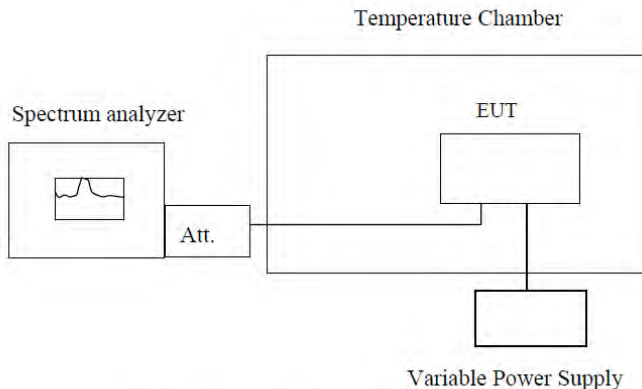Test Requirement:	FCC Part15 C Section 15.407(g)
Test Method:	ANSI C63.10:2013, FCC Part 2.1055
Limit:	Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified
Test Procedure:	a. The EUT was placed inside the environmental test chamber and powered by nominal DC voltage. b. Turn the EUT on and couple its output to a spectrum analyzer. c. Turn the EUT off and set the chamber to the highest temperature specified. d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 Minutes. e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature. f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 Minute s. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.
Test setup:	 Note : Measurement setup for testing on Antenna connector
Test Instruments:	Refer to section 3.0 for details
Test mode:	Refer to section 2.2 for details
Test results:	Pass

Remark: Set the EUT transmits at un-modulation mode to test frequency stability.

Measurement data:

Frequency stability versus Temp.					
Power Supply: DC 5V					
Temp. (°C)	Operating Frequency (MHz)	0 minute	2 minute	5 minute	10 minute
		Measured Frequency (MHz)	Measured Frequency (MHz)	Measured Frequency (MHz)	Measured Frequency (MHz)
-30	5180	5180.001	5180.005	5180.019	5180.073
	5190	5189.991	5190.035	5190.019	5190.073
	5200	5200.001	5200.055	5200.009	5200.063
	5210	5209.991	5210.035	5300.019	5210.053
	5220	5220.011	5220.035	5220.009	5220.063
	5230	5229.991	5230.055	5230.029	5300.065
	5240	5240.011	5240.045	5240.009	5240.064
-20	5180	5180.011	5180.035	5180.019	5180.023
	5190	5190.011	5190.035	5190.009	5190.053
	5200	5200.001	5200.035	5200.019	5200.083
	5210	5210.011	5300.036	5210.009	5210.063
	5220	5220.001	5220.035	5220.029	5220.053
	5230	5230.001	5230.055	5230.009	5230.084
	5240	5239.971	5240.025	5240.029	5240.074
-10	5180	5179.961	5180.035	5180.019	5180.073
	5190	5189.991	5190.035	5190.009	5190.073
	5200	5200.021	5200.035	5200.019	5200.063
	5210	5210.001	5300.036	5210.009	5210.073
	5220	5219.991	5220.035	5220.029	5220.063
	5230	5230.021	5230.055	5230.009	5230.064
	5240	5240.011	5240.025	5240.029	5240.034
0	5180	5180.001	5180.005	5180.019	5180.073
	5190	5189.991	5190.035	5190.019	5190.073
	5200	5200.001	5200.055	5200.009	5200.063
	5210	5209.991	5210.035	5300.019	5210.053
	5220	5220.011	5220.035	5220.009	5220.063
	5230	5229.991	5230.055	5230.029	5300.065
	5240	5240.011	5240.045	5240.009	5240.064
10	5180	5179.991	5180.035	5180.019	5180.073
	5190	5190.001	5190.035	5190.009	5180.073
	5200	5199.991	5200.035	5200.019	5190.073
	5210	5209.991	5210.035	5210.009	5200.063
	5220	5220.001	5220.055	5220.029	5210.073
	5230	5230.021	5230.025	5230.009	5220.063
	5240	5239.991	5240.045	5240.029	5230.064
20	5180	5180.011	5180.035	5180.019	5180.023
	5190	5190.011	5190.035	5190.009	5190.053

	5200	5200.001	5200.035	5200.019	5200.083
	5210	5210.011	5300.036	5210.009	5210.063
	5220	5220.001	5220.035	5220.029	5220.053
	5230	5230.001	5230.055	5230.009	5230.084
	5240	5239.971	5240.025	5240.029	5240.074
30	5180	5180.011	5180.035	5180.019	5180.023
	5190	5190.011	5190.035	5190.009	5190.053
	5200	5200.001	5200.035	5200.019	5200.083
	5210	5210.011	5300.036	5210.009	5210.063
	5220	5220.001	5220.035	5220.029	5220.053
	5230	5230.001	5230.055	5230.009	5230.084
	5240	5239.971	5240.025	5240.029	5240.074
40	5180	5180.001	5180.025	5180.019	5180.063
	5190	5190.001	5190.035	5190.009	5190.063
	5200	5199.991	5200.025	5200.019	5200.053
	5210	5300.002	5210.035	5210.009	5300.065
	5220	5219.991	5220.035	5220.029	5220.053
	5230	5230.011	5230.055	5230.009	5230.074
	5240	5239.991	5240.025	5240.029	5240.054
50	5180	5179.961	5180.035	5180.009	5180.183
	5190	5189.991	5190.035	5190.019	5200.063
	5200	5200.021	5200.035	5200.009	5200.083
	5210	5210.001	5300.036	5210.009	5210.063
	5220	5219.991	5220.035	5220.019	5220.083
	5230	5230.021	5230.055	5230.039	5230.074
	5240	5240.011	5240.025	5240.009	5240.084

Frequency stability versus Voltage					
Temperature: 25°C					
Power Supply (VAC)	Operating Frequency (MHz)	0 minute	2 minute	5 minute	10 minute
		Measured Frequency (MHz)	Measured Frequency (MHz)	Measured Frequency (MHz)	Measured Frequency (MHz)
DC 4.25V	5180	5180.001	5180.025	5180.029	5180.073
	5190	5189.991	5190.035	5190.029	5190.053
	5200	5200.001	5200.025	5200.019	5200.053
	5210	5210.011	5210.035	5210.029	5210.073
	5220	5219.991	5220.035	5220.019	5220.063
	5230	5229.991	5230.055	5230.019	5230.074
	5240	5180.131	5180.045	5180.019	5180.053
DC 5V	5180	5200.001	5190.035	5190.009	5190.063
	5190	5200.031	5200.035	5200.019	5200.053
	5200	5210.001	5210.045	5210.009	5210.053
	5210	5220.021	5220.045	5220.029	5220.063
	5220	5230.011	5300.046	5230.009	5230.084
	5230	5240.021	5240.045	5240.029	5240.064
	5240	5180.131	5180.045	5180.019	5180.053
DC 5.75V	5180	5180.011	5180.045	5180.009	5180.053
	5190	5190.011	5190.045	5190.019	5190.063
	5200	5200.001	5200.035	5200.009	5200.053
	5210	5210.011	5210.045	5210.009	5210.053
	5220	5220.001	5220.045	5220.019	5220.063
	5230	5230.001	5230.035	5230.039	5230.084
	5240	5239.971	5240.015	5240.009	5240.054

Frequency stability versus Temp.					
Power Supply: DC 5V					
Temp. (°C)	Operating Frequency (MHz)	0 minute Measured Frequency (MHz)	2 minute Measured Frequency (MHz)	5 minute Measured Frequency (MHz)	10 minute Measured Frequency (MHz)
-30	5745	5745.026	5745.025	5744.639	5745.044
	5755	5744.976	5755.035	5755.029	5755.064
	5775	5754.997	5775.035	5775.029	5775.074
	5785	5775.007	5785.035	5785.029	5785.065
	5795	5784.997	5795.045	5795.009	5795.075
	5825	5795.007	5825.035	5825.009	5825.085
-20	5745	5744.996	5745.025	5745.019	5745.064
	5755	5755.017	5755.035	5755.019	5755.094
	5775	5774.997	5775.035	5775.029	5775.084
	5785	5785.007	5785.035	5785.019	5785.075
	5795	5795.007	5795.045	5795.009	5795.065
	5825	5825.017	5825.035	5825.019	5824.995
-10	5745	5744.996	5745.035	5745.009	5745.134
	5755	5755.007	5755.035	5755.029	5744.694
	5775	5774.997	5775.055	5775.009	5755.084
	5785	5784.987	5785.035	5785.019	5775.084
	5795	5794.997	5795.025	5795.019	5785.085
	5825	5824.927	5825.035	5825.029	5795.065
0	5745	5744.996	5745.035	5745.009	5745.064
	5755	5755.007	5755.035	5755.019	5755.054
	5775	5775.027	5775.025	5775.039	5775.064
	5785	5784.997	5785.025	5785.009	5785.075
	5795	5794.997	5795.025	5795.009	5795.095
	5825	5824.997	5824.955	5825.009	5825.085
10	5745	5744.986	5745.045	5745.009	5745.074
	5755	5755.007	5755.045	5755.029	5755.094
	5775	5775.007	5775.045	5775.009	5775.074
	5785	5785.007	5785.035	5785.019	5785.065
	5795	5795.017	5795.025	5795.019	5795.055
	5825	5824.997	5825.035	5825.029	5825.096
20	5745	5745.006	5745.055	5745.019	5745.064
	5755	5755.027	5755.025	5755.039	5755.084
	5775	5775.007	5775.055	5775.019	5775.064
	5785	5784.997	5785.055	5785.009	5785.095
	5795	5794.987	5795.045	5794.999	5795.085
	5825	5825.027	5825.055	5825.039	5825.096
30	5745	5744.986	5745.045	5745.009	5745.074
	5755	5755.007	5755.045	5755.029	5755.094
	5775	5775.007	5775.045	5775.009	5775.074
	5785	5785.007	5785.035	5785.019	5785.065
	5795	5795.017	5795.025	5795.019	5795.055
	5825	5824.997	5825.035	5825.029	5825.096
40	5745	5745.006	5745.035	5745.009	5745.064
	5755	5755.017	5755.045	5755.029	5755.084
	5775	5775.017	5775.045	5775.009	5775.064
	5785	5785.007	5785.035	5785.019	5785.075

50	5795	5794.997	5795.045	5795.019	5795.075
	5825	5825.007	5825.045	5825.029	5825.085
	5745	5744.996	5745.035	5745.009	5745.064
	5755	5755.017	5755.045	5755.019	5755.074
	5775	5774.997	5775.045	5775.009	5775.095
	5785	5785.007	5785.035	5784.999	5785.065
	5795	5795.007	5795.045	5795.009	5795.065
	5825	5825.017	5825.045	5824.939	5825.065

Frequency stability versus Voltage					
Temperature: 25°C					
Power Supply (VAC)	Operating Frequency (MHz)	0 minute Measured Frequency (MHz)	2 minute Measured Frequency (MHz)	5 minute Measured Frequency (MHz)	10 minute Measured Frequency (MHz)
DC 4.25V	5745	5744.986	5745.035	5745.009	5745.064
	5755	5755.007	5755.035	5755.029	5755.084
	5775	5775.007	5775.025	5775.029	5775.064
	5785	5785.007	5785.025	5785.009	5785.075
	5795	5795.017	5795.025	5795.029	5795.075
	5825	5824.997	5824.955	5825.029	5825.085
DC 5V	5745	5744.986	5745.045	5745.009	5745.074
	5755	5755.007	5755.045	5755.029	5755.094
	5775	5775.007	5775.045	5775.009	5775.074
	5785	5785.007	5785.035	5785.019	5785.065
	5795	5795.017	5795.025	5795.019	5795.055
	5825	5824.997	5825.035	5825.029	5825.096
DC 5.75V	5745	5745.006	5745.055	5745.019	5745.064
	5755	5755.027	5755.025	5755.039	5755.084
	5775	5775.007	5775.055	5775.019	5775.064
	5785	5784.997	5785.055	5785.009	5785.095
	5795	5794.987	5795.045	5794.999	5795.085
	5825	5825.027	5825.055	5825.039	5825.096

5 Test Setup Photo

Reference to the file No.: ET-25051487SP for details.

6 EUT Constructional Details

Reference to the file No.: ET-25051487EP and ET-25051487IP for details.

-----END-----