

Appendix Test Data for BT(BLE) (Conducted Measurement)

Product Name: Smart Watch

Trade Mark: N/A

Test Model: JX629

FCC ID: 2BEB8-JX629

Environmental Conditions

Temperature:	22.5
Relative Humidity:	56%
ATM Pressure:	100.0 kPa
Test Engineer:	Tony lu
Supervised by:	Max zhang
NOTE	N/A


1. Duty Cycle

1.1 Ant1


1.1.1 Test Result

Ant1							
Mode	Tx Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
1M	SISO	2402	2.211	2.500	88.44	0.53	0.03
		2440	2.211	2.501	88.40	0.54	0.03
		2480	2.211	2.500	88.44	0.53	0.03
2M	SISO	2402	1.155	2.500	46.20	3.35	0.02
		2440	1.156	2.501	46.22	3.35	0.03
		2480	1.156	2.501	46.22	3.35	0.02


1.1.2 Test Graph

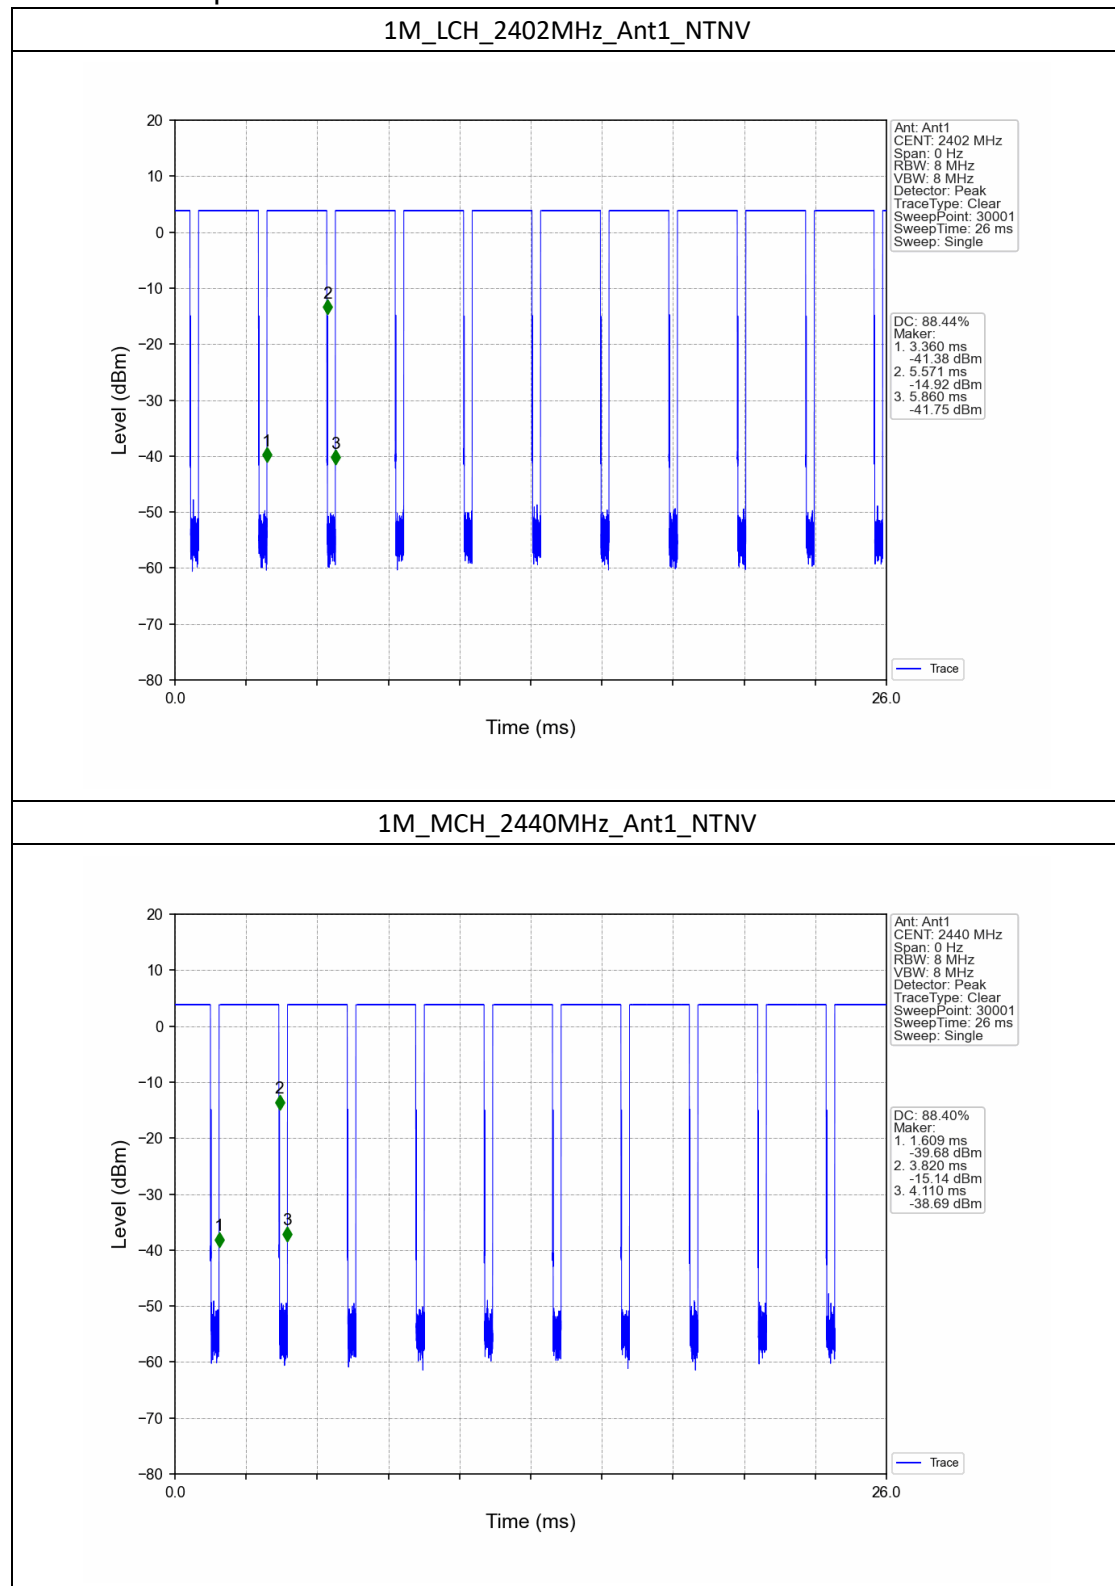


1M_HCH_2480MHz_Ant1_NTNV

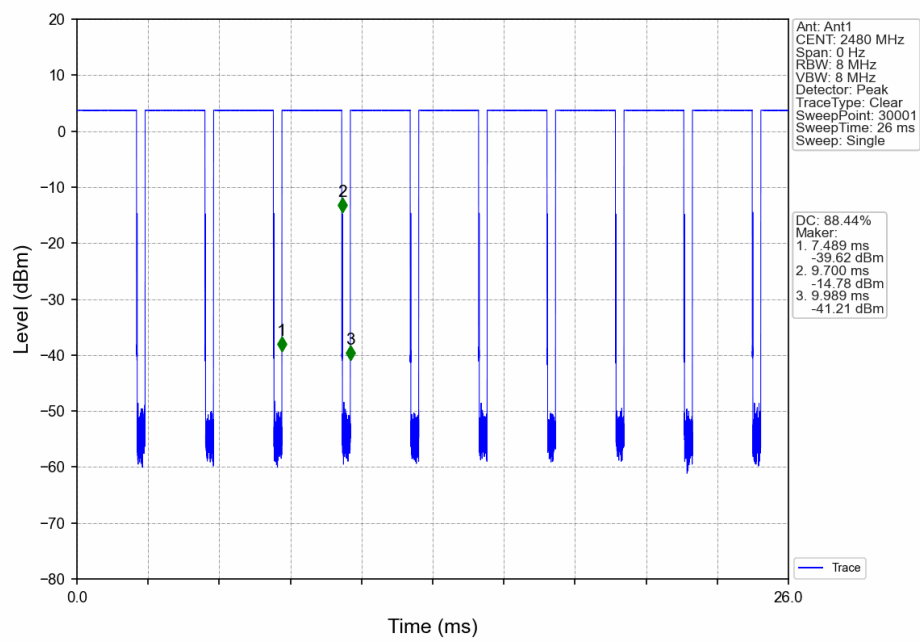


2M_LCH_2402MHz_Ant1_NTNV

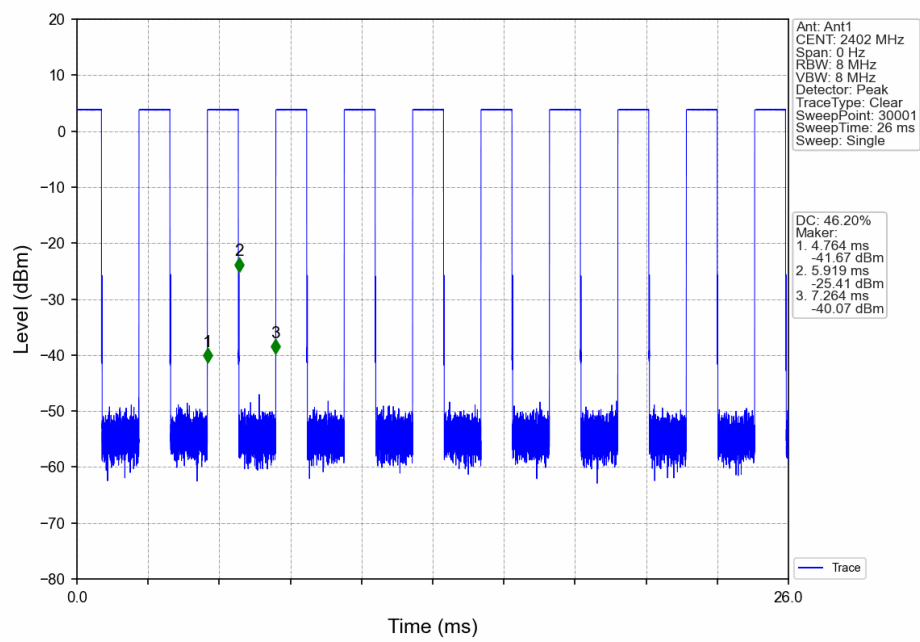

2M_MCH_2440MHz_Ant1_NTNV

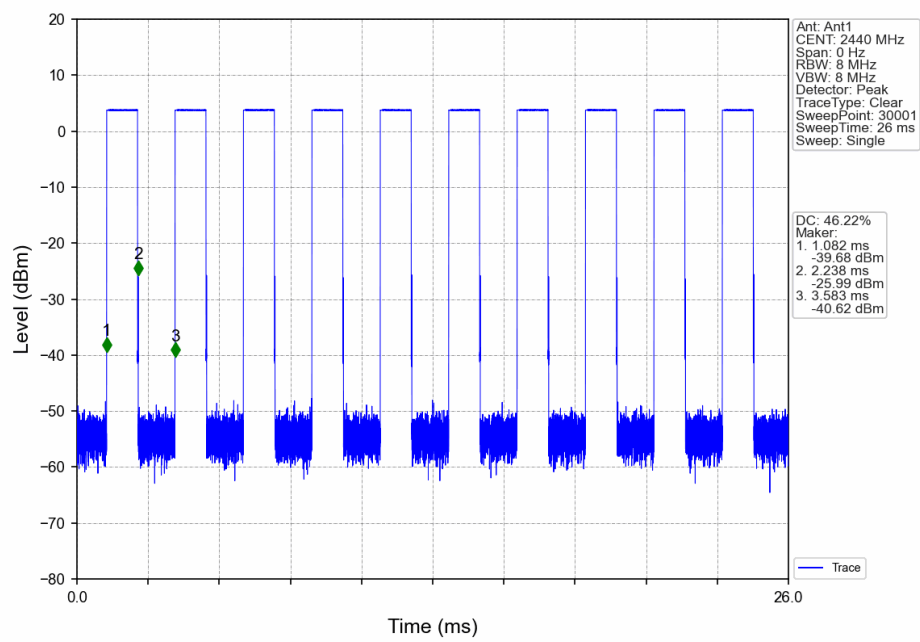

2M_HCH_2480MHz_Ant1_NTNV

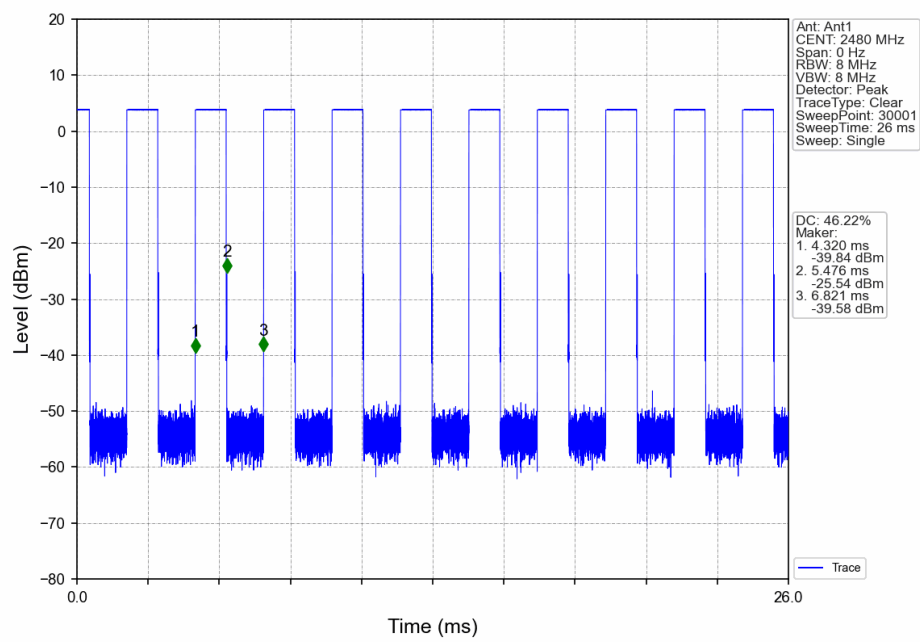


2. Bandwidth

2.1 OBW


2.1.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	1.016	/	Pass
		2440	1	1.015	/	Pass
		2480	1	1.015	/	Pass
2M	SISO	2402	1	2.039	/	Pass
		2440	1	2.040	/	Pass
		2480	1	2.033	/	Pass


2.1.2 Test Graph

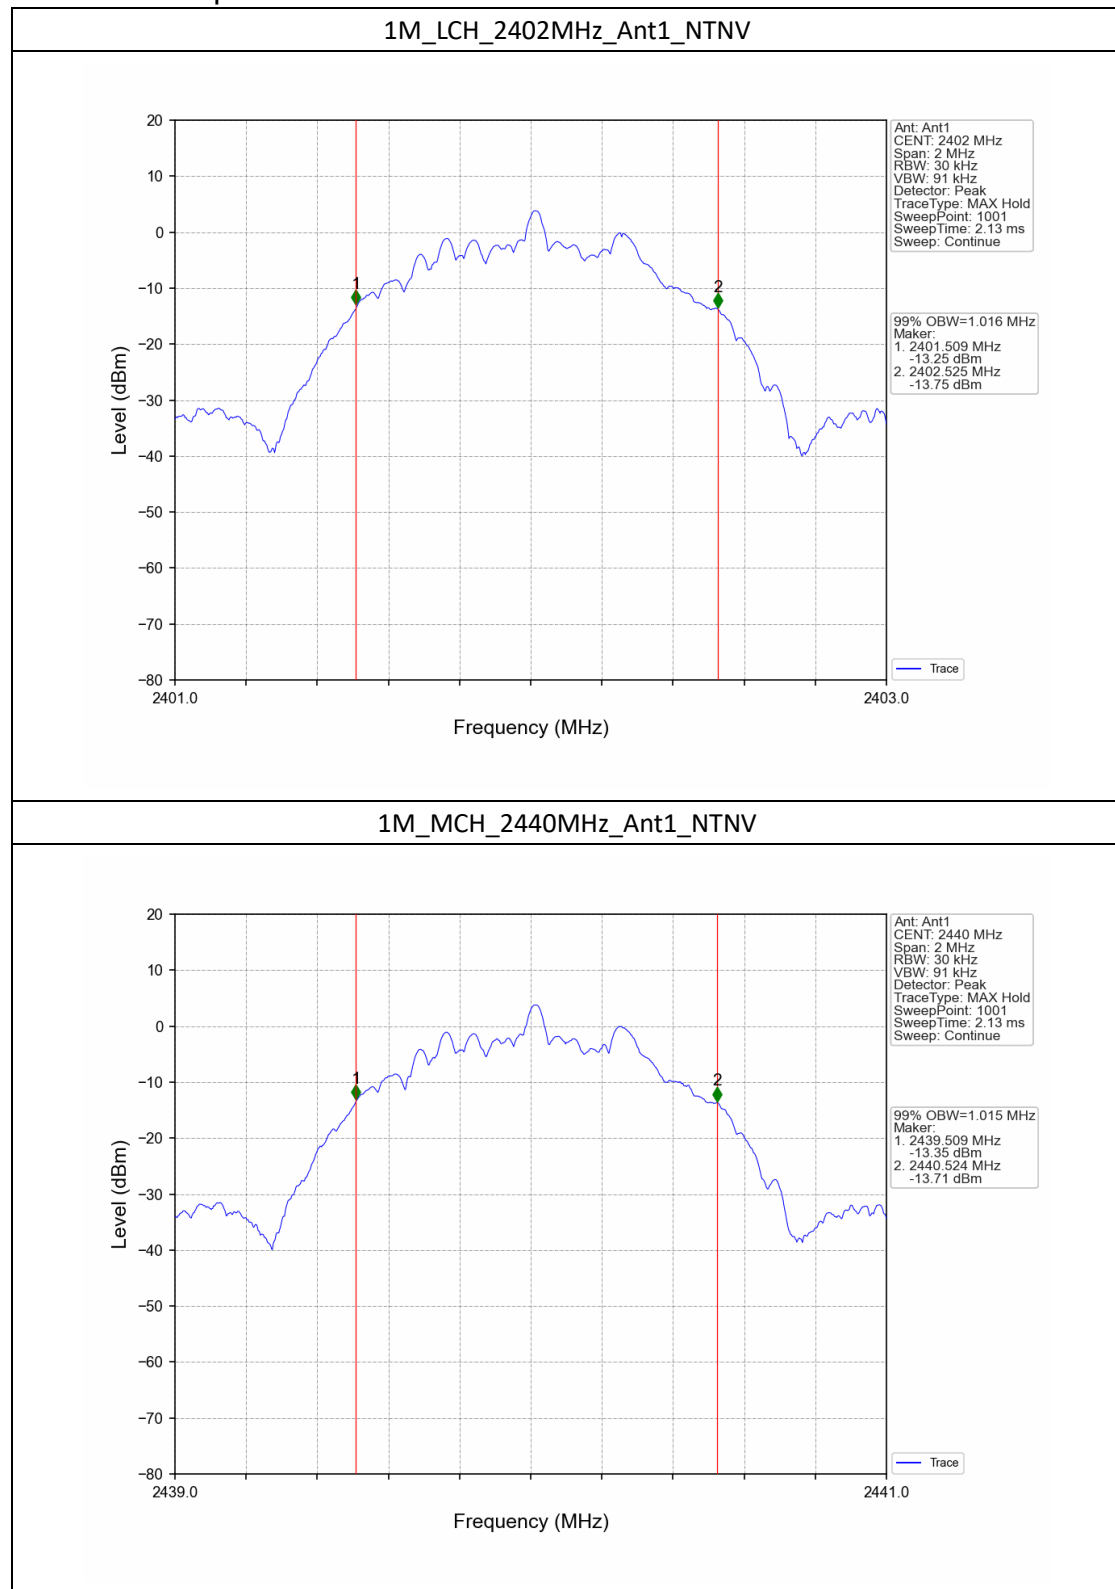


1M_HCH_2480MHz_Ant1_NTNV

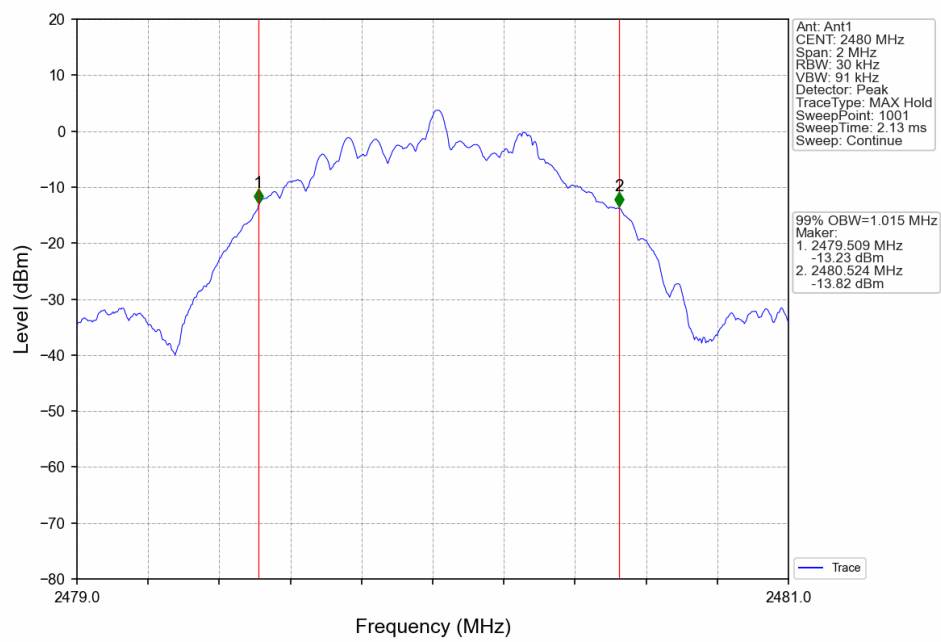


2M_LCH_2402MHz_Ant1_NTNV

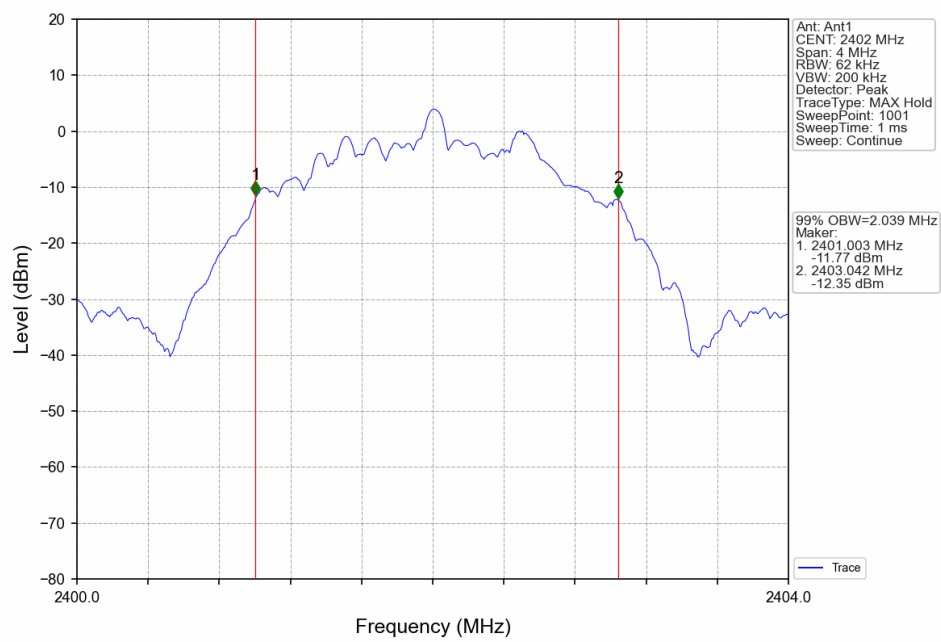

2M_MCH_2440MHz_Ant1_NTNV

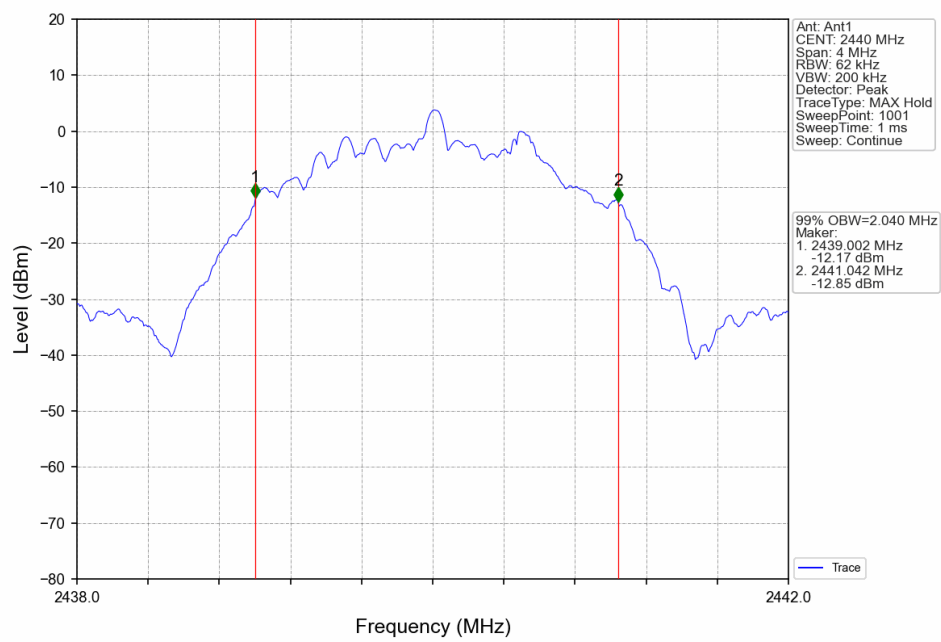

2M_HCH_2480MHz_Ant1_NTNV

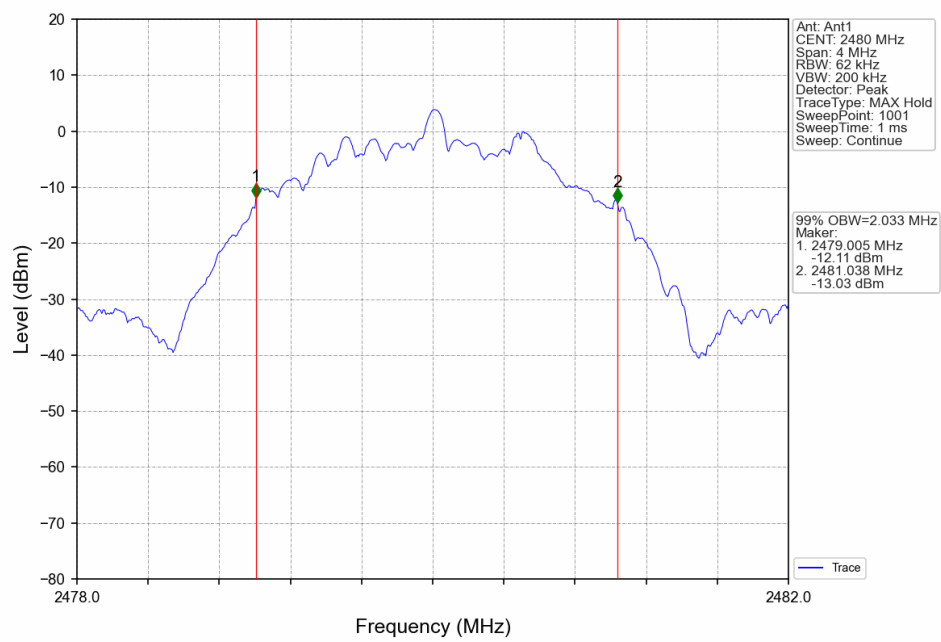


2.2 6dB BW


2.2.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.659	≥ 0.5	Pass
		2440	1	0.667	≥ 0.5	Pass
		2480	1	0.657	≥ 0.5	Pass
2M	SISO	2402	1	1.149	≥ 0.5	Pass
		2440	1	1.137	≥ 0.5	Pass
		2480	1	1.148	≥ 0.5	Pass


2.2.2 Test Graph

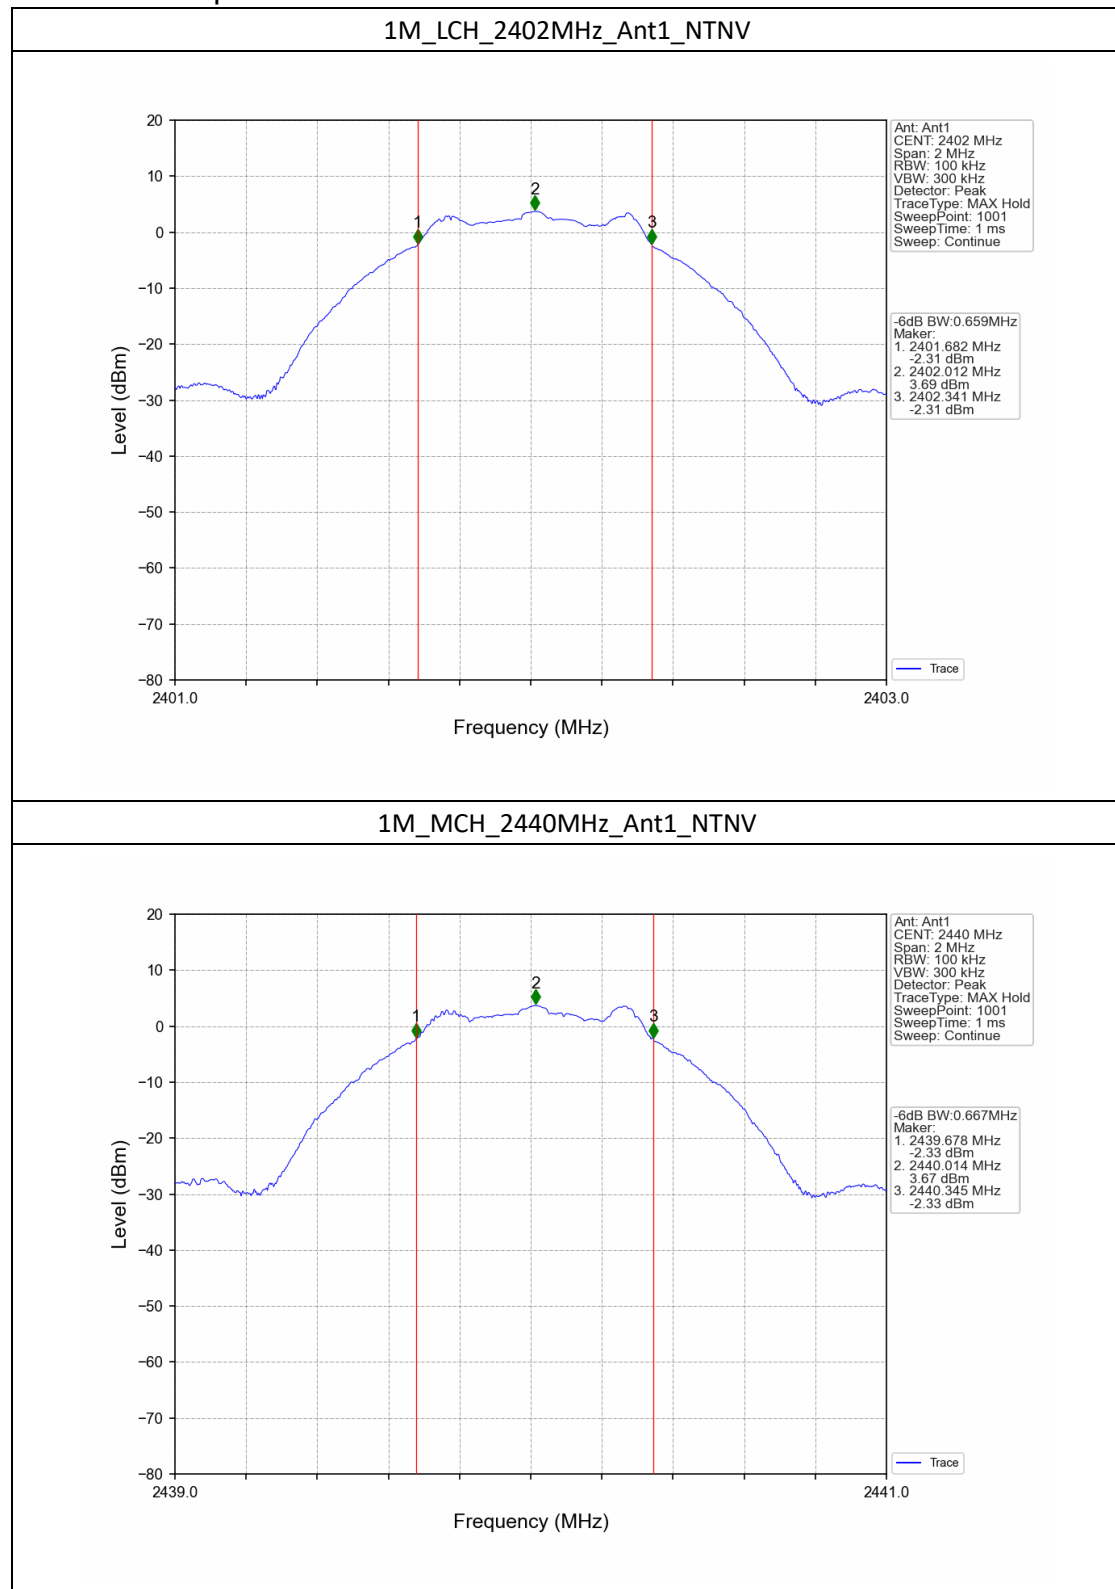


1M_HCH_2480MHz_Ant1_NTNV

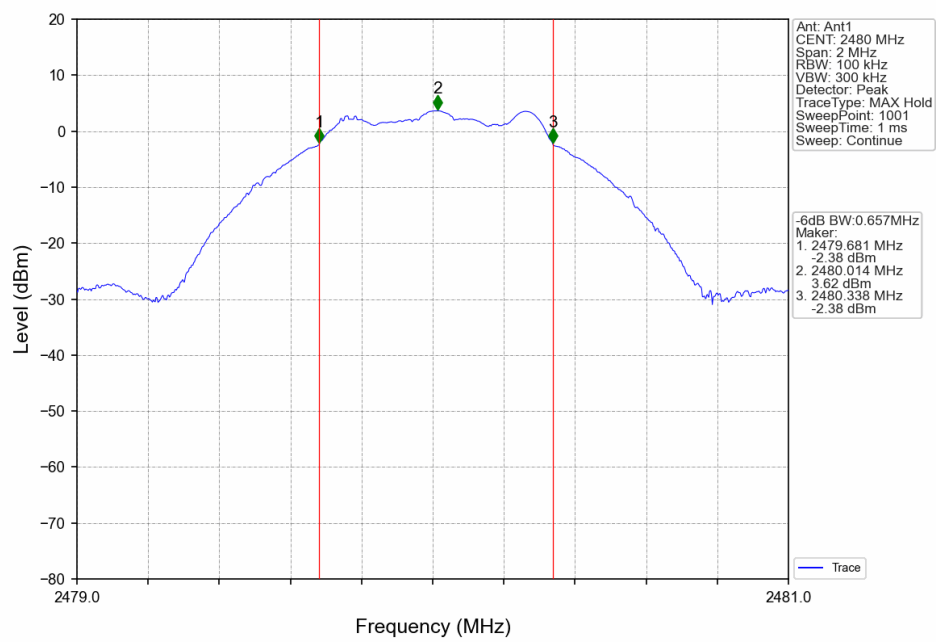


2M_LCH_2402MHz_Ant1_NTNV

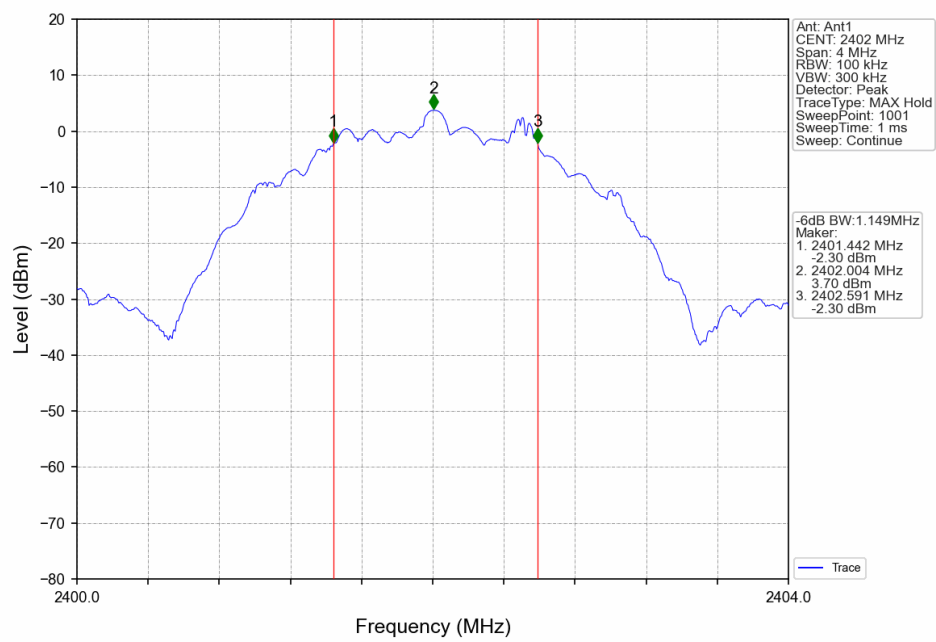


2M_MCH_2440MHz_Ant1_NTNV

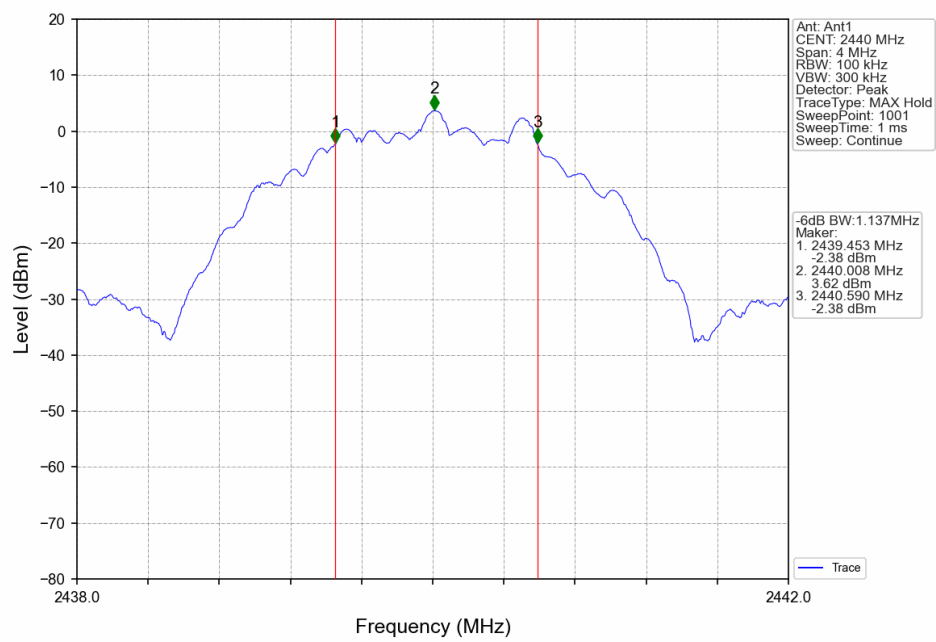


2M_HCH_2480MHz_Ant1_NTNV

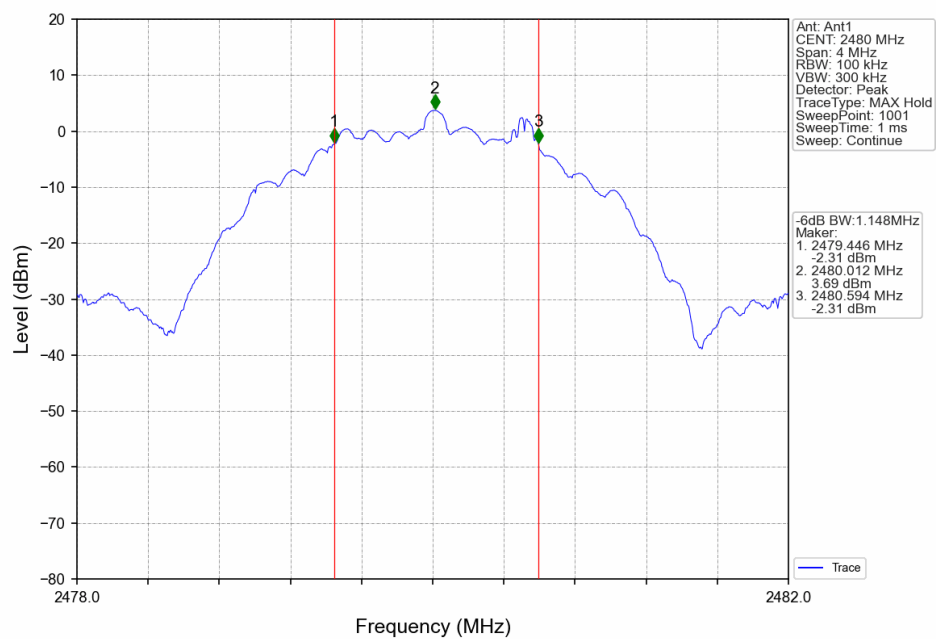


3.1.2 Test Graph

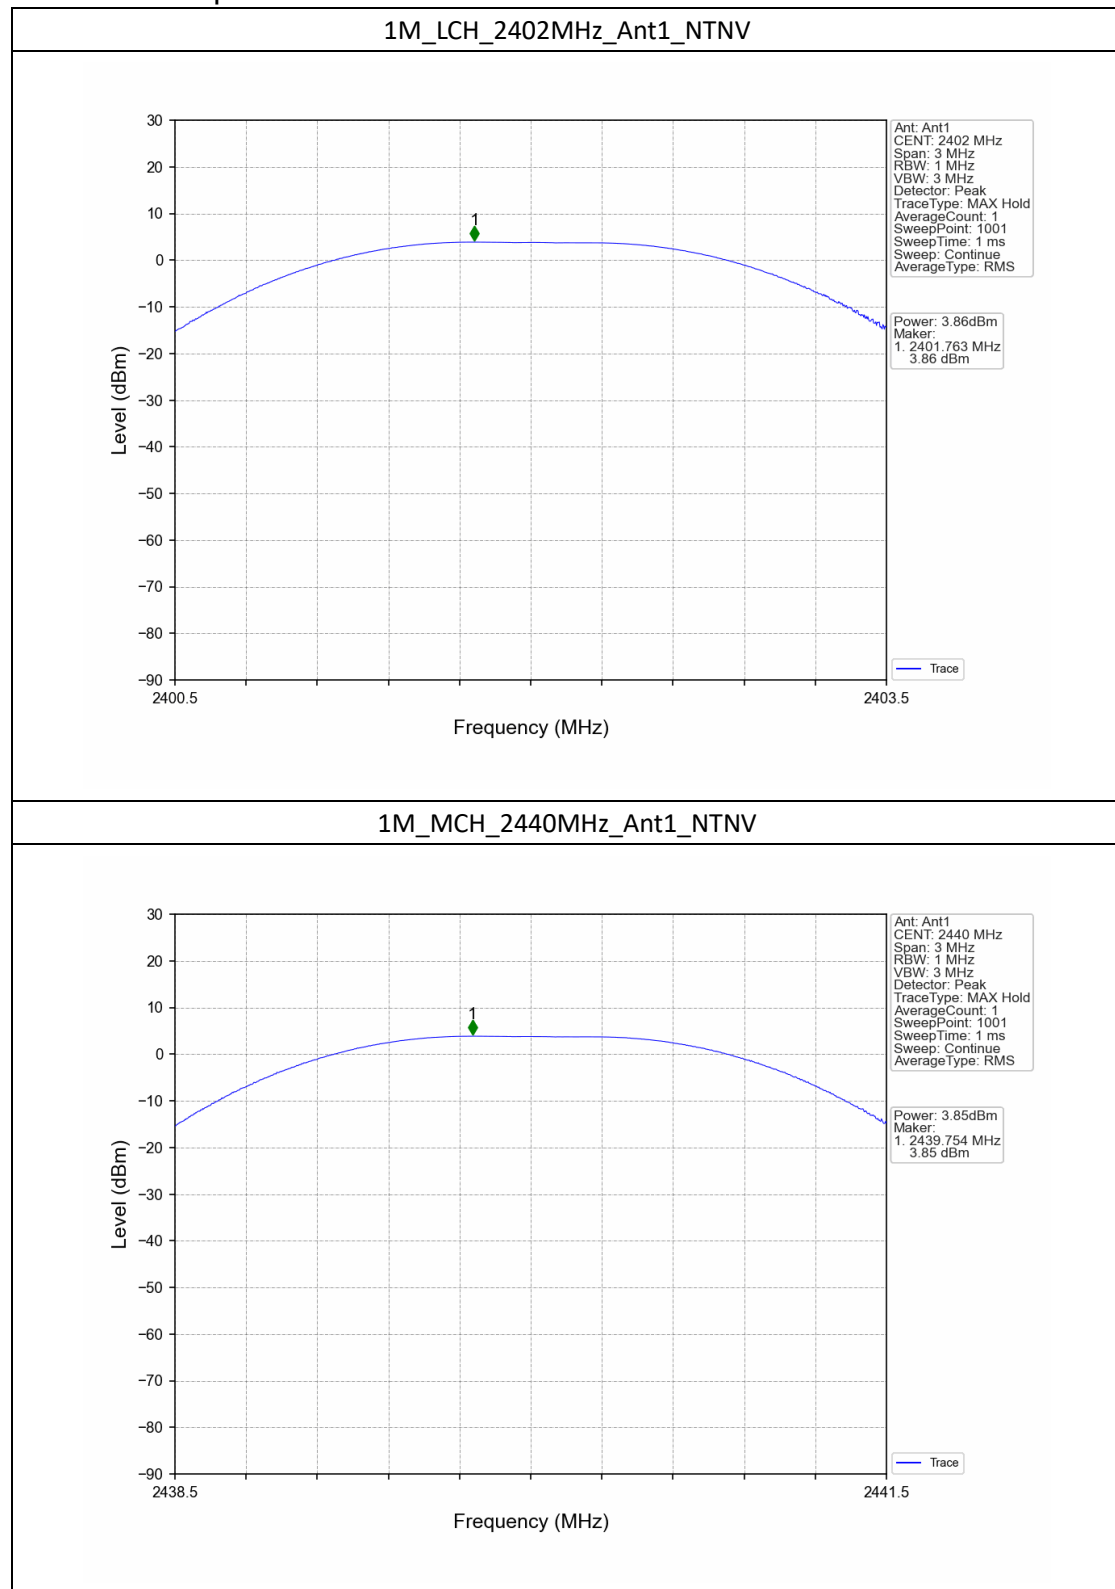


1M_HCH_2480MHz_Ant1_NTNV

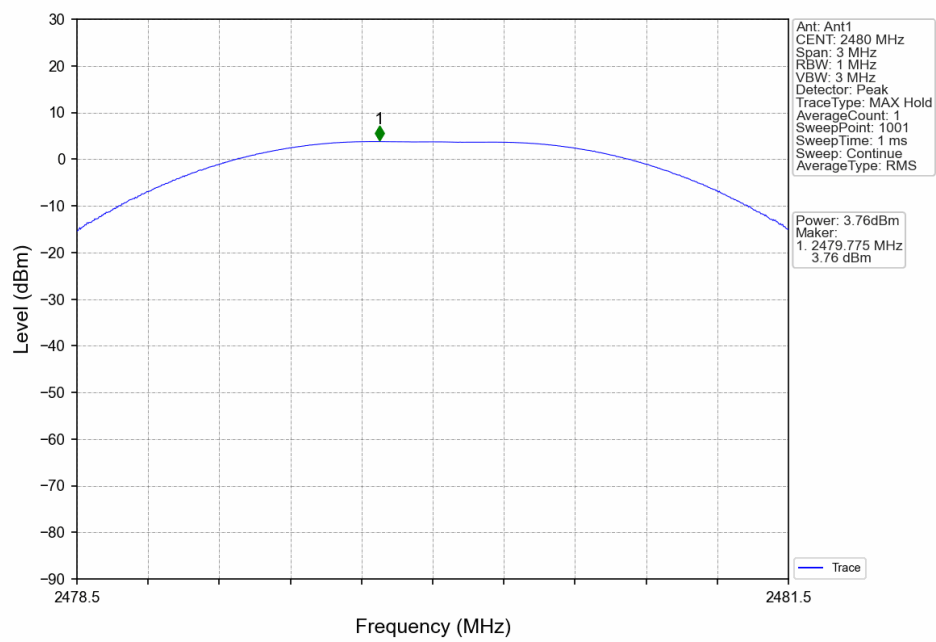


2M_LCH_2402MHz_Ant1_NTNV

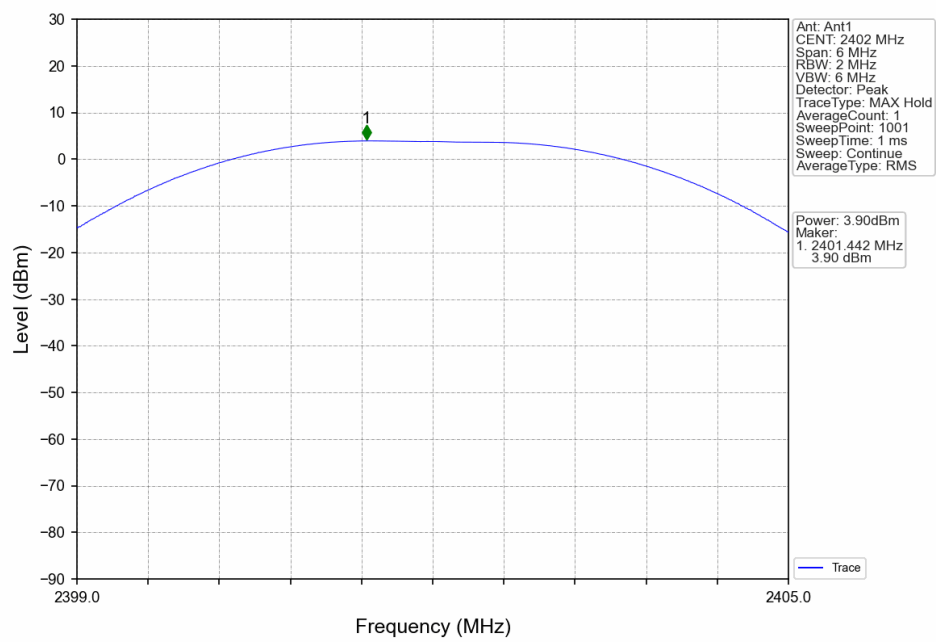

2M_MCH_2440MHz_Ant1_NTNV

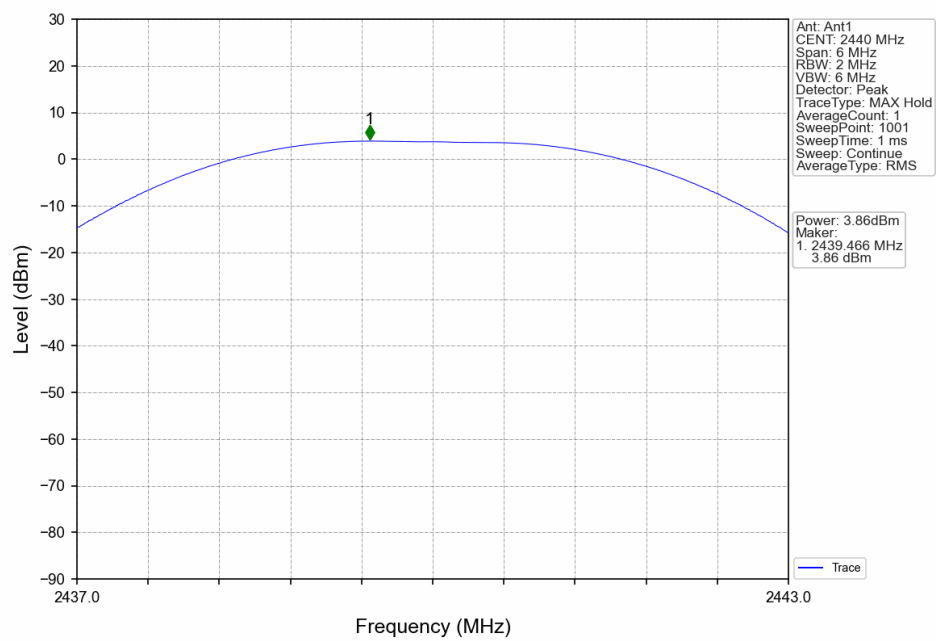

2M_HCH_2480MHz_Ant1_NTNV

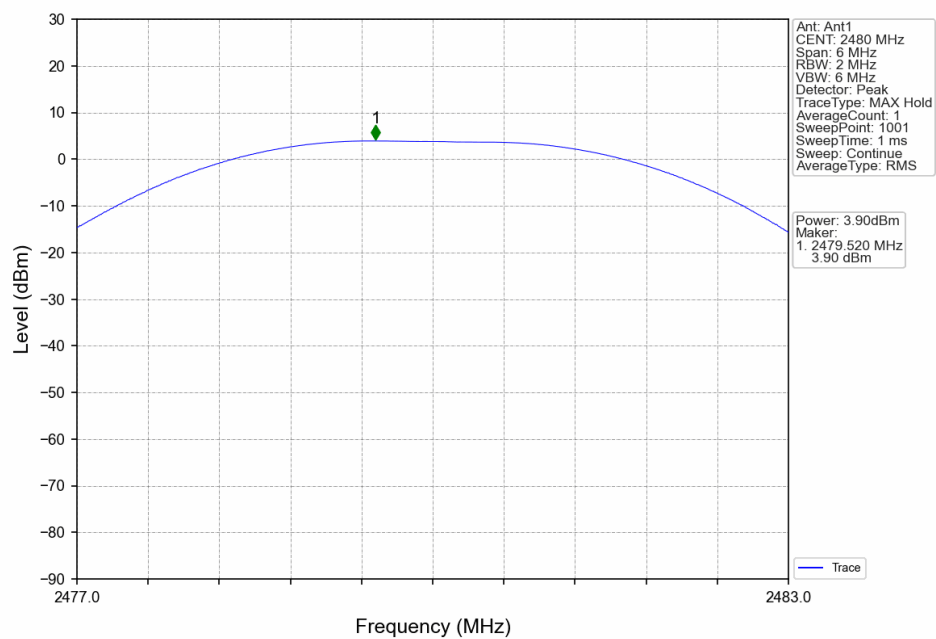


4. Maximum Power Spectral Density

4.1 PSD


4.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			ANT1	Limit	
1M	SISO	2402	-6.52	<=8	Pass
		2440	-6.61	<=8	Pass
		2480	-6.68	<=8	Pass
2M	SISO	2402	-7.65	<=8	Pass
		2440	-7.34	<=8	Pass
		2480	-7.22	<=8	Pass
Note1: Antenna Gain: Ant1: 0.00dBi;					


4.1.2 Test Graph

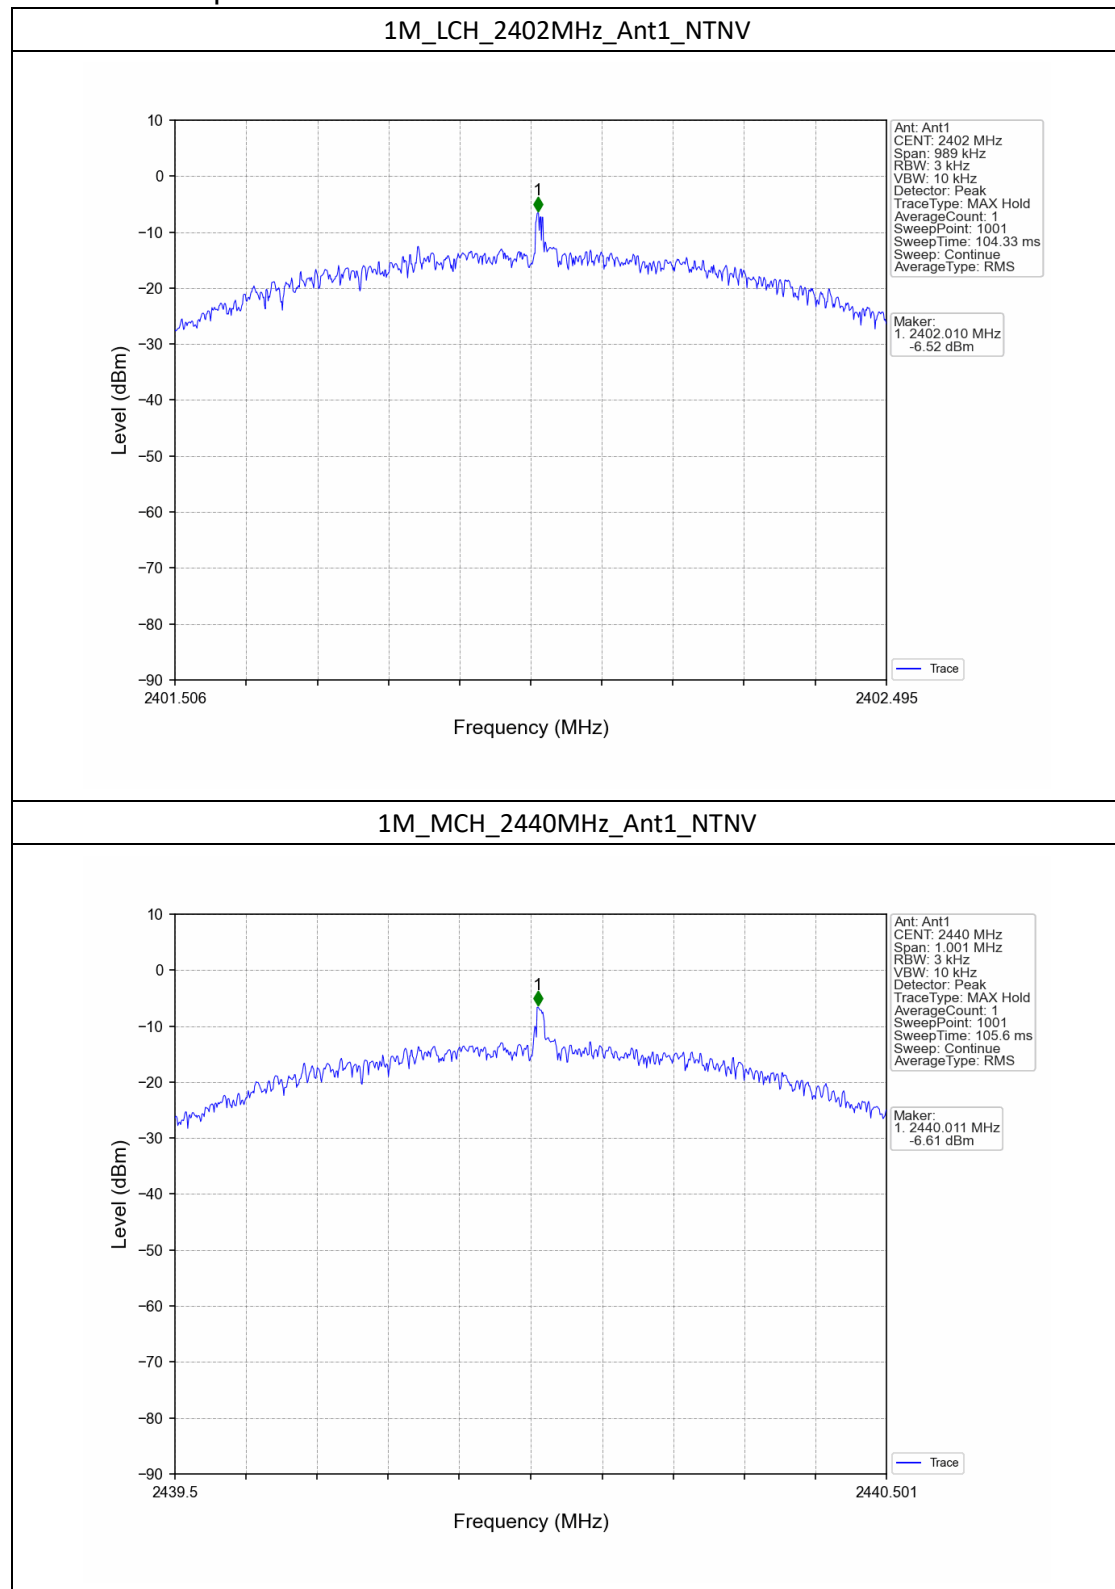


1M_HCH_2480MHz_Ant1_NTNV

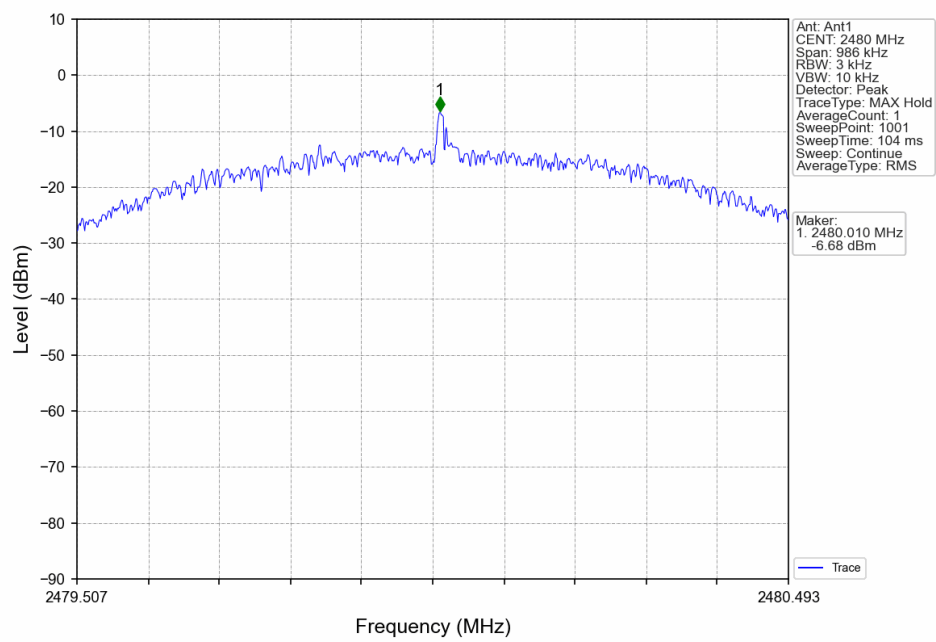


2M_LCH_2402MHz_Ant1_NTNV

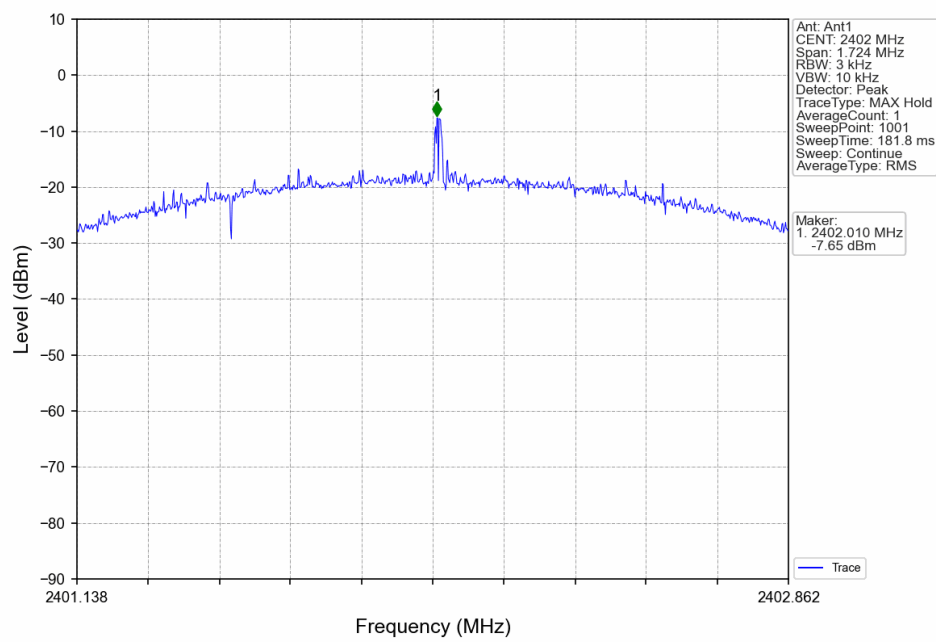

2M_MCH_2440MHz_Ant1_NTNV

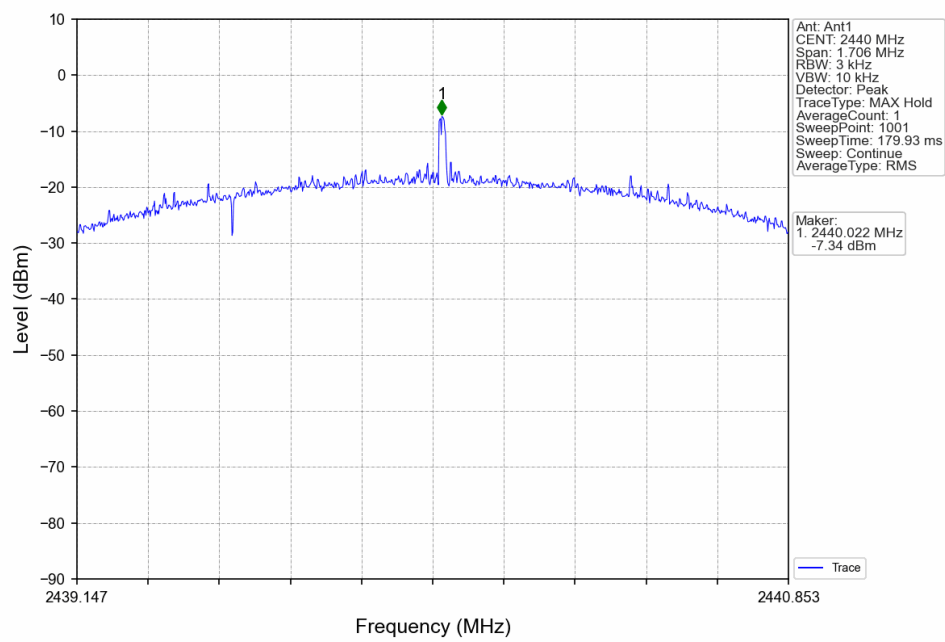

2M_HCH_2480MHz_Ant1_NTNV

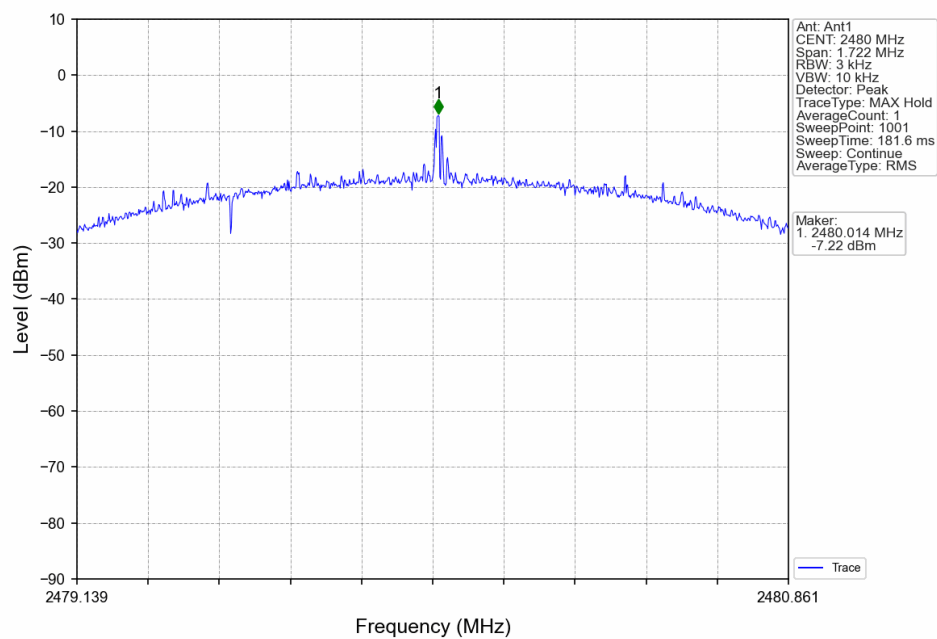


5. Unwanted Emissions In Non-restricted Frequency Bands

5.1 Ref


5.1.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	1	3.69
		2440	1	3.68
		2480	1	3.61
2M	SISO	2402	1	3.66
		2440	1	3.62
		2480	1	3.68
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.				


5.1.2 Test Graph

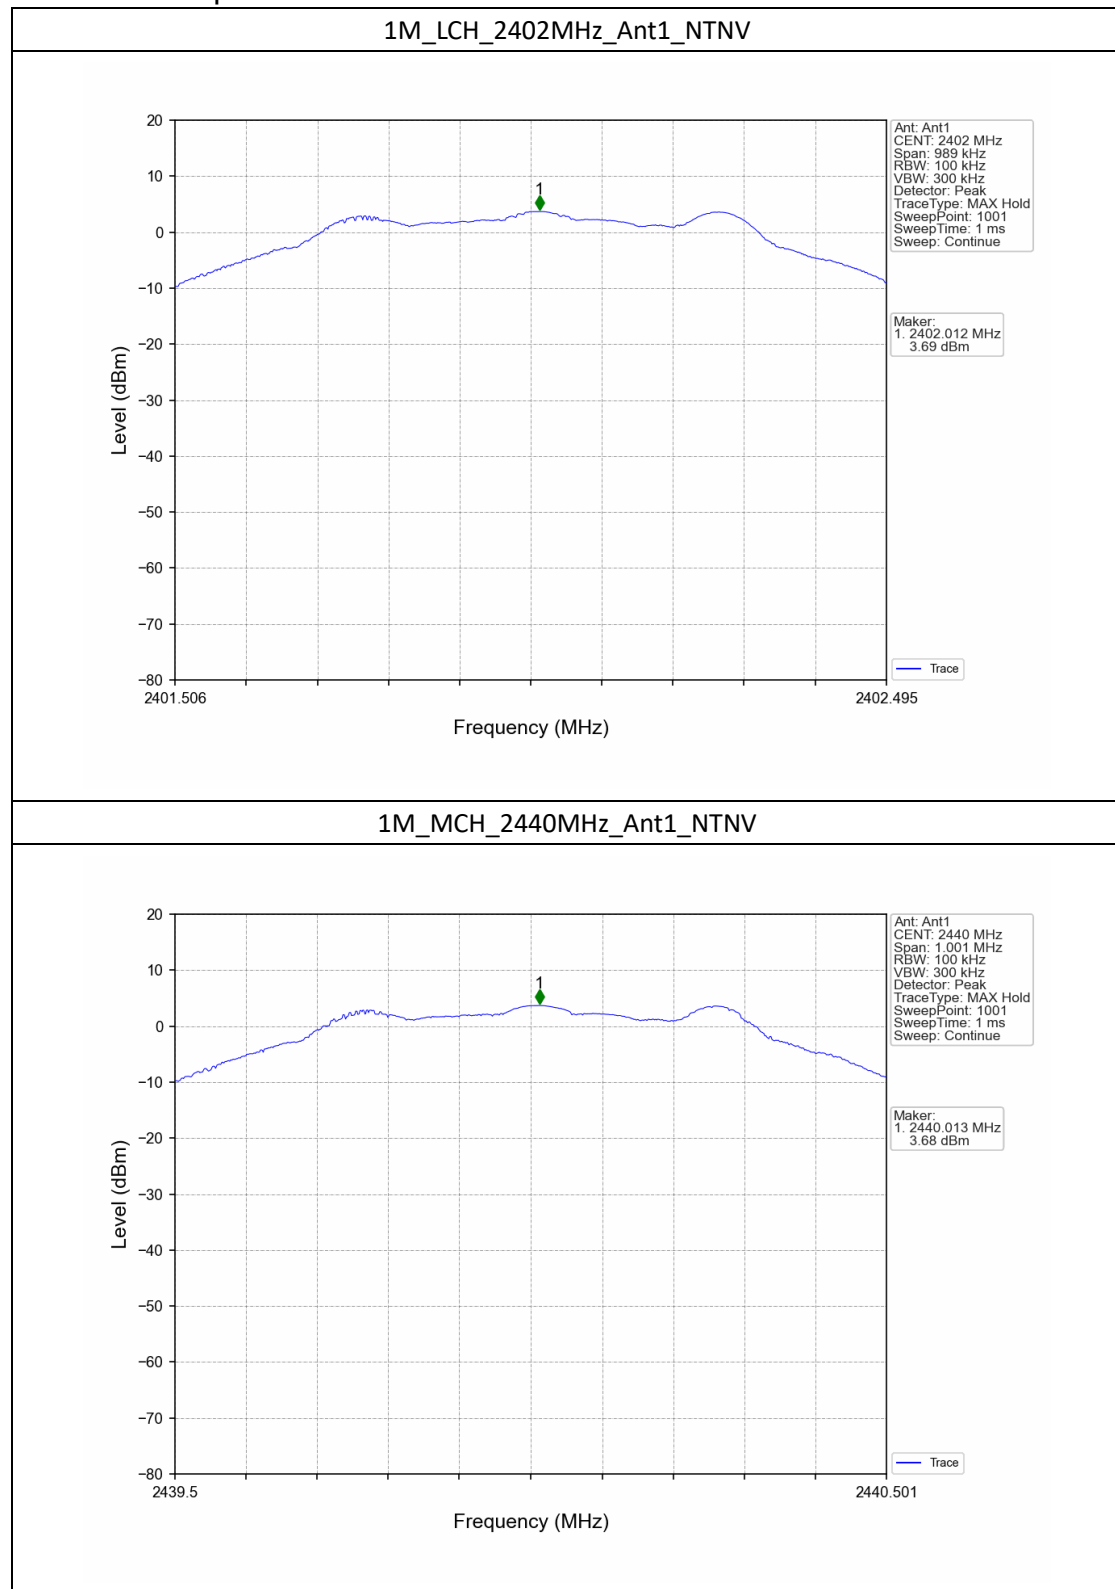


1M_HCH_2480MHz_Ant1_NTNV

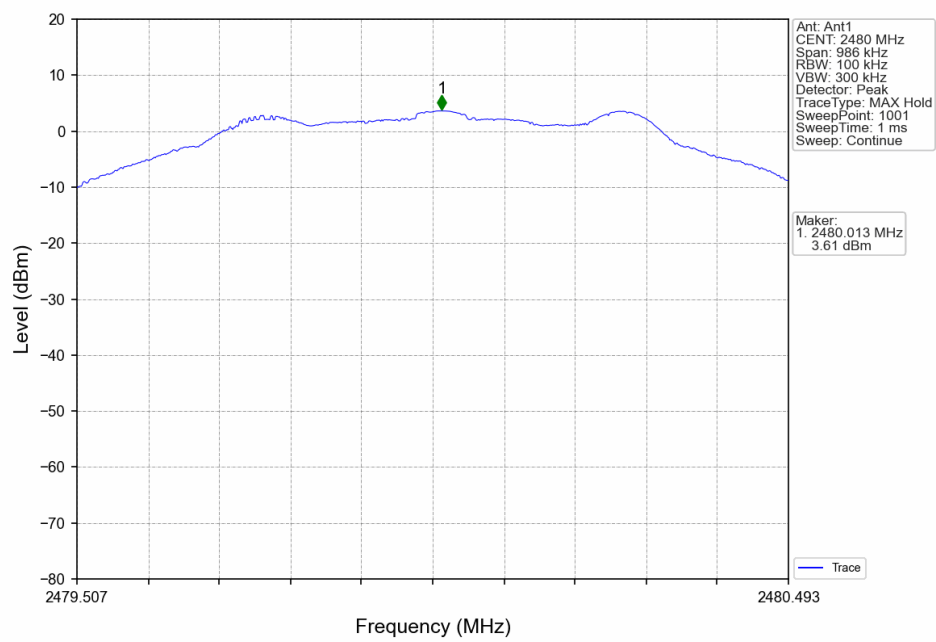


2M_LCH_2402MHz_Ant1_NTNV

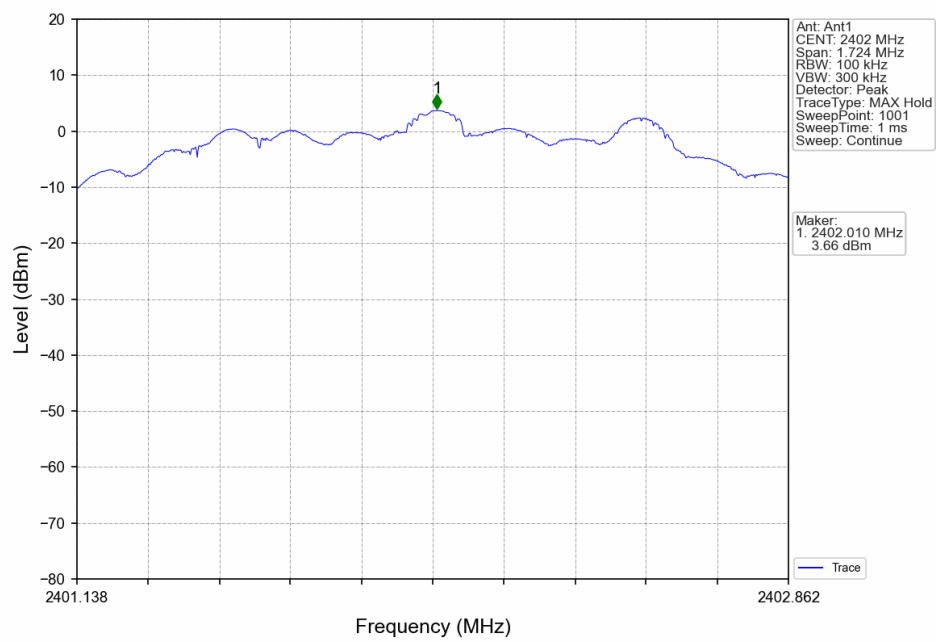


2M_MCH_2440MHz_Ant1_NTNV

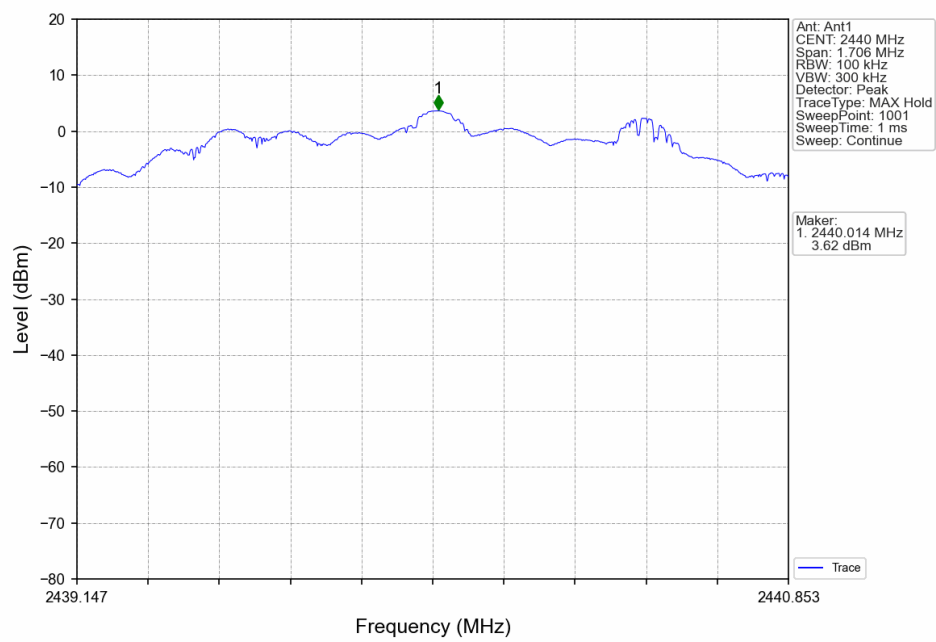


2M_HCH_2480MHz_Ant1_NTNV

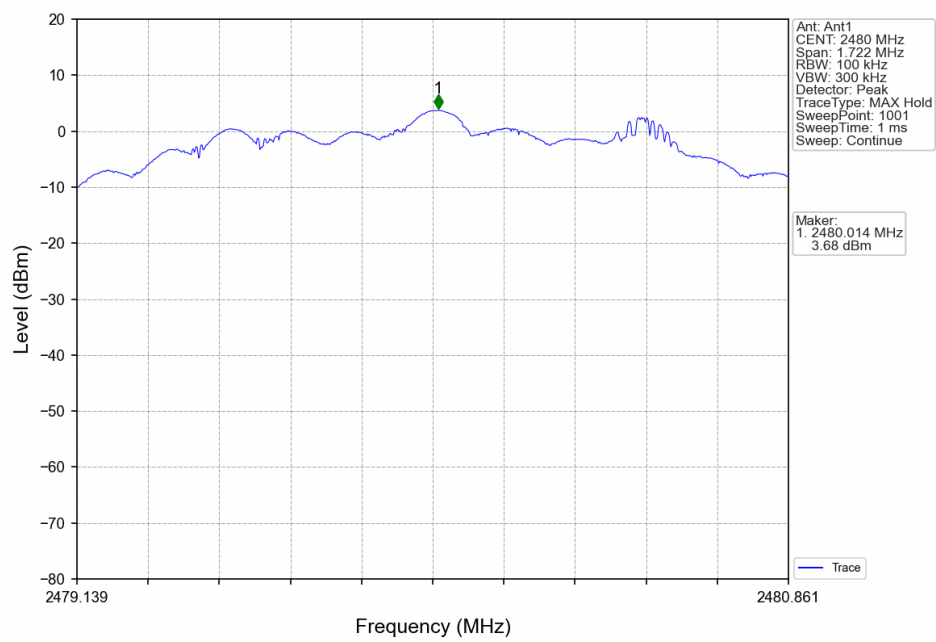


5.2.2 Test Graph

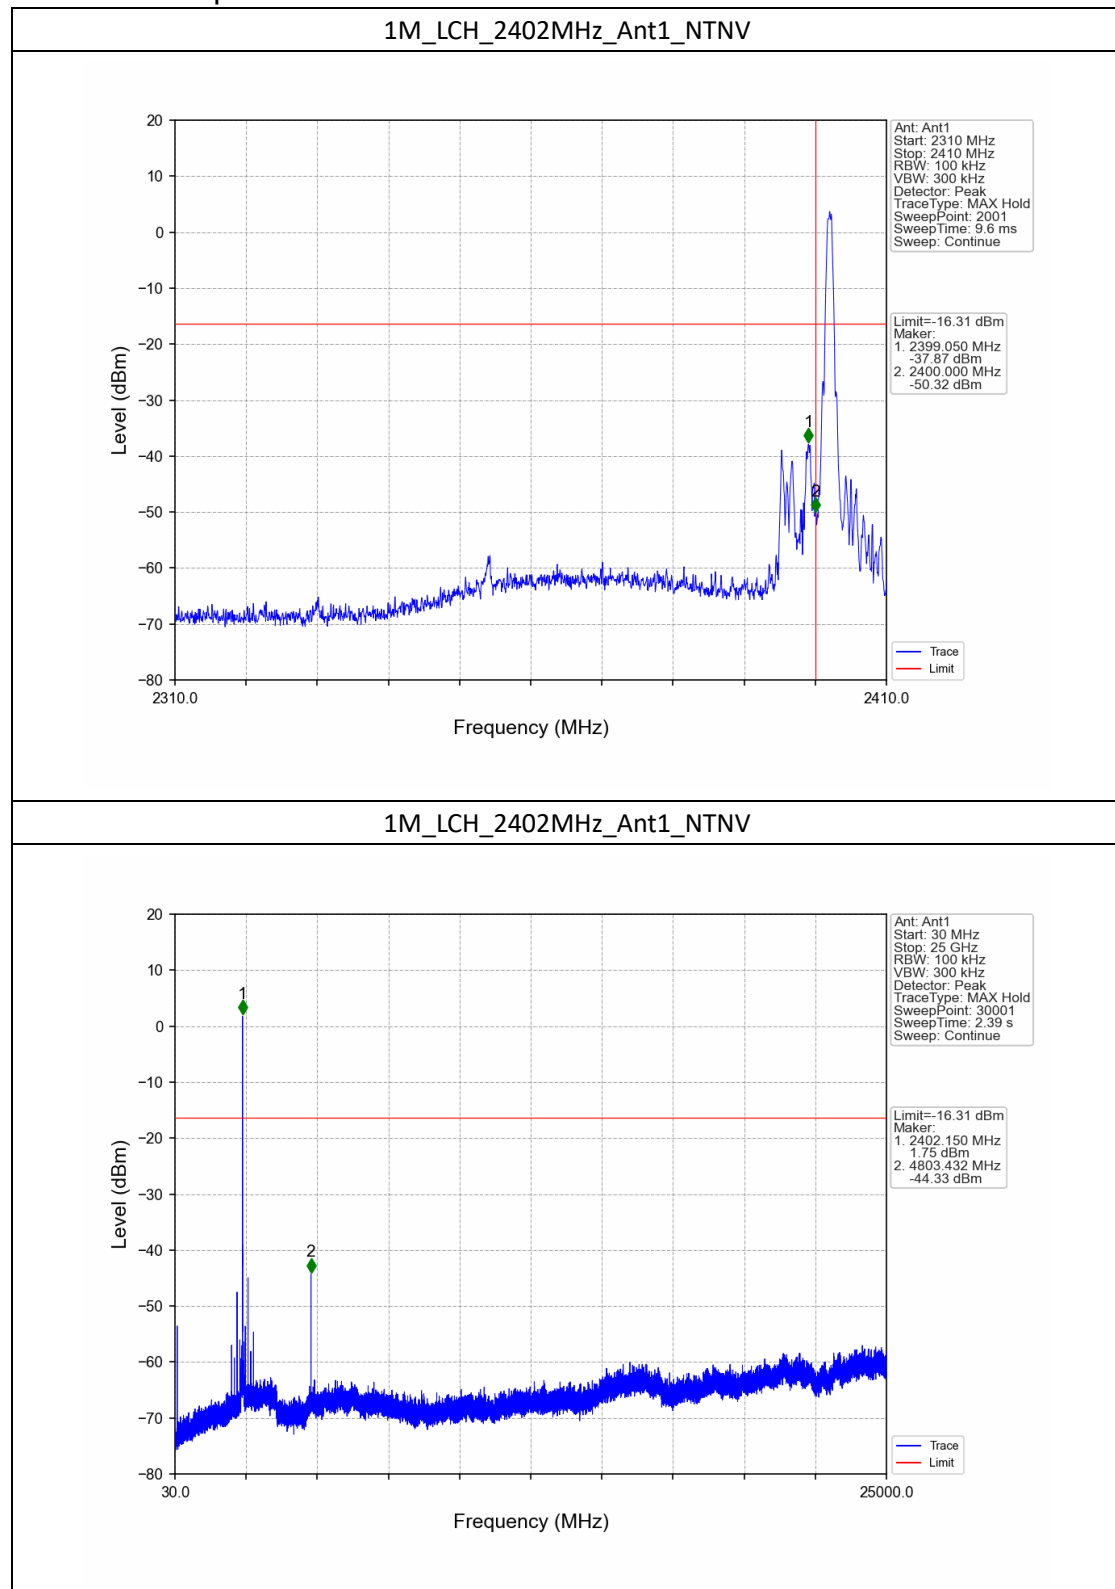


1M_MCH_2440MHz_Ant1_NTNV

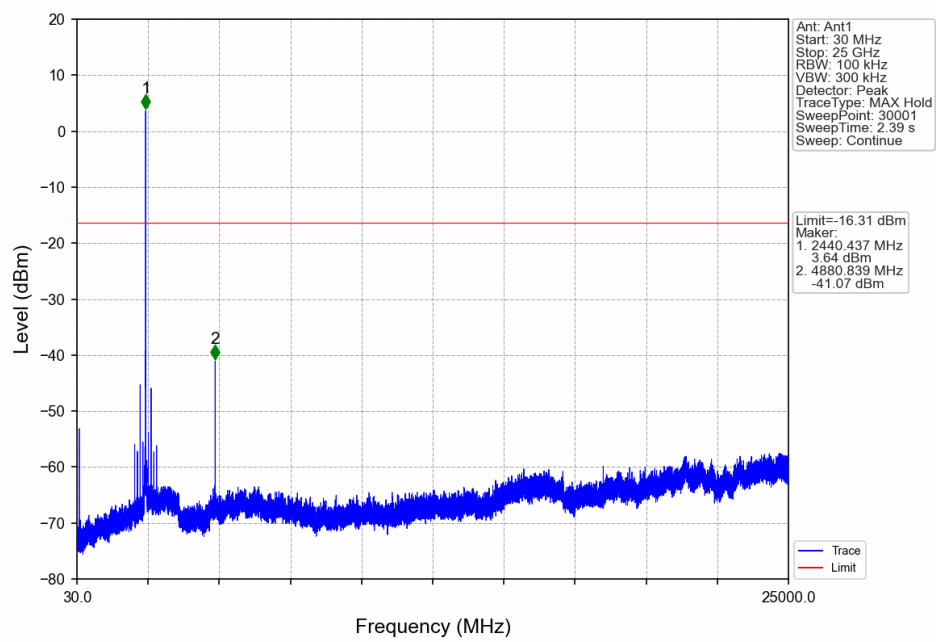


1M_HCH_2480MHz_Ant1_NTNV

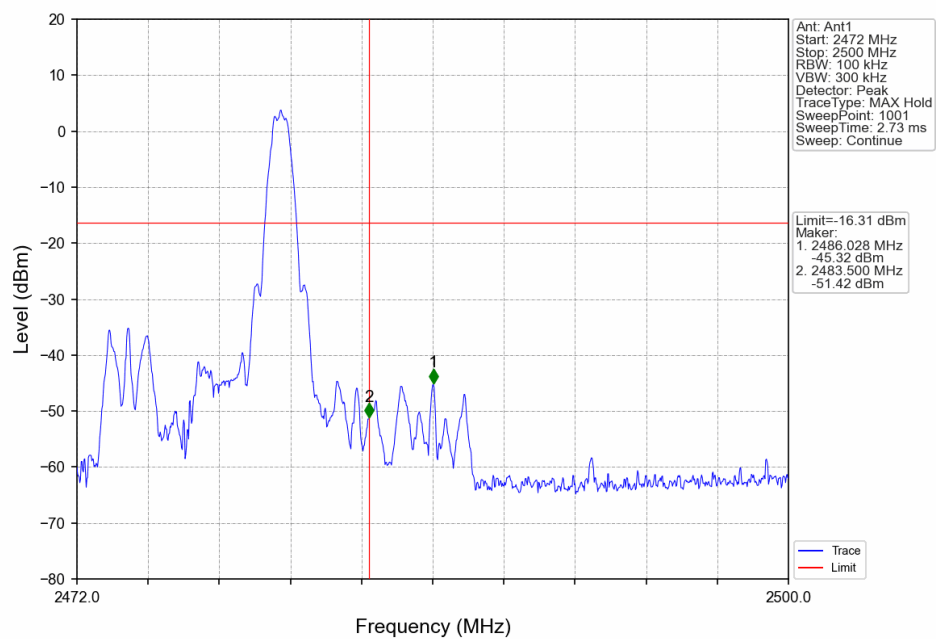


1M_HCH_2480MHz_Ant1_NTNV

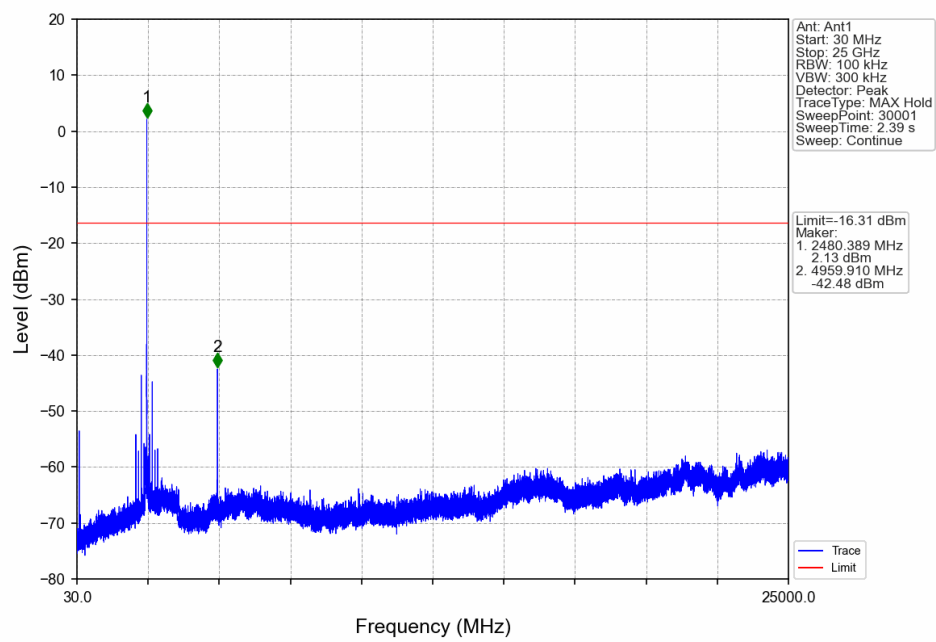


2M_LCH_2402MHz_Ant1_NTNV

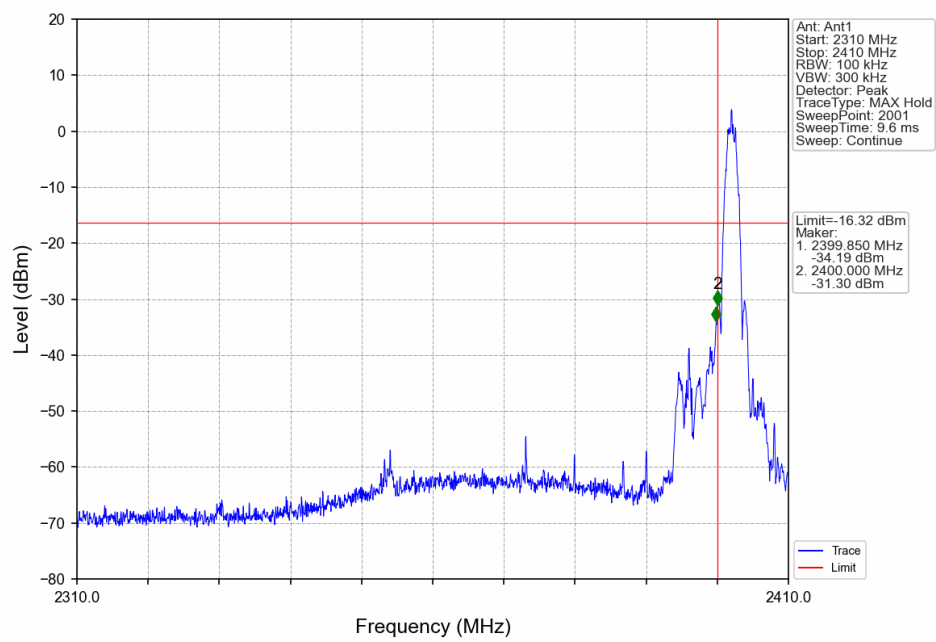


2M_LCH_2402MHz_Ant1_NTNV

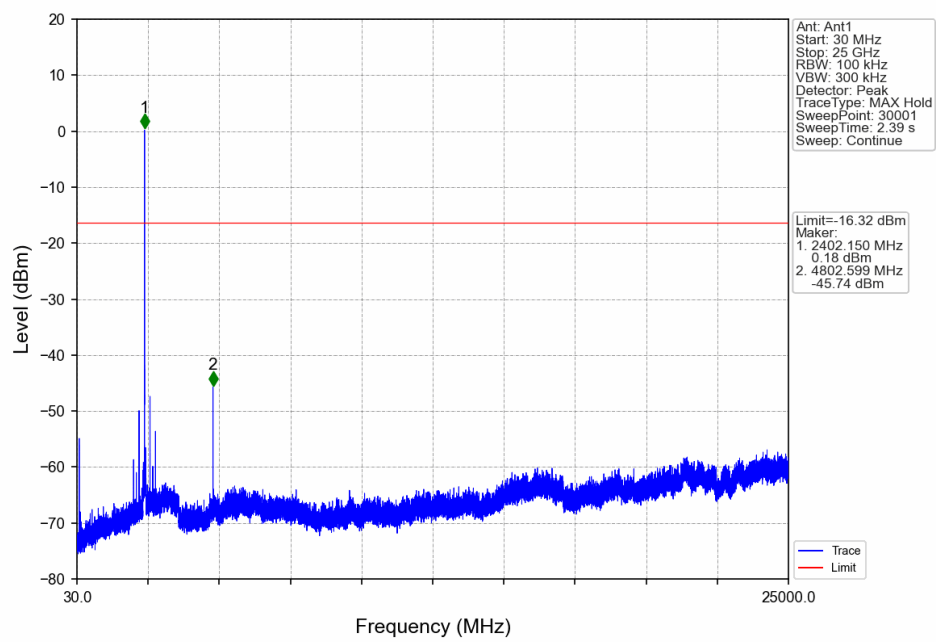


2M_MCH_2440MHz_Ant1_NTNV

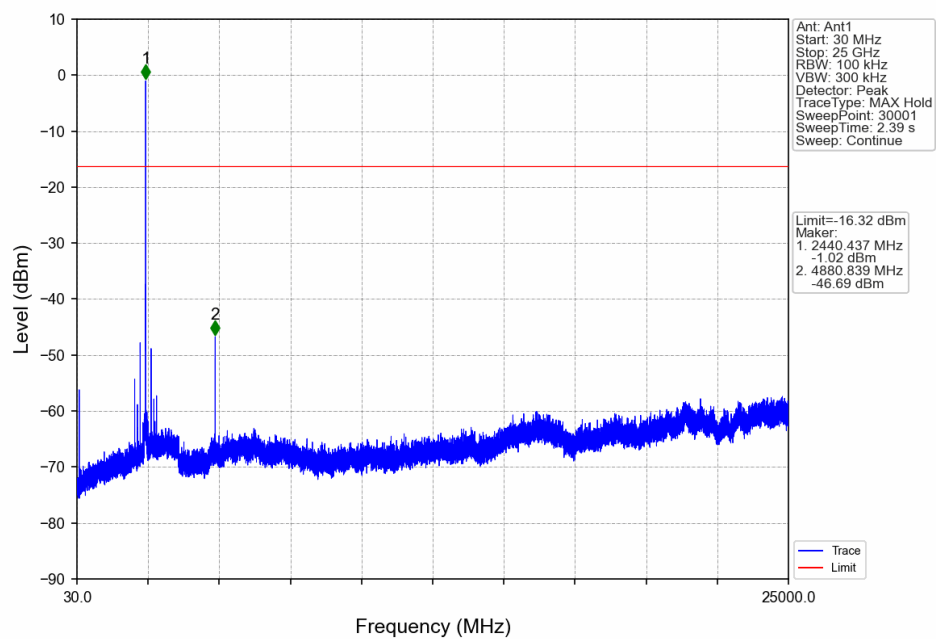

2M_HCH_2480MHz_Ant1_NTNV

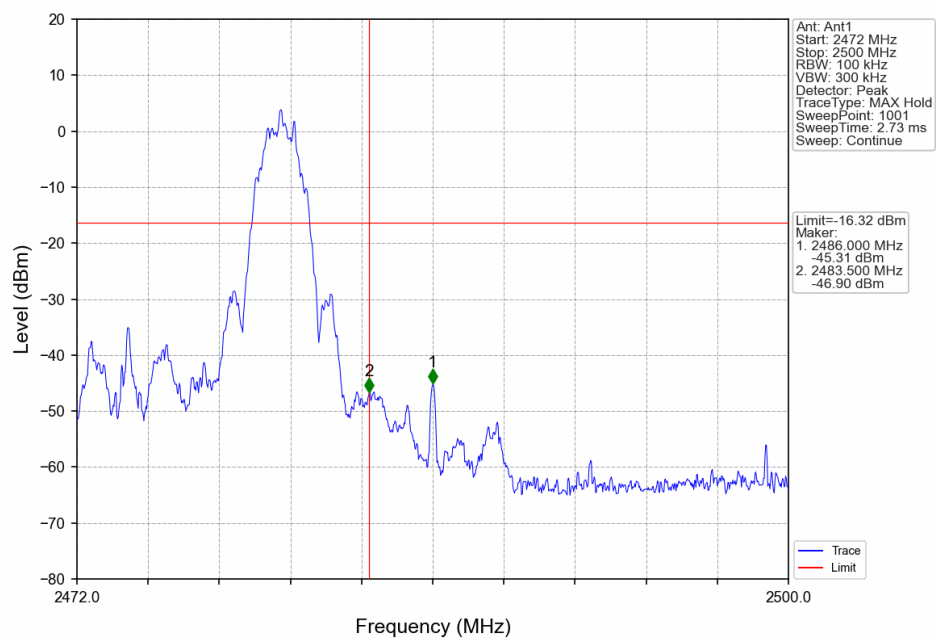

2M_HCH_2480MHz_Ant1_NTNV

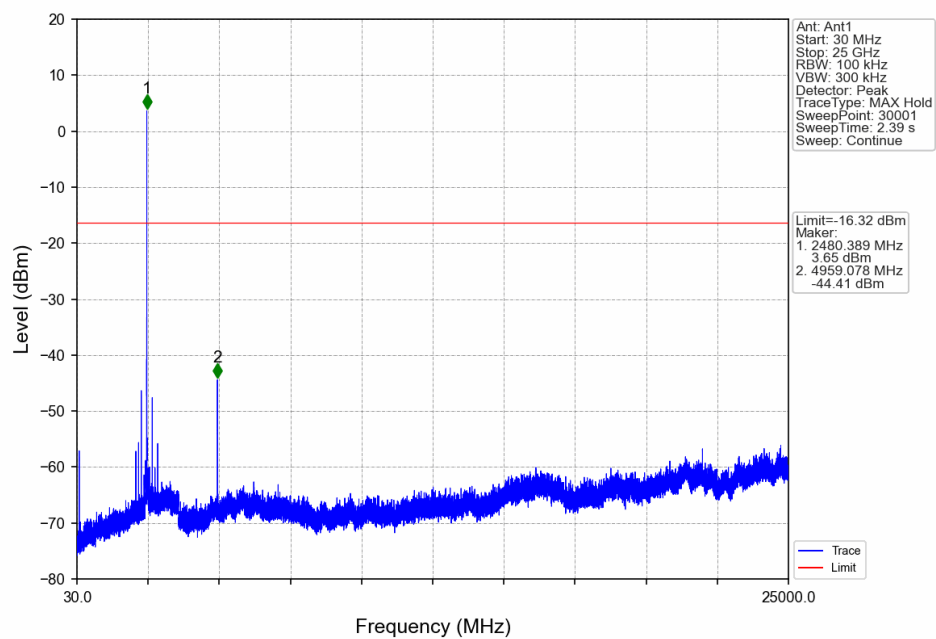

6. Form731

6.1 Form731

6.1.1 Test Result

Lower Freq (MHz)	High Freq (MHz)	MAX Power (W)	MAX Power (dBm)
2402	2480	0.0025	3.90