

## Appendix A

### RF Test Data for BT LE (Conducted Measurement)

Product Name: Portable Power Station


Test Model: P300A-Plus



#### Environmental Conditions



Temperature:	23.6 ° C
Relative Humidity:	52.2%
ATM Pressure:	100.0 kPa
Test Engineer:	Jone.Lee
Supervised by:	Paddi Chen

## A.1 -6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.664	$\geq 0.5$	Pass
NVNT	BLE 1M	2440	Ant1	0.659	$\geq 0.5$	Pass
NVNT	BLE 1M	2480	Ant1	0.647	$\geq 0.5$	Pass
NVNT	BLE 2M	2402	Ant1	1.169	$\geq 0.5$	Pass
NVNT	BLE 2M	2440	Ant1	1.146	$\geq 0.5$	Pass
NVNT	BLE 2M	2480	Ant1	1.167	$\geq 0.5$	Pass


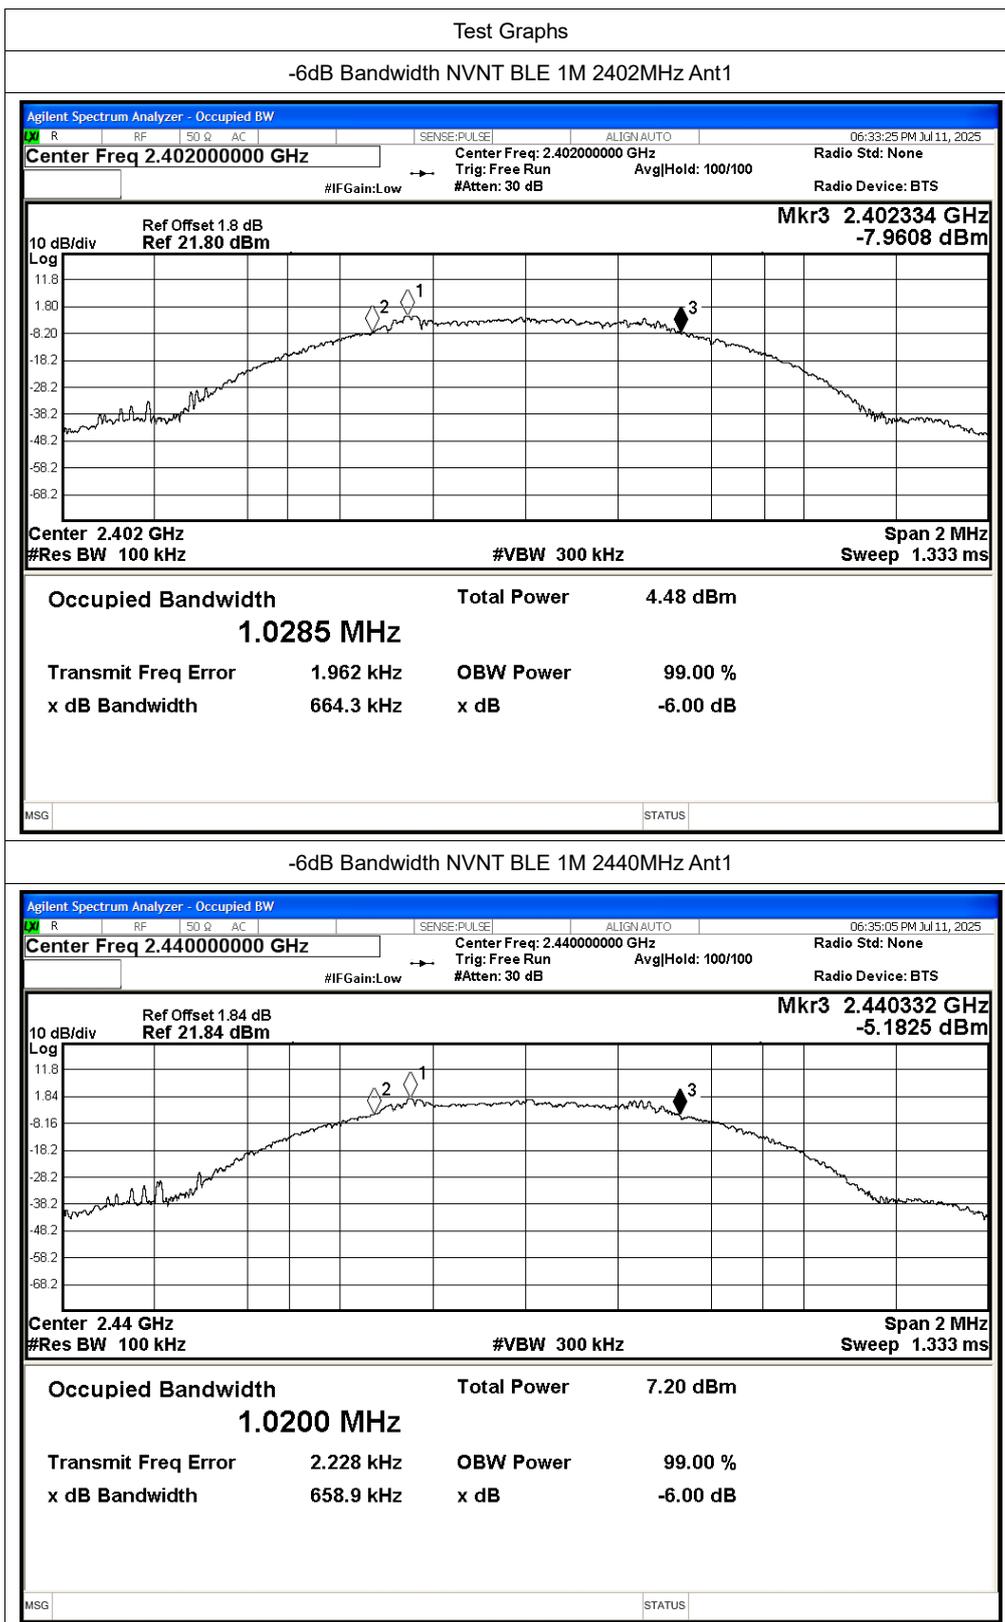


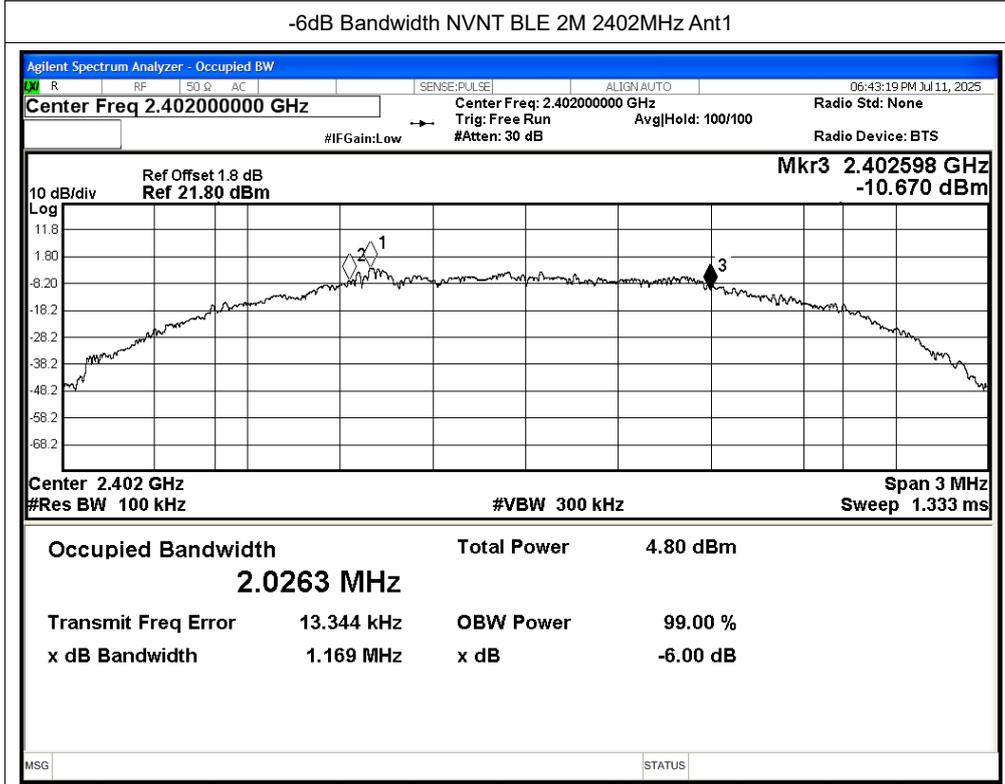
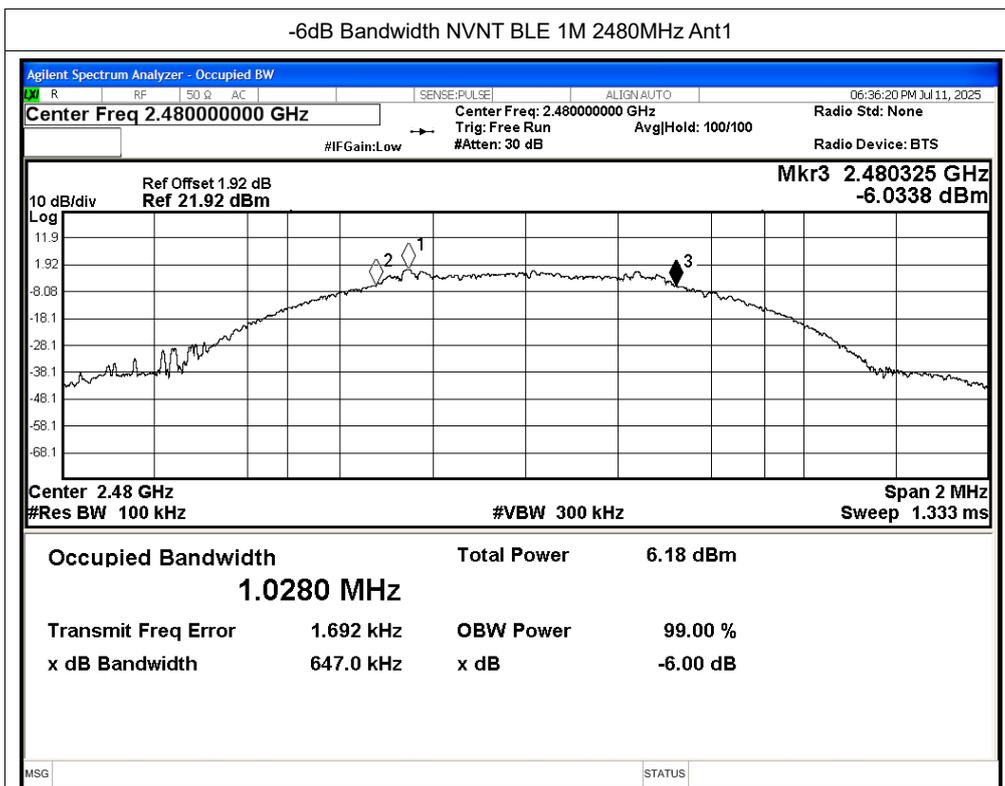


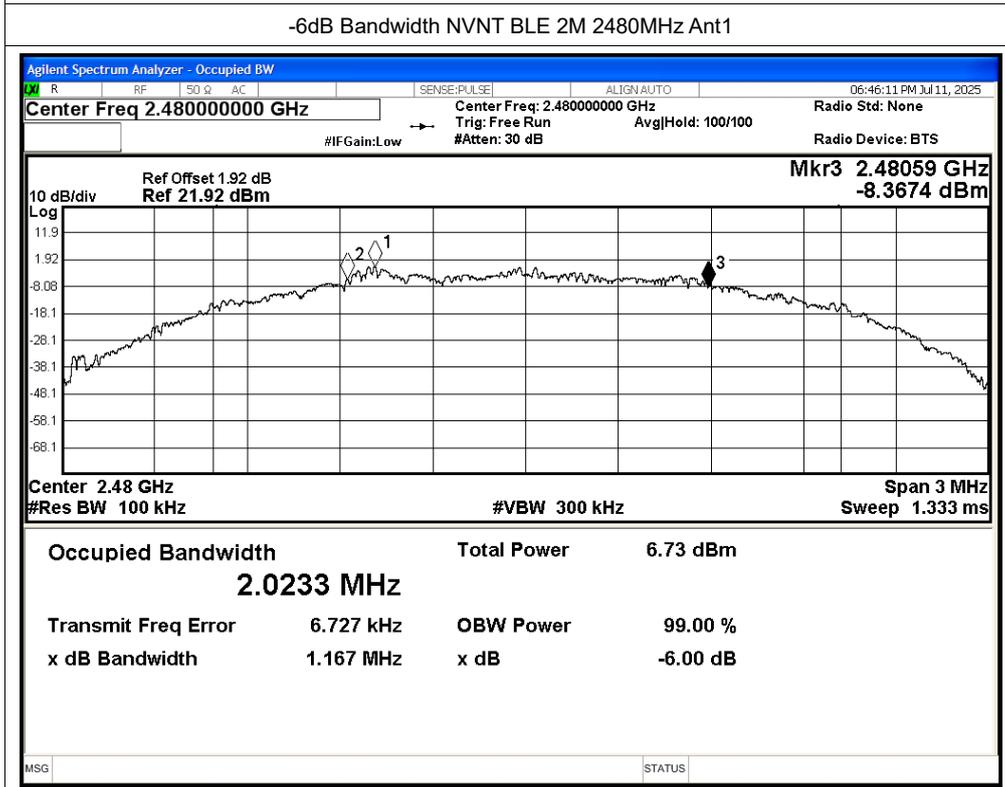
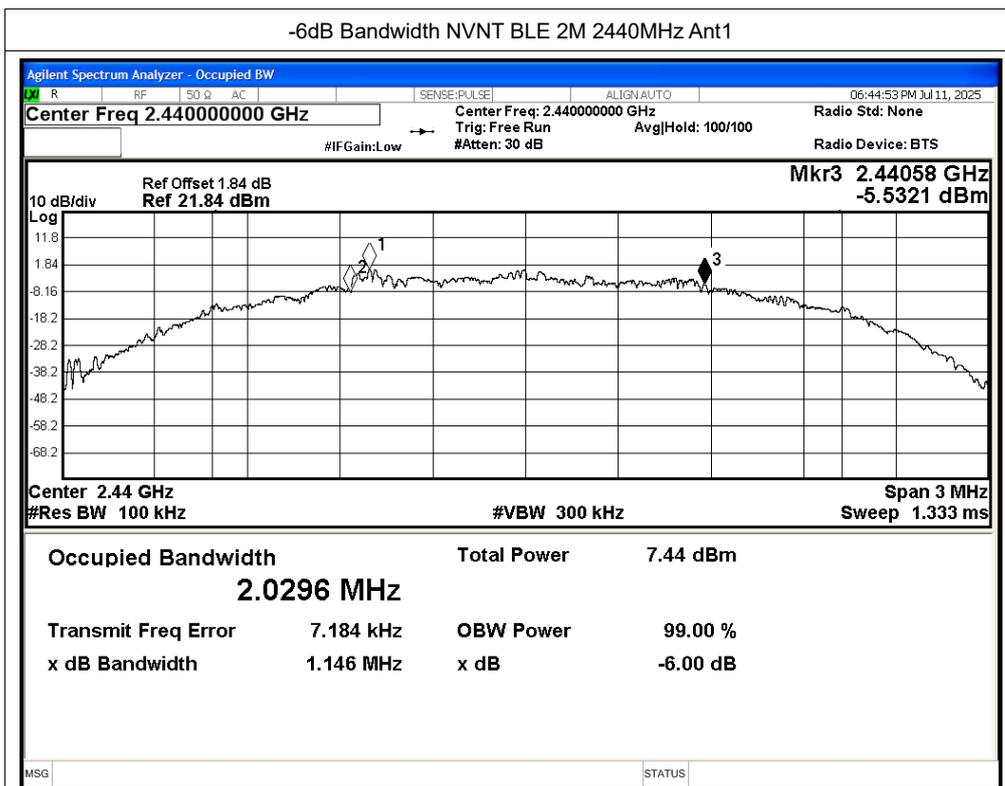


## A.2 Maximum Peak Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-1.11	30	Pass
NVNT	BLE 1M	2440	Ant1	1.54	30	Pass
NVNT	BLE 1M	2480	Ant1	0.63	30	Pass
NVNT	BLE 2M	2402	Ant1	-1.22	30	Pass
NVNT	BLE 2M	2440	Ant1	1.31	30	Pass
NVNT	BLE 2M	2480	Ant1	0.41	30	Pass

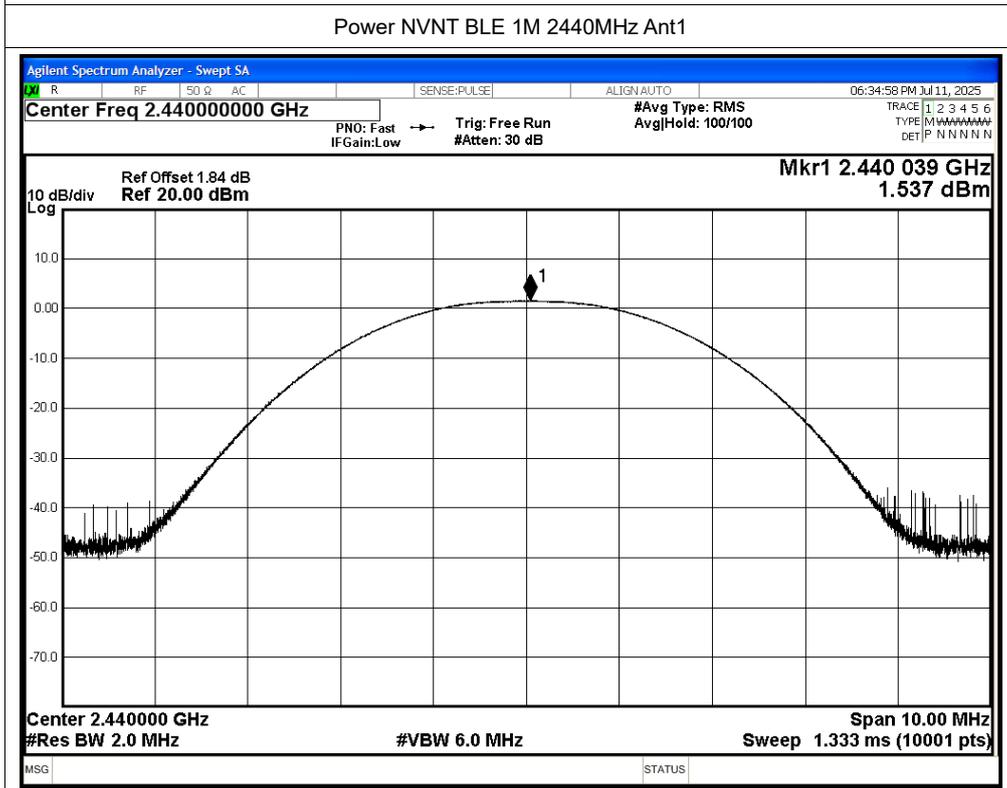
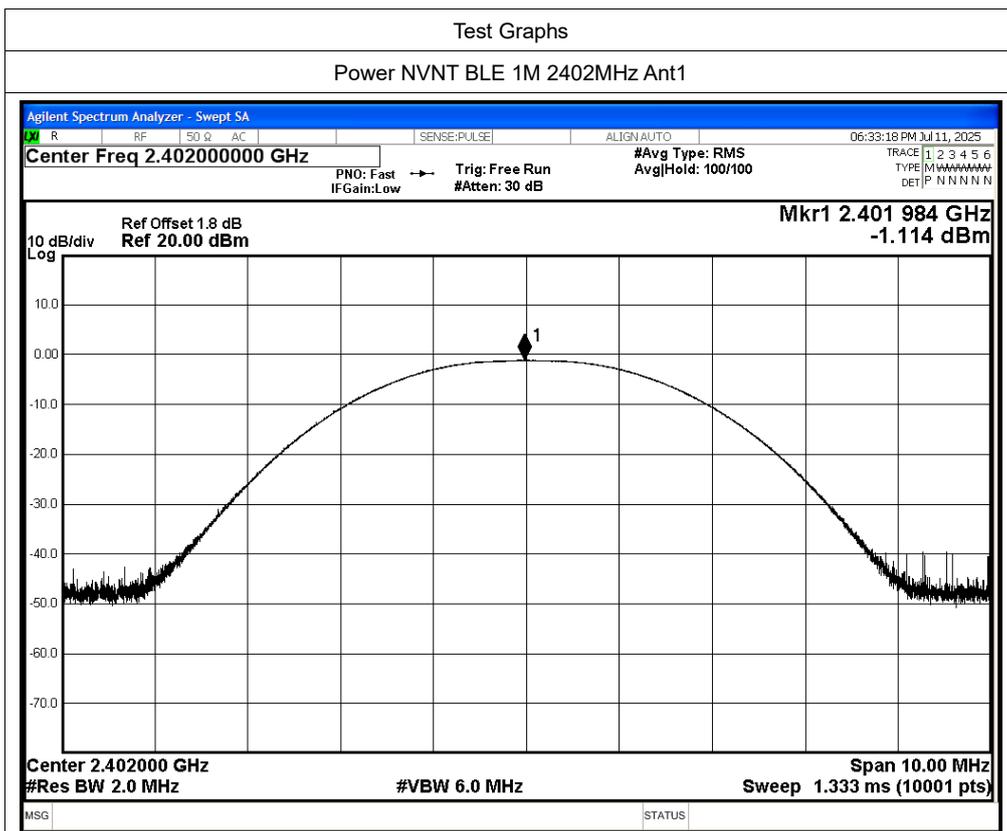


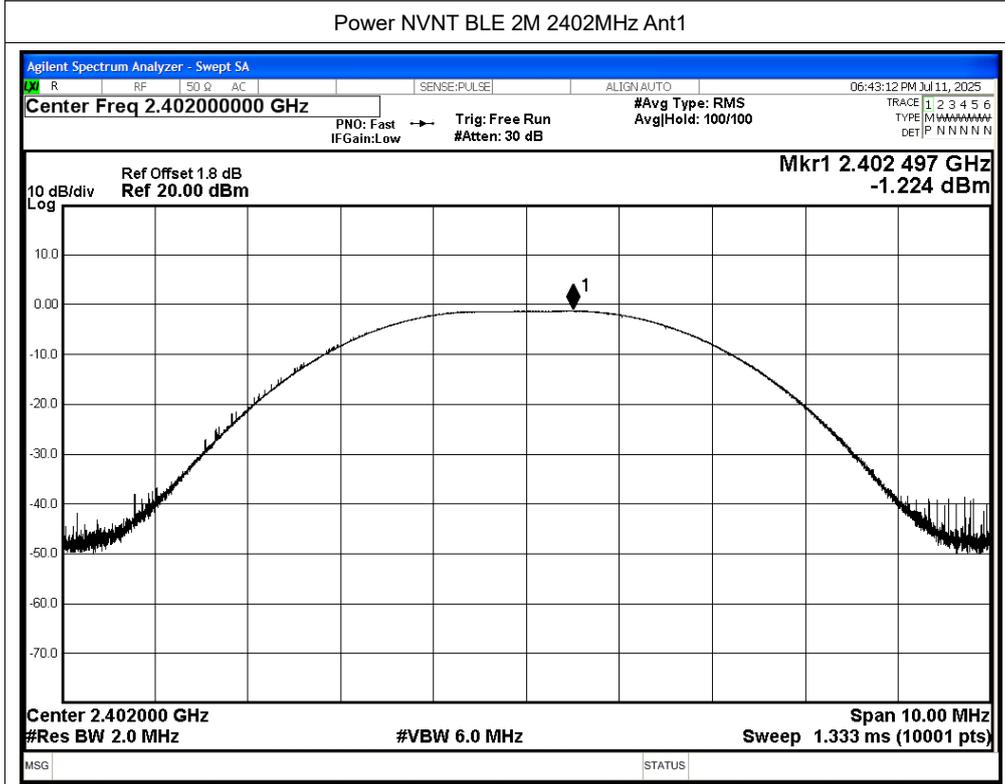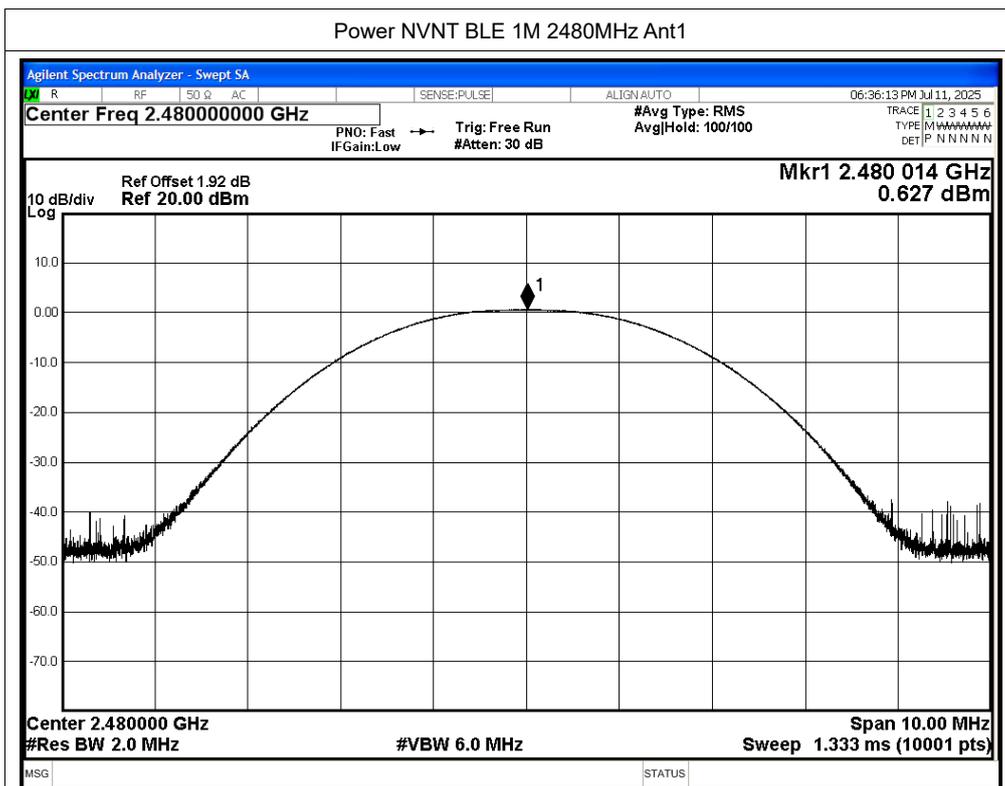

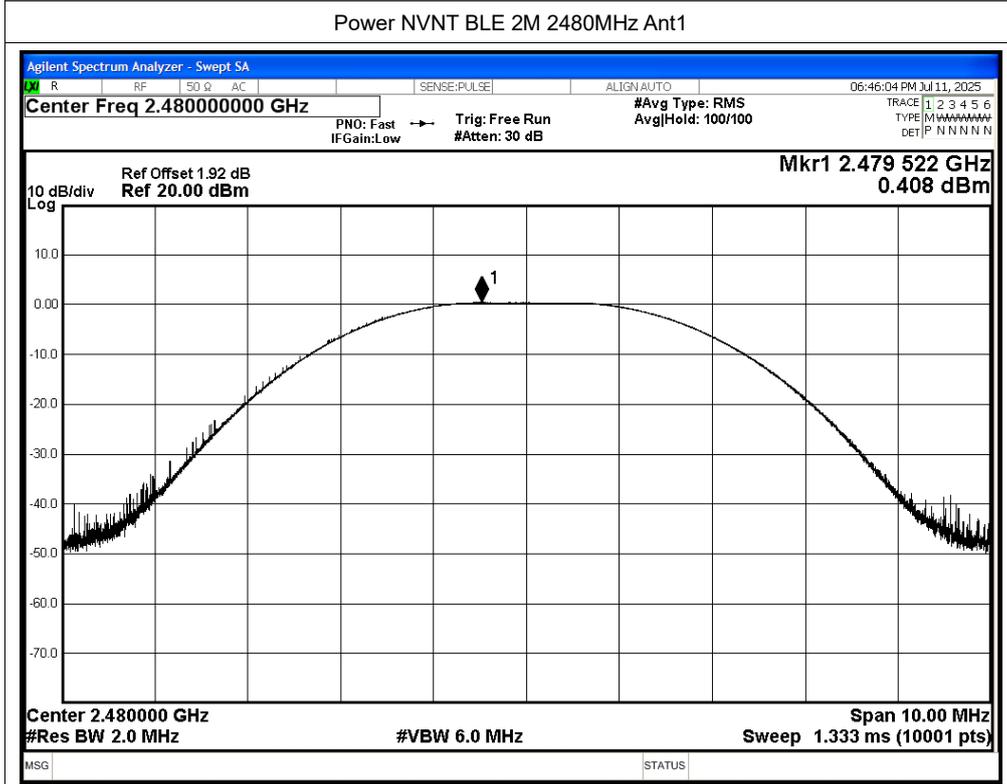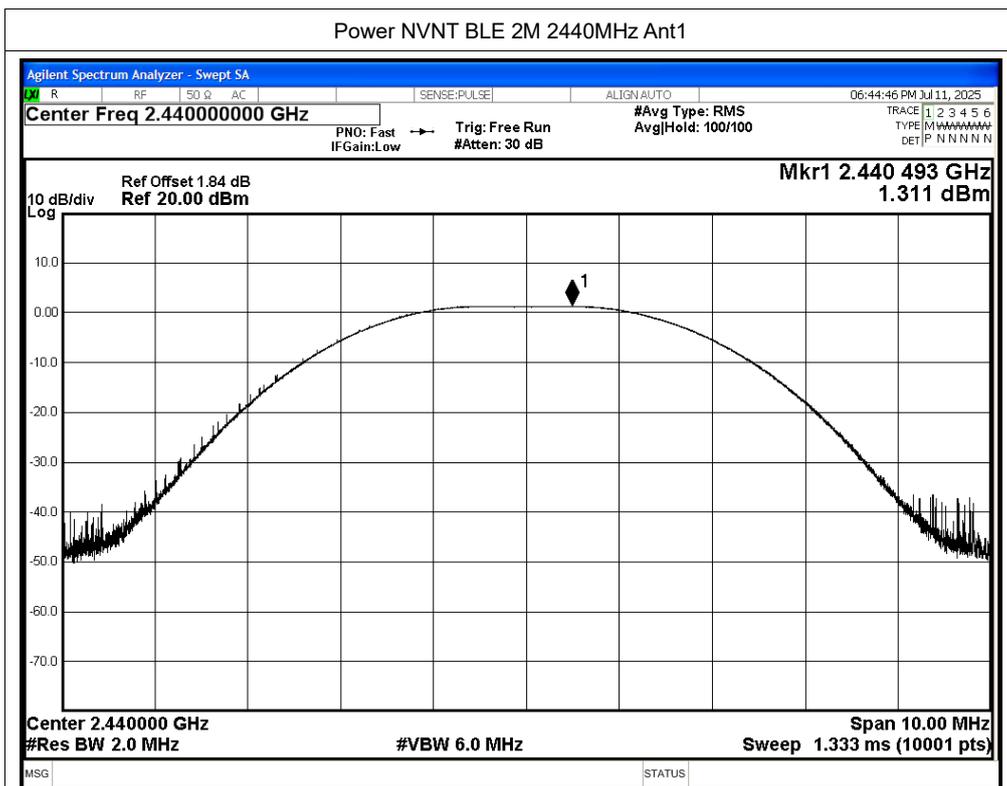

### A.3 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	Ant1	-17.34	8	Pass
NVNT	BLE 1M	2440	Ant1	-14.97	8	Pass
NVNT	BLE 1M	2480	Ant1	-15.69	8	Pass
NVNT	BLE 2M	2402	Ant1	-20.58	8	Pass
NVNT	BLE 2M	2440	Ant1	-17.58	8	Pass
NVNT	BLE 2M	2480	Ant1	-19.6	8	Pass

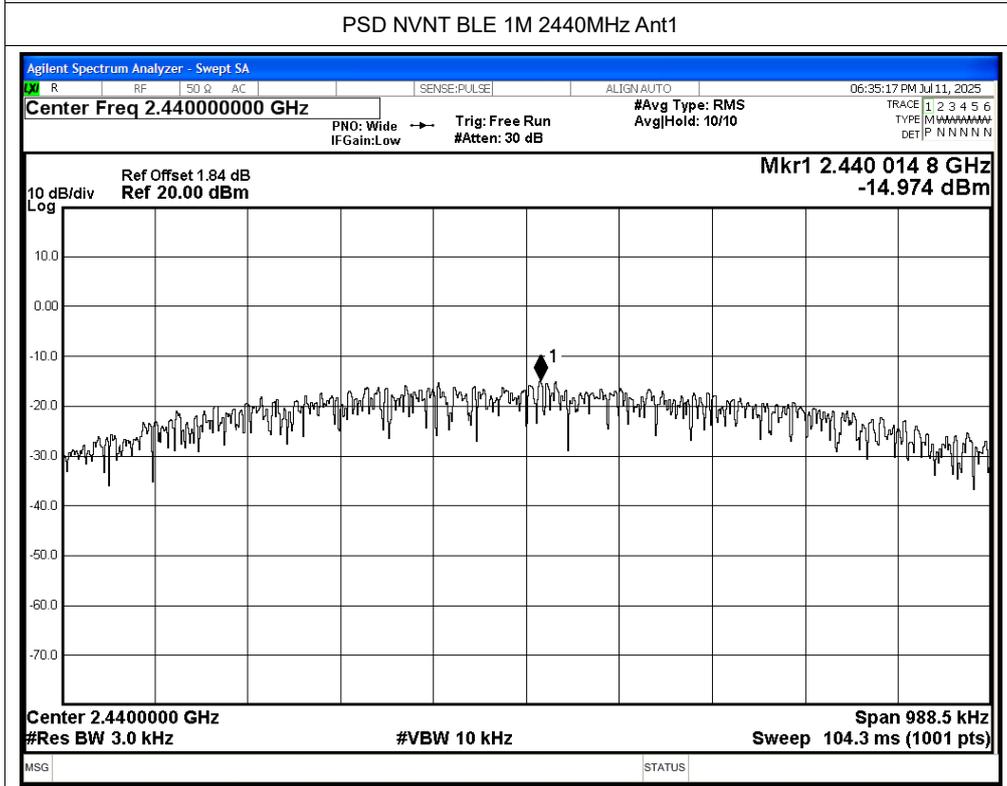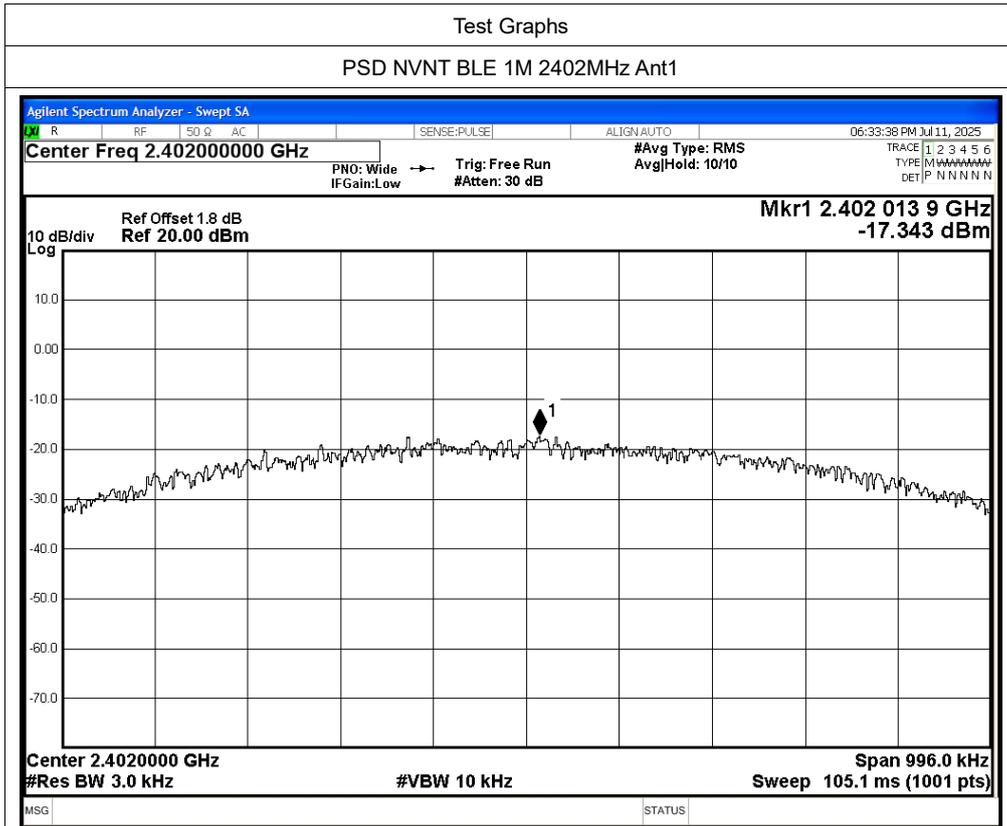












## A.4 Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-54.82	-20	Pass
NVNT	BLE 1M	2480	Ant1	-56.93	-20	Pass
NVNT	BLE 2M	2402	Ant1	-43.62	-20	Pass
NVNT	BLE 2M	2480	Ant1	-54.75	-20	Pass

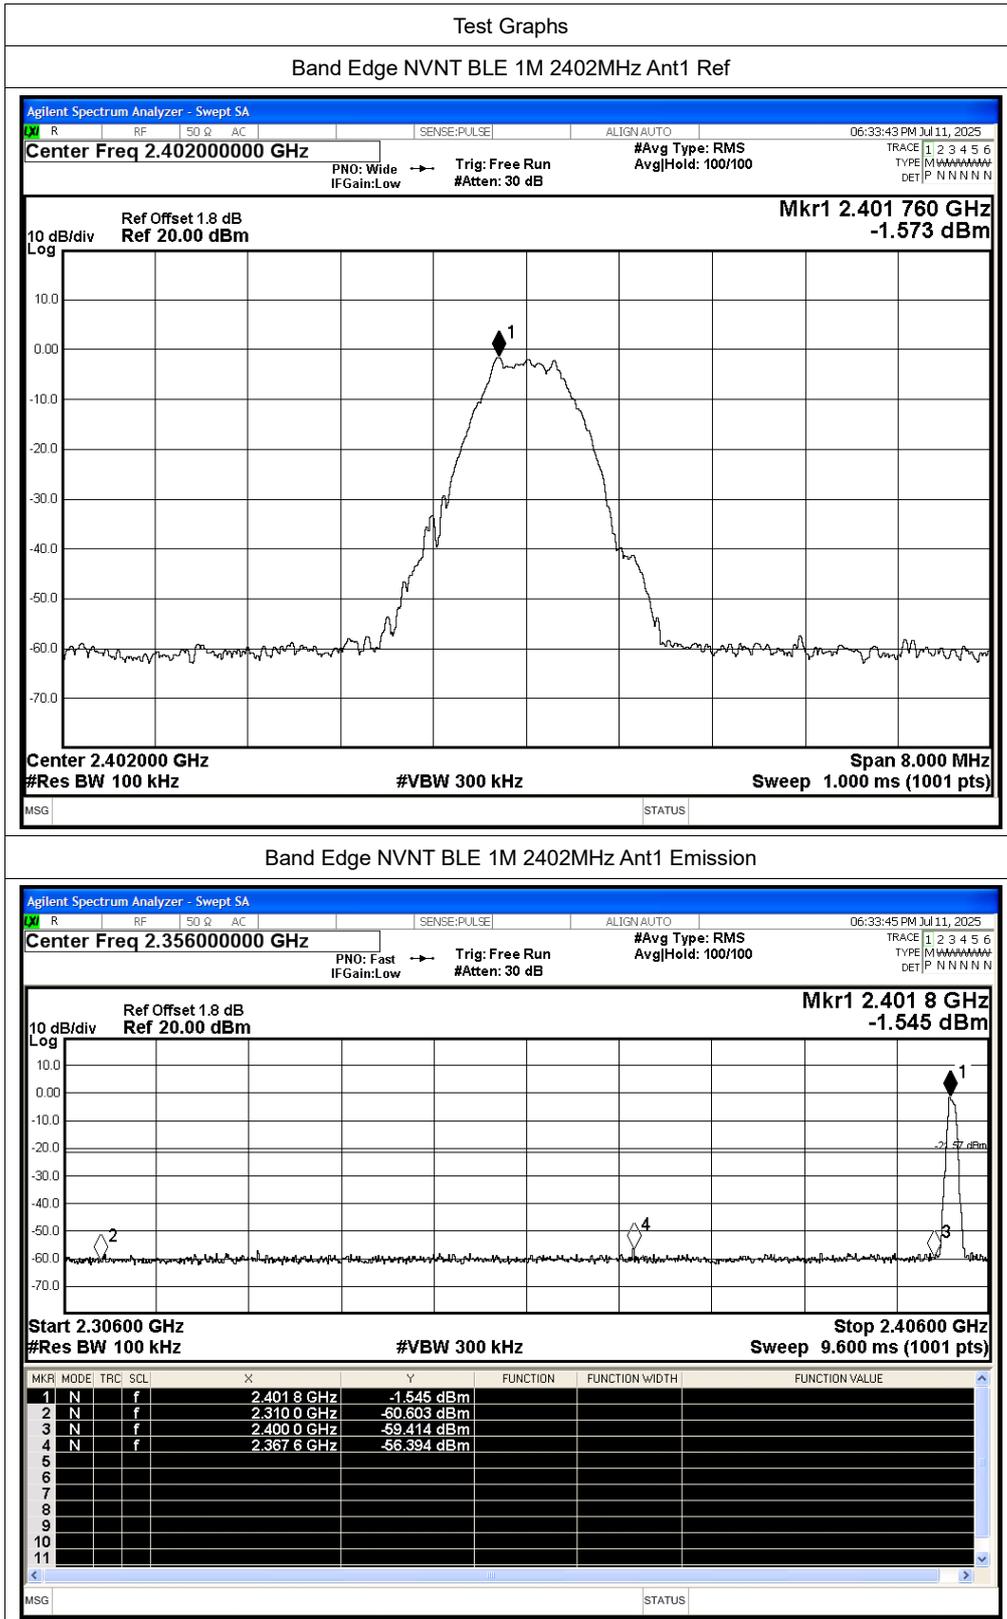

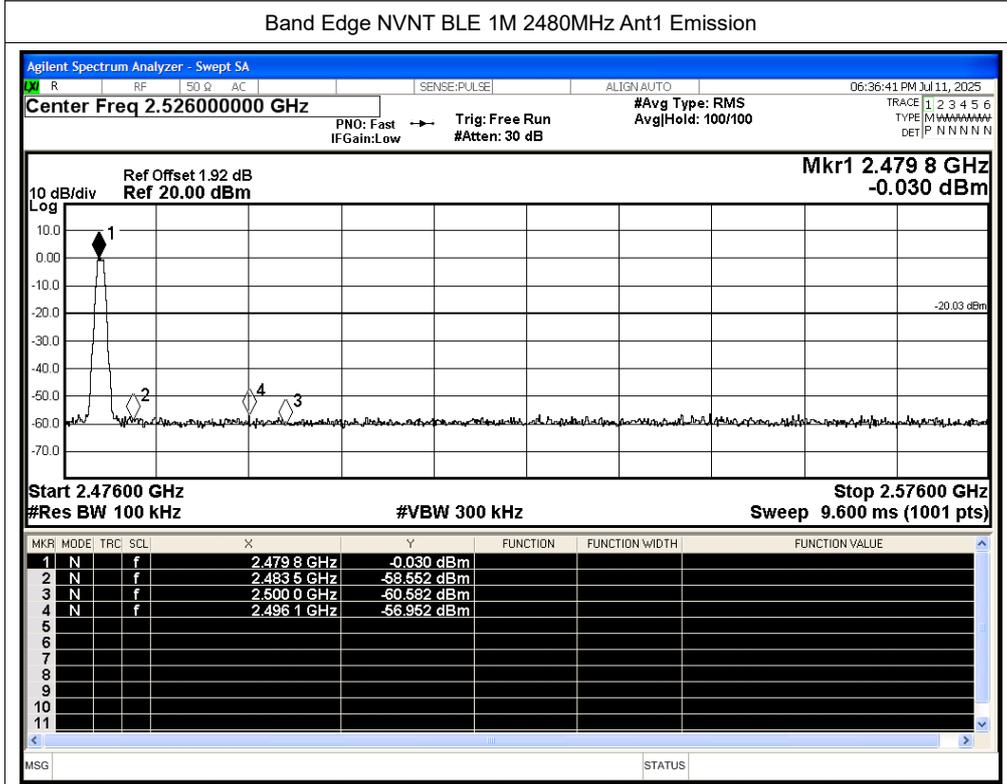
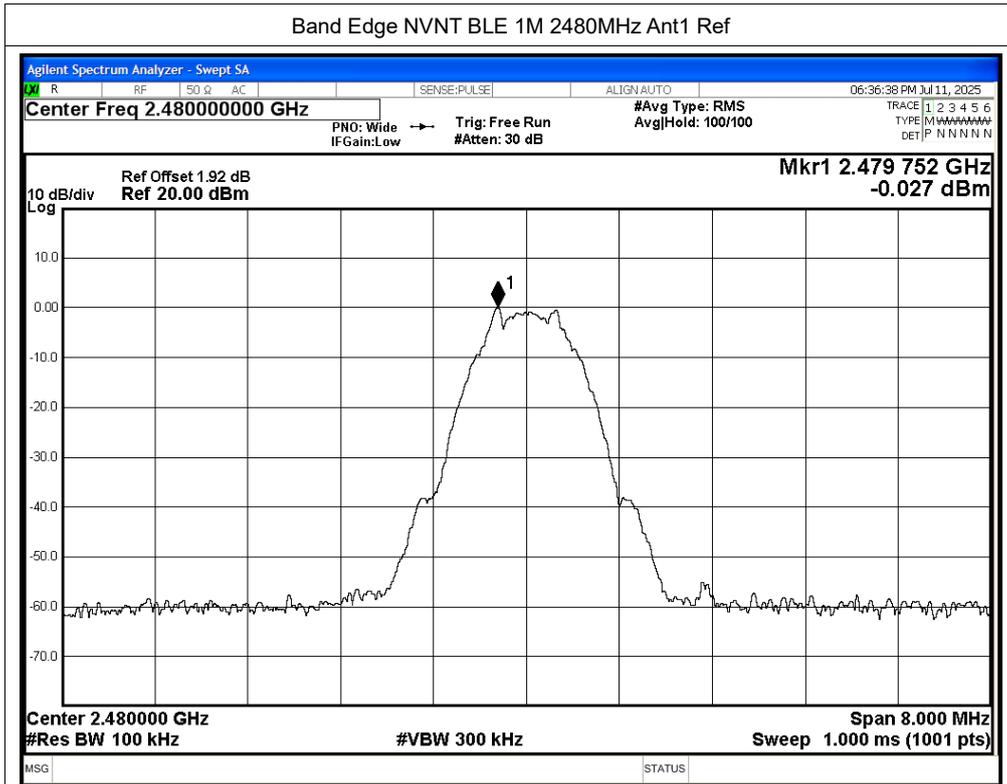


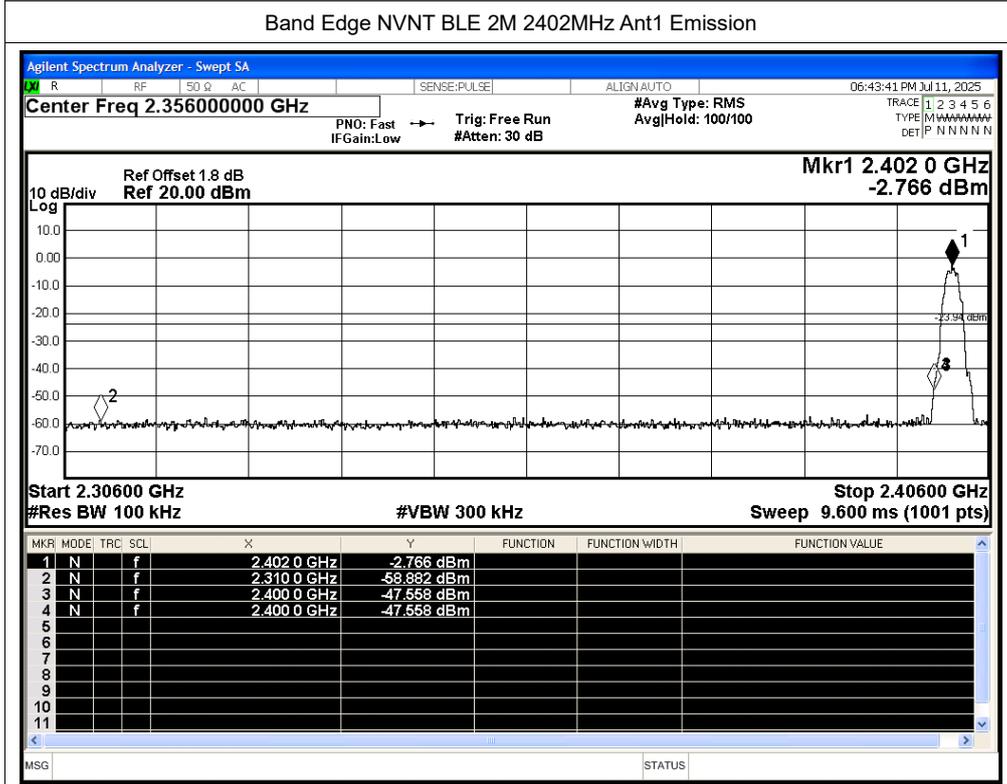
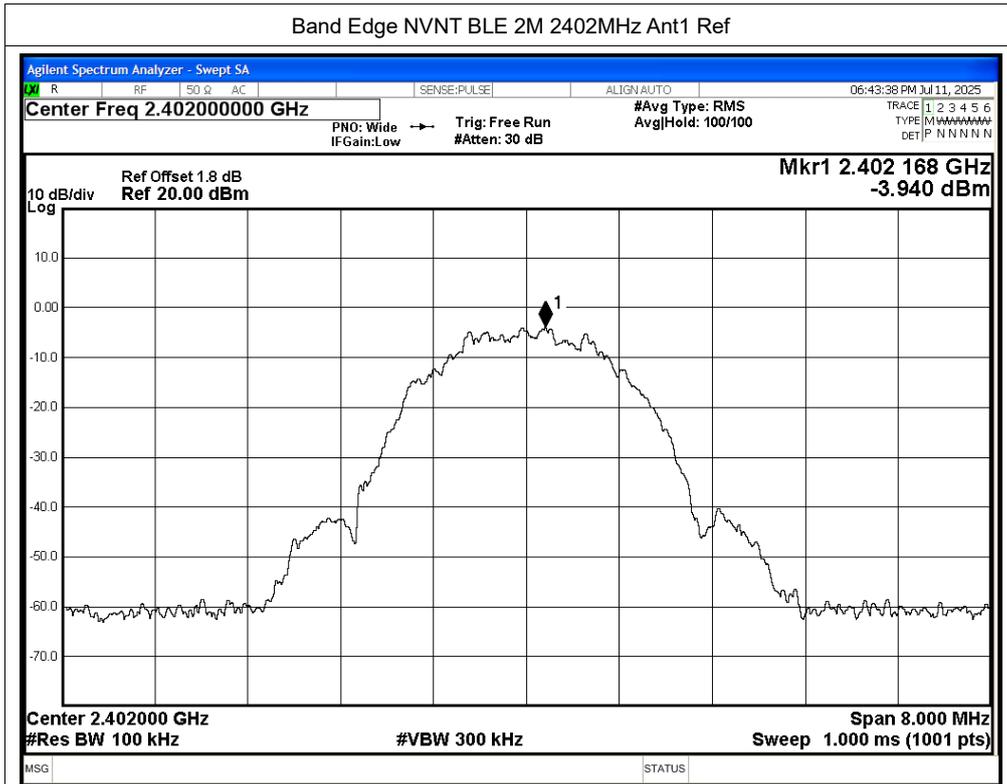


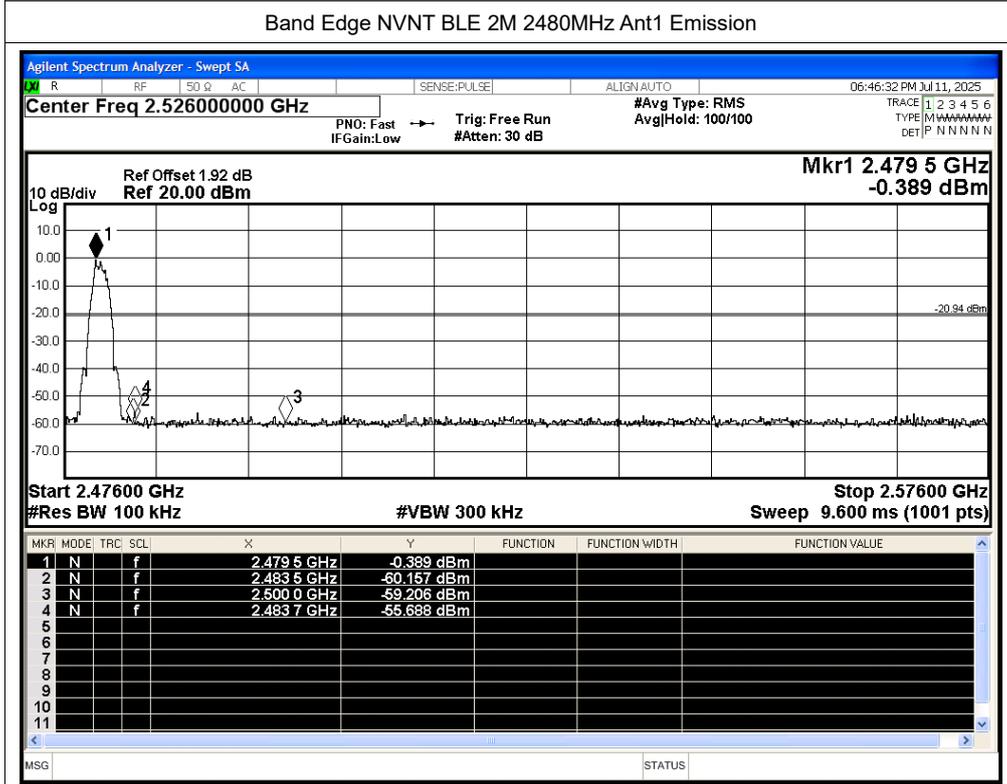
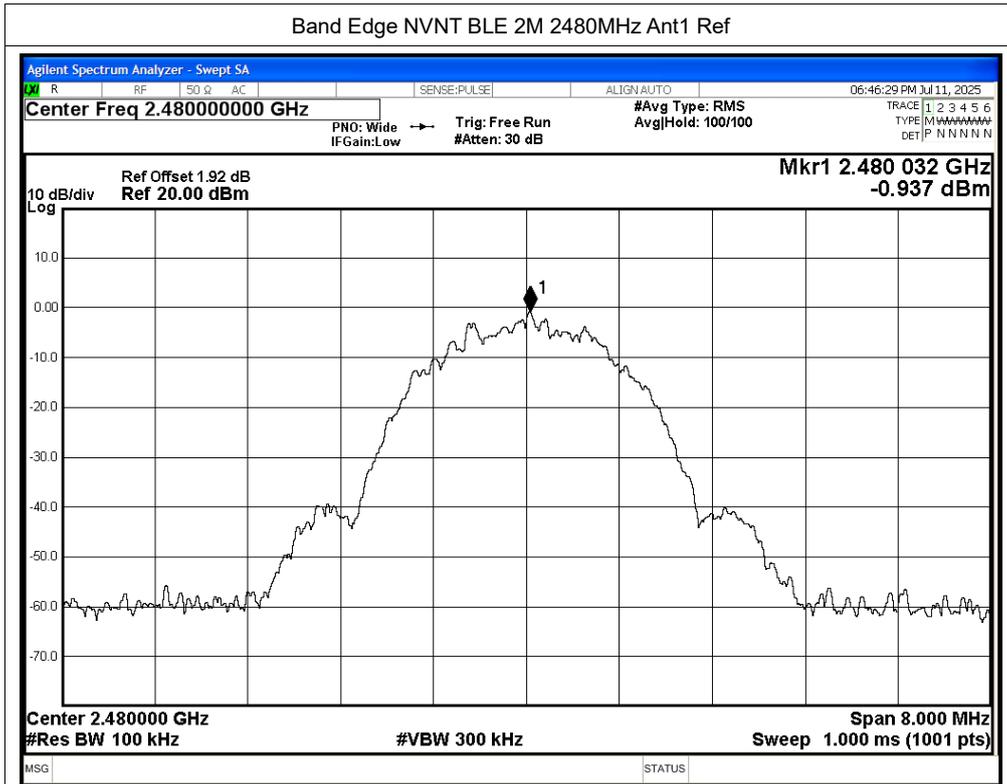




## A.5 Conducted RF Spurious Emission



Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-53.63	-20	Pass
NVNT	BLE 1M	2440	Ant1	-56.24	-20	Pass
NVNT	BLE 1M	2480	Ant1	-54.92	-20	Pass
NVNT	BLE 2M	2402	Ant1	-53.19	-20	Pass
NVNT	BLE 2M	2440	Ant1	-55.58	-20	Pass
NVNT	BLE 2M	2480	Ant1	-54.9	-20	Pass

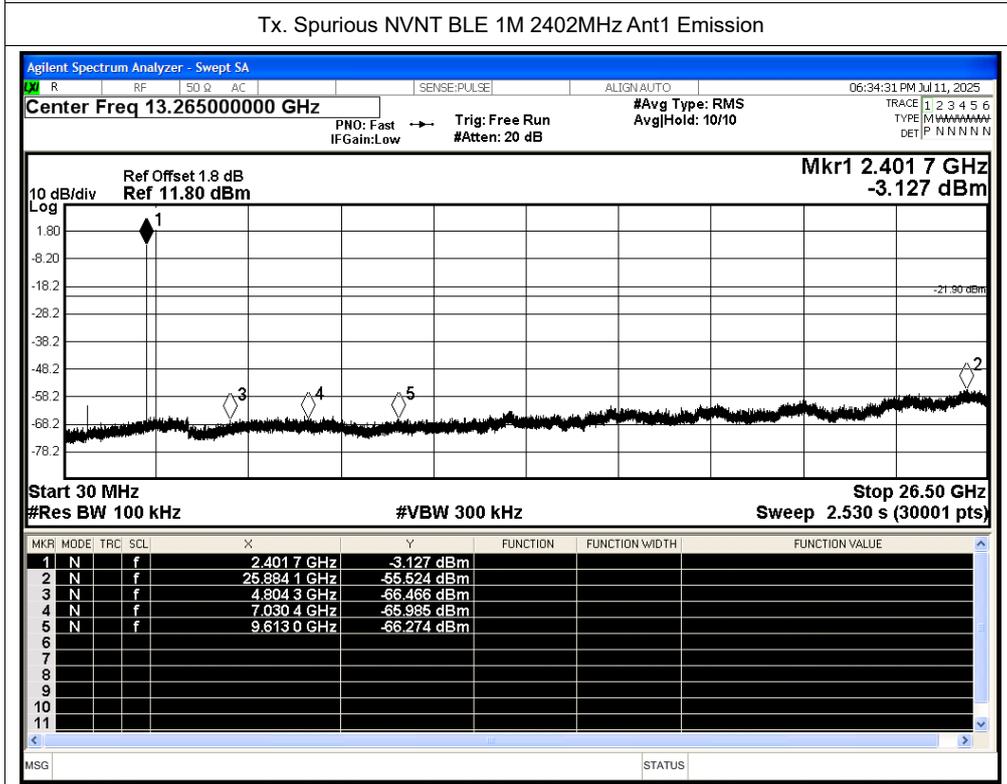
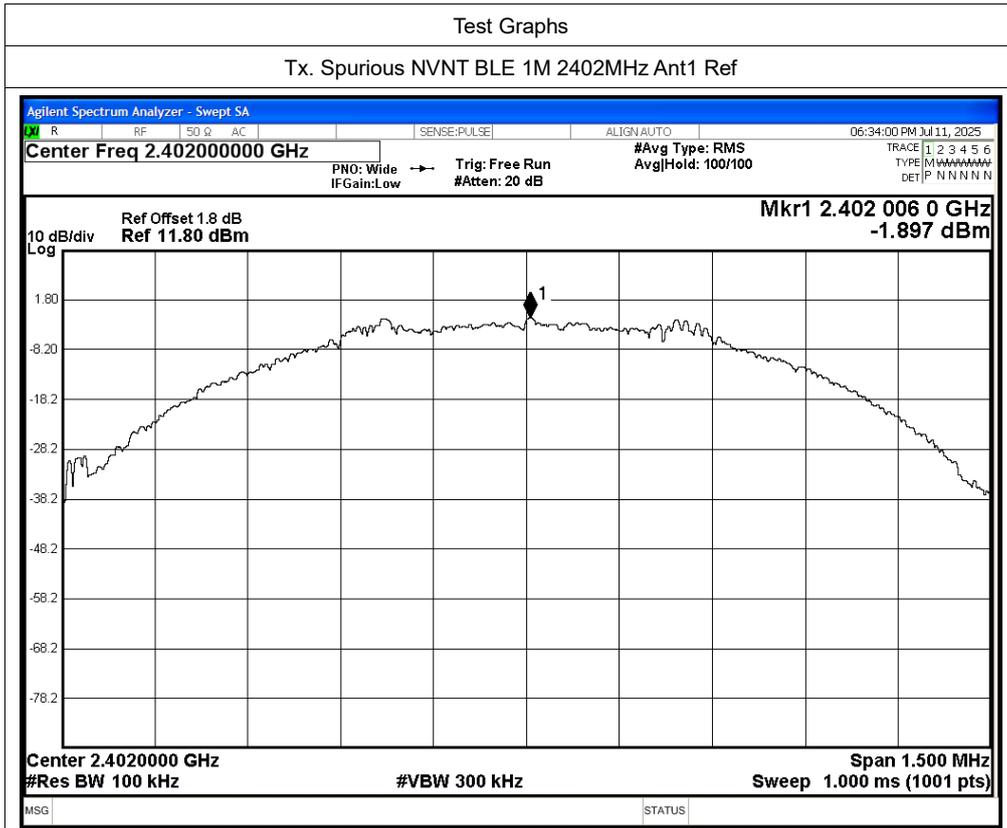


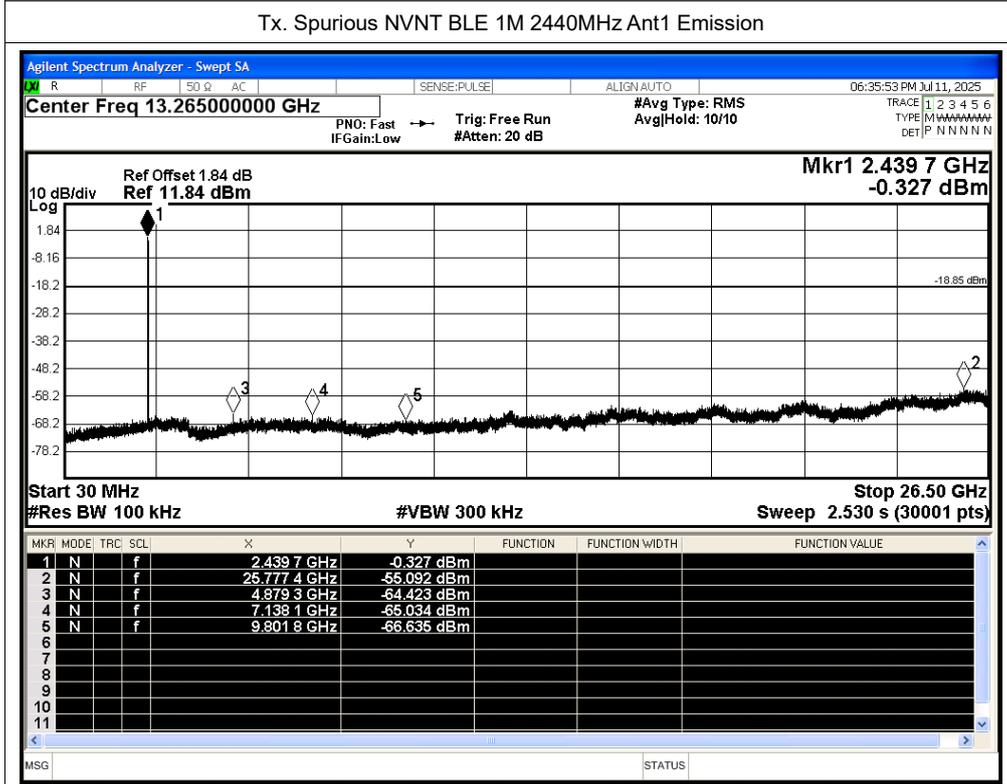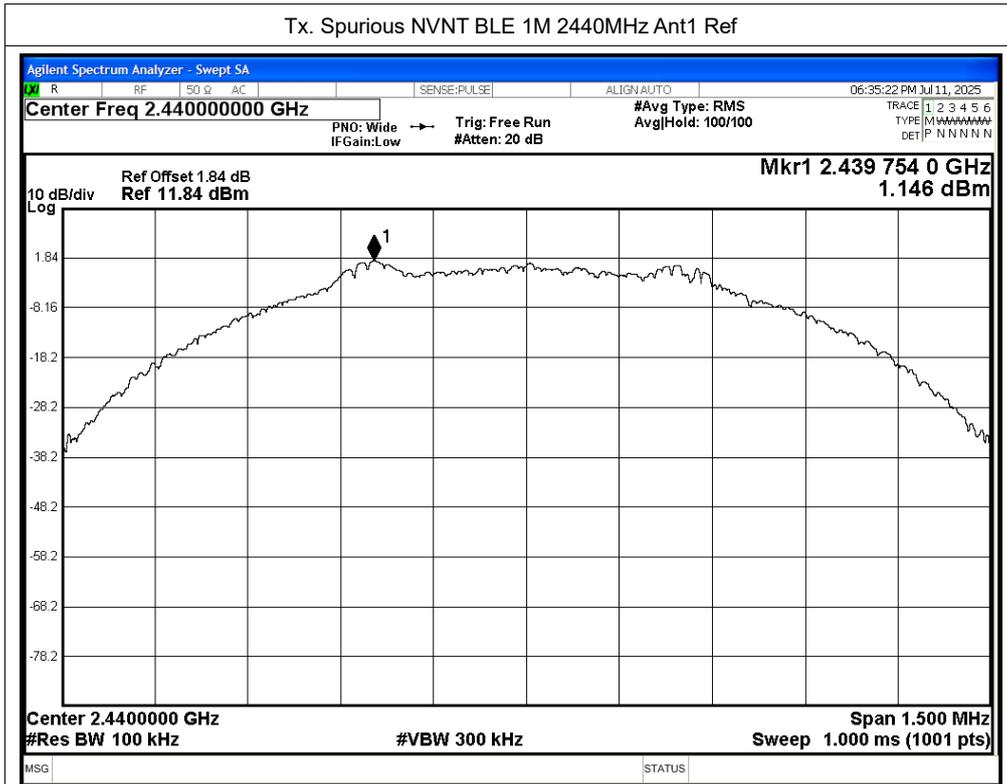

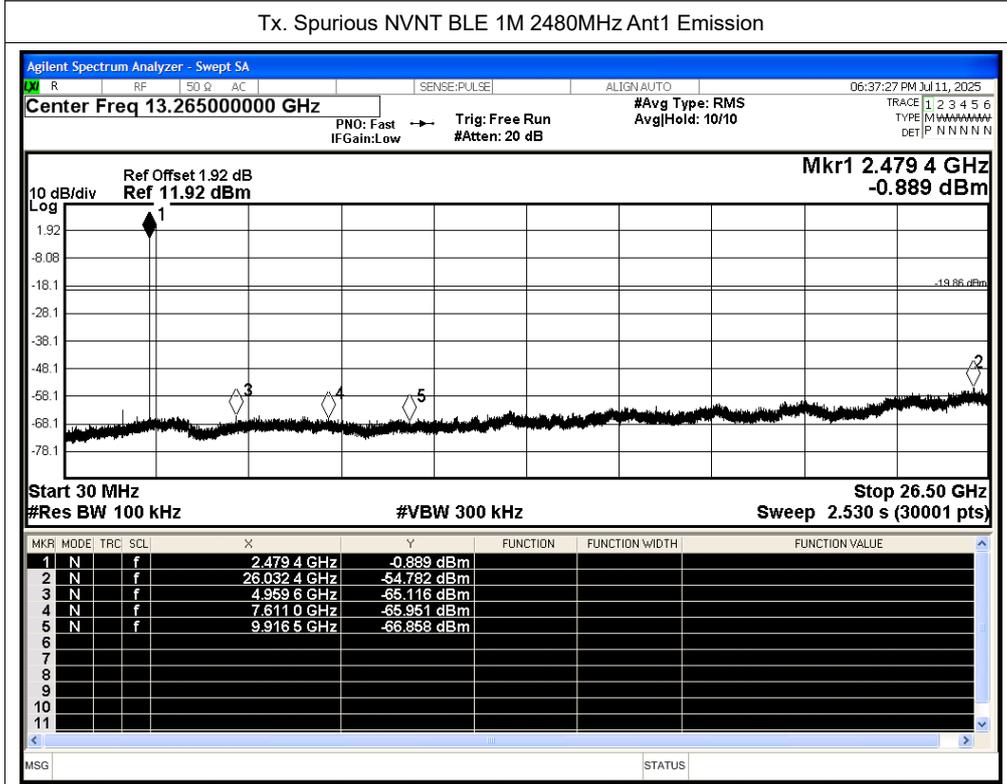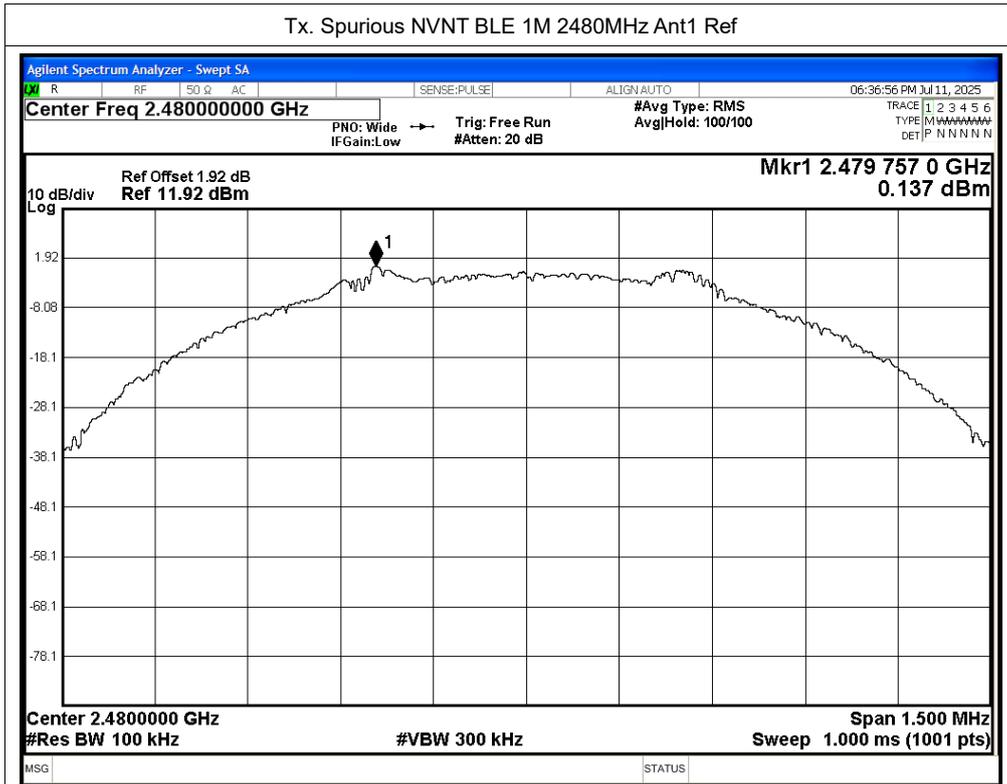

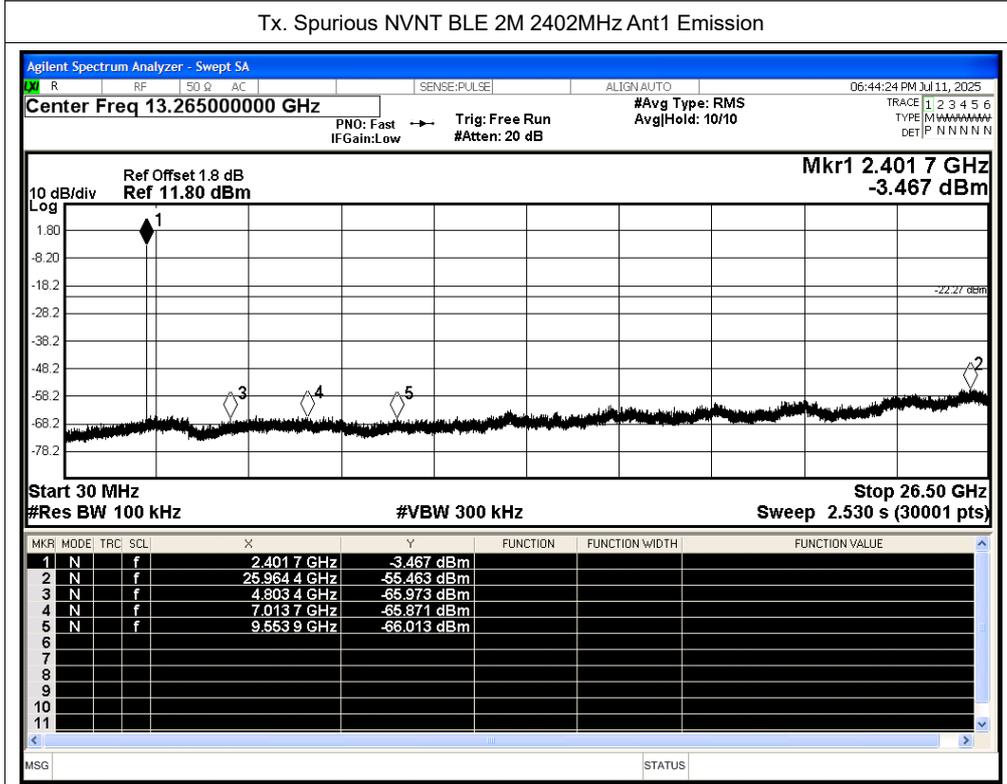
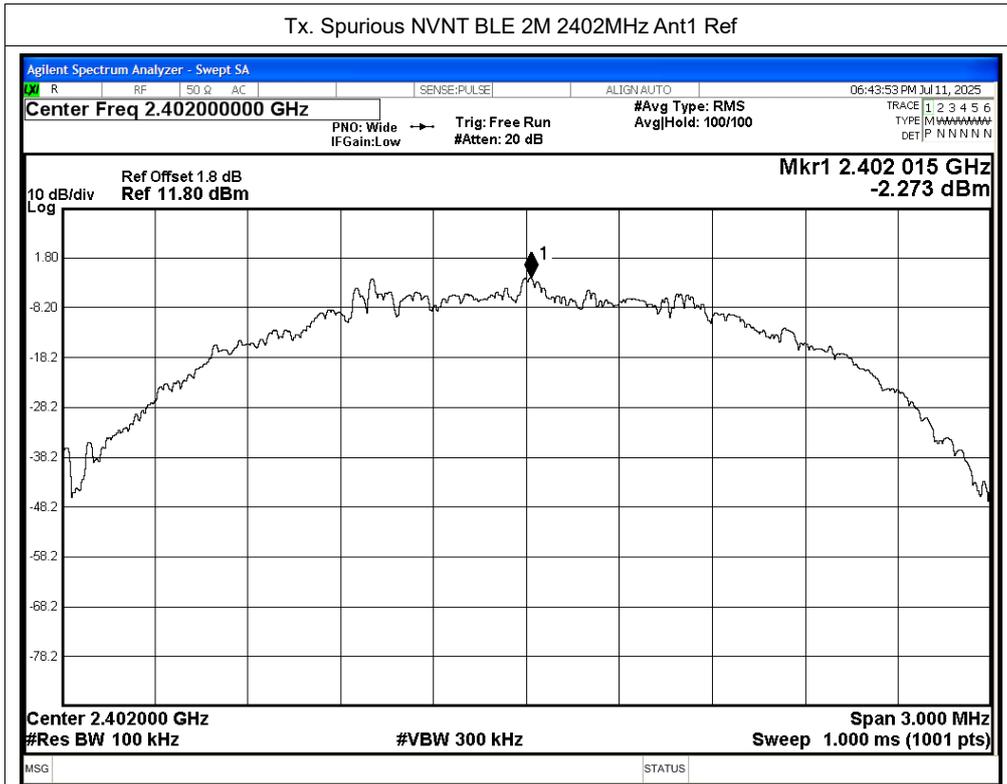


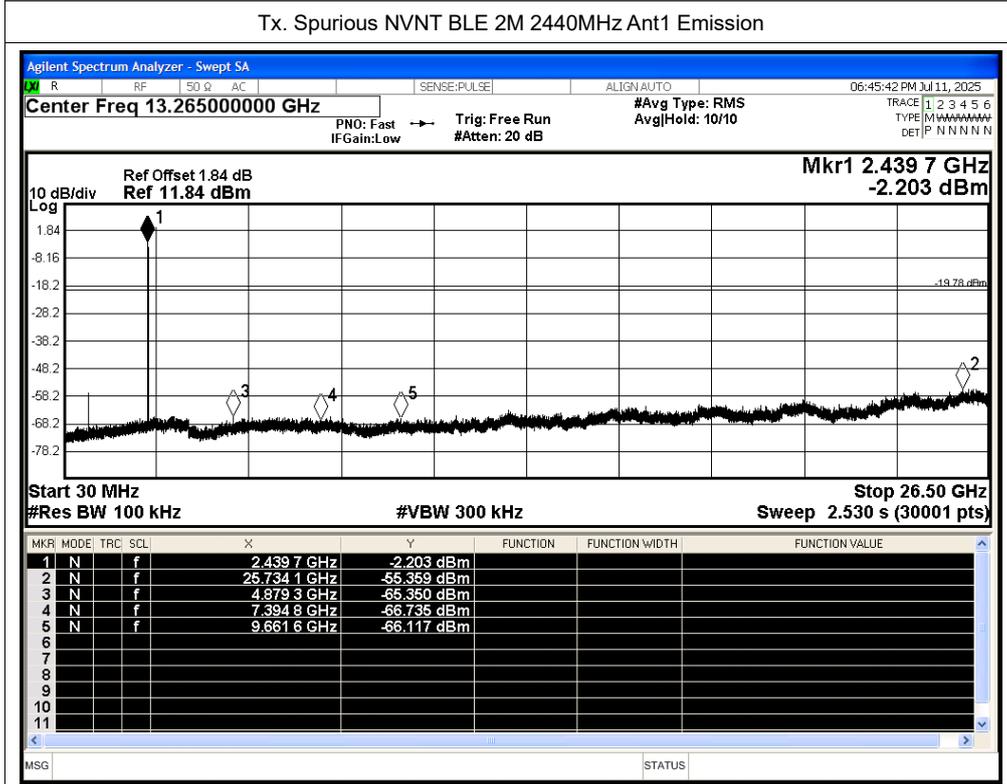
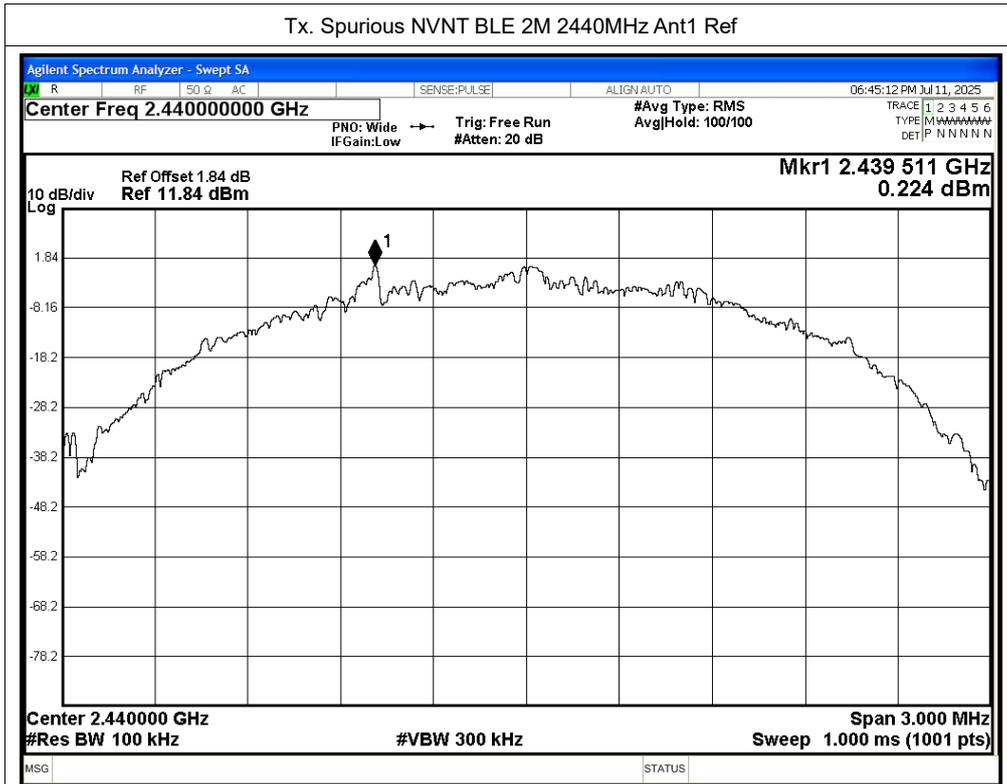


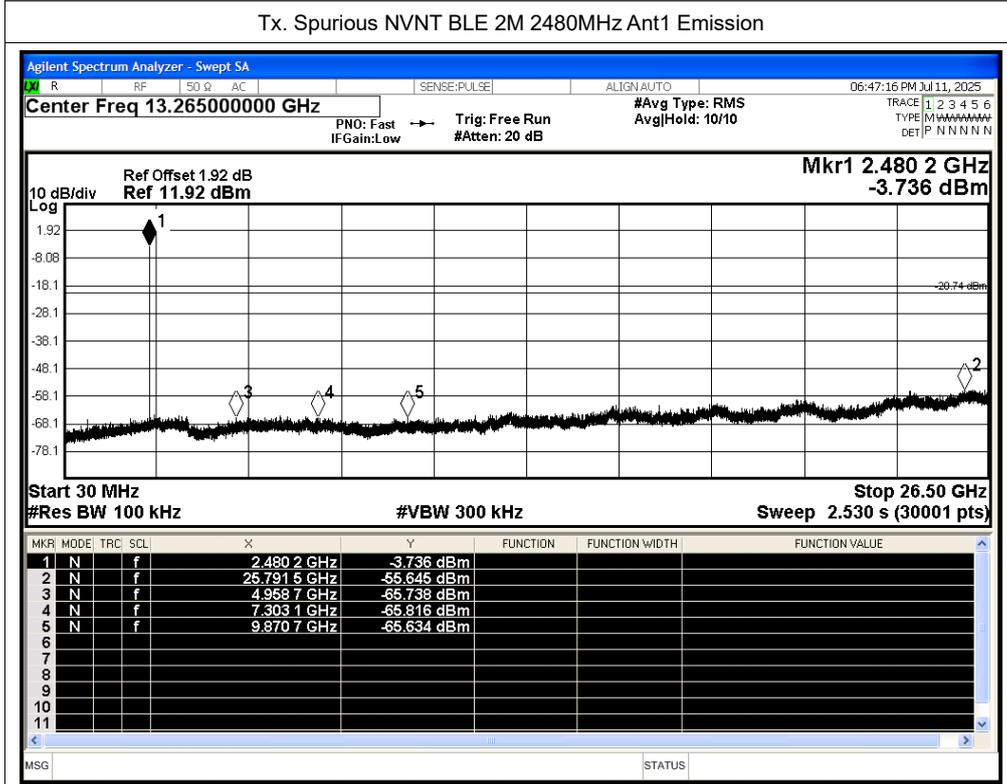
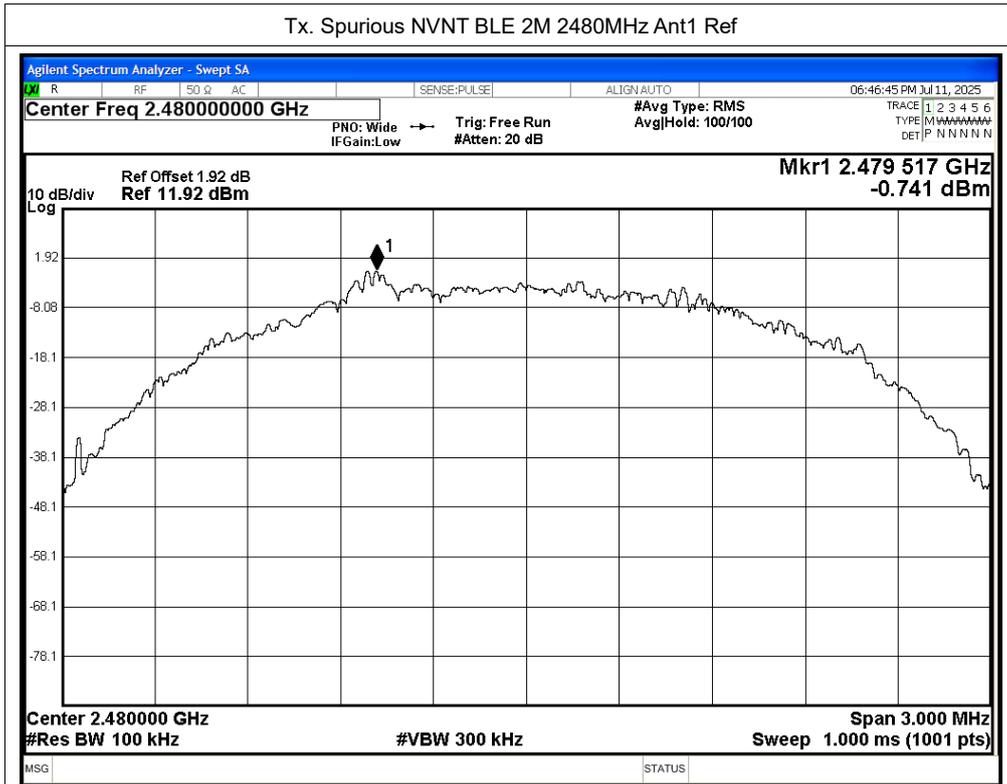


## A.6 Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1M	2402	Ant1	72.03	1.42	0.74
NVNT	BLE 1M	2440	Ant1	72.03	1.42	0.74
NVNT	BLE 1M	2480	Ant1	72.03	1.42	0.74
NVNT	BLE 2M	2402	Ant1	54.44	2.64	1.47
NVNT	BLE 2M	2440	Ant1	54.4	2.64	1.47
NVNT	BLE 2M	2480	Ant1	54.4	2.64	1.47

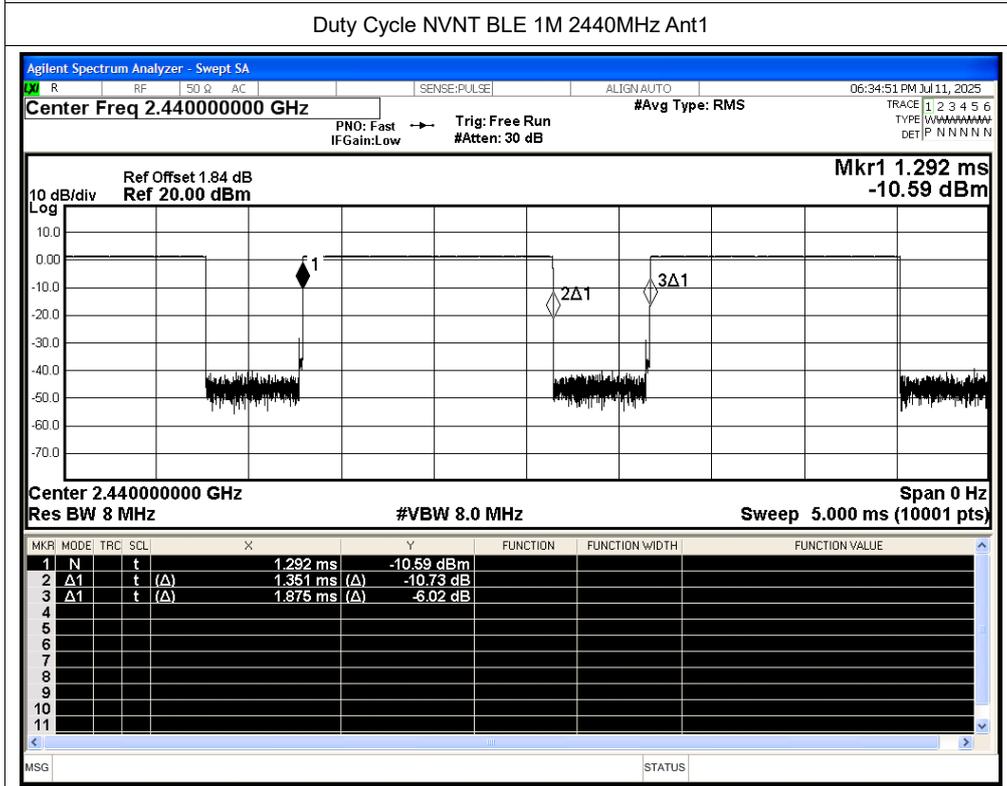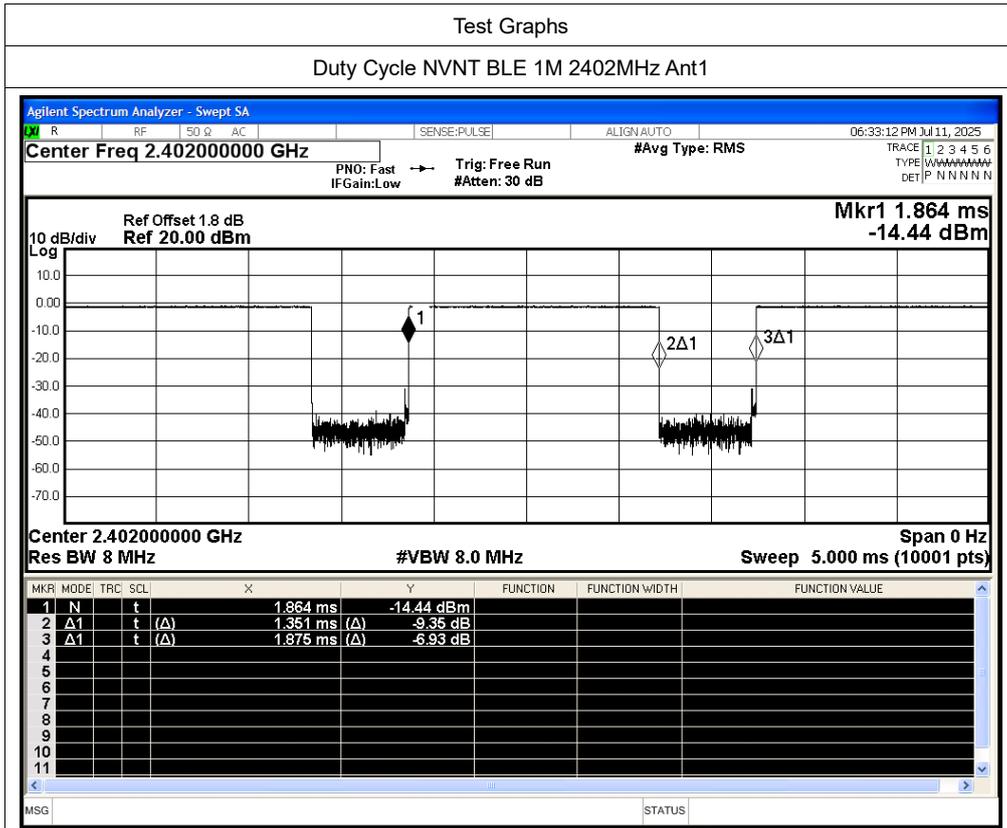

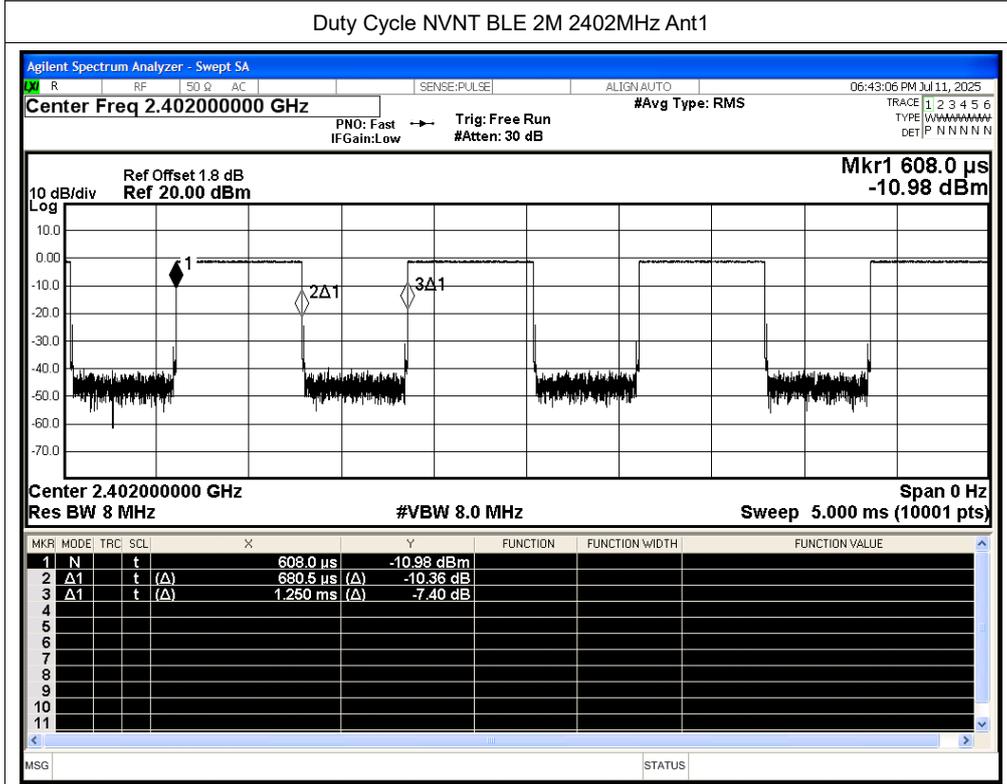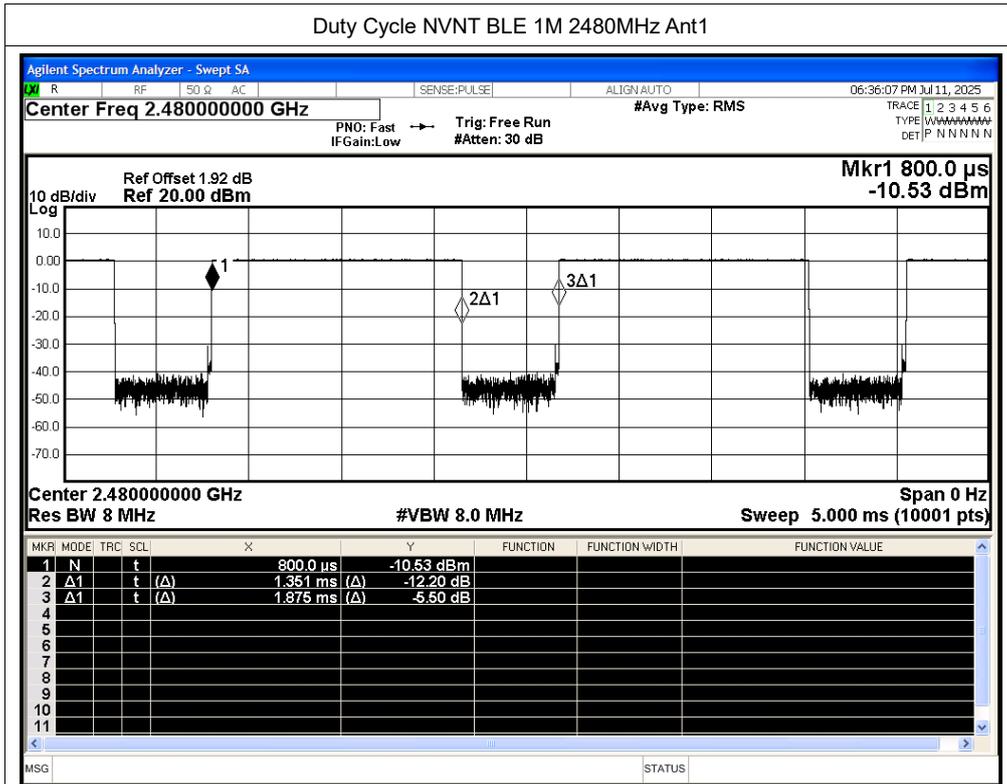

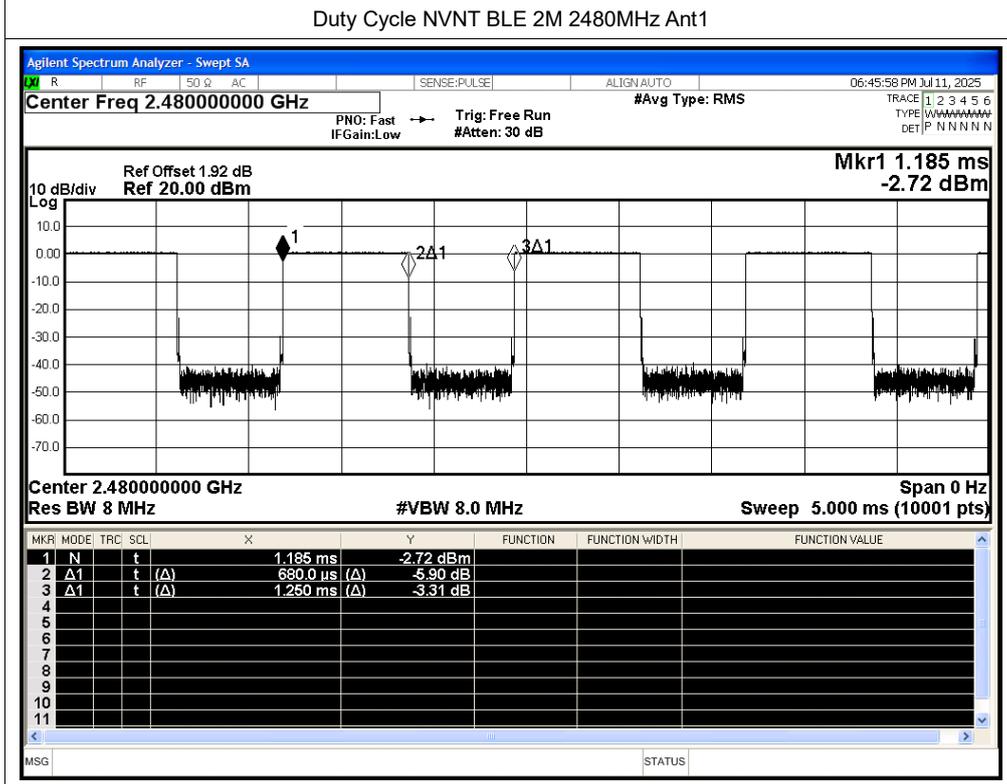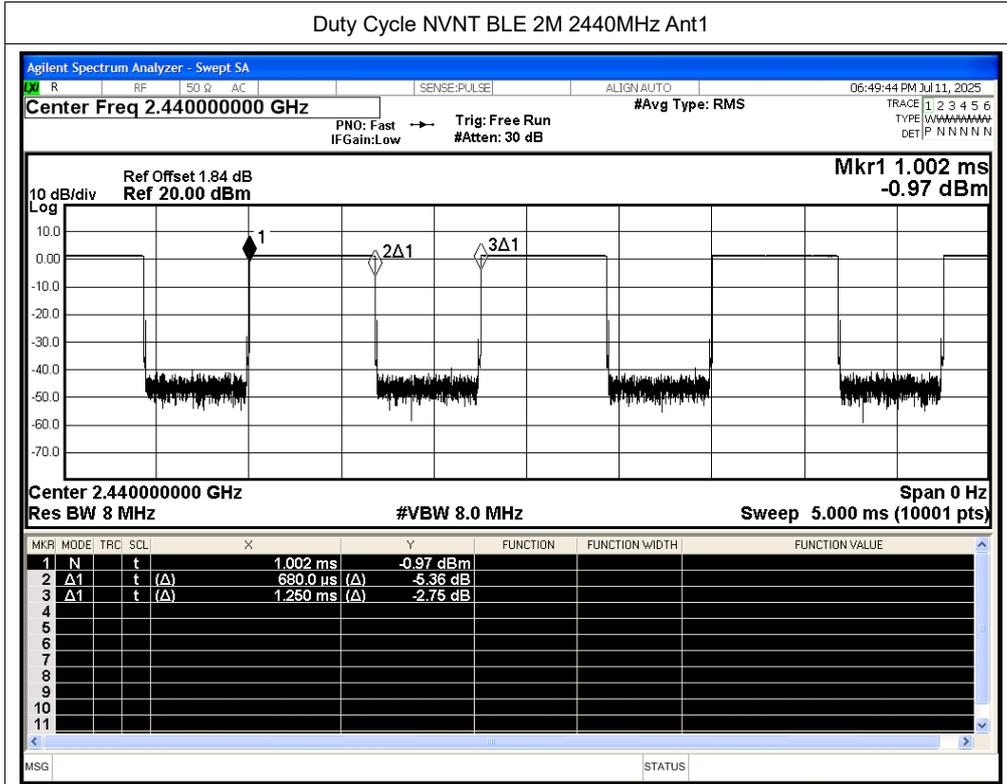

## A.7 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	BLE 1M	2402	Ant1	2310	-51.05	2	-	46.21	Peak	74	Pass
NVNT	BLE 1M	2402	Ant1	2310	-59.07	2	1.42	39.61	Average	54	Pass
NVNT	BLE 1M	2402	Ant1	2332.56	-47.77	2	-	49.49	Peak	74	Pass
NVNT	BLE 1M	2402	Ant1	2369.136	-58.33	2	1.42	40.35	Average	54	Pass
NVNT	BLE 1M	2402	Ant1	2390	-50.22	2	-	47.04	Peak	74	Pass
NVNT	BLE 1M	2402	Ant1	2390	-58.66	2	1.42	40.02	Average	54	Pass
NVNT	BLE 1M	2480	Ant1	2483.5	-50	2	-	47.26	Peak	74	Pass
NVNT	BLE 1M	2480	Ant1	2483.5	-57.82	2	1.42	40.86	Average	54	Pass
NVNT	BLE 1M	2480	Ant1	2484.04	-44.39	2	-	52.87	Peak	74	Pass
NVNT	BLE 1M	2480	Ant1	2486.992	-57.62	2	1.42	41.06	Average	54	Pass
NVNT	BLE 1M	2480	Ant1	2500	-50.72	2	-	46.54	Peak	74	Pass
NVNT	BLE 1M	2480	Ant1	2500	-58.06	2	1.42	40.62	Average	54	Pass
NVNT	BLE 2M	2402	Ant1	2310	-50.08	2	-	47.18	Peak	74	Pass
NVNT	BLE 2M	2402	Ant1	2310	-58.18	2	2.64	41.72	Average	54	Pass
NVNT	BLE 2M	2402	Ant1	2329.584	-48.23	2	-	49.03	Peak	74	Pass
NVNT	BLE 2M	2402	Ant1	2389.488	-57.9	2	2.64	42	Average	54	Pass
NVNT	BLE 2M	2402	Ant1	2390	-50.61	2	-	46.65	Peak	74	Pass
NVNT	BLE 2M	2402	Ant1	2390	-58.7	2	2.64	41.2	Average	54	Pass
NVNT	BLE 2M	2480	Ant1	2483.5	-50.43	2	-	46.83	Peak	74	Pass
NVNT	BLE 2M	2480	Ant1	2483.5	-58.06	2	2.64	41.84	Average	54	Pass
NVNT	BLE 2M	2480	Ant1	2486.032	-44.31	2	-	52.95	Peak	74	Pass
NVNT	BLE 2M	2480	Ant1	2498.68	-57.32	2	2.64	42.58	Average	54	Pass
NVNT	BLE 2M	2480	Ant1	2500	-49.17	2	-	48.09	Peak	74	Pass
NVNT	BLE 2M	2480	Ant1	2500	-58.36	2	2.64	41.54	Average	54	Pass

