

Appendix D.1(5G WIFI-CE&RSE Test Result)

AC Line Conducted Emissions

Test Data


Environmental Conditions

Temperature:	23.6°C
Relative Humidity:	55 %
ATM Pressure:	99.7 kPa
Test Engineer:	Jason Fan
Test Date:	2025-06-17
EUT Operation Mode:	5G WIFI Transmitting

Test Result: Compliance, please refer to the below data.

Note: The maximum output power mode and channel: 802.11ax20 5200MHz was tested.


AC 120V/60Hz, Line:

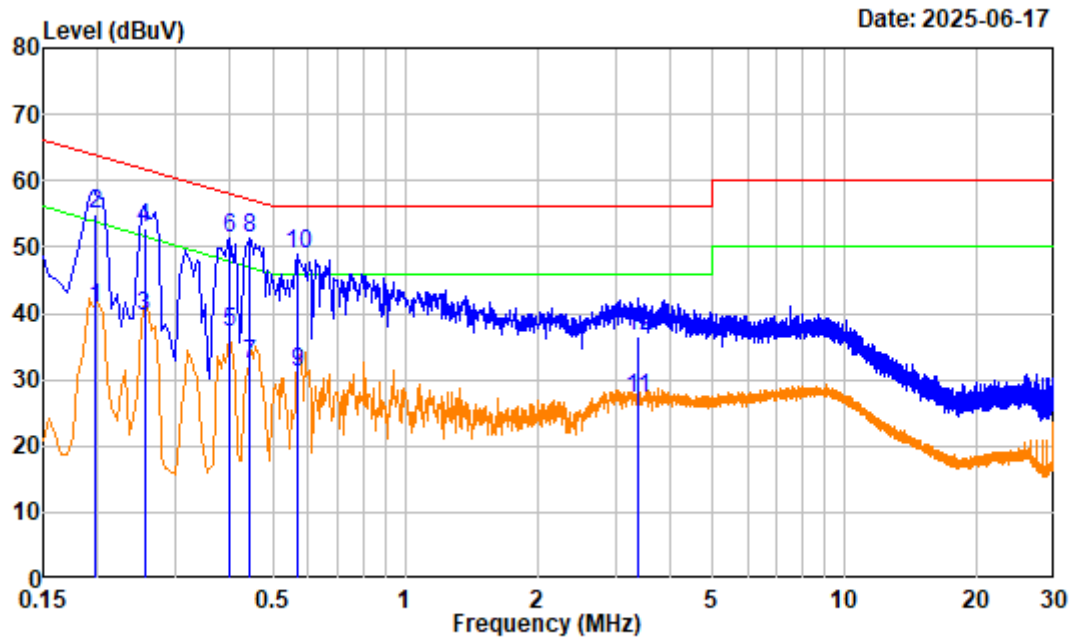

Site : Shielding Room
 Condition : Line
 Project No. : 2504T31635E-RF Tester: Jason Fan
 Test Mode : 5G WIFI Transmitting
 Note : Adapter
 Receiver Setting: IF B/W 9kHz PK/AV

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.198	20.31	20.53	40.84	53.70	-12.86	Average
2	0.198	20.31	34.75	55.06	63.70	-8.64	QP
3	0.255	20.27	19.25	39.52	51.60	-12.08	Average
4	0.255	20.27	32.51	52.78	61.60	-8.82	QP
5	0.400	20.17	16.90	37.07	47.85	-10.78	Average
6	0.400	20.17	31.26	51.43	57.85	-6.42	Peak
7	0.440	20.15	12.19	32.34	47.06	-14.72	Average
8	0.440	20.15	31.30	51.45	57.06	-5.61	Peak
9	0.570	20.28	10.69	30.97	46.00	-15.03	Average
10	0.570	20.28	28.53	48.81	56.00	-7.19	Peak
11	3.385	20.72	6.56	27.28	46.00	-18.72	Average
12	3.385	20.72	15.69	36.41	56.00	-19.59	QP

AC 120V/60Hz, Neutral:

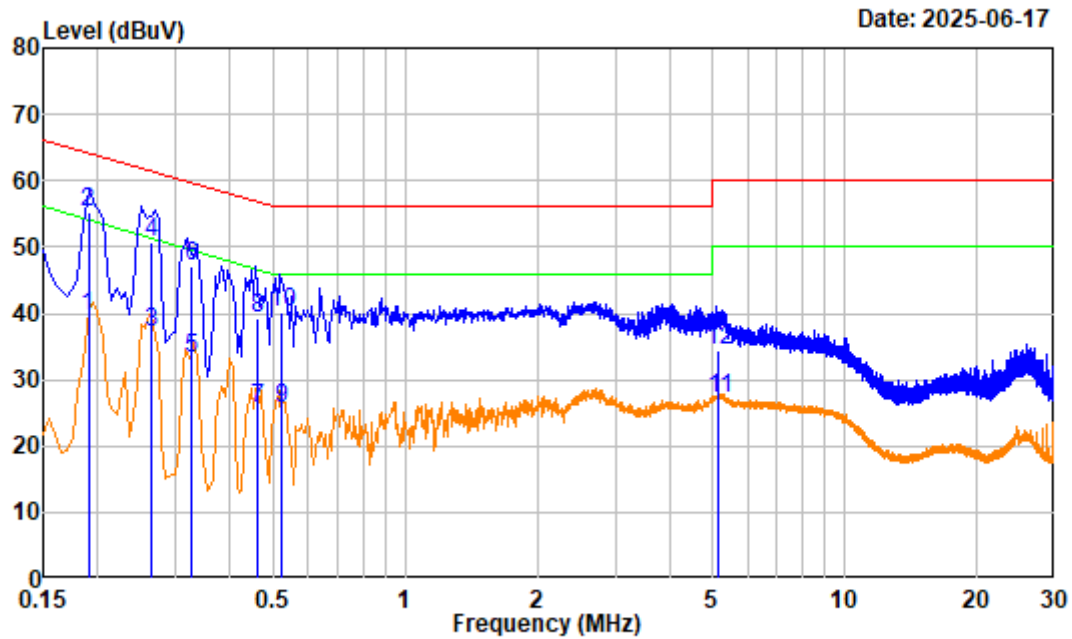

Site : Shielding Room
 Condition : neutral
 Project No. : 2504T31635E-RF Tester: Jason Fan
 Test Mode : 5G WIFI Transmitting
 Note : Adapter
 Receiver Setting: IF B/W 9kHz PK/AV

	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.190	19.83	19.60	39.43	54.04	-14.61	Average
2	0.190	19.83	35.51	55.34	64.04	-8.70	QP
3	0.263	19.93	17.09	37.02	51.33	-14.31	Average
4	0.263	19.93	30.76	50.69	61.33	-10.64	QP
5	0.327	20.10	13.00	33.10	49.52	-16.42	Average
6	0.327	20.10	27.00	47.10	59.52	-12.42	QP
7	0.462	20.36	5.29	25.65	46.66	-21.01	Average
8	0.462	20.36	18.93	39.29	56.66	-17.37	QP
9	0.522	20.46	5.06	25.52	46.00	-20.48	Average
10	0.522	20.46	19.82	40.28	56.00	-15.72	QP
11	5.167	20.63	6.67	27.30	50.00	-22.70	Average
12	5.167	20.63	13.89	34.52	60.00	-25.48	QP

Radiated Spurious Emissions

Test Data

9kHz-1GHz

Environmental Conditions


Temperature:	24.6°C
Relative Humidity:	56 %
ATM Pressure:	99.7kPa
Test Engineer:	Colin Lin
Test Date:	2025-06-12
EUT Operation Mode:	5G WIFI Transmitting

Test Result: Compliance, please refer to the below data.

Note 1: The Loop Antenna were tested in parallel, perpendicular and ground-parallel. The worst orientation was parallel and the data was recorded in report.

Note 2: The maximum output power mode and channel: 802.11ax20 5200MHz was tested.


9kHz~30MHz:

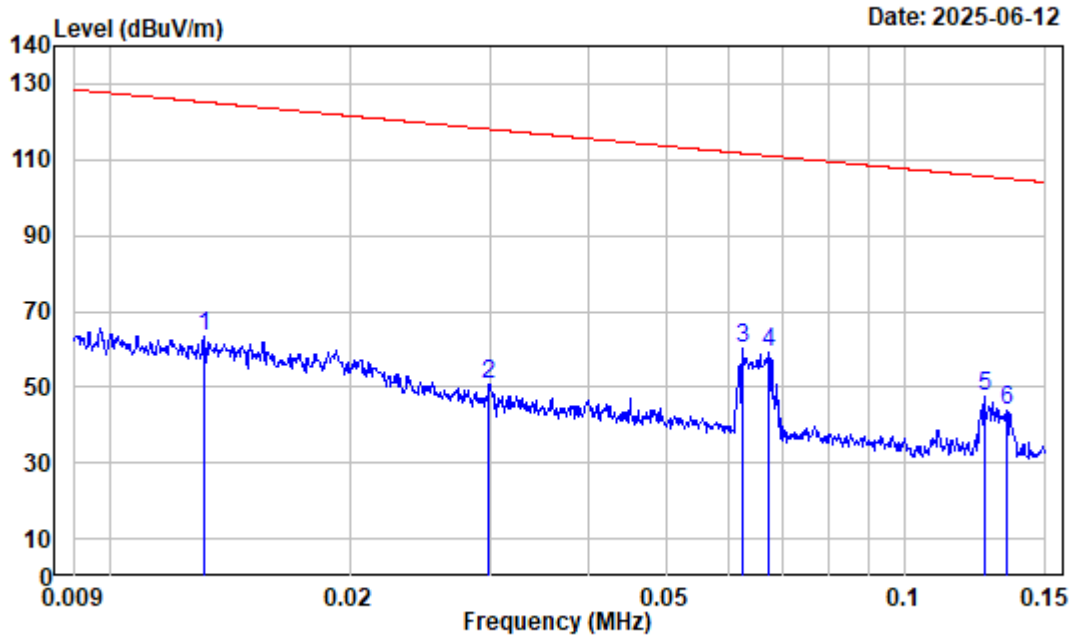

Date: 2025-06-12

Site : Chamber
 Condition : 3m
 Job No. : 2504T31635E-RF Tester: Colin Lin
 Polarization : Parallel
 Test Mode : 5G WIFI Transmitting
 Receiver Setting: RBW:300Hz VBW:1kHz


	Freq	Factor	Read		Limit		Over	Remark
			Level	Level	Line	Limit		
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dBuV/m	dB	
1	0.013	34.44	28.78	63.22	125.25	-62.03	Peak	
2	0.030	26.98	23.82	50.80	118.09	-67.29	Peak	
3	0.063	21.04	39.44	60.48	111.68	-51.20	Peak	
4	0.067	20.34	38.94	59.28	111.02	-51.74	Peak	
5	0.126	15.27	32.12	47.39	105.62	-58.23	Peak	
6	0.134	14.87	28.82	43.69	105.04	-61.35	Peak	

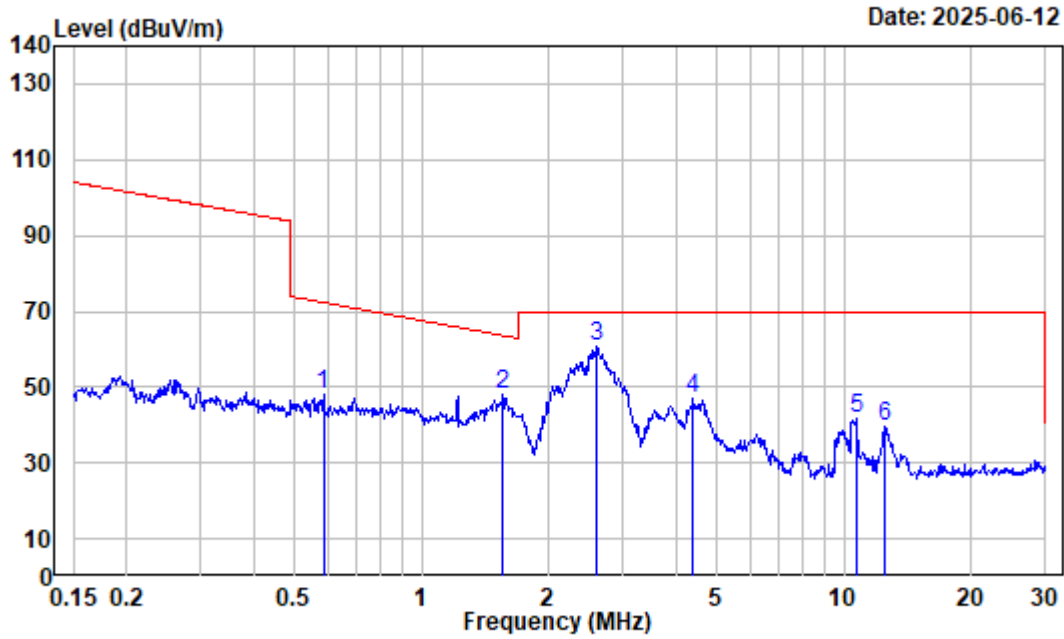

Site : Chamber
 Condition : 3m
 Job No. : 2504T31635E-RF Tester: Colin Lin
 Polarization : Parallel
 Test Mode : 5G WIFI Transmitting
 Receiver Setting: RBW:10kHz VBW:30kHz


	Freq	Factor	Read		Limit		Over	Remark
			Level	Level	Line	Limit		
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB		
1	0.585	2.27	46.01	48.28	72.22	-23.94	Peak	
2	1.560	-3.86	51.69	47.83	63.53	-15.70	Peak	
3	2.608	-5.70	66.31	60.61	69.54	-8.93	Peak	
4	4.384	-6.31	53.57	47.26	69.54	-22.28	Peak	
5	10.676	-5.27	46.83	41.56	69.54	-27.98	Peak	
6	12.516	-4.83	44.71	39.88	69.54	-29.66	Peak	

30MHz~1GHz:

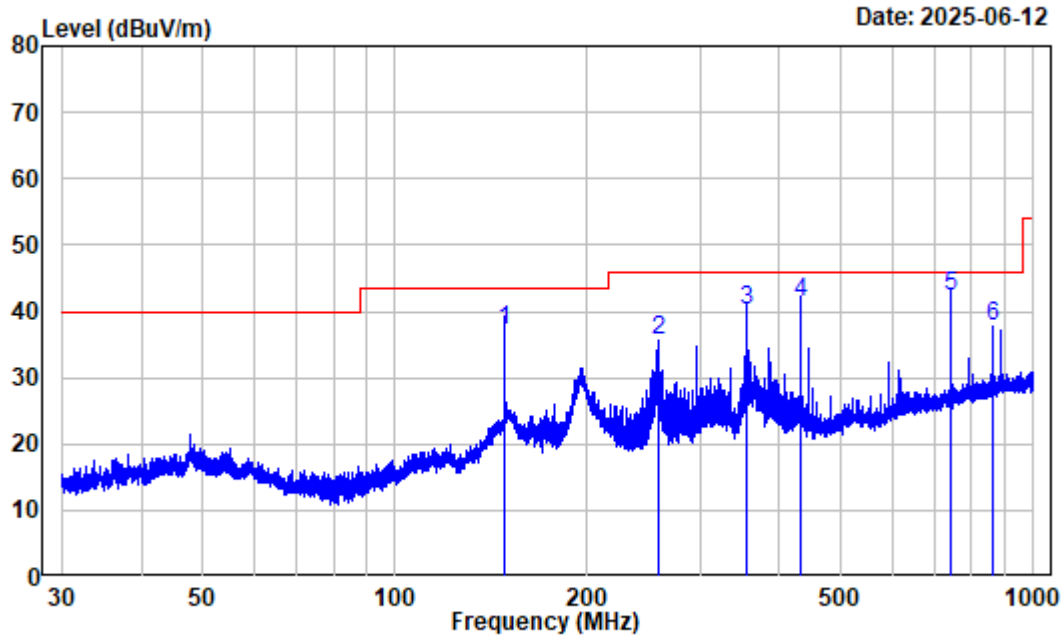

Site : Chamber
 Condition : 3m HORIZONTAL
 Job No. : 2504T31635E-RF Tester: Colin Lin
 Test Mode : 5G WIFI Transmitting
 Receiver Setting: RBW:100kHz VBW:300kHz

	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	148.376	-15.36	52.50	37.14	43.50	-6.36	QP
2	258.440	-10.76	46.50	35.74	46.00	-10.26	Peak
3	356.051	-7.77	47.90	40.13	46.00	-5.87	QP
4	431.977	-5.55	46.89	41.34	46.00	-4.66	QP
5	741.934	-1.00	43.40	42.40	46.00	-3.60	QP
6	864.192	0.37	37.46	37.83	46.00	-8.17	Peak

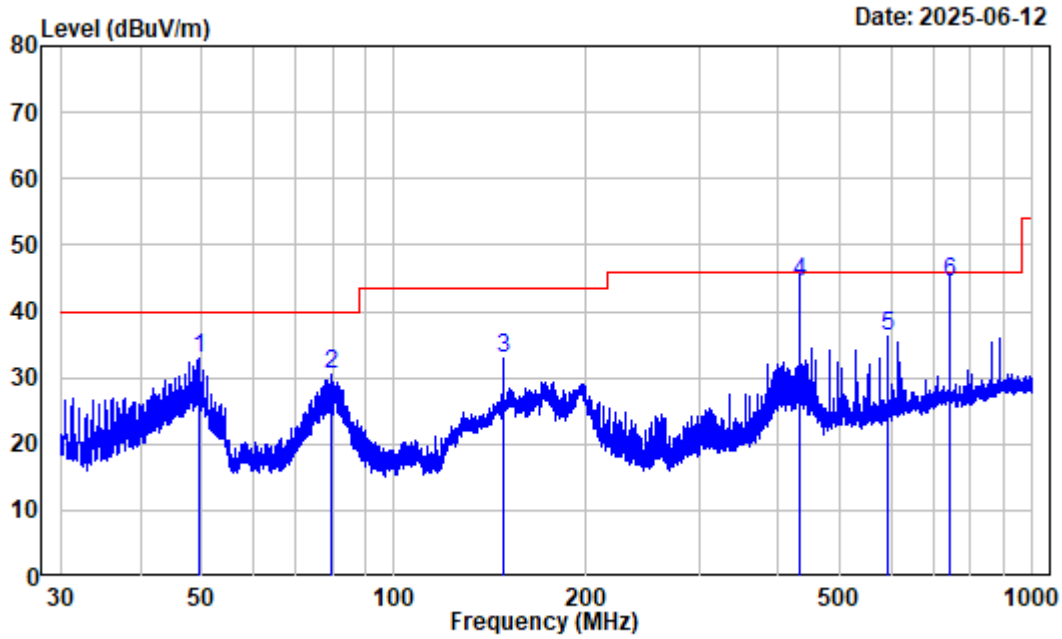

Site : Chamber
 Condition : 3m VERTICAL
 Job No. : 2504T31635E-RF Tester: Colin Lin
 Test Mode : 5G WIFI Transmitting
 Receiver Setting: RBW:100kHz VBW:300kHz

	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	49.381	-10.37	43.18	32.81	40.00	-7.19	Peak
2	79.870	-17.01	47.52	30.51	40.00	-9.49	Peak
3	148.311	-15.36	48.21	32.85	43.50	-10.65	Peak
4	431.977	-5.55	49.99	44.44	46.00	-1.56	QP
5	593.570	-3.14	39.51	36.37	46.00	-9.63	Peak
6	741.934	-1.00	45.50	44.50	46.00	-1.50	QP

1GHz-25GHz

Environmental Conditions

Temperature:	23.9 to 24.4 °C
Relative Humidity:	52 to 55 %
ATM Pressure:	99.7 kPa
Test Engineer:	Kevin Lv
Test Date:	2025-06-06 to 2025-06-11
EUT Operation Mode:	Transmitting


Test Result: Compliance, please refer to the below data.

Note 1: The fundamental with band reject filter.

Note 2: For 18GHz-40GHz, the maximum output power mode and channel: 802.11ax20 5200MHz was tested.

BAND1:


802.11a Low Channel 1GHz-6.6GHz_HORIZONTAL

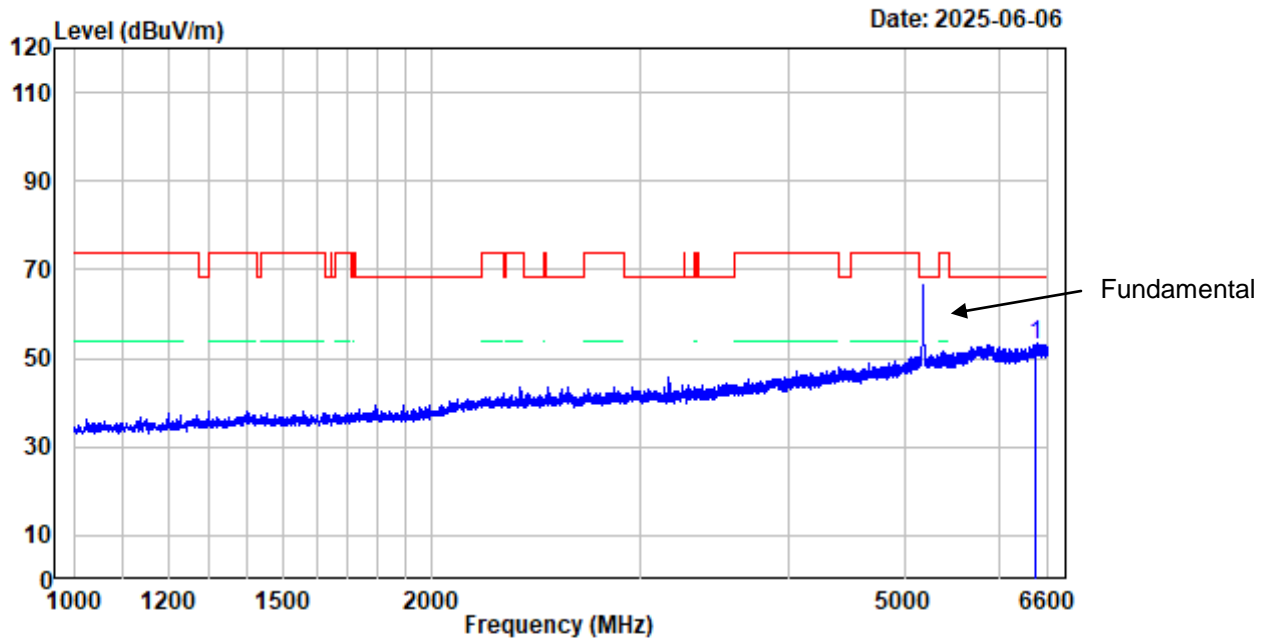

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11a Low Channel 5180MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6439.000	-3.63	56.77	53.14	68.20	-15.06	Peak


802.11a Low Channel 1GHz-6.6GHz_VERTICAL

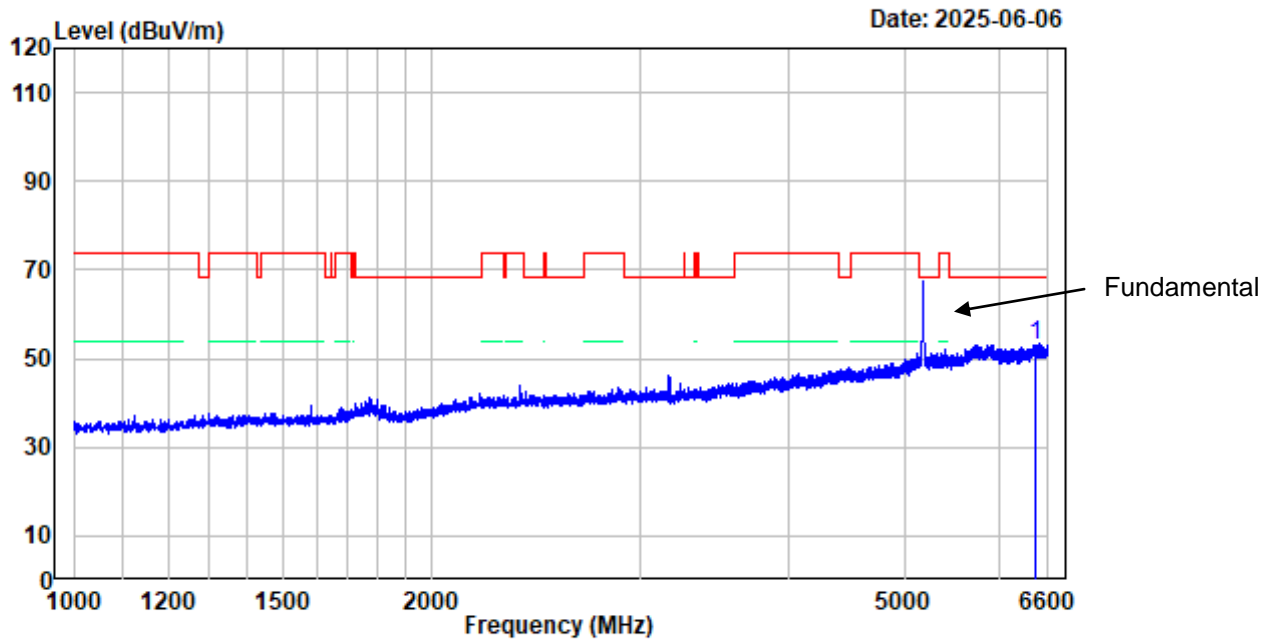

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11a Low Channel 5180MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6432.000	-3.64	56.71	53.07	68.20	-15.13	Peak


802.11a Low Channel 6.6GHz-18GHz_HORIZONTAL

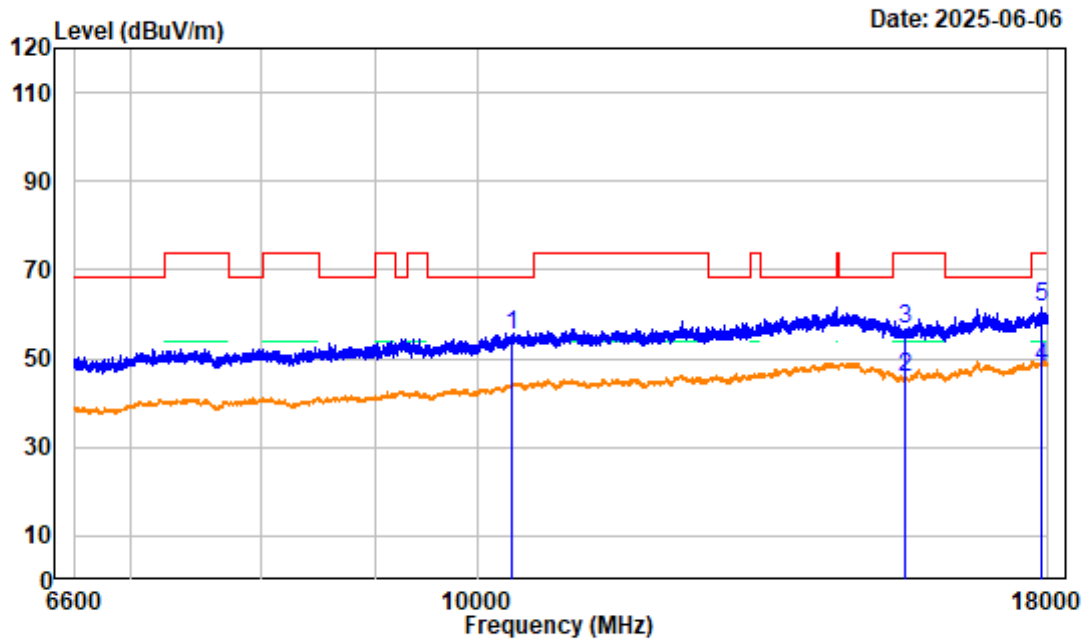

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11a Low Channel 5180MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBUV/m	dBUV/m	dB	
1	10360.000	3.84	51.46	55.30	68.20	-12.90	peak
2	15540.000	4.75	41.12	45.87	54.00	-8.13	average
3	15540.000	4.75	51.94	56.69	74.00	-17.31	peak
4	17888.850	8.23	39.63	47.86	54.00	-6.14	average
5	17888.850	8.23	53.42	61.65	74.00	-12.35	peak


802.11a Low Channel 6.6GHz-18GHz_VERTICAL

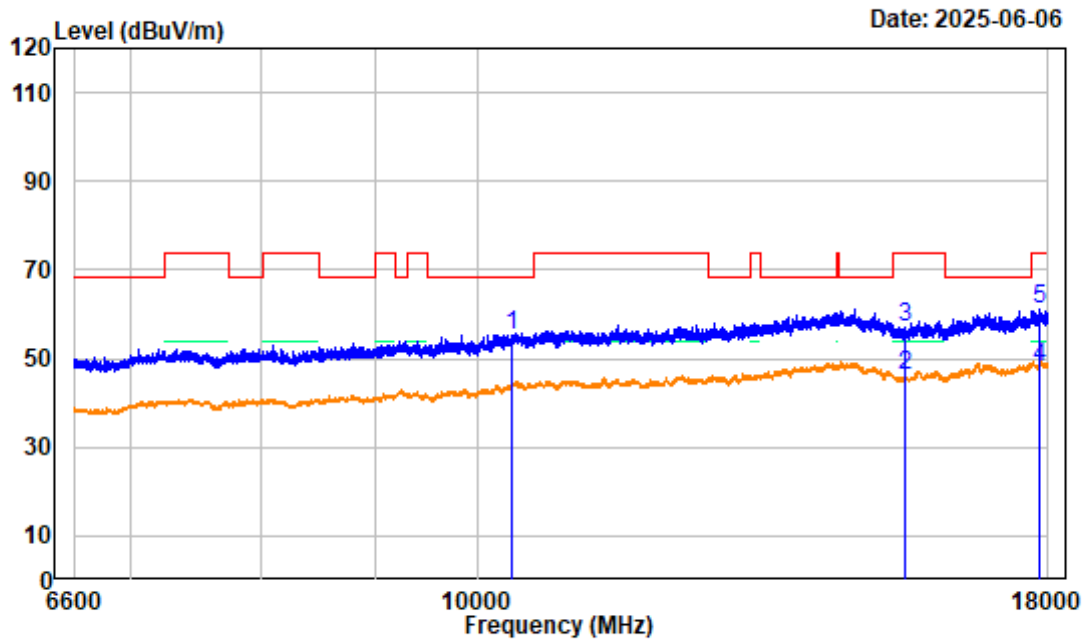

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11a Low Channel 5180MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBUV/m	dBUV/m	dB	
1	10360.000	3.84	51.31	55.15	68.20	-13.05	peak
2	15540.000	4.75	41.25	46.00	54.00	-8.00	average
3	15540.000	4.75	52.25	57.00	74.00	-17.00	peak
4	17843.250	8.15	39.68	47.83	54.00	-6.17	average
5	17843.250	8.15	52.88	61.03	74.00	-12.97	peak


802.11a Low Channel Bandedge_HORIZONTAL

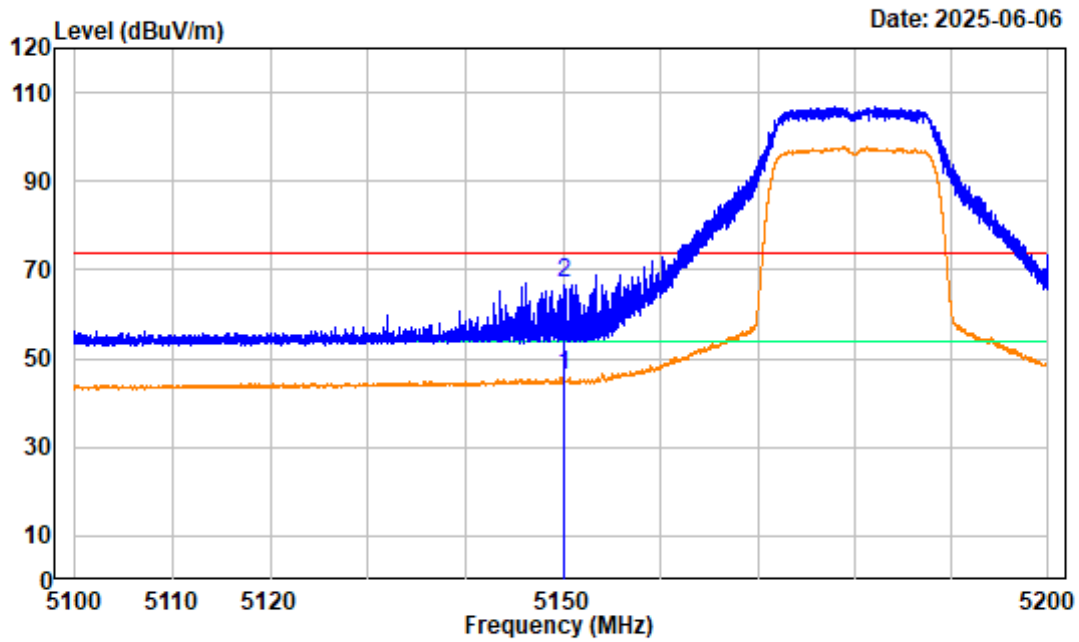

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11a Low Channel 5180MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	51.98	45.99	54.00	-8.01	average
2	5150.000	-5.99	72.89	66.90	74.00	-7.10	peak


802.11a Low Channel Bandedge_VERTICAL

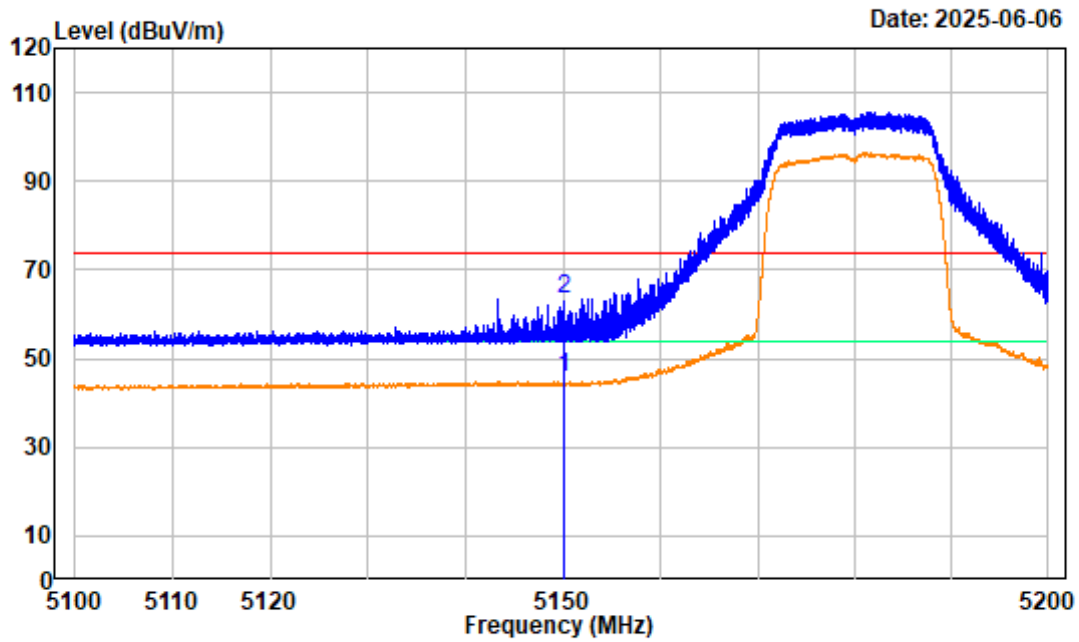

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11a Low Channel 5180MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	51.72	45.73	54.00	-8.27	average
2	5150.000	-5.99	69.26	63.27	74.00	-10.73	peak


802.11a Middle Channel 1GHz-6.6GHz_HORIZONTAL

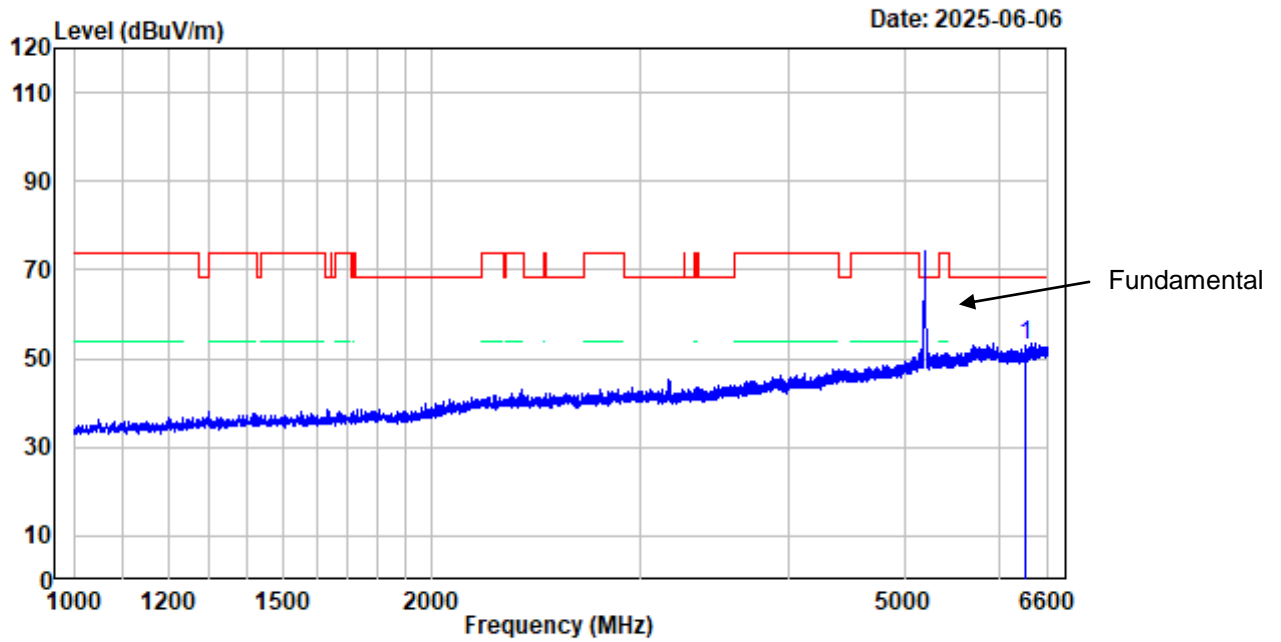

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11a Middle Channel 5200MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6323.500	-4.47	57.39	52.92	68.20	-15.28	Peak


802.11a Middle Channel 1GHz-6.6GHz_VERTICAL

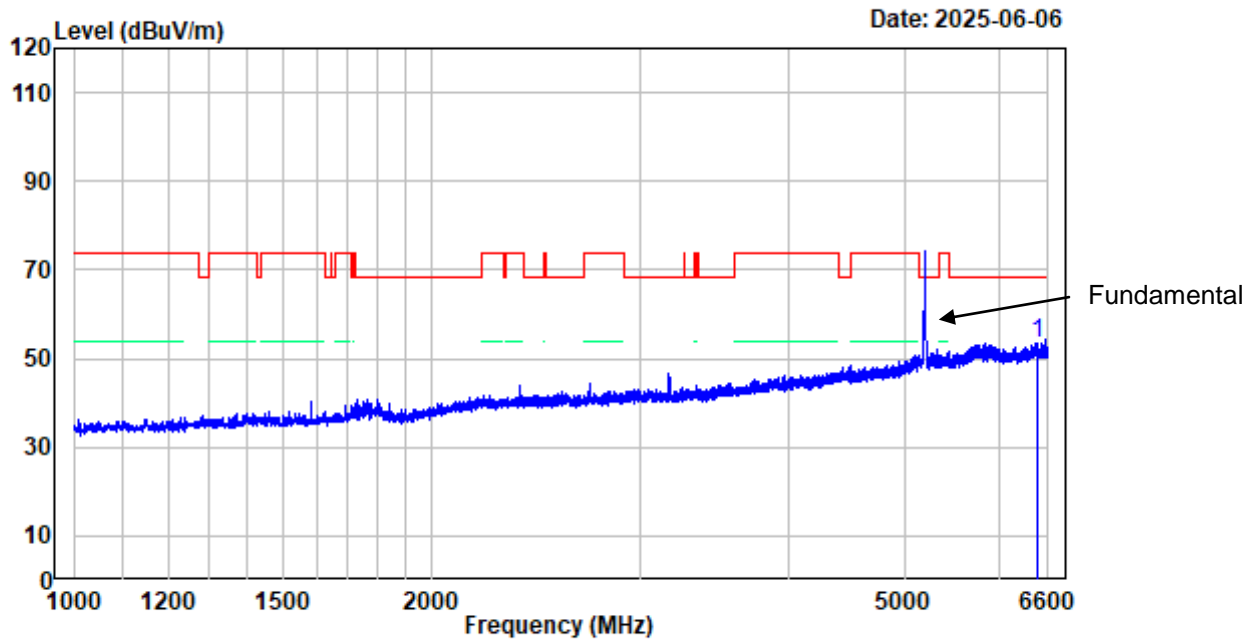

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11a Middle Channel 5200MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6455.100	-3.63	57.18	53.55	68.20	-14.65	Peak


802.11a Middle Channel 6.6GHz-18GHz_HORIZONTAL

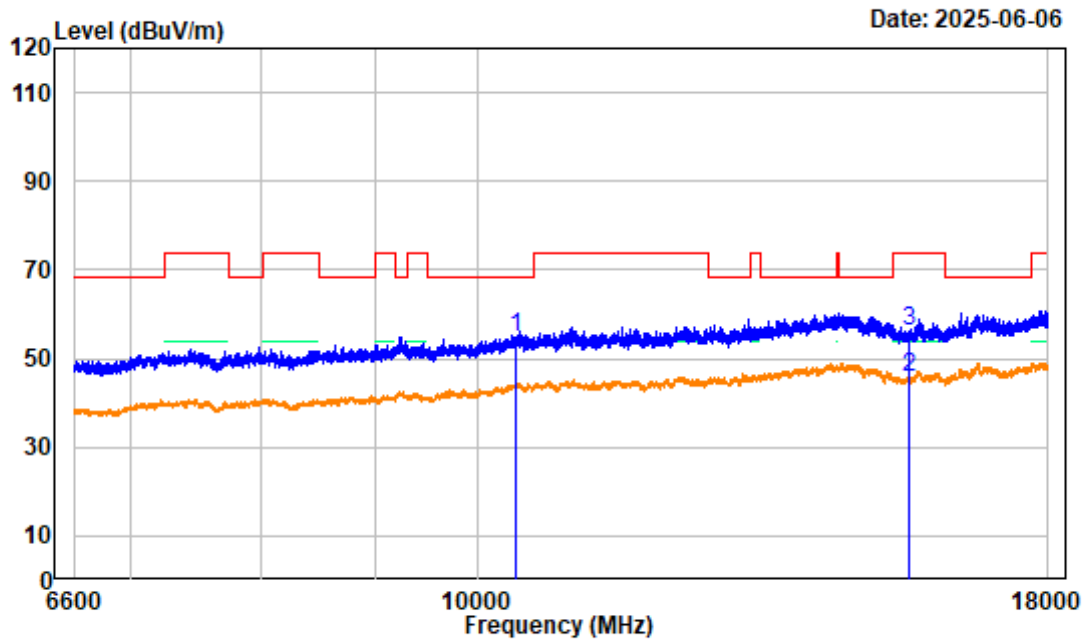

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11a Middle Channel 5200MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10400.000	4.10	50.62	54.72	68.20	-13.48	peak
2	15600.000	4.60	41.30	45.90	54.00	-8.10	average
3	15600.000	4.60	51.49	56.09	74.00	-17.91	peak


802.11a Middle Channel 6.6GHz-18GHz_VERTICAL

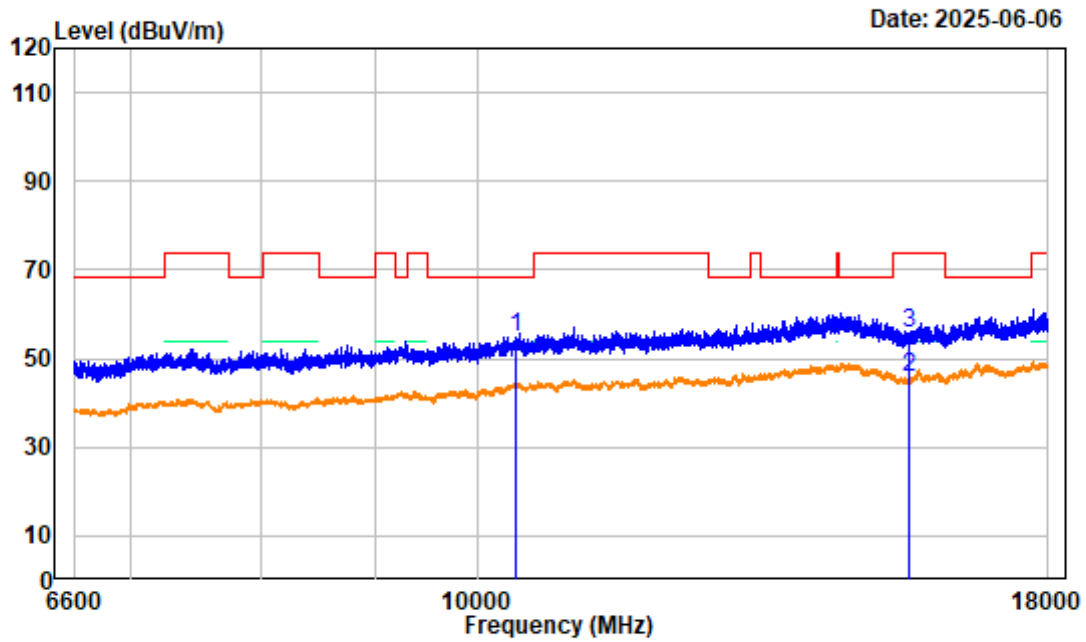

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11a Middle Channel 5200MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBUV/m	dBUV/m	dB	
1	10400.000	4.10	50.61	54.71	68.20	-13.49	peak
2	15600.000	4.60	41.00	45.60	54.00	-8.40	average
3	15600.000	4.60	51.20	55.80	74.00	-18.20	peak


802.11a High Channel 1GHz-6.6GHz_HORIZONTAL

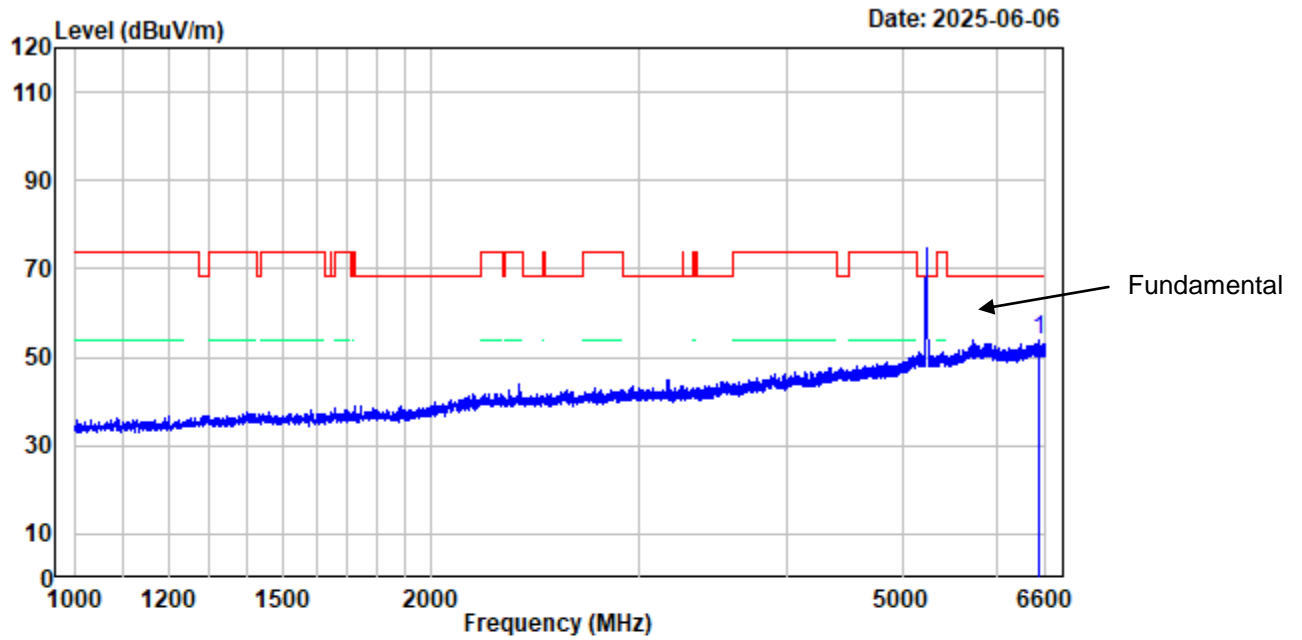

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11a High Channel 5240MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6507.600	-3.80	57.74	53.94	68.20	-14.26	Peak


802.11a High Channel 1GHz-6.6GHz_VERTICAL

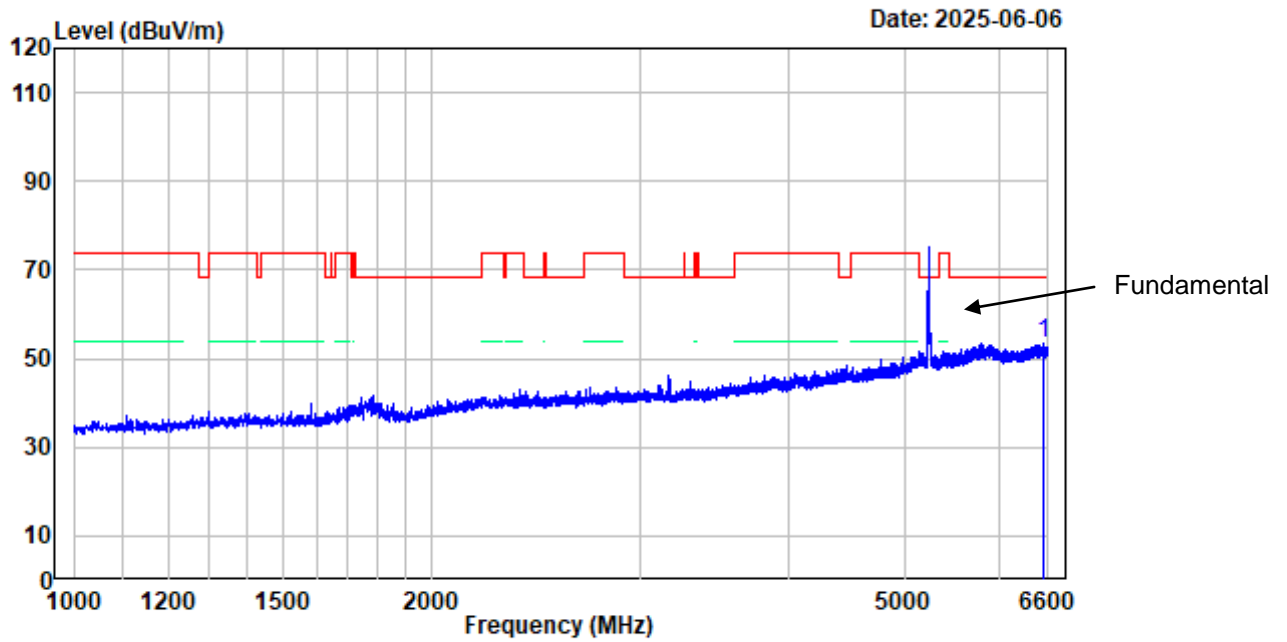

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11a High Channel 5240MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6551.700	-3.71	57.31	53.60	68.20	-14.60	Peak


802.11a High Channel 6.6GHz-18GHz_HORIZONTAL

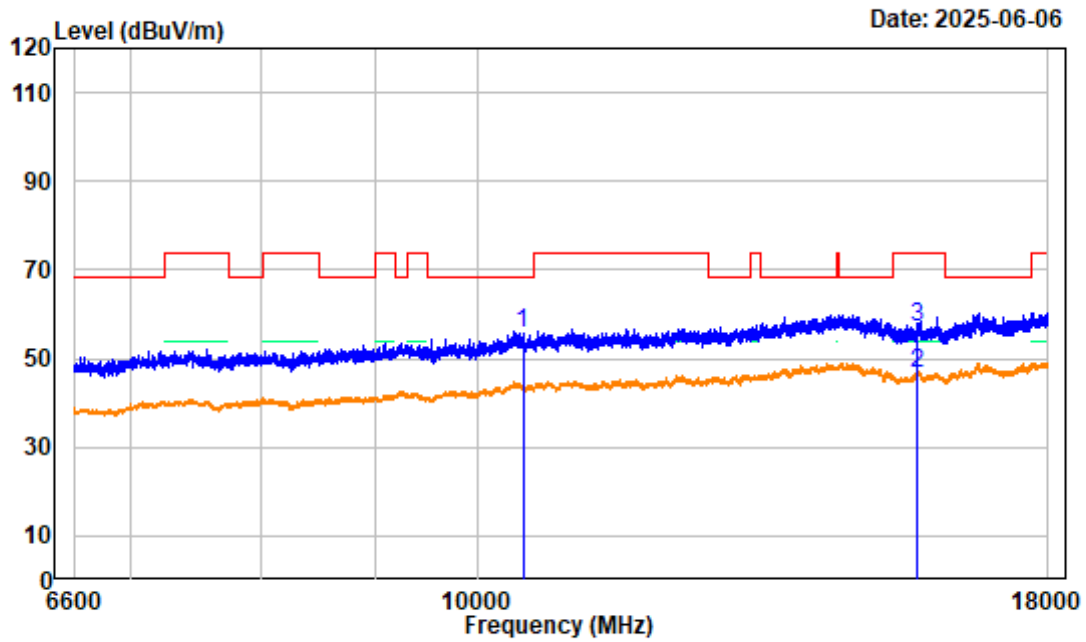

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11a High Channel 5240MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10480.000	3.92	51.65	55.57	68.20	-12.63	peak
2	15720.000	4.90	41.81	46.71	54.00	-7.29	average
3	15720.000	4.90	52.27	57.17	74.00	-16.83	peak


802.11a High Channel 6.6GHz-18GHz_VERTICAL

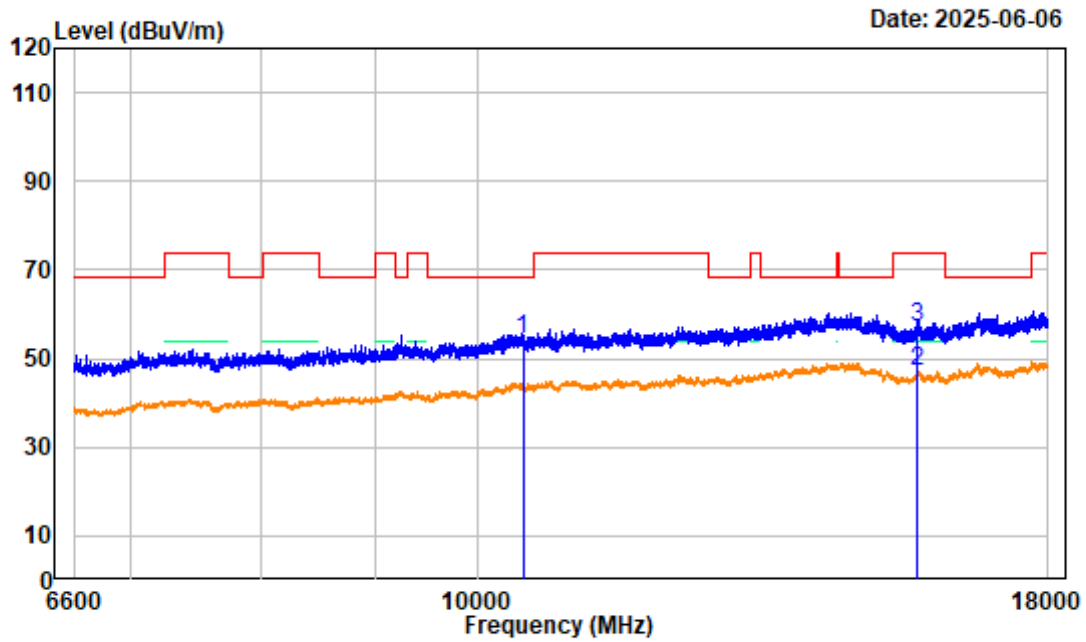

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11a High Channel 5240MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10480.000	3.92	50.50	54.42	68.20	-13.78	peak
2	15720.000	4.90	42.03	46.93	54.00	-7.07	average
3	15720.000	4.90	52.05	56.95	74.00	-17.05	peak


802.11a High Channel Bandedge_HORIZONTAL

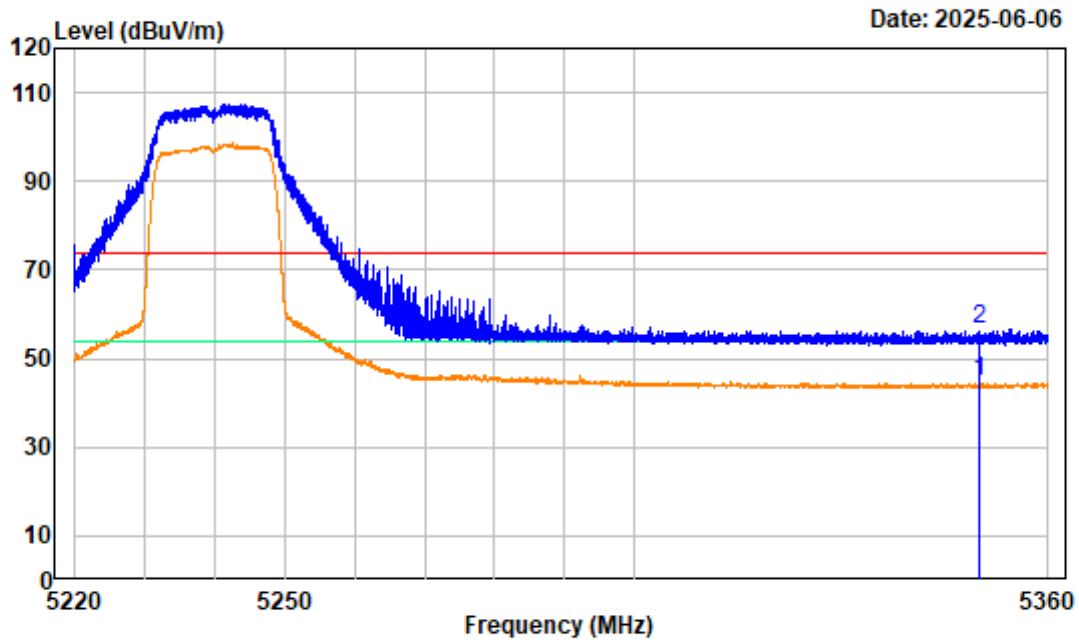

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11a High Channel 5240MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBUV/m	dBUV/m	dB	
1	5350.000	-5.81	50.64	44.83	54.00	-9.17	average
2	5350.000	-5.81	62.29	56.48	74.00	-17.52	peak


802.11a High Channel Bandedge_VERTICAL

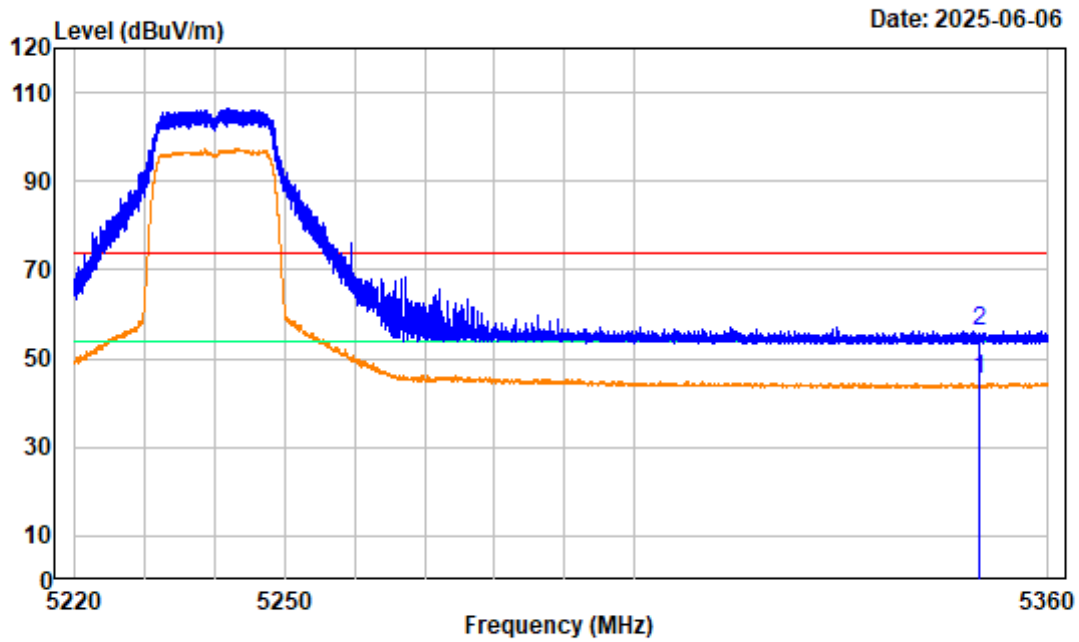

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11a High Channel 5240MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	50.95	45.14	54.00	-8.86	average
2	5350.000	-5.81	62.14	56.33	74.00	-17.67	peak

802.11ac20 Low Channel 1GHz-6.6GHz_HORIZONTAL

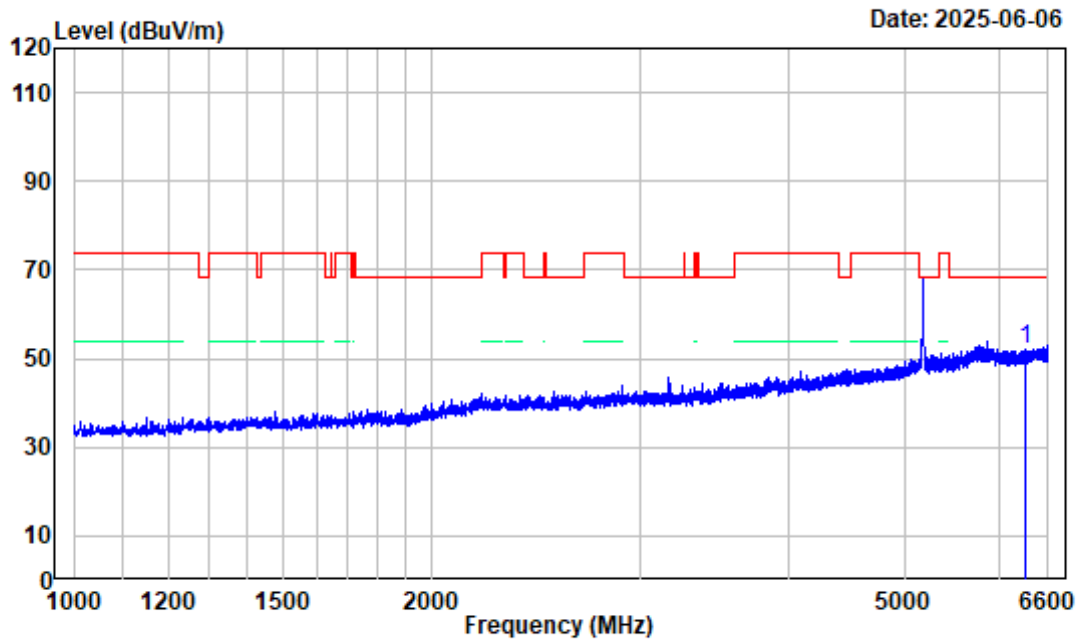


Date: 2025-06-06

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac20 Low Channel 5180MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6326.300	-4.46	56.44	51.98	68.20	-16.22	Peak


802.11ac20 Low Channel 1GHz-6.6GHz_VERTICAL

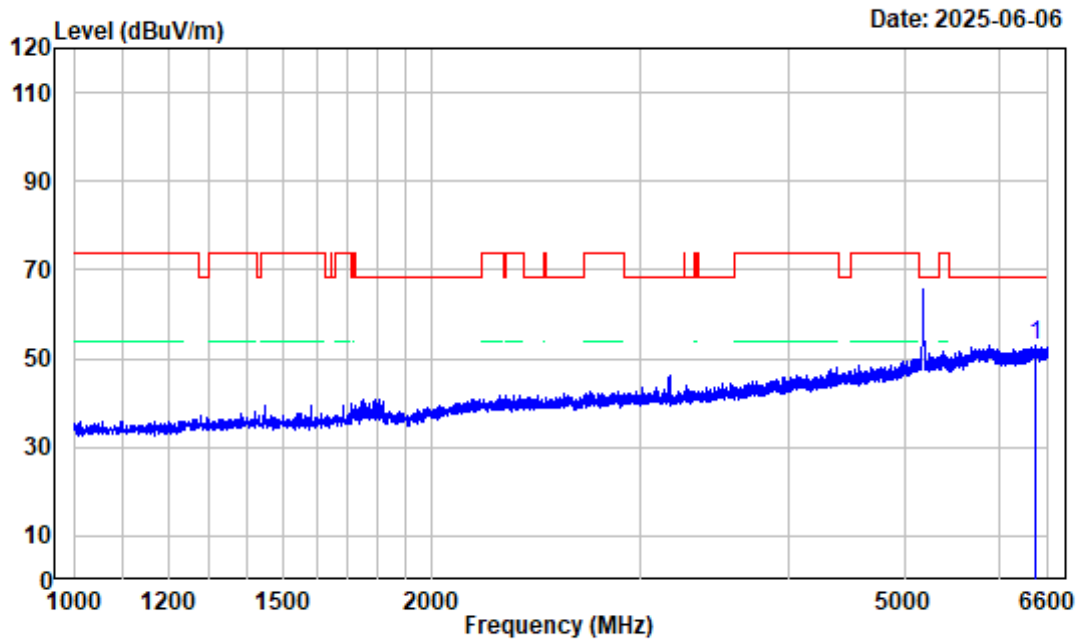

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac20 Low Channel 5180MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6432.000	-3.64	56.80	53.16	68.20	-15.04	Peak


802.11ac20 Low Channel 6.6GHz-18GHz_HORIZONTAL

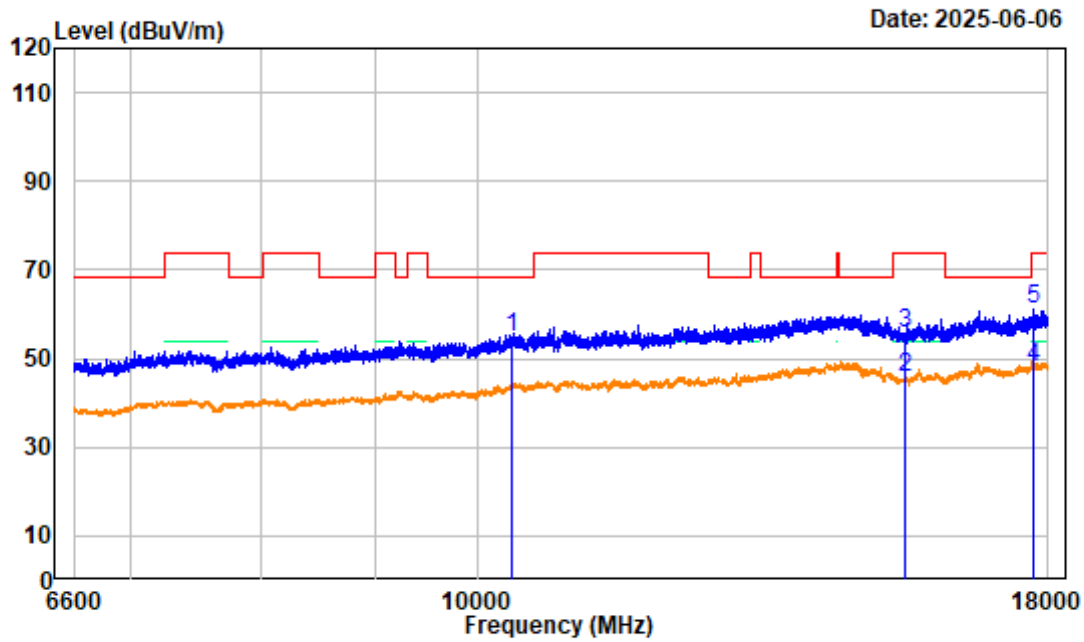

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac20 Low Channel 5180MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10360.000	3.84	50.82	54.66	68.20	-13.54	peak
2	15540.000	4.75	41.07	45.82	54.00	-8.18	average
3	15540.000	4.75	51.08	55.83	74.00	-18.17	peak
4	17747.780	7.71	40.22	47.93	54.00	-6.07	average
5	17747.780	7.71	53.26	60.97	74.00	-13.03	peak


802.11ac20 Low Channel 6.6GHz-18GHz_VERTICAL

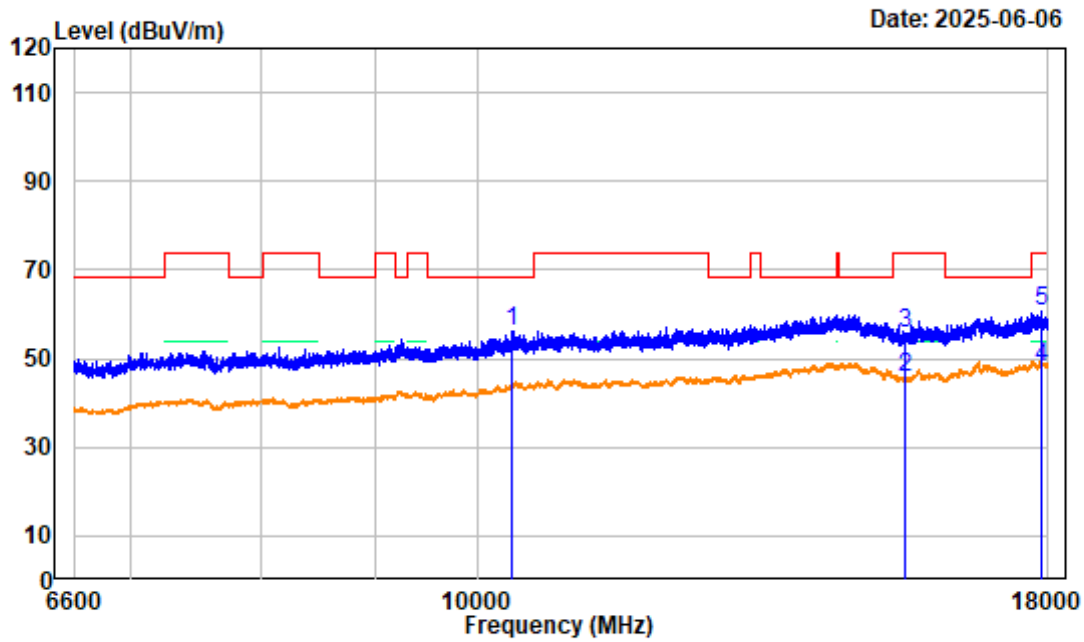

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac20 Low Channel 5180MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10360.000	3.84	52.47	56.31	68.20	-11.89	peak
2	15540.000	4.75	40.92	45.67	54.00	-8.33	average
3	15540.000	4.75	50.87	55.62	74.00	-18.38	peak
4	17867.470	8.23	39.66	47.89	54.00	-6.11	average
5	17867.470	8.23	52.24	60.47	74.00	-13.53	peak


802.11ac20 Low Channel Bandedge_HORIZONTAL

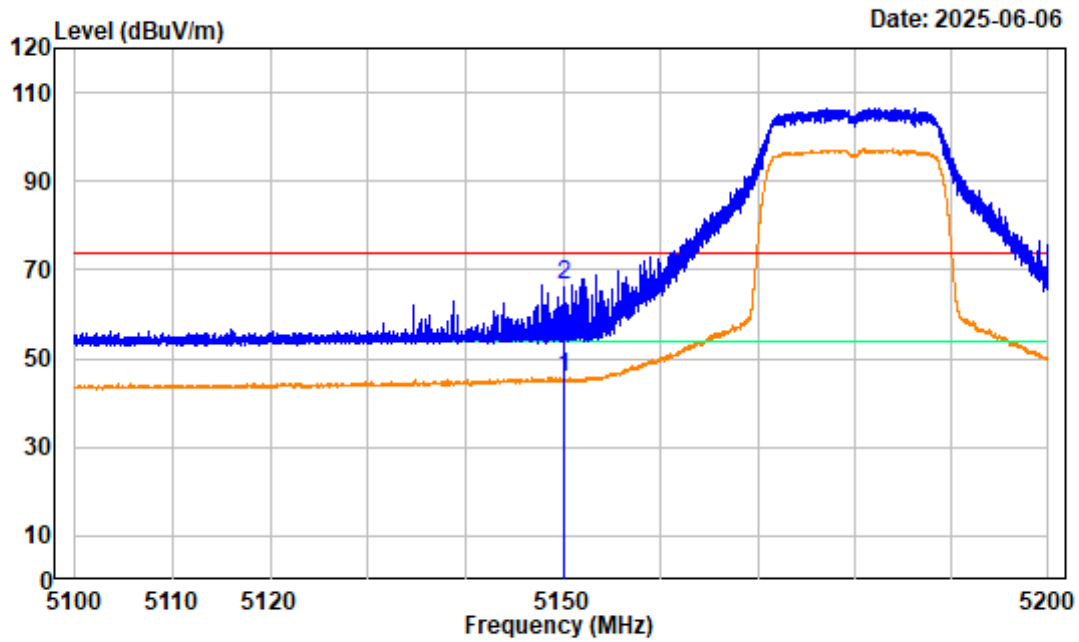

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac20 Low Channel 5180MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	51.92	45.93	54.00	-8.07	average
2	5150.000	-5.99	72.38	66.39	74.00	-7.61	peak


802.11ac20 Low Channel Bandedge_VERTICAL

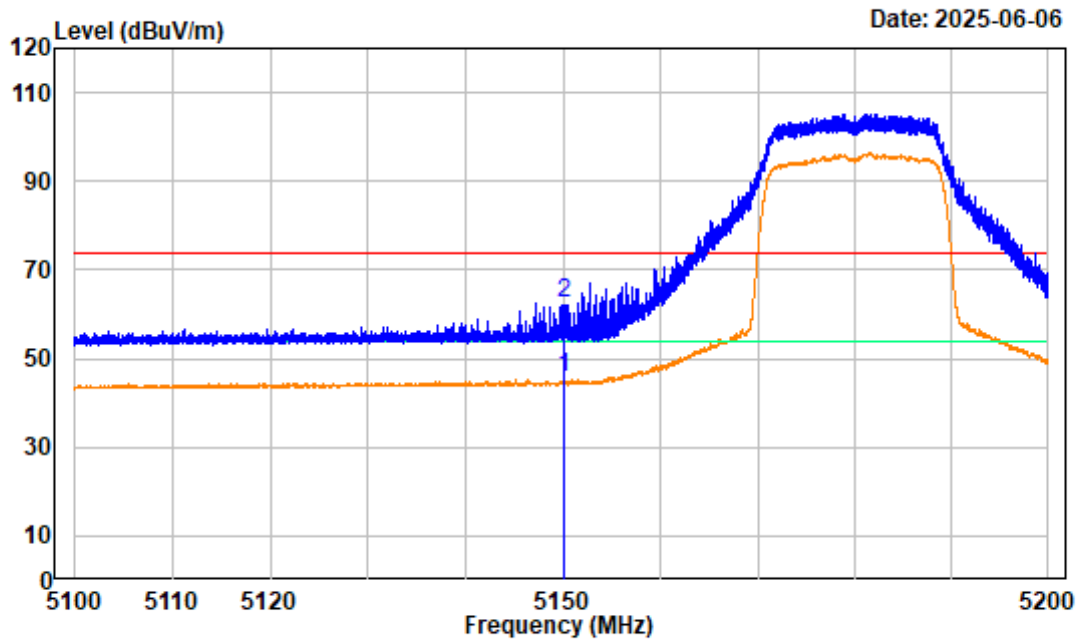

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac20 Low Channel 5180MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	51.61	45.62	54.00	-8.38	average
2	5150.000	-5.99	68.55	62.56	74.00	-11.44	peak

802.11ac20 Middle Channel 1GHz-6.6GHz_HORIZONTAL

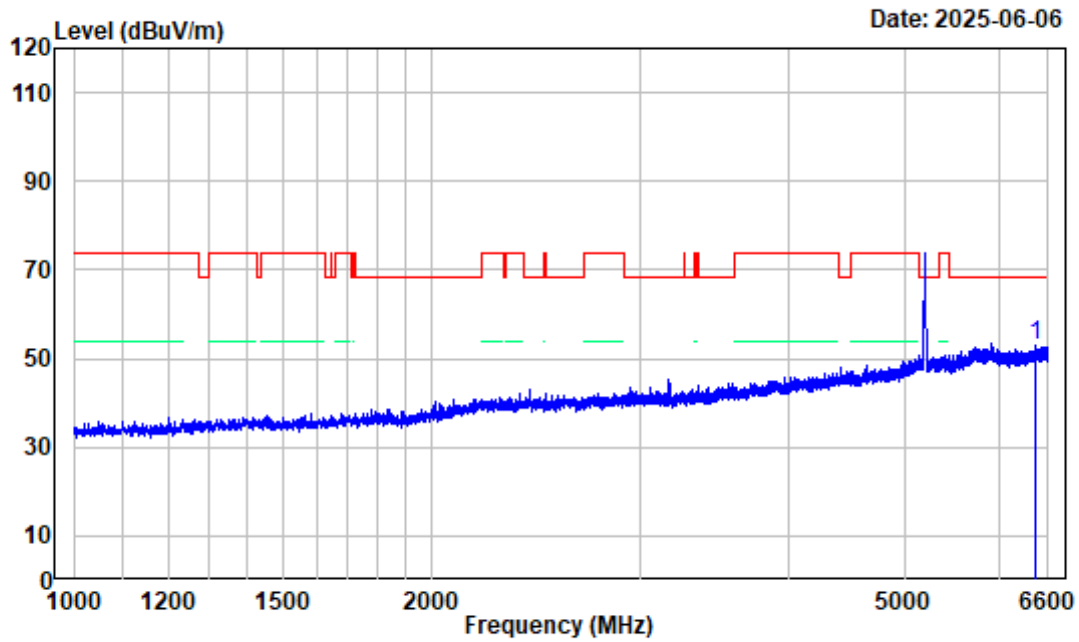


Date: 2025-06-06

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac20 Middle Channel 5200MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6450.200	-3.61	56.38	52.77	68.20	-15.43	Peak


802.11ac20 Middle Channel 1GHz-6.6GHz_VERTICAL

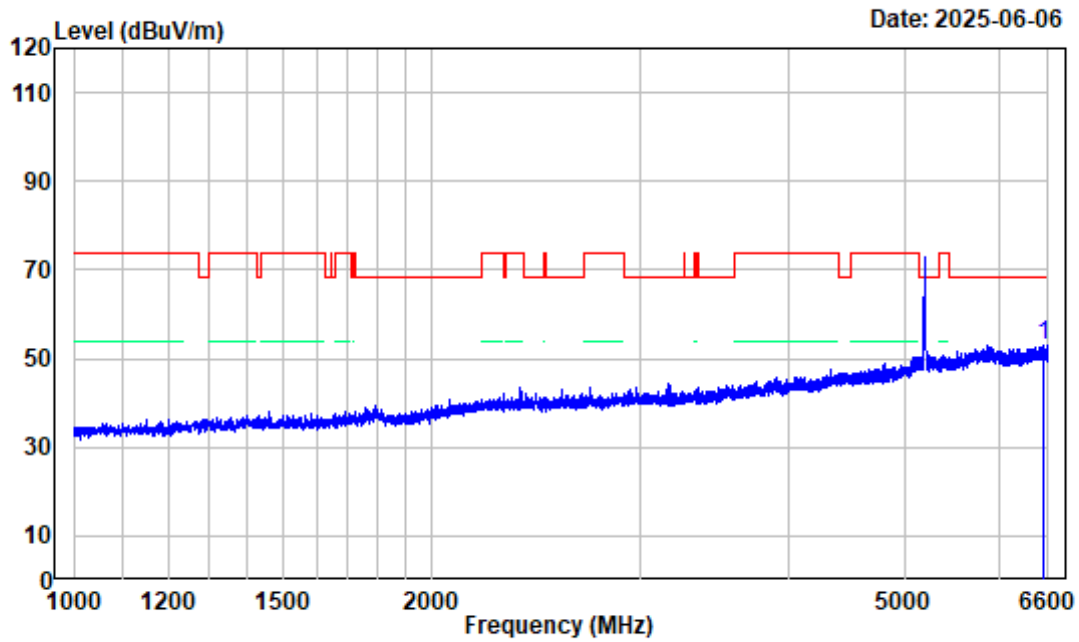

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac20 Middle Channel 5200MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6549.600	-3.72	56.81	53.09	68.20	-15.11	Peak


802.11ac20 Middle Channel 6.6GHz-18GHz_HORIZONTAL

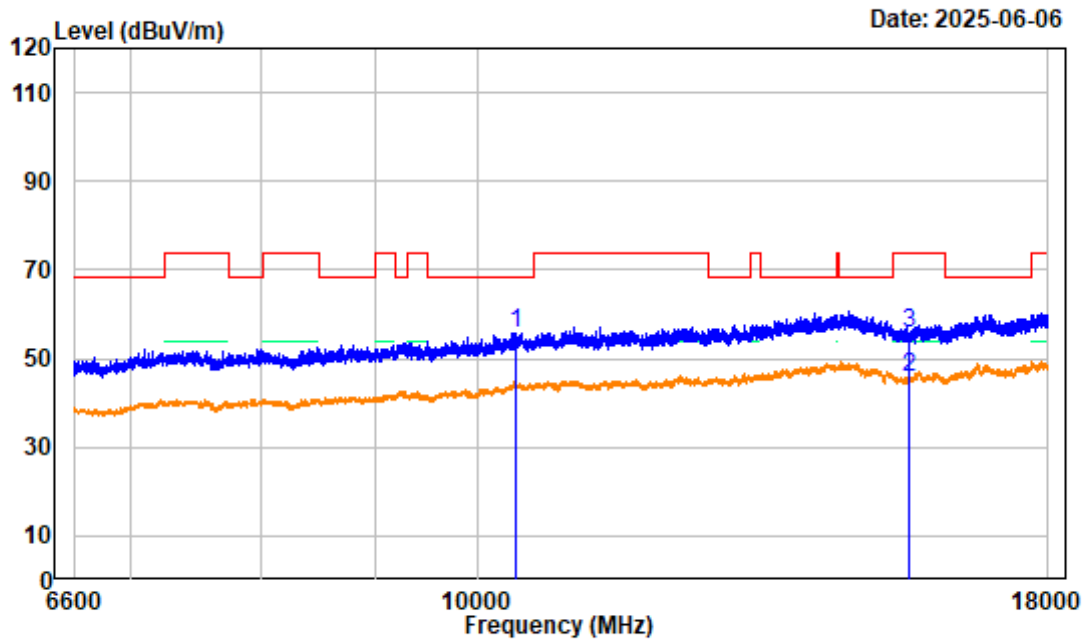

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac20 Middle Channel 5200MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10400.000	4.10	51.61	55.71	68.20	-12.49	peak
2	15600.000	4.60	41.11	45.71	54.00	-8.29	average
3	15600.000	4.60	51.14	55.74	74.00	-18.26	peak


802.11ac20 Middle Channel 6.6GHz-18GHz_VERTICAL

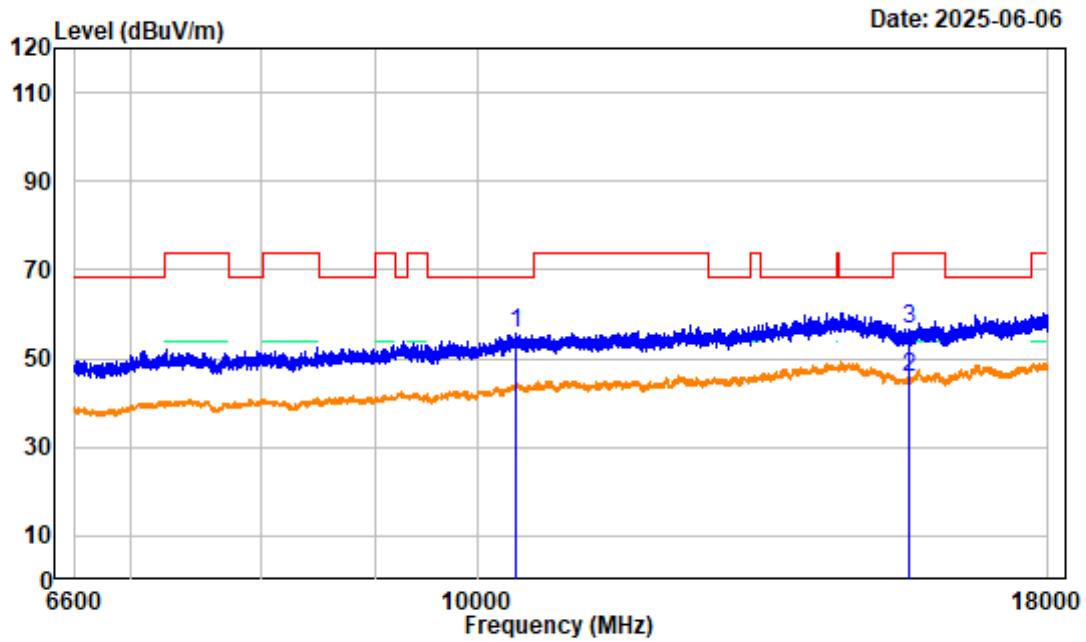

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac20 Middle Channel 5200MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10400.000	4.10	51.40	55.50	68.20	-12.70	peak
2	15600.000	4.60	40.95	45.55	54.00	-8.45	average
3	15600.000	4.60	51.97	56.57	74.00	-17.43	peak

802.11ac20 High Channel 1GHz-6.6GHz_HORIZONTAL

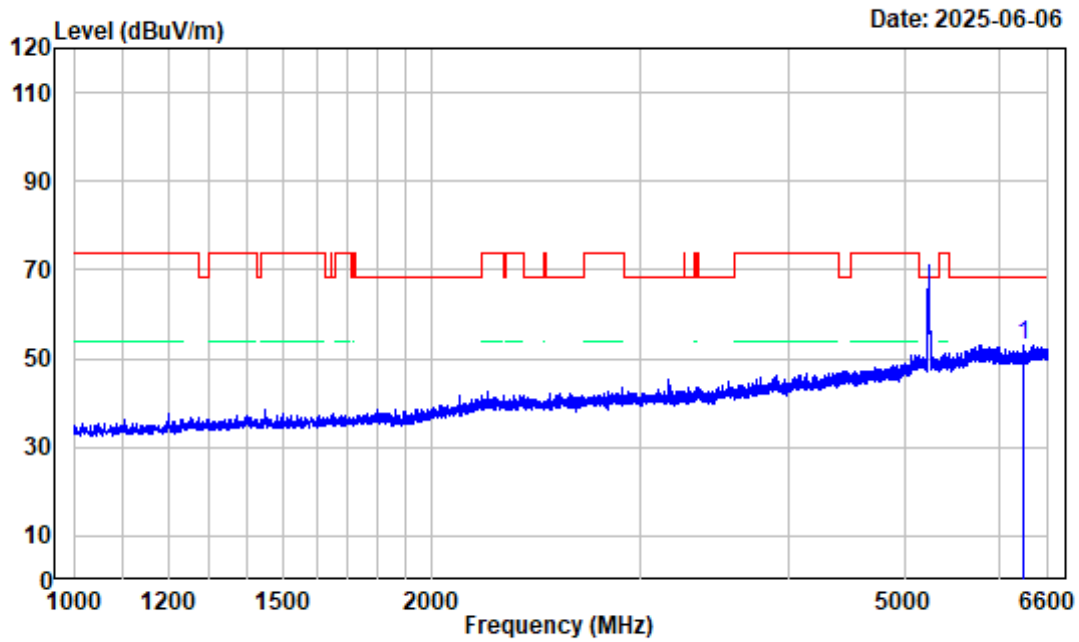


Date: 2025-06-06

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac20 High Channel 5240MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6292.000	-4.44	57.21	52.77	68.20	-15.43	Peak


802.11ac20 High Channel 1GHz-6.6GHz_VERTICAL

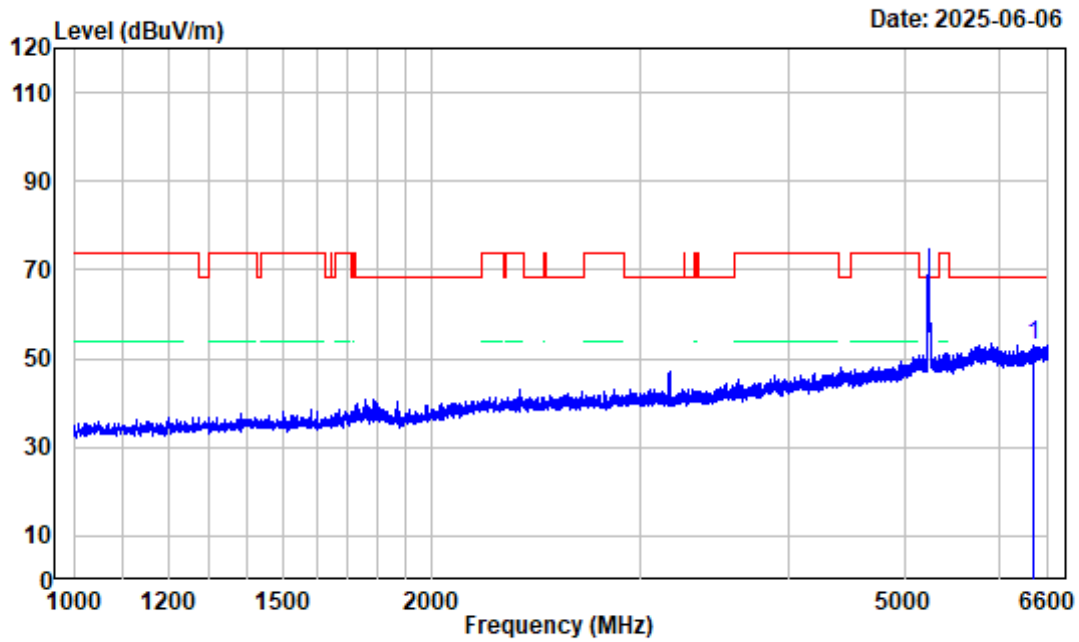

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac20 High Channel 5240MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6412.400	-3.65	56.62	52.97	68.20	-15.23	Peak


802.11ac20 High Channel 6.6GHz-18GHz_HORIZONTAL

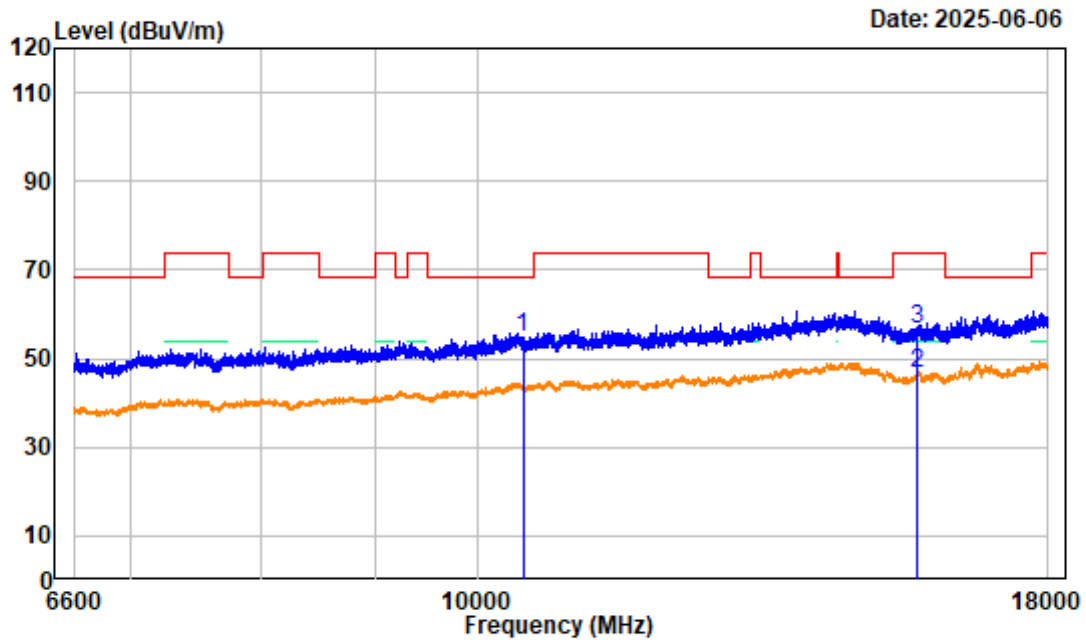

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac20 High Channel 5240MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10480.000	3.92	50.67	54.59	68.20	-13.61	peak
2	15720.000	4.90	41.77	46.67	54.00	-7.33	average
3	15720.000	4.90	51.71	56.61	74.00	-17.39	peak


802.11ac20 High Channel 6.6GHz-18GHz_VERTICAL

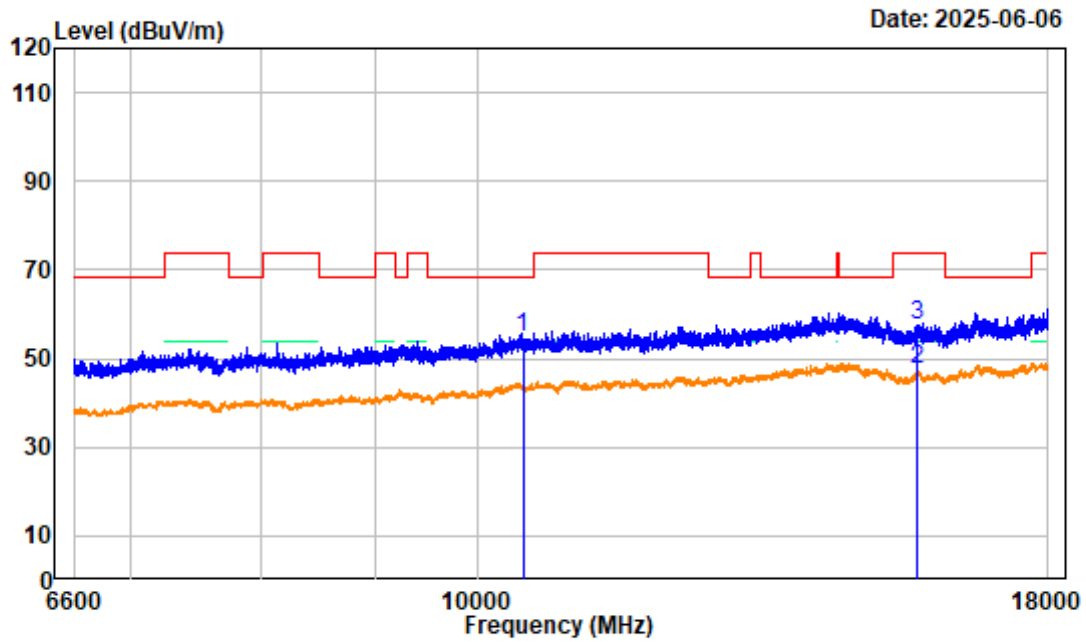

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac20 High Channel 5240MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10480.000	3.92	51.06	54.98	68.20	-13.22	peak
2	15720.000	4.90	42.52	47.42	54.00	-6.58	average
3	15720.000	4.90	52.59	57.49	74.00	-16.51	peak


802.11ac20 High Channel Bandedge_HORIZONTAL

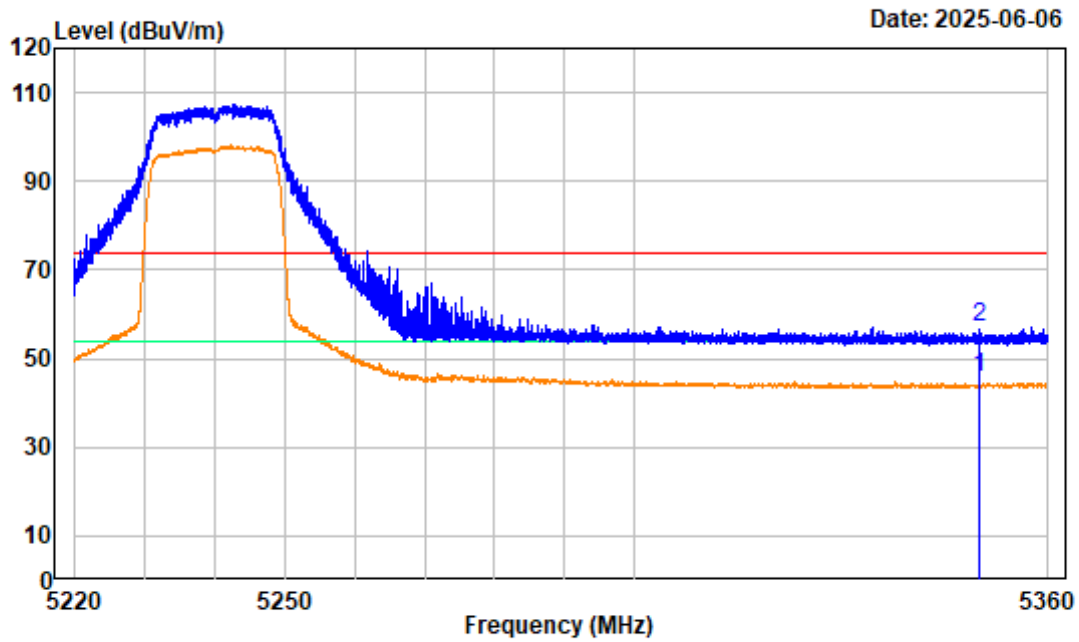

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac20 High Channel 5240MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	51.70	45.89	54.00	-8.11	average
2	5350.000	-5.81	62.90	57.09	74.00	-16.91	peak


802.11ac20 High Channel Bandedge_VERTICAL

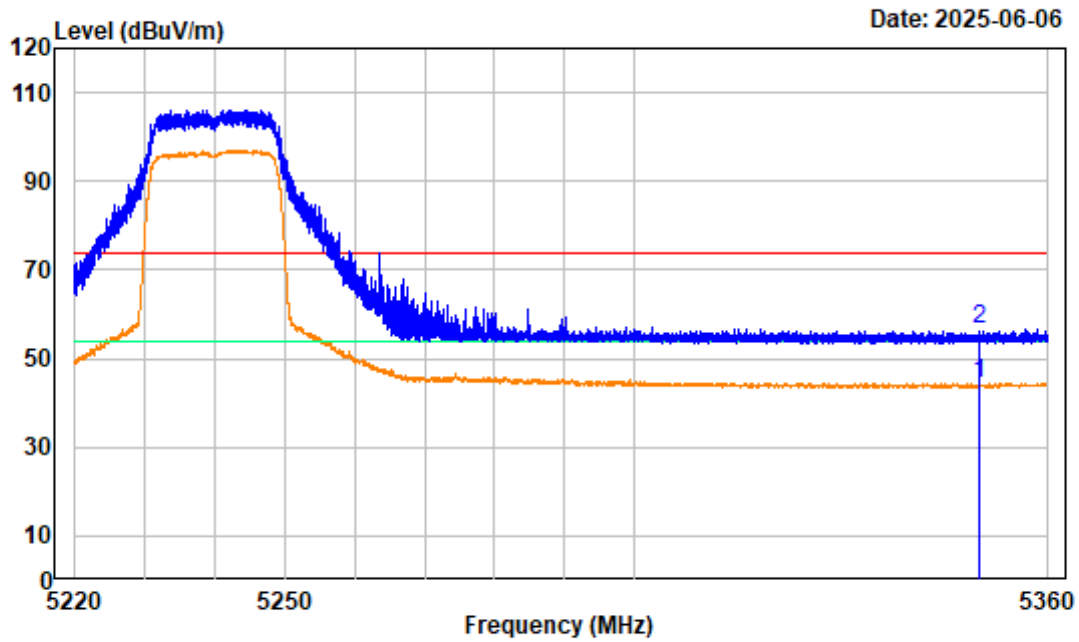

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac20 High Channel 5240MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	50.30	44.49	54.00	-9.51	average
2	5350.000	-5.81	62.46	56.65	74.00	-17.35	peak

802.11ac40 Low Channel 1GHz-6.6GHz_HORIZONTAL

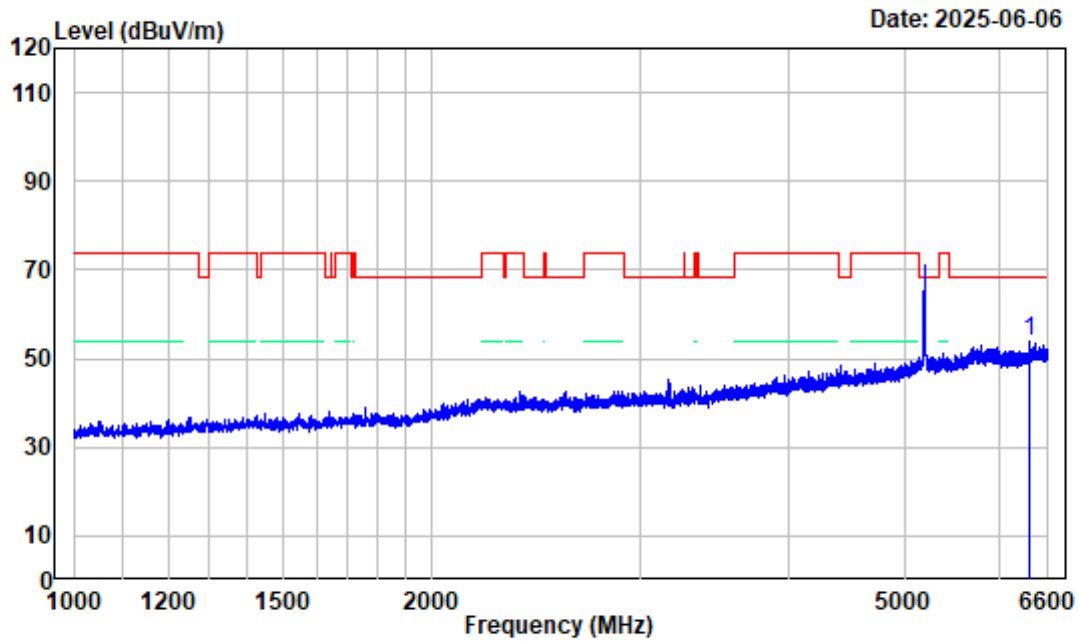


Date: 2025-06-06

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac40 Low Channel 5190MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6371.800	-4.15	57.87	53.72	68.20	-14.48	Peak

802.11ac40 Low Channel 1GHz-6.6GHz_VERTICAL

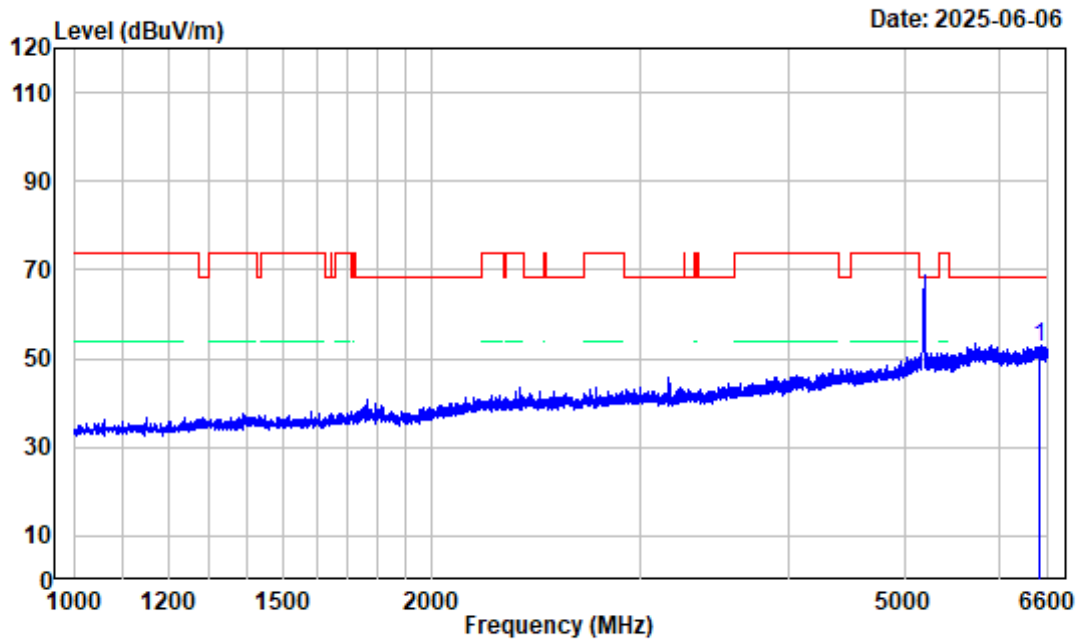


Date: 2025-06-06

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac40 Low Channel 5190MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6497.100	-3.81	56.55	52.74	68.20	-15.46	Peak


802.11ac40 Low Channel 6.6GHz-18GHz_HORIZONTAL

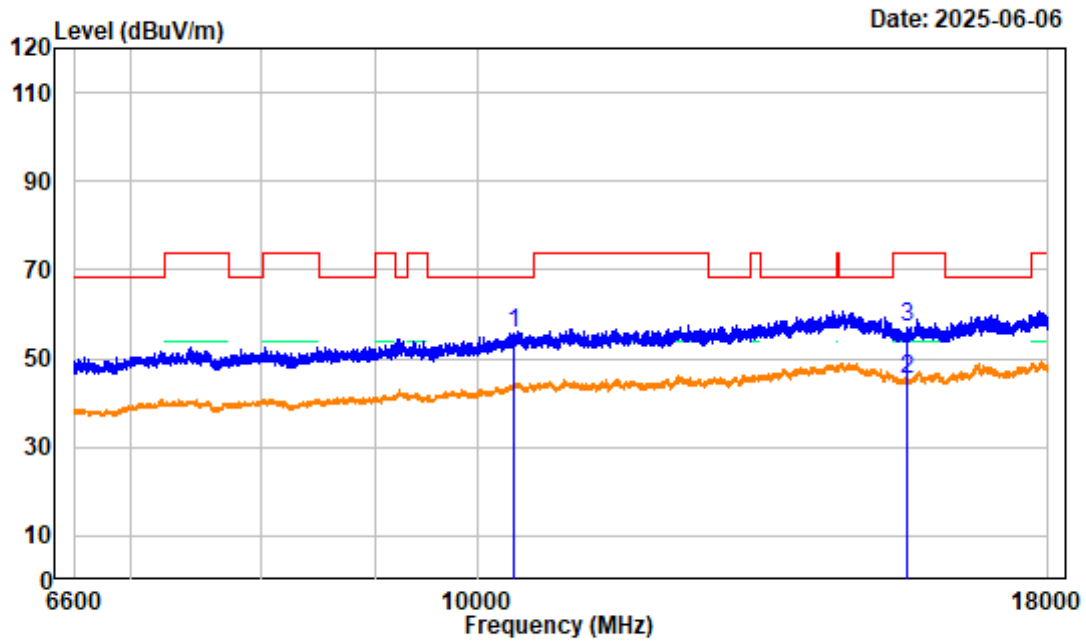

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac40 Low Channel 5190MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10380.000	3.97	51.70	55.67	68.20	-12.53	peak
2	15570.000	4.70	40.57	45.27	54.00	-8.73	average
3	15570.000	4.70	52.56	57.26	74.00	-16.74	peak


802.11ac40 Low Channel 6.6GHz-18GHz_VERTICAL

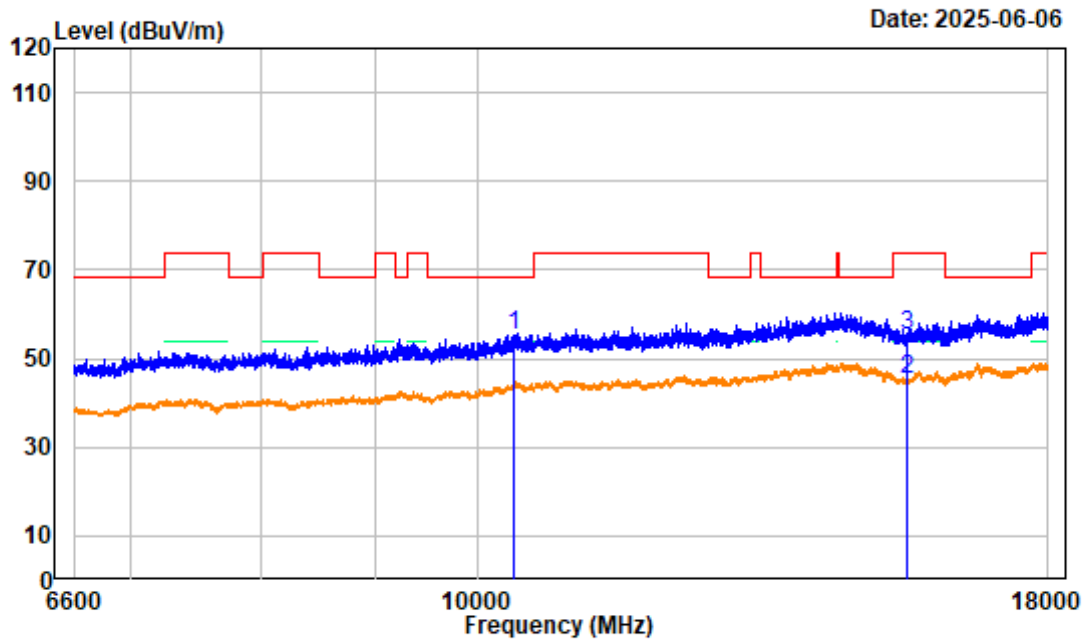

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac40 Low Channel 5190MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10380.000	3.97	51.36	55.33	68.20	-12.87	peak
2	15570.000	4.70	40.72	45.42	54.00	-8.58	average
3	15570.000	4.70	50.74	55.44	74.00	-18.56	peak


802.11ac40 Low Channel Bandedge_HORIZONTAL

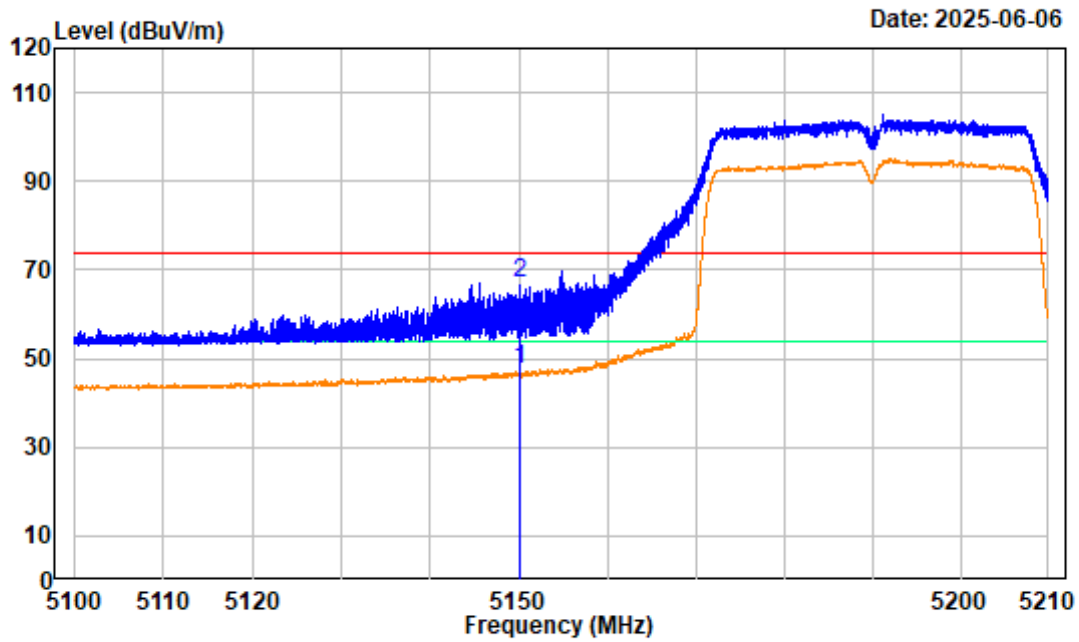

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac40 Low Channel 5190MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	53.34	47.35	54.00	-6.65	average
2	5150.000	-5.99	72.83	66.84	74.00	-7.16	peak


802.11ac40 Low Channel Bandedge_VERTICAL

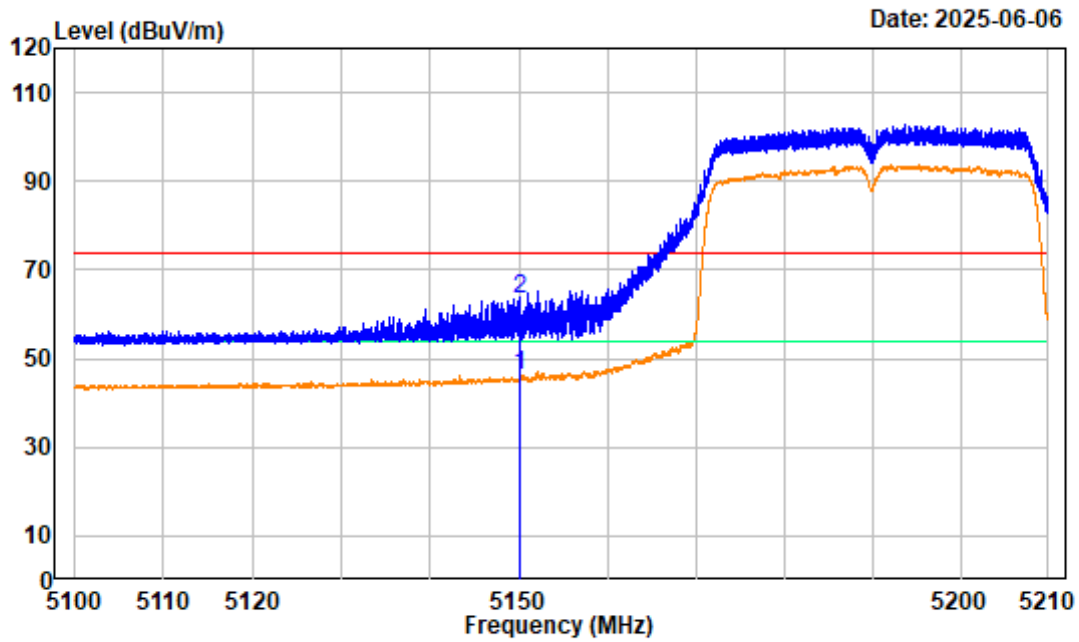

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac40 Low Channel 5190MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	52.40	46.41	54.00	-7.59	average
2	5150.000	-5.99	69.33	63.34	74.00	-10.66	peak


802.11ac40 High Channel 1GHz-6.6GHz_HORIZONTAL

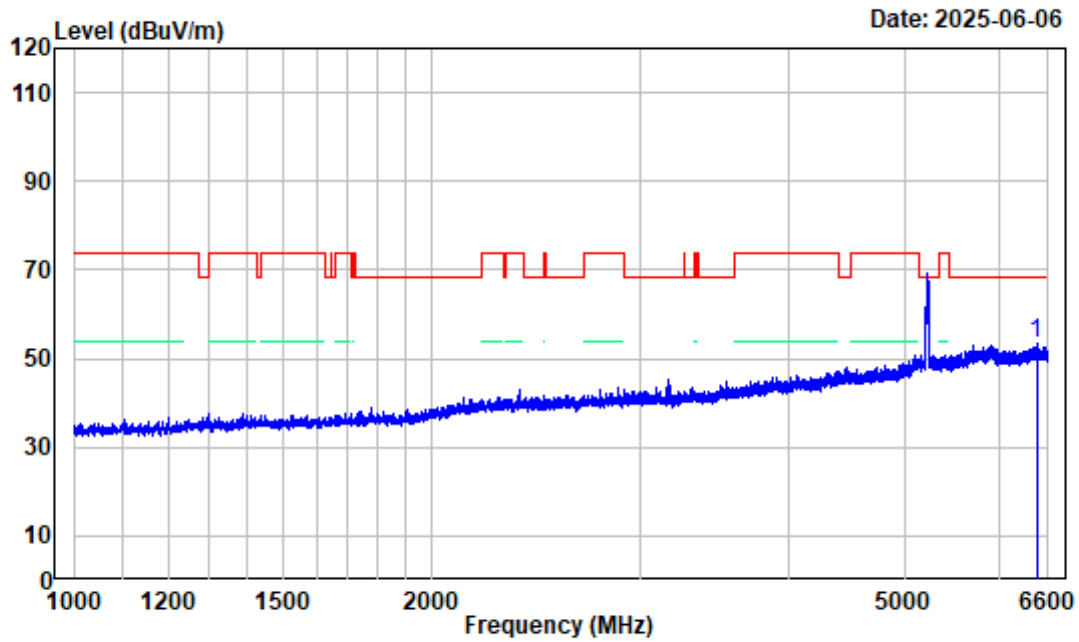

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac40 High Channel 5230MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6453.700	-3.62	56.84	53.22	68.20	-14.98	Peak

802.11ac40 High Channel 1GHz-6.6GHz_VERTICAL

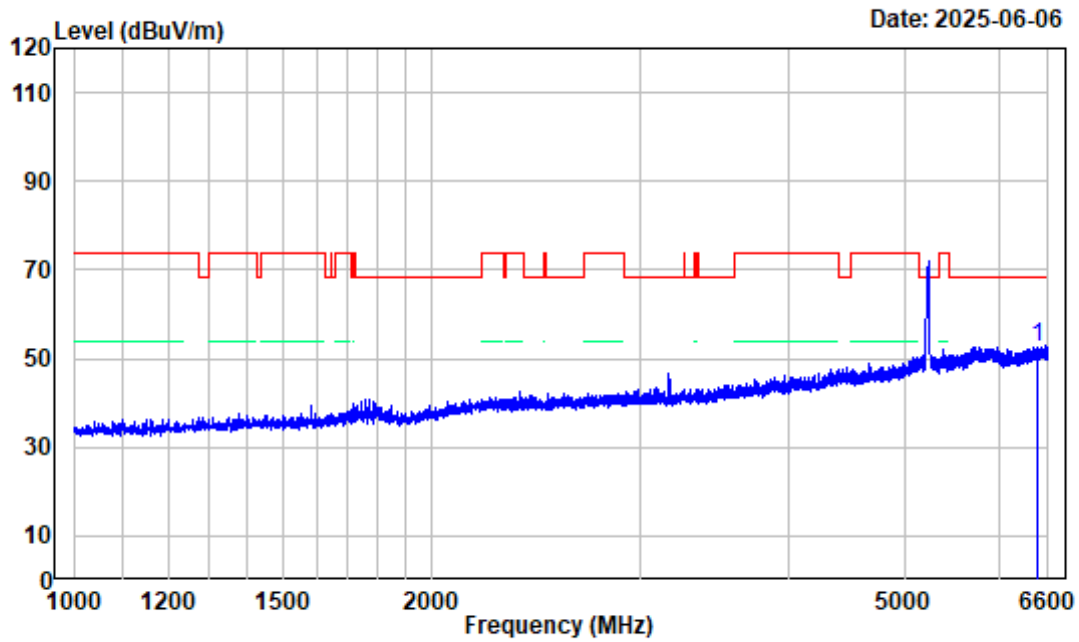


Date: 2025-06-06

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac40 High Channel 5230MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6464.200	-3.68	56.21	52.53	68.20	-15.67	Peak


802.11ac40 High Channel 6.6GHz-18GHz_HORIZONTAL

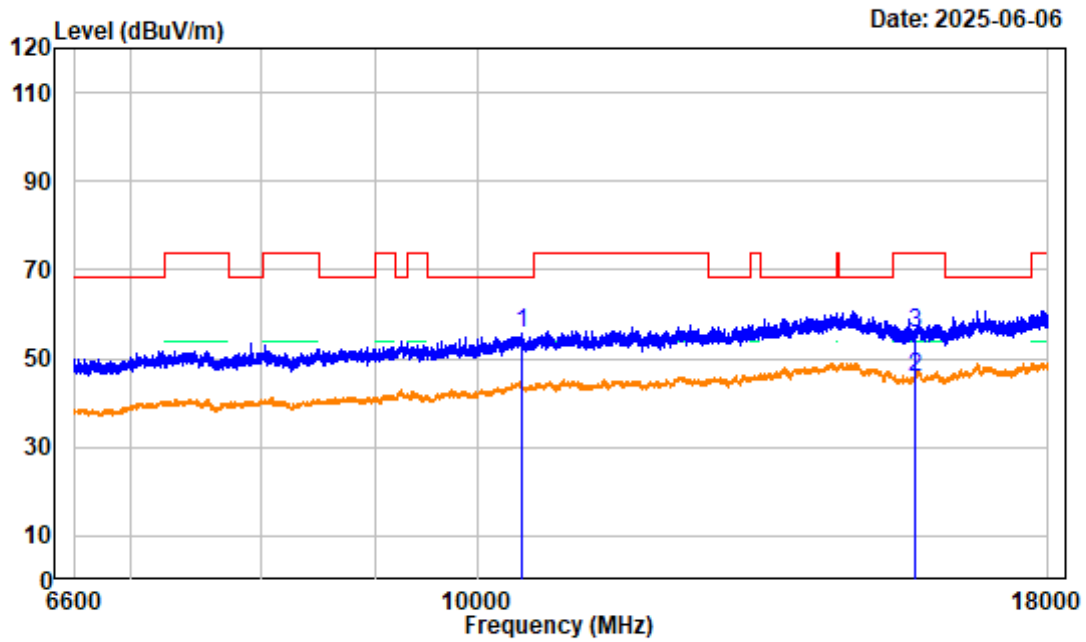

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac40 High Channel 5230MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10460.000	4.18	51.52	55.70	68.20	-12.50	peak
2	15690.000	4.67	41.27	45.94	54.00	-8.06	average
3	15690.000	4.67	51.23	55.90	74.00	-18.10	peak


802.11ac40 High Channel 6.6GHz-18GHz_VERTICAL

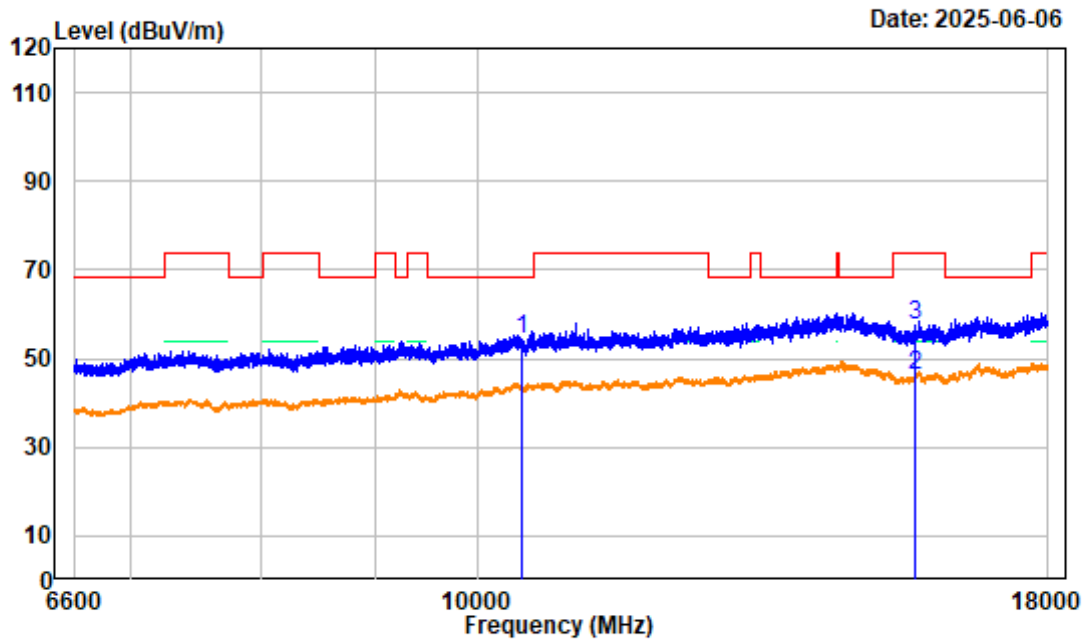

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac40 High Channel 5230MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10460.000	4.18	50.36	54.54	68.20	-13.66	peak
2	15690.000	4.67	41.63	46.30	54.00	-7.70	average
3	15690.000	4.67	52.71	57.38	74.00	-16.62	peak


802.11ac40 High Channel Bandedge_HORIZONTAL

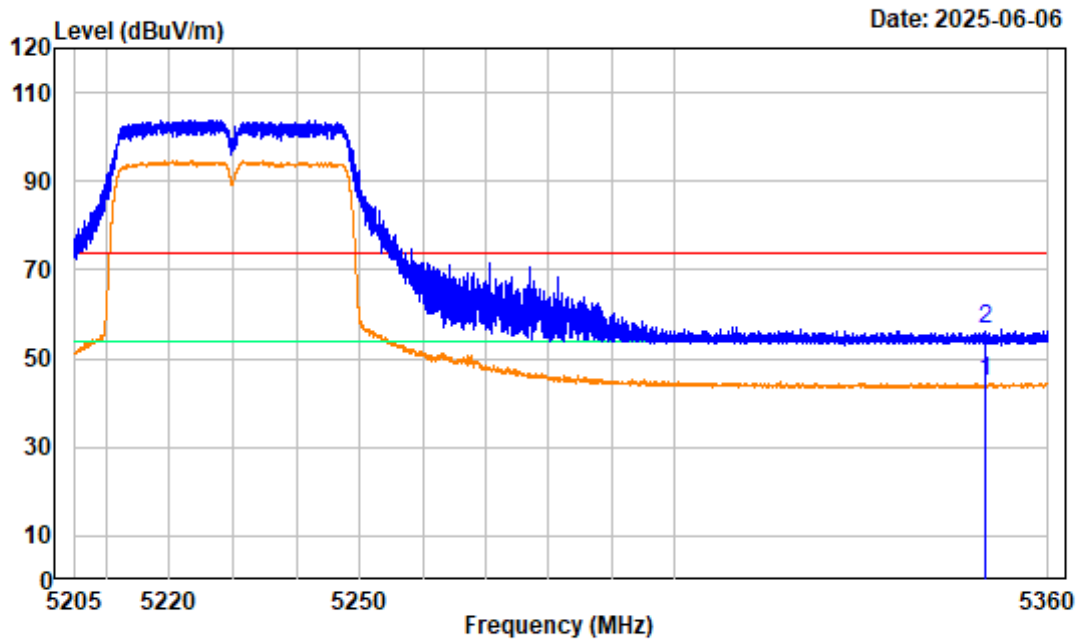

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac40 High Channel 5230MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	50.66	44.85	54.00	-9.15	average
2	5350.000	-5.81	62.50	56.69	74.00	-17.31	peak


802.11ac40 High Channel Bandedge_VERTICAL

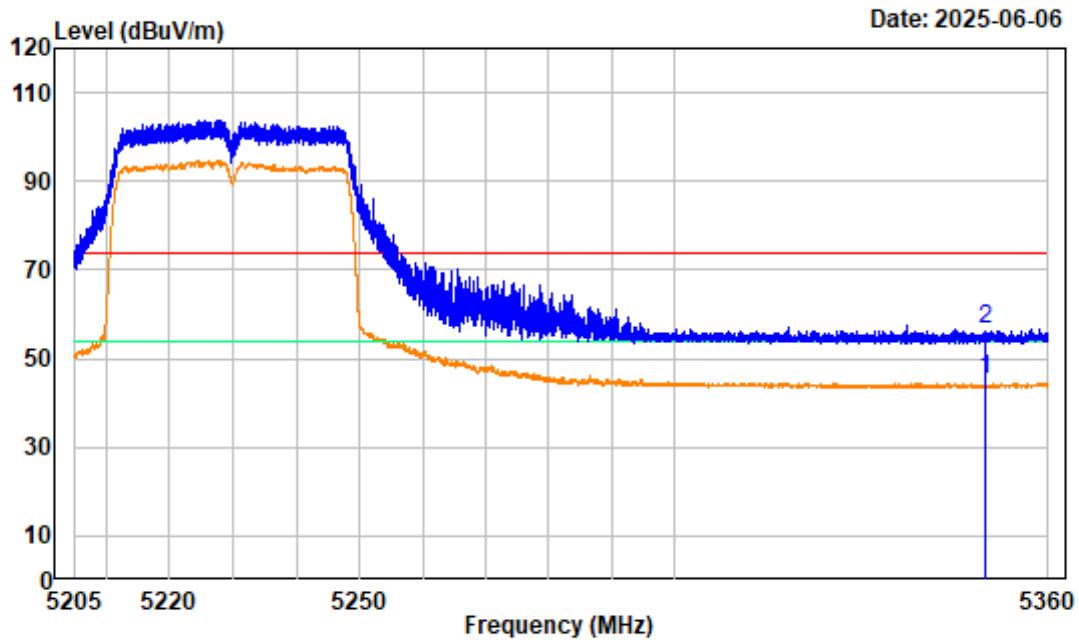

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac40 High Channel 5230MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	51.05	45.24	54.00	-8.76	average
2	5350.000	-5.81	62.33	56.52	74.00	-17.48	peak


802.11ax20 Low Channel 1GHz-6.6GHz_HORIZONTAL

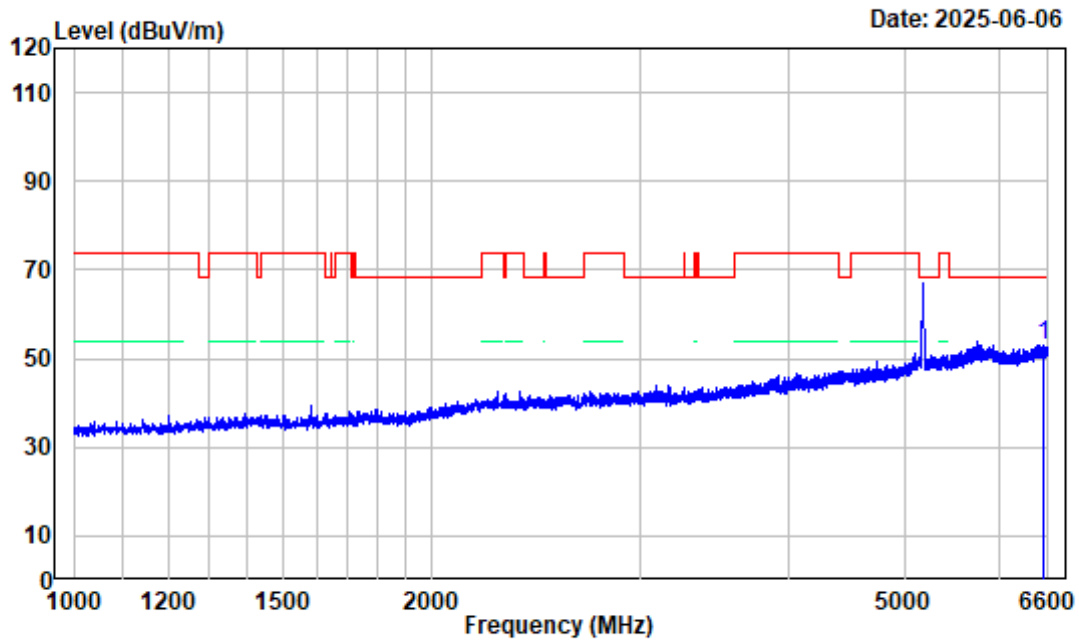

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax20 Low Channel 5180MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6530.700	-3.76	56.70	52.94	68.20	-15.26	Peak

802.11ax20 Low Channel 1GHz-6.6GHz_VERTICAL

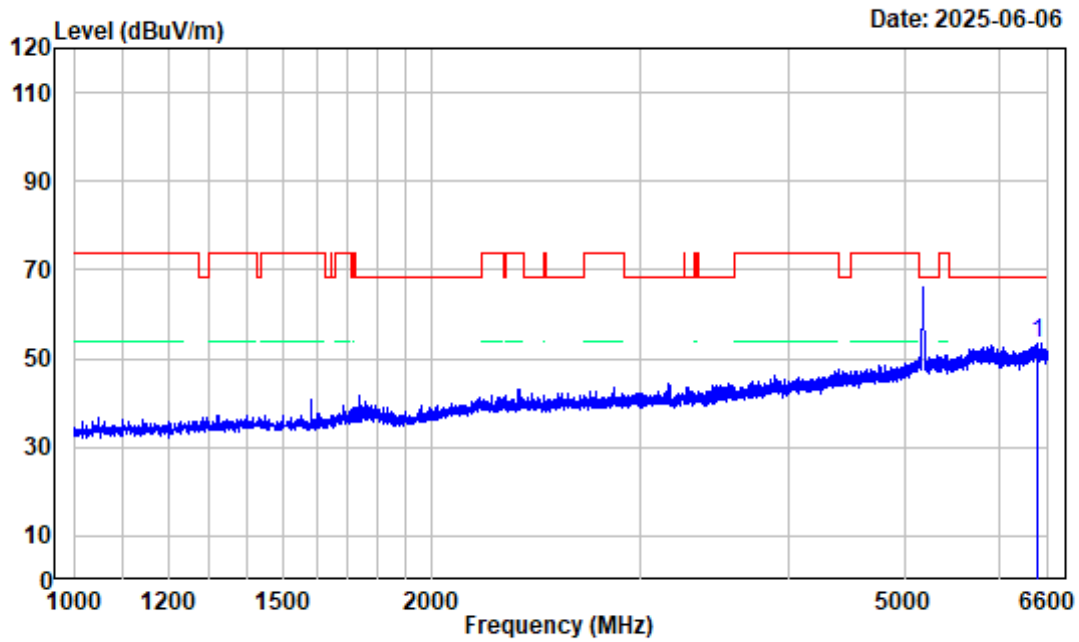


Date: 2025-06-06

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax20 Low Channel 5180MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6460.000	-3.65	56.87	53.22	68.20	-14.98	Peak


802.11ax20 Low Channel 6.6GHz-18GHz_HORIZONTAL

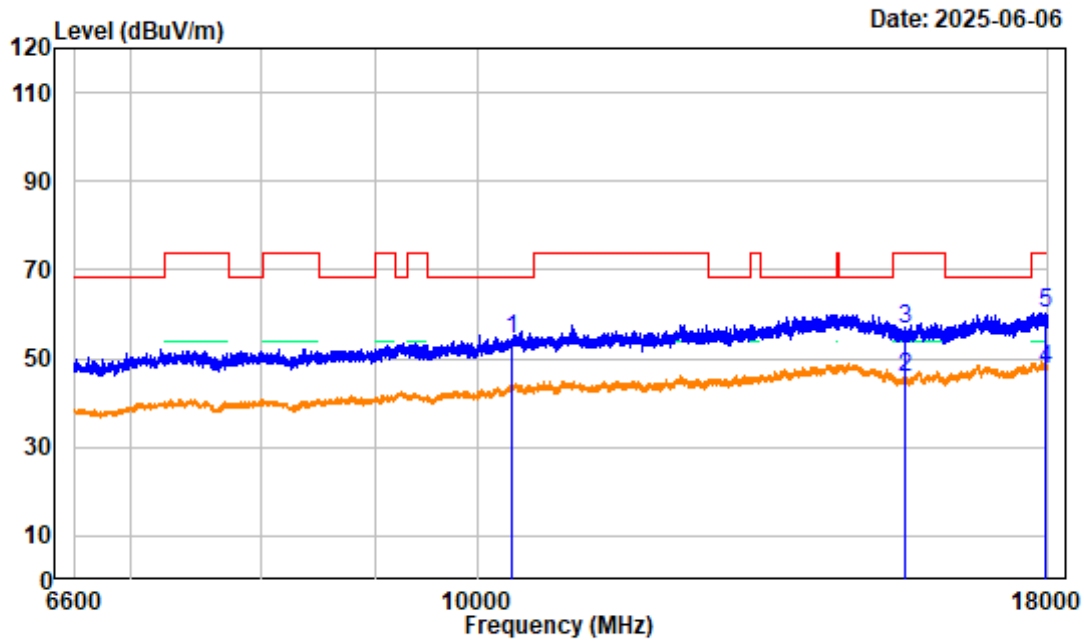

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax20 Low Channel 5180MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBUV/m	dBUV/m	dB	
1	10360.000	3.84	50.52	54.36	68.20	-13.84	peak
2	15540.000	4.75	41.05	45.80	54.00	-8.20	average
3	15540.000	4.75	52.06	56.81	74.00	-17.19	peak
4	17938.720	8.20	39.54	47.74	54.00	-6.26	average
5	17938.720	8.20	52.14	60.34	74.00	-13.66	peak


802.11ax20 Low Channel 6.6GHz-18GHz_VERTICAL

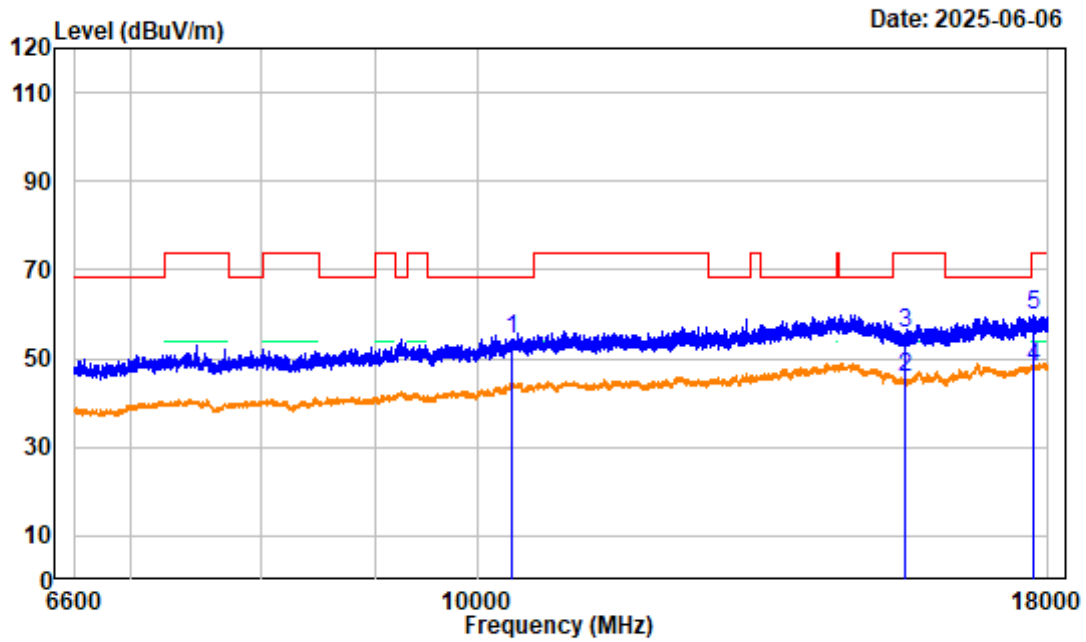

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax20 Low Channel 5180MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10360.000	3.84	50.66	54.50	68.20	-13.70	peak
2	15540.000	4.75	40.92	45.67	54.00	-8.33	average
3	15540.000	4.75	50.94	55.69	74.00	-18.31	peak
4	17732.100	7.68	40.13	47.81	54.00	-6.19	average
5	17732.100	7.68	52.21	59.89	74.00	-14.11	peak


802.11ax20 Low Channel Bandedge_HORIZONTAL

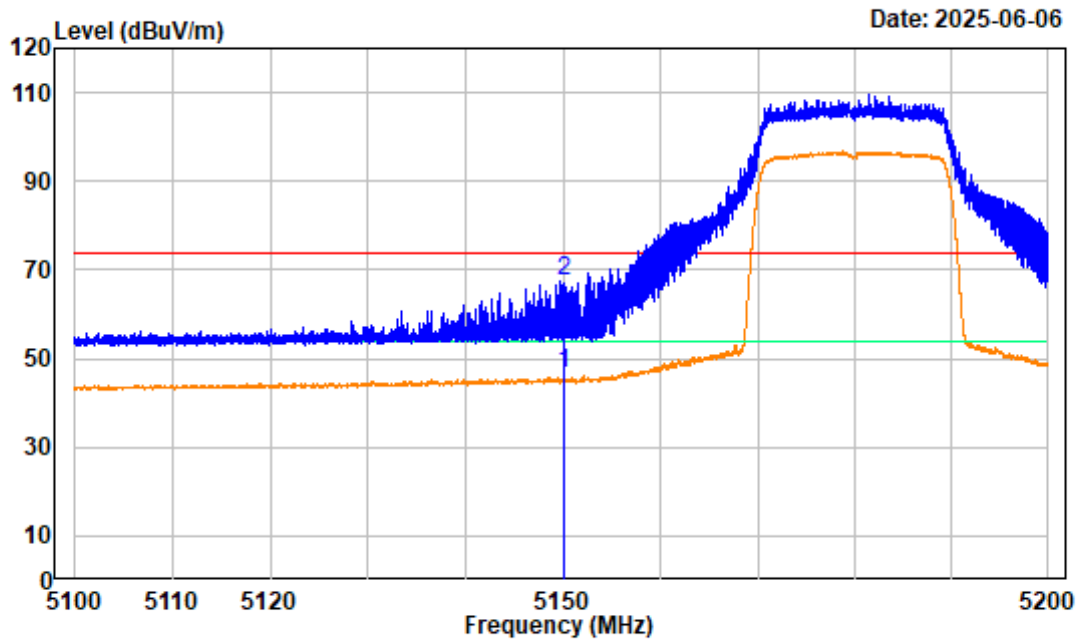

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax20 Low Channel 5180MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	52.56	46.57	54.00	-7.43	average
2	5150.000	-5.99	73.45	67.46	74.00	-6.54	peak


802.11ax20 Low Channel Bandedge_VERTICAL

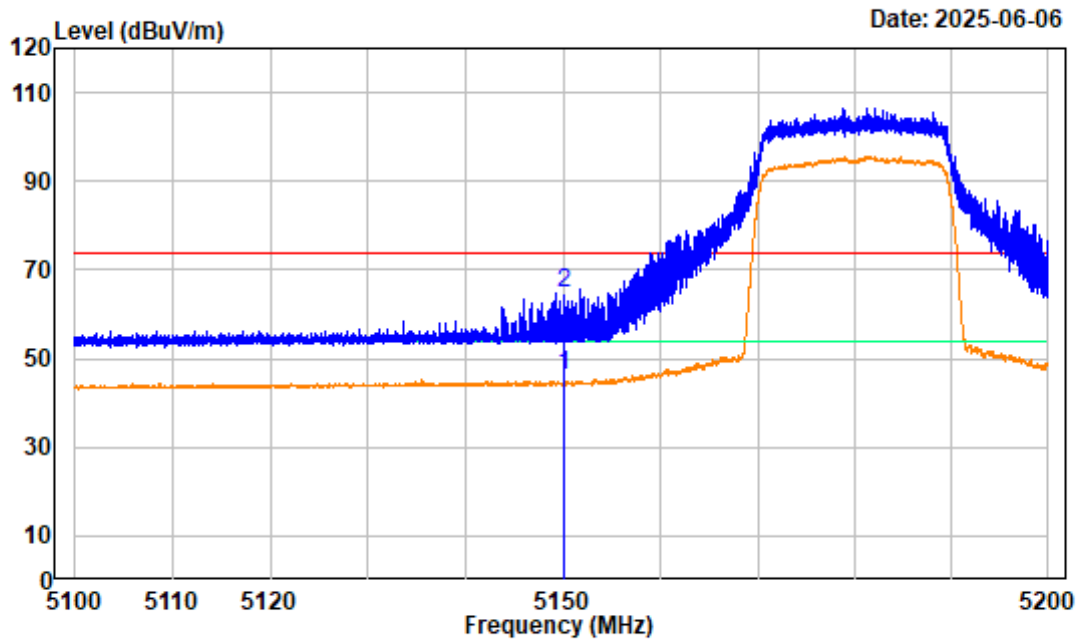

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax20 Low Channel 5180MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	52.09	46.10	54.00	-7.90	average
2	5150.000	-5.99	70.90	64.91	74.00	-9.09	peak


802.11ax20 Middle Channel 1GHz-6.6GHz_HORIZONTAL

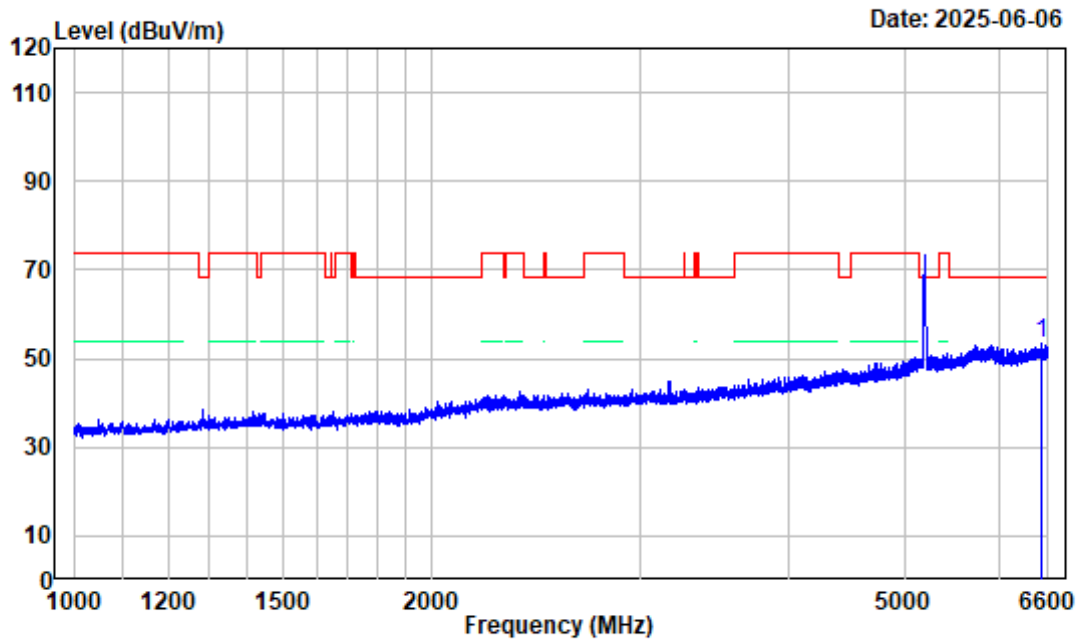

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax20 Middle Channel 5200MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6513.900	-3.79	57.11	53.32	68.20	-14.88	Peak

802.11ax20 Middle Channel 1GHz-6.6GHz_VERTICAL

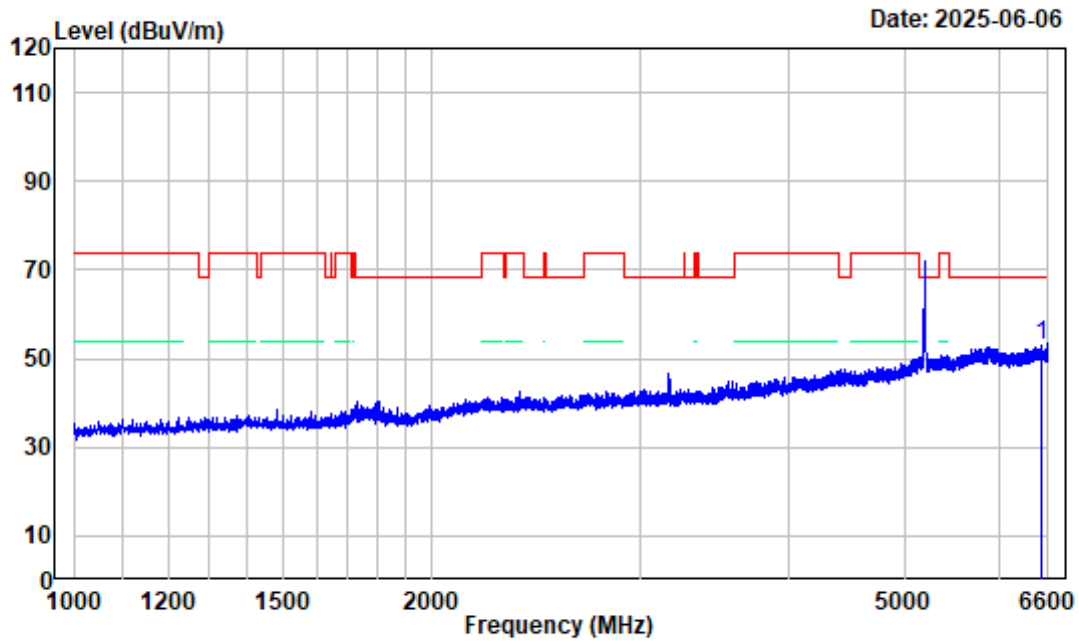


Date: 2025-06-06

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax20 Middle Channel 5200MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6509.000	-3.80	56.66	52.86	68.20	-15.34	Peak


802.11ax20 Middle Channel 6.6GHz-18GHz_HORIZONTAL

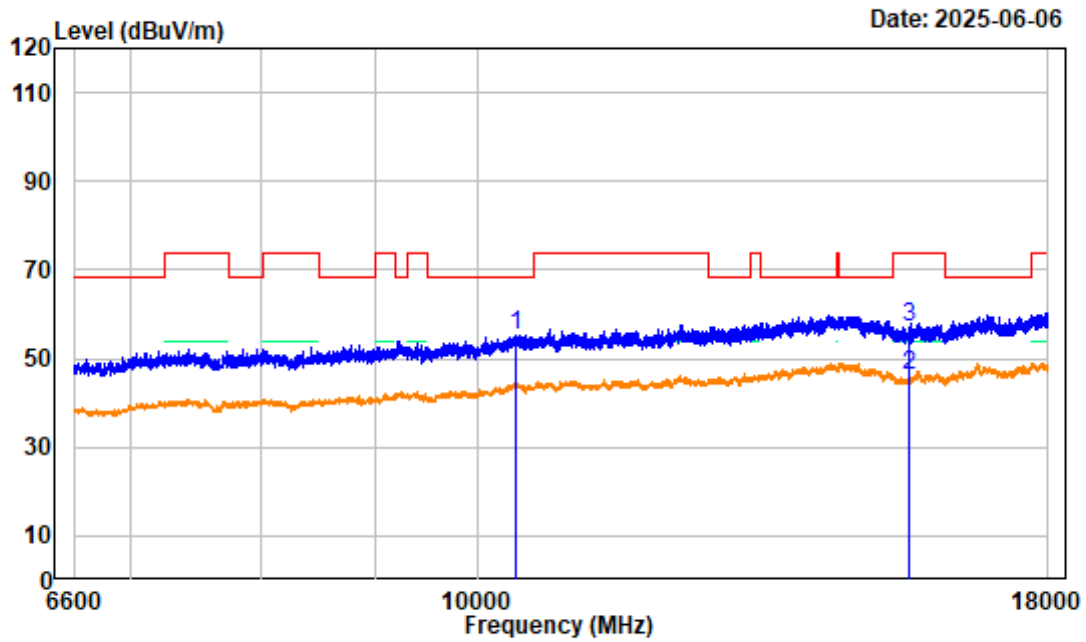

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax20 Middle Channel 5200MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10400.000	4.10	51.18	55.28	68.20	-12.92	peak
2	15600.000	4.60	41.53	46.13	54.00	-7.87	average
3	15600.000	4.60	52.58	57.18	74.00	-16.82	peak


802.11ax20 Middle Channel 6.6GHz-18GHz_VERTICAL

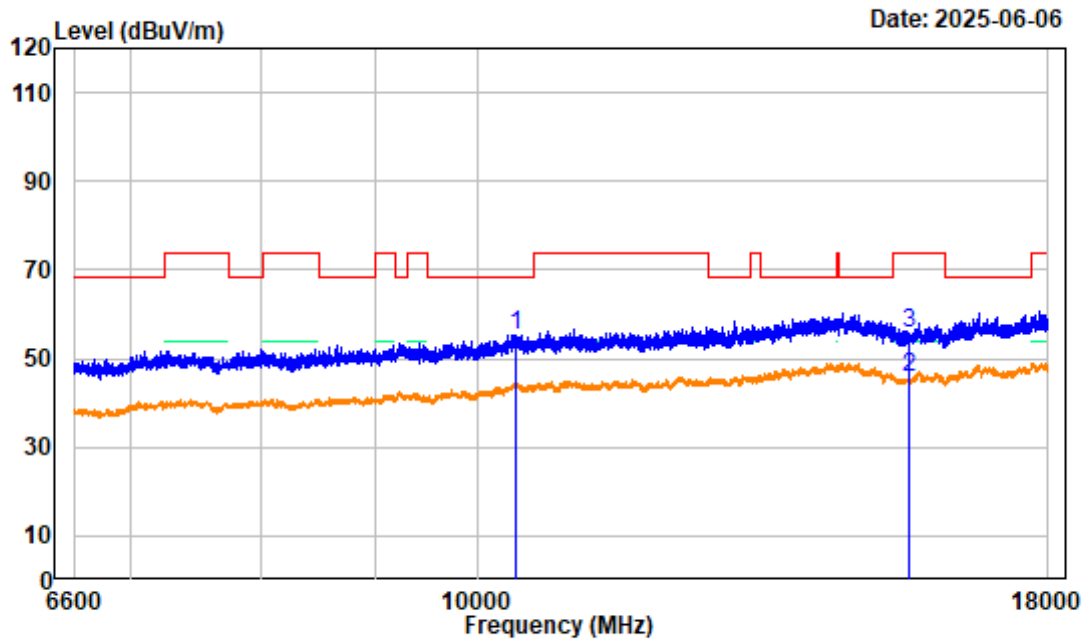

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax20 Middle Channel 5200MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10400.000	4.10	51.36	55.46	68.20	-12.74	peak
2	15600.000	4.60	41.14	45.74	54.00	-8.26	average
3	15600.000	4.60	51.19	55.79	74.00	-18.21	peak


802.11ax20 Middle Channel 18GHz-26.5GHz_HORIZONTAL

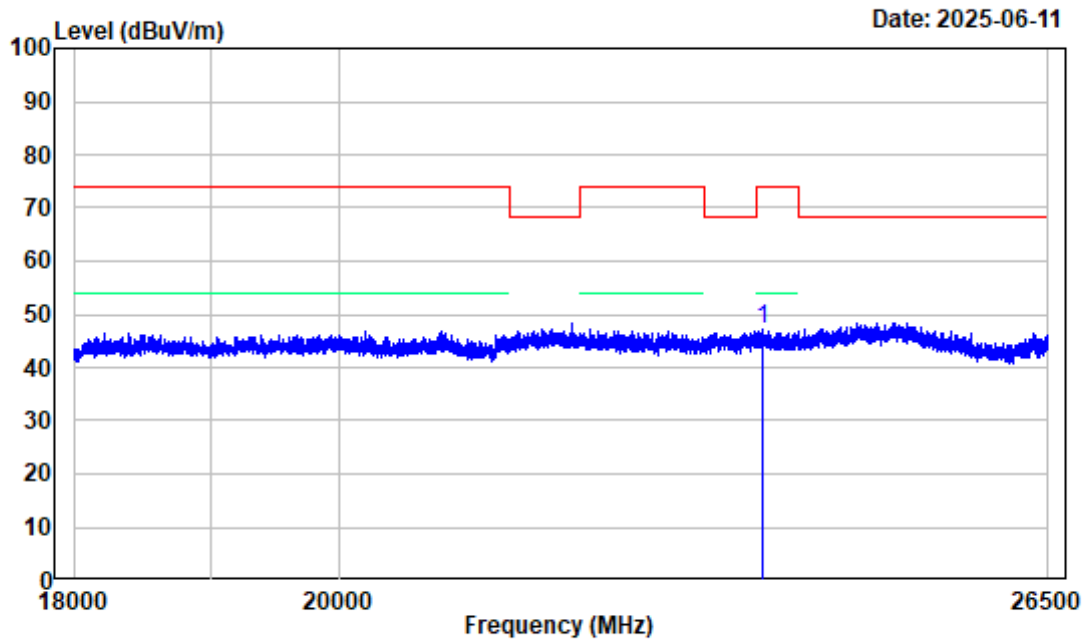

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax20 Middle Channel 5200MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	23669.500	-2.17	49.23	47.06	74.00	-26.94	Peak

802.11ax20 Middle Channel 18GHz-26.5GHz_VERTICAL

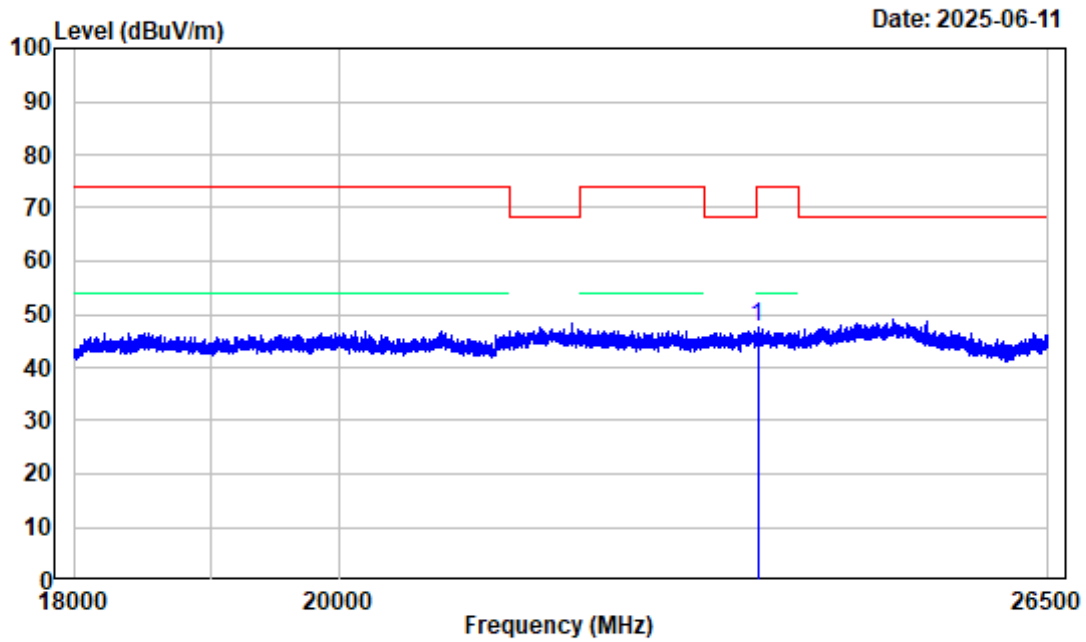


Date: 2025-06-11

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax20 Middle Channel 5200MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	23614.250	-2.24	49.62	47.38	74.00	-26.62	Peak


802.11ax20 Middle Channel 26.5GHz-40GHz_HORIZONTAL

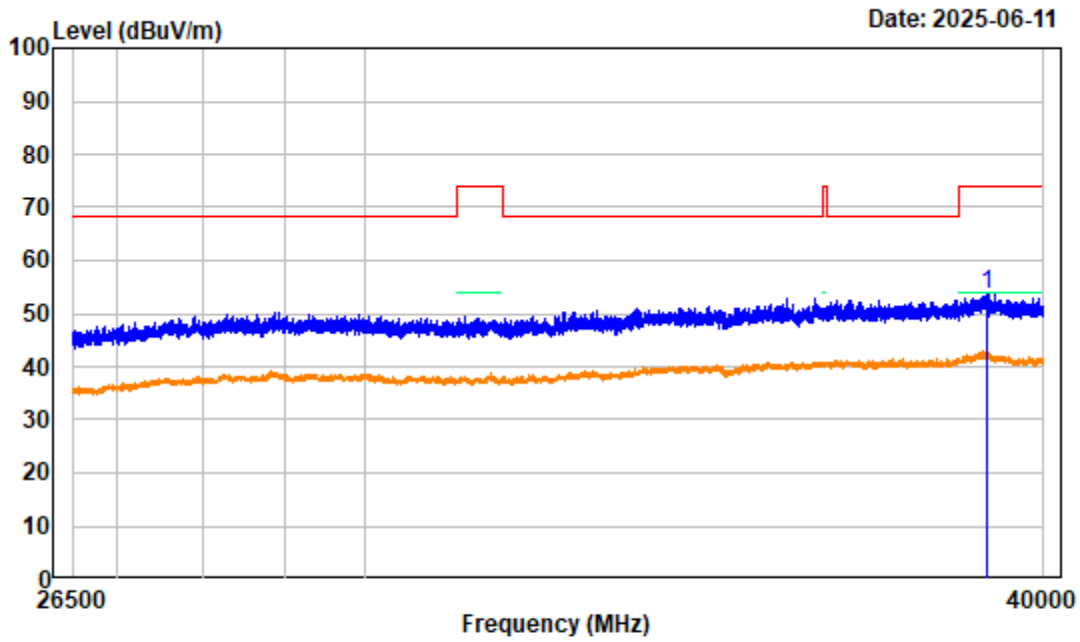

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax20 Middle Channel 5200MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	39068.500	2.88	50.64	53.52	74.00	-20.48	Peak


802.11ax20 Middle Channel 26.5GHz-40GHz_VERTICAL

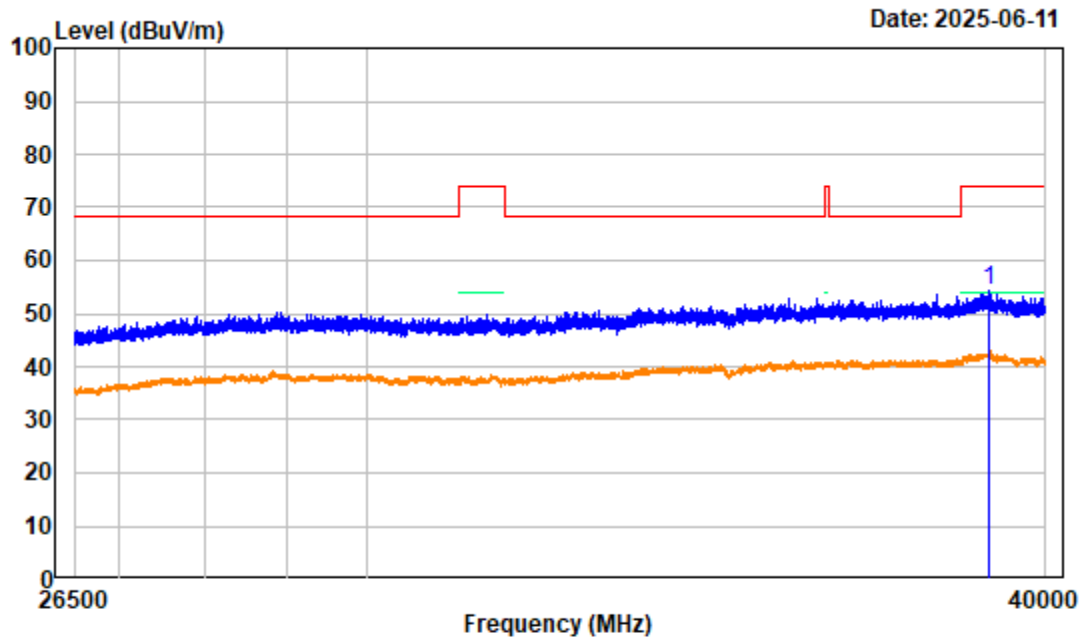

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax20 Middle Channel 5200MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 39055.000	2.93	51.56	54.49	74.00	-19.51	Peak


802.11ax20 High Channel 1GHz-6.6GHz_HORIZONTAL

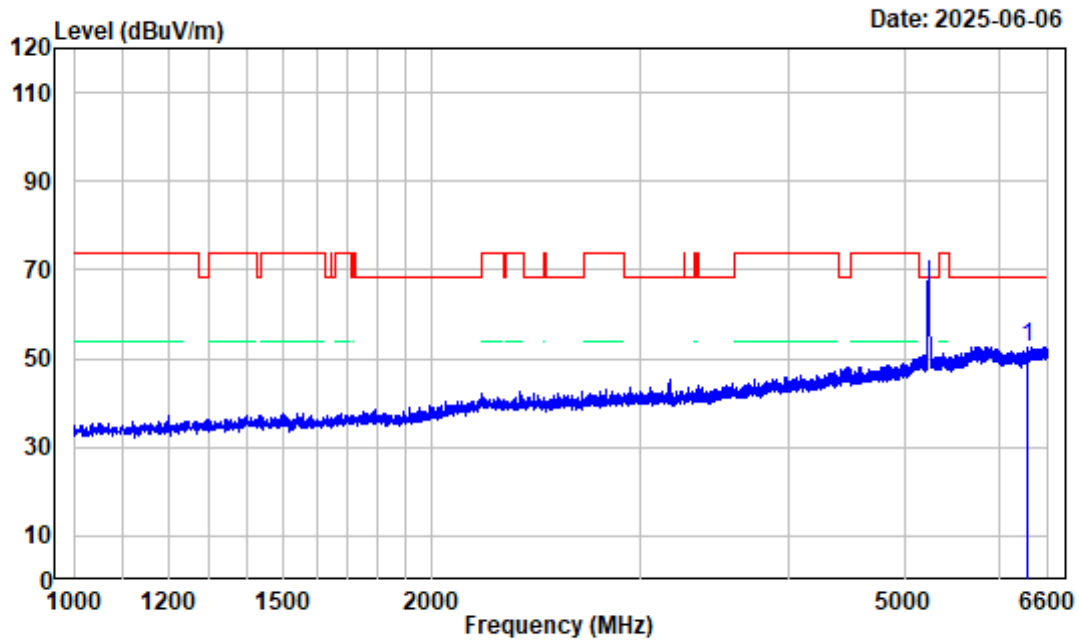

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax20 High Channel 5240MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6343.800	-4.51	57.17	52.66	68.20	-15.54	Peak

802.11ax20 High Channel 1GHz-6.6GHz_VERTICAL

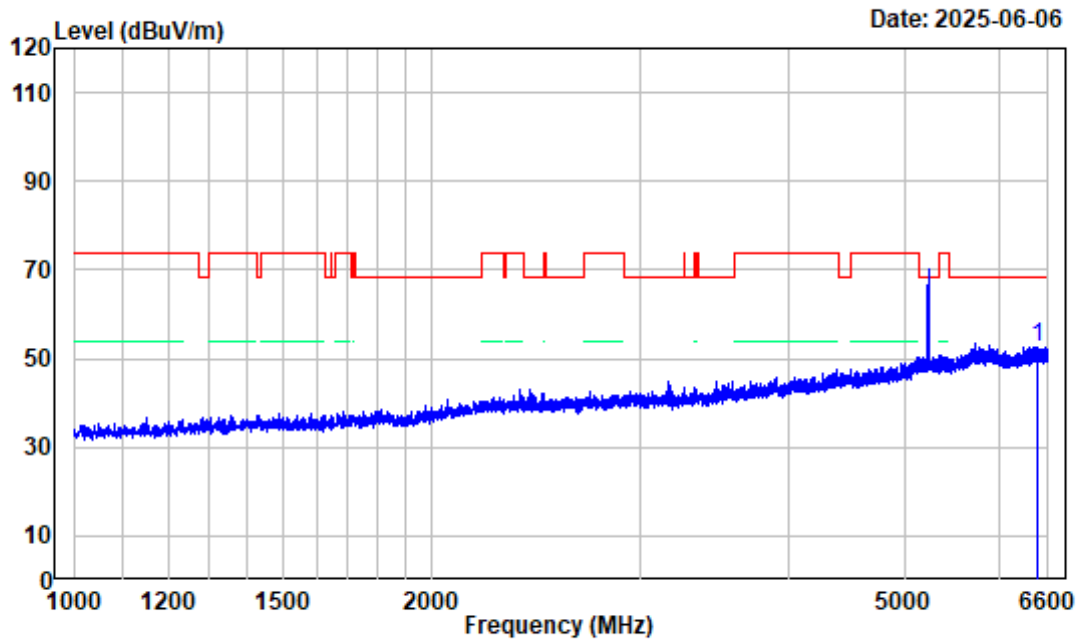


Date: 2025-06-06

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax20 High Channel 5240MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6471.900	-3.71	56.37	52.66	68.20	-15.54	Peak


802.11ax20 High Channel 6.6GHz-18GHz_HORIZONTAL

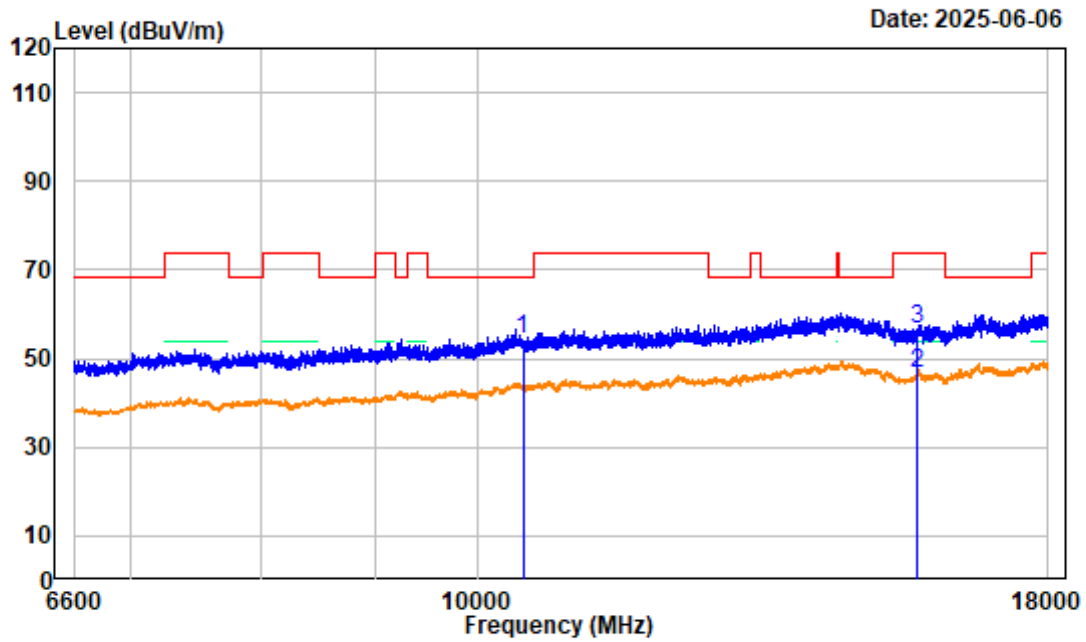

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax20 High Channel 5240MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10480.000	3.92	50.63	54.55	68.20	-13.65	peak
2	15720.000	4.90	41.83	46.73	54.00	-7.27	average
3	15720.000	4.90	51.86	56.76	74.00	-17.24	peak


802.11ax20 High Channel 6.6GHz-18GHz_VERTICAL

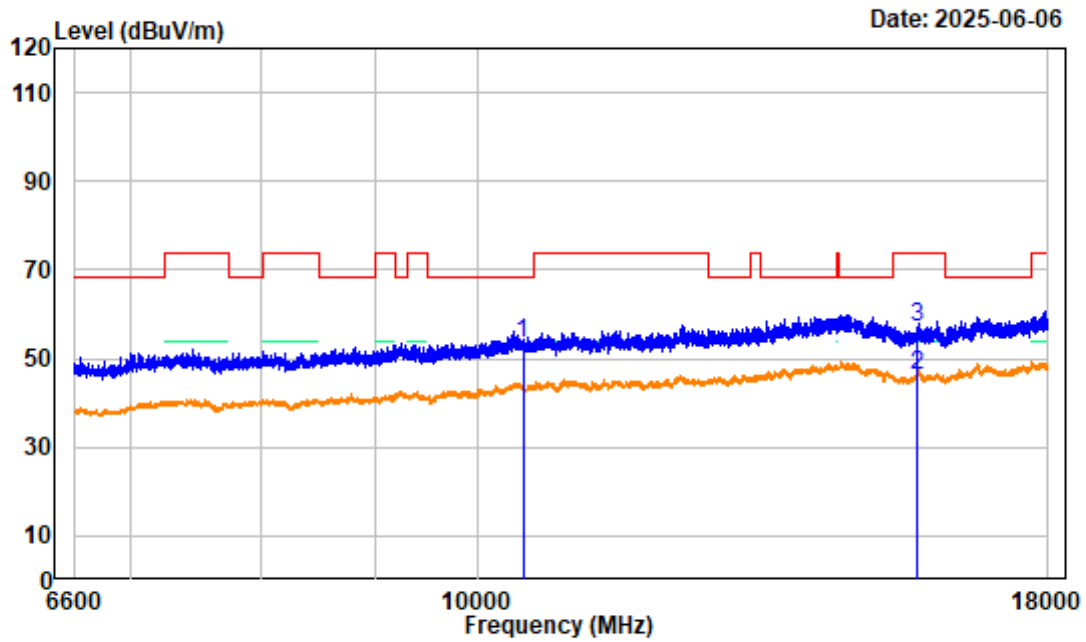

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax20 High Channel 5240MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10480.000	3.92	49.47	53.39	68.20	-14.81	peak
2	15720.000	4.90	41.26	46.16	54.00	-7.84	average
3	15720.000	4.90	52.24	57.14	74.00	-16.86	peak


802.11ax20 High Channel Bandedge_HORIZONTAL

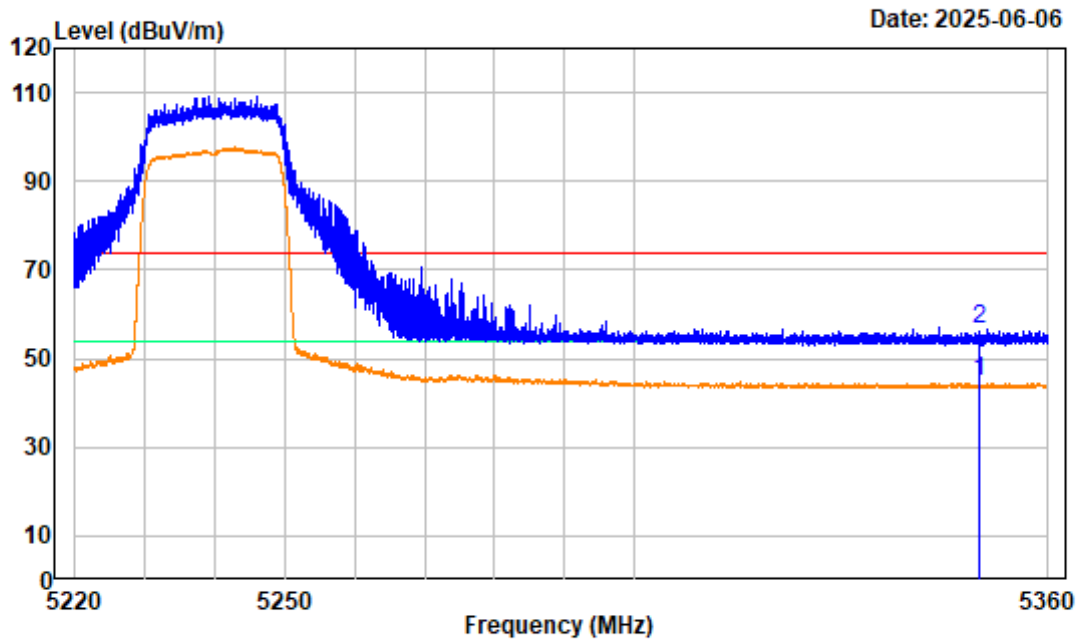

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax20 High Channel 5240MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	50.61	44.80	54.00	-9.20	average
2	5350.000	-5.81	62.19	56.38	74.00	-17.62	peak


802.11ax20 High Channel Bandedge_VERTICAL

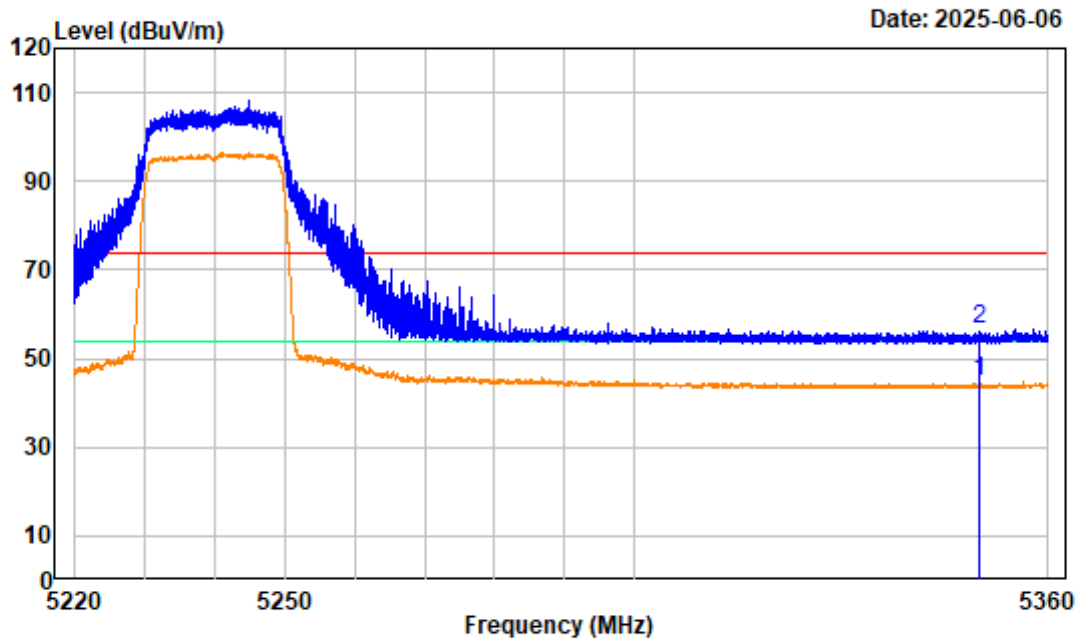

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax20 High Channel 5240MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	50.86	45.05	54.00	-8.95	average
2	5350.000	-5.81	62.51	56.70	74.00	-17.30	peak


802.11ax40 Low Channel 1GHz-6.6GHz_HORIZONTAL

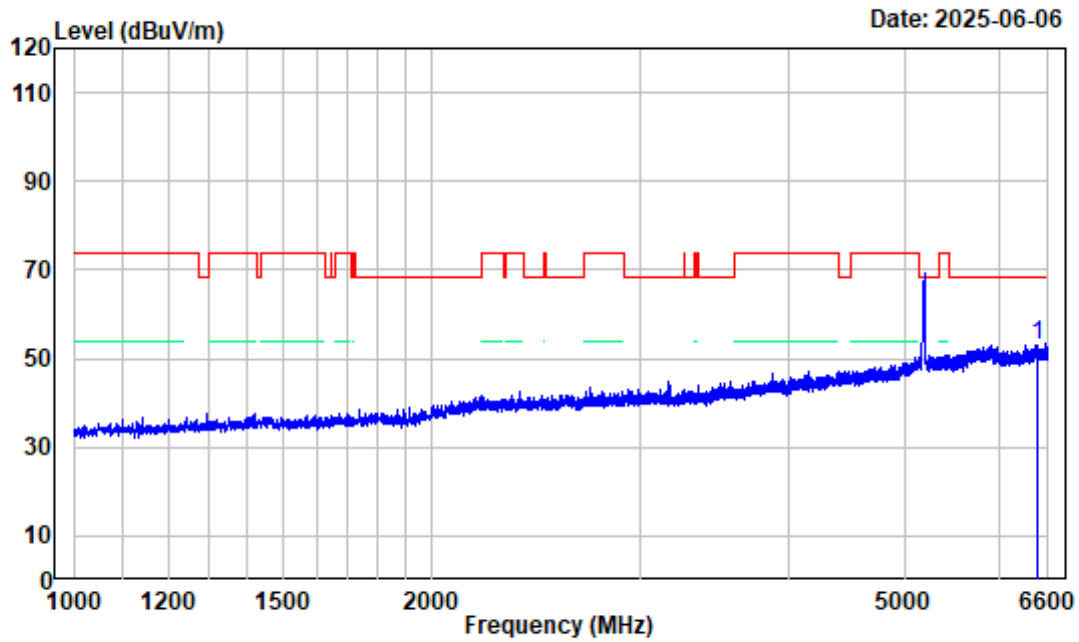

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax40 Low Channel 5190MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6462.100	-3.66	56.65	52.99	68.20	-15.21	Peak

802.11ax40 Low Channel 1GHz-6.6GHz_VERTICAL

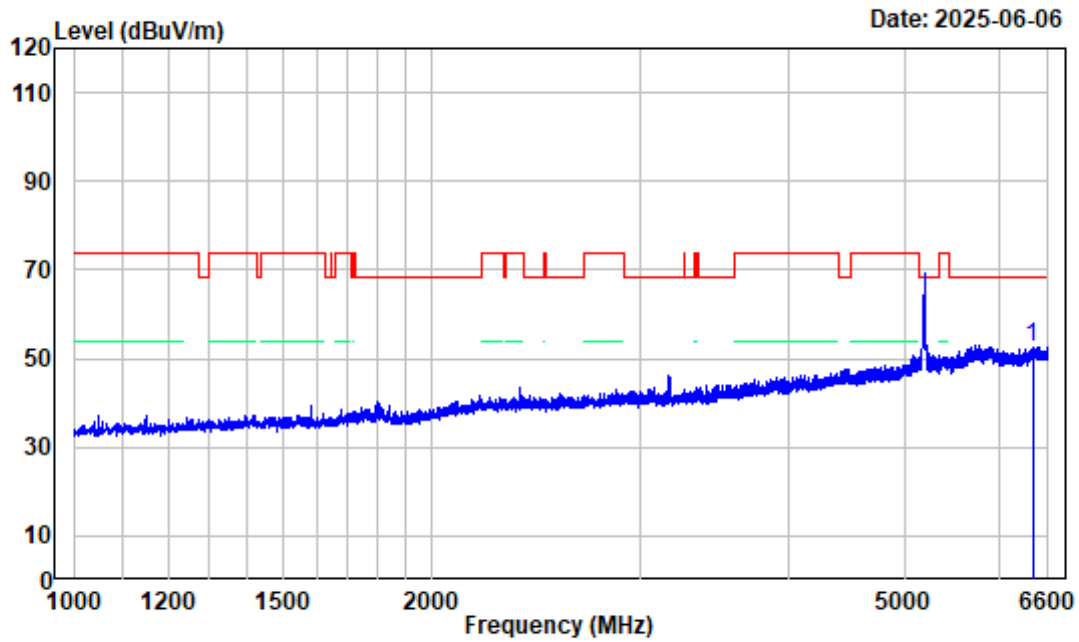


Date: 2025-06-06

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax40 Low Channel 5190MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6404.000	-3.66	56.09	52.43	68.20	-15.77	Peak


802.11ax40 Low Channel 6.6GHz-18GHz_HORIZONTAL

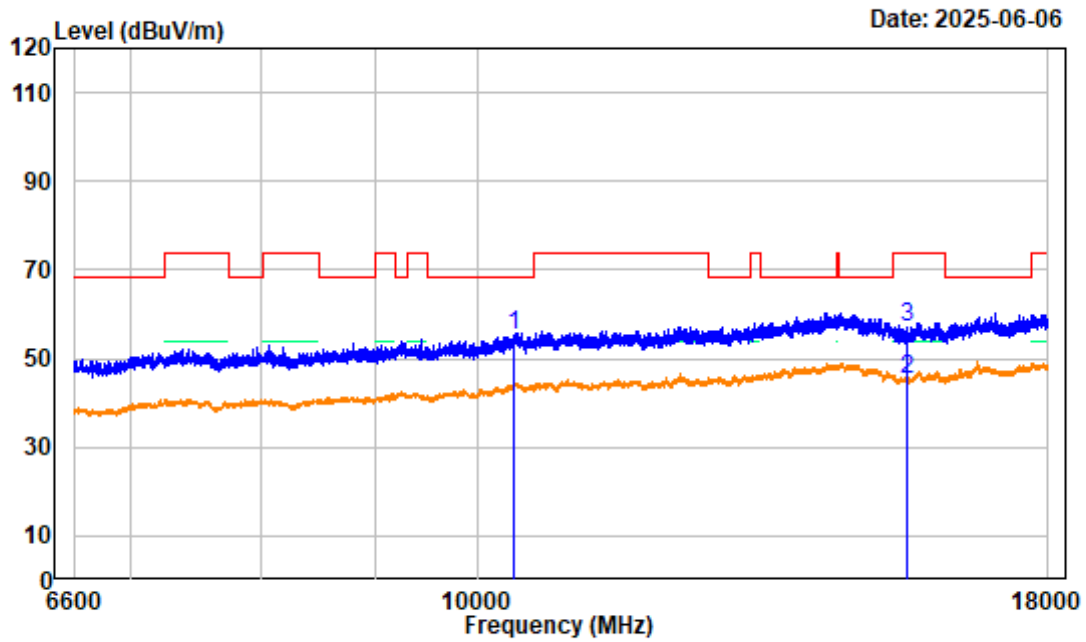

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax40 Low Channel 5190MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10380.000	3.97	51.33	55.30	68.20	-12.90	peak
2	15570.000	4.70	40.60	45.30	54.00	-8.70	average
3	15570.000	4.70	52.55	57.25	74.00	-16.75	peak


802.11ax40 Low Channel 6.6GHz-18GHz_VERTICAL

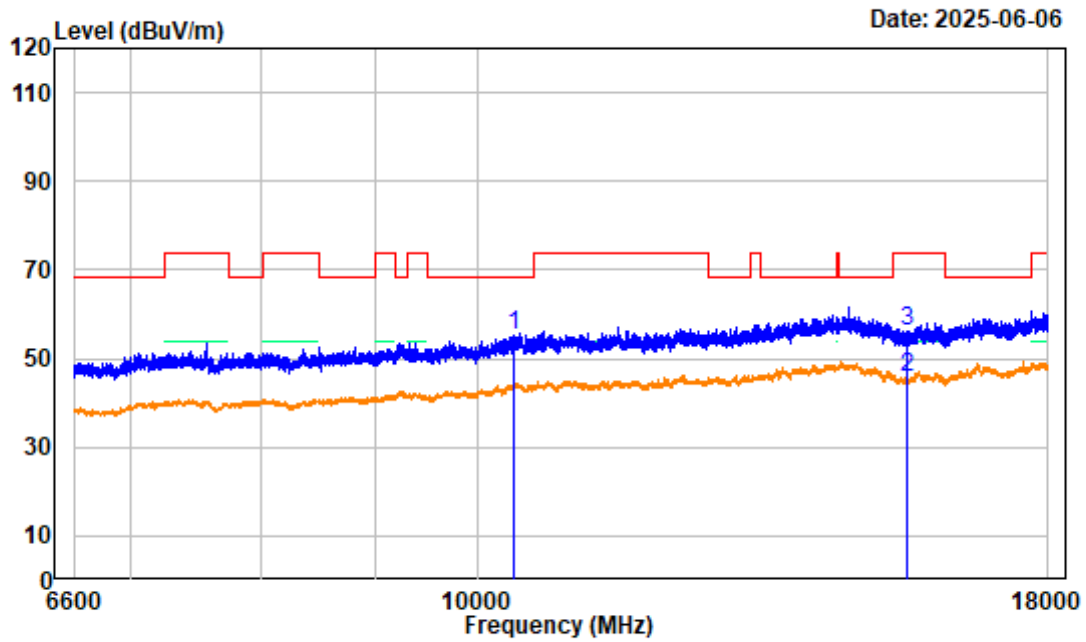

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax40 Low Channel 5190MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10380.000	3.97	51.26	55.23	68.20	-12.97	peak
2	15570.000	4.70	40.87	45.57	54.00	-8.43	average
3	15570.000	4.70	51.49	56.19	74.00	-17.81	peak


802.11ax40 Low Channel Bandedge_HORIZONTAL

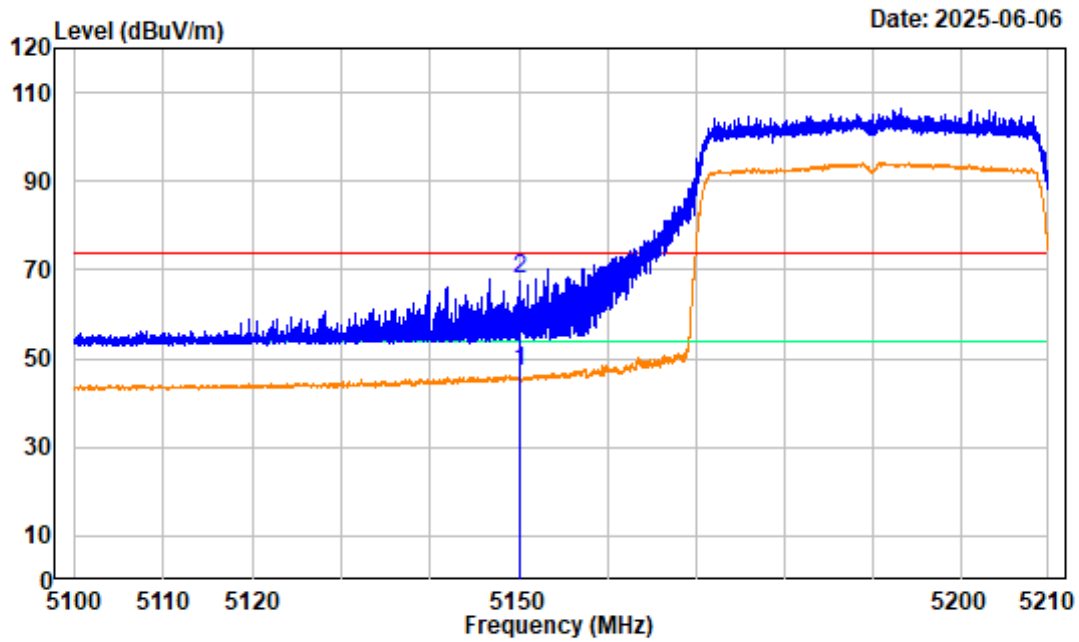

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax40 Low Channel 5190MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	52.98	46.99	54.00	-7.01	average
2	5150.000	-5.99	73.89	67.90	74.00	-6.10	peak


802.11ax40 Low Channel Bandedge_VERTICAL

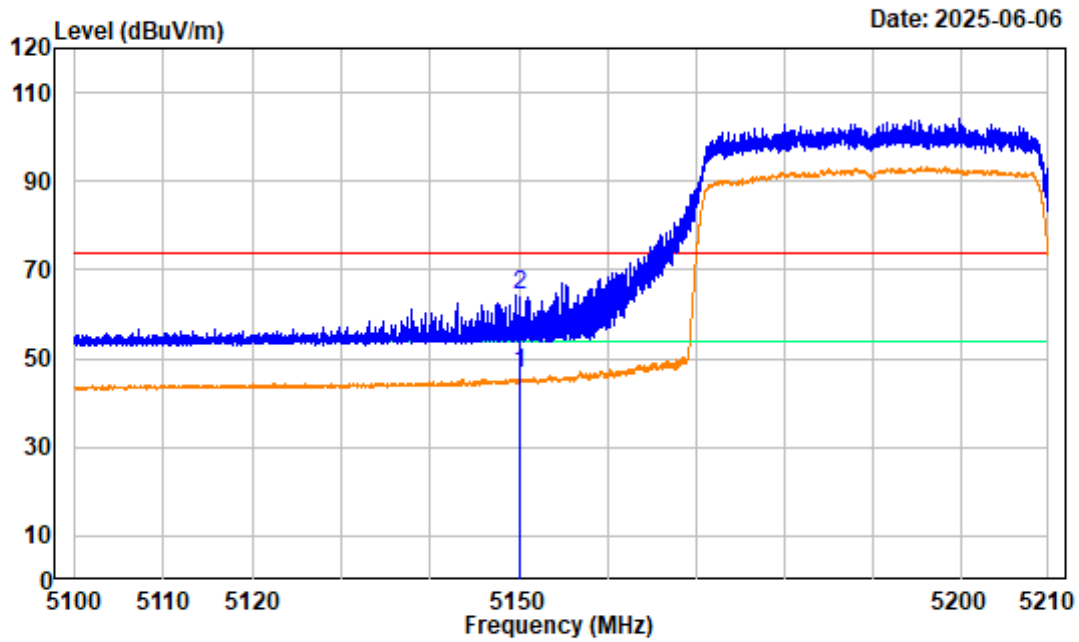

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax40 Low Channel 5190MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	52.52	46.53	54.00	-7.47	average
2	5150.000	-5.99	70.34	64.35	74.00	-9.65	peak

802.11ax40 High Channel 1GHz-6.6GHz_HORIZONTAL

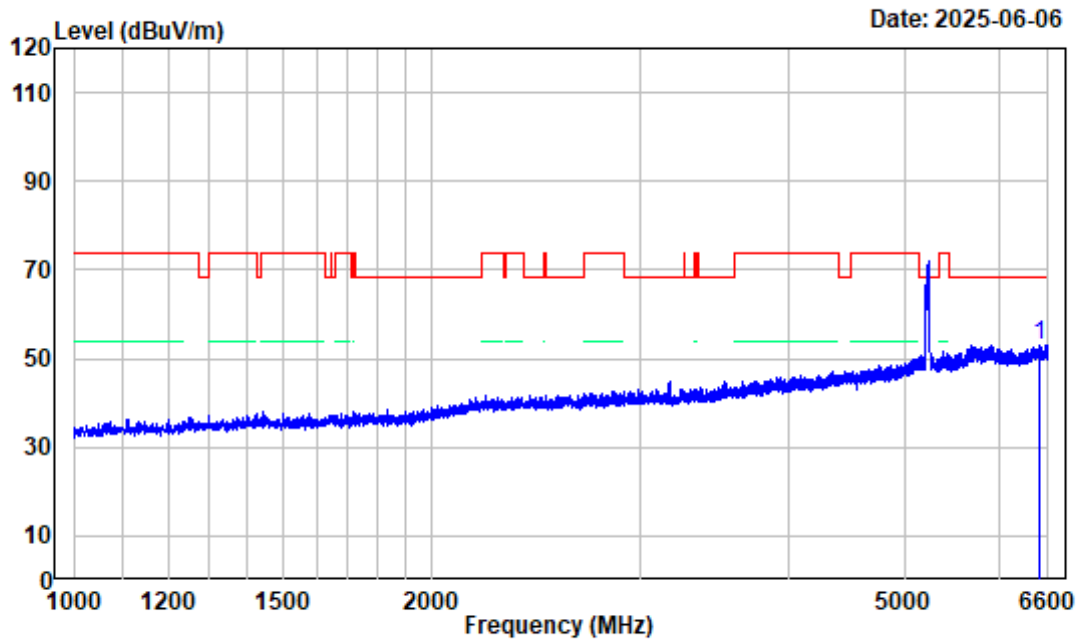


Date: 2025-06-06

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax40 High Channel 5230MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6499.900	-3.82	56.74	52.92	68.20	-15.28	Peak


802.11ax40 High Channel 1GHz-6.6GHz_VERTICAL

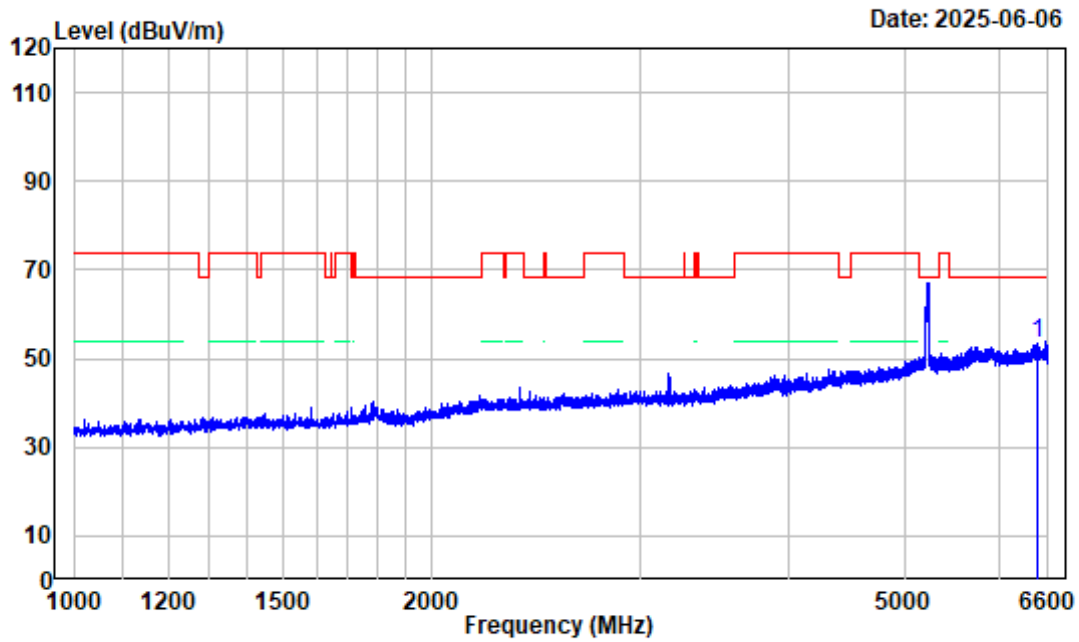

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax40 High Channel 5230MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6469.100	-3.70	56.96	53.26	68.20	-14.94	Peak


802.11ax40 High Channel 6.6GHz-18GHz_HORIZONTAL

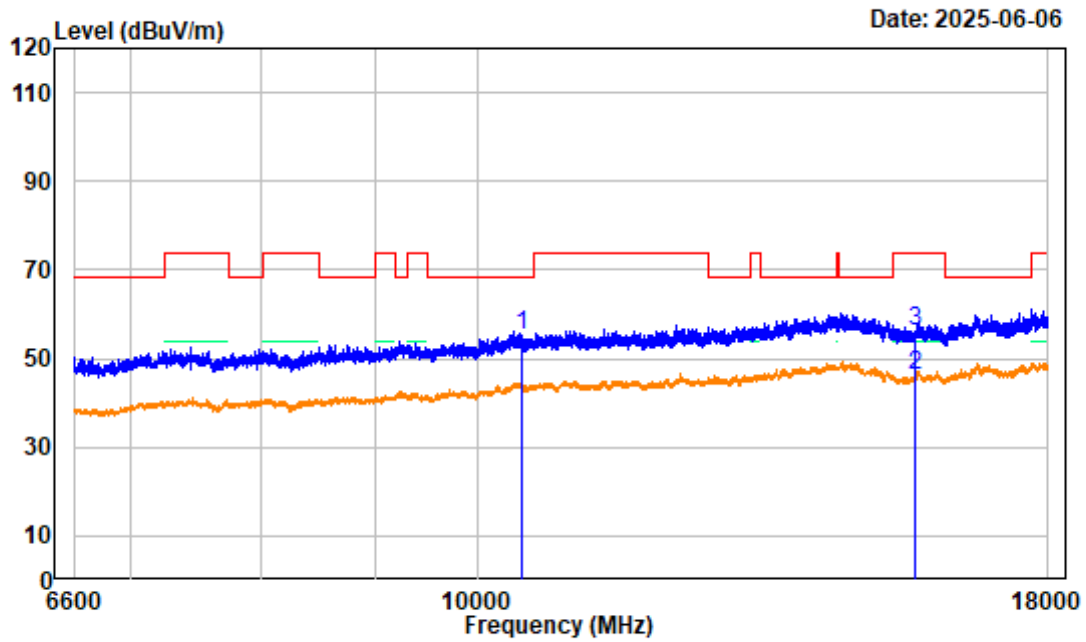

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax40 High Channel 5230MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10460.000	4.18	51.20	55.38	68.20	-12.82	peak
2	15690.000	4.67	41.46	46.13	54.00	-7.87	average
3	15690.000	4.67	51.43	56.10	74.00	-17.90	peak


802.11ax40 High Channel 6.6GHz-18GHz_VERTICAL

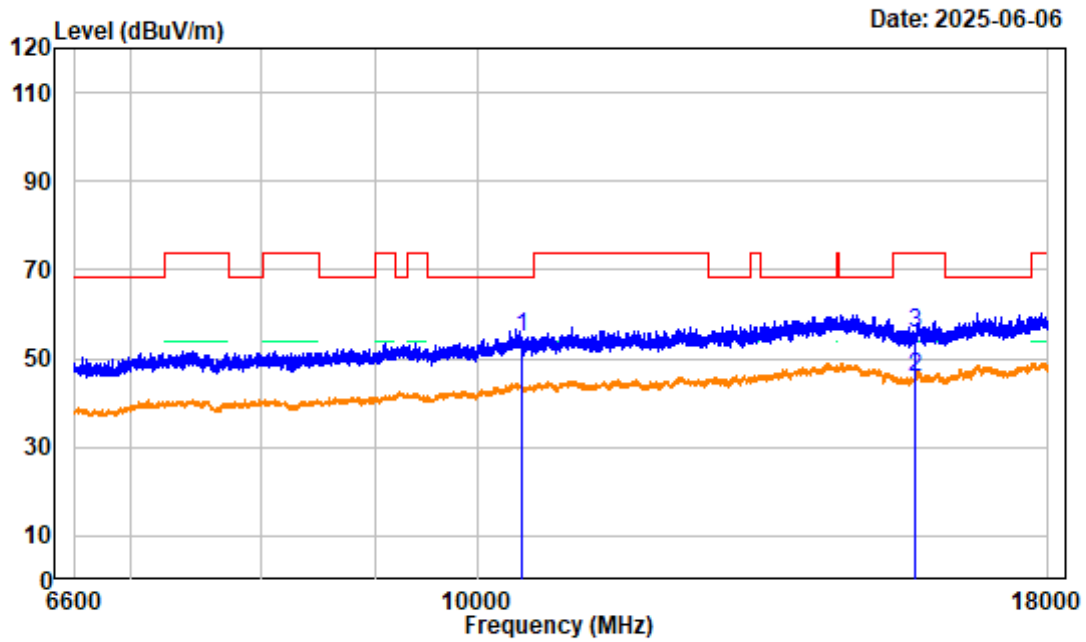

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax40 High Channel 5230MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10460.000	4.18	50.67	54.85	68.20	-13.35	peak
2	15690.000	4.67	41.04	45.71	54.00	-8.29	average
3	15690.000	4.67	51.09	55.76	74.00	-18.24	peak


802.11ax40 High Channel Bandedge_HORIZONTAL

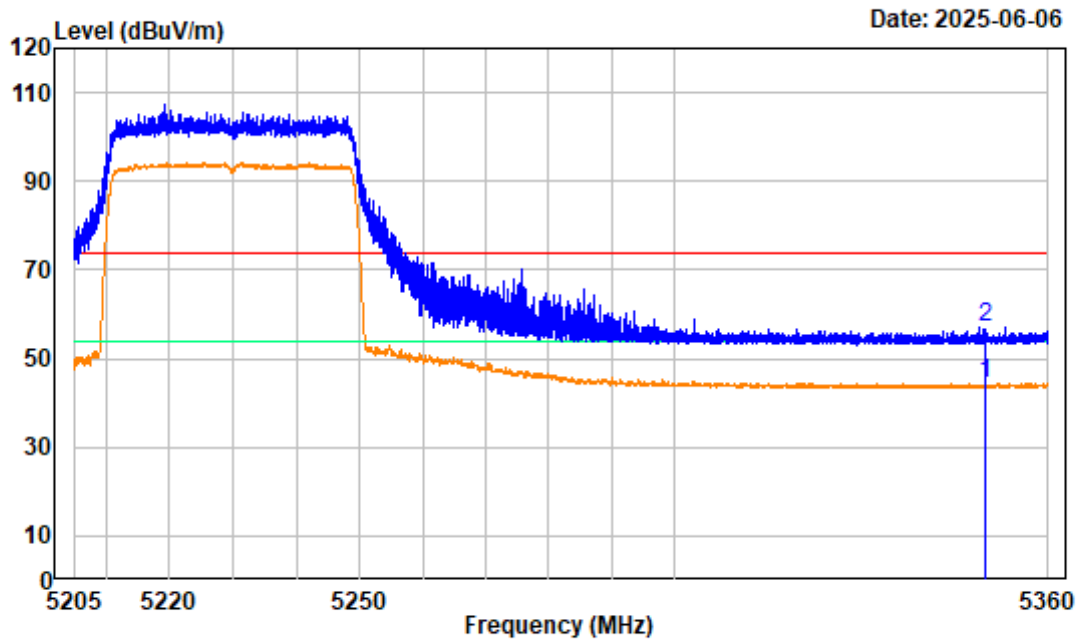

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax40 High Channel 5230MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	50.34	44.53	54.00	-9.47	average
2	5350.000	-5.81	63.06	57.25	74.00	-16.75	peak

802.11ax40 High Channel Bandedge_VERTICAL

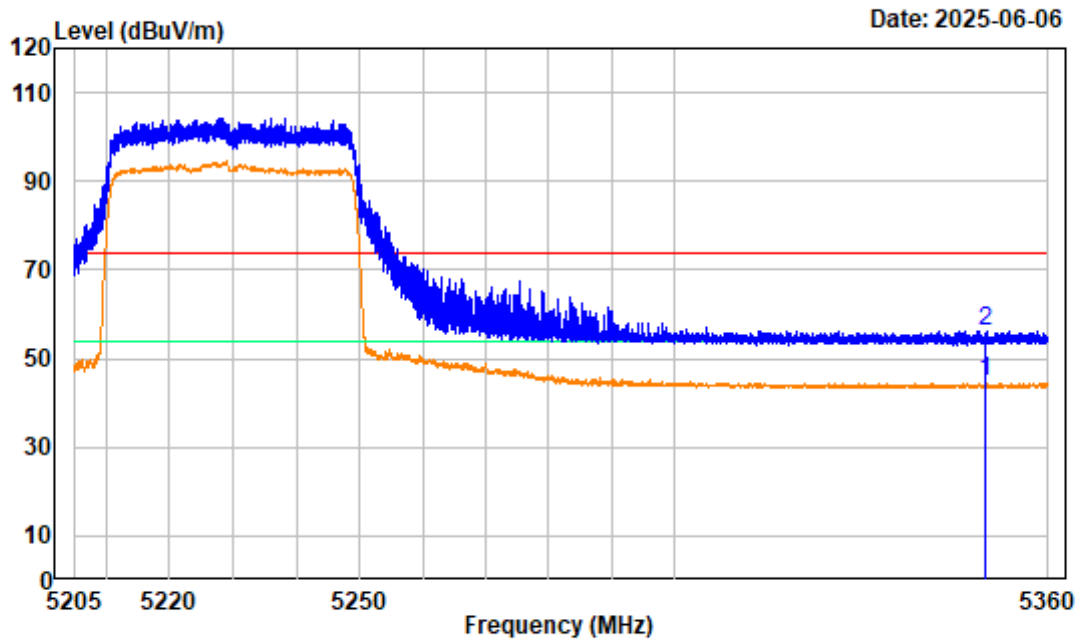


Date: 2025-06-06

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax40 High Channel 5230MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	50.48	44.67	54.00	-9.33	average
2	5350.000	-5.81	62.08	56.27	74.00	-17.73	peak

BAND 4:


802.11a Low Channel 1GHz-6.6GHz_HORIZONTAL

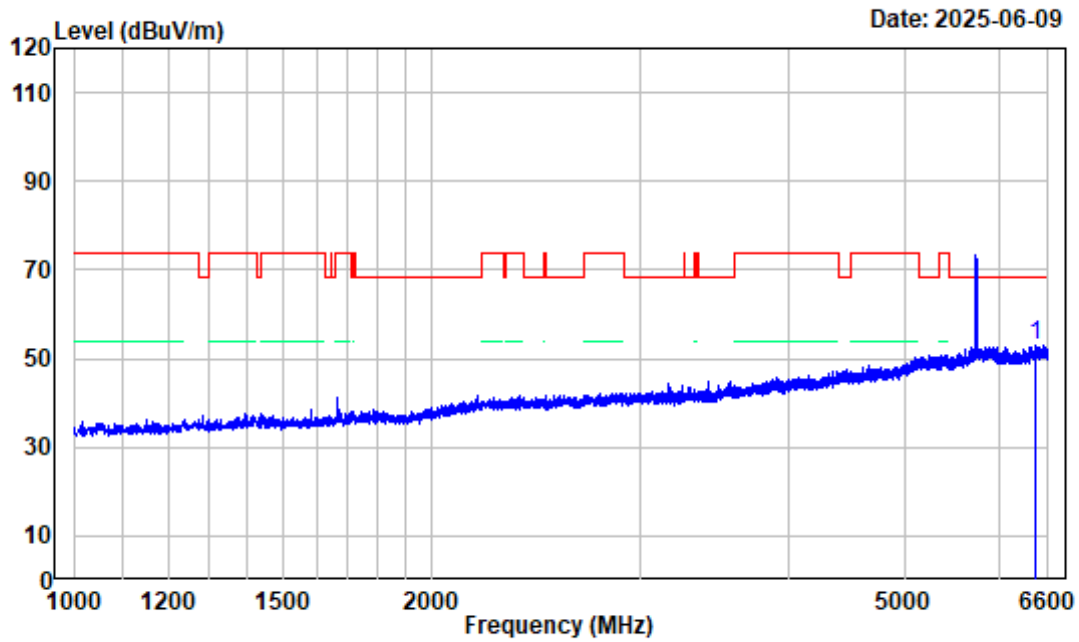

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11a Low Channel 5745MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6436.900	-3.63	56.61	52.98	68.20	-15.22	Peak

802.11a Low Channel 1GHz-6.6GHz_VERTICAL

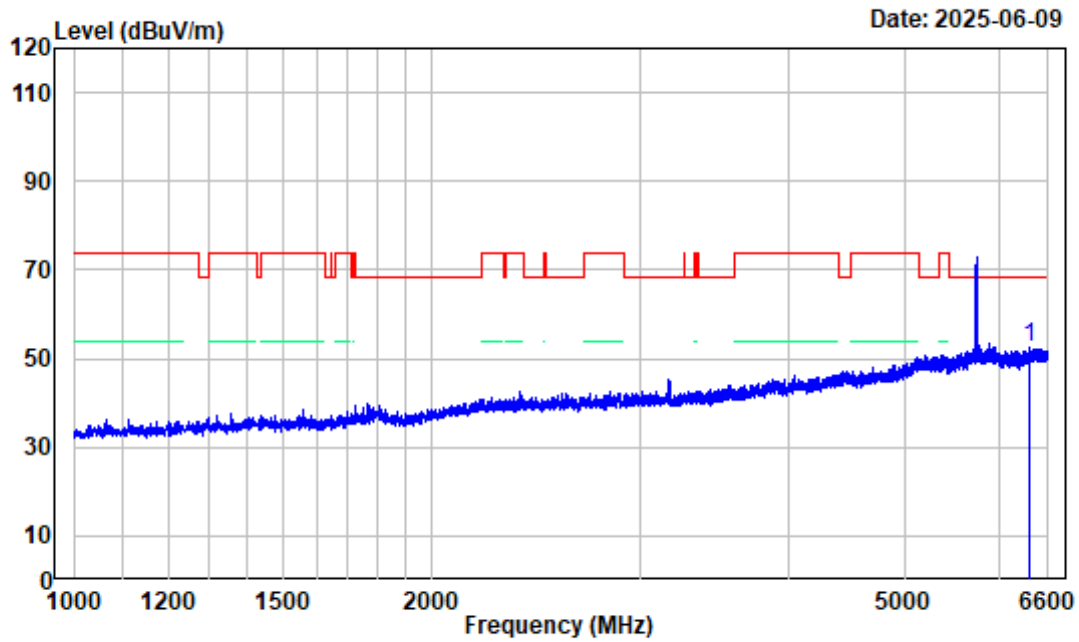


Date: 2025-06-09

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11a Low Channel 5745MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6371.100	-4.17	56.70	52.53	68.20	-15.67	Peak


802.11a Low Channel 6.6GHz-18GHz_HORIZONTAL

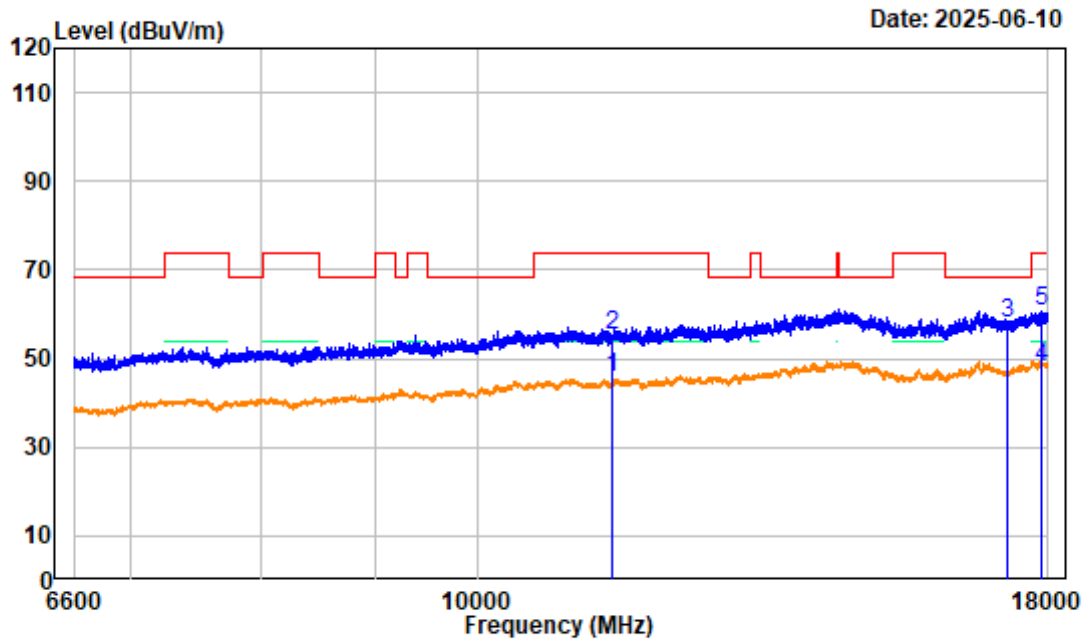

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11a Low Channel 5745MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11490.000	6.10	39.60	45.70	54.00	-8.30	average
2	11490.000	6.10	49.37	55.47	74.00	-18.53	peak
3	17265.000	6.67	51.22	57.89	68.20	-10.31	peak
4	17888.850	8.23	39.64	47.87	54.00	-6.13	average
5	17888.850	8.23	52.67	60.90	74.00	-13.10	peak


802.11a Low Channel 6.6GHz-18GHz_VERTICAL

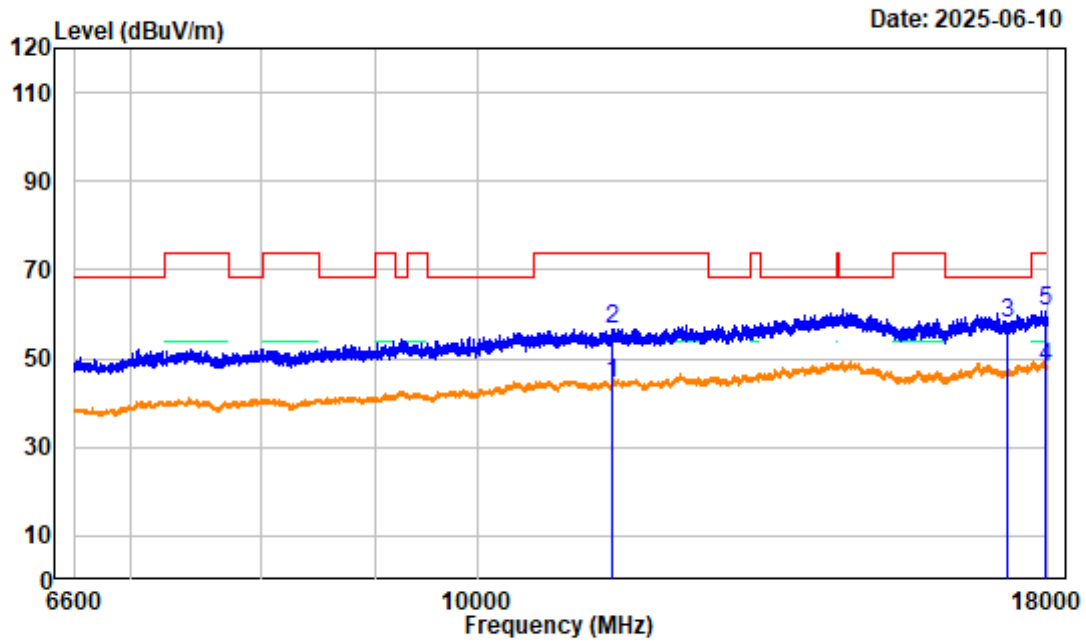

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11a Low Channel 5745MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11490.000	6.10	38.45	44.55	54.00	-9.45	average
2	11490.000	6.10	50.46	56.56	74.00	-17.44	peak
3	17265.000	6.67	51.19	57.86	68.20	-10.34	peak
4	17962.950	8.23	39.67	47.90	54.00	-6.10	average
5	17962.950	8.23	52.41	60.64	74.00	-13.36	peak


802.11a Low Channel Bandedge_HORIZONTAL

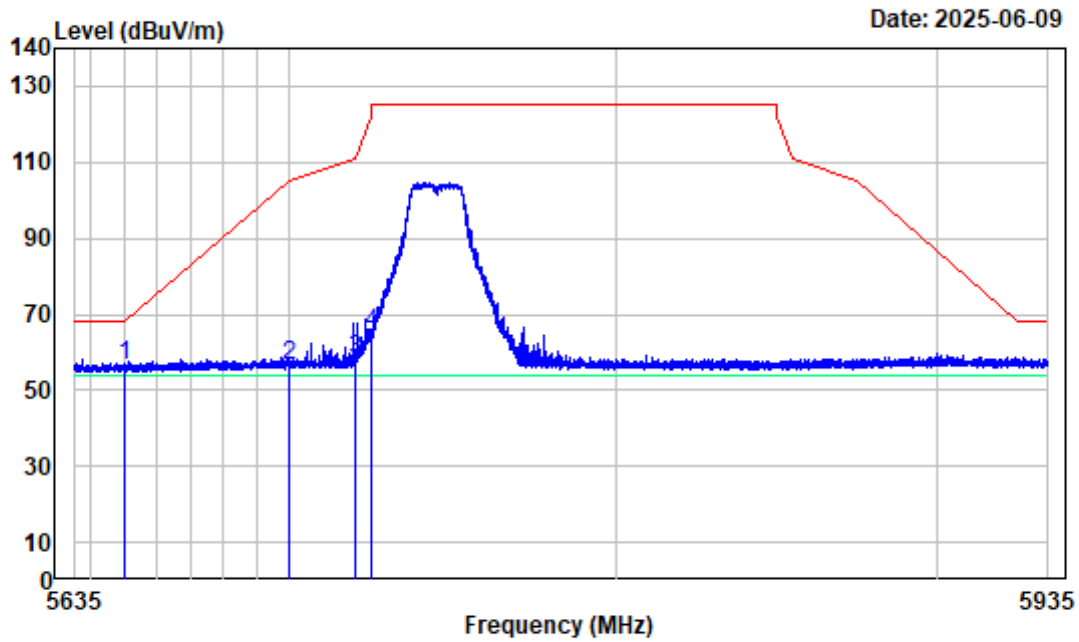

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11a Low Channel 5745MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.84	61.14	56.30	68.20	-11.90	peak
2	5700.000	-4.41	61.10	56.69	105.20	-48.51	peak
3	5720.000	-4.44	62.34	57.90	110.80	-52.90	peak
4	5725.000	-4.46	69.26	64.80	122.20	-57.40	peak


802.11a Low Channel Bandedge_VERTICAL

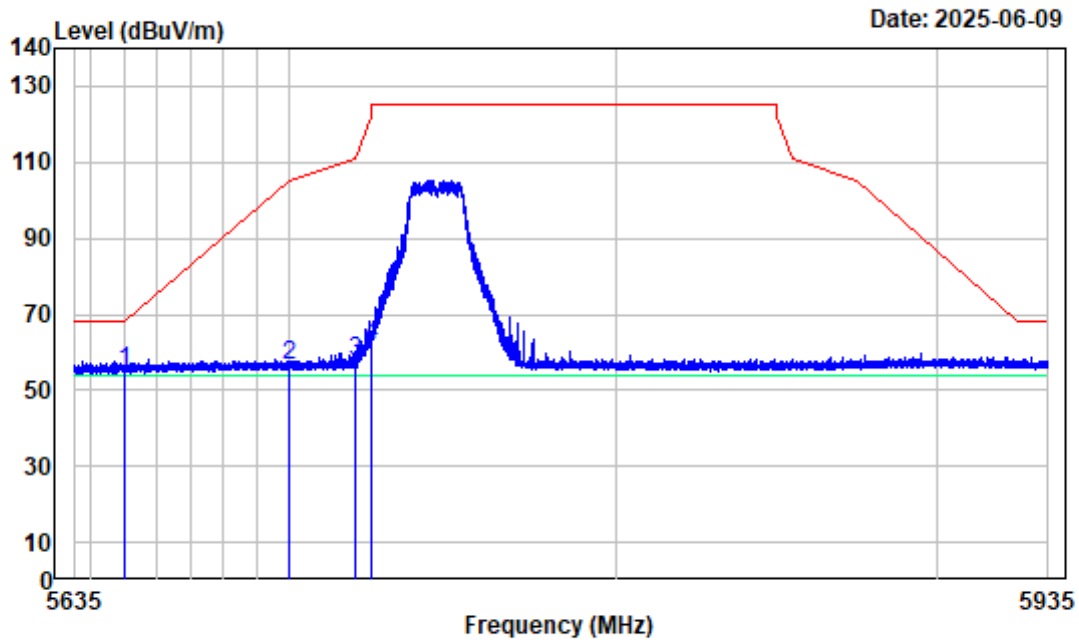

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11a Low Channel 5745MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.84	59.56	54.72	68.20	-13.48	peak
2	5700.000	-4.41	60.91	56.50	105.20	-48.70	peak
3	5720.000	-4.44	62.29	57.85	110.80	-52.95	peak
4	5725.000	-4.46	66.03	61.57	122.20	-60.63	peak

802.11a Middle Channel 1GHz-6.6GHz_HORIZONTAL

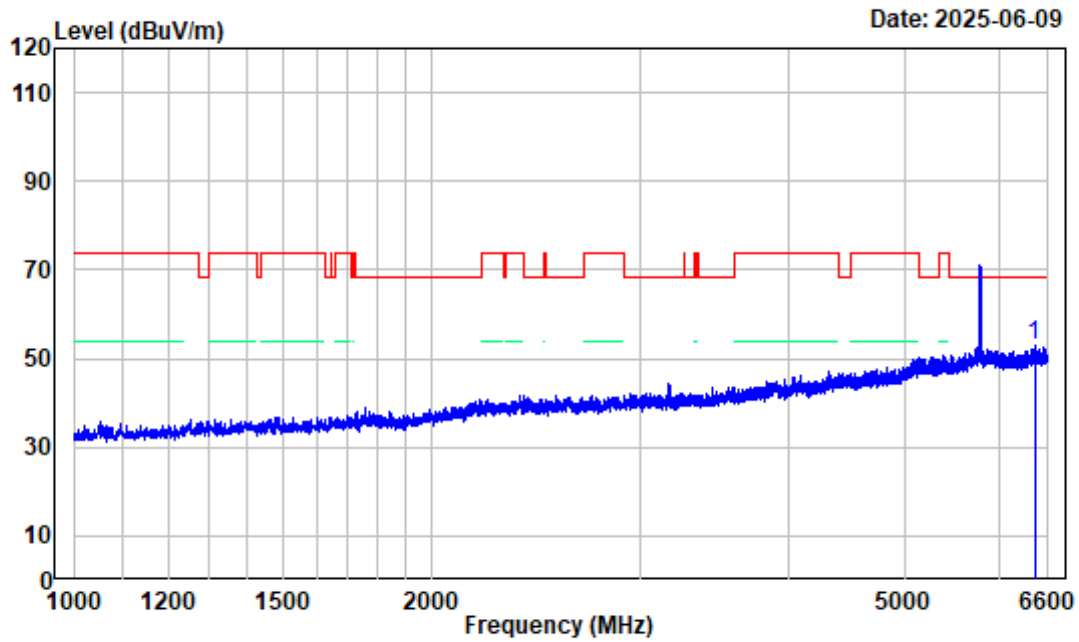


Date: 2025-06-09

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11a Middle Channel 5785MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6428.500	-3.64	56.51	52.87	68.20	-15.33	Peak

802.11a Middle Channel 1GHz-6.6GHz_VERTICAL

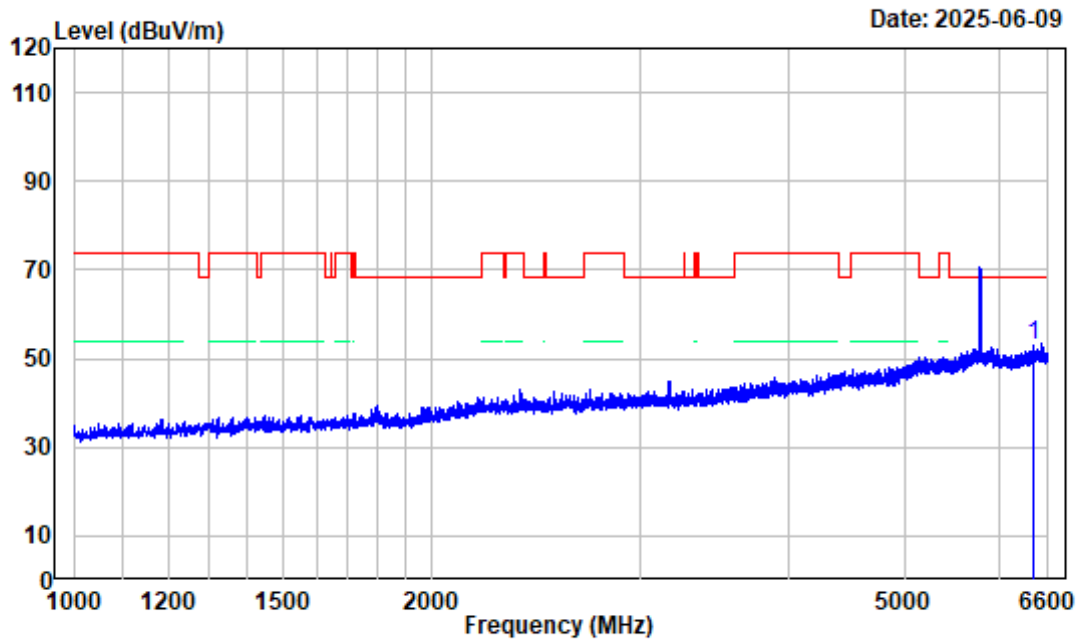


Date: 2025-06-09

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11a Middle Channel 5785MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6422.200	-3.64	56.51	52.87	68.20	-15.33	Peak


802.11a Middle Channel 6.6GHz-18GHz_HORIZONTAL

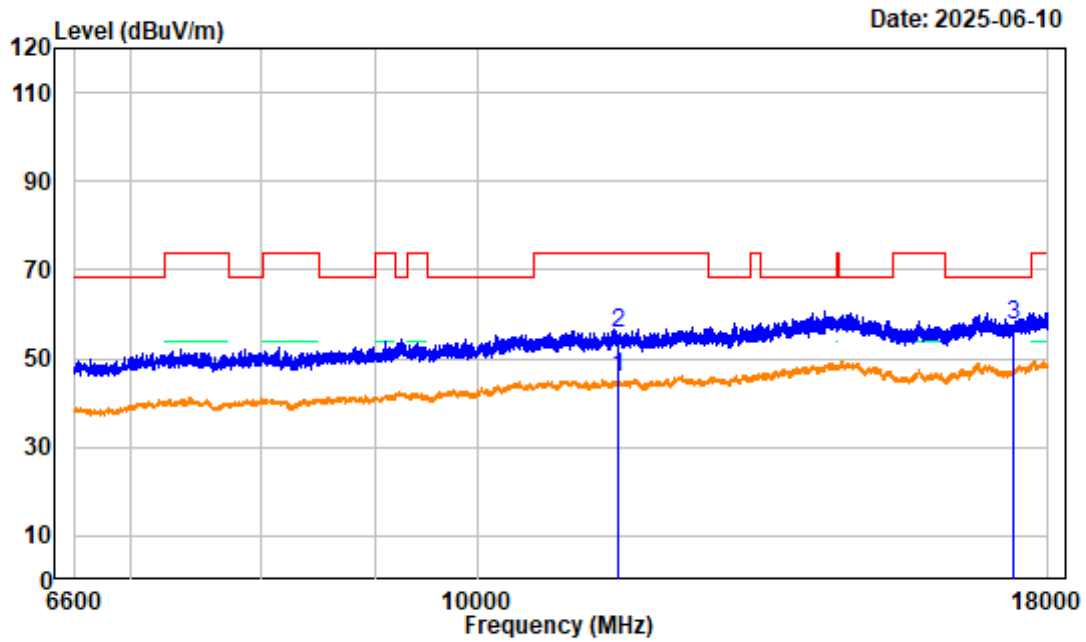

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11a Middle Channel 5785MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11570.000	5.93	39.61	45.54	54.00	-8.46	average
2	11570.000	5.93	49.57	55.50	74.00	-18.50	peak
3	17355.000	6.58	51.15	57.73	68.20	-10.47	peak


802.11a Middle Channel 6.6GHz-18GHz_VERTICAL

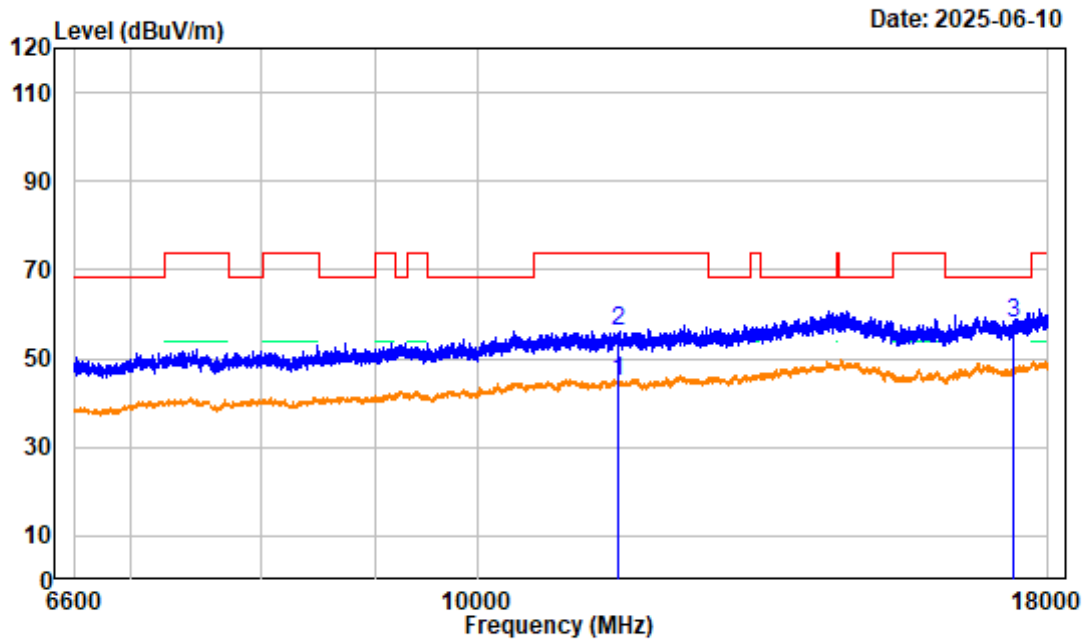

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11a Middle Channel 5785MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11570.000	5.93	38.79	44.72	54.00	-9.28	average
2	11570.000	5.93	50.31	56.24	74.00	-17.76	peak
3	17355.000	6.58	51.24	57.82	68.20	-10.38	peak

802.11a High Channel 1GHz-6.6GHz_HORIZONTAL

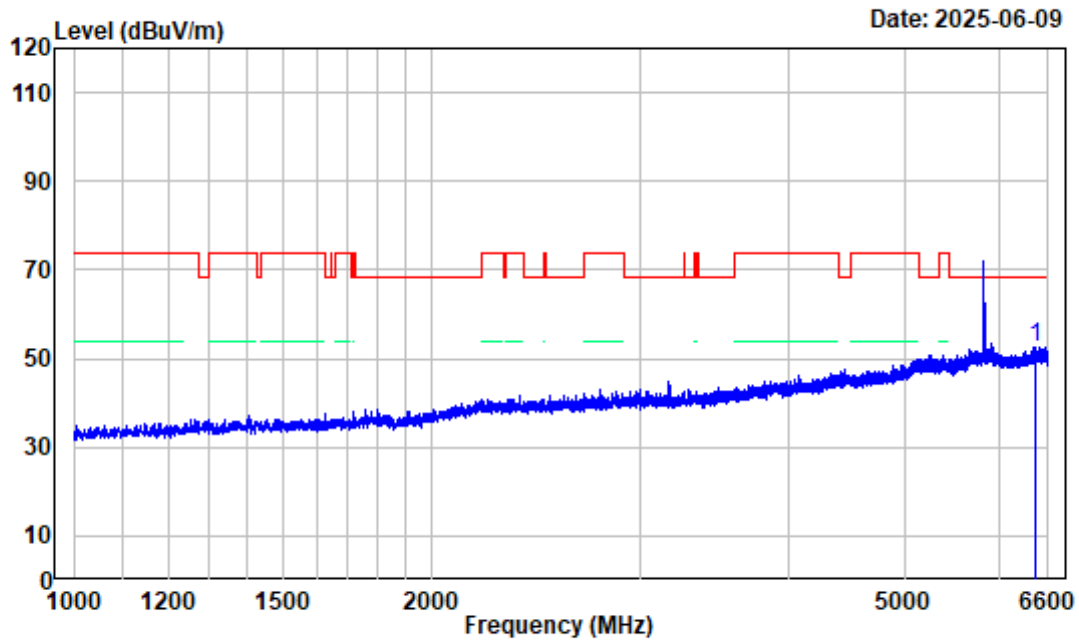


Date: 2025-06-09

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11a High Channel 5825MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6450.200	-3.61	56.34	52.73	68.20	-15.47	Peak

802.11a High Channel 1GHz-6.6GHz_VERTICAL

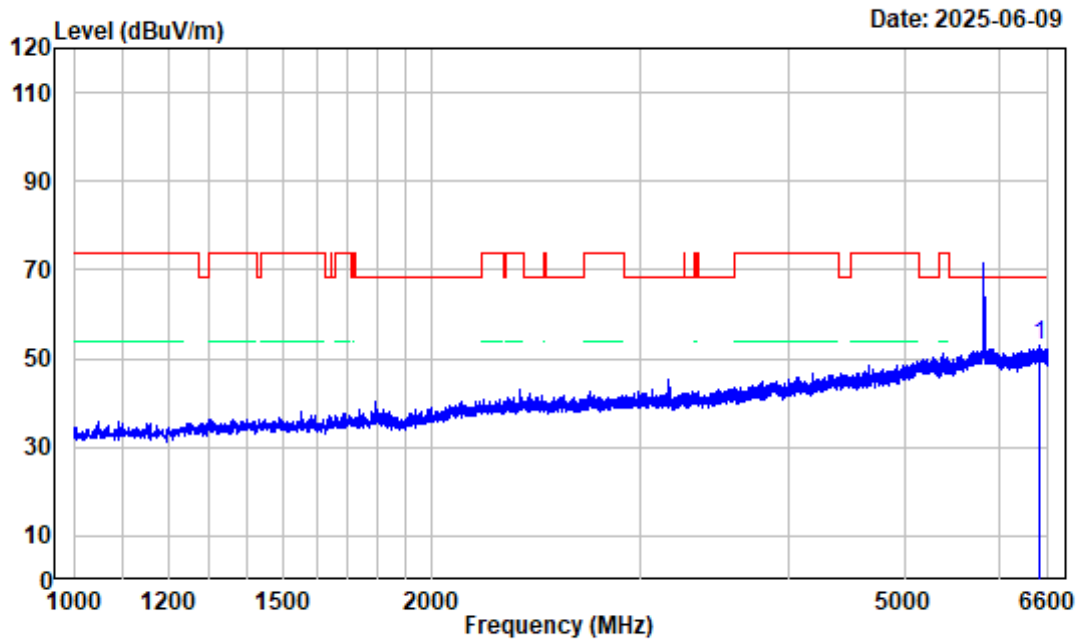


Date: 2025-06-09

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11a High Channel 5825MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6498.500	-3.81	56.79	52.98	68.20	-15.22	Peak


802.11a High Channel 6.6GHz-18GHz_HORIZONTAL

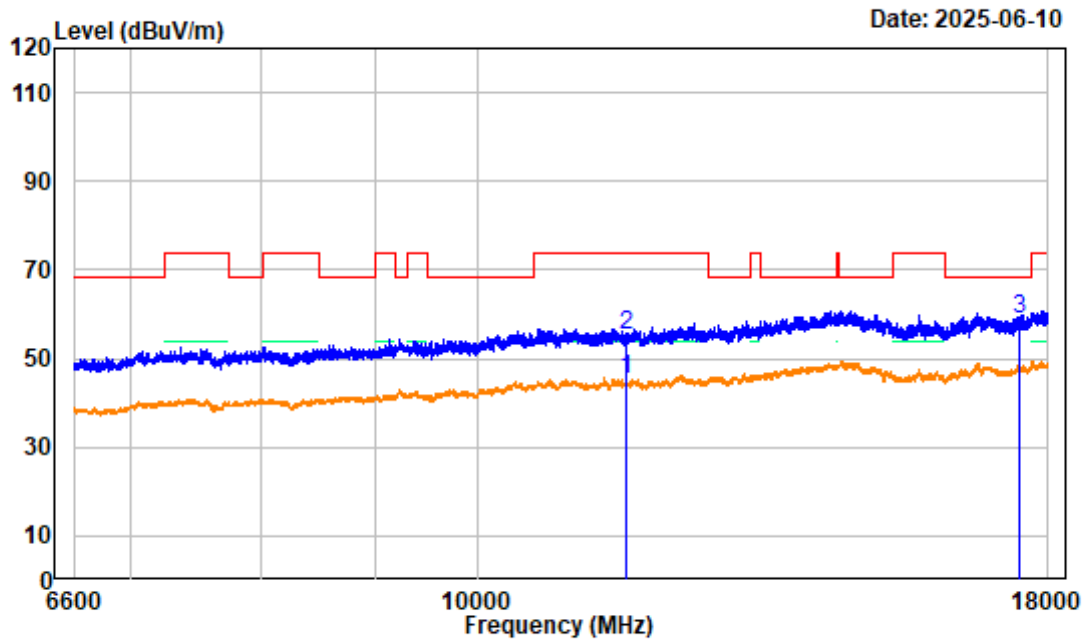

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11a High Channel 5825MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	5.37	39.95	45.32	54.00	-8.68	average
2	11650.000	5.37	49.97	55.34	74.00	-18.66	peak
3	17475.000	7.12	51.80	58.92	68.20	-9.28	peak


802.11a High Channel 6.6GHz-18GHz_VERTICAL

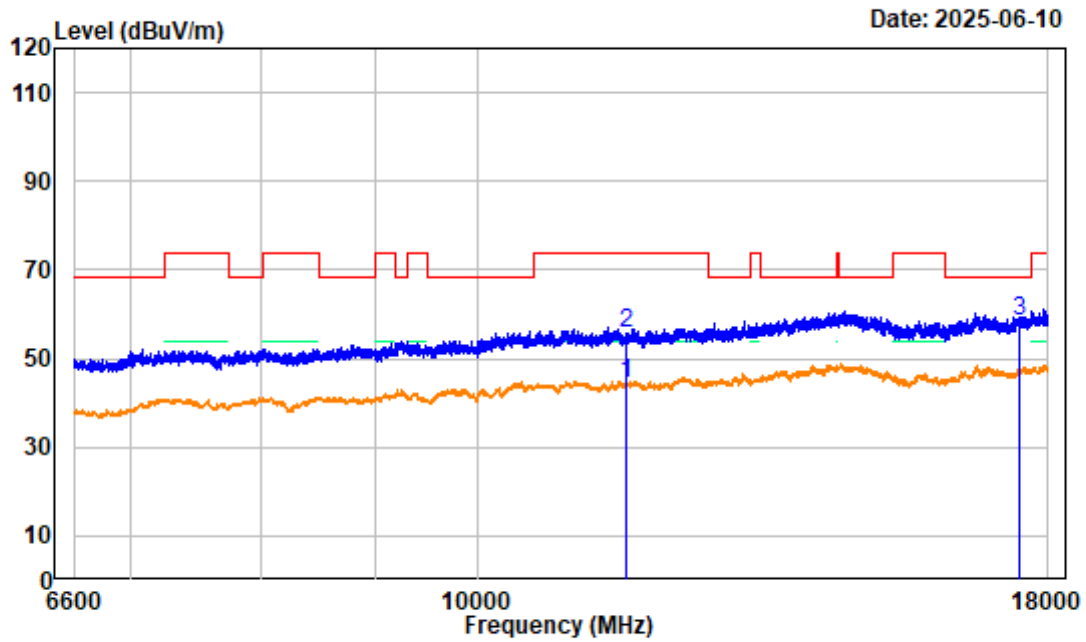

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11a High Channel 5825MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	5.37	39.20	44.57	54.00	-9.43	average
2	11650.000	5.37	50.21	55.58	74.00	-18.42	peak
3	17475.000	7.12	51.49	58.61	68.20	-9.59	peak


802.11a High Channel Bandedge_HORIZONTAL

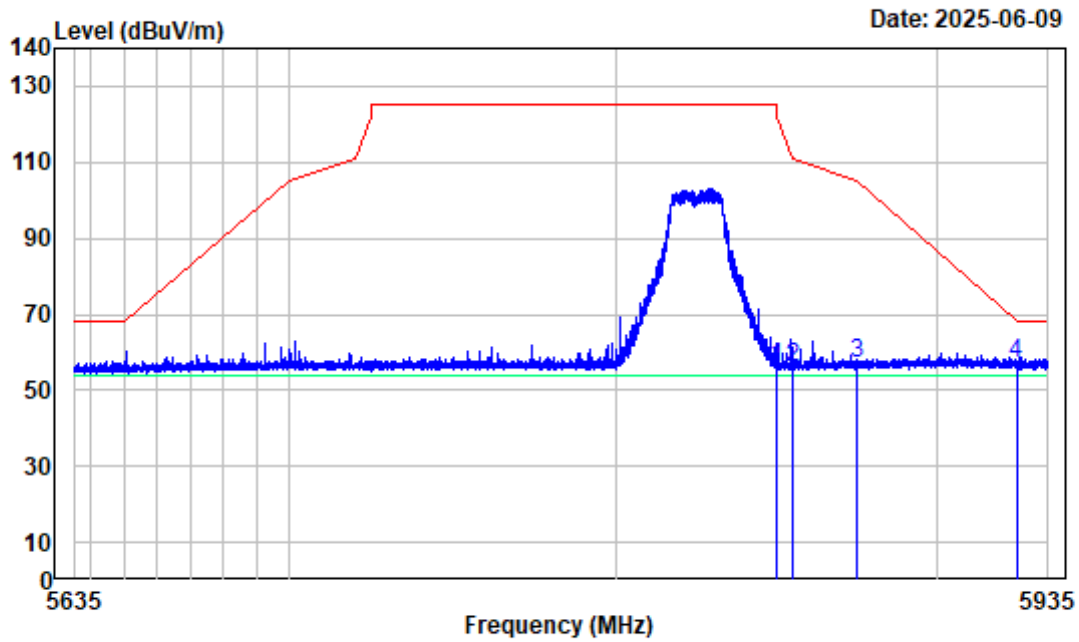

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11a High Channel 5825MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.53	60.65	56.12	122.20	-66.08	peak
2	5855.000	-4.48	60.36	55.88	110.80	-54.92	peak
3	5875.000	-4.28	61.44	57.16	105.20	-48.04	peak
4	5925.000	-4.43	61.30	56.87	68.20	-11.33	peak


802.11a High Channel Bandedge_VERTICAL

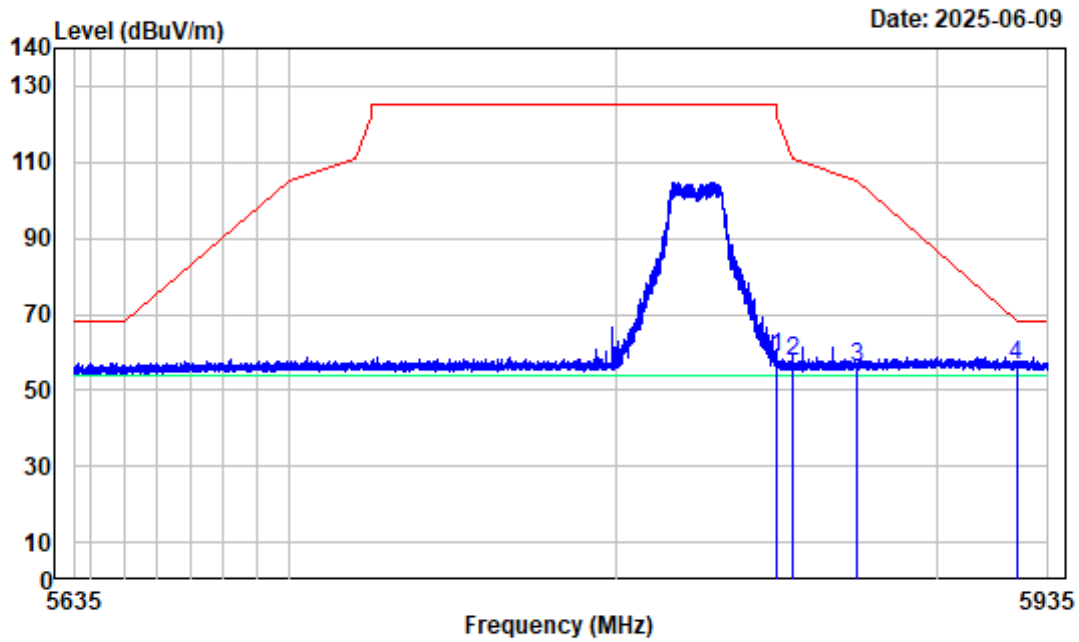

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11a High Channel 5825MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.53	63.42	58.89	122.20	-63.31	peak
2	5855.000	-4.48	62.16	57.68	110.80	-53.12	peak
3	5875.000	-4.28	60.39	56.11	105.20	-49.09	peak
4	5925.000	-4.43	60.88	56.45	68.20	-11.75	peak

802.11ac20 Low Channel 1GHz-6.6GHz_HORIZONTAL

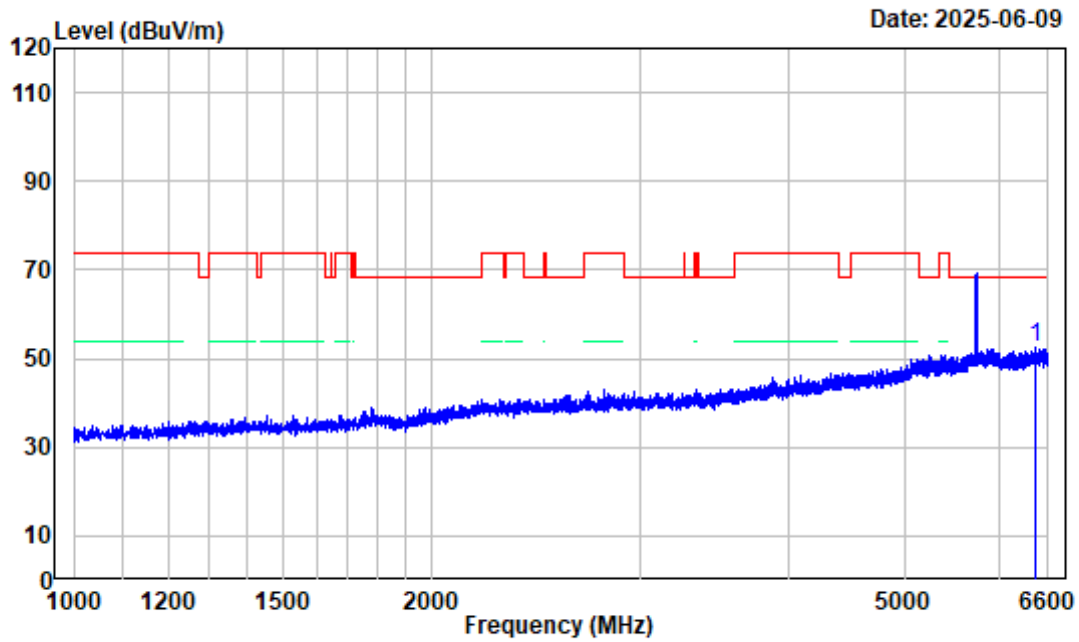


Date: 2025-06-09

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac20 Low Channel 5745MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6443.900	-3.62	55.98	52.36	68.20	-15.84	Peak


802.11ac20 Low Channel 1GHz-6.6GHz_VERTICAL

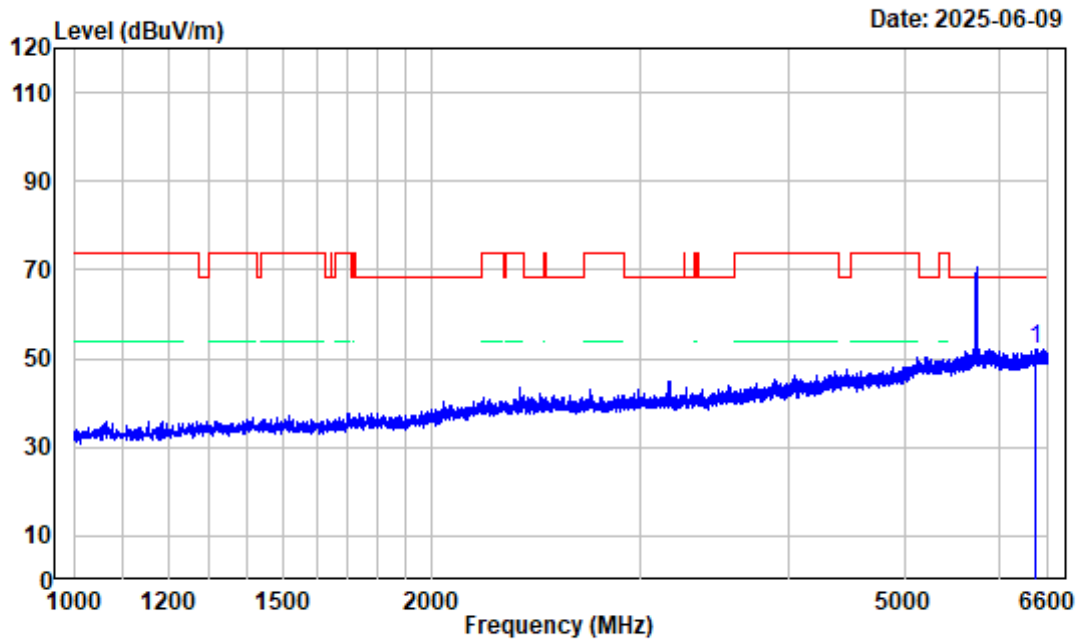

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac20 Low Channel 5745MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6434.800	-3.63	55.79	52.16	68.20	-16.04	Peak


802.11ac20 Low Channel 6.6GHz-18GHz_HORIZONTAL

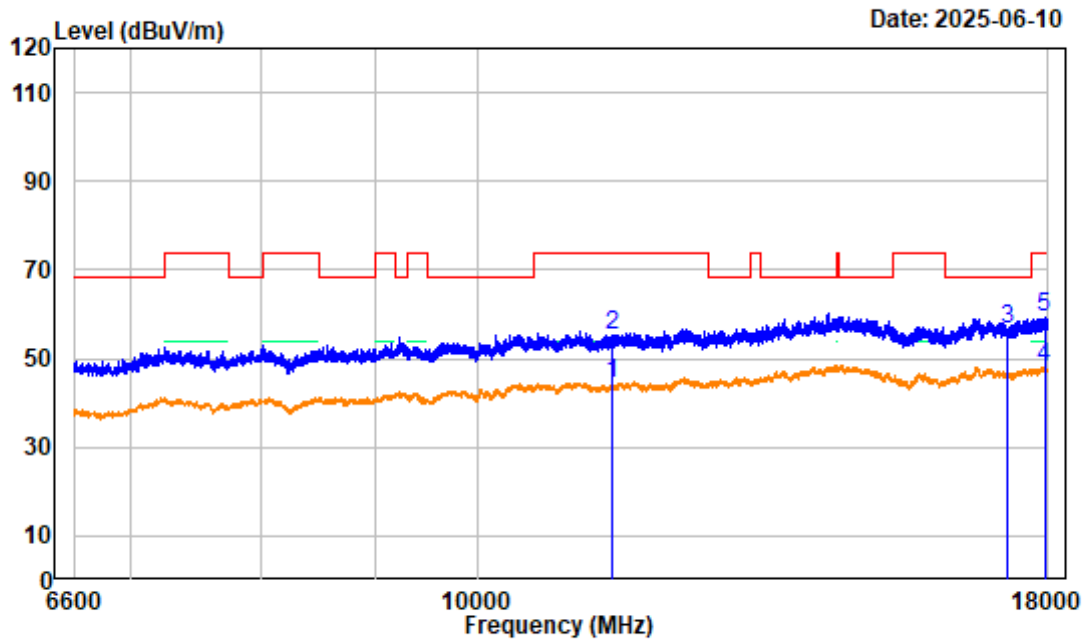

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac20 Low Channel 5745MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11490.000	6.10	38.27	44.37	54.00	-9.63	average
2	11490.000	6.10	49.21	55.31	74.00	-18.69	peak
3	17265.000	6.67	50.04	56.71	68.20	-11.49	peak
4	17934.450	8.20	39.66	47.86	54.00	-6.14	average
5	17934.450	8.20	51.04	59.24	74.00	-14.76	peak


802.11ac20 Low Channel 6.6GHz-18GHz_VERTICAL

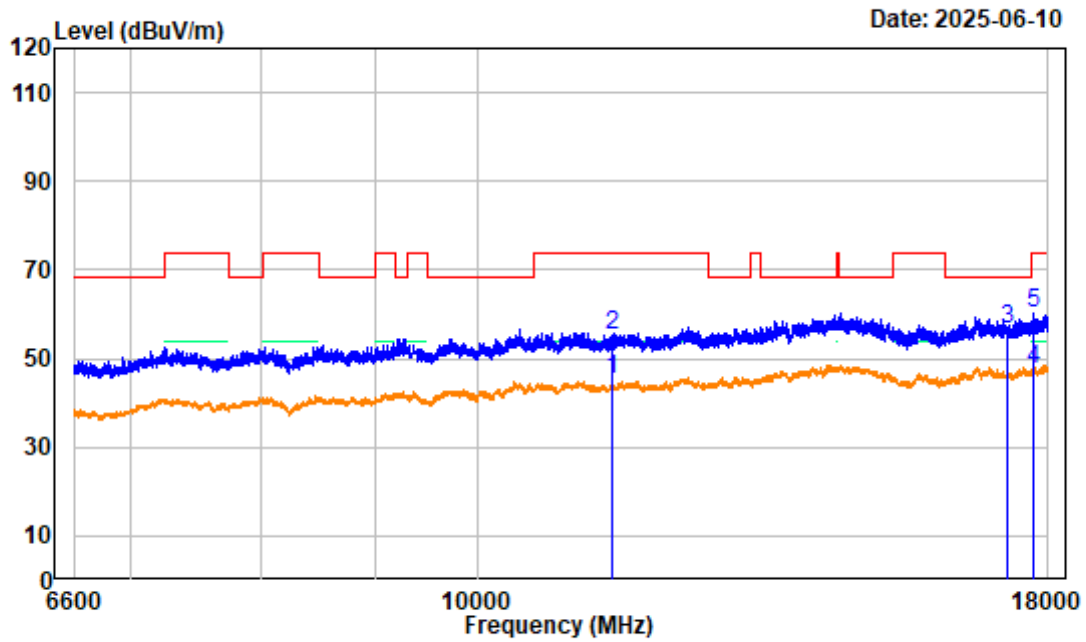

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac20 Low Channel 5745MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11490.000	6.10	39.13	45.23	54.00	-8.77	average
2	11490.000	6.10	49.15	55.25	74.00	-18.75	peak
3	17265.000	6.67	49.80	56.47	68.20	-11.73	peak
4	17730.680	7.68	39.96	47.64	54.00	-6.36	average
5	17730.680	7.68	52.44	60.12	74.00	-13.88	peak


802.11ac20 Low Channel Bandedge_HORIZONTAL

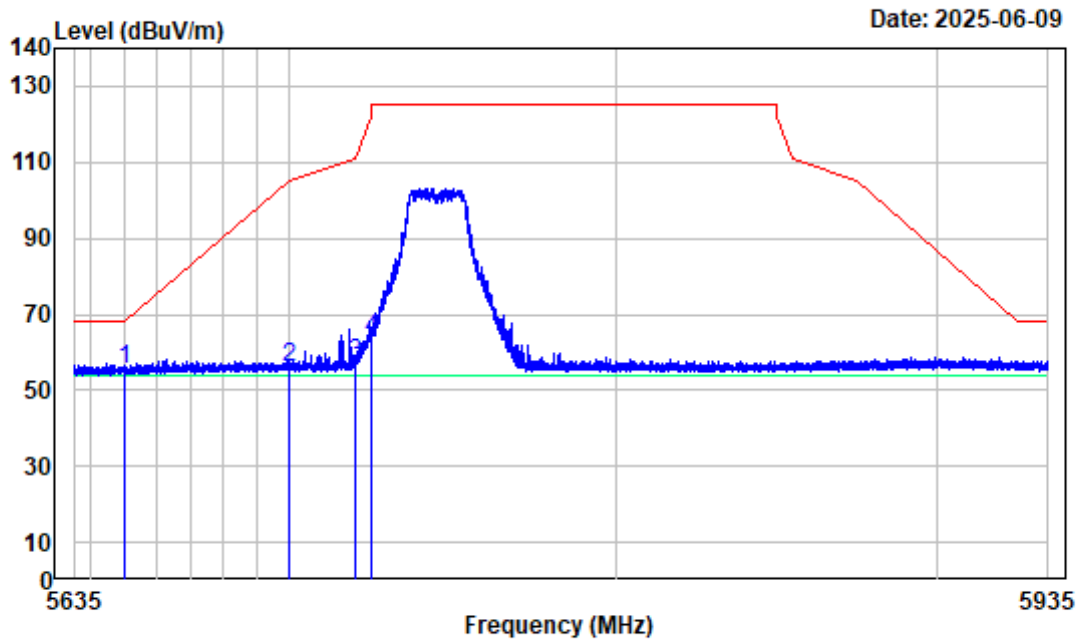

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac20 Low Channel 5745MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.84	60.46	55.62	68.20	-12.58	peak
2	5700.000	-4.41	60.29	55.88	105.20	-49.32	peak
3	5720.000	-4.44	61.65	57.21	110.80	-53.59	peak
4	5725.000	-4.46	68.04	63.58	122.20	-58.62	peak


802.11ac20 Low Channel Bandedge_VERTICAL

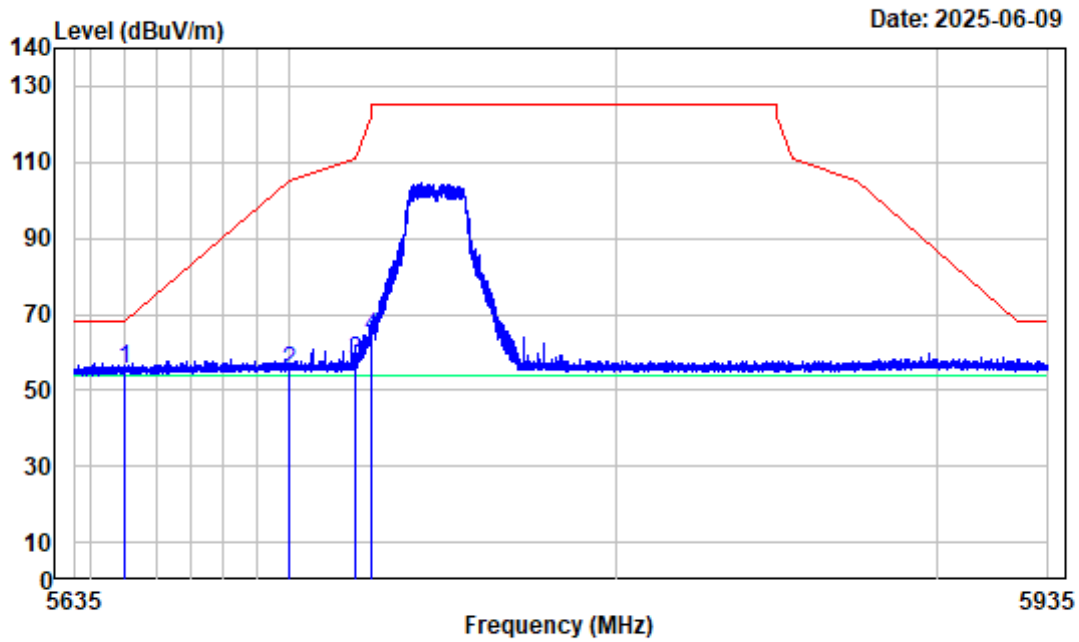

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac20 Low Channel 5745MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.84	60.49	55.65	68.20	-12.55	peak
2	5700.000	-4.41	59.60	55.19	105.20	-50.01	peak
3	5720.000	-4.44	61.88	57.44	110.80	-53.36	peak
4	5725.000	-4.46	68.49	64.03	122.20	-58.17	peak

802.11ac20 Middle Channel 1GHz-6.6GHz_HORIZONTAL

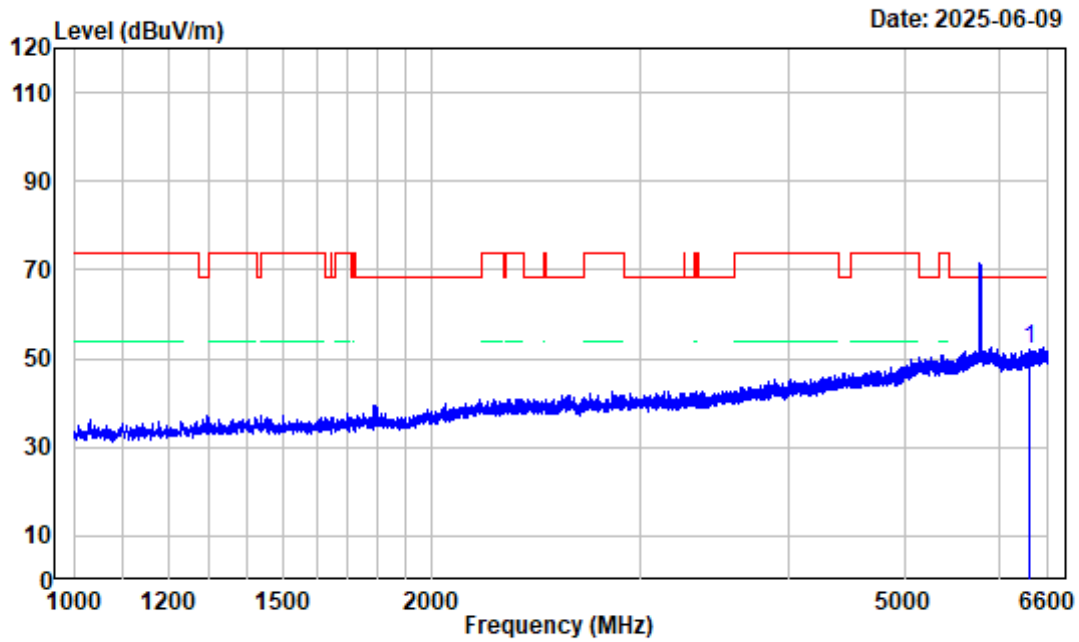


Date: 2025-06-09

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac20 Middle Channel 5785MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6367.600	-4.23	56.39	52.16	68.20	-16.04	Peak

802.11ac20 Middle Channel 1GHz-6.6GHz_VERTICAL

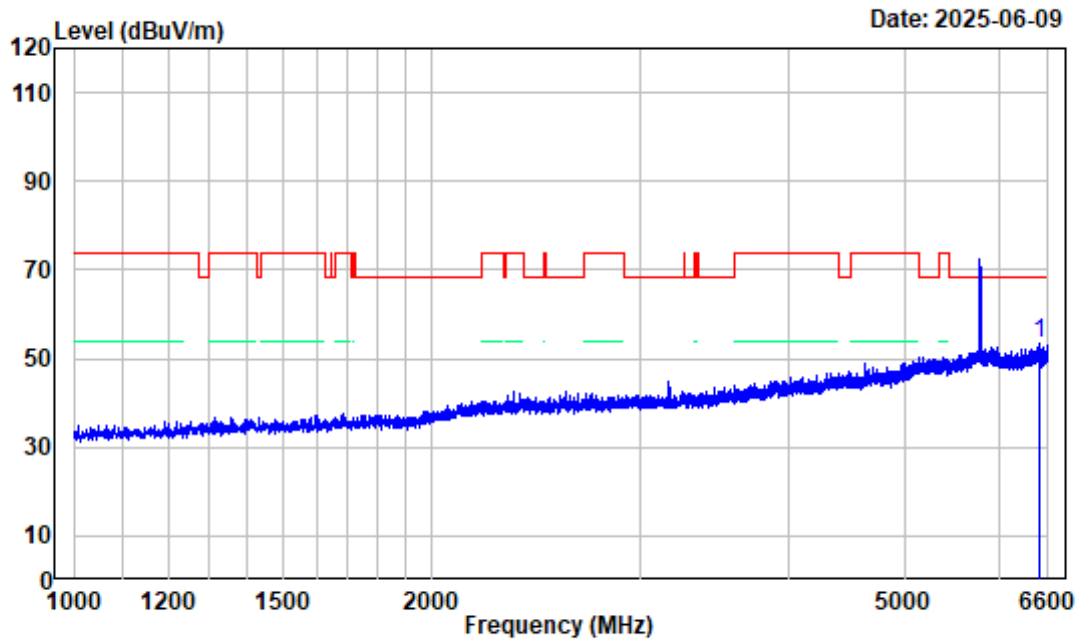


Date: 2025-06-09

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac20 Middle Channel 5785MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6487.300	-3.76	57.34	53.58	68.20	-14.62	Peak


802.11ac20 Middle Channel 6.6GHz-18GHz_HORIZONTAL

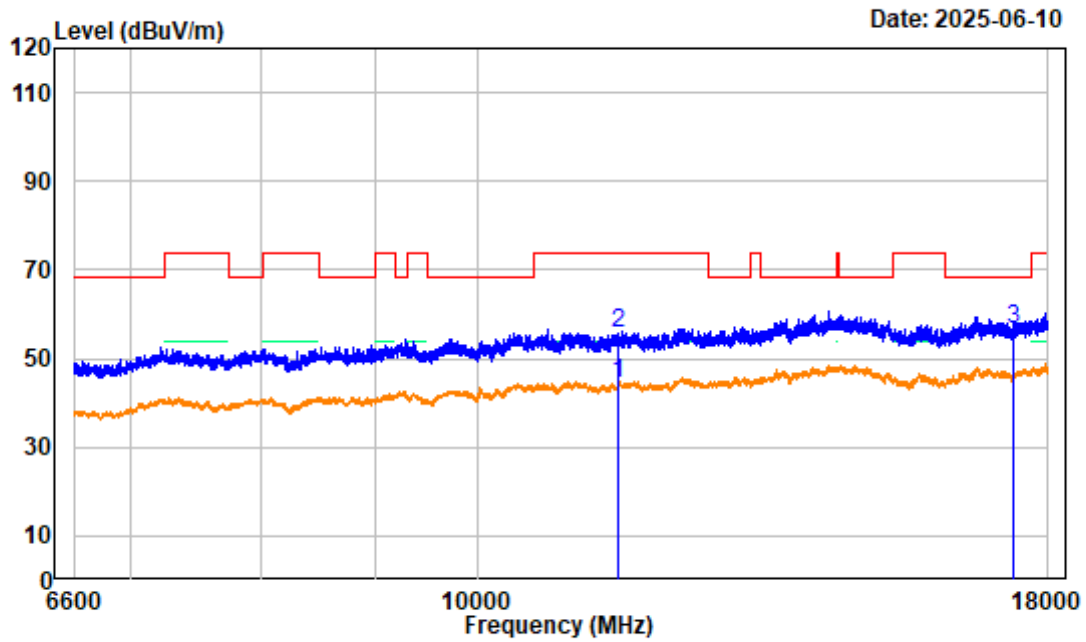

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac20 Middle Channel 5785MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11570.000	5.93	38.60	44.53	54.00	-9.47	average
2	11570.000	5.93	49.61	55.54	74.00	-18.46	peak
3	17355.000	6.58	50.01	56.59	68.20	-11.61	peak


802.11ac20 Middle Channel 6.6GHz-18GHz_VERTICAL

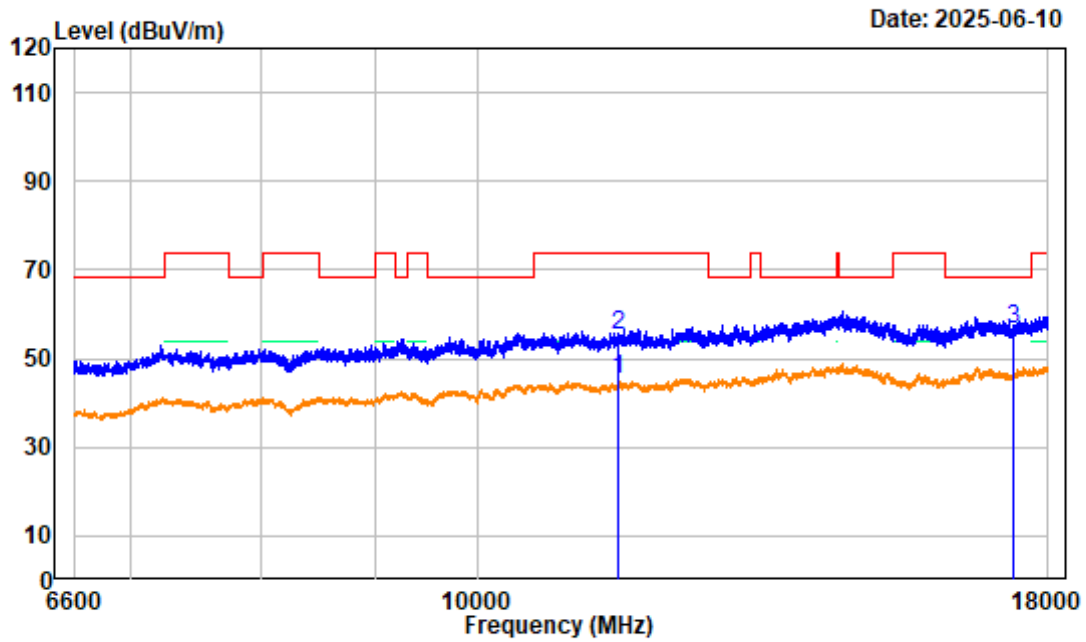

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac20 Middle Channel 5785MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11570.000	5.93	39.20	45.13	54.00	-8.87	average
2	11570.000	5.93	49.21	55.14	74.00	-18.86	peak
3	17355.000	6.58	50.00	56.58	68.20	-11.62	peak

802.11ac20 High Channel 1GHz-6.6GHz_HORIZONTAL

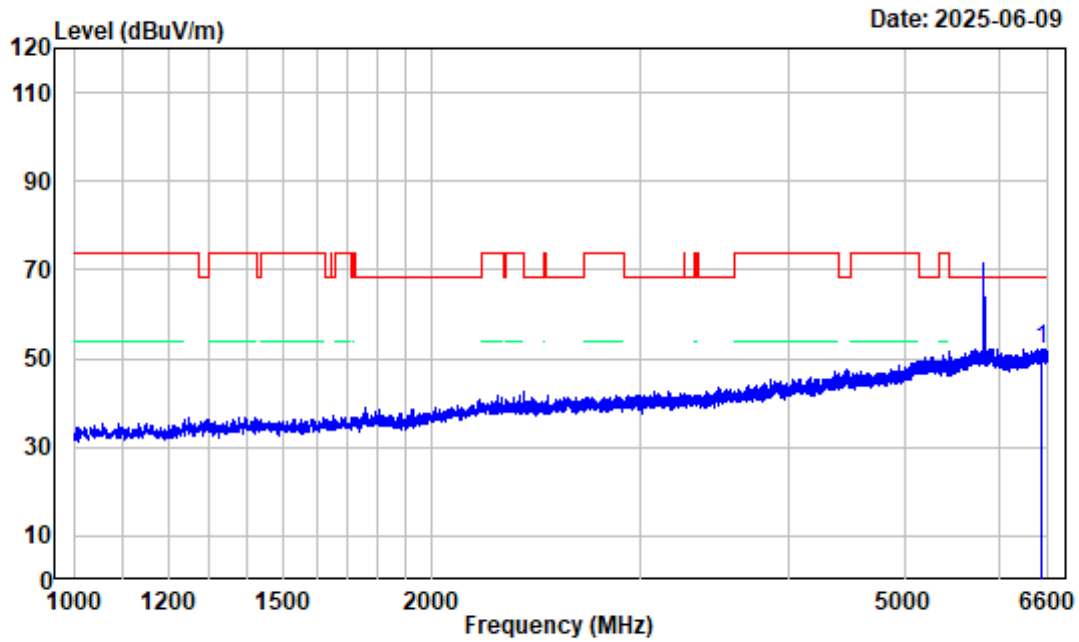


Date: 2025-06-09

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac20 High Channel 5825MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6513.200	-3.79	56.04	52.25	68.20	-15.95	Peak


802.11ac20 High Channel 1GHz-6.6GHz_VERTICAL

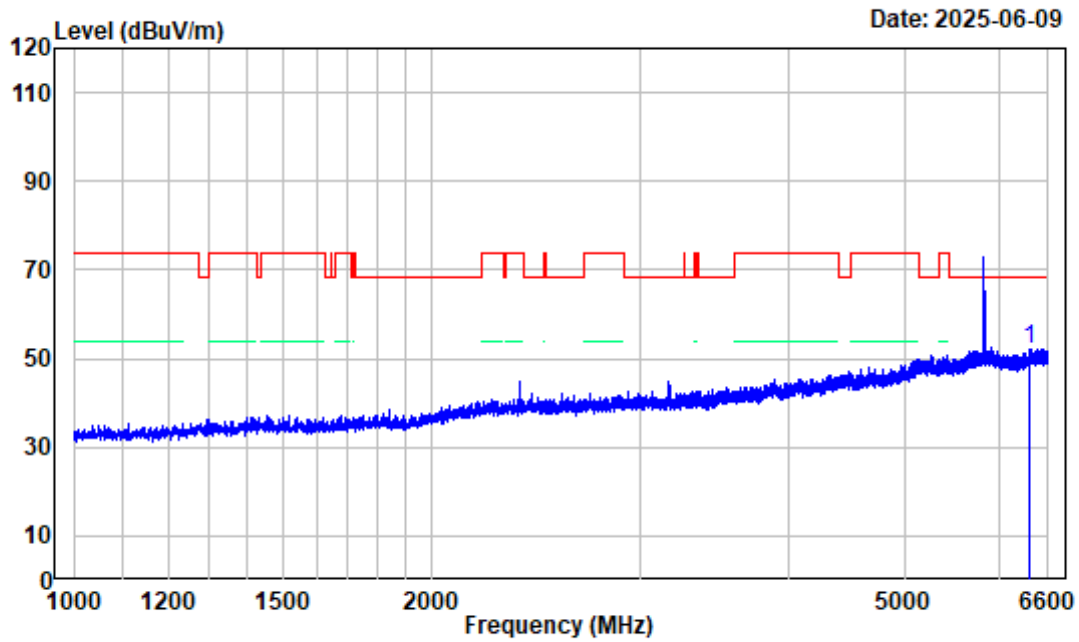

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac20 High Channel 5825MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6373.900	-4.11	56.28	52.17	68.20	-16.03	Peak


802.11ac20 High Channel 6.6GHz-18GHz_HORIZONTAL

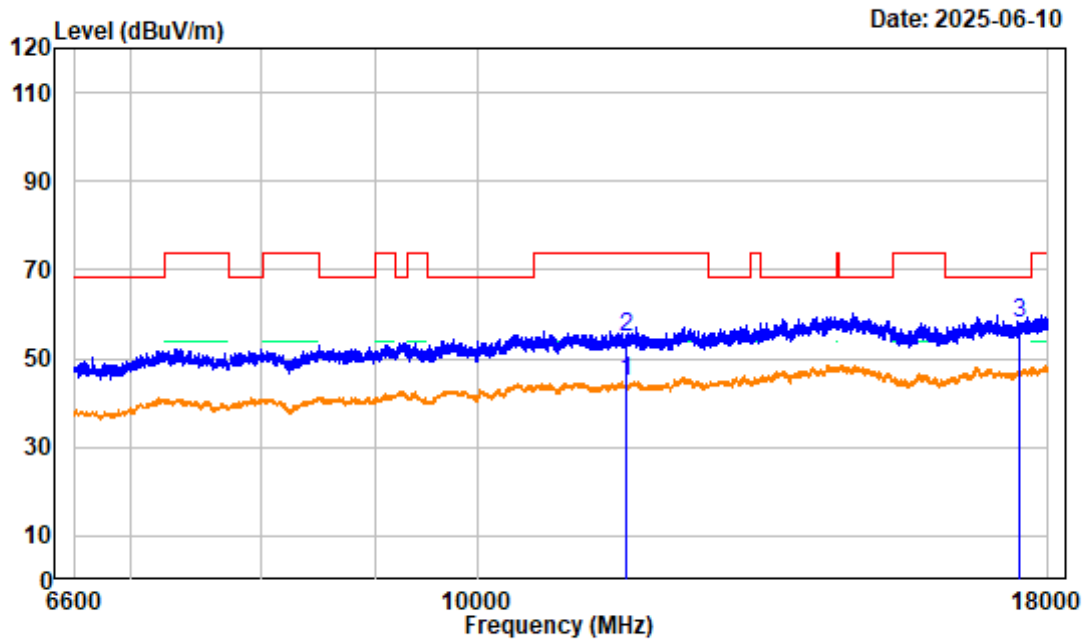

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac20 High Channel 5825MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	5.37	39.52	44.89	54.00	-9.11	average
2	11650.000	5.37	49.46	54.83	74.00	-19.17	peak
3	17475.000	7.12	50.76	57.88	68.20	-10.32	peak


802.11ac20 High Channel 6.6GHz-18GHz_VERTICAL

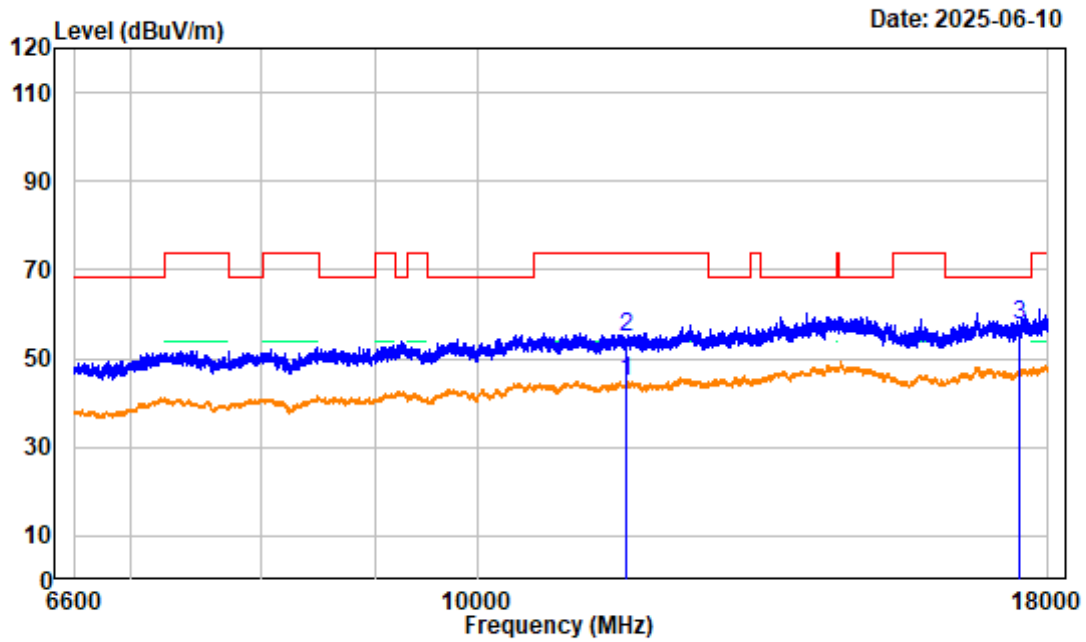

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac20 High Channel 5825MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	5.37	39.48	44.85	54.00	-9.15	average
2	11650.000	5.37	49.52	54.89	74.00	-19.11	peak
3	17475.000	7.12	50.61	57.73	68.20	-10.47	peak


802.11ac20 High Channel Bandedge_HORIZONTAL

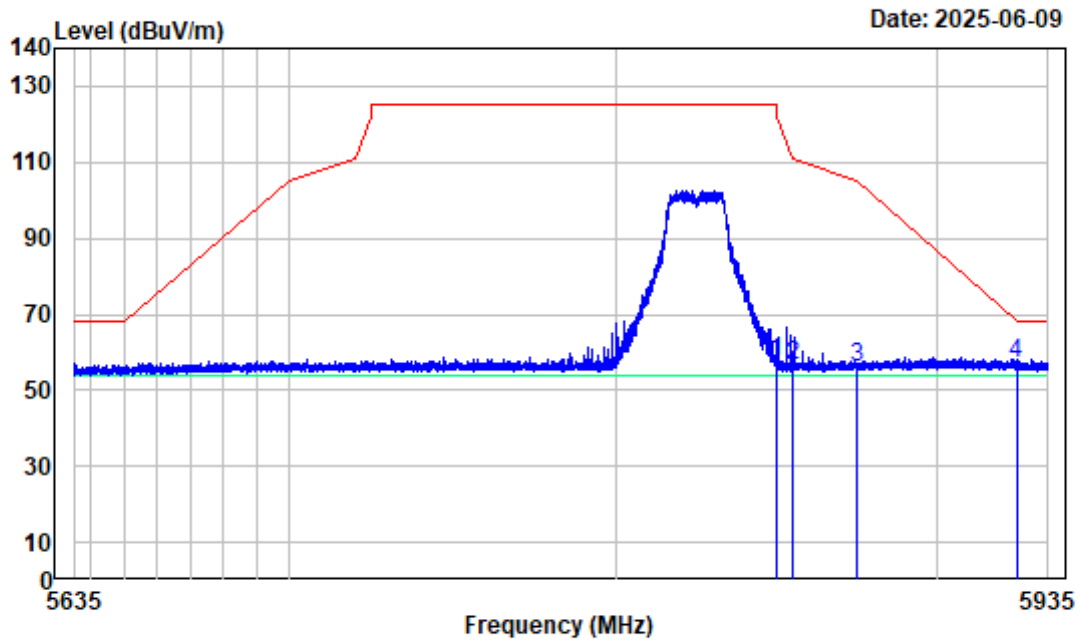

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac20 High Channel 5825MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.53	61.96	57.43	122.20	-64.77	peak
2	5855.000	-4.48	61.06	56.58	110.80	-54.22	peak
3	5875.000	-4.28	60.06	55.78	105.20	-49.42	peak
4	5925.000	-4.43	61.48	57.05	68.20	-11.15	peak


802.11ac20 High Channel Bandedge_VERTICAL

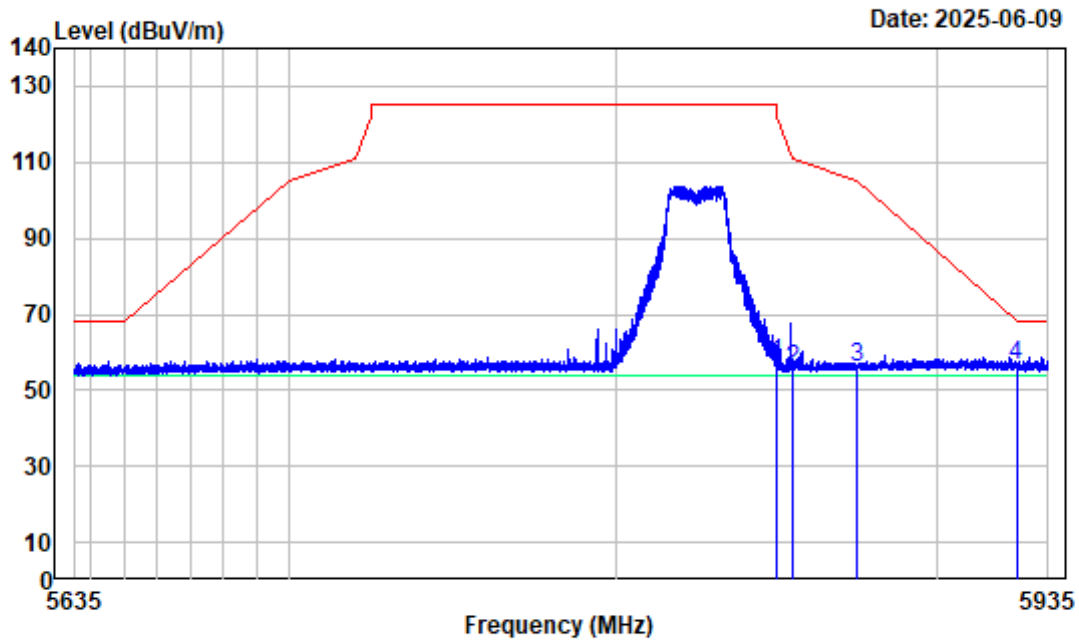

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac20 High Channel 5825MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.53	61.37	56.84	122.20	-65.36	peak
2	5855.000	-4.48	60.12	55.64	110.80	-55.16	peak
3	5875.000	-4.28	60.35	56.07	105.20	-49.13	peak
4	5925.000	-4.43	60.77	56.34	68.20	-11.86	peak

802.11ac40 Low Channel 1GHz-6.6GHz_HORIZONTAL

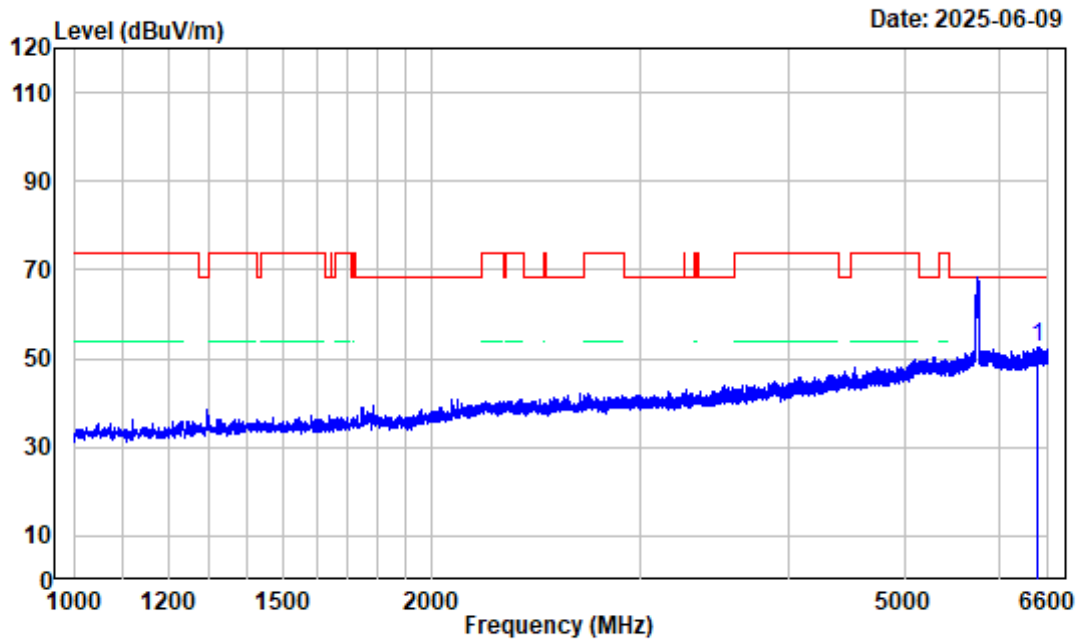


Date: 2025-06-09

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac40 Low Channel 5755MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6461.400	-3.66	56.00	52.34	68.20	-15.86	Peak


802.11ac40 Low Channel 1GHz-6.6GHz_VERTICAL

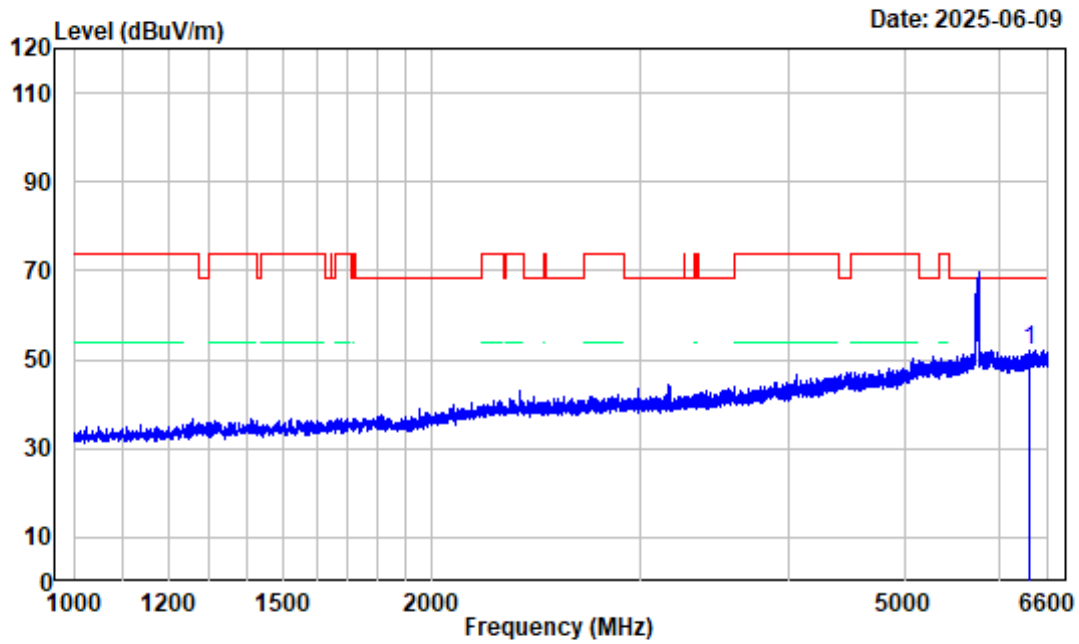

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac40 Low Channel 5755MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq		Read		Limit	Over	Remark
	Factor	Level	Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6357.100	-4.40	56.60	52.20	68.20	-16.00	Peak


802.11ac40 Low Channel 6.6GHz-18GHz_HORIZONTAL

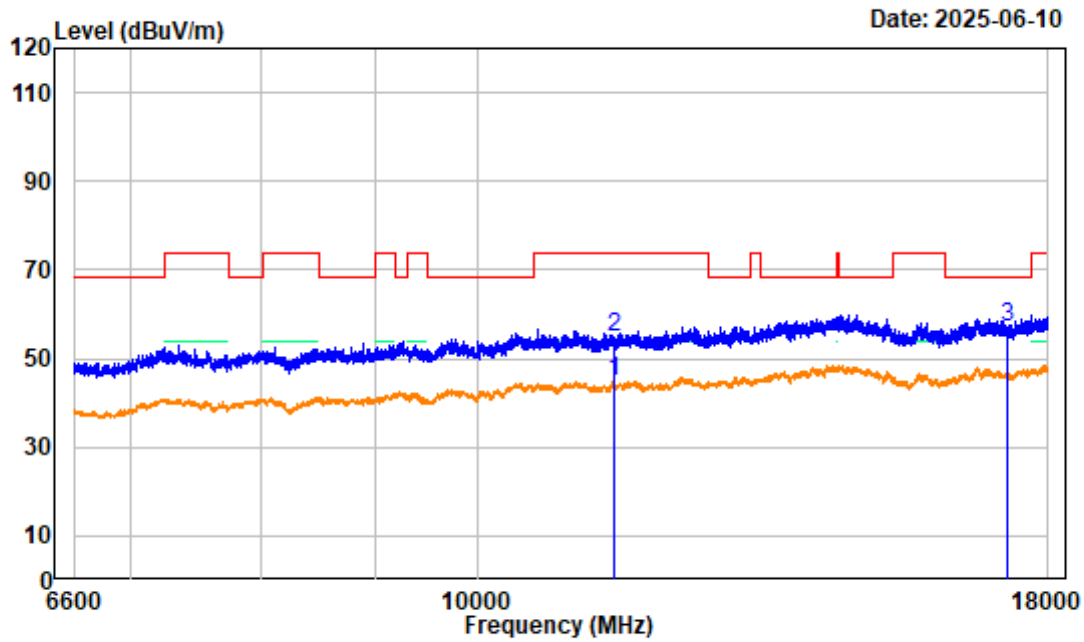

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac40 Low Channel 5755MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11510.000	6.30	38.48	44.78	54.00	-9.22	average
2	11510.000	6.30	48.47	54.77	74.00	-19.23	peak
3	17265.000	6.67	50.17	56.84	68.20	-11.36	peak


802.11ac40 Low Channel 6.6GHz-18GHz_VERTICAL

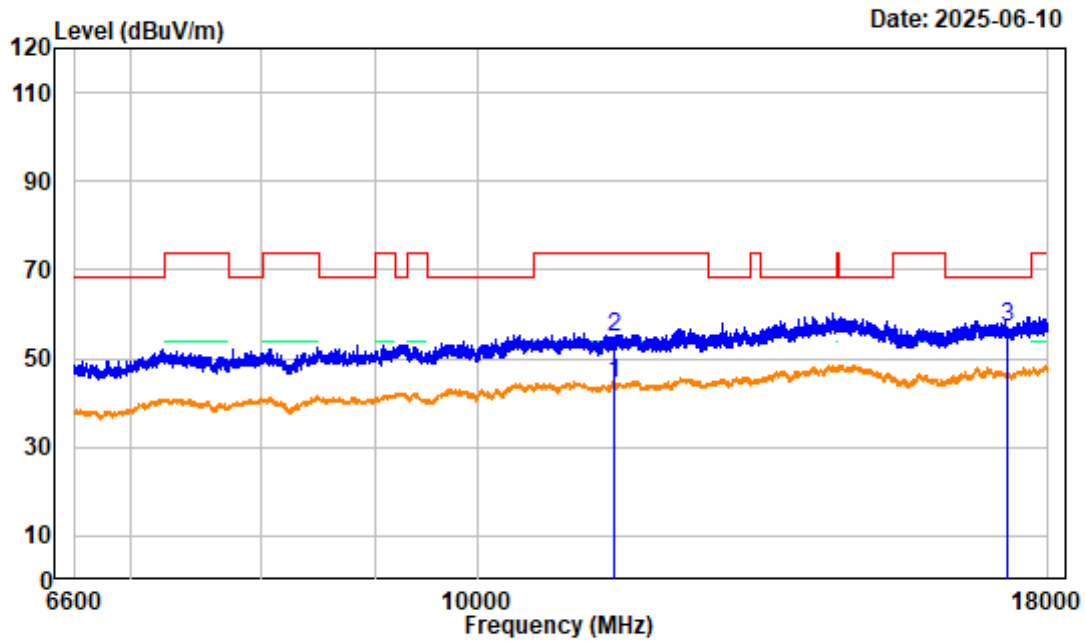

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac40 Low Channel 5755MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11510.000	6.30	38.30	44.60	54.00	-9.40	average
2	11510.000	6.30	48.33	54.63	74.00	-19.37	peak
3	17265.000	6.67	50.31	56.98	68.20	-11.22	peak


802.11ac40 Low Channel Bandedge_HORIZONTAL

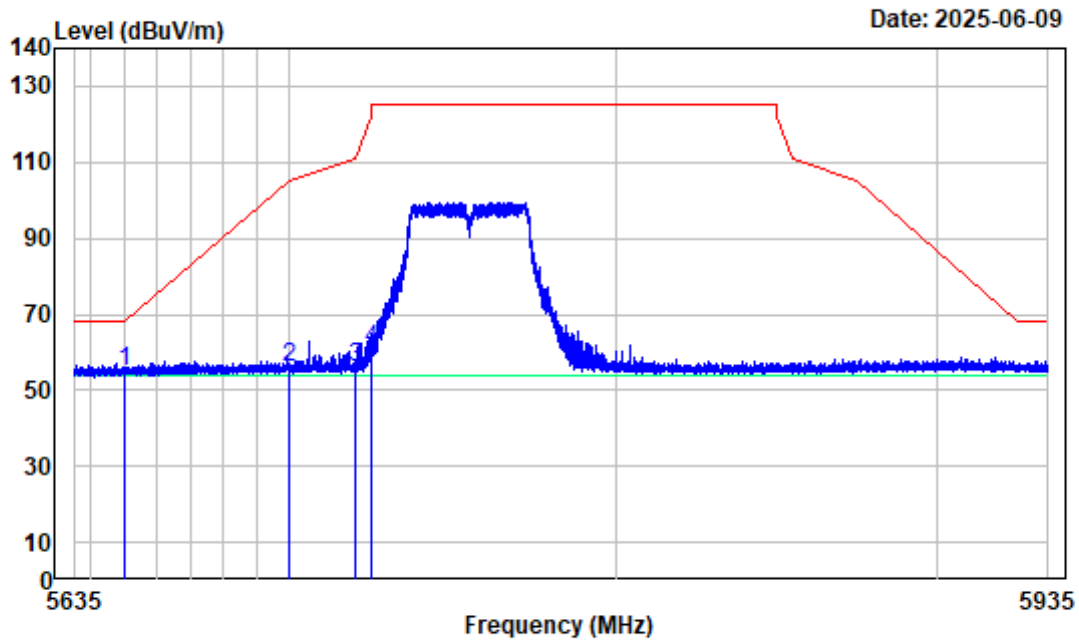

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac40 Low Channel 5755MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.84	59.61	54.77	68.20	-13.43	peak
2	5700.000	-4.41	60.48	56.07	105.20	-49.13	peak
3	5720.000	-4.44	60.18	55.74	110.80	-55.06	peak
4	5725.000	-4.46	65.38	60.92	122.20	-61.28	peak


802.11ac40 Low Channel Bandedge_VERTICAL

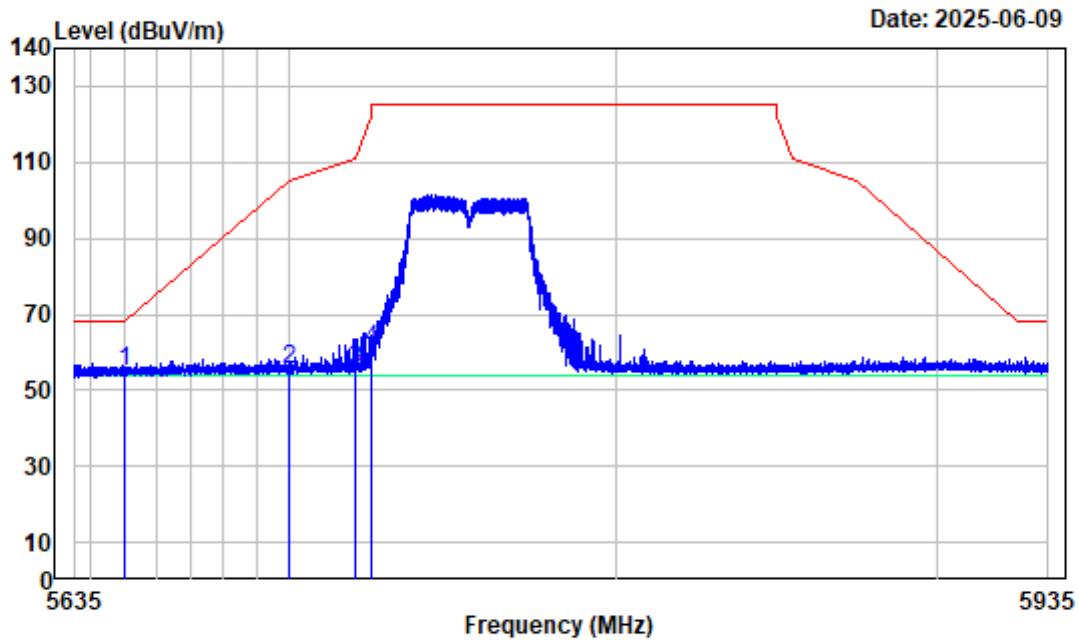

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac40 Low Channel 5755MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.84	59.65	54.81	68.20	-13.39	peak
2	5700.000	-4.41	59.81	55.40	105.20	-49.80	peak
3	5720.000	-4.44	60.05	55.61	110.80	-55.19	peak
4	5725.000	-4.46	65.11	60.65	122.20	-61.55	peak


802.11ac40 High Channel 1GHz-6.6GHz_HORIZONTAL

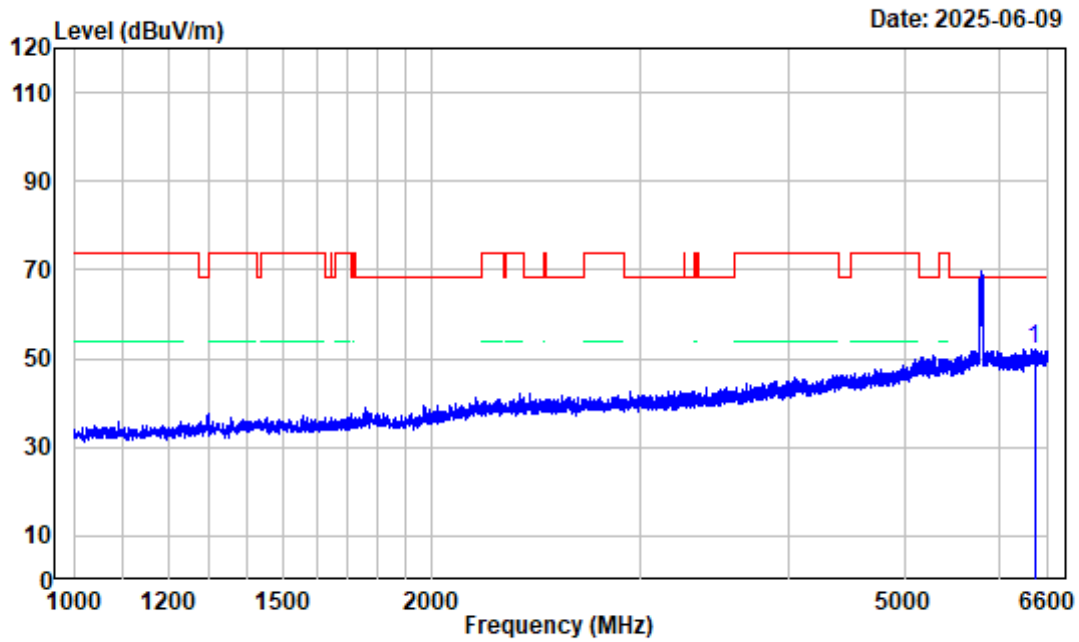

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac40 High Channel 5795MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6429.200	-3.64	55.76	52.12	68.20	-16.08	Peak

802.11ac40 High Channel 1GHz-6.6GHz_VERTICAL

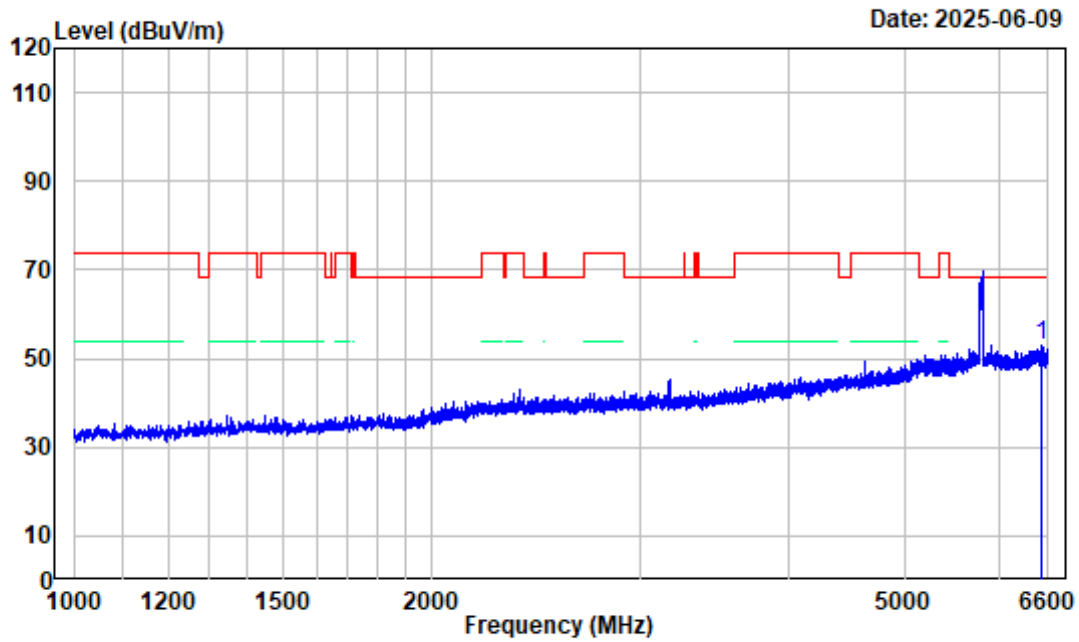


Date: 2025-06-09

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac40 High Channel 5795MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6511.800	-3.80	56.93	53.13	68.20	-15.07	Peak


802.11ac40 High Channel 6.6GHz-18GHz_HORIZONTAL

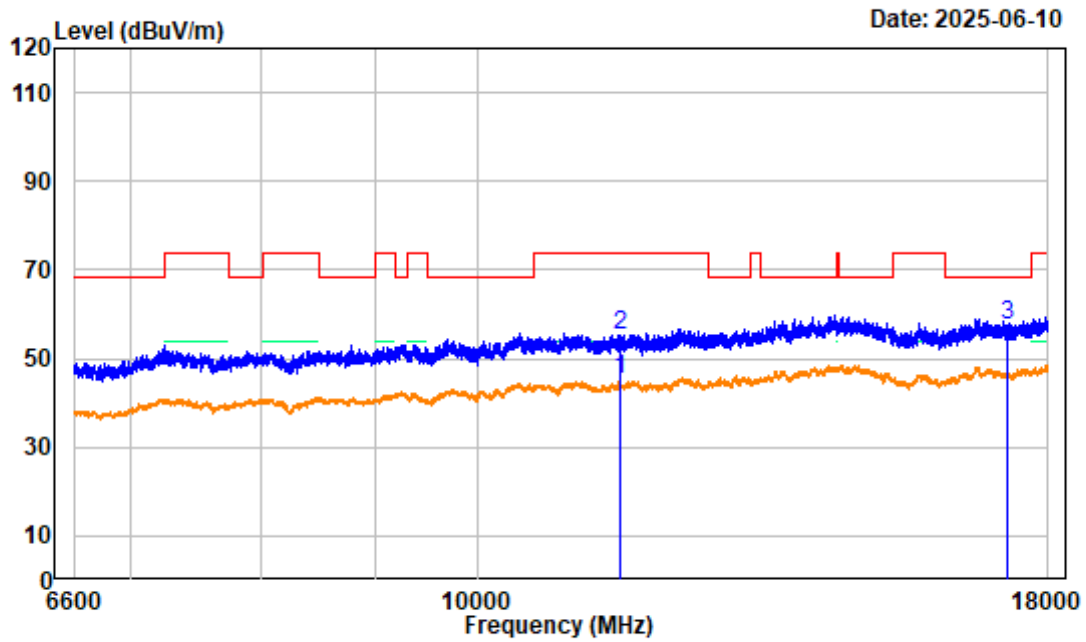

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac40 High Channel 5795MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11590.000	5.77	39.49	45.26	54.00	-8.74	average
2	11590.000	5.77	49.53	55.30	74.00	-18.70	peak
3	17265.000	6.67	50.62	57.29	68.20	-10.91	peak


802.11ac40 High Channel 6.6GHz-18GHz_VERTICAL

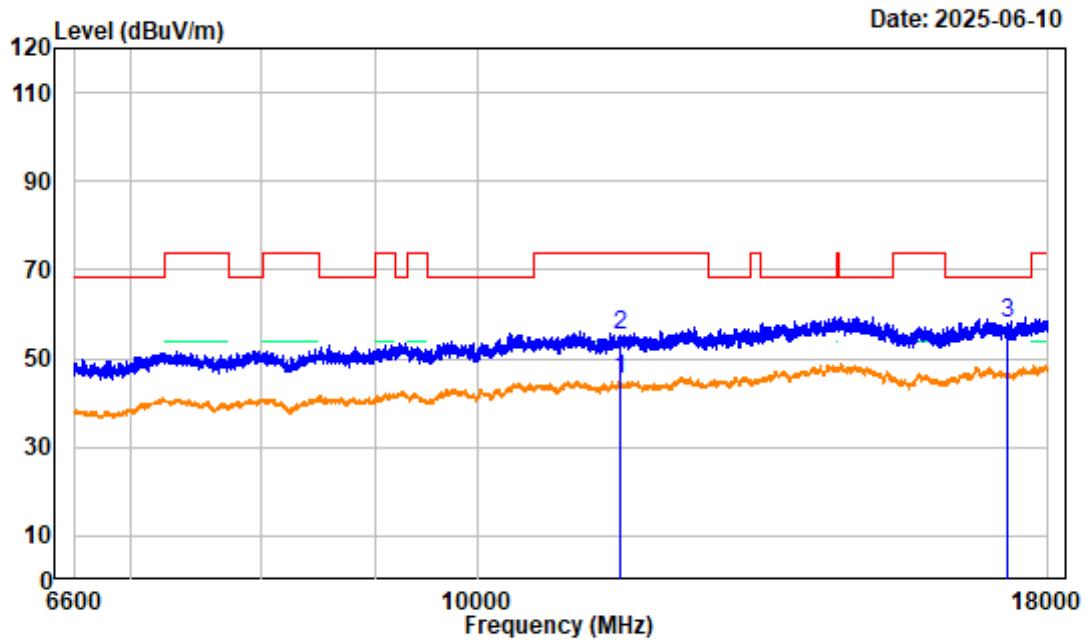

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac40 High Channel 5795MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11590.000	5.77	39.42	45.19	54.00	-8.81	average
2	11590.000	5.77	49.35	55.12	74.00	-18.88	peak
3	17265.000	6.67	51.42	58.09	68.20	-10.11	peak


802.11ac40 High Channel Bandedge_HORIZONTAL

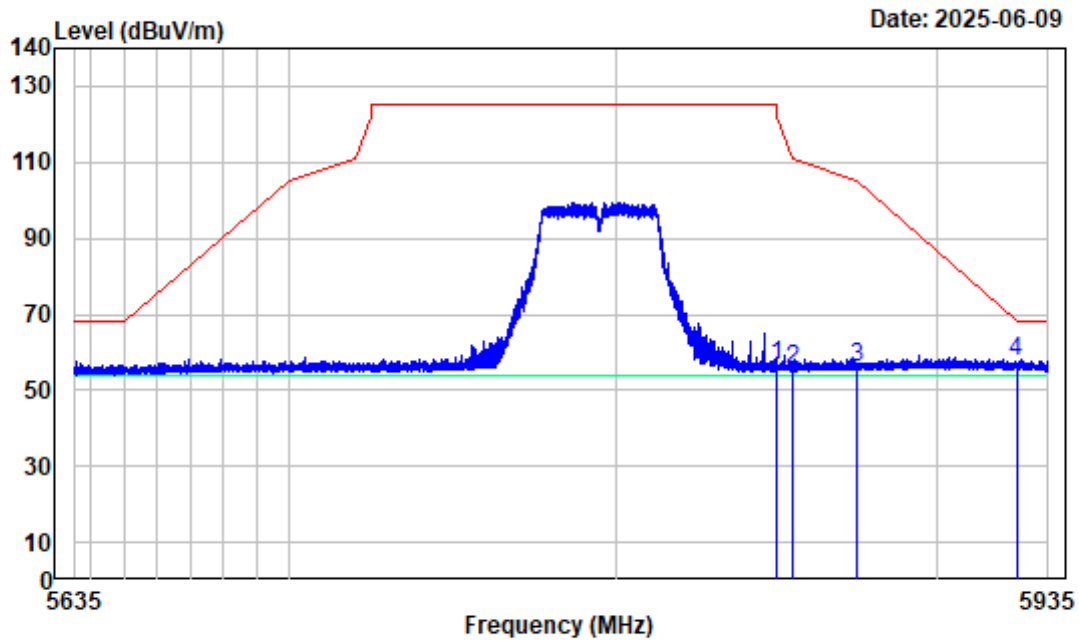

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac40 High Channel 5795MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.53	61.24	56.71	122.20	-65.49	peak
2	5855.000	-4.48	60.13	55.65	110.80	-55.15	peak
3	5875.000	-4.28	60.31	56.03	105.20	-49.17	peak
4	5925.000	-4.43	61.83	57.40	68.20	-10.80	peak


802.11ac40 High Channel Bandedge_VERTICAL

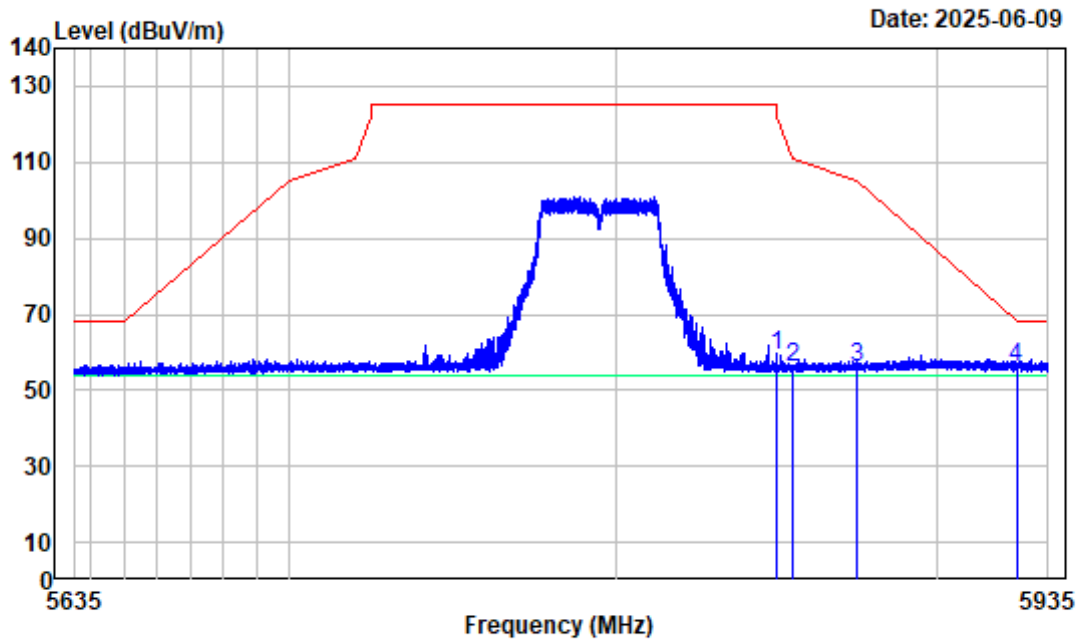

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac40 High Channel 5795MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.53	63.69	59.16	122.20	-63.04	peak
2	5855.000	-4.48	60.28	55.80	110.80	-55.00	peak
3	5875.000	-4.28	60.24	55.96	105.20	-49.24	peak
4	5925.000	-4.43	60.58	56.15	68.20	-12.05	peak


802.11ax20 Low Channel 1GHz-6.6GHz_HORIZONTAL

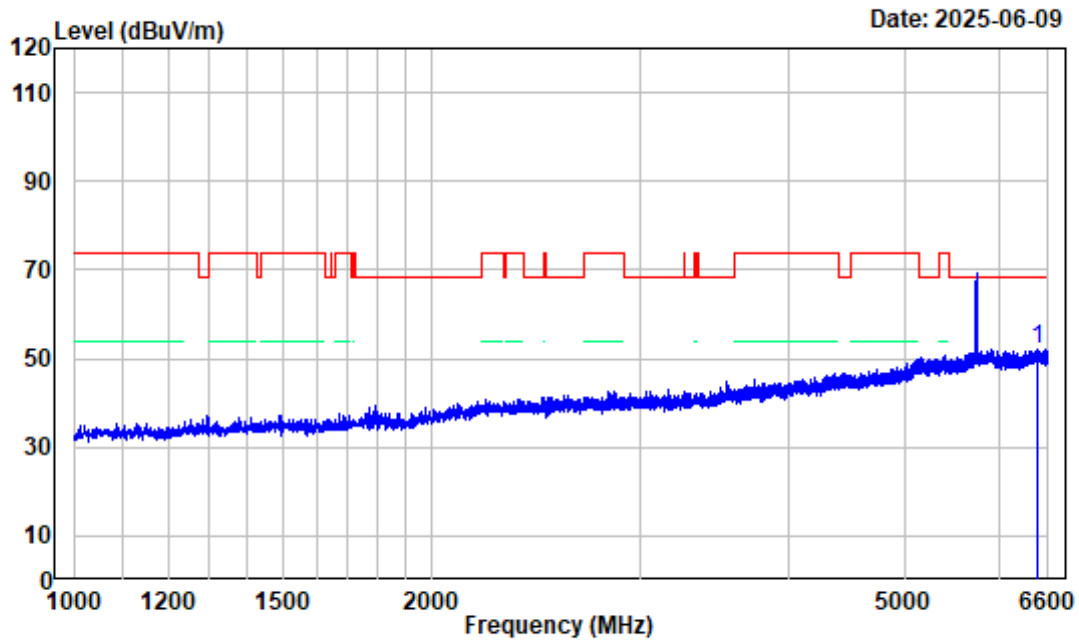

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax20 Low Channel 5745MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6456.500	-3.64	55.90	52.26	68.20	-15.94	Peak


802.11ax20 Low Channel 1GHz-6.6GHz_VERTICAL

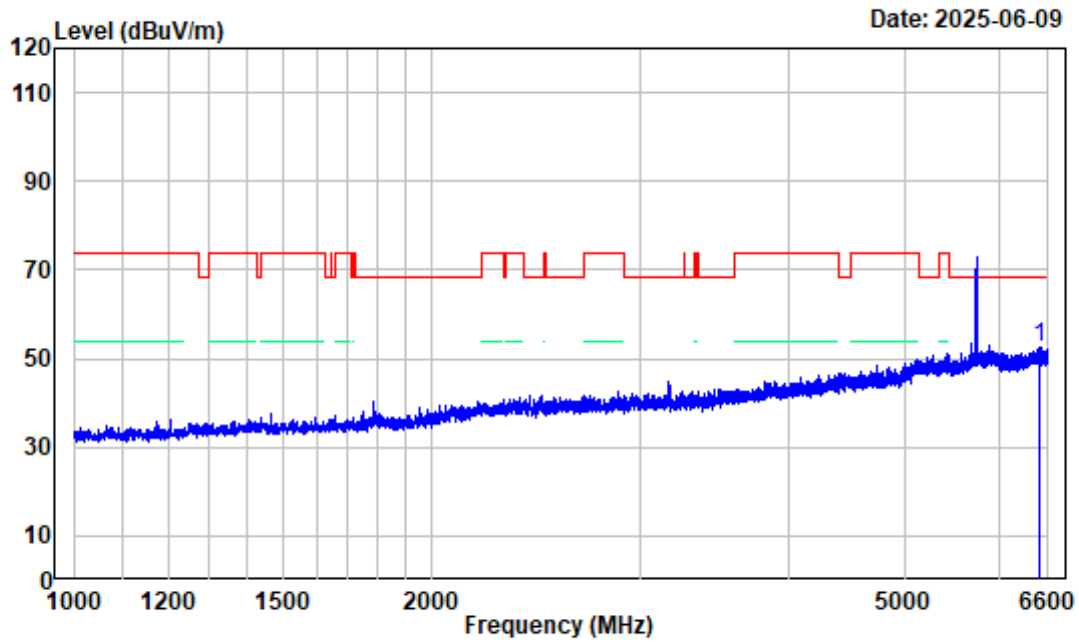

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax20 Low Channel 5745MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6496.400	-3.81	56.29	52.48	68.20	-15.72	Peak


802.11ax20 Low Channel 6.6GHz-18GHz_HORIZONTAL

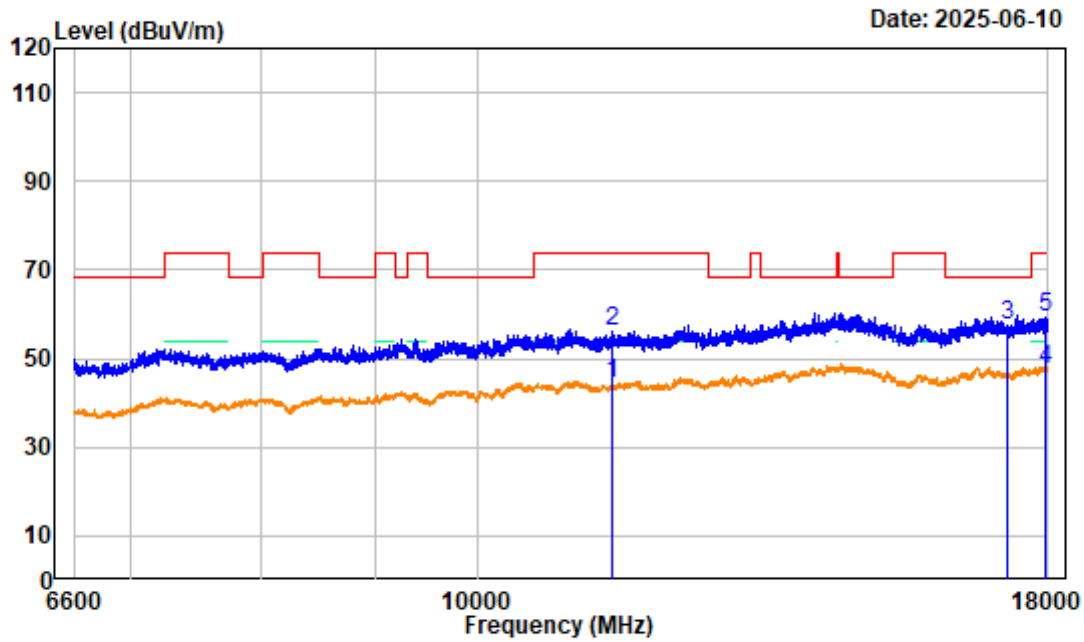

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax20 Low Channel 5745MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11490.000	6.10	38.28	44.38	54.00	-9.62	average
2	11490.000	6.10	50.22	56.32	74.00	-17.68	peak
3	17265.000	6.67	51.06	57.73	68.20	-10.47	peak
4	17950.130	8.18	39.51	47.69	54.00	-6.31	average
5	17950.130	8.18	51.23	59.41	74.00	-14.59	peak


802.11ax20 Low Channel 6.6GHz-18GHz_VERTICAL

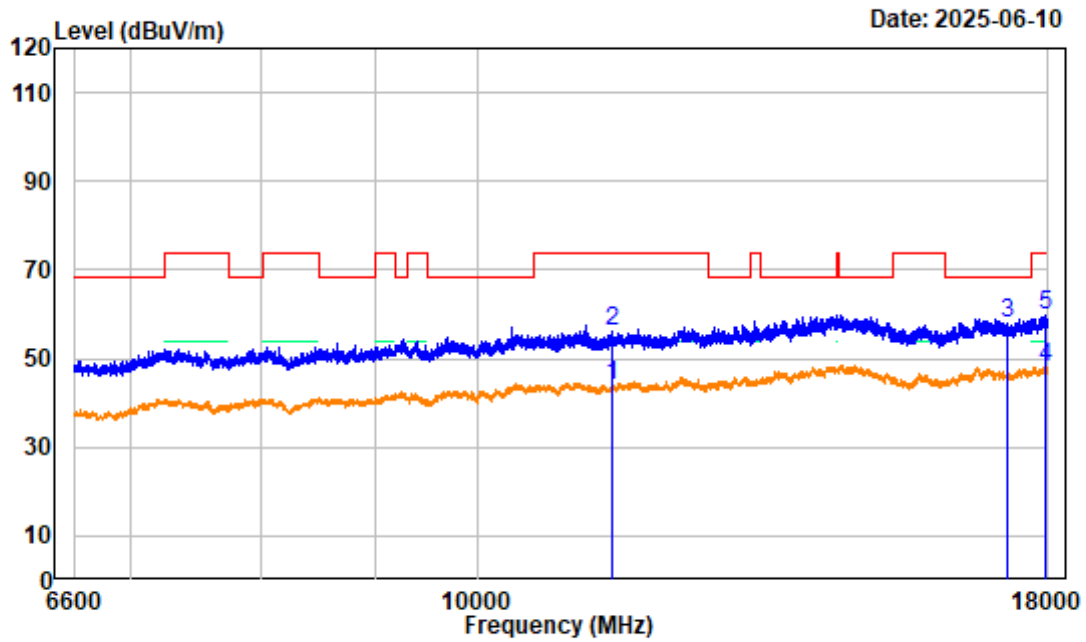

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax20 Low Channel 5745MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11490.000	6.10	37.96	44.06	54.00	-9.94	average
2	11490.000	6.10	50.00	56.10	74.00	-17.90	peak
3	17265.000	6.67	51.41	58.08	68.20	-10.12	peak
4	17945.850	8.19	39.60	47.79	54.00	-6.21	average
5	17945.850	8.19	51.36	59.55	74.00	-14.45	peak


802.11ax20 Low Channel Bandedge_HORIZONTAL

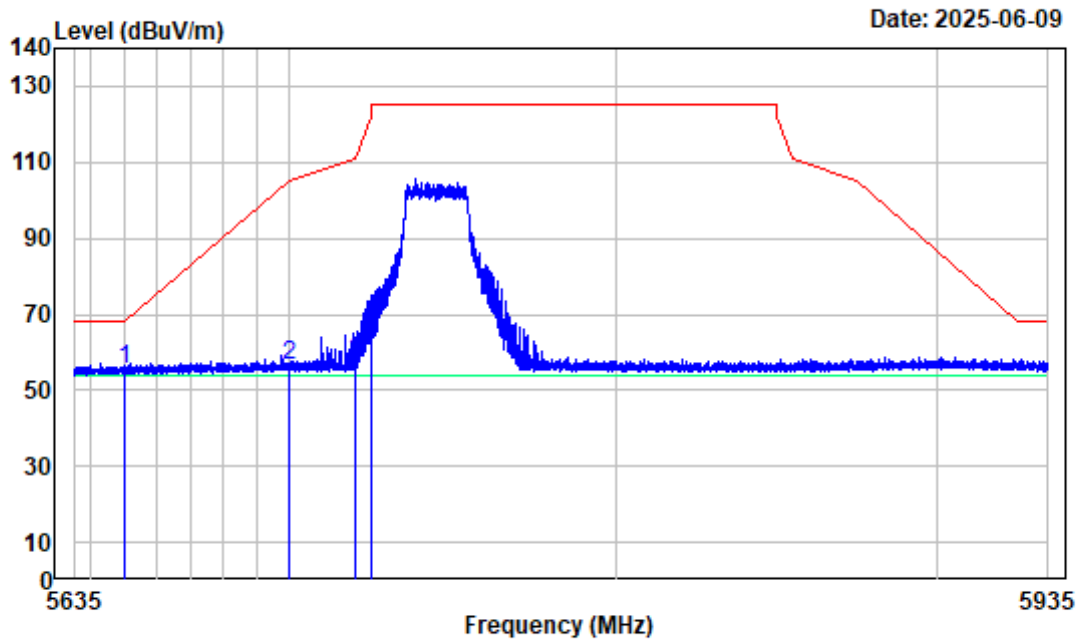

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax20 Low Channel 5745MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.84	60.09	55.25	68.20	-12.95	peak
2	5700.000	-4.41	61.08	56.67	105.20	-48.53	peak
3	5720.000	-4.44	61.53	57.09	110.80	-53.71	peak
4	5725.000	-4.46	69.09	64.63	122.20	-57.57	peak


802.11ax20 Low Channel Bandedge_VERTICAL

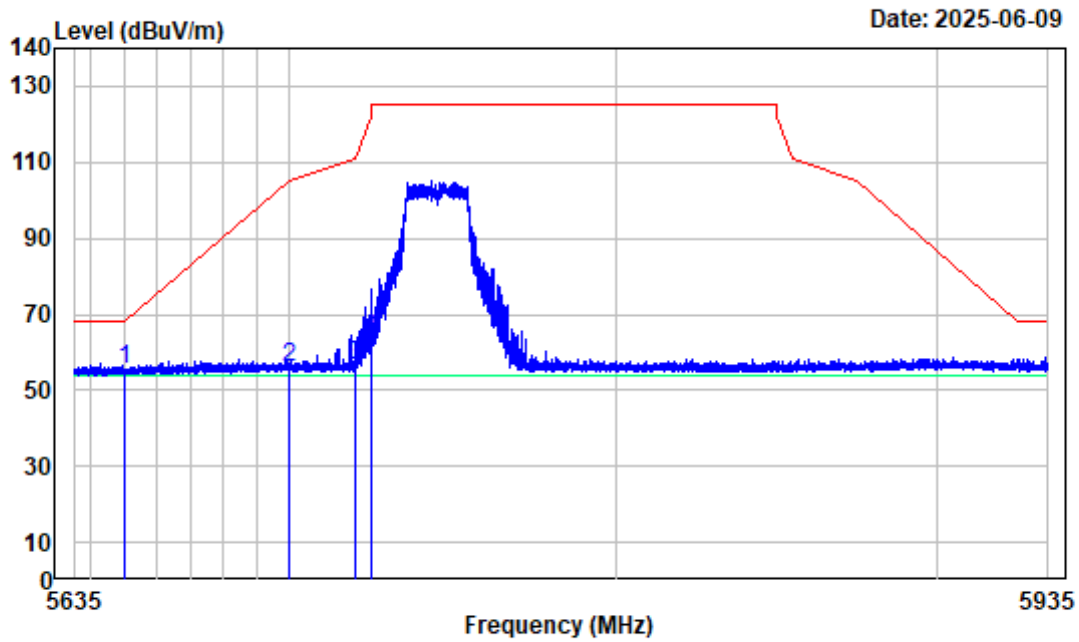

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax20 Low Channel 5745MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.84	60.34	55.50	68.20	-12.70	peak
2	5700.000	-4.41	60.17	55.76	105.20	-49.44	peak
3	5720.000	-4.44	61.22	56.78	110.80	-54.02	peak
4	5725.000	-4.46	68.08	63.62	122.20	-58.58	peak

802.11ax20 Middle Channel 1GHz-6.6GHz_HORIZONTAL

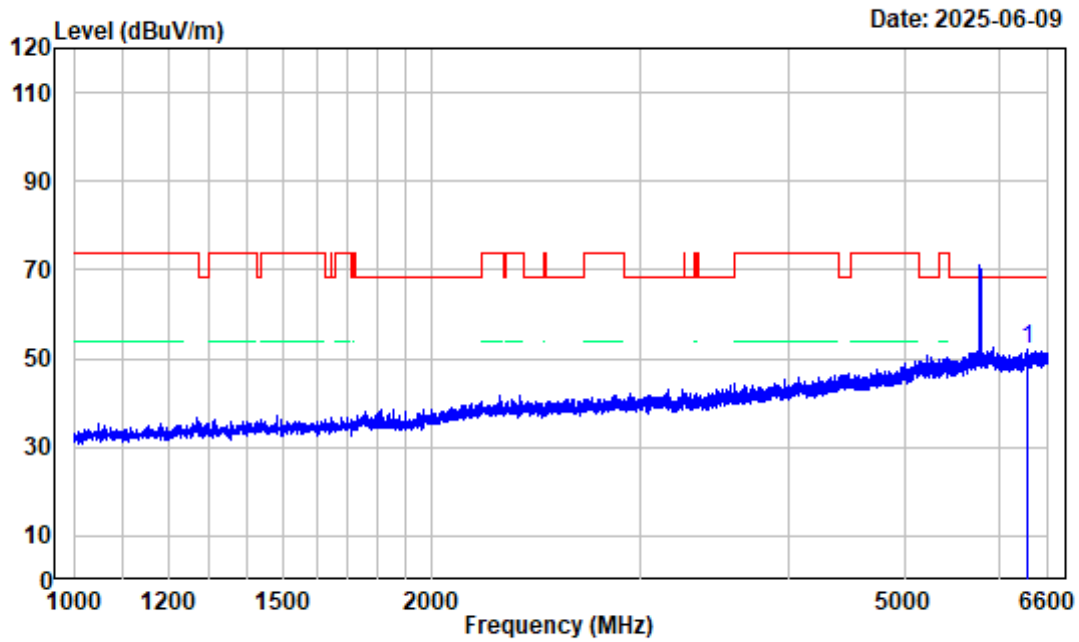


Date: 2025-06-09

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax20 Middle Channel 5785MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6341.700	-4.51	56.49	51.98	68.20	-16.22	Peak

802.11ax20 Middle Channel 1GHz-6.6GHz_VERTICAL

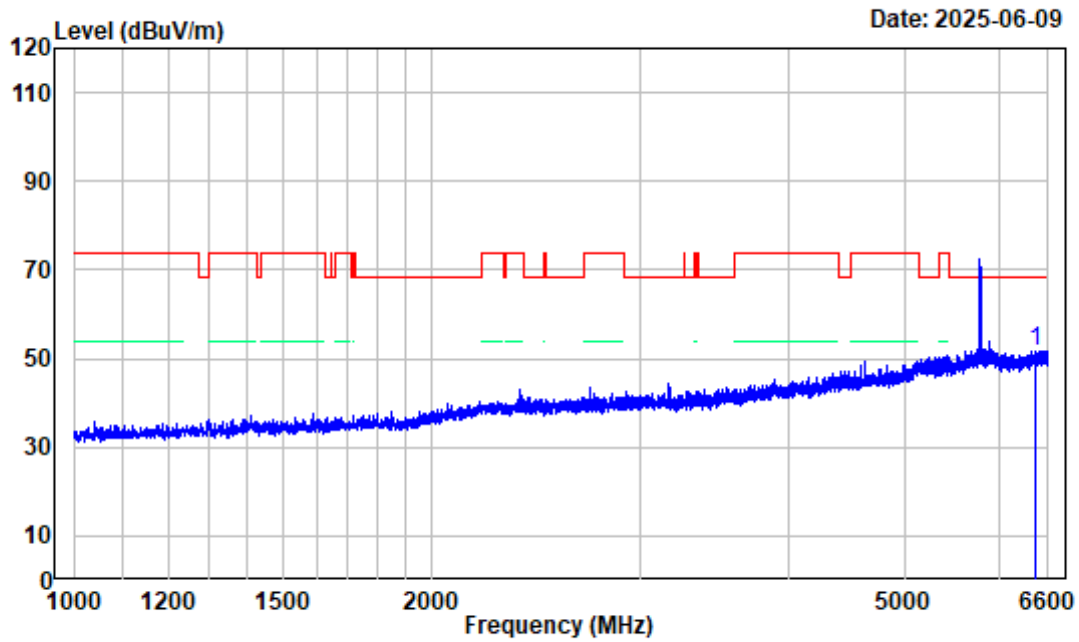


Date: 2025-06-09

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax20 Middle Channel 5785MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6434.800	-3.63	55.46	51.83	68.20	-16.37	Peak


802.11ax20 Middle Channel 6.6GHz-18GHz_HORIZONTAL

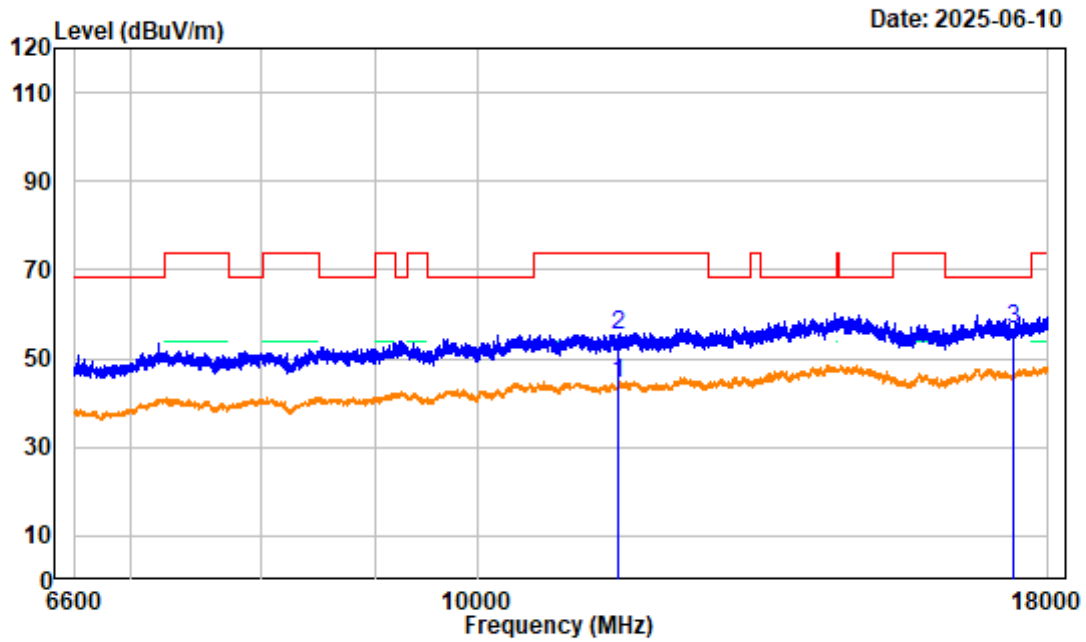

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax20 Middle Channel 5785MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11570.000	5.93	38.50	44.43	54.00	-9.57	average
2	11570.000	5.93	49.26	55.19	74.00	-18.81	peak
3	17355.000	6.58	49.82	56.40	68.20	-11.80	peak


802.11ax20 Middle Channel 6.6GHz-18GHz_VERTICAL

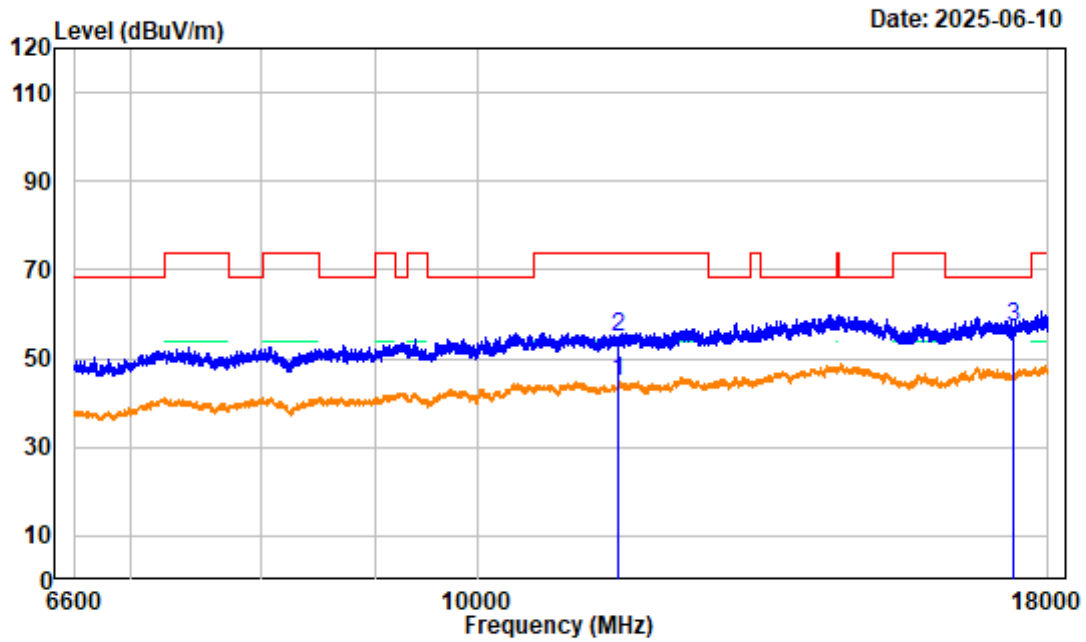

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax20 Middle Channel 5785MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBUV/m	dBUV/m	dB	
1	11570.000	5.93	39.03	44.96	54.00	-9.04	average
2	11570.000	5.93	49.06	54.99	74.00	-19.01	peak
3	17355.000	6.58	50.51	57.09	68.20	-11.11	peak


802.11ax20 High Channel 1GHz-6.6GHz_HORIZONTAL

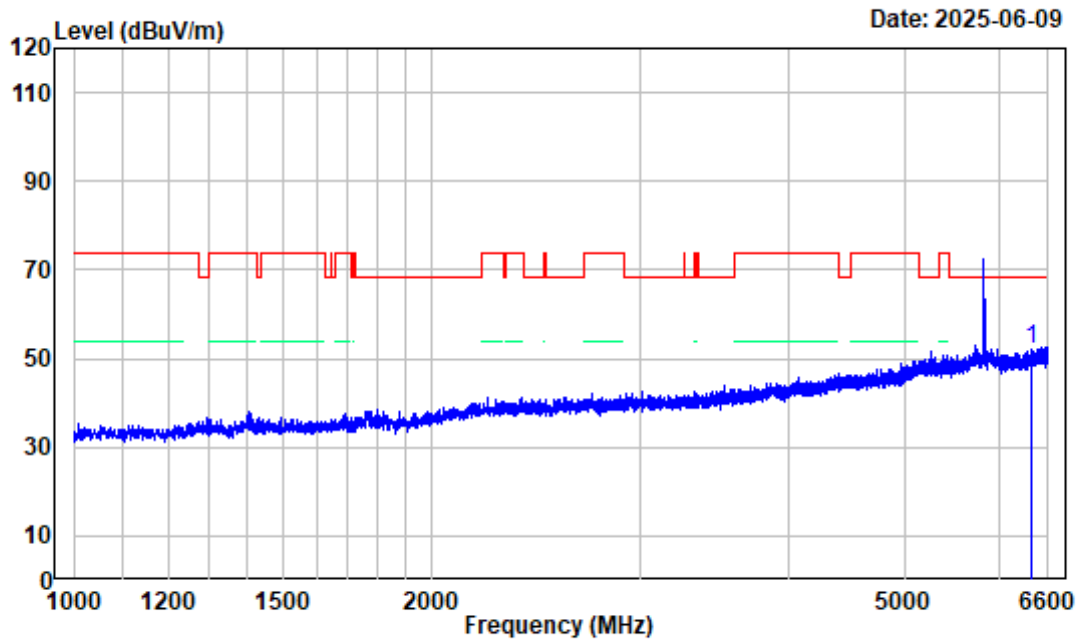

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax20 High Channel 5825MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6397.000	-3.72	55.68	51.96	68.20	-16.24	Peak

802.11ax20 High Channel 1GHz-6.6GHz_VERTICAL

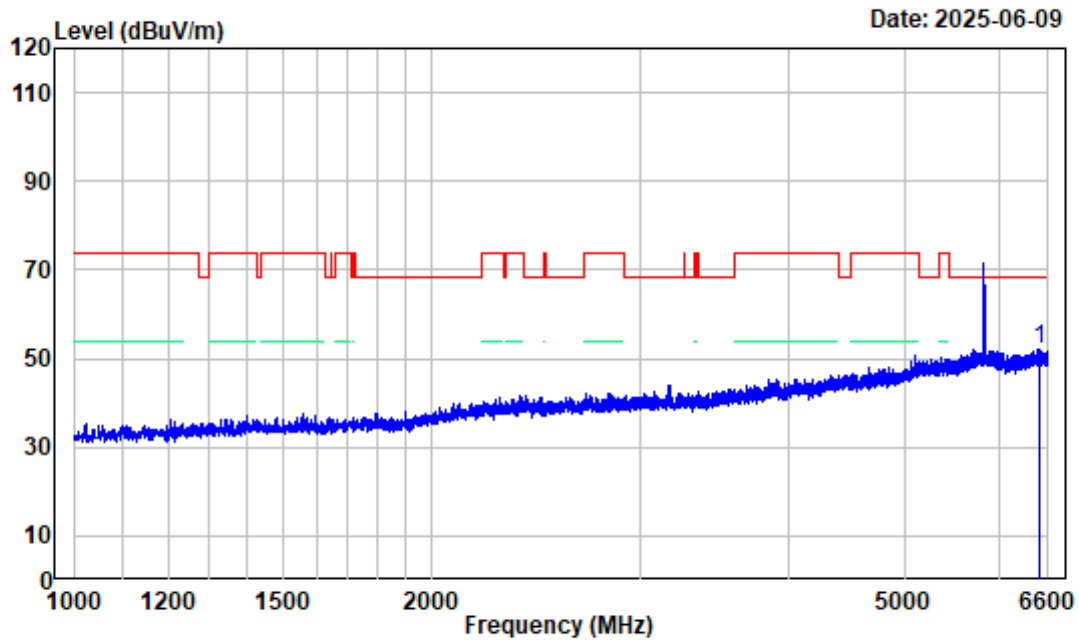


Date: 2025-06-09

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax20 High Channel 5825MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6495.000	-3.80	56.05	52.25	68.20	-15.95	Peak


802.11ax20 High Channel 6.6GHz-18GHz_HORIZONTAL

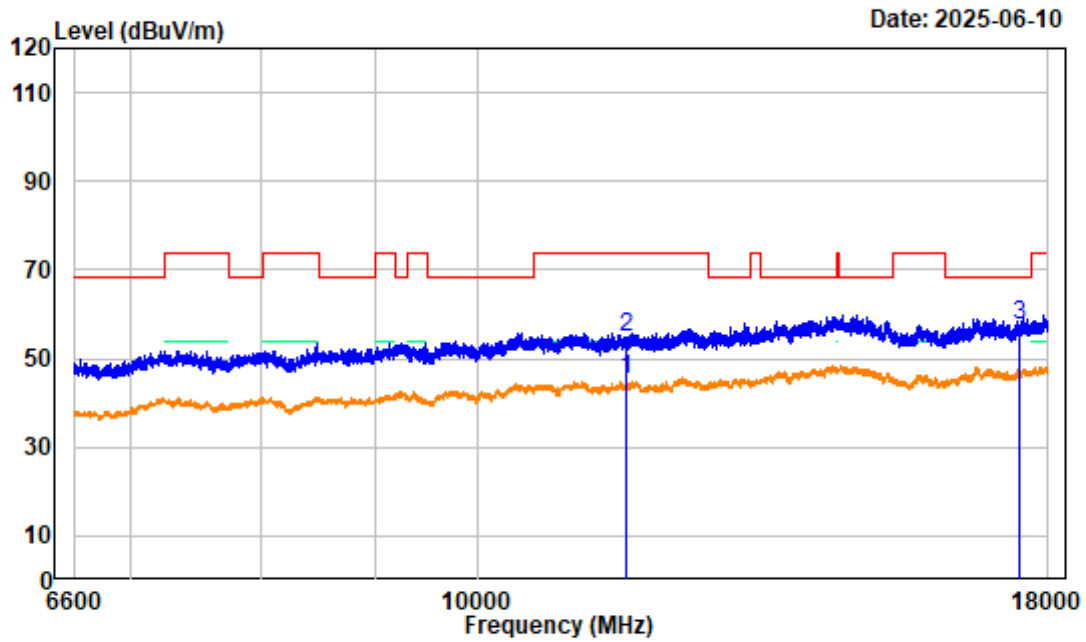

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax20 High Channel 5825MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	5.37	39.83	45.20	54.00	-8.80	average
2	11650.000	5.37	49.45	54.82	74.00	-19.18	peak
3	17475.000	7.12	50.42	57.54	68.20	-10.66	peak


802.11ax20 High Channel 6.6GHz-18GHz_VERTICAL

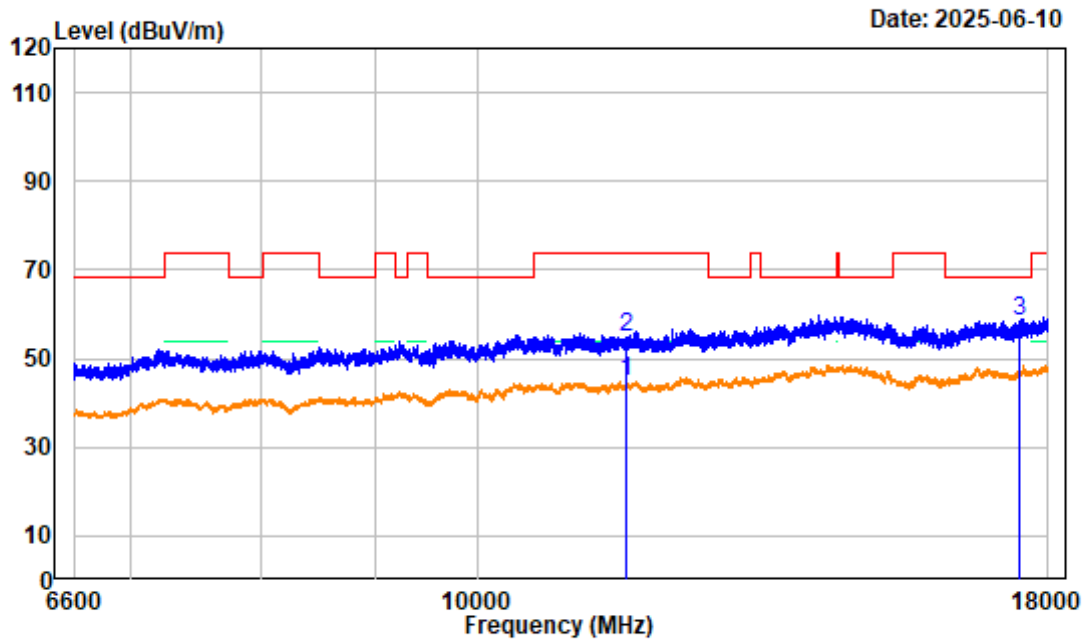

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax20 High Channel 5825MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	5.37	39.59	44.96	54.00	-9.04	average
2	11650.000	5.37	49.63	55.00	74.00	-19.00	peak
3	17475.000	7.12	51.24	58.36	68.20	-9.84	peak


802.11ax20 High Channel Bandedge_HORIZONTAL

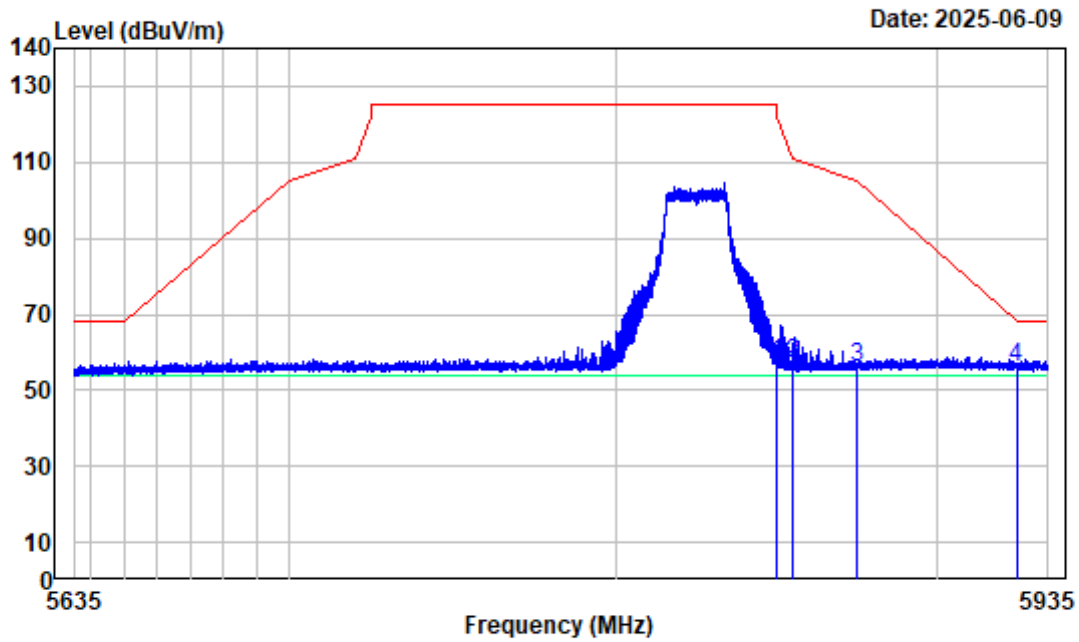

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax20 High Channel 5825MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.53	61.50	56.97	122.20	-65.23	peak
2	5855.000	-4.48	61.28	56.80	110.80	-54.00	peak
3	5875.000	-4.28	60.12	55.84	105.20	-49.36	peak
4	5925.000	-4.43	60.49	56.06	68.20	-12.14	peak


802.11ax20 High Channel Bandedge_VERTICAL

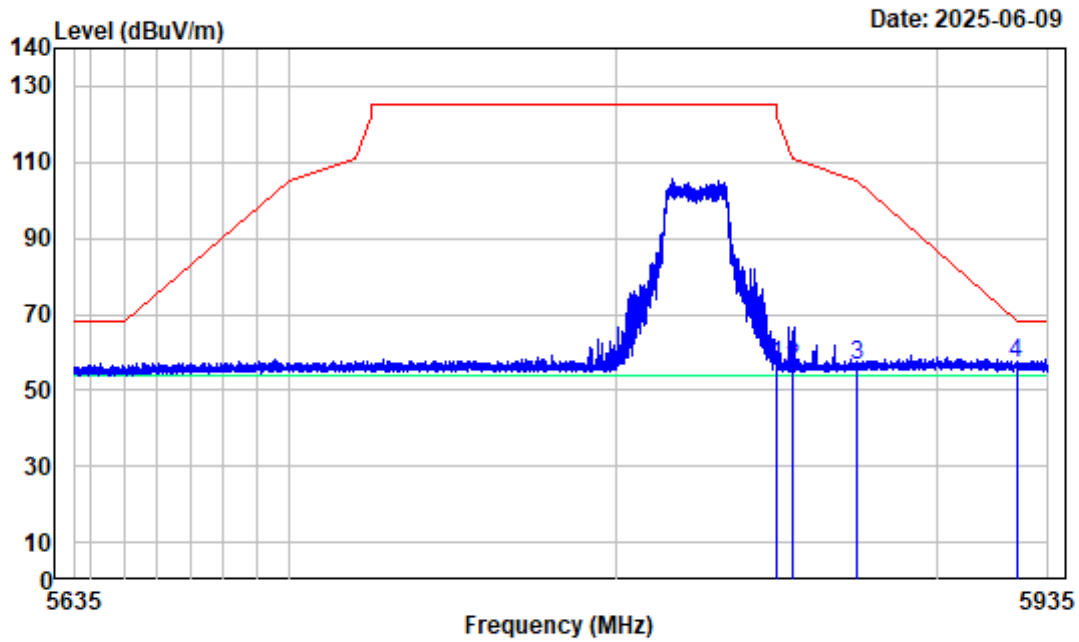

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax20 High Channel 5825MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.53	60.87	56.34	122.20	-65.86	peak
2	5855.000	-4.48	60.38	55.90	110.80	-54.90	peak
3	5875.000	-4.28	60.73	56.45	105.20	-48.75	peak
4	5925.000	-4.43	61.23	56.80	68.20	-11.40	peak


802.11ax40 Low Channel 1GHz-6.6GHz_HORIZONTAL

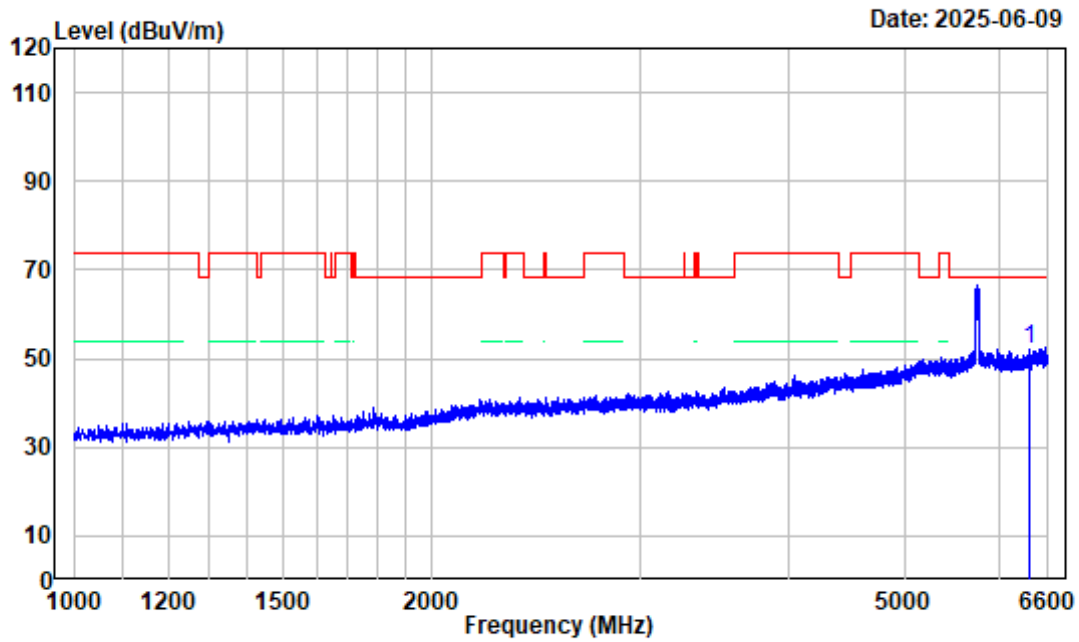

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax40 Low Channel 5755MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6376.000	-4.09	56.18	52.09	68.20	-16.11	Peak


802.11ax40 Low Channel 1GHz-6.6GHz_VERTICAL

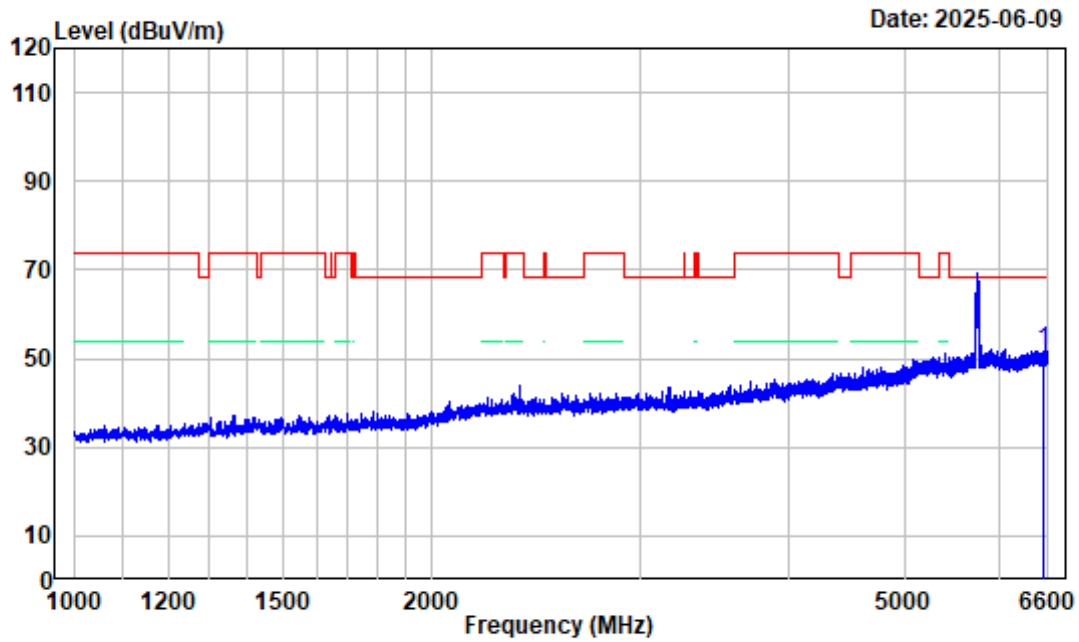

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax40 Low Channel 5755MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6530.700	-3.76	55.50	51.74	68.20	-16.46	Peak


802.11ax40 Low Channel 6.6GHz-18GHz_HORIZONTAL

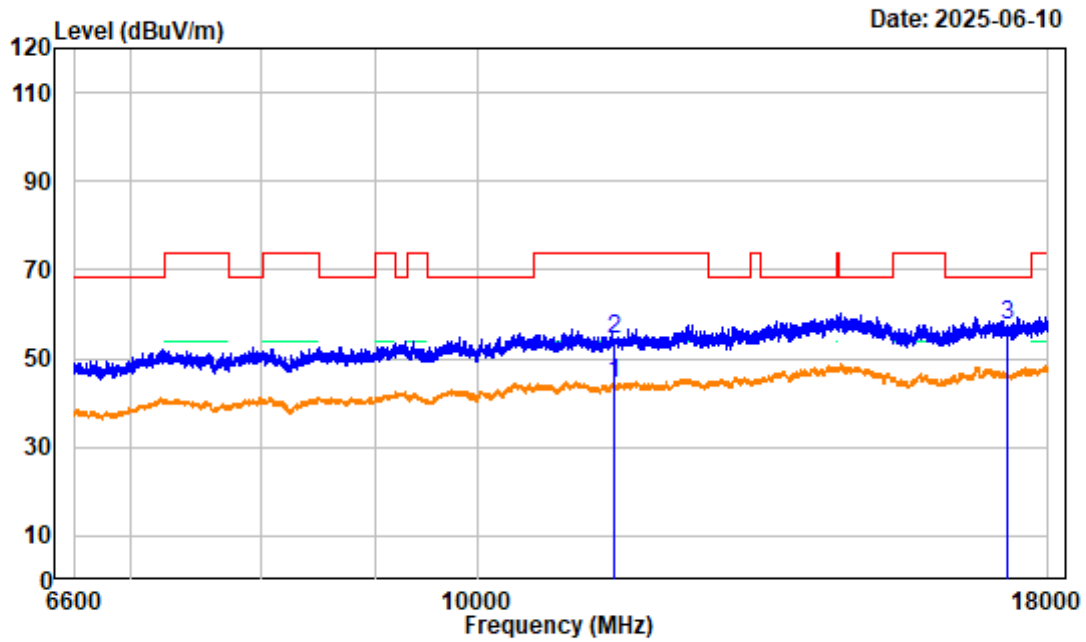

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax40 Low Channel 5755MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11510.000	6.30	38.14	44.44	54.00	-9.56	average
2	11510.000	6.30	48.12	54.42	74.00	-19.58	peak
3	17265.000	6.67	50.83	57.50	68.20	-10.70	peak


802.11ax40 Low Channel 6.6GHz-18GHz_VERTICAL

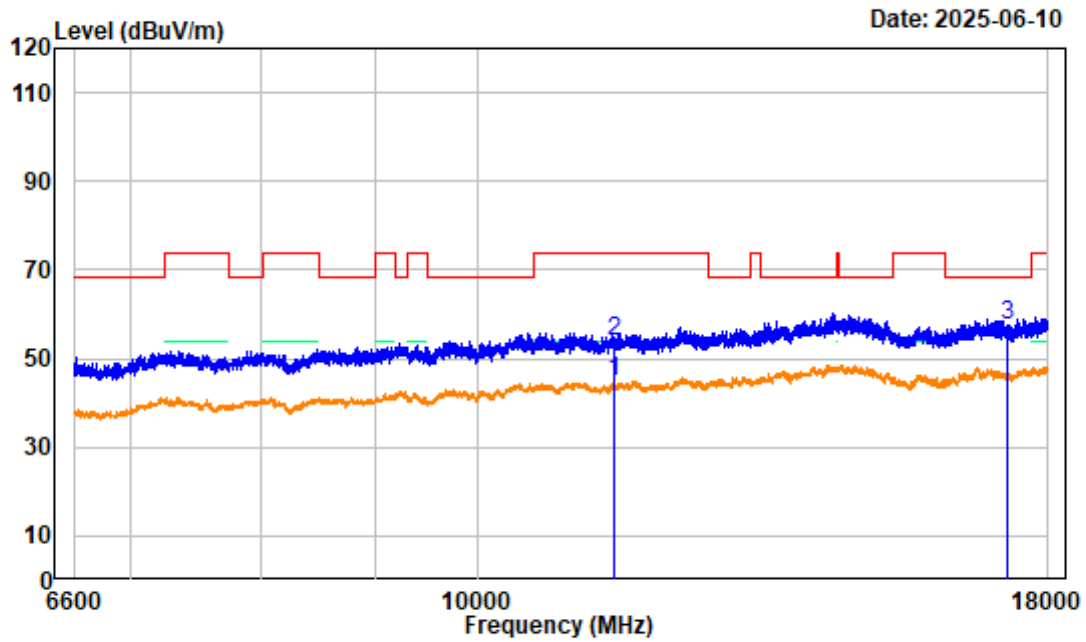

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax40 Low Channel 5755MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11510.000	6.30	38.54	44.84	54.00	-9.16	average
2	11510.000	6.30	47.53	53.83	74.00	-20.17	peak
3	17265.000	6.67	50.66	57.33	68.20	-10.87	peak


802.11ax40 Low Channel Bandedge_HORIZONTAL

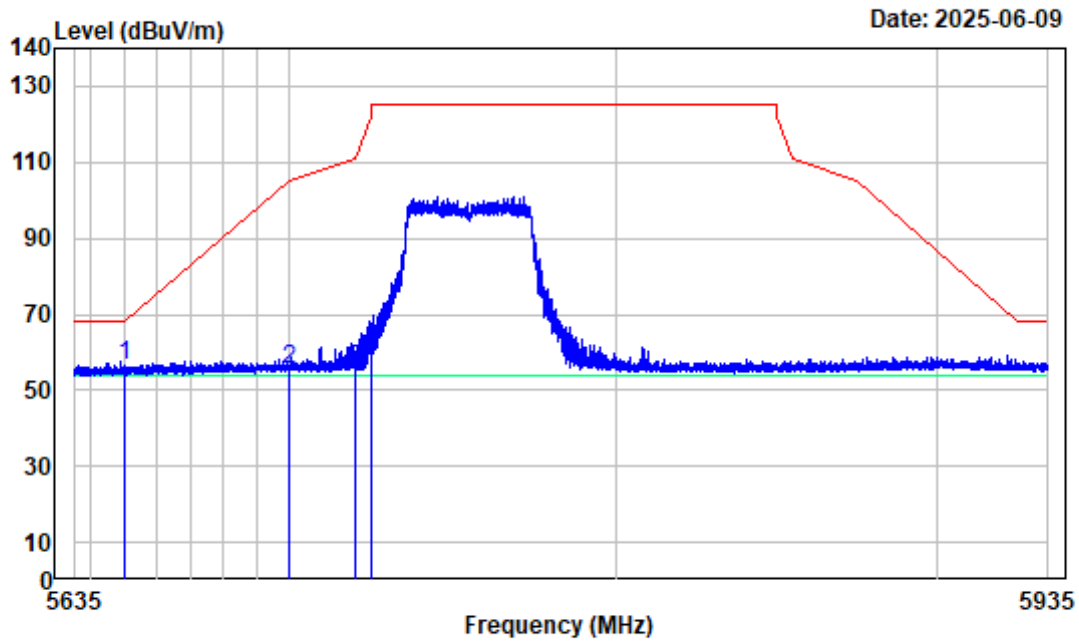

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax40 Low Channel 5755MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.84	61.21	56.37	68.20	-11.83	peak
2	5700.000	-4.41	60.14	55.73	105.20	-49.47	peak
3	5720.000	-4.44	60.04	55.60	110.80	-55.20	peak
4	5725.000	-4.46	65.31	60.85	122.20	-61.35	peak

802.11ax40 Low Channel Bandedge_VERTICAL

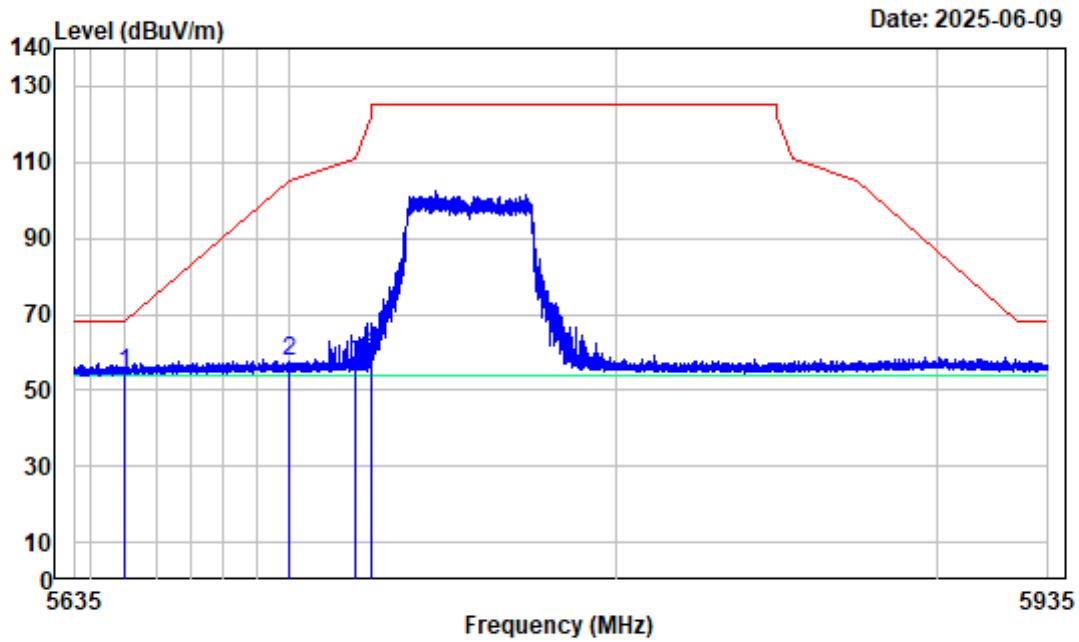


Date: 2025-06-09

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax40 Low Channel 5755MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.84	59.08	54.24	68.20	-13.96	peak
2	5700.000	-4.41	61.93	57.52	105.20	-47.68	peak
3	5720.000	-4.44	60.89	56.45	110.80	-54.35	peak
4	5725.000	-4.46	64.47	60.01	122.20	-62.19	peak


802.11ax40 High Channel 1GHz-6.6GHz_HORIZONTAL

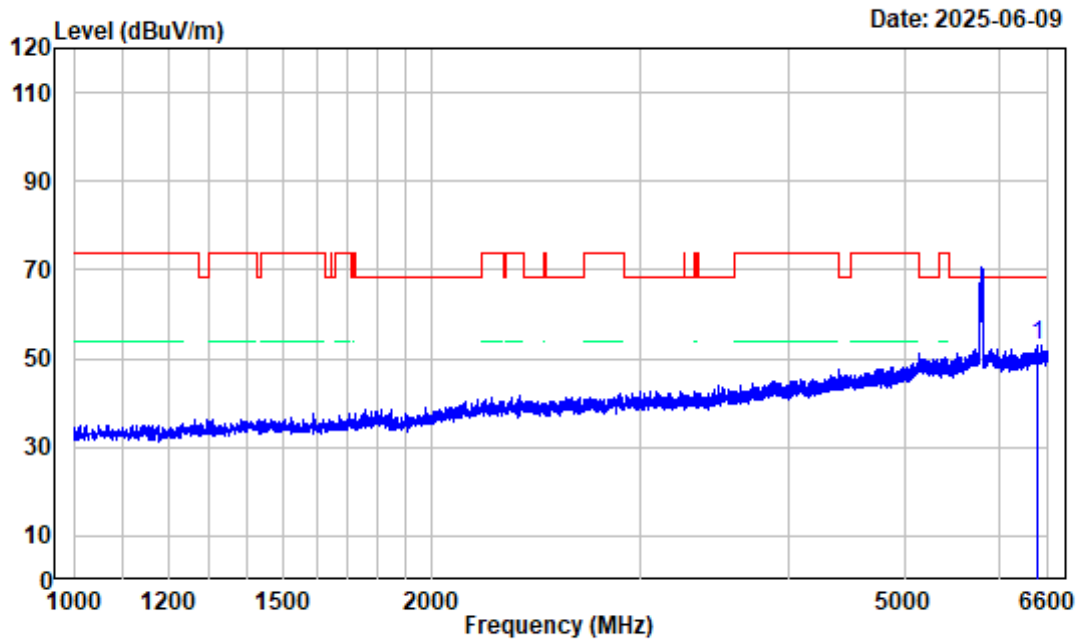

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax40 High Channel 5795MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6454.400	-3.63	56.81	53.18	68.20	-15.02	Peak

802.11ax40 High Channel 1GHz-6.6GHz_VERTICAL

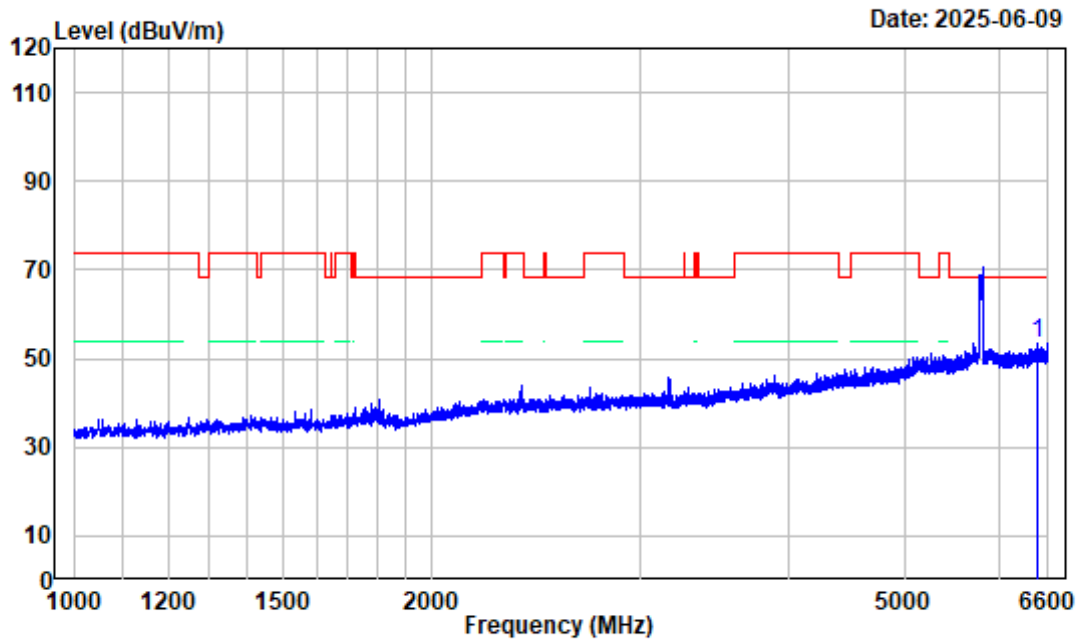


Date: 2025-06-09

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax40 High Channel 5795MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6472.600	-3.71	56.95	53.24	68.20	-14.96	Peak


802.11ax40 High Channel 6.6GHz-18GHz_HORIZONTAL

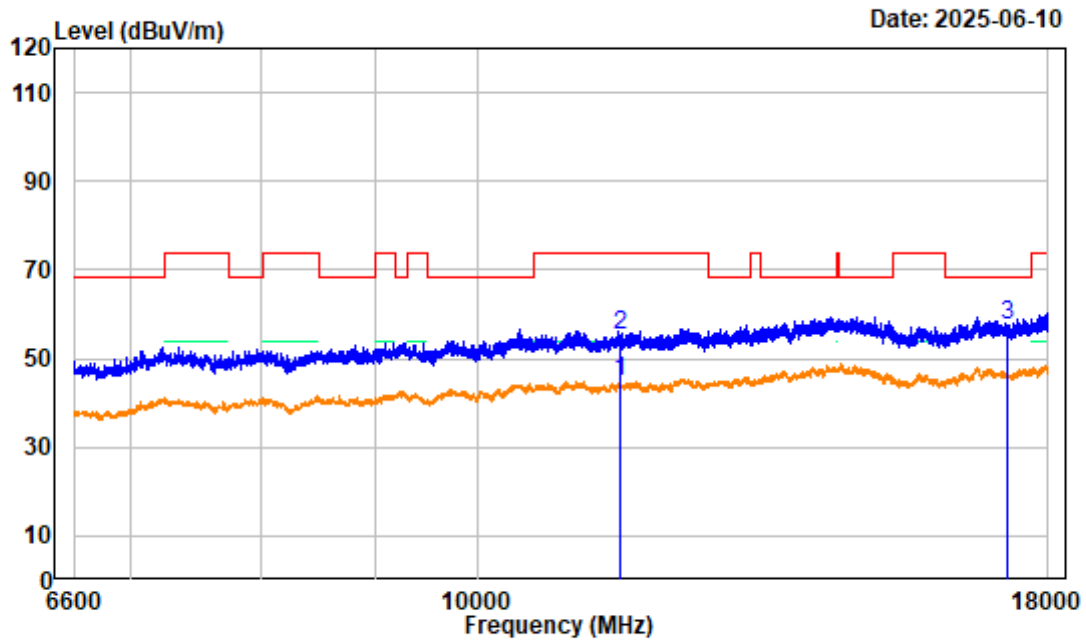

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax40 High Channel 5795MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11590.000	5.77	38.91	44.68	54.00	-9.32	average
2	11590.000	5.77	49.52	55.29	74.00	-18.71	peak
3	17265.000	6.67	51.04	57.71	68.20	-10.49	peak


802.11ax40 High Channel 6.6GHz-18GHz_VERTICAL

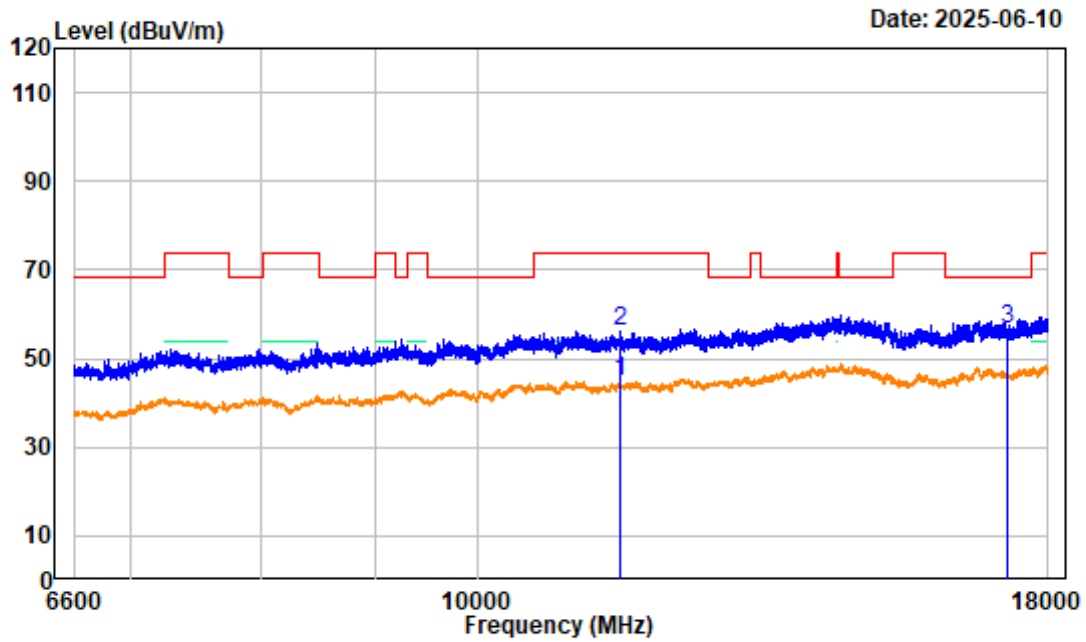

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax40 High Channel 5795MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11590.000	5.77	38.85	44.62	54.00	-9.38	average
2	11590.000	5.77	50.18	55.95	74.00	-18.05	peak
3	17265.000	6.67	50.13	56.80	68.20	-11.40	peak

802.11ax40 High Channel Bandedge_HORIZONTAL

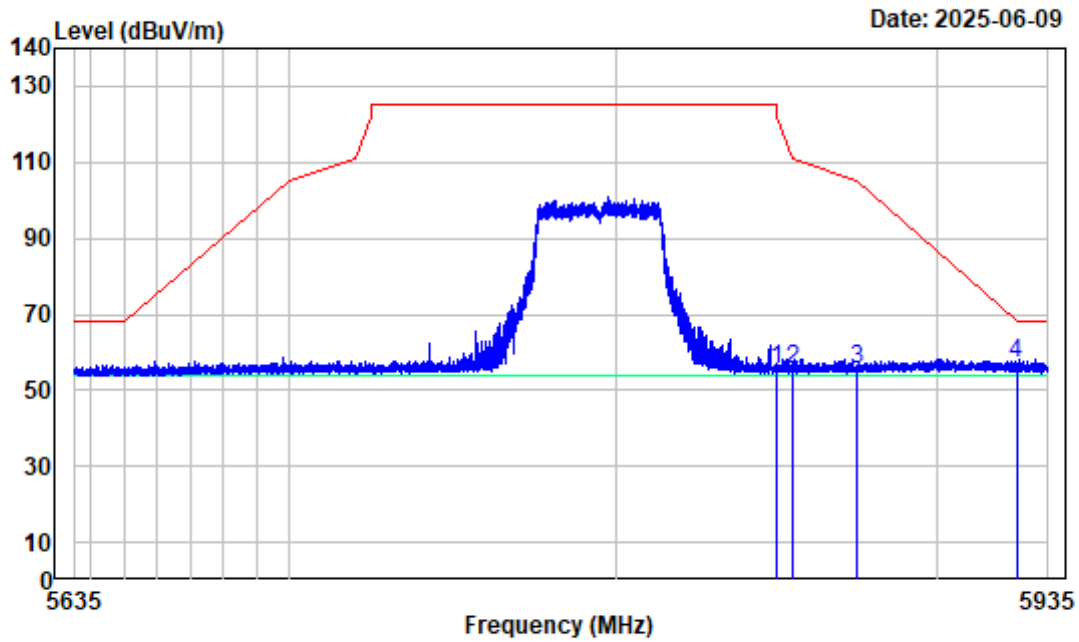


Date: 2025-06-09

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax40 High Channel 5795MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.53	59.85	55.32	122.20	-66.88	peak
2	5855.000	-4.48	59.74	55.26	110.80	-55.54	peak
3	5875.000	-4.28	59.92	55.64	105.20	-49.56	peak
4	5925.000	-4.43	61.45	57.02	68.20	-11.18	peak

802.11ax40 High Channel Bandedge_VERTICAL

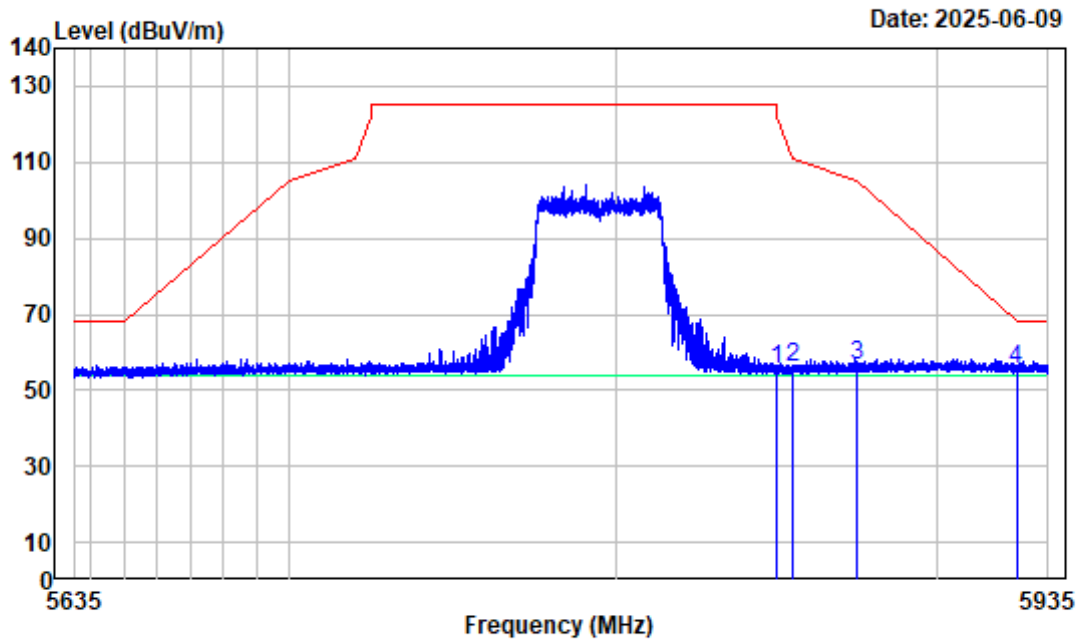

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T31635E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ax40 High Channel 5795MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.53	60.14	55.61	122.20	-66.59	peak
2	5855.000	-4.48	60.30	55.82	110.80	-54.98	peak
3	5875.000	-4.28	60.61	56.33	105.20	-48.87	peak
4	5925.000	-4.43	60.12	55.69	68.20	-12.51	peak

**** END ****