



REPORT No.: SZ25030223S01

Annex D Plots of Maximum SAR & PD Test Results

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2025/4/26

WLAN 2.4GHz_802.11b 1Mbps_Front Edge_Ch11_Ant 2

Communication System: UID 0, WLAN 2.4GHz 802.11b (0); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL_2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.633$ S/m; $\epsilon_r = 38.806$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(7.26, 7.26, 7.26) @ 2462 MHz; Calibrated: 2024/11/11
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2024/11/11
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch11/Area Scan (71x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.67 W/kg

Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.945 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 2.16 W/kg

SAR(1 g) = 1 W/kg; SAR(10 g) = 0.410 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 51.1%

Maximum value of SAR (measured) = 1.51 W/kg

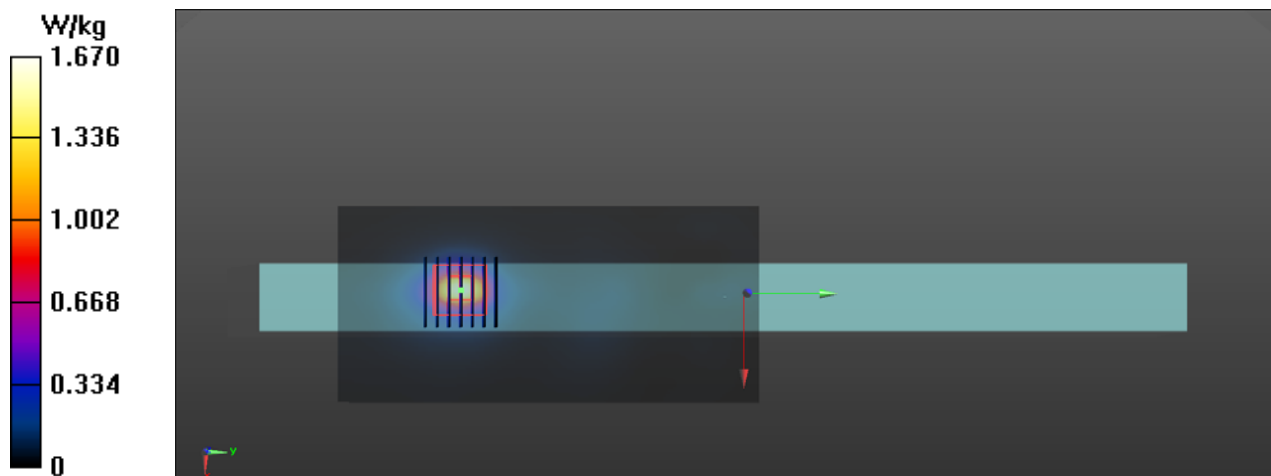

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2025/4/24

WLAN 5.2GHz_802.11ac-VHT80 MCS0_Front Edge_Ch42_Ant 2

Communication System: UID 0, WLAN 5GHz (0); Frequency: 5240 MHz; Duty Cycle: 1:1
Medium: HSL_5250 Medium parameters used: $f = 5210$ MHz; $\sigma = 4.787$ S/m; $\epsilon_r = 35.271$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(5.1, 5.1, 5.1) @ 5210 MHz; Calibrated: 2024/11/11
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2024.11.11
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch42/Area Scan (71x181x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.75 W/kg

Ch42/Zoom Scan (8x8x15)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.811 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 3.91 W/kg

SAR(1 g) = 1.29 W/kg; SAR(10 g) = 0.330 W/kg

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 56.6%

Maximum value of SAR (measured) = 2.01 W/kg

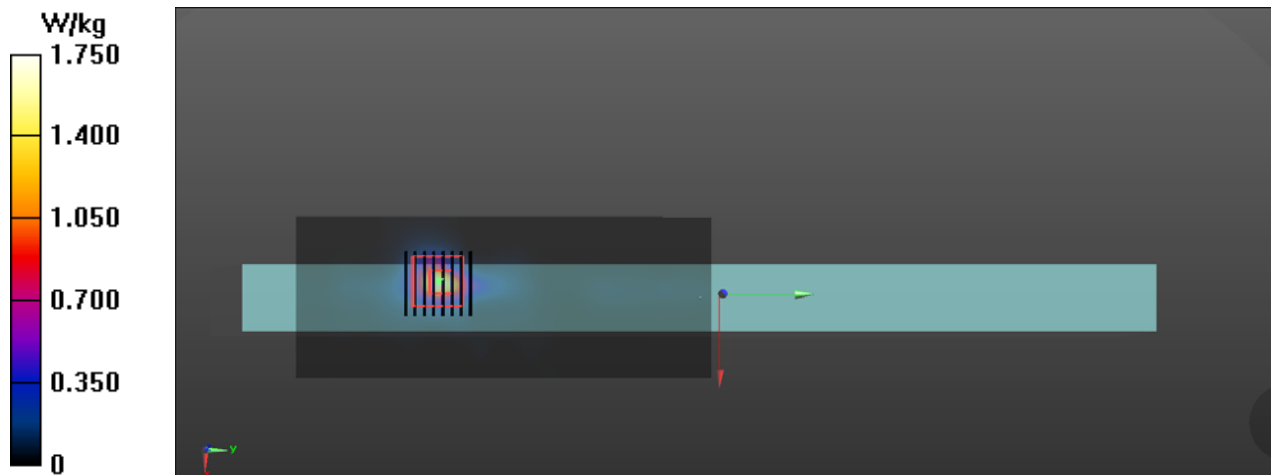

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2025/5/11

WLAN 5.3GHz_802.11ax-HEW20 MCS0_Front Edge_Ch60_Ant 1

Communication System: UID 0, WLAN 5GHz (0); Frequency: 5300 MHz; Duty Cycle: 1:1
Medium: HSL_5250 Medium parameters used: $f = 5300$ MHz; $\sigma = 4.934$ S/m; $\epsilon_r = 35.486$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(5.1, 5.1, 5.1) @ 5300 MHz; Calibrated: 2024/11/11
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2024/11/11
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch60/Area Scan (71x181x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.10 W/kg

Ch60/Zoom Scan (8x8x15)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.046 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 3.75 W/kg

SAR(1 g) = 1.33 W/kg; SAR(10 g) = 0.428 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 59.5%

Maximum value of SAR (measured) = 2.01 W/kg

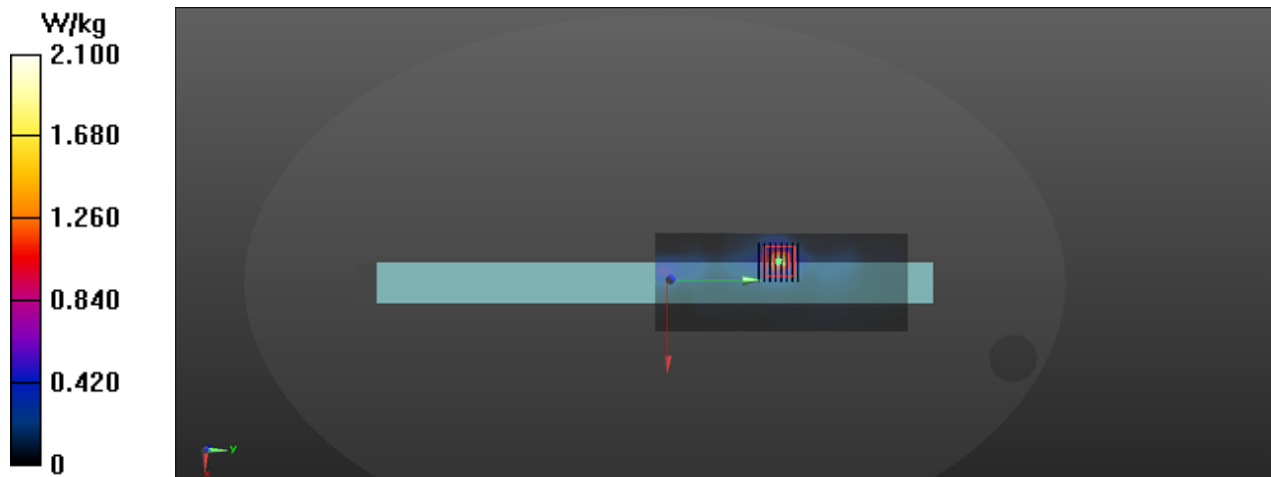

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2025/4/27

WLAN 5.5GHz_802.11ax-HEW160 MCS0_Front Edge_Ch114_Ant 2

Communication System: UID 0, WLAN 5GHz (0); Frequency: 5570 MHz; Duty Cycle: 1:1
Medium: HSL_5600 Medium parameters used: $f = 5570$ MHz; $\sigma = 5.041$ S/m; $\epsilon_r = 34.5$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(4.47, 4.47, 4.47) @ 5570 MHz; Calibrated: 2024/11/11
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2024.11.11
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch114/Area Scan (71x181x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.63 W/kg

Ch114/Zoom Scan (8x8x15)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.06400 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 3.36 W/kg

SAR(1 g) = 1.27 W/kg; SAR(10 g) = 0.350 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 52.8%

Maximum value of SAR (measured) = 1.68 W/kg

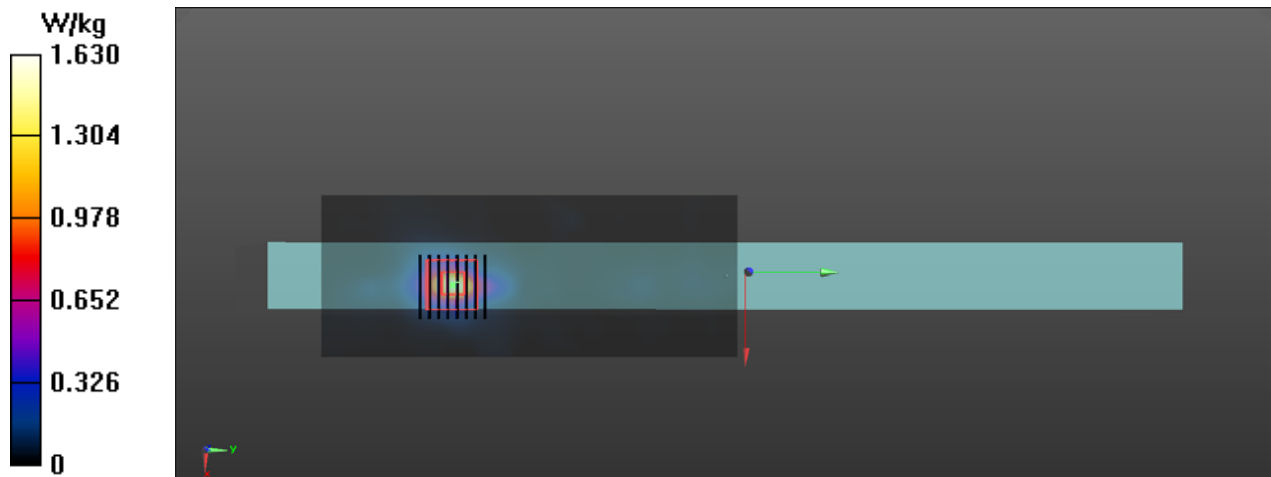

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2025/4/28

WLAN 5.8GHz_802.11ac-VHT40 MCS0_Front Edge_Ch159_Ant 1

Communication System: UID 0, WLAN 5GHz (0); Frequency: 5795 MHz; Duty Cycle: 1:1
Medium: HSL_5750 Medium parameters used: $f = 5795$ MHz; $\sigma = 5.013$ S/m; $\epsilon_r = 33.033$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(4.6, 4.6, 4.6) @ 5795 MHz; Calibrated: 2024/11/11
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2024.11.11
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch159/Area Scan (71x181x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.69 W/kg

Ch159/Zoom Scan (8x8x15)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.499 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 3.60 W/kg

SAR(1 g) = 1.27 W/kg; SAR(10 g) = 0.405 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 54.1%

Maximum value of SAR (measured) = 1.68 W/kg

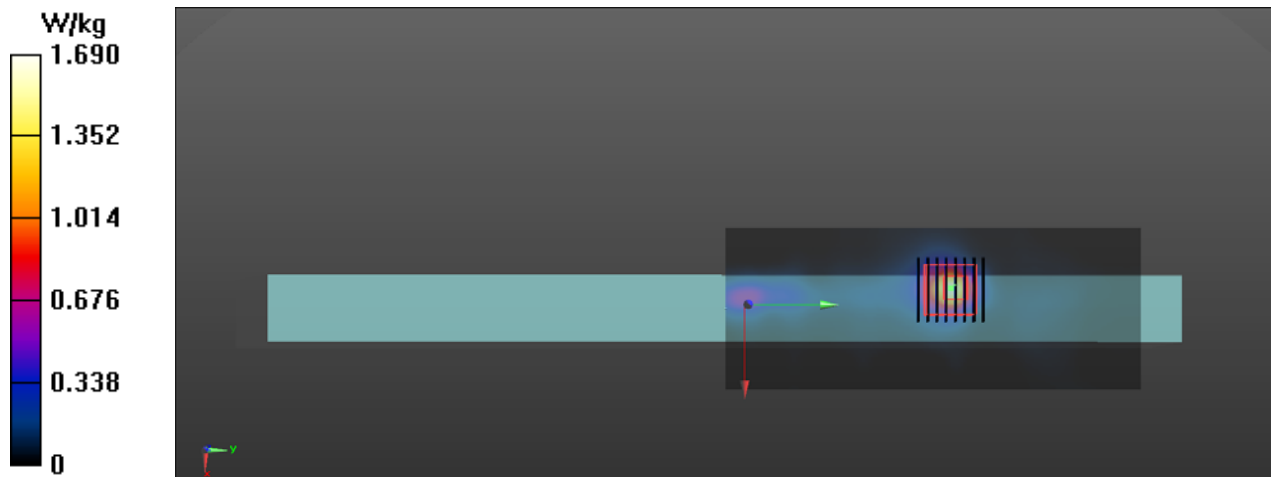

Measurement Report for Device, FRONT Edge, U-NII-5, IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 79 (6345.0 MHz)

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	396.0 x 29.0 x 290.0		Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	FRONT, 5.00	U-NII-5	WLAN, 10743-AAC	6345.0, 79	5.39	5.77	34.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2181	HBBL-600-10000 Charge:xxxx, --	EX3DV4 - SN7608, 2025-03-20	DAE4 Sn1643, 2025-03-21

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 136.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	n/a	Yes
Grading Ratio	n/a	1.4
MAIA	Y	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-04-30, 14:14	2025-04-30, 14:41
psSAR1g [W/Kg]	1.15	1.28
psSAR10g [W/Kg]	0.350	0.377
Power Drift [dB]	0.01	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		57.5
Dist 3dB Peak [mm]		6.5

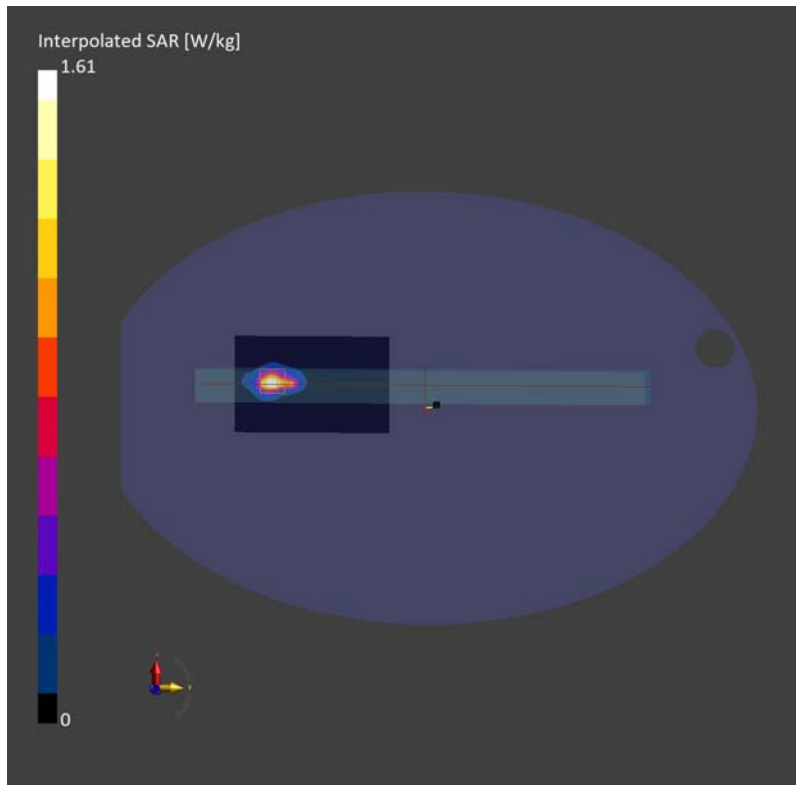

Measurement Report for Device, FRONT Edge, U-NII-6, IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 111 (6505.0 MHz)

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	396.0 x 29.0 x 290.0		Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	FRONT, 5.00	U-NII-6	WLAN, 10743-AAC	6505.0, 111	5.39	6.08	34.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2181	HBBL-600-10000 Charge:xxxx, --	EX3DV4 - SN7608, 2025-03-20	DAE4 Sn1643, 2025-03-21

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	68.0 x 289.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	n/a	Yes
Grading Ratio	n/a	1.4
MAIA	Y	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-04-30, 16:43	2025-04-30, 17:19
psSAR1g [W/Kg]	1.16	1.35
psSAR10g [W/Kg]	0.368	0.401
Power Drift [dB]	0.08	-0.09
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		53.2
Dist 3dB Peak [mm]		6.1

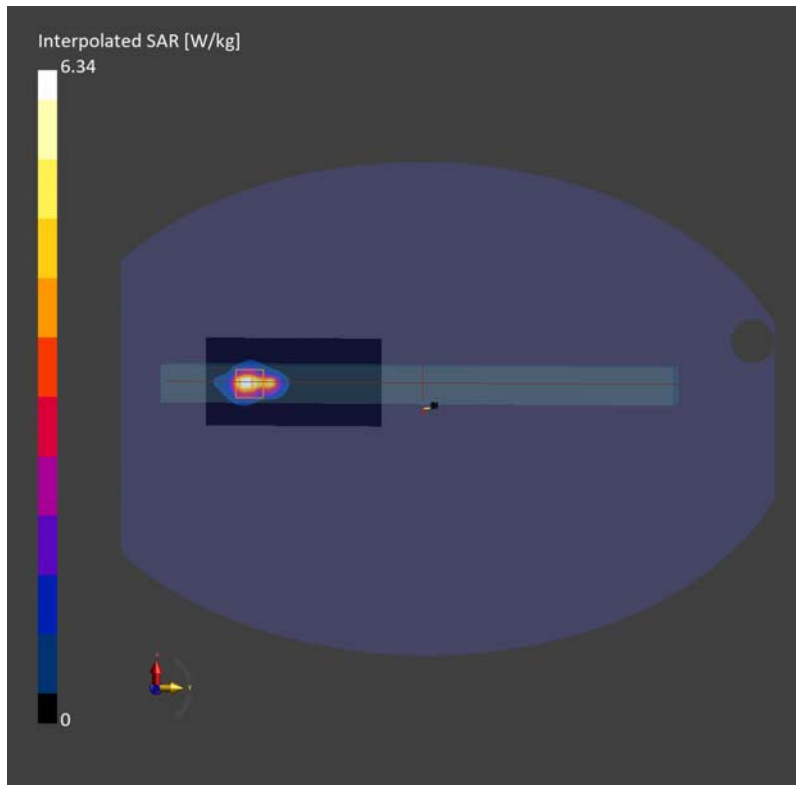

Measurement Report for Device, FRONT Edge, U-NII-7, IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 143 (6665.0 MHz)

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	396.0 x 29.0 x 290.0		Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	FRONT, 5.00	U-NII-7	WLAN, 10743-AAC	6665.0, 143	5.39	6.39	33.6

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2181	HBBL-600-10000 Charge:xxxx, --	EX3DV4 - SN7608, 2025-03-20	DAE4 Sn1643, 2025-03-21

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 289.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	n/a	Yes
Grading Ratio	n/a	1.4
MAIA	Y	N/A
Surface Detection	All points	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-04-30, 19:56	2025-04-30, 20:24
psSAR1g [W/Kg]	0.610	0.630
psSAR10g [W/Kg]	0.183	0.188
Power Drift [dB]	0.10	0.05
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		54.0
Dist 3dB Peak [mm]		6.8

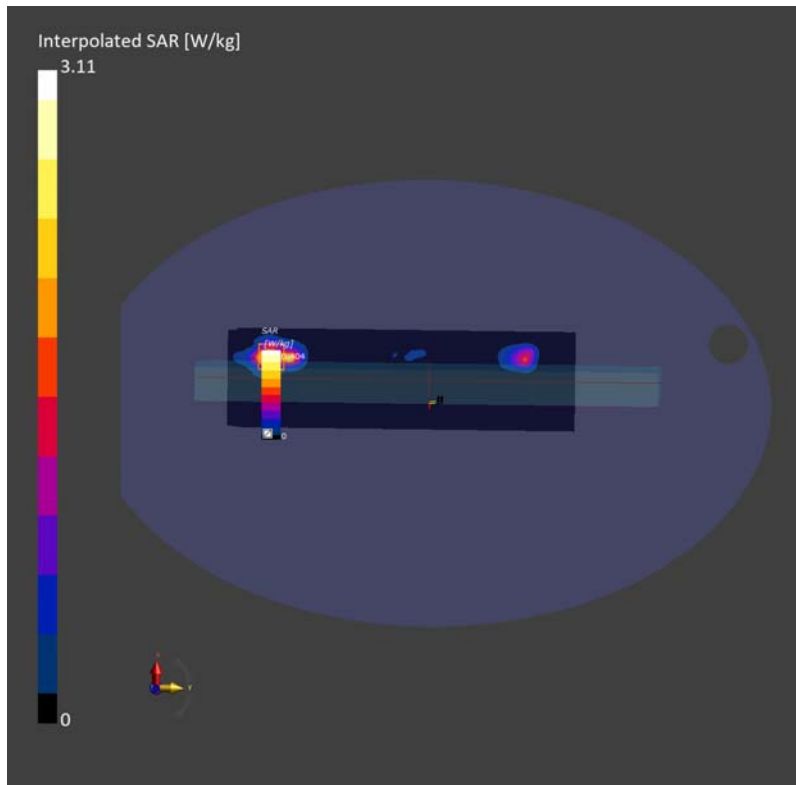

Measurement Report for Device, FRONT Edge, U-NII-8, IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 207 (6985.0 MHz)

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	396.0 x 29.0 x 290.0		Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	FRONT, 5.00	U-NII-8	WLAN, 10743-AAC	6985.0, 207	5.39	6.69	33.2

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2181	HBBL-600-10000 Charge:xxxx, --	EX3DV4 - SN7608, 2025-03-20	DAE4 Sn1643, 2025-03-21

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 153.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	n/a	Yes
Grading Ratio	n/a	1.4
MAIA	N/A	N/A
Surface Detection	All points	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-04-30, 21:21	2025-04-30, 21:54
psSAR1g [W/Kg]	1.24	1.20
psSAR10g [W/Kg]	0.385	0.375
Power Drift [dB]	-0.03	0.05
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		51.3
Dist 3dB Peak [mm]		4.6

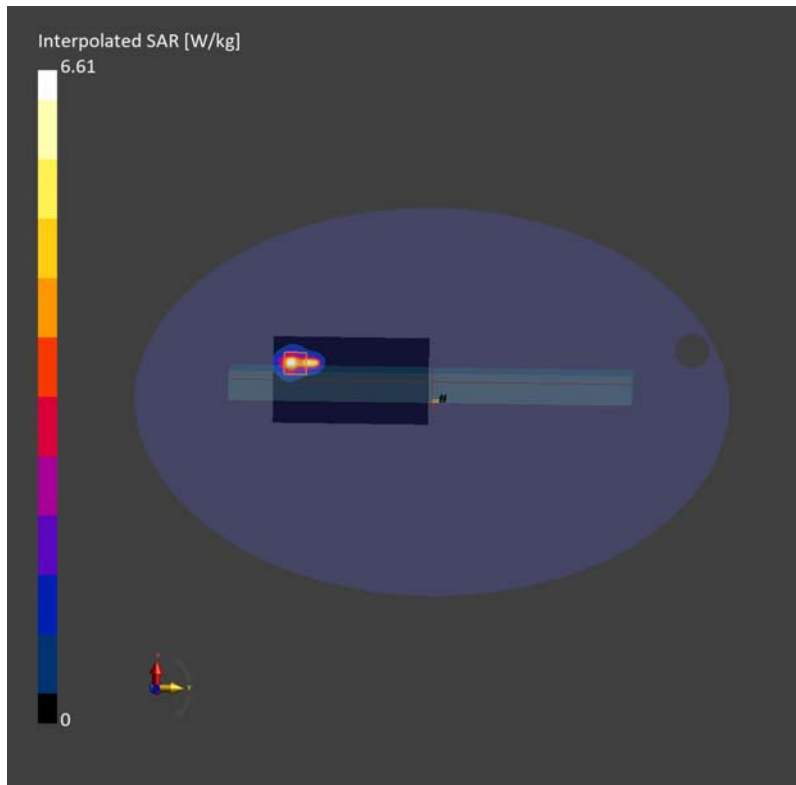

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2025/4/26

Bluetooth_DH5 1Mbps_Front Edge_Ch78_Ant 1


Communication System: UID 0, Bluetooth (0); Frequency: 2480 MHz; Duty Cycle: 1:1
Medium: HSL_2450 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.839$ S/m; $\epsilon_r = 38.675$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3823; ConvF(7.26, 7.26, 7.26) @ 2480 MHz; Calibrated: 2024/11/11
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn480; Calibrated: 2024.11.11
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch78/Area Scan (71x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.216 W/kg

Ch78/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 3.149 V/m; Power Drift = 0.15 dB
Peak SAR (extrapolated) = 0.324 W/kg
SAR(1 g) = 0.148 W/kg; SAR(10 g) = 0.060 W/kg
Smallest distance from peaks to all points 3 dB below = 7.6 mm
Ratio of SAR at M2 to SAR at M1 = 48.6%
Maximum value of SAR (measured) = 0.236 W/kg

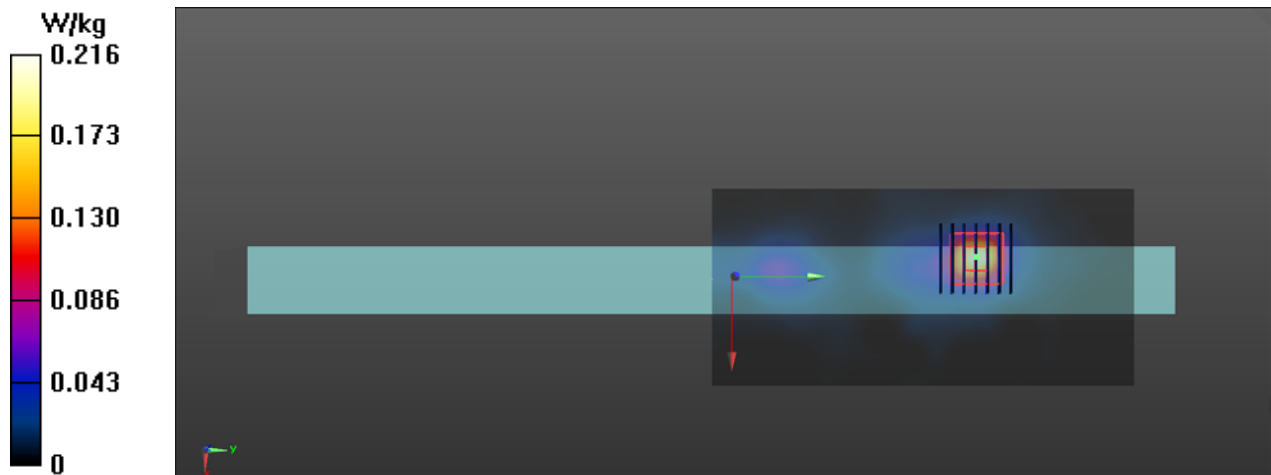

Measurement Report for Device, FRONT Edge, U-NII-5, IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle), Channel 79 (6345.0 MHz)

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	290.0 x 400.0 x 20.0		Laptop

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G	EDGE BOTTOM, 2.00	U-NII-5	WLAN, 10743-AAC	6345.0, 79	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave – xxxx	Air –	EummWV4 – SN9602_F1–55GHz, 2025–03–19	DAE4 Sn1643, 2025–03–20

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	25.0 x 25.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0
MAIA	N/A

Measurement Results

Scan Type	5G Scan
Date	2025–04–24, 10:48
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	3.03
psPDtot+ [W/m ²]	3.49
psPDmod+ [W/m ²]	3.96
E _{max} [V/m]	51.1
Power Drift [dB]	0.32

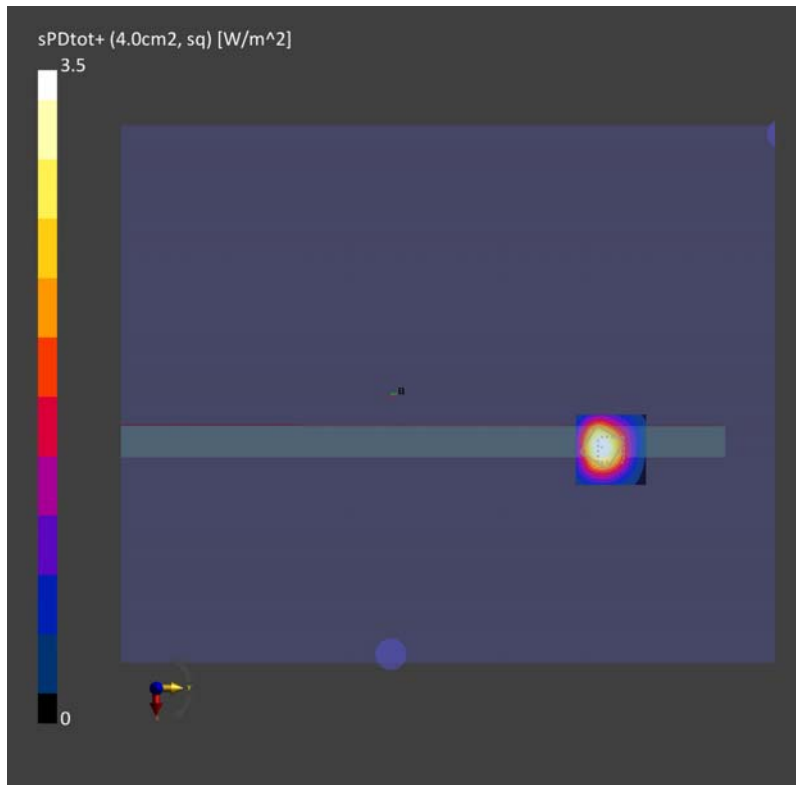

Measurement Report for Device, FRONT Edge, U-NII-6, IEEE 802.11ax (160MHz, MCS0, 99pc duty cycle), Channel 111 (6505.0 MHz)

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	290.0 x 400.0 x 20.0		Laptop

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G	EDGE BOTTOM, 2.00	U-NII-6	WLAN, 10755-AAC	6505.0, 111	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave – xxxx	Air –	EummWV4 – SN9602_F1–55GHz, 2025–03–19	DAE4 Sn1643, 2025–03–20

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	25.0 x 25.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0
MAIA	N/A

Measurement Results

Scan Type	5G Scan
Date	2025–04–24, 11:36
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	3.17
psPDtot+ [W/m ²]	3.52
psPDmod+ [W/m ²]	3.87
E _{max} [V/m]	52.8
Power Drift [dB]	0.03

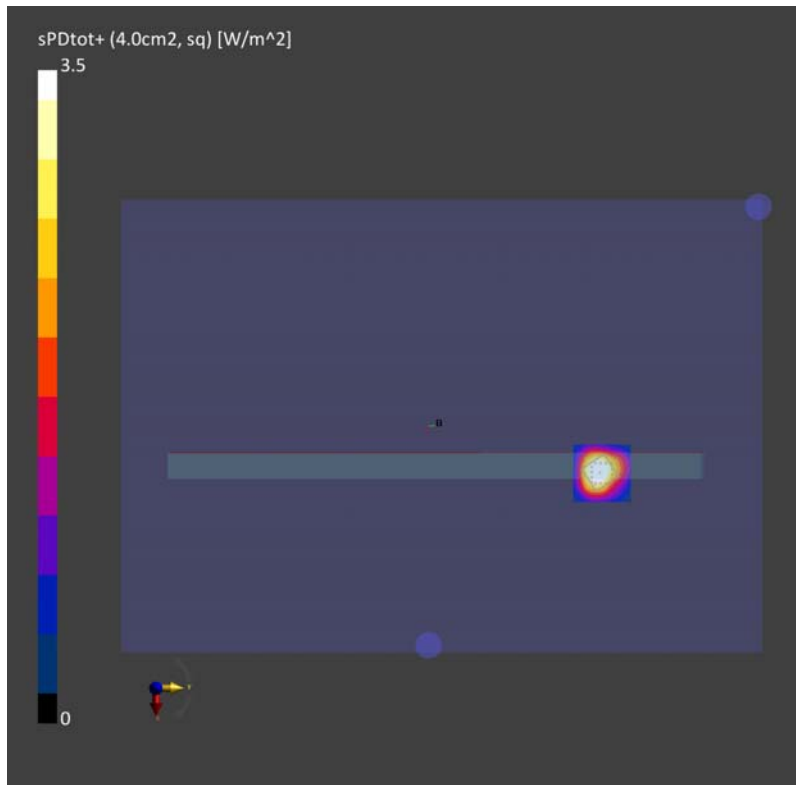

Measurement Report for Device, FRONT Edge, U-NII-7, IEEE 802.11ax (160MHz, MCS0, 99pc duty cycle), Channel 143 (6665.0 MHz)

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	290.0 x 400.0 x 20.0		Laptop

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G	EDGE BOTTOM, 2.00	U-NII-7	WLAN, 10755-AAC	6665.0, 143	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave – xxxx	Air –	EUmmWV4 – SN9602_F1–55GHz, 2025–03–19	DAE4 Sn1643, 2025–03–20

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	25.0 x 25.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0
MAIA	N/A

Measurement Results

Scan Type	5G Scan
Date	2025–04–24, 12:48
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	2.00
psPDtot+ [W/m ²]	2.16
psPDmod+ [W/m ²]	2.36
E _{max} [V/m]	41.5
Power Drift [dB]	0.07

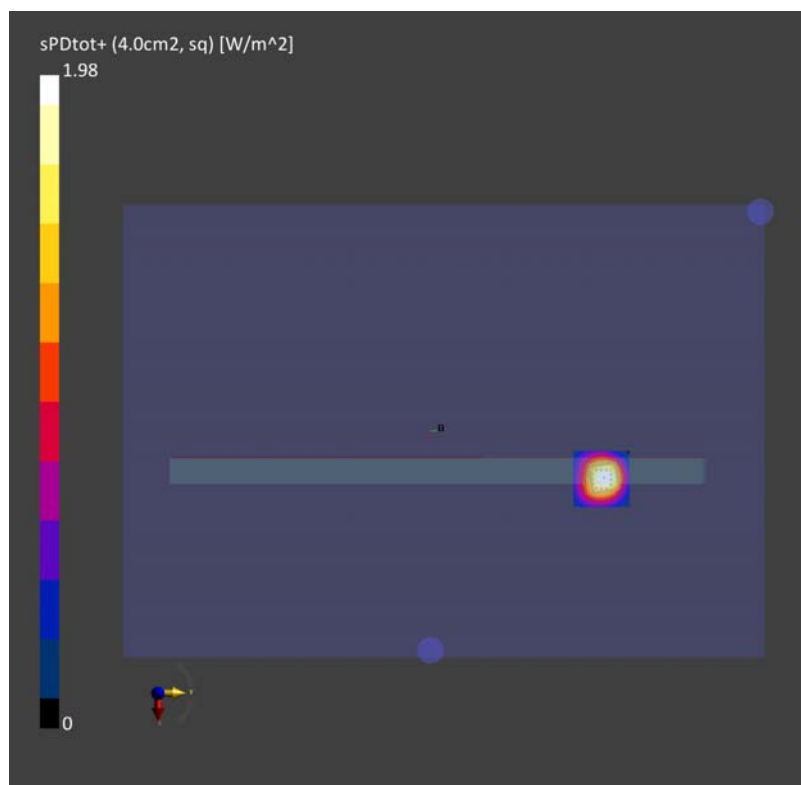

Measurement Report for Device, FRONT Edge, U-NII-8, IEEE 802.11ax (160MHz, MCS0, 99pc duty cycle), Channel 207 (6985.0 MHz)

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	290.0 x 400.0 x 20.0		Laptop

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G	EDGE BOTTOM, 2.00	U-NII-8	WLAN, 10755-AAC	6985.0, 207	1.0

Hardware Setup

Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave - xxxx	Air -	EummWV4 - SN9602_F1-55GHz, 2025-03-19	DAE4 Sn1643, 2025-03-20

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	25.0 x 25.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0
MAIA	N/A

Measurement Results

Scan Type	5G Scan
Date	2025-04-24, 12:18
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	3.42
psPDtot+ [W/m ²]	4.09
psPDmod+ [W/m ²]	4.37
E _{max} [V/m]	56.2
Power Drift [dB]	-0.14

